

MEASUREMENT REPORT

FCC PART 15.247 / ISSED RSS-247 WLAN OFDMA

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

1/8/2024 - 3/15/2024

Test Report Issue Date:

3/31/2024

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2311270068-15-R1.BCG

FCC ID:

BCGA2837

IC:

579C-A2837

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2837, A3006

EUT Type:

Tablet Device

Frequency Range:

2412 – 2467MHz

Modulation Type:

OFDMA

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISSED Specification:

RSS-247 Issue 3

Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r02,
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2311270068-15-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President

Prepared by: WKR0000010245

Reviewed by: WKR0000005805



FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 1 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope	4
1.2	Element Materials Technology Test Location	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Antenna Description	7
2.4	Test Support Equipment.....	7
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS.....	8
3.1	Evaluation Procedure	8
3.2	AC Line Conducted Emissions	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS.....	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS.....	13
7.1	Summary.....	13
7.2	Bandwidth Measurement.....	14
7.2.1	Antenna 4a Bandwidth Measurements	16
7.2.2	Antenna 2a Bandwidth Measurements	23
7.3	Output Power Measurement.....	30
7.3.1	Peak Output Power Measurement.....	31
7.3.2	Average Output Power Measurement.....	33
7.4	Power Spectral Density	36
7.4.1	Antenna 4a Power Spectral Density Measurements.....	37
7.4.2	Antenna 2a Power Spectral Density Measurements.....	44
7.4.3	CDD Power Spectral Density Measurements	51
7.5	Conducted Authorized Band Edge	65
7.5.1	Antenna 4a Conducted Emissions at the Band Edge	66
7.5.2	Antenna 2a Conducted Emissions at the Band Edge	73
7.6	Conducted Spurious Emissions.....	80
7.7	Radiated Spurious Emissions – Above 1 GHz.....	94
7.7.1	Radiated Spurious Emission Measurements	97
7.7.2	Antenna 4a Radiated Restricted Band Edge Measurements.....	116
7.7.3	Antenna 2a Radiated Restricted Band Edge Measurements	123
7.7.4	CDD Primary Radiated Restricted Band Edge Measurements	130
7.8	Radiated Spurious Emissions – Below 1GHz	139
7.9	AC Line-Conducted Emissions Measurement	144
8.0	CONCLUSION	150


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 2 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



802.11	RU	Tx Frequency [MHz]	Antenna 4a				Antenna 2a			
			Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
11ax OFDMA	26	2412 - 2467	13.935	11.44	121.227	20.84	14.044	11.48	112.876	20.53
11ax OFDMA	242	2412 - 2467	105.269	20.22	525.896	27.21	100.000	20.00	526.138	27.21

EUT Overview SISO (802.11ax – RU)

Mode	RU	Tx Frequency [MHz]	Antenna 4a				Antenna 2a				CDD			
			Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
11ax OFDMA	26	2412 - 2467	13.813	11.40	120.504	20.81	13.693	11.37	117.625	20.71	27.472	14.39	237.480	23.76
11ax OFDMA	242	2412 - 2467	104.304	20.18	454.988	26.58	104.376	20.19	450.817	26.54	208.680	23.19	905.805	29.57

EUT Overview CDD (802.11ax – RU)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 3 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISCED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISCED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISCED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 4 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2837, IC: 579C-A2837**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN 802.11ax – RU (DTS) transmitter.

Test Device Serial No.: Q1VQ22L4XG, N4LP6X9FG4, KXYH5M6MPG, DLXH1C000140000662

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), WPT, 802.15.4

This device supports BT Beamforming

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13*	2472
7	2442		

Table 2-1. 802.11ax Frequency/ Channel Operations

*Channel 13 is disabled for DTS 802.11ax HE20.

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		Antenna 4a	Antenna 2a	CDD
2.4GHz	ax (RU26)	88.7	88.5	88.7
	ax (RU242)	92.0	92.0	92.5

Table 2-2. Measured Duty Cycles

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 5 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

The device employs CDD technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		Antenna 4a	Antenna 2a	Antenna 4a	Antenna 2a	Antenna 4a	Antenna 2a
2.4GHz	11ax	✓	✓	✓	✓	✓	✓

Table 2-3. WiFi Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – CDD function

CDD = Cyclic Delay Diversity - 2Tx Function

Data Rate(s) Supported: 8/8.6Mbps, 16/17.2Mbps, 24/25.8Mbps, 33/34.4Mbps, 49/51.6Mbps, 65/68.8Mbps, 73/77.4Mbps, 81/86.0Mbps, 98/103.2Mbps, 108/114.7Mbps (ax – 20MHz)
16/17.2 Mbps, 32/34.4 Mbps, 48/51.6 Mbps, 66/68.8 Mbps, 98/103.2 Mbps, 130/137.6 Mbps, 146/154.8 Mbps, 162/172 Mbps, 196/206.4 Mbps, 216/229.4Mbps (CDD ax – 20MHz)

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Wifi 2GHz	Bluetooth	Thread	Wifi 5GHz	Wifi 6GHz	NB UNII	LTE/FR1 NR	
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 a/n/ac/ax	802.11 a/ax	BDR, HDR4/8	MB/HB	UHB
2a	Config 1	✗	✓	✗	✓	✗	✗	✗	✗
2a	Config 2	✗	✓	✗	✗	✓	✗	✗	✗
2a	Config 3	✓	✗	✗	✗	✗	✓	✗	✗
2a	Config 4	✗	✗	✓	✓	✗	✗	✗	✗
2a	Config 5	✗	✗	✓	✗	✓	✗	✗	✗
4a	Config 6	✗	✓	✗	✓	✗	✗	✗	✗
4a	Config 7	✗	✓	✗	✗	✓	✗	✗	✗
4a	Config 8	✓	✗	✗	✗	✗	✓	✗	✗
4a	Config 9	✗	✗	✓	✓	✗	✗	✗	✗
4a	Config 10	✗	✗	✓	✗	✓	✗	✗	✗

Table 2-4. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be config 1 and reported in Bluetooth and UNII RF Test Reports.

Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) - BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 6 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.3 Antenna Description

The following antenna gains provided by manufacturer were used for testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna 4a	Antenna 2a
2.4	3.6	1.9

Table 2-5. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-6. Test Support Equipment List

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Sections 3.2 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions are reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by host PC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11ax HE20 2Tx CDD mode test data provided in this report covers 802.11ax HE20 2Tx SDM.

For 802.11b/g/n/ax-SU test results, see separate WLAN report, 1C2311270068-14.BCG

2.6 Software and Firmware

The test was conducted with firmware version 21E8197 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 7 of 150

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 8 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 9 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 10 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 11 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/21/2023	Annual	6/21/2024	MY49430244
Anritsu	ML2496A	Power Meter	4/4/2023	Annual	4/4/2024	1840005
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	4/5/2023	Annual	4/5/2024	1726261
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/30/2023	Annual	3/30/2024	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	3/10/2023	Annual	3/10/2024	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/31/2023	Annual	8/31/2024	100052
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/11/2023	Annual	5/11/2024	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	6/6/2023	Annual	6/6/2024	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/2/2023	Annual	6/2/2024	100050
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/1/2023	Annual	5/1/2024	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	6/8/2023	Annual	6/8/2024	192052
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/17/2023	Annual	4/17/2024	00304

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 12 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.

FCC ID: BCGA2837

IC: 579C-A2837

FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.7.4, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	AC LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “WLAN Automation,” Version 5.0.
- For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.0.0.
- 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- Only one RU index could be selected at a time so no contiguous or non-contiguous RU’s were considered for testing.

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 13 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2 Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.8.2 Option 2

KDB 558074 D01 v05r02 – Section 8.2

RSS-Gen [6.7]

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 99% occupied bandwidth and the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 14 of 150

V 10.6 09/14/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations and data rates were investigated and only the worst case is reported
2. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 15 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2.1 Antenna 4a Bandwidth Measurements


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	26	0	10/11.8 (MCS9)	18.19	2.09	0.50	Pass
			26	4	10/11.8 (MCS9)	17.02	2.71	0.50	Pass
			26	8	10/11.8 (MCS9)	18.18	2.10	0.50	Pass
2437	6	ax	26	0	10/11.8 (MCS9)	18.17	2.15	0.50	Pass
			26	4	10/11.8 (MCS9)	17.05	2.71	0.50	Pass
			26	8	10/11.8 (MCS9)	18.27	2.09	0.50	Pass
2462	11	ax	26	0	10/11.8 (MCS9)	18.16	2.12	0.50	Pass
			26	4	10/11.8 (MCS9)	17.03	2.71	0.50	Pass
			26	8	10/11.8 (MCS9)	18.29	2.10	0.50	Pass
2412	1	ax	242	61	97.5/114.7 (MCS9)	18.97	19.10	0.50	Pass
2437	6	ax	242	61	97.5/114.7 (MCS9)	18.99	19.13	0.50	Pass
2462	11	ax	242	61	97.5/114.7 (MCS9)	18.98	19.11	0.50	Pass

Table 7-2. 6dB BW & 99% OBW Measurements Antenna 4a


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 16 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

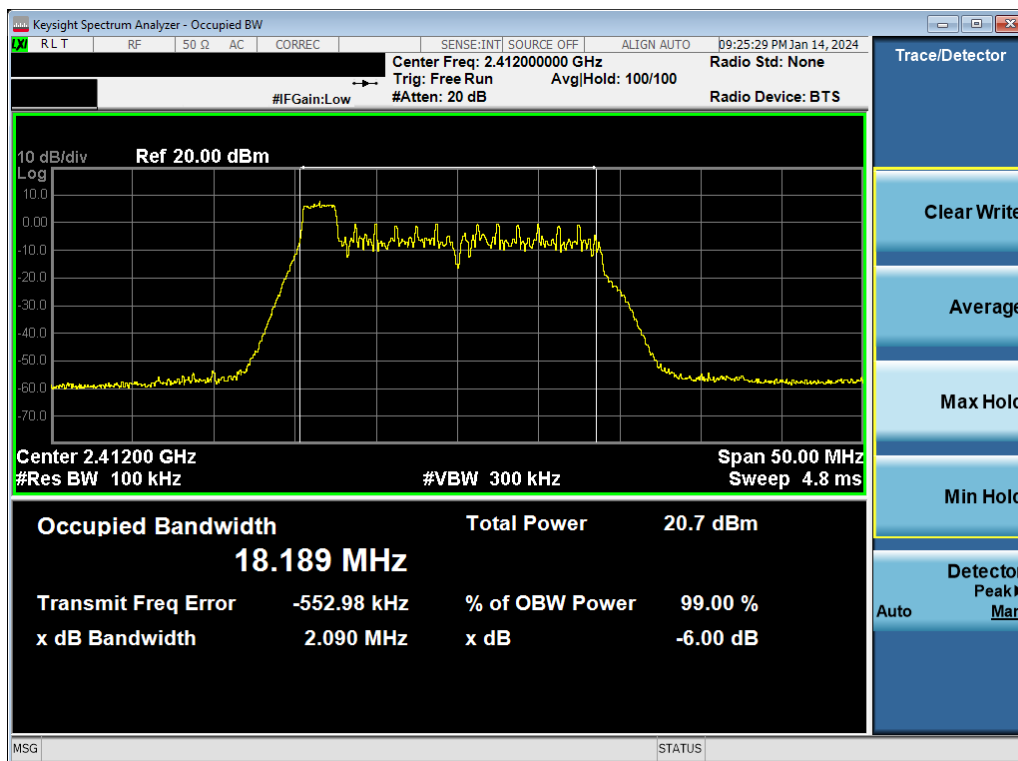

Plot 7-1. 6dB BW & 99% OBW Plot Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

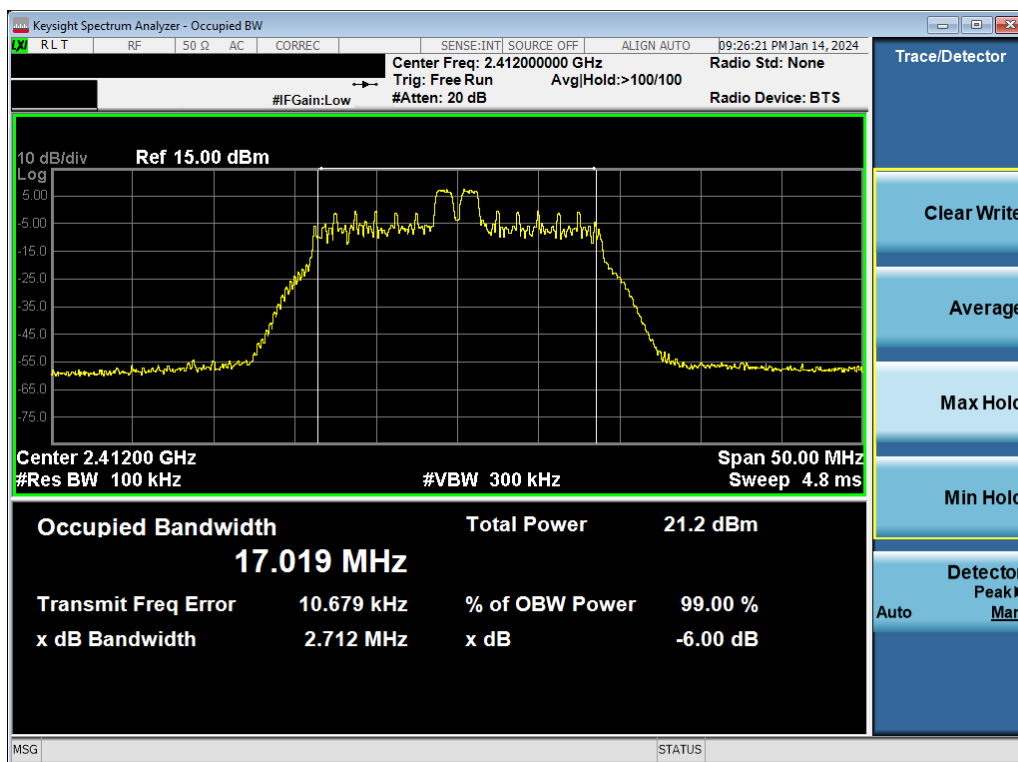


Plot 7-2. 6dB BW & 99% OBW Plot Antenna 4a (802.11ax OFDMA – RU26 Index 4 – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 17 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

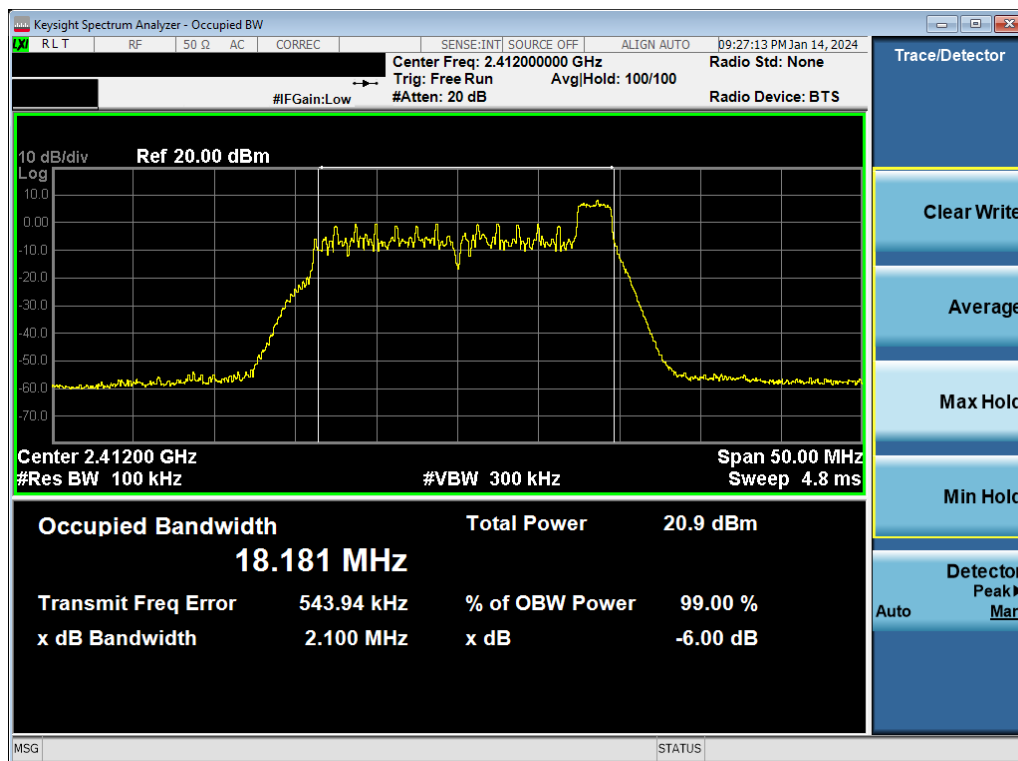

Plot 7-3. 6dB BW & 99% OBW Plot Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 1)

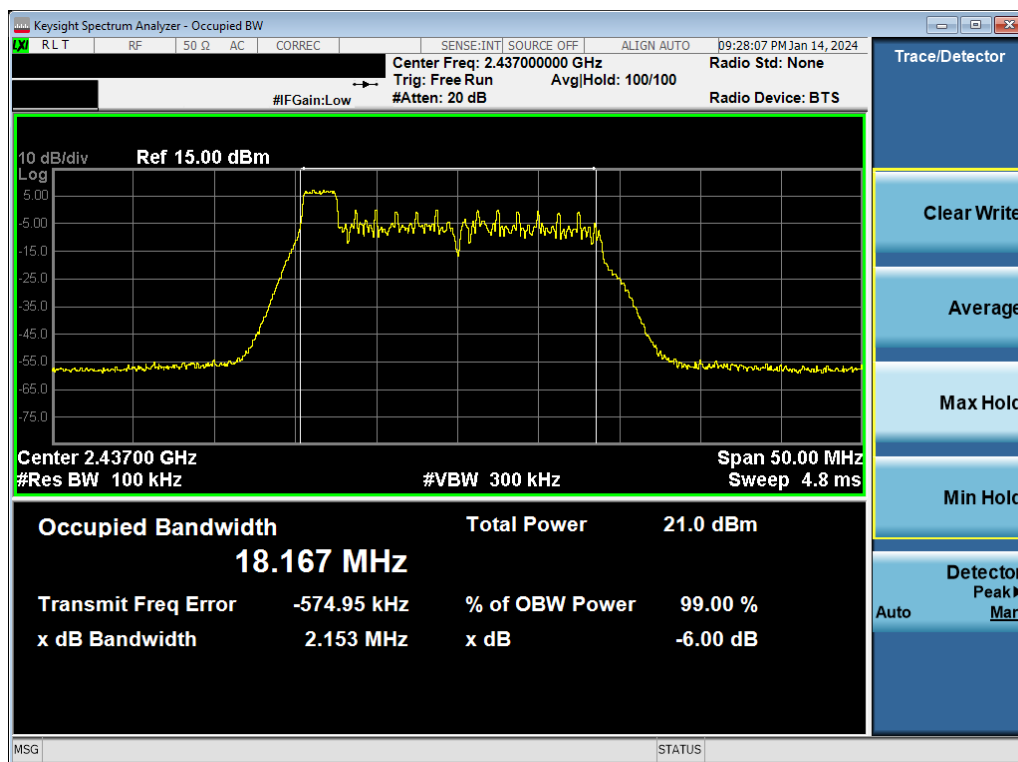


Plot 7-4. 6dB BW & 99% OBW Plot Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 18 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

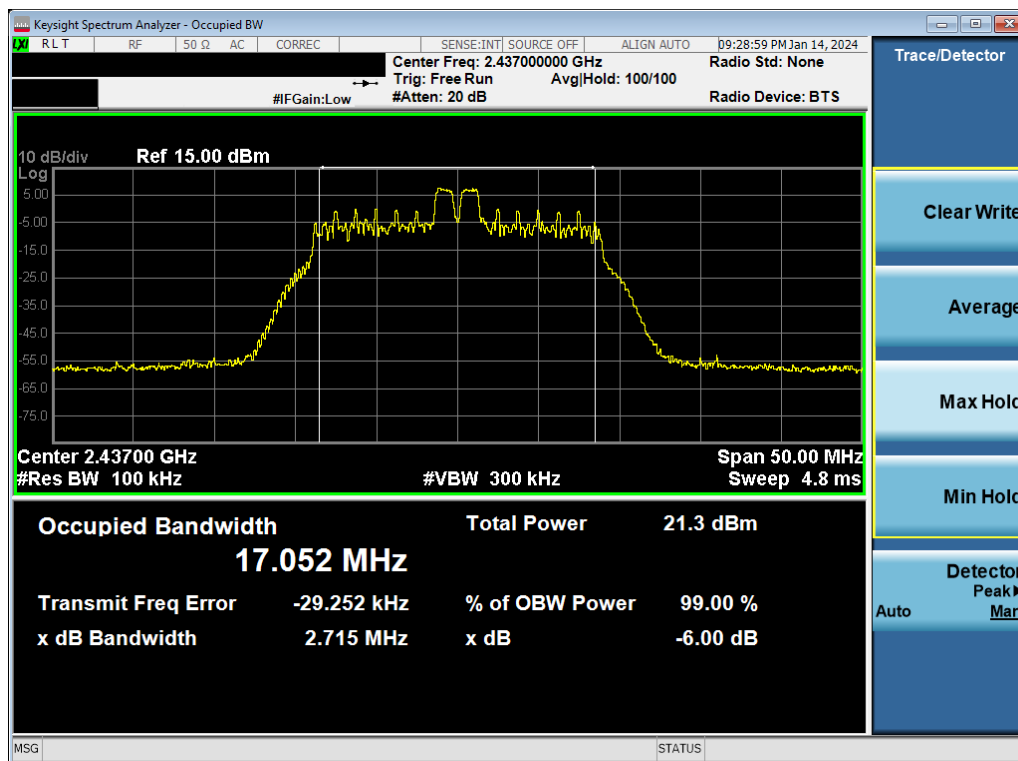

Plot 7-5. 6dB BW & 99% OBW Plot Antenna 4a (802.11ax OFDMA – RU26 Index 4 – Ch. 6)

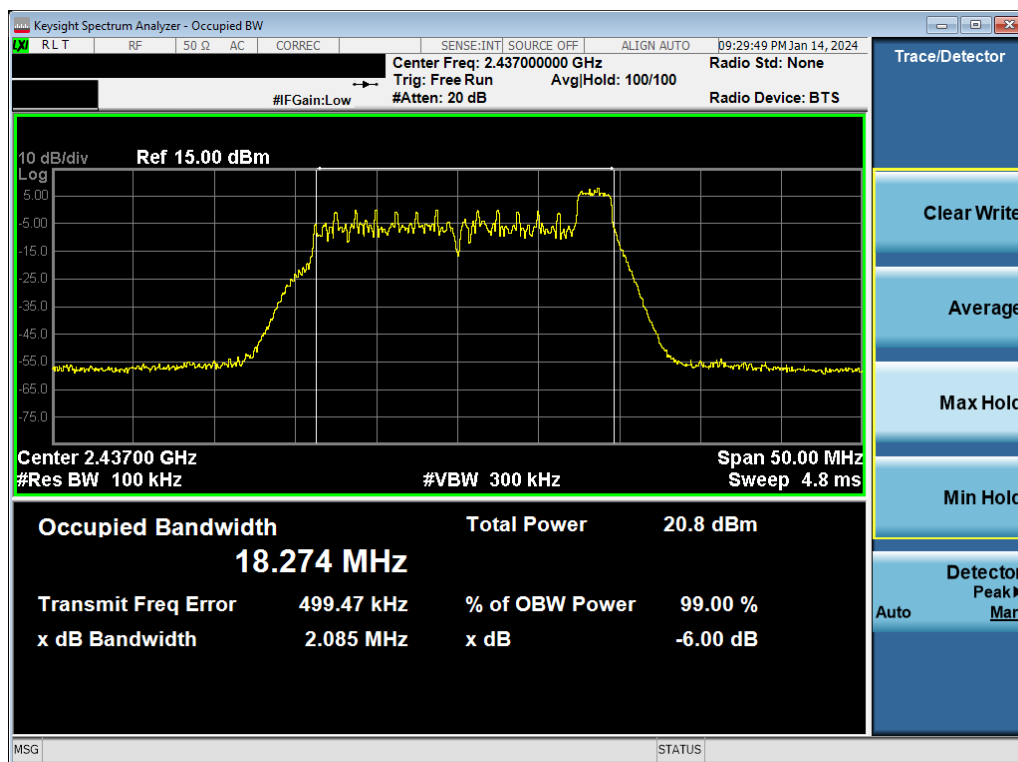


Plot 7-6. 6dB BW & 99% OBW Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 19 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

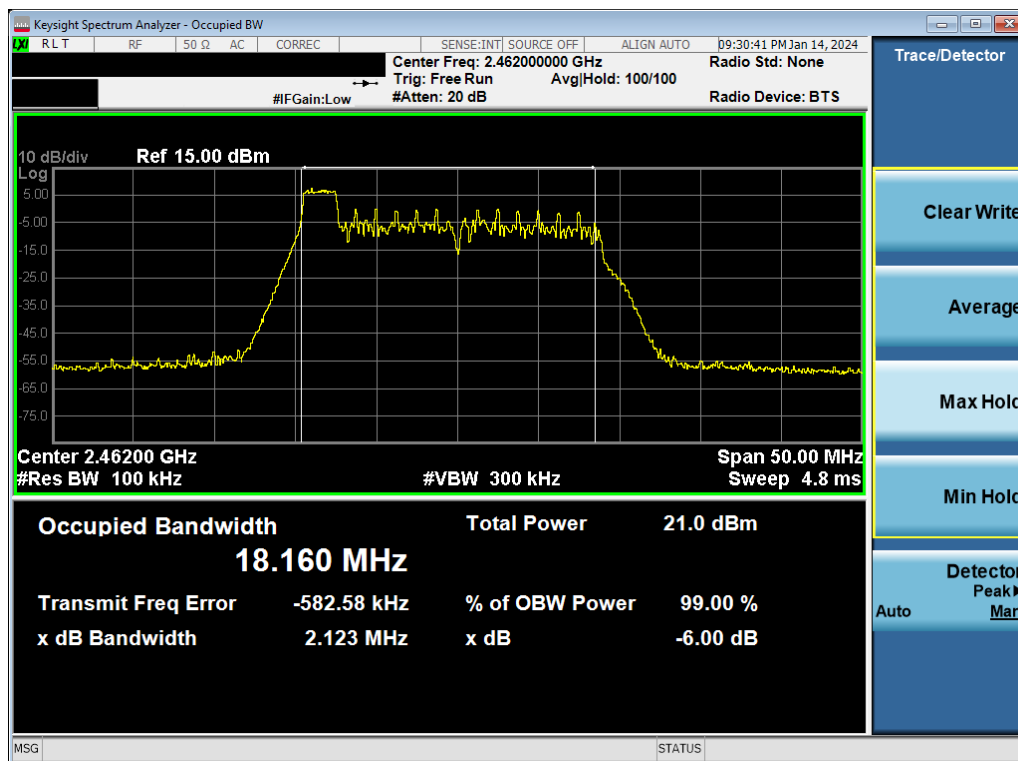

Plot 7-7. 6dB BW & 99% OBW Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 11)

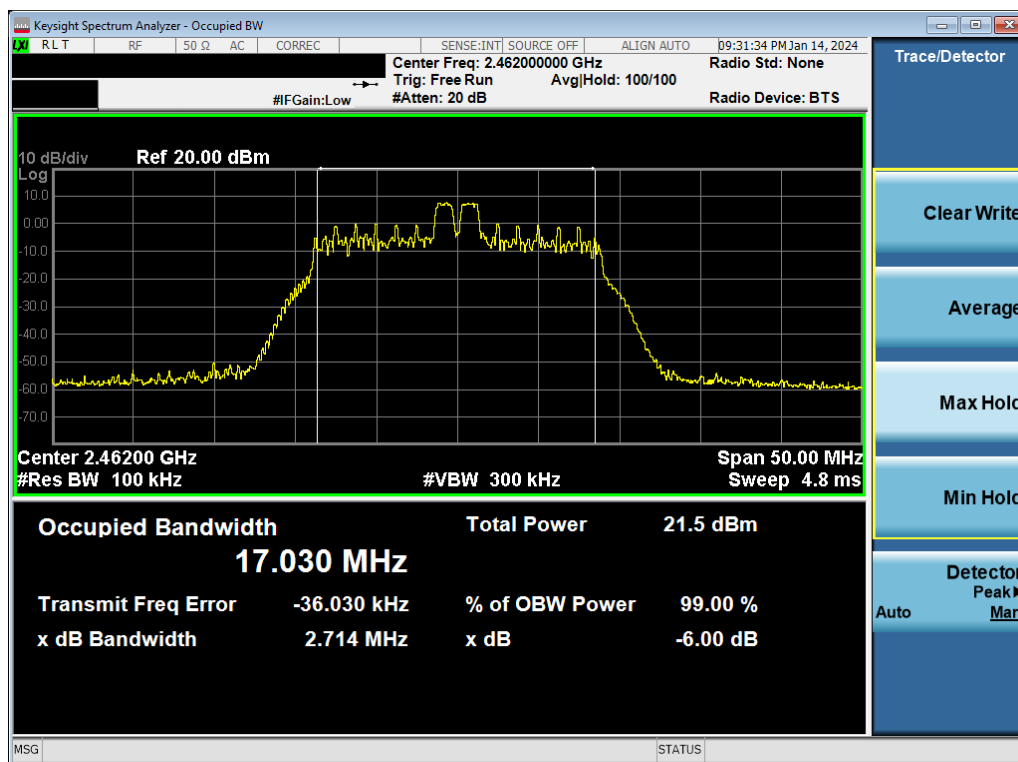


Plot 7-8. 6dB BW & 99% OBW Antenna 4a (802.11ax OFDMA – RU26 Index 4 – Ch. 11)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 20 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

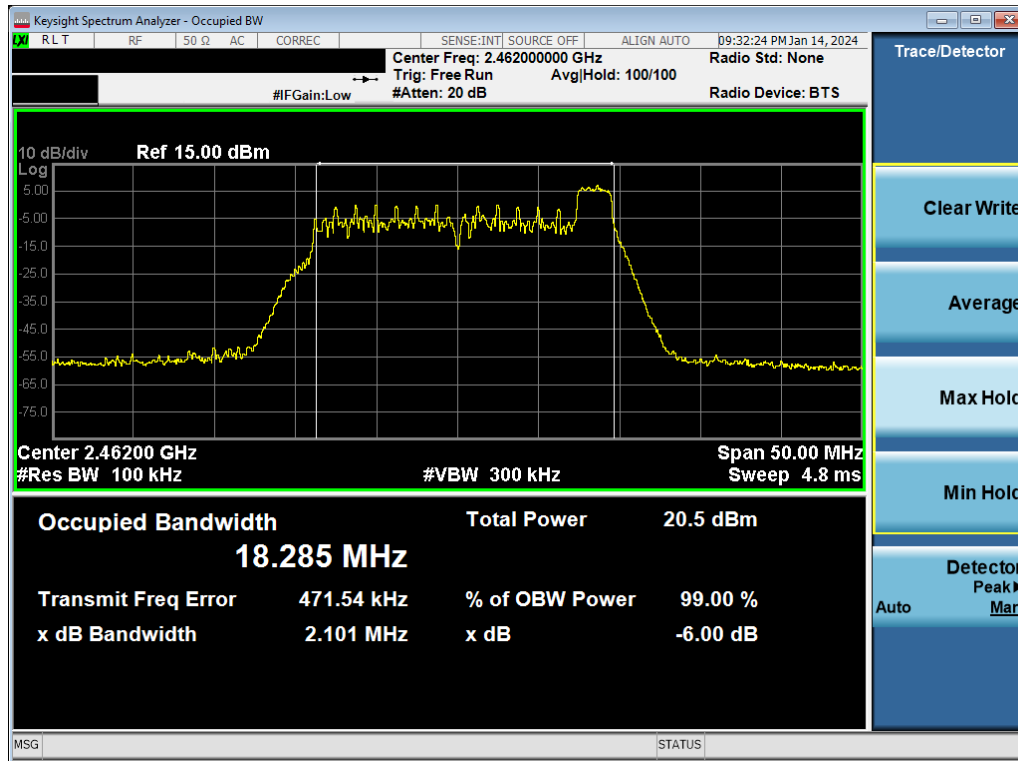

Plot 7-9. 6dB BW & 99% OBW Plot Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

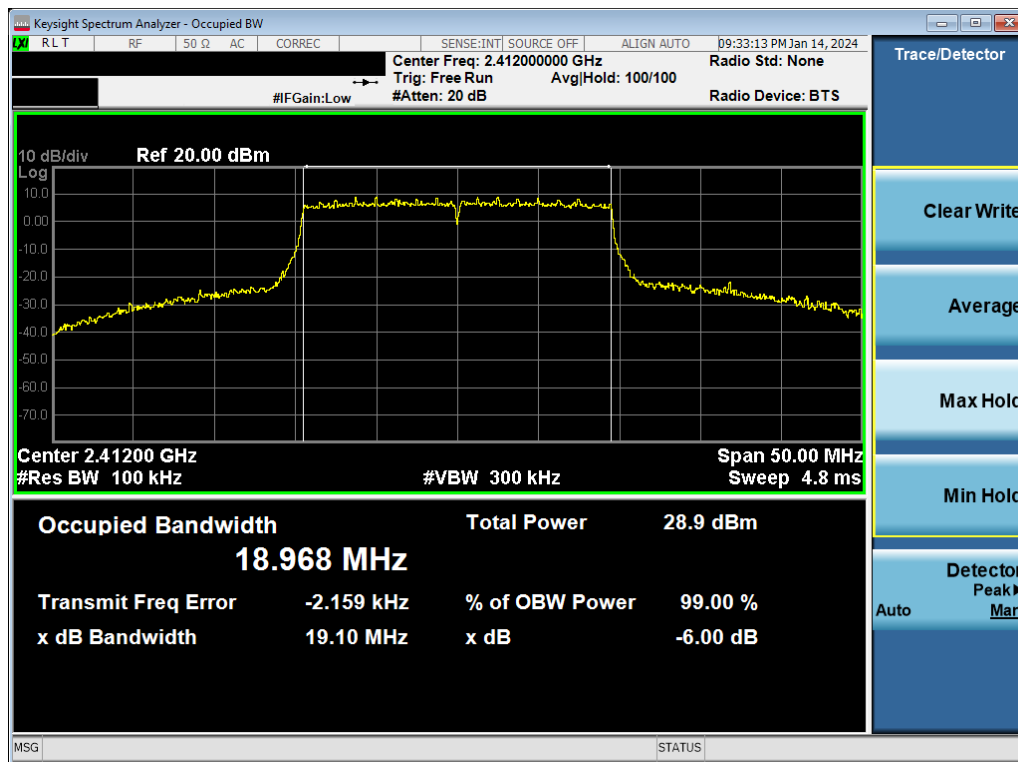


Plot 7-10. 6dB BW & 99% OBW Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 21 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

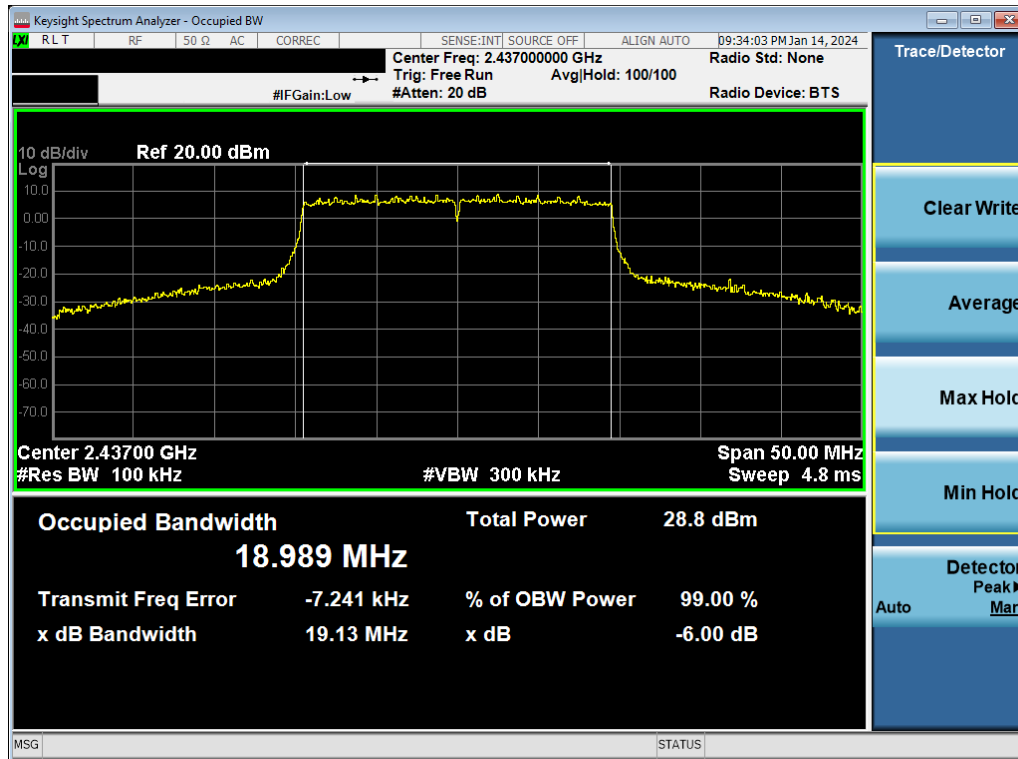

Plot 7-11. 6dB BW & 99% OBW Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 6)

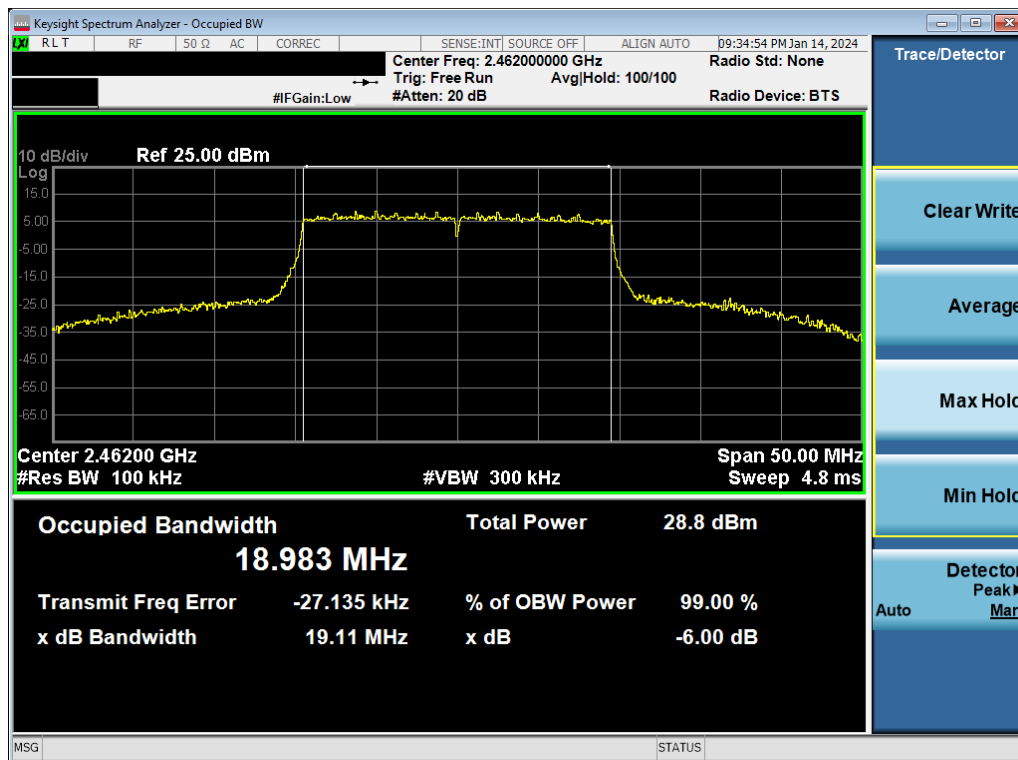

Plot 7-12. 6dB BW & 99% OBW Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 22 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2.2 Antenna 2a Bandwidth Measurements


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	26	0	10/11.8 (MCS9)	18.24	2.12	0.50	Pass
			26	4	10/11.8 (MCS9)	17.06	2.71	0.50	Pass
			26	8	10/11.8 (MCS9)	18.19	2.11	0.50	Pass
2437	6	ax	26	0	10/11.8 (MCS9)	18.14	2.10	0.50	Pass
			26	4	10/11.8 (MCS9)	17.01	2.72	0.50	Pass
			26	8	10/11.8 (MCS9)	18.29	2.14	0.50	Pass
2462	11	ax	26	0	10/11.8 (MCS9)	18.18	2.11	0.50	Pass
			26	4	10/11.8 (MCS9)	17.00	2.69	0.50	Pass
			26	8	10/11.8 (MCS9)	18.18	2.13	0.50	Pass
2412	1	ax	242	61	97.5/114.7 (MCS9)	18.98	19.10	0.50	Pass
2437	6	ax	242	61	97.5/114.7 (MCS9)	18.95	19.09	0.50	Pass
2462	11	ax	242	61	97.5/114.7 (MCS9)	18.99	19.13	0.50	Pass

Table 7-3. 6dB BW & 99% OBW Measurements Antenna 2a


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 23 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

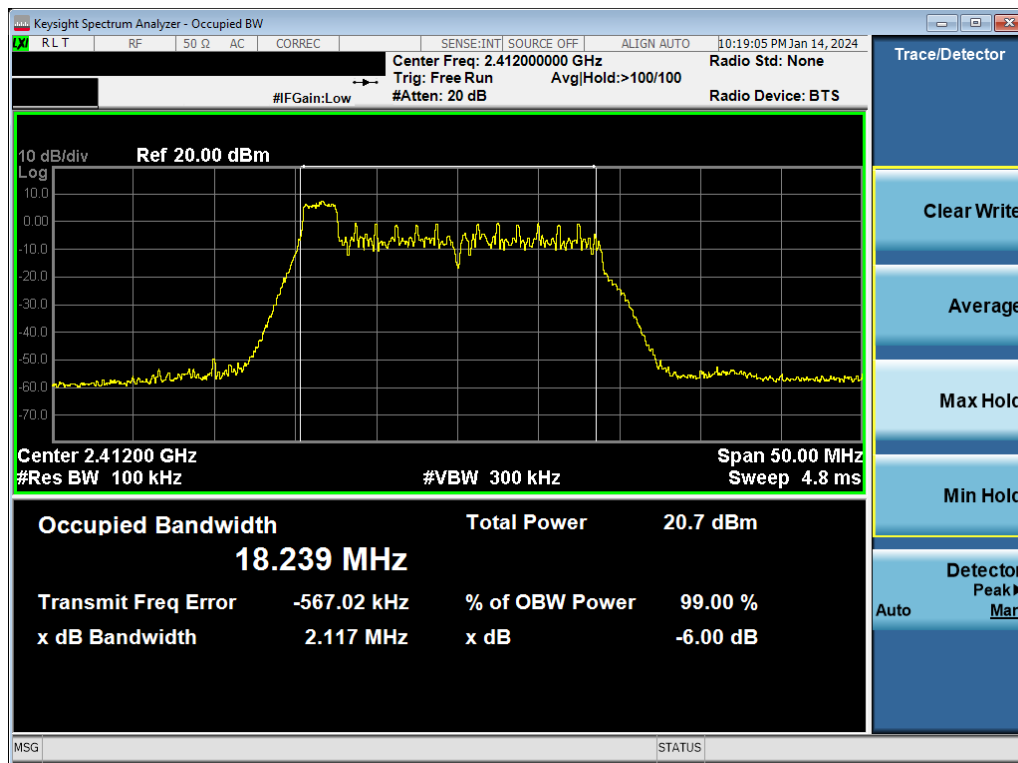

Plot 7-13. 6dB BW & 99% OBW Plot Antenna 2a (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

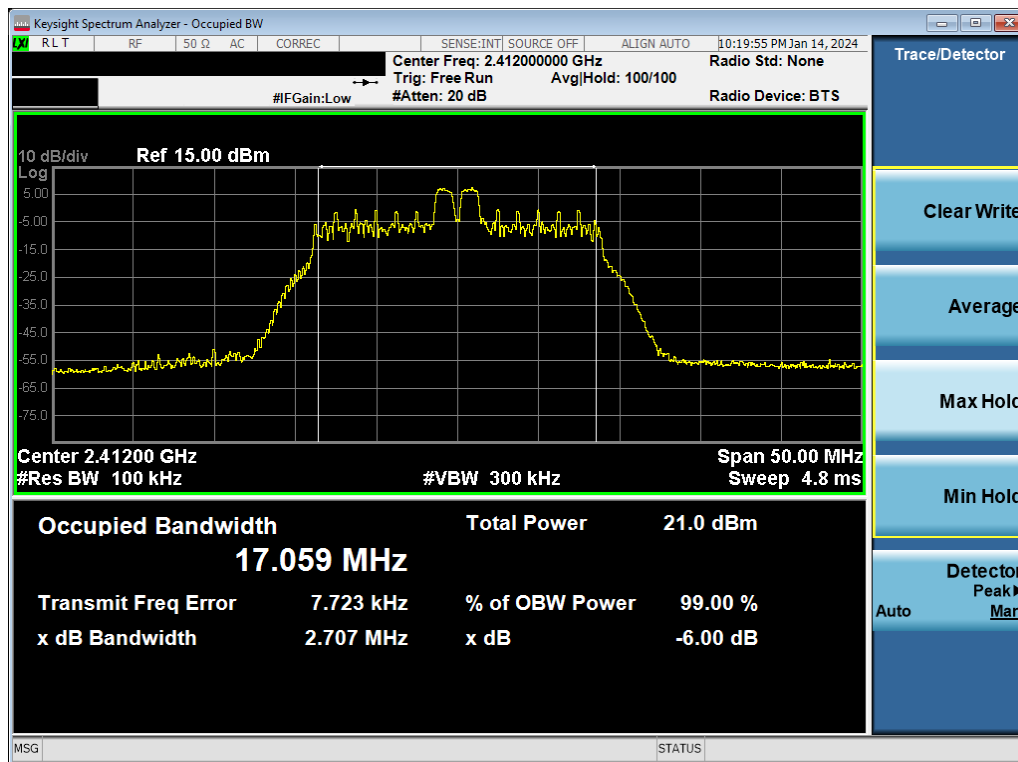


Plot 7-14. 6dB BW & 99% OBW Plot Antenna 2a (802.11ax OFDMA – RU26 Index 4 – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 24 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

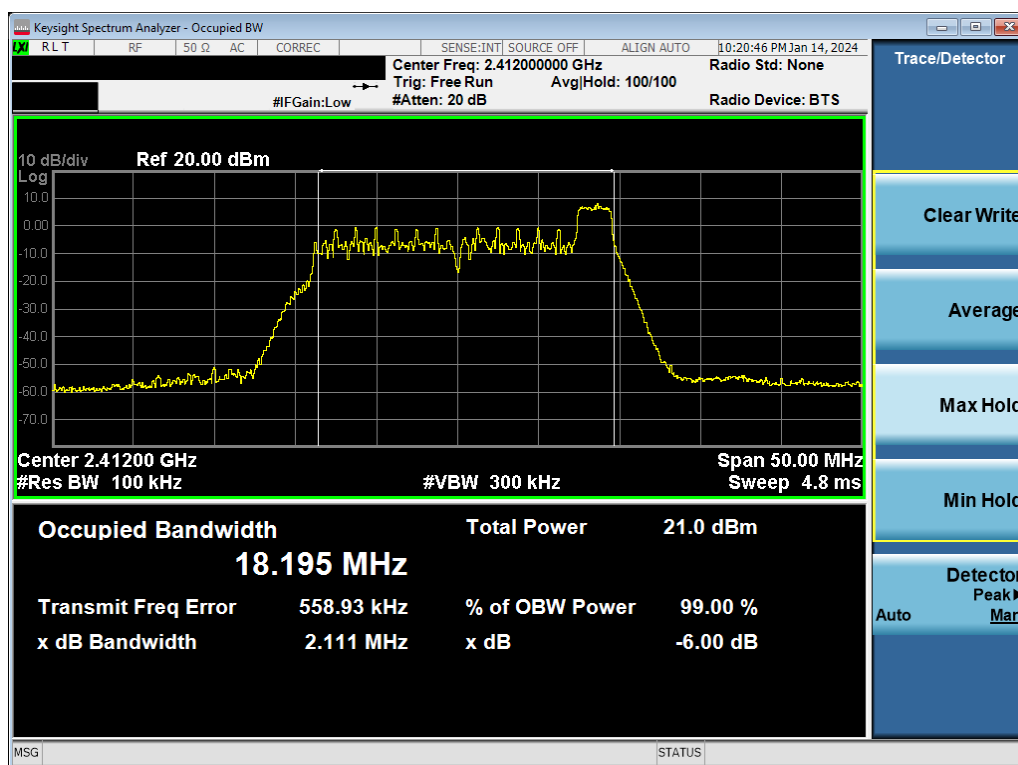

Plot 7-15. 6dB BW & 99% OBW Plot Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 1)

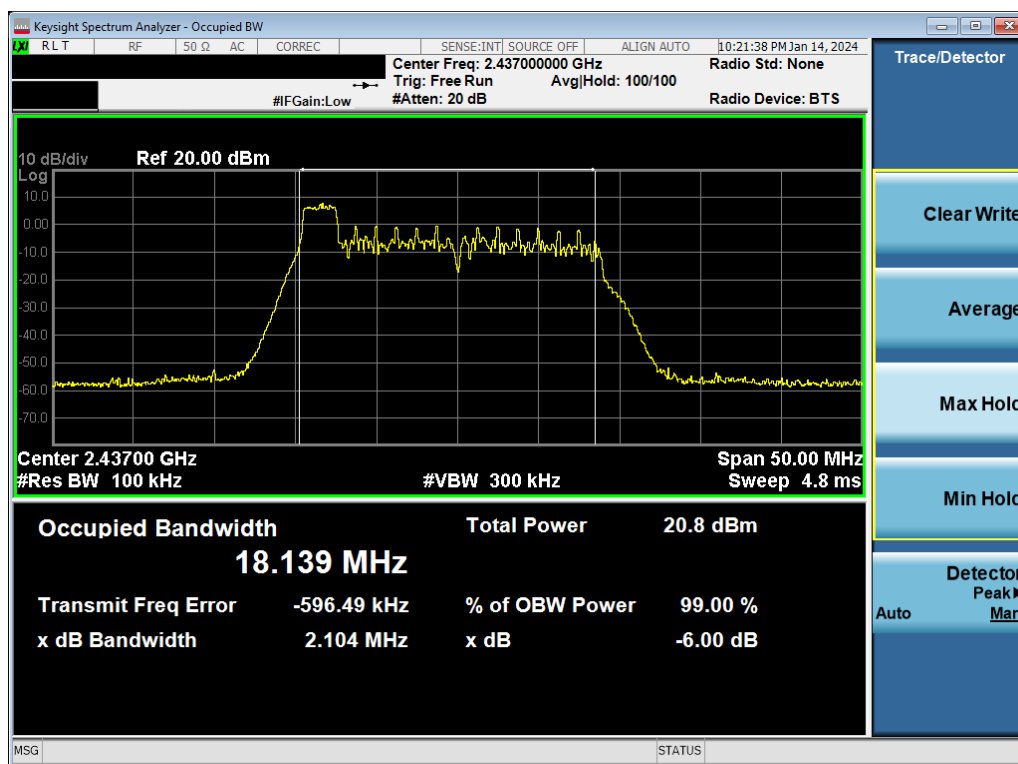


Plot 7-16. 6dB BW & 99% OBW Plot Antenna 2a (802.11ax OFDMA – RU26 Index 0 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 25 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

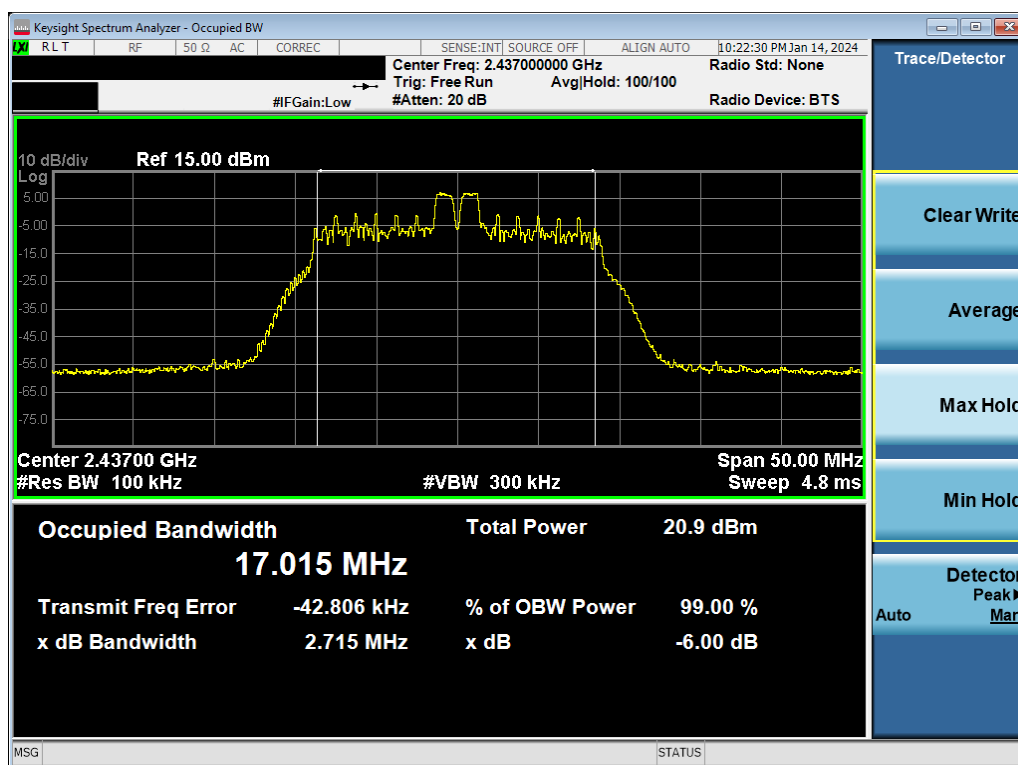

Plot 7-17. 6dB BW & 99% OBW Plot Antenna 2a (802.11ax OFDMA – RU26 Index 4 – Ch. 6)

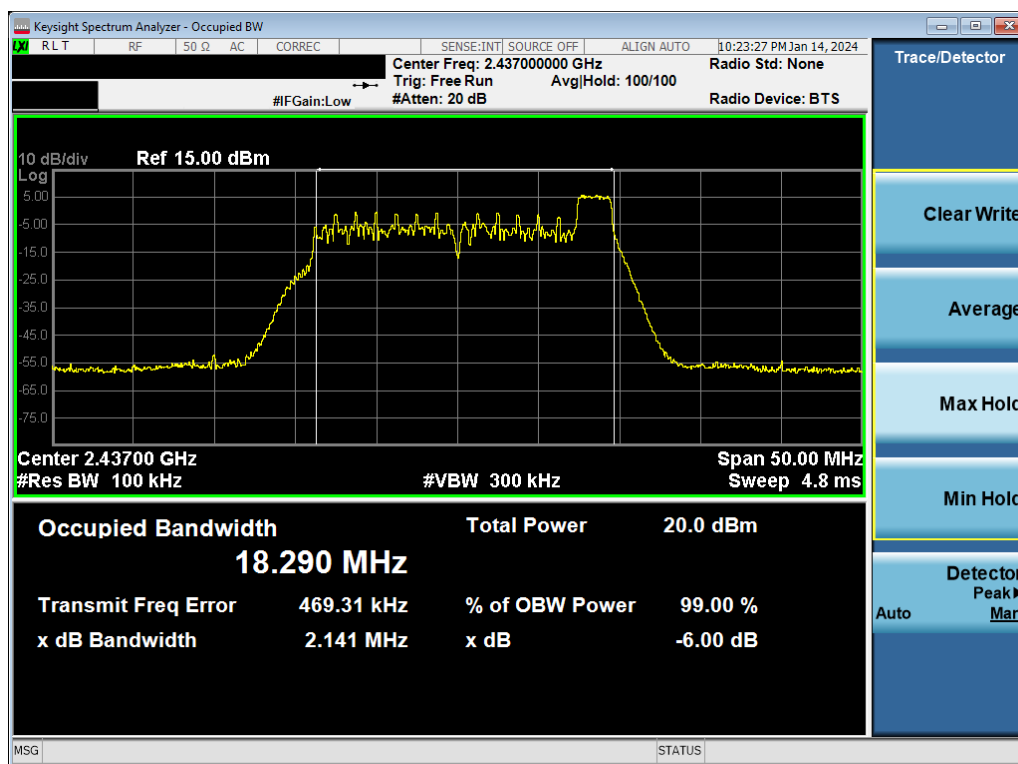


Plot 7-18. 6dB BW & 99% OBW Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 26 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

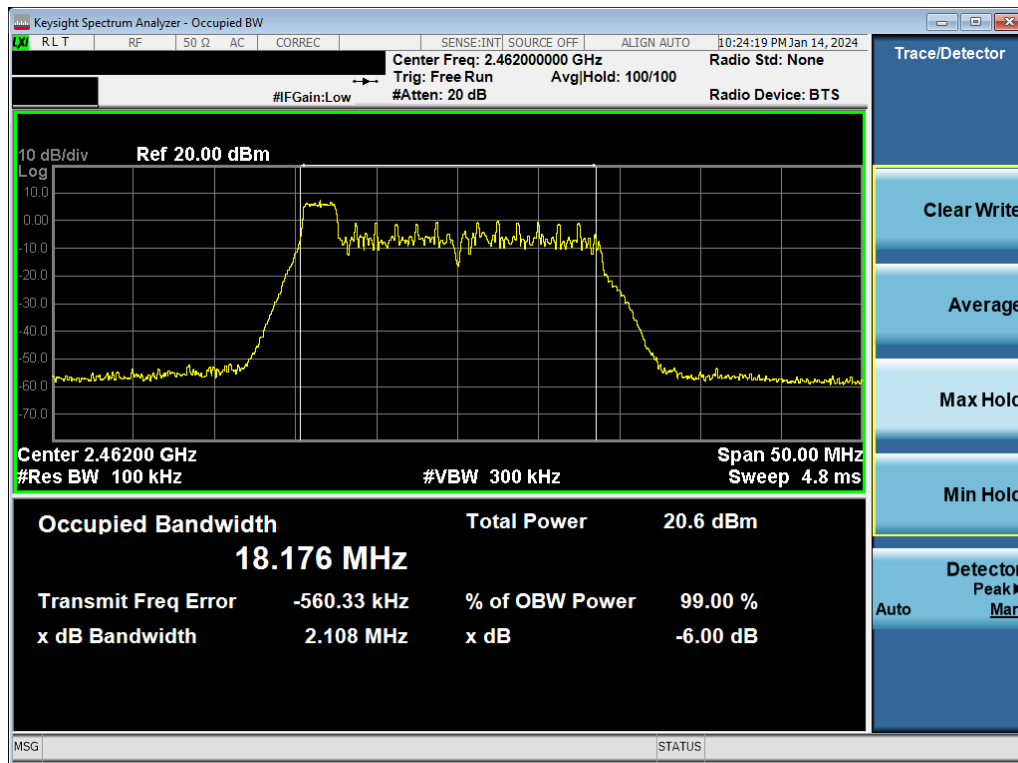


Plot 7-19. 6dB BW & 99% OBW Antenna 2a (802.11ax OFDMA – RU26 Index 0 – Ch. 11)

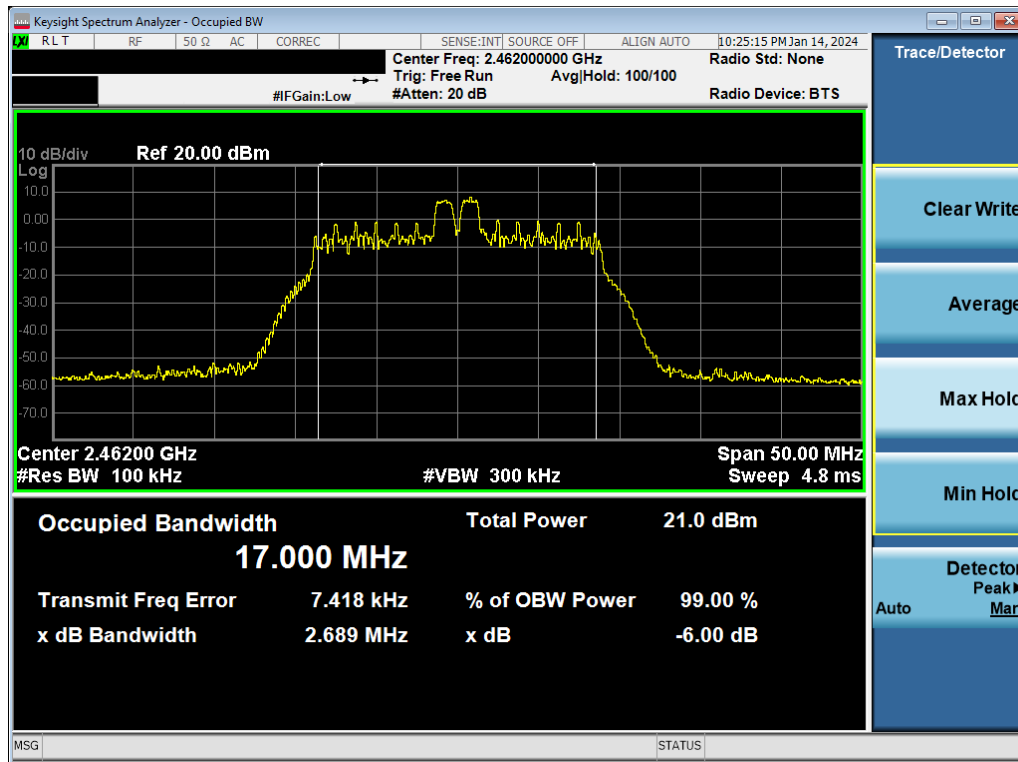


Plot 7-20. 6dB BW & 99% OBW Antenna 2a (802.11ax OFDMA – RU26 Index 4 – Ch. 11)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 27 of 150

V 10.6 09/14/2023

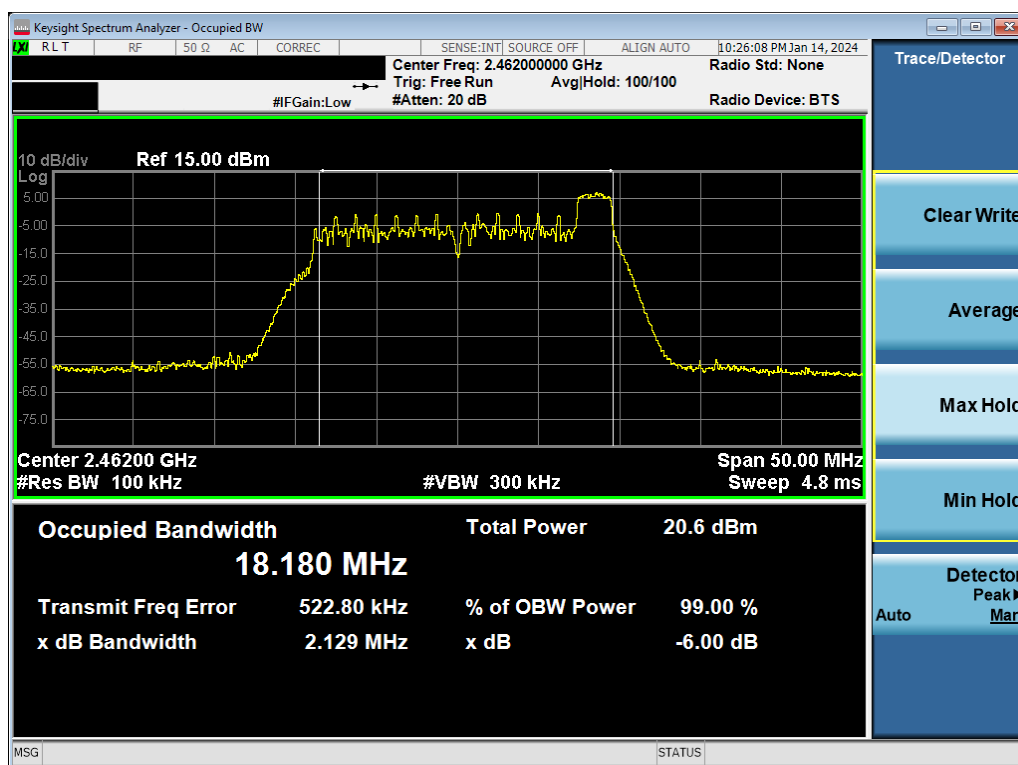

Plot 7-21. 6dB BW & 99% OBW Plot Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

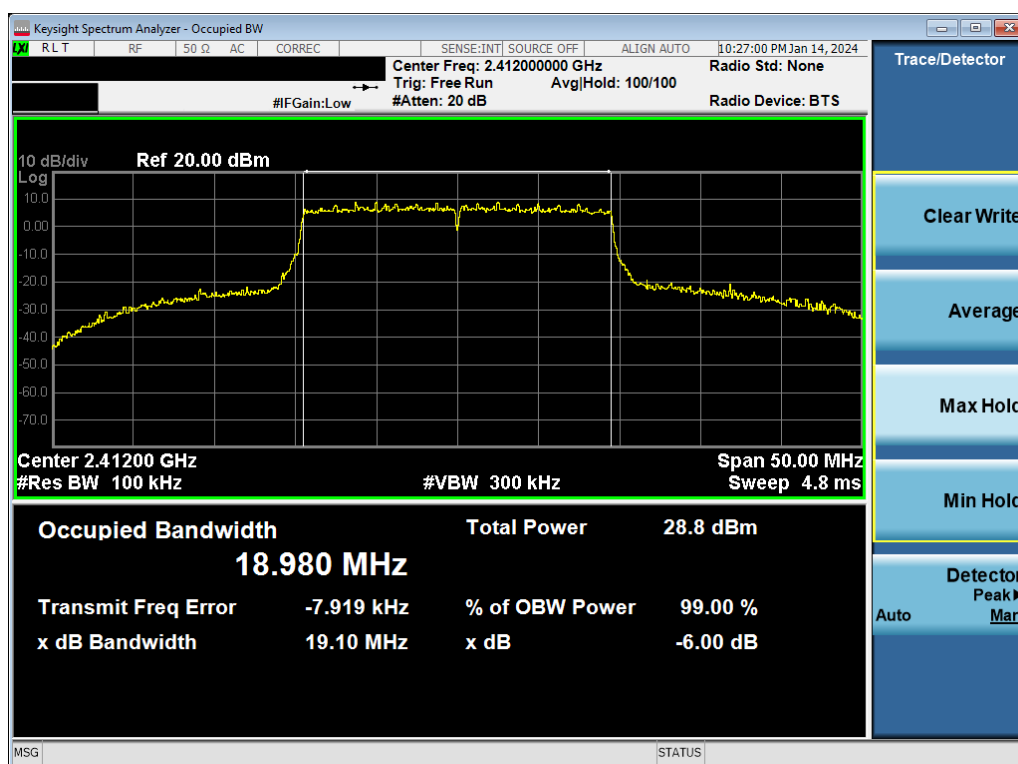


Plot 7-22. 6dB BW & 99% OBW Plot Antenna 2a (802.11ax OFDMA – RU242 – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 28 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

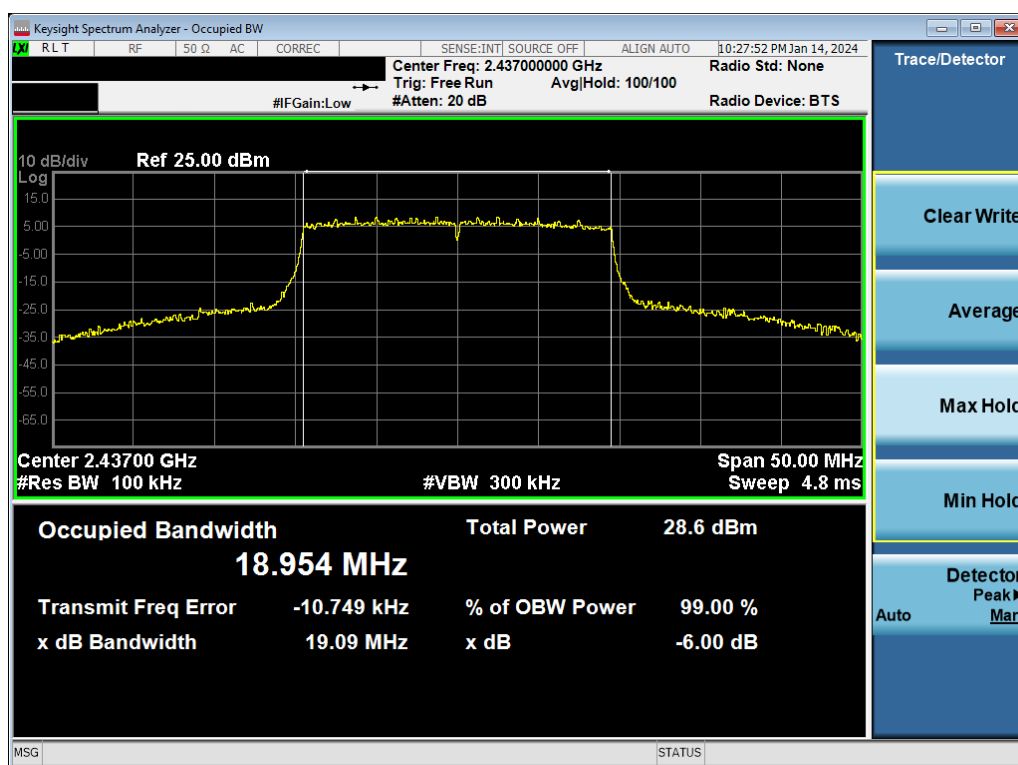

Plot 7-23. 6dB BW & 99% OBW Plot Antenna 2a (802.11ax OFDMA – RU242 – Ch. 6)

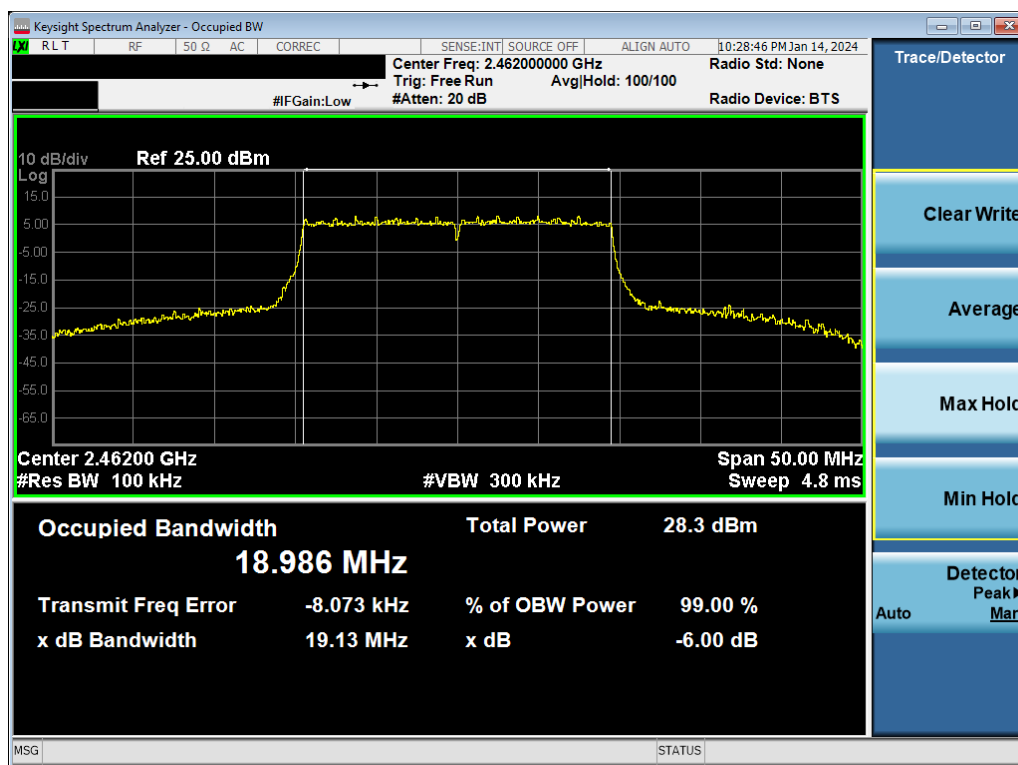

Plot 7-24. 6dB BW & 99% OBW Plot Antenna 2a (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 29 of 150

V 10.6 09/14/2023

7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum peak conducted output power of digital modulation systems operating in the 2400-2483.5 MHz band is 1 Watt.

The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For DTSSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.9.1.3 PKPM1 Peak Power Method
 KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method
 ANSI C63.10-2013 – Subclause 11.9.2.3.2 Method AVGPM-G
 KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)
 ANSI C63.10-2013 – Subclause 14.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

1. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.
2. For 802.11ax-RU, the worst case data rate was found to be MCS9.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 30 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.1 Peak Output Power Measurement

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	108/114.7 (MCS9)	PEAK	20.24	30.00	-9.76	3.60	23.84	36.02	-12.18
2412	1	26	4	108/114.7 (MCS9)	PEAK	20.56	30.00	-9.44	3.60	24.16	36.02	-11.86
2412	1	26	8	108/114.7 (MCS9)	PEAK	20.36	30.00	-9.64	3.60	23.96	36.02	-12.06
2437	6	26	0	108/114.7 (MCS9)	PEAK	20.60	30.00	-9.40	3.60	24.20	36.02	-11.82
2437	6	26	4	108/114.7 (MCS9)	PEAK	20.46	30.00	-9.54	3.60	24.06	36.02	-11.96
2437	6	26	8	108/114.7 (MCS9)	PEAK	20.54	30.00	-9.46	3.60	24.14	36.02	-11.88
2462	11	26	0	108/114.7 (MCS9)	PEAK	20.74	30.00	-9.26	3.60	24.34	36.02	-11.68
2462	11	26	4	108/114.7 (MCS9)	PEAK	20.49	30.00	-9.51	3.60	24.09	36.02	-11.93
2462	11	26	8	108/114.7 (MCS9)	PEAK	20.80	30.00	-9.20	3.60	24.40	36.02	-11.62
2467	12	26	0	108/114.7 (MCS9)	PEAK	20.76	30.00	-9.24	3.60	24.36	36.02	-11.66
2467	12	26	4	108/114.7 (MCS9)	PEAK	20.55	30.00	-9.45	3.60	24.15	36.02	-11.87
2467	12	26	8	108/114.7 (MCS9)	PEAK	20.84	30.00	-9.16	3.60	24.44	36.02	-11.58

Table 7-4. Peak Conducted Output Power Measurements Antenna 4a (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	108/114.7 (MCS9)	PEAK	23.50	30.00	-6.50	3.60	27.10	36.02	-8.92
2417	2	242	61	108/114.7 (MCS9)	PEAK	25.35	30.00	-4.65	3.60	28.95	36.02	-7.07
2422	3	242	61	108/114.7 (MCS9)	PEAK	26.39	30.00	-3.61	3.60	29.99	36.02	-6.03
2427	4	242	61	108/114.7 (MCS9)	PEAK	27.14	30.00	-2.86	3.60	30.74	36.02	-5.28
2432	5	242	61	108/114.7 (MCS9)	PEAK	27.18	30.00	-2.82	3.60	30.78	36.02	-5.24
2437	6	242	61	108/114.7 (MCS9)	PEAK	27.13	30.00	-2.87	3.60	30.73	36.02	-5.29
2442	7	242	61	108/114.7 (MCS9)	PEAK	27.21	30.00	-2.79	3.60	30.81	36.02	-5.21
2447	8	242	61	108/114.7 (MCS9)	PEAK	26.86	30.00	-3.14	3.60	30.46	36.02	-5.56
2452	9	242	61	108/114.7 (MCS9)	PEAK	26.76	30.00	-3.24	3.60	30.36	36.02	-5.66
2457	10	242	61	108/114.7 (MCS9)	PEAK	25.42	30.00	-4.58	3.60	29.02	36.02	-7.00
2462	11	242	61	108/114.7 (MCS9)	PEAK	23.14	30.00	-6.86	3.60	26.74	36.02	-9.28
2467	12	242	61	108/114.7 (MCS9)	PEAK	21.44	30.00	-8.56	3.60	25.04	36.02	-10.98

Table 7-5. Peak Conducted Output Power Measurements Antenna 4a (RU242)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	108/114.7 (MCS9)	PEAK	20.28	30.00	-9.72	1.90	22.18	36.02	-13.84
2412	1	26	4	108/114.7 (MCS9)	PEAK	20.35	30.00	-9.65	1.90	22.25	36.02	-13.77
2412	1	26	8	108/114.7 (MCS9)	PEAK	20.22	30.00	-9.78	1.90	22.12	36.02	-13.90
2437	6	26	0	108/114.7 (MCS9)	PEAK	20.28	30.00	-9.72	1.90	22.18	36.02	-13.84
2437	6	26	4	108/114.7 (MCS9)	PEAK	20.45	30.00	-9.55	1.90	22.35	36.02	-13.67
2437	6	26	8	108/114.7 (MCS9)	PEAK	20.28	30.00	-9.72	1.90	22.18	36.02	-13.84
2462	11	26	0	108/114.7 (MCS9)	PEAK	20.38	30.00	-9.62	1.90	22.28	36.02	-13.74
2462	11	26	4	108/114.7 (MCS9)	PEAK	20.40	30.00	-9.60	1.90	22.30	36.02	-13.72
2462	11	26	8	108/114.7 (MCS9)	PEAK	20.40	30.00	-9.60	1.90	22.30	36.02	-13.72
2467	12	26	0	108/114.7 (MCS9)	PEAK	20.53	30.00	-9.47	1.90	22.43	36.02	-13.59
2467	12	26	4	108/114.7 (MCS9)	PEAK	20.40	30.00	-9.60	1.90	22.30	36.02	-13.72
2467	12	26	8	108/114.7 (MCS9)	PEAK	20.52	30.00	-9.48	1.90	22.42	36.02	-13.60

Table 7-6. Peak Conducted Output Power Measurements Antenna 2a (RU26)

FCC ID: BCGA2837 IC: 579C-A2837			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 31 of 150	

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Powers [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	108/114.7 (MCS9)	PEAK	23.40	30.00	-6.60	1.90	25.30	36.02	-10.72
2417	2	242	61	108/114.7 (MCS9)	PEAK	25.34	30.00	-4.66	1.90	27.24	36.02	-8.78
2422	3	242	61	108/114.7 (MCS9)	PEAK	26.30	30.00	-3.70	1.90	28.20	36.02	-7.82
2427	4	242	61	108/114.7 (MCS9)	PEAK	27.21	30.00	-2.79	1.90	29.11	36.02	-6.91
2432	5	242	61	108/114.7 (MCS9)	PEAK	27.13	30.00	-2.87	1.90	29.03	36.02	-6.99
2437	6	242	61	108/114.7 (MCS9)	PEAK	27.05	30.00	-2.95	1.90	28.95	36.02	-7.07
2442	7	242	61	108/114.7 (MCS9)	PEAK	27.12	30.00	-2.88	1.90	29.02	36.02	-7.00
2447	8	242	61	108/114.7 (MCS9)	PEAK	26.66	30.00	-3.34	1.90	28.56	36.02	-7.46
2452	9	242	61	108/114.7 (MCS9)	PEAK	26.56	30.00	-3.44	1.90	28.46	36.02	-7.56
2457	10	242	61	108/114.7 (MCS9)	PEAK	25.05	30.00	-4.95	1.90	26.95	36.02	-9.07
2462	11	242	61	108/114.7 (MCS9)	PEAK	22.94	30.00	-7.06	1.90	24.84	36.02	-11.18
2467	12	242	61	108/114.7 (MCS9)	PEAK	21.55	30.00	-8.45	1.90	23.45	36.02	-12.57

Table 7-7. Peak Conducted Output Power Measurements Antenna 2a (RU242)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						Antenna 4a	Antenna 2a	Summed						
2412	1	26	0	216/229.4 (MCS9)	PEAK	20.25	20.15	23.21	30.00	-6.79	5.80	29.01	36.02	-7.01
2412	1	26	4	216/229.4 (MCS9)	PEAK	20.58	20.46	23.53	30.00	-6.47	5.80	29.34	36.02	-6.68
2412	1	26	8	216/229.4 (MCS9)	PEAK	20.27	20.44	23.37	30.00	-6.63	5.80	29.17	36.02	-6.85
2437	6	26	0	216/229.4 (MCS9)	PEAK	20.56	20.43	23.50	30.00	-6.50	5.80	29.31	36.02	-6.71
2437	6	26	4	216/229.4 (MCS9)	PEAK	20.44	20.37	23.41	30.00	-6.59	5.80	29.22	36.02	-6.81
2437	6	26	8	216/229.4 (MCS9)	PEAK	20.64	20.43	23.54	30.00	-6.46	5.80	29.35	36.02	-6.68
2462	11	26	0	216/229.4 (MCS9)	PEAK	20.78	20.56	23.68	30.00	-6.32	5.80	29.48	36.02	-6.54
2462	11	26	4	216/229.4 (MCS9)	PEAK	20.44	20.49	23.48	30.00	-6.52	5.80	29.28	36.02	-6.74
2462	11	26	8	216/229.4 (MCS9)	PEAK	20.78	20.53	23.67	30.00	-6.33	5.80	29.47	36.02	-6.55
2467	12	26	0	216/229.4 (MCS9)	PEAK	20.51	20.71	23.62	30.00	-6.38	5.80	29.42	36.02	-6.60
2467	12	26	4	216/229.4 (MCS9)	PEAK	20.27	20.18	23.24	30.00	-6.76	5.80	29.04	36.02	-6.98
2467	12	26	8	216/229.4 (MCS9)	PEAK	20.81	20.68	23.76	30.00	-6.24	5.80	29.56	36.02	-6.46

Table 7-8. Peak Conducted Output Power Measurements CDD (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						Antenna 4a	Antenna 2a	Summed						
2412	1	242	61	216/229.4 (MCS9)	PEAK	23.03	22.99	26.02	30.00	-3.98	5.80	31.82	36.02	-4.20
2417	2	242	61	216/229.4 (MCS9)	PEAK	24.99	24.96	27.99	30.00	-2.01	5.80	33.79	36.02	-2.23
2422	3	242	61	216/229.4 (MCS9)	PEAK	26.47	26.30	29.39	30.00	-0.61	5.80	35.19	36.02	-0.83
2427	4	242	61	216/229.4 (MCS9)	PEAK	26.58	26.54	29.57	30.00	-0.43	5.80	35.37	36.02	-0.65
2432	5	242	61	216/229.4 (MCS9)	PEAK	26.09	26.07	29.09	30.00	-0.91	5.80	34.89	36.02	-1.13
2437	6	242	61	216/229.4 (MCS9)	PEAK	26.12	26.14	29.14	30.00	-0.86	5.80	34.94	36.02	-1.08
2442	7	242	61	216/229.4 (MCS9)	PEAK	26.12	26.03	29.08	30.00	-0.92	5.80	34.89	36.02	-1.13
2447	8	242	61	216/229.4 (MCS9)	PEAK	26.41	26.52	29.48	30.00	-0.52	5.80	35.28	36.02	-0.74
2452	9	242	61	216/229.4 (MCS9)	PEAK	26.52	26.34	29.44	30.00	-0.56	5.80	35.24	36.02	-0.78
2457	10	242	61	216/229.4 (MCS9)	PEAK	24.87	24.80	27.85	30.00	-2.15	5.80	33.65	36.02	-2.37
2462	11	242	61	216/229.4 (MCS9)	PEAK	22.53	22.64	25.59	30.00	-4.41	5.80	31.39	36.02	-4.63
2467	12	242	61	216/229.4 (MCS9)	PEAK	20.37	20.60	23.50	30.00	-6.50	5.80	29.30	36.02	-6.72

Table 7-9. Peak Conducted Output Power Measurements CDD (RU242)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 32 of 150

7.3.2 Average Output Power Measurement

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	108/114.7 (MCS9)	AVG	10.91	30.00	-19.10	3.60	14.51	36.02	-21.52
2412	1	26	4	108/114.7 (MCS9)	AVG	11.44	30.00	-18.56	3.60	15.04	36.02	-20.98
2412	1	26	8	108/114.7 (MCS9)	AVG	11.16	30.00	-18.85	3.60	14.76	36.02	-21.27
2437	6	26	0	108/114.7 (MCS9)	AVG	11.22	30.00	-18.78	3.60	14.82	36.02	-21.20
2437	6	26	4	108/114.7 (MCS9)	AVG	11.44	30.00	-18.56	3.60	15.04	36.02	-20.98
2437	6	26	8	108/114.7 (MCS9)	AVG	10.80	30.00	-19.20	3.60	14.40	36.02	-21.62
2462	11	26	0	108/114.7 (MCS9)	AVG	11.19	30.00	-18.81	3.60	14.79	36.02	-21.23
2462	11	26	4	108/114.7 (MCS9)	AVG	11.36	30.00	-18.64	3.60	14.96	36.02	-21.06
2462	11	26	8	108/114.7 (MCS9)	AVG	10.51	30.00	-19.49	3.60	14.11	36.02	-21.91
2467	12	26	0	108/114.7 (MCS9)	AVG	11.28	30.00	-18.73	3.60	14.88	36.02	-21.15
2467	12	26	4	108/114.7 (MCS9)	AVG	11.40	30.00	-18.60	3.60	15.00	36.02	-21.02
2467	12	26	8	108/114.7 (MCS9)	AVG	10.34	30.00	-19.66	3.60	13.94	36.02	-22.08

Table 7-10. Average Conducted Output Power Measurements Antenna 4a (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	108/114.7 (MCS9)	AVG	13.87	30.00	-16.13	3.60	17.47	36.02	-18.55
2417	2	242	61	108/114.7 (MCS9)	AVG	16.00	30.00	-14.00	3.60	19.60	36.02	-16.42
2422	3	242	61	108/114.7 (MCS9)	AVG	17.78	30.00	-12.22	3.60	21.38	36.02	-14.64
2427	4	242	61	108/114.7 (MCS9)	AVG	19.78	30.00	-10.22	3.60	23.38	36.02	-12.64
2432	5	242	61	108/114.7 (MCS9)	AVG	20.20	30.00	-9.80	3.60	23.80	36.02	-12.22
2437	6	242	61	108/114.7 (MCS9)	AVG	20.14	30.00	-9.87	3.60	23.74	36.02	-12.29
2442	7	242	61	108/114.7 (MCS9)	AVG	20.22	30.00	-9.78	3.60	23.82	36.02	-12.20
2447	8	242	61	108/114.7 (MCS9)	AVG	19.00	30.00	-11.00	3.60	22.60	36.02	-13.42
2452	9	242	61	108/114.7 (MCS9)	AVG	18.50	30.00	-11.50	3.60	22.10	36.02	-13.92
2457	10	242	61	108/114.7 (MCS9)	AVG	16.00	30.00	-14.00	3.60	19.60	36.02	-16.42
2462	11	242	61	108/114.7 (MCS9)	AVG	13.50	30.00	-16.50	3.60	17.10	36.02	-18.92
2467	12	242	61	108/114.7 (MCS9)	AVG	11.83	30.00	-18.17	3.60	15.43	36.02	-20.59

Table 7-11. Average Conducted Output Power Measurements Antenna 4a (RU242)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	108/114.7 (MCS9)	AVG	10.96	30.00	-19.05	1.90	12.86	36.02	-23.17
2412	1	26	4	108/114.7 (MCS9)	AVG	11.27	30.00	-18.73	1.90	13.17	36.02	-22.85
2412	1	26	8	108/114.7 (MCS9)	AVG	11.02	30.00	-18.98	1.90	12.92	36.02	-23.10
2437	6	26	0	108/114.7 (MCS9)	AVG	10.98	30.00	-19.02	1.90	12.88	36.02	-23.14
2437	6	26	4	108/114.7 (MCS9)	AVG	11.48	30.00	-18.53	1.90	13.38	36.02	-22.65
2437	6	26	8	108/114.7 (MCS9)	AVG	9.94	30.00	-20.06	1.90	11.84	36.02	-24.18
2462	11	26	0	108/114.7 (MCS9)	AVG	10.49	30.00	-19.51	1.90	12.39	36.02	-23.63
2462	11	26	4	108/114.7 (MCS9)	AVG	11.35	30.00	-18.65	1.90	13.25	36.02	-22.77
2462	11	26	8	108/114.7 (MCS9)	AVG	10.59	30.00	-19.41	1.90	12.49	36.02	-23.53
2467	12	26	0	108/114.7 (MCS9)	AVG	10.49	30.00	-19.51	1.90	12.39	36.02	-23.63
2467	12	26	4	108/114.7 (MCS9)	AVG	11.32	30.00	-18.68	1.90	13.22	36.02	-22.80
2467	12	26	8	108/114.7 (MCS9)	AVG	9.69	30.00	-20.31	1.90	11.59	36.02	-24.43

Table 7-12. Average Conducted Output Power Measurements Antenna 2a (RU26)

FCC ID: BCGA2837 IC: 579C-A2837			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 33 of 150	

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Powers [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	108/114.7 (MCS9)	AVG	13.82	30.00	-16.18	1.90	15.72	36.02	-20.30
2417	2	242	61	108/114.7 (MCS9)	AVG	16.00	30.00	-14.00	1.90	17.90	36.02	-18.12
2422	3	242	61	108/114.7 (MCS9)	AVG	17.81	30.00	-12.19	1.90	19.71	36.02	-16.31
2427	4	242	61	108/114.7 (MCS9)	AVG	20.00	30.00	-10.00	1.90	21.90	36.02	-14.12
2432	5	242	61	108/114.7 (MCS9)	AVG	19.92	30.00	-10.08	1.90	21.82	36.02	-14.20
2437	6	242	61	108/114.7 (MCS9)	AVG	19.88	30.00	-10.12	1.90	21.78	36.02	-14.24
2442	7	242	61	108/114.7 (MCS9)	AVG	19.94	30.00	-10.06	1.90	21.84	36.02	-14.18
2447	8	242	61	108/114.7 (MCS9)	AVG	18.76	30.00	-11.24	1.90	20.66	36.02	-15.36
2452	9	242	61	108/114.7 (MCS9)	AVG	18.33	30.00	-11.67	1.90	20.23	36.02	-15.79
2457	10	242	61	108/114.7 (MCS9)	AVG	15.77	30.00	-14.23	1.90	17.67	36.02	-18.35
2462	11	242	61	108/114.7 (MCS9)	AVG	13.25	30.00	-16.76	1.90	15.15	36.02	-20.88
2467	12	242	61	108/114.7 (MCS9)	AVG	11.89	30.00	-18.11	1.90	13.79	36.02	-22.23

Table 7-13. Average Conducted Output Power Measurements Antenna 2a (RU242)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						Antenna 4a	Antenna 2a	Summed						
2412	1	26	0	216/229.4 (MCS9)	AVG	10.85	10.94	13.91	30.00	-16.09	5.80	19.71	36.02	-16.31
2412	1	26	4	216/229.4 (MCS9)	AVG	11.40	11.35	14.39	30.00	-15.61	5.80	20.19	36.02	-15.83
2412	1	26	8	216/229.4 (MCS9)	AVG	11.06	11.15	14.12	30.00	-15.88	5.80	19.92	36.02	-16.10
2437	6	26	0	216/229.4 (MCS9)	AVG	11.11	11.04	14.09	30.00	-15.91	5.80	19.89	36.02	-16.13
2437	6	26	4	216/229.4 (MCS9)	AVG	11.35	11.29	14.33	30.00	-15.67	5.80	20.13	36.02	-15.89
2437	6	26	8	216/229.4 (MCS9)	AVG	10.71	10.01	13.38	30.00	-16.62	5.80	19.19	36.02	-16.83
2462	11	26	0	216/229.4 (MCS9)	AVG	11.18	10.60	13.91	30.00	-16.09	5.80	19.71	36.02	-16.31
2462	11	26	4	216/229.4 (MCS9)	AVG	11.29	11.37	14.34	30.00	-15.66	5.80	20.14	36.02	-15.88
2462	11	26	8	216/229.4 (MCS9)	AVG	10.45	10.68	13.58	30.00	-16.42	5.80	19.38	36.02	-16.64
2467	12	26	0	216/229.4 (MCS9)	AVG	10.93	10.62	13.79	30.00	-16.21	5.80	19.59	36.02	-16.43
2467	12	26	4	216/229.4 (MCS9)	AVG	11.00	11.00	14.01	30.00	-15.99	5.80	19.81	36.02	-16.21
2467	12	26	8	216/229.4 (MCS9)	AVG	10.30	9.79	13.06	30.00	-16.94	5.80	18.86	36.02	-17.16

Table 7-14. Average Conducted Output Power Measurements CDD (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate [Mbps]	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						Antenna 4a	Antenna 2a	Summed						
2412	1	242	61	216/229.4 (MCS9)	AVG	13.37	13.37	16.38	30.00	-13.62	5.80	22.19	36.02	-13.84
2417	2	242	61	216/229.4 (MCS9)	AVG	15.50	15.50	18.51	30.00	-11.49	5.80	24.31	36.02	-11.71
2422	3	242	61	216/229.4 (MCS9)	AVG	17.97	17.83	20.91	30.00	-9.09	5.80	26.71	36.02	-9.31
2427	4	242	61	216/229.4 (MCS9)	AVG	19.29	19.48	22.40	30.00	-7.60	5.80	28.20	36.02	-7.82
2432	5	242	61	216/229.4 (MCS9)	AVG	20.00	19.89	22.95	30.00	-7.05	5.80	28.76	36.02	-7.27
2437	6	242	61	216/229.4 (MCS9)	AVG	20.18	20.19	23.19	30.00	-6.81	5.80	29.00	36.02	-7.02
2442	7	242	61	216/229.4 (MCS9)	AVG	19.99	19.91	22.96	30.00	-7.04	5.80	28.76	36.02	-7.26
2447	8	242	61	216/229.4 (MCS9)	AVG	18.44	18.50	21.48	30.00	-8.52	5.80	27.28	36.02	-8.74
2452	9	242	61	216/229.4 (MCS9)	AVG	18.00	17.93	20.98	30.00	-9.02	5.80	26.78	36.02	-9.24
2457	10	242	61	216/229.4 (MCS9)	AVG	15.43	15.41	18.43	30.00	-11.57	5.80	24.23	36.02	-11.79
2462	11	242	61	216/229.4 (MCS9)	AVG	12.93	13.00	15.97	30.00	-14.03	5.80	21.78	36.02	-14.24
2467	12	242	61	216/229.4 (MCS9)	AVG	10.78	10.98	13.89	30.00	-16.11	5.80	19.69	36.02	-16.33

Table 7-15. Average Conducted Output Power Measurements CDD (RU242)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 34 of 150

Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 4a and Antenna 2a were first measured separately during CDD transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Subclause 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample CDD Calculation:

At 2412MHz the average conducted output power was measured to be 13.37 dBm for Antenna 4a and 13.37 dBm for Antenna 2a.

$$\text{Antenna 4a} + \text{Antenna 2a} = \text{CDD}$$

$$(13.37 \text{ dBm} + 13.37 \text{ dBm}) = (21.727 \text{ mW} + 21.727 \text{ mW}) = 43.454 \text{ mW} = 16.38 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 2412MHz, the average conducted output power was calculated to be 16.38 dBm with antenna gain of 5.80 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$16.38 \text{ dBm} + 5.80 \text{ dBi} = 22.19 \text{ dBm}$$

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 35 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, RU configurations, and RU indices were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.10.3 Method AVGPSPD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2013 – Subclause 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the OBW
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = power averaging (RMS)
6. Number of sweep points $\geq [2 \times \text{span} / \text{RBW}]$
7. Sweep time = auto couple
8. Trace mode = Averaging (RMS) over a minimum of 100 traces
9. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. All data rates were investigated and only the worst case is reported.
2. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 36 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.1 Antenna 4a Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]	Pass/Fail
2412	1	ax	26	0	10/11.8 (MCS9)	-16.33	8.0	-24.33	Pass
			26	4	10/11.8 (MCS9)	-15.93	8.0	-23.93	Pass
			26	8	10/11.8 (MCS9)	-16.00	8.0	-24.00	Pass
2437	6	ax	26	0	10/11.8 (MCS9)	-16.09	8.0	-24.09	Pass
			26	4	10/11.8 (MCS9)	-15.70	8.0	-23.70	Pass
			26	8	10/11.8 (MCS9)	-16.82	8.0	-24.82	Pass
2462	11	ax	26	0	10/11.8 (MCS9)	-16.25	8.0	-24.25	Pass
			26	4	10/11.8 (MCS9)	-15.92	8.0	-23.92	Pass
			26	8	10/11.8 (MCS9)	-17.13	8.0	-25.13	Pass
2412	1	ax (20MHz)	242	61	97.5/114.7 (MCS9)	-20.30	8.0	-28.30	Pass
2437	6	ax (20MHz)	242	61	97.5/114.7 (MCS9)	-13.99	8.0	-21.99	Pass
2462	11	ax (20MHz)	242	61	97.5/114.7 (MCS9)	-20.55	8.0	-28.55	Pass

Table 7-16. Conducted Power Density Measurements Antenna 4a


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 37 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

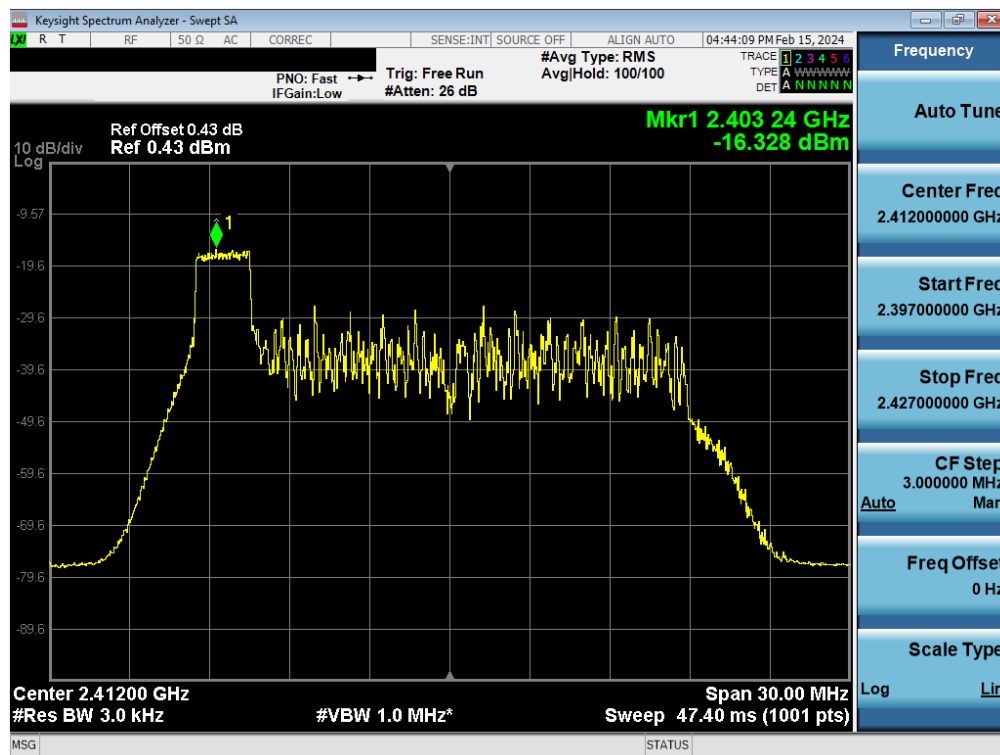

Plot 7-25. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

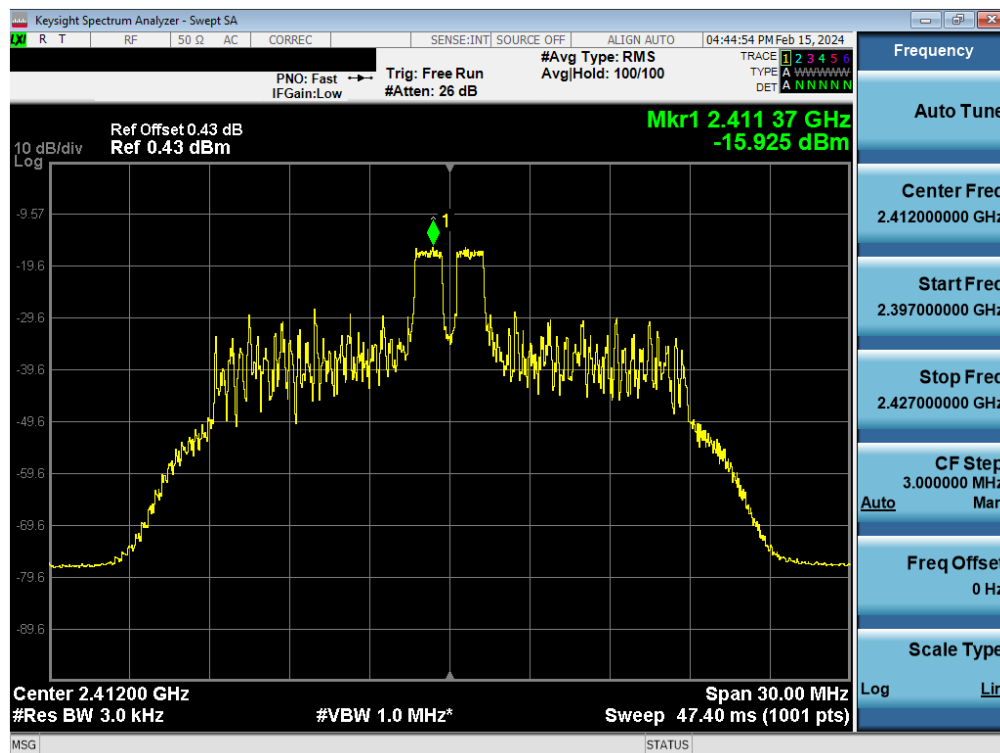


Plot 7-26. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 4 – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 38 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

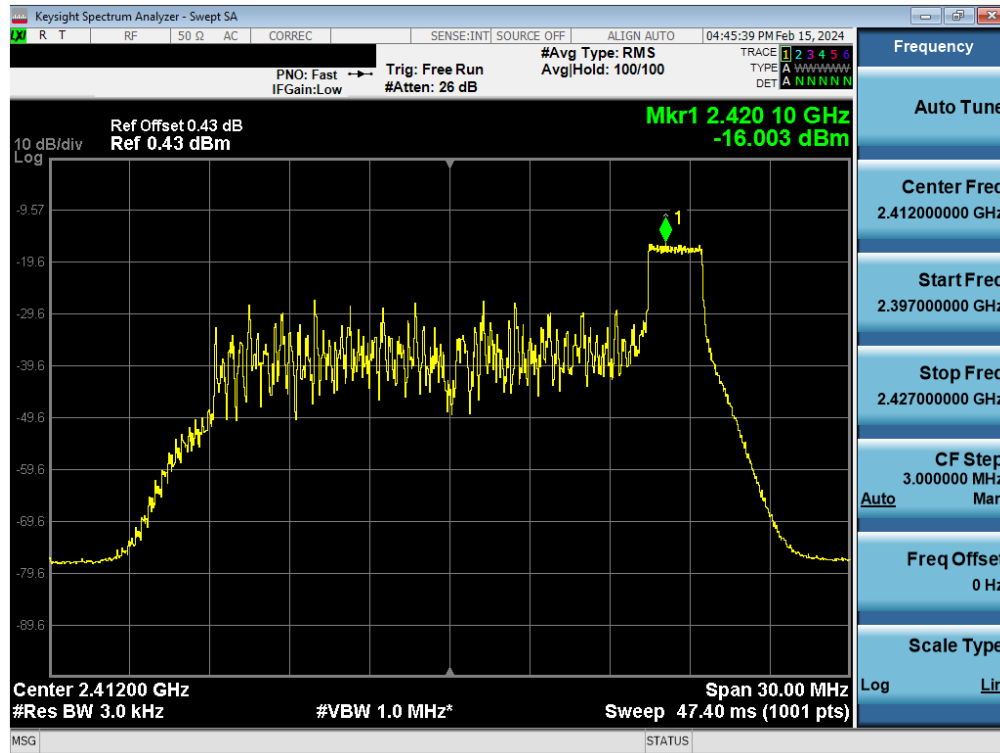

Plot 7-27. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 1)

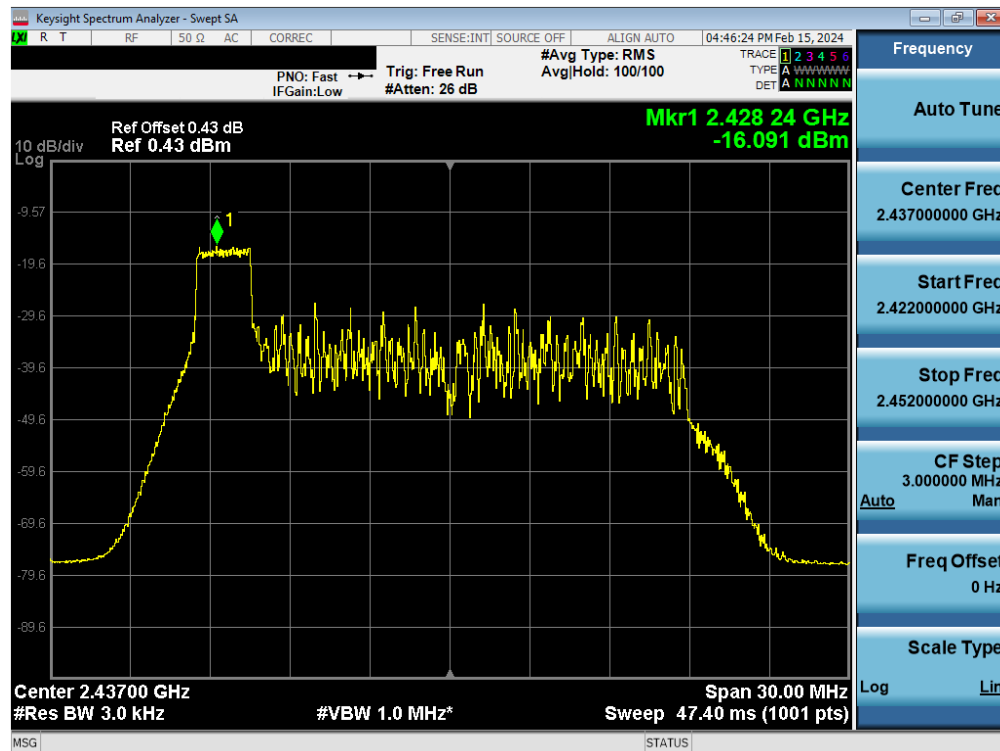


Plot 7-28. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 39 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

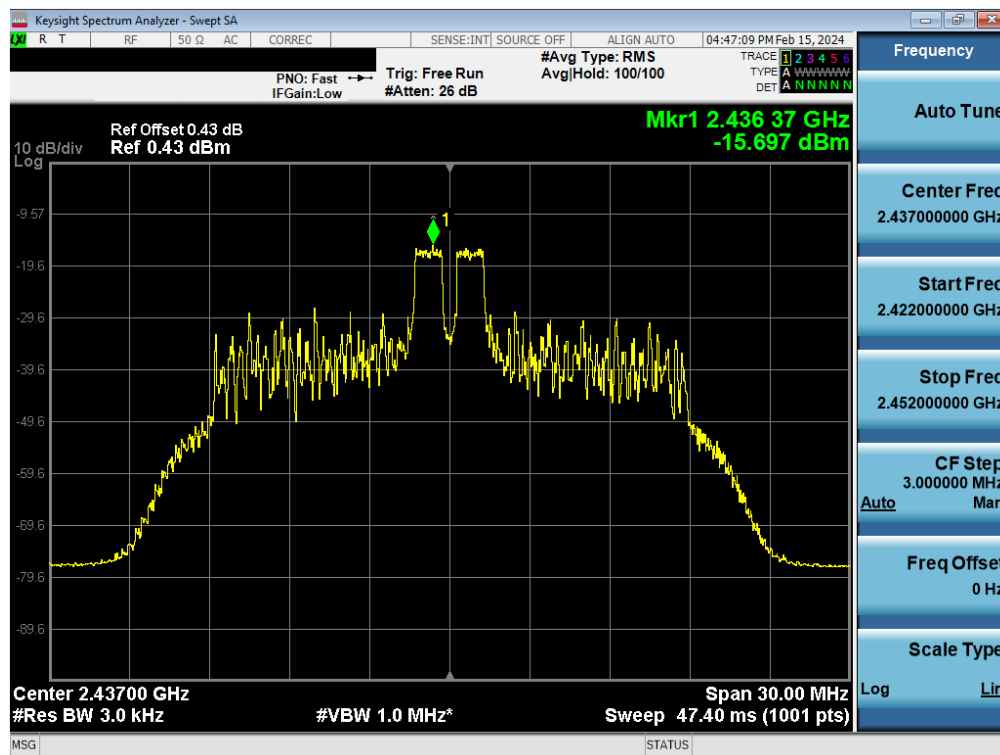

Plot 7-29. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 4 – Ch. 6)

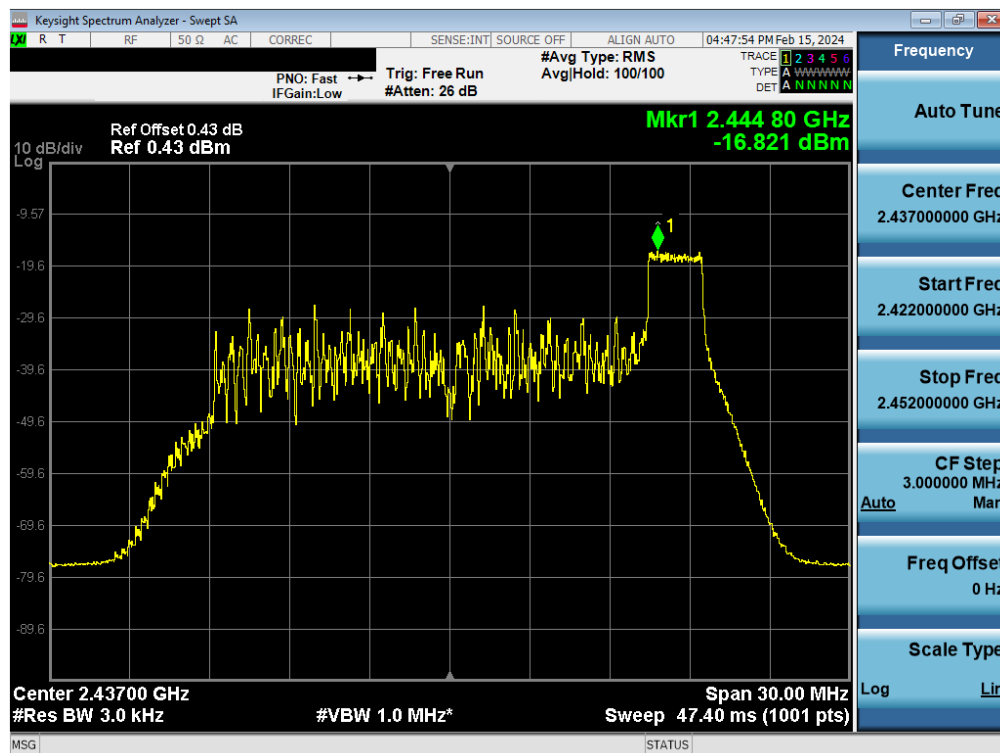


Plot 7-30. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 40 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

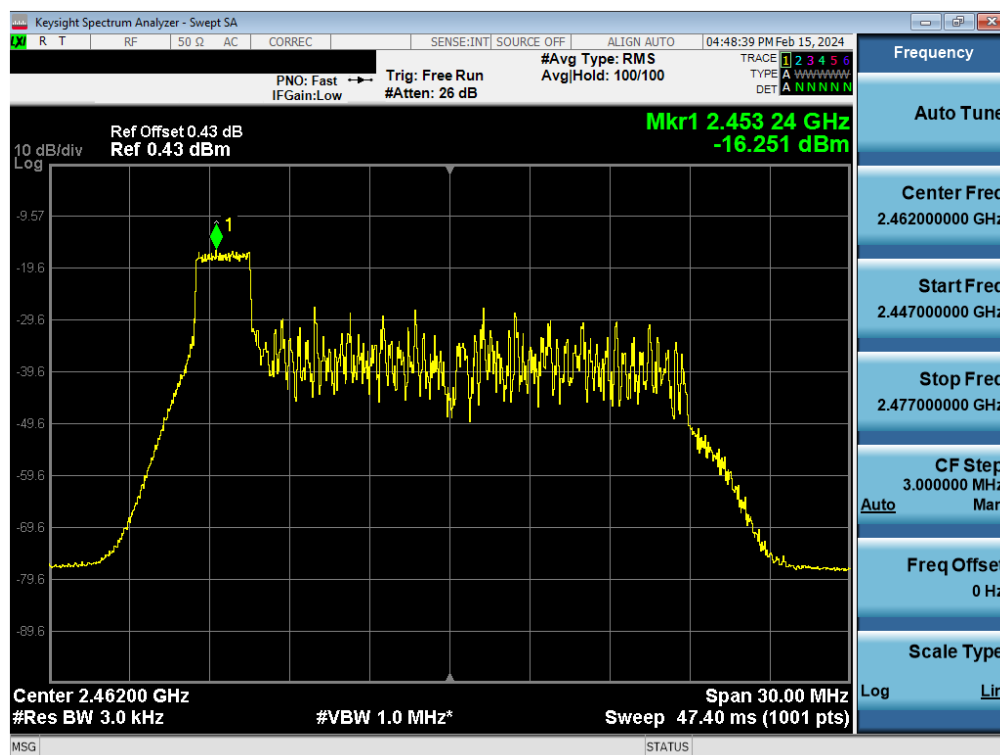

Plot 7-31. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 11)

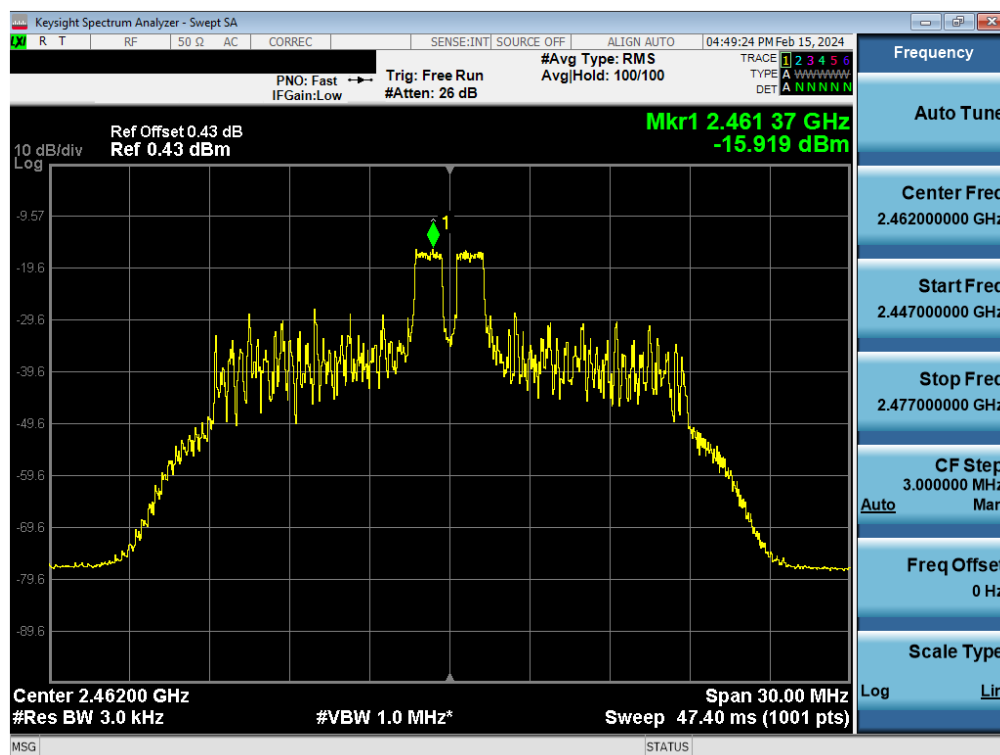


Plot 7-32. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 4 – Ch. 11)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 41 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

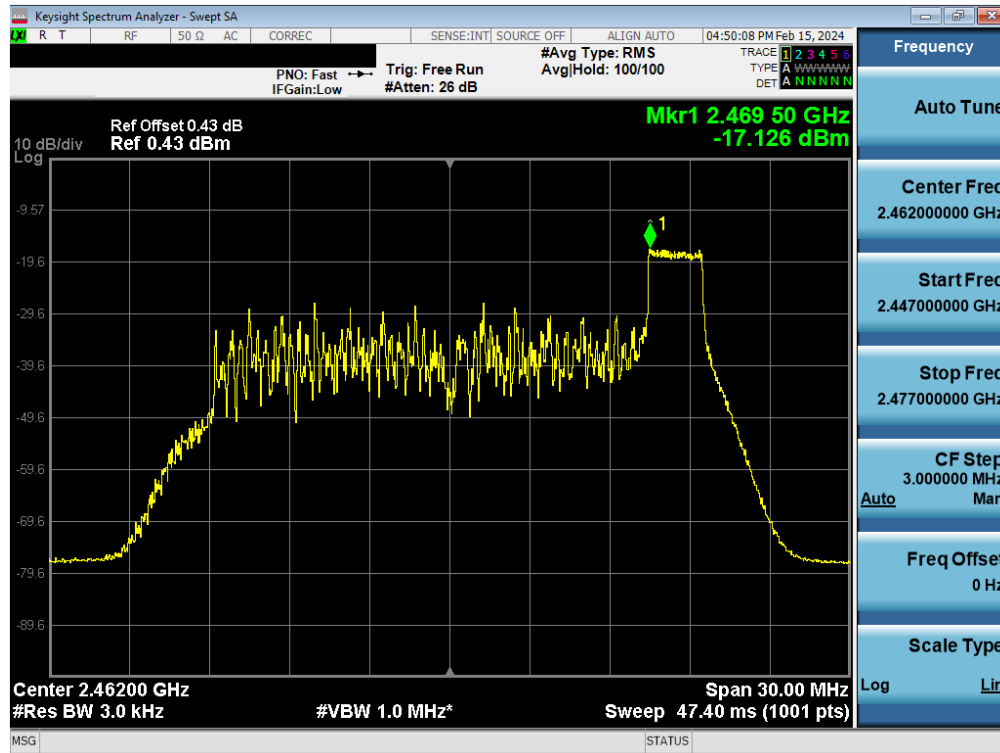


Plot 7-33. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

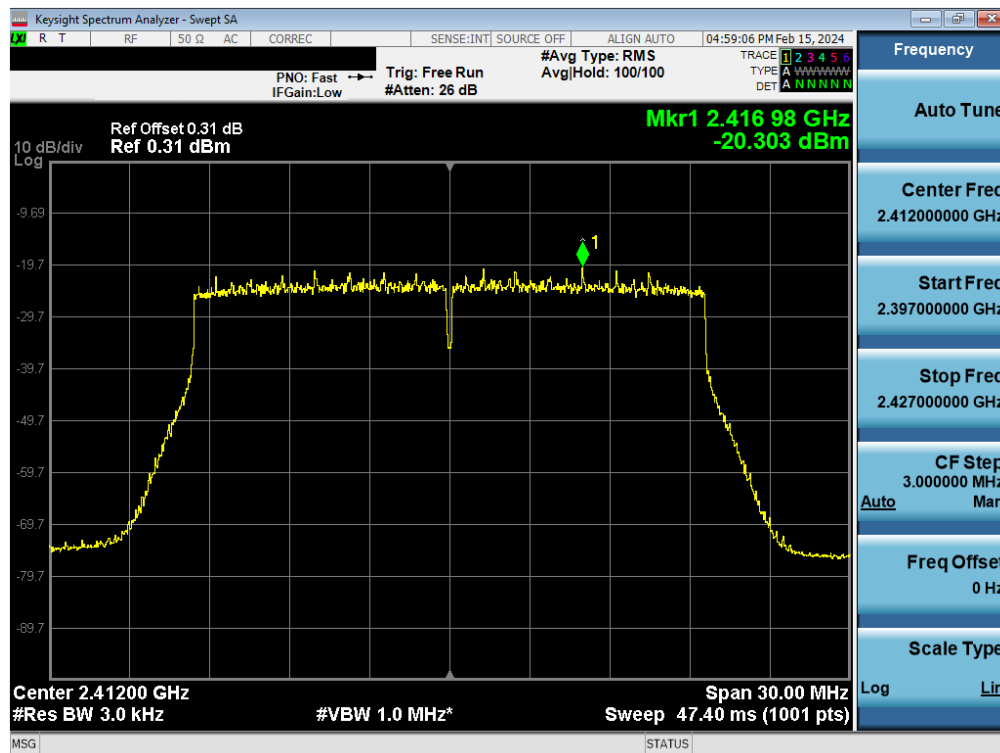


Plot 7-34. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 42 of 150

V 10.6 09/14/2023

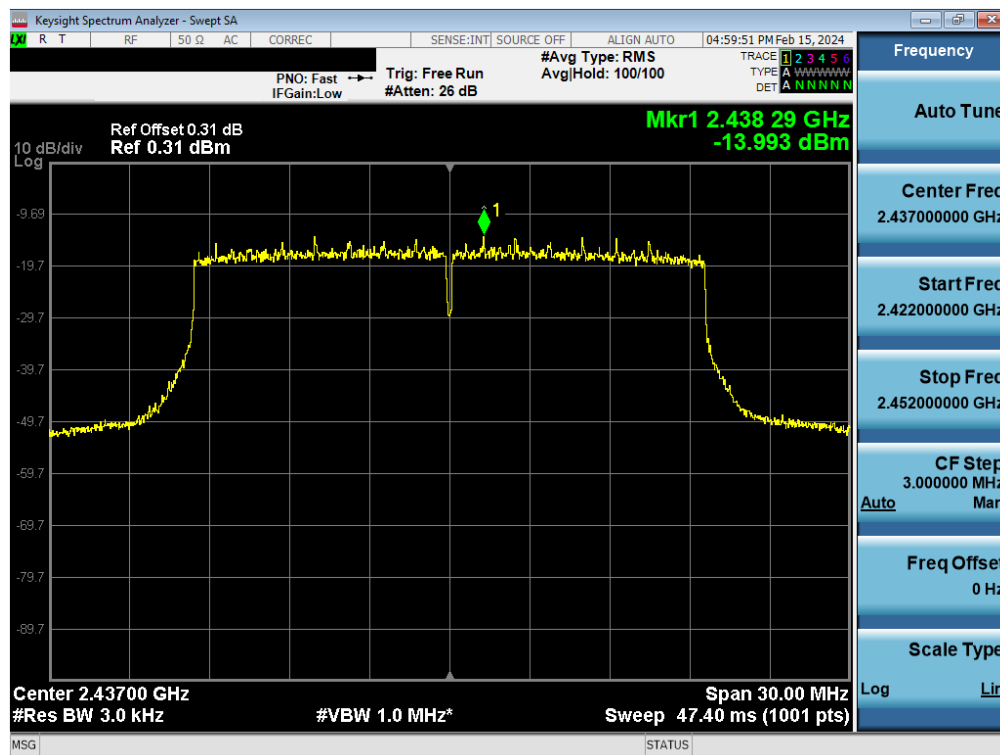

Plot 7-35. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 6)

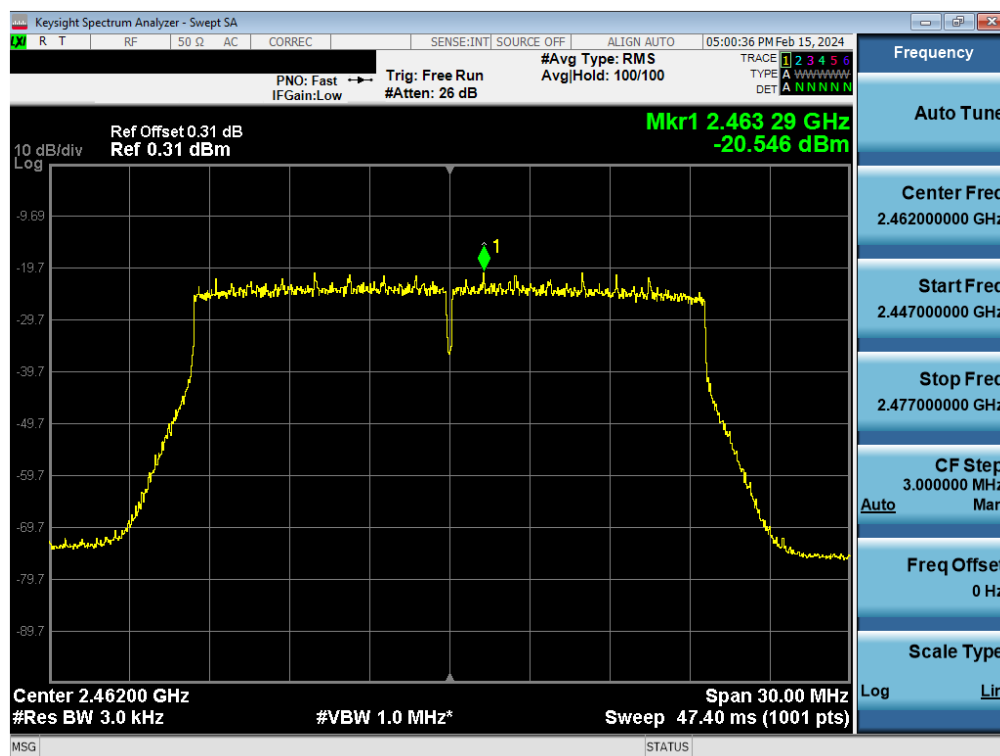

Plot 7-36. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 43 of 150

V 10.6 09/14/2023

7.4.2 Antenna 2a Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]	Pass/Fail
2412	1	ax	26	0	10/11.8 (MCS9)	-16.53	8.0	-24.53	Pass
			26	4	10/11.8 (MCS9)	-15.54	8.0	-23.54	Pass
			26	8	10/11.8 (MCS9)	-16.24	8.0	-24.24	Pass
2437	6	ax	26	0	10/11.8 (MCS9)	-16.27	8.0	-24.27	Pass
			26	4	10/11.8 (MCS9)	-15.54	8.0	-23.54	Pass
			26	8	10/11.8 (MCS9)	-17.47	8.0	-25.47	Pass
2462	11	ax	26	0	10/11.8 (MCS9)	-16.58	8.0	-24.58	Pass
			26	4	10/11.8 (MCS9)	-15.61	8.0	-23.61	Pass
			26	8	10/11.8 (MCS9)	-16.88	8.0	-24.88	Pass
2412	1	ax (20MHz)	242	61	97.5/114.7 (MCS9)	-20.06	8.0	-28.06	Pass
2437	6	ax (20MHz)	242	61	97.5/114.7 (MCS9)	-13.95	8.0	-21.95	Pass
2462	11	ax (20MHz)	242	61	97.5/114.7 (MCS9)	-20.33	8.0	-28.33	Pass

Table 7-17. Conducted Power Density Measurements Antenna 2a


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 44 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

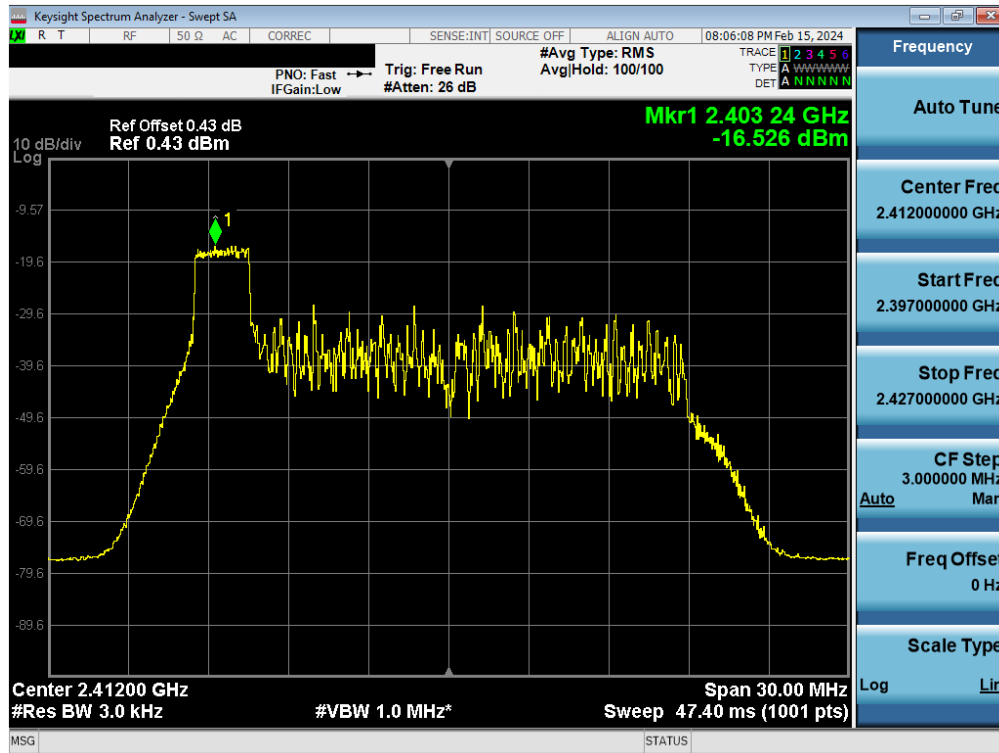

Plot 7-37. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

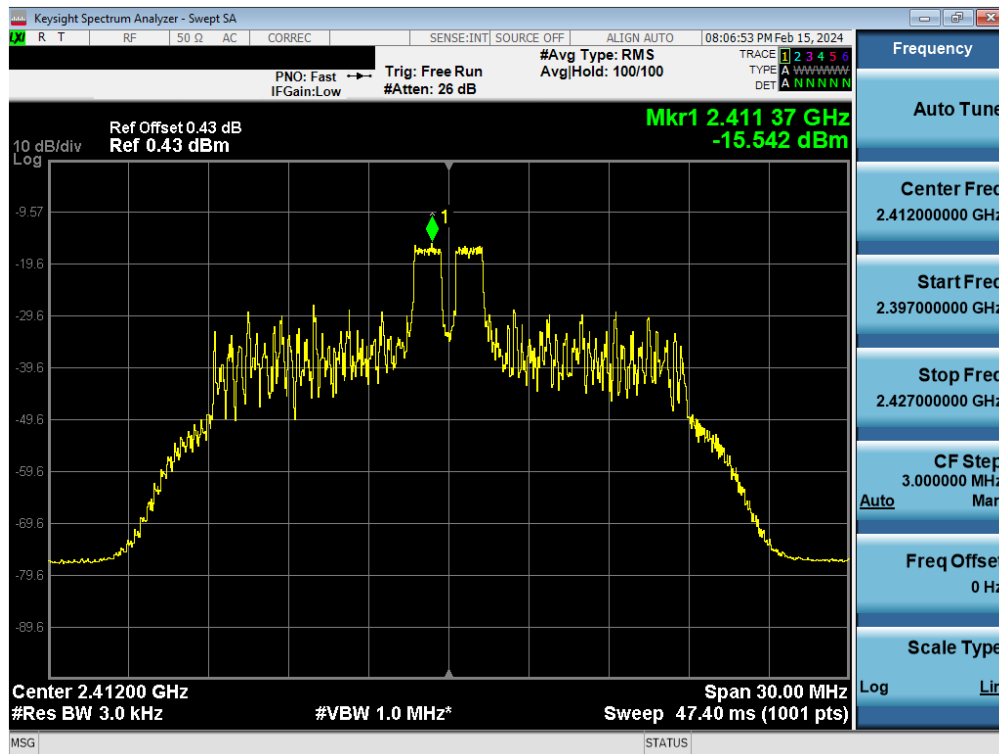


Plot 7-38. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 4 – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 45 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

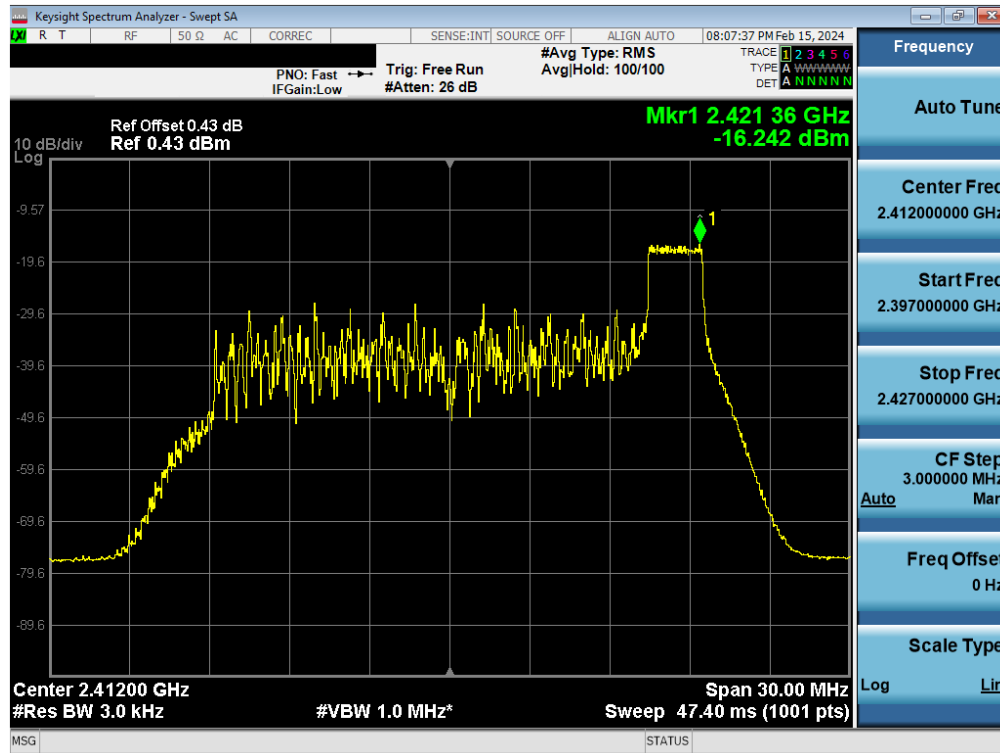

Plot 7-39. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA - RU26 Index 8 - Ch. 1)

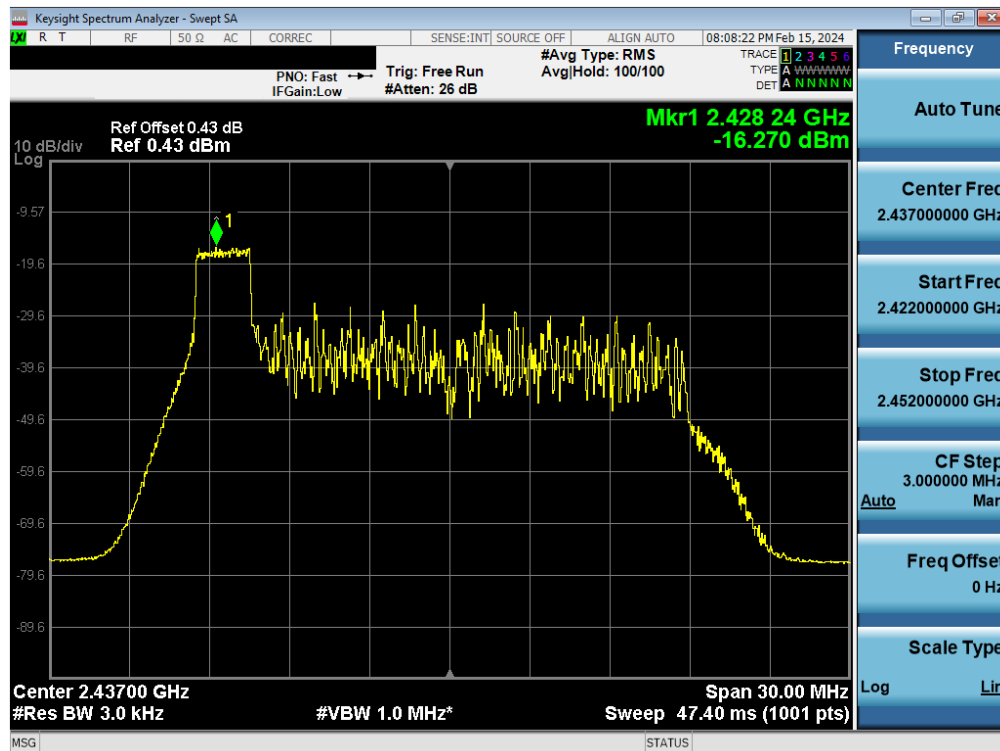


Plot 7-40. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA - RU26 Index 0 - Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 46 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.ci@element.com.

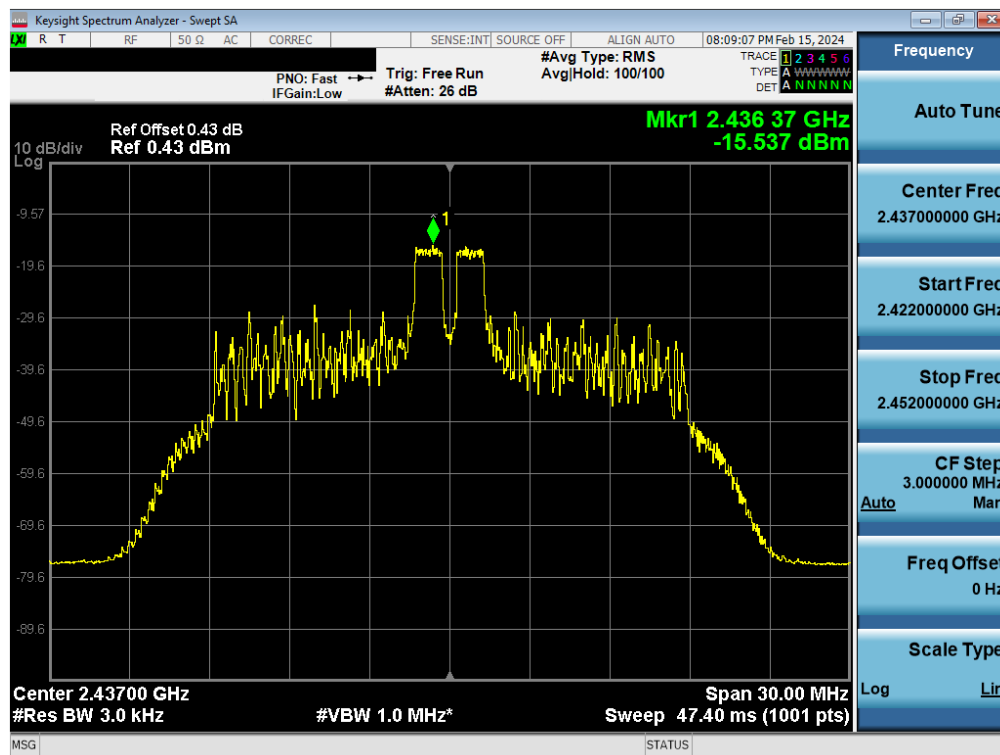

Plot 7-41. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 4 – Ch. 6)

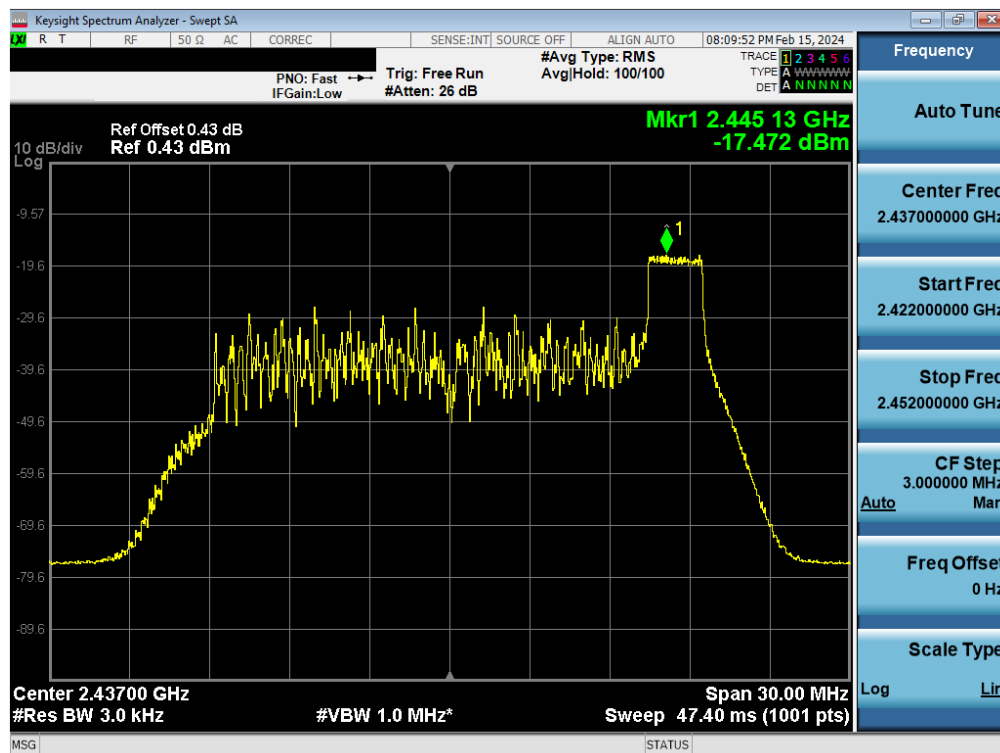


Plot 7-42. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 47 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

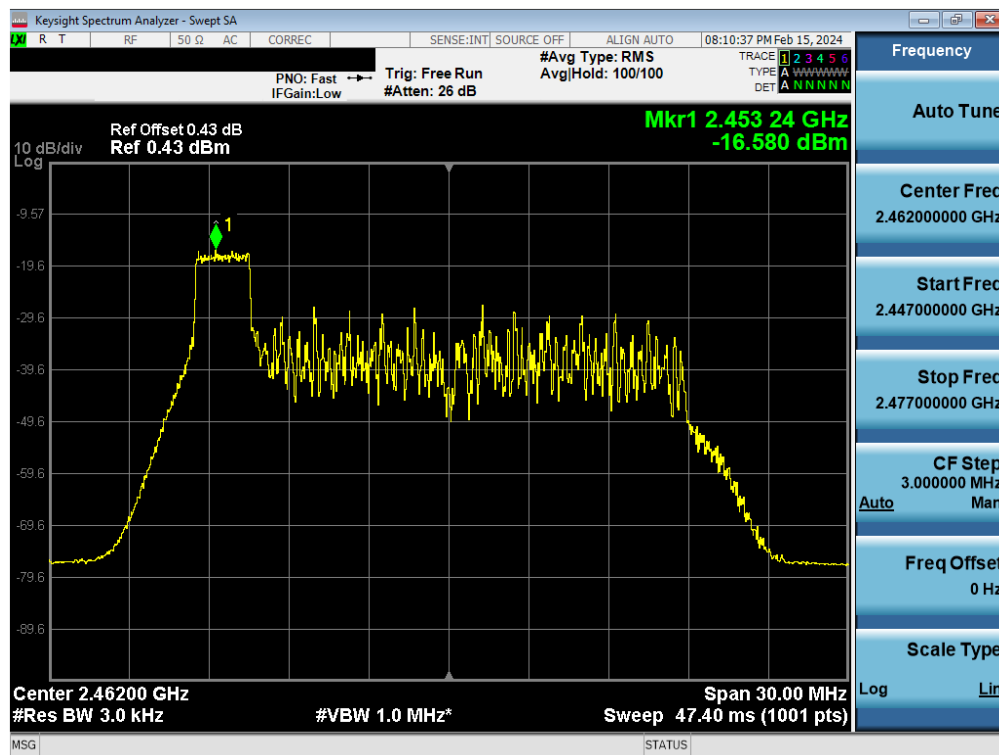

Plot 7-43. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 0 – Ch. 11)

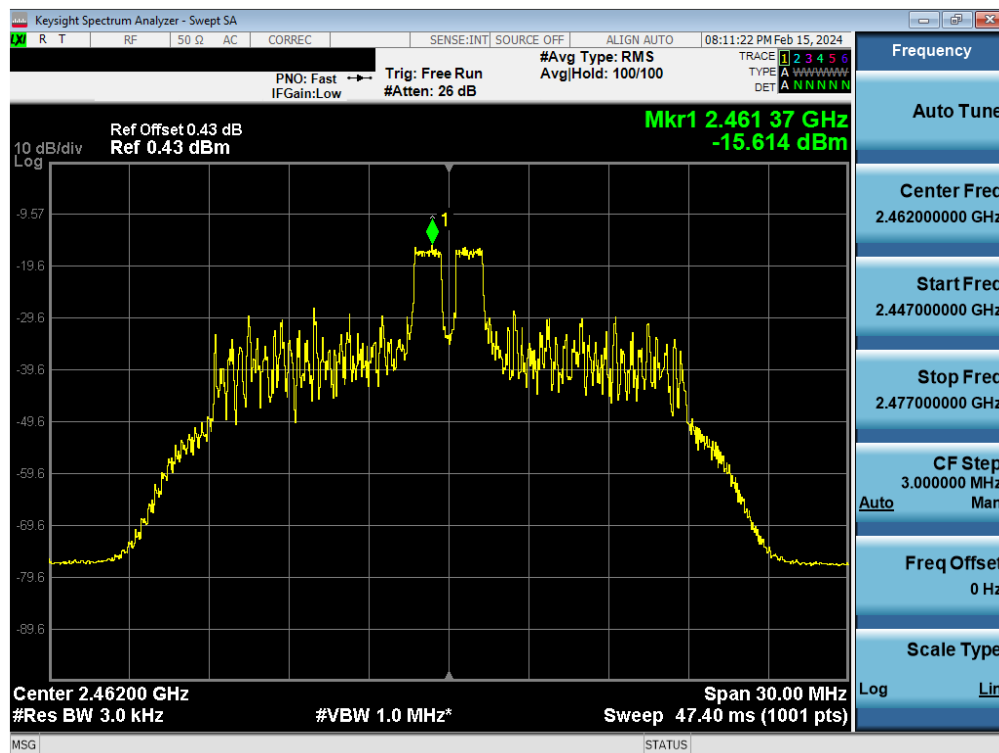


Plot 7-44. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 4 – Ch. 11)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 48 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

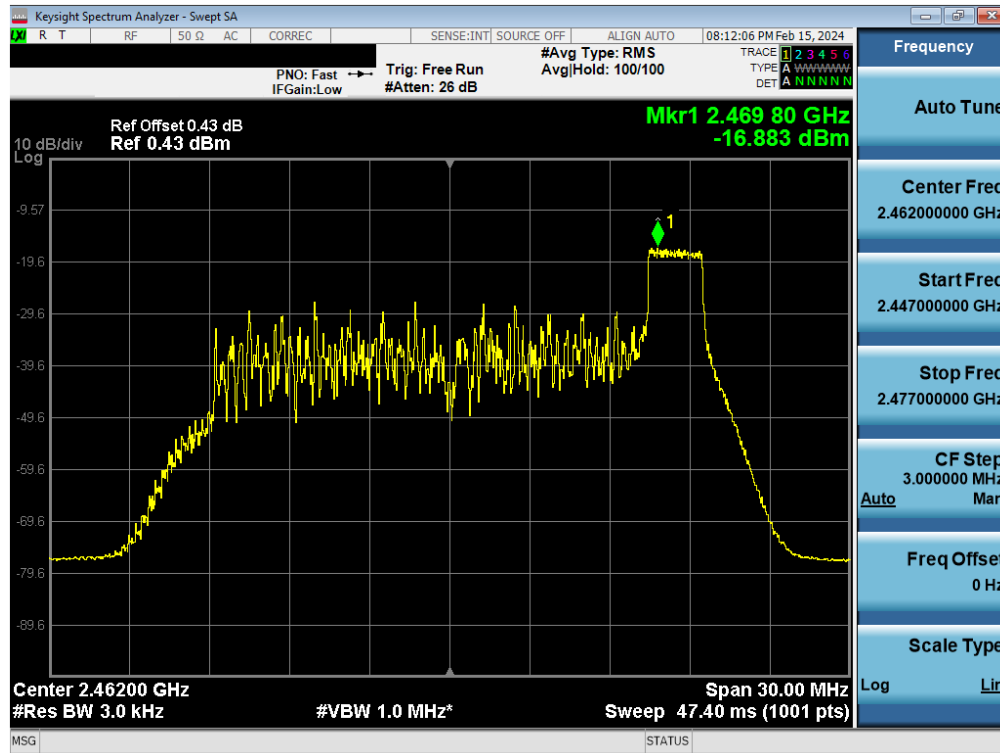


Plot 7-45. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

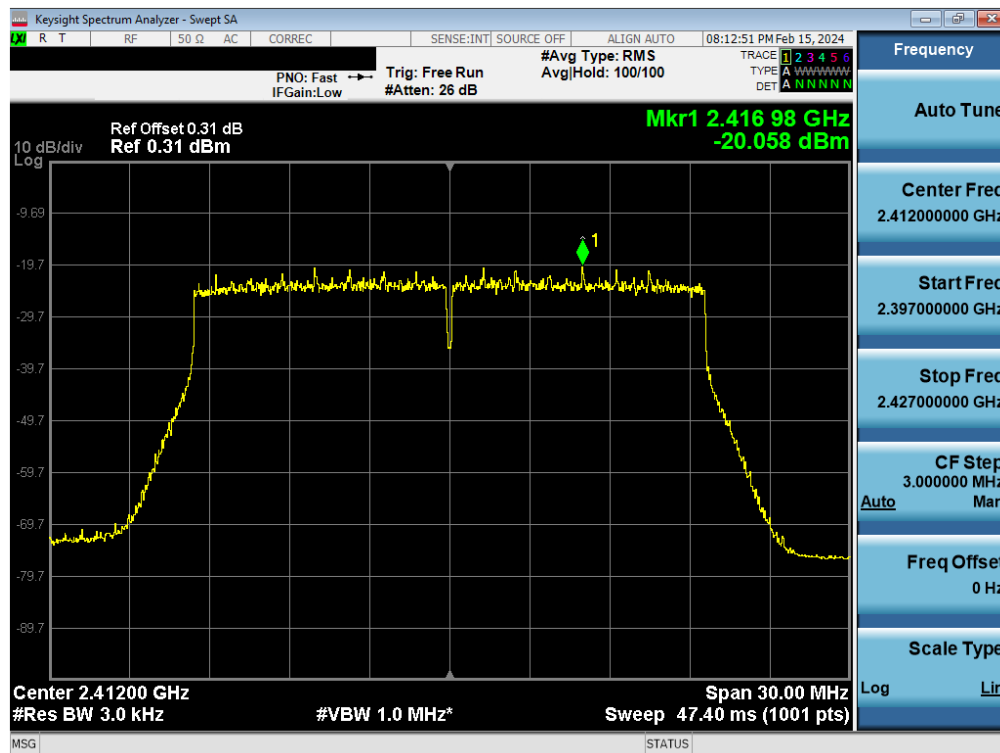


Plot 7-46. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU242 – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 49 of 150

V 10.6 09/14/2023

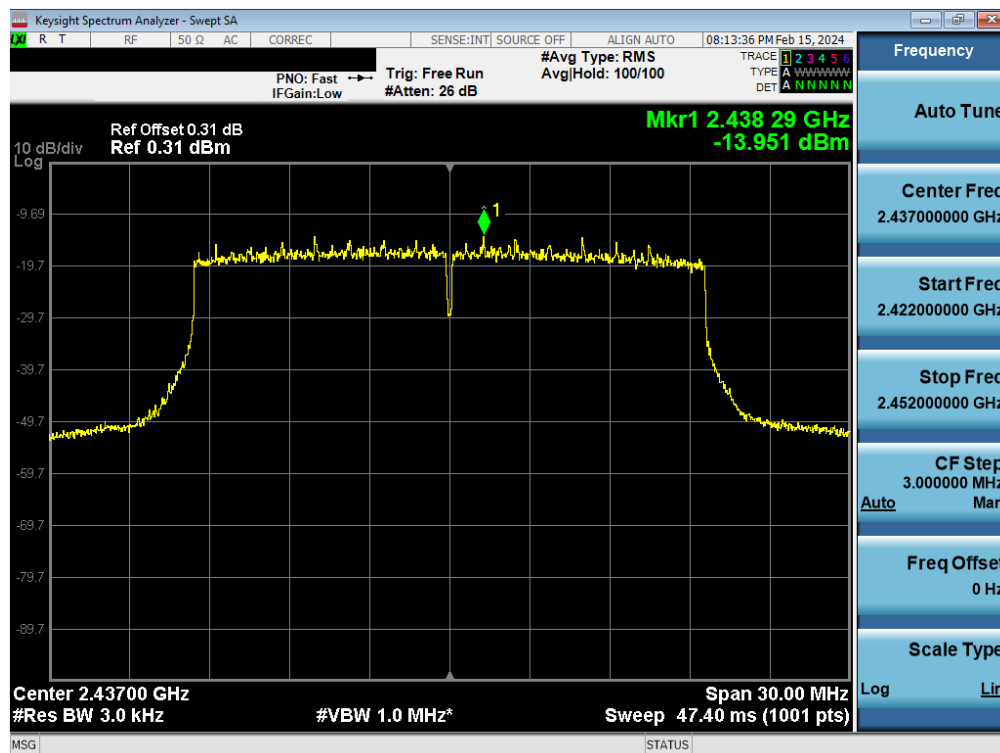

Plot 7-47. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU242 – Ch. 6)

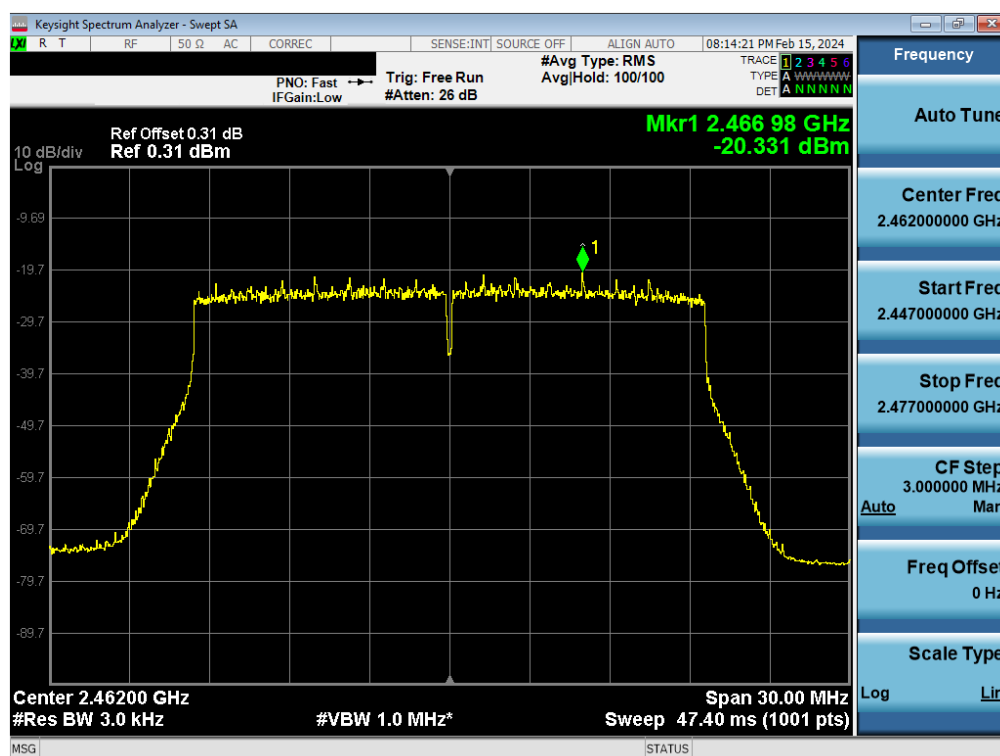

Plot 7-48. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 50 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.4.3 CDD Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Antenna 4a Power Density [dBm/3kHz]	Antenna 2a Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]	Pass/Fail
2412	1	ax	26	0	20/23.5 (MCS9)	-16.51	-16.56	-13.52	8.0	-24.56	Pass
			26	4	20/23.5 (MCS9)	-15.96	-15.93	-12.93	8.0	-23.93	Pass
			26	8	20/23.5 (MCS9)	-15.91	-16.38	-13.13	8.0	-24.38	Pass
2437	6	ax	26	0	20/23.5 (MCS9)	-16.31	-16.24	-13.26	8.0	-24.24	Pass
			26	4	20/23.5 (MCS9)	-15.99	-15.47	-12.71	8.0	-23.47	Pass
			26	8	20/23.5 (MCS9)	-17.04	-17.54	-14.27	8.0	-25.54	Pass
2462	11	ax	26	0	20/23.5 (MCS9)	-16.10	-16.73	-13.39	8.0	-24.73	Pass
			26	4	20/23.5 (MCS9)	-15.92	-15.92	-12.91	8.0	-23.92	Pass
			26	8	20/23.5 (MCS9)	-17.13	-16.89	-14.00	8.0	-24.89	Pass
2412	1	ax	242	61	195/229.4 (MCS9)	-20.66	-20.75	-17.69	8.0	-28.75	Pass
2437	6	ax	242	61	195/229.4 (MCS9)	-13.97	-13.87	-10.91	8.0	-21.87	Pass
2462	11	ax	242	61	195/229.4 (MCS9)	-21.07	-20.93	-17.99	8.0	-28.93	Pass


Table 7-18.CDD Conducted Power Density Measurements

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 51 of 150

V 10.6 09/14/2023

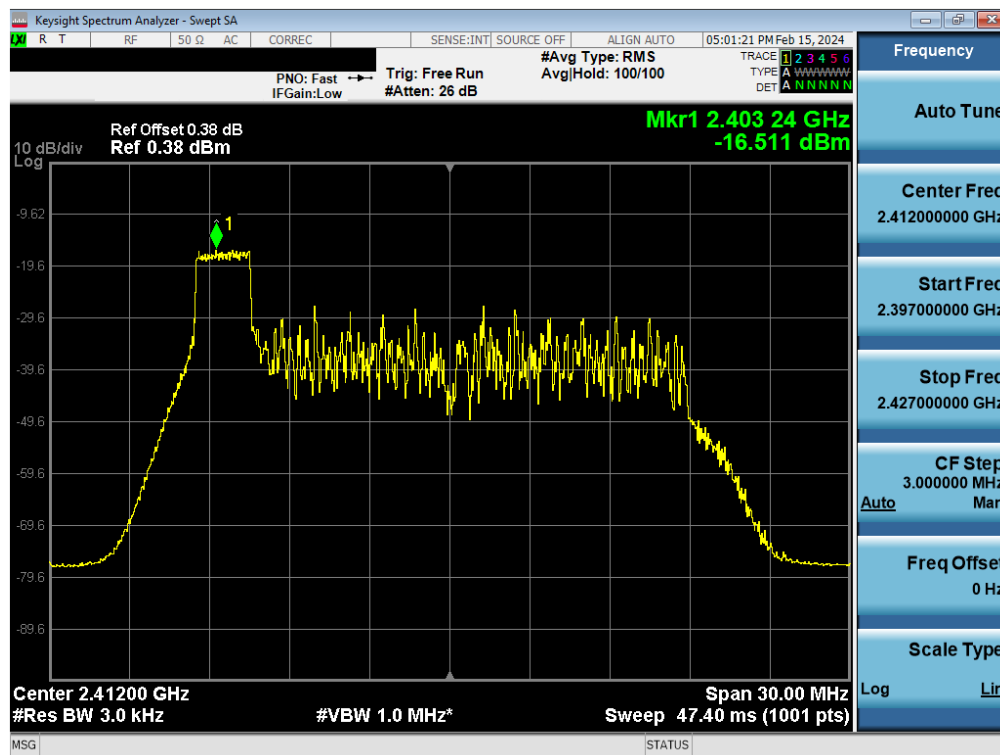


Plot 7-49. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

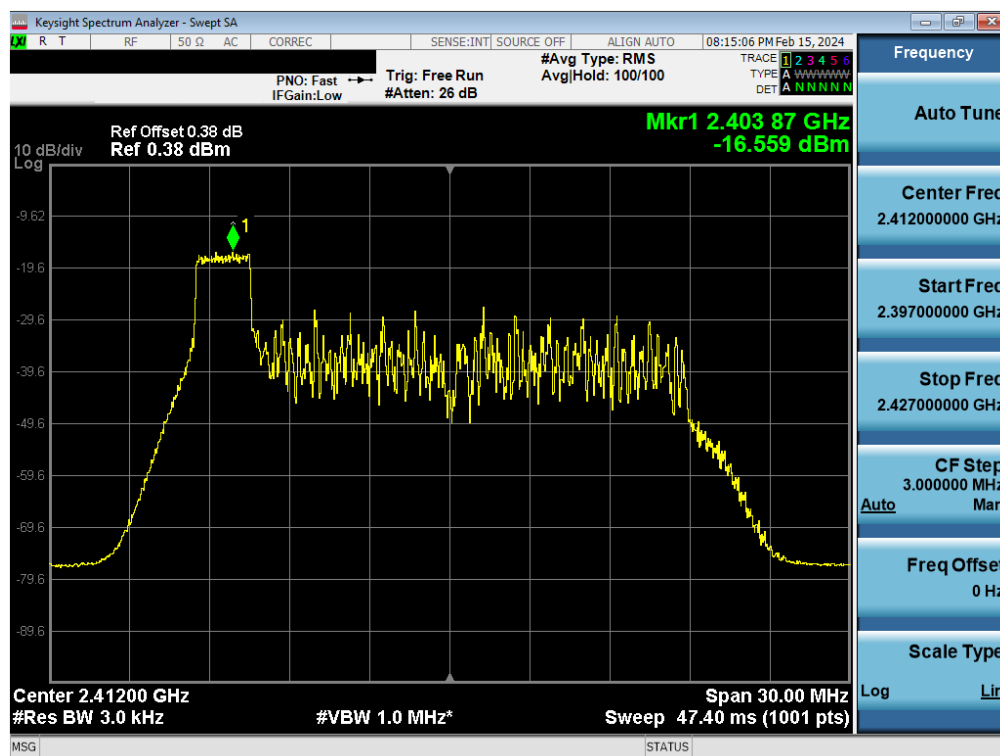


Plot 7-50. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 52 of 150

V 10.6 09/14/2023

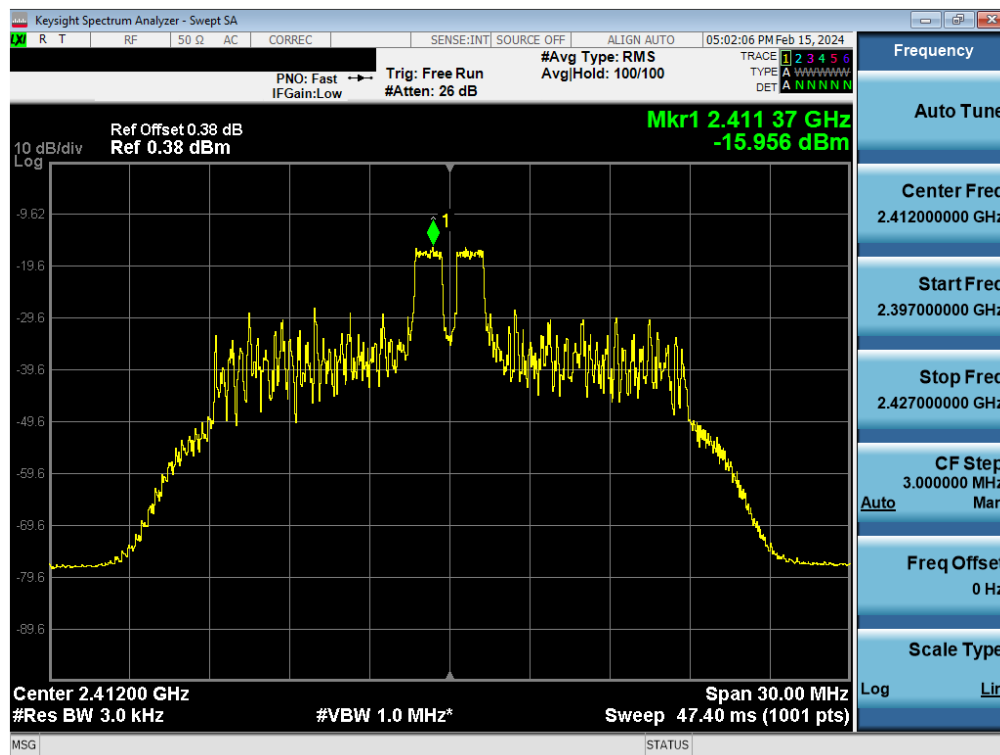

Plot 7-51. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 4 – Ch. 1)

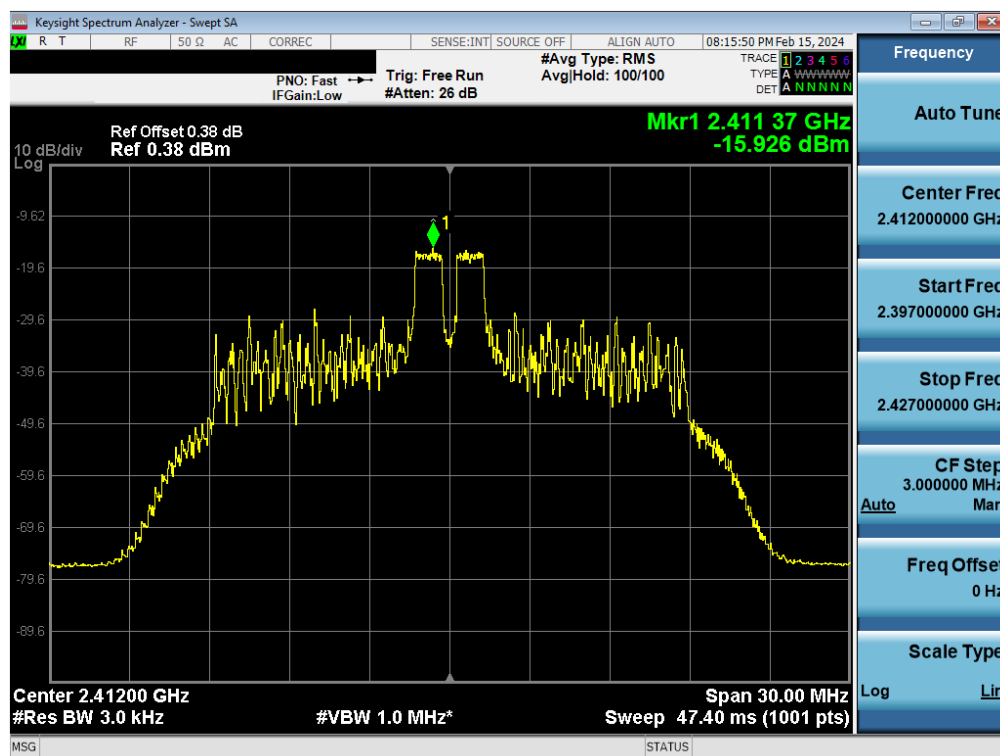


Plot 7-52. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 4 – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 53 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

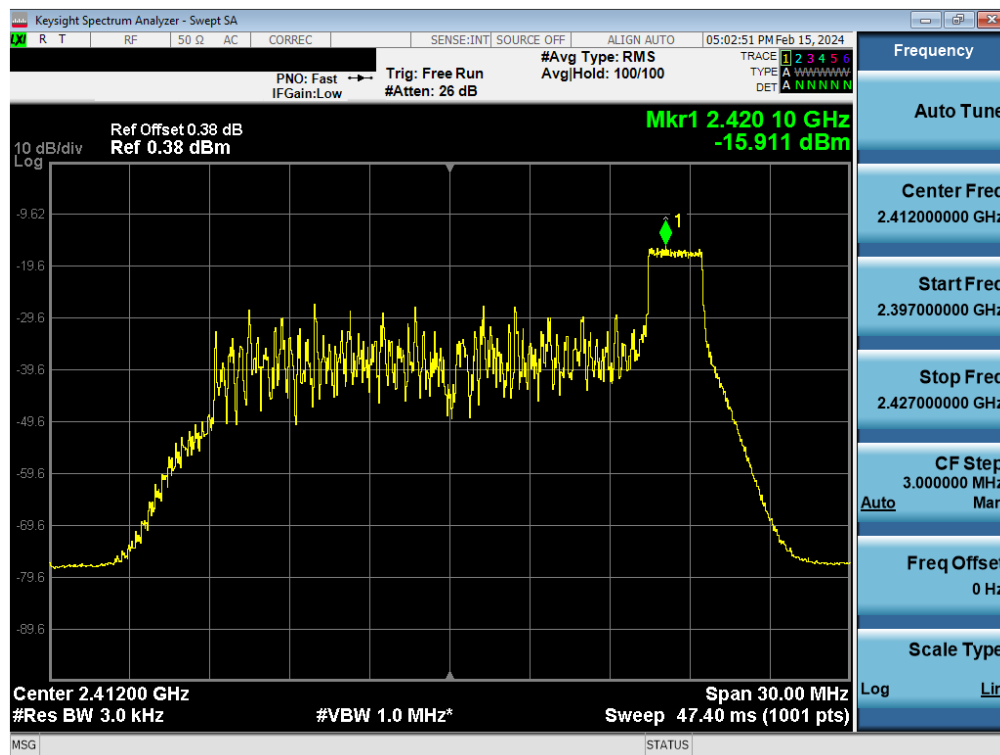

Plot 7-53. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 1)

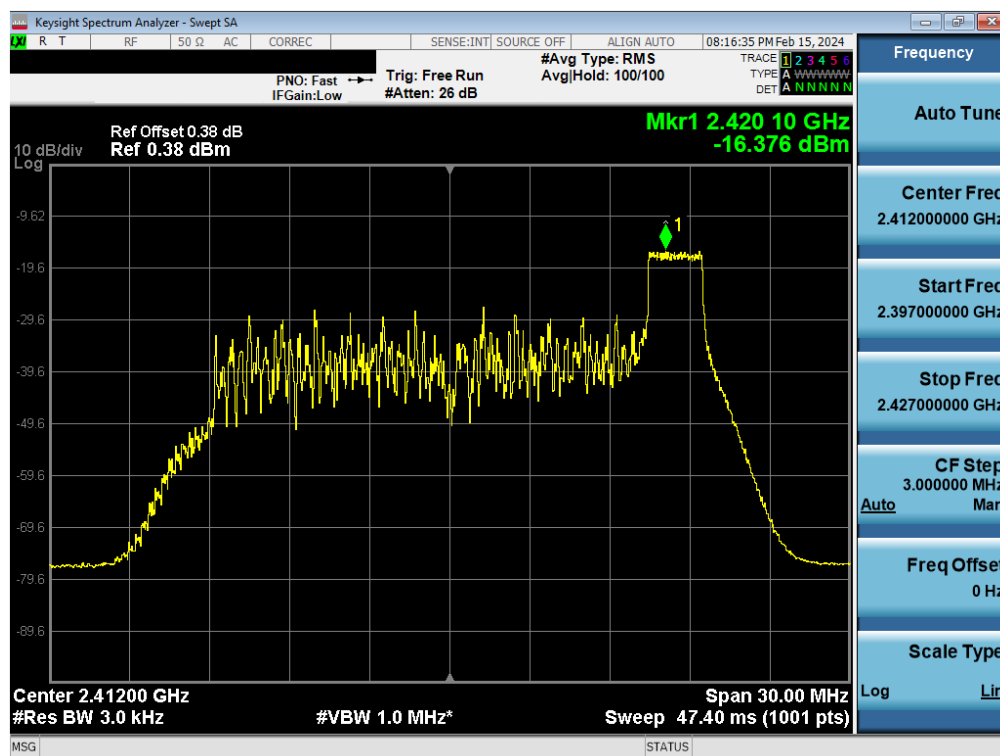


Plot 7-54. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 54 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

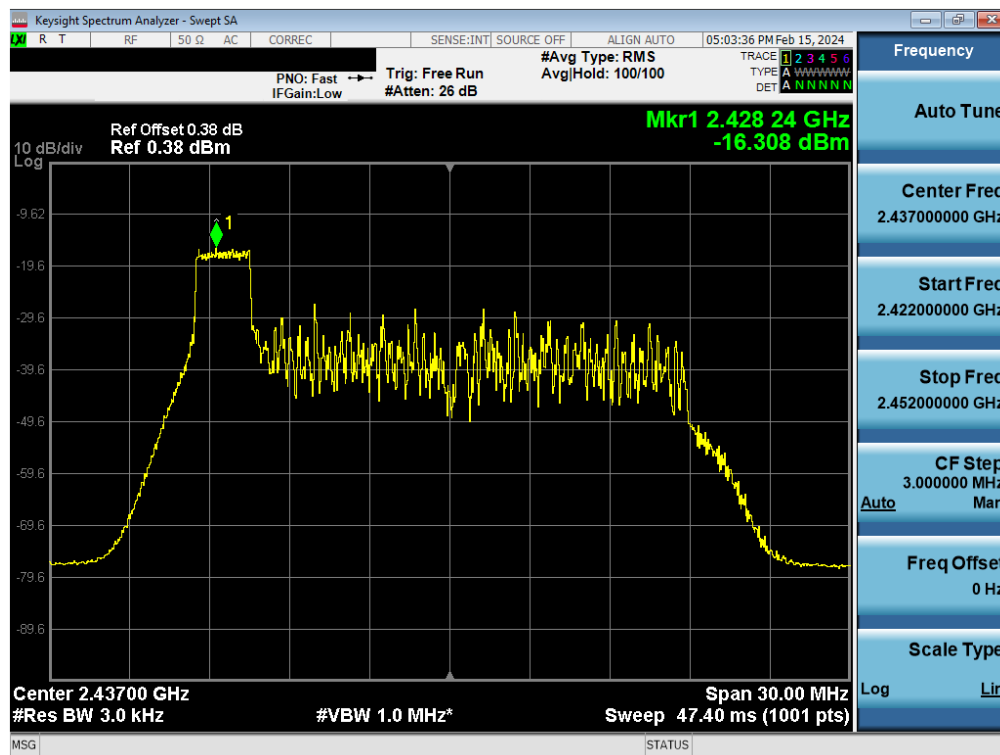

Plot 7-55. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 6)

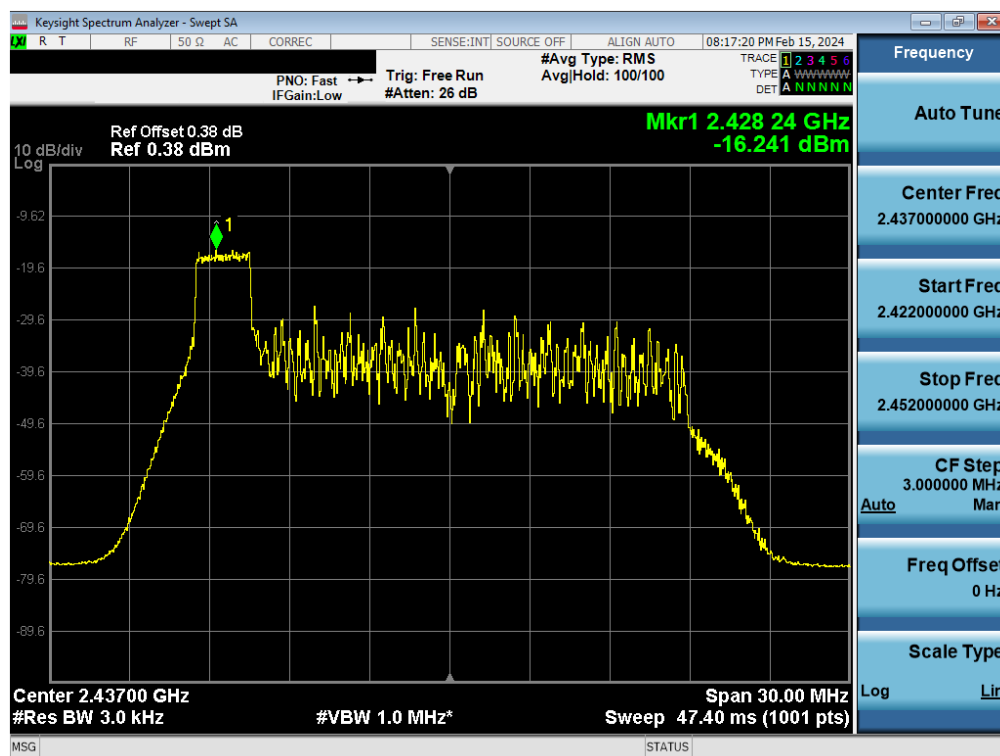


Plot 7-56. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 0 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 55 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

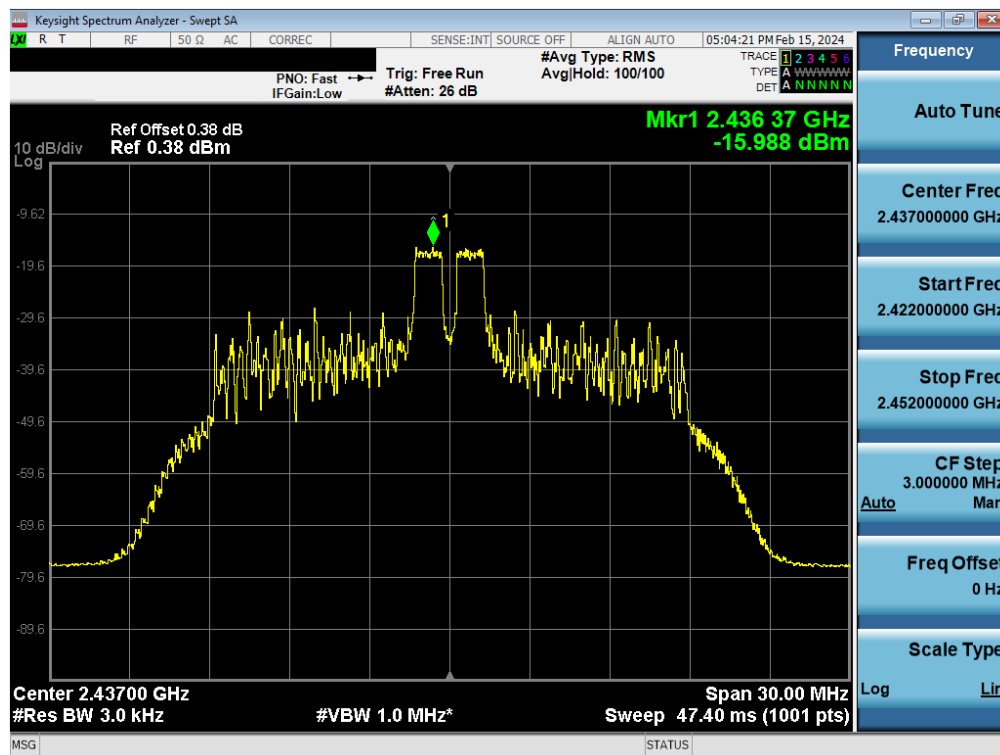

Plot 7-57. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 4 – Ch. 6)

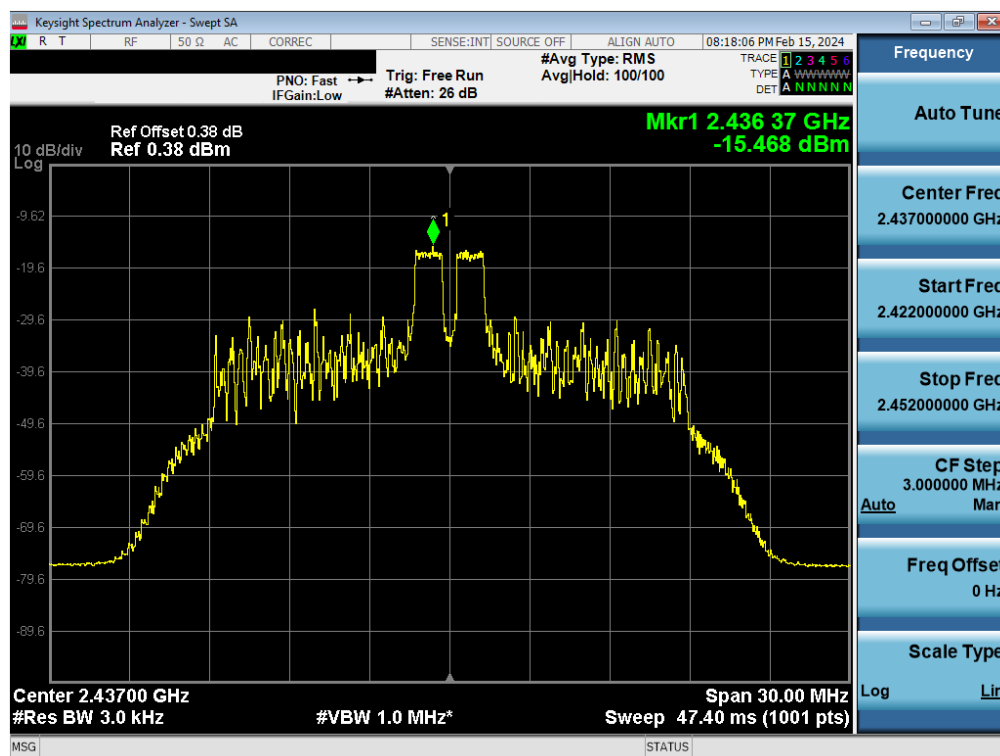


Plot 7-58. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 4 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 56 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

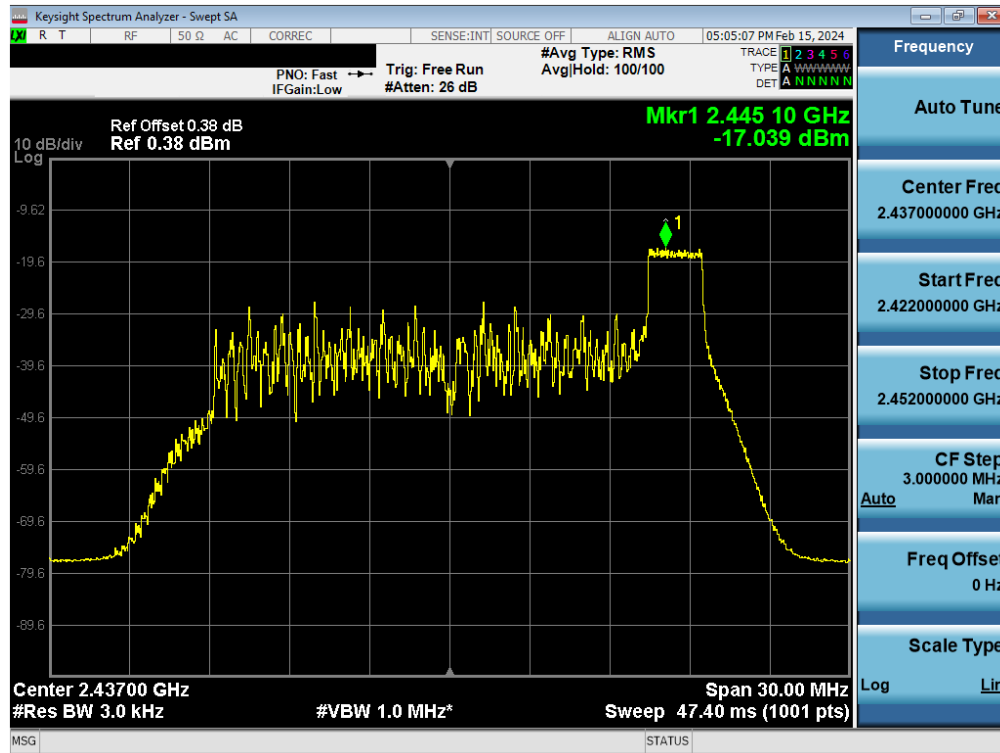

Plot 7-59. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 6)

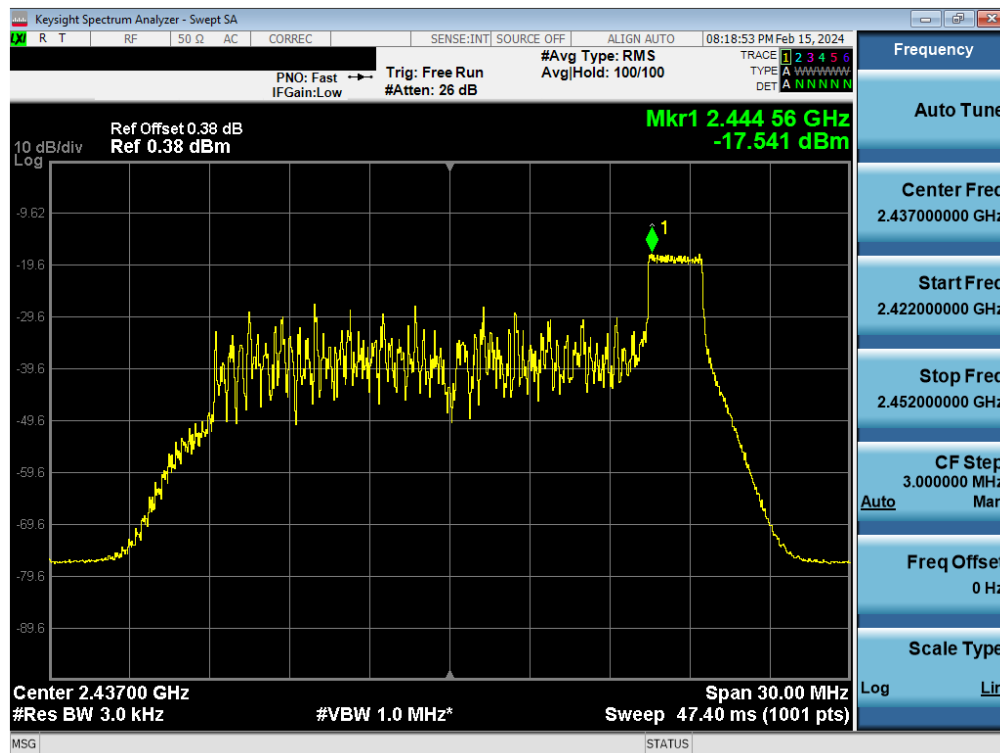


Plot 7-60. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 6)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 57 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

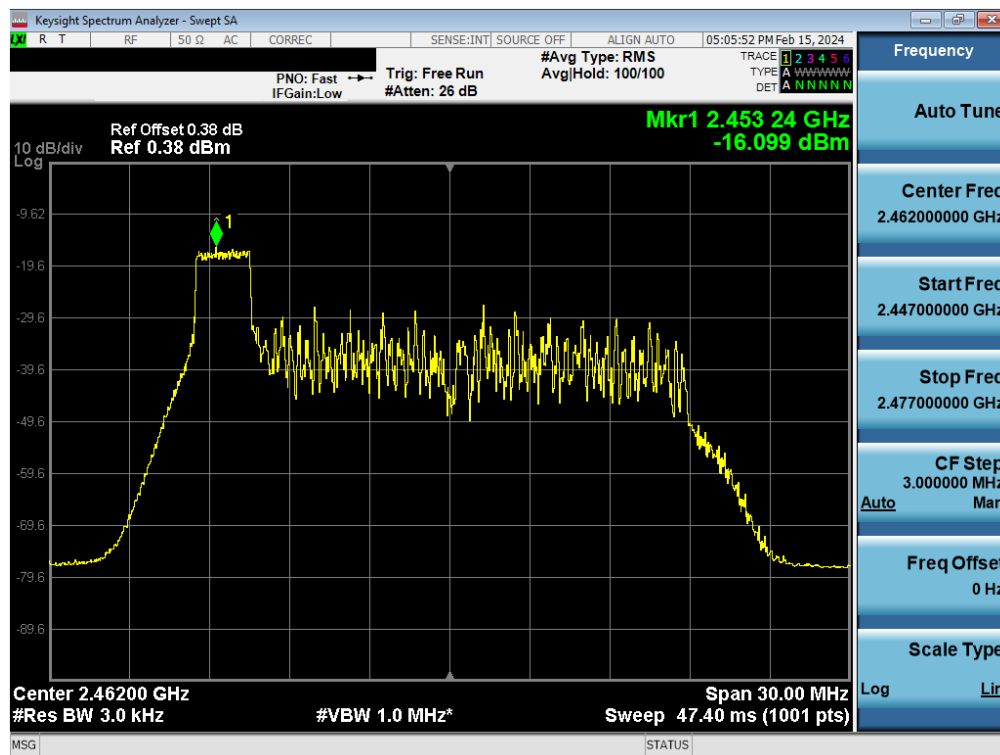

Plot 7-61. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 11)

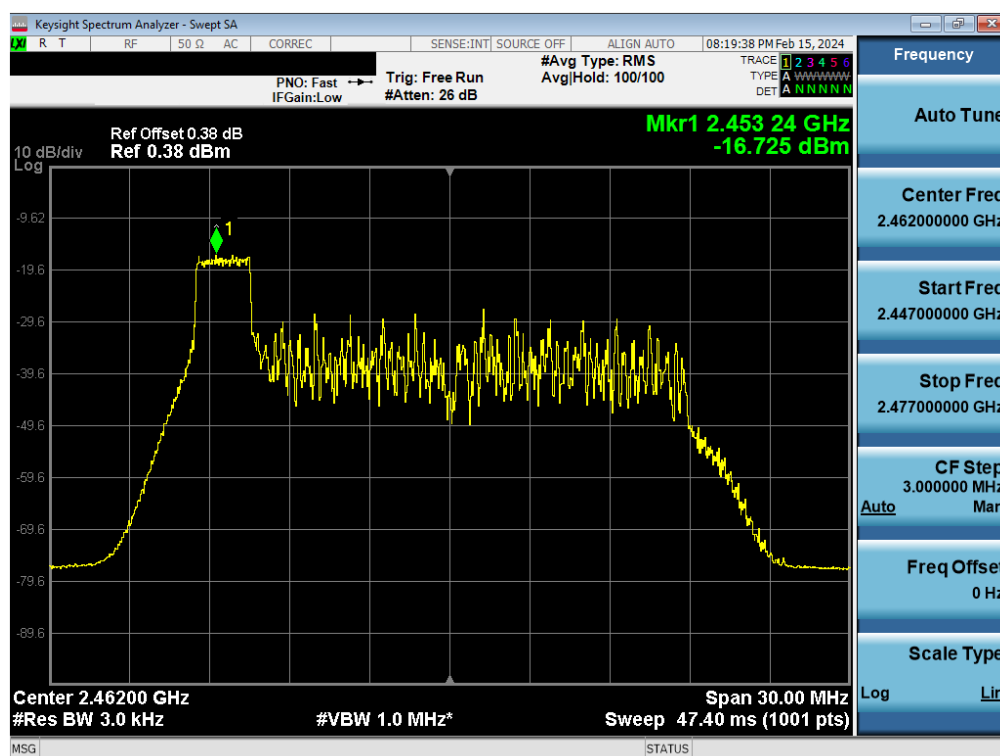


Plot 7-62. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 0 – Ch. 11)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 58 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

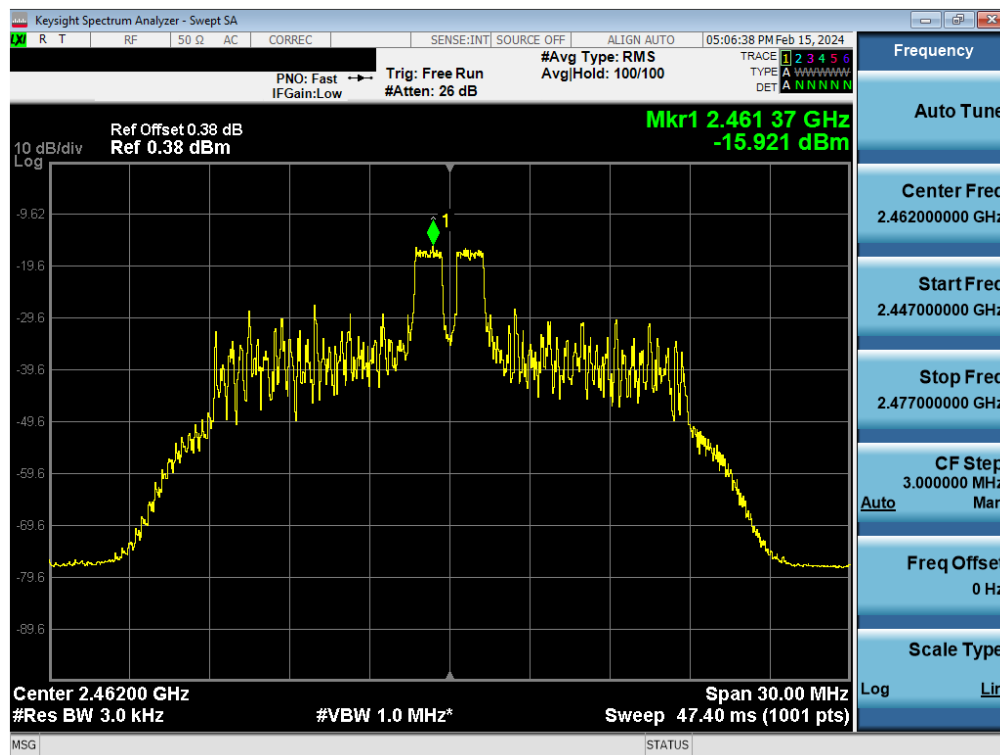


Plot 7-63. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 4 – Ch. 11)

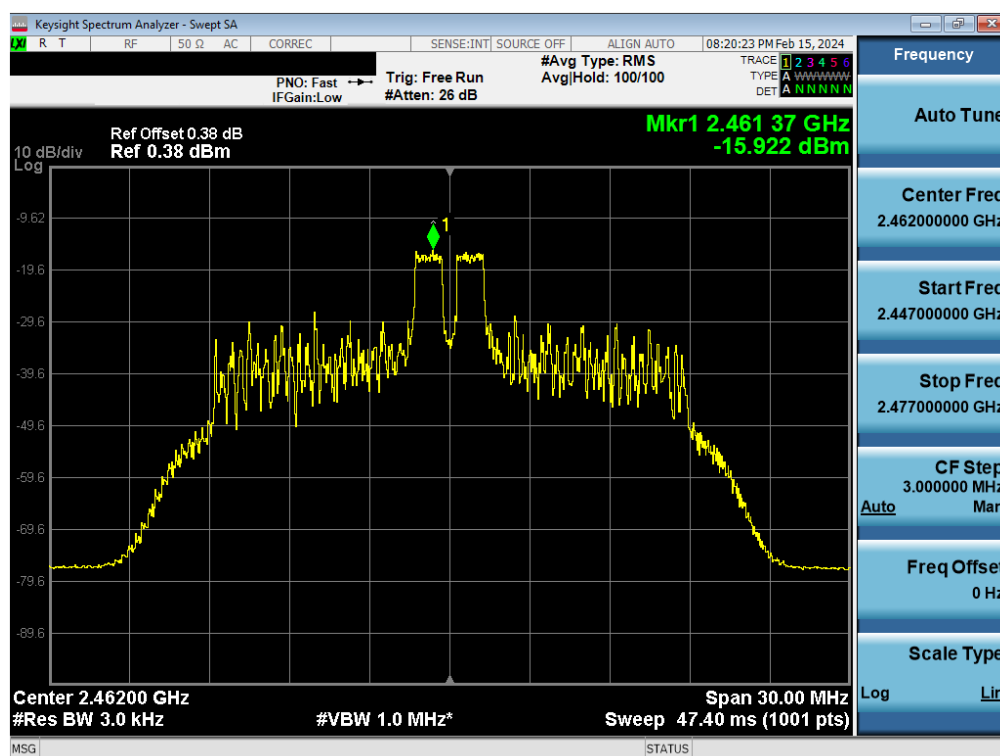


Plot 7-64. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 4 – Ch. 11)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 59 of 150

V 10.6 09/14/2023

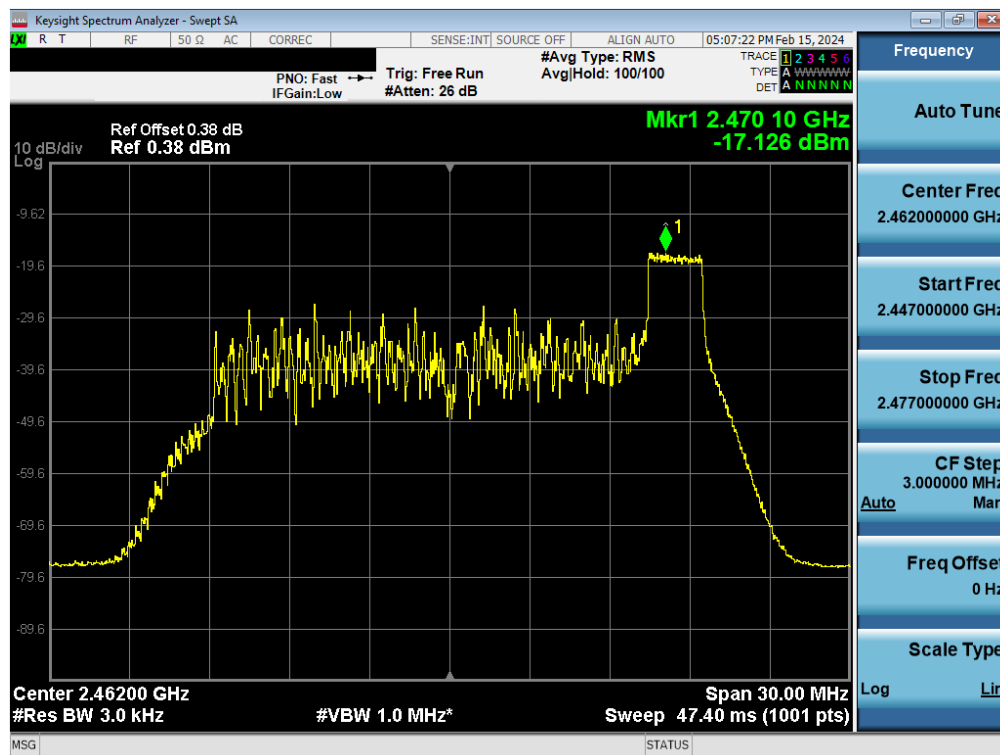

Plot 7-65. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

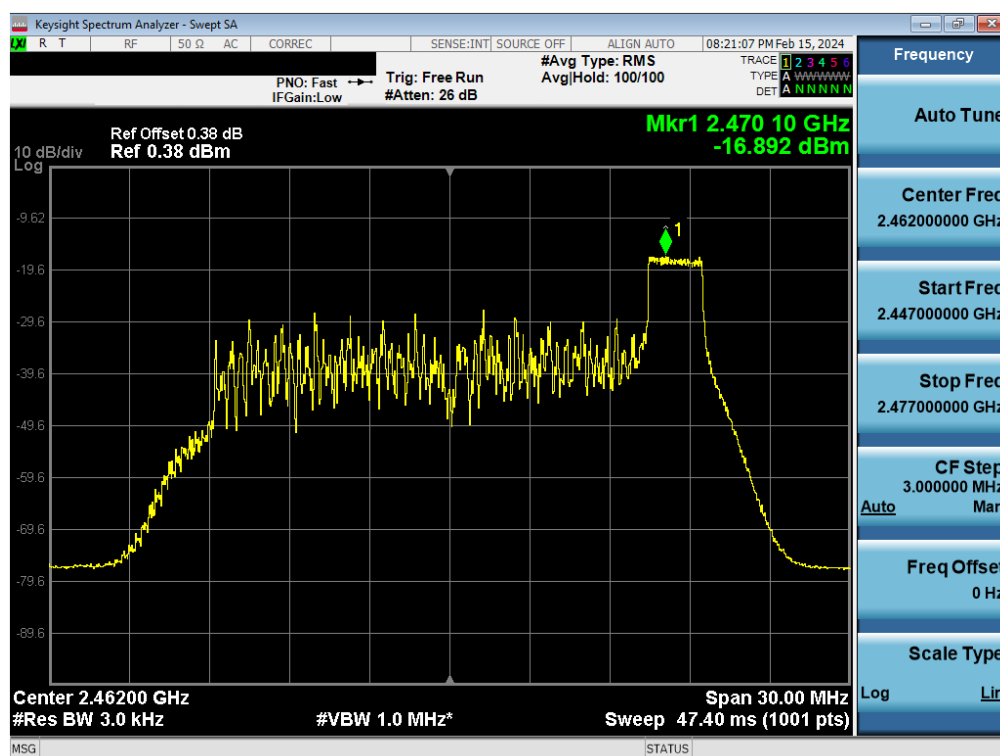


Plot 7-66. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 11)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 60 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

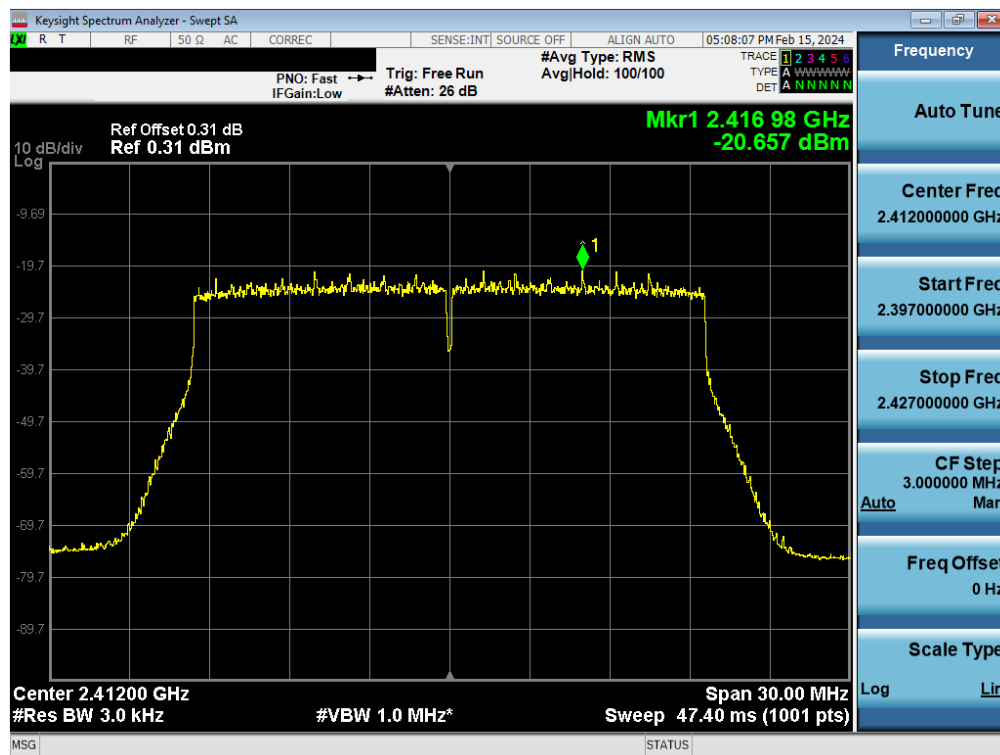


Plot 7-67. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 1)

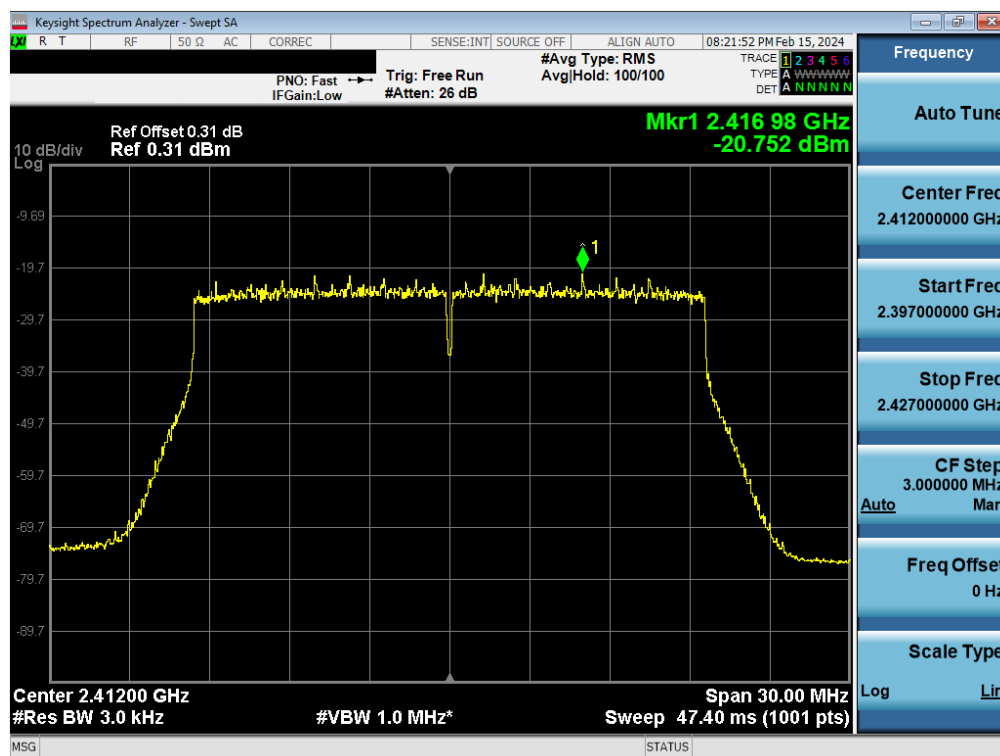


Plot 7-68. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU242 – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 61 of 150

V 10.6 09/14/2023

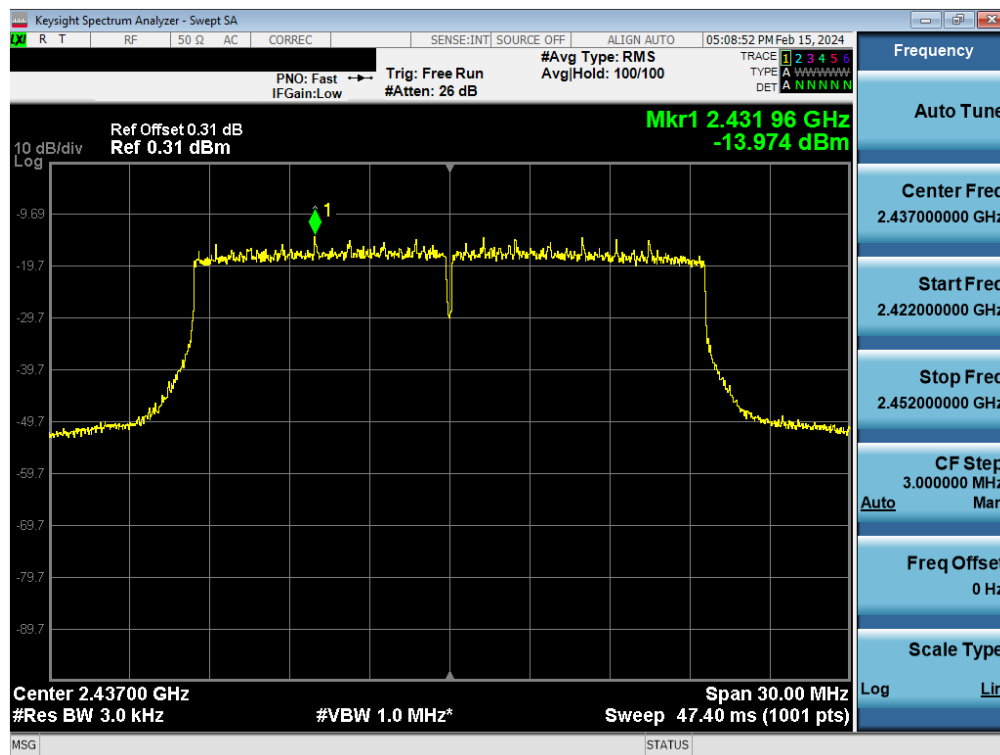


Plot 7-69. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 6)

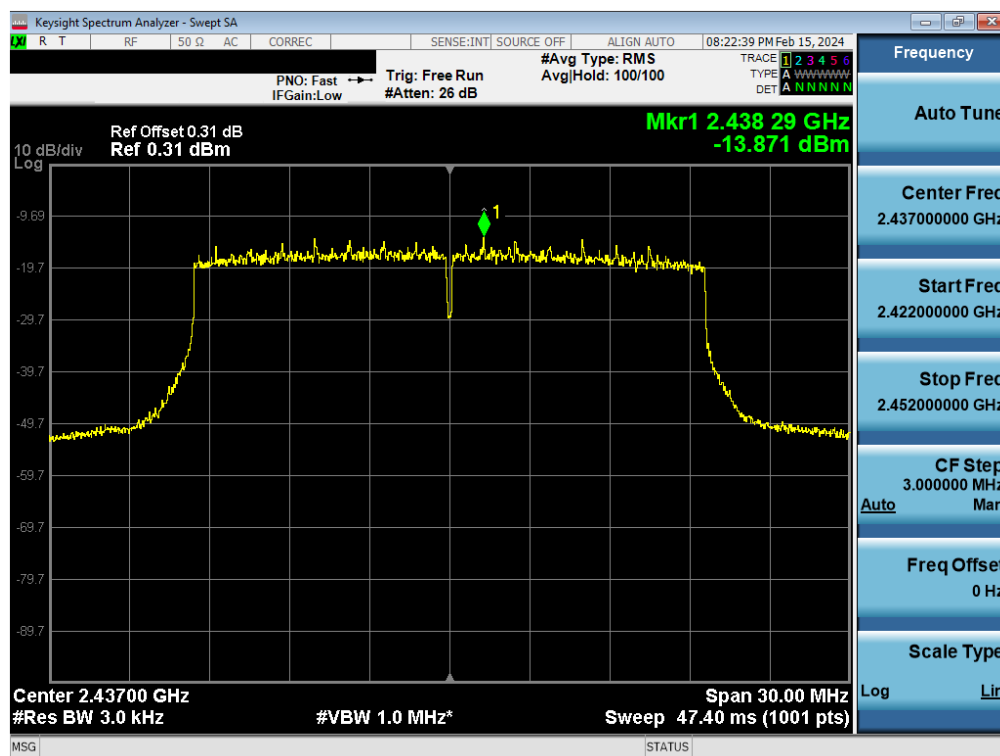


Plot 7-70. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU242 – Ch. 6)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 62 of 150

V 10.6 09/14/2023

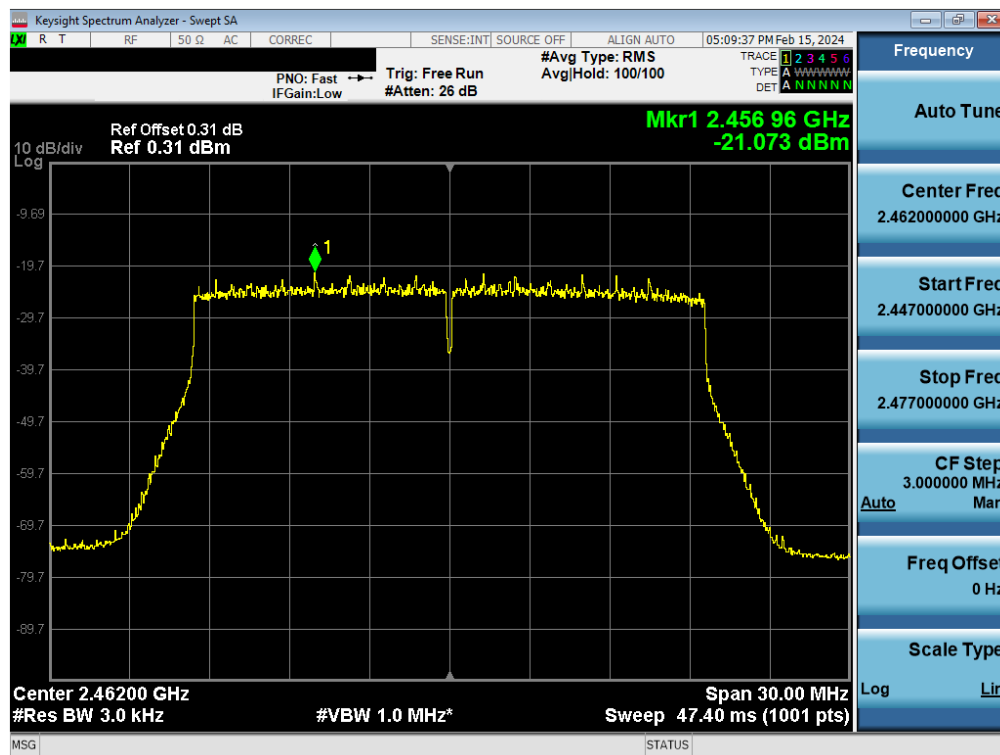

Plot 7-71. Power Spectral Density Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 11)

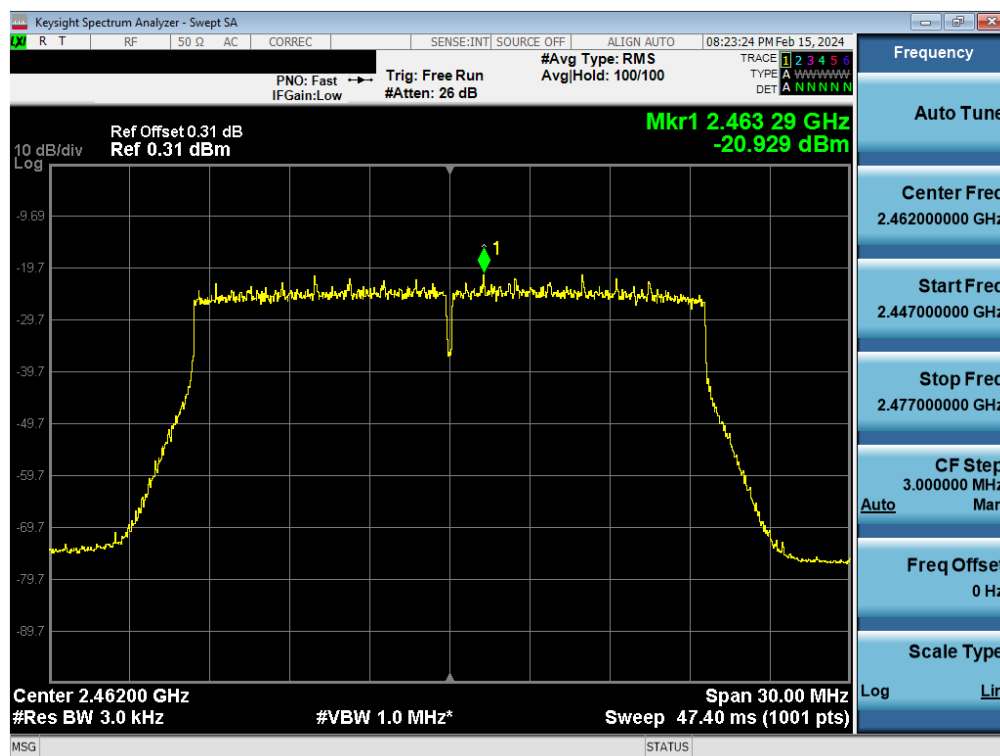

Plot 7-72. Power Spectral Density Plot Antenna 2a (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 63 of 150

V 10.6 09/14/2023

Note:

Per ANSI C63.10-2013 Subclause 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 4a and Antenna 2a were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample CDD Calculation:

At 2412MHz the average conducted power spectral density was measured to be -16.51 dBm for Antenna 4a and -16.56 dBm for Antenna 2a.

$$\text{Antenna 4a} + \text{Antenna 2a} = \text{CDD}$$

$$(-16.51 \text{ dBm} + -16.56 \text{ dBm}) = (0.0223 \text{ mW} + 0.0221 \text{ mW}) = 0.0444 \text{ mW} = -13.52 \text{ dBm}$$

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 64 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5 Conducted Authorized Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst case configuration. For the following out of band conducted emissions plots at the band edge, the EUT was set to a data rate of MCS9 in 802.11ax-RU mode as this setting produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


1. All antenna configurations and data rates were investigated and only the worst case are reported.
2. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 65 of 150


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5.1 Antenna 4a Conducted Emissions at the Band Edge

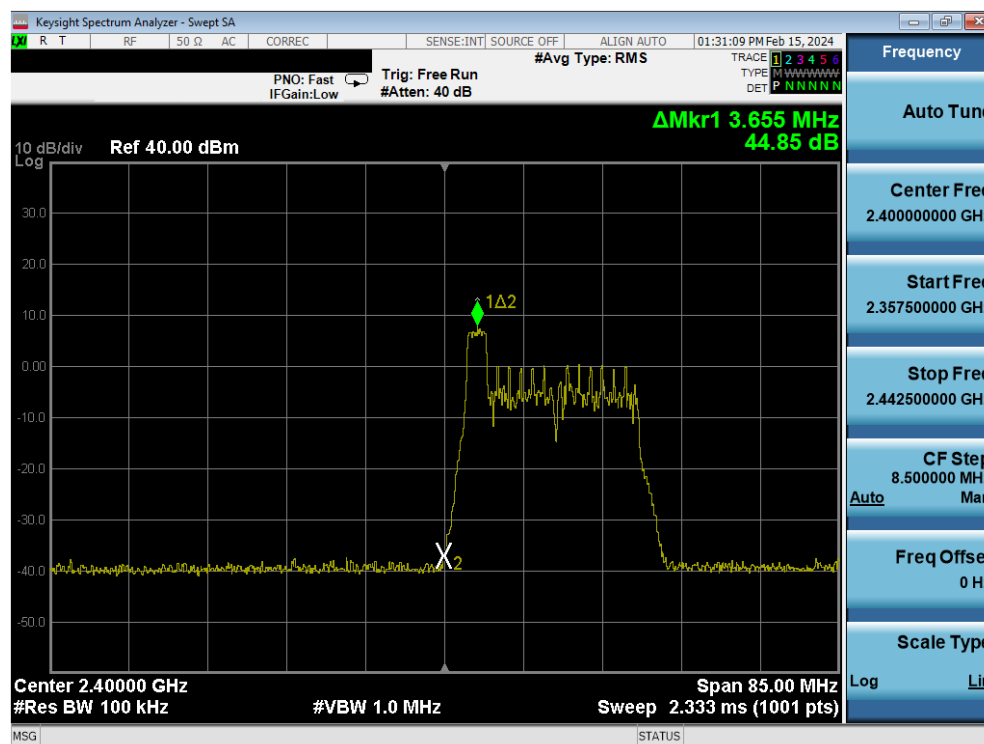

Plot 7-73. Band Edge Antenna 4a (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

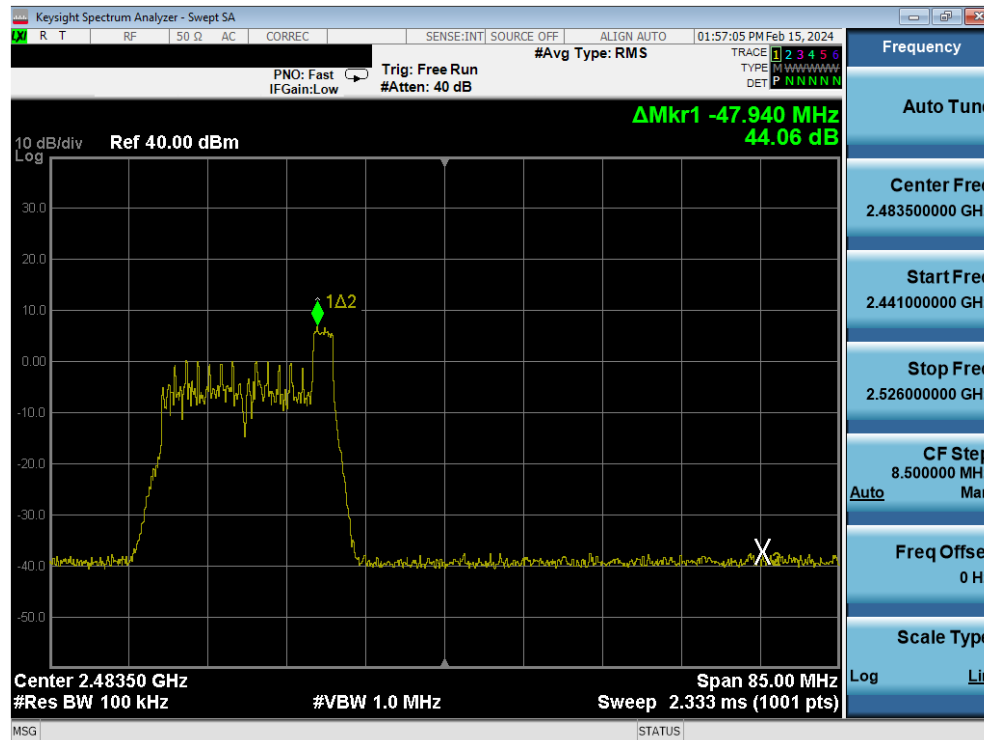


Plot 7-74. Band Edge Antenna 4a (802.11ax OFDMA – RU26 Index 8 – Ch. 11)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 66 of 150

V 10.6 09/14/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

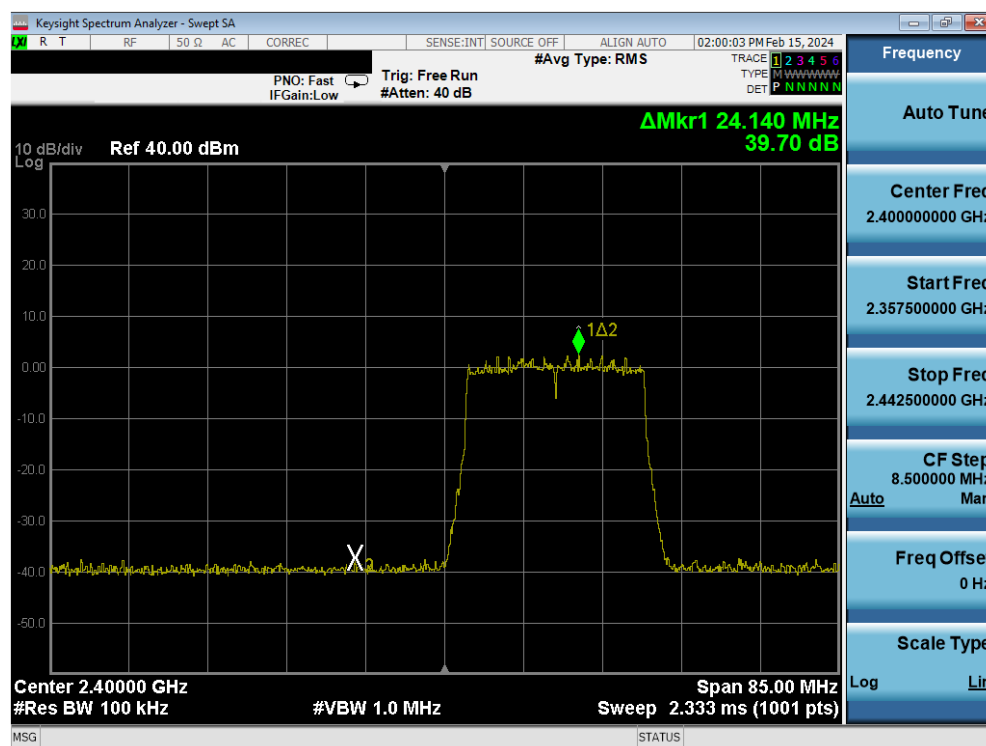

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 67 of 150

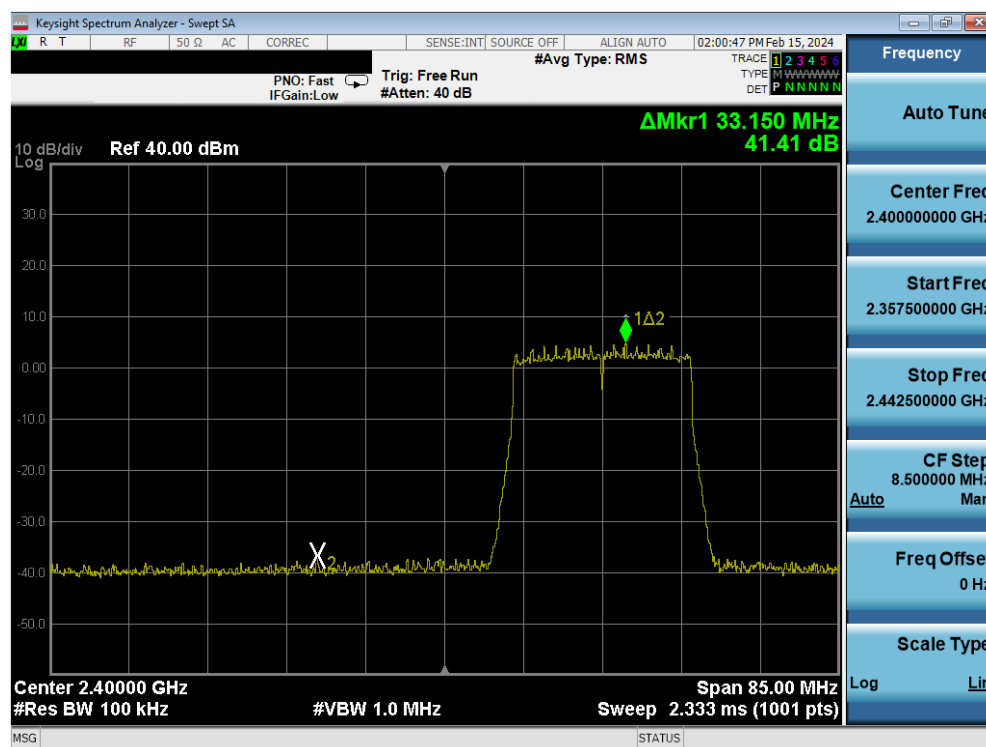

Plot 7-77. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 2)

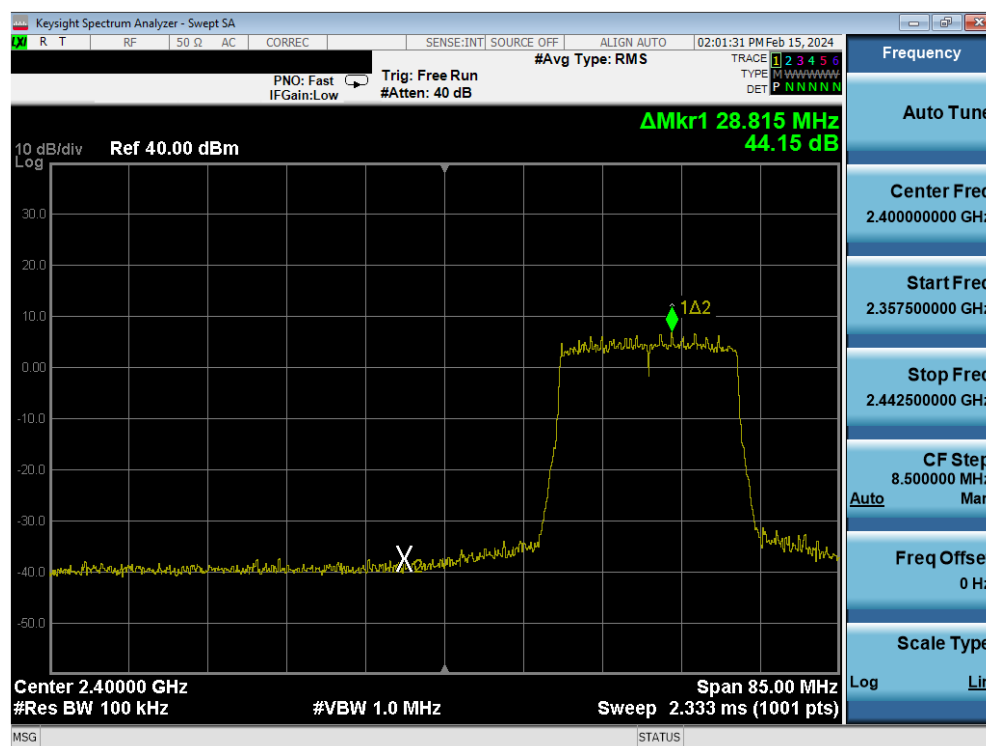


Plot 7-78. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 3)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 68 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

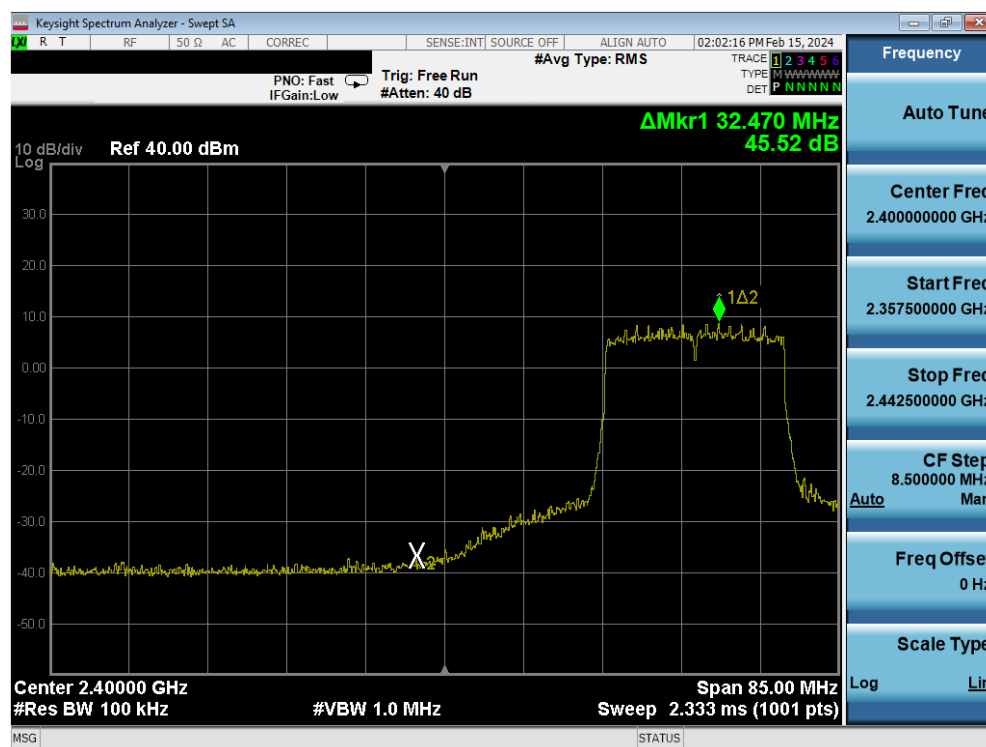

Plot 7-79. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 4)

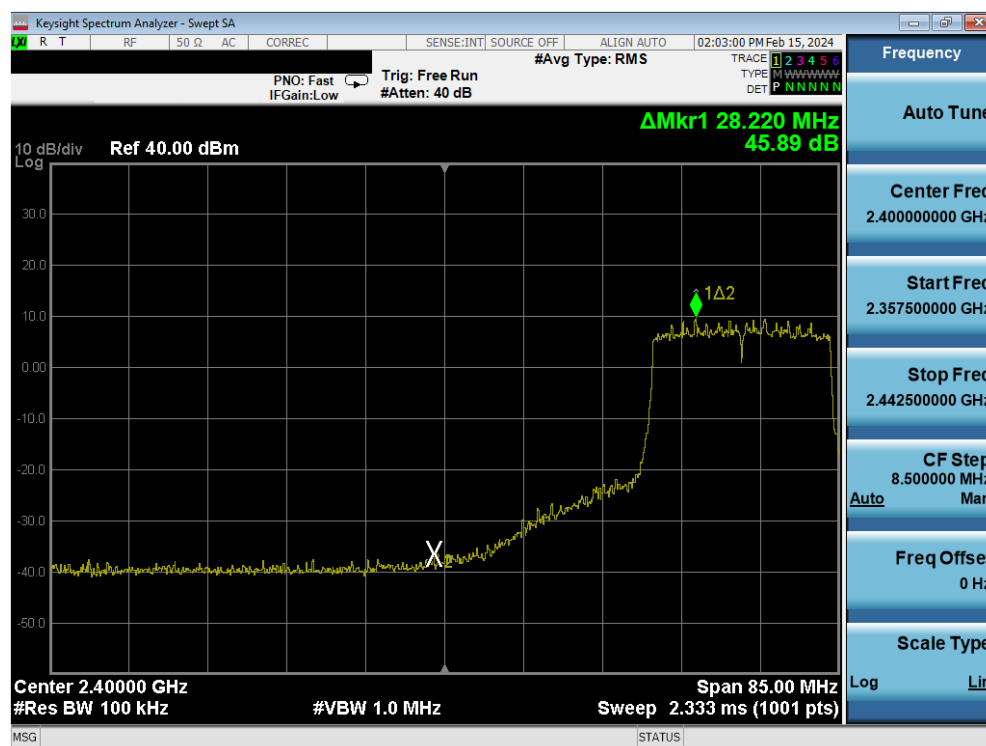


Plot 7-80. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 5)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 69 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

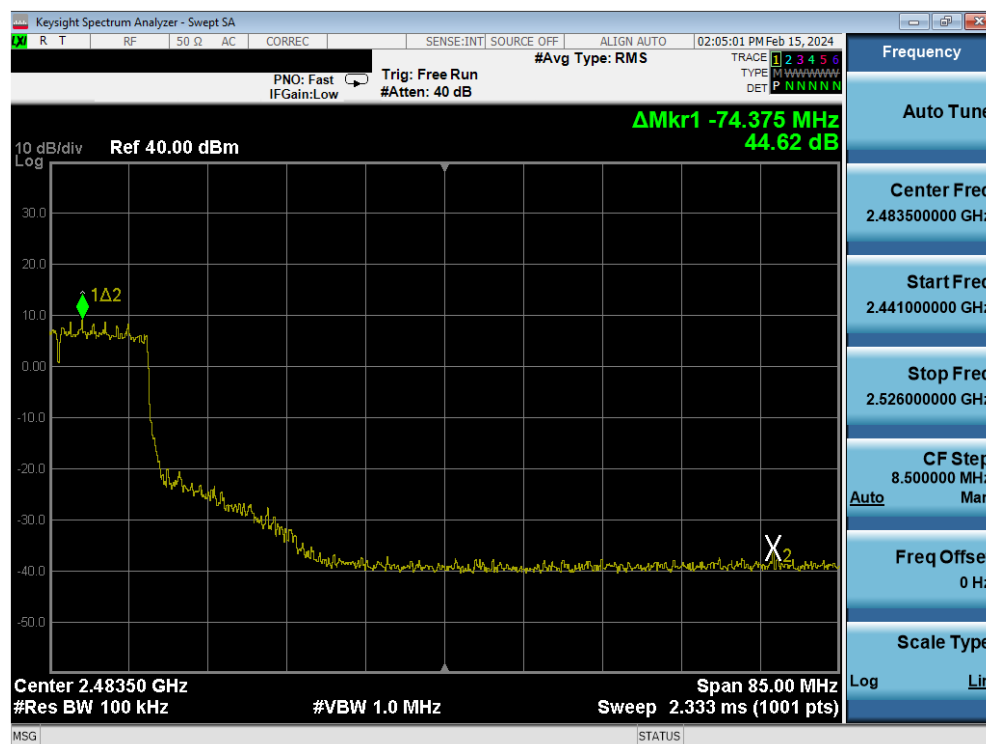

Plot 7-81. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 7)

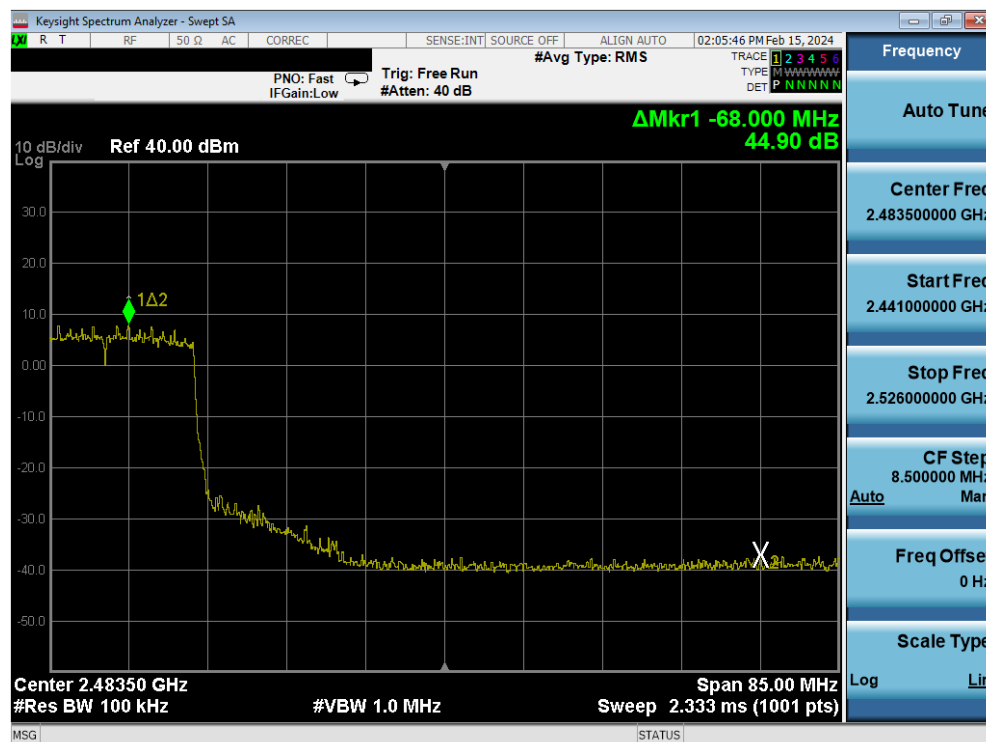


Plot 7-82. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 8)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 70 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

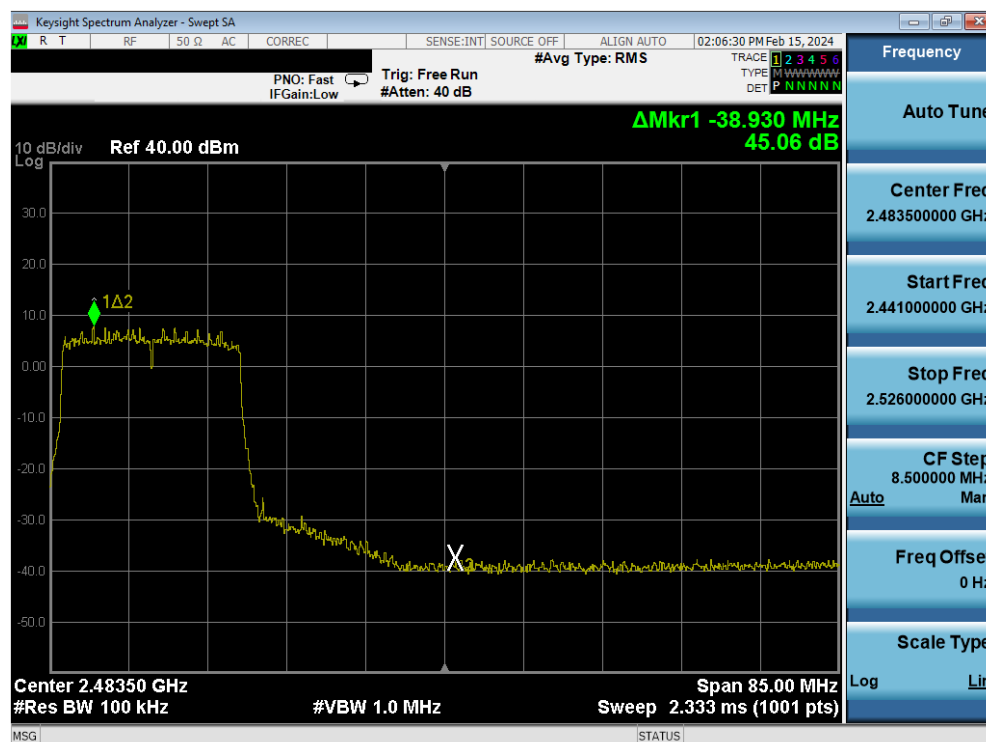


Plot 7-83. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 9)

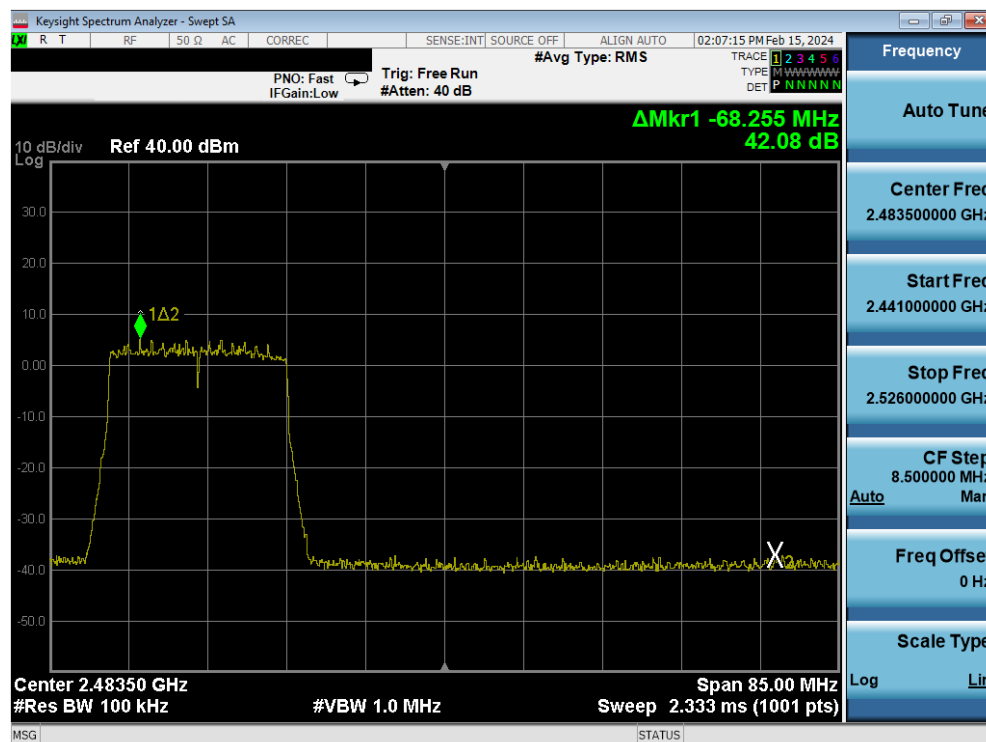


Plot 7-84. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 10)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 71 of 150

V 10.6 09/14/2023

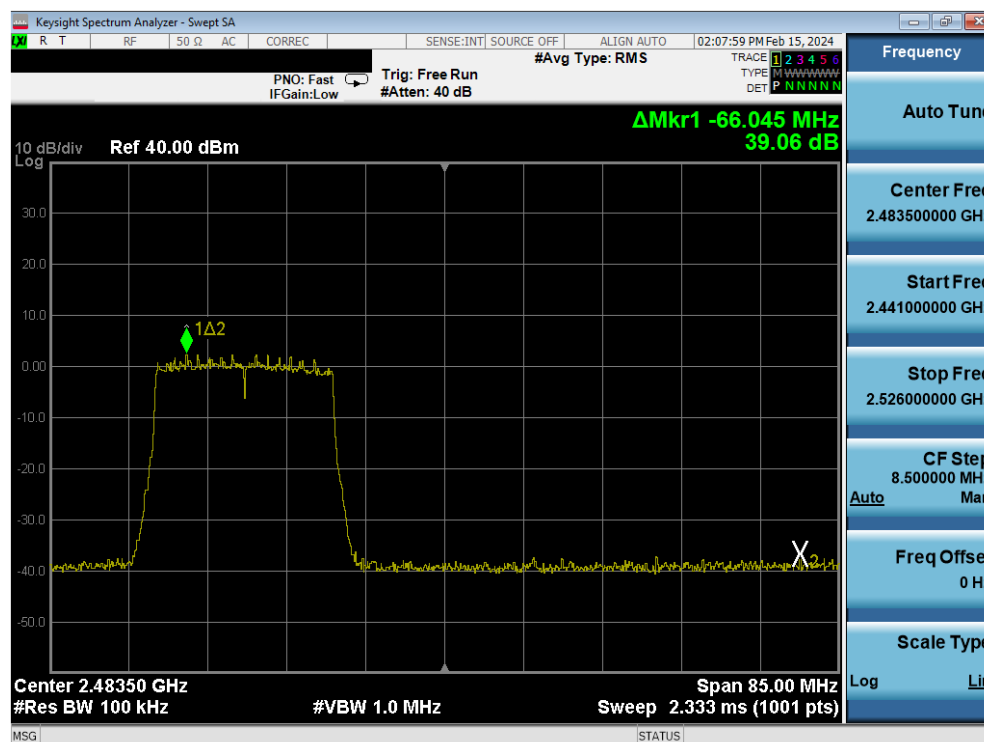

Plot 7-85. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 11)

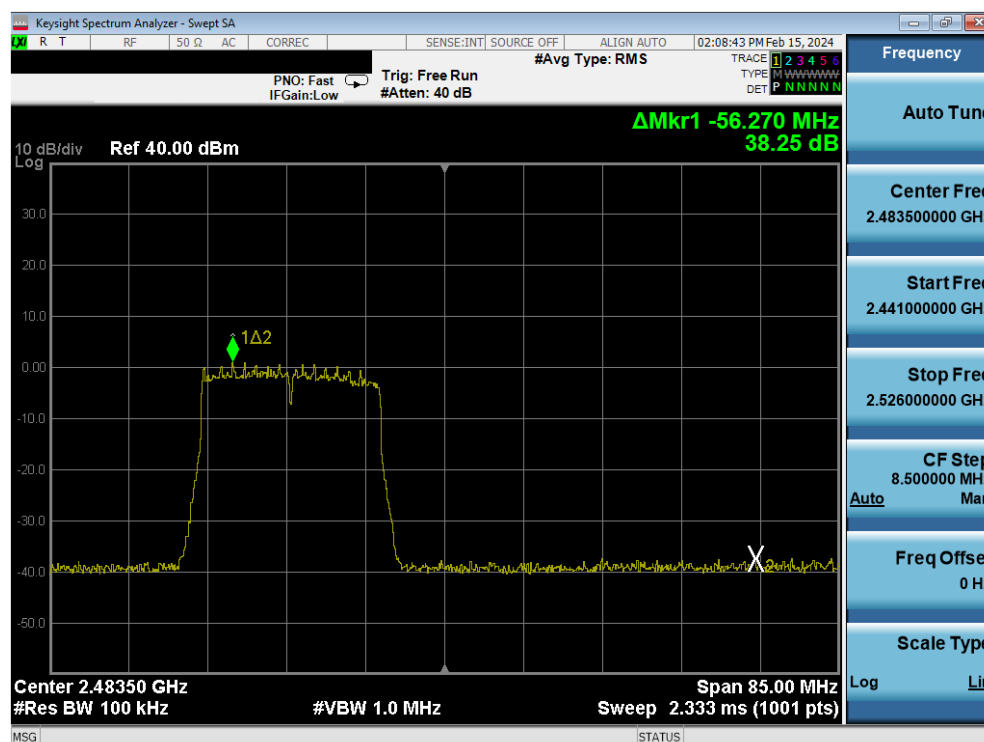


Plot 7-86. Band Edge Antenna 4a (802.11ax OFDMA – RU242 – Ch. 12)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 72 of 150


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5.2 Antenna 2a Conducted Emissions at the Band Edge

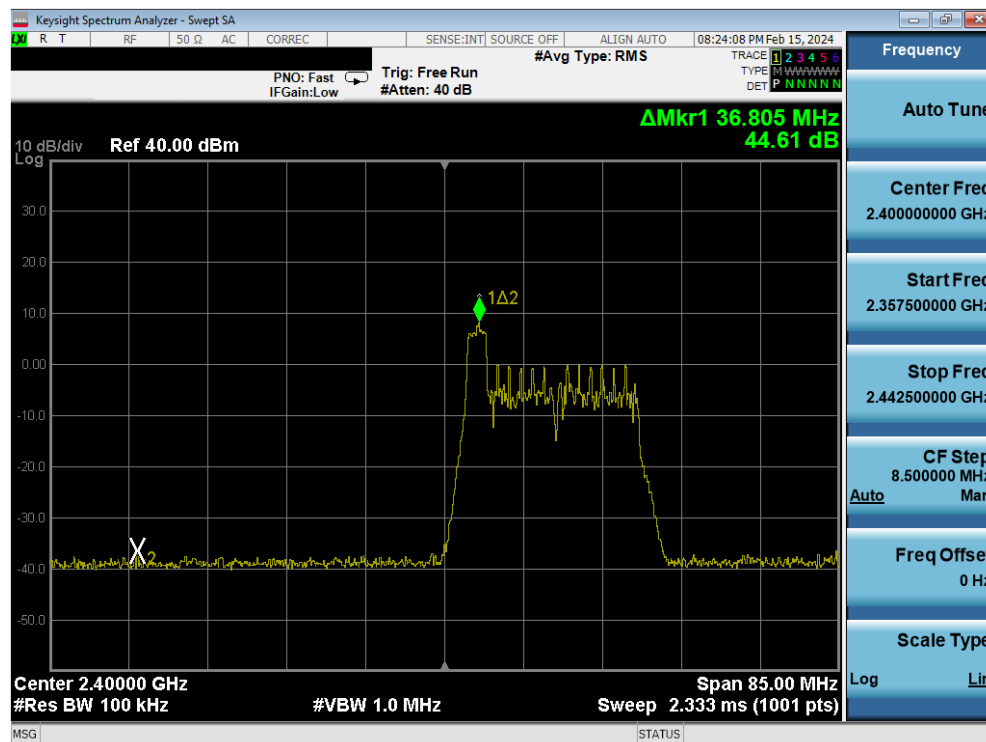

Plot 7-87. Band Edge Antenna 2a (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

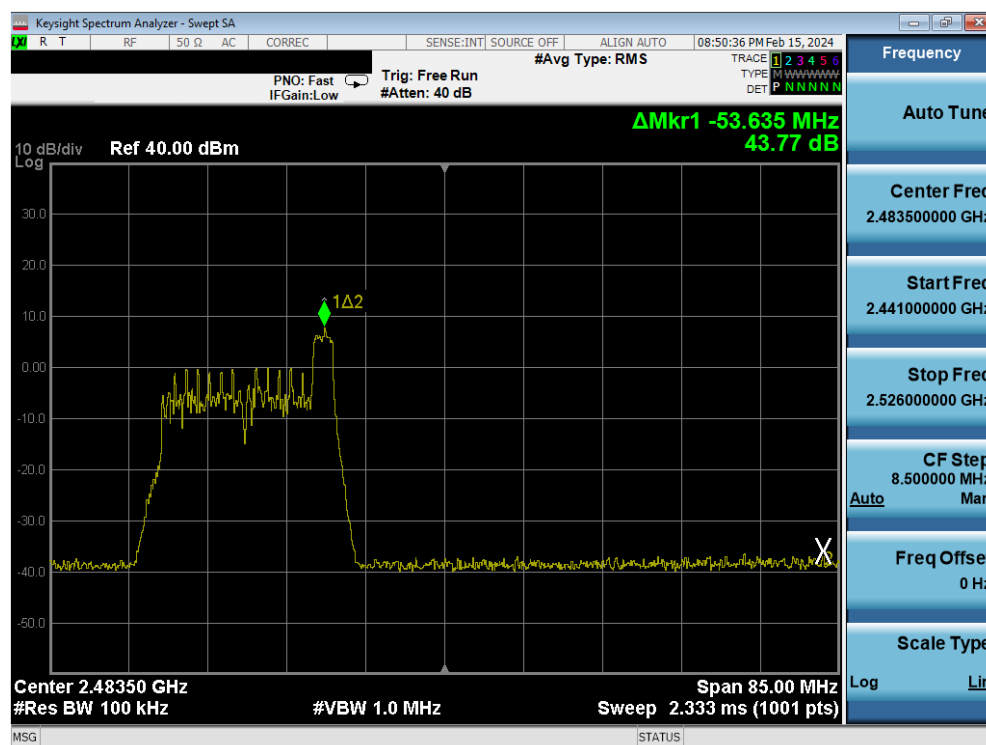


Plot 7-88. Band Edge Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 11)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 73 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

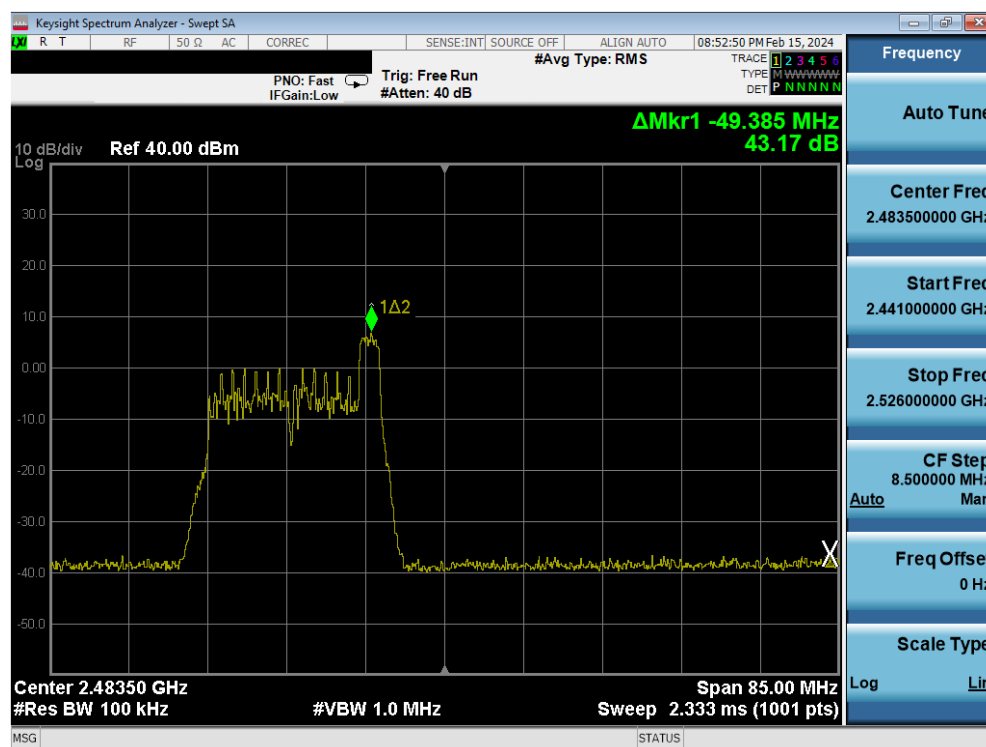

Plot 7-89. Band Edge Antenna 2a (802.11ax OFDMA – RU26 Index 8 – Ch. 12)

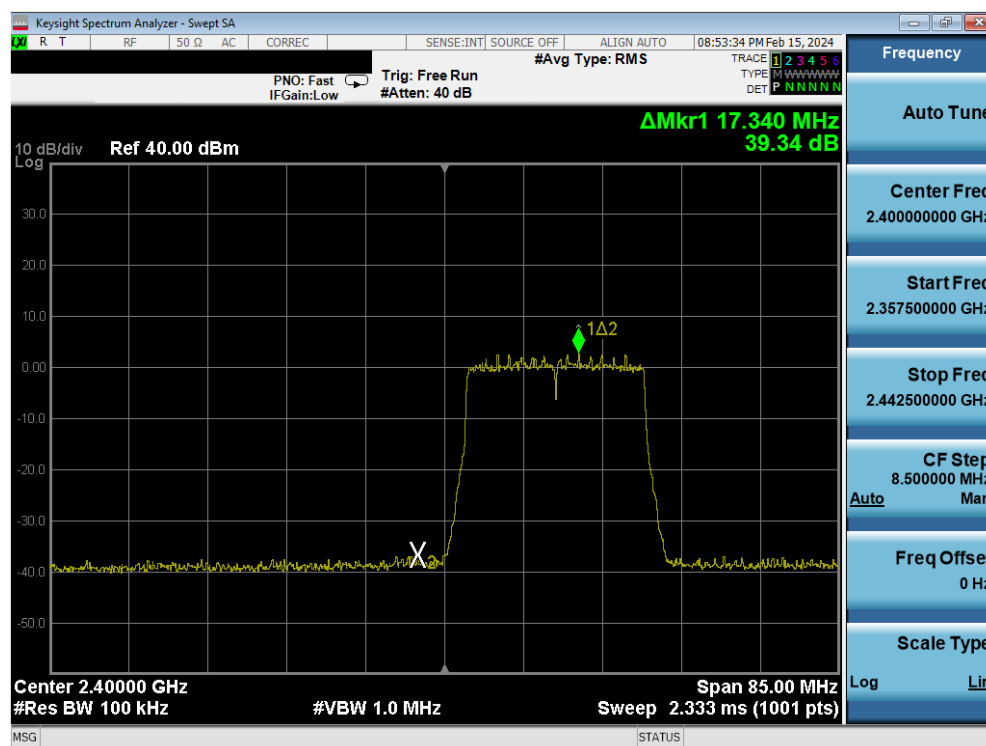


Plot 7-90. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 1)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 74 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

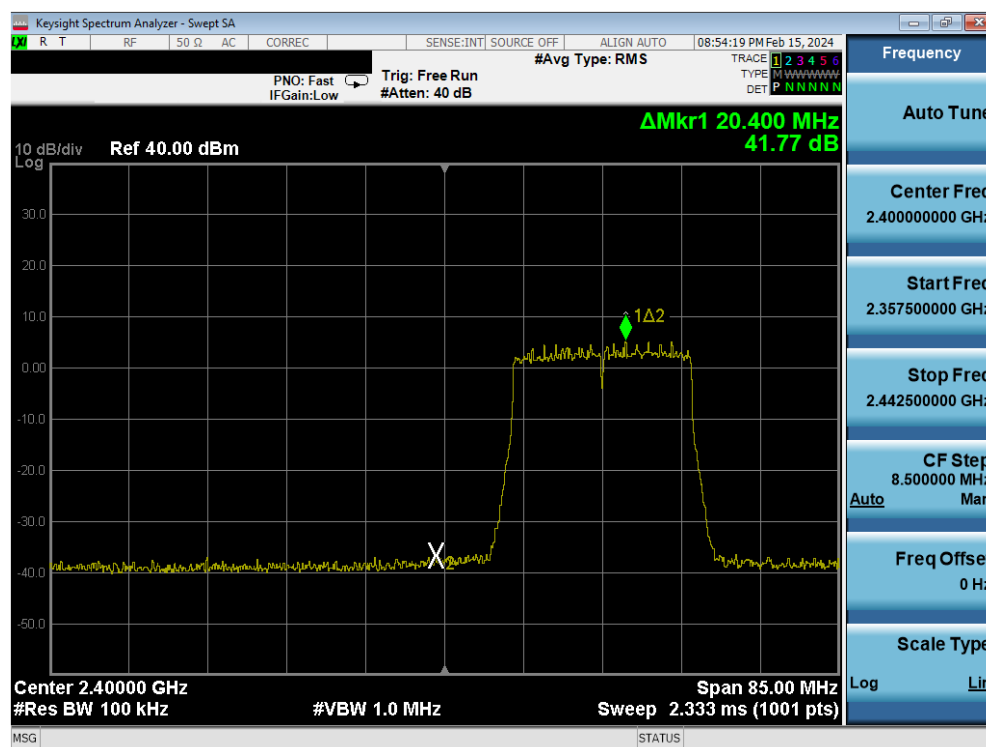

Plot 7-91. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 2)

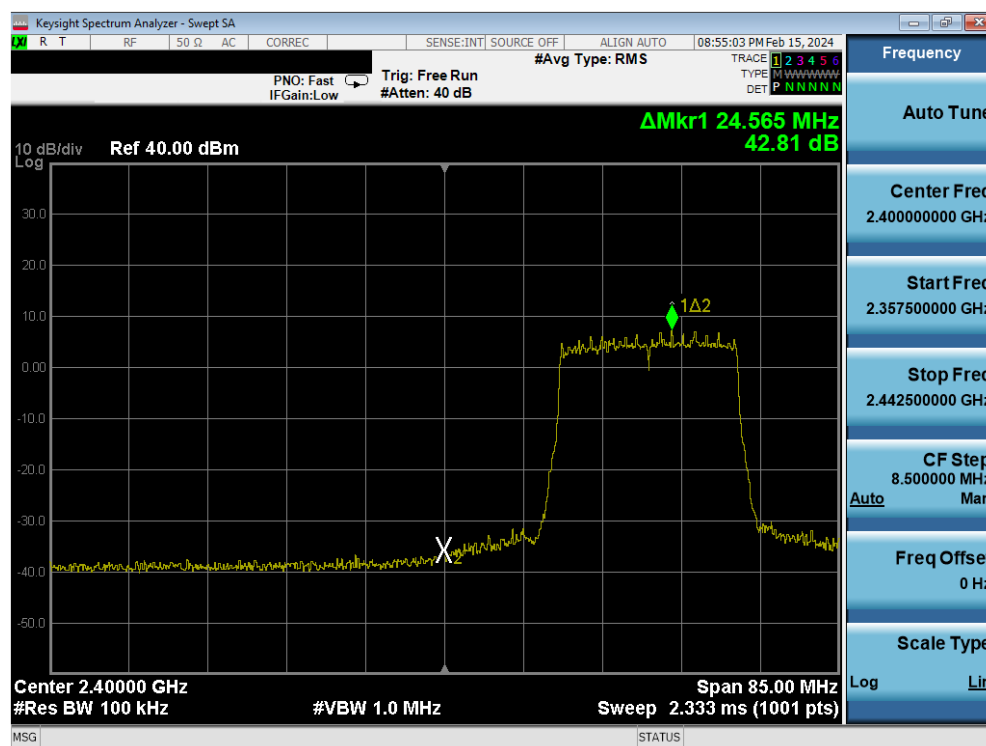


Plot 7-92. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 3)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 75 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

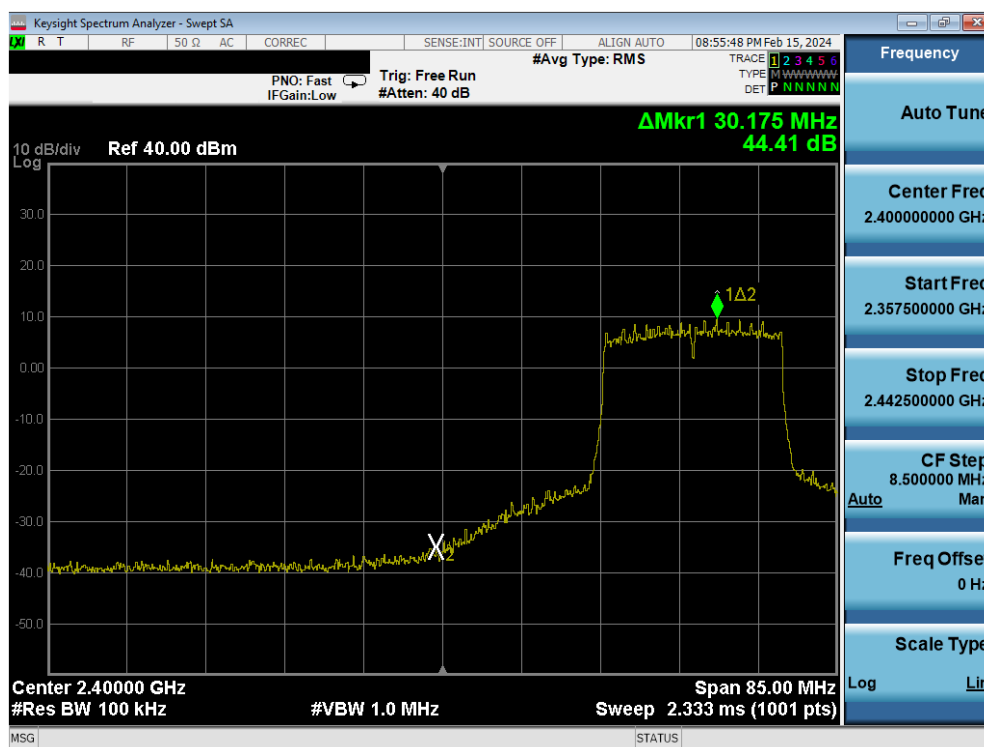

Plot 7-93. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 4)

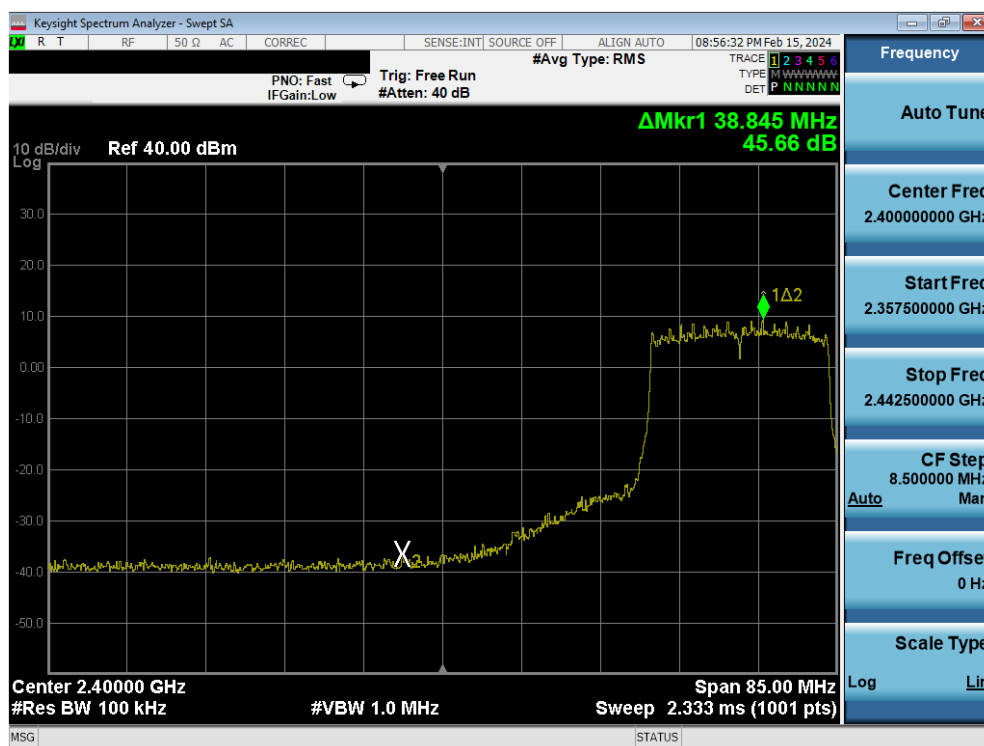


Plot 7-94. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 5)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 76 of 150

V 10.6 09/14/2023



Plot 7-95. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 7)

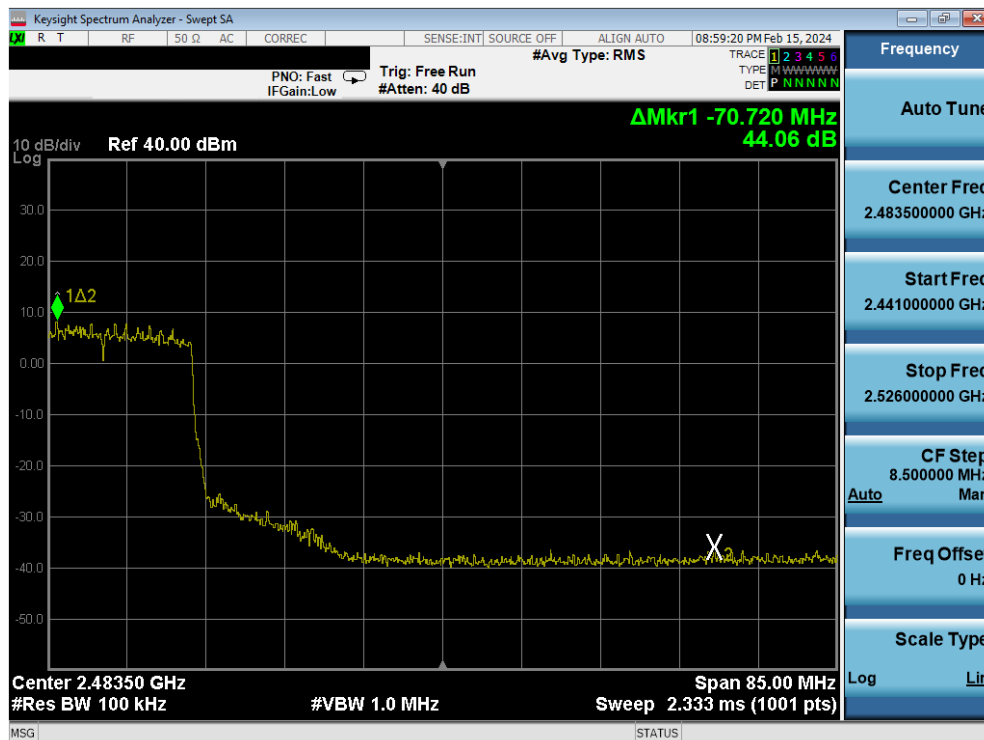


Plot 7-96. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 8)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 77 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

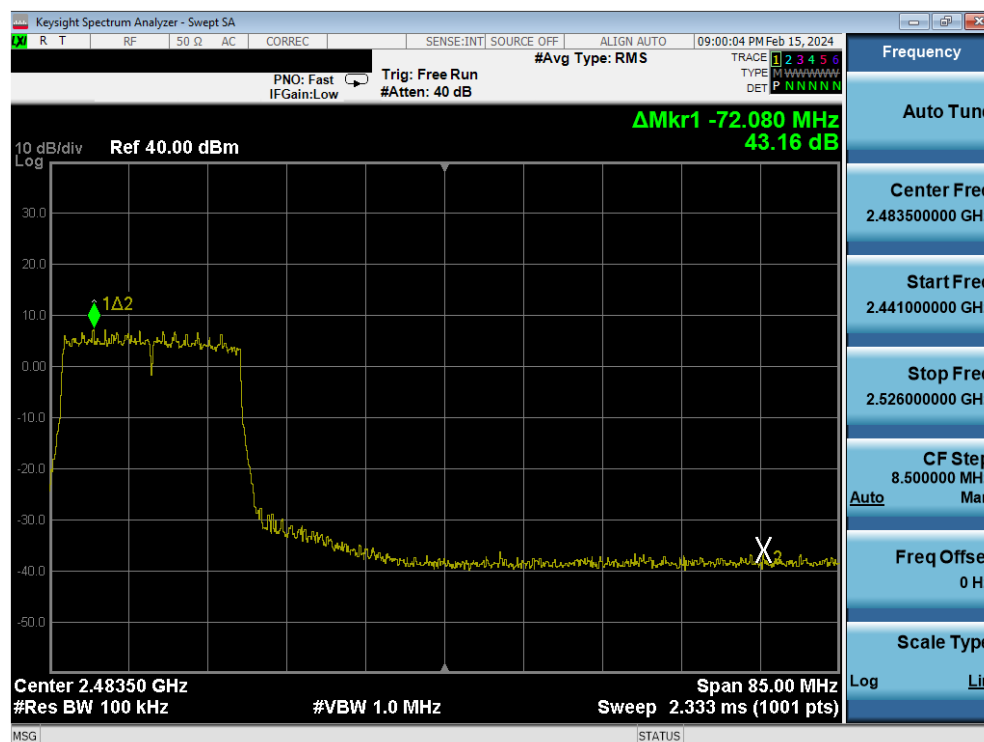

Plot 7-97. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 9)

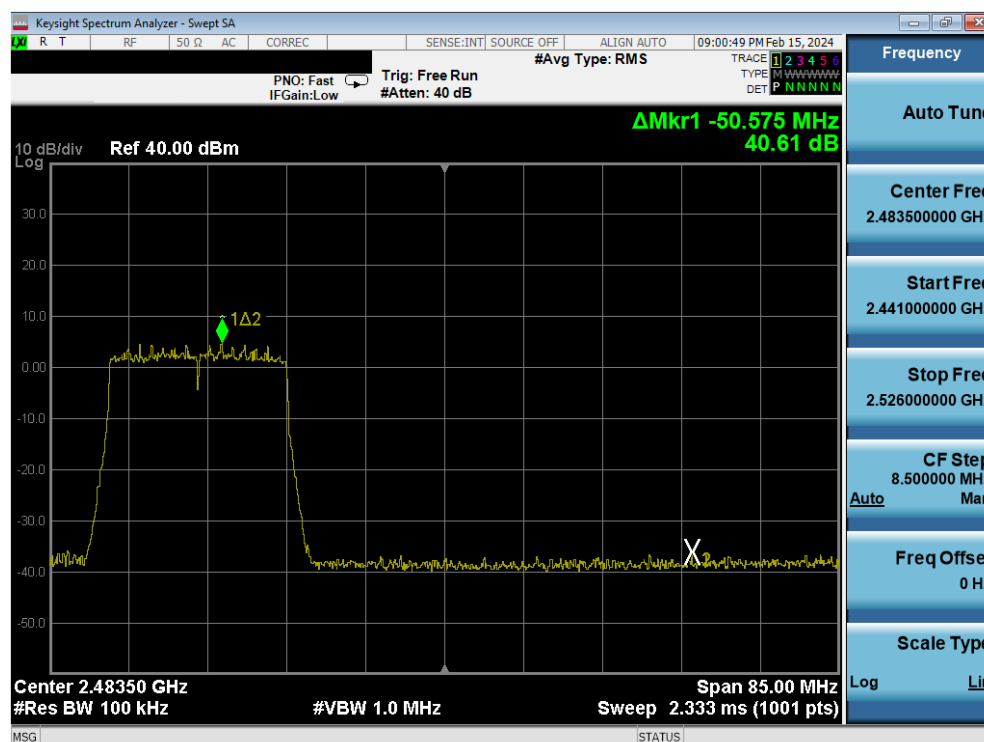


Plot 7-98. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 10)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 78 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

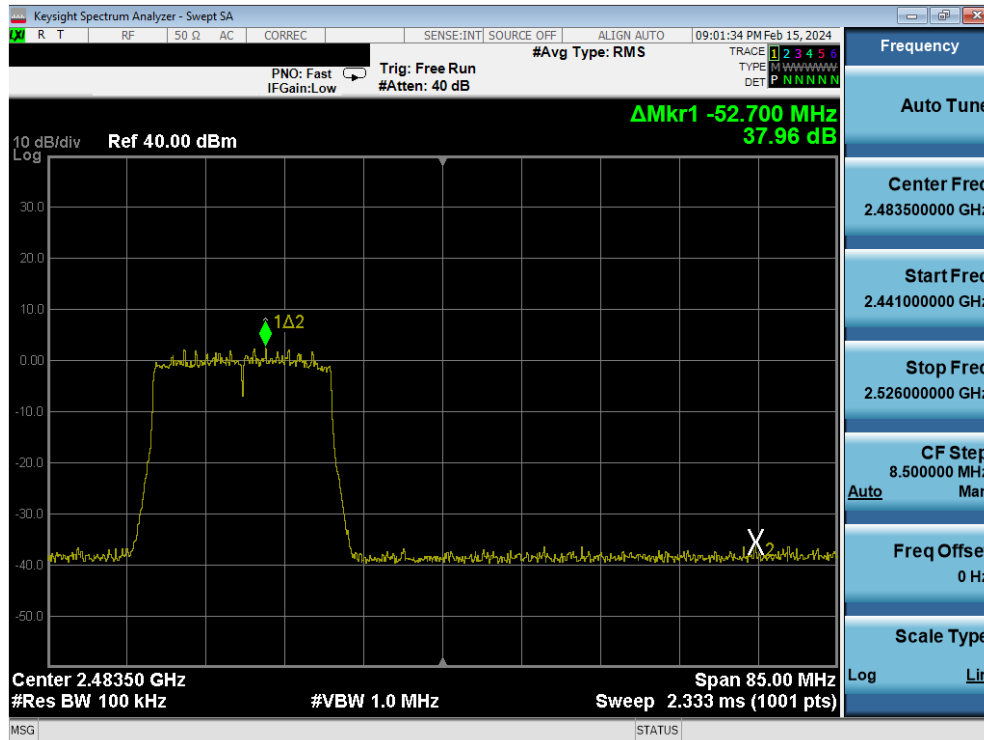

Plot 7-99. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 11)

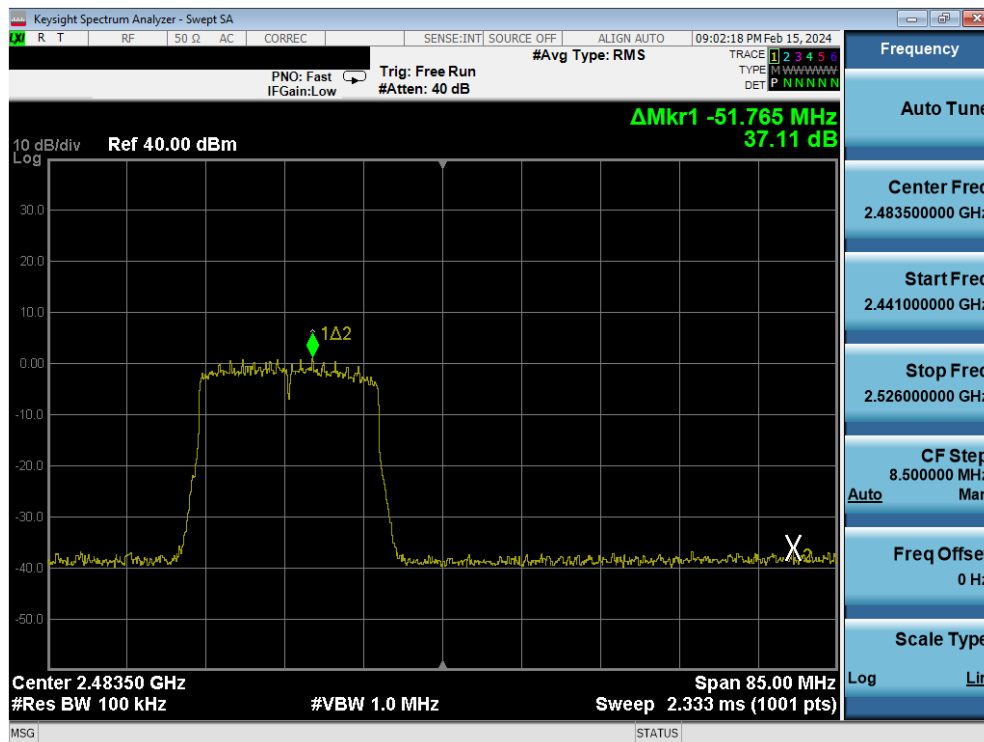

Plot 7-100. Band Edge Antenna 2a (802.11ax OFDMA – RU242 – Ch. 12)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 79 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Conducted Spurious Emissions

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst case configuration. For the following out of band conducted emissions plots, the EUT was set to a data rate of MCS9 in 802.11ax-RU mode as this setting produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Subclause 11.11 of ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Test Procedure Used

ANSI C63.10-2013 – Subclause 11.11.3
KDB 558074 D01 v05r02 – Section 8.5
ANSI C63.10-2013 – Subclause 14.3.3
KDB 662911 D01 v02r01 – Section E)3)b)

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 80 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)3)b), it was unnecessary to show compliance through the summation of test results of the individual outputs.
5. All antenna configurations and data rates were investigated and only the worst case are reported.
6. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 81 of 150


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

V 10.6 09/14/2023

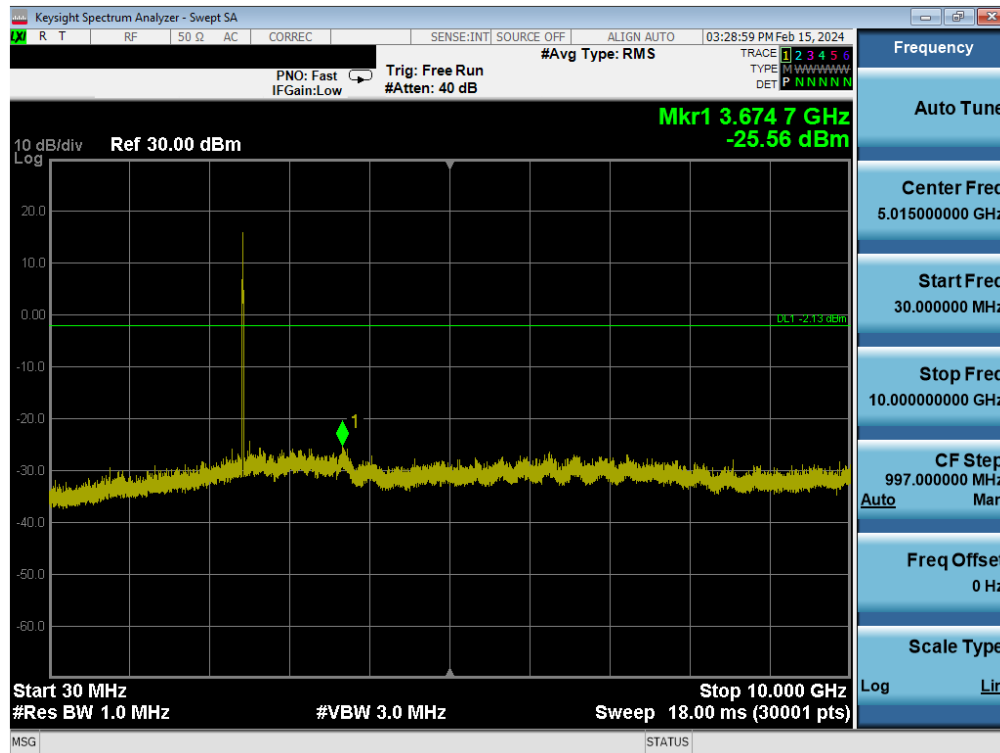


Plot 7-103. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU26 – Ch. 6)

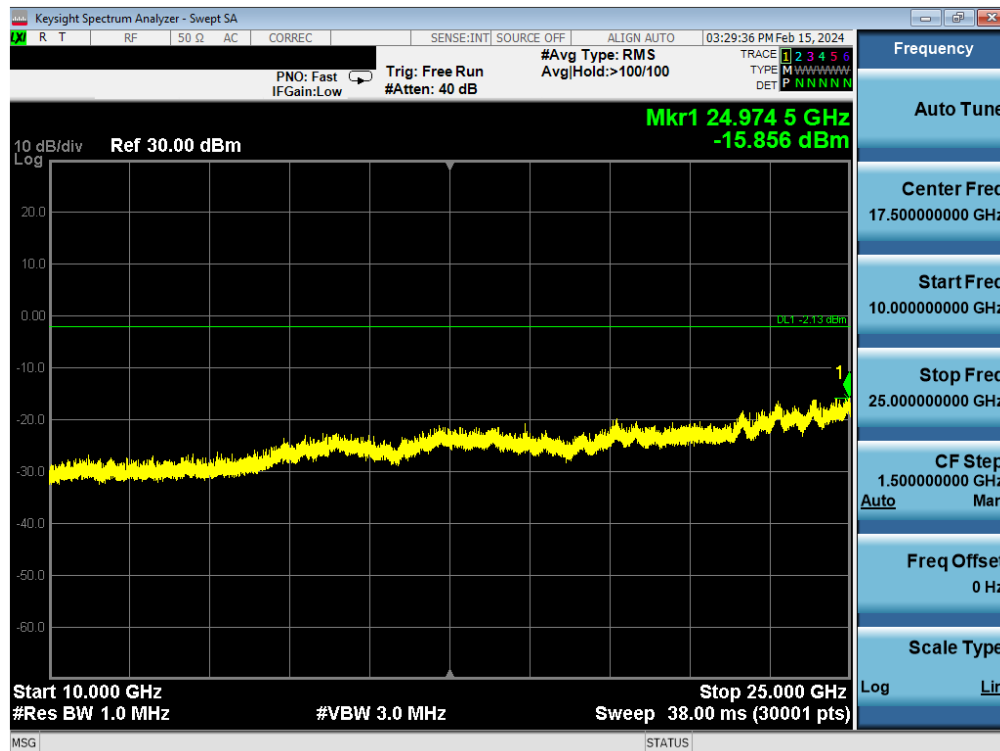


Plot 7-104. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU26 – Ch. 6)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 83 of 150

V 10.6 09/14/2023

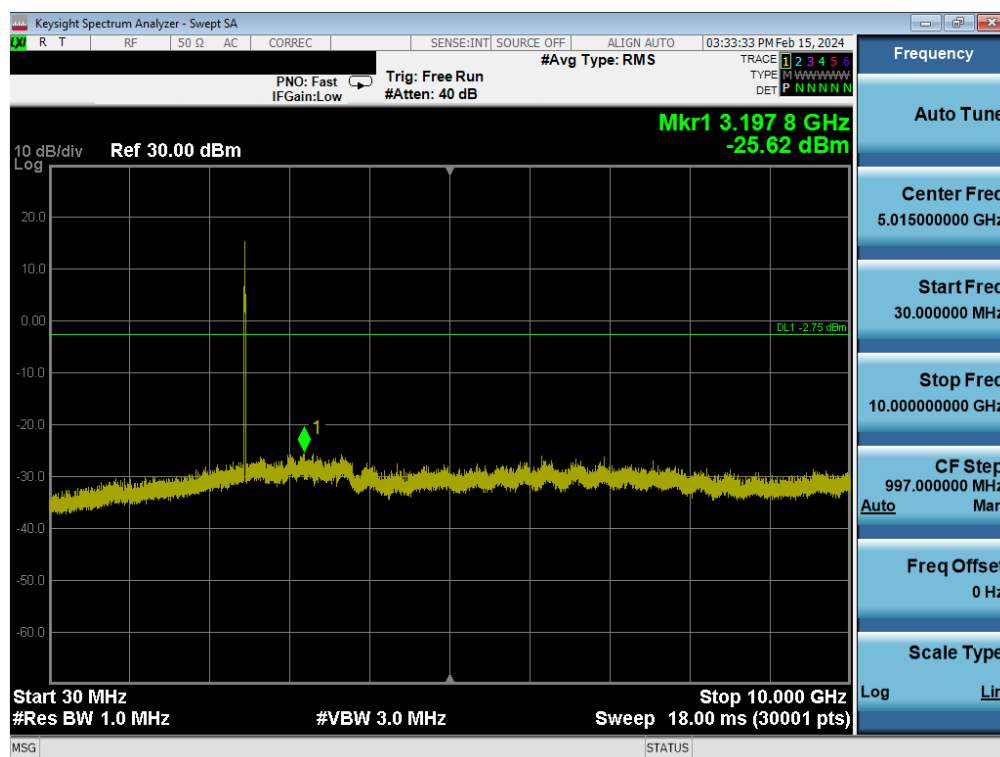

Plot 7-105. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU26 – Ch. 11)

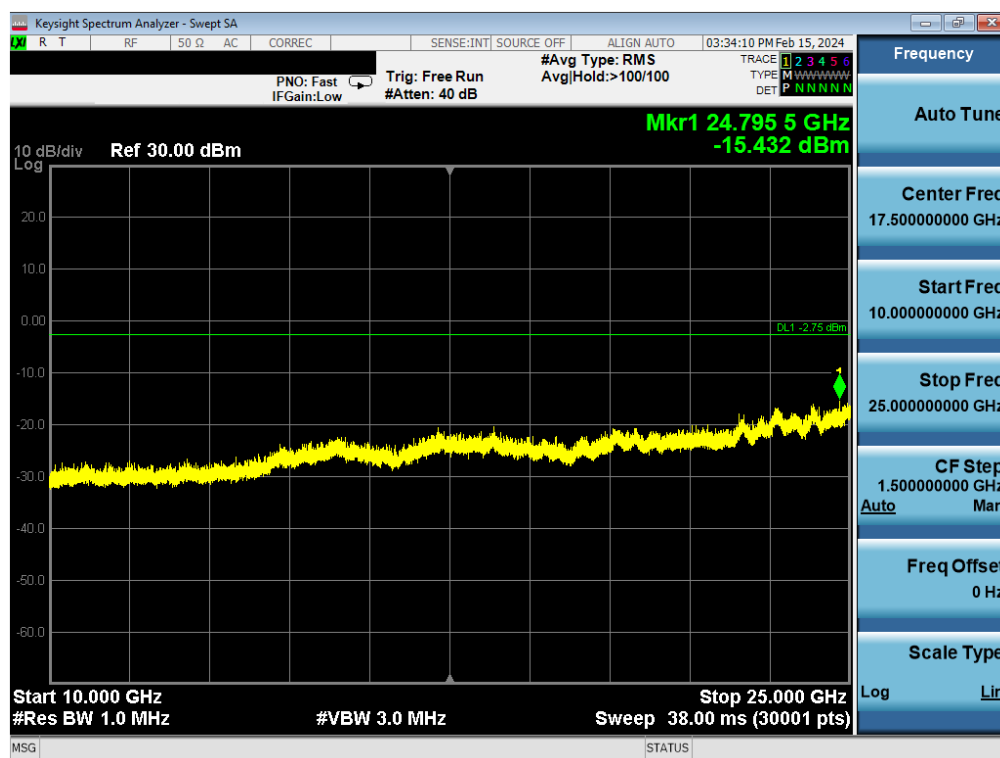


Plot 7-106. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU26 – Ch. 11)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 84 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

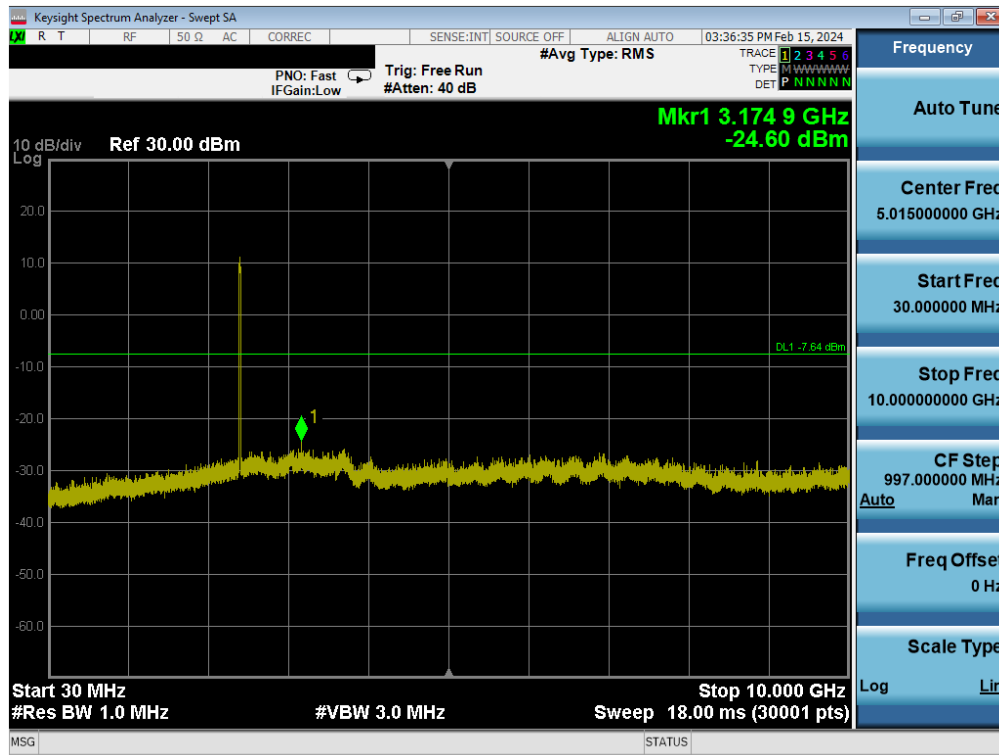


Plot 7-107. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 1)

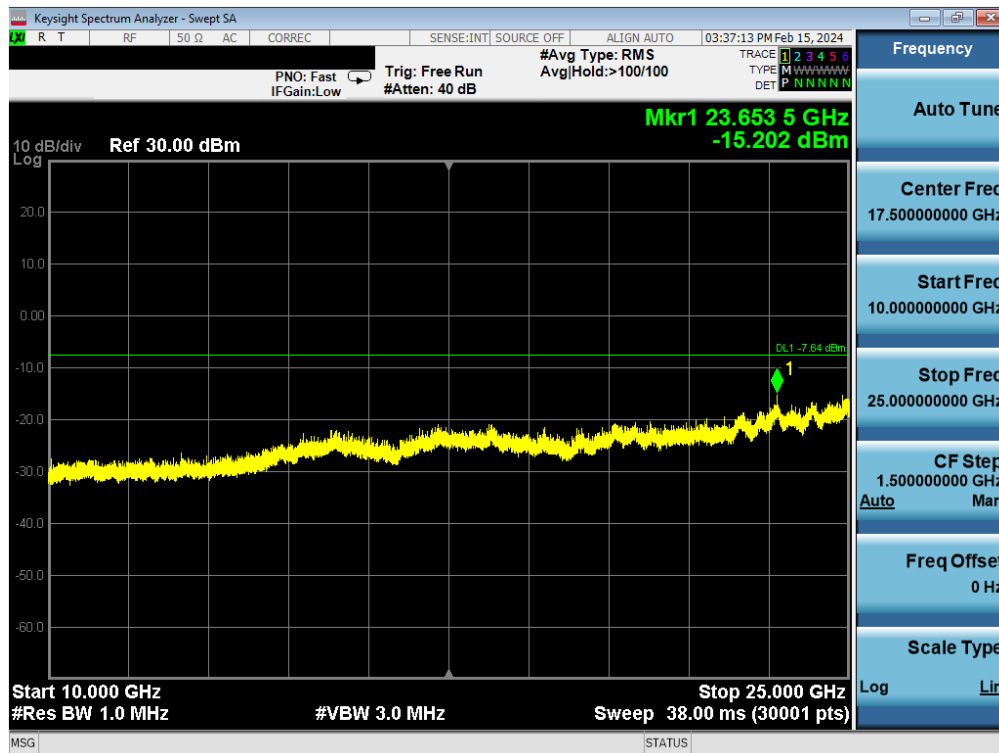


Plot 7-108. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 85 of 150

V 10.6 09/14/2023

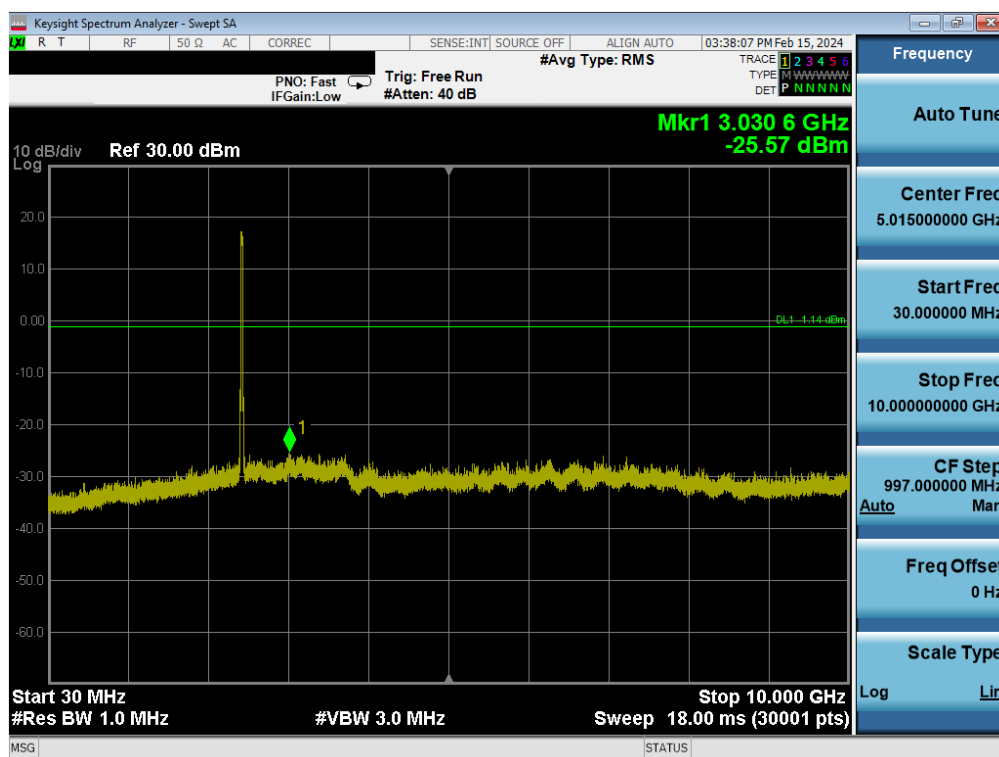


Plot 7-109. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 6)

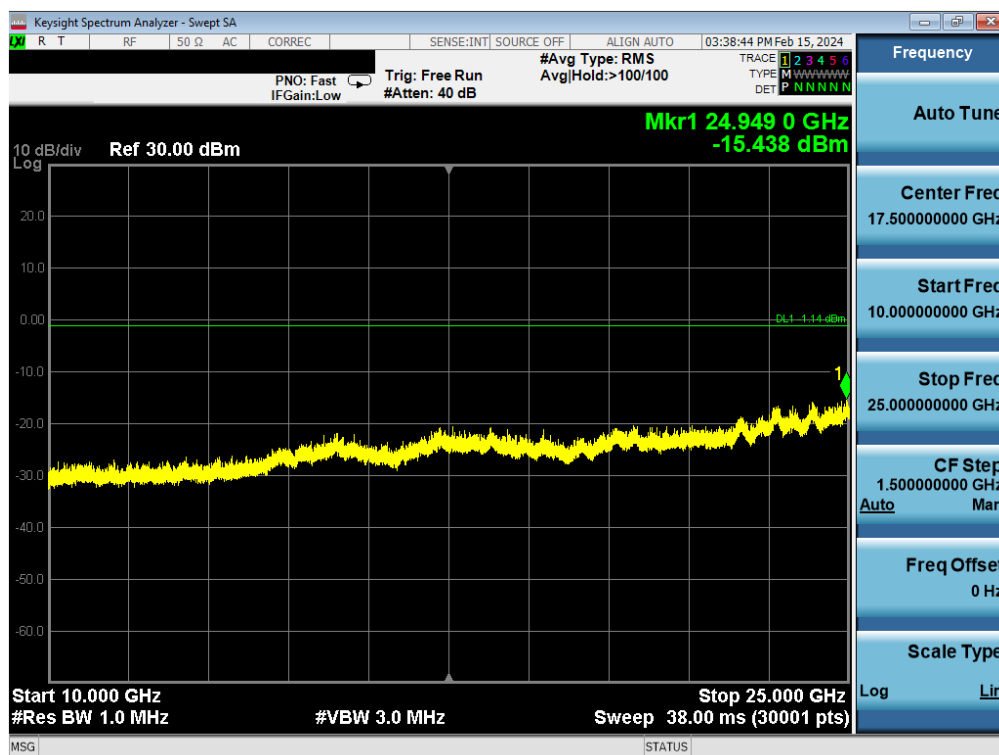


Plot 7-110. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 6)

FCC ID: BCGA2837			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
IC: 579C-A2837	Test Report S/N:	Test Dates:	EUT Type:	Page 86 of 150
	1C2311270068-15-R1.BCG	1/8/2024 - 3/15/2024	Tablet Device	

V 10.6 09/14/2023

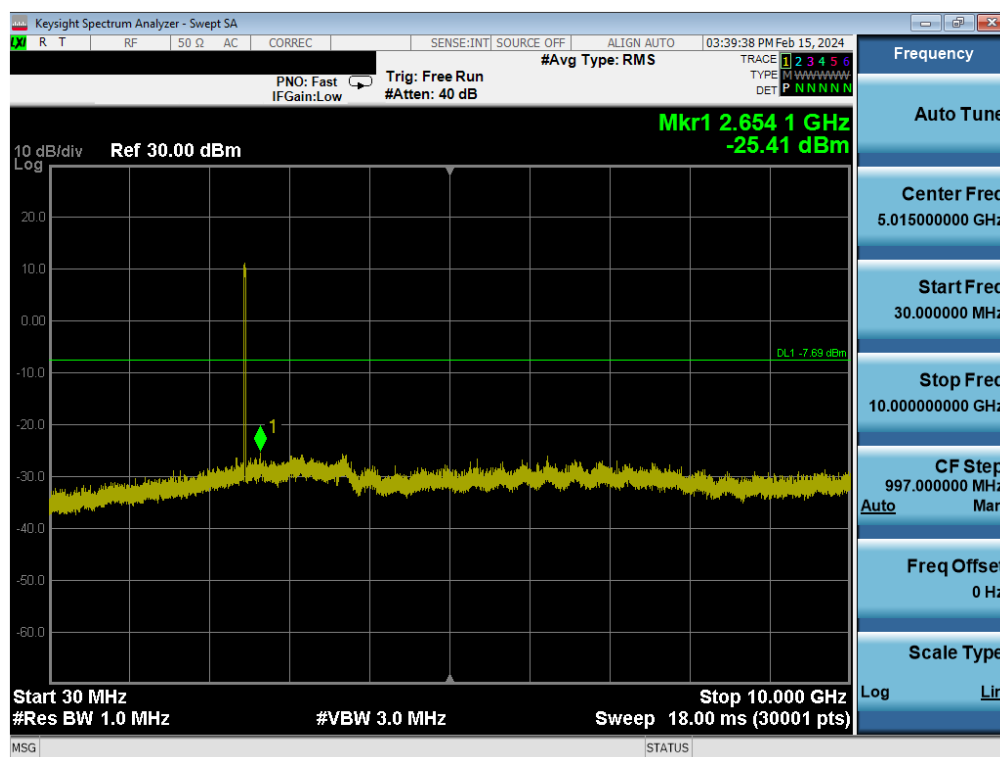

Plot 7-111. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 11)

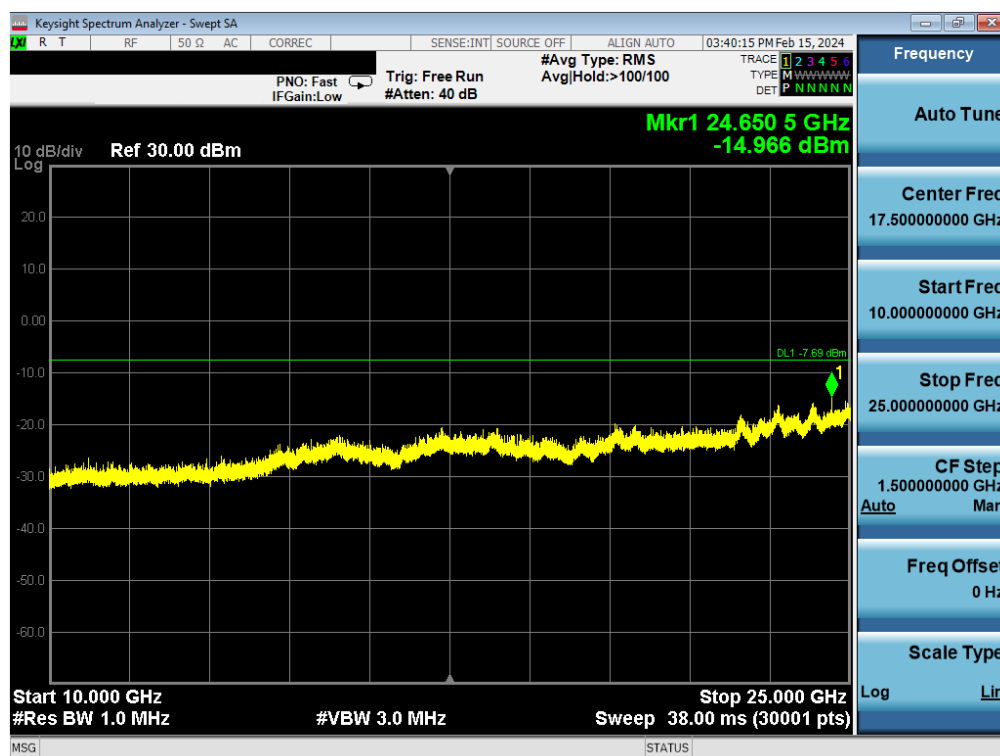


Plot 7-112. Conducted Spurious Plot Antenna 4a (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 87 of 150


V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Antenna 2a

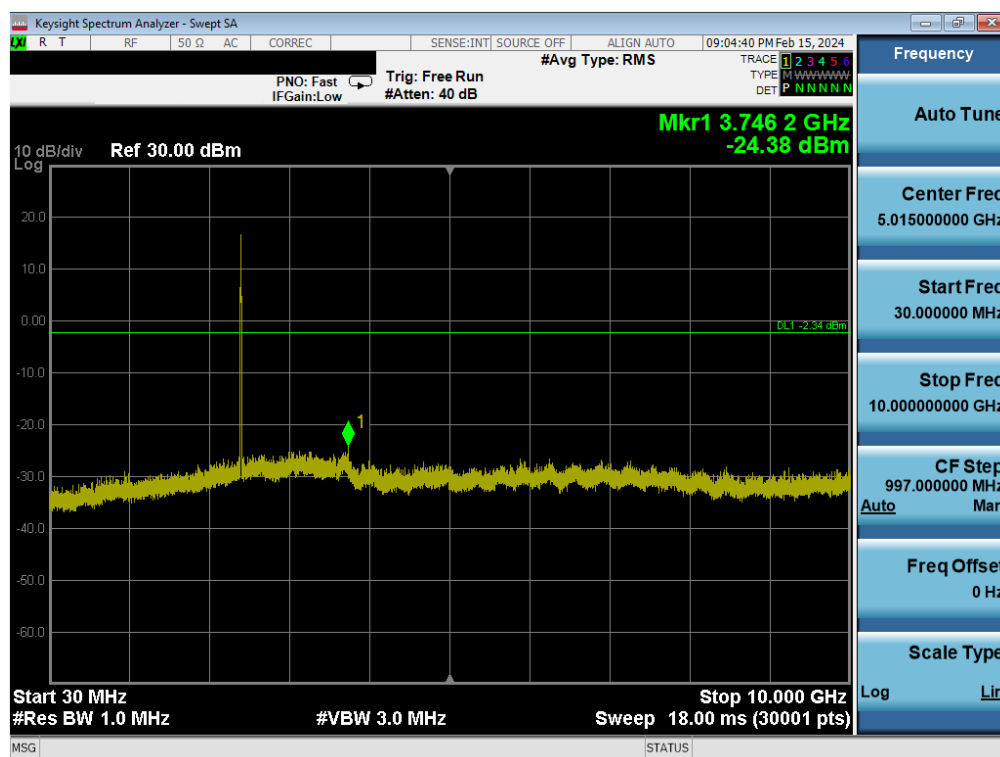

Plot 7-113. Conducted Spurious Plot Antenna 2a (802.11ax OFDMA – RU26 – Ch. 1)


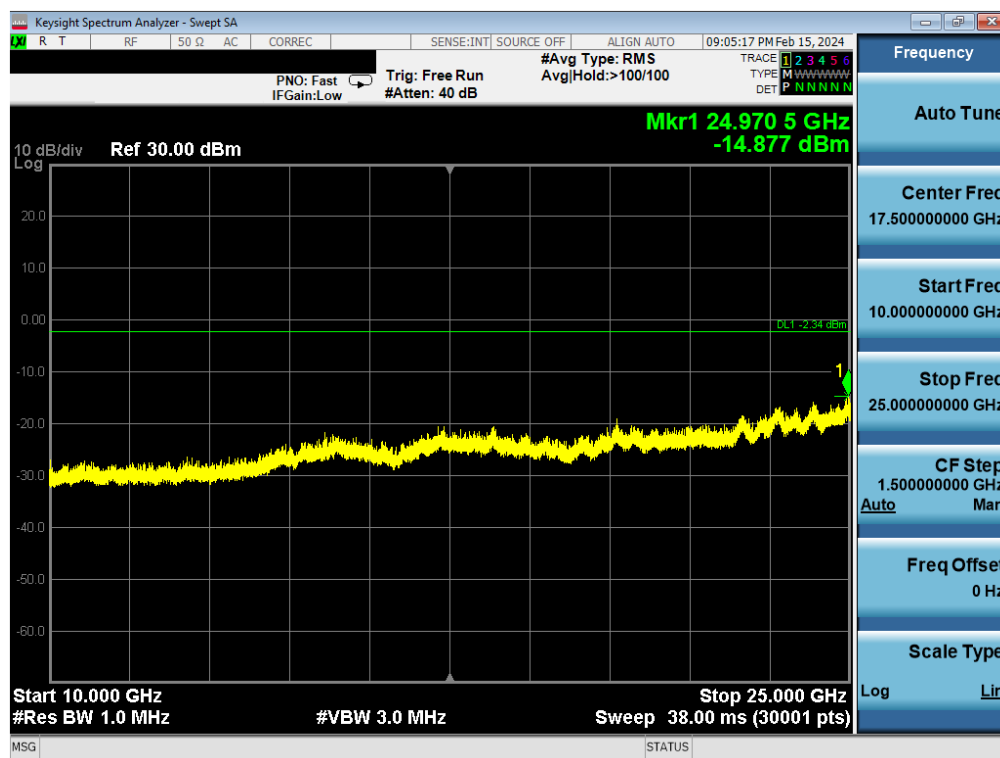


Plot 7-114. Conducted Spurious Plot Antenna 2a (802.11ax OFDMA – RU26 – Ch. 1)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 88 of 150

V 10.6 09/14/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

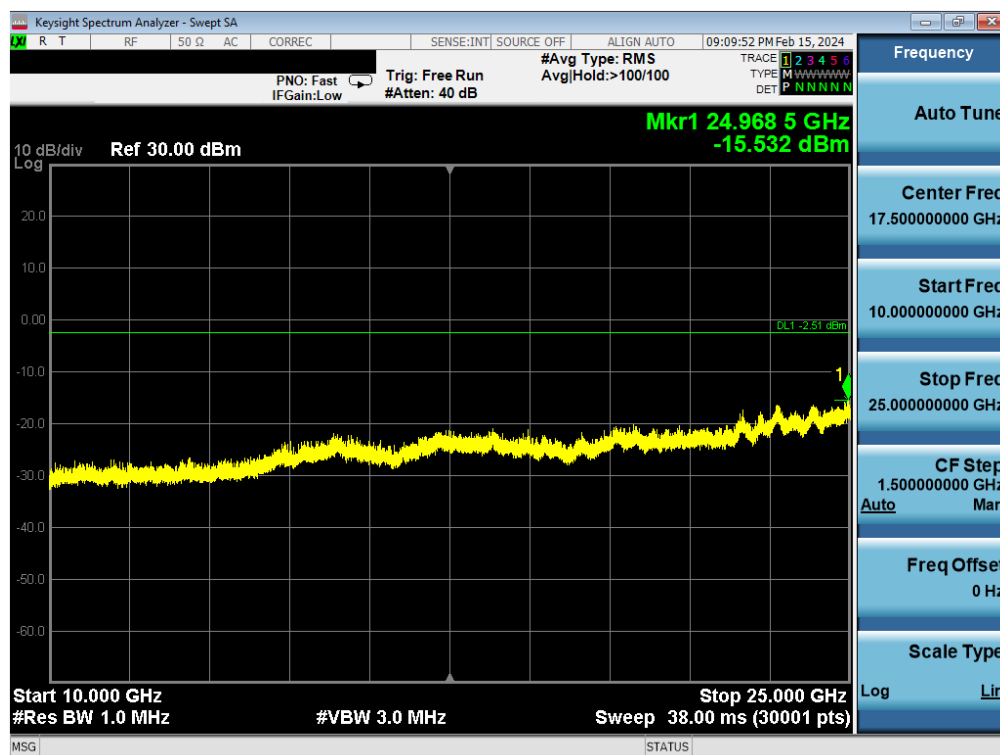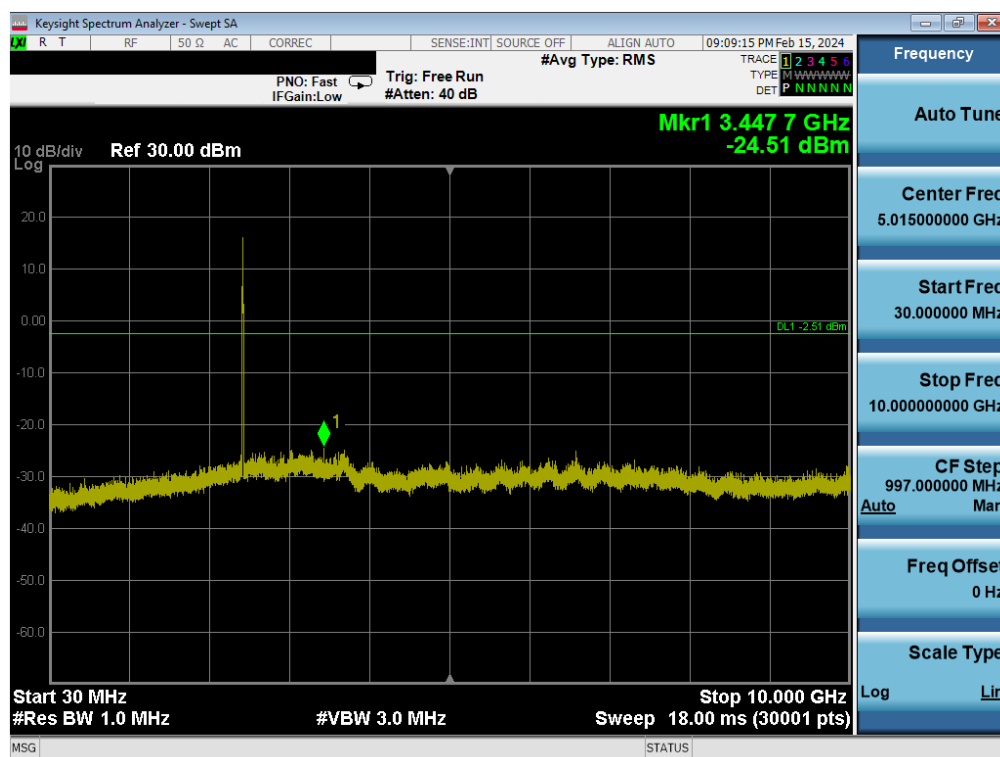


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 89 of 150

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

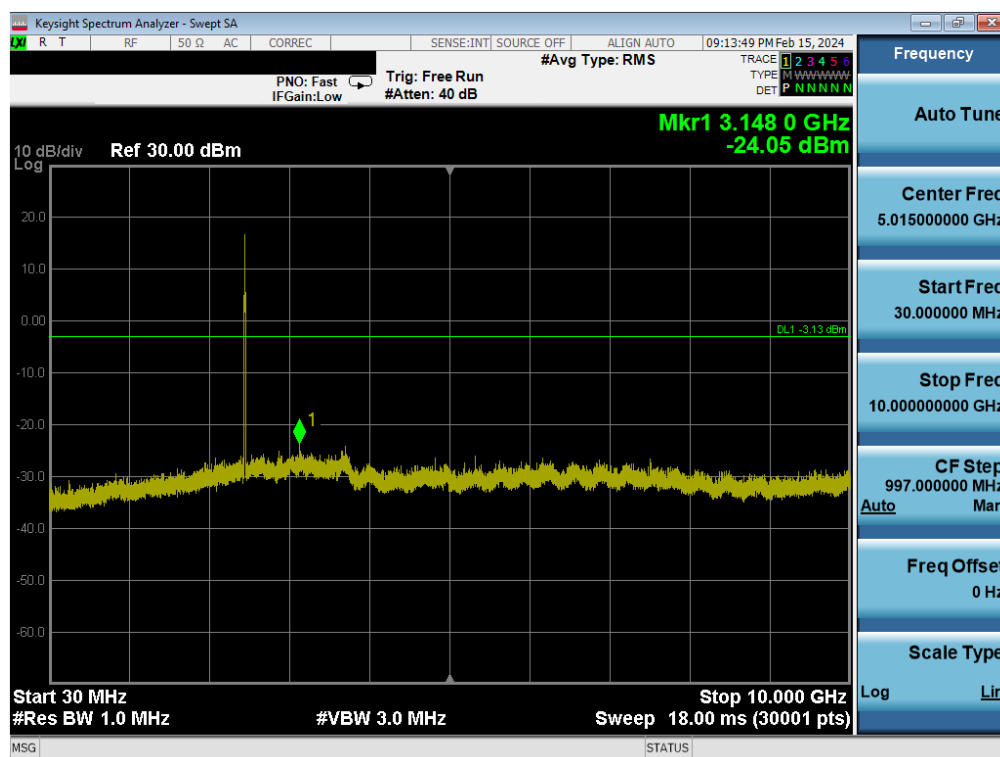

Plot 7-117. Conducted Spurious Plot Antenna 2a (802.11ax OFDMA – RU26 – Ch. 11)

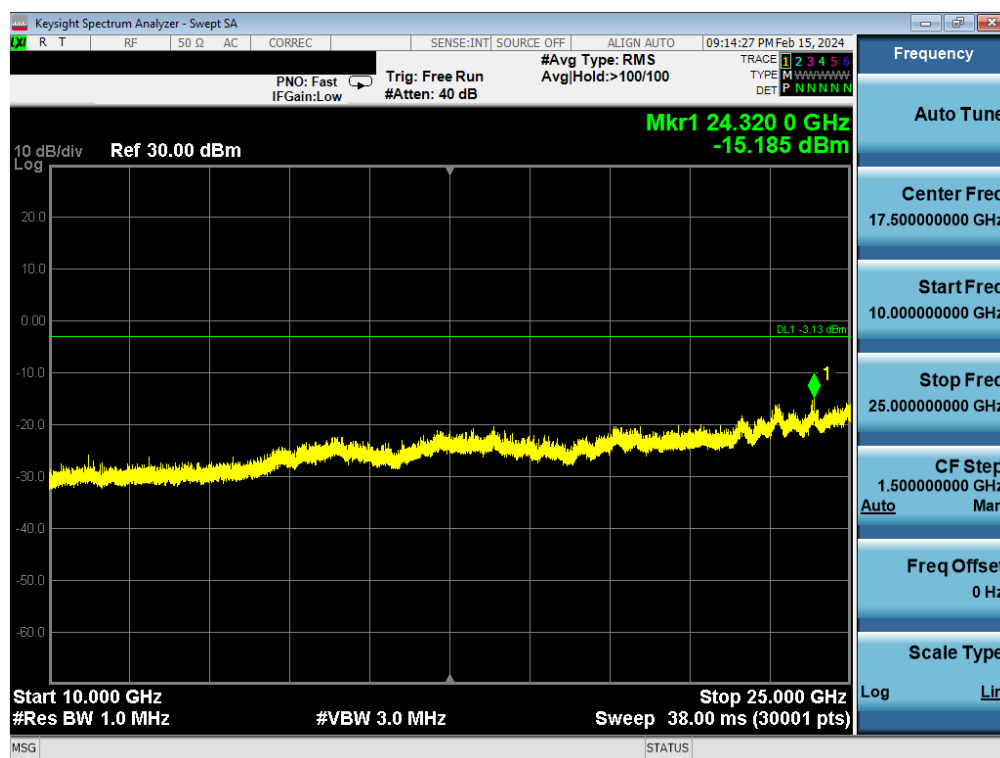

Plot 7-118. Conducted Spurious Plot Antenna 2a (802.11ax OFDMA – RU26 – Ch. 11)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-15-R1.BCG	Test Dates: 1/8/2024 - 3/15/2024	EUT Type: Tablet Device	Page 90 of 150

V 10.6 09/14/2023

