

USE INSTRUCTIONS

Product parameters

Communication method: BLE Bluetooth 4.0  
Main control chip: PIC18F25K80  
Software platform: Support Windows / iOS  
Working voltage: 9V~36V  
Working current: 85mA  
Standby current: 25mA  
Working temperature: -40°C~85°C  
Working humidity: less than 60%  
Product size: 41.8mm\*31.7mm\*19.7mm

1.

Supported agreement

- 1. SAE J1850 PWM (41.6Kbaud)
- 2. SAE J1850 VPW (10.4Kbaud)
- 3. ISO9141-2(5 baud init, 10.4Kbaud)
- 4. ISO14230-4 KWP (5 baud init, 10.4 Kbaud)
- 5. ISO14230-4 KWP (fast init, 10.4 Kbaud)
- 6. ISO15765-4 CAN (11bit ID, 500 Kbaud)
- 7. ISO15765-4 CAN (29bit ID, 500 Kbaud)
- 8. ISO15765-4 CAN (11bit ID, 250 Kbaud)
- 9. ISO15765-4 CAN (29bit ID, 250 Kbaud)

2.

Use guide

1.Turn on the phone Bluetooth Insert OBD into the car OBD interface Open phone APP torque




3.

2.into the car OBD interface realtime infomation



4.

3.into the car OBD interface setting

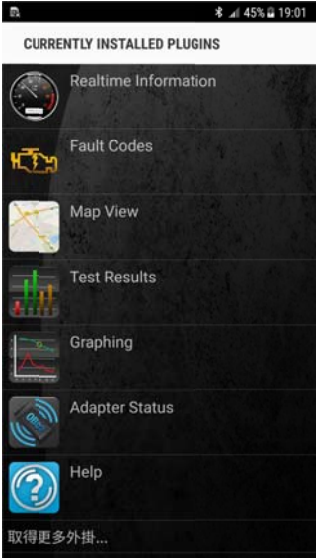

5.

## **Warning Statement**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.