



Sensor IV Installation Overview

revised 01/16/2025


Step 1: Gather required tools and materials.



Step 2: Measure and mark location.



Step 3: Use template to start pilot hole.

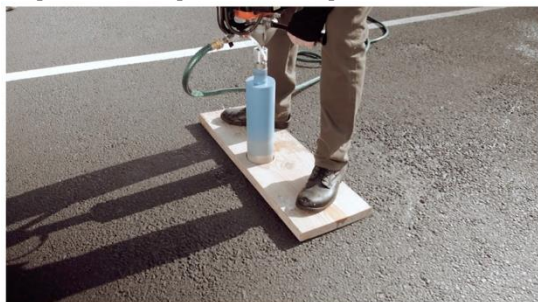

Step 4: Finish drilling hole (4" diameter x 3" deep).



Step 5: Remove core, using pry bar if necessary.



Step 6: Level sensor in hole using a base of sand.



Step 7: Insert sensor, paying attention to orientation.



Step 8: Seal sensor in place.



This product complies with FCC & Industry Canada's RSS-102 radiation exposure limits set forth for an uncontrolled environment

Ce produit est conforme à la norme FCC et aux limites d'exposition au rayonnement RSS-102 d'Industrie Canada définies pour un environnement non contrôlé.

Pursuant to FCC 15.21 of the FCC rules, changes not expressly approved by Fybr might cause harmful interference and void the FCC authorization to operate this product.

The antennas used for this transmitter must be installed to provide a separation distance greater than 20 cm from all persons.

This device complies with Part 15 of the FCC rules and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à des règlements d'Industrie Canada exempts de licence standard RSS (s). Son fonctionnement est soumis aux deux conditions suivantes: (1) Ce dispositif ne doit pas causer d'interférences nuisibles, et (2) cet appareil doit accepter toute interférence reçue, y compris les interférences pouvant entraîner un fonctionnement indésirable.

640 Cepi Drive | Suite C | Chesterfield MO USA 63005 p 636-730-3111 | www.fybr-tech.com