FCC PART 27

FCC PART 22H, PART 24E

MEASUREMENT AND TEST REPORT

For

b mobile HK Limited

Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong,China

FCC ID: ZSW-30-007

Report Type:	**Product Type:**
Original Report	Mobile Phone

Test Engineer:	Simon Wang
Report Number:	RSZ150323006-00D
Report Date:	2015-04-20
Reviewed By:	Jimmy Xiao RF Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *b mobile HK Limited's* product, model number: *AX1060 (FCC ID: ZSW-30-007)* or the "EUT" in this report was a *Mobile Phone*, which was measured approximately: 128 mm (L) × 64 mm (W) × 10 mm (H), rated input voltage: DC 3.8 V battery or DC 5.0V from adapter.The highest operating frequency is 1500MHz.

Adapter Information:
Input: AC100-240V, 50/60Hz, 0.2A
Output: DC 5.0V, 1.0A

Note: The serial models AX1060 and AX1050 share the same schematics, they are different in model names, the details was explained in the attached product similarity declaration letter provided and guaranteed by applicant. Model AX1060 was selected for testing.

**All measurement and test data in this report was gathered from production sample serial number: 1503205 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2015-03-23.*

Objective

This type approval report is prepared on behalf of *b mobile HK Limited* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS&DTS submissions with FCC ID: ZSW-30-007.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA-1037, TIA/EIA 603-D & TIA/EIA 603-D, ANSI C63.4-2009.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.0002K50
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Block Diagram of Test Setup

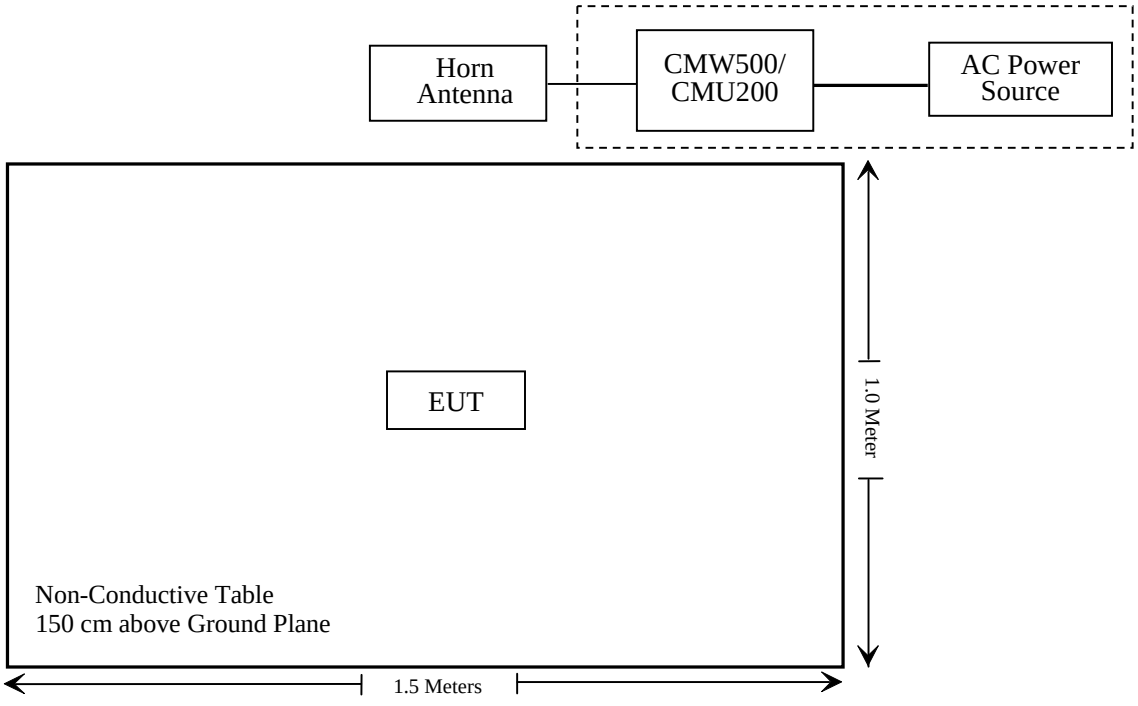

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093, §27.52	RF Exposure Information	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (i)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53 (c)	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53(c) (g)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (c) (g)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (c) (g);	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Note: * Please refer to SAR report released by BACL, report number: RSZ150323006-20.

FCC §1.1307(b) & §27.52 & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093 and §27.52.

Test Result

Compliance, please refer to the SAR report: RSZ150323006-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER

Applicable Standards

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.
The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(c), the maximum EIRP must not exceed 3Watts (34.77dBm) for 704-716MHz.
According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.
According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



Radiated method:

TIA603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2014-12-07	2017-12-06
HP	Synthesized Sweeper	8341B	2624A00116	2014-06-03	2015-06-03
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-08-22	2015-08-22
Sunol Sciences	Horn Antenna	DRH-118	A052304	2014-12-01	2015-11-30
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	22 ℃
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-04-08.

Conducted Power

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.14	38.45
	190	836.6	32.18	38.45
	251	848.8	32.17	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.08	31.37	29.67	28.50	38.45
	190	836.6	32.14	31.41	29.70	28.55	38.45
	251	848.8	32.14	31.43	29.71	28.57	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	26.02	24.83	22.85	21.73	38.45
	190	836.6	26.19	25.05	23.06	21.88	38.45
	251	848.8	26.14	24.93	22.89	21.77	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC12.2k		21.83	21.97	21.67
		Rel 6 HSDPA	1	20.85	21.02	20.53
			2	20.83	21.01	20.56
			3	20.84	21.04	20.57
			4	20.86	21.05	20.54
		Rel 6 HSUPA	1	20.64	20.74	20.44
			2	20.69	20.76	20.42
			3	20.68	20.71	20.45
			4	20.62	20.72	20.43
			5	20.63	20.75	20.47

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.23	33
	661	1880.0	29.14	33
	810	1909.8	29.47	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.17	28.55	26.88	25.27	33
	661	1880.0	29.09	28.53	26.87	25.26	33
	810	1909.8	29.45	28.87	27.32	25.72	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	25.67	24.68	22.78	21.53	33
	661	1880.0	25.57	24.60	22.55	21.30	33
	810	1909.8	25.57	24.56	22.58	21.34	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC12.2k		21.92	21.70	21.92
		Rel 6 HSDPA	1	20.65	20.42	20.51
			2	20.60	20.47	20.53
			3	20.59	20.41	20.57
			4	20.57	20.45	20.54
		Rel 6 HSUPA	1	20.47	20.15	20.30
			2	20.49	20.15	20.29
			3	20.45	20.17	20.28
			4	20.44	20.14	20.27
			5	20.46	20.13	20.25

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	RMC12.2k		22.15	22.11	22.23
		Rel 6 HSDPA	1	21.35	21.07	21.53
			2	21.32	21.08	21.50
			3	21.33	21.05	21.54
			4	21.34	21.09	21.55
		Rel 6 HSUPA	1	20.89	20.66	21.05
			2	20.87	20.69	21.02
			3	20.88	20.68	21.07
			4	20.86	20.64	21.04
			5	20.83	20.61	21.03

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.25	13
	Middle	0.33	13
	High	0.27	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.19	13
	Middle	0.21	13
	High	0.16	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.46	13
	Middle	3.44	13
	High	3.43	13
HSDPA (16QAM)	Low	3.38	13
	Middle	3.40	13
	High	3.37	13
HSUPA (BPSK)	Low	3.39	13
	Middle	3.41	13
	High	3.43	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.23	13
	Middle	0.26	13
	High	0.24	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.31	13
	Middle	0.27	13
	High	0.29	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.15	13
	Middle	3.03	13
	High	3.12	13
HSDPA (16QAM)	Low	3.17	13
	Middle	3.16	13
	High	3.14	13
HSUPA (BPSK)	Low	3.20	13
	Middle	3.12	13
	High	3.16	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dBm)
WCDMA (BPSK)	Low	3.22	13
	Middle	3.22	13
	High	3.17	13
HSDPA (16QAM)	Low	3.16	13
	Middle	3.15	13
	High	3.13	13
HSUPA (BPSK)	Low	3.27	13
	Middle	3.24	13
	High	3.20	13

Radiated Power (Measured at Max. conducted power channel)

ERP & EIRP

GSM Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	95.13	282	1.0	H	28.7	0.67	0	28.03	38.45	10.42
836.6	96.72	128	2.4	V	30.3	0.67	0	29.63	38.45	8.82
EIRP for PCS Band (Part 24E), High Channel										
1909.8	87.78	324	1.2	H	16.4	1.0	9.4	24.80	33	8.20
1909.8	89.85	110	1.4	V	18.2	1.0	9.4	26.60	33	6.40

EDGE Mode：

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	90.12	142	1.1	H	23.7	0.67	0	23.03	38.45	15.42
836.6	91.65	53	1.2	V	25.2	0.67	0	24.53	38.45	13.92
EIRP for PCS Band (Part 24E), Low Channel										
1850.2	86.82	113	2.2	H	15.4	1.40	7.30	21.30	33	11.70
1850.2	88.55	242	2.2	V	17.2	1.40	7.30	23.10	33	9.90

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E/27	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
EIRP for WCDMA Band V (Part 22H), Middle Channel										
836.6	85.32	250	1.8	H	18.8	0.67	0	18.13	38.45	20.32
836.6	87.34	140	1.4	V	21.1	0.67	0	20.43	38.45	18.02
EIRP for WCDMA Band II (Part 24E), Low Channel										
1852.4	82.34	190	1.6	H	10.9	1.40	7.30	16.80	33	16.20
1852.4	84.45	75	1.5	V	13.1	1.40	7.30	19.00	33	14.00
EIRP for WCDMA Band IV (Part27), High Channel										
1752.6	85.17	55	1.6	H	13.8	1.20	7.10	19.70	30	10.30
1752.6	86.79	110	1.4	V	15.2	1.20	7.10	21.10	30	8.90

Note：
All above data were tested with no amplifier.
Absolute Level = SG Level - Cable loss + Antenna Gain
Margin = Limit- Absolute Level

Band 2:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.23	22.50	22.52
		RB Size=1, RB Offset=2	22.19	22.51	22.53
		RB Size=1, RB Offset=5	22.24	22.54	22.02
		RB Size=3, RB Offset=0	22.18	22.53	22.52
		RB Size=3, RB Offset=1	22.19	22.54	22.51
		RB Size=3, RB Offset=2	22.22	22.51	22.54
		RB Size=6, RB Offset=0	21.19	21.51	21.53
	16QAM	RB Size=1, RB Offset=0	21.43	21.66	21.68
		RB Size=1, RB Offset=2	21.18	21.63	22.63
		RB Size=1, RB Offset=5	21.42	21.65	21.22
		RB Size=3, RB Offset=0	21.43	21.34	21.23
		RB Size=3, RB Offset=1	21.44	21.45	21.20
		RB Size=3, RB Offset=2	21.45	21.65	21.24
		RB Size=6, RB Offset=0	20.38	20.65	20.58
3.0	QPSK	RB Size=1, RB Offset=0	22.32	22.58	22.79
		RB Size=1, RB Offset=7	22.30	22.52	22.71
		RB Size=1, RB Offset=14	22.26	22.63	22.16
		RB Size=8, RB Offset=0	22.31	22.51	22.23
		RB Size=8, RB Offset=4	22.29	22.41	22.28
		RB Size=8, RB Offset=7	22.31	22.54	22.34
		RB Size=15, RB Offset=0	21.24	21.58	21.80
	16QAM	RB Size=1, RB Offset=0	21.50	21.63	22.22
		RB Size=1, RB Offset=7	21.50	21.32	22.05
		RB Size=1, RB Offset=14	21.49	21.68	21.74
		RB Size=8, RB Offset=0	21.47	21.30	21.76
		RB Size=8, RB Offset=4	21.45	21.33	21.80
		RB Size=8, RB Offset=7	21.46	21.38	21.81
		RB Size=15, RB Offset=0	20.40	20.76	20.84

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.07	22.29	22.19
		RB Size=1, RB Offset=12	22.28	21.67	22.25
		RB Size=1, RB Offset=24	22.22	22.34	22.23
		RB Size=12, RB Offset=0	22.26	22.31	22.35
		RB Size=12, RB Offset=6	22.21	22.20	22.12
		RB Size=12, RB Offset=11	22.24	22.23	22.35
		RB Size=25, RB Offset=0	20.91	21.14	21.80
	16QAM	RB Size=1, RB Offset=0	21.82	21.68	22.03
		RB Size=1, RB Offset=12	21.53	21.64	22.36
		RB Size=1, RB Offset=24	21.76	21.67	21.50
		RB Size=12, RB Offset=0	21.74	21.65	21.51
		RB Size=12, RB Offset=6	21.75	21.57	21.59
		RB Size=12, RB Offset=11	21.56	21.59	21.58
		RB Size=25, RB Offset=0	20.33	20.55	20.83
10.0	QPSK	RB Size=1, RB Offset=0	21.78	22.47	22.35
		RB Size=1, RB Offset=24	21.75	22.45	22.31
		RB Size=1, RB Offset=49	21.76	22.52	22.26
		RB Size=25, RB Offset=0	21.74	22.50	22.37
		RB Size=25, RB Offset=12	21.69	22.51	22.51
		RB Size=25, RB Offset=24	21.75	22.42	22.63
		RB Size=50, RB Offset=0	21.77	21.87	22.41
	16QAM	RB Size=1, RB Offset=0	21.70	22.41	22.58
		RB Size=1, RB Offset=24	21.74	22.32	22.57
		RB Size=1, RB Offset=49	21.73	22.33	22.59
		RB Size=25, RB Offset=0	21.75	22.34	22.41
		RB Size=25, RB Offset=12	21.72	22.35	22.48
		RB Size=25, RB Offset=24	21.77	22.53	22.50
		RB Size=50, RB Offset=0	21.76	21.14	22.62

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.31	21.97	22.2
		RB Size=1, RB Offset=37	22.31	21.95	22.65
		RB Size=1, RB Offset=74	22.53	21.90	21.91
		RB Size=36, RB Offset=0	22.45	21.94	22.10
		RB Size=36, RB Offset=18	22.39	21.92	22.00
		RB Size=36, RB Offset=37	22.38	21.93	22.72
		RB Size=75, RB Offset=0	22.24	21.90	22.55
	16QAM	RB Size=1, RB Offset=0	22.20	21.87	21.93
		RB Size=1, RB Offset=37	22.21	21.88	21.97
		RB Size=1, RB Offset=74	22.37	21.92	22.58
		RB Size=36, RB Offset=0	22.10	21.9	22.61
		RB Size=36, RB Offset=18	22.03	21.87	22.17
		RB Size=36, RB Offset=37	22.09	21.86	21.93
		RB Size=75, RB Offset=0	22.08	21.85	22.43
20.0	QPSK	RB Size=1, RB Offset=0	22.75	22.68	22.71
		RB Size=1, RB Offset=49	22.39	22.09	22.43
		RB Size=1, RB Offset=99	22.31	22.04	22.58
		RB Size=50, RB Offset=0	22.34	22.03	22.23
		RB Size=50, RB Offset=24	22.38	22.14	22.38
		RB Size=50, RB Offset=49	22.32	22.32	22.49
		RB Size=100, RB Offset=0	22.30	22.37	22.39
	16QAM	RB Size=1, RB Offset=0	22.45	22.16	22.51
		RB Size=1, RB Offset=49	22.30	22.17	22.19
		RB Size=1, RB Offset=99	22.31	22.63	22.34
		RB Size=50, RB Offset=0	22.29	22.61	22.65
		RB Size=50, RB Offset=24	22.31	22.65	22.18
		RB Size=50, RB Offset=49	22.28	22.67	22.4
		RB Size=100, RB Offset=0	22.37	22.64	22.21

EIRP:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
1880.00	83.85	190	1.5	H	12.1	1.40	7.30	18.0	33
1880.00	85.62	145	1.6	V	14.2	1.40	7.30	20.1	33

Modulation	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	PAR Limit (dB)	Result
16QAM (1RB Size)	5.47	5.85	5.67	≦ 13	Pass
16QAM (100RB Size)	7.05	6.91	6.86	≦ 13	Pass

20.0 MHz PAR – Low Channel (16QAM, 1RB Size)

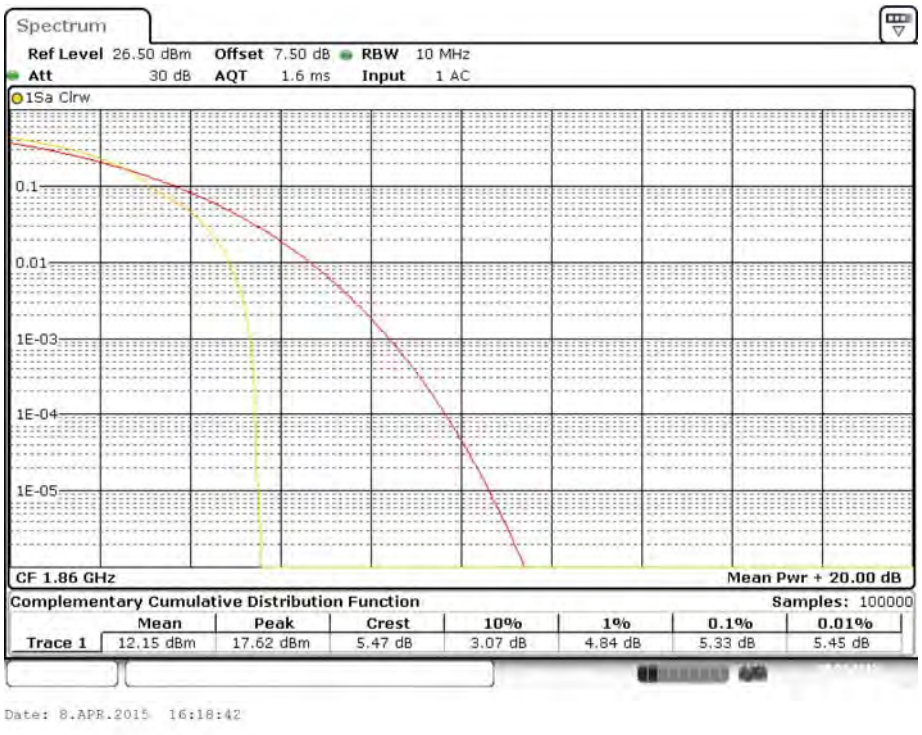

20.0 MHz PAR – Middle Channel (16QAM, 1RB Size)

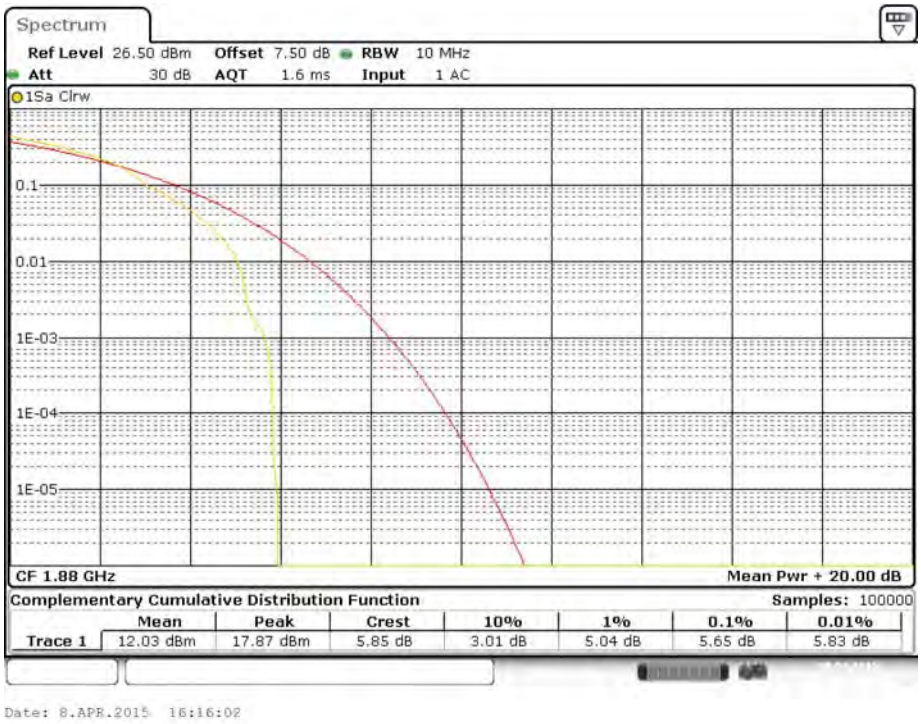

20.0 MHz PAR – High Channel (16QAM, 100RB Size)

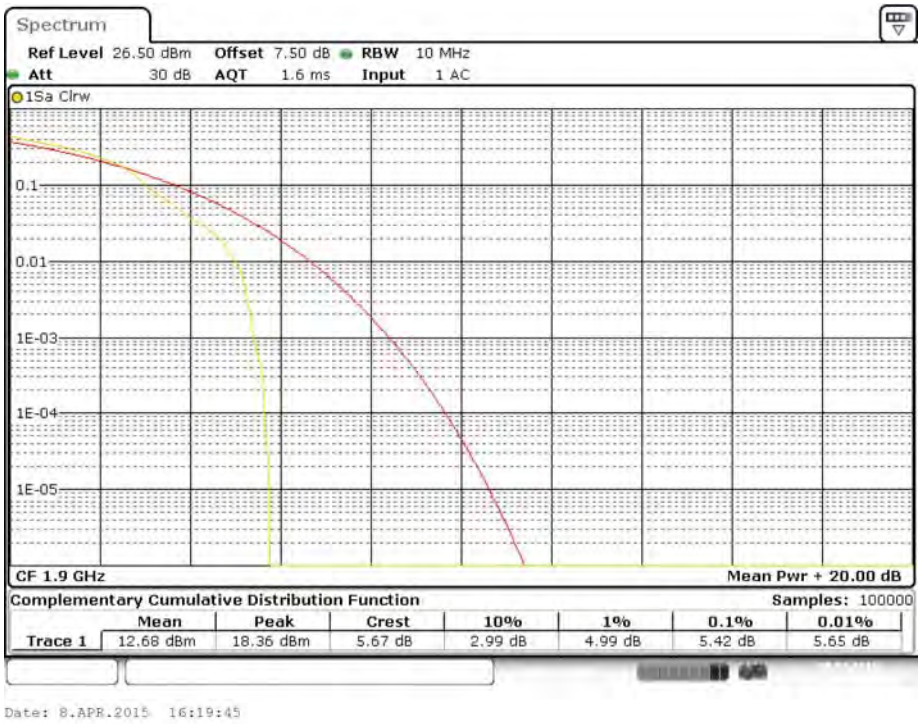

20.0 MHz PAR – Low Channel (16QAM, 100RB Size)

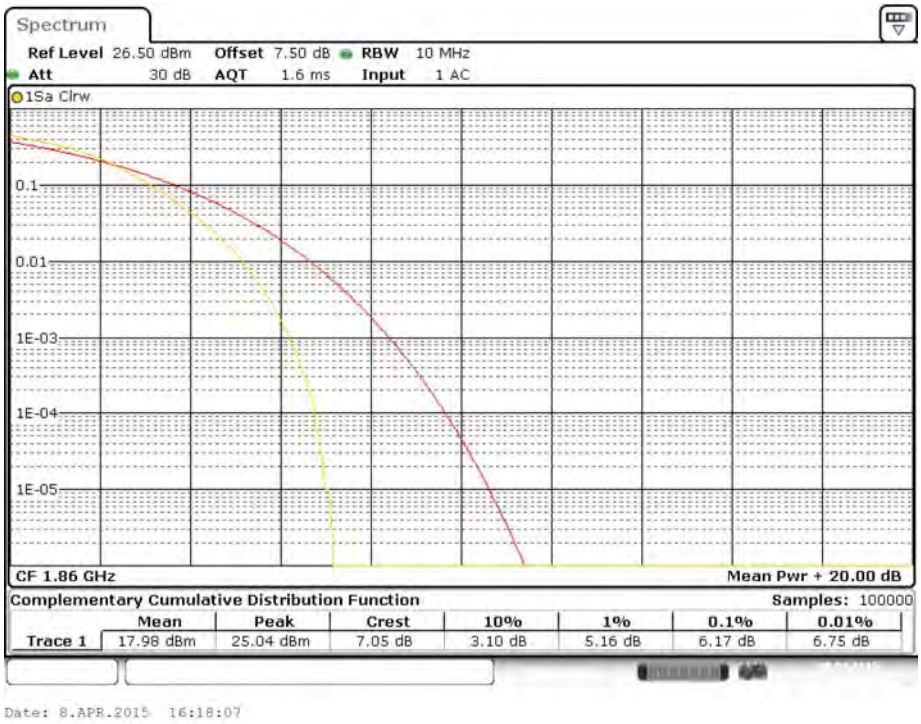

20.0 MHz PAR – Middle Channel (16QAM, 100RB Size)

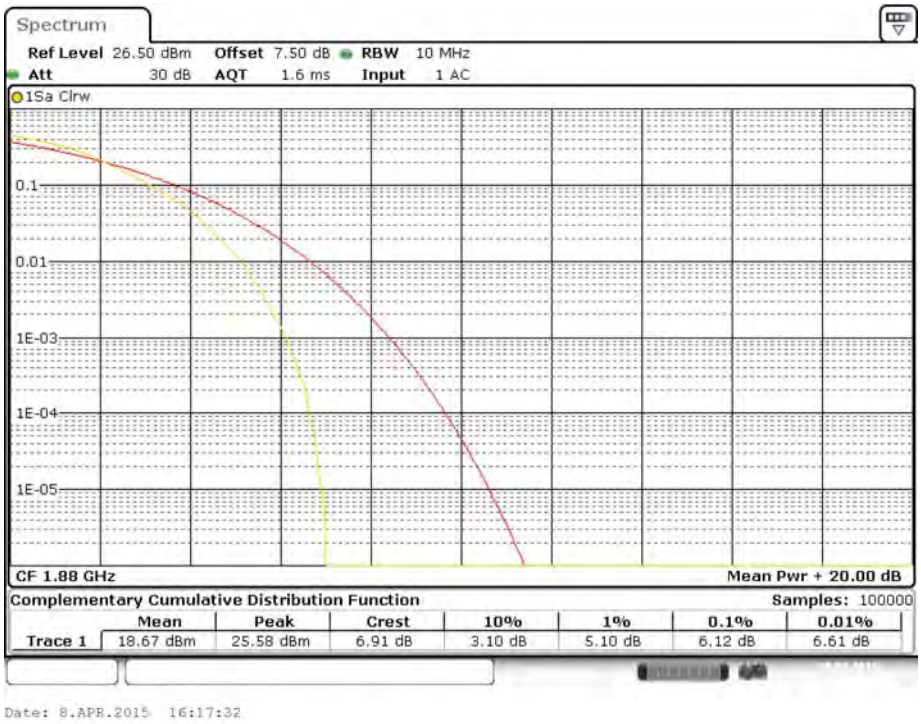

20.0 MHz PAR – High Channel (16QAM, 100RB Size)

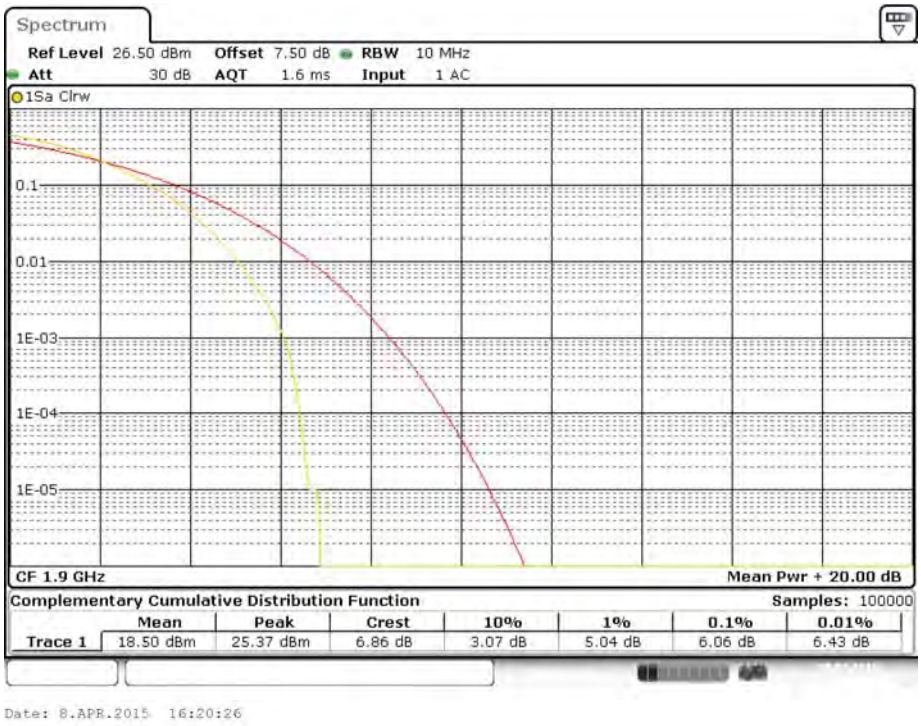

Band 4:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	21.15	21.64	21.34
		RB Size=1, RB Offset=2	20.89	21.71	21.22
		RB Size=1, RB Offset=5	21.04	21.67	21.31
		RB Size=3, RB Offset=0	20.86	21.72	21.18
		RB Size=3, RB Offset=1	20.45	21.65	21.10
		RB Size=3, RB Offset=2	20.47	21.69	21.11
		RB Size=6, RB Offset=0	20.77	21.63	21.21
	16QAM	RB Size=1, RB Offset=0	21.01	21.58	21.21
		RB Size=1, RB Offset=2	20.89	21.65	21.12
		RB Size=1, RB Offset=5	20.96	21.62	21.31
		RB Size=3, RB Offset=0	20.74	21.59	21.34
		RB Size=3, RB Offset=1	20.70	21.57	21.36
		RB Size=3, RB Offset=2	20.70	21.60	21.51
		RB Size=6, RB Offset=0	20.50	21.65	21.35
3.0	QPSK	RB Size=1, RB Offset=0	20.75	21.50	21.39
		RB Size=1, RB Offset=7	20.76	21.51	21.36
		RB Size=1, RB Offset=14	20.68	21.62	21.53
		RB Size=8, RB Offset=0	20.75	21.63	21.56
		RB Size=8, RB Offset=4	20.74	21.67	21.50
		RB Size=8, RB Offset=7	20.71	21.64	21.59
		RB Size=15, RB Offset=0	20.73	21.58	21.50
	16QAM	RB Size=1, RB Offset=0	21.02	21.89	21.50
		RB Size=1, RB Offset=7	21.04	21.87	21.37
		RB Size=1, RB Offset=14	20.89	21.90	21.35
		RB Size=8, RB Offset=0	20.69	21.09	21.34
		RB Size=8, RB Offset=4	20.70	21.08	21.38
		RB Size=8, RB Offset=7	20.73	21.15	21.32
		RB Size=15, RB Offset=0	20.78	21.24	21.49

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	20.58	21.65	21.07
		RB Size=1, RB Offset=12	20.63	21.31	21.07
		RB Size=1, RB Offset=24	20.65	22.01	21.09
		RB Size=12, RB Offset=0	20.64	21.14	21.08
		RB Size=12, RB Offset=6	20.62	21.16	21.09
		RB Size=12, RB Offset=11	20.67	21.15	21.08
		RB Size=25, RB Offset=0	20.63	21.30	20.79
	16QAM	RB Size=1, RB Offset=0	20.71	21.69	21.24
		RB Size=1, RB Offset=12	20.78	21.63	21.21
		RB Size=1, RB Offset=24	20.87	21.82	21.37
		RB Size=12, RB Offset=0	20.93	21.81	21.34
		RB Size=12, RB Offset=6	20.91	21.82	21.32
		RB Size=12, RB Offset=11	20.94	21.85	21.36
		RB Size=25, RB Offset=0	20.25	21.25	20.98
10.0	QPSK	RB Size=1, RB Offset=0	20.46	21.81	20.94
		RB Size=1, RB Offset=24	20.45	21.83	20.87
		RB Size=1, RB Offset=49	20.35	21.69	20.40
		RB Size=25, RB Offset=0	20.31	21.68	20.76
		RB Size=25, RB Offset=12	20.45	21.66	20.65
		RB Size=25, RB Offset=24	20.56	22.00	20.87
		RB Size=50, RB Offset=0	20.32	21.11	20.91
	16QAM	RB Size=1, RB Offset=0	20.33	21.30	20.98
		RB Size=1, RB Offset=24	20.36	22.03	20.34
		RB Size=1, RB Offset=49	20.59	21.35	20.57
		RB Size=25, RB Offset=0	20.67	22.04	20.66
		RB Size=25, RB Offset=12	20.64	21.14	20.78
		RB Size=25, RB Offset=24	20.51	21.11	20.74
		RB Size=50, RB Offset=0	20.40	21.20	20.86

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	20.56	21.80	21.89
		RB Size=1, RB Offset=37	20.61	21.78	21.69
		RB Size=1, RB Offset=74	20.67	21.91	21.32
		RB Size=36, RB Offset=0	20.63	21.36	21.45
		RB Size=36, RB Offset=18	20.64	21.38	21.31
		RB Size=36, RB Offset=37	20.71	21.34	21.37
		RB Size=75, RB Offset=0	20.57	21.71	21.46
	16QAM	RB Size=1, RB Offset=0	20.59	22.05	21.12
		RB Size=1, RB Offset=37	20.65	21.34	21.15
		RB Size=1, RB Offset=74	21.16	21.25	21.41
		RB Size=36, RB Offset=0	21.34	21.31	21.15
		RB Size=36, RB Offset=18	21.41	21.37	21.13
		RB Size=36, RB Offset=37	20.37	21.65	21.14
		RB Size=75, RB Offset=0	20.50	22.01	21.15
20.0	QPSK	RB Size=1, RB Offset=0	21.89	21.92	22.05
		RB Size=1, RB Offset=49	20.66	21.35	21.68
		RB Size=1, RB Offset=99	21.56	21.25	20.25
		RB Size=50, RB Offset=0	21.77	21.71	21.84
		RB Size=50, RB Offset=24	20.71	21.45	21.54
		RB Size=50, RB Offset=49	20.68	21.40	21.46
		RB Size=100, RB Offset=0	20.58	22.04	21.30
	16QAM	RB Size=1, RB Offset=0	20.35	21.60	21.50
		RB Size=1, RB Offset=49	20.53	21.63	21.69
		RB Size=1, RB Offset=99	21.63	21.65	20.74
		RB Size=50, RB Offset=0	21.45	21.64	21.77
		RB Size=50, RB Offset=24	20.85	21.62	21.74
		RB Size=50, RB Offset=49	20.83	21.64	21.71
		RB Size=100, RB Offset=0	20.86	21.94	21.37

EIRP:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 27
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
1732.50	83.21	270	1.9	H	12.7	1.20	7.10	18.60	30
1732.50	84.86	85	1.6	V	13.2	1.20	7.10	19.10	30

Modulation	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	PAR Limit (dB)	Result
16QAM (1RB Size)	5.95	5.53	5.37	≦ 13	Pass
16QAM (100RB Size)	6.82	6.88	6.77	≦ 13	Pass

20.0 MHz PAR – Low Channel (16QAM, 1RB Size)

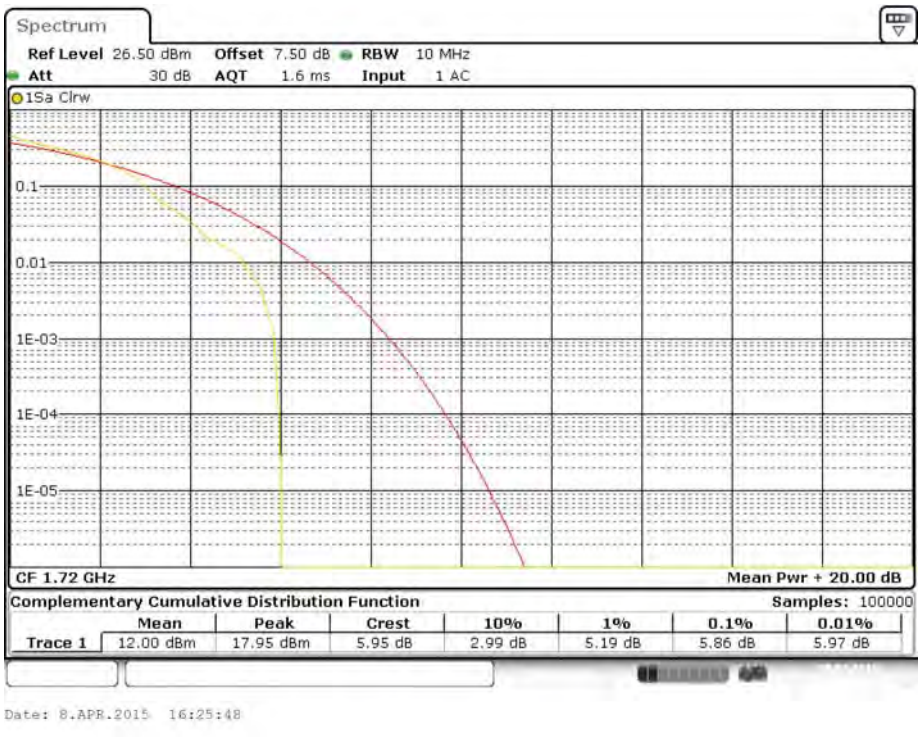

20.0 MHz PAR – Middle Channel (16QAM, 1RB Size)

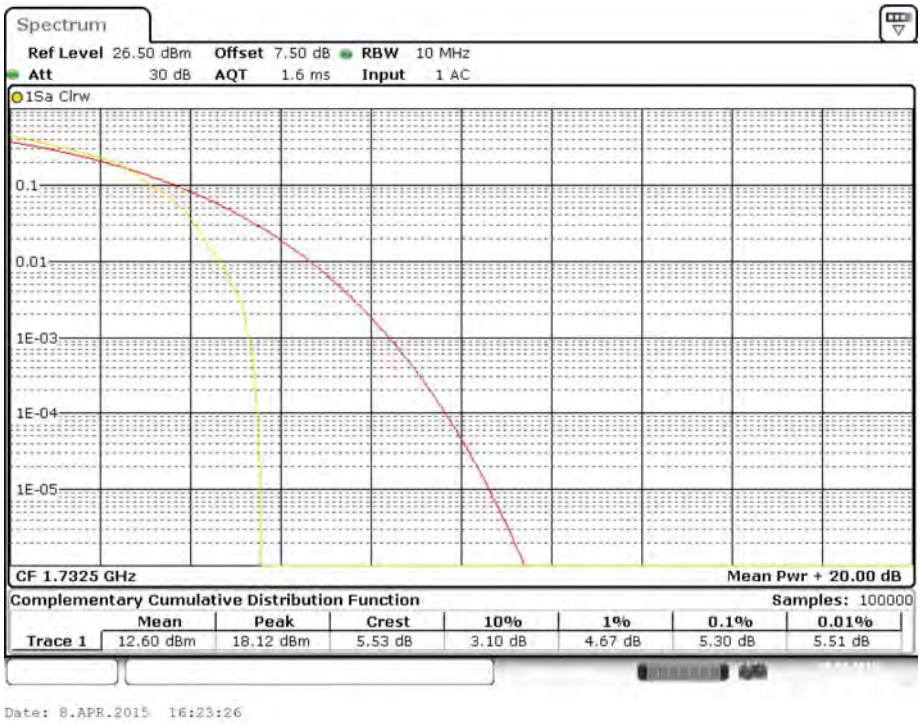

20.0 MHz PAR – High Channel (16QAM, 100RB Size)

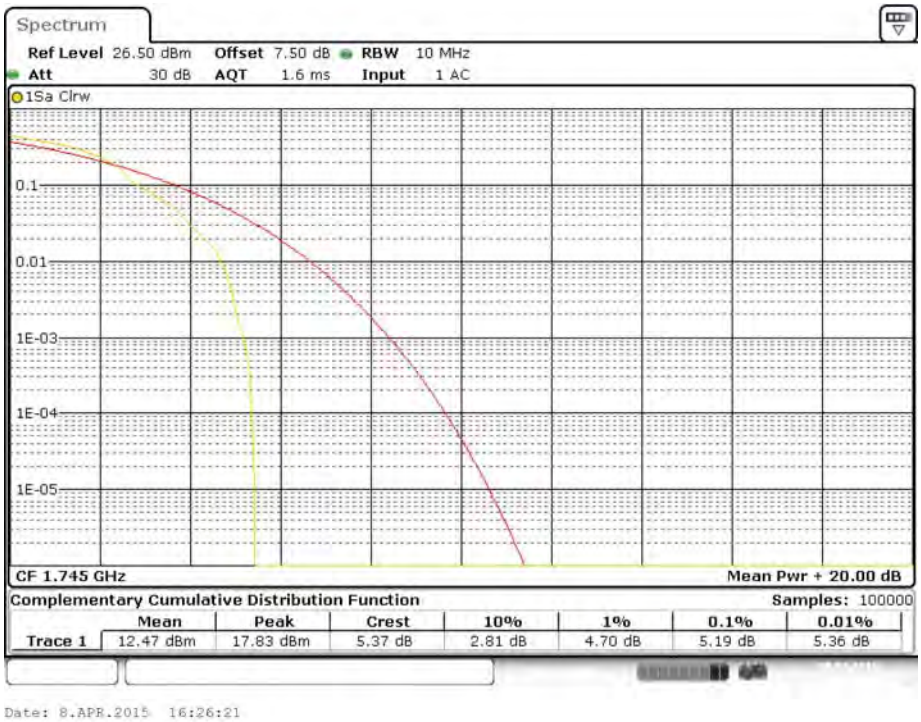

20.0 MHz PAR – Low Channel (16QAM, 100RB Size)

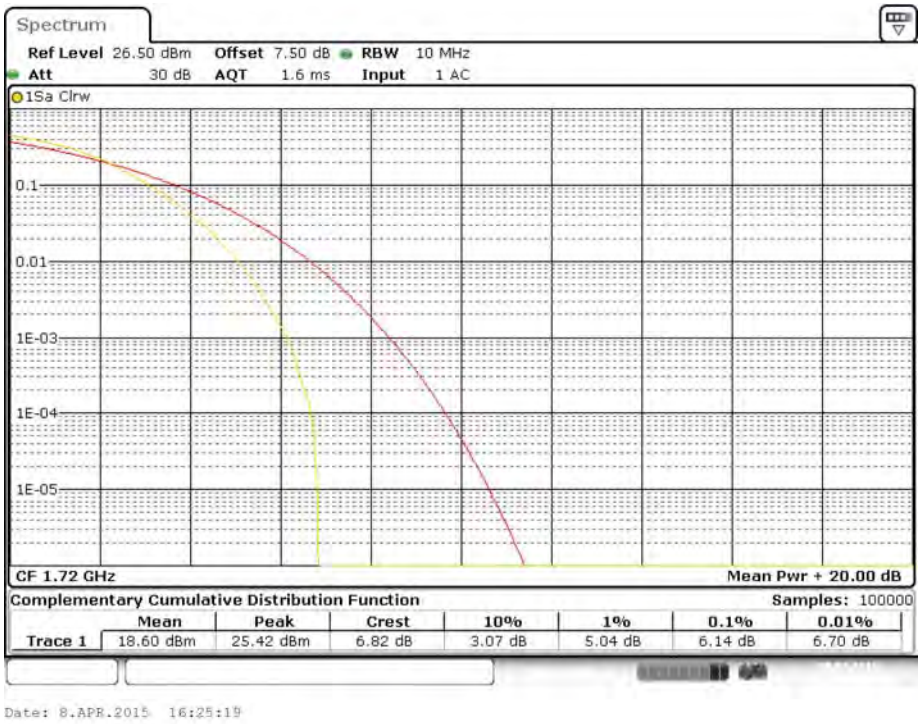

20.0 MHz PAR – Middle Channel (16QAM, 100RB Size)

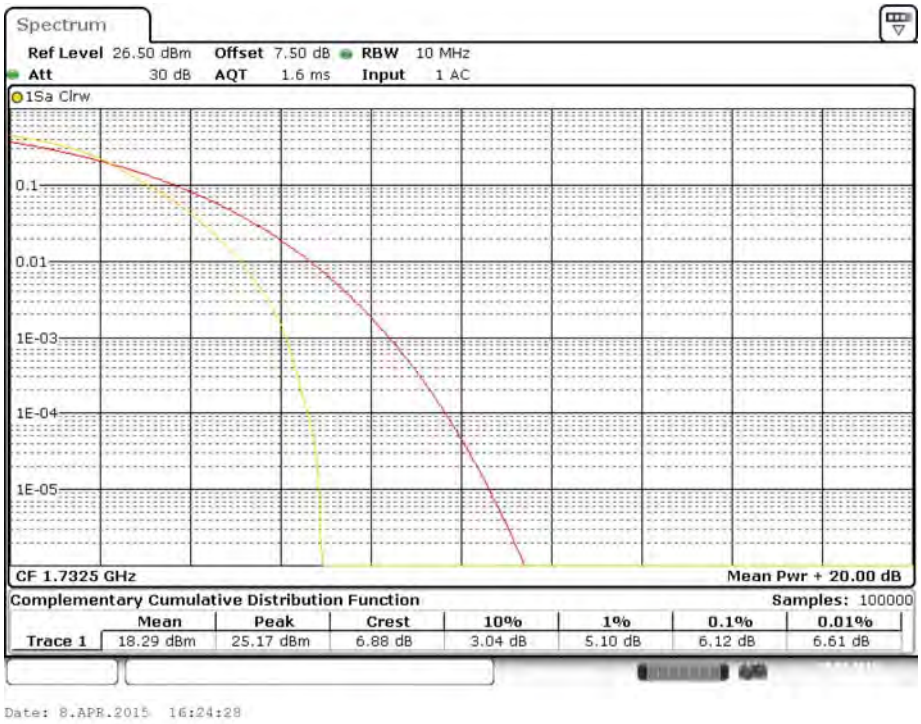

20.0 MHz PAR – High Channel (16QAM, 100RB Size)

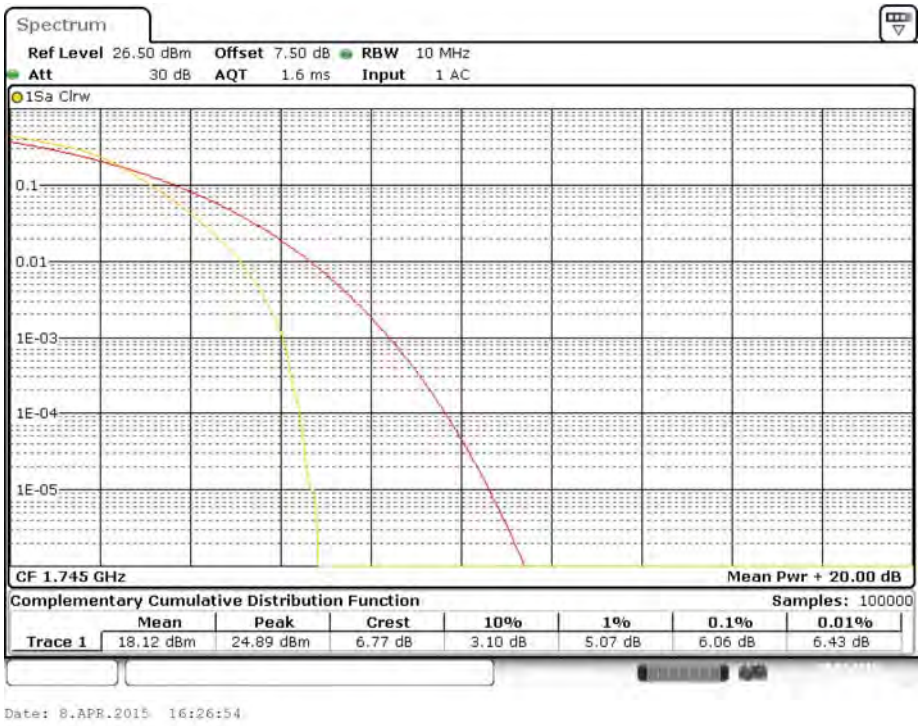

Band 5:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.58	22.64	22.53
		RB Size=1, RB Offset=2	22.44	22.70	22.95
		RB Size=1, RB Offset=5	22.39	22.59	22.25
		RB Size=3, RB Offset=0	22.61	22.56	22.90
		RB Size=3, RB Offset=1	22.28	22.58	22.84
		RB Size=3, RB Offset=2	22.31	22.63	22.92
		RB Size=6, RB Offset=0	21.24	21.55	21.70
	16QAM	RB Size=1, RB Offset=0	21.82	21.88	21.69
		RB Size=1, RB Offset=2	21.27	21.90	23.01
		RB Size=1, RB Offset=5	21.58	21.91	21.23
		RB Size=3, RB Offset=0	21.62	21.77	21.42
		RB Size=3, RB Offset=1	21.65	21.73	21.66
		RB Size=3, RB Offset=2	21.57	21.89	21.28
		RB Size=6, RB Offset=0	20.86	20.68	20.80
3.0	QPSK	RB Size=1, RB Offset=0	22.33	22.87	22.17
		RB Size=1, RB Offset=7	22.71	22.85	22.15
		RB Size=1, RB Offset=14	22.62	23.01	22.34
		RB Size=8, RB Offset=0	22.49	22.90	22.27
		RB Size=8, RB Offset=4	22.50	22.58	22.33
		RB Size=8, RB Offset=7	22.67	22.62	22.58
		RB Size=15, RB Offset=0	21.43	21.99	21.91
	16QAM	RB Size=1, RB Offset=0	21.50	21.91	22.51
		RB Size=1, RB Offset=7	21.85	21.55	22.17
		RB Size=1, RB Offset=14	21.89	22.07	22.03
		RB Size=8, RB Offset=0	21.95	21.59	22.15
		RB Size=8, RB Offset=4	21.46	21.47	22.28
		RB Size=8, RB Offset=7	21.65	21.55	22.24
		RB Size=15, RB Offset=0	20.96	21.01	20.89

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.45	21.67	22.16
		RB Size=1, RB Offset=12	22.59	22.13	22.87
		RB Size=1, RB Offset=24	22.46	22.68	22.31
		RB Size=12, RB Offset=0	22.72	23.03	22.56
		RB Size=12, RB Offset=6	22.24	22.81	22.44
		RB Size=12, RB Offset=11	22.25	22.70	22.95
		RB Size=25, RB Offset=0	21.29	21.58	22.07
	16QAM	RB Size=1, RB Offset=0	22.32	21.87	22.08
		RB Size=1, RB Offset=12	21.76	22.13	22.82
		RB Size=1, RB Offset=24	21.87	21.96	21.65
		RB Size=12, RB Offset=0	21.92	21.83	21.61
		RB Size=12, RB Offset=6	21.78	21.96	21.64
		RB Size=12, RB Offset=11	21.59	21.72	21.62
		RB Size=25, RB Offset=0	20.54	20.76	21.15
10.0	QPSK	RB Size=1, RB Offset=0	23.05	22.82	22.94
		RB Size=1, RB Offset=24	22.10	22.69	22.74
		RB Size=1, RB Offset=49	21.93	22.84	22.41
		RB Size=25, RB Offset=0	22.95	22.81	22.61
		RB Size=25, RB Offset=12	22.02	22.83	22.60
		RB Size=25, RB Offset=24	21.81	22.49	22.76
		RB Size=50, RB Offset=0	22.10	22.00	22.86
	16QAM	RB Size=1, RB Offset=0	21.73	22.88	22.83
		RB Size=1, RB Offset=24	22.04	22.55	23.02
		RB Size=1, RB Offset=49	22.15	22.57	22.91
		RB Size=25, RB Offset=0	22.14	22.51	22.89
		RB Size=25, RB Offset=12	22.08	22.37	22.49
		RB Size=25, RB Offset=24	21.85	22.94	22.98
		RB Size=50, RB Offset=0	21.84	21.19	22.08

EIRP:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
836.5	86.37	331	2.4	H	19.9	0.67	0	19.23	38.45
836.5	87.55	276	2.4	V	21.1	0.67	0	20.43	38.45

Modulation	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	PAR Limit (dB)	Result
16QAM (1RB Size)	5.32	5.42	5.31	≦ 13	Pass
16QAM (100RB Size)	5.78	5.87	5.80	≦ 13	Pass

Band 7:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.46	21.77	22.01
		RB Size=1, RB Offset=12	22.33	21.83	21.95
		RB Size=1, RB Offset=24	22.32	22.71	22.50
		RB Size=12, RB Offset=0	22.45	21.86	22.54
		RB Size=12, RB Offset=6	22.27	22.14	22.23
		RB Size=12, RB Offset=11	22.32	22.14	22.04
		RB Size=25, RB Offset=0	21.14	21.15	22.07
	16QAM	RB Size=1, RB Offset=0	21.97	21.91	22.08
		RB Size=1, RB Offset=12	21.82	21.88	22.41
		RB Size=1, RB Offset=24	21.96	21.77	21.67
		RB Size=12, RB Offset=0	21.76	21.73	21.74
		RB Size=12, RB Offset=6	22.01	21.86	21.63
		RB Size=12, RB Offset=11	21.62	21.72	21.81
		RB Size=25, RB Offset=0	20.74	20.76	20.86
10.0	QPSK	RB Size=1, RB Offset=0	22.22	22.45	22.11
		RB Size=1, RB Offset=24	21.85	22.35	22.14
		RB Size=1, RB Offset=49	22.50	22.76	22.15
		RB Size=25, RB Offset=0	22.35	22.31	22.25
		RB Size=25, RB Offset=12	22.57	22.29	22.39
		RB Size=25, RB Offset=24	22.50	21.30	22.46
		RB Size=50, RB Offset=0	21.92	21.38	22.35
	16QAM	RB Size=1, RB Offset=0	22.51	21.76	21.64
		RB Size=1, RB Offset=24	22.50	21.71	21.35
		RB Size=1, RB Offset=49	21.58	21.87	21.34
		RB Size=25, RB Offset=0	21.53	21.53	21.46
		RB Size=25, RB Offset=12	21.55	21.60	21.50
		RB Size=25, RB Offset=24	22.07	21.38	21.61
		RB Size=50, RB Offset=0	20.89	20.78	20.71

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.54	22.03	22.47
		RB Size=1, RB Offset=37	22.61	22.16	22.76
		RB Size=1, RB Offset=74	22.58	21.96	22.09
		RB Size=36, RB Offset=0	22.63	22.38	22.21
		RB Size=36, RB Offset=18	22.41	22.06	22.11
		RB Size=36, RB Offset=37	22.46	22.16	22.79
		RB Size=75, RB Offset=0	22.42	22.03	22.65
	16QAM	RB Size=1, RB Offset=0	22.25	22.04	22.15
		RB Size=1, RB Offset=37	22.31	22.07	22.20
		RB Size=1, RB Offset=74	22.65	21.97	22.64
		RB Size=36, RB Offset=0	22.27	22.24	22.72
		RB Size=36, RB Offset=18	22.06	22.11	22.36
		RB Size=36, RB Offset=37	22.15	22.16	22.19
		RB Size=75, RB Offset=0	22.08	22.14	22.71
20.0	QPSK	RB Size=1, RB Offset=0	22.78	22.69	22.82
		RB Size=1, RB Offset=49	22.61	22.17	22.43
		RB Size=1, RB Offset=99	22.31	22.11	22.79
		RB Size=50, RB Offset=0	22.53	22.17	22.66
		RB Size=50, RB Offset=24	22.58	22.40	22.19
		RB Size=50, RB Offset=49	22.54	22.39	22.53
		RB Size=100, RB Offset=0	22.45	22.47	22.02
	16QAM	RB Size=1, RB Offset=0	22.65	22.31	22.53
		RB Size=1, RB Offset=49	22.39	22.23	22.39
		RB Size=1, RB Offset=99	22.39	22.35	22.52
		RB Size=50, RB Offset=0	22.45	22.72	22.76
		RB Size=50, RB Offset=24	22.56	22.80	22.40
		RB Size=50, RB Offset=49	22.44	22.74	22.61
		RB Size=100, RB Offset=0	22.54	22.70	22.34

Radiated Power:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 27
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
2535.00	80.73	74	1.8	H	13.4	1.70	8.60	20.30	33
2535.00	78.41	223	1.6	V	11.0	1.70	8.60	17.90	33

Note:
All above data were tested with no amplifier.
Absolute Level = SG Level - Cable loss + Antenna Gain
Margin = Limit- Absolute Level

Modulation	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	PAR Limit (dB)	Result
16QAM (1RB Size)	3.35	4.12	5.43	≦ 13	Pass
16QAM (100RB Size)	5.47	6.14	7.45	≦ 13	Pass

20.0 MHz PAR – Low Channel (16QAM, 1RB Size)

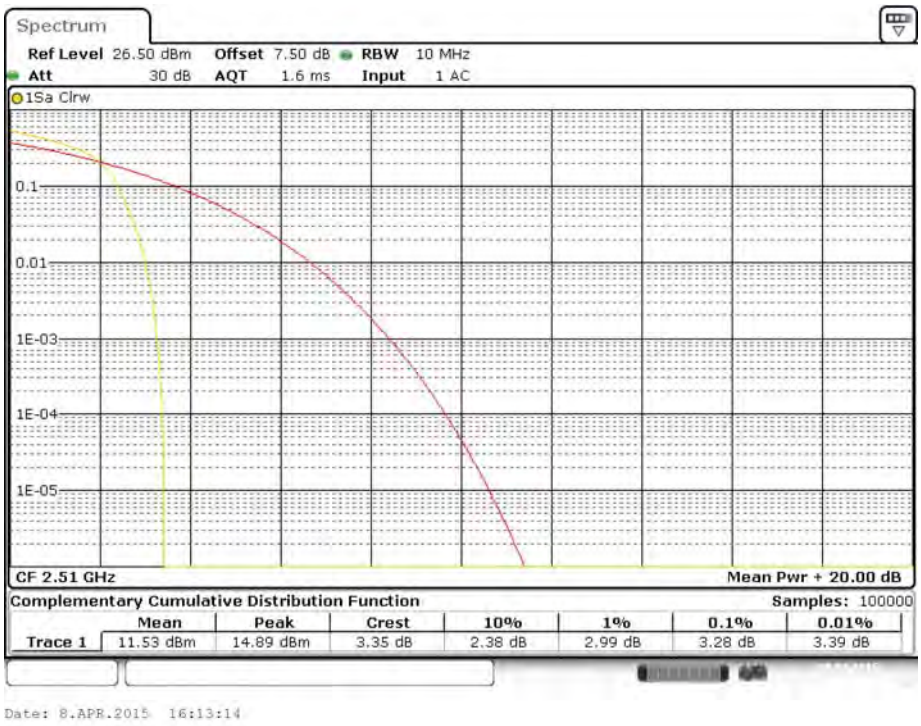

20.0 MHz PAR – Middle Channel (16QAM, 1RB Size)

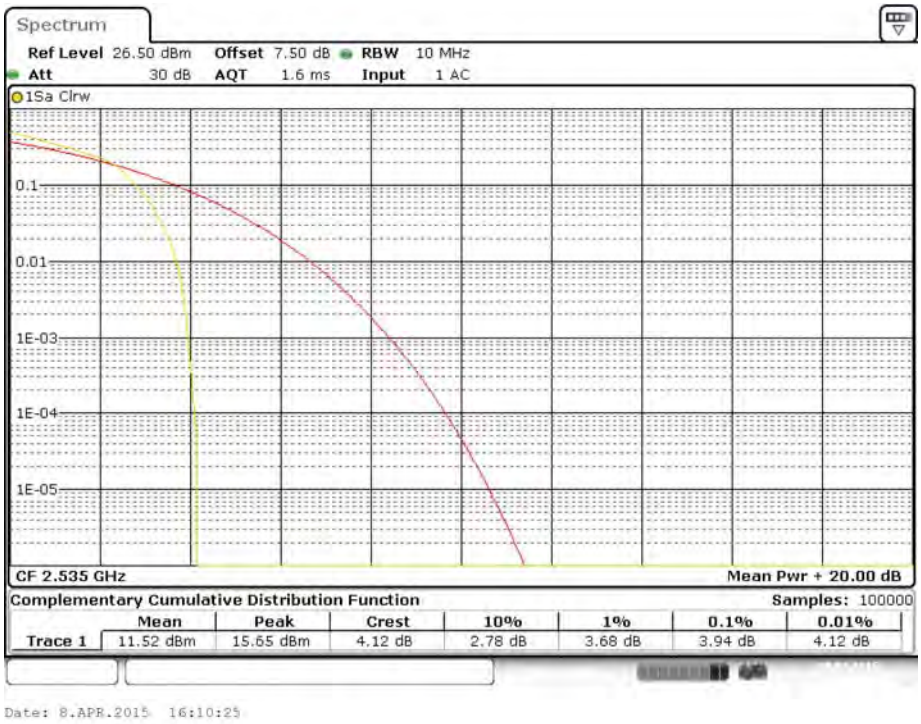

20.0 MHz PAR – High Channel (16QAM, 100RB Size)

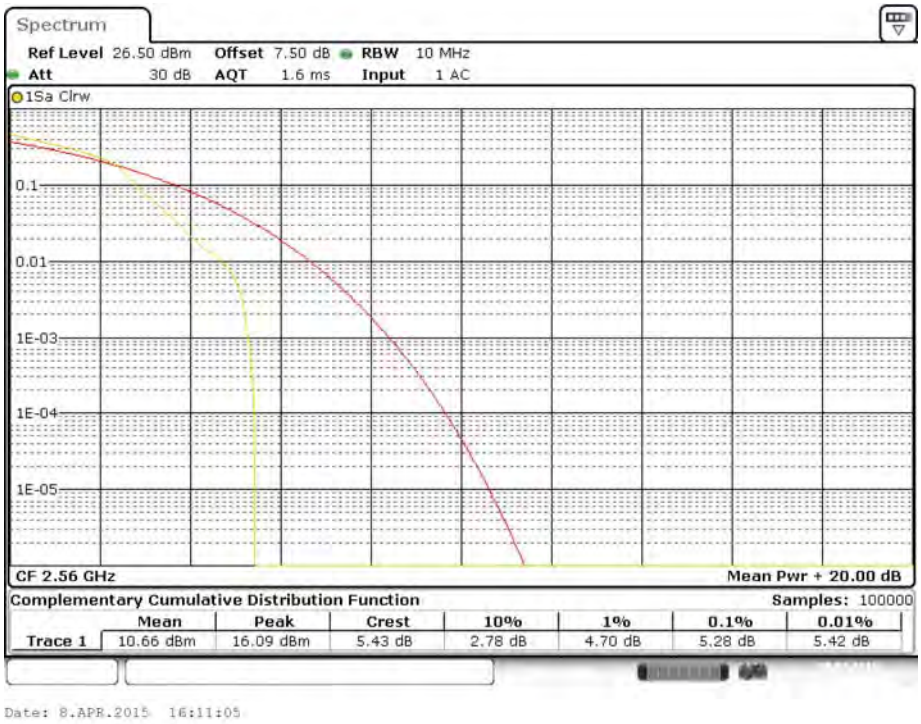

20.0 MHz PAR – Low Channel (16QAM, 100RB Size)

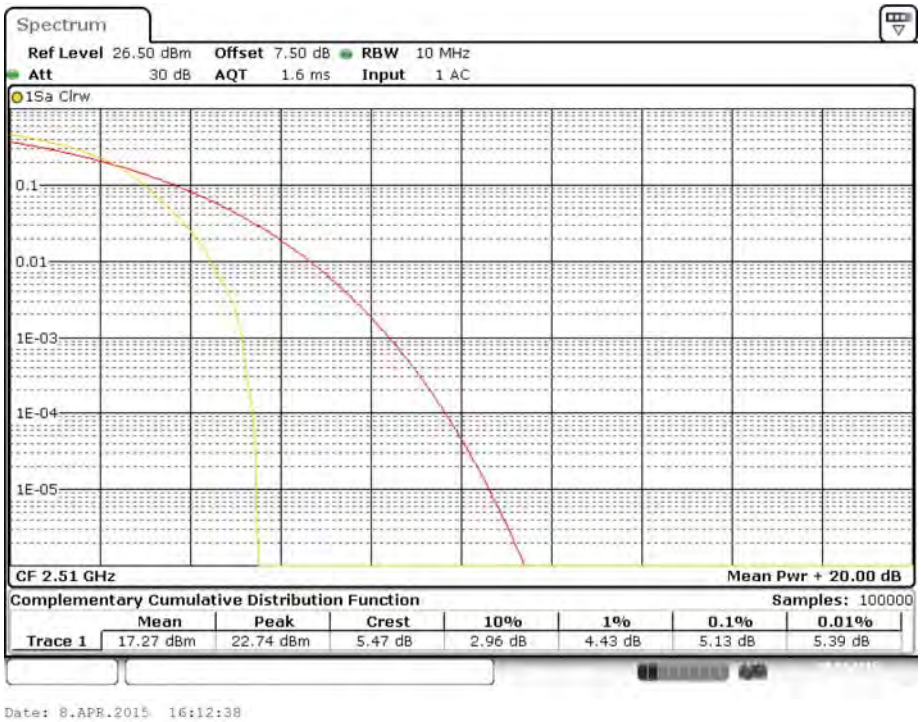

20.0 MHz PAR – Middle Channel (16QAM, 100RB Size)

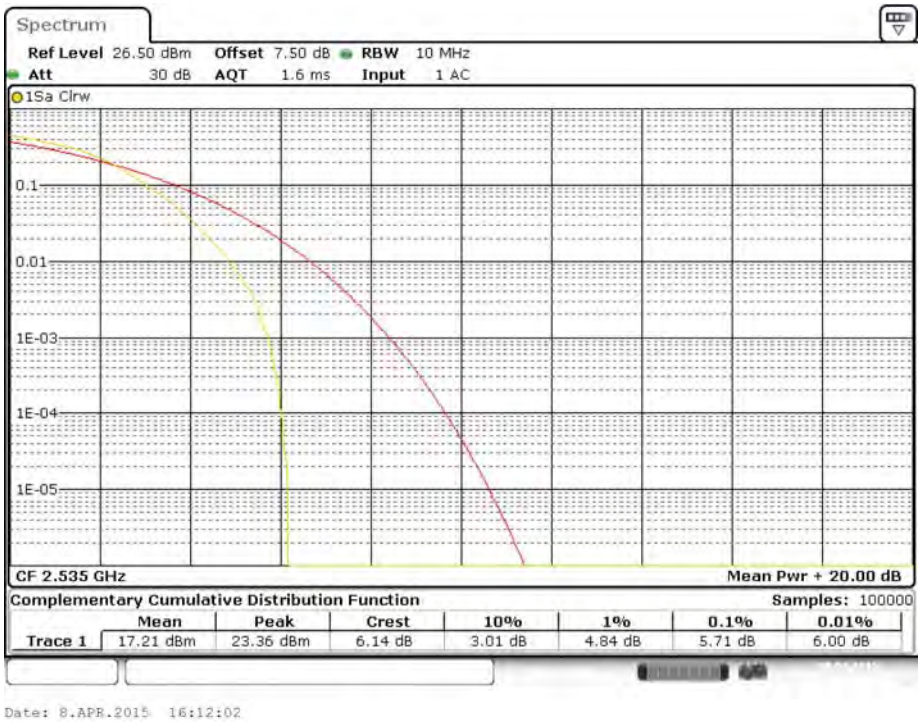

20.0 MHz PAR – High Channel (16QAM, 100RB Size)

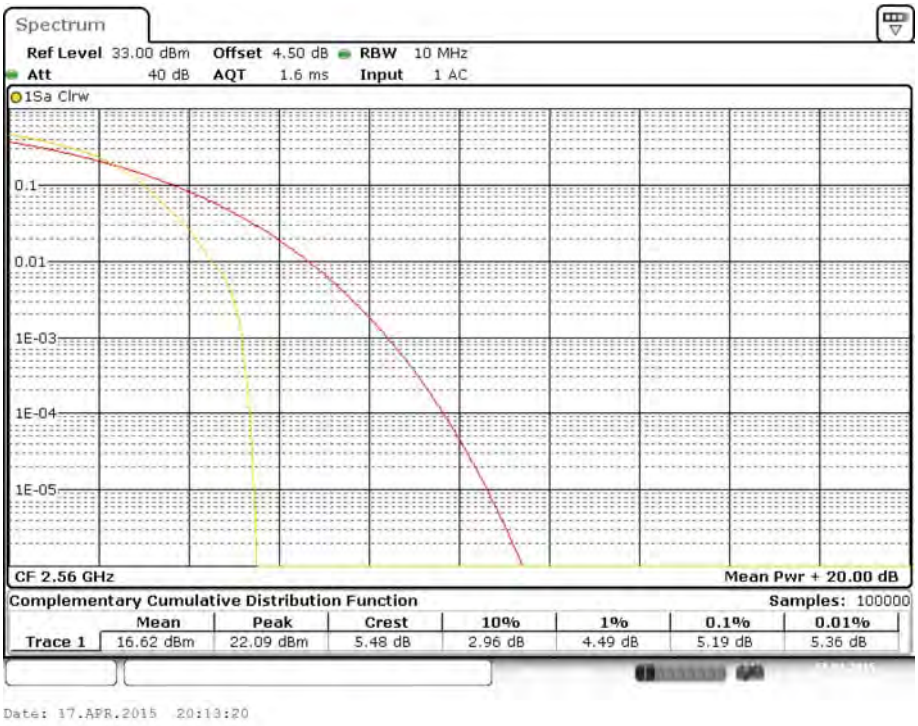

Band 17:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.66	22.53	22.69
		RB Size=1, RB Offset=12	22.63	22.51	22.62
		RB Size=1, RB Offset=24	22.64	22.59	22.71
		RB Size=12, RB Offset=0	22.60	22.56	22.65
		RB Size=12, RB Offset=6	22.58	22.50	22.58
		RB Size=12, RB Offset=11	22.59	21.59	21.57
		RB Size=25, RB Offset=0	21.60	21.53	21.60
	16QAM	RB Size=1, RB Offset=0	22.04	21.94	21.96
		RB Size=1, RB Offset=12	21.89	21.63	21.64
		RB Size=1, RB Offset=24	22.30	21.65	21.95
		RB Size=12, RB Offset=0	22.24	22.27	21.34
		RB Size=12, RB Offset=6	22.21	22.26	21.39
		RB Size=12, RB Offset=11	22.20	22.30	21.37
		RB Size=25, RB Offset=0	20.55	20.58	20.56
10.0	QPSK	RB Size=1, RB Offset=0	22.84	22.80	22.79
		RB Size=1, RB Offset=24	22.53	22.46	22.63
		RB Size=1, RB Offset=49	22.64	22.60	22.62
		RB Size=25, RB Offset=0	22.52	22.54	22.60
		RB Size=25, RB Offset=12	22.51	22.57	22.54
		RB Size=25, RB Offset=24	22.54	22.59	22.58
		RB Size=50, RB Offset=0	21.63	21.60	21.68
	16QAM	RB Size=1, RB Offset=0	22.24	21.77	21.64
		RB Size=1, RB Offset=24	21.37	21.69	21.65
		RB Size=1, RB Offset=49	21.67	21.85	22.17
		RB Size=25, RB Offset=0	21.60	21.80	22.15
		RB Size=25, RB Offset=12	21.55	21.82	22.30
		RB Size=25, RB Offset=24	21.58	21.57	21.50
		RB Size=50, RB Offset=0	20.71	20.79	20.85

Radiated Power:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 27
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)
Middle Channel									
710	87.25	331	2.4	H	20.8	0.62	0	20.18	34.77
710	86.96	276	2.4	V	20.5	0.62	0	19.88	34.77

Note:
All above data were tested with no amplifier.
Absolute Level = SG Level - Cable loss + Antenna Gain
Margin = Limit- Absolute Level

Modulation	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	PAR Limit (dB)	Result
16QAM (1RB Size)	5.55	5.32	5.60	≦ 13	Pass
16QAM (100RB Size)	5.78	5.89	5.83	≦ 13	Pass

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH

Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

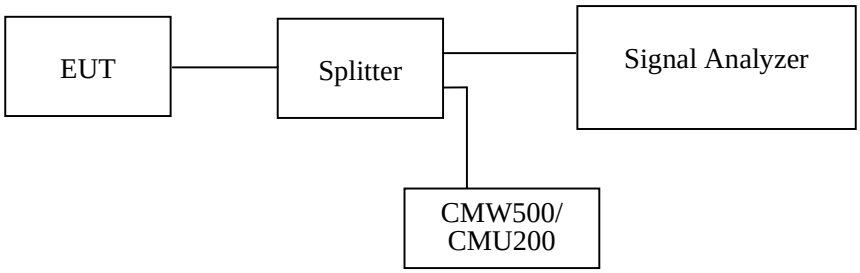

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-08-22	2015-08-22
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2014-06-13	2015-06-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21~26 ℃
Relative Humidity:	48~54 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Simon Wang from 2015-03-25to 2015-04-16.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.5	314.6
EGPRS(8PSK)	836.6	252.5	318.6

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	836.6	4.21	4.91
HSUPA (BPSK)	836.6	4.21	4.91
HSDPA (16QAM)	836.6	4.20	4.91

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	244.4	313.5
EGPRS(8PSK)	1880.0	245.2	309.7

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1880.0	4.20	4.88
HSUPA (BPSK)	1880.0	4.21	4.88
HSDPA (16QAM)	1880.0	4.21	4.88

AWS Band (Part 27)

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1732.6	4.19	4.89
HSUPA (BPSK)	1732.6	4.21	4.89
HSDPA (16QAM)	1732.6	4.20	4.87

Cellular Band (Part 22H)

99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

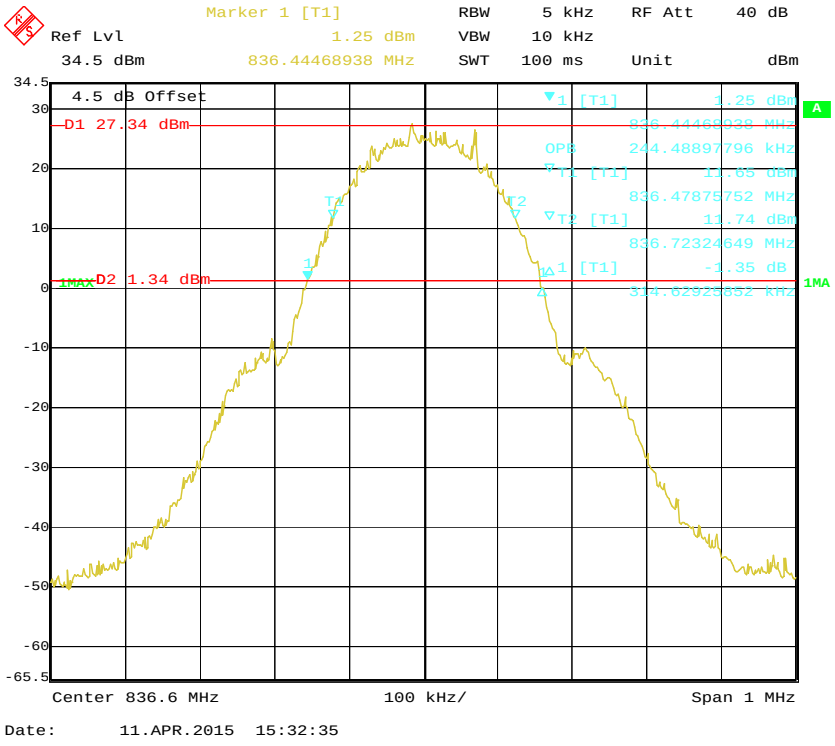

99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode

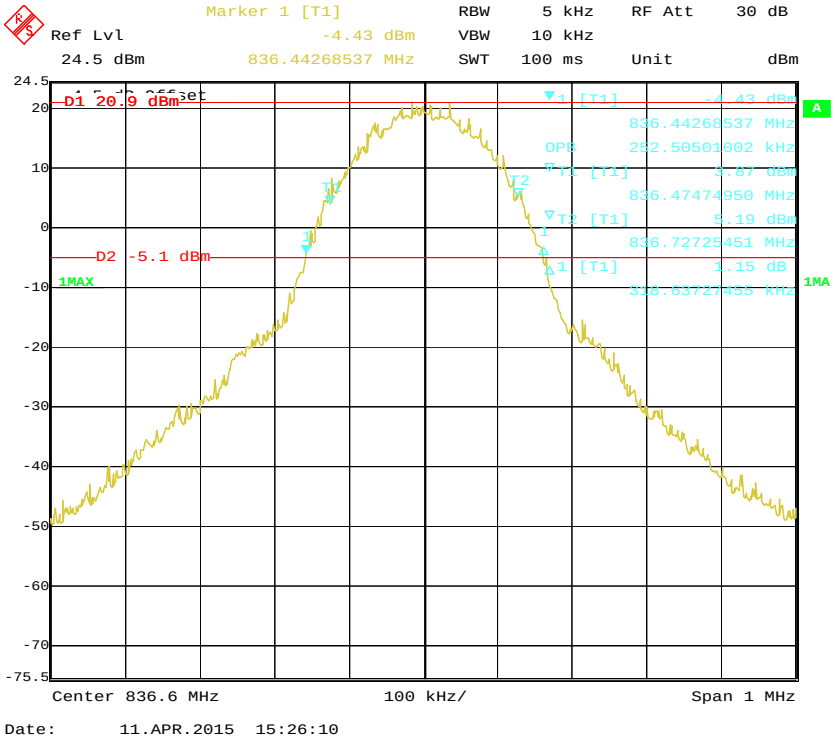

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode

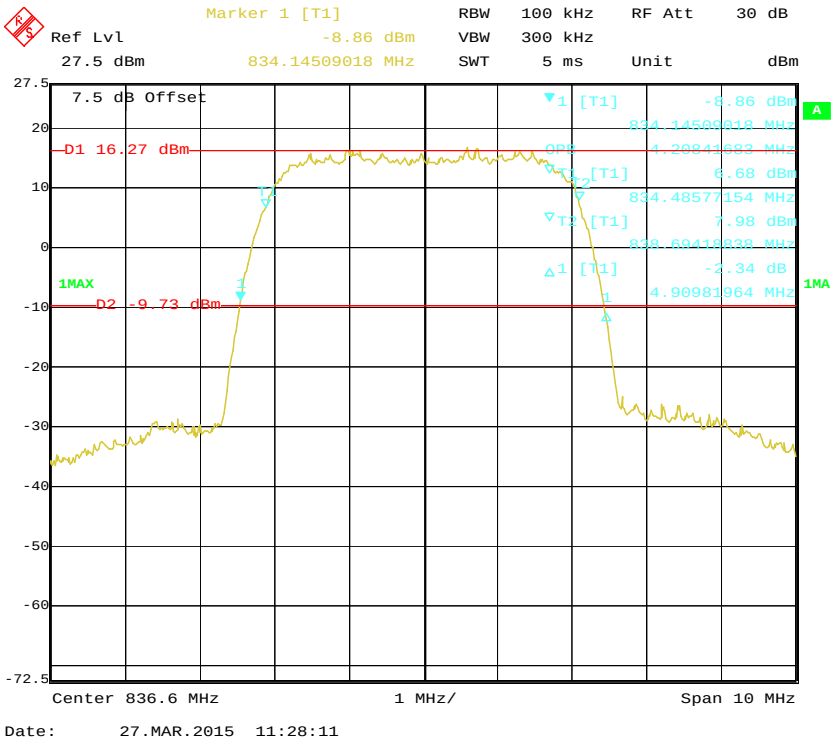

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

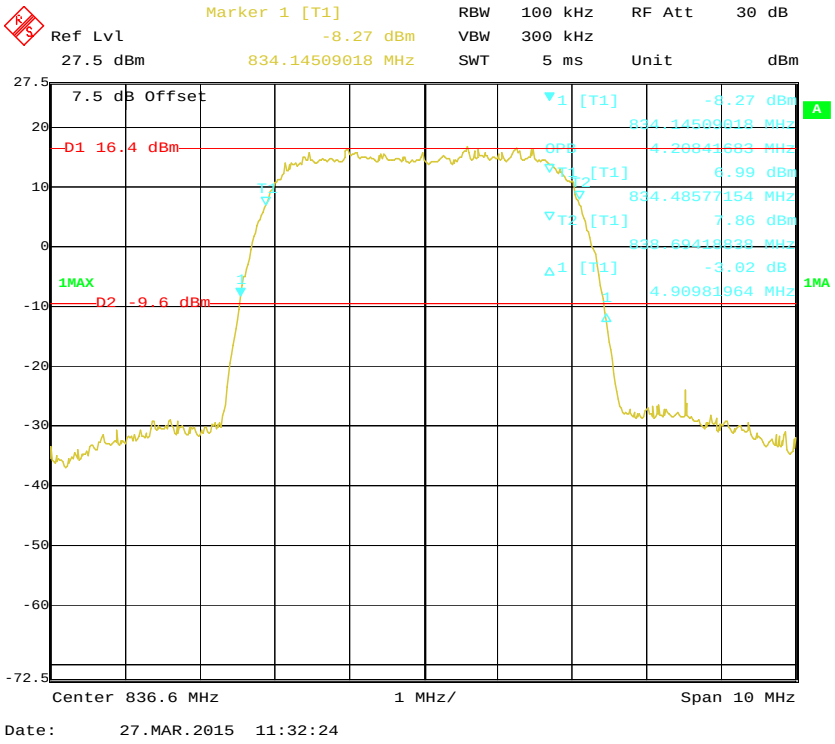

99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

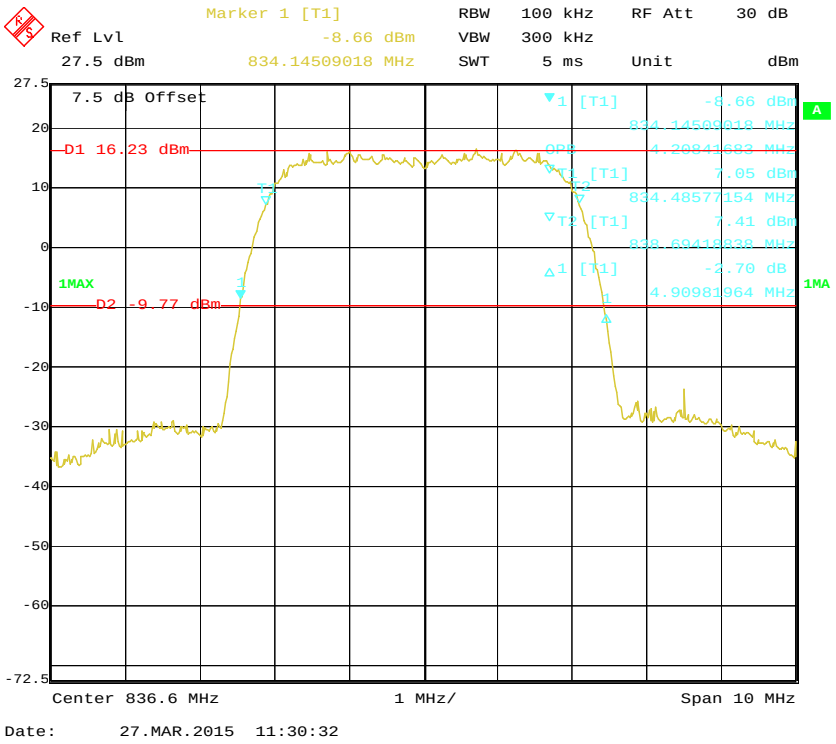

PCS Band (Part 24E)

99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

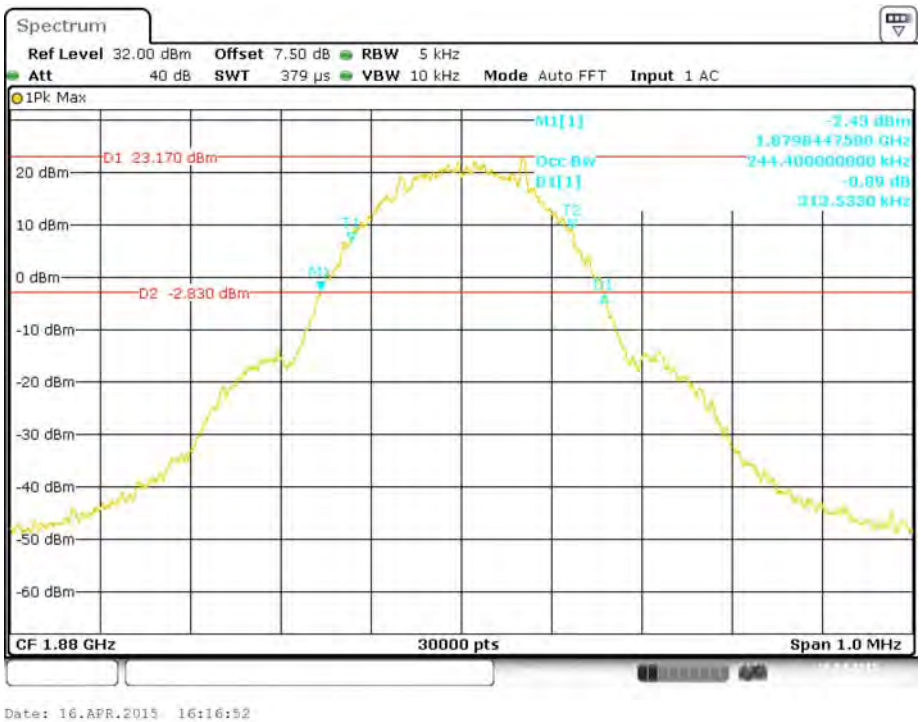

99% Occupied & 26 dB Emissions Bandwidth for EGPRS Mode

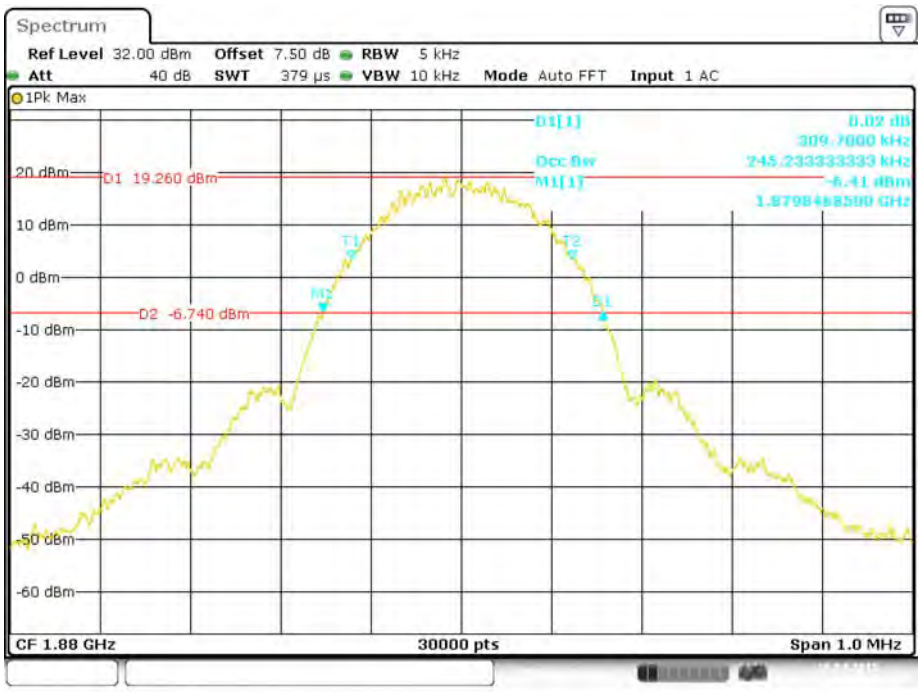

Date: 16.APR.2015 16:23:43

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode

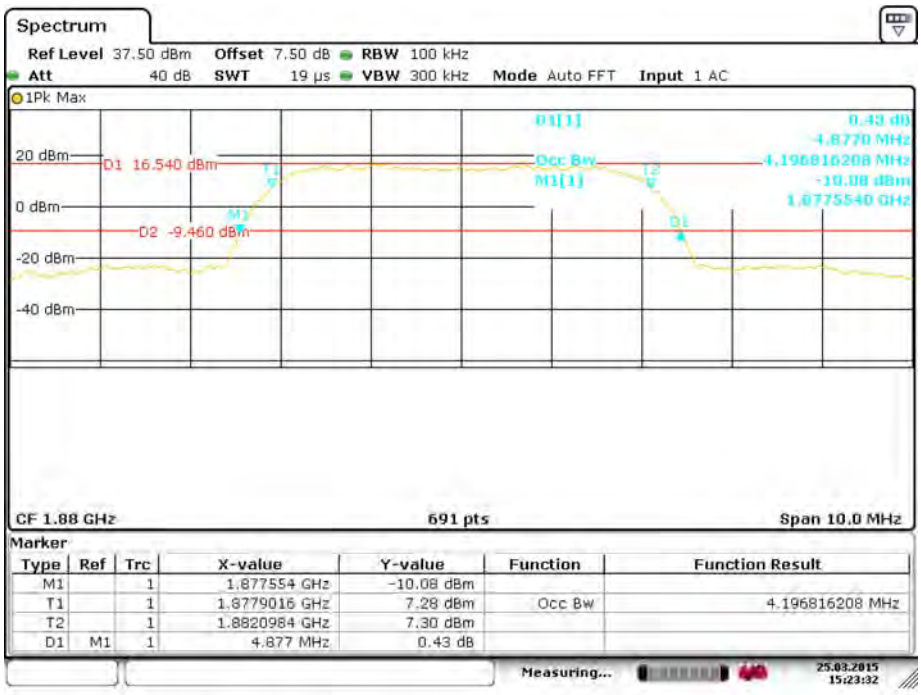

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

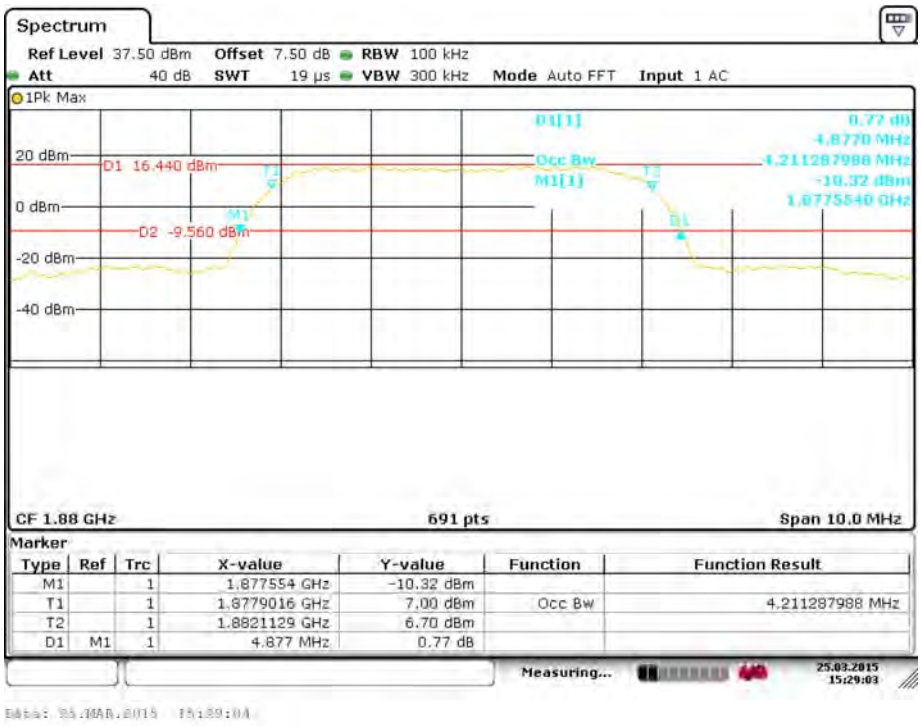

99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

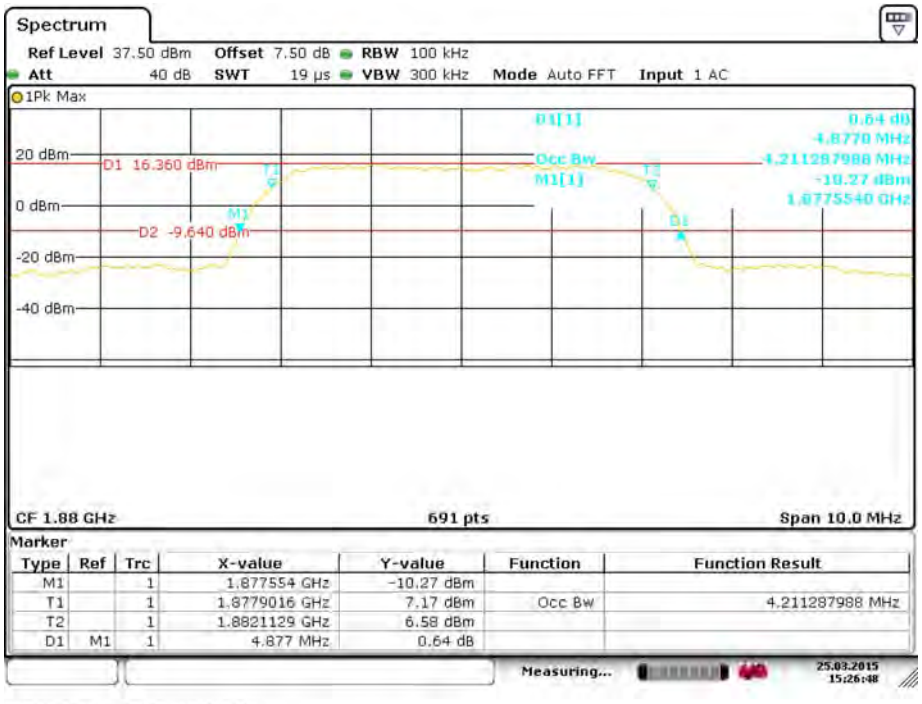

AWS Band:

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode

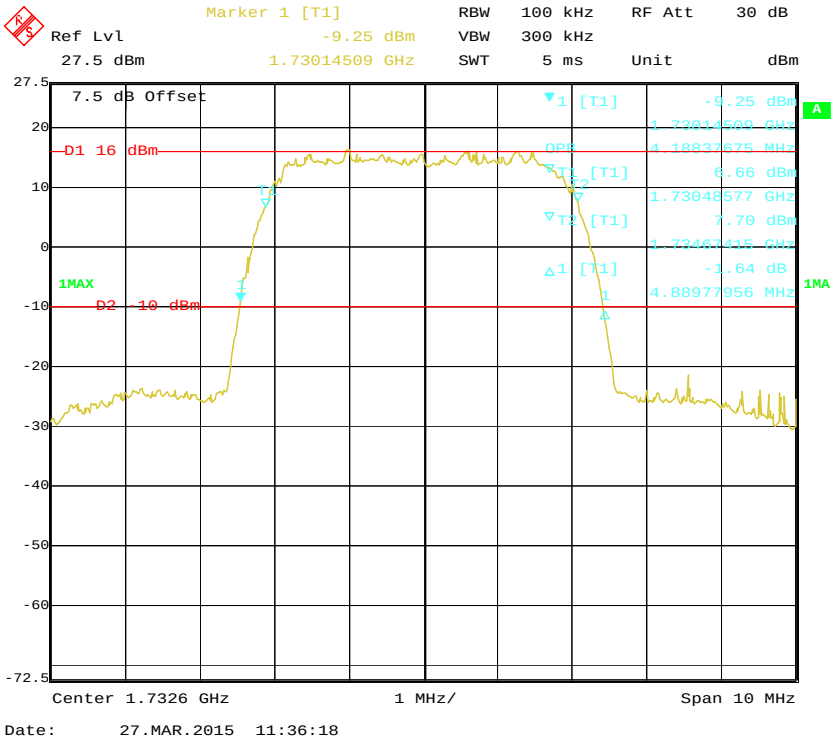

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

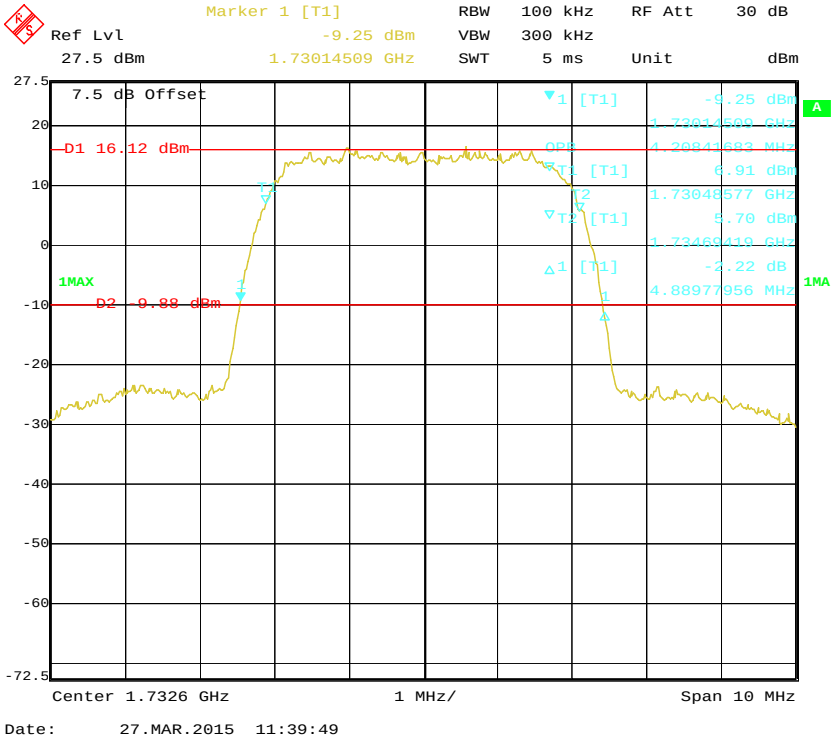

99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

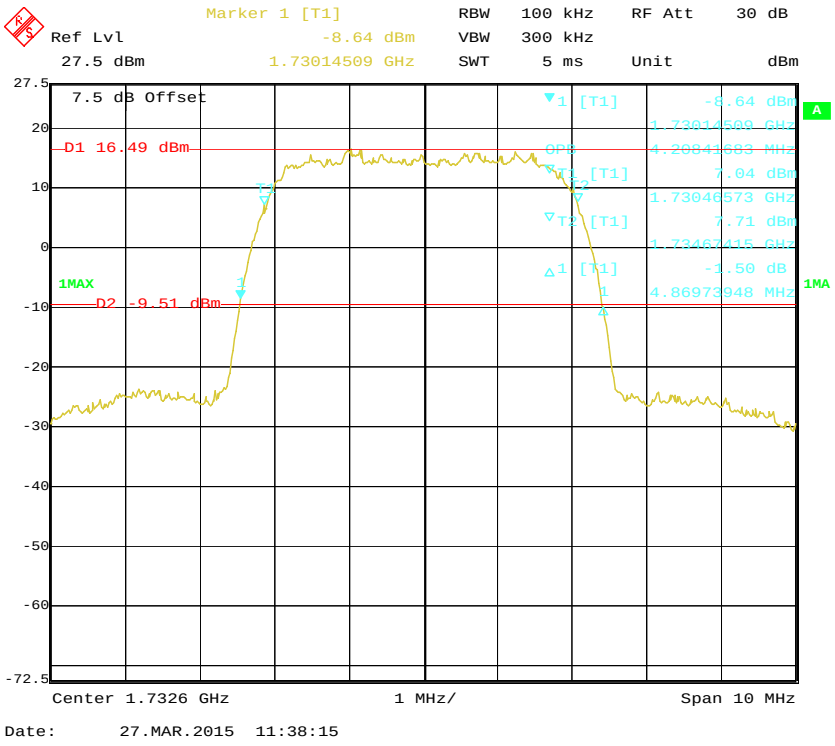

Band 2:

99% Occupied Bandwidth		Low channel （MHz）	Middle channel （MHz）	High channel （MHz）
1.4 MHz	QPSK	1.10	1.10	1.12
	16QAM	1.09	1.11	1.11
3.0 MHz	QPSK	2.74	2.74	2.75
	16QAM	2.74	2.75	2.74
5.0 MHz	QPSK	4.52	4.54	4.53
	16QAM	4.53	4.53	4.54
10.0 MHz	QPSK	9.00	9.09	9.06
	16QAM	9.06	9.09	9.06
15.0 MHz	QPSK	13.46	13.55	13.55
	16QAM	13.50	13.55	13.55
20.0 MHz	QPSK	18.52	18.46	18.46
	16QAM	18.41	18.52	18.52

26 dB Emission Bandwidth		Low channel （MHz）	Middle channel （MHz）	High channel （MHz）
1.4 MHz	QPSK	1.29	1.28	1.51
	16QAM	1.26	1.30	1.53
3.0 MHz	QPSK	3.02	3.04	3.55
	16QAM	3.02	3.05	3.75
5.0 MHz	QPSK	5.11	5.09	5.11
	16QAM	5.07	5.09	5.15
10.0 MHz	QPSK	10.07	10.16	10.19
	16QAM	9.93	10.04	10.04
15.0 MHz	QPSK	14.89	15.02	15.02
	16QAM	14.81	14.89	14.94
20.0 MHz	QPSK	20.67	20.61	20.67
	16QAM	20.61	20.61	20.61

QPSK (1.4 MHz) - 99% Occupied Bandwidth, Low channel

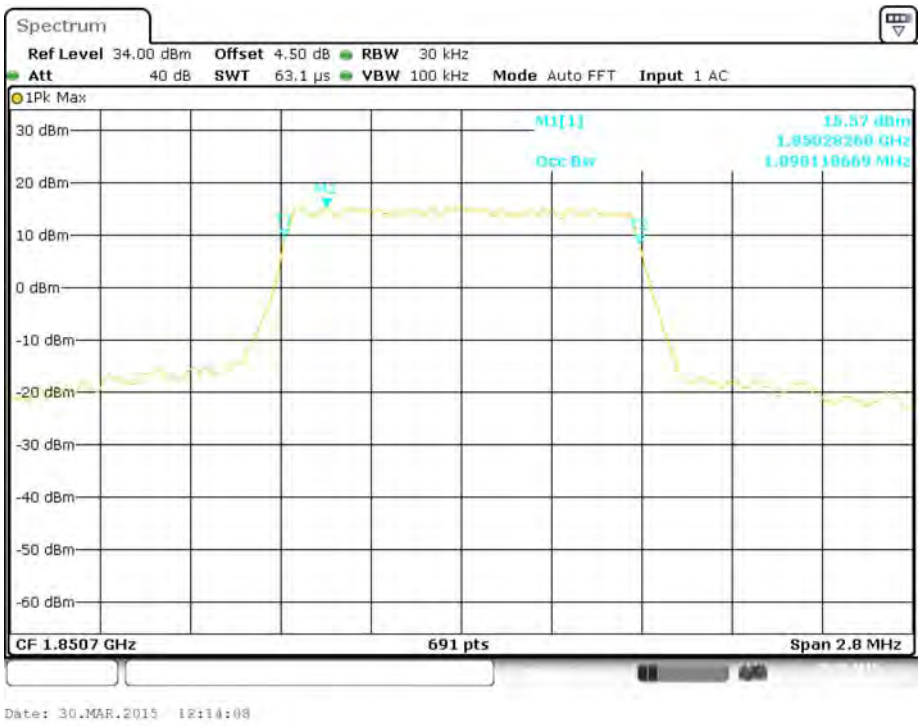

QPSK (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

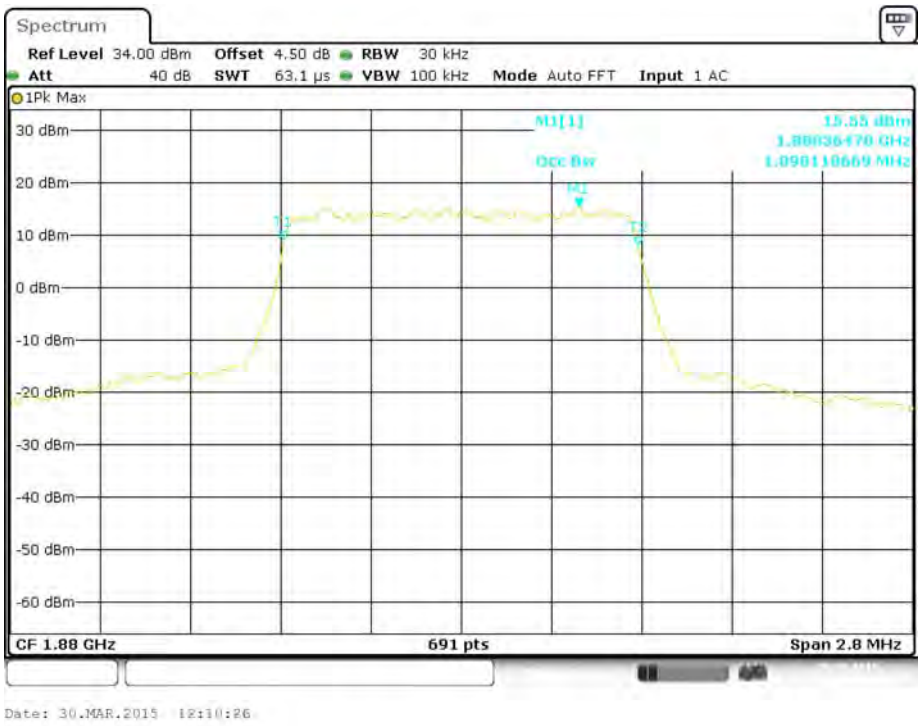

QPSK (1.4 MHz) - 99% Occupied Bandwidth, High channel

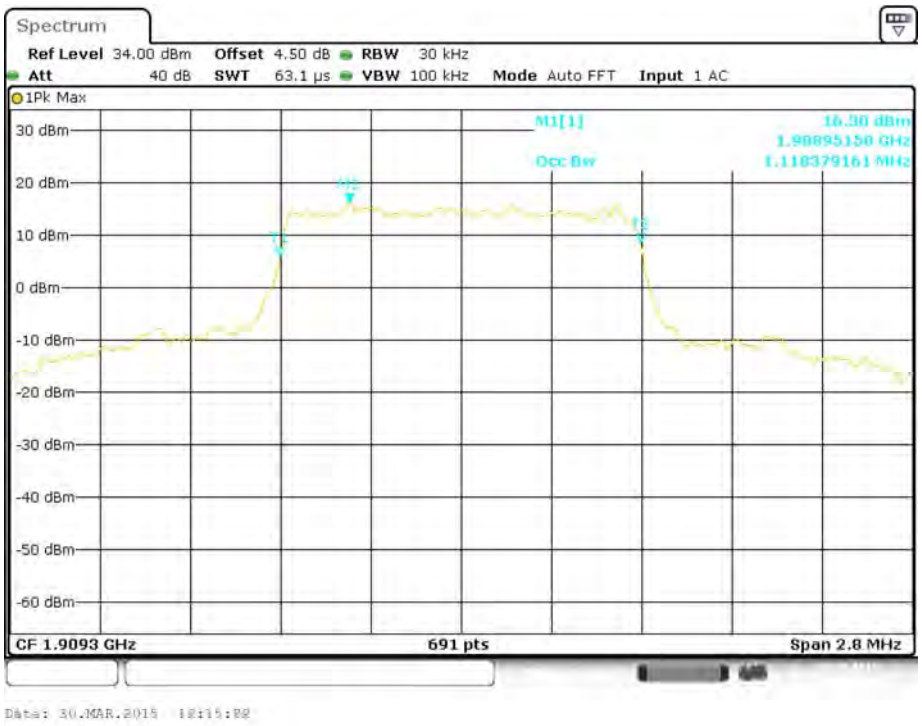

16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Low channel

16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel

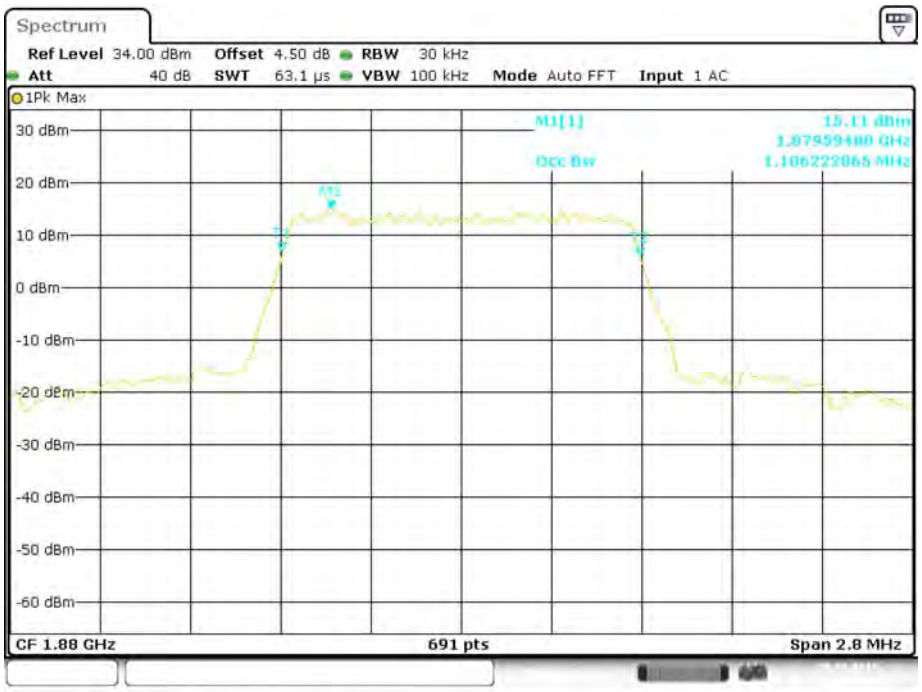

16-QAM (1.4 MHz) - 99% Occupied Bandwidth, High channel

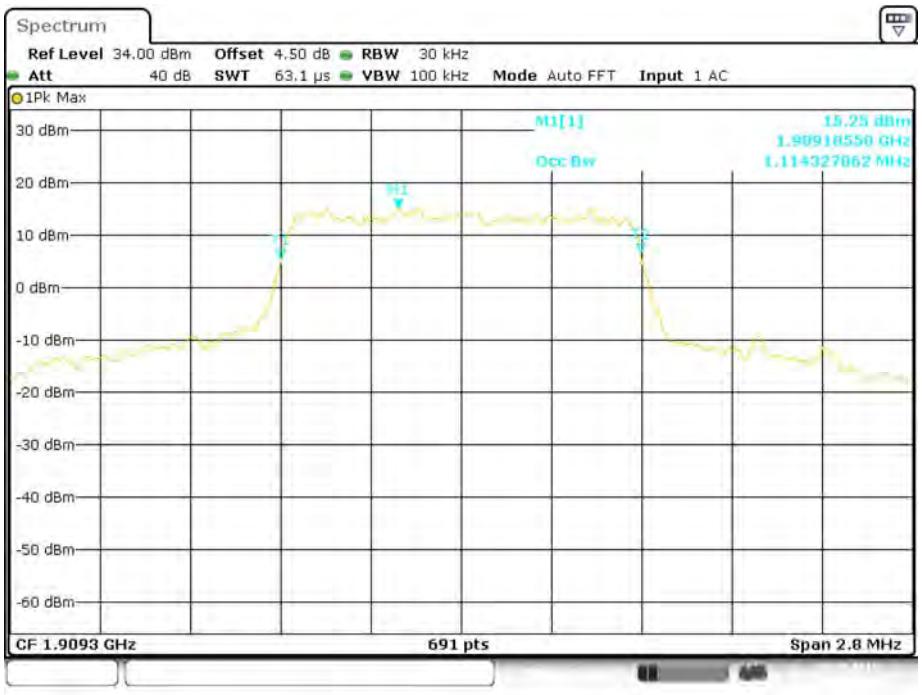

QPSK (3.0 MHz) - 99% Occupied Bandwidth, Low channel

Date: 30.MAR.2015 12:02:08

QPSK (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

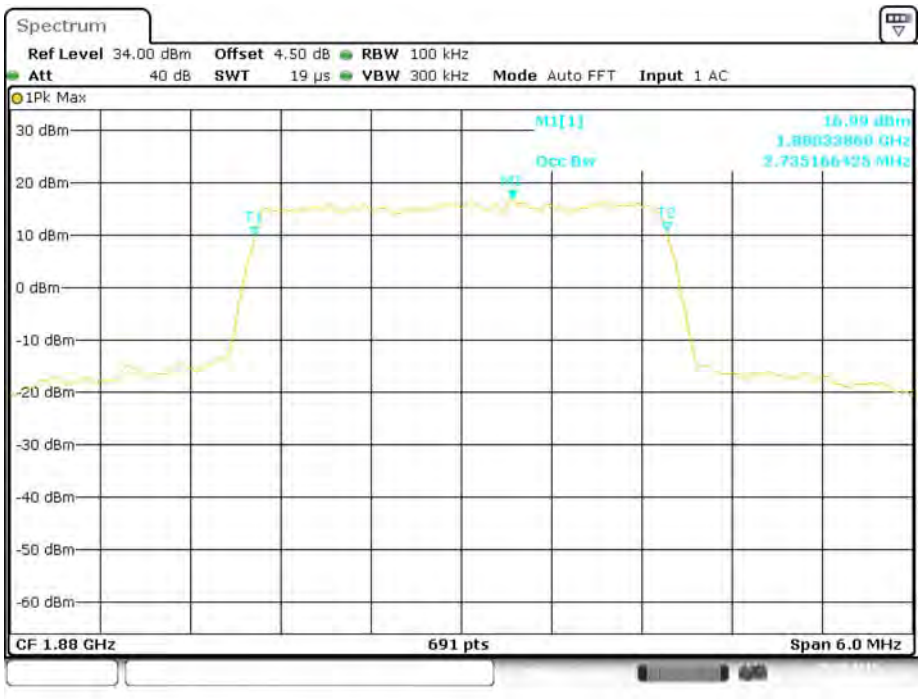

Date: 30.MAR.2015 13:58:38

QPSK (3.0 MHz) - 99% Occupied Bandwidth, High channel

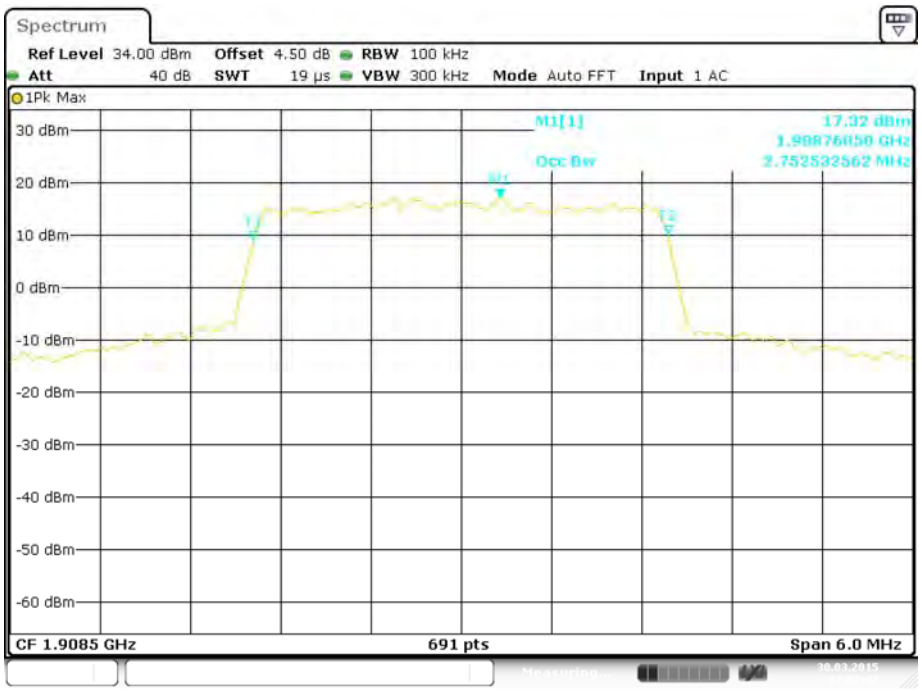

Date: 30.MAR.2015 12:02:48

16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Low channel

Date: 30.MAR.2015 12:01:34

16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel

Date: 30.MAR.2015 12:00:20

16-QAM (3.0 MHz) - 99% Occupied Bandwidth, High channel

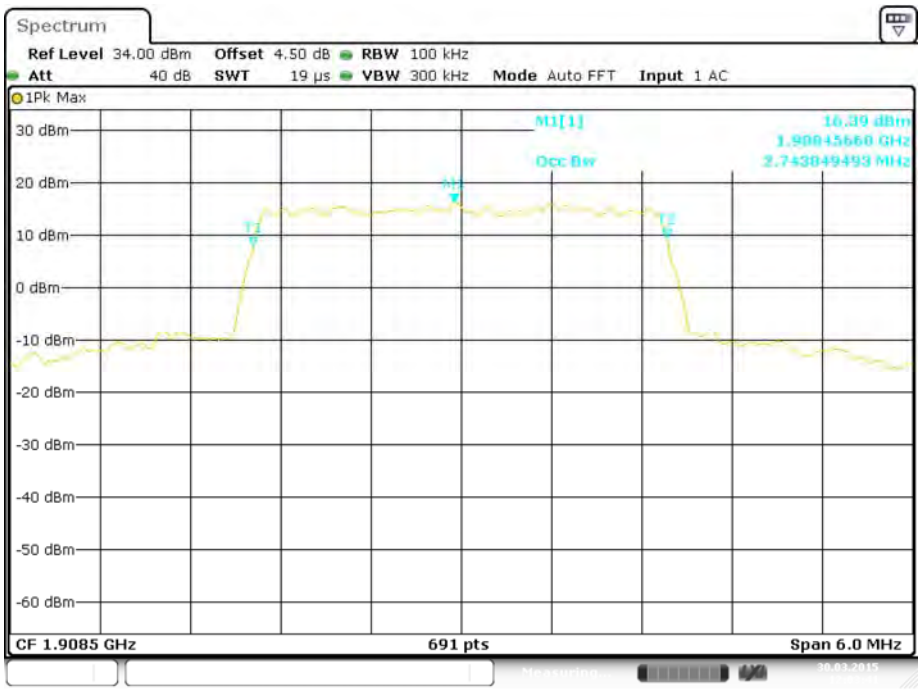

Date: 30.MAR.2015 12:03:41

QPSK (5.0 MHz) - 99% Occupied Bandwidth, Low channel

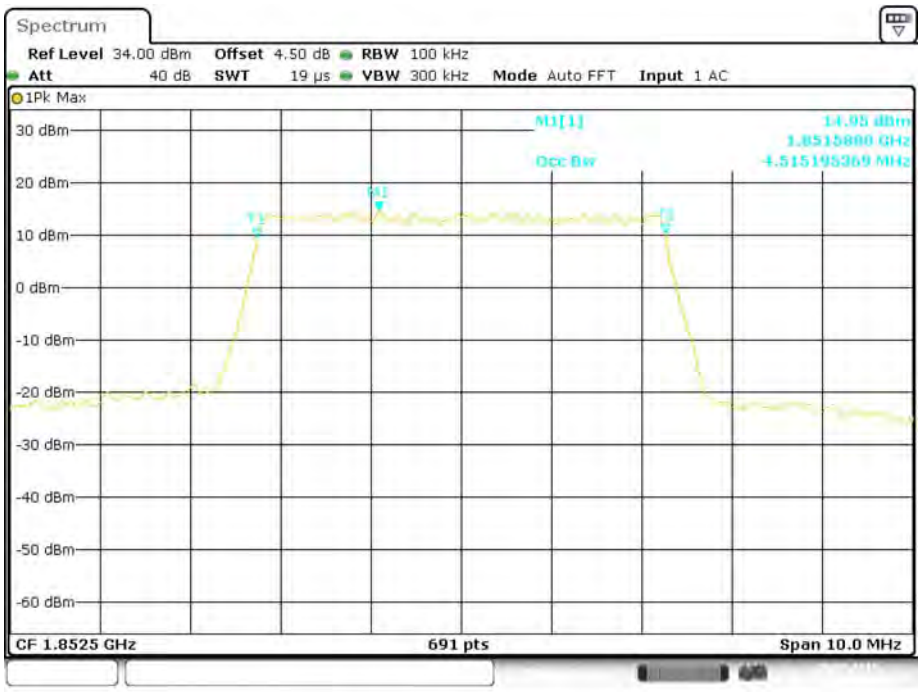

QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

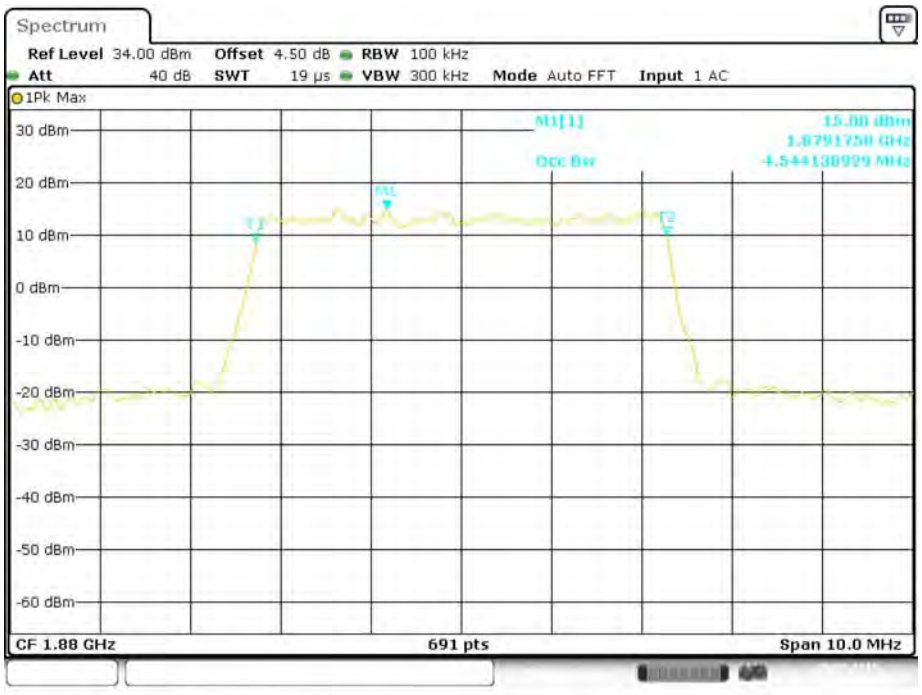

QPSK (5.0 MHz) - 99% Occupied Bandwidth, High channel

16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Low channel

16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

16-QAM (5.0 MHz) - 99% Occupied Bandwidth, High channel

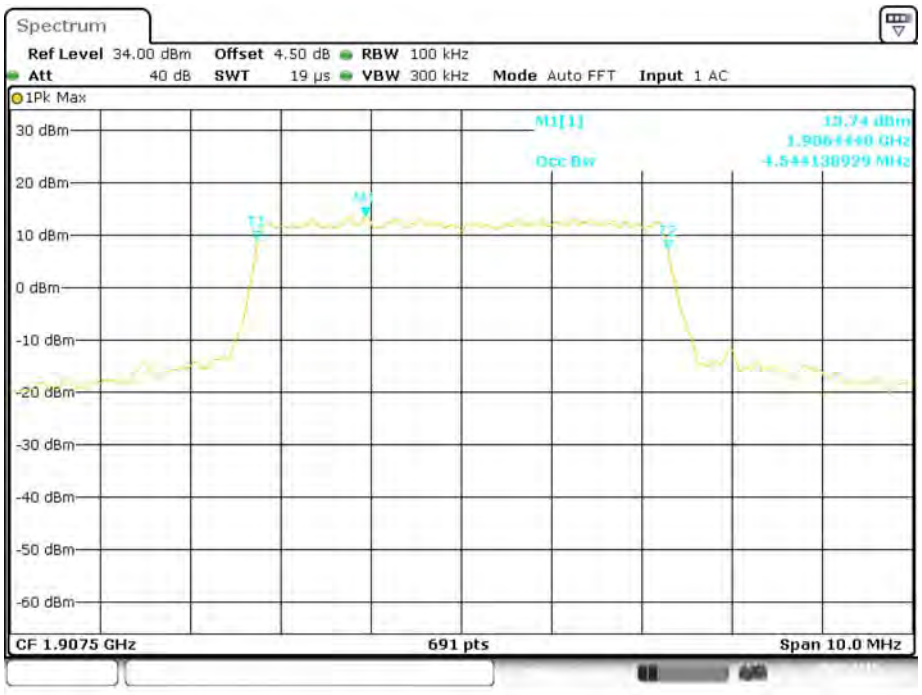

QPSK (10.0 MHz) - 99% Occupied Bandwidth, Low channel

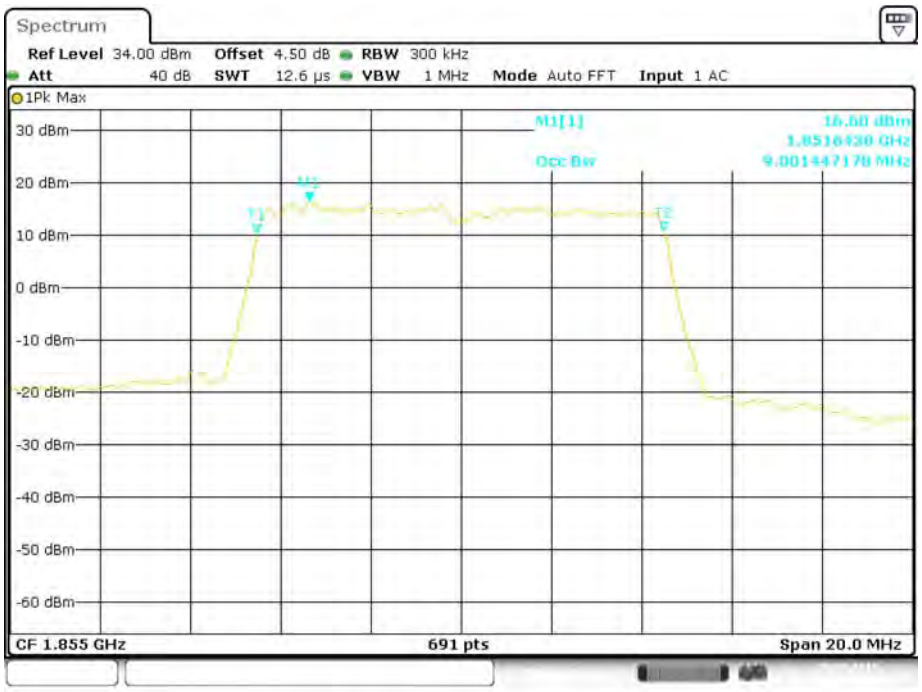

Date: 30.MAR.2015 13:03:38

QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

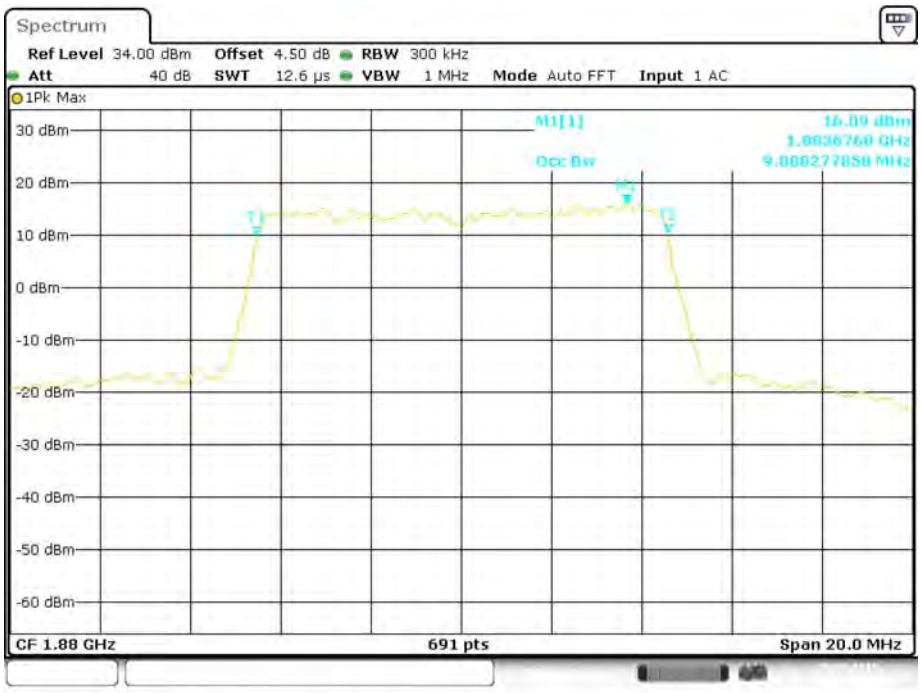

Date: 30.MAR.2015 11:42:27

QPSK (10.0 MHz) - 99% Occupied Bandwidth, High channel

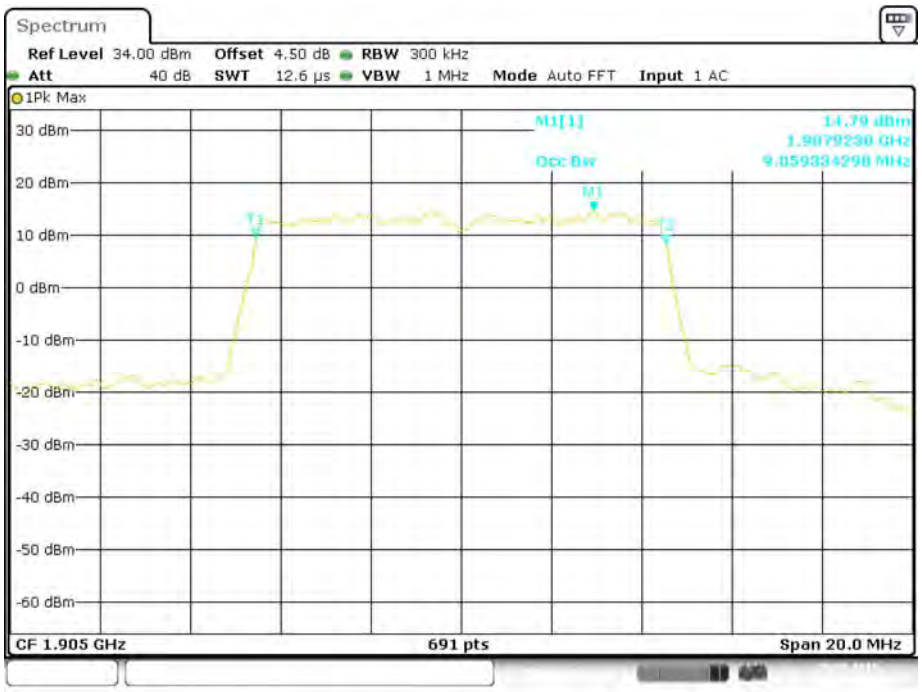

16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Low channel

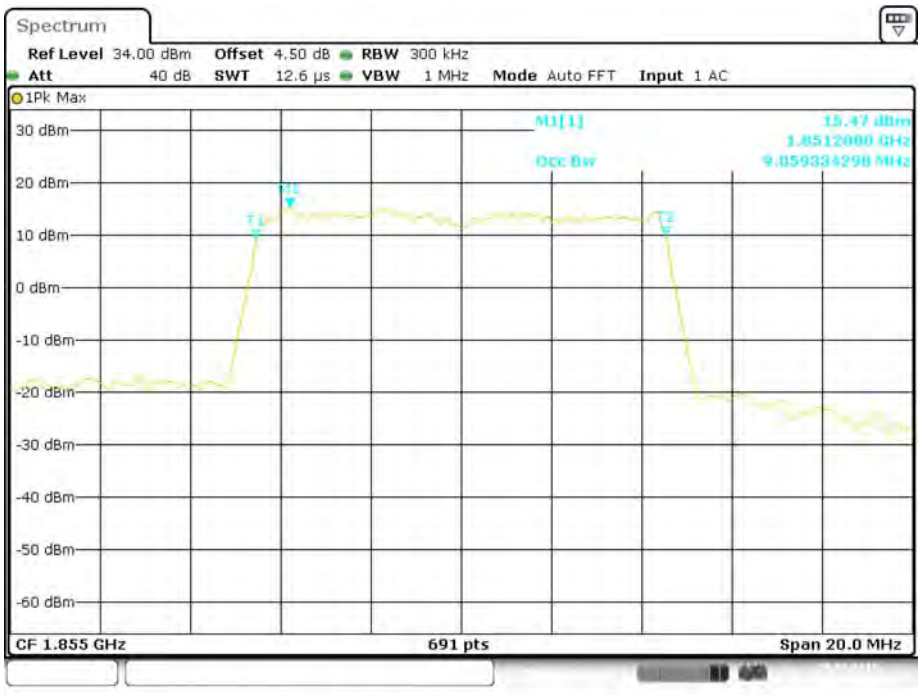

16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

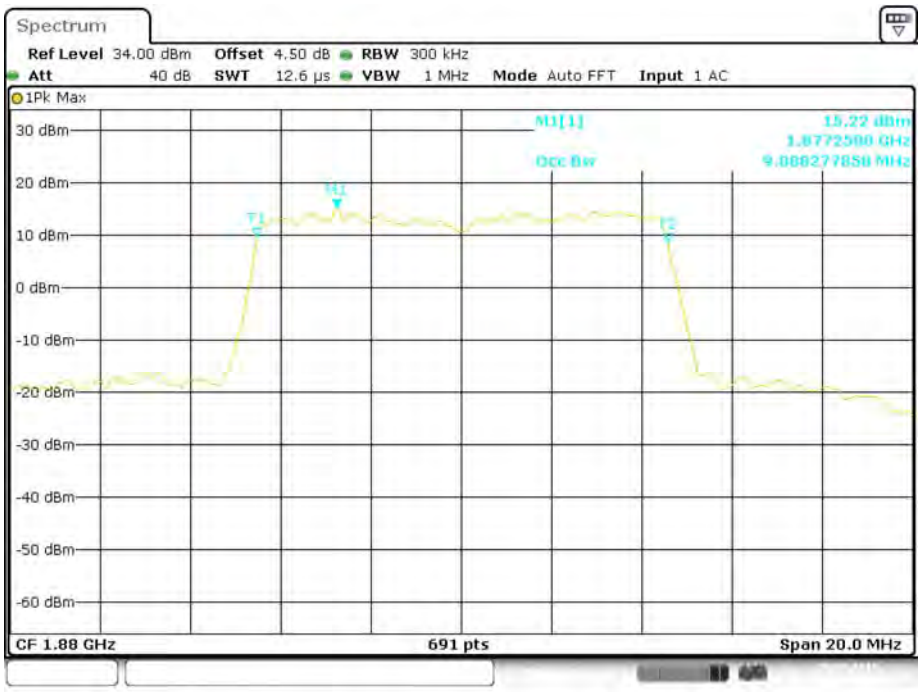

Date: 30.MAR.2015 13:40:03

16-QAM (10.0 MHz) - 99% Occupied Bandwidth, High channel

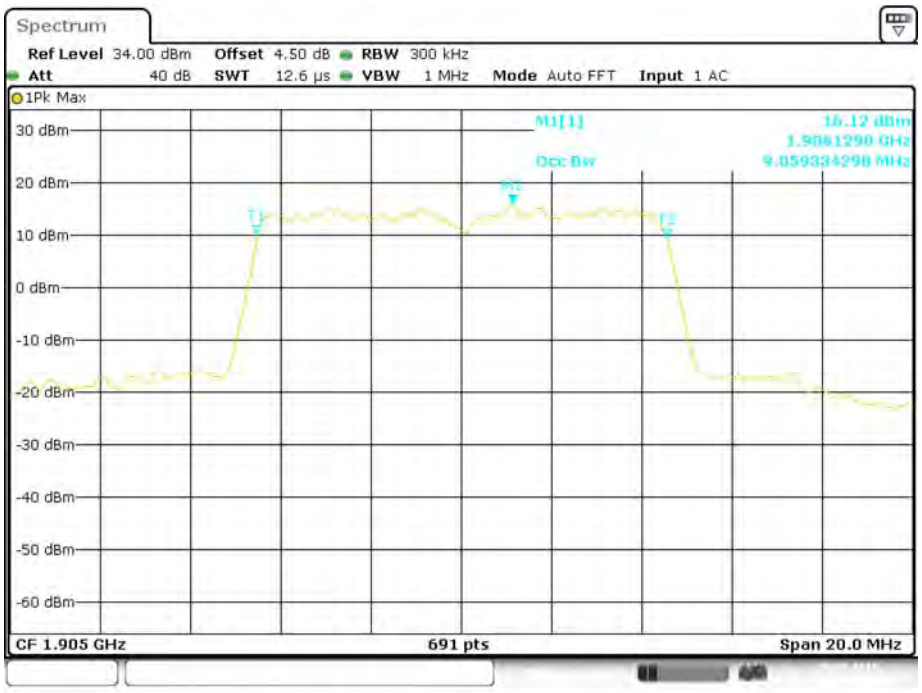

Date: 30.MAR.2015 11:46:00

QPSK (15.0 MHz) - 99% Occupied Bandwidth, Low channel

QPSK (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

QPSK (15.0 MHz) - 99% Occupied Bandwidth, High channel

16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Low channel

16-QAM (15.0 MHz) - 99% Occupied Bandwidth, Middle channel

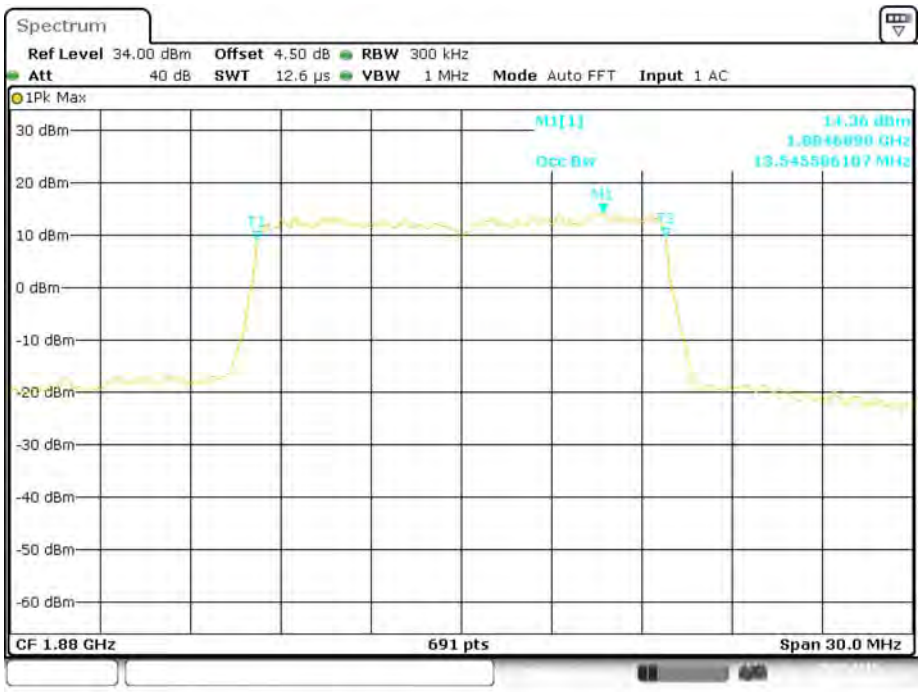

Date: 30.MAR.2015 11:29:42

16-QAM (15.0 MHz) - 99% Occupied Bandwidth, High channel

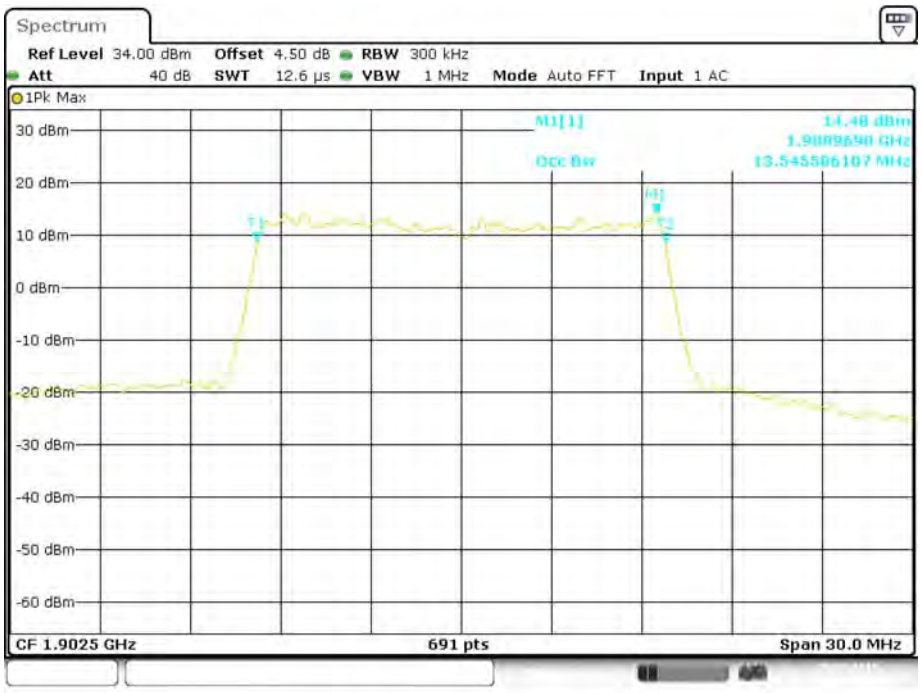

Date: 30.MAR.2015 11:36:57

QPSK (20.0 MHz) - 99% Occupied Bandwidth, Low channel

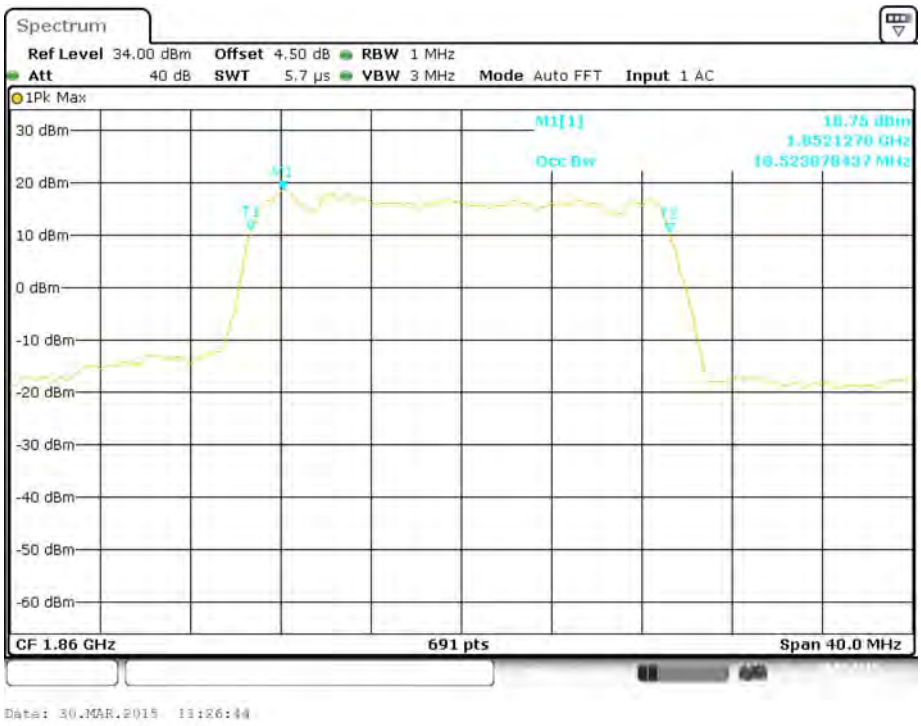

QPSK (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

QPSK (20.0 MHz) - 99% Occupied Bandwidth, High channel

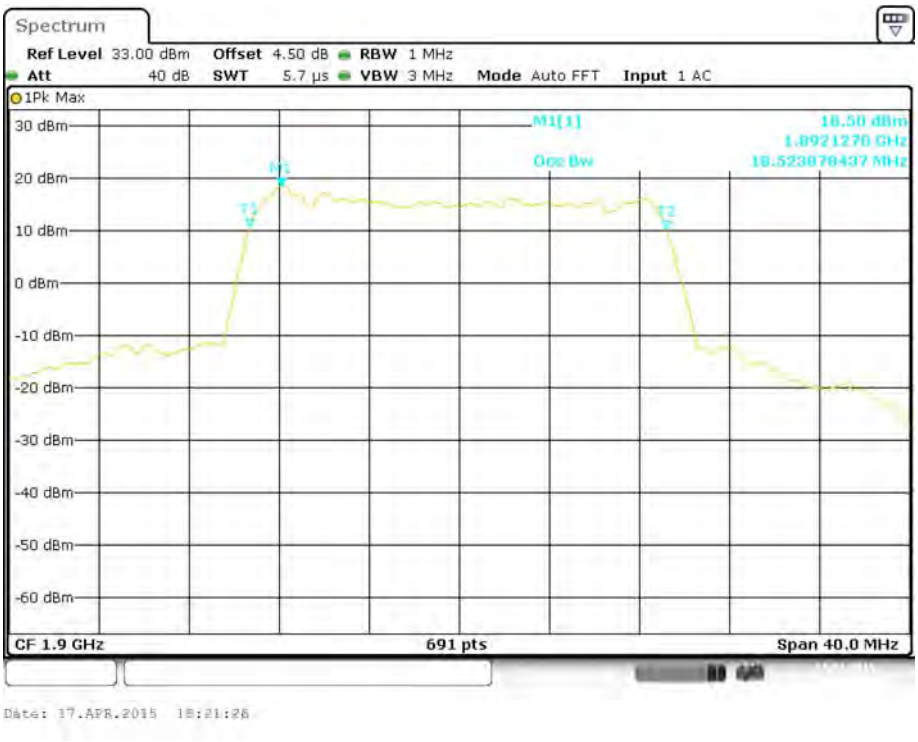

16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Low channel

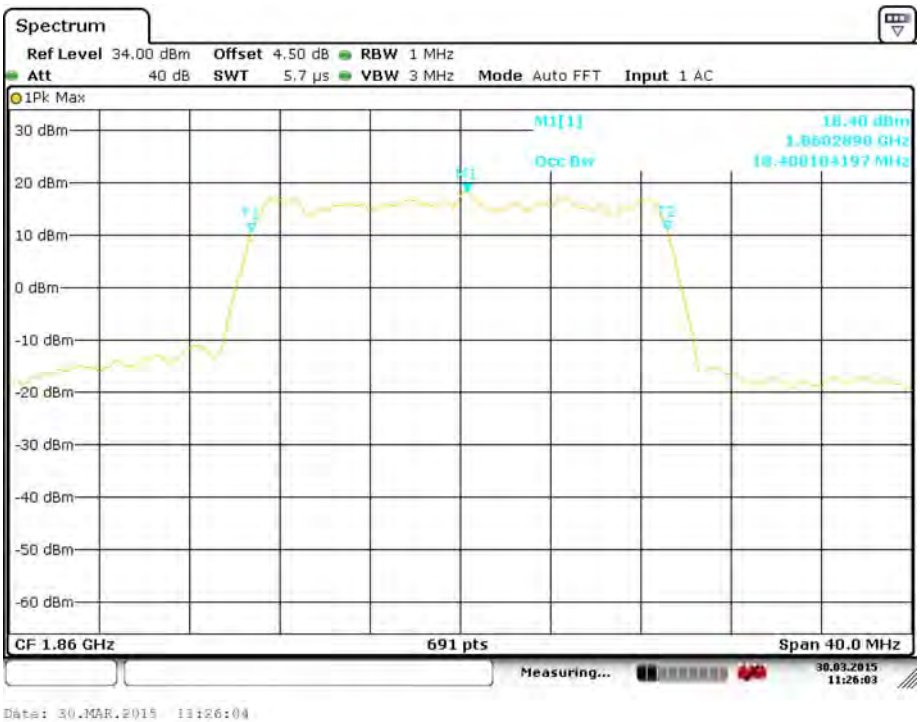

16-QAM (20.0 MHz) - 99% Occupied Bandwidth, Middle channel

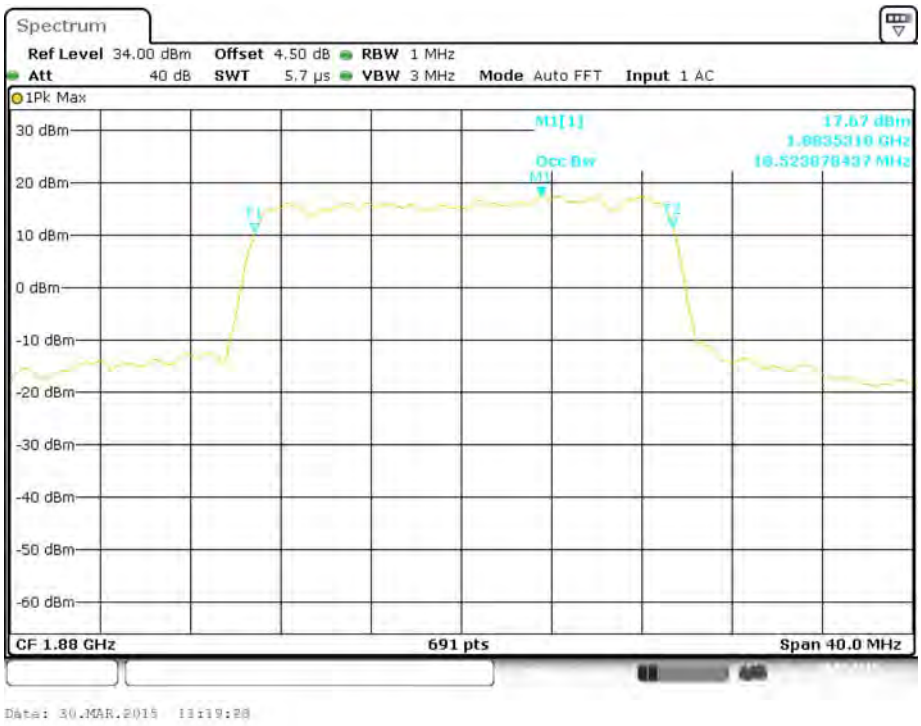

16-QAM (20.0 MHz) - 99% Occupied Bandwidth, High channel