


Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

 Lighting Graphics Approval Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.		
REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spelling ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

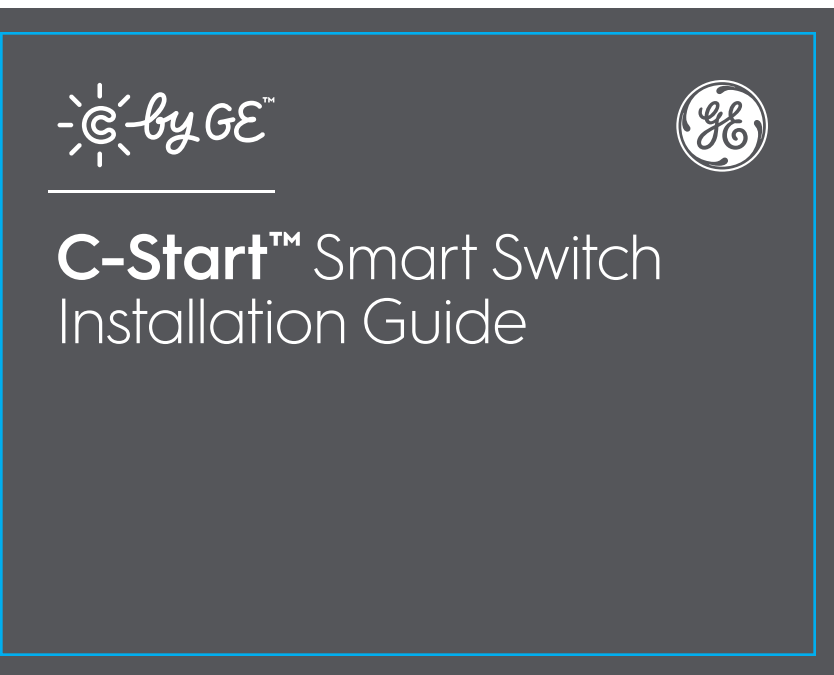

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig ☐ Website

☐ Proof against TDS#quest ☐ Graphics Printabiljt

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig ☐ Website

☐ Proof against TDS#quest ☐ Graphics Printabiljt

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Compatibility Requirements

Rating 120V AC 60Hz

Neutral wire is required
(Wire is usually white or grey)

Ground wire is required
(Wire is usually green, green with a yellow stripe, or copper)

Wi-Fi 802.11 b/g/n @ 2.4 GHZ is required

Works with compatible LED bulbs, including C by GE smart LED bulbs. Visit cbyge.com/compatibility

LED up to 150 watts

Incandescent/halogen up to 450 watts

4

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

! IMPORTANT NOTE ON 3-WAY WIRING:
Some lights have one wall switch, while others are controlled by two or more wall switches (such as stair lights, which have a switch at both the top and bottom of the stairs). If your lights have more than one switch (called a 3-way), we’ve created instructions for how to install and enable the capability.

Visit cbyge.com/switch-support for 3-way installation instructions and how-to-videos.

5

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig

☐ Website

☐ Proof against TDS#quest

☐ Graphics Printabiljt

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig

☐ Website

☐ Proof against TDS#quest

☐ Graphics Printabiljt

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Let's Do It

INCLUDED

Switch

Wall Plate

4 Wire Nuts

4 Phillips Mounting Screws

Line

Load

Ground

Neutral

Wire Labels

6

YOU'LL NEED

Phillips Screwdriver

Needle Nose Pliers
(recommended)

Voltage Tester
(recommended)

Approximately
30 minutes of your day
to install and setup
the switch

7

4.25"

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"



Lighting Graphics Approval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS

☐ Proof Reading – Spelling
☐ Proof against TDS request

☐ Website
☐ Graphics Printability



Lighting Graphics Approval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS

☐ Proof Reading – Spelling

☐ Website

☐ Proof against TDS request

☐ Graphics Printability

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

You Got This!

And we're here to help.
For in-depth instructional videos and a guided tour through the installation, go to cbyge.com/switch-support.

8 For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

BEFORE YOU DO ANYTHING: Step 1
Turn Off The Power!

Turn off the power for the switch location at the circuit breaker box.

Test existing switch by toggling switch on/off, ensuring lights do not turn on.

Now, follow these setup steps for a single gang switch.

9 For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

Process CYAN	Process MAGENTA	Graphics Job #:	0
		Project Name:	0
		Version # (date)	2 (08-23-18) CN
		Bar Code:	100% No BWR
		Insert:	None
Process YELLOW	Process BLACK	Supplier Project#:	00000
		Print Method:	☐ Offset/Litho ☐ Flexo (direct)
		GE DIE#:	NOT CONTROLLED
		Part ID:	N/A
	PMS COOL GRAY 11	Res#:	PK-00100021 1

Lighting Graphics App roval Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.		
REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

Process CYAN	Process MAGENTA	Graphics Job #:	0
		Project Name:	0
		Version # (date)	2 (08-23-18) CN
		Bar Code:	100% No BWR
		Insert:	None
Process YELLOW	Process BLACK	Supplier Project#:	00000
		Print Method:	☐ Offset/Litho ☐ Flexo (direct)
		GE DIE#:	NOT CONTROLLED
		Part ID:	N/A
	PMS COOL GRAY 11	Res#:	PK-00100021 1

Lighting Graphics App roval Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.		
REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

STEP 2


Remove Your Old Switch

1. Remove the existing wall plate and switch from the wall.
2. Use voltage tester on the black wire to confirm power to the switch is off (recommended).
3. Before disconnecting the wires from the wall, label each with the provided wire labels.
⚠ Neutral and ground wires are required. If you don't have either wire, the C-Start switch is not compatible.
4. Disconnect wires and remove existing switch.

10

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

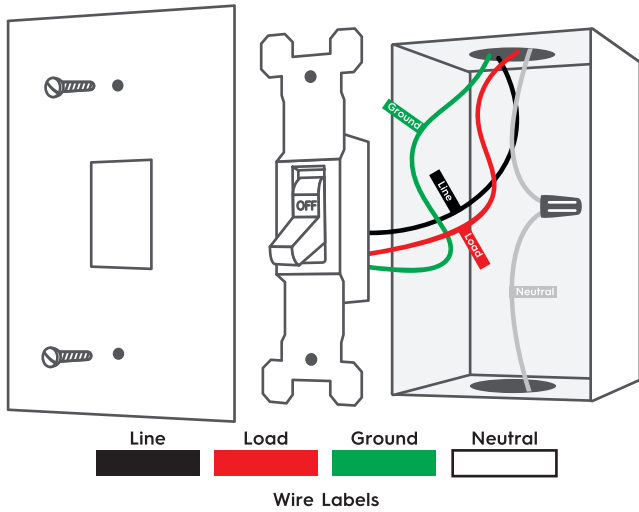

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

11

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig

☐ Website

☐ Proof against TDS#quest

☐ Graphics Printabilijt

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig

☐ Website

☐ Proof against TDS#quest

☐ Graphics Printabilijt

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

STEP 3

Connect The Wires

1. Connect the neutral (white) wire on the switch to the neutral (white label) wire from the wall.

2. Connect the line (black) wire on the switch to the line (black label) wire from the wall.

3. Connect the load (red) wire on the switch with the load (red label) wire from the wall.

4. Connect the ground (green) wire on the switch with the ground (green label) wire from the wall.

5. Cap the 3-way/multi-way traveler wire (if applicable). For 3-way switch setup, visit cbyge.com/switch-support
▲ Attention: Incorrectly connecting the Neutral or Ground wire from the wall to the Line or Load wire on the switch will damage the product.

12

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

USING WIRE NUTS

1. Insert wires into wire nut.

2. Turn wire nut clockwise.

3. Pull gently on wires to test connection.

13

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1



Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabiljt		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1



Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabiljt		

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

STEP 4


Fit Wires Into Wall Box

Neatly push the wires back into the box, rotating the switch so it's oriented according to the image.

14

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

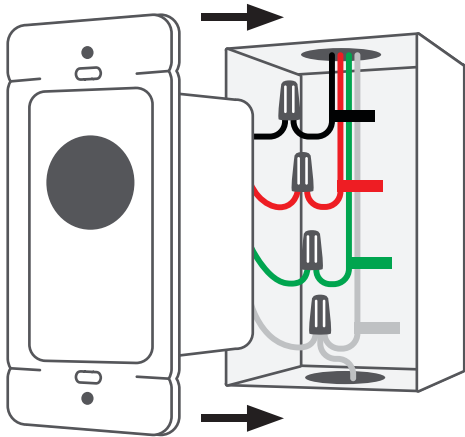

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

15

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig

☐ Website

☐ Proof against TDS#quest

☐ Graphics Printabiljt

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig

☐ Website

☐ Proof against TDS#quest

☐ Graphics Printabiljt

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

STEP 5


Secure The Switch

Using a phillips screwdriver and the screws provided, secure the switch to the wall until level and flush. Screw on the faceplate bracket, then snap the faceplate cover onto the bracket.

16

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

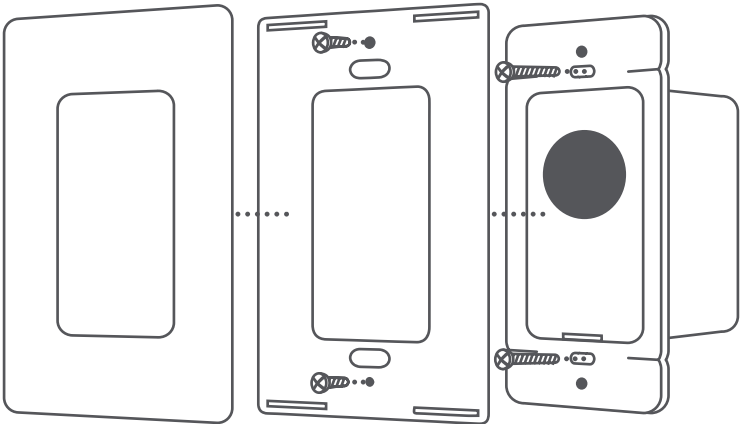

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

17

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig ☐ Website

☐ Proof against TDS#quest ☐ Graphics Printabiljt

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig ☐ Website

☐ Proof against TDS#quest ☐ Graphics Printabiljt

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

STEP 6

Turn The Power Back On

After the switch is secured and faceplate mounted, turn the power back on at the circuit breaker box.

At the switch, the light ring will flash blue indicating the device is wired correctly and the device is in setup mode.

18

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

Light ring will continuously flash blue until the switch is added to the C by GE app.

Light ring will flash red if the circuit is overloaded. Max load rating 150W LED and 450W incandescent/halogen.

Light ring will not illuminate if wired incorrectly.

IF LIGHTS DON'T TURN ON:

1. Check that air gap switch is depressed.
2. Check that power to the switch is on at the breaker.
3. Turn power off at the breaker, return to the switch to confirm the wires are securely and properly wired according to the installation guide.
4. Go to cbyge.com/switch-support for more troubleshooting.

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

19

4.25"

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1



Lighting Graphics App roval
Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabiljt		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1



Lighting Graphics App roval
Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabiljt		

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Additional Information and Warnings

FCC Compliance Statement Compliance Notice:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

22

4.25"

This device complies with part 15 of FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications that are not expressly approved by the manufacturer could void the user's authority to operate the equipment.

RF Exposure Information:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 8 inches during normal operation.

RF Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This transmitter must be installed to provide a separation distance of at least 8 inches from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.

23

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig ☐ Website

☐ Proof against TDS#quest ☐ Graphics Printabilijt

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig ☐ Website

☐ Proof against TDS#quest ☐ Graphics Printabilijt

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

CAUTION: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the

26

interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Déclaration d'IC sur l'exposition aux radiations:

- Cet équipement est conforme aux limites d'exposition aux radiations définies par le Canada pour des environnements non contrôlés.
- Cet équipement doit être installé et utilisé à une distance minimum de 20 cm entre l'antenne et votre corps.
- Cet émetteur ne doit pas être installé au même endroit ni utilisé avec une autre antenne ou un autre émetteur.

CAN ICES-3 (B)/NMB-3(B)

27


4.25"

4.25"

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

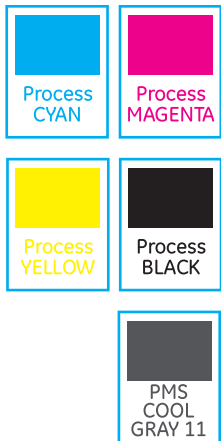

Graphics Job #:	0
Project Name:	0
Version # (date)	2 (08-23-18) CN
Bar Code:	100% No BWR
Insert:	None
Supplier Project#:	00000
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
Part ID:	N/A
Res#:	PK-00100021 1



Lighting Graphics App roval


Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spelling ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

PC48717 GUIDE

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

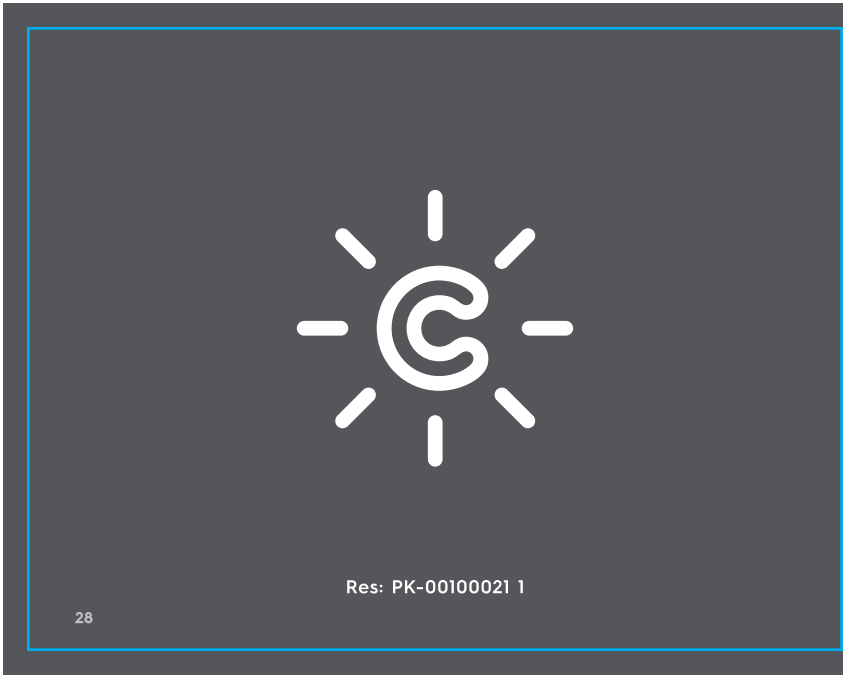

4.25"