



JAPAN QUALITY ASSURANCE ORGANIZATION
21-25, KINUTA 1-CHOME, SETAGAYA-KU, TOKYO 157 JAPAN
PHONE (03) 3416-0111, TELEX 242-2531 JQA J FAX (03) 3416-9691

Exhibit - C

JQA APPLICATION NO. : 80-80520
Issue Date : October 27, 1998
Page 1 of 27

EMI TEST REPORT

JQA APPLICATION NO. : 80-80520
Model No. : XM-6502B
Type of Equipment : CD-ROM Drive
Regulations Applied : CFR 47 FCC Rules and Regulations Part 15
FCC ID : Certification
Applicant : TOSHIBA CORPORATION
Address : 70, Yanagi-cho, Saiwai-ku, Kawasaki 210-8501, Japan
Manufacture : TOSHIBA CORPORATION
Address : 70, Yanagi-cho, Saiwai-ku, Kawasaki 210-8501, Japan
Final Judgment : Passed

TEST RESULTS IN THIS REPORT are obtained in use of equipment that is traceable to Electrotechnical Lab. of NITEL Japan and Communications Research Lab. of PTT Japan.

The test results only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the JQA EMC Engineering Dept. Testing Div.

This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.





JQA Application No. : 80-80520
 Model No. : XM-6502B
 Standard : CFR 47 FCC Rules Part 15

FCC ID : CJ6AT98-038
 Issue Date : October 27, 1998
 Page 2 of 27

TABLE OF CONTENTS

	Page
1 Documentation	
1.1 General Information	<u>3</u>
1.2 Test Regulation	<u>3</u>
1.3 Test Condition	<u>4 - 6</u>
1.4 EUT Modifications	<u>7</u>
1.5 Test results / Uncertainty	<u>8</u>
1.6 Summary	<u>9</u>
1.7 Test Configuration / Operation of EUT	<u>10 - 11</u>
1.8 EUT Arrangement (Drawings)	<u>12</u>
1.9 Preliminary Test and Test-setup (Drawings)	<u>13 - 15</u>
1.10 EUT Arrangement (Photographs)	<u>16 - 23</u>
 2 Test Data	
2.1 AC Power Line Conducted Emission 0.45 MHz - 30 MHz	<u>24 - 25</u>
2.2 Radiated Emission (Electric Field) 30 MHz - 1000 MHz	<u>26 - 27</u>
2.3 Radiated Emission (Electric Field) 1 GHz - 2 GHz	<u>N/A</u>



JQA Application No. : 80-80520
 Model No. : XM-6502B
 Standard : CFR 47 FCC Rules Part 15

FCC ID : CJ6AT98-038
 Issue Date : October 27, 1998
 Page 3 of 27

1 DOCUMENTATION

1.1 GENERAL INFORMATION

1.1.1 Test facility :

- 1) Test Facility located at EMC Engineering Dept. Testing Div. : No.2 and 3 Anechoic Chambers
 (3 meters Site)

FCC filing No. : 31040/SIT 1300F2

- 2) EMC Engineering Dept. Testing Div. is recognized under the National Voluntary Laboratory accreditation Program for satisfactory compliance established in title 15, Part 285 Code of Federal Regulations.
 NVLAP Lab Code : 200189-0 (Effective through : June 30, 1999)

1.1.2 Description of the Equipment Under Test (EUT) :

- | | |
|---|--------------------------|
| 1) Type of Equipment | : CD-ROM Drive |
| 2) Product Type | : Pre-Production |
| 3) Category | : Class B Digital Device |
| 4) EUT Authorization | : Certification |
| 5) FCC ID | : CJ6AT98-038 |
| 6) Trade Name | : TOSHIBA |
| 7) Model No. | : XM-6502B |
| 8) Fundamental Frequency Generated/Operated | |
| In the EUT | : 33.86 MHz, 50.00 MHz |
| 9) Highest Frequency Used in the EUT | : 50.00 MHz |
| 10) Serial No. | : 2S2-001 |
| 11) Date of Manufacture | : August 30, 1998 |
| 12) Power Rating | : +5VDC, +12VDC |
| * DC power for the EUT was controlled by the personal computer(Model No. : DSC,
Serial No. : S2421 by DELL Computer.). | |
| 13) EUT Grounding | : None |

1.1.3 Definitions for symbols used in this test report :

- - Black box indicates that the listed condition, standard or equipment is applicable for this report.
- - Blank box indicates that the listed condition, standard or equipment is not applicable for this report.

1.2 TEST REGULATION

FCC Rules and Regulations Part 15 Subpart A and B (June 23, 1989) Class B Digital Device

Test procedure :

AC power line conducted emission and radiated emission tests were performed according to the procedures in ANSI C63.4-1992.



JQA Application No. : 80-80520
Model No. : XM-6502B
Standard : CFR 47 FCC Rules Part 15

FCC ID : CJEAT98-038
Issue Date : October 27, 1998
Page 4 of 27

1.3 TEST CONDITION

1.3.1 The measurement of the AC Power Line Conducted Emission

- - was performed in the following test site.
- - was not applicable.

Test location :

Safety Testing Center Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157, Japan

- - Shielded Enclosure
- - Anechoic Chamber No. 2 (portable Type)

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
○ - Field Strength Meter	ESH-2	Rohde & Schwarz	872280/011	June 1998	1 Year
● - Field Strength Meter	ESH-2	Rohde & Schwarz	880370/016	May 1998	1 Year
○ - Field Strength Meter	ESH-3	Rohde & Schwarz	881460/016	May 1998	1 Year
○ - Field Strength Meter	ESH-3	Rohde & Schwarz	881460/030	May 1998	1 Year
● - LISN	ENW-407	Kyoritsu Electrical	8-833-6	Apr. 1998	1 Year
○ - LISN	ENW-407	Kyoritsu Electrical	8-855-2	Apr. 1998	1 Year
○ - LISN	ENW-407	Kyoritsu Electrical	8-757-1	Apr. 1998	1 Year
● - RF Cable	3D-2W	Fujikura	155-21-005	May 1998	1 Year
○ - RF Cable	3D-2W	Fujikura	155-21-006	May 1998	1 Year



JQA Application No. : 80-80520
 Model No. : XM-6502B
 Standard : CFR 47 FCC Rules Part 15

FCC ID : C16AT98-038
 Issue Date : October 27, 1998
 Page 5 of 27

1.3.2 The measurement of the Radiated Emission(30 MHz - 1000 MHz)

- - was performed in the following test site.
- - was not applicable.

Test location :

Safety Testing Center Testing Div.

21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- - Anechoic Chamber No. 2 (3 meters)
- - Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

- 1) Last Confirmed Date : May, 1998
- 2) Interval : 1 year

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
○ - Field Strength Meter	ESV	Rohde & Schwarz	872148/039	May 1998	1 Year
○ - Field Strength Meter	ESVP	Rohde & Schwarz	879783/030	May 1998	1 Year
○ - Field Strength Meter	ESVP	Rohde & Schwarz	881478/004	May 1998	1 Year
● - Field Strength Meter	ESVP	Rohde & Schwarz	881478/005	May 1998	1 Year
○ - Antenna	KBA-511A	Kyoritsu Electrical	0-201-13	Nov. 1997	1 Year
● - Antenna	KBA-511A	Kyoritsu Electrical	0-170-1	Nov. 1997	1 Year
○ - Antenna	KBA-611	Kyoritsu Electrical	0-210-5	Nov. 1997	1 Year
● - Antenna	KBA-611	Kyoritsu Electrical	0-147-14	Nov. 1997	1 Year
● - RF Cable	5D-2W	Fujikura	155-21-001	May 1998	1 Year
○ - RF Cable	5D-2W	Fujikura	155-21-002	May 1998	1 Year



JQA Application No. : 80-80520
Model No. : XM-6502H
Standard : CFR 47 FCC Rules Part 15

FCC ID : CJ6AT98-038
Issue Date : October 27, 1998
Page 6 of 27

1.3.3 The measurement of the Radiated Emission(Above 1000 MHz)

- ☐ - was performed in the following test site.
☒ - was not applicable.

Test location :

Safety Testing Center Testing Div.
21-25, Kinata 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- ☐ - No. 2 site (3 meters)
☐ - No. 3 site (3 meters)

Validation of Site Attenuation :

- 1) Last Confirmed Date : May, 1998
2) Interval : 1 year

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="radio"/> - Spectrum Analyzer	8560E	Hewlett Packard	3240A00189	Apr. 1998	1 Year
<input type="radio"/> - Spectrum Analyzer	8563E	Hewlett Packard	3221A00201	Apr. 1998	1 Year
<input type="radio"/> - Spectrum Analyzer	8565B	Hewlett Packard	2140A01091	Apr. 1998	1 Year
<input type="radio"/> - Log-Periodic Antenna	EL 025	Rohde & Schwarz	340182/015	Nov. 1997	1 Year
<input type="radio"/> - RF Cable	S 04272B	Suhner	155-21-001	May 1998	1 Year

Setting of the spectrum analyzer :

Resolution Bandwidth : 1 MHz
Video Bandwidth : 1 MHz
Sweep Time : 20 msec.
Scale : Linear



JQA Application No. : 80-80520
Model No. : XW-6502B
Standard : CFR 47 FCC Rules Part 15

FCC ID : CJ6AT98-038
Issue Date : October 27, 1998
Page 7 of 27

7

1.4 EUT MODIFICATION

- - No modifications were conducted by JQA to achieve compliance to Class B levels.
- - To achieve compliance to Class B levels, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant :

Date :

Typed Name :

Position :

RESPONSIBLE PARTY

Responsible Party of Test Item(Product)

Responsible Party :

Contact Person :

Signatory



JQA Application No. : 80-80520
Model No. : XM-6502B
Standard : CFR 47 FCC Rules Part 15

FCC ID : CJ6AT98-038
Issue Date : October 27, 1998
Page 8 of 27

8

1.5 TEST RESULTS / UNCERTAINTY

AC Power Line Conducted Emission

● - Applicable ○ - NOT Applicable

The requirements are

● - PASSED ○ - NOT PASSED

Min. Limit Margin 13.1 dB at 12.28 MHz

Max. Limit Exceeding dB at MHz

Uncertainty of Measurement Results ± 2.3 dB - 2.3 dB

Remarks :

Radiated Emission

● - Applicable ○ - NOT Applicable

The requirements are

● - PASSED ○ - NOT PASSED

Min. Limit Margin 3.7 dB at 793.8 MHz

Max. Limit Exceeding dB at MHz

Uncertainty of Measurement Results ± 3.2 dB - 3.2 dB

Remarks:



JQA Application No. : 80-80520
Model No. : XM-6502B
Standard : CFR 47 FCC Rules Part 15

FCC ID : CJBAT98 038
Issue Date : October 27, 1998
Page 9 of 27

9

1.6 SUMMARY

General Remarks :

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart A and B (June 23, 1988) under the test configuration, as shown in clause 1.7 to 1.10.
The conclusion for the test items of which are required by the applied regulation is indicated under the final judgment.

Final Judgment :

The "as received" sample;

- - fulfill the test requirements of the regulation mentioned on clause 1.2.
- - fulfill the test requirements of the regulation mentioned on clause 1.2, but with certain qualifications.
- - doesn't fulfill the test regulation mentioned on clause 1.2.

Begin of testing : October 21, 1998

End of testing : October 21, 1998

- JAPAN QUALITY ASSURANCE ORGANIZATION -

Approved Signatories:

Takaharu Hada
Manager
JQA EMC Engineering Dept.

Yoichi Nakajima
Assistant Manager
JQA EMC Engineering Dept.



JQA Application No. : 80-80520
Model No. : XM-6502B
Standard : CFR 47 FCC Rules Part 15

FCC ID : CJ6AT98-038
Issue Date : October 27, 1998
Page 10 of 27

1.7 TEST CONFIGURATION / OPERATION OF EUT

1.7.1 Test Configuration

The equipment under test (EUT) consists of :

Symbol	Item	Manufacturer	Model No.	FCC ID	Serial No.
A(*1)	CD-ROM Drive	TOSHIBA CORPORATION	XM-6502B	CJ6AT98-038	2S2-001

Note 1. DC power for the EUT was controlled by the personal computer(Model No. : DSC,
Serial No. : SZ421 by DELL Computer.).

The measurement was carried out with the following support equipment connected :

Symbol	Item	Manufacturer	Model No.	FCC ID	Serial No.
B	Personal Computer	DELL Computer	DSC	N/A(DoC)	SZ421
C	Color Computer Display	Gatesway2000	500-060EV	BEJCS592	1502E013098
D	Keyboard	DELL Computer	SK-1000REW	GYUR36SK	M971217891
E	Mouse	DELL Computer	X03-61001	C3KXP3	124592-00000
F(*2)	Printer(Parallel)	HEWLETT PACKARD	C4608A	B04C2164X	SG77H1F1WX
G	Track Ball	Logitech	T-C31-9F	DZLLBG	LU0890003767
H	Stereo Headphone	Sony Corporation	MDR-E838	N/A	-
I	Stereo Cassette Player	Sony Corporation	NW-MV1	N/A	33118
J	MIC	-	-	N/A	-
K	Game PAD	NEC	PK-GP101	N/A	81005528
L	AC Adaptor	HEWLETT PACKARD	C2178A	N/A	-

Note 2. This Printer was operated with the AC adaptor(above symbol "L" Model: C2178A,
Input: 100VAC 50/60Hz, Output: 30VDC by HEWLETT PACKARD).



JQA Application No. : 80-80520
Model No. : XM-65028
Standard : CFR 47 FCC Rules Part 15

FCC ID : CJBAT98-038
Issue Date : October 27, 1998
Page 11 of 27

Type of Cable :

Symbol	Description	Identification(Manu. e. t. c.)	Shielded YES / NO	Ferrite Core	Length (m)
1	CRT Attachment Cable	-	YES	YES	1.86
2	Printer Attachment Cable	SHOWA	YES	NO	1.60
3	Network Cable	-	NO	NO	1.00
4	Track Ball Attachment Cable	-	YES	NO	2.70
5	Keyboard Attachment Cable	-	YES	NO	1.90
6	Headphone Attachment Cable	-	NO	NO	1.70
7	Mouse Attachment Cable	-	YES	NO	1.95
8	Stereo Attachment Cable	-	NO	NO	1.65
9	MIC Attachment Cable	-	YES	NO	2.10
10	Resistor Attachment Cable	-	NO	NO	1.65
11	PAD Attachment Cable	-	YES	YES	2.50
12	AC Power Line Cable(for Printer)	-	NO	NO	0.95
13	AC Adaptor Cable(for Printer)	-	NO	NO	1.85
14	AC Power Cable(for CRT)	HITACHI	NO	NO	2.20
15	AC Power Cable(for PC)	HIRAKAWA	YES	NO	2.55

1.7.2 Operating condition


Power supply Voltage : 120VAC, 60Hz(for Personal Computer).
The tests have been carried out the following running mode.

- 1) CD-ROM Drive(EUT) : Random Data Read
 - 2) Color Computer Display : Displayed the "H" Pattern
 - 3) Printer : Printing the "H" Pattern
- Return to step (1)

1.7.3 Generating and Operating frequency of EUT

50.0 MHz, 33.86 MHz

1.8 EUT ARRANGEMENT (DRAWINGS)

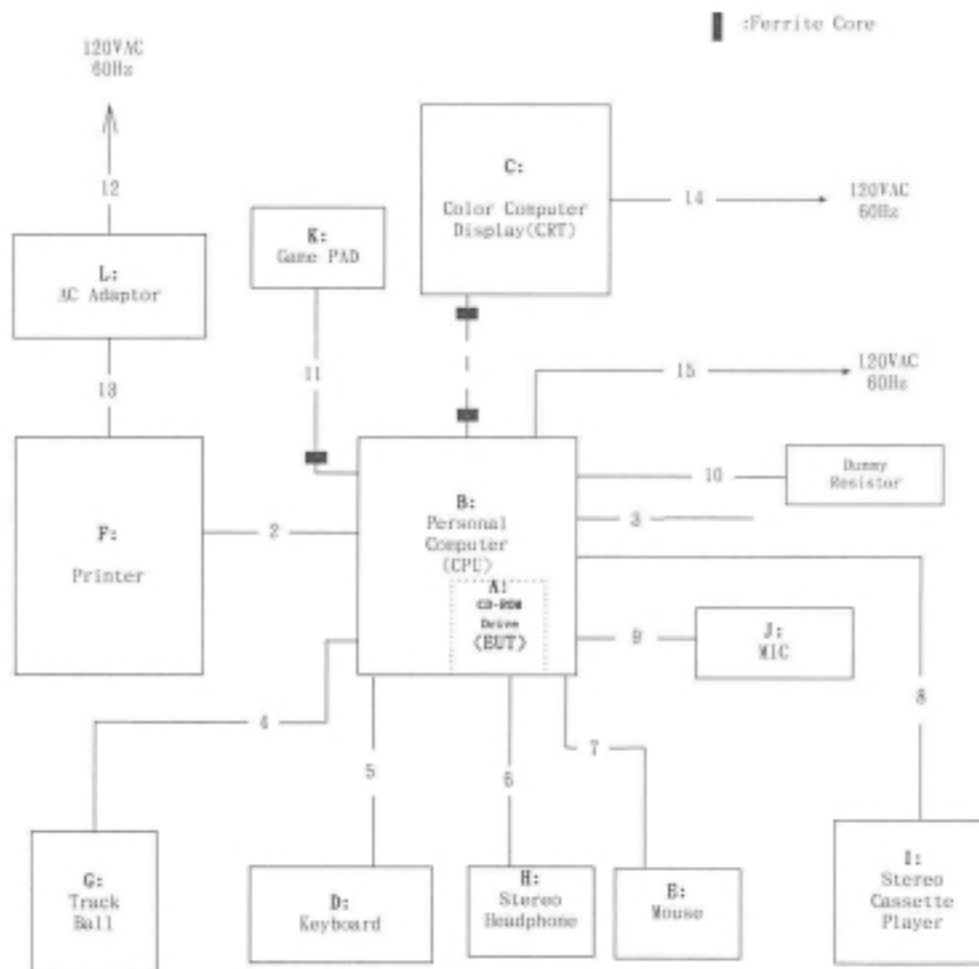



JQA Application No. : 80-80520
Model No. : XM-6502B
Standard : CFR 47 FCC Rules Part 15

FCC ID : CJ&AT98-038
Issue Date : October 27, 1998
Page 24 of 27

2 TEST DATA

2.1 AC Power Line Conducted Emission Measurement(0.45 MHz - 30 MHz)

Date : October 21, 1998
Temp. : 22°C Humi. : 48%

Frequency (MHz)	LISN Factor (dB)	Meter Reading		Limits (dB/uV)	Emission Levels		Margins	
		V-A (dB/uV)	V-B (dB/uV)		V-A (dB/uV)	V-B (dB/uV)	V-A (dB)	V-B (dB)
0.48	0.2	29.5	29.2	48.0	29.7	29.4	18.3	18.6
0.55	0.2	32.8	31.7	48.0	33.0	31.9	15.0	16.1
0.62	0.2	30.6	29.8	48.0	30.8	30.0	17.2	18.0
0.83	0.2	27.8	30.0	48.0	28.0	30.2	20.0	17.8
1.04	0.2	22.2	27.5	48.0	22.4	27.7	25.6	20.3
1.53	0.2	16.0	29.2	48.0	16.2	29.4	31.8	18.6
2.22	0.2	14.7	30.0	48.0	14.9	30.2	33.1	17.8
2.91	0.2	16.4	29.8	48.0	16.6	30.0	31.4	18.0
3.19	0.2	14.0	29.5	48.0	14.2	29.7	33.8	18.3
5.06	0.2	19.7	28.9	48.0	19.9	29.1	28.1	18.9
6.03	0.2	22.6	28.8	48.0	22.8	29.0	25.2	19.0
7.21	0.2	26.7	29.4	48.0	26.9	29.6	21.1	18.4
9.15	0.2	26.0	25.7	48.0	26.2	25.9	21.8	22.1
11.30	0.2	31.4	31.7	48.0	31.6	31.9	16.4	16.1
12.28	0.2	34.4	34.7	48.0	34.6	34.9	13.4	13.1
13.24	0.3	30.0	30.6	48.0	30.3	30.9	17.7	17.1
16.37	0.3	27.2	20.3	48.0	27.5	20.6	20.5	27.4
18.03	0.4	23.3	16.5	48.0	23.7	16.9	24.3	31.1
20.04	0.4	20.9	18.0	48.0	21.3	18.4	26.7	29.6
24.01	0.5	11.6	19.5	48.0	12.1	20.0	35.9	28.0
28.11	0.6	< 10.0	22.7	48.0	< 10.6	23.3	> 37.4	24.7
29.83	0.6	< 10.0	23.3	48.0	< 10.6	23.9	> 37.4	24.1

- Notes: 1). The spectrum was checked from 0.45 MHz to 30 MHz.
2). V-A : One end & Ground ; V-B : The other end & Ground
3). The symbol of '<' means 'or less'.
4). The symbol of '>' means 'or greater'.
5). The cable(2.0 m length) loss is included in the LISN factor.
6). See sec.11.5.2 in ANSI C63.4-1992 for the symbol '*'.
7). A sample calculation was made at 0.48 MHz.

$$Lf + Mr = 0.2 + 29.5 = 29.7 \text{ dB/uV}$$

Where,

Lf : LISN Factor
Mr : Meter Reading

Tested by :

Y. Nakajima
Yoichi Nakajima
Testing Engineer




JQA Application No.: 80-80520
Model No.: XM-6502B
Standard: CFR 47 FCC Rules Part 15

FCC ID: CJ6AT98-038
Issue Date: October 27, 1998
Page 25 of 27

14

AC POWER LINE CONDUCTED EMISSIONS MEASUREMENT

MODEL NO.: XM-6502B

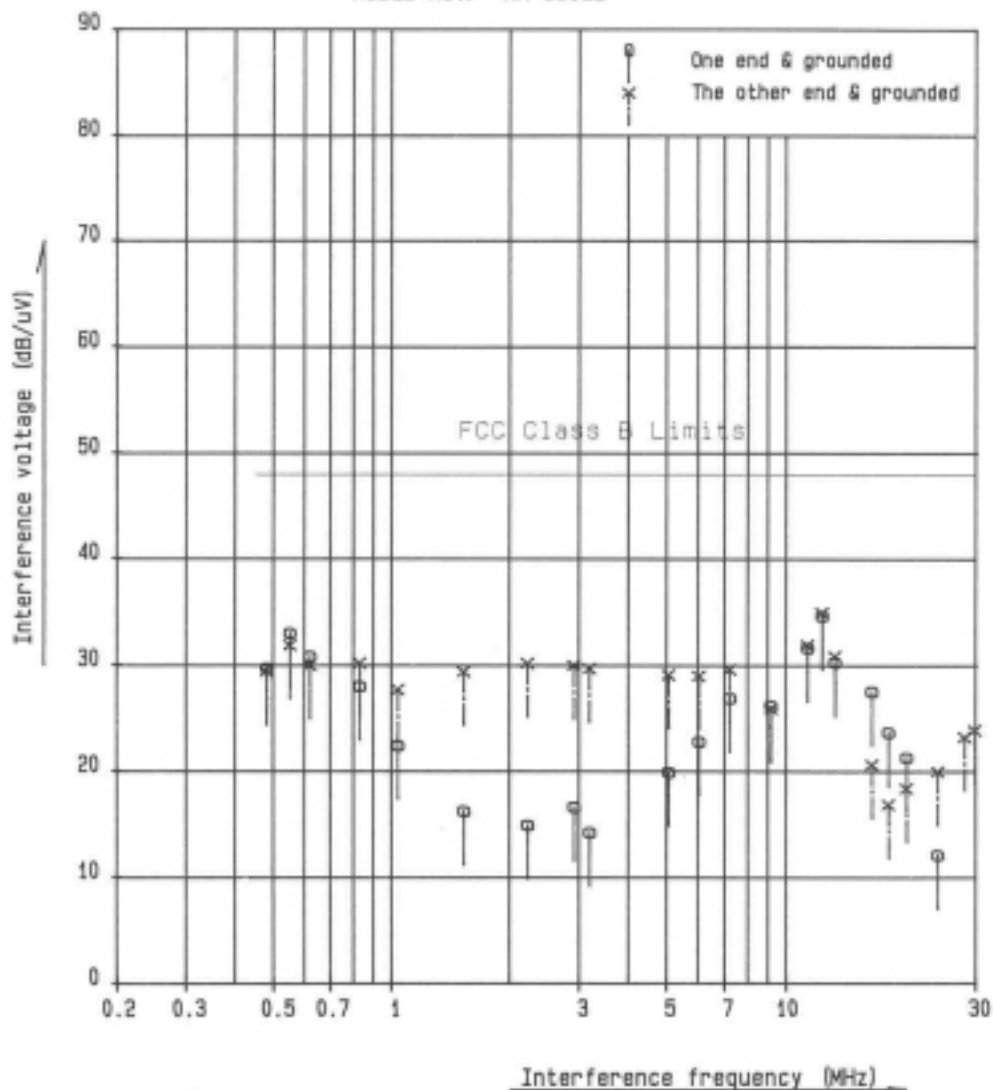



JQA Application No. : 80-80520
 Model No. : XM-6502B
 Standard : CFR 47 FCC Rules Part 15

FCC ID : CJ6AT98-033
 Issue Date : October 27, 1998
 Page 26 of 27

2.2 Radiated Emissions Measurement(30 MHz - 1000 MHz)

Date : October 21, 1998
 Temp. : 22°C Humi. : 50%

Frequency (MHz)	Antenna Factor (dB/m)	Meter Reading at 3 m		Limits (dB/uV/m)	Emission Levels at 3 m		Margins	
		Horiz. (dB/uV)	Vert. (dB/uV)		Horiz. (dB/uV/m)	Vert. (dB/uV/m)	Horiz. (dB)	Vert. (dB)
33.9	0.6	30.5	26.2	40.0	31.1	26.8	8.9	13.2
43.2	2.8	13.1	20.0	40.0	15.9	22.8	24.1	17.2
56.7	5.4	8.6	19.9	40.0	14.0	25.3	26.0	14.7
67.7	7.1	15.6	14.8	40.0	22.7	21.9	17.3	18.1
87.9	9.6	12.1	14.4	40.0	21.7	24.0	18.3	16.0
111.8	12.0	9.2	14.3	43.5	21.2	26.3	22.3	17.2
144.0	14.6	5.6	9.1	43.5	20.2	23.7	23.3	19.8
169.4	16.3	15.2	14.1	43.5	31.5	30.4	12.0	13.1
186.3	17.3	6.7	7.5	43.5	24.0	24.8	19.5	18.7
203.6	18.2	10.7	3.7	43.5	28.9	21.9	14.6	21.6
220.2	19.1	12.7	8.5	46.0	31.8	27.6	14.2	18.4
240.0	20.0	9.7	5.4	46.0	29.7	25.4	16.3	20.6
264.6	21.1	18.0	16.2	46.0	39.1	37.3	6.9	8.7
317.5	23.0	5.8	5.4	46.0	28.8	28.4	17.2	17.6
508.9	28.4	10.8	5.5	46.0	39.2	33.9	6.8	12.1
542.8	29.2	6.0	1.8	46.0	35.2	31.0	10.8	15.0
644.6	31.5	5.4	4.2	46.0	36.9	35.7	9.1	10.3
661.5	31.8	5.6	7.3	46.0	37.4	39.1	8.6	6.9
712.4	32.8	0.4	3.1	46.0	33.2	35.9	12.8	10.1
793.8	34.3	5.7	8.0	46.0	40.0	42.3	6.0	3.7
833.5	34.9	6.0	5.0	46.0	40.9	39.9	5.1	6.1

- Notes: 1). The spectrum was checked from 30 MHz to 1000 MHz.
 2). The symbol of '<' means 'or less'.
 3). The symbol of '>' means 'or greater'.
 4). The cable(14.0 m length) loss is included in the antenna factor.
 5). A sample calculation was made at 33.9 MHz.

$$Af + Mr = 0.6 + 30.5 = 31.1 \text{ dB/uV/m}$$

Where,

Af : Antenna Factor

Mr : Meter Reading

Tested by :

Y. Nakajima
 Yoichi Nakajima
 Testing Engineer



JQA Application No. : 80-80520
Model No. : XM-6502B
Standard : CFR 47 FCC Rules Part 15

FCC ID : CJ6AT88-038
Issue Date : October 27, 1998
Page 27 of 27

RADIATED EMISSIONS MEASUREMENT

MODEL NO.: XM-6502B

