


# Test Report

| Project Information           |                             |           |                 |
|-------------------------------|-----------------------------|-----------|-----------------|
| Customer:                     |                             |           |                 |
| EUT:                          | Seedpace Interactive Player |           |                 |
| Model:                        | XHS10A                      | SN:       |                 |
| Mode:                         | 11AC20_5500                 | Voltage:  | 5V $\approx$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu        |
| Remark:                       | Power Set:Default           |           |                 |
| Test Standard: FCC Part15C AV |                             |           |                 |

Start of Test:2025-05-14 17:06:15

## Test Graph

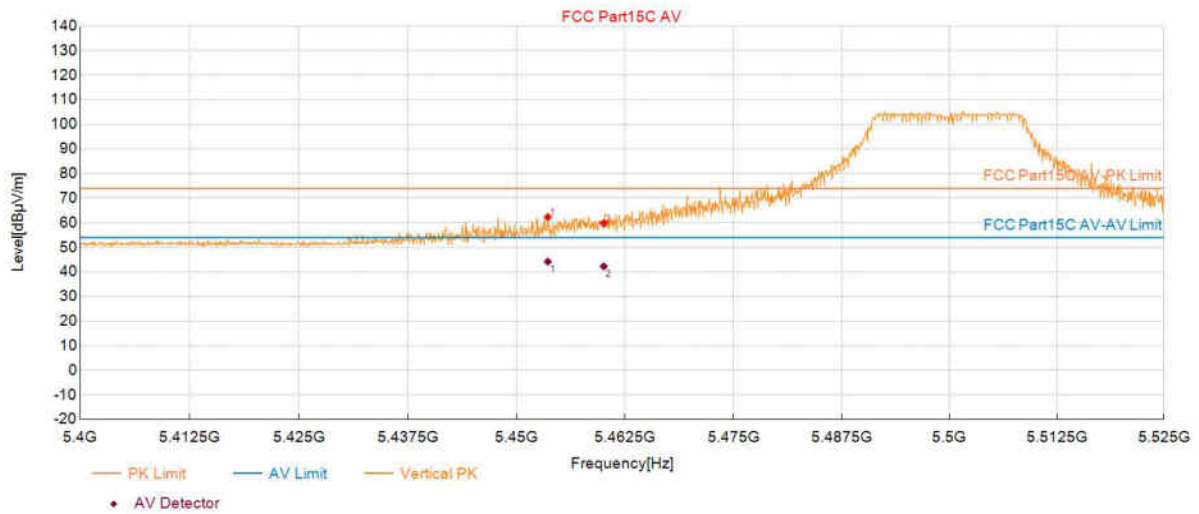

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5453.5893       | 62.32          | 18.71       | 74.00          | 11.68       | 150         | 237       | Vertical |
| 2   | 5460.0300       | 59.75          | 18.72       | 74.00          | 14.25       | 150         | 237       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5453.5893       | 18.71       | 44.20             | 54.00             | 9.80           | 150         | 237       | Vertical |
| 2   | 5460.0300       | 18.72       | 42.27             | 54.00             | 11.73          | 150         | 237       | Vertical |

# Test Report

| Project Information           |                             |           |                |
|-------------------------------|-----------------------------|-----------|----------------|
| Customer:                     |                             |           |                |
| EUT:                          | Seedpace Interactive Player |           |                |
| Model:                        | XHS10A                      | SN:       |                |
| Mode:                         | 11AC20_5700                 | Voltage:  | 5V $\equiv$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu       |
| Remark:                       | Power Set:2 1 0 14          |           |                |
| Test Standard: FCC Part15C AV |                             |           |                |

Start of Test:2025-05-16 17:20:39

## Test Graph

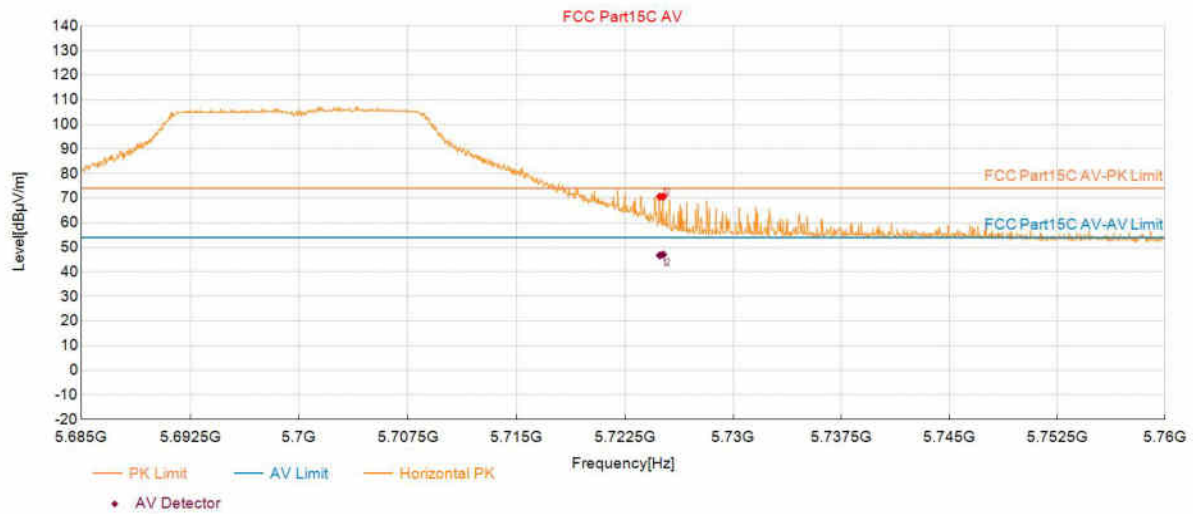

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5724.9200       | 70.60          | 19.92       | 74.00          | 3.40        | 150         | 196       | Horizontal |
| 2   | 5725.1451       | 70.59          | 19.93       | 74.00          | 3.41        | 150         | 196       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5724.9200       | 19.92       | 46.72             | 54.00             | 7.28           | 150         | 196       | Horizontal |
| 2   | 5725.1451       | 19.93       | 47.07             | 54.00             | 6.93           | 150         | 196       | Horizontal |

# Test Report

| Project Information           |                             |           |                 |
|-------------------------------|-----------------------------|-----------|-----------------|
| Customer:                     |                             |           |                 |
| EUT:                          | Seedpace Interactive Player |           |                 |
| Model:                        | XHS10A                      | SN:       |                 |
| Mode:                         | 11AC20_5700                 | Voltage:  | 5V $\approx$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu        |
| Remark:                       | Power Set:2 1 0 14          |           |                 |
| Test Standard: FCC Part15C AV |                             |           |                 |

Start of Test:2025-05-16 17:21:19

## Test Graph

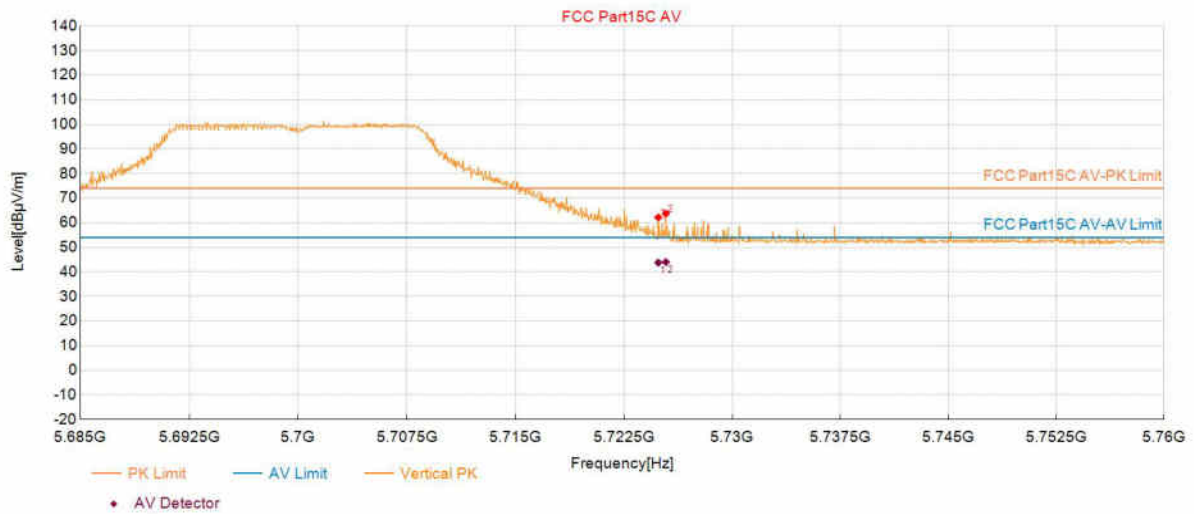

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5724.8824       | 62.15          | 19.92       | 74.00          | 11.85       | 150         | 257       | Vertical |
| 2   | 5725.4077       | 63.73          | 19.93       | 74.00          | 10.27       | 150         | 221       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5724.8824       | 19.92       | 43.79             | 54.00             | 10.21          | 150         | 257       | Vertical |
| 2   | 5725.4077       | 19.93       | 44.04             | 54.00             | 9.96           | 150         | 221       | Vertical |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AC40_5190                 | Voltage:  | 5V--- 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 17:33:26

## Test Graph

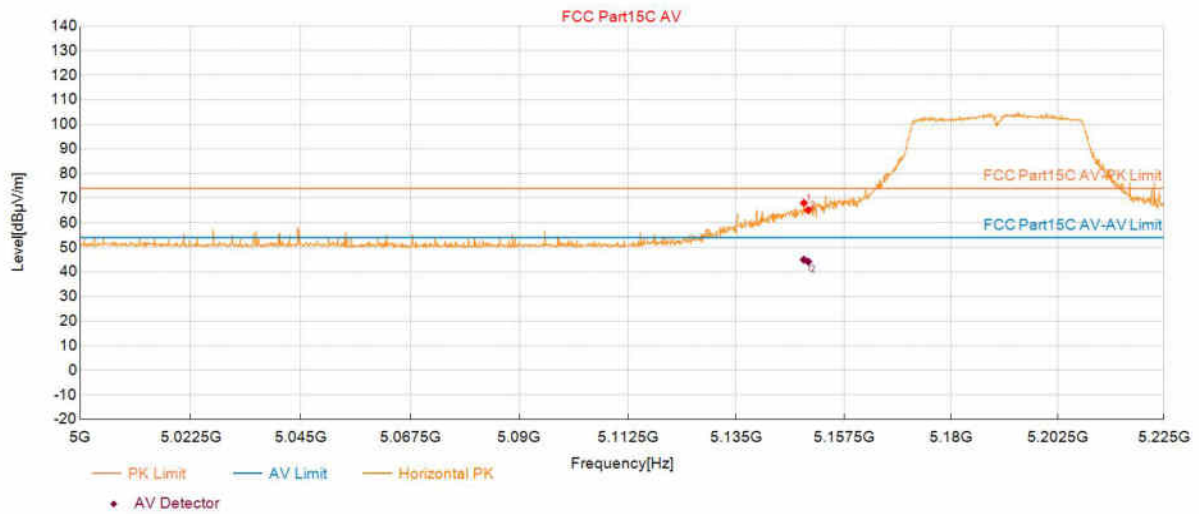

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5149.1371       | 68.01          | 17.80       | 74.00          | 5.99        | 150         | 168       | Horizontal |
| 2   | 5150.0375       | 65.19          | 17.79       | 74.00          | 8.81        | 150         | 168       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5149.1371       | 17.80       | 44.99             | 54.00             | 9.01           | 150         | 168       | Horizontal |
| 2   | 5150.0375       | 17.79       | 44.20             | 54.00             | 9.80           | 150         | 168       | Horizontal |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AC40_5190                 | Voltage:  | 5V= 1A   |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 17:34:06

## Test Graph

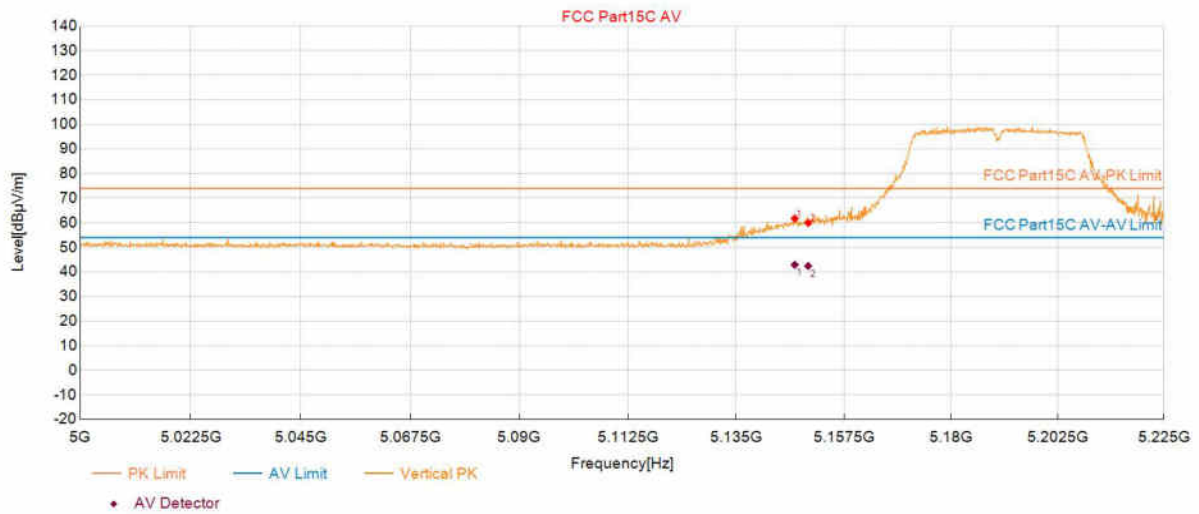

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5147.2236       | 61.74          | 17.80       | 74.00          | 12.26       | 150         | 178       | Vertical |
| 2   | 5150.0375       | 59.92          | 17.79       | 74.00          | 14.08       | 150         | 164       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5147.2236       | 17.80       | 42.91             | 54.00             | 11.09          | 150         | 178       | Vertical |
| 2   | 5150.0375       | 17.79       | 42.43             | 54.00             | 11.57          | 150         | 164       | Vertical |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AC40_5310                 | Voltage:  | 5V--- 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 17:38:06

## Test Graph

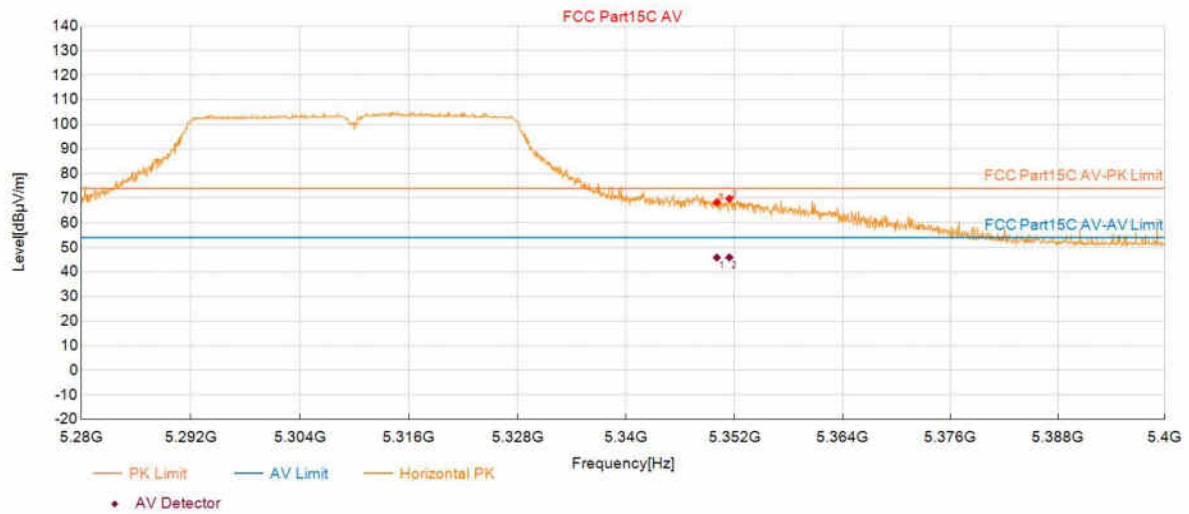

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5350.0550       | 68.31          | 18.34       | 74.00          | 5.69        | 150         | 175       | Horizontal |
| 2   | 5351.4357       | 69.80          | 18.34       | 74.00          | 4.20        | 150         | 184       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5350.0550       | 18.34       | 45.83             | 54.00             | 8.17           | 150         | 175       | Horizontal |
| 2   | 5351.4357       | 18.34       | 45.90             | 54.00             | 8.10           | 150         | 184       | Horizontal |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AC40_5310                 | Voltage:  | 5V--- 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 17:38:46

## Test Graph

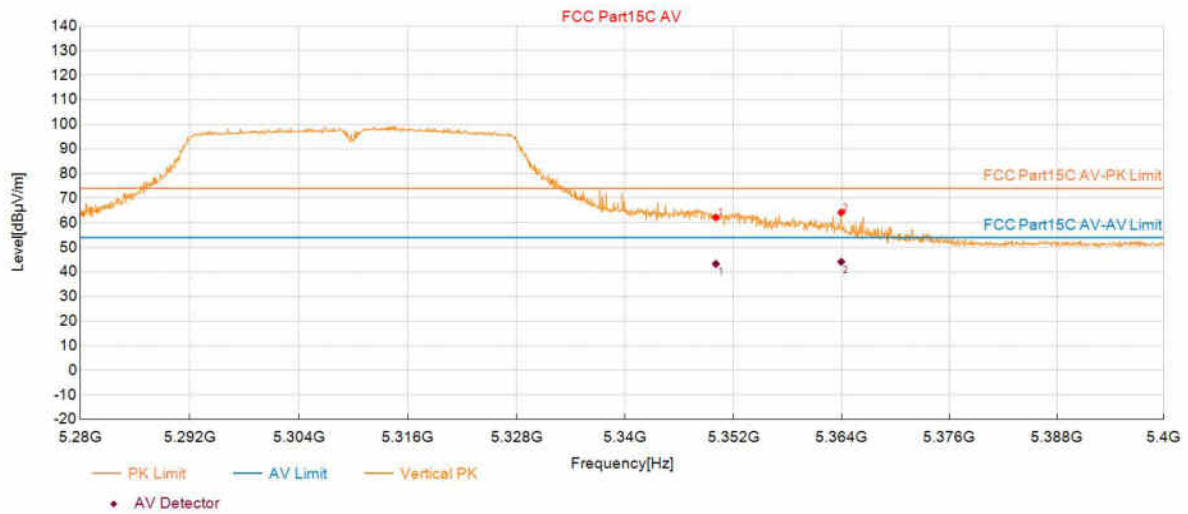

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5350.0550       | 62.17          | 18.34       | 74.00          | 11.83       | 150         | 227       | Vertical |
| 2   | 5363.9820       | 64.16          | 18.41       | 74.00          | 9.84        | 150         | 164       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5350.0550       | 18.34       | 43.27             | 54.00             | 10.73          | 150         | 227       | Vertical |
| 2   | 5363.9820       | 18.41       | 44.11             | 54.00             | 9.89           | 150         | 164       | Vertical |

## Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AC40_5510                 | Voltage:  | 5V== 1A  |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:2 1 0 16          |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-16 17:33:26

### Test Graph

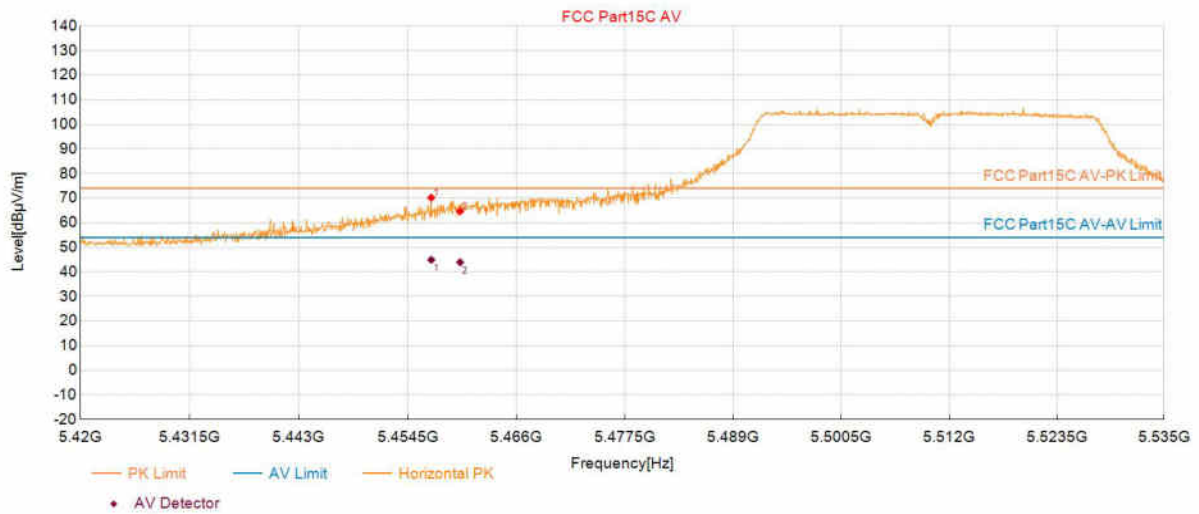

### Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5456.9910       | 70.21          | 18.72       | 74.00          | 3.79        | 150         | 163       | Horizontal |
| 2   | 5460.0400       | 64.65          | 18.72       | 74.00          | 9.35        | 150         | 240       | Horizontal |

### PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5456.9910       | 18.72       | 44.91             | 54.00             | 9.09           | 150         | 163       | Horizontal |
| 2   | 5460.0400       | 18.72       | 43.94             | 54.00             | 10.06          | 150         | 240       | Horizontal |

# Test Report

| Project Information           |                             |           |                |
|-------------------------------|-----------------------------|-----------|----------------|
| Customer:                     |                             |           |                |
| EUT:                          | Seedpace Interactive Player |           |                |
| Model:                        | XHS10A                      | SN:       |                |
| Mode:                         | 11AC40_5510                 | Voltage:  | 5V $\equiv$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu       |
| Remark:                       | Power Set:2 1 0 16          |           |                |
| Test Standard: FCC Part15C AV |                             |           |                |

Start of Test:2025-05-16 17:35:29

## Test Graph

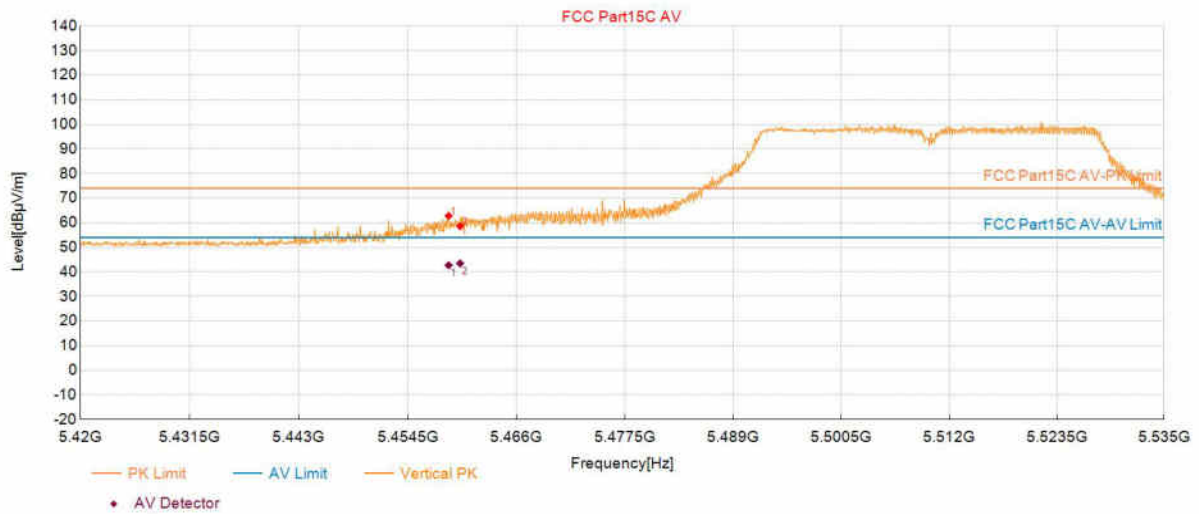

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5458.8319       | 62.83          | 18.72       | 74.00          | 11.17       | 150         | 216       | Vertical |
| 2   | 5460.0400       | 58.55          | 18.72       | 74.00          | 15.45       | 150         | 219       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5458.8319       | 18.72       | 42.71             | 54.00             | 11.29          | 150         | 216       | Vertical |
| 2   | 5460.0400       | 18.72       | 43.48             | 54.00             | 10.52          | 150         | 219       | Vertical |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AC40_5670                 | Voltage:  | 5V--- 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 17:47:50

## Test Graph

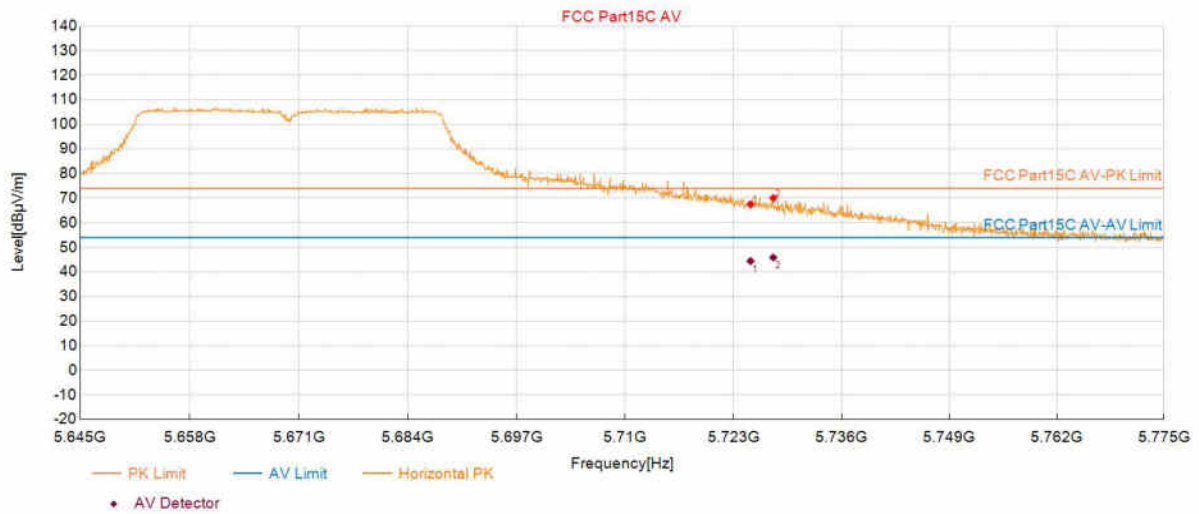

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5725.0550       | 67.42          | 19.93       | 74.00          | 6.58        | 150         | 225       | Horizontal |
| 2   | 5727.7864       | 70.05          | 19.94       | 74.00          | 3.95        | 150         | 158       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5725.0550       | 19.93       | 44.40             | 54.00             | 9.60           | 150         | 225       | Horizontal |
| 2   | 5727.7864       | 19.94       | 45.86             | 54.00             | 8.14           | 150         | 158       | Horizontal |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AC40_5670                 | Voltage:  | 5V= 1A   |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 17:48:29

## Test Graph

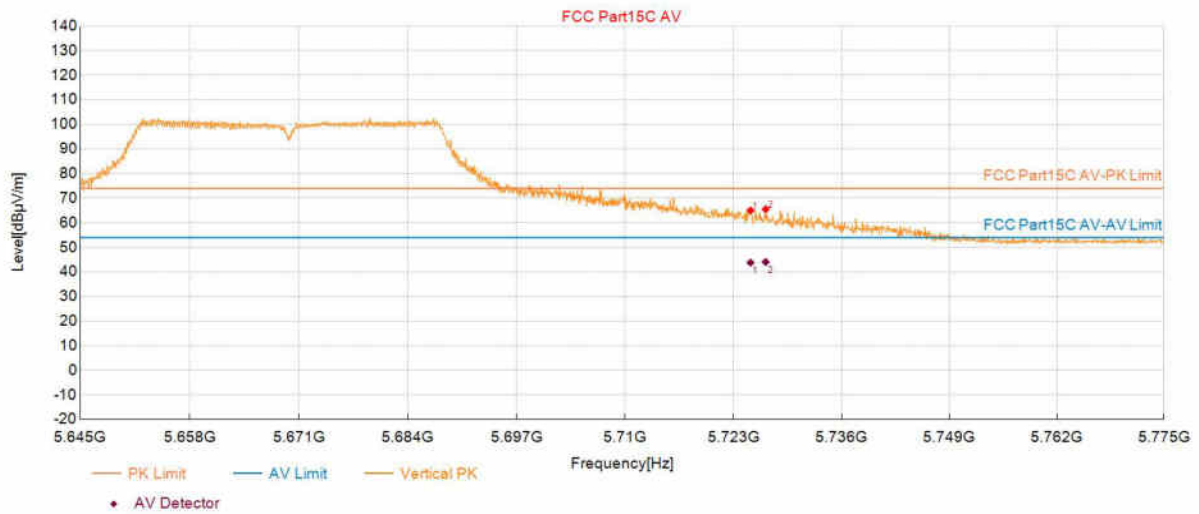

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5725.0550       | 65.00          | 19.93       | 74.00          | 9.00        | 150         | 226       | Vertical |
| 2   | 5726.8759       | 65.48          | 19.93       | 74.00          | 8.52        | 150         | 230       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5725.0550       | 19.93       | 43.78             | 54.00             | 10.22          | 150         | 226       | Vertical |
| 2   | 5726.8759       | 19.93       | 44.04             | 54.00             | 9.96           | 150         | 230       | Vertical |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AX20_5180                 | Voltage:  | 5V--- 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 17:53:25

## Test Graph

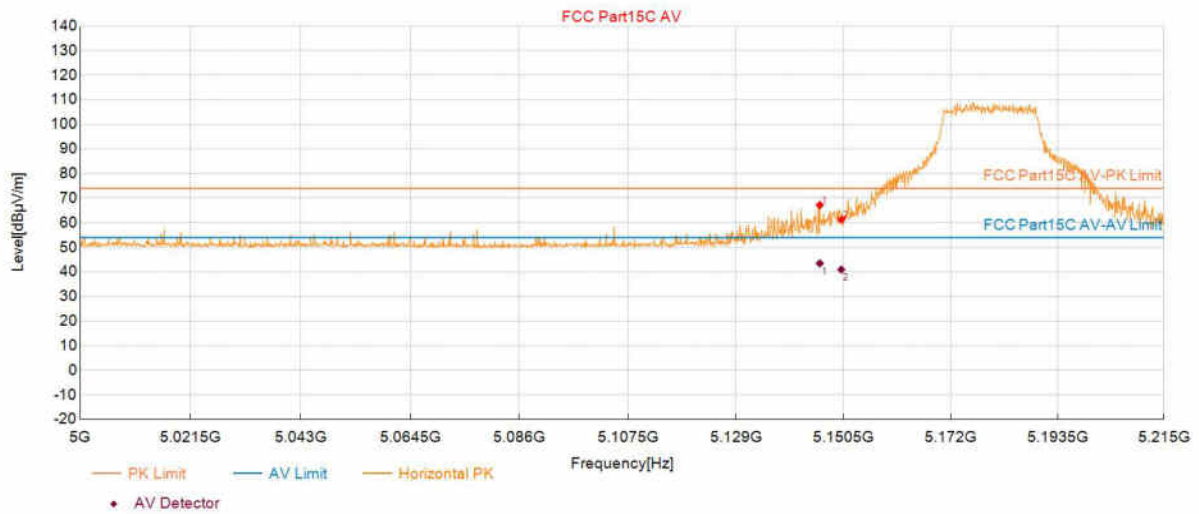

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5145.7354       | 67.17          | 17.80       | 74.00          | 6.83        | 150         | 172       | Horizontal |
| 2   | 5150.0375       | 61.26          | 17.79       | 74.00          | 12.74       | 150         | 226       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5145.7354       | 17.80       | 43.46             | 54.00             | 10.54          | 150         | 172       | Horizontal |
| 2   | 5150.0375       | 17.79       | 40.97             | 54.00             | 13.03          | 150         | 226       | Horizontal |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AX20_5180                 | Voltage:  | 5V= 1A   |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 17:54:05

## Test Graph

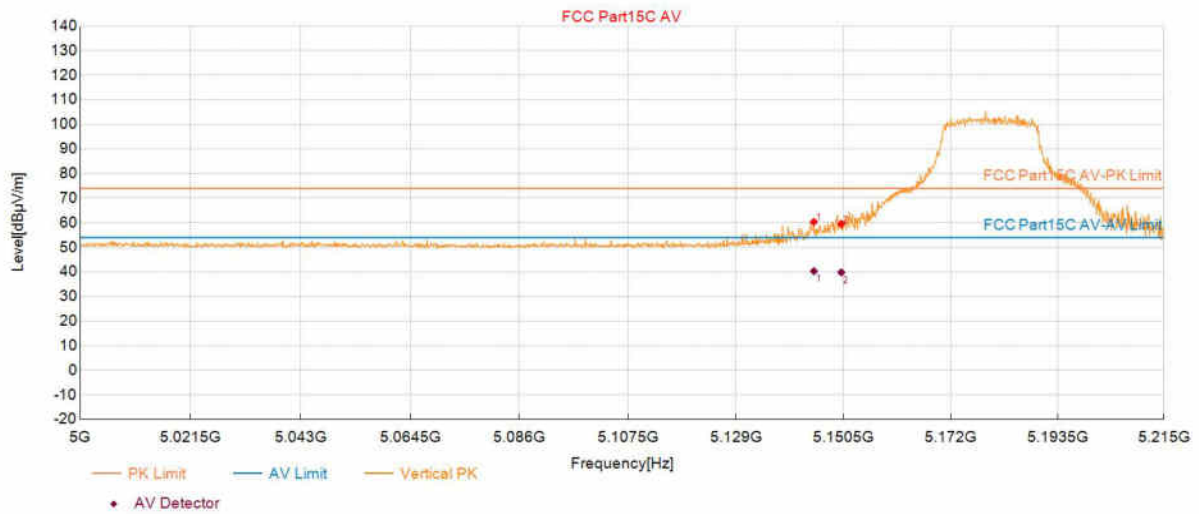

### Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5144.5523       | 60.34          | 17.80       | 74.00          | 13.66       | 150         | 171       | Vertical |
| 2   | 5150.0375       | 59.55          | 17.79       | 74.00          | 14.45       | 150         | 256       | Vertical |

### PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5144.5523       | 17.80       | 40.29             | 54.00             | 13.71          | 150         | 171       | Vertical |
| 2   | 5150.0375       | 17.79       | 39.83             | 54.00             | 14.17          | 150         | 256       | Vertical |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AX20_5320                 | Voltage:  | 5V= 1A   |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 17:59:36

## Test Graph

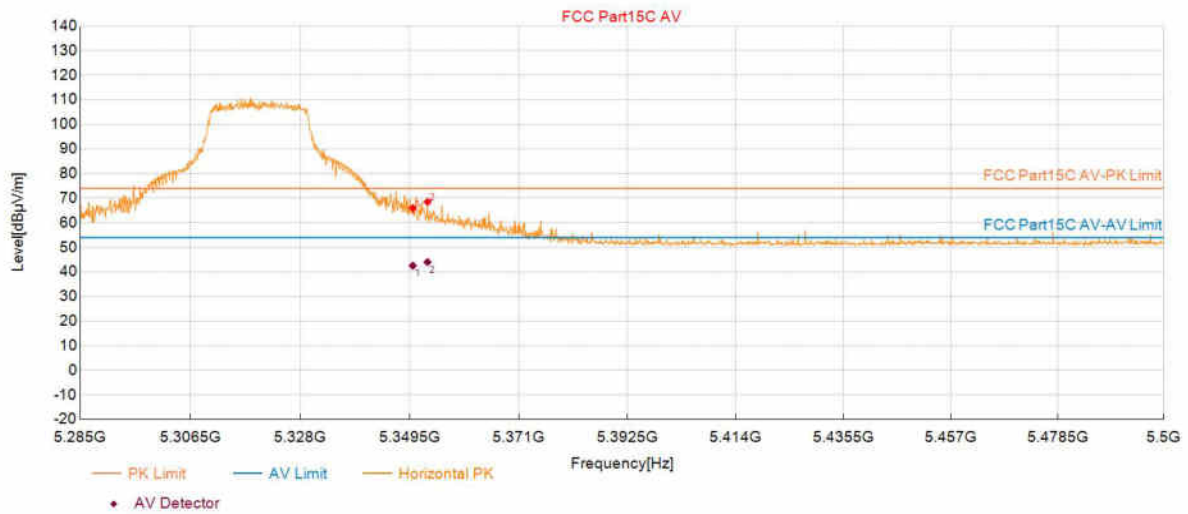

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5350.0700       | 65.97          | 18.34       | 74.00          | 8.03        | 150         | 170       | Horizontal |
| 2   | 5352.9740       | 68.46          | 18.35       | 74.00          | 5.54        | 150         | 157       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5350.0700       | 18.34       | 42.53             | 54.00             | 11.47          | 150         | 170       | Horizontal |
| 2   | 5352.9740       | 18.35       | 44.01             | 54.00             | 9.99           | 150         | 157       | Horizontal |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AX20_5320                 | Voltage:  | 5V--- 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 18:00:16

## Test Graph

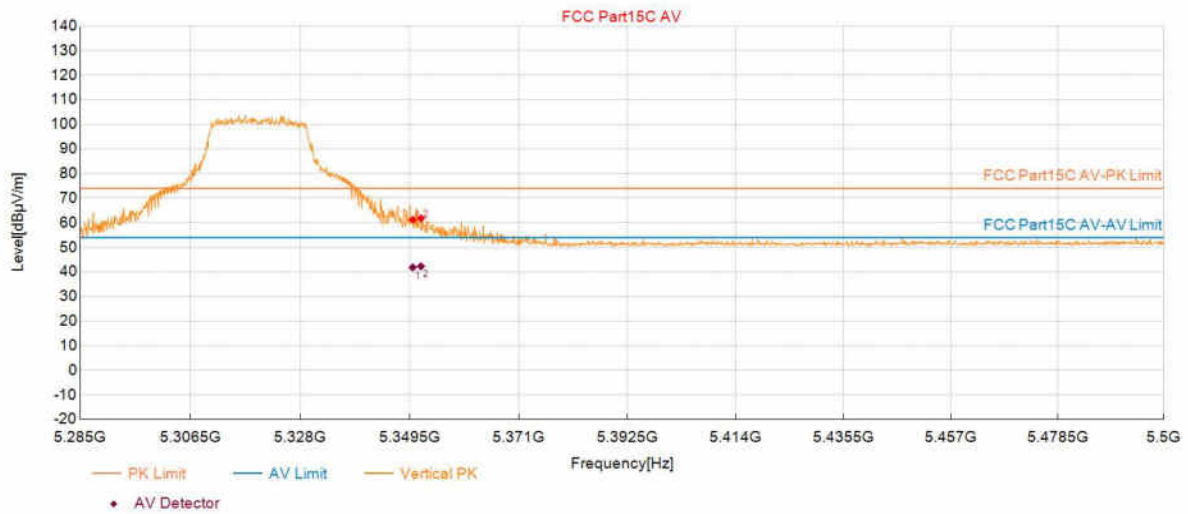

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5350.0700       | 61.19          | 18.34       | 74.00          | 12.81       | 150         | 177       | Vertical |
| 2   | 5351.6833       | 61.78          | 18.34       | 74.00          | 12.22       | 150         | 165       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5350.0700       | 18.34       | 41.85             | 54.00             | 12.15          | 150         | 177       | Vertical |
| 2   | 5351.6833       | 18.34       | 42.28             | 54.00             | 11.72          | 150         | 165       | Vertical |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AX20_5500                 | Voltage:  | 5V--- 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 19:07:05

## Test Graph

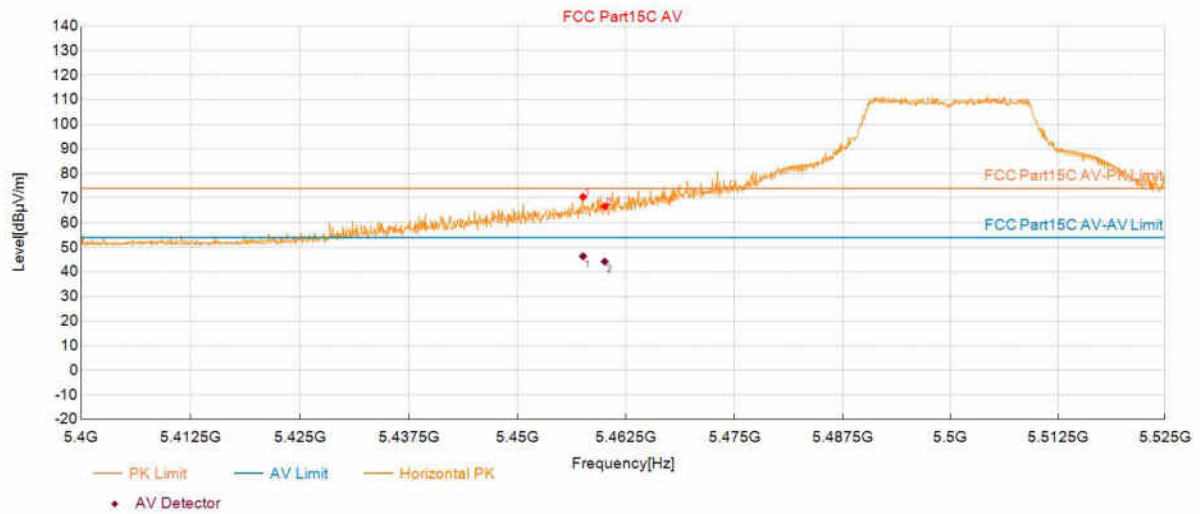

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5457.5288       | 70.49          | 18.72       | 74.00          | 3.51        | 150         | 158       | Horizontal |
| 2   | 5460.0300       | 66.66          | 18.72       | 74.00          | 7.34        | 150         | 146       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5457.5288       | 18.72       | 46.36             | 54.00             | 7.64           | 150         | 158       | Horizontal |
| 2   | 5460.0300       | 18.72       | 44.21             | 54.00             | 9.79           | 150         | 146       | Horizontal |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AX20_5500                 | Voltage:  | 5V--- 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 19:07:45

## Test Graph

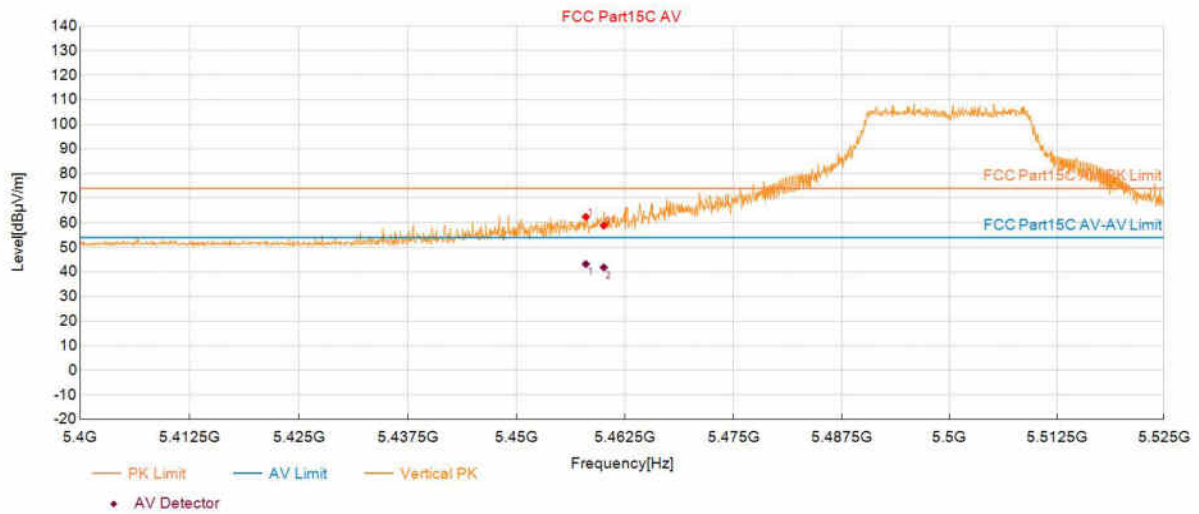

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5457.9665       | 62.37          | 18.72       | 74.00          | 11.63       | 150         | 230       | Vertical |
| 2   | 5460.0300       | 58.83          | 18.72       | 74.00          | 15.17       | 150         | 220       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5457.9665       | 18.72       | 43.21             | 54.00             | 10.79          | 150         | 230       | Vertical |
| 2   | 5460.0300       | 18.72       | 41.81             | 54.00             | 12.19          | 150         | 220       | Vertical |

# Test Report

| Project Information           |                             |           |                |
|-------------------------------|-----------------------------|-----------|----------------|
| Customer:                     |                             |           |                |
| EUT:                          | Seedpace Interactive Player |           |                |
| Model:                        | XHS10A                      | SN:       |                |
| Mode:                         | 11AX20_5700                 | Voltage:  | 5V $\equiv$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu       |
| Remark:                       | Power Set:2 2 0 14          |           |                |
| Test Standard: FCC Part15C AV |                             |           |                |

Start of Test:2025-05-16 17:39:27

## Test Graph

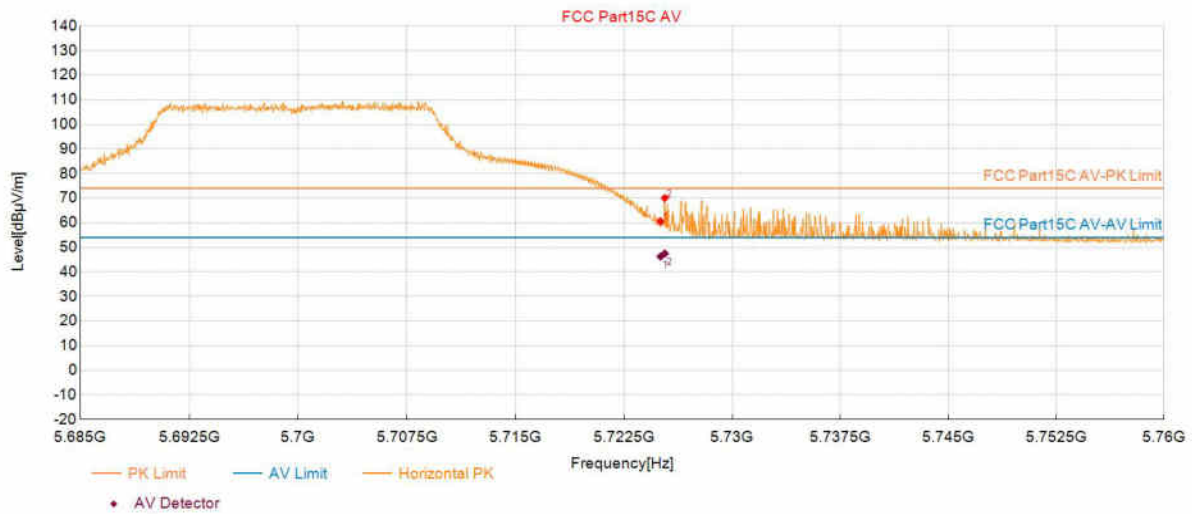

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5725.0325       | 60.58          | 19.93       | 74.00          | 13.42       | 150         | 250       | Horizontal |
| 2   | 5725.3327       | 70.06          | 19.93       | 74.00          | 3.94        | 150         | 194       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5725.0325       | 19.93       | 46.23             | 54.00             | 7.77           | 150         | 250       | Horizontal |
| 2   | 5725.3327       | 19.93       | 47.49             | 54.00             | 6.51           | 150         | 194       | Horizontal |

# Test Report

| Project Information           |                             |           |                |
|-------------------------------|-----------------------------|-----------|----------------|
| Customer:                     |                             |           |                |
| EUT:                          | Seedpace Interactive Player |           |                |
| Model:                        | XHS10A                      | SN:       |                |
| Mode:                         | 11AX20_5700                 | Voltage:  | 5V $\equiv$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu       |
| Remark:                       | Power Set:2 2 0 14          |           |                |
| Test Standard: FCC Part15C AV |                             |           |                |

Start of Test:2025-05-16 17:40:07

## Test Graph

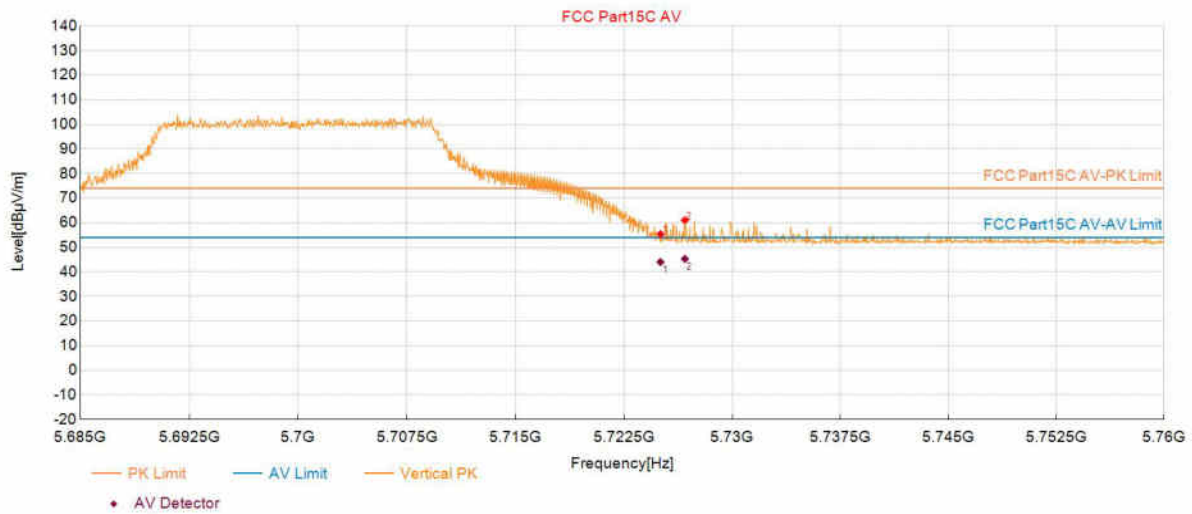

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5725.0325       | 55.38          | 19.93       | 74.00          | 18.62       | 150         | 239       | Vertical |
| 2   | 5726.7209       | 61.04          | 19.93       | 74.00          | 12.96       | 150         | 270       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5725.0325       | 19.93       | 44.02             | 54.00             | 9.98           | 150         | 239       | Vertical |
| 2   | 5726.7209       | 19.93       | 45.29             | 54.00             | 8.71           | 150         | 270       | Vertical |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AX40_5190                 | Voltage:  | 5V--- 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:Default           |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-14 19:19:34

## Test Graph

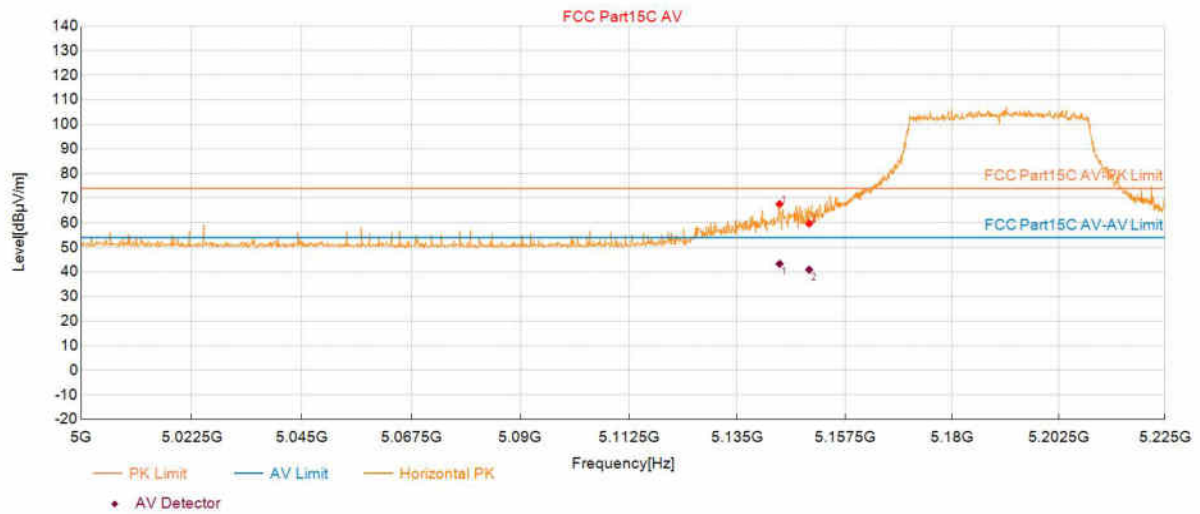

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5143.8469       | 67.57          | 17.80       | 74.00          | 6.43        | 150         | 170       | Horizontal |
| 2   | 5150.0375       | 59.62          | 17.79       | 74.00          | 14.38       | 150         | 166       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5143.8469       | 17.80       | 43.29             | 54.00             | 10.71          | 150         | 170       | Horizontal |
| 2   | 5150.0375       | 17.79       | 40.89             | 54.00             | 13.11          | 150         | 166       | Horizontal |

# Test Report

| Project Information           |                             |           |                     |
|-------------------------------|-----------------------------|-----------|---------------------|
| Customer:                     |                             |           |                     |
| EUT:                          | Seedpace Interactive Player |           |                     |
| Model:                        | XHS10A                      | SN:       |                     |
| Mode:                         | 11AX40_5190                 | Voltage:  | 5V <sub>DC</sub> 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu            |
| Remark:                       | Power Set:Default           |           |                     |
| Test Standard: FCC Part15C AV |                             |           |                     |

Start of Test:2025-05-14 19:20:14

## Test Graph

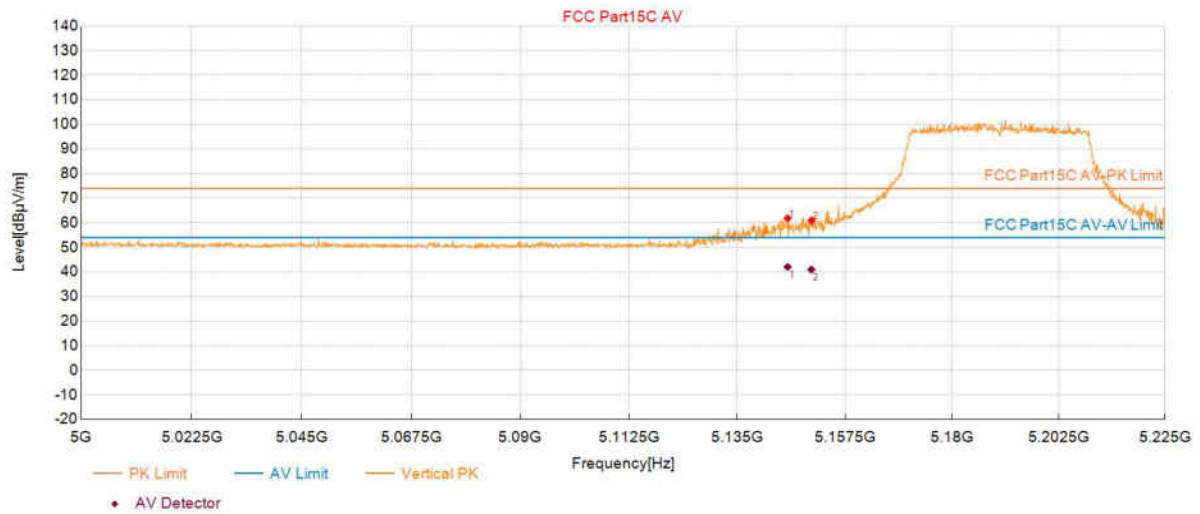

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5145.5353       | 61.76          | 17.80       | 74.00          | 12.24       | 150         | 164       | Vertical |
| 2   | 5150.4877       | 60.89          | 17.79       | 74.00          | 13.11       | 150         | 270       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5145.5353       | 17.80       | 42.02             | 54.00             | 11.98          | 150         | 164       | Vertical |
| 2   | 5150.4877       | 17.79       | 40.95             | 54.00             | 13.05          | 150         | 270       | Vertical |

# Test Report

| Project Information           |                             |           |                |
|-------------------------------|-----------------------------|-----------|----------------|
| Customer:                     |                             |           |                |
| EUT:                          | Seedpace Interactive Player |           |                |
| Model:                        | XHS10A                      | SN:       |                |
| Mode:                         | 11AX40_5310                 | Voltage:  | 5V $\equiv$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu       |
| Remark:                       | Power Set:2 2 0 17          |           |                |
| Test Standard: FCC Part15C AV |                             |           |                |

Start of Test:2025-05-16 17:44:55

## Test Graph

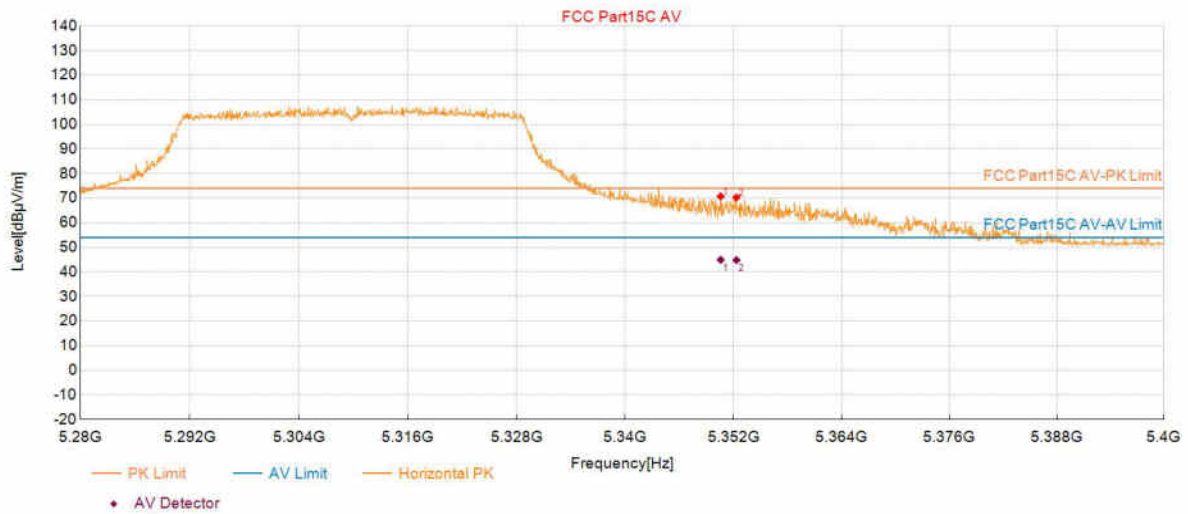

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5350.5953       | 70.71          | 18.34       | 74.00          | 3.29        | 150         | 176       | Horizontal |
| 2   | 5352.3362       | 70.31          | 18.35       | 74.00          | 3.69        | 150         | 184       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5350.5953       | 18.34       | 44.91             | 54.00             | 9.09           | 150         | 176       | Horizontal |
| 2   | 5352.3362       | 18.35       | 44.84             | 54.00             | 9.16           | 150         | 184       | Horizontal |

# Test Report

| Project Information           |                             |           |          |
|-------------------------------|-----------------------------|-----------|----------|
| Customer:                     |                             |           |          |
| EUT:                          | Seedpace Interactive Player |           |          |
| Model:                        | XHS10A                      | SN:       |          |
| Mode:                         | 11AX40_5310                 | Voltage:  | 5V= 1A   |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu |
| Remark:                       | Power Set:2 2 0 17          |           |          |
| Test Standard: FCC Part15C AV |                             |           |          |

Start of Test:2025-05-16 17:45:34

## Test Graph

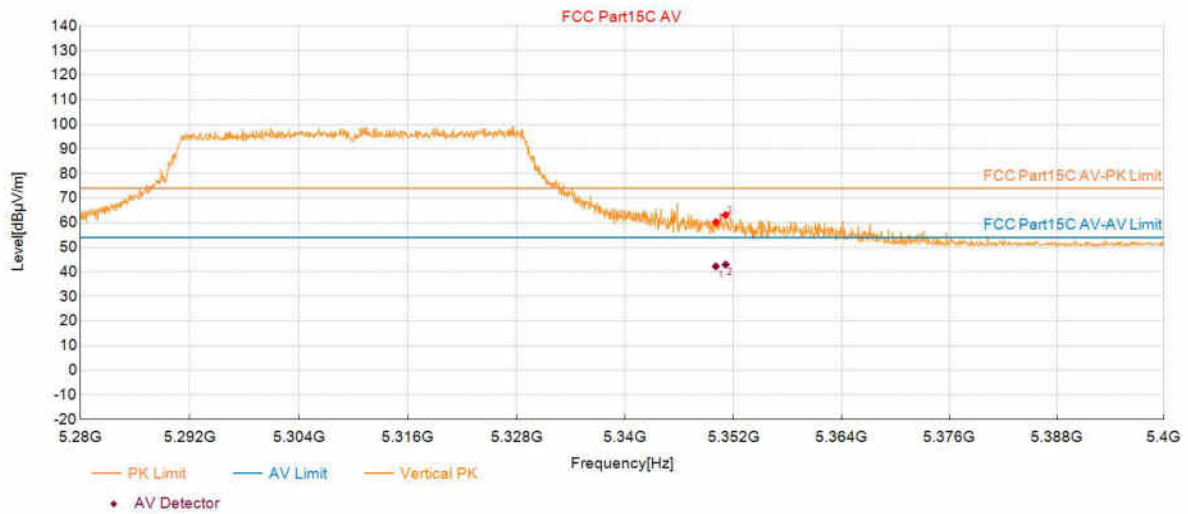

### Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5350.0550       | 60.23          | 18.34       | 74.00          | 13.77       | 150         | 224       | Vertical |
| 2   | 5351.1356       | 63.08          | 18.34       | 74.00          | 10.92       | 150         | 215       | Vertical |

### PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5350.0550       | 18.34       | 42.23             | 54.00             | 11.77          | 150         | 224       | Vertical |
| 2   | 5351.1356       | 18.34       | 42.99             | 54.00             | 11.01          | 150         | 215       | Vertical |

# Test Report

| Project Information           |                             |           |                 |
|-------------------------------|-----------------------------|-----------|-----------------|
| Customer:                     |                             |           |                 |
| EUT:                          | Seedpace Interactive Player |           |                 |
| Model:                        | XHS10A                      | SN:       |                 |
| Mode:                         | 11AX40_5510                 | Voltage:  | 5V $\approx$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu        |
| Remark:                       | Power Set:2 2 0 17          |           |                 |
| Test Standard: FCC Part15C AV |                             |           |                 |

Start of Test:2025-05-16 17:51:45

## Test Graph

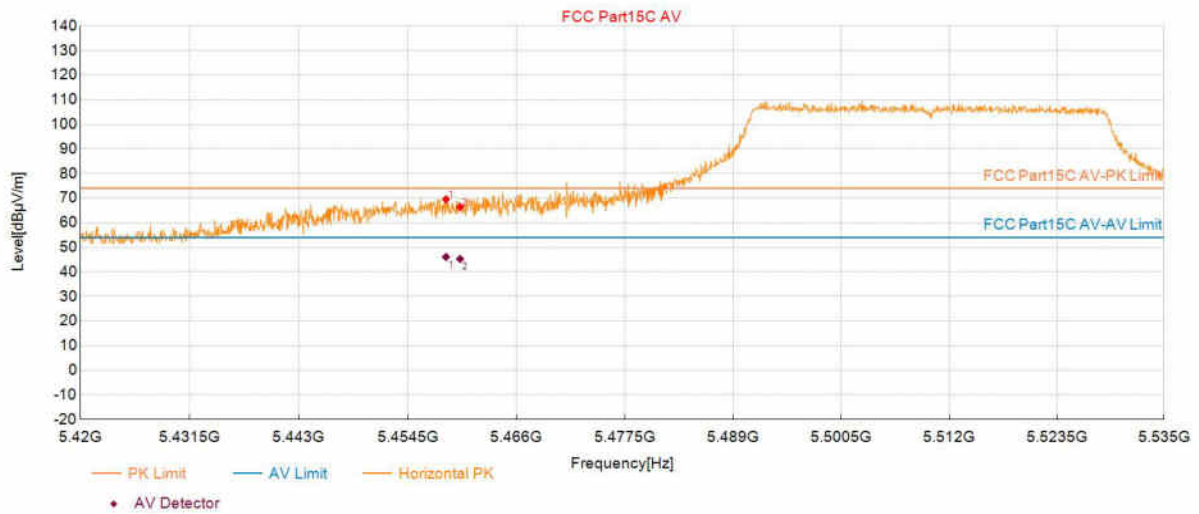

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5458.5443       | 69.53          | 18.72       | 74.00          | 4.47        | 150         | 173       | Horizontal |
| 2   | 5460.0400       | 66.36          | 18.72       | 74.00          | 7.64        | 150         | 173       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5458.5443       | 18.72       | 46.08             | 54.00             | 7.92           | 150         | 173       | Horizontal |
| 2   | 5460.0400       | 18.72       | 45.27             | 54.00             | 8.73           | 150         | 173       | Horizontal |

# Test Report

| Project Information           |                             |           |                 |
|-------------------------------|-----------------------------|-----------|-----------------|
| Customer:                     |                             |           |                 |
| EUT:                          | Seedpace Interactive Player |           |                 |
| Model:                        | XHS10A                      | SN:       |                 |
| Mode:                         | 11AX40_5510                 | Voltage:  | 5V $\approx$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu        |
| Remark:                       | Power Set:2 2 0 17          |           |                 |
| Test Standard: FCC Part15C AV |                             |           |                 |

Start of Test:2025-05-16 17:52:25

## Test Graph

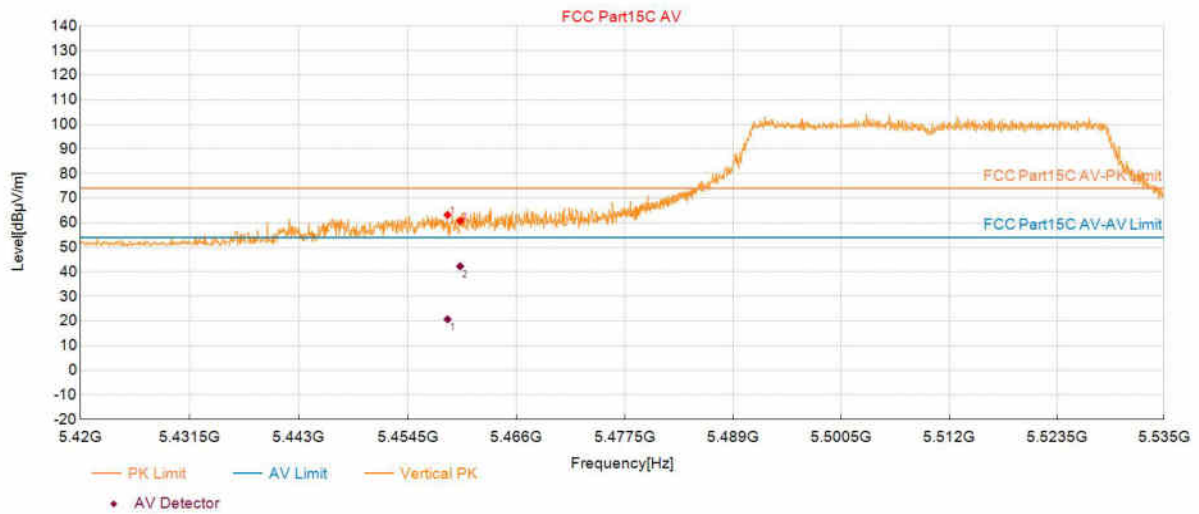

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5458.7169       | 63.19          | 18.72       | 74.00          | 10.81       | 150         | 213       | Vertical |
| 2   | 5460.0400       | 60.70          | 18.72       | 74.00          | 13.30       | 150         | 223       | Vertical |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5458.7169       | 18.72       | 20.72             | 54.00             | 33.28          | 150         | 213       | Vertical |
| 2   | 5460.0400       | 18.72       | 42.30             | 54.00             | 11.70          | 150         | 223       | Vertical |

# Test Report

| Project Information           |                             |           |                 |
|-------------------------------|-----------------------------|-----------|-----------------|
| Customer:                     |                             |           |                 |
| EUT:                          | Seedpace Interactive Player |           |                 |
| Model:                        | XHS10A                      | SN:       |                 |
| Mode:                         | 11AX40_5670                 | Voltage:  | 5V $\approx$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu        |
| Remark:                       | Power Set:2 2 0 17          |           |                 |
| Test Standard: FCC Part15C AV |                             |           |                 |

Start of Test:2025-05-16 17:56:12

## Test Graph

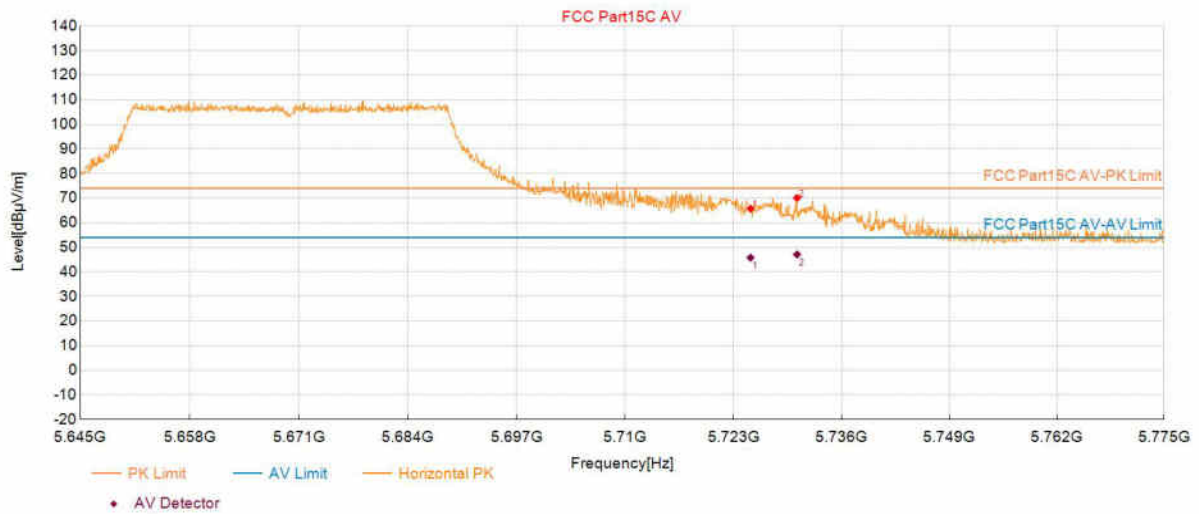

## Suspected Data List

| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5725.0550       | 65.72          | 19.93       | 74.00          | 8.28        | 150         | 202       | Horizontal |
| 2   | 5730.6478       | 70.07          | 19.95       | 74.00          | 3.93        | 150         | 175       | Horizontal |

## PK Final Data List


| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5725.0550       | 19.93       | 45.80             | 54.00             | 8.20           | 150         | 202       | Horizontal |
| 2   | 5730.6478       | 19.95       | 47.11             | 54.00             | 6.89           | 150         | 175       | Horizontal |

# Test Report

| Project Information           |                             |           |                 |
|-------------------------------|-----------------------------|-----------|-----------------|
| Customer:                     |                             |           |                 |
| EUT:                          | Seedpace Interactive Player |           |                 |
| Model:                        | XHS10A                      | SN:       |                 |
| Mode:                         | 11AX40_5670                 | Voltage:  | 5V $\approx$ 1A |
| Environment:                  | Temp: 25℃; Humi:60%         | Engineer: | Soho Liu        |
| Remark:                       | Power Set:2 2 0 17          |           |                 |
| Test Standard: FCC Part15C AV |                             |           |                 |

Start of Test:2025-05-16 17:56:51

## Test Graph

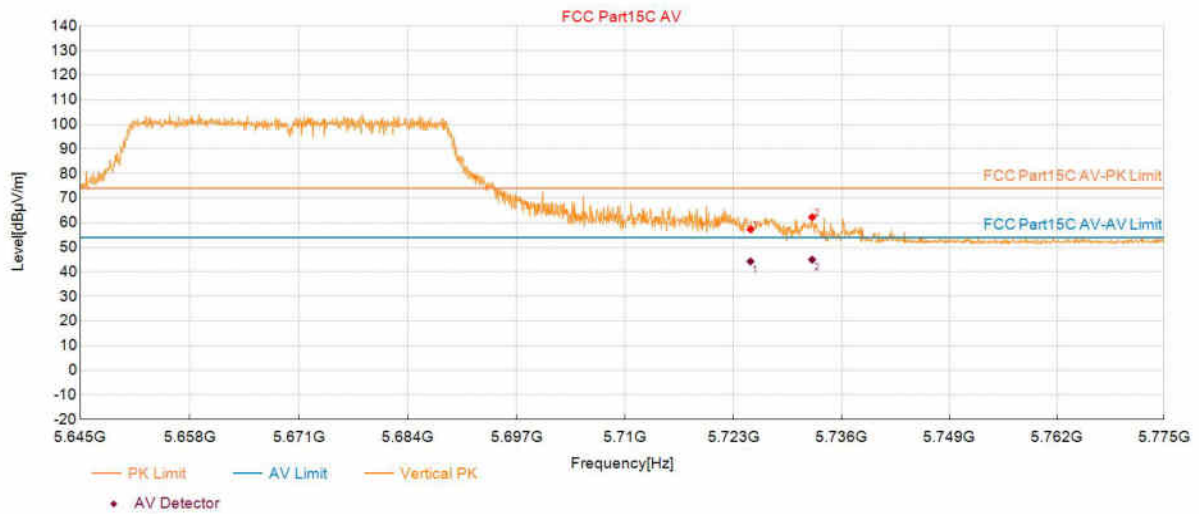


## Suspected Data List


| NO. | Frequency [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5725.0550       | 57.34          | 19.93       | 74.00          | 16.66       | 150         | 230       | Vertical |
| 2   | 5732.4687       | 62.23          | 19.96       | 74.00          | 11.77       | 150         | 212       | Vertical |

## PK Final Data List

| NO. | Frequency [MHz] | Factor [dB] | AV Value [dBμV/m] | AV Limit [dBμV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-----------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5725.0550       | 19.93       | 44.26             | 54.00             | 9.74           | 150         | 230       | Vertical |
| 2   | 5732.4687       | 19.96       | 44.97             | 54.00             | 9.03           | 150         | 212       | Vertical |

## APPENDIX C – AC Power Line Conducted Emission Test Data

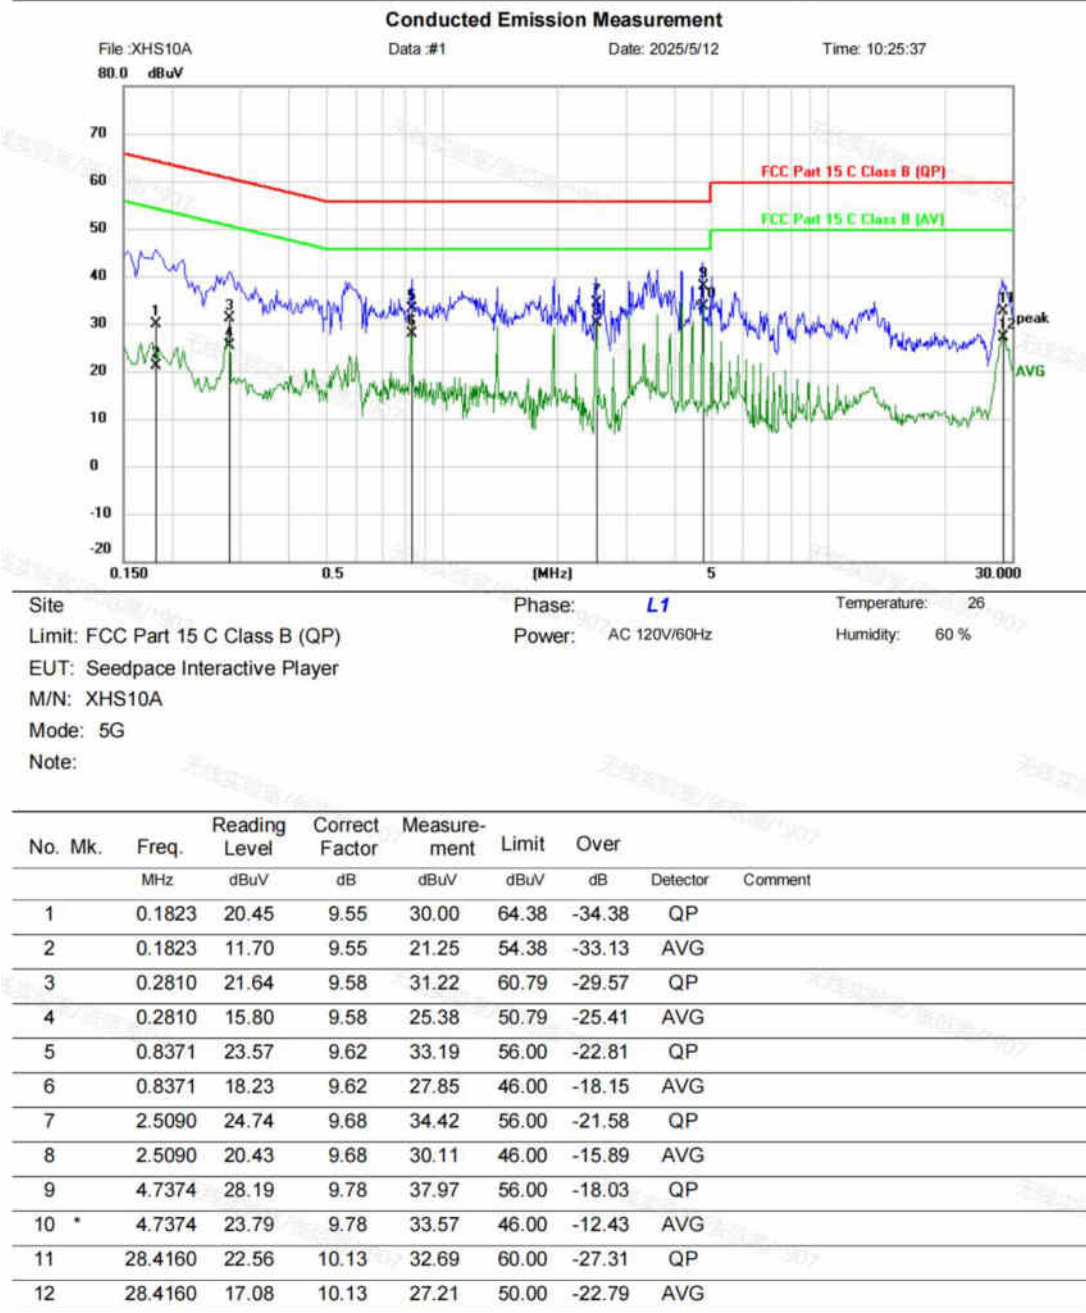

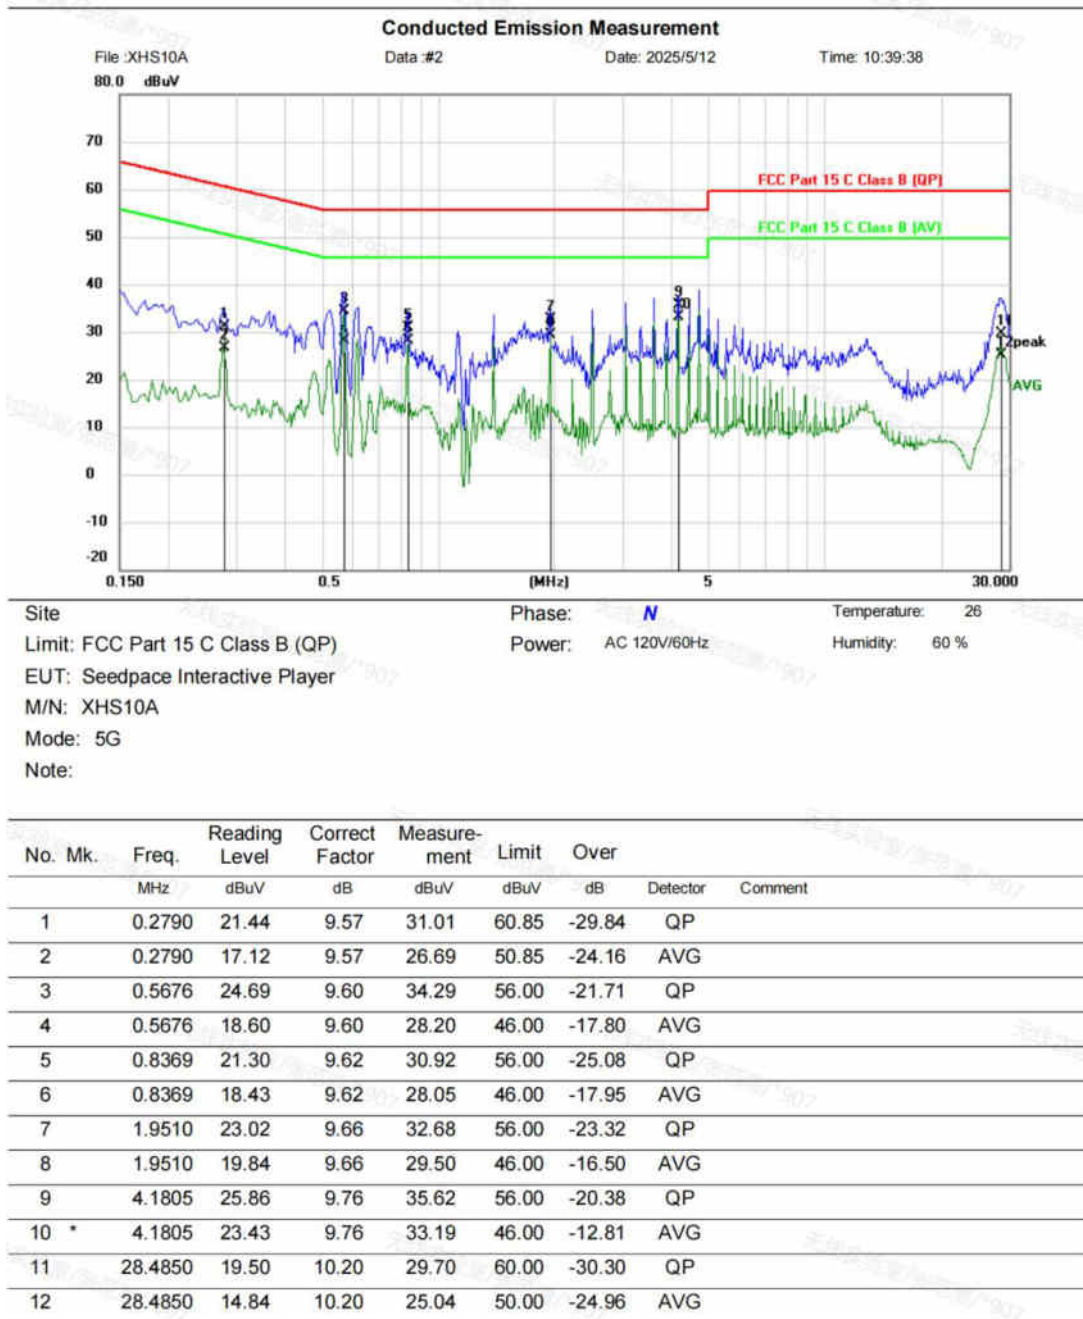

**END OF REPORT**