



Modulation	ax HE40_RU242	Test Freq. (MHz)	2452
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2452
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			

Page No. : 39 of 42



Modulation	ax HE40_RU242	Test Freq. (MHz)	2457
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			

Configuration 3: 2Tx, port 1 + 2, AYF6Y-100184 + AYF6Y-100185 antenna

Unwanted Emissions (Below 1GHz)

Modulation	ax HE40	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			




Modulation	ax HE40	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) <			



Unwanted Emissions (Above 1GHz) for ax HE20

Modulation	ax HE20		Test Freq. (MHz)		2412	
Polarization	Horizontal					
Test By :Brad Wu Temperature(°C):24 Humidity(%):65						
Level (dBUV/m) <						

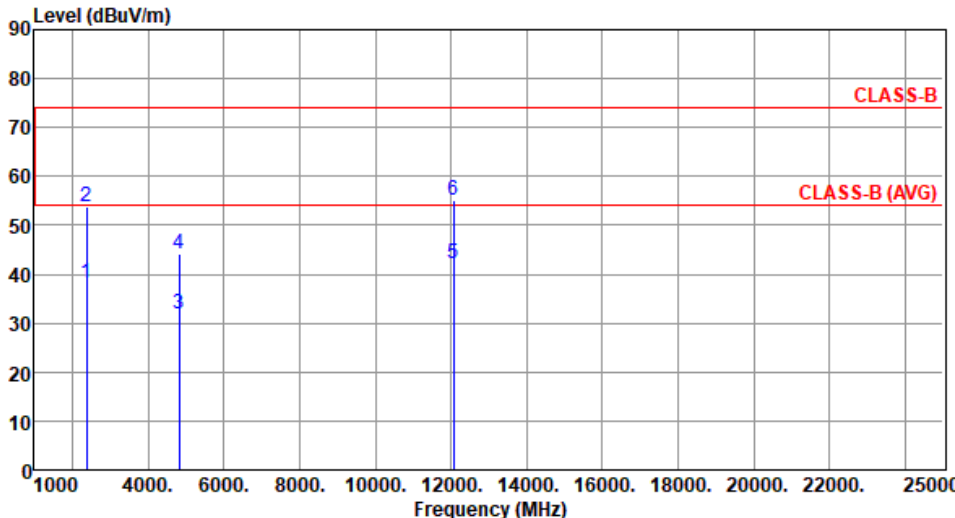

Modulation	ax HE20	Test Freq. (MHz)	2412						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):24 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.33	54.00	-15.67	41.08	-2.75	Average	100	169
2	2390.00	53.65	74.00	-20.35	56.40	-2.75	Peak	100	169
3	4824.00	31.85	54.00	-22.15	27.71	4.14	Average	100	25
4	4824.00	44.26	74.00	-29.74	40.12	4.14	Peak	100	25
5	12060.00	42.18	54.00	-11.82	28.39	13.79	Average	100	55
6	12060.00	55.29	74.00	-18.71	41.50	13.79	Peak	100	55
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	ax HE20	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) <			



Modulation	ax HE20	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) </			



Modulation	ax HE20	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE20	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) </			



Modulation	ax HE20	Test Freq. (MHz)	2467
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			



Modulation	ax HE20	Test Freq. (MHz)	2467																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):64																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>2483.50</td><td>38.66</td><td>54.00</td><td>-15.34</td><td>41.36</td><td>-2.70</td><td>Average</td><td>105</td><td>159</td></tr><tr><td>2</td><td>2483.50</td><td>51.49</td><td>74.00</td><td>-22.51</td><td>54.19</td><td>-2.70</td><td>Peak</td><td>105</td><td>159</td></tr><tr><td>3</td><td>4934.00</td><td>32.05</td><td>54.00</td><td>-21.95</td><td>28.01</td><td>4.04</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>4</td><td>4934.00</td><td>44.42</td><td>74.00</td><td>-29.58</td><td>40.38</td><td>4.04</td><td>Peak</td><td>100</td><td>33</td></tr><tr><td>5</td><td>7401.00</td><td>35.02</td><td>54.00</td><td>-18.98</td><td>25.78</td><td>9.24</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>7401.00</td><td>47.68</td><td>74.00</td><td>-26.32</td><td>38.44</td><td>9.24</td><td>Peak</td><td>100</td><td>29</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2483.50	38.66	54.00	-15.34	41.36	-2.70	Average	105	159	2	2483.50	51.49	74.00	-22.51	54.19	-2.70	Peak	105	159	3	4934.00	32.05	54.00	-21.95	28.01	4.04	Average	100	33	4	4934.00	44.42	74.00	-29.58	40.38	4.04	Peak	100	33	5	7401.00	35.02	54.00	-18.98	25.78	9.24	Average	100	29	6	7401.00	47.68	74.00	-26.32	38.44	9.24	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	2483.50	38.66	54.00	-15.34	41.36	-2.70	Average	105	159																																																																
2	2483.50	51.49	74.00	-22.51	54.19	-2.70	Peak	105	159																																																																
3	4934.00	32.05	54.00	-21.95	28.01	4.04	Average	100	33																																																																
4	4934.00	44.42	74.00	-29.58	40.38	4.04	Peak	100	33																																																																
5	7401.00	35.02	54.00	-18.98	25.78	9.24	Average	100	29																																																																
6	7401.00	47.68	74.00	-26.32	38.44	9.24	Peak	100	29																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20	Test Freq. (MHz)	2472
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	ax HE20	Test Freq. (MHz)	2472																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):64																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>2483.50</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>42.95</td><td>-2.70</td><td>Average</td><td>102</td><td>158</td></tr><tr><td>2</td><td>2483.50</td><td>58.62</td><td>74.00</td><td>-15.38</td><td>61.32</td><td>-2.70</td><td>Peak</td><td>102</td><td>158</td></tr><tr><td>3</td><td>4944.00</td><td>32.18</td><td>54.00</td><td>-21.82</td><td>28.14</td><td>4.04</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>4</td><td>4944.00</td><td>44.29</td><td>74.00</td><td>-29.71</td><td>40.25</td><td>4.04</td><td>Peak</td><td>100</td><td>82</td></tr><tr><td>5</td><td>7416.00</td><td>34.87</td><td>54.00</td><td>-19.13</td><td>25.58</td><td>9.29</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>6</td><td>7416.00</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>38.26</td><td>9.29</td><td>Peak</td><td>100</td><td>46</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2483.50	40.25	54.00	-13.75	42.95	-2.70	Average	102	158	2	2483.50	58.62	74.00	-15.38	61.32	-2.70	Peak	102	158	3	4944.00	32.18	54.00	-21.82	28.14	4.04	Average	100	82	4	4944.00	44.29	74.00	-29.71	40.25	4.04	Peak	100	82	5	7416.00	34.87	54.00	-19.13	25.58	9.29	Average	100	46	6	7416.00	47.55	74.00	-26.45	38.26	9.29	Peak	100	46
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	2483.50	40.25	54.00	-13.75	42.95	-2.70	Average	102	158																																																																
2	2483.50	58.62	74.00	-15.38	61.32	-2.70	Peak	102	158																																																																
3	4944.00	32.18	54.00	-21.82	28.14	4.04	Average	100	82																																																																
4	4944.00	44.29	74.00	-29.71	40.25	4.04	Peak	100	82																																																																
5	7416.00	34.87	54.00	-19.13	25.58	9.29	Average	100	46																																																																
6	7416.00	47.55	74.00	-26.45	38.26	9.29	Peak	100	46																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Unwanted Emissions (Above 1GHz) for ax HE40

Modulation	ax HE40		Test Freq. (MHz)		2422	
Polarization	Horizontal					
Test By :Brad Wu Temperature(°C):24 Humidity(%):65						
Level (dBUV/m)						



Modulation	ax HE40	Test Freq. (MHz)	2422																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):65																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>2390.00</td><td>38.45</td><td>54.00</td><td>-15.55</td><td>41.20</td><td>-2.75</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>2</td><td>2390.00</td><td>53.82</td><td>74.00</td><td>-20.18</td><td>56.57</td><td>-2.75</td><td>Peak</td><td>100</td><td>172</td></tr><tr><td>3</td><td>4844.00</td><td>31.85</td><td>54.00</td><td>-22.15</td><td>27.69</td><td>4.16</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>4</td><td>4844.00</td><td>44.29</td><td>74.00</td><td>-29.71</td><td>40.13</td><td>4.16</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>5</td><td>7266.00</td><td>34.98</td><td>54.00</td><td>-19.02</td><td>25.75</td><td>9.23</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>6</td><td>7266.00</td><td>47.61</td><td>74.00</td><td>-26.39</td><td>38.38</td><td>9.23</td><td>Peak</td><td>100</td><td>25</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2390.00	38.45	54.00	-15.55	41.20	-2.75	Average	100	172	2	2390.00	53.82	74.00	-20.18	56.57	-2.75	Peak	100	172	3	4844.00	31.85	54.00	-22.15	27.69	4.16	Average	100	28	4	4844.00	44.29	74.00	-29.71	40.13	4.16	Peak	100	28	5	7266.00	34.98	54.00	-19.02	25.75	9.23	Average	100	25	6	7266.00	47.61	74.00	-26.39	38.38	9.23	Peak	100	25
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	2390.00	38.45	54.00	-15.55	41.20	-2.75	Average	100	172																																																																
2	2390.00	53.82	74.00	-20.18	56.57	-2.75	Peak	100	172																																																																
3	4844.00	31.85	54.00	-22.15	27.69	4.16	Average	100	28																																																																
4	4844.00	44.29	74.00	-29.71	40.13	4.16	Peak	100	28																																																																
5	7266.00	34.98	54.00	-19.02	25.75	9.23	Average	100	25																																																																
6	7266.00	47.61	74.00	-26.39	38.38	9.23	Peak	100	25																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE40		Test Freq. (MHz)		2437	
Polarization	Horizontal					
Test By :Brad Wu Temperature(°C):24 Humidity(%):65						
Level (dBUV/m) <						



Modulation	ax HE40	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	2452
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	2452
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	2457
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			



Modulation	ax HE40	Test Freq. (MHz)	2457																																																																						
Polarization	Vertical																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):64																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>2483.50</td><td>39.46</td><td>54.00</td><td>-14.54</td><td>42.16</td><td>-2.70</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>2</td><td>2483.50</td><td>52.19</td><td>74.00</td><td>-21.81</td><td>54.89</td><td>-2.70</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>3</td><td>4914.00</td><td>32.15</td><td>54.00</td><td>-21.85</td><td>28.07</td><td>4.08</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>4</td><td>4914.00</td><td>44.36</td><td>74.00</td><td>-29.64</td><td>40.28</td><td>4.08</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>5</td><td>7371.00</td><td>34.89</td><td>54.00</td><td>-19.11</td><td>25.64</td><td>9.25</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>6</td><td>7371.00</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>38.32</td><td>9.25</td><td>Peak</td><td>100</td><td>31</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2483.50	39.46	54.00	-14.54	42.16	-2.70	Average	100	162	2	2483.50	52.19	74.00	-21.81	54.89	-2.70	Peak	100	162	3	4914.00	32.15	54.00	-21.85	28.07	4.08	Average	100	48	4	4914.00	44.36	74.00	-29.64	40.28	4.08	Peak	100	48	5	7371.00	34.89	54.00	-19.11	25.64	9.25	Average	100	31	6	7371.00	47.57	74.00	-26.43	38.32	9.25	Peak	100	31
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	2483.50	39.46	54.00	-14.54	42.16	-2.70	Average	100	162																																																																
2	2483.50	52.19	74.00	-21.81	54.89	-2.70	Peak	100	162																																																																
3	4914.00	32.15	54.00	-21.85	28.07	4.08	Average	100	48																																																																
4	4914.00	44.36	74.00	-29.64	40.28	4.08	Peak	100	48																																																																
5	7371.00	34.89	54.00	-19.11	25.64	9.25	Average	100	31																																																																
6	7371.00	47.57	74.00	-26.43	38.32	9.25	Peak	100	31																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE40	Test Freq. (MHz)	2462																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):64																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>2483.50</td><td>46.73</td><td>54.00</td><td>-7.27</td><td>49.43</td><td>-2.70</td><td>Average</td><td>168</td><td>235</td></tr><tr><td>2</td><td>2483.50</td><td>65.79</td><td>74.00</td><td>-8.21</td><td>68.49</td><td>-2.70</td><td>Peak</td><td>168</td><td>235</td></tr><tr><td>3</td><td>4924.00</td><td>33.21</td><td>54.00</td><td>-20.79</td><td>29.15</td><td>4.06</td><td>Average</td><td>122</td><td>49</td></tr><tr><td>4</td><td>4924.00</td><td>46.18</td><td>74.00</td><td>-27.82</td><td>42.12</td><td>4.06</td><td>Peak</td><td>122</td><td>49</td></tr><tr><td>5</td><td>7386.00</td><td>35.19</td><td>54.00</td><td>-18.81</td><td>25.94</td><td>9.25</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>7386.00</td><td>48.05</td><td>74.00</td><td>-25.95</td><td>38.80</td><td>9.25</td><td>Peak</td><td>100</td><td>22</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2483.50	46.73	54.00	-7.27	49.43	-2.70	Average	168	235	2	2483.50	65.79	74.00	-8.21	68.49	-2.70	Peak	168	235	3	4924.00	33.21	54.00	-20.79	29.15	4.06	Average	122	49	4	4924.00	46.18	74.00	-27.82	42.12	4.06	Peak	122	49	5	7386.00	35.19	54.00	-18.81	25.94	9.25	Average	100	22	6	7386.00	48.05	74.00	-25.95	38.80	9.25	Peak	100	22
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	2483.50	46.73	54.00	-7.27	49.43	-2.70	Average	168	235																																																																
2	2483.50	65.79	74.00	-8.21	68.49	-2.70	Peak	168	235																																																																
3	4924.00	33.21	54.00	-20.79	29.15	4.06	Average	122	49																																																																
4	4924.00	46.18	74.00	-27.82	42.12	4.06	Peak	122	49																																																																
5	7386.00	35.19	54.00	-18.81	25.94	9.25	Average	100	22																																																																
6	7386.00	48.05	74.00	-25.95	38.80	9.25	Peak	100	22																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE40	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			



11ax Partial RU mode: Configuration 3: 2Tx, port 1 + 2, AYF6Y-100184 + AYF6Y-100185 antenna

Unwanted Emissions (Below 1GHz)

Modulation	ax HE20_RU 26		Test Freq. (MHz)		2437		
Polarization	Horizontal						
Test By		:Roger Lu		Temperature(°C):23		Humidity(%):65	
Level (dBuV/m) <							



Modulation	ax HE20_RU 26	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) </			

Unwanted Emissions (Above 1GHz) for ax HE20_RU26

Modulation	ax HE20_RU26	Test Freq. (MHz)	2412
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBUV/m) <			



Modulation	ax HE20_RU26	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBUV/m) </			



Modulation	ax HE20_RU26	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) <			



Modulation	ax HE20_RU26	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			



Modulation	ax HE20_RU26	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE20_RU26	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE20_RU26	Test Freq. (MHz)	2467
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			



Modulation	ax HE20_RU26	Test Freq. (MHz)	2467						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):68									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	38.06	54.00	-15.94	40.76	-2.70	Average	100	165
2	2483.50	58.55	74.00	-15.45	61.25	-2.70	Peak	100	165
3	4934.00	32.30	54.00	-21.70	28.26	4.04	Average	100	30
4	4934.00	44.70	74.00	-29.30	40.66	4.04	Peak	100	30
5	7401.00	36.40	54.00	-17.60	27.16	9.24	Average	100	50
6	7401.00	49.80	74.00	-24.20	40.56	9.24	Peak	100	50
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	ax HE20_RU26	Test Freq. (MHz)	2472
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBUV/m) </			



Modulation	ax HE20_RU26	Test Freq. (MHz)	2472
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			

Unwanted Emissions (Above 1GHz) for ax HE20_RU52

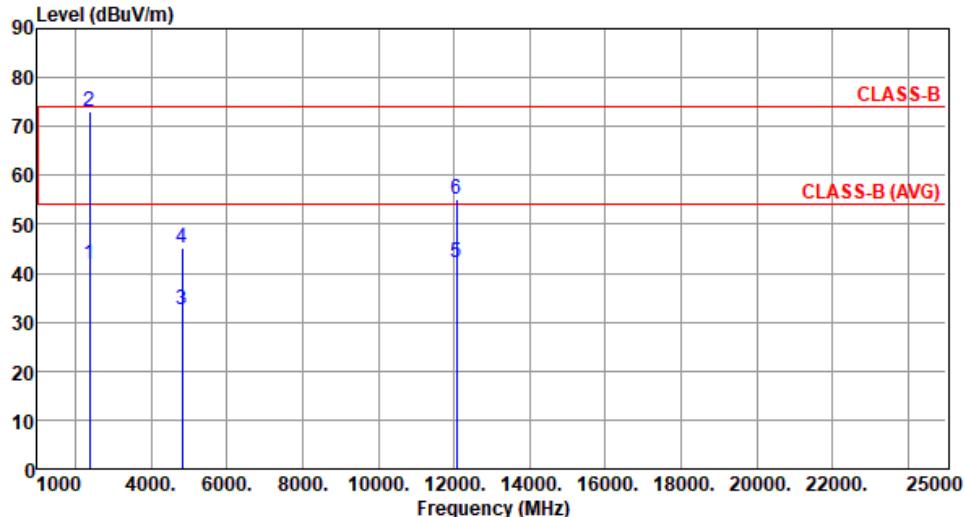Modulation	ax HE20_RU52		Test Freq. (MHz)		2412				
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):68									
Level (dBUV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg
1	2390.00	41.83	54.00	-12.17	44.58	-2.75	Average	125	295
2	2390.00	73.19	74.00	-0.81	75.94	-2.75	Peak	125	295
3	4824.00	32.40	54.00	-21.60	28.26	4.14	Average	100	80
4	4824.00	45.00	74.00	-29.00	40.86	4.14	Peak	100	80
5	12060.00	42.16	54.00	-11.84	28.37	13.79	Average	100	40
6	12060.00	54.98	74.00	-19.02	41.19	13.79	Peak	100	40

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	ax HE20_RU52	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBUV/m)			



Modulation	ax HE20_RU52	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE20_RU52	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) <			



Modulation	ax HE20_RU52	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			



Modulation	ax HE20_RU52	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) <			



Modulation	ax HE20_RU52	Test Freq. (MHz)	2467
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) <			



Modulation	ax HE20_RU52	Test Freq. (MHz)	2467
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			



Modulation	ax HE20_RU52	Test Freq. (MHz)	2472
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE20_RU52	Test Freq. (MHz)	2472
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) <			

Unwanted Emissions (Above 1GHz) for ax HE20_RU106

Modulation	ax HE20_RU106		Test Freq. (MHz)		2412				
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):68									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	43.25	54.00	-10.75	46.00	-2.75	Average	155	298
2	2390.00	69.51	74.00	-4.49	72.26	-2.75	Peak	155	298
3	4824.00	32.60	54.00	-21.40	28.46	4.14	Average	100	60
4	4824.00	44.90	74.00	-29.10	40.76	4.14	Peak	100	60
5	12060.00	42.26	54.00	-11.74	28.47	13.79	Average	100	30
6	12060.00	54.93	74.00	-19.07	41.14	13.79	Peak	100	30
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	ax HE20_RU106	Test Freq. (MHz)	2412																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):68																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>2390.00</td><td>38.45</td><td>54.00</td><td>-15.55</td><td>41.20</td><td>-2.75</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>2</td><td>2390.00</td><td>60.14</td><td>74.00</td><td>-13.86</td><td>62.89</td><td>-2.75</td><td>Peak</td><td>100</td><td>168</td></tr><tr><td>3</td><td>4824.00</td><td>32.36</td><td>54.00</td><td>-21.64</td><td>28.22</td><td>4.14</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>4824.00</td><td>44.80</td><td>74.00</td><td>-29.20</td><td>40.66</td><td>4.14</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>12060.00</td><td>41.99</td><td>54.00</td><td>-12.01</td><td>28.20</td><td>13.79</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>12060.00</td><td>54.53</td><td>74.00</td><td>-19.47</td><td>40.74</td><td>13.79</td><td>Peak</td><td>100</td><td>20</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2390.00	38.45	54.00	-15.55	41.20	-2.75	Average	100	168	2	2390.00	60.14	74.00	-13.86	62.89	-2.75	Peak	100	168	3	4824.00	32.36	54.00	-21.64	28.22	4.14	Average	100	50	4	4824.00	44.80	74.00	-29.20	40.66	4.14	Peak	100	50	5	12060.00	41.99	54.00	-12.01	28.20	13.79	Average	100	20	6	12060.00	54.53	74.00	-19.47	40.74	13.79	Peak	100	20
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	2390.00	38.45	54.00	-15.55	41.20	-2.75	Average	100	168																																																																
2	2390.00	60.14	74.00	-13.86	62.89	-2.75	Peak	100	168																																																																
3	4824.00	32.36	54.00	-21.64	28.22	4.14	Average	100	50																																																																
4	4824.00	44.80	74.00	-29.20	40.66	4.14	Peak	100	50																																																																
5	12060.00	41.99	54.00	-12.01	28.20	13.79	Average	100	20																																																																
6	12060.00	54.53	74.00	-19.47	40.74	13.79	Peak	100	20																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	ax HE20_RU106	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE20_RU106	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBUV/m) <			



Modulation	ax HE20_RU106	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) <			



Modulation	ax HE20_RU106	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE20_RU106	Test Freq. (MHz)	2467
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE20_RU106	Test Freq. (MHz)	2467
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			



Modulation	ax HE20_RU106	Test Freq. (MHz)	2472
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE20_RU106	Test Freq. (MHz)	2472
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			



Unwanted Emissions (Above 1GHz) for ax HE40_RU242

Modulation	ax HE40_RU242	Test Freq. (MHz)	2422
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBUV/m) </			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2422
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2452
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2452
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2457
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) </			



Modulation	ax HE40_RU242	Test Freq. (MHz)	2457
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m)			




Modulation	ax HE40_RU242	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):68			
Level (dBuV/m) <			

Page No. : 42 of 42

802.11b_Nss1,(1Mbps)_1TX

CSEndB


2412MHz

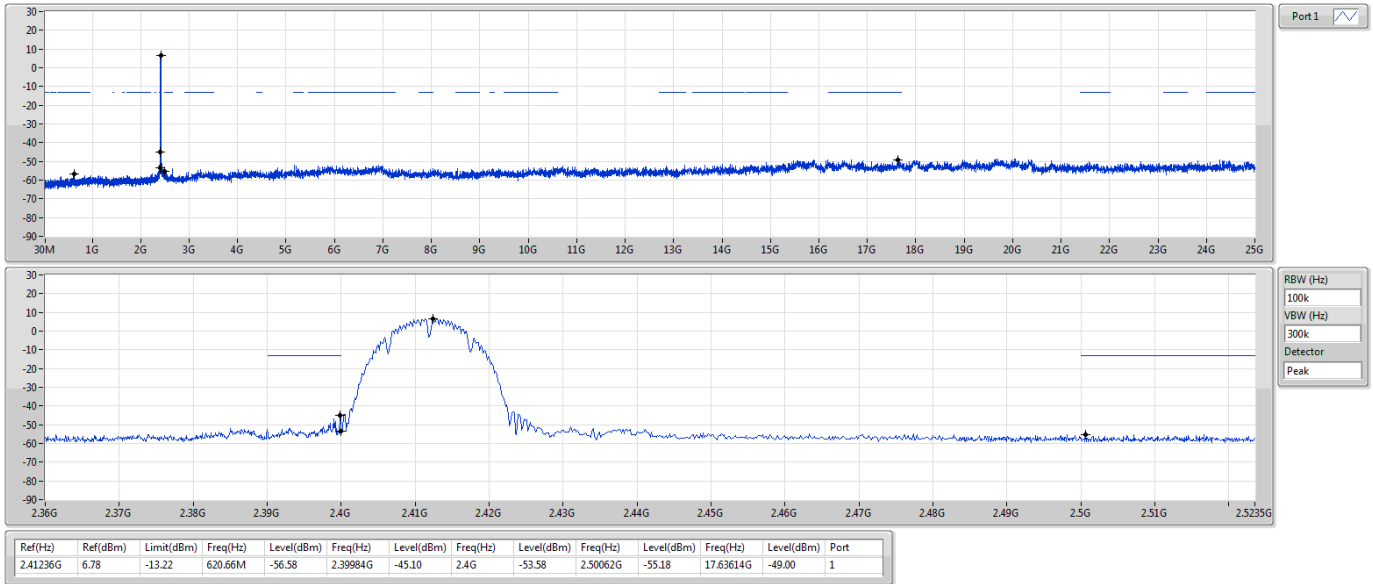

802.11b_Nss1,(1Mbps)_1TX

CSEndB


2437MHz

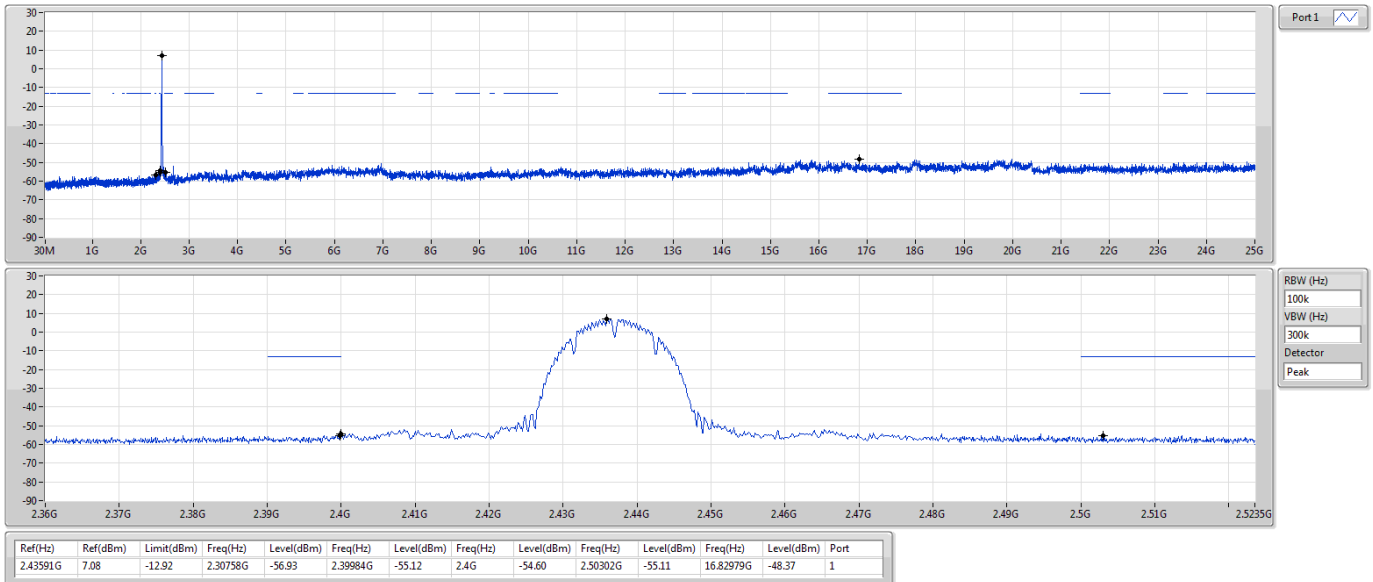

802.11b_Nss1,(1Mbps)_1TX

2462MHz


CSENdB

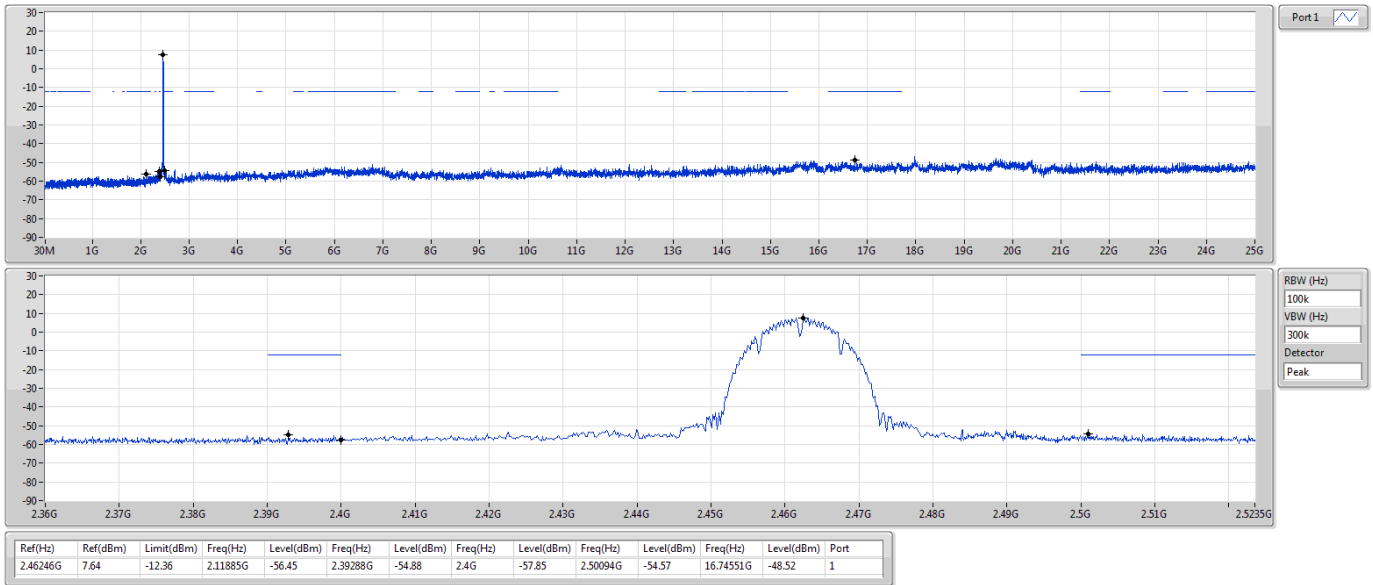

802.11b_Nss1,(1Mbps)_1TX

2467MHz


CSENdB

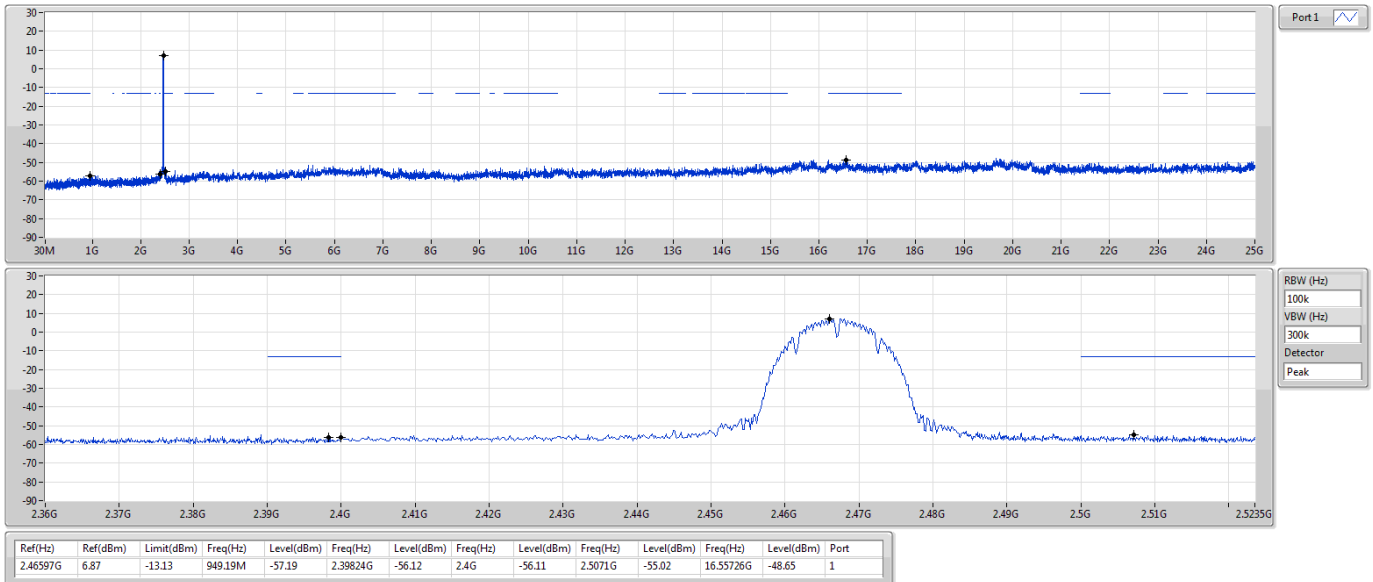

802.11b_Nss1,(1Mbps)_1TX

CSENdB


2472MHz

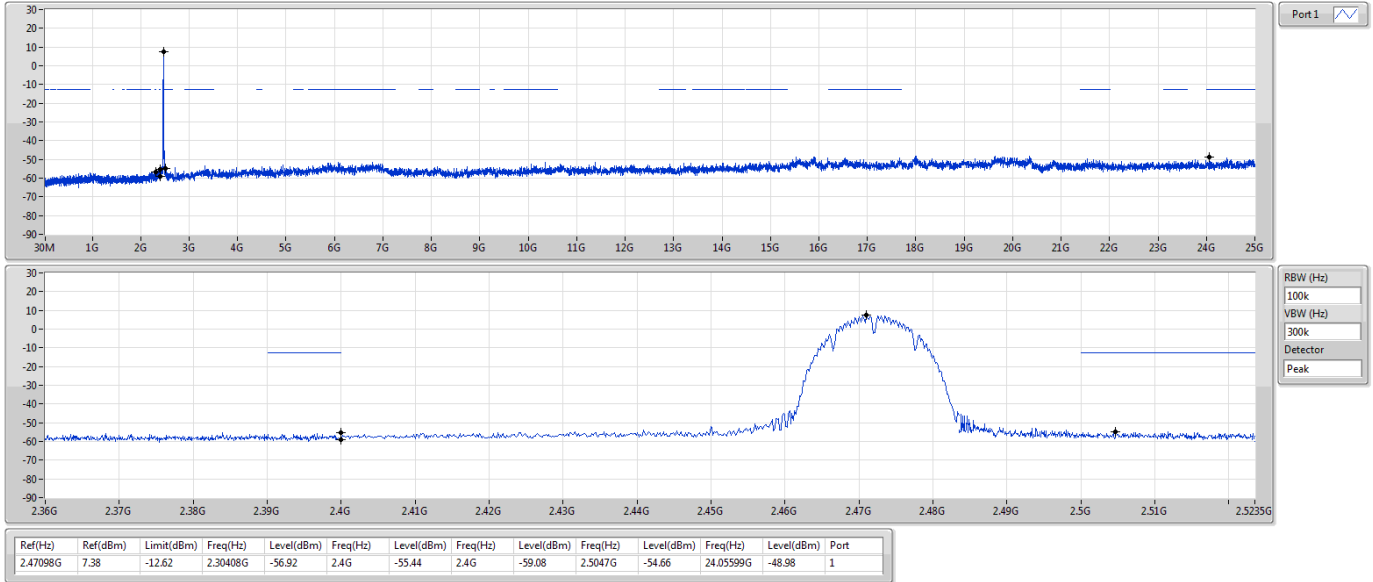

802.11g_Nss1,(6Mbps)_1TX

CSENdB


2412MHz

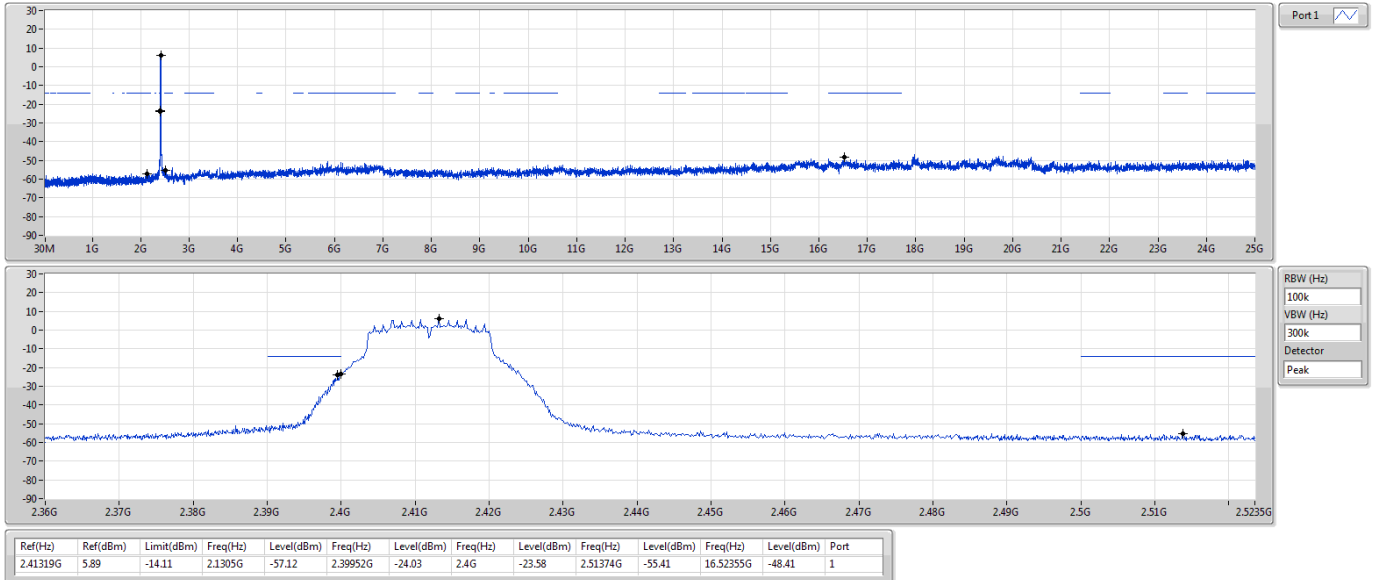

802.11g_Nss1,(6Mbps)_1TX

CSENdB


2437MHz

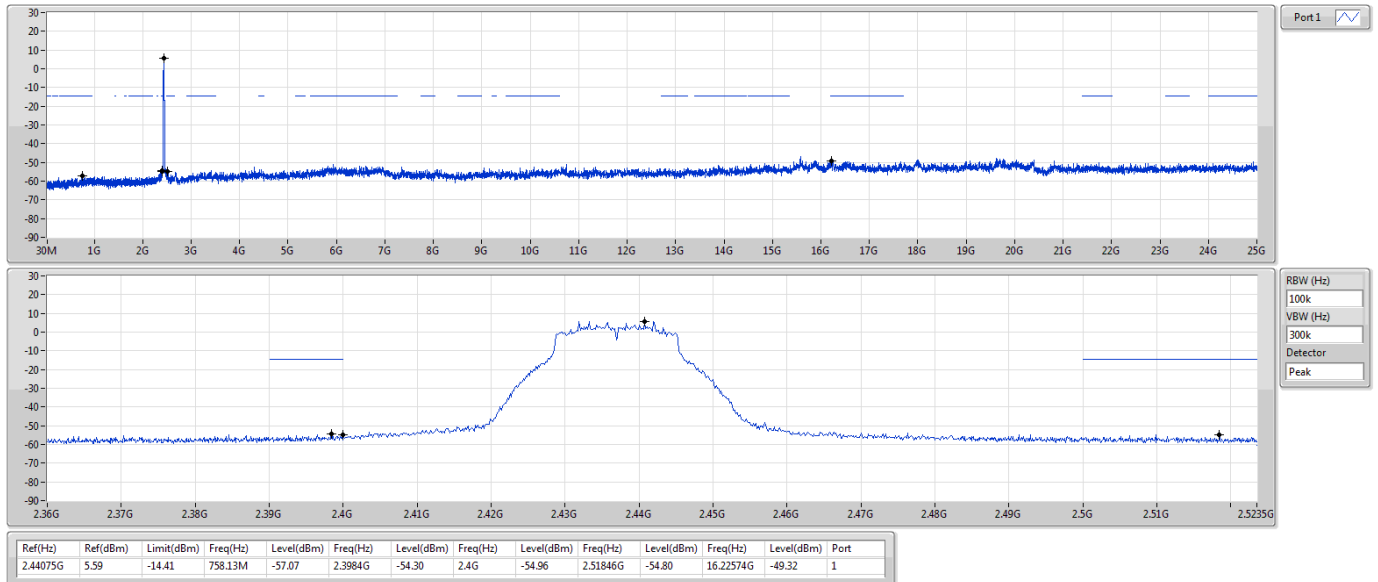

802.11g_Nss1,(6Mbps)_1TX

CSENdB


2462MHz

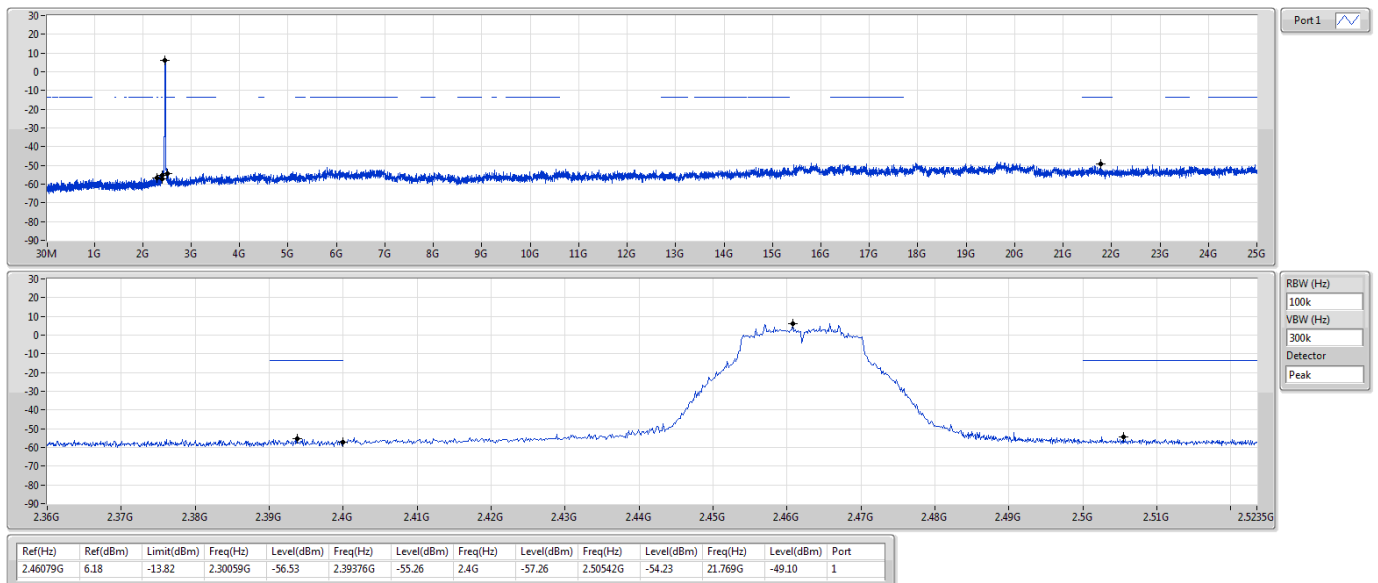

802.11g_Nss1,(6Mbps)_1TX

CSENdB


2467MHz

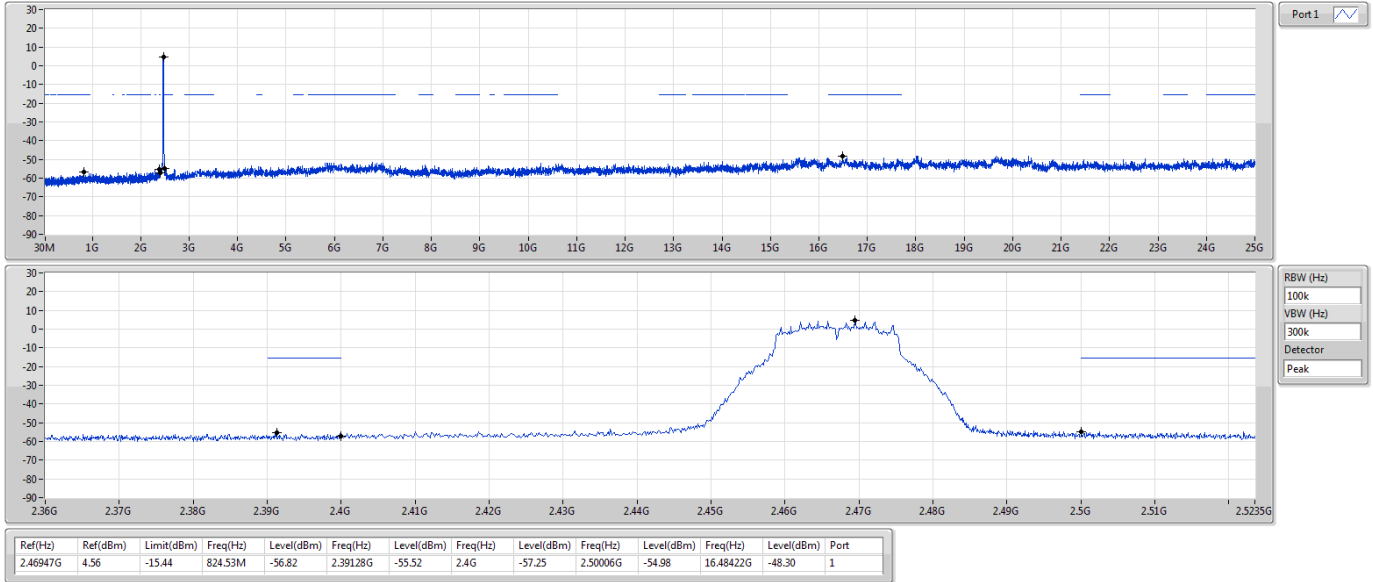

802.11g_Nss1,(6Mbps)_1TX

CSENdB


2472MHz

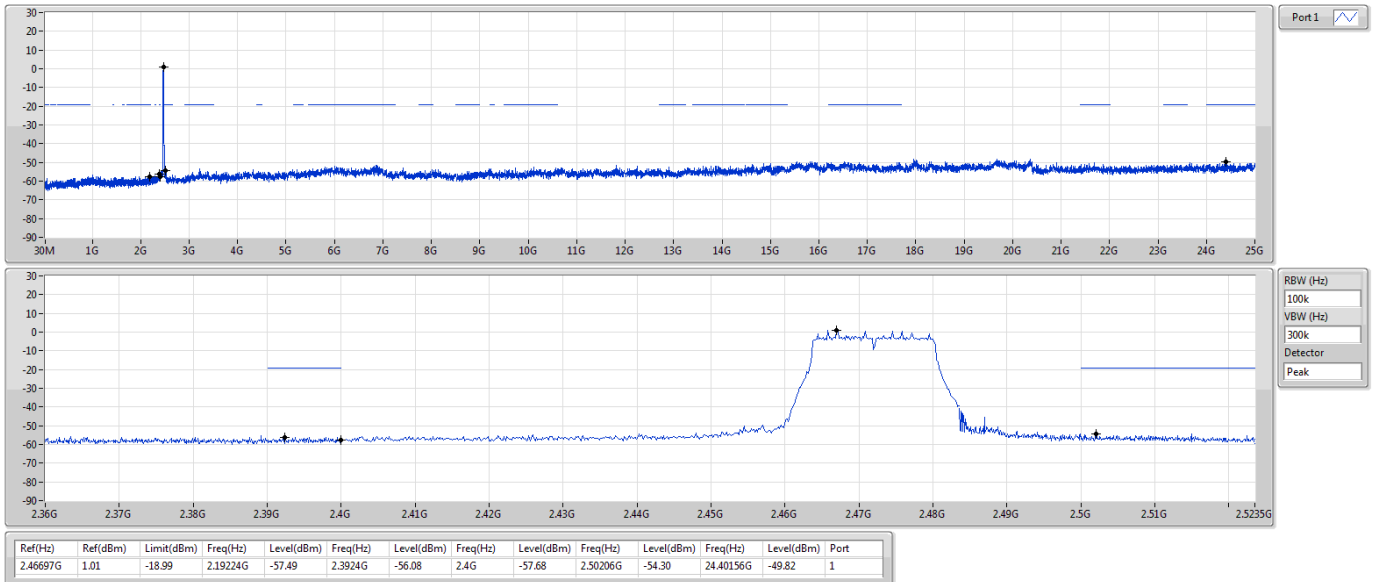

802.11ax HEW20_Nss1,(MCS0)_1TX

CSENdB


2412MHz

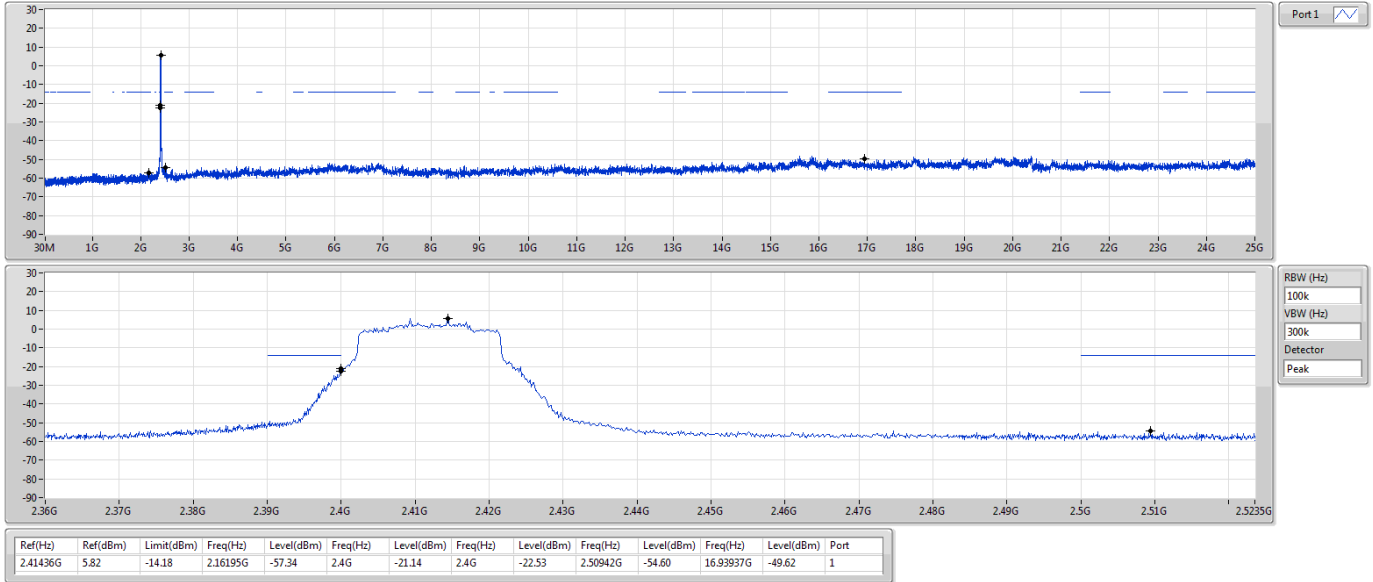

802.11ax HEW20_Nss1,(MCS0)_1TX

CSENdB


2437MHz

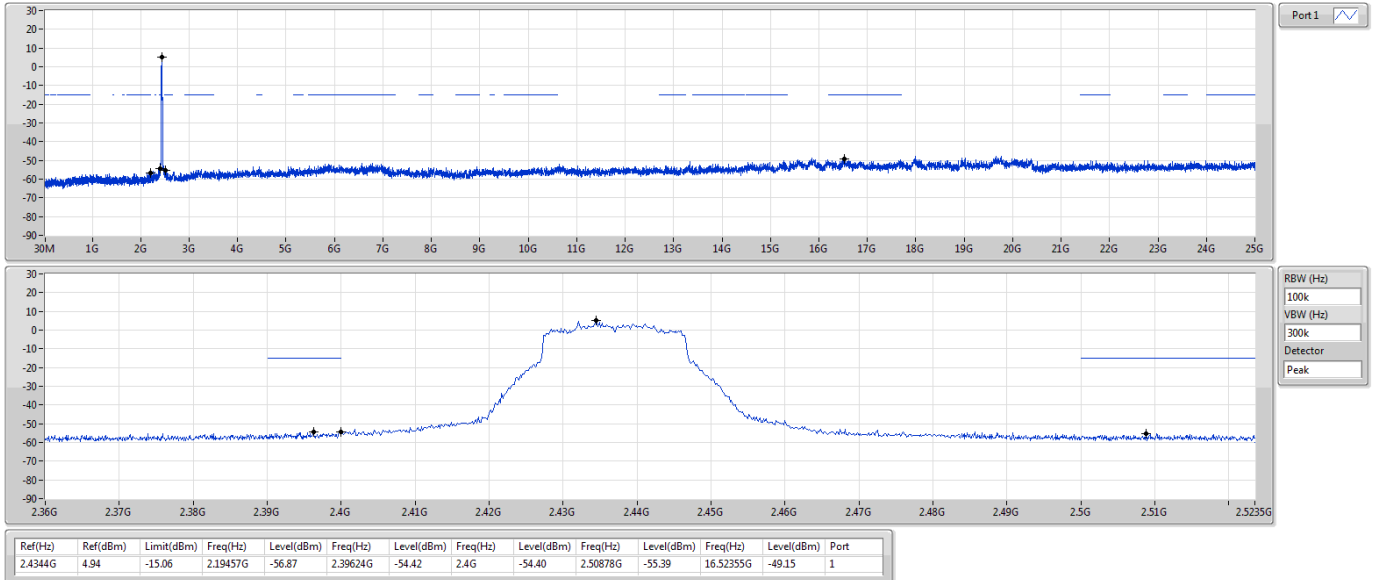

802.11ax HEW20_Nss1,(MCS0)_1TX

CSENdB


2462MHz

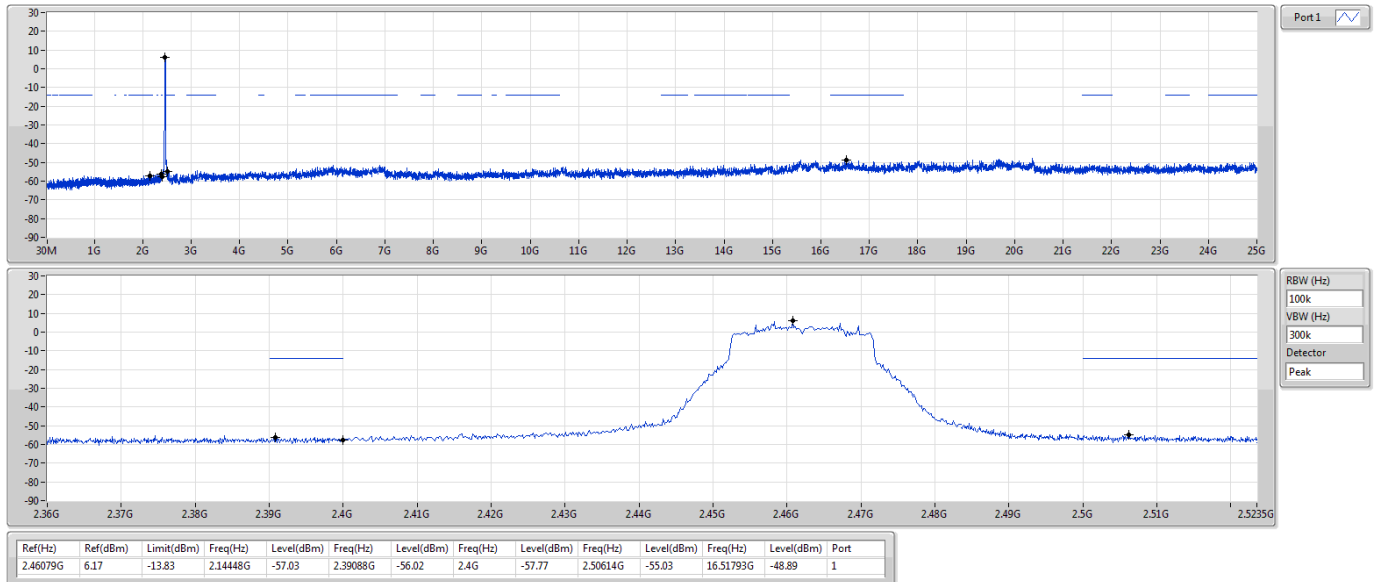

802.11ax HEW20_Nss1,(MCS0)_1TX

CSENdB


2467MHz

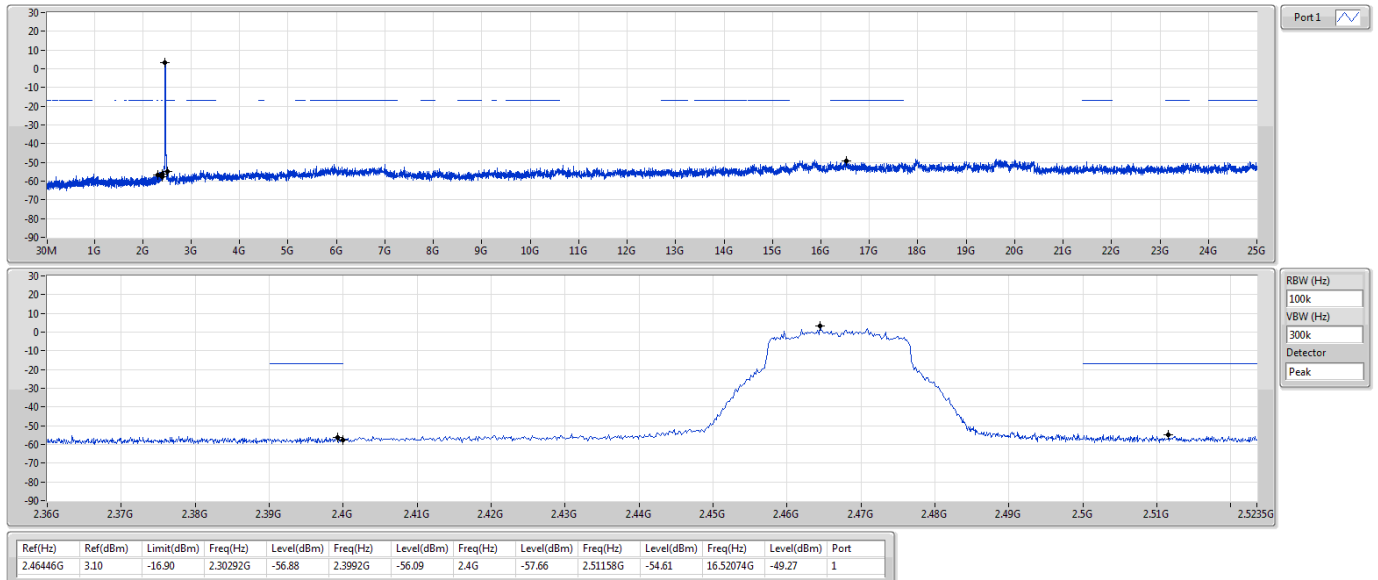

802.11ax HEW20_Nss1,(MCS0)_1TX

CSENdB


2472MHz

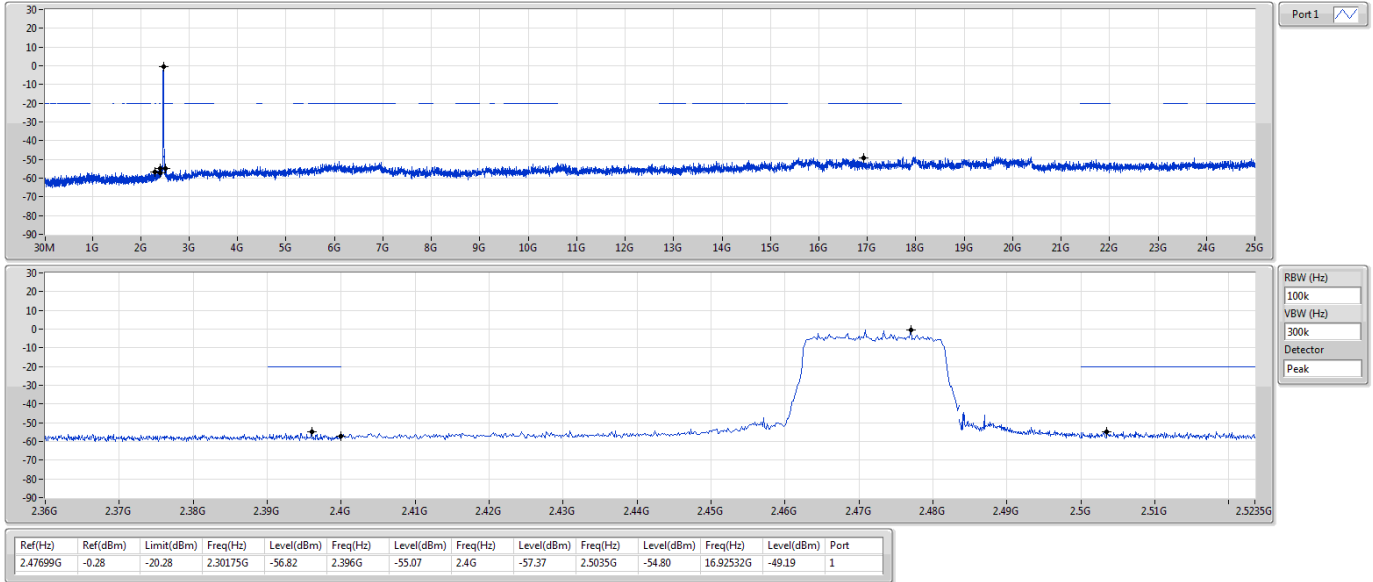

802.11ax HEW40_Nss1,(MCS0)_1TX

CSENdB


2422MHz

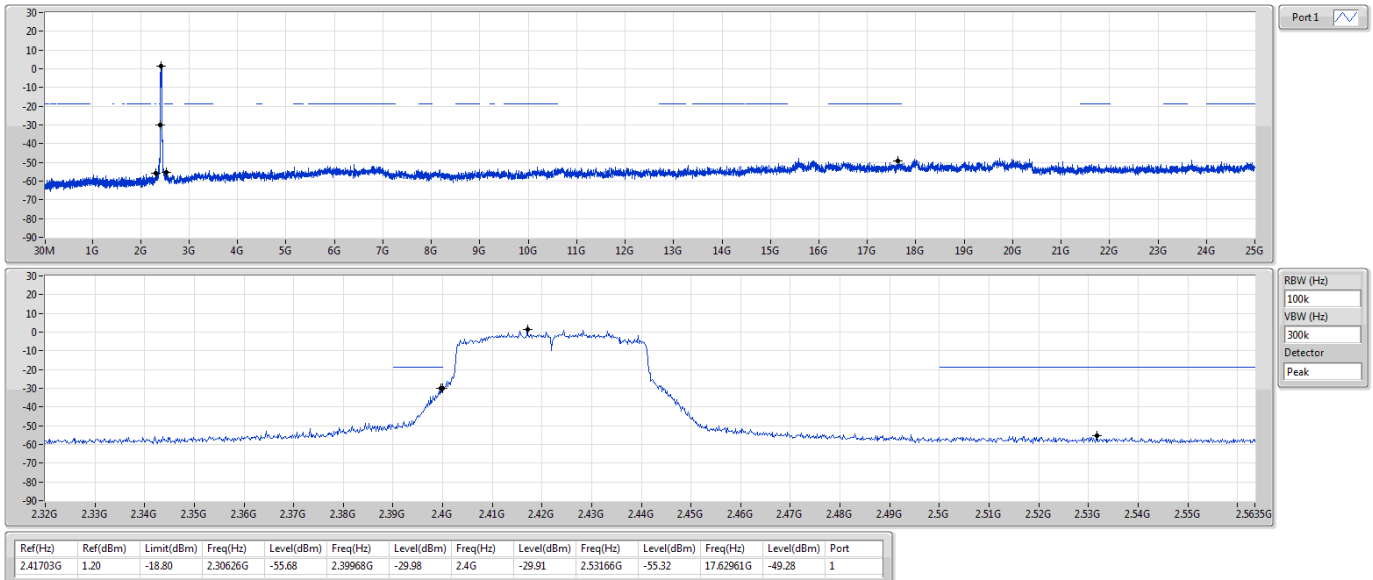

802.11ax HEW40_Nss1,(MCS0)_1TX

CSENdB


2437MHz

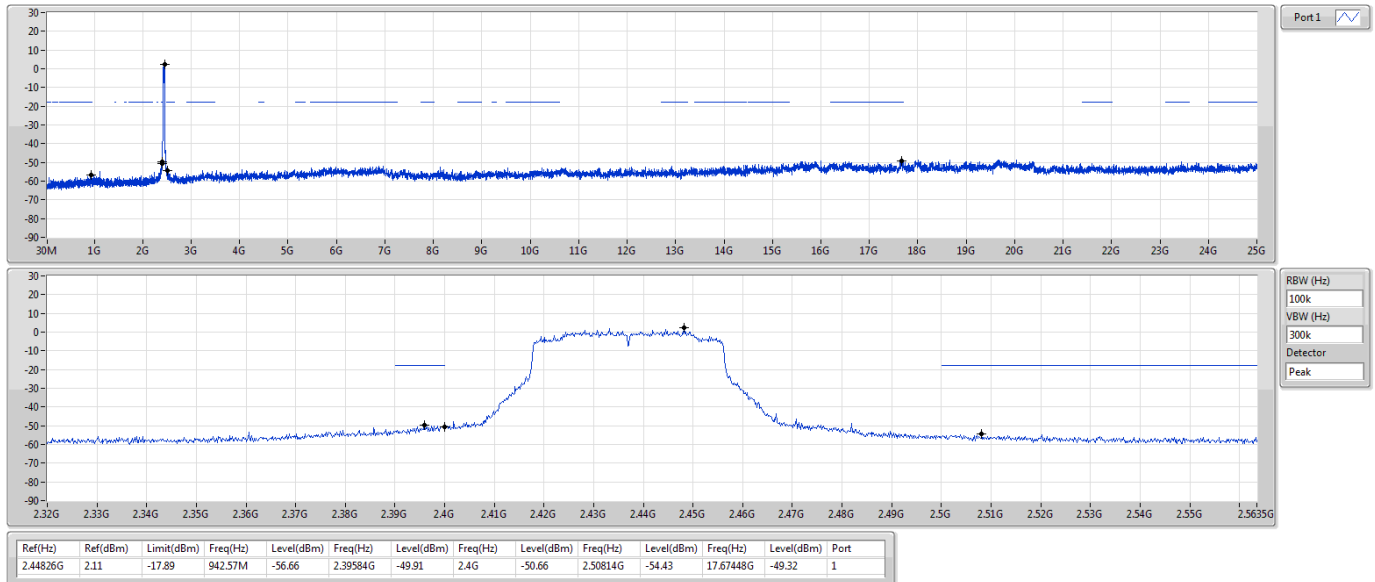

802.11ax HEW40_Nss1,(MCS0)_1TX

CSENdB


2452MHz

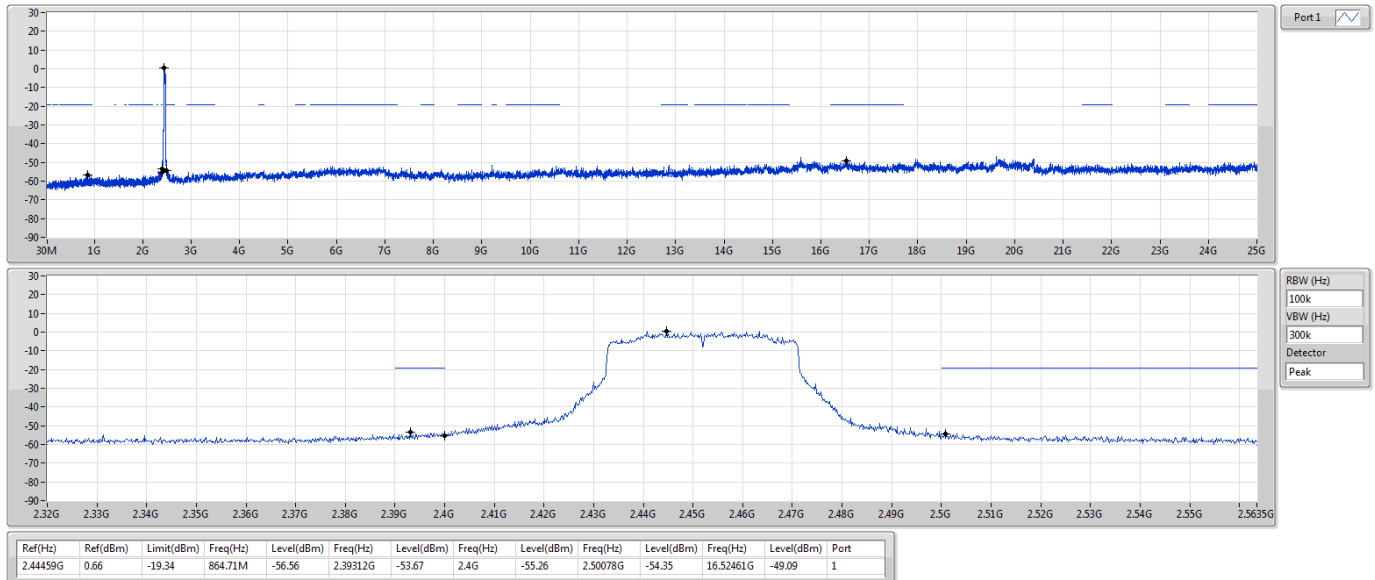

802.11ax HEW40_Nss1,(MCS0)_1TX

CSENdB


2457MHz

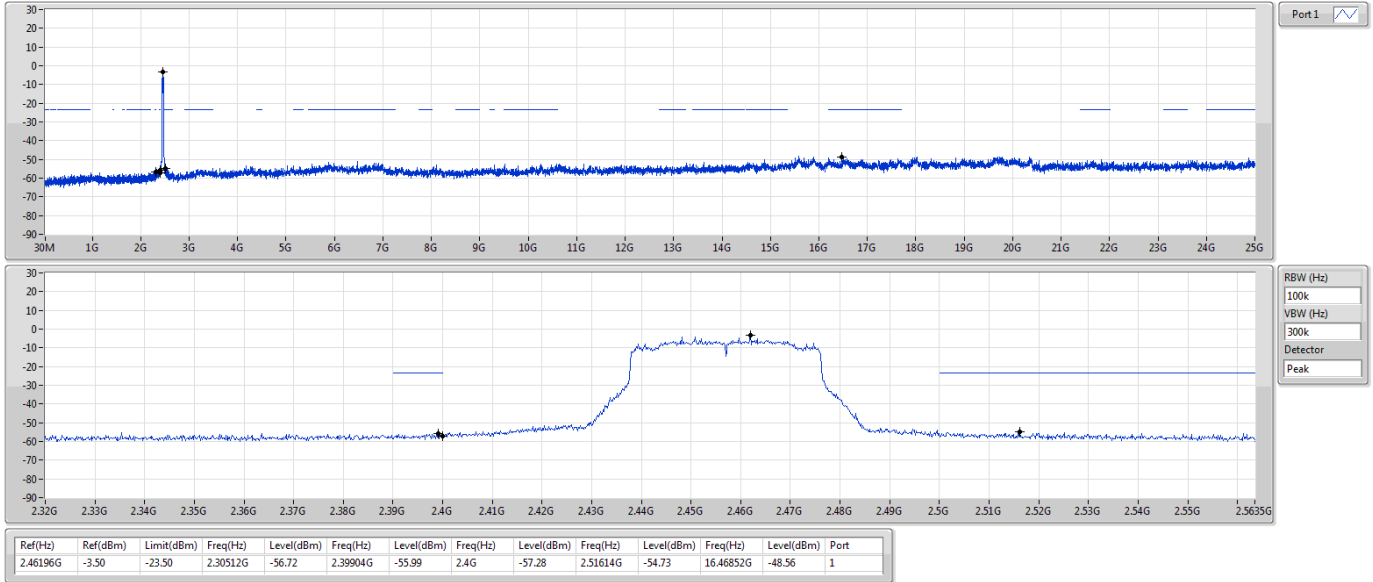

802.11ax HEW40_Nss1,(MCS0)_1TX

CSENdB

2462MHz

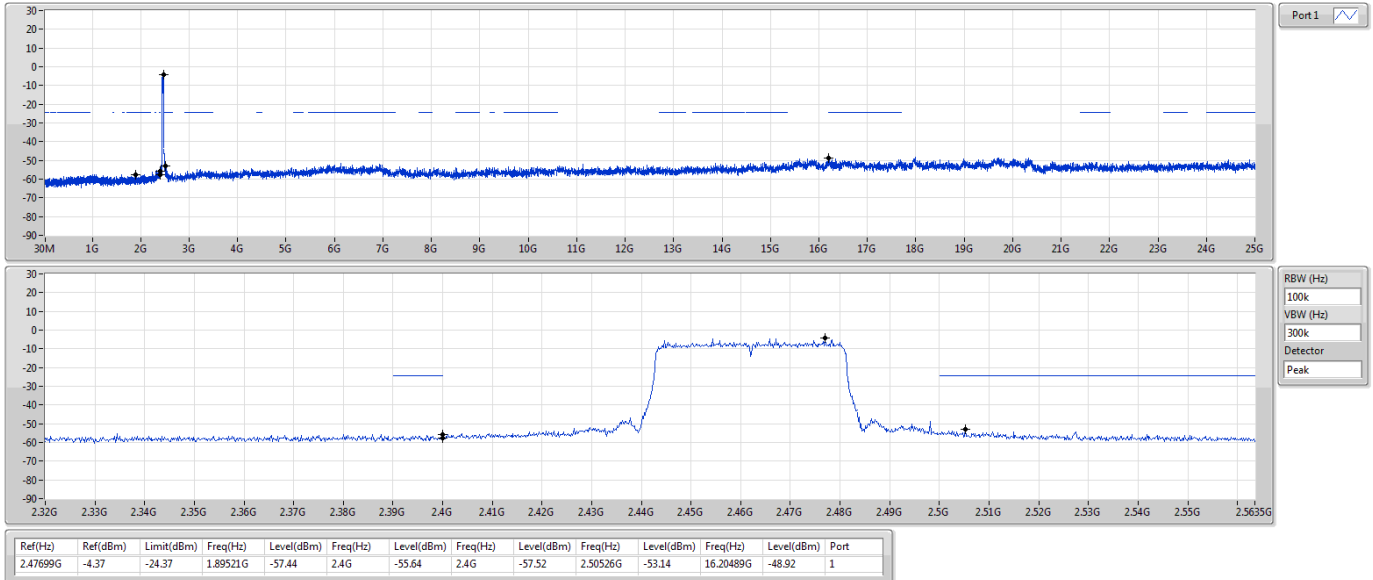




802.11ax HEW20_Nss2,(MCS0)_2TX

CSEndB


2412MHz

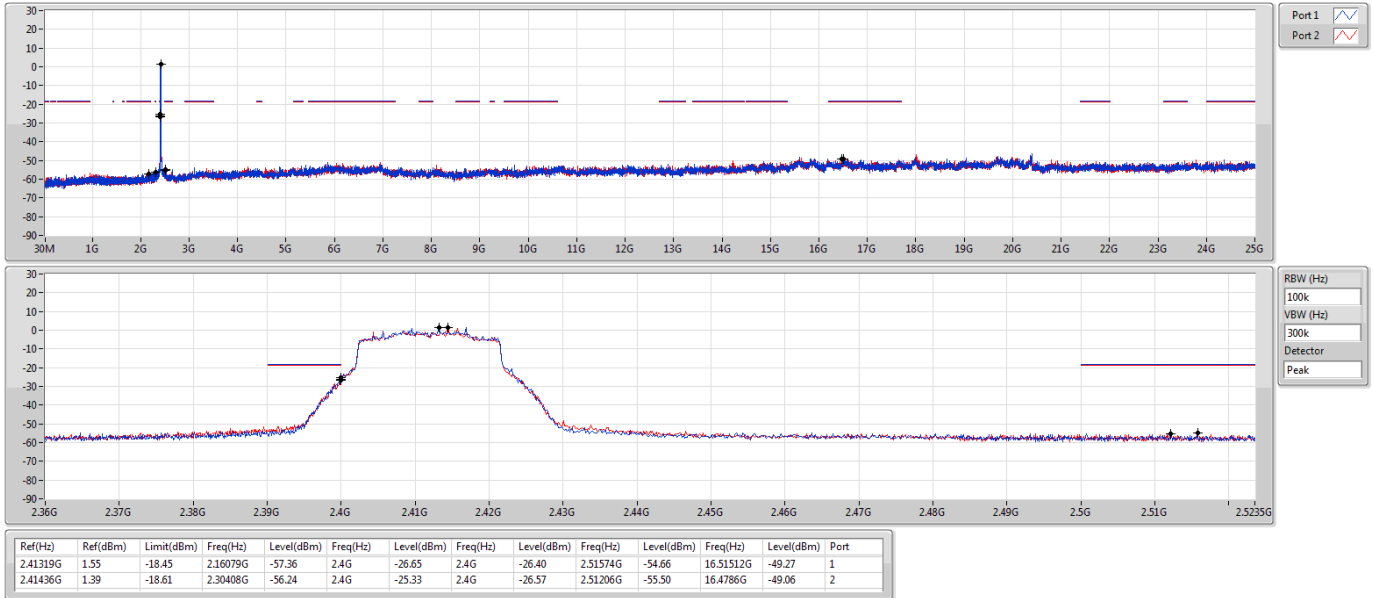

802.11ax HEW20_Nss2,(MCS0)_2TX

CSEndB

2437MHz

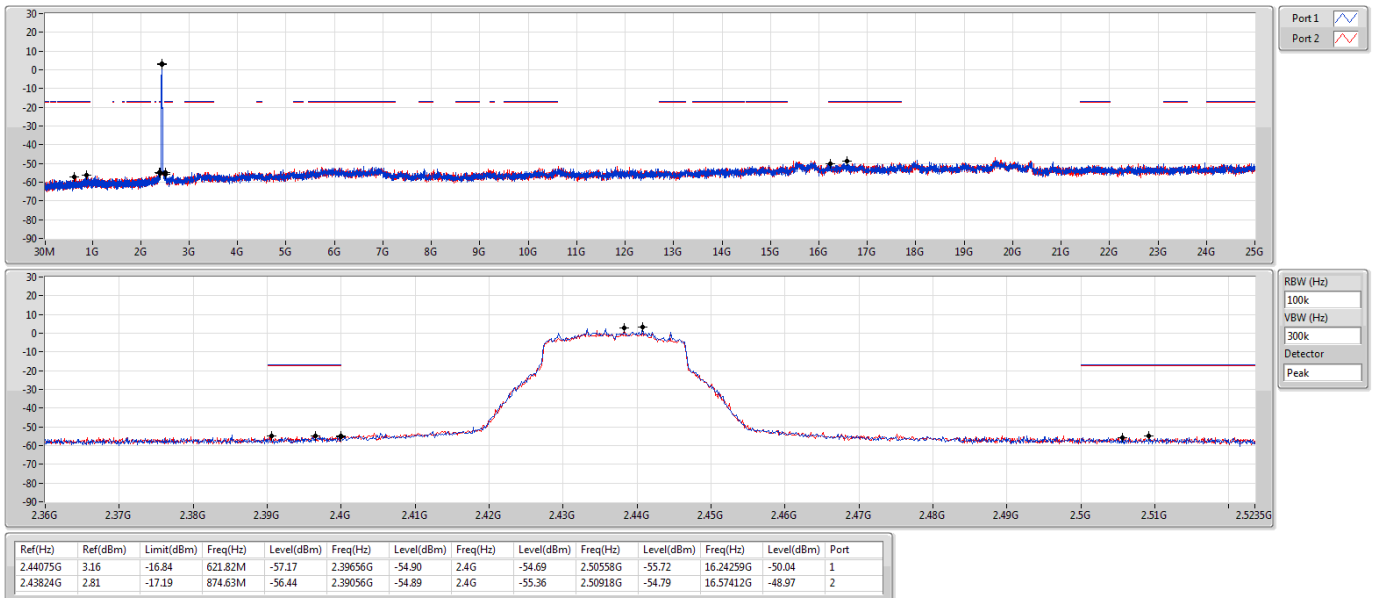




802.11ax HEW20_Nss2,(MCS0)_2TX

CSEndB


2462MHz

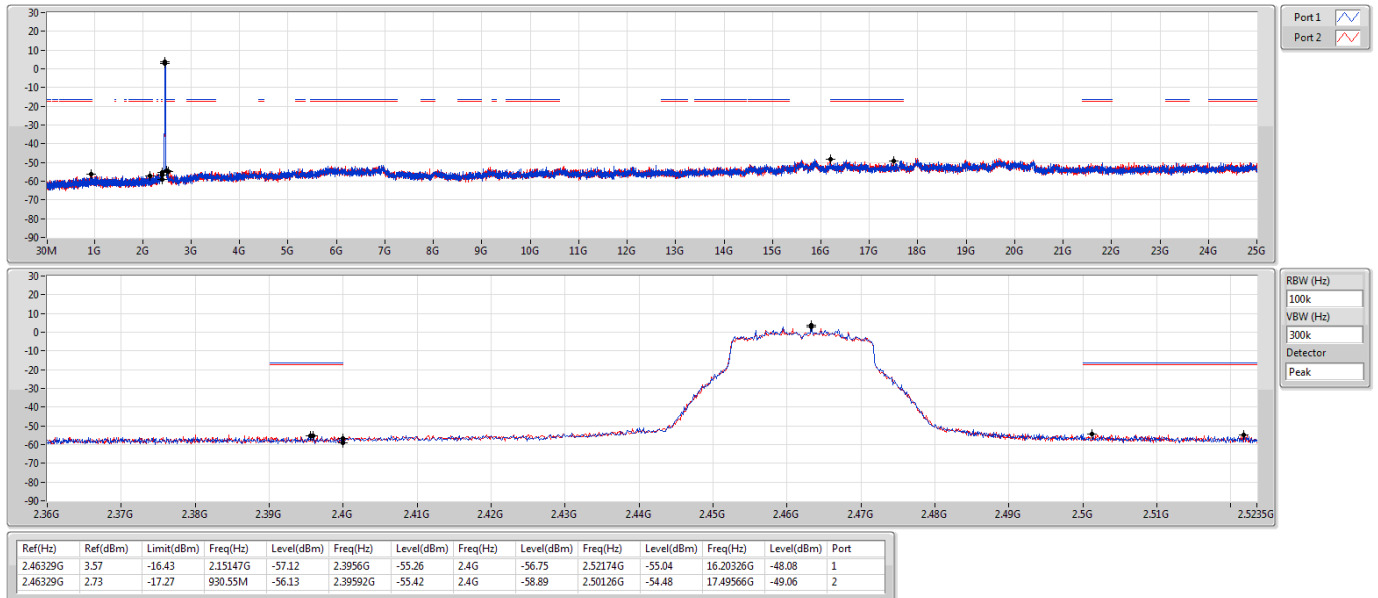

802.11ax HEW20_Nss2,(MCS0)_2TX

CSEndB


2467MHz

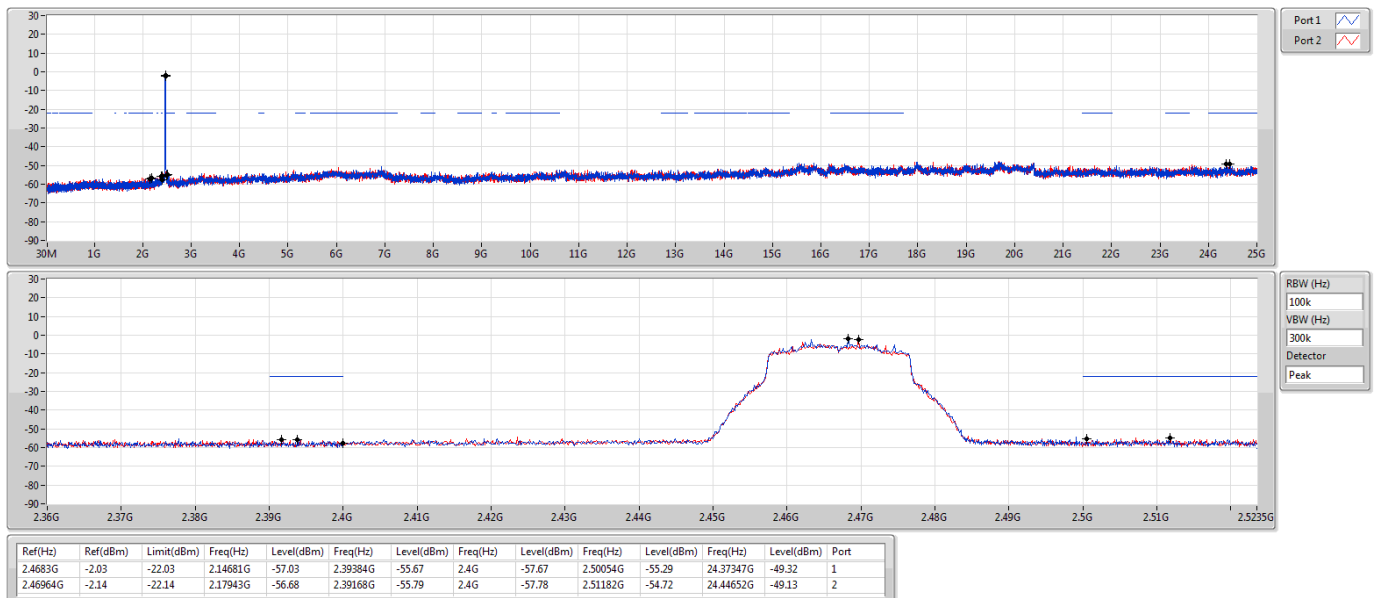

802.11ax HEW20_Nss2,(MCS0)_2TX

CSEndB


2472MHz

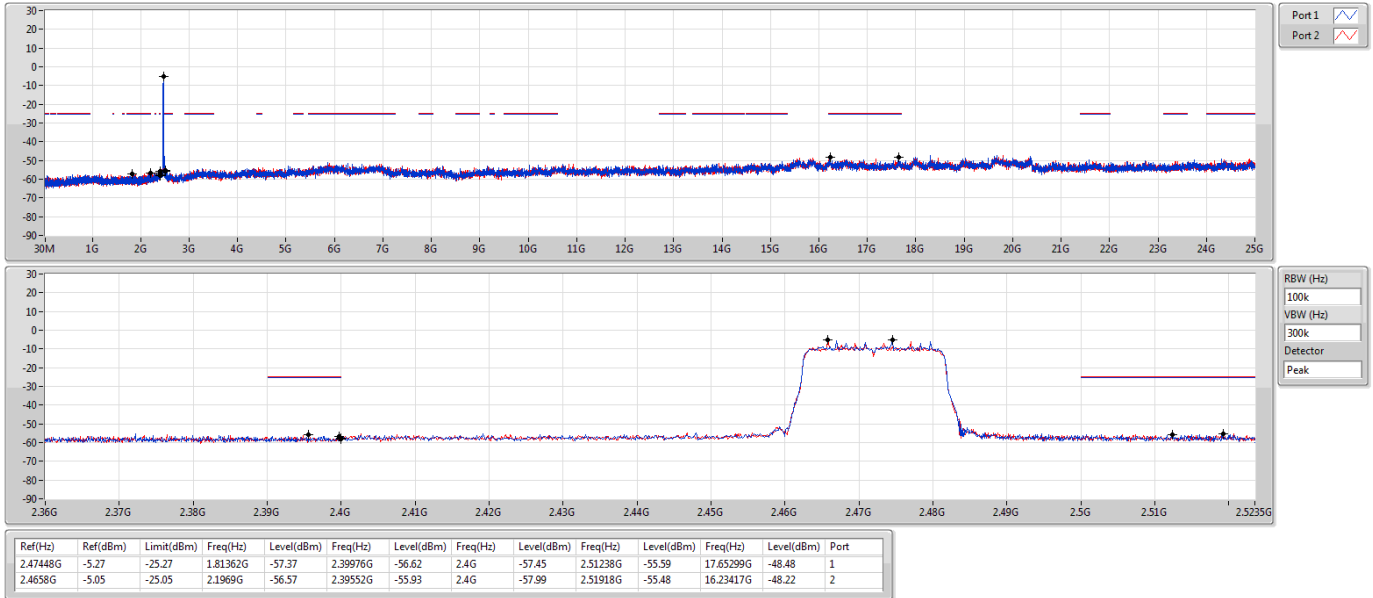

802.11ax HEW40_Nss2,(MCS0)_2TX

CSEndB


2422MHz

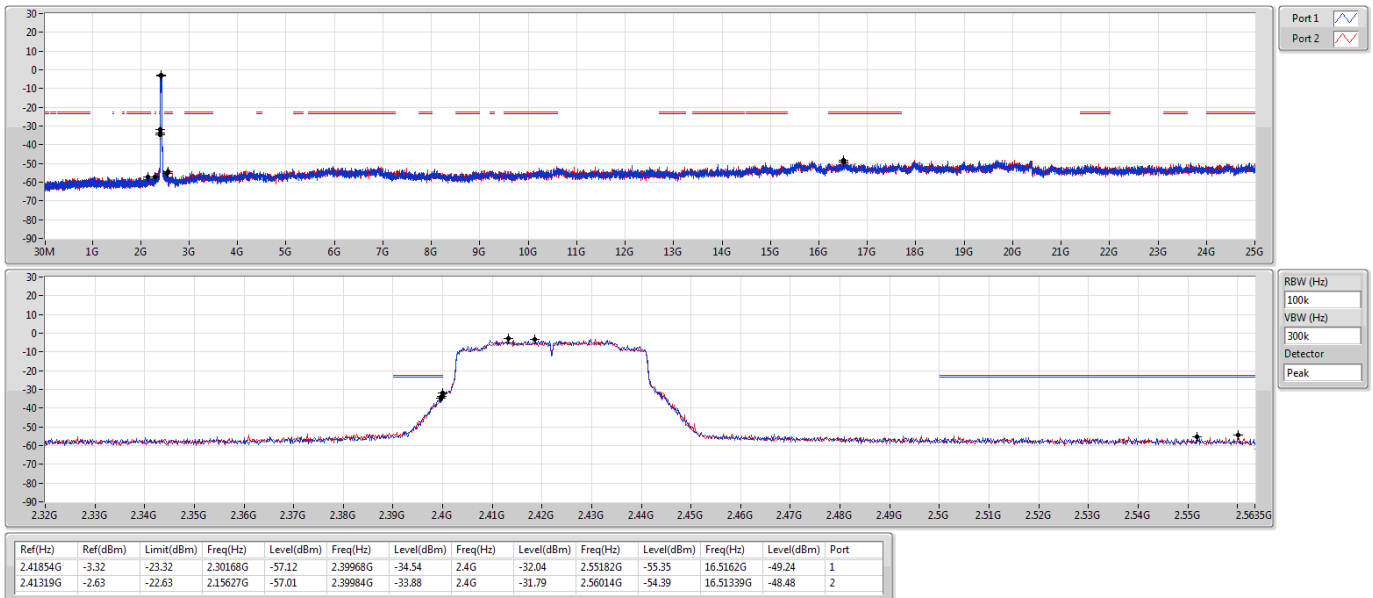

802.11ax HEW40_Nss2,(MCS0)_2TX

CSEndB


2437MHz

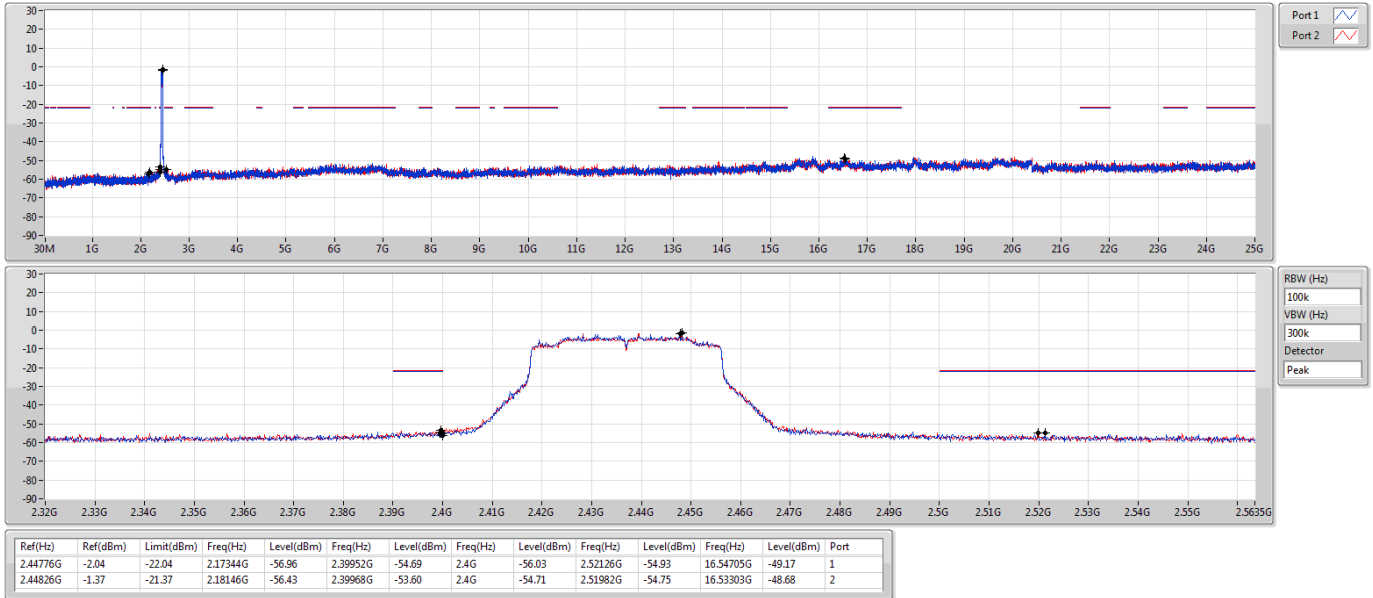

802.11ax HEW40_Nss2,(MCS0)_2TX

CSEndB


2452MHz

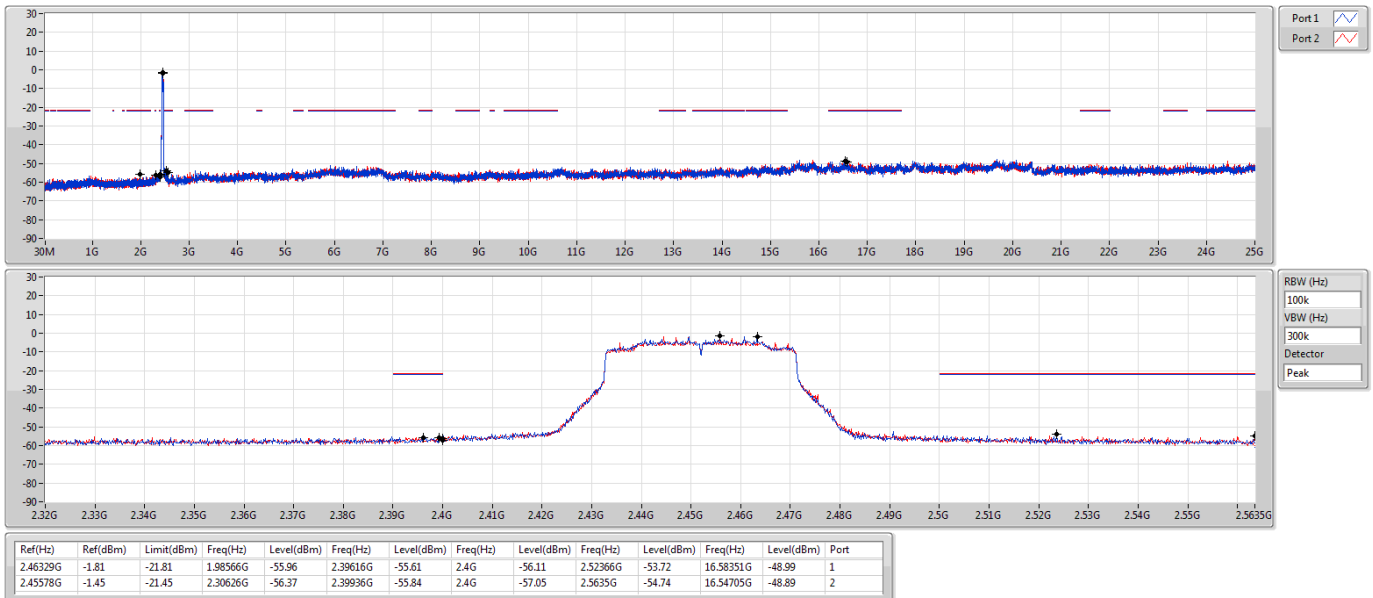

802.11ax HEW40_Nss2,(MCS0)_2TX

CSEndB


2457MHz

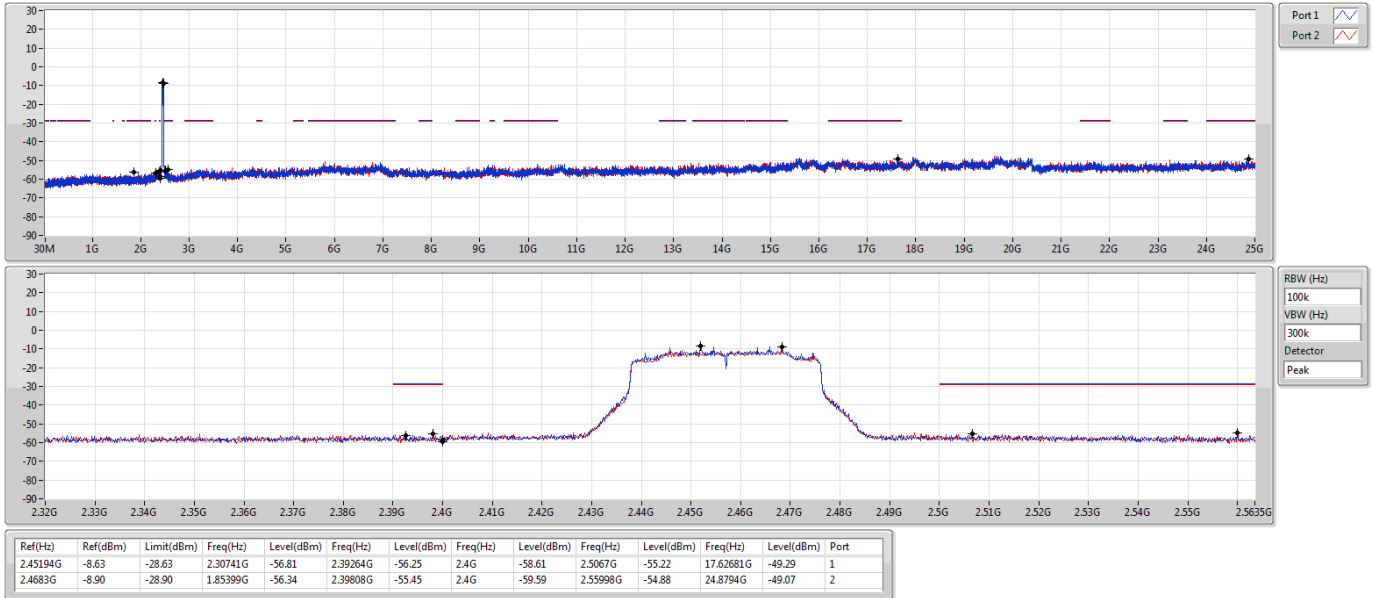

802.11ax HEW40_Nss2,(MCS0)_2TX

CSEndB

2462MHz

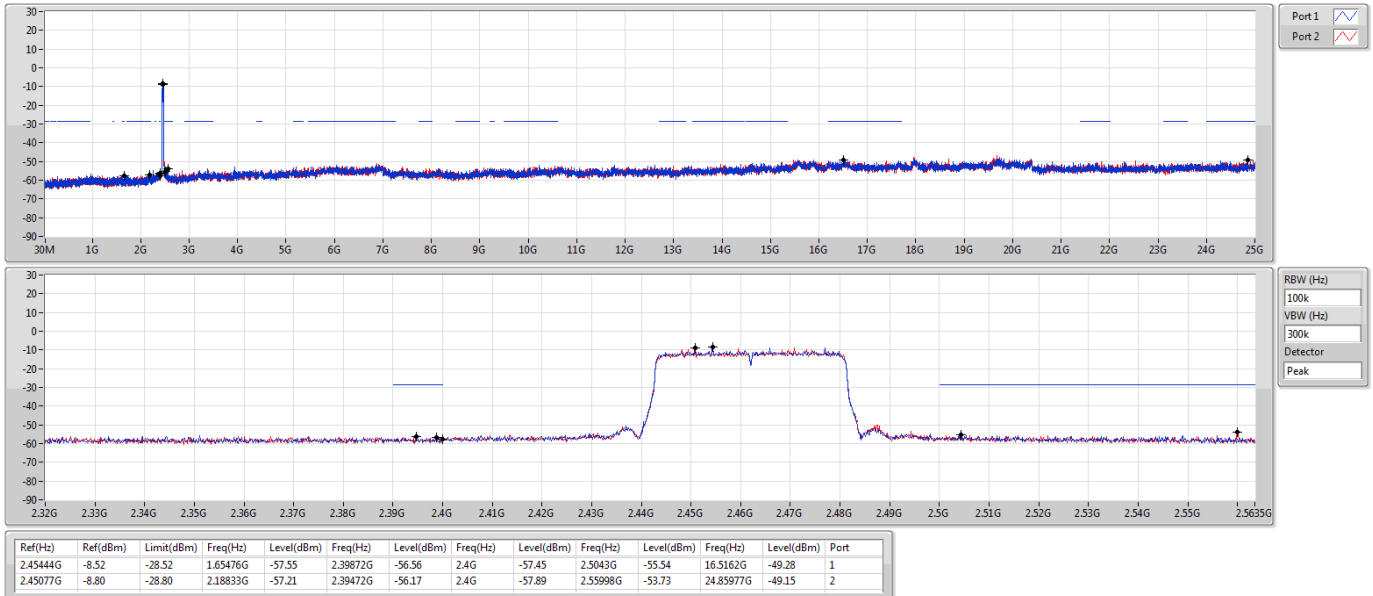




11ax Partial RU mode

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_1TX(Port1)

CSEndB


2412MHz

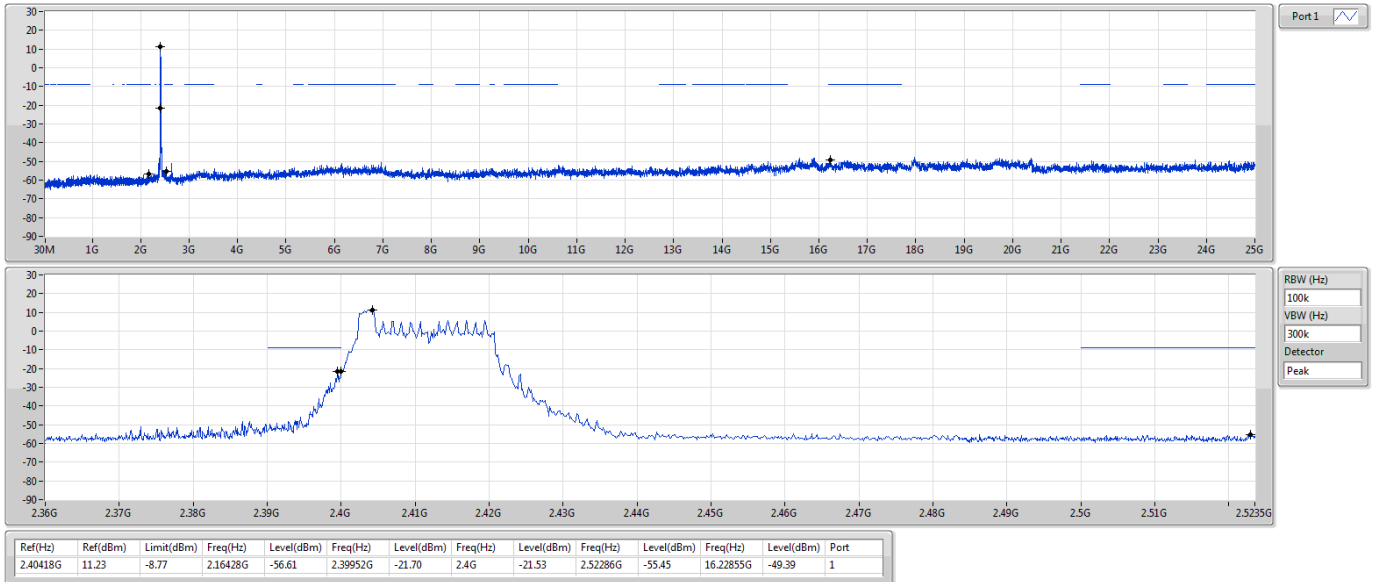

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_1TX(Port1)

CSEndB


2412MHz

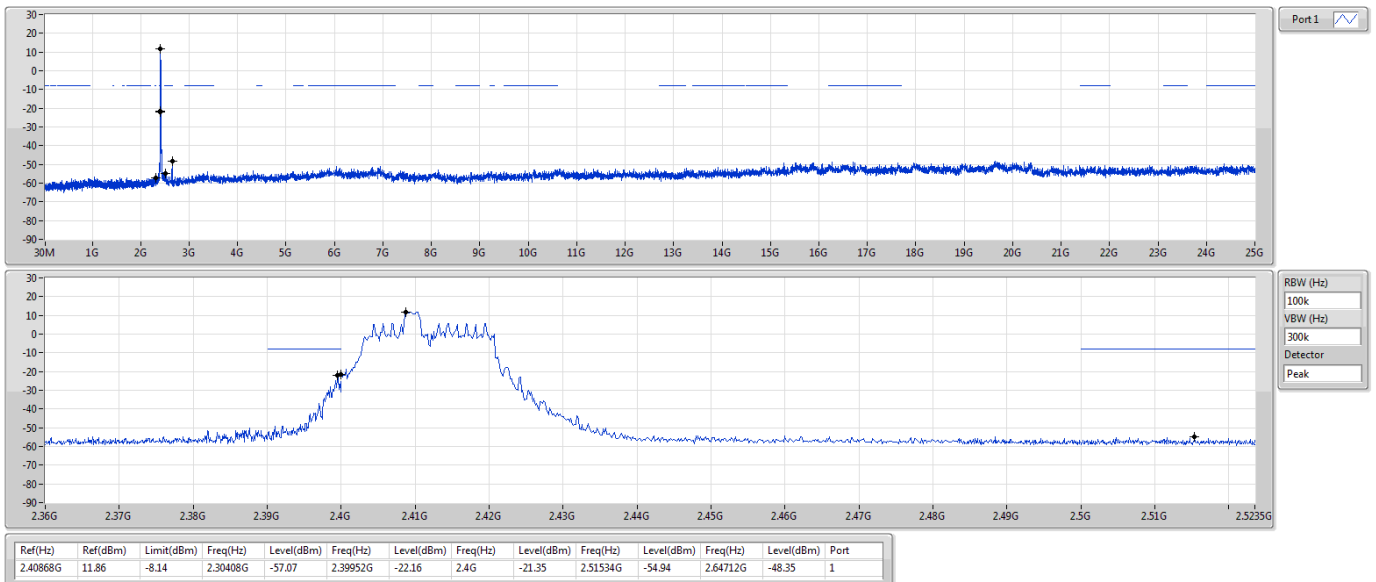

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_1TX(Port1)

CSEndB


2437MHz

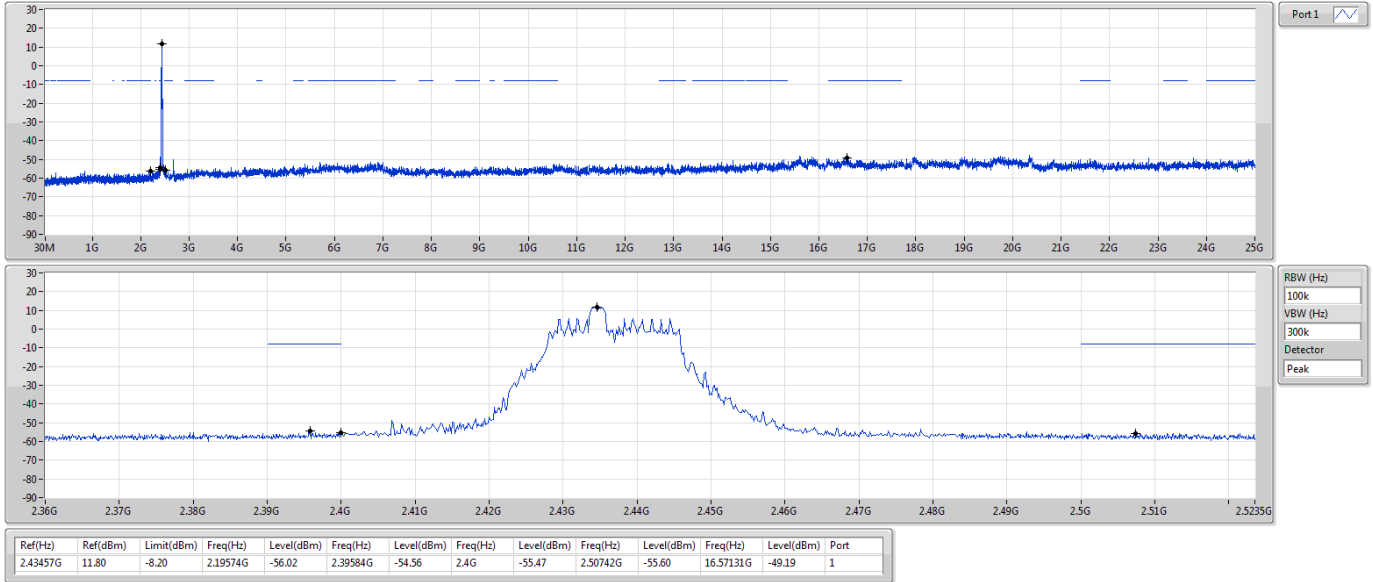

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_1TX(Port1)

CSEndB


2462MHz

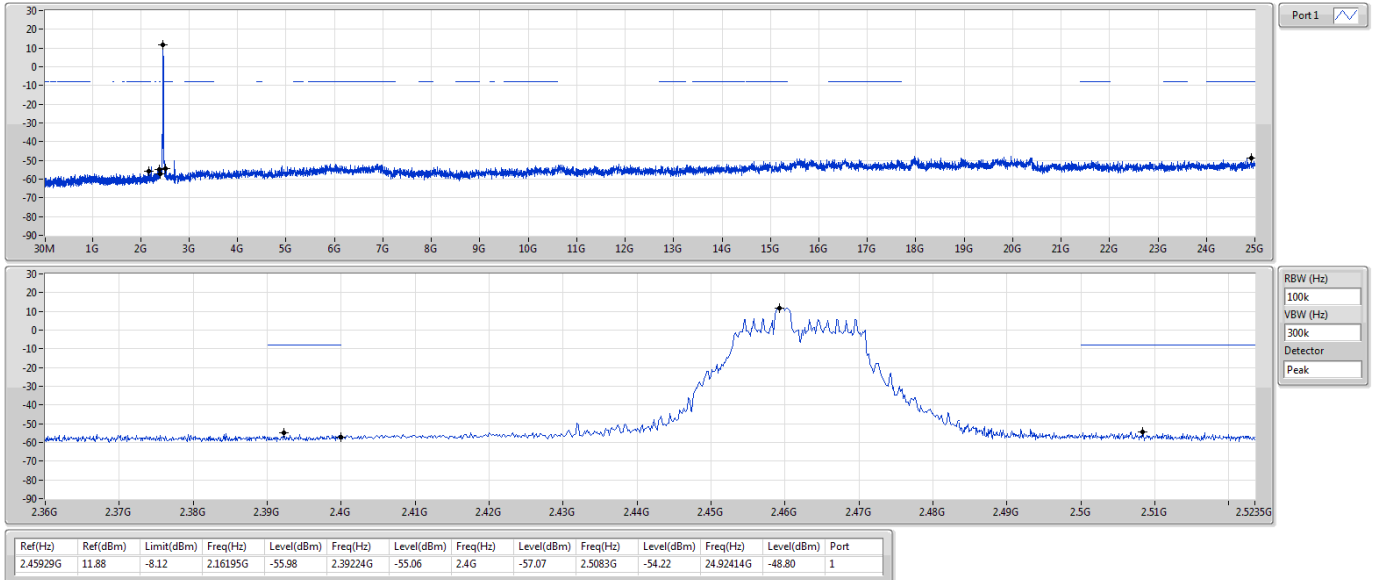

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_1TX(Port1)

CSENdB


2467MHz

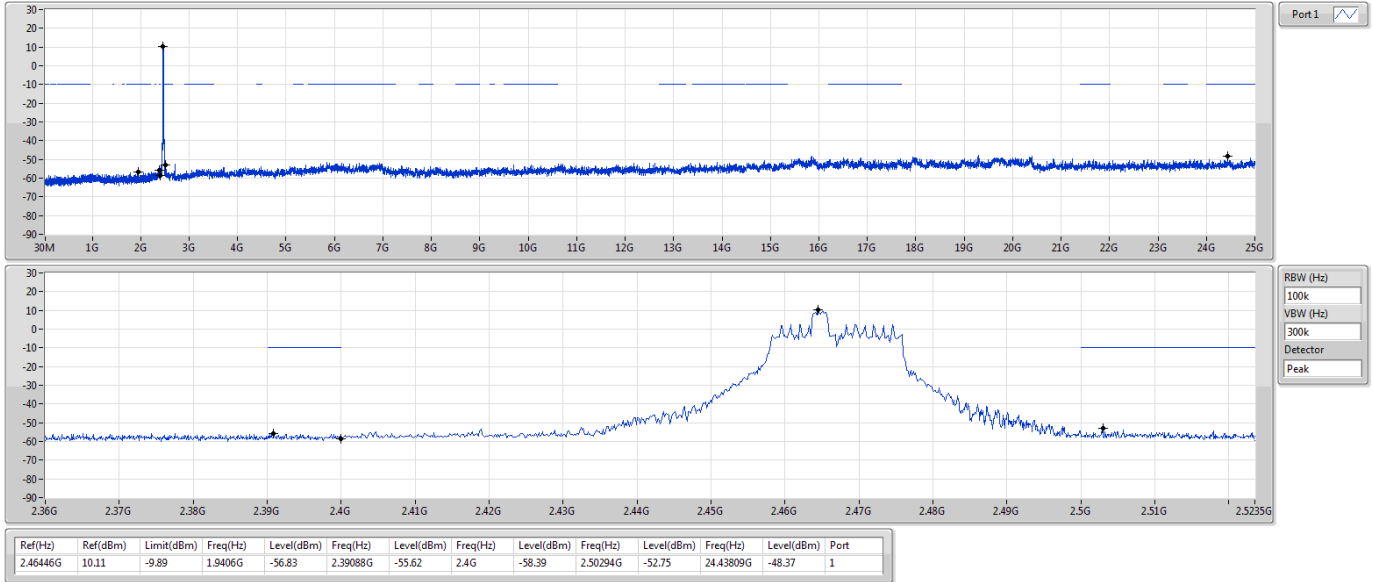

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_1TX(Port1)

CSENdB


2472MHz

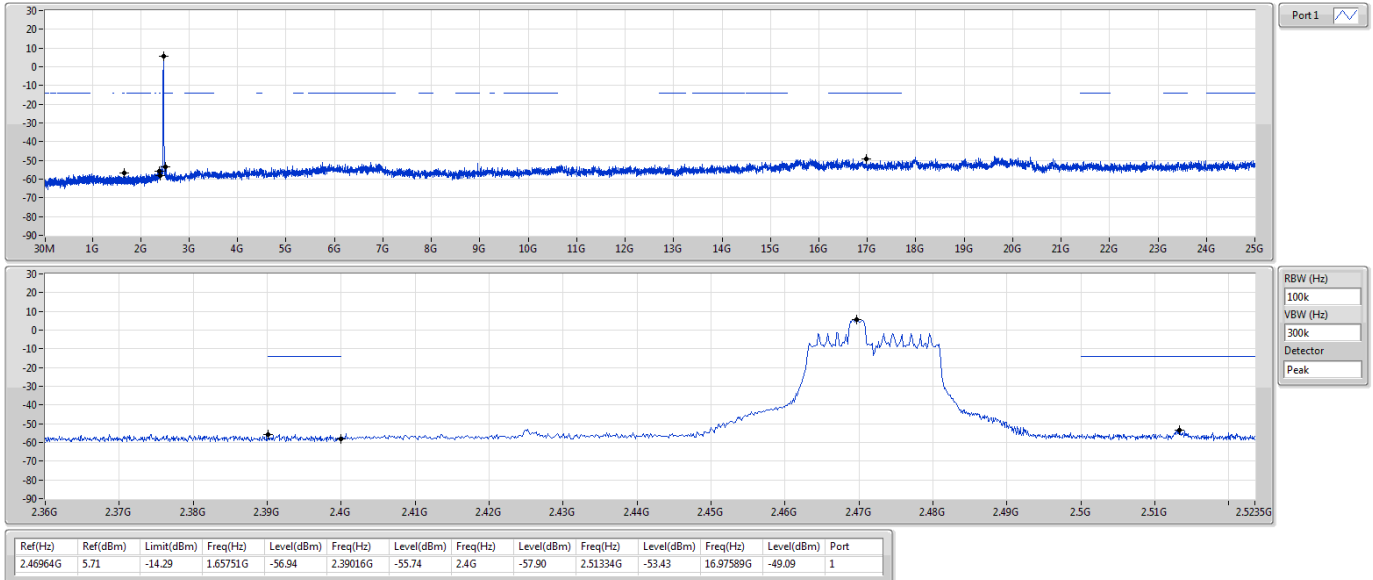

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_1TX(Port1)

CSENdB


2412MHz

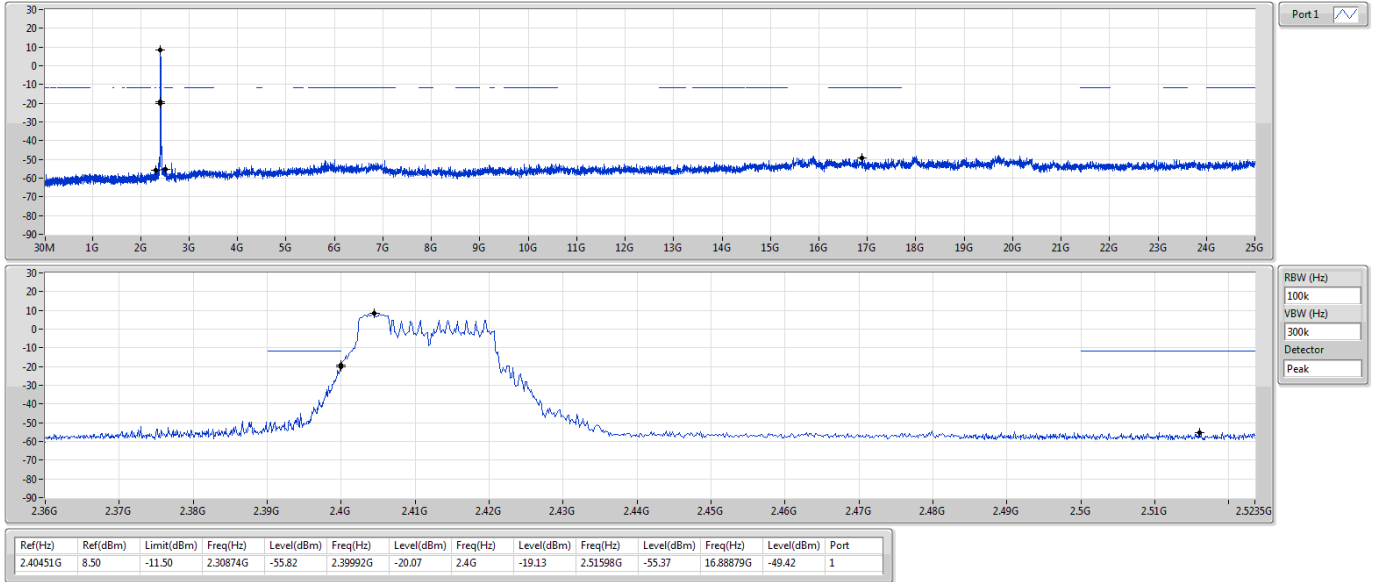

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_1TX(Port1)

CSENdB


2412MHz

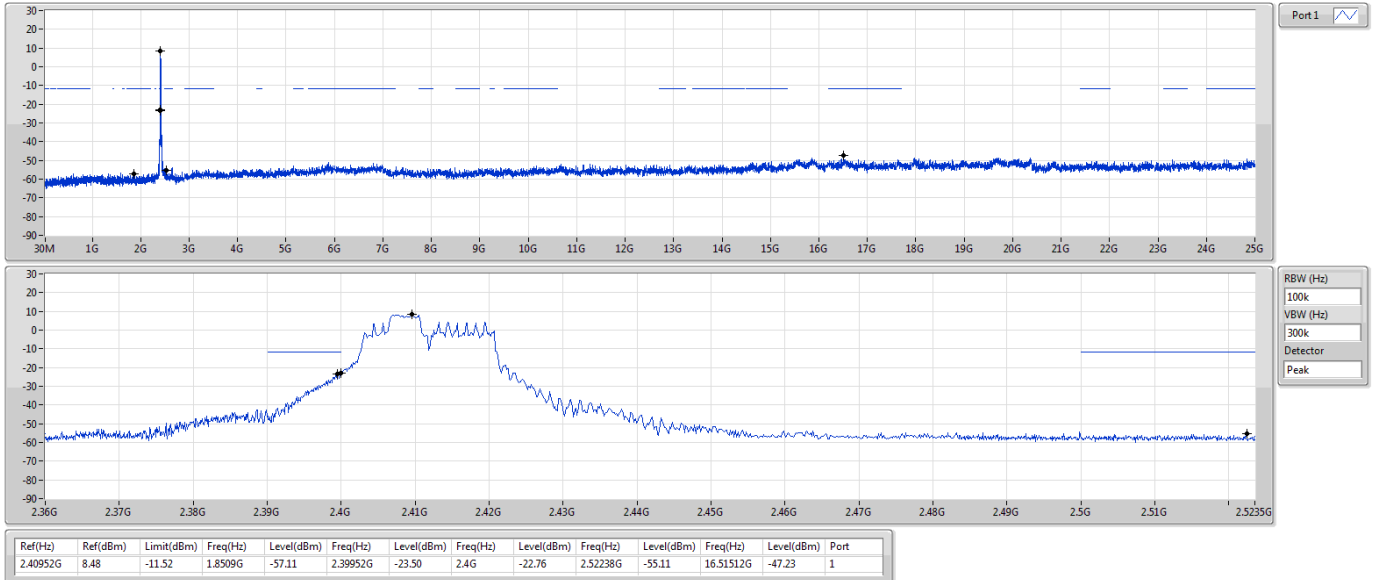

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_1TX(Port1)

CSENdB


2437MHz

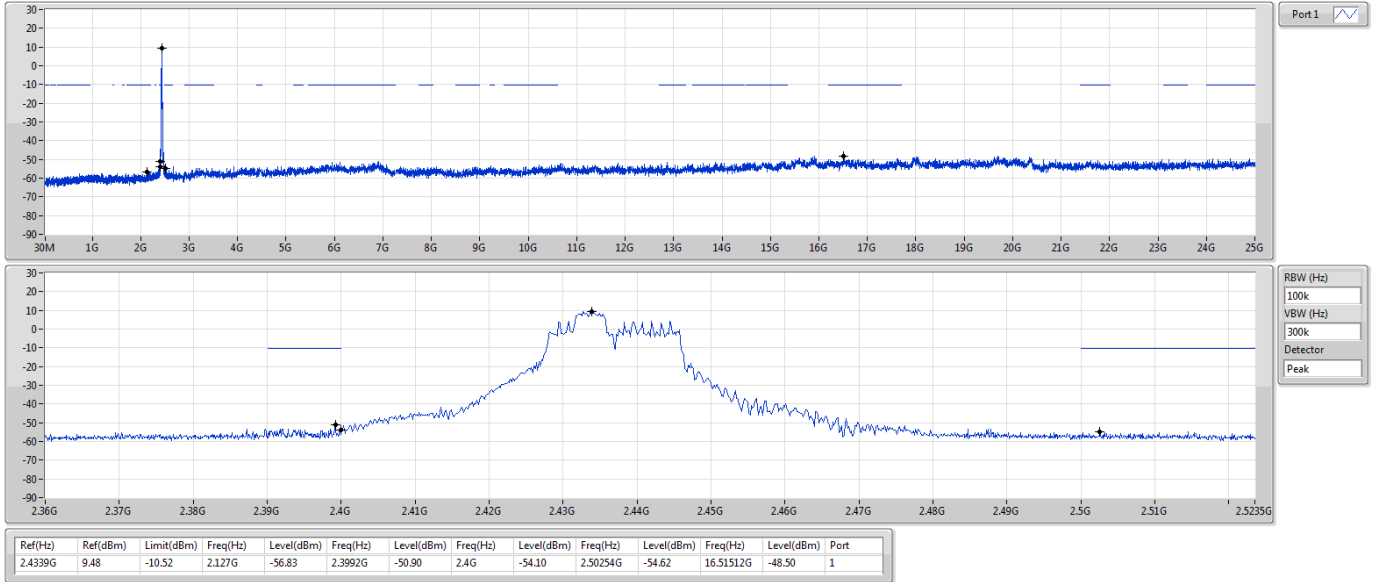

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_1TX(Port1)

CSENdB


2462MHz

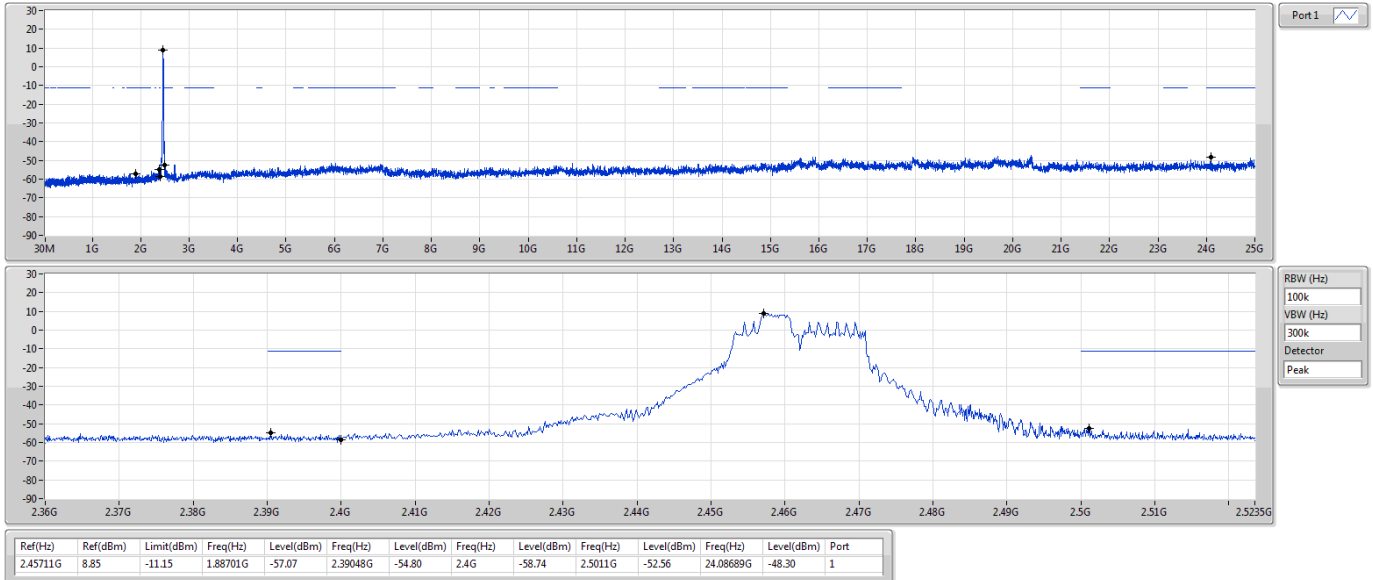

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_1TX(Port1)

CSENdB


2467MHz

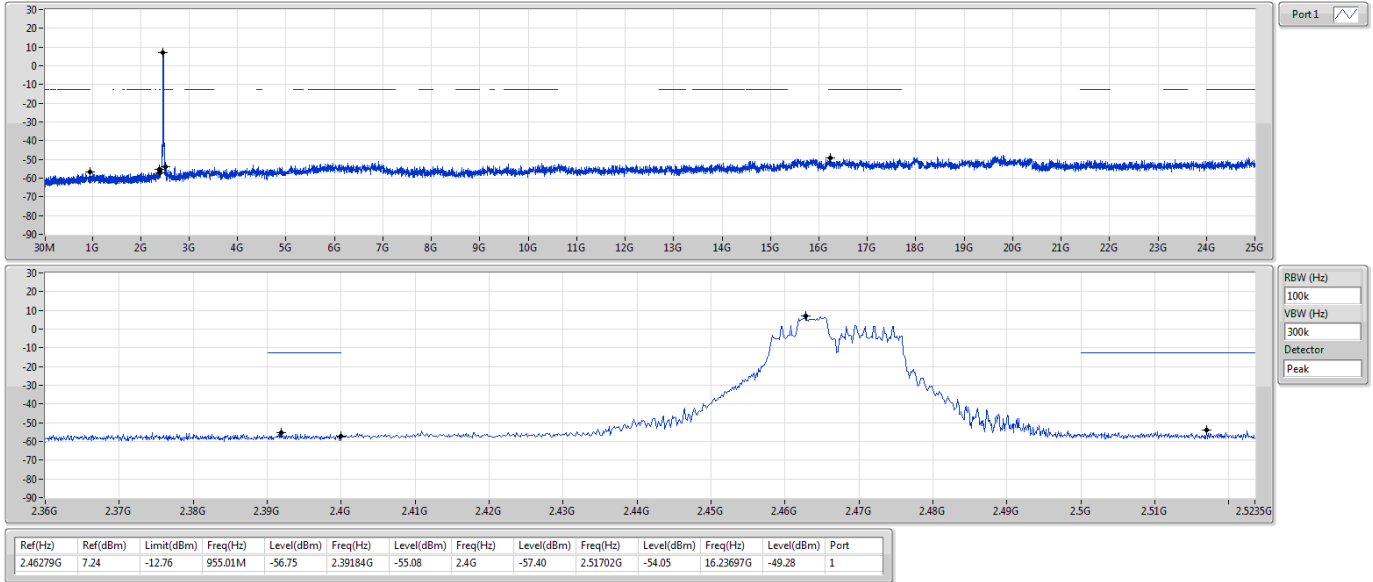

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_1TX(Port1)

CSENdB


2472MHz

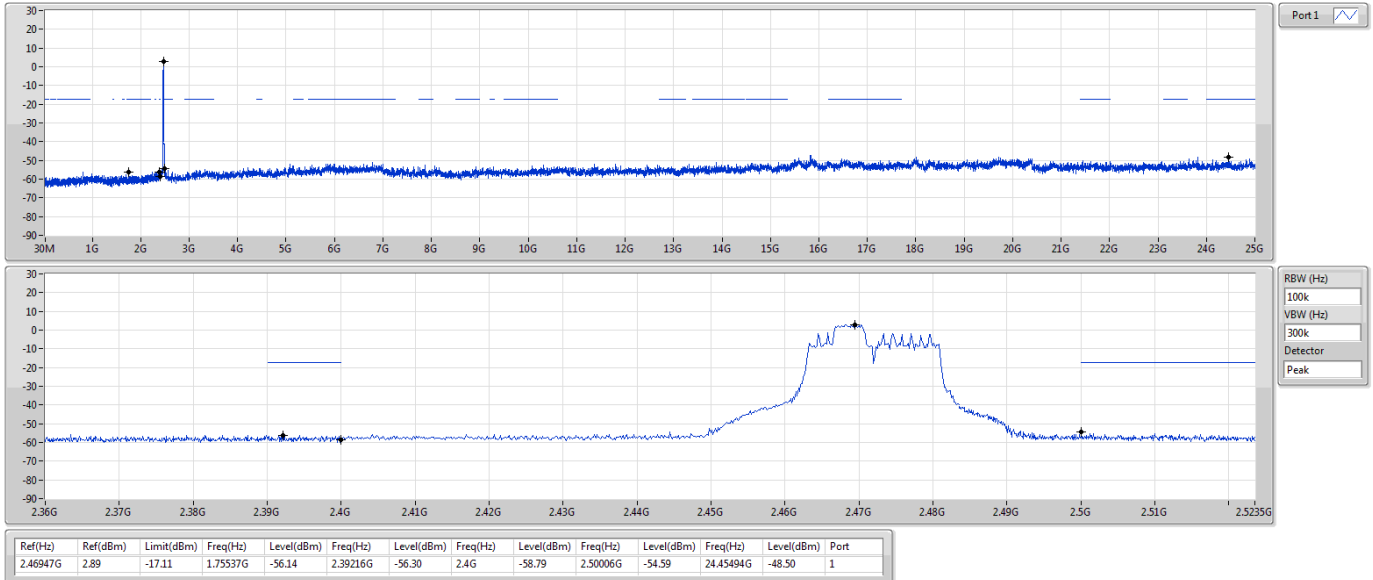

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_1TX(Port1)

CSENdB


2412MHz

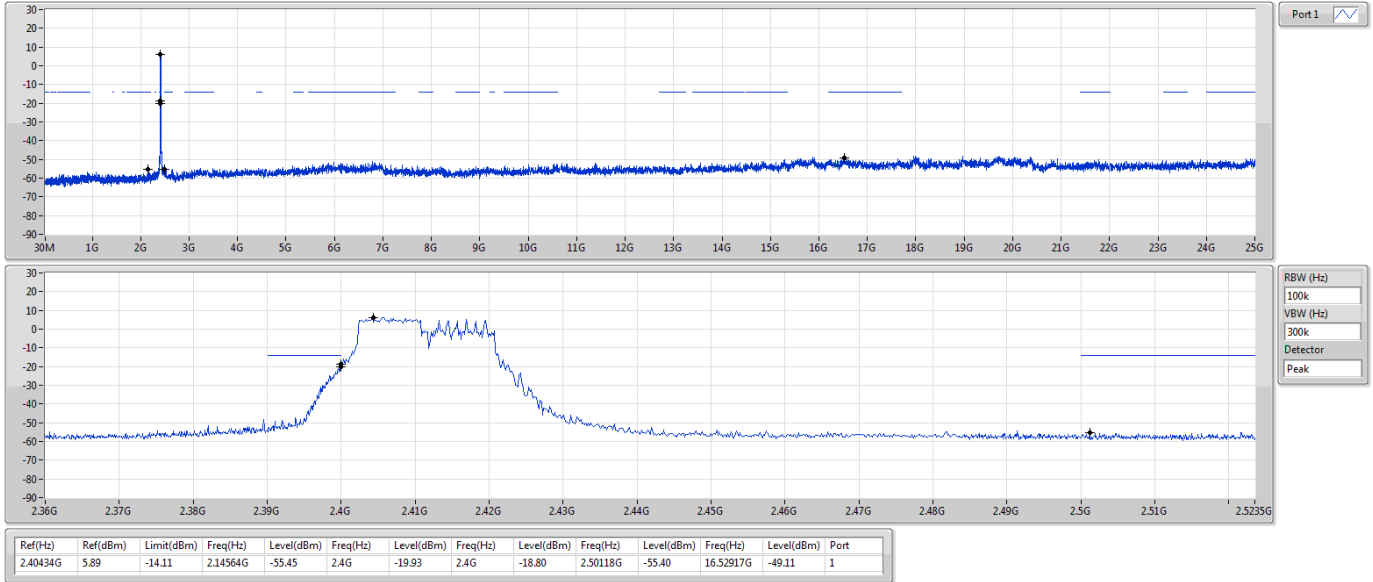

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_1TX(Port1)

CSENdB


2437MHz

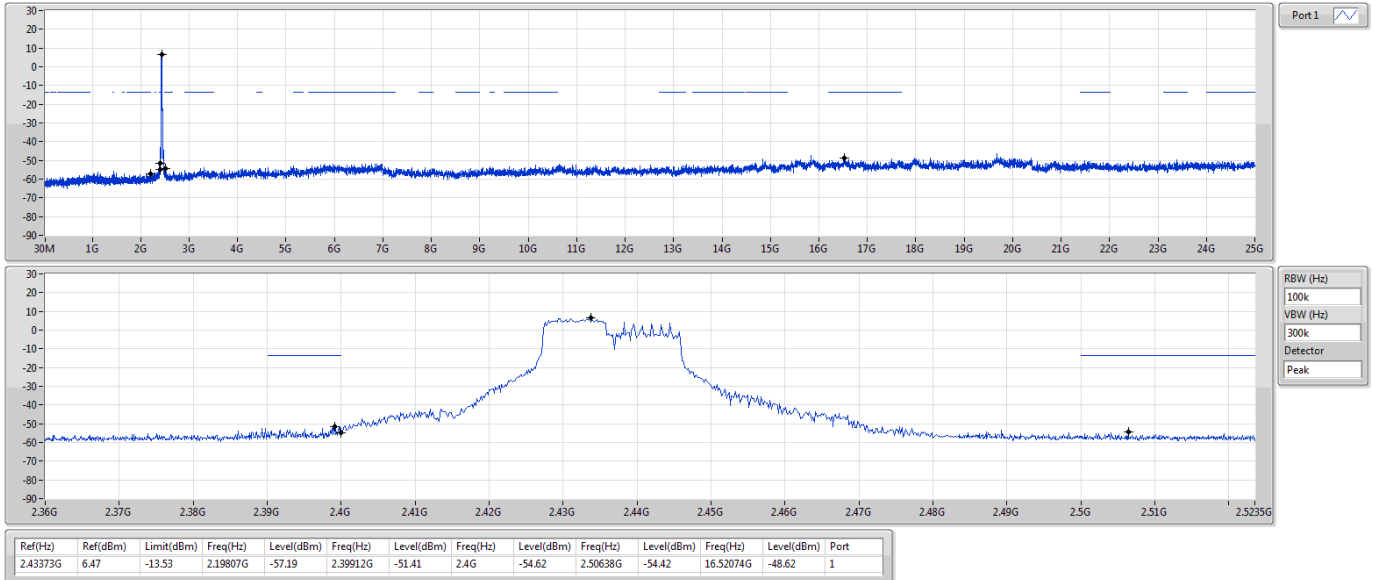

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_1TX(Port1)

CSENdB


2462MHz

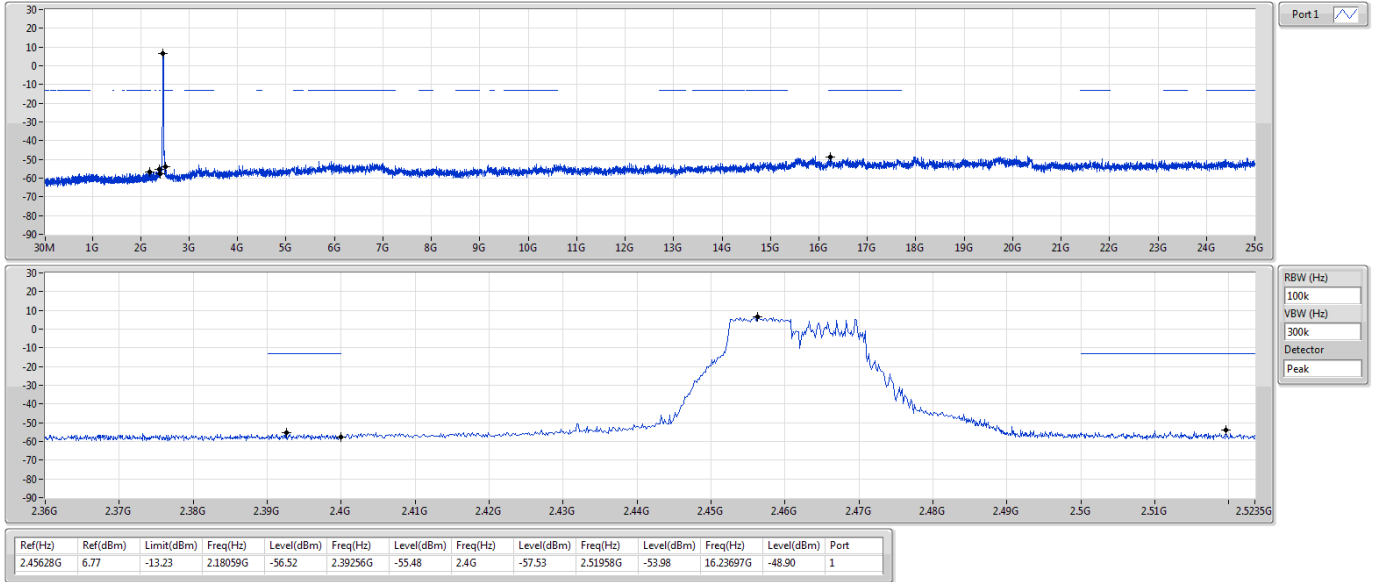

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_1TX(Port1)

CSENdB


2467MHz

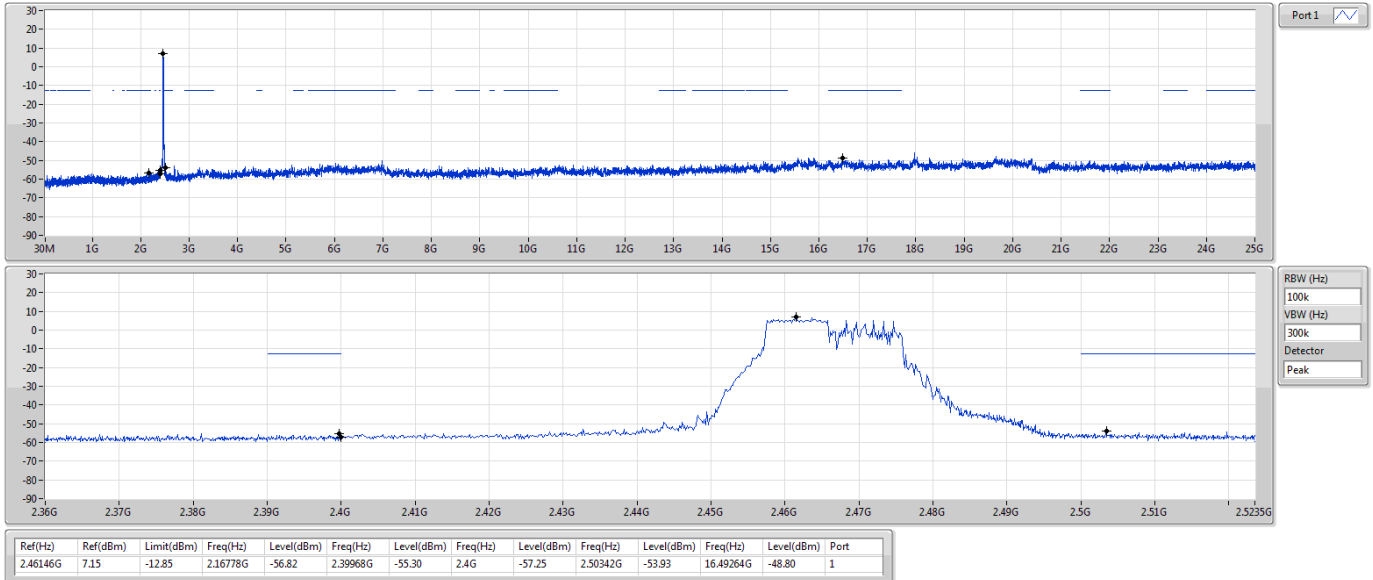

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_1TX(Port1)

CSENdB


2472MHz

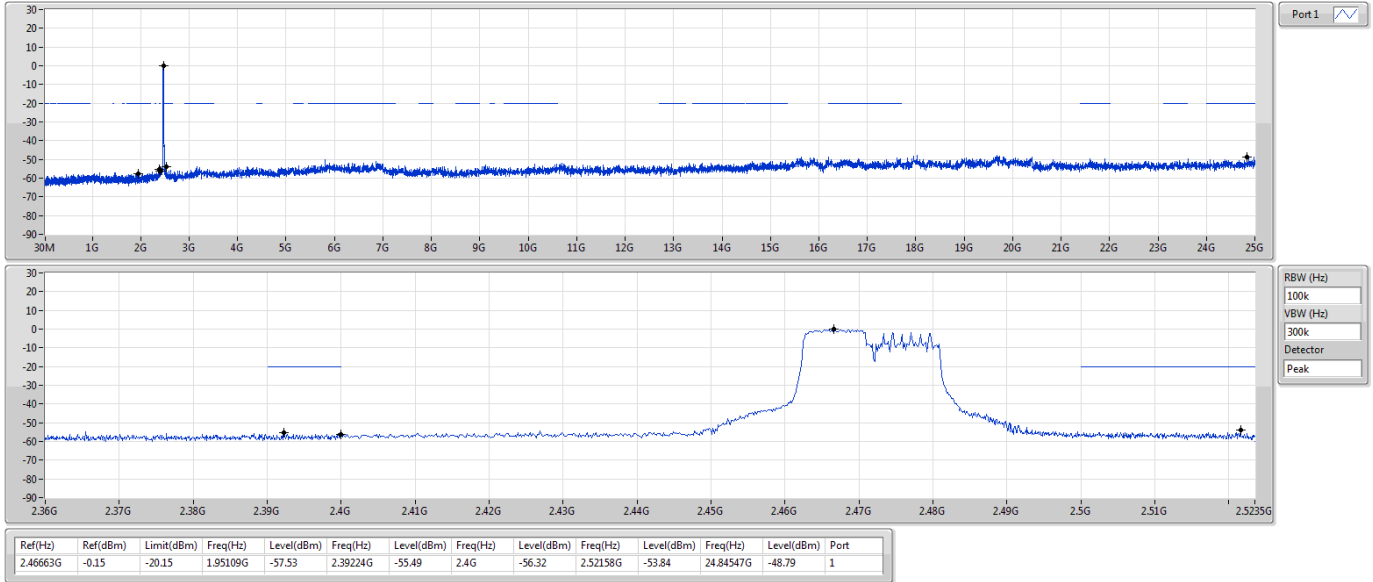

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_1TX(Port1)

CSENdB


2422MHz

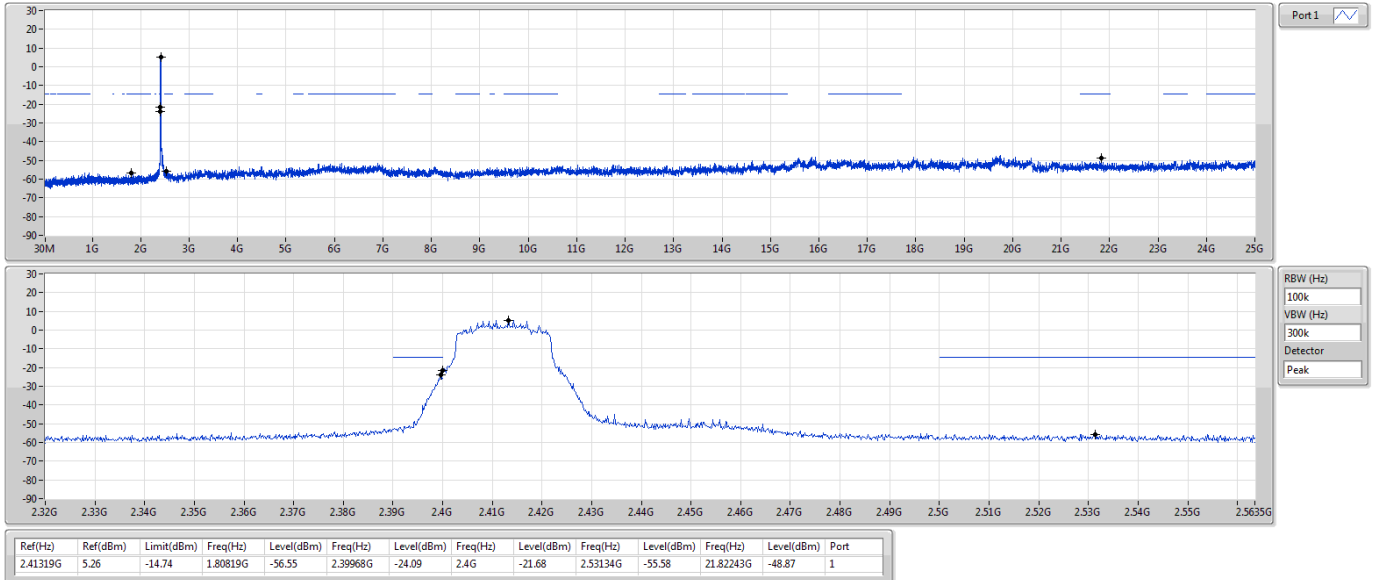

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_1TX(Port1)

CSENdB


2437MHz

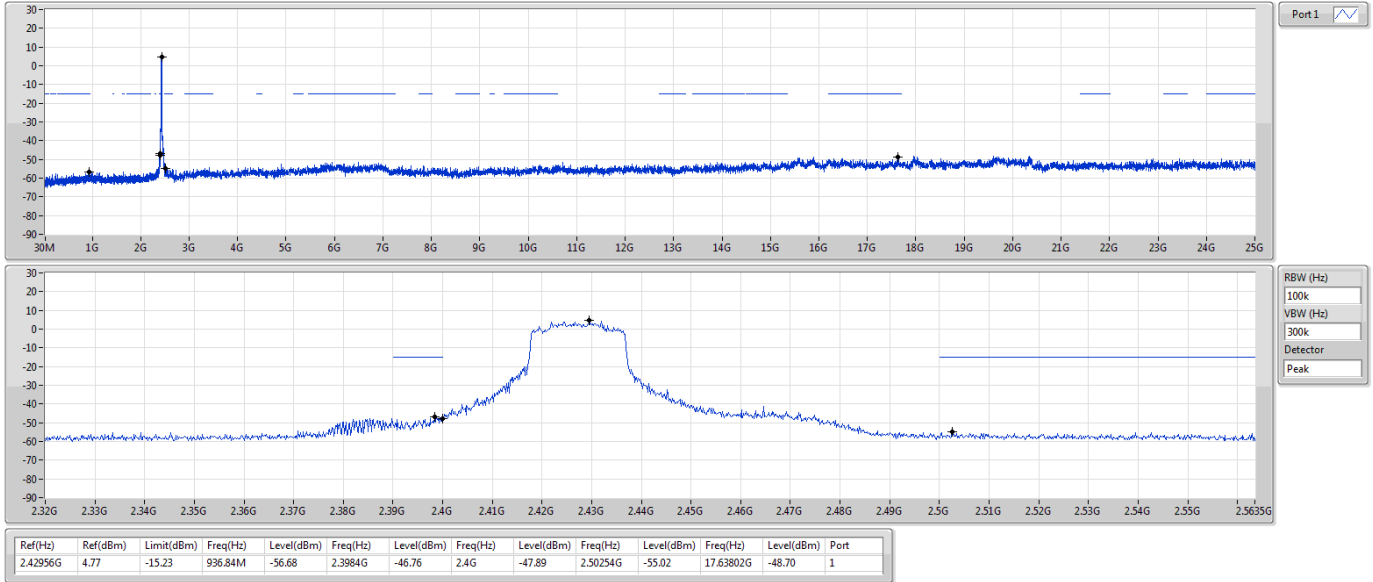

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_1TX(Port1)

CSENdB


2452MHz

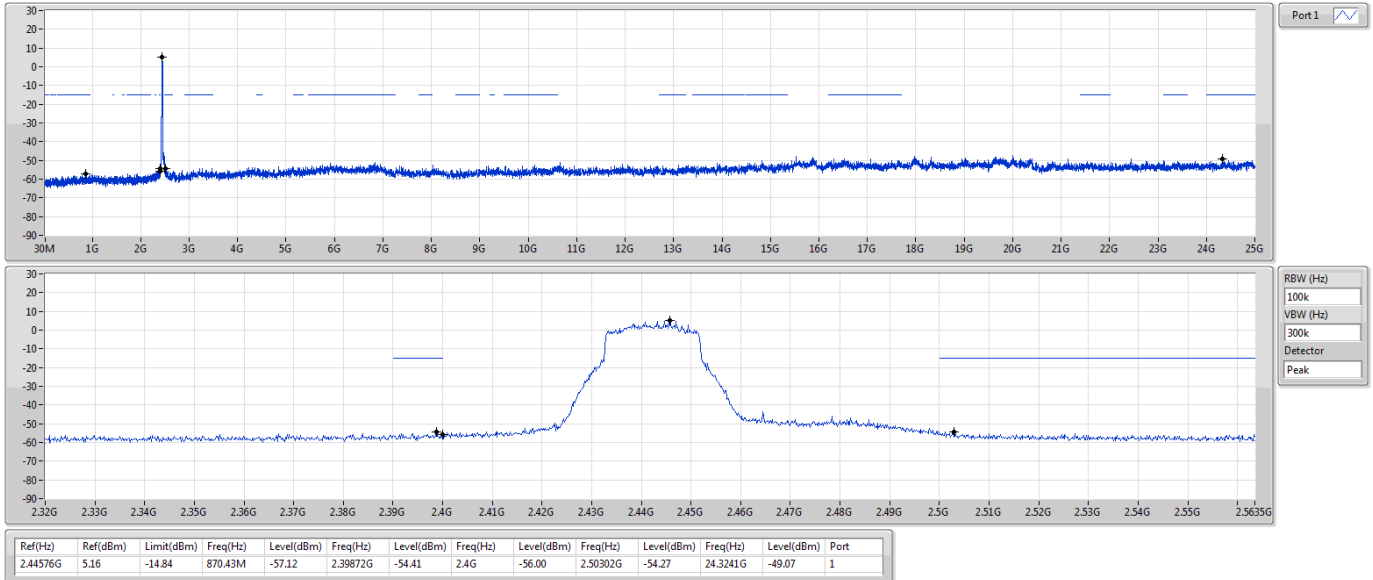

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_1TX(Port1)

CSENdB


2457MHz

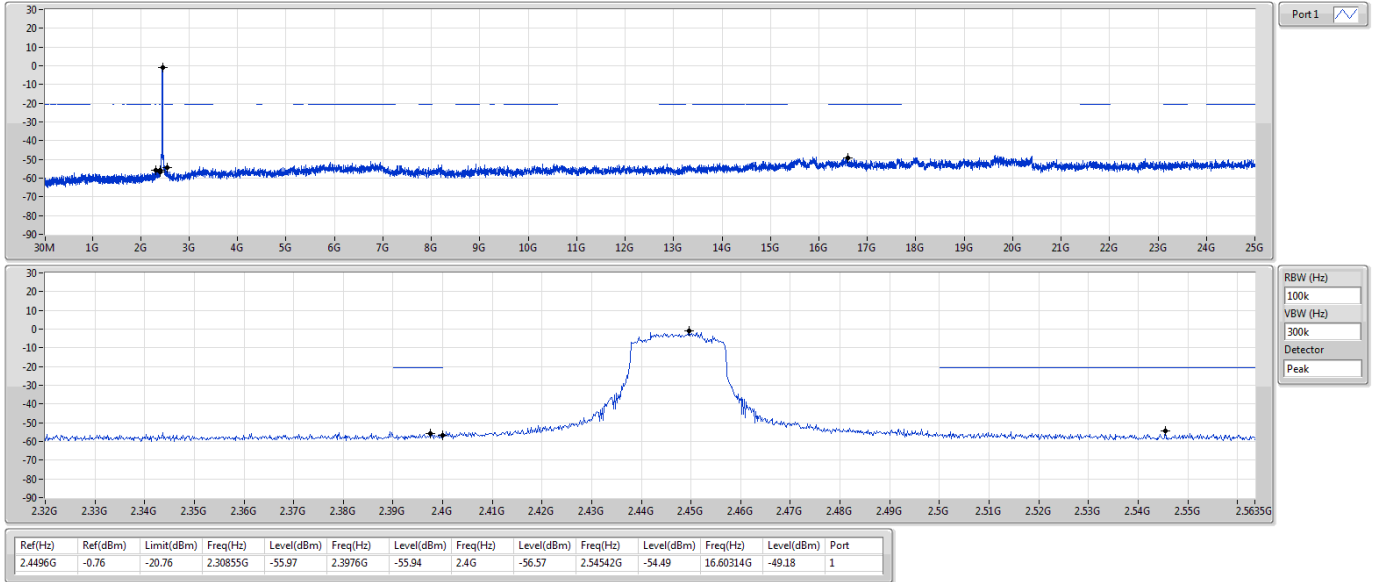

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_1TX(Port1)

CSENdB


2462MHz

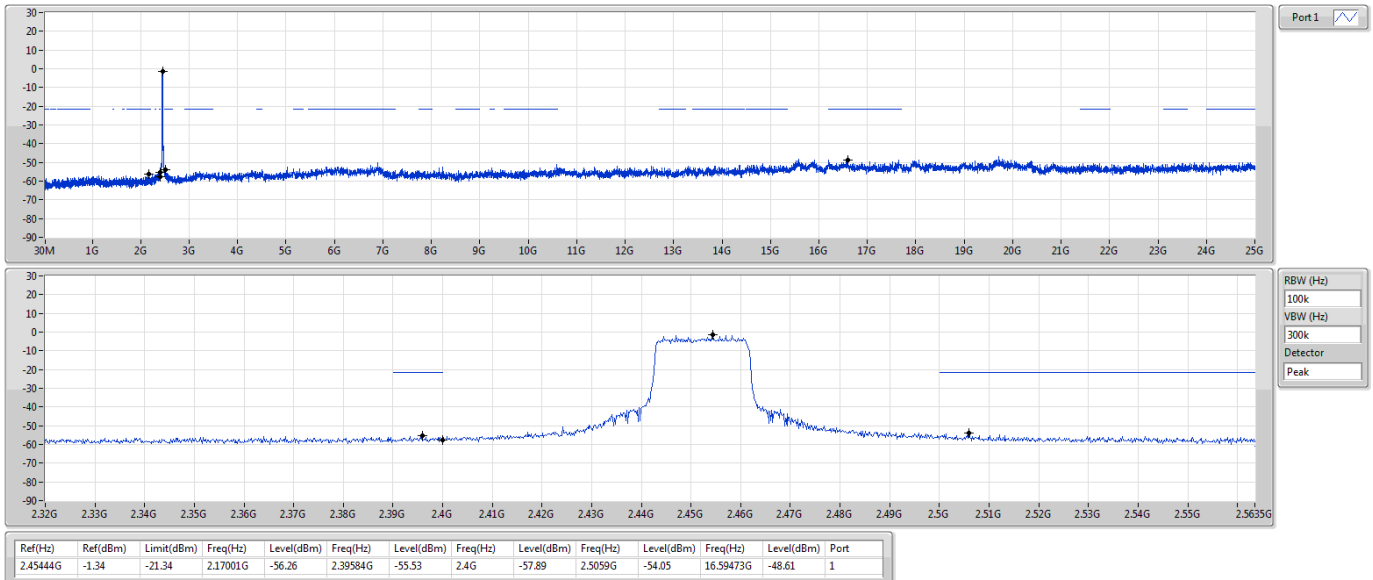

802.11ax HEW20_RU26_Index3_Nss2,(MCS0)_2TX

CSEndB


2412MHz

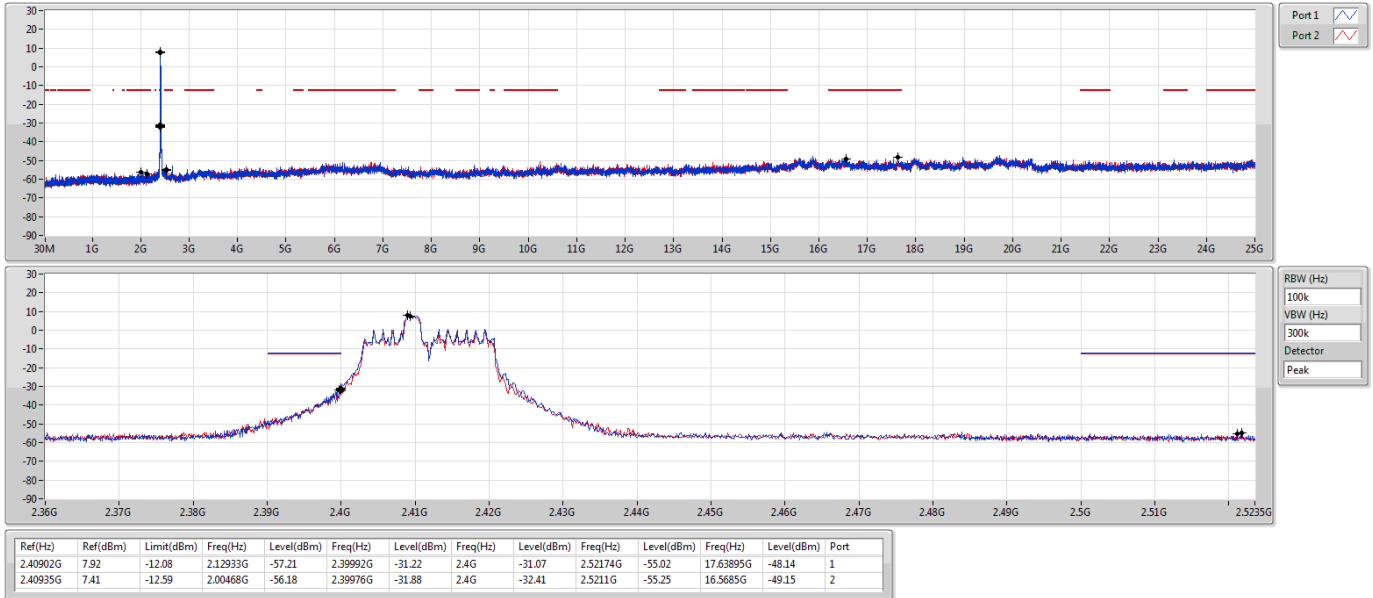

802.11ax HEW20_RU26_Index3_Nss2,(MCS0)_2TX

CSEndB

2437MHz

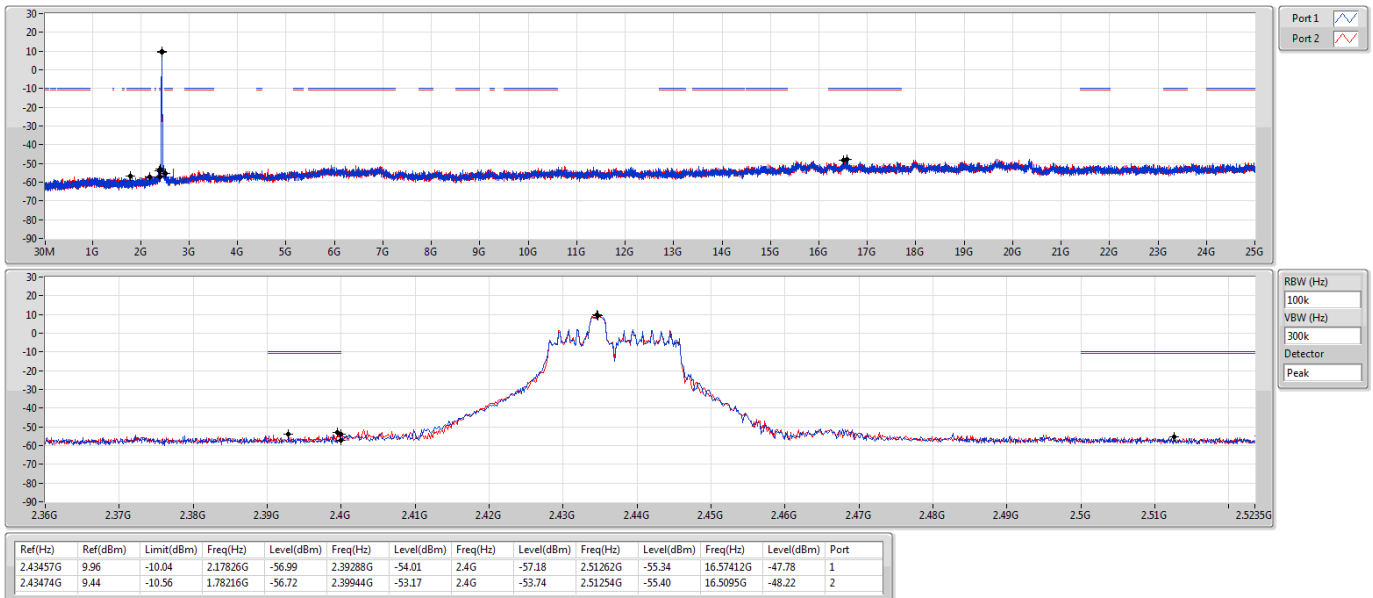




802.11ax HEW20_RU26_Index3_Nss2,(MCS0)_2TX

CSEndB


2462MHz

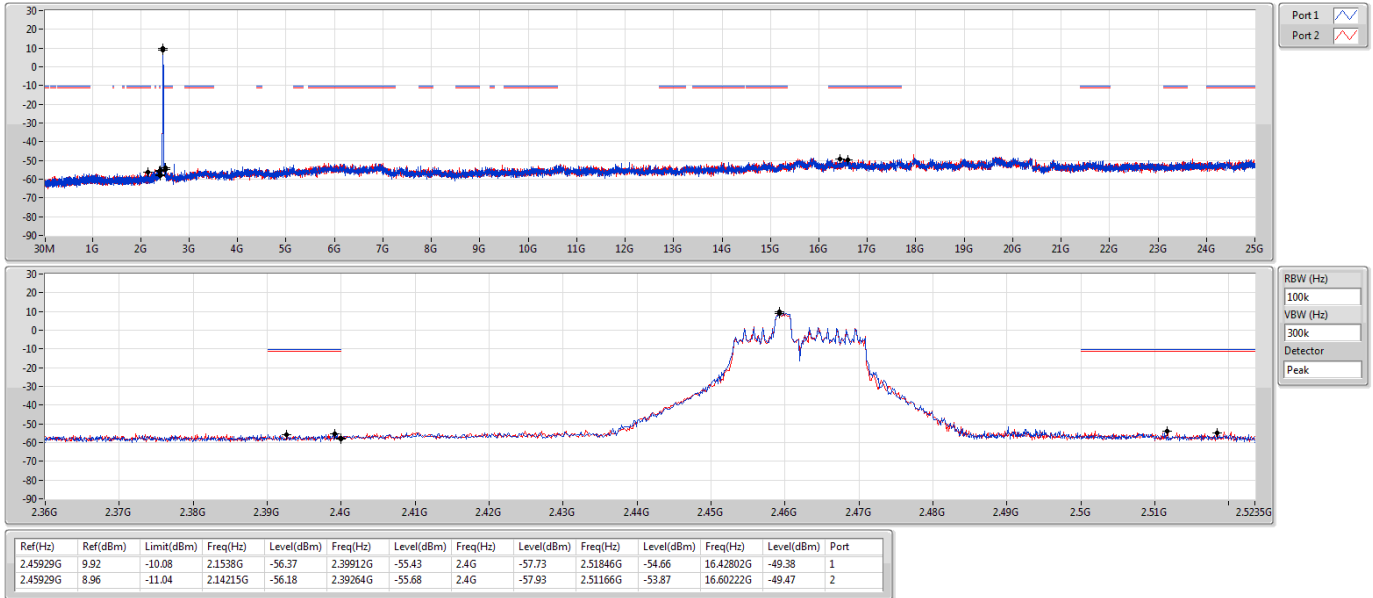

802.11ax HEW20_RU26_Index3_Nss2,(MCS0)_2TX

CSEndB


2467MHz

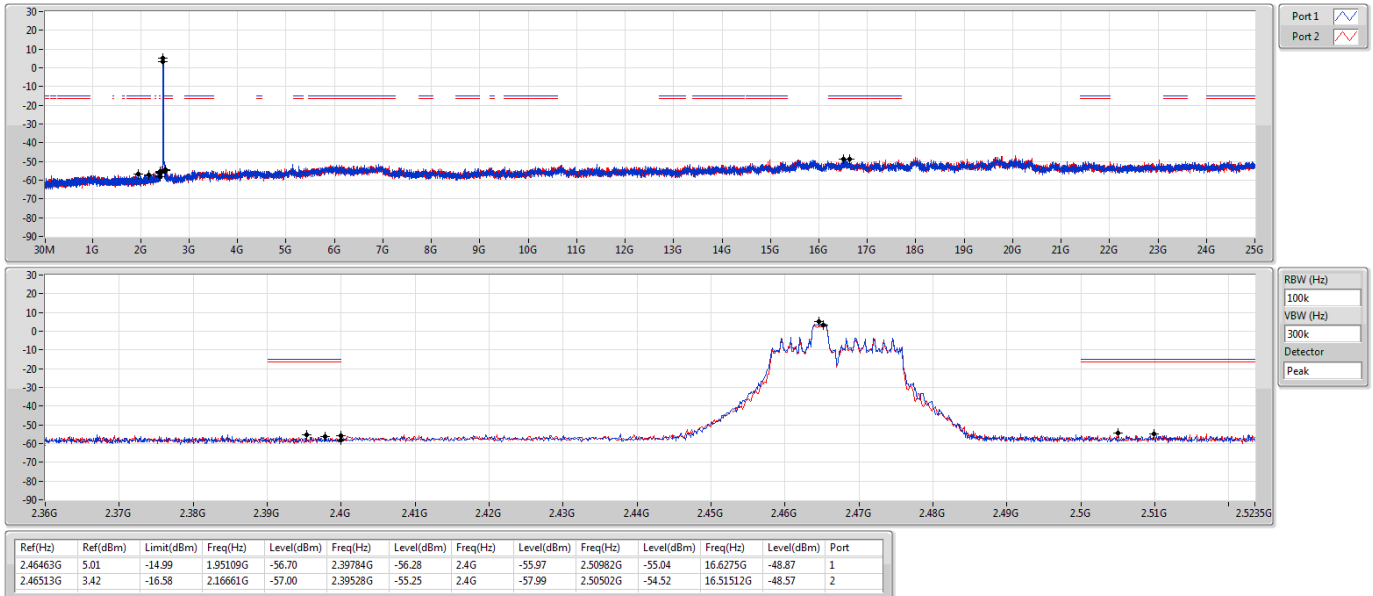

802.11ax HEW20_RU26_Index3_Nss2,(MCS0)_2TX

CSEndB


2472MHz

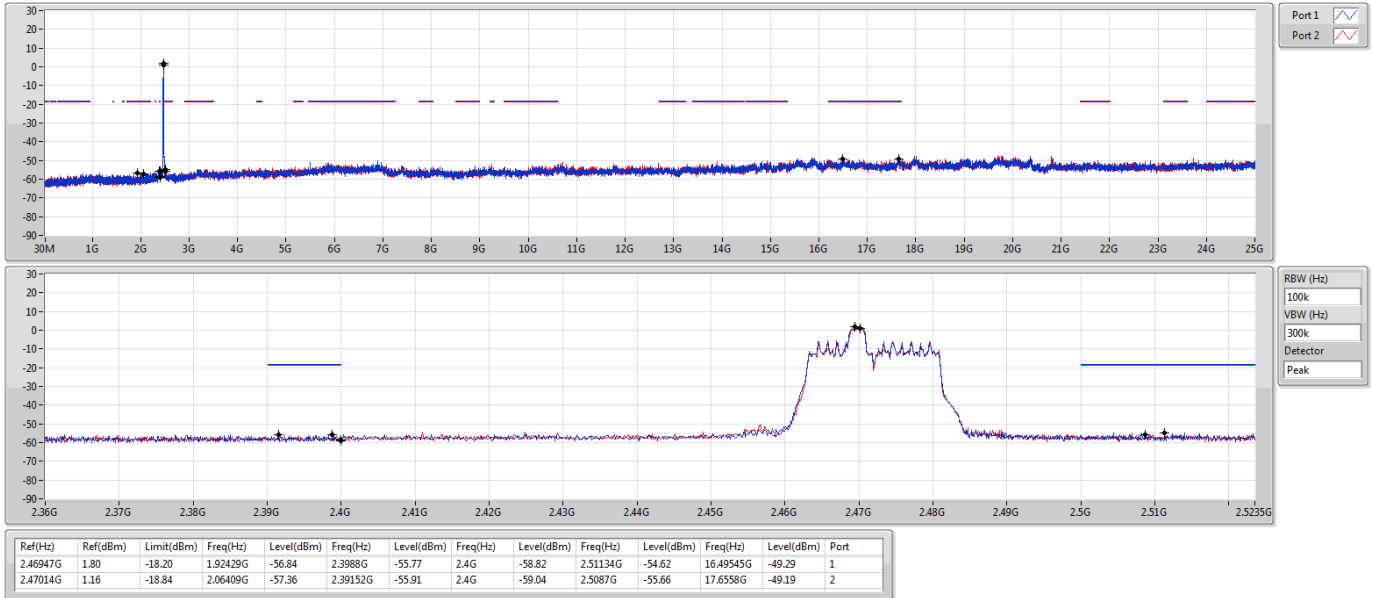

802.11ax HEW20_RU52_Index37_Nss2,(MCS0)_2TX

CSEndB

2412MHz

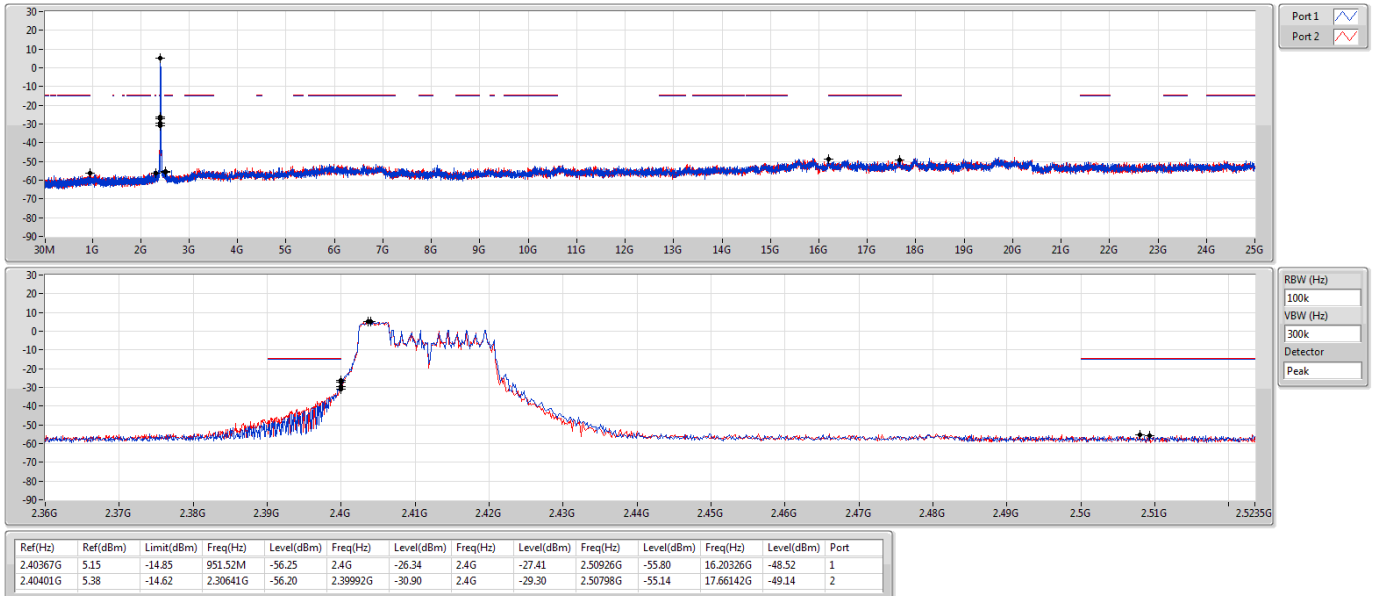




802.11ax HEW20_RU52_Index38_Nss2,(MCS0)_2TX

CSEndB


2412MHz

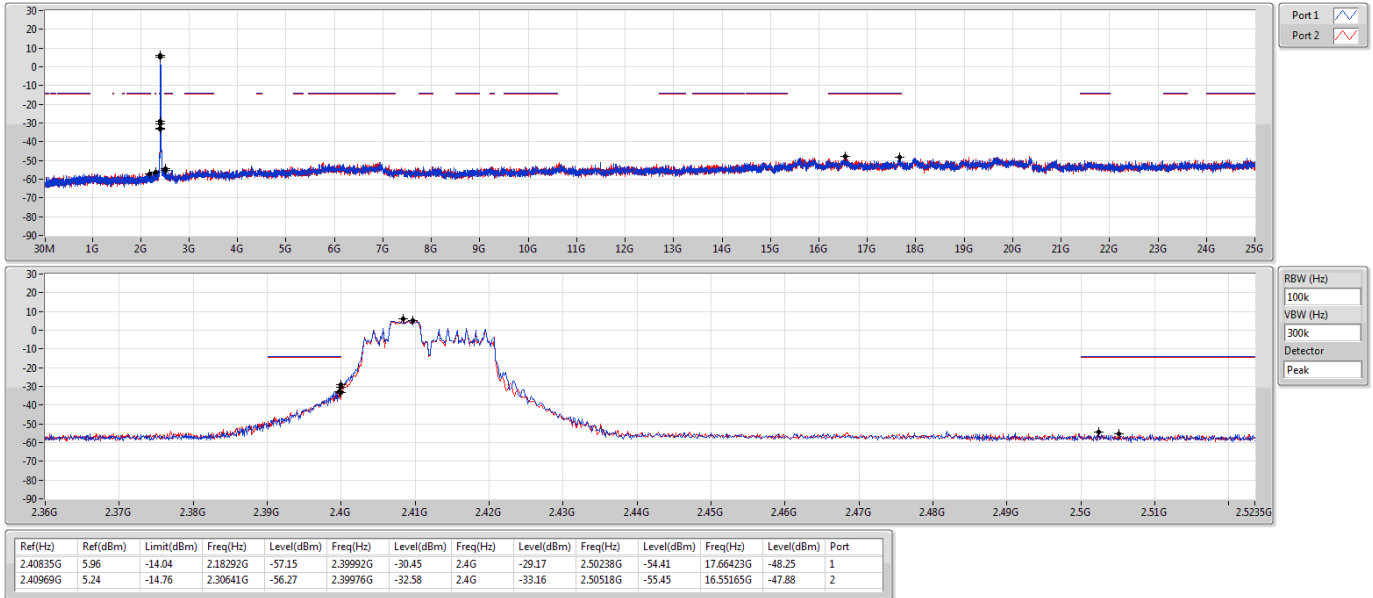

802.11ax HEW20_RU52_Index38_Nss2,(MCS0)_2TX

CSEndB

2437MHz

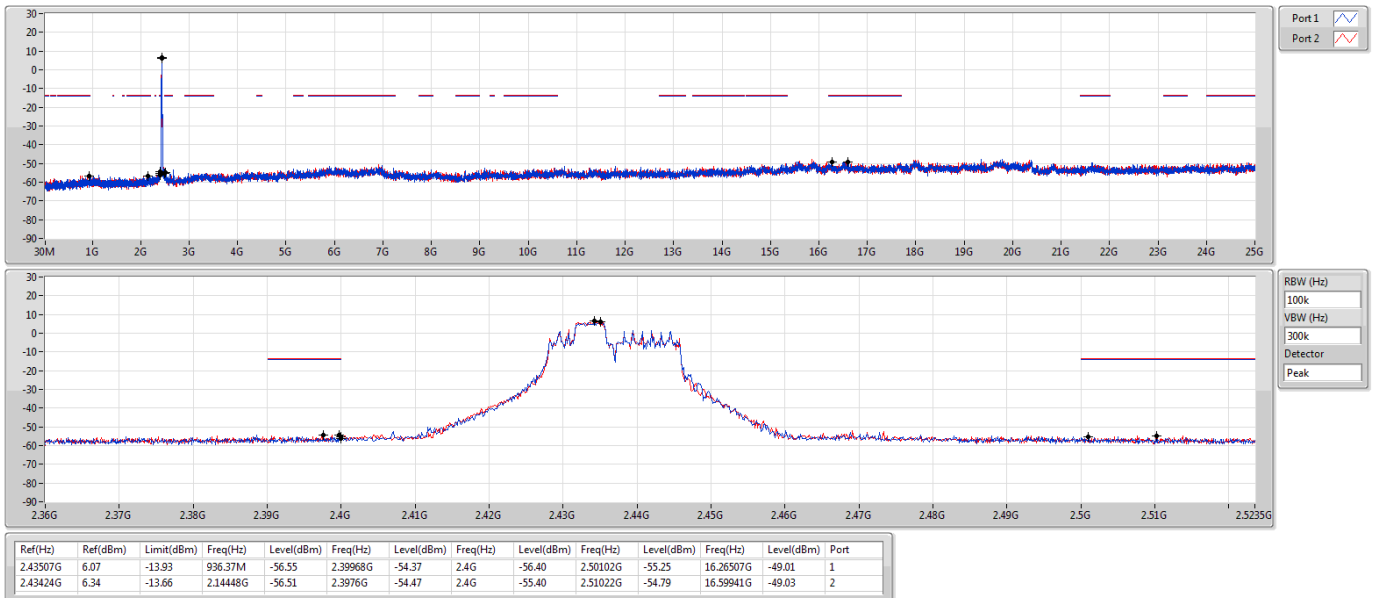




802.11ax HEW20_RU52_Index38_Nss2,(MCS0)_2TX

CSEndB


2462MHz

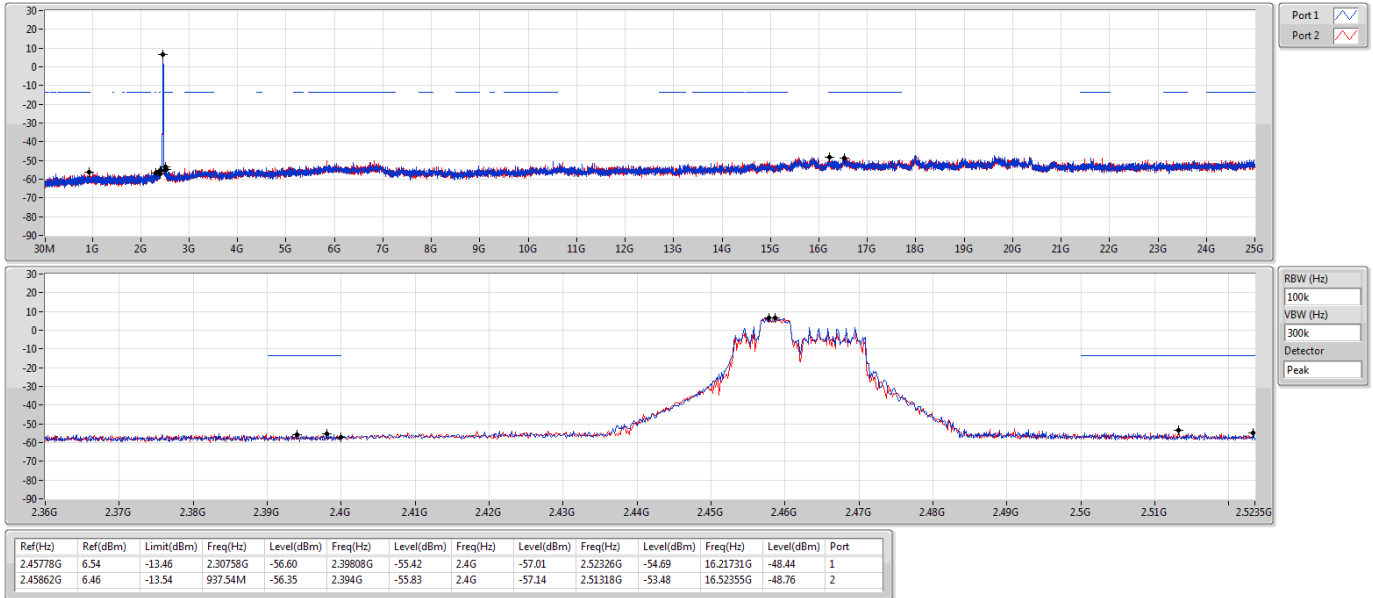

802.11ax HEW20_RU52_Index38_Nss2,(MCS0)_2TX

CSEndB


2467MHz

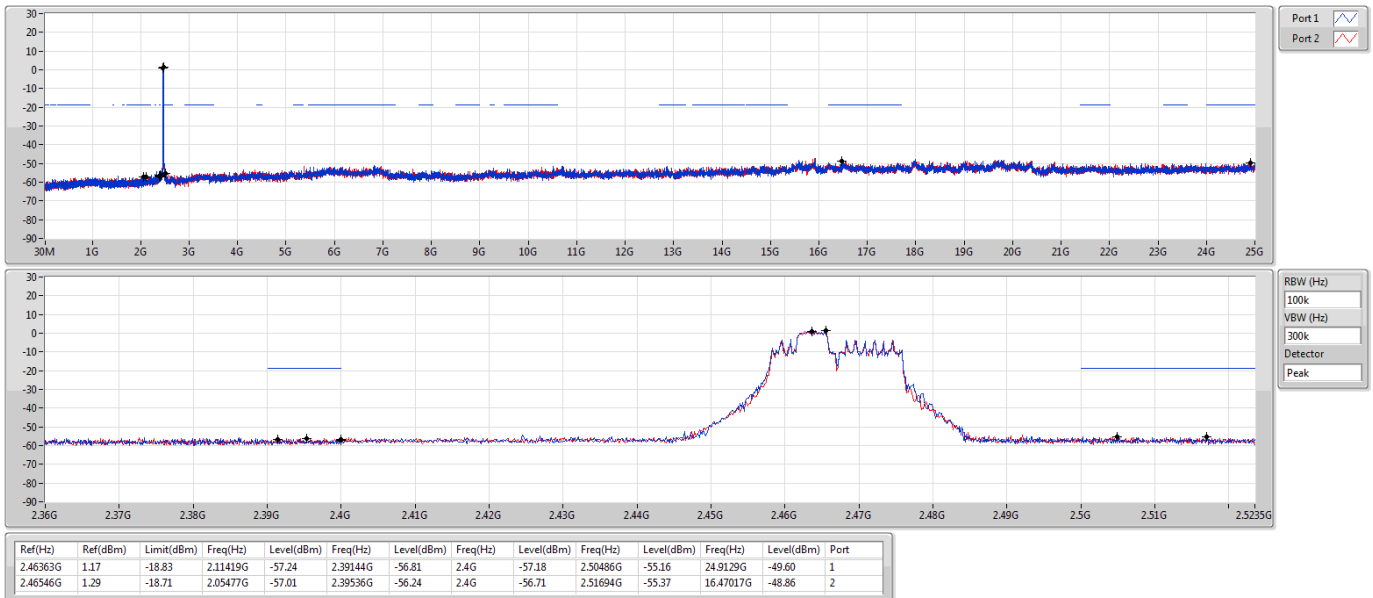

802.11ax HEW20_RU52_Index38_Nss2,(MCS0)_2TX

CSENdB


2472MHz

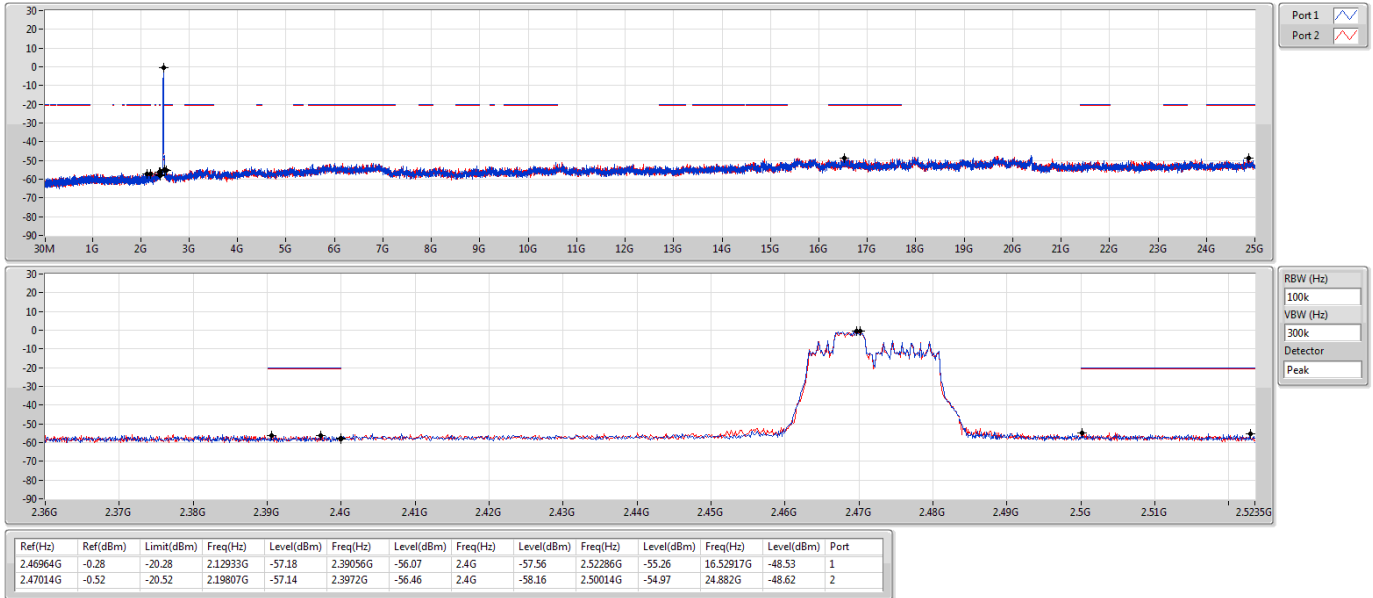

802.11ax HEW20_RU106_Index53_Nss2,(MCS0)_2TX

CSENdB

2412MHz

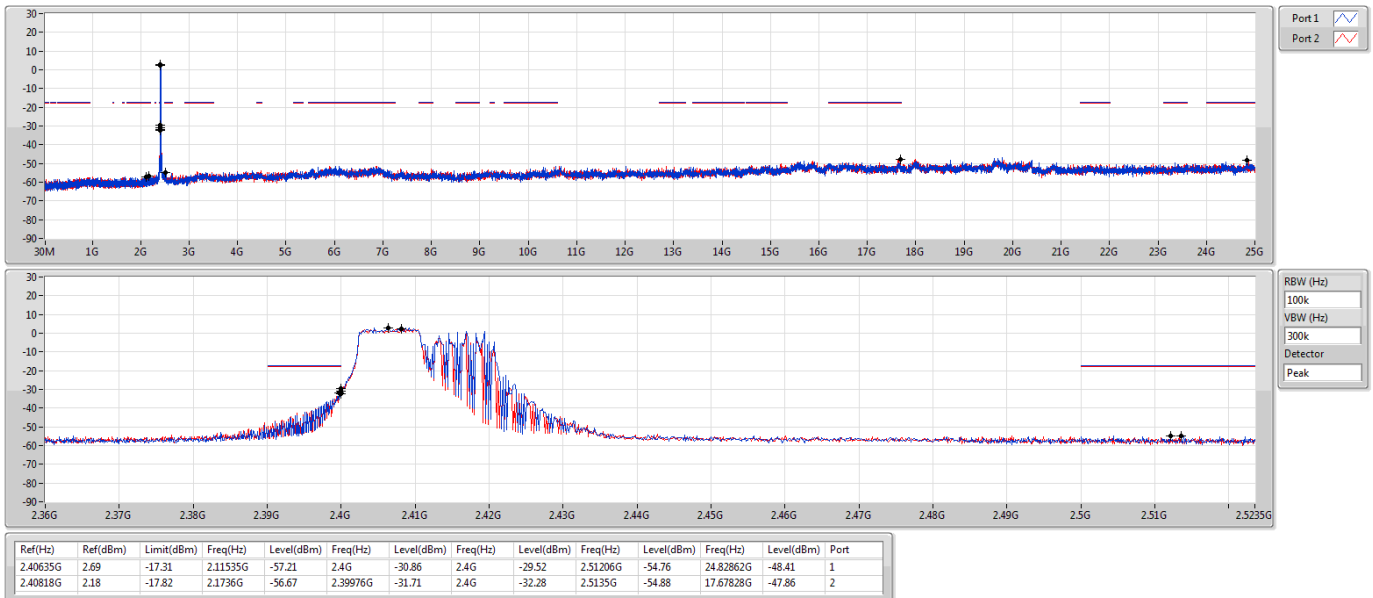




802.11ax HEW20_RU106_Index53_Nss2,(MCS0)_2TX

CSEndB


2437MHz

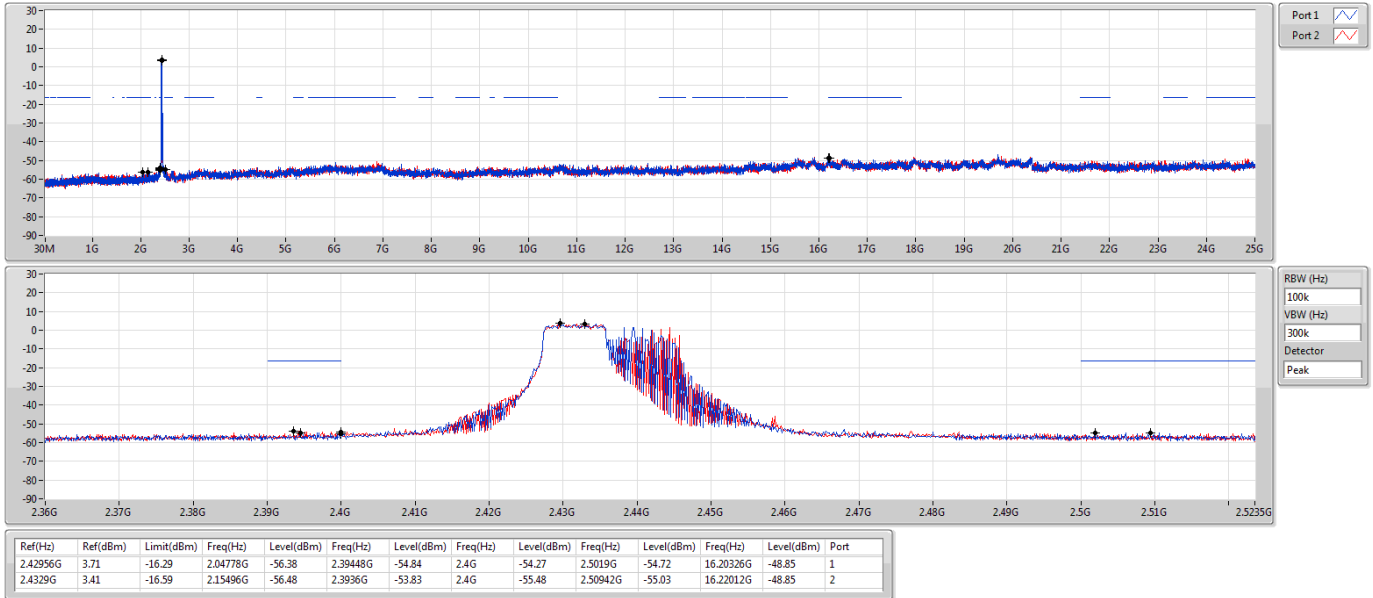

802.11ax HEW20_RU106_Index53_Nss2,(MCS0)_2TX

CSEndB

2462MHz

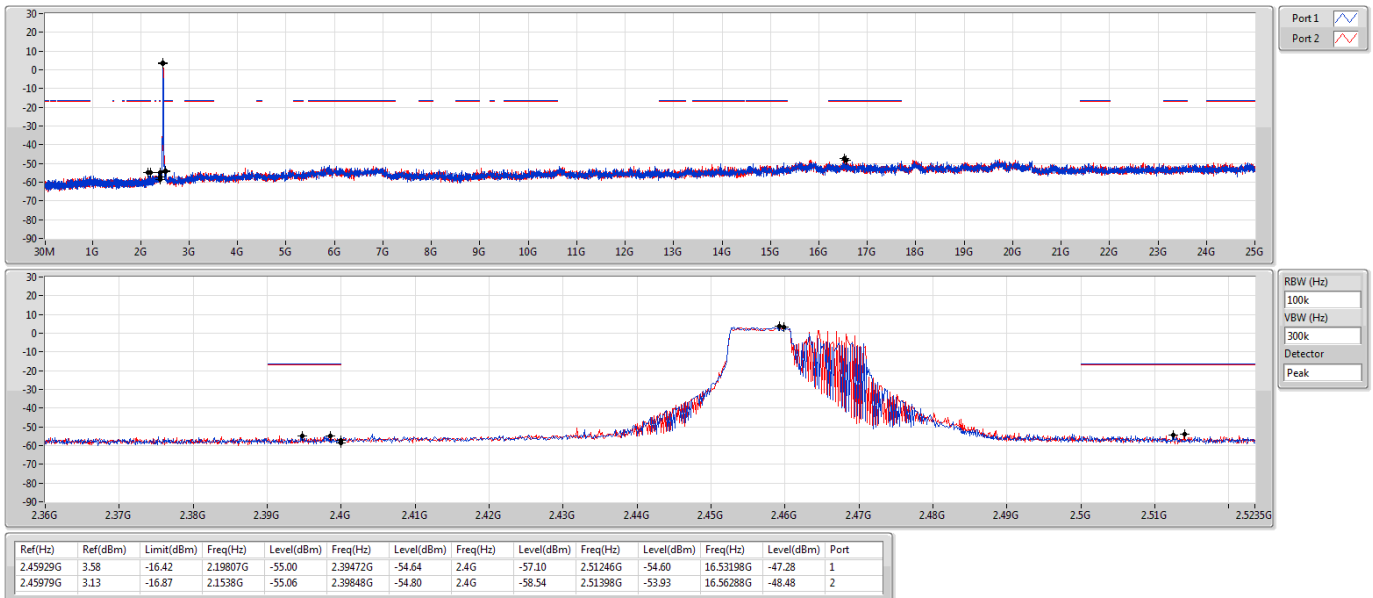




802.11ax HEW20_RU106_Index53_Nss2,(MCS0)_2TX

CSEndB


2467MHz

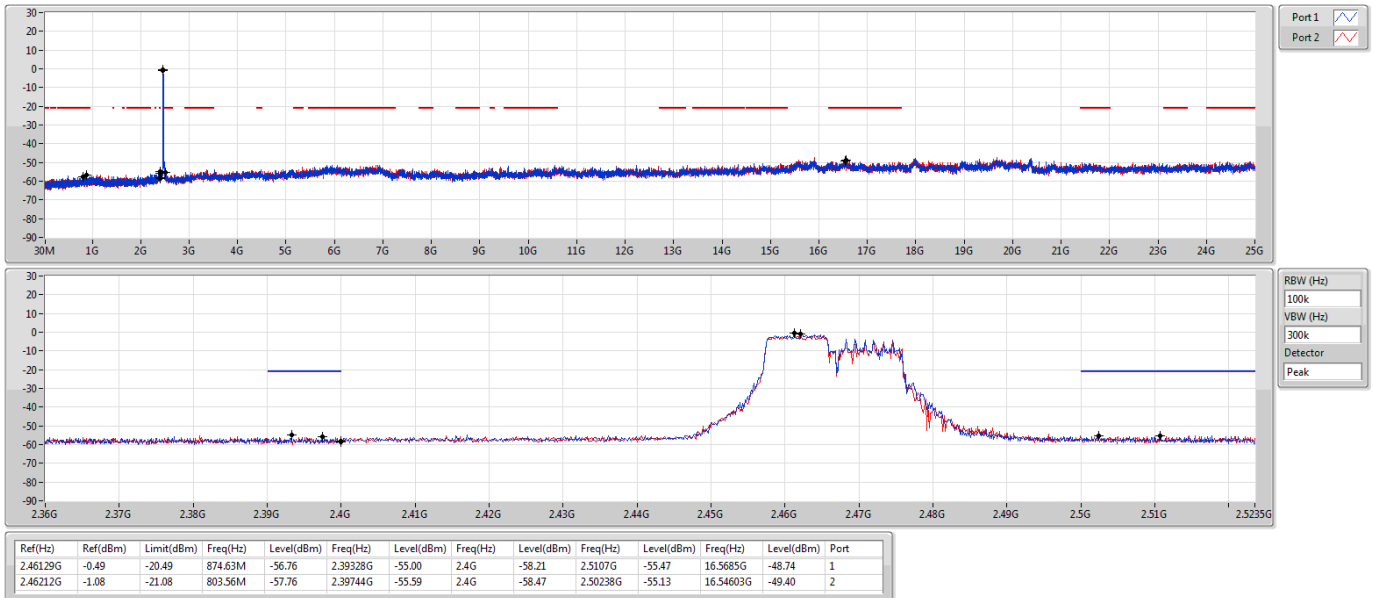

802.11ax HEW20_RU106_Index53_Nss2,(MCS0)_2TX

CSEndB

2472MHz

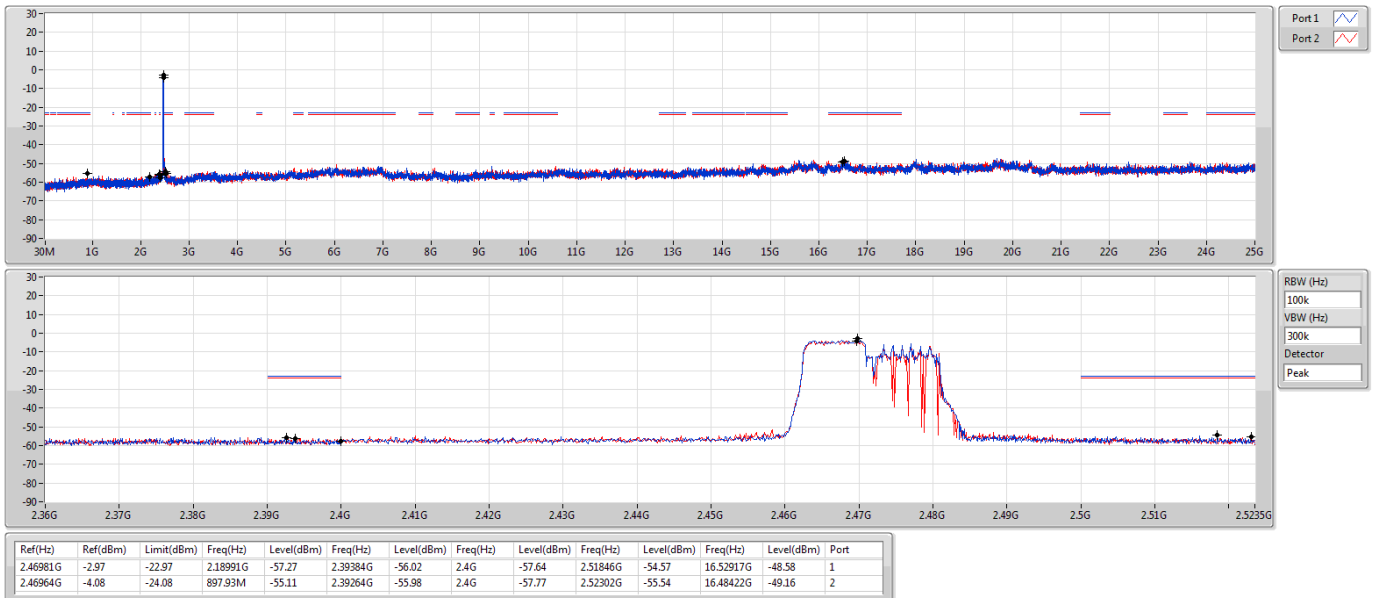




802.11ax HEW40_RU242_Index61_Nss2,(MCS0)_2TX

CSEndB


2422MHz

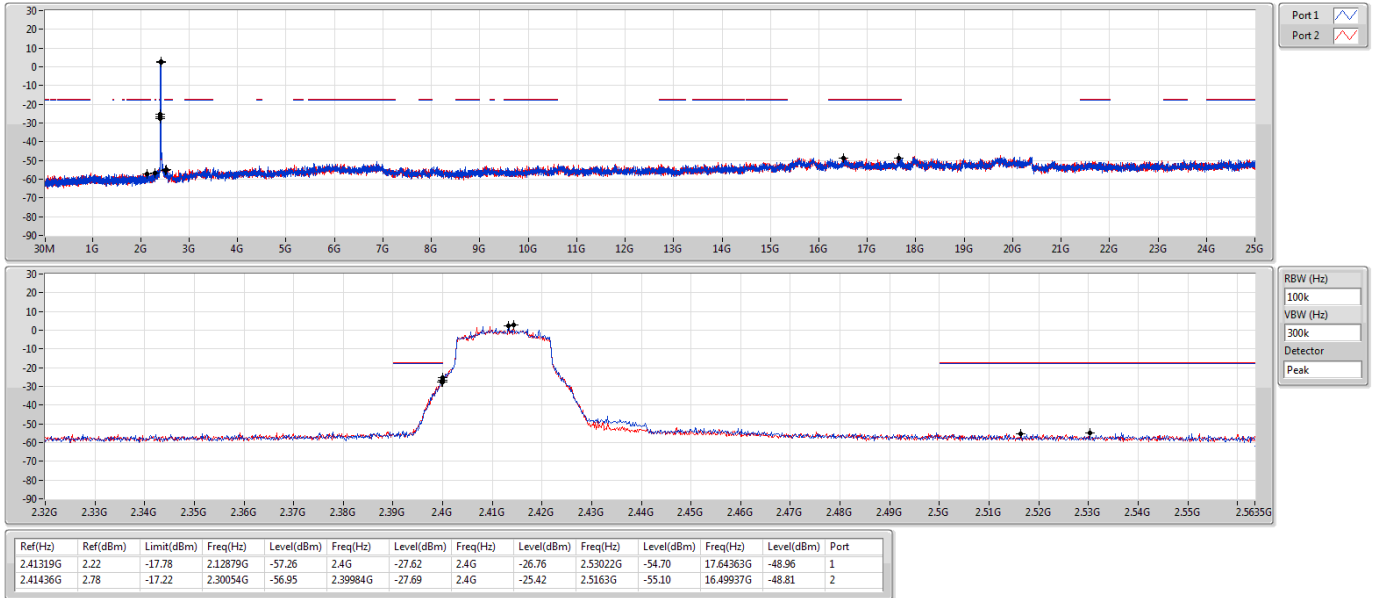

802.11ax HEW40_RU242_Index61_Nss2,(MCS0)_2TX

CSEndB

2437MHz

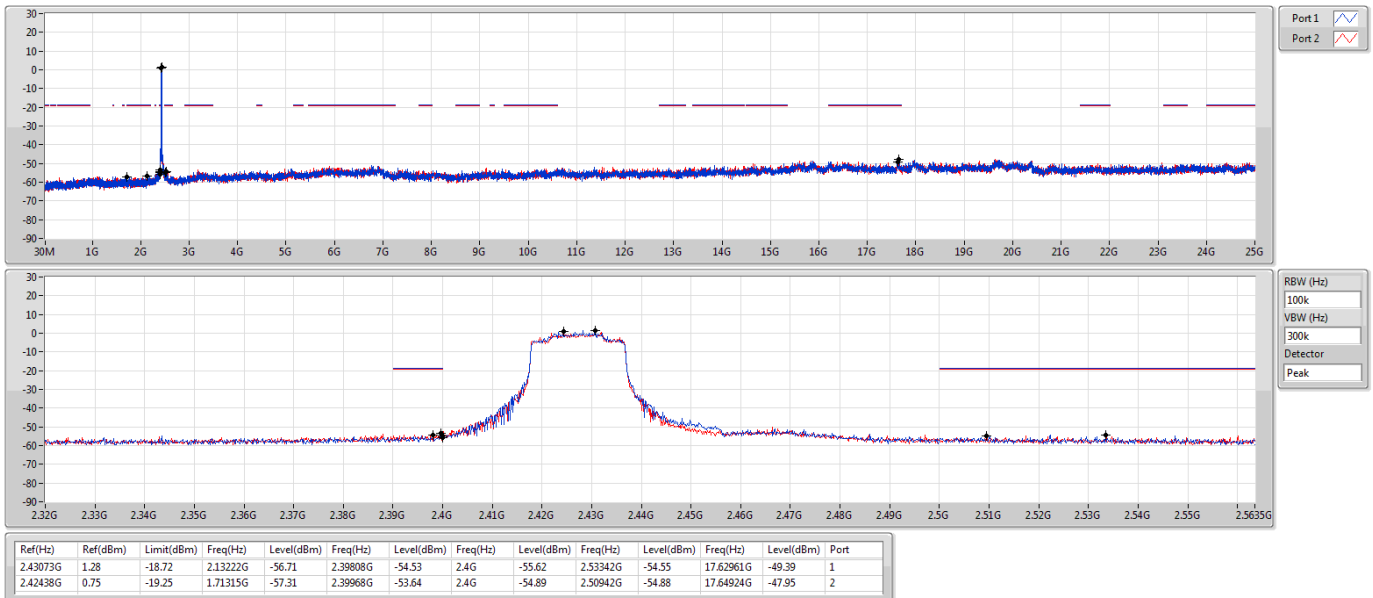




802.11ax HEW40_RU242_Index61_Nss2,(MCS0)_2TX

CSEndB


2452MHz

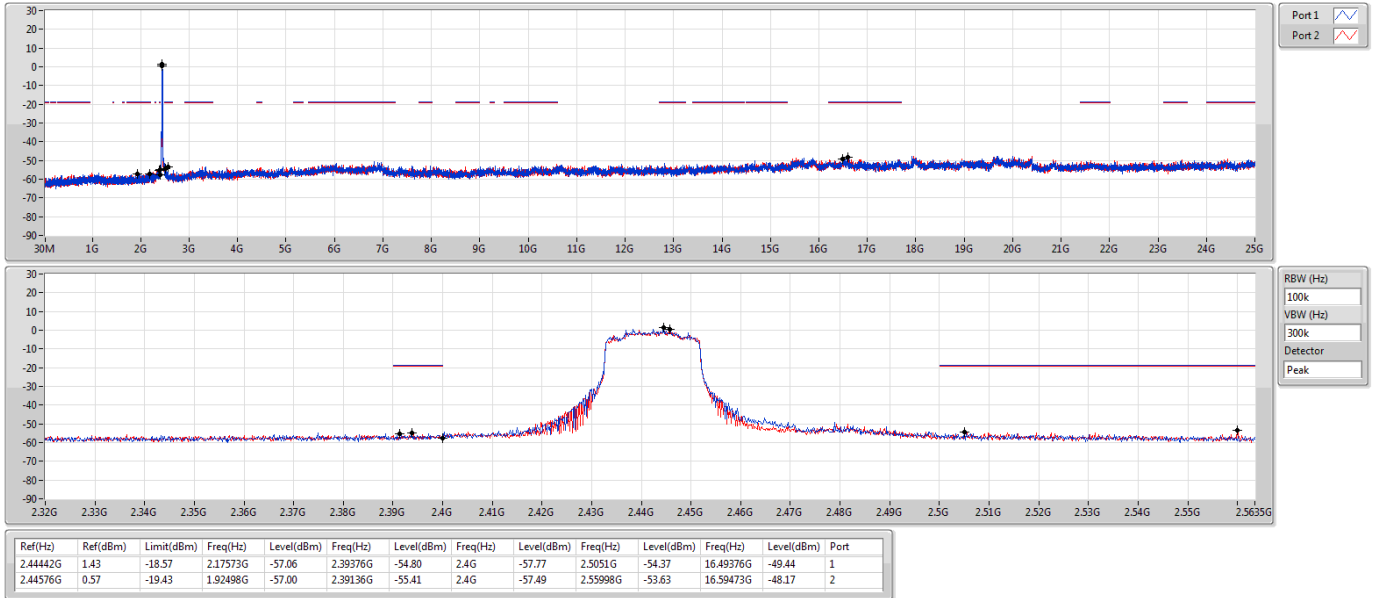

802.11ax HEW40_RU242_Index61_Nss2,(MCS0)_2TX

CSEndB

2457MHz

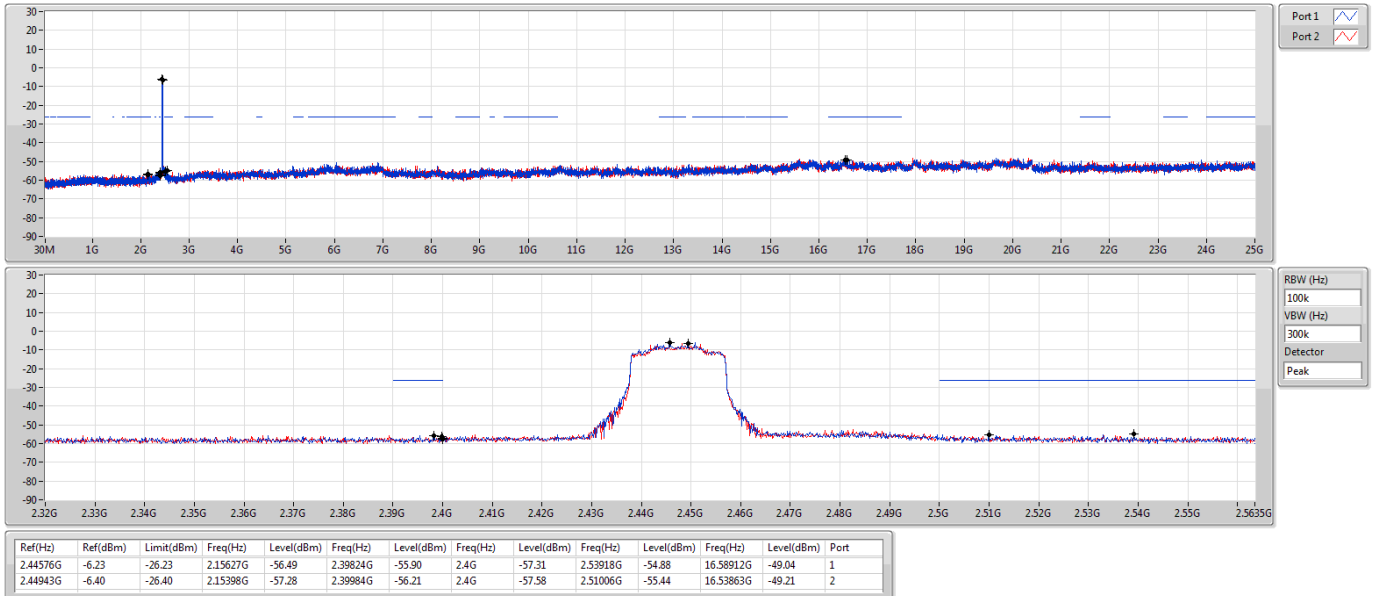




802.11ax HEW40_RU242_Index61_Nss2,(MCS0)_2TX

CSEndB

2462MHz

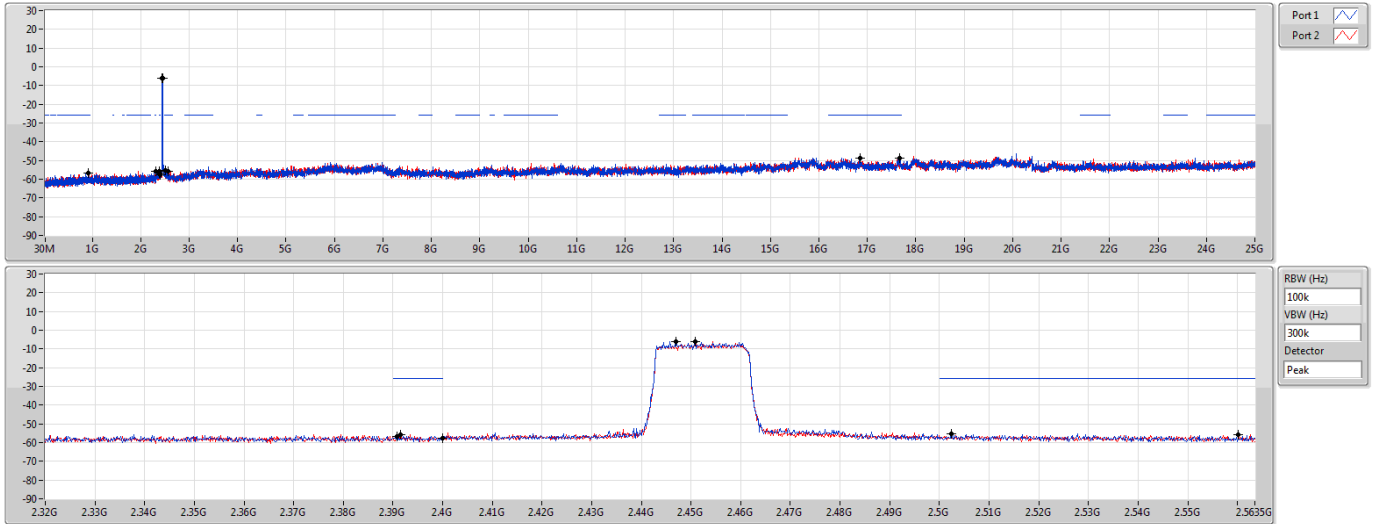

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44693G	-5.88	-25.88	909.36M	-56.65	2.39088G	-56.69	2.4G	-57.71	2.50238G	-55.47	16.85275G	-48.87	1
2.45077G	-5.99	-25.99	2.30741G	-55.64	2.39152G	-55.62	2.4G	-57.72	2.56014G	-55.57	17.66046G	-48.66	2




Modulation Mode	11ax HE20	Test Freq. (MHz)	2437
Power Phase	Line		

Test by : Joe Liao

Temperature: 19°C

Humidity: 62%

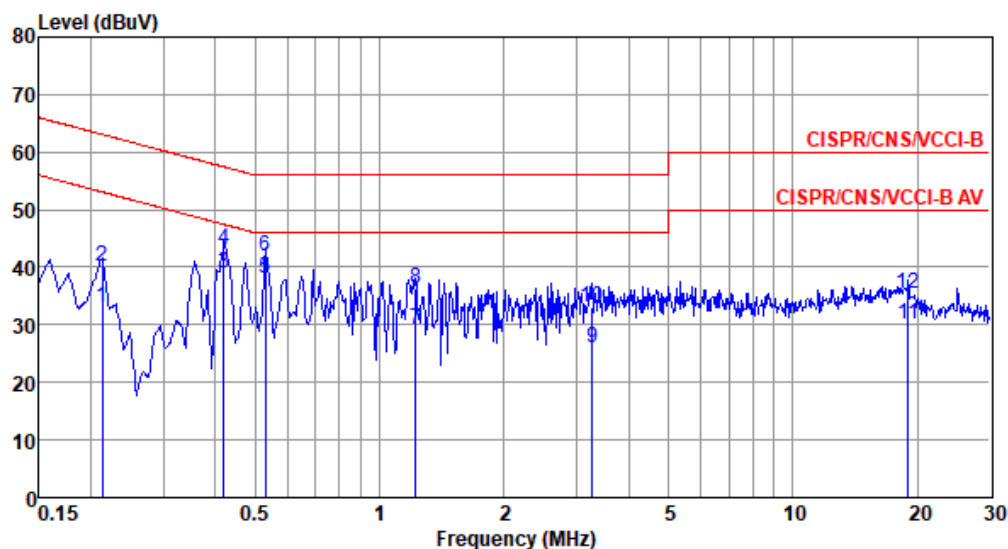

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	
			dBuV	dB	dBuV		dB		
1	0.213	33.07	53.10	-20.03	23.38	9.61	0.08	0.00	Average
2	0.213	40.12	63.10	-22.98	30.43	9.61	0.08	0.00	QP
3	0.419	39.06	47.46	-8.40	29.37	9.61	0.08	0.00	Average
4	0.419	43.25	57.46	-14.21	33.56	9.61	0.08	0.00	QP
5*	0.529	38.21	46.00	-7.79	28.50	9.61	0.10	0.00	Average
6	0.529	42.00	56.00	-14.00	32.29	9.61	0.10	0.00	QP
7	1.223	29.28	46.00	-16.72	19.50	9.61	0.17	0.00	Average
8	1.223	36.32	56.00	-19.68	26.54	9.61	0.17	0.00	QP
9	3.276	26.13	46.00	-19.87	16.29	9.63	0.21	0.00	Average
10	3.276	33.04	56.00	-22.96	23.20	9.63	0.21	0.00	QP
11	19.021	30.04	50.00	-19.96	19.62	9.78	0.64	0.00	Average
12	19.021	35.45	60.00	-24.55	25.03	9.78	0.64	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




Modulation Mode	11ax HE20	Test Freq. (MHz)	2437
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 19°C

Humidity: 62%

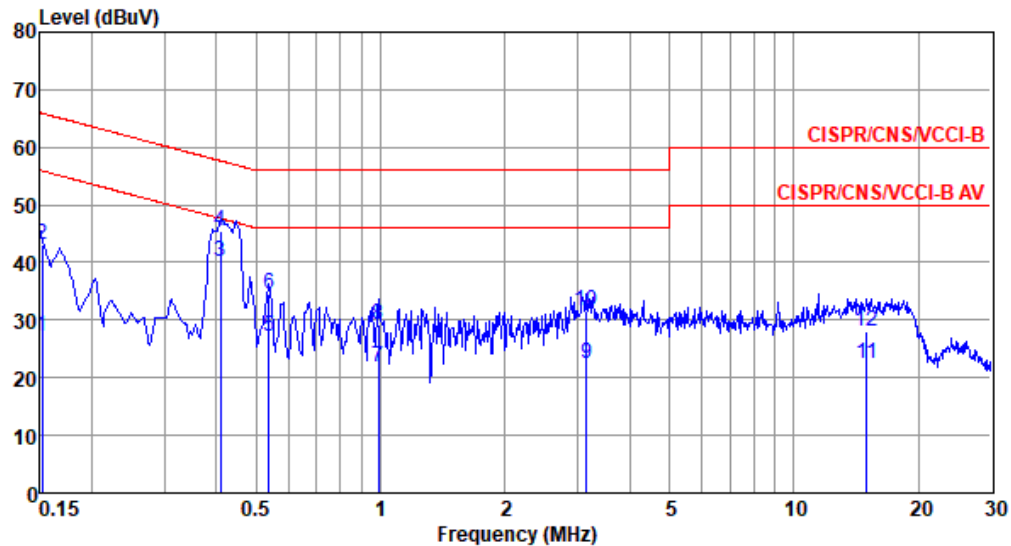

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	
			dBuV	dB	dBuV		dB		
1	0.152	27.18	55.91	-28.73	17.42	9.68	0.08	0.00	Average
2	0.152	43.11	65.91	-22.80	33.35	9.68	0.08	0.00	QP
3*	0.410	40.17	47.64	-7.47	30.42	9.67	0.08	0.00	Average
4	0.410	45.49	57.64	-12.15	35.74	9.67	0.08	0.00	QP
5	0.538	27.03	46.00	-18.97	17.25	9.67	0.11	0.00	Average
6	0.538	34.54	56.00	-21.46	24.76	9.67	0.11	0.00	QP
7	0.989	21.70	46.00	-24.30	11.86	9.68	0.16	0.00	Average
8	0.989	29.17	56.00	-26.83	19.33	9.68	0.16	0.00	QP
9	3.156	22.42	46.00	-23.58	12.51	9.70	0.21	0.00	Average
10	3.156	31.50	56.00	-24.50	21.59	9.70	0.21	0.00	QP
11	14.986	22.42	50.00	-27.58	12.13	9.73	0.56	0.00	Average
12	14.986	28.11	60.00	-31.89	17.82	9.73	0.56	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).


**11ax Partial RU mode**

Modulation Mode	11ax HE20_RU26	Test Freq. (MHz)	2437
Power Phase	Line		

Test by : Joe Liao

Temperature: 19°C

Humidity: 62%

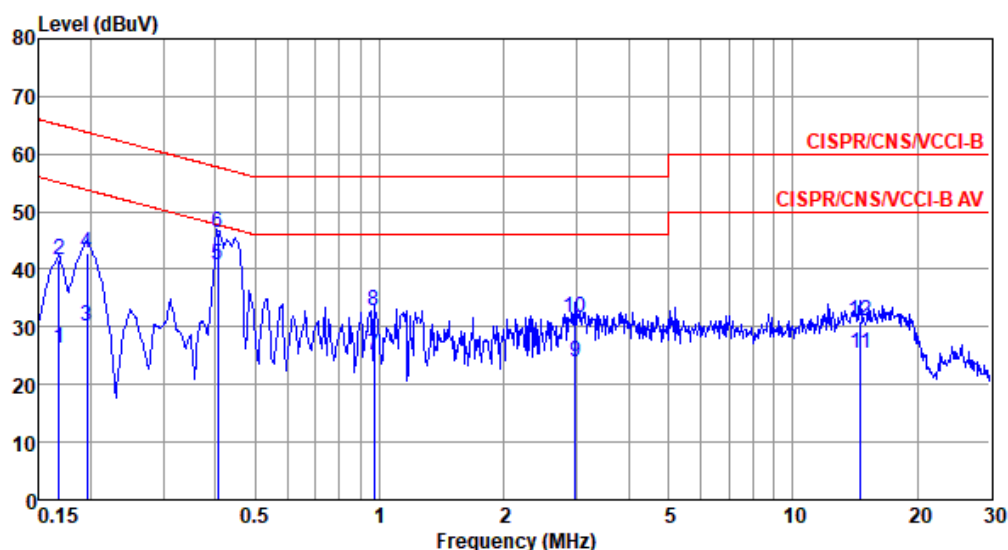

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.168	26.41	55.08	-28.67	16.65	9.68	0.08	0.00	Average
2	0.168	41.77	65.08	-23.31	32.01	9.68	0.08	0.00	QP
3	0.195	30.23	53.80	-23.57	20.47	9.68	0.08	0.00	Average
4	0.195	42.87	63.80	-20.93	33.11	9.68	0.08	0.00	QP
5*	0.406	40.74	47.73	-6.99	30.99	9.67	0.08	0.00	Average
6	0.406	46.25	57.73	-11.48	36.50	9.67	0.08	0.00	QP
7	0.968	25.09	46.00	-20.91	15.25	9.68	0.16	0.00	Average
8	0.968	32.86	56.00	-23.14	23.02	9.68	0.16	0.00	QP
9	2.978	23.78	46.00	-22.22	13.87	9.70	0.21	0.00	Average
10	2.978	31.52	56.00	-24.48	21.61	9.70	0.21	0.00	QP
11	14.594	25.34	50.00	-24.66	15.06	9.73	0.55	0.00	Average
12	14.594	31.09	60.00	-28.91	20.81	9.73	0.55	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	11ax HE20_RU26	Test Freq. (MHz)	2437																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 19°C Humidity: 62%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.159</td><td>31.92</td><td>55.52</td><td>-23.60</td><td>22.23</td><td>9.61</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.159</td><td>39.61</td><td>65.52</td><td>-25.91</td><td>29.92</td><td>9.61</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.393</td><td>30.90</td><td>47.99</td><td>-17.09</td><td>21.21</td><td>9.61</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.393</td><td>41.04</td><td>57.99</td><td>-16.95</td><td>31.35</td><td>9.61</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>5*</td><td>0.437</td><td>39.91</td><td>47.11</td><td>-7.20</td><td>30.21</td><td>9.61</td><td>0.09</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>0.437</td><td>44.33</td><td>57.11</td><td>-12.78</td><td>34.63</td><td>9.61</td><td>0.09</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>1.367</td><td>22.61</td><td>46.00</td><td>-23.39</td><td>12.82</td><td>9.61</td><td>0.18</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>1.367</td><td>33.30</td><td>56.00</td><td>-22.70</td><td>23.51</td><td>9.61</td><td>0.18</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>3.681</td><td>26.21</td><td>46.00</td><td>-19.79</td><td>16.36</td><td>9.64</td><td>0.21</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>3.681</td><td>33.08</td><td>56.00</td><td>-22.92</td><td>23.23</td><td>9.64</td><td>0.21</td><td>0.00</td><td>QP</td></tr><tr><td>11</td><td>14.440</td><td>28.10</td><td>50.00</td><td>-21.90</td><td>17.81</td><td>9.74</td><td>0.55</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>14.440</td><td>33.54</td><td>60.00</td><td>-26.46</td><td>23.25</td><td>9.74</td><td>0.55</td><td>0.00</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.159	31.92	55.52	-23.60	22.23	9.61	0.08	0.00	Average	2	0.159	39.61	65.52	-25.91	29.92	9.61	0.08	0.00	QP	3	0.393	30.90	47.99	-17.09	21.21	9.61	0.08	0.00	Average	4	0.393	41.04	57.99	-16.95	31.35	9.61	0.08	0.00	QP	5*	0.437	39.91	47.11	-7.20	30.21	9.61	0.09	0.00	Average	6	0.437	44.33	57.11	-12.78	34.63	9.61	0.09	0.00	QP	7	1.367	22.61	46.00	-23.39	12.82	9.61	0.18	0.00	Average	8	1.367	33.30	56.00	-22.70	23.51	9.61	0.18	0.00	QP	9	3.681	26.21	46.00	-19.79	16.36	9.64	0.21	0.00	Average	10	3.681	33.08	56.00	-22.92	23.23	9.64	0.21	0.00	QP	11	14.440	28.10	50.00	-21.90	17.81	9.74	0.55	0.00	Average	12	14.440	33.54	60.00	-26.46	23.25	9.74	0.55	0.00	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.159	31.92	55.52	-23.60	22.23	9.61	0.08	0.00	Average																																																																																																																												
2	0.159	39.61	65.52	-25.91	29.92	9.61	0.08	0.00	QP																																																																																																																												
3	0.393	30.90	47.99	-17.09	21.21	9.61	0.08	0.00	Average																																																																																																																												
4	0.393	41.04	57.99	-16.95	31.35	9.61	0.08	0.00	QP																																																																																																																												
5*	0.437	39.91	47.11	-7.20	30.21	9.61	0.09	0.00	Average																																																																																																																												
6	0.437	44.33	57.11	-12.78	34.63	9.61	0.09	0.00	QP																																																																																																																												
7	1.367	22.61	46.00	-23.39	12.82	9.61	0.18	0.00	Average																																																																																																																												
8	1.367	33.30	56.00	-22.70	23.51	9.61	0.18	0.00	QP																																																																																																																												
9	3.681	26.21	46.00	-19.79	16.36	9.64	0.21	0.00	Average																																																																																																																												
10	3.681	33.08	56.00	-22.92	23.23	9.64	0.21	0.00	QP																																																																																																																												
11	14.440	28.10	50.00	-21.90	17.81	9.74	0.55	0.00	Average																																																																																																																												
12	14.440	33.54	60.00	-26.46	23.25	9.74	0.55	0.00	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					