

: 1 of 21

Page Number

Report No.: FR832501-01D



# FCC RADIO TEST REPORT

FCC ID : PY7-04606A

Equipment: GSM/WCDMA/LTE Phone+Bluetooth,

DTS/UNII a/b/g/n/ac and NFC

Brand Name : Sony

**Applicant**: Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku,

Tokyo, 140-0002, Japan

Manufacturer : Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku,

Tokyo, 140-0002, Japan

Standard : FCC Part 15 Subpart C §15.225

The product was received on Mar. 25, 2018 and testing was started from Apr. 17, 2018 and completed on Apr. 25, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

TEL: 886-3-327-3456

SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

C3. Results of Radiated Emissions (30MHz~1GHz)

# **Table of Contents**

Report No. : FR832501-01D

History	y of this test report	3
	pary of Test Result	
	neral Description	
1.1	•	
1.2	Product Specification of Equipment Under Test	5
1.3		
1.4	Testing Location	6
1.5	Applicable Standards	6
2. Test	t Configuration of Equipment Under Test	7
2.1	Descriptions of Test Mode	7
2.2	Connection Diagram of Test System	8
2.3	Table for Supporting Units	g
2.4	EUT Operation Test Setup	g
3. Test	t Results	10
3.1	AC Power Line Conducted Emissions Measurement	10
3.2	20dB and 99% OBW Spectrum Bandwidth Measurement	12
3.3	Frequency Stability Measurement	13
3.4	Field Strength of Fundamental Emissions and Mask Measurement	14
3.5	Radiated Emissions Measurement	16
3.6	Antenna Requirements	19
4. List	of Measuring Equipment	20
5. Unc	certainty of Evaluation	21
<b>Appen</b>	ndix A. Test Results of Conducted Emission Test	
<b>Appen</b>	ndix B. Test Results of Conducted Test Items	
B1.	Test Result of 20dB Spectrum Bandwidth	
B2.	Test Result of Frequency Stability	
	ndix C. Test Results of Radiated Test Items	
C1.	Test Result of Field Strength of Fundamental Emissions	
C2	Possite of Padiated Emissions (0 kHz, 20MHz)	

TEL: 886-3-327-3456 Page Number : 2 of 21

FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018: 02

# History of this test report

Report No. : FR832501-01D

Report No.	Version	Description	Issued Date
FR832501-01D	01	Initial issue of report	May 29, 2018
FR832501-01D	02	Revising TX frequency information in section 1.2.	Jun. 27, 2018

TEL: 886-3-327-3456 Page Number : 3 of 21

# **Summary of Test Result**

Report No. : FR832501-01D

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Line Conducted Emissions	Pass	Under limit 1.00 dB at 13.560MHz
0.0	15.215(c)	20dB Spectrum Bandwidth	Pass	-
3.2	2.1049	99% OBW Spectrum Bandwidth	Pass	-
3.3	15.225(e)	Frequency Stability	Pass	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Pass	Max level 55.51 dBµV/m at 13.560 MHz
3.5	15.225(d) & 15.209	Radiated Spurious Emissions	Pass	Under limit 12.35 dB at 958.700MHz
3.6	15.203	Antenna Requirements	Pass	-

Reviewed by: Joseph Lin

**Report Producer: Maggie Chiang** 

TEL: 886-3-327-3456 Page Number : 4 of 21

FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

# 1. General Description

# 1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, FM Receiver, NFC, and GNSS

Standards-related Product Specification		
Antenna Type	Single loop Antenna type	

Report No.: FR832501-01D

EUT Information List					
HW Version SW Version		S/N	Performed Test Item		
А	9.29	CQ3000PSRK	RF conducted measurement Radiated Spurious Emission Conducted Emission		

Accessory List			
AC Adomtor	Model No. : UCH20		
AC Adapter	S/N: 3515W45302520		
	Model No. : MH410c		
Earphone	S/N: N/A		
LICD Calaba	Model No. : UCB20		
USB Cable	S/N:N/A		

#### Note:

- 1. Above EUT list used are electrically identical per declared by manufacturer.
- 2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report.
- 3. For other wireless features of this EUT, test report will be issued separately.

# 1.2 Product Specification of Equipment Under Test

Standards-related Product Specification			
Tx/Rx Frequency	13.56MHz		
Channel Number	1		
Type of Modulation	ASK		

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

TEL: 886-3-327-3456 Page Number : 5 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

# 1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Report No.: FR832501-01D

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978			
Test Site No.	Sporton Site No.			
rest site No.	TH03-HY	CO05-HY	03CH07-HY	
Test Engineer	Louis Chung Blue Lan Stan Hsieh			
Temperature	22~24°C 25~26°C 22~24°C			
Relative Humidity	53~55% 55~58% 51~53%			

Note: The test site complies with ANSI C63.4 2014 requirement.

# 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.225
- ANSI C63.10-2013

TEL: 886-3-327-3456 Page Number : 6 of 21

FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

# 2. Test Configuration of Equipment Under Test

# 2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.

Test Items			
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions		
20dB Spectrum Bandwidth	Frequency Stability		
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz		

Report No.: FR832501-01D


The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.

	Test Cases				
AC	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + NFC Tx + Earphone + Battery +				
Conducted	USB Cable (Charging from Adapter)				
Emission	COB Cable (Charging nom Adapter)				

TEL: 886-3-327-3456 Page Number : 7 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018


# 2.2 Connection Diagram of Test System

#### <AC Conducted Emissions>

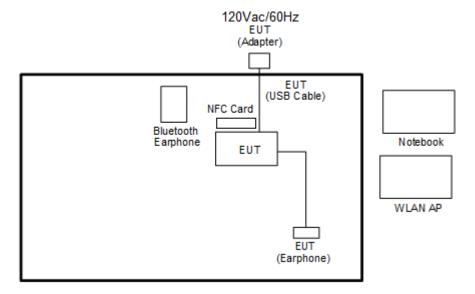

Report No.: FR832501-01D

#### <For Radiated Emissions Measurement>

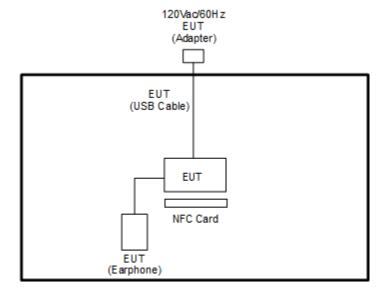

TEL: 886-3-327-3456 Page Number : 8 of 21

FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

# 2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
5.	NFC Card	Metro Taipei	Easy Card	N/A	N/A	N/A

Report No. : FR832501-01D

# 2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 0 cm gap to the EUT.

TEL: 886-3-327-3456 Page Number : 9 of 21

## 3. Test Results

## 3.1 AC Power Line Conducted Emissions Measurement

#### 3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Report No.: FR832501-01D

Frequency of Emission	Conducted Limit (dBμV)		
(MHz)	Quasi-Peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

<sup>\*</sup>Decreases with the logarithm of the frequency.

## 3.1.2 Measuring Instruments


See list of measuring equipment of this test report.

#### 3.1.3 Test Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

TEL: 886-3-327-3456 Page Number : 10 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

# 3.1.4 Test setup

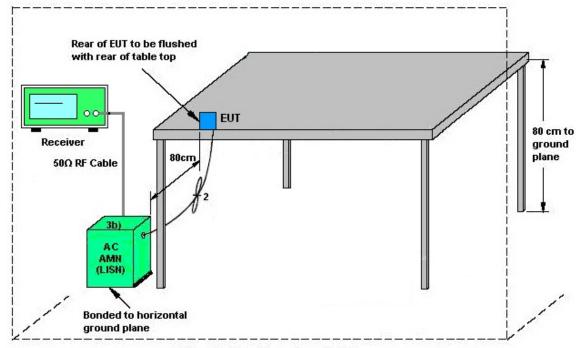

Report No. : FR832501-01D

AMN = Artificial mains network (LISN)

AE = Associated equipment

EUT = Equipment under test

ISN = Impedance stabilization network

### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 11 of 21

# 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

#### 3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.

Report No.: FR832501-01D


## 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.2.3 Test Procedures

- The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.
- 4. Measured the 99% OBW.

### 3.2.4 Test Setup



#### 3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 12 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

# 3.3 Frequency Stability Measurement

#### 3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Report No.: FR832501-01D


### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT.
- 2. EUT have transmitted signal and fixed channelize.
- 3. Set the spectrum analyzer span to view the entire emissions bandwidth.
- 4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
- 5. The fc is declaring of channel frequency. Then the frequency error formula is  $(fc-f)/fc \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
- 6. Extreme temperature rule is -20°C~50°C.

#### 3.3.4 Test Setup

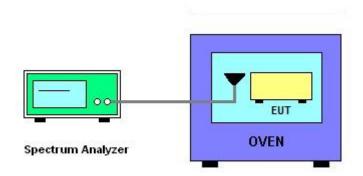

#### 3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 13 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

# 3.4 Field Strength of Fundamental Emissions and Mask Measurement

Report No.: FR832501-01D

## 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225					
Description	Compliance with th	e spectrum mask is t	ested with RBW set t	o 9kHz.		
From of Emission (MIII-)	Field Strength	Field Strength	Field Strength	Field Strength		
Freq. of Emission (MHz)	(µV/m) at 30m	(dBµV/m) at 30m	(dBµV/m) at 10m	(dBµV/m) at 3m		
1.705~13.110	30	29.5	48.58	69.5		
13.110~13.410	106	40.5	59.58	80.5		
13.410~13.553	334	334 50.5 6		90.5		
13.553~13.567	15848	84.0	103.08	124.0		
13.567~13.710	334	50.5	69.58	90.5		
13.710~14.010	106 40.5 59.58 80.5			80.5		
14.010~30.000	30	29.5	48.58	69.5		

# 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

TEL: 886-3-327-3456 Page Number : 14 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

#### 3.4.3 Test Procedures


 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.

Report No.: FR832501-01D

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
- 4. For Fundamental emissions, use the receiver to measure QP reading.
- 5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 6. Compliance with the spectrum mask is tested with RBW set to 9kHz. Note: Emission level ( $dB\mu V/m$ ) = 20 log Emission level ( $\mu V/m$ ).

## 3.4.4 Test Setup

For radiated emissions below 30MHz

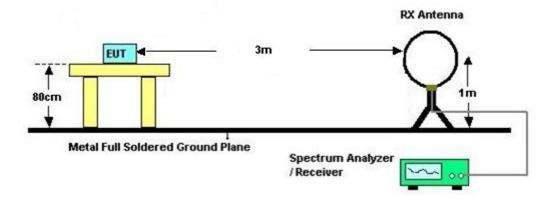

#### 3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

TEL: 886-3-327-3456 Page Number : 15 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

### 3.5 Radiated Emissions Measurement

## 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Report No.: FR832501-01D

Frequencies	Field Strength	Measurement Distance
(MHz)	(μV/m)	(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

TEL: 886-3-327-3456 Page Number : 16 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

#### 3.5.4 Test Procedures

 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.


Report No.: FR832501-01D

- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver.

TEL: 886-3-327-3456 Page Number : 17 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018


## 3.5.5 Test Setup

#### For radiated emissions below 30MHz

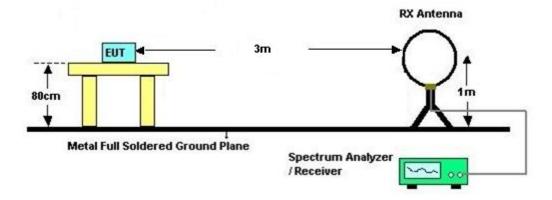

Report No.: FR832501-01D

#### For radiated emissions above 30MHz

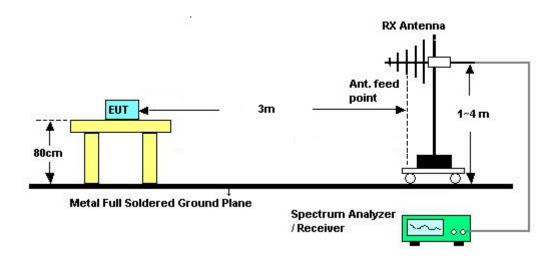

#### 3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

**Remark:** There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

TEL: 886-3-327-3456 Page Number: 18 of 21

# 3.6 Antenna Requirements

### 3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: FR832501-01D

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### 3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

TEL: 886-3-327-3456 Page Number : 19 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

# 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Mar. 21, 2018	Apr. 25, 2018	Mar. 20, 2019	Conducted (TH03-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 19, 2018	Apr. 25, 2018	Mar. 18, 2019	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 26, 2017	Apr. 25, 2018	Jun. 25, 2018	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Dec. 06, 2017	Apr. 25, 2018	Dec. 05, 2019	Conducted (TH03-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 17, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Apr. 17, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Apr. 17, 2018	Nov. 29, 2018	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Apr. 17, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Test Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 17, 2018	N/A	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Apr. 17, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Apr. 20, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 10, 2017	Apr. 20, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY53290053	20Hz to 26.5GHz	Jan. 16, 2018	Apr. 20, 2018	Jan. 15, 2019	Radiation (03CH07-HY)
Amplifier	SONOMA	310N	187231	9kHz~1GHz	Jan. 08, 2018	Apr. 20, 2018	Jan. 07, 2019	Radiation (03CH07-HY)
Hygrometer	Itel	HTC-2	1	N/A	Jun. 27, 2017	Apr. 20, 2018	Jun. 26, 2018	Radiation (03CH07-HY)
Filter	Wainwright	WHK20/1000 C7/40SS	SN2	20M High Pass	Nov. 21, 2017	Apr. 20, 2018	Nov. 20, 2018	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	Y84209521+ MY84209521	9KHz~30MHz	Jan. 02, 2018	Apr. 20, 2018	Jan. 01, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	30MHz~1GHz	Jan. 02, 2018	Apr. 20, 2018	Jan. 01, 2019	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Apr. 20, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Apr. 20, 2018	N/A	Radiation (03CH07-HY)
Test Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Apr. 20, 2018	N/A	Radiation (03CH07-HY)

Report No. : FR832501-01D

TEL: 886-3-327-3456 Page Number : 20 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

# 5. Uncertainty of Evaluation

### **Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence	2.70
of 95% (U = 2Uc(y))	2.70

Report No.: FR832501-01D

#### Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence	3.40
of 95% (U = 2Uc(y))	3.40

#### **Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

Measuring Uncertainty for a Level of Confidence	5.70
of 95% (U = 2Uc(y))	3.70

TEL: 886-3-327-3456 Page Number : 21 of 21
FAX: 886-3-328-4978 Issued Date : Jun. 27, 2018

# **Appendix A. Test Results of Conducted Emission Test**

Toot Engineer	Test Engineer : Blue Lan	Temperature :	<b>25~26</b> ℃
rest Engineer:	Dide Lan	Relative Humidity :	55~58%

Report No. : FR832501-01D

TEL: 886-3-327-3456 Page Number : A1 of A1

# **EUT Information**


 Report NO :
 832501-01

 Test Mode :
 Mode 1

 Test Voltage :
 120Vac/60Hz

Phase: Line

### Full Spectrum

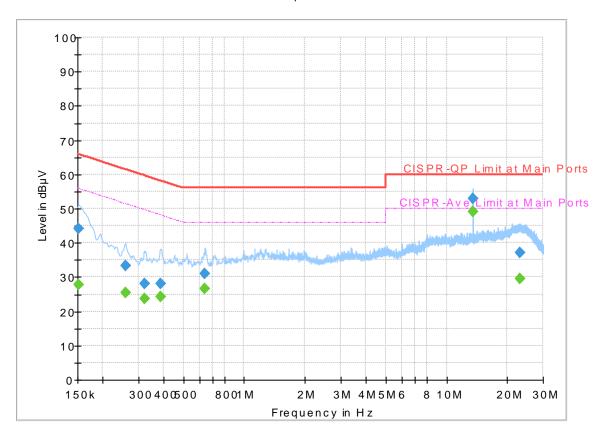


# Final\_Result

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBµV)	(dBµV)	(dBµV)	(dB)			(dB)
0.152250		27.79	55.88	28.09	L1	OFF	19.5
0.152250	44.01		65.88	21.87	L1	OFF	19.5
0.258000		25.48	51.50	26.02	L1	OFF	19.5
0.258000	33.22		61.50	28.28	L1	OFF	19.5
0.321000		23.68	49.68	26.00	L1	OFF	19.5
0.321000	28.01		59.68	31.67	L1	OFF	19.5
0.386250		24.18	48.14	23.96	L1	OFF	19.5
0.386250	28.18		58.14	29.96	L1	OFF	19.5
0.640500		26.68	46.00	19.32	L1	OFF	19.5
0.640500	30.88		56.00	25.12	L1	OFF	19.5
13.560000	-	49.00	50.00	1.00	L1	OFF	19.7
13.560000	52.81		60.00	7.19	L1	OFF	19.7
23.104500		29.42	50.00	20.58	L1	OFF	19.8
23.104500	37.16		60.00	22.84	L1	OFF	19.8

# **EUT Information**

Report NO: 832501-01
Test Mode: Mode 1
Test Voltage: 120Vac/60Hz
Phase: Neutral

Full Spectrum

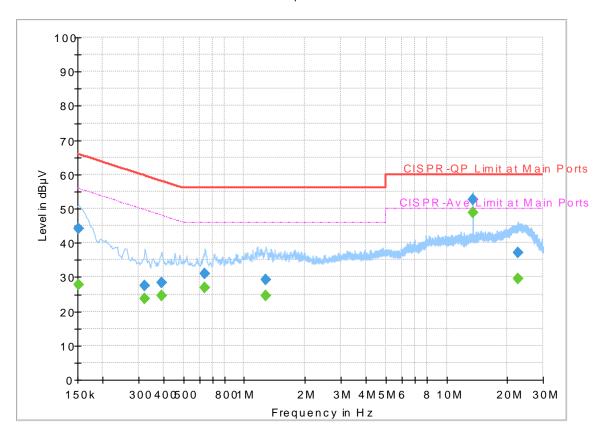


# Final\_Result

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBµV)	(dBµV)	(dBµV)	(dB)			(dB)
0.152250		27.73	55.88	28.15	N	OFF	19.5
0.152250	44.05	-	65.88	21.83	N	OFF	19.5
0.323250		23.65	49.62	25.97	N	OFF	19.5
0.323250	27.55		59.62	32.07	N	OFF	19.5
0.388500		24.46	48.10	23.64	N	OFF	19.5
0.388500	28.28		58.10	29.82	N	OFF	19.5
0.640500		26.76	46.00	19.24	N	OFF	19.5
0.640500	31.12	-	56.00	24.88	N	OFF	19.5
1.277250		24.57	46.00	21.43	N	OFF	19.5
1.277250	29.35	-	56.00	26.65	N	OFF	19.5
13.560000		48.90	50.00	1.10	N	OFF	19.8
13.560000	52.68		60.00	7.32	N	OFF	19.8
22.598250		29.44	50.00	20.56	N	OFF	19.9
22.598250	37.25		60.00	22.75	N	OFF	19.9

# **Appendix B. Test Results of Conducted Test Items**

## **B1.Test Result of 20dB Spectrum Bandwidth**

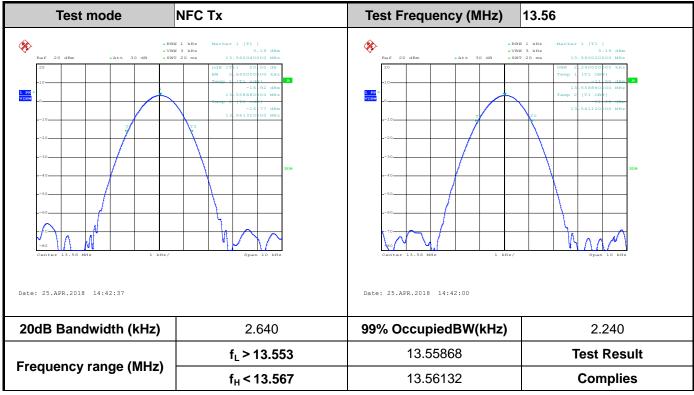

Report No.: FR832501-01D

**Remark:** Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

TEL: 886-3-327-3456 Page Number: B1 of B3



# **B2.Test Result of Frequency Stability**

B3. Voltage vs. F	B3. Voltage vs. Frequency Stability		ture vs. Frequ	ency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (℃)	Time	Measurement Frequency (MHz)	
120	13.560000	-20	0	13.560020	
102	13.560000		2	13.560040	
138	13.560000		5	13.560050	
			10	13.560040	
		-10	0	13.560050	
			2	13.560020	
			5	13.560040	
			10	13.560040	
		0	0	13.560050	
			2	13.560040	
			5	13.560060	
			10	13.560060	
		10	0	13.560060	
			2	13.560060	
			5	13.560060	
			10	13.560060	
		20	0	13.560000	
			2	13.560000	
			5	13.560000	
			10	13.560000	
		30	0	13.559980	
			2	13.559980	
			5	13.559980	
			10	13.559980	
		40	0	13.559980	
			2	13.559980	
			5	13.559980	
			10	13.559980	

Report No. : FR832501-01D

TEL: 886-3-327-3456 Page Number : B2 of B3

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability				
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)		
		50	0	13.560000		
			2	13.559980		
			5	13.559980		
			10	13.559980		
Max.Deviation (MHz)	-0.000370	Max.Deviation (MHz)		-0.000380		
Max.Deviation (ppm)	-27.2861	Max.Deviation (ppm)		-28.0236		
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm		
Test Result	PASS	Test Result		Test Result		PASS


Report No. : FR832501-01D

TEL: 886-3-327-3456 Page Number : B3 of B3



# **Appendix C. Test Results of Radiated Test Items**


### C1. Test Result of Field Strength of Fundamental Emissions

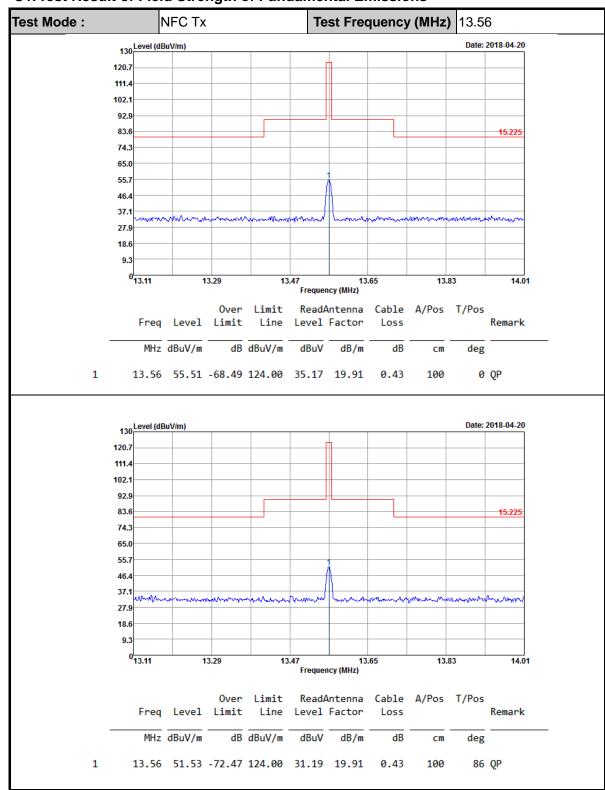

Report No.: FR832501-01D


TEL: 886-3-327-3456 Page Number : C1 of C5

## C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

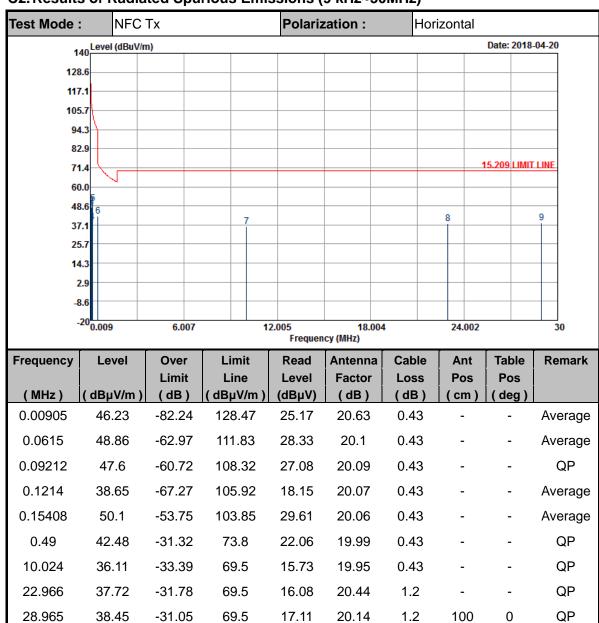

Report No.: FR832501-01D

TEL: 886-3-327-3456 Page Number : C2 of C5

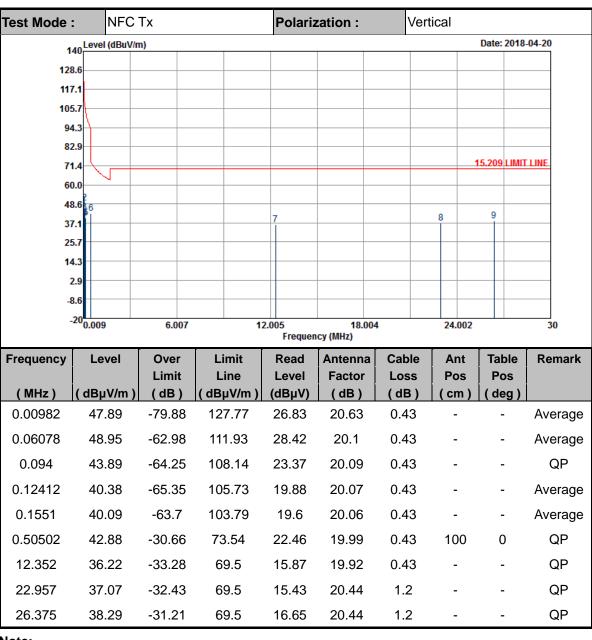


Report No.: FR832501-01D

#### Note:

- 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
- 3. Limit line = specific limits ( $dB\mu V$ ) + distance extrapolation factor.

TEL: 886-3-327-3456 Page Number : C3 of C5


## C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

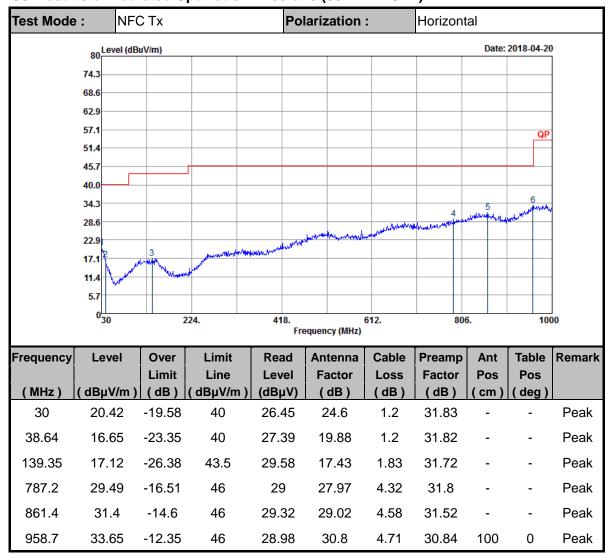

Report No.: FR832501-01D

TEL: 886-3-327-3456 Page Number : C4 of C5



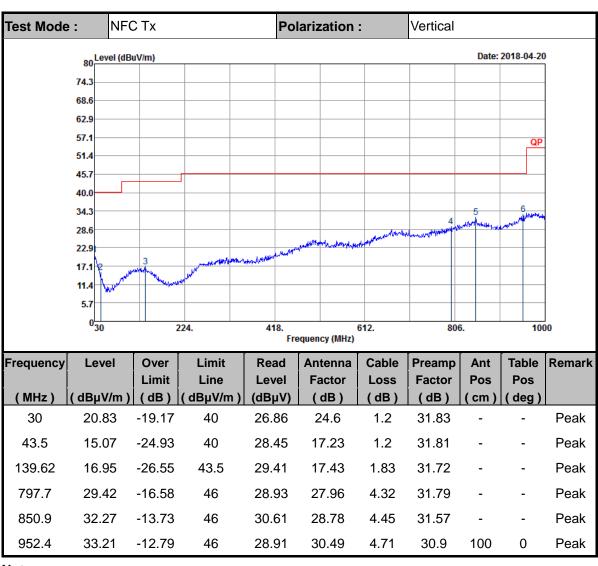

Report No.: FR832501-01D

THE END-

#### Note:

- 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (\mu V/m)$ .
- 3. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor= Level.

TEL: 886-3-327-3456 Page Number : C5 of C5