



## RF Exposure Evaluation Declaration

---

**FCC ID:** H8N-ASK8822

**Applicant:** Askey Computer Corp.

**Application Type:** Certification

**Product:** WIFI+BT Combo Module

**Model No.:** ASK8822

**Brand Name:** ASKEY

**FCC Classification:** FCC Part 15 Spread Spectrum Transmitter (DSS)  
Digital Transmission System (DTS)  
Unlicensed National Information Infrastructure (NII)


**Test Procedure(s):** KDB 447498 D01v06

**Test Date:** August 26, 2020

Reviewed By:

  
( Kevin Guo )

Approved By:

  
( Robin Wu )



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2006RSU028-U6	Rev. 01	Initial Report	08-31-2020	Valid

---

## CONTENTS

Description	Page
<b>General Information .....</b>	<b>4</b>
<b>1. INTRODUCTION.....</b>	<b>5</b>
1.1. Scope.....	5
1.2. MRT Test Location .....	5
<b>2. PRODUCT INFORMATION.....</b>	<b>6</b>
2.1. Equipment Description.....	6
2.2. Description of Available Antennas .....	6
2.3. Description of Antenna RF Port .....	7
<b>3. RF Exposure Evaluation .....</b>	<b>8</b>
3.1. Limits .....	8
3.2. Test Result of RF Exposure Evaluation .....	9
<b>Appendix A - EUT Photograph .....</b>	<b>10</b>

## General Information

<b>Applicant:</b>	Askey Computer Corp.
<b>Applicant Address:</b>	10F, No.119, JIANKANG RD., ZHONGHE DIST., NEW TAIPEI CITY, TAIWAN
<b>Manufacturer:</b>	Askey Computer Corp.
<b>Manufacturer Address:</b>	10F, No.119, JIANKANG RD., ZHONGHE DIST., NEW TAIPEI CITY, TAIWAN
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China

## Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is an FCC accredited testing laboratory (MRT Designation No. CN1166) on the FCC website.
- MRT facility is an ISED recognized testing laboratory (MRT Reg. No. CN0001) on the ISED website.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the A2LA under the A2LA Program (Cert. No. 3628.01) and CNAS under the CNAS Program (Cert. No. L10551) in EMC, Safety, Radio, Telecommunications and SAR testing.

## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	WIFI+BT Combo Module
Model No.:	ASK8822
Brand Name:	ASKEY
Wi-Fi Specification:	802.11a/b/g/n/ac
Bluetooth Specification:	v4.2 dual mode

### 2.2. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	Tx Paths	Per Chain Max Antenna Gain (dBi)		Directional Gain (dBi)	
			Ant 0	Ant 1	For Power	For PSD
Wi-Fi Internal Antenna						
PIFA	2412 ~ 2462	2	2.40	1.98	2.40	5.41
	5150 ~ 5825	2	4.34	3.14	4.34	7.35
Bluetooth Internal Antenna						
PIFA	2402 ~ 2480	1	1.98		--	

Note:

The EUT supports Cyclic Delay Diversity (CDD) technology and CDD signals are correlated.

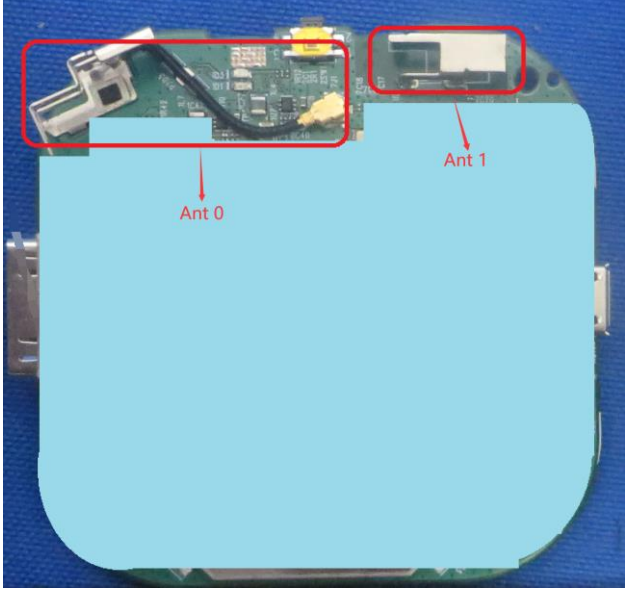
For CDD transmissions, directional gain is calculated as follows,  $N_{ANT} = 2$ ,  $N_{SS} = 1$ .

If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,  
Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB = 3.01;
- For power measurements on IEEE 802.11 devices,  
Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain.

### 2.3. Description of Antenna RF Port

Wi-Fi & Bluetooth Antenna		
Software Control Port	Ant 0 (Wi-Fi)	Ant 1 (Wi-Fi & Bluetooth)
		
Note: A temporary RF connector to test conveniently in Ant 1 was provided by manufacturer		

### 3. RF Exposure Evaluation

#### 3.1. Limits

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

##### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (Minutes)
(A) Limits for Occupational/ Control Exposures				
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/ Uncontrolled Exposures				
300-1500	--	--	f/1500	6
1500-100,000	--	--	1	30

f= Frequency in MHz

Calculation Formula:  $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

$P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi$  = 3.1416

$r$  = distance between observation point and center of the radiator in cm

$P_d$  is the limit of MPE, 1mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance  $r$  where the MPE limit is reached.



### 3.2. Test Result of RF Exposure Evaluation

Product	WIFI+BT Combo Module
Test Item	RF Exposure Evaluation

Test Mode	Frequency Band (MHz)	Maximum conducted power (dBm)	Antenna Gain (dBi)	Maximum EIRP (dBm)	Power Density at R = 20 cm (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )
Bluetooth	2402 ~ 2480	6.04	1.98	8.02	0.0013	1
Wi-Fi	2412 ~ 2462	22.25	2.40	24.65	0.0580	1
	5180 ~ 5825	20.03	4.34	24.37	0.0544	1

#### CONCLUSION:

The max Power Density at R (20 cm) =  $0.0013 \text{ mW/cm}^2 + 0.0580 \text{ mW/cm}^2 + 0.0544 \text{ mW/cm}^2 = 0.1137 \text{ mW/cm}^2 < 1 \text{ mW/cm}^2$ .

Therefore, the Min Safety Distance is 20cm.

\_\_\_\_\_ The End \_\_\_\_\_

## **Appendix A - EUT Photograph**

Refer to "2006RSU028-UE" file.