

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1878

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2440MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

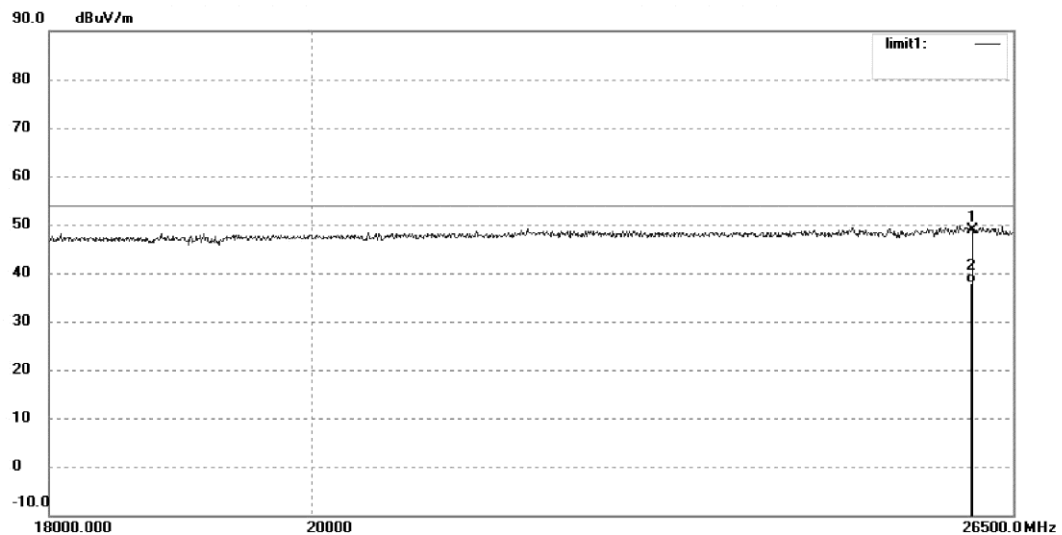

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26062.917	31.60	17.19	48.79	74.00	-25.21	peak			
2	26062.917	20.65	17.19	37.84	54.00	-16.16	AVG			

High Channel


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
 Manufacturer: Lenovo
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: DC 3.7V
 Comment: X
 Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

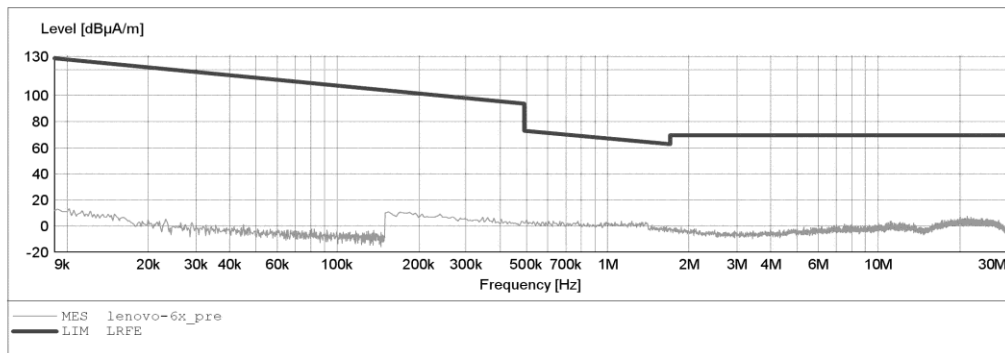


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
 Manufacturer: Lenovo
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: DC 3.7V
 Comment: Y
 Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M		
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M		

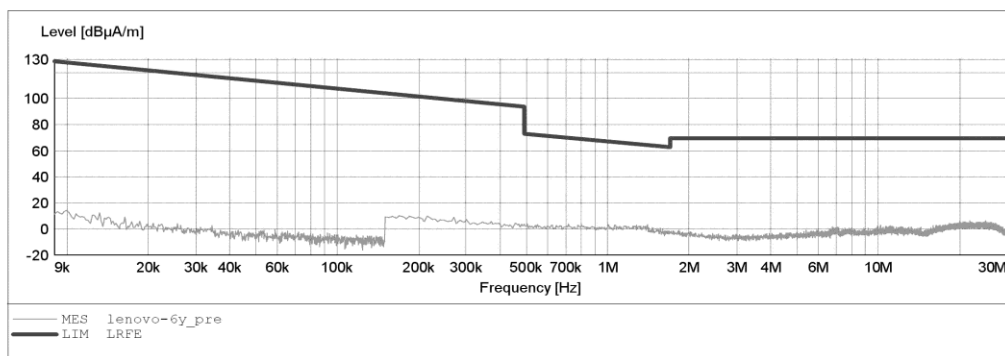


ACCURATE TECHNOLOGY CO., LTD.

FCC Class B 3M Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
 Manufacturer: Lenovo
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: DC 3.7V
 Comment: Z
 Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.			
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M		
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M		

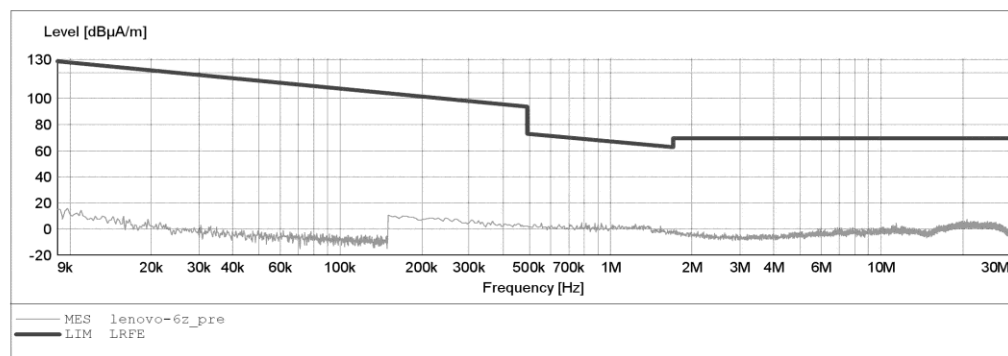



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1927

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2480MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

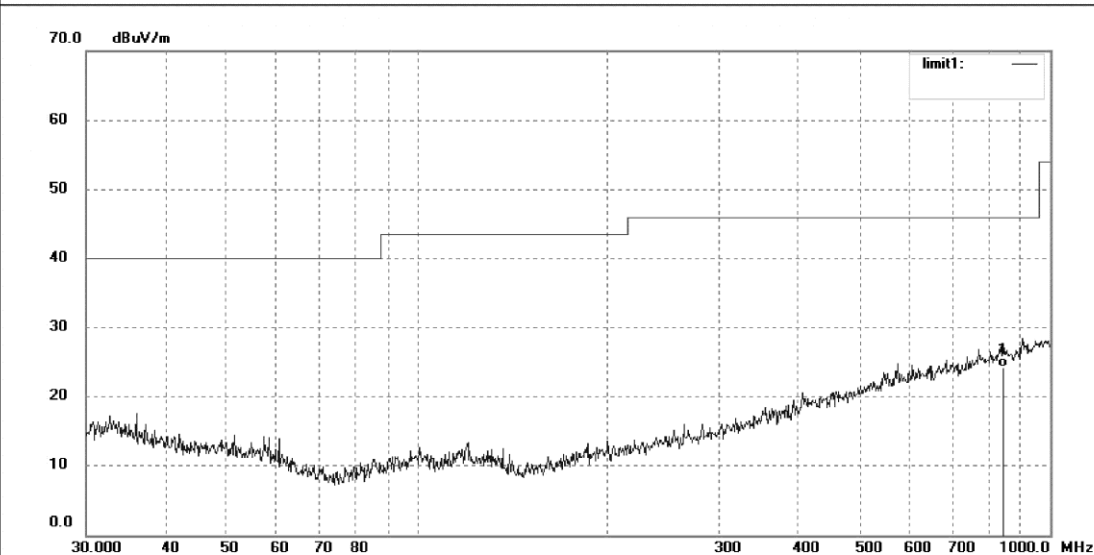

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	842.1295	23.61	0.66	24.27	46.00	-21.73	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1928

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2480MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

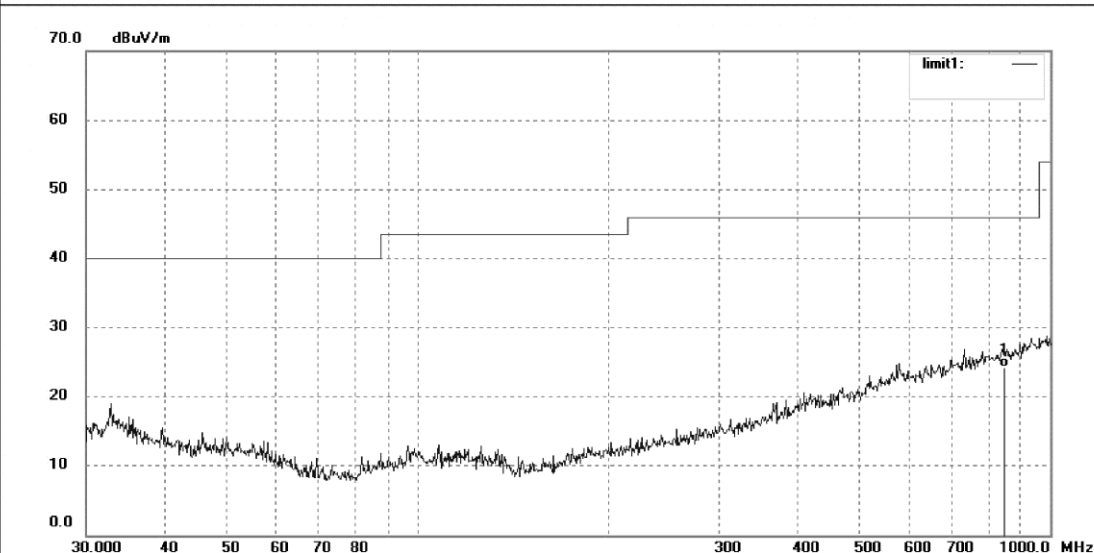

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	848.0562	23.55	0.70	24.25	46.00	-21.75	QP			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1855

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2480MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

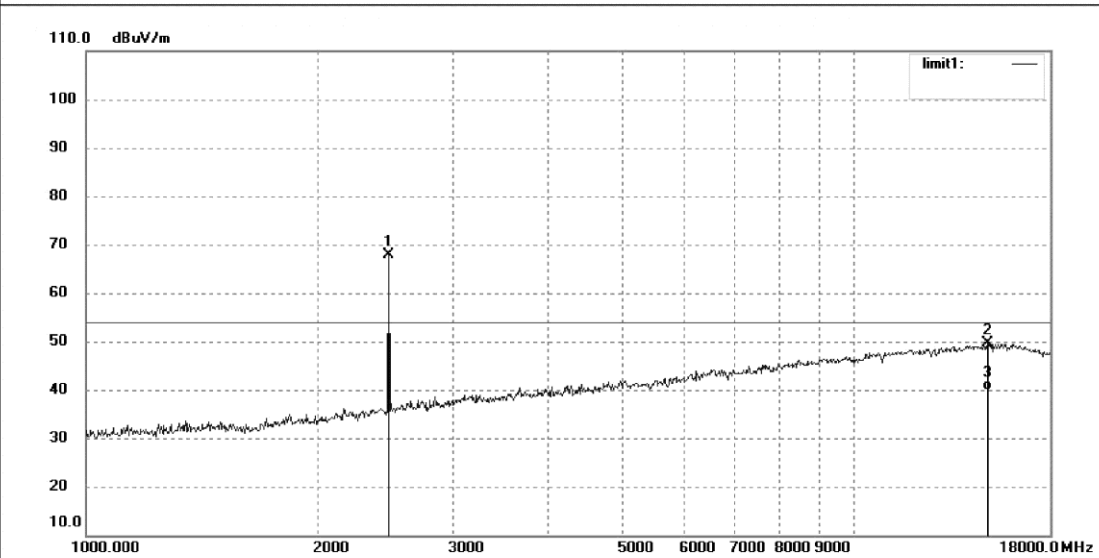

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	75.19	-7.37	67.82	/	/	peak			
2	14916.942	8.31	41.35	49.66	74.00	-24.34	peak			
3	14916.942	-1.36	41.35	39.99	54.00	-14.01	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1856

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2480MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

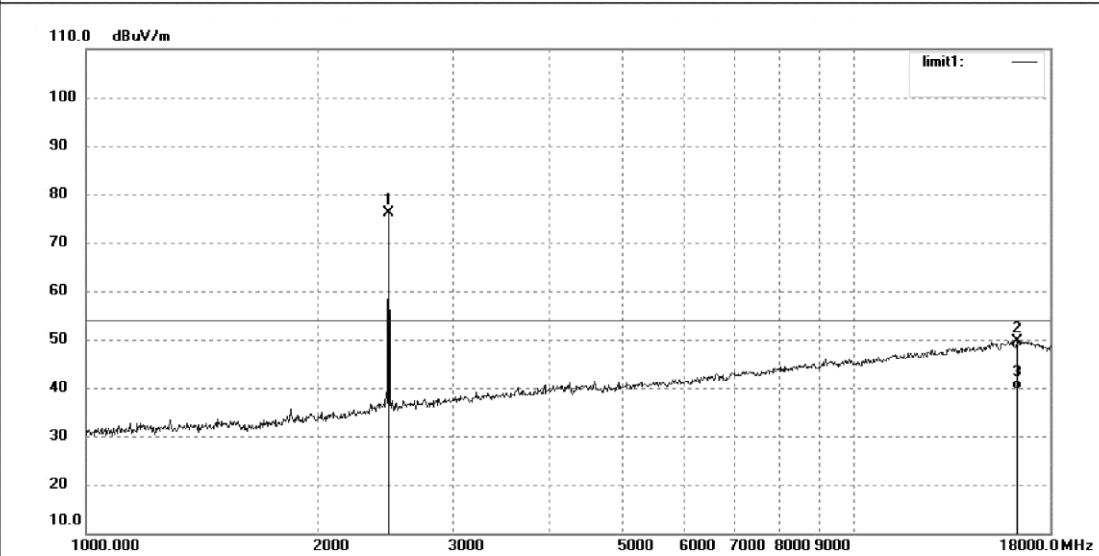

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	83.38	-7.37	76.01	/	/	peak			
2	16315.231	9.49	40.19	49.68	74.00	-24.32	peak			
3	16315.231	-0.55	40.19	39.64	54.00	-14.36	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1879

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2480MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

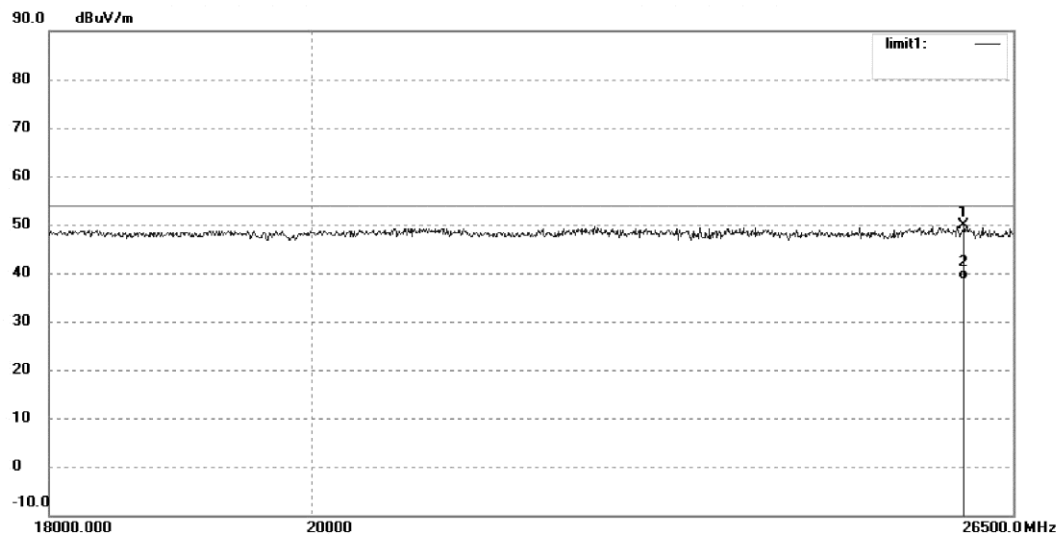

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25982.398	32.61	17.24	49.85	74.00	-24.15	peak			
2	25982.398	21.46	17.24	38.70	54.00	-15.30	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1880

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2480MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

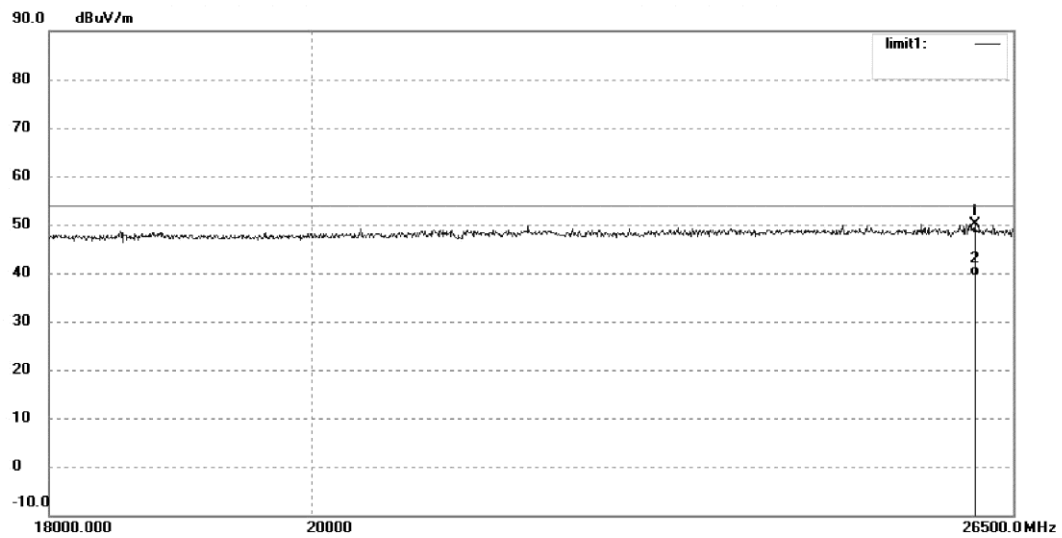

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26093.176	33.05	17.17	50.22	74.00	-23.78	peak			
2	26093.176	22.14	17.17	39.31	54.00	-14.69	AVG			

Appendix A.2: Radiated Emissions in Restricted Bands
 Low Channel
**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1863

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

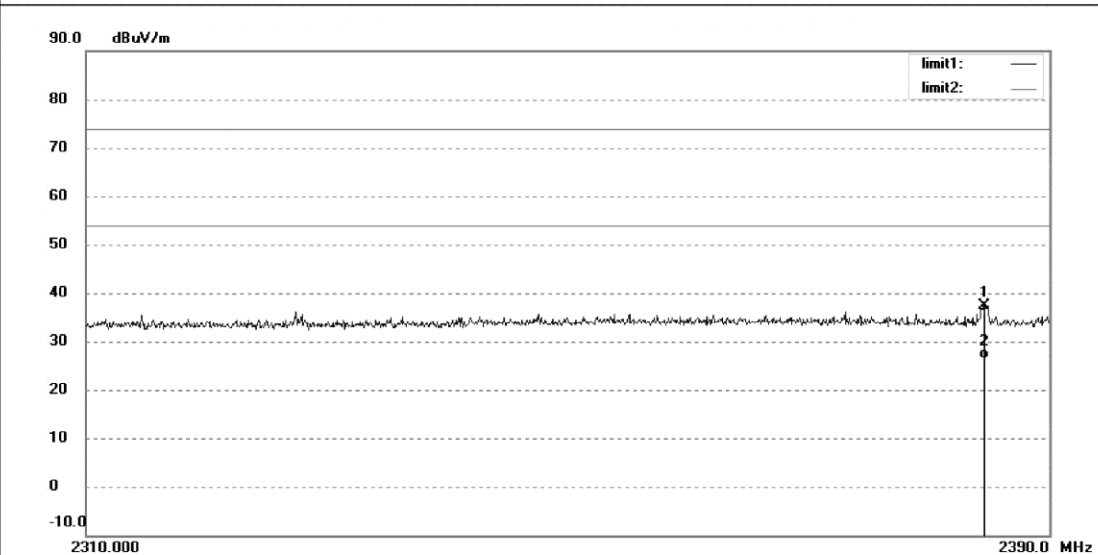

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2384.560	44.98	-7.56	37.42	74.00	-36.58	peak			
2	2384.560	33.95	-7.56	26.39	54.00	-27.61	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1864

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

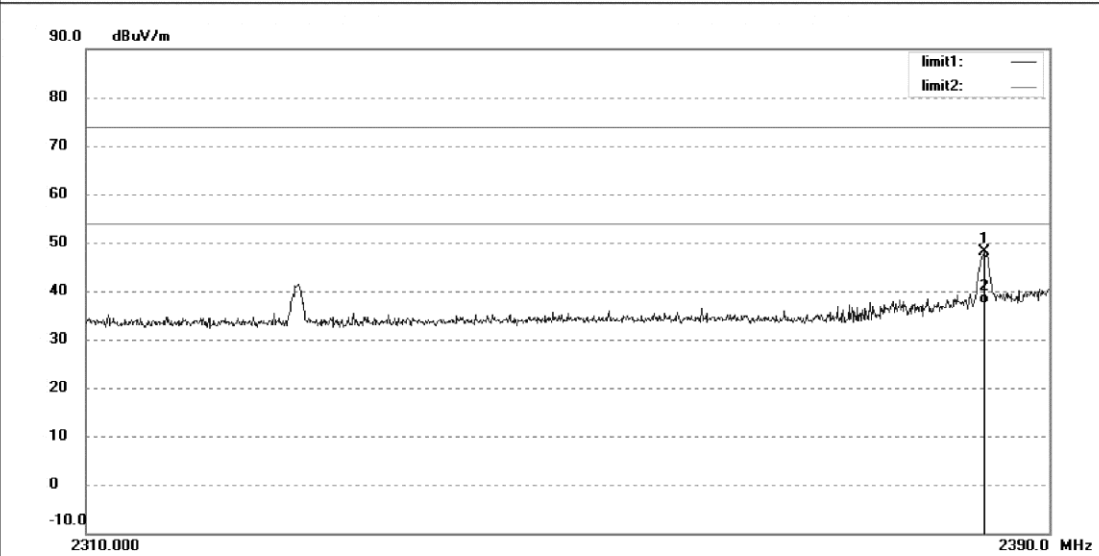

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2384.560	55.72	-7.56	48.16	74.00	-25.84	peak			
2	2384.560	44.93	-7.56	37.37	54.00	-16.63	AVG			

High Channel

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1867

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2480MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

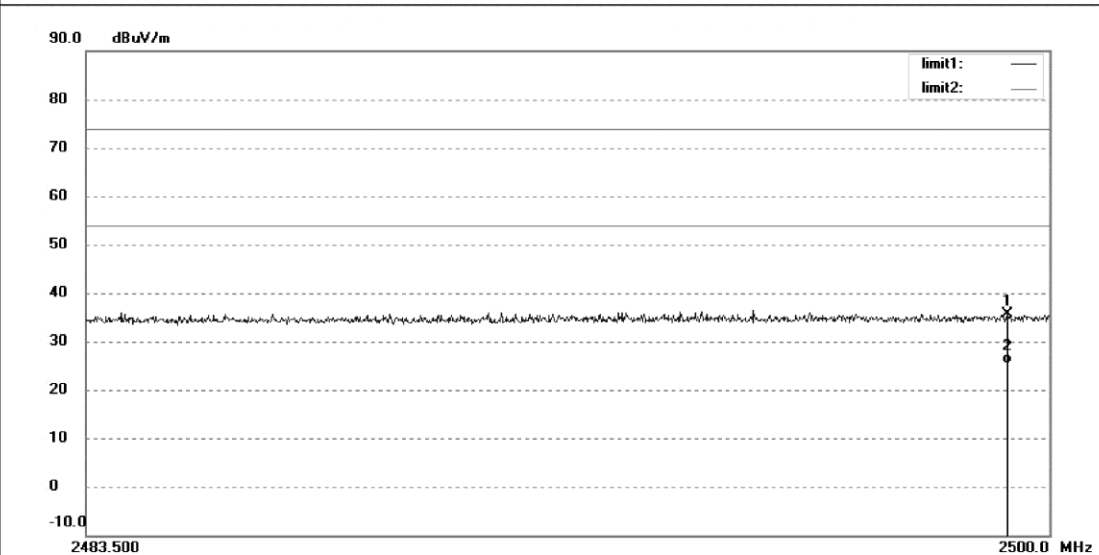

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2499.291	43.02	-7.40	35.62	74.00	-38.38	peak			
2	2499.291	32.85	-7.40	25.45	54.00	-28.55	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1868

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2480MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: Bluetooth 4.0

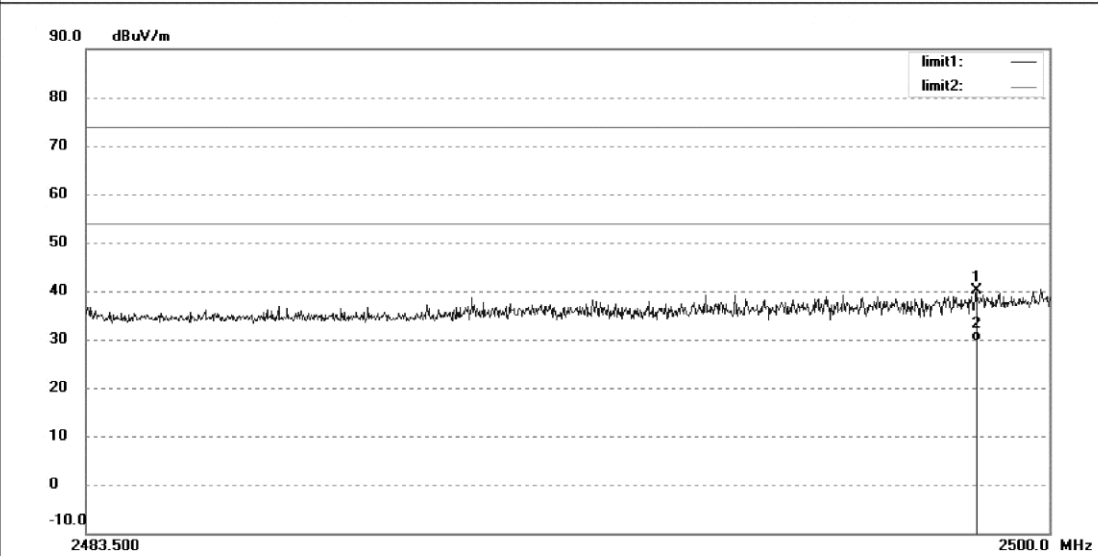

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2498.746	47.43	-7.39	40.04	74.00	-33.96	peak			
2	2498.746	36.94	-7.39	29.55	54.00	-24.45	AVG			

Appendix B

Test Results of RF Exposure - Bluetooth 4.0 Low Energy Mode

APPENDIX B.1: RF EXPOSURE COMPLIANCE	2
--	---

Appendix B.1: RF Exposure Compliance

Radio Frequency Exposure Compliance

RESULT:

Pass

Test standard : FCC 1.1310
RSS-102 Issue 5
KDB 447498 D01 General RF Exposure Guidance v06

This device is Bluetooth 4.0 Low Energy and 2.4 GHz wireless device. The EUT has only one antenna, Bluetooth 4.0 Low Energy and 2.4 GHz wireless cannot transmit simultaneously.

This RF exposure evaluation is only for Bluetooth 4.0 Low Energy operation.

Since the maximum peak output power of the transmitter is 0.61 mw, and the separation between body and antenna is 5 mm. The maximum peak output power is less than 10mW (FCC Limit) and 4mW (IC Limit), hence the EUT is excluded from SAR evaluation according to FCC KDB 447498 D01: Mobile Portable RF Exposure and RSS-102 Issue 5.

Appendix C

Test Results of 2.4 GHz Wireless Mode

APPENDIX C.1: SPURIOUS EMISSIONS OF 2.4 GHZ WIRELESS OPERATION 2

Low Channel..... 2

Middle Channel..... 11

High Channel..... 20

APPENDIX C.2: RADIATED EMISSIONS IN RESTRICTED BANDS - 2.4 GHZ WIRELESS OPERATION 29

Low Channel..... 29

High Channel..... 31

Appendix C.1: Spurious Emissions of 2.4 GHz Wireless operation Low Channel


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
Manufacturer: Lenovo
Operating Condition: TX 2402MHz
Test Site: 2# Chamber
Operator: LAN
Test Specification: DC 3.7V
Comment: X
Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

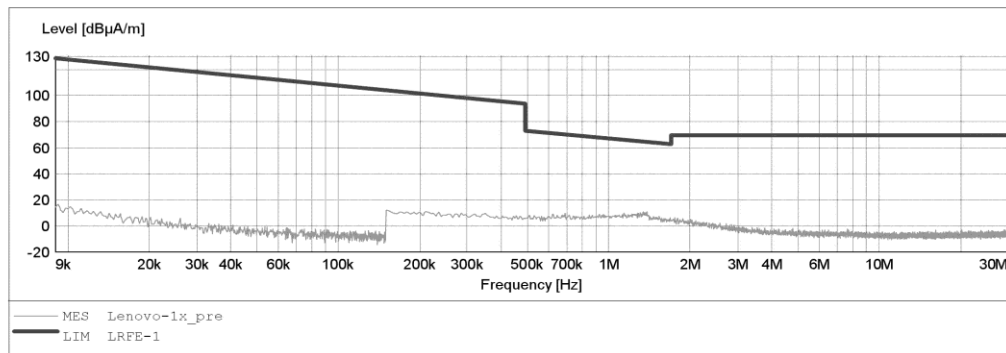


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
Manufacturer: Lenovo
Operating Condition: TX 2402MHz
Test Site: 2# Chamber
Operator: LAN
Test Specification: DC 3.7V
Comment: Y
Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

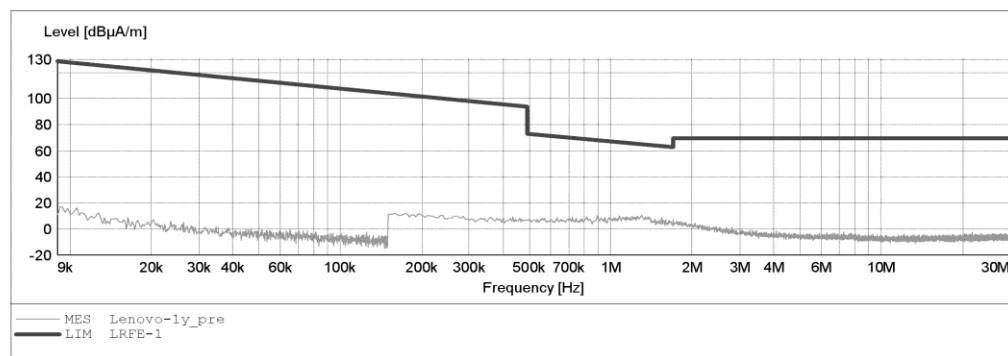


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
Manufacturer: Lenovo
Operating Condition: TX 2402MHz
Test Site: 2# Chamber
Operator: LAN
Test Specification: DC 3.7V
Comment: Z
Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

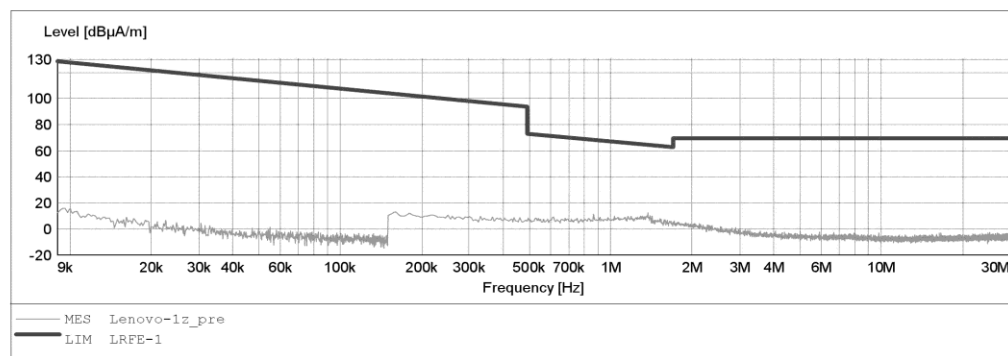



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1917

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

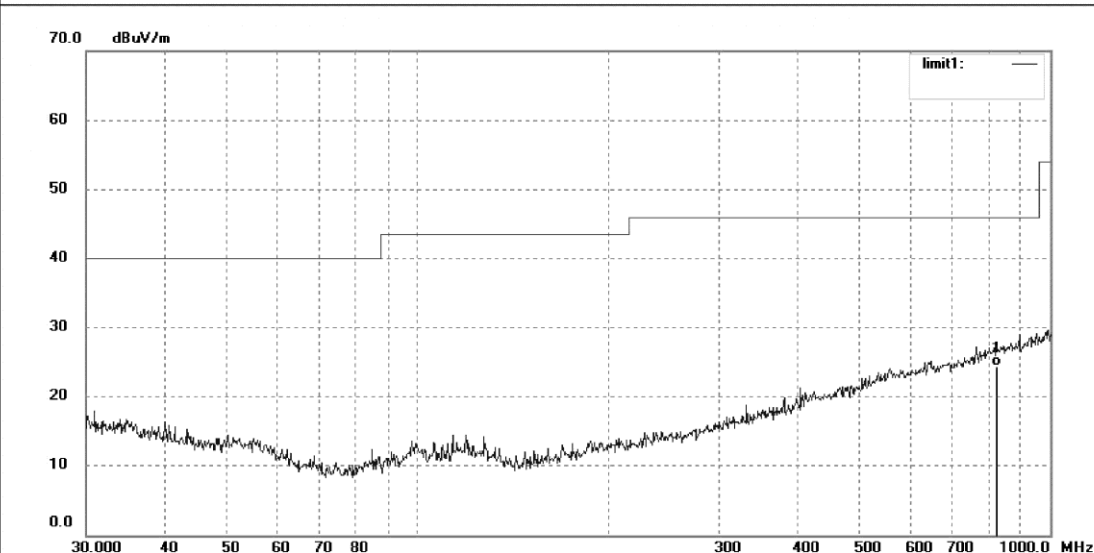

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	821.7103	23.99	0.36	24.35	46.00	-21.65	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1918

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

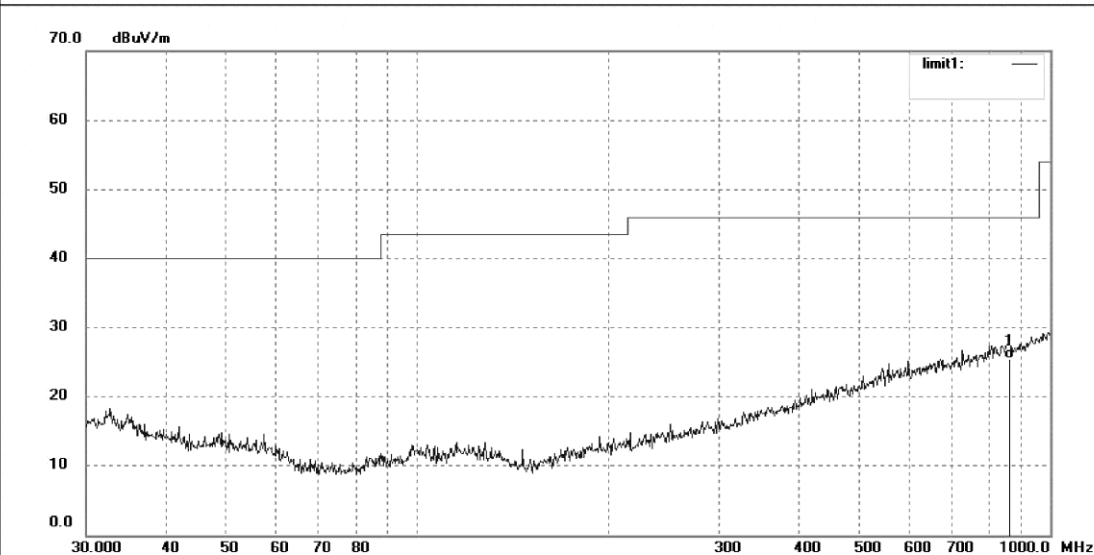

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	863.0561	24.45	0.96	25.41	46.00	-20.59	QP			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1837

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

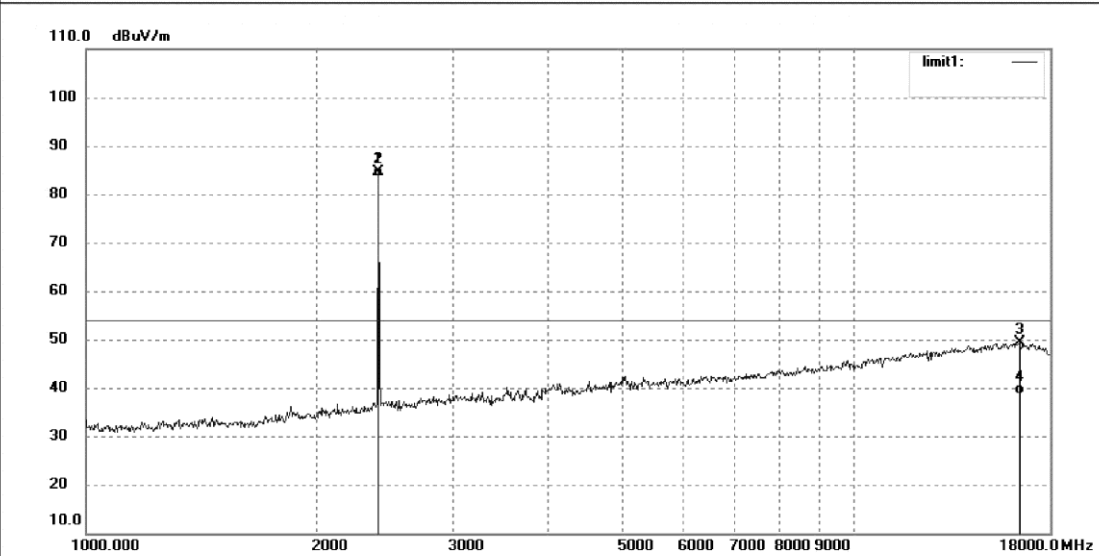

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	92.04	-7.45	84.59	/	/	peak			
2	2402.000	91.01	-7.45	83.56	/	/	AVG			
3	16409.819	9.02	40.25	49.27	74.00	-24.73	peak			
4	16409.819	-1.56	40.25	38.69	54.00	-15.31	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1838

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

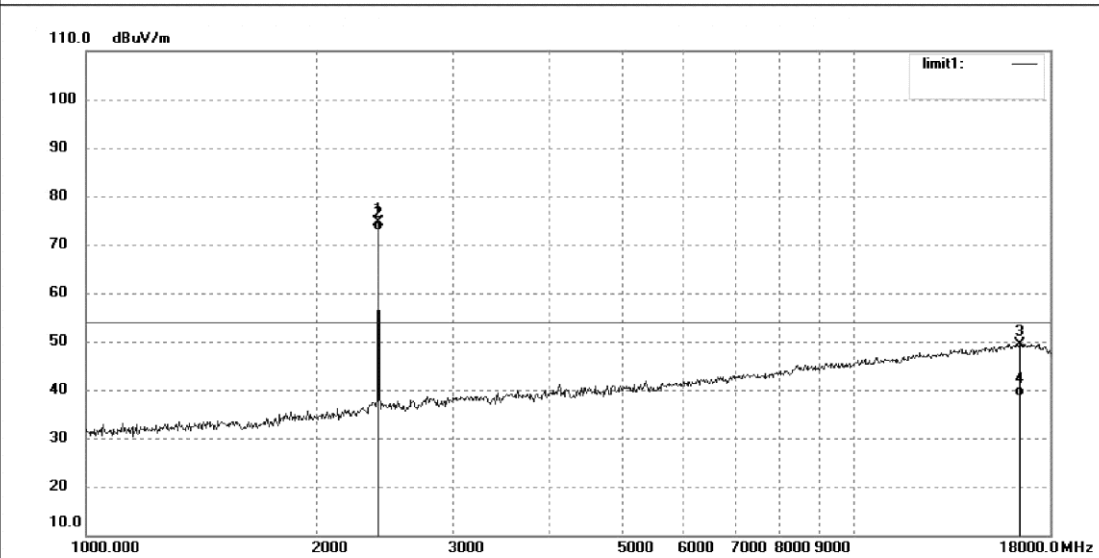

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	82.13	-7.45	74.68	/	/	peak			
2	2402.000	80.32	-7.45	72.87	/	/	AVG			
3	16457.318	9.22	40.27	49.49	74.00	-24.51	peak			
4	16457.318	-1.57	40.27	38.70	54.00	-15.30	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1869

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

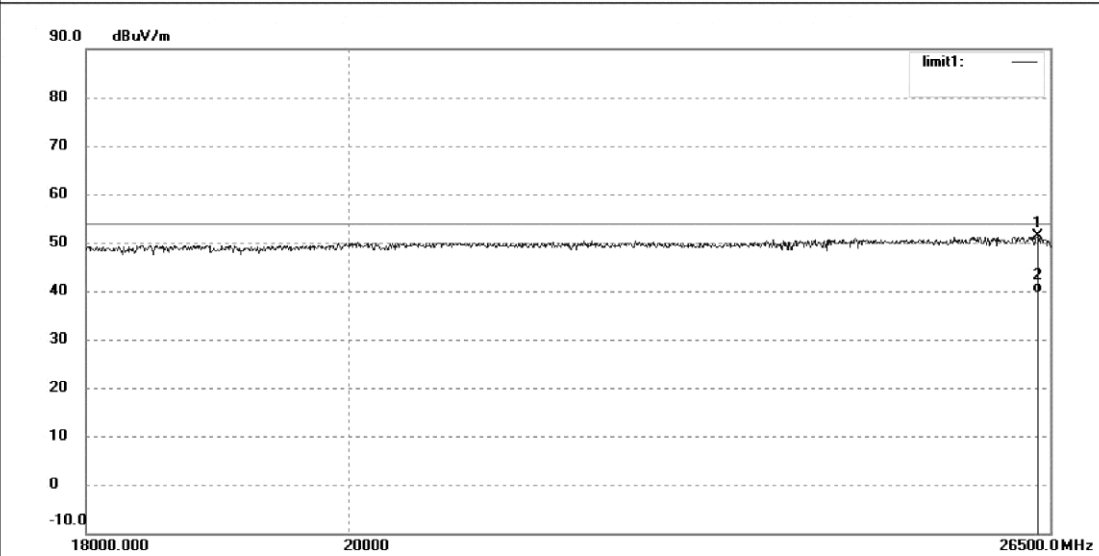

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26367.091	34.45	16.99	51.44	74.00	-22.56	peak			
2	26367.091	22.73	16.99	39.72	54.00	-14.28	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1870

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

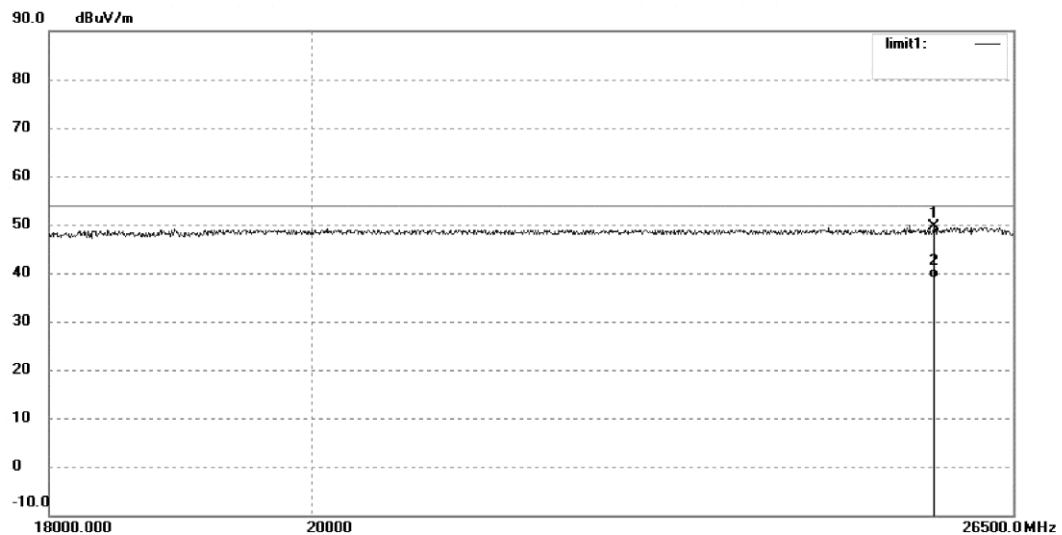

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25672.730	32.20	17.45	49.65	74.00	-24.35	peak			
2	25672.730	21.42	17.45	38.87	54.00	-15.13	AVG			

Middle Channel


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
 Manufacturer: Lenovo
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: DC 3.7V
 Comment: X
 Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

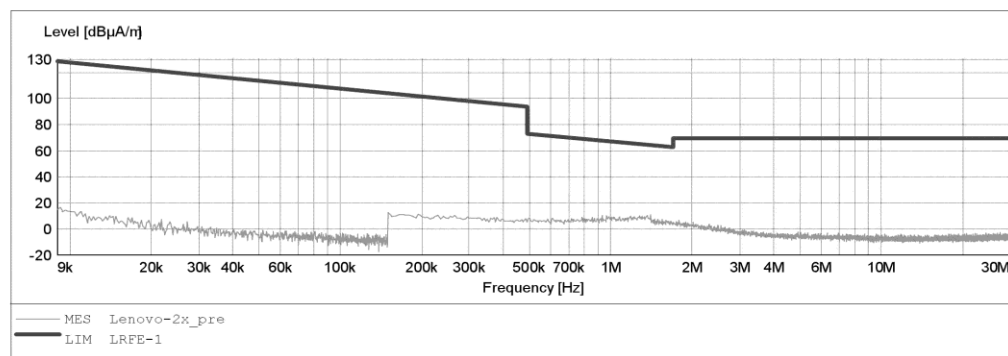


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
 Manufacturer: Lenovo
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: DC 3.7V
 Comment: Y
 Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				IF	Transducer
Start	Stop	Step	Detector	Meas.	Time	Bandw.		
Frequency	Frequency	Width						
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s		200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s		9 kHz	1516M	

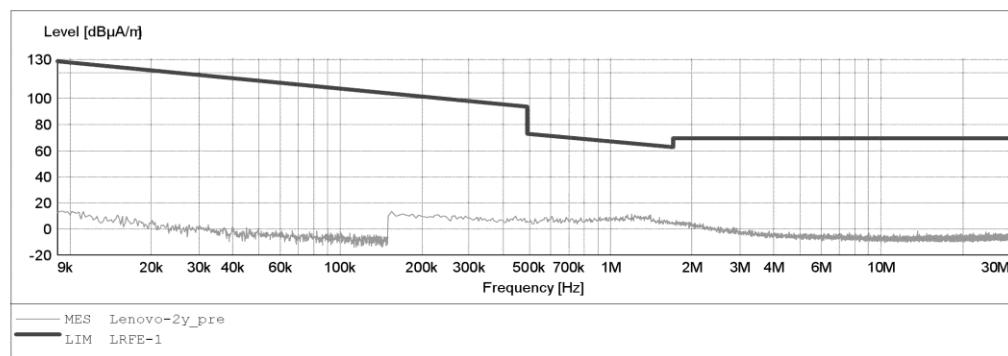


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
Manufacturer: Lenovo
Operating Condition: TX 2441MHz
Test Site: 2# Chamber
Operator: LAN
Test Specification: DC 3.7V
Comment: Z
Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

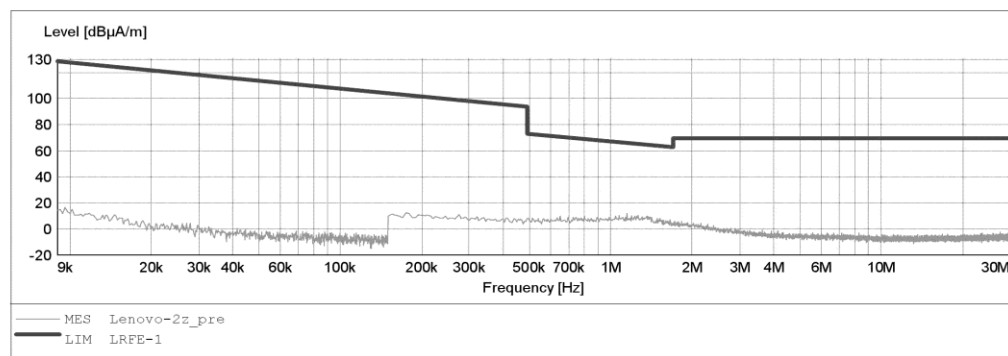



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1919

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2441MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

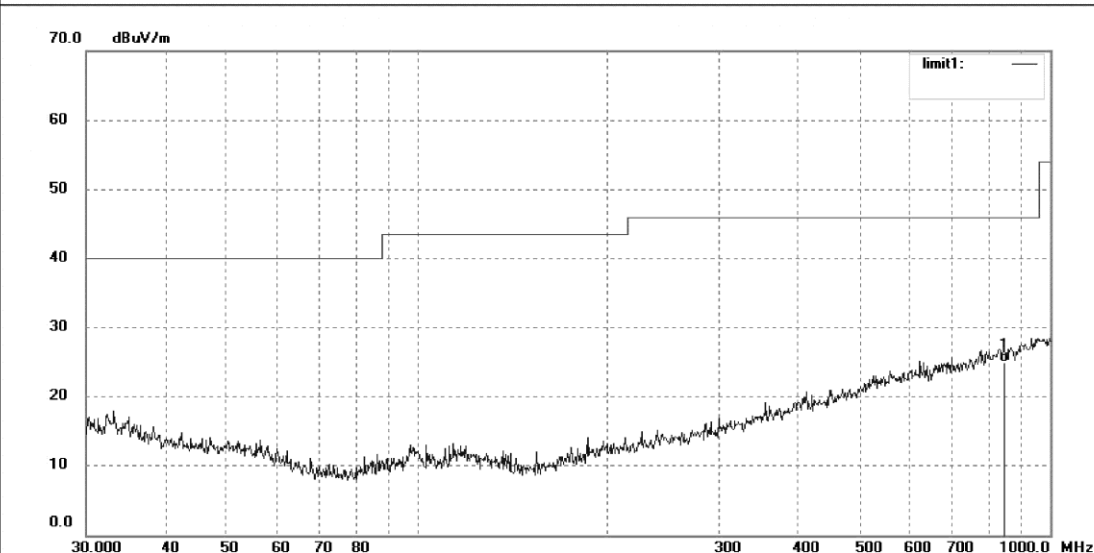

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	845.0878	24.18	0.69	24.87	46.00	-21.13	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1920

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2441MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

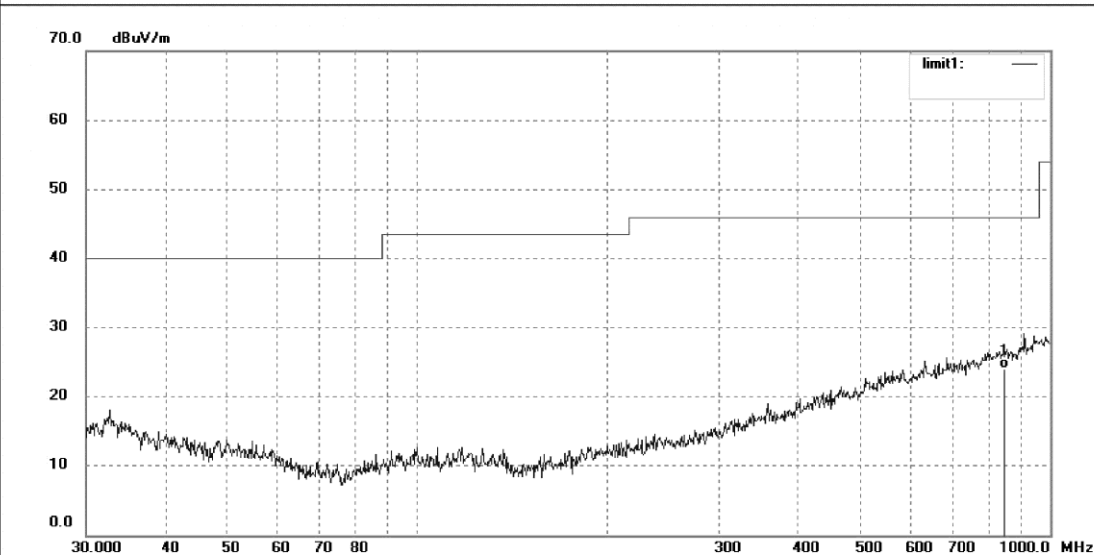

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	848.0562	23.37	0.70	24.07	46.00	-21.93	QP			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1839

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2441MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

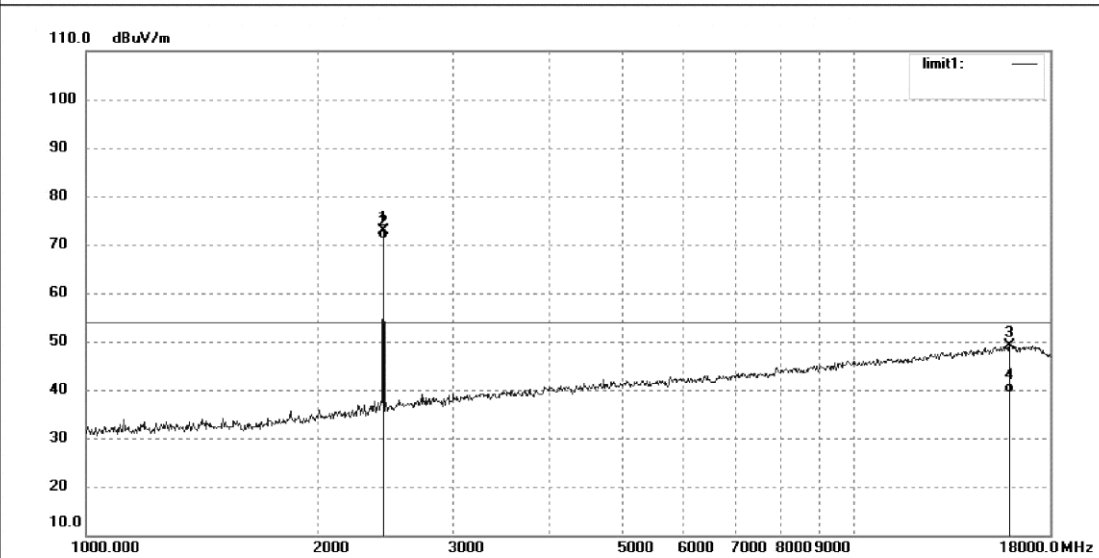

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	80.27	-7.35	72.92	/	/	peak			
2	2441.000	78.58	-7.35	71.23	/	/	AVG			
3	15942.303	9.10	40.01	49.11	74.00	-24.89	peak			
4	15942.303	-0.56	40.01	39.45	54.00	-14.55	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1840

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2441MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

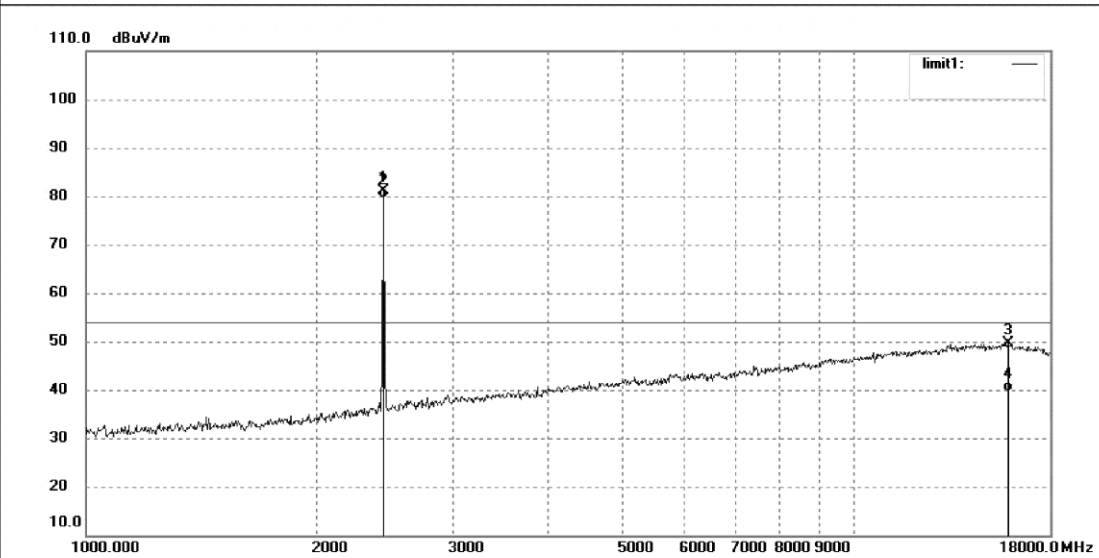

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	88.37	-7.35	81.02	/	/	peak			
2	2441.000	86.93	-7.35	79.58	/	/	AVG			
3	15896.290	9.60	40.02	49.62	74.00	-24.38	peak			
4	15896.290	-0.35	40.02	39.67	54.00	-14.33	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1871

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2441MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

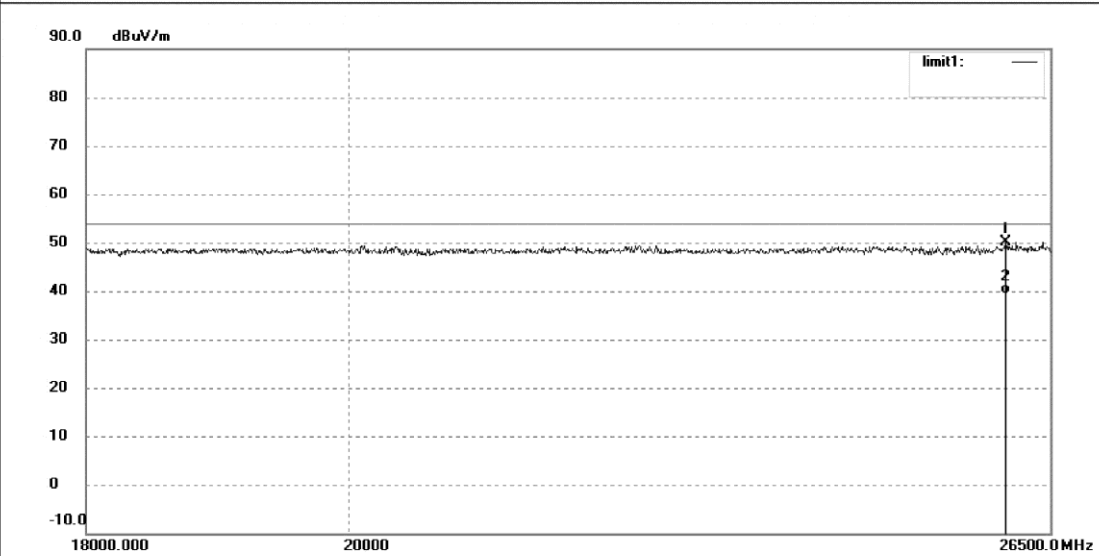

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26032.693	33.01	17.21	50.22	74.00	-23.78	peak			
2	26032.693	22.18	17.21	39.39	54.00	-14.61	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1872

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2441MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

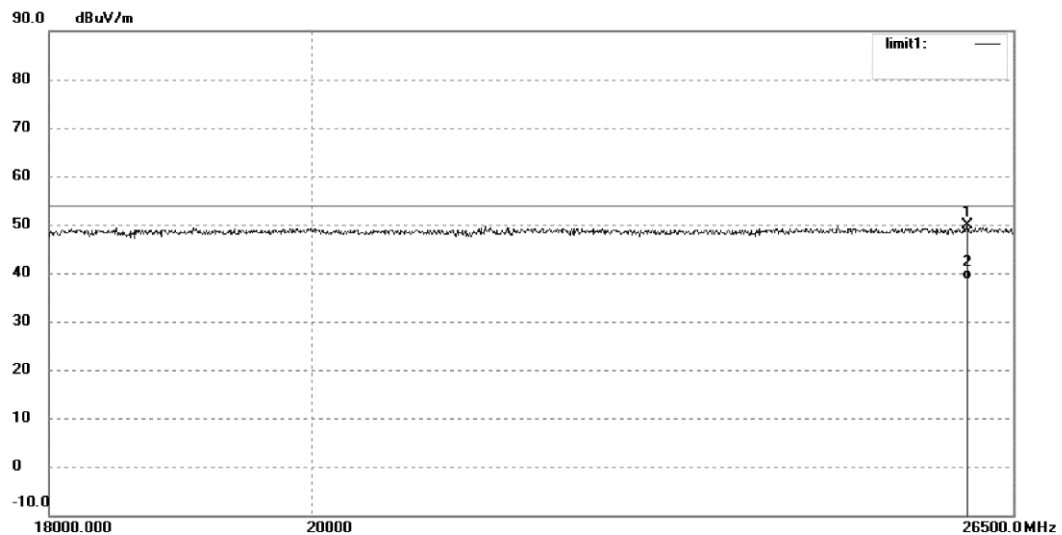

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26022.626	32.64	17.22	49.86	74.00	-24.14	peak			
2	26022.626	21.40	17.22	38.62	54.00	-15.38	AVG			

High Channel


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
 Manufacturer: Lenovo
 Operating Condition: TX 2479MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: DC 3.7V
 Comment: X
 Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.			
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M		
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M		

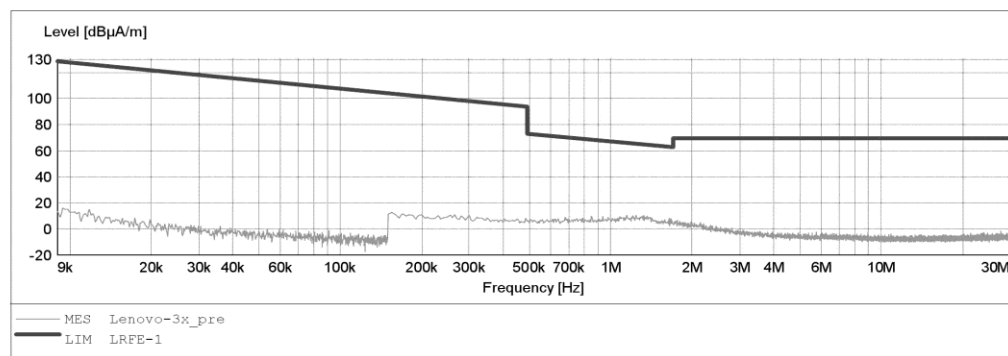


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
 Manufacturer: Lenovo
 Operating Condition: TX 2479MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: DC 3.7V
 Comment: Y
 Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

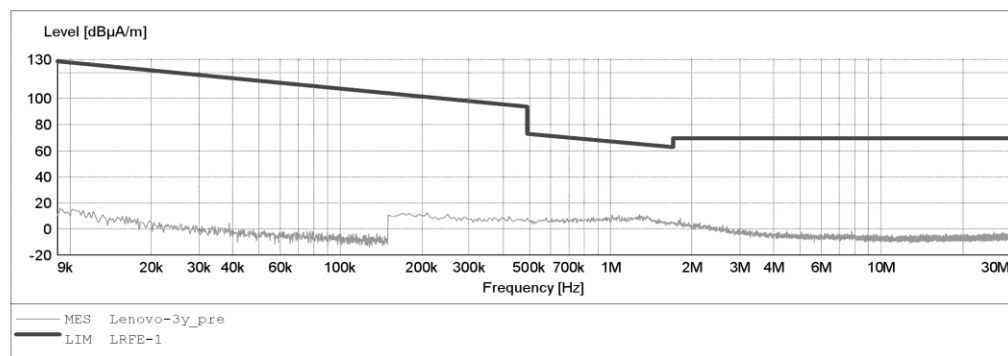


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3m Radiated

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
Manufacturer: Lenovo
Operating Condition: TX 2479MHz
Test Site: 2# Chamber
Operator: LAN
Test Specification: DC 3.7V
Comment: Z
Start of Test: 2015-11-29 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

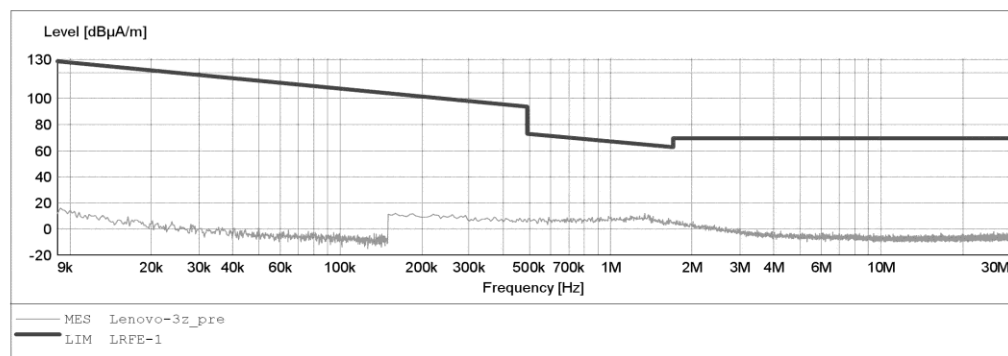



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1921

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2479MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

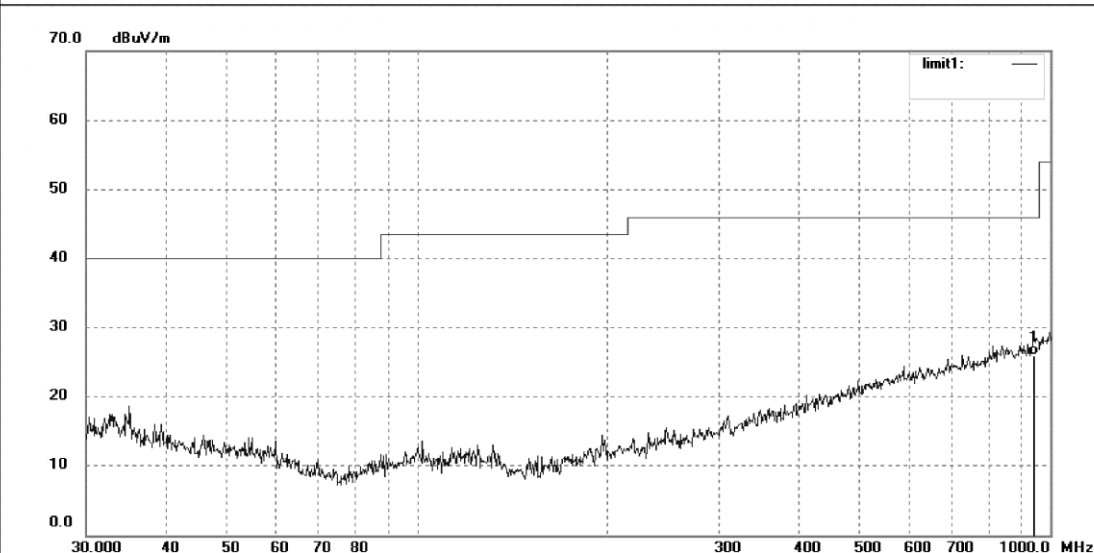

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	942.1304	24.04	1.98	26.02	46.00	-19.98	QP			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1922

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2479MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

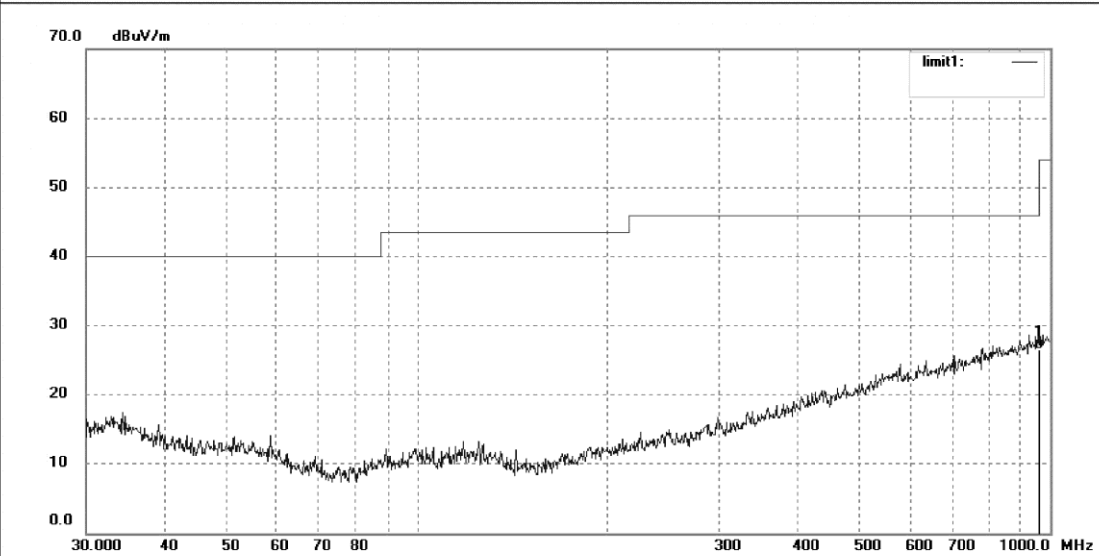

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	958.7943	24.22	2.35	26.57	46.00	-19.43	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1845

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2479MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

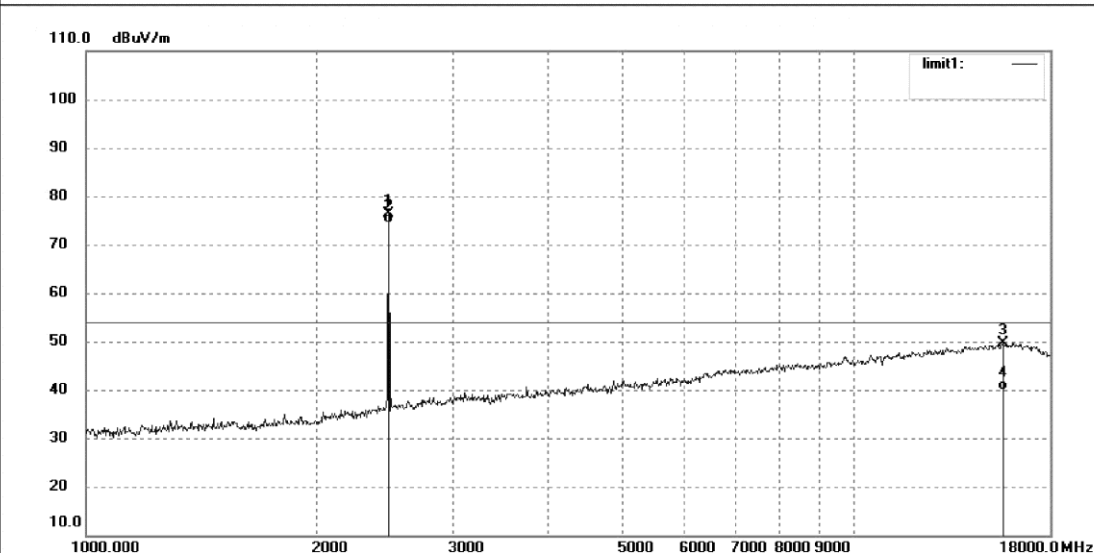

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2479.000	83.85	-7.37	76.48	/	/	peak			
2	2479.000	81.63	-7.37	74.26	/	/	AVG			
3	15622.990	9.58	40.08	49.66	74.00	-24.34	peak			
4	15622.990	-0.25	40.08	39.83	54.00	-14.17	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1846

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2479MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

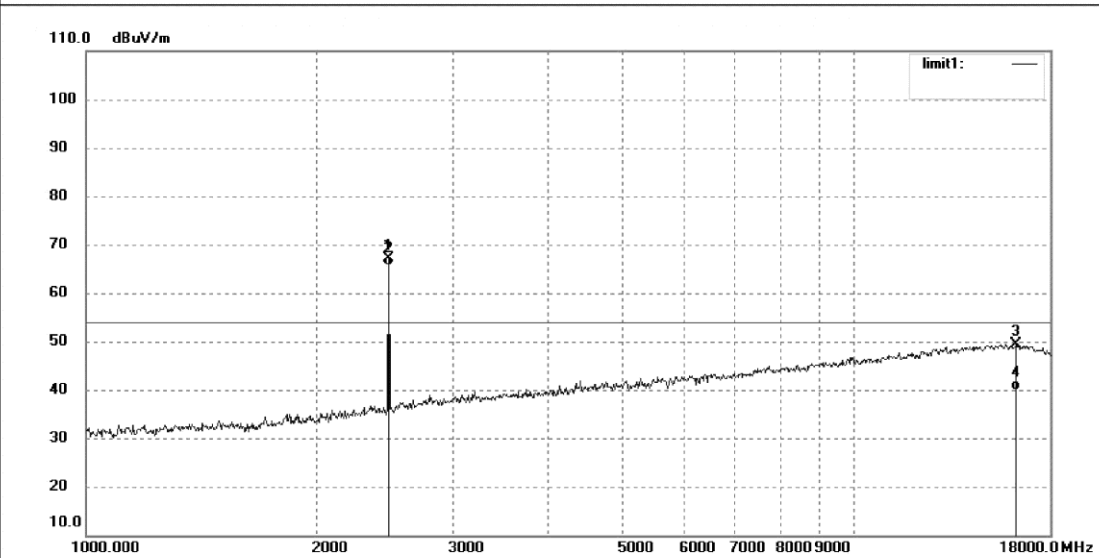

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2479.000	74.39	-7.37	67.02	/	/	peak			
2	2479.000	73.01	-7.37	65.64	/	/	AVG			
3	16268.142	9.31	40.16	49.47	74.00	-24.53	peak			
4	16268.142	-0.27	40.16	39.89	54.00	-14.11	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel: +86-0755-26503290

Fax: +86-0755-26503396

Job No.: Ian2015-2 #1873

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2479MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

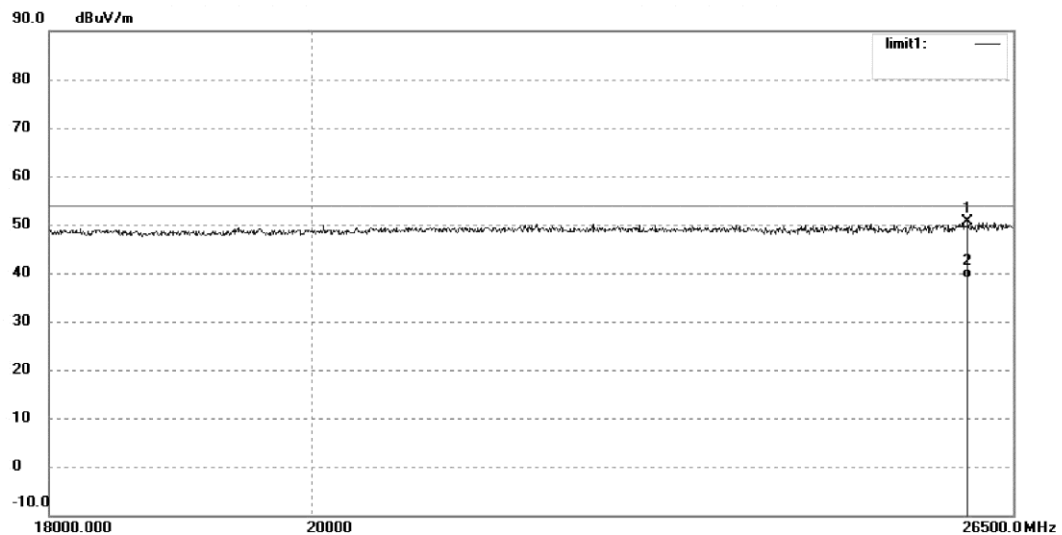

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26022.626	33.33	17.22	50.55	74.00	-23.45	peak			
2	26022.626	21.55	17.22	38.77	54.00	-15.23	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1874

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2479MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

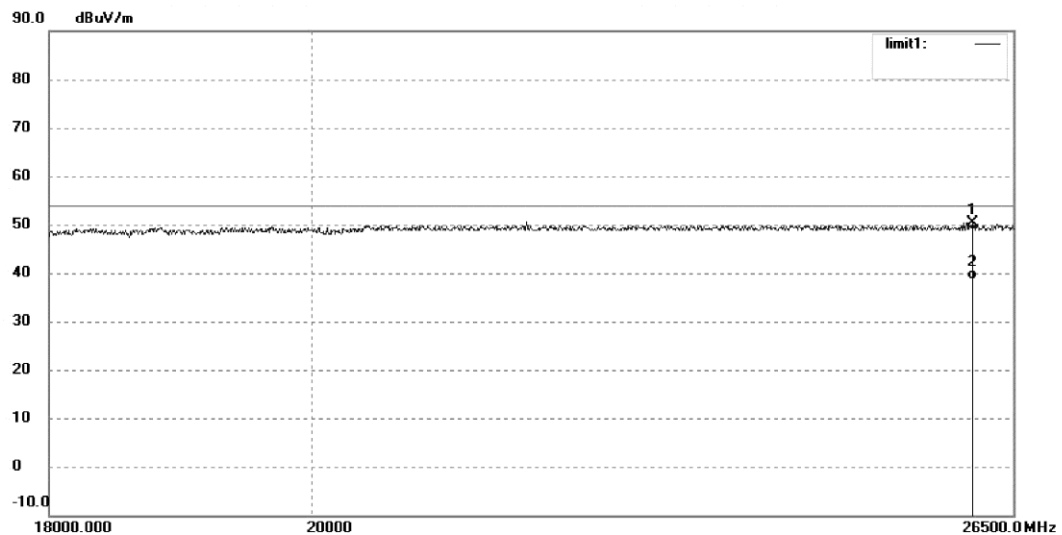

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26072.999	33.28	17.18	50.46	74.00	-23.54	peak			
2	26072.999	21.43	17.18	38.61	54.00	-15.39	AVG			

Appendix C.2: Radiated Emissions in Restricted Bands - 2.4 GHz Wireless operation
 Low Channel
**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel: +86-0755-26503290

Fax: +86-0755-26503396

Job No.: Ian2015-2 #1860

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

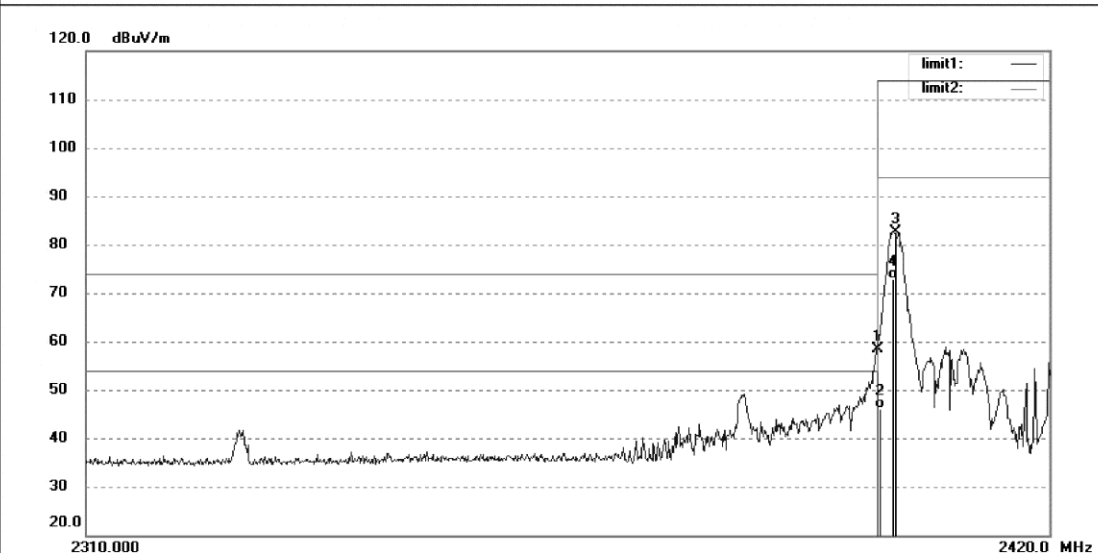

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	65.94	-7.46	58.48	74.00	-15.52	peak			
2	2400.000	53.66	-7.46	46.20	54.00	-7.80	AVG			
3	2402.000	89.97	-7.45	82.52	114.00	-31.48	peak			
4	2402.000	80.34	-7.45	72.89	94.00	-21.11	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1859

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2402MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

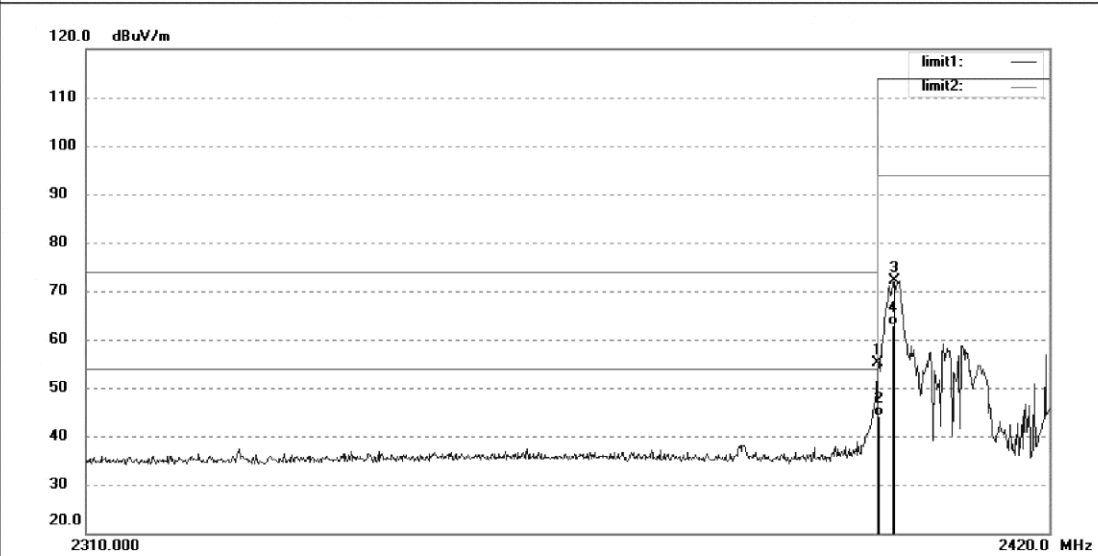

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	62.48	-7.46	55.02	74.00	-18.98	peak			
2	2400.000	51.63	-7.46	44.17	54.00	-9.83	AVG			
3	2402.000	79.54	-7.45	72.09	114.00	-41.91	peak			
4	2402.000	70.32	-7.45	62.87	94.00	-31.13	AVG			

High Channel

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1861

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2479MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

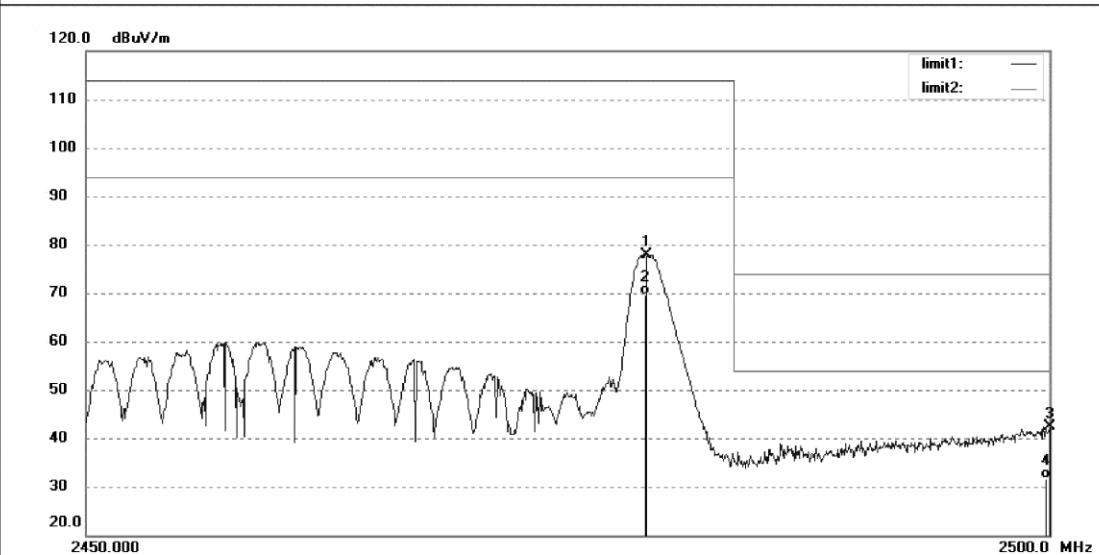

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2479.000	85.31	-7.37	77.94	114.00	-36.06	peak			
2	2479.000	76.95	-7.37	69.58	94.00	-24.42	AVG			
3	2500.000	49.77	-7.40	42.37	74.00	-31.63	peak			
4	2500.000	38.94	-7.40	31.54	54.00	-22.46	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #1862

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: TX 2479MHz

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 3.7V


Date: 15/11/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 2.4GHz

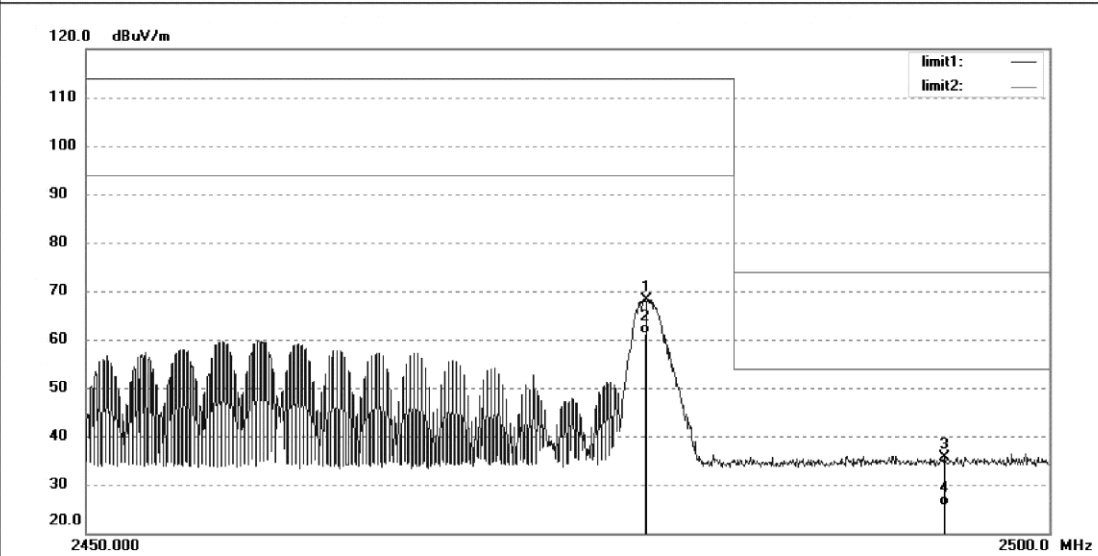

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2479.000	75.48	-7.37	68.11	114.00	-45.89	peak			
2	2479.000	68.52	-7.37	61.15	94.00	-32.85	AVG			
3	2494.550	43.10	-7.39	35.71	74.00	-38.29	peak			
4	2494.550	32.94	-7.39	25.55	54.00	-28.45	AVG			

Appendix D

Test Results of RF Exposure - 2.4 GHz Wireless Mode

APPENDIX D.1: RF EXPOSURE COMPLIANCE	2
--	---

Appendix D.1: RF Exposure Compliance

Radio Frequency Exposure Compliance

RESULT:

Pass

Test standard : FCC 1.1310
RSS-102 Issue 5
KDB 447498 D01 General RF Exposure Guidance v06

This device is Bluetooth 4.0 Low Energy and 2.4 GHz wireless device. The EUT has only one antenna, Bluetooth 4.0 Low Energy and 2.4 GHz wireless cannot transmit simultaneously.

This RF exposure evaluation is only for 2.4 GHz wireless operation.

Since the maximum peak output power of the transmitter is 0.61 mw, and the separation between body and antenna is 5 mm. The maximum peak output power is less than 10mW (FCC Limit) and 4mW (IC Limit), hence the EUT is excluded from SAR evaluation according to FCC KDB 447498 D01: Mobile Portable RF Exposure and RSS-102 Issue 5.

Appendix E

Test Results of Battery Charging Mode

APPENDIX E.1: RADIATED EMISSIONS, BATTERY CHARGING WITH PC.....	2
APPENDIX E.2: CONDUCTED EMISSIONS, BATTERY CHARGING WITH PC	6

Appendix E.1: Radiated Emissions, Battery Charging with PC



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #2009

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: C

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 5V


Date: 2015-11-30

Time:

Engineer Signature: PEI

Distance: 3m

Note:

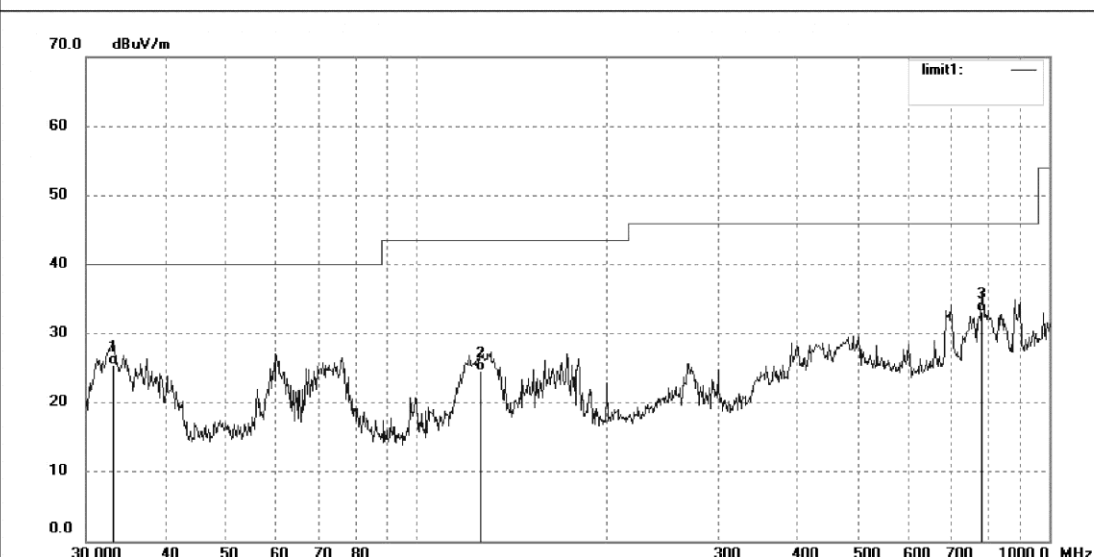

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.0949	34.49	-9.01	25.48	40.00	-14.52	QP			
2	126.3285	37.98	-13.42	24.56	43.50	-18.94	QP			
3	782.3452	33.45	-0.37	33.08	46.00	-12.92	QP			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #2010

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: C

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 5V

Date: 2015-11-30

Time:

Engineer Signature: PEI

Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	69.6004	39.71	-15.48	24.23	40.00	-15.77	QP			
2	357.9286	39.13	-7.64	31.49	46.00	-14.51	QP			
3	782.3452	34.58	-0.37	34.21	46.00	-11.79	QP			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #2011

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: C

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Vertical

Power Source: DC 5V


Date: 2015-11-30

Time:

Engineer Signature: PEI

Distance: 3m

Note:

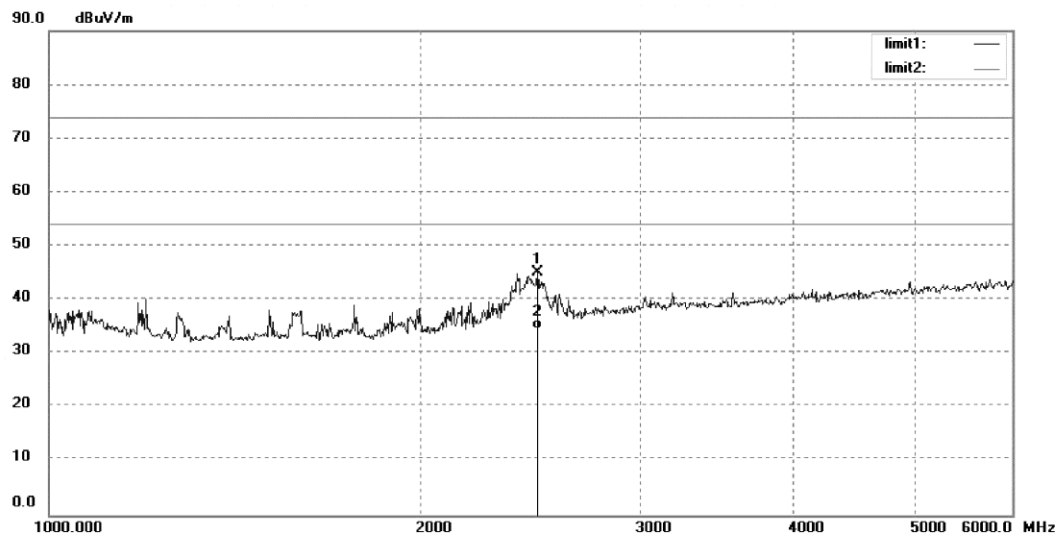

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.405	52.42	-7.37	45.05	74.00	-28.95	peak			
2	2480.405	41.90	-7.37	34.53	54.00	-19.47	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ian2015-2 #2012

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Lenovo Yoga Mouse

Mode: C

Model: MOBTJLL

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: DC 5V


Date: 2015-11-30

Time:

Engineer Signature: PEI

Distance: 3m

Note:

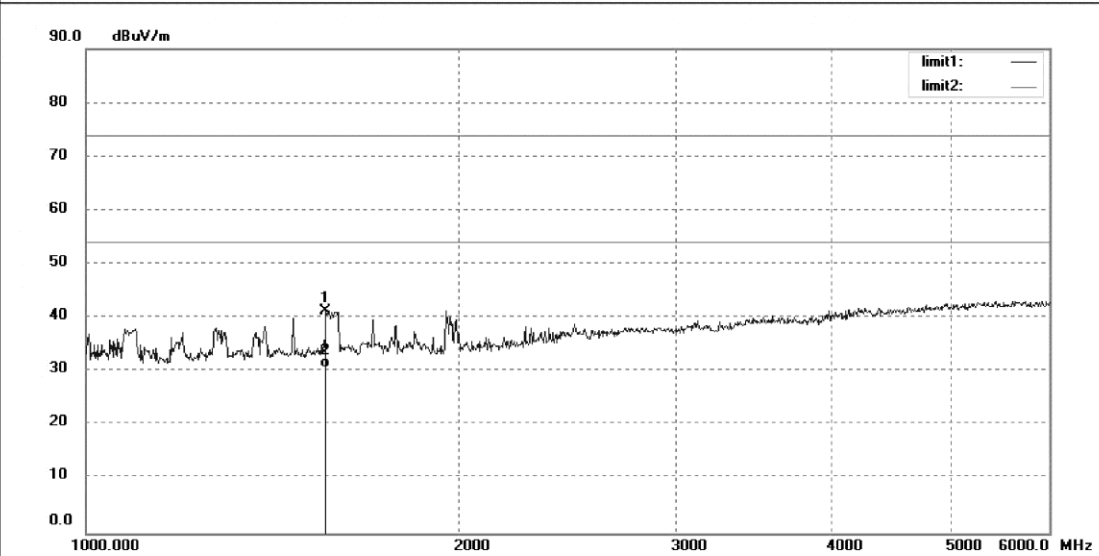

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1562.283	52.31	-11.01	41.30	74.00	-32.70	peak			
2	1562.283	41.73	-11.01	30.72	54.00	-23.28	AVG			

Appendix E.2: Conducted Emissions, Battery Charging with PC


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
Manufacturer: Lenovo
Operating Condition: C
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 2015-12-2 /

SCAN TABLE: "V 150K-30MHz fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
			Average			

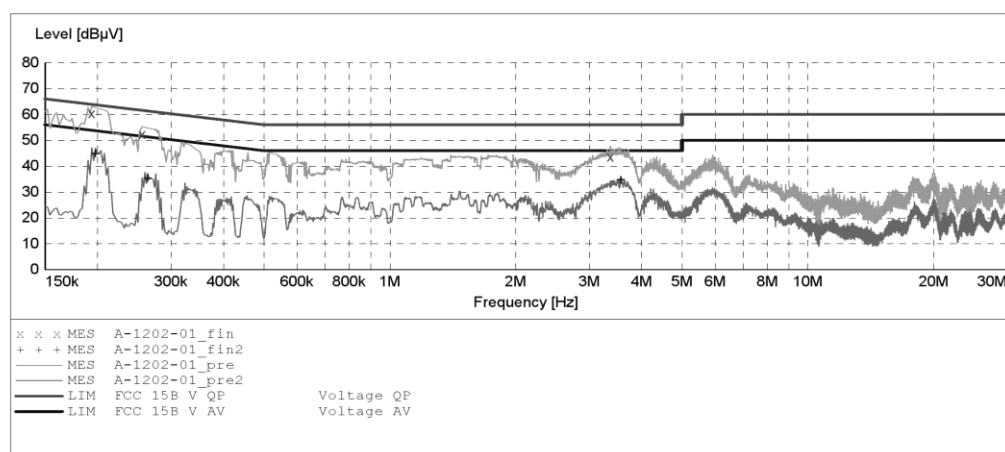

MEASUREMENT RESULT: "A-1202-01_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.194000	60.40	10.6	64	3.5	QP	L1	GND
0.256000	52.40	10.9	62	9.2	QP	L1	GND
3.372500	43.60	11.7	56	12.4	QP	L1	GND

MEASUREMENT RESULT: "A-1202-01_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.198000	44.60	10.6	54	9.1	AV	L1	GND
0.264000	35.10	10.9	51	16.2	AV	L1	GND
3.575000	34.50	11.7	46	11.5	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Lenovo Yoga Mouse M/N:MOBTJLL
Manufacturer: Lenovo
Operating Condition: C
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 2015-12-2 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

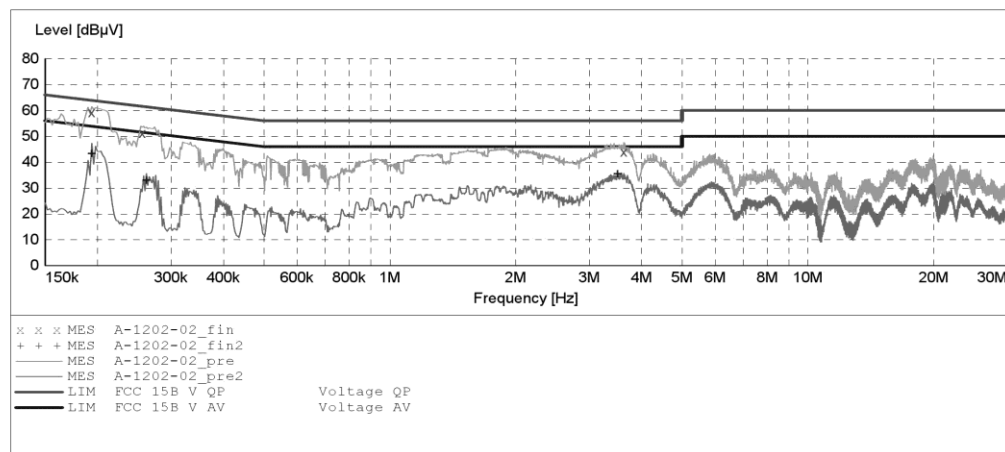

MEASUREMENT RESULT: "A-1202-02_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.194000	59.20	10.6	64	4.7	QP	N	GND
0.256000	51.30	10.9	62	10.3	QP	N	GND
3.629000	44.00	11.7	56	12.0	QP	N	GND

MEASUREMENT RESULT: "A-1202-02_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.194000	43.10	10.6	54	10.8	AV	N	GND
0.262000	32.90	10.9	51	18.5	AV	N	GND
3.507500	35.40	11.7	46	10.6	AV	N	GND