

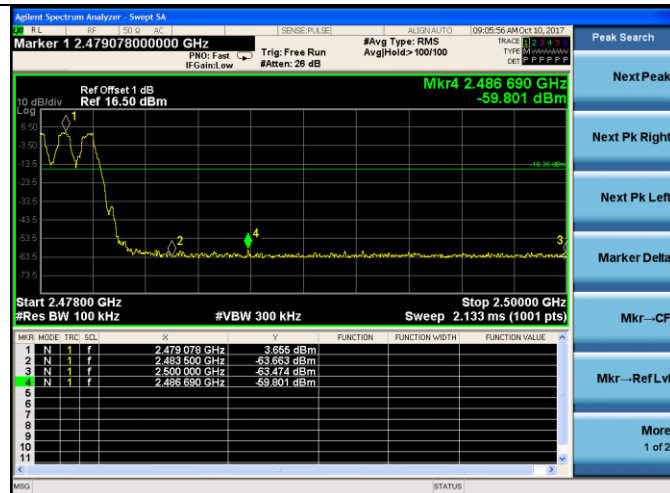
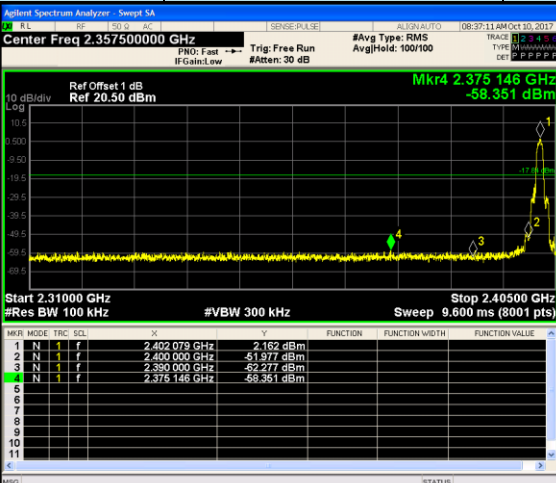
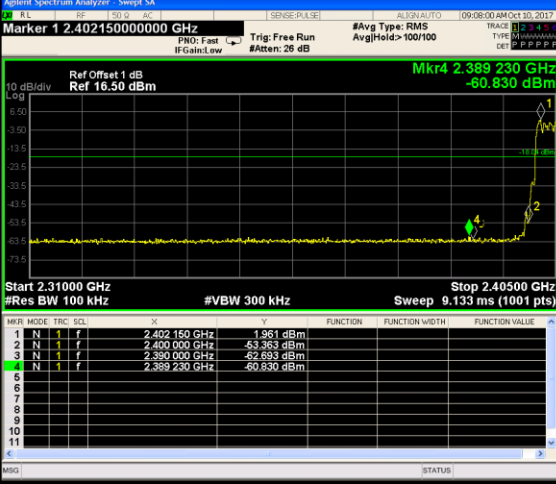





CH78
Hopping mode

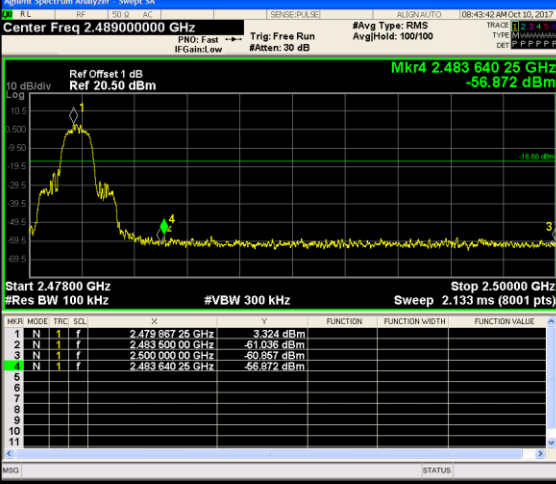


Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK
CH00 No hopping mode			
CH00 Hopping mode			
CH78 No hopping mode			




CH78
Hopping mode

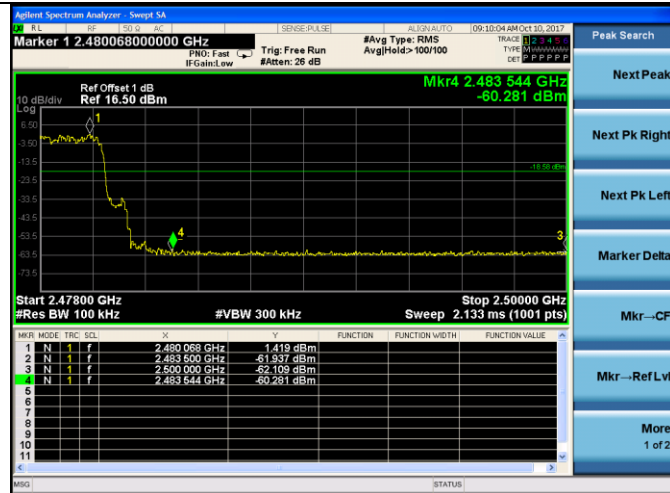


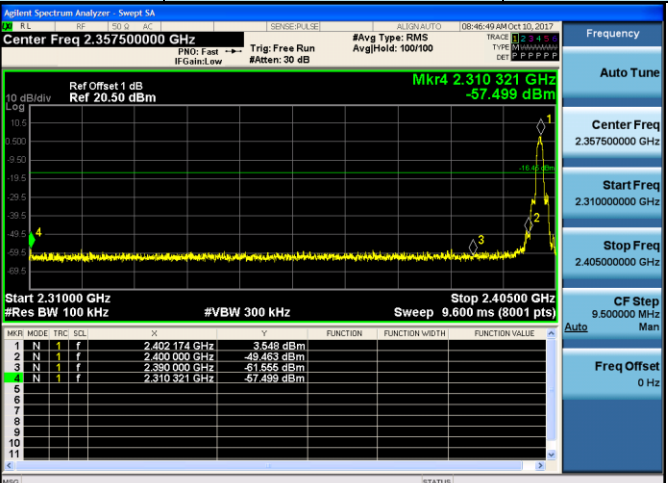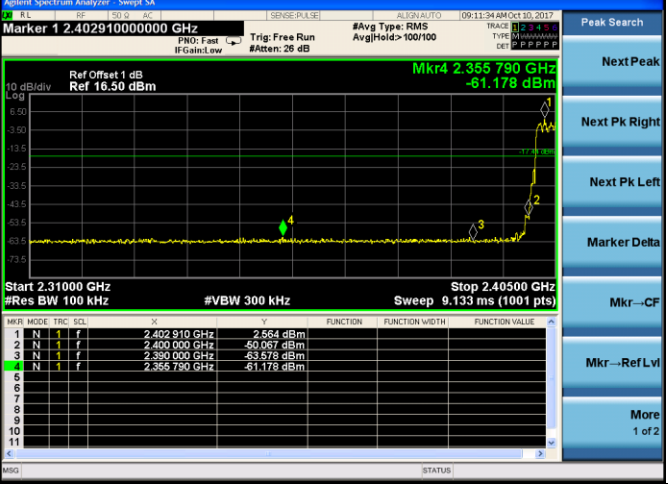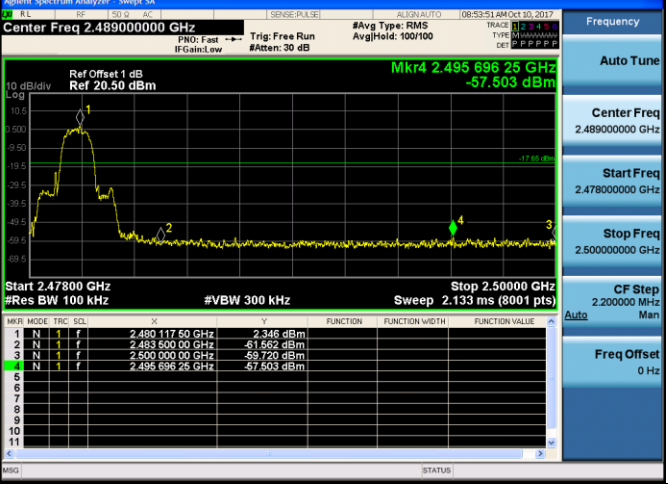
Test Item:	Band edge	Modulation type:	8DPSK
CH00 No hopping mode			
CH00 Hopping mode			
CH78 No hopping mode			


CH78
Hoppig mode

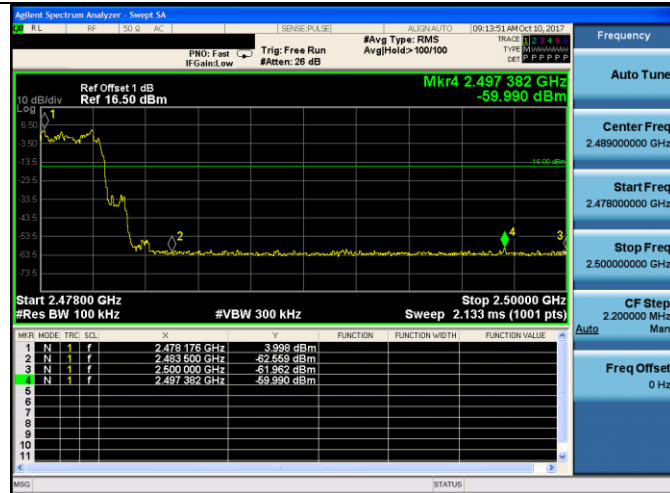


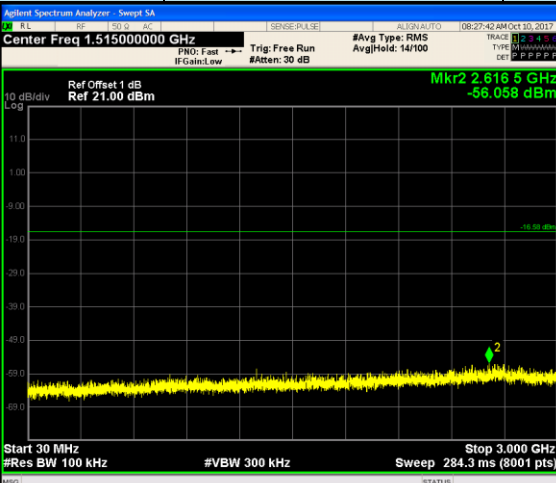
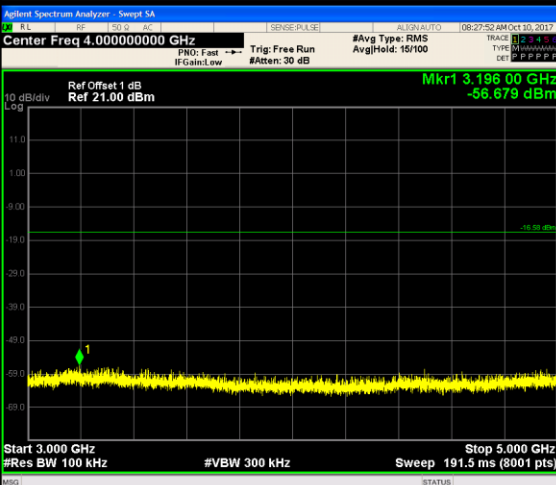
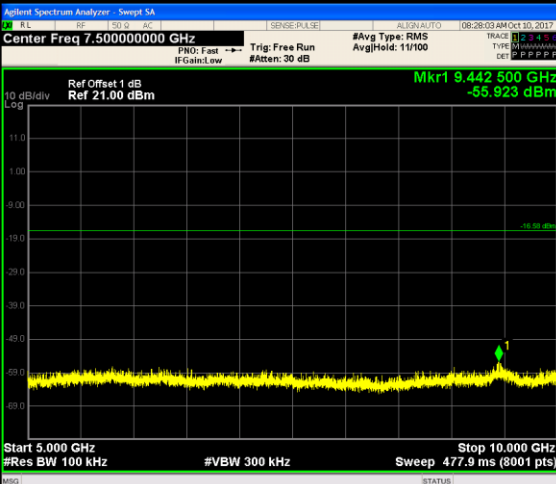
Test Item:	SE	Modulation type:	GFSK
CH00 30MHz~3GHz			
CH00 3GHz~5GHz			
CH00 5GHz~10GHz			

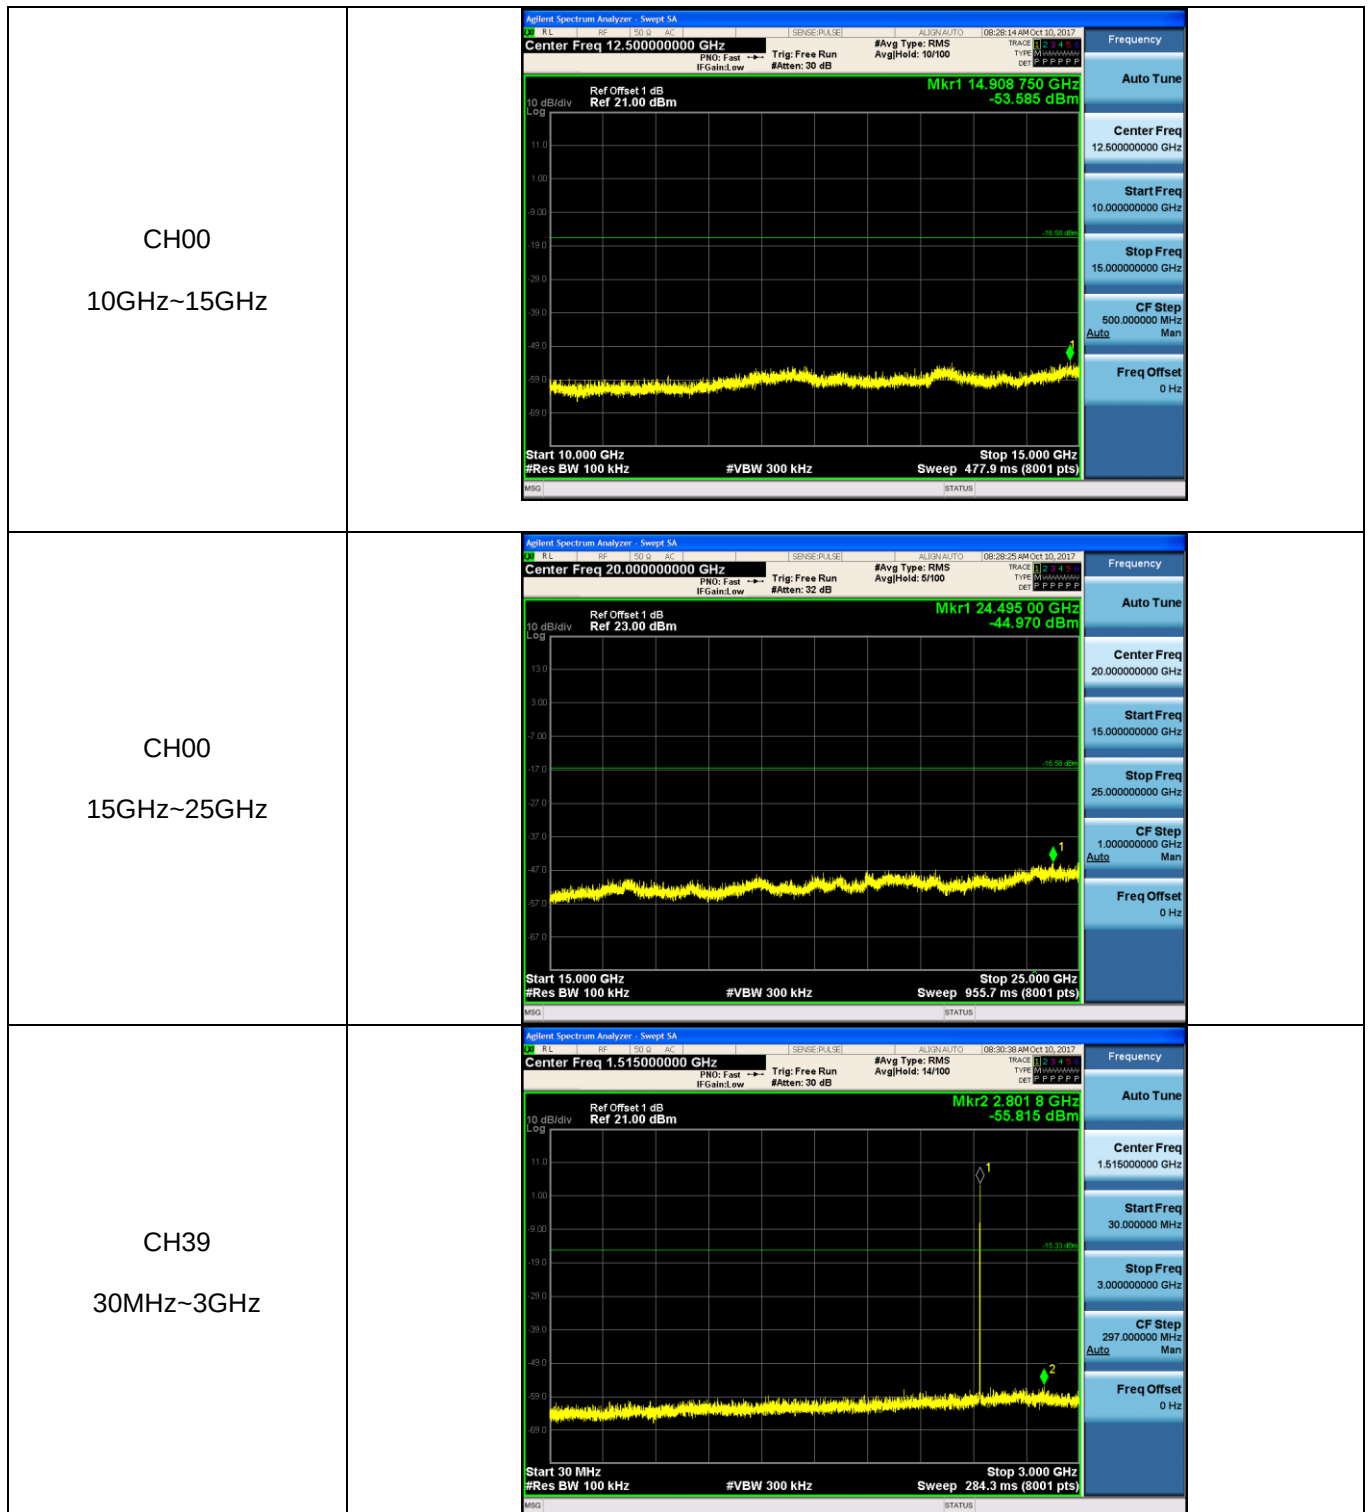


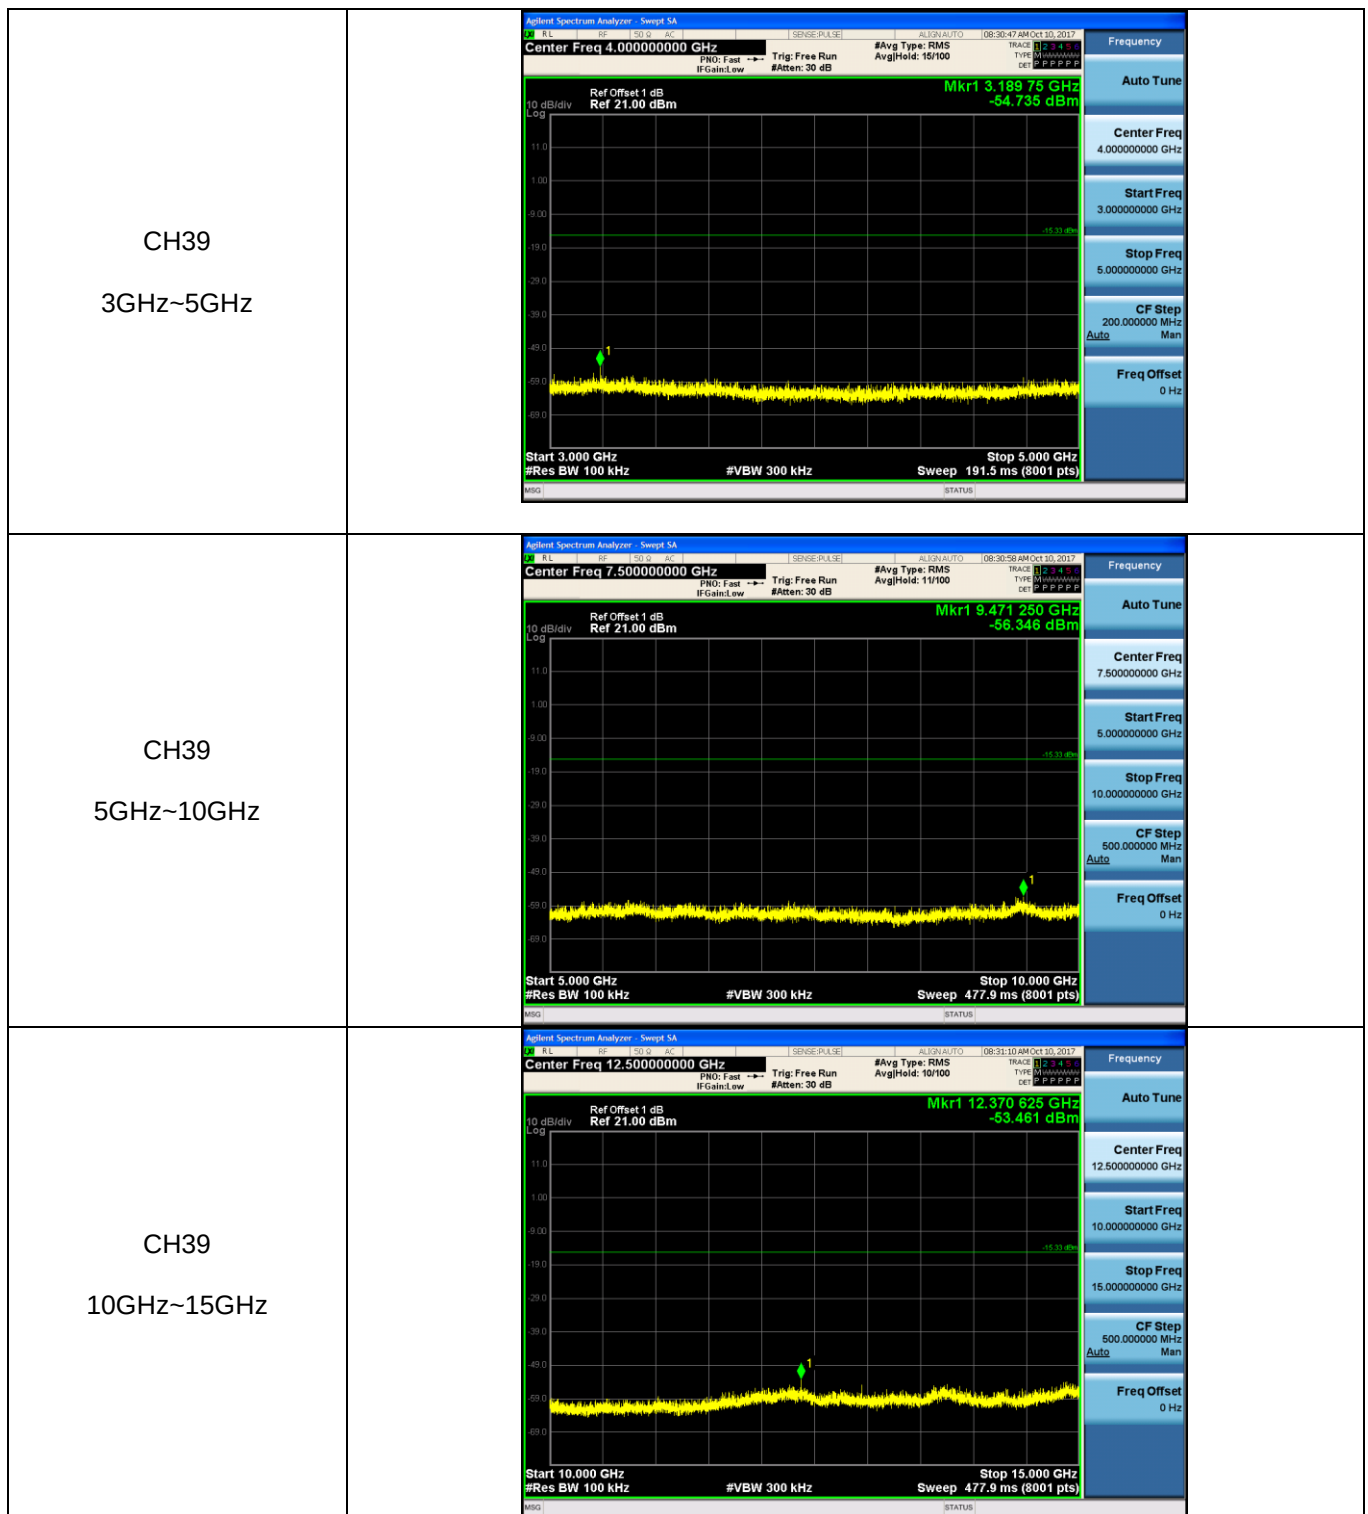


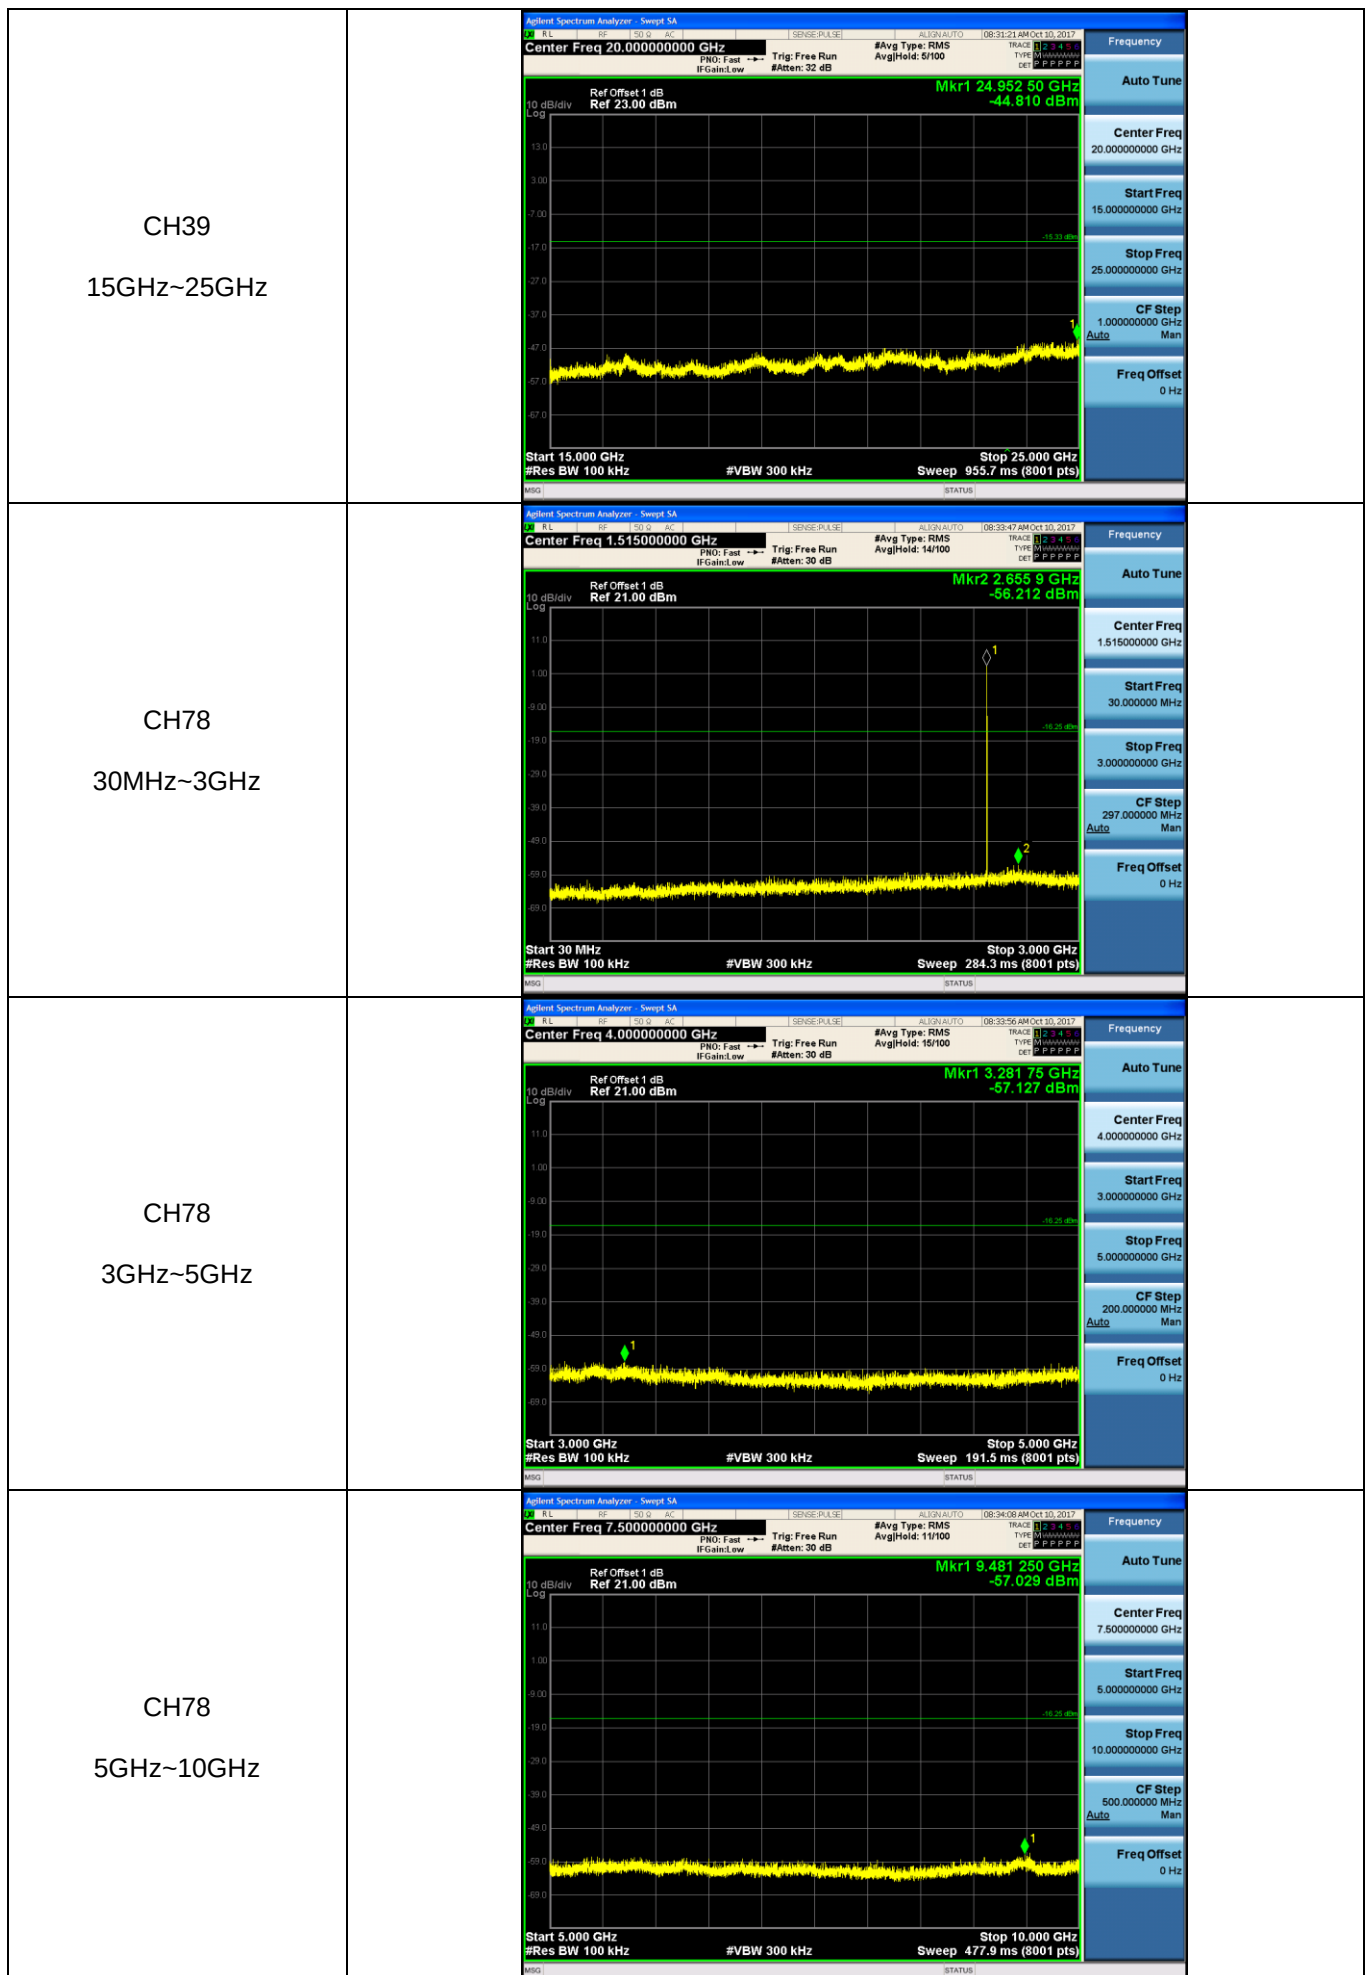




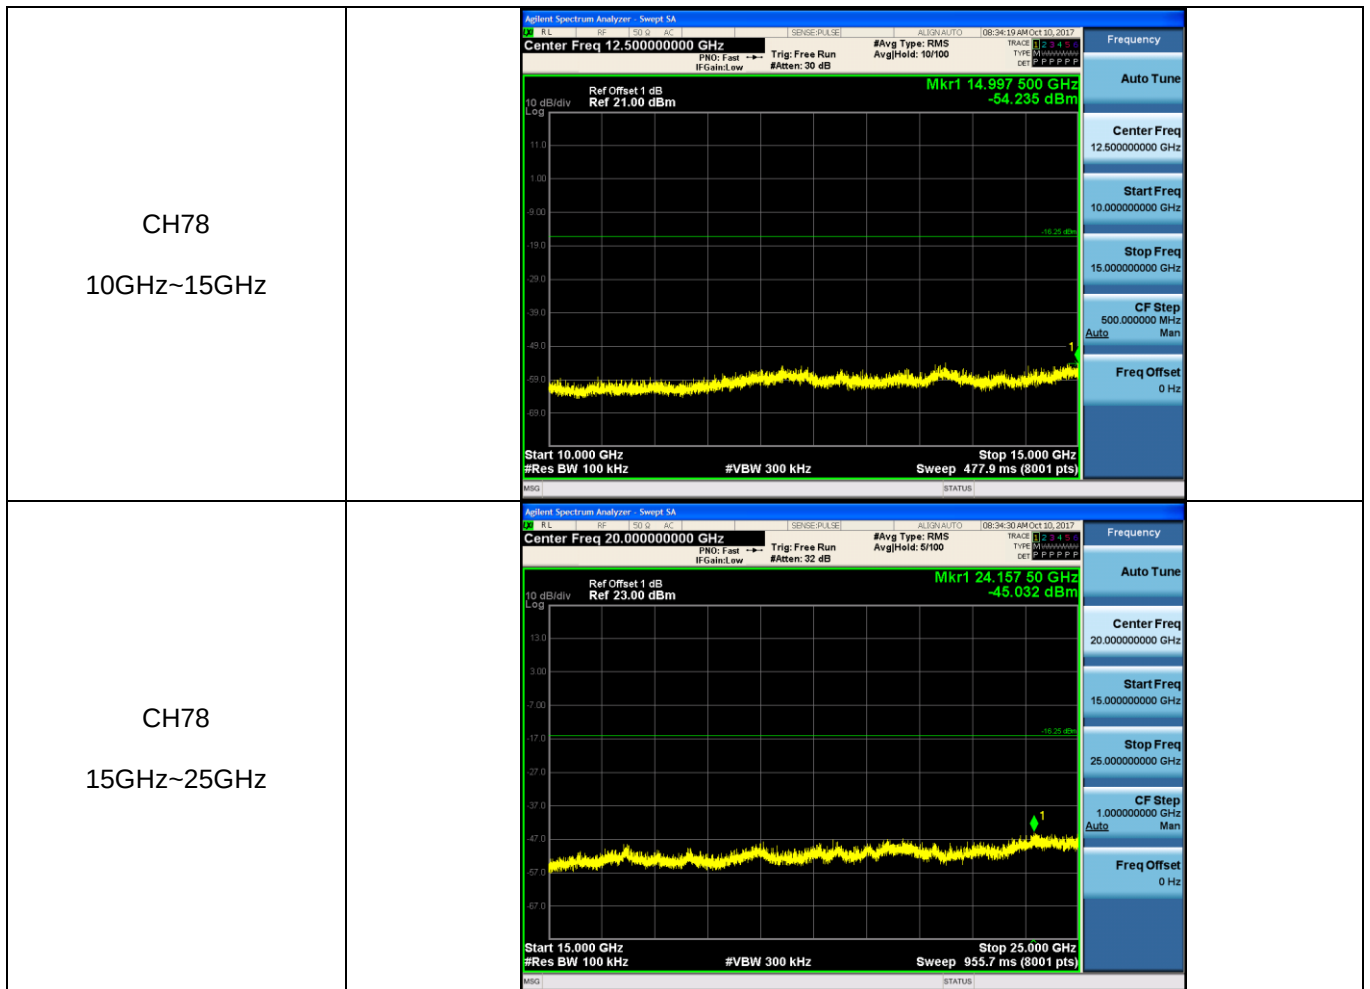


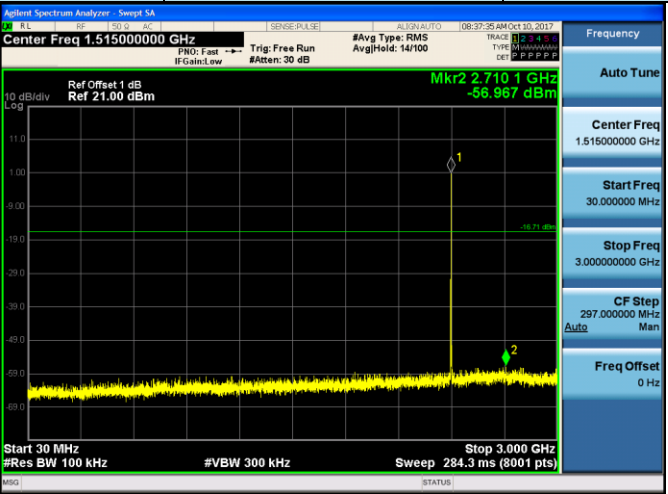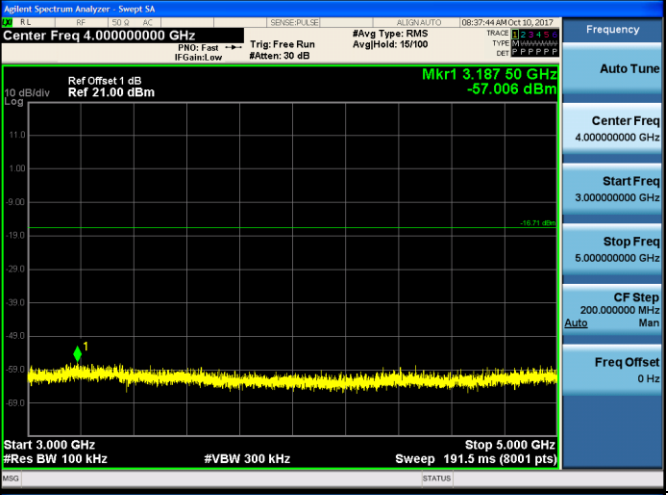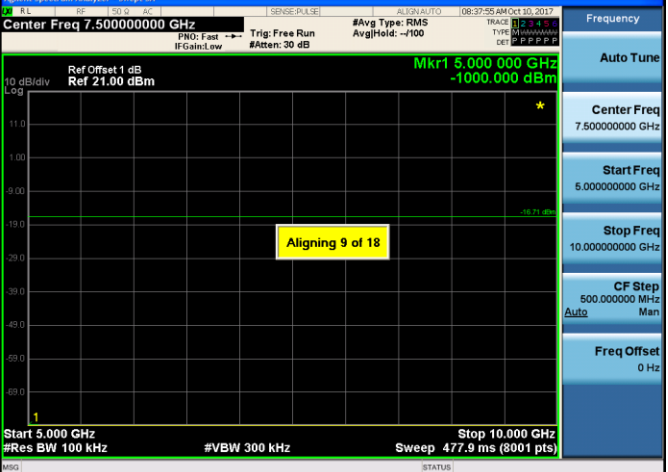
Test Item:	SE	Modulation type:	$\pi/4$ DQPSK
CH00 30MHz~3GHz			
CH00 3GHz~5GHz			
CH00 5GHz~10GHz			

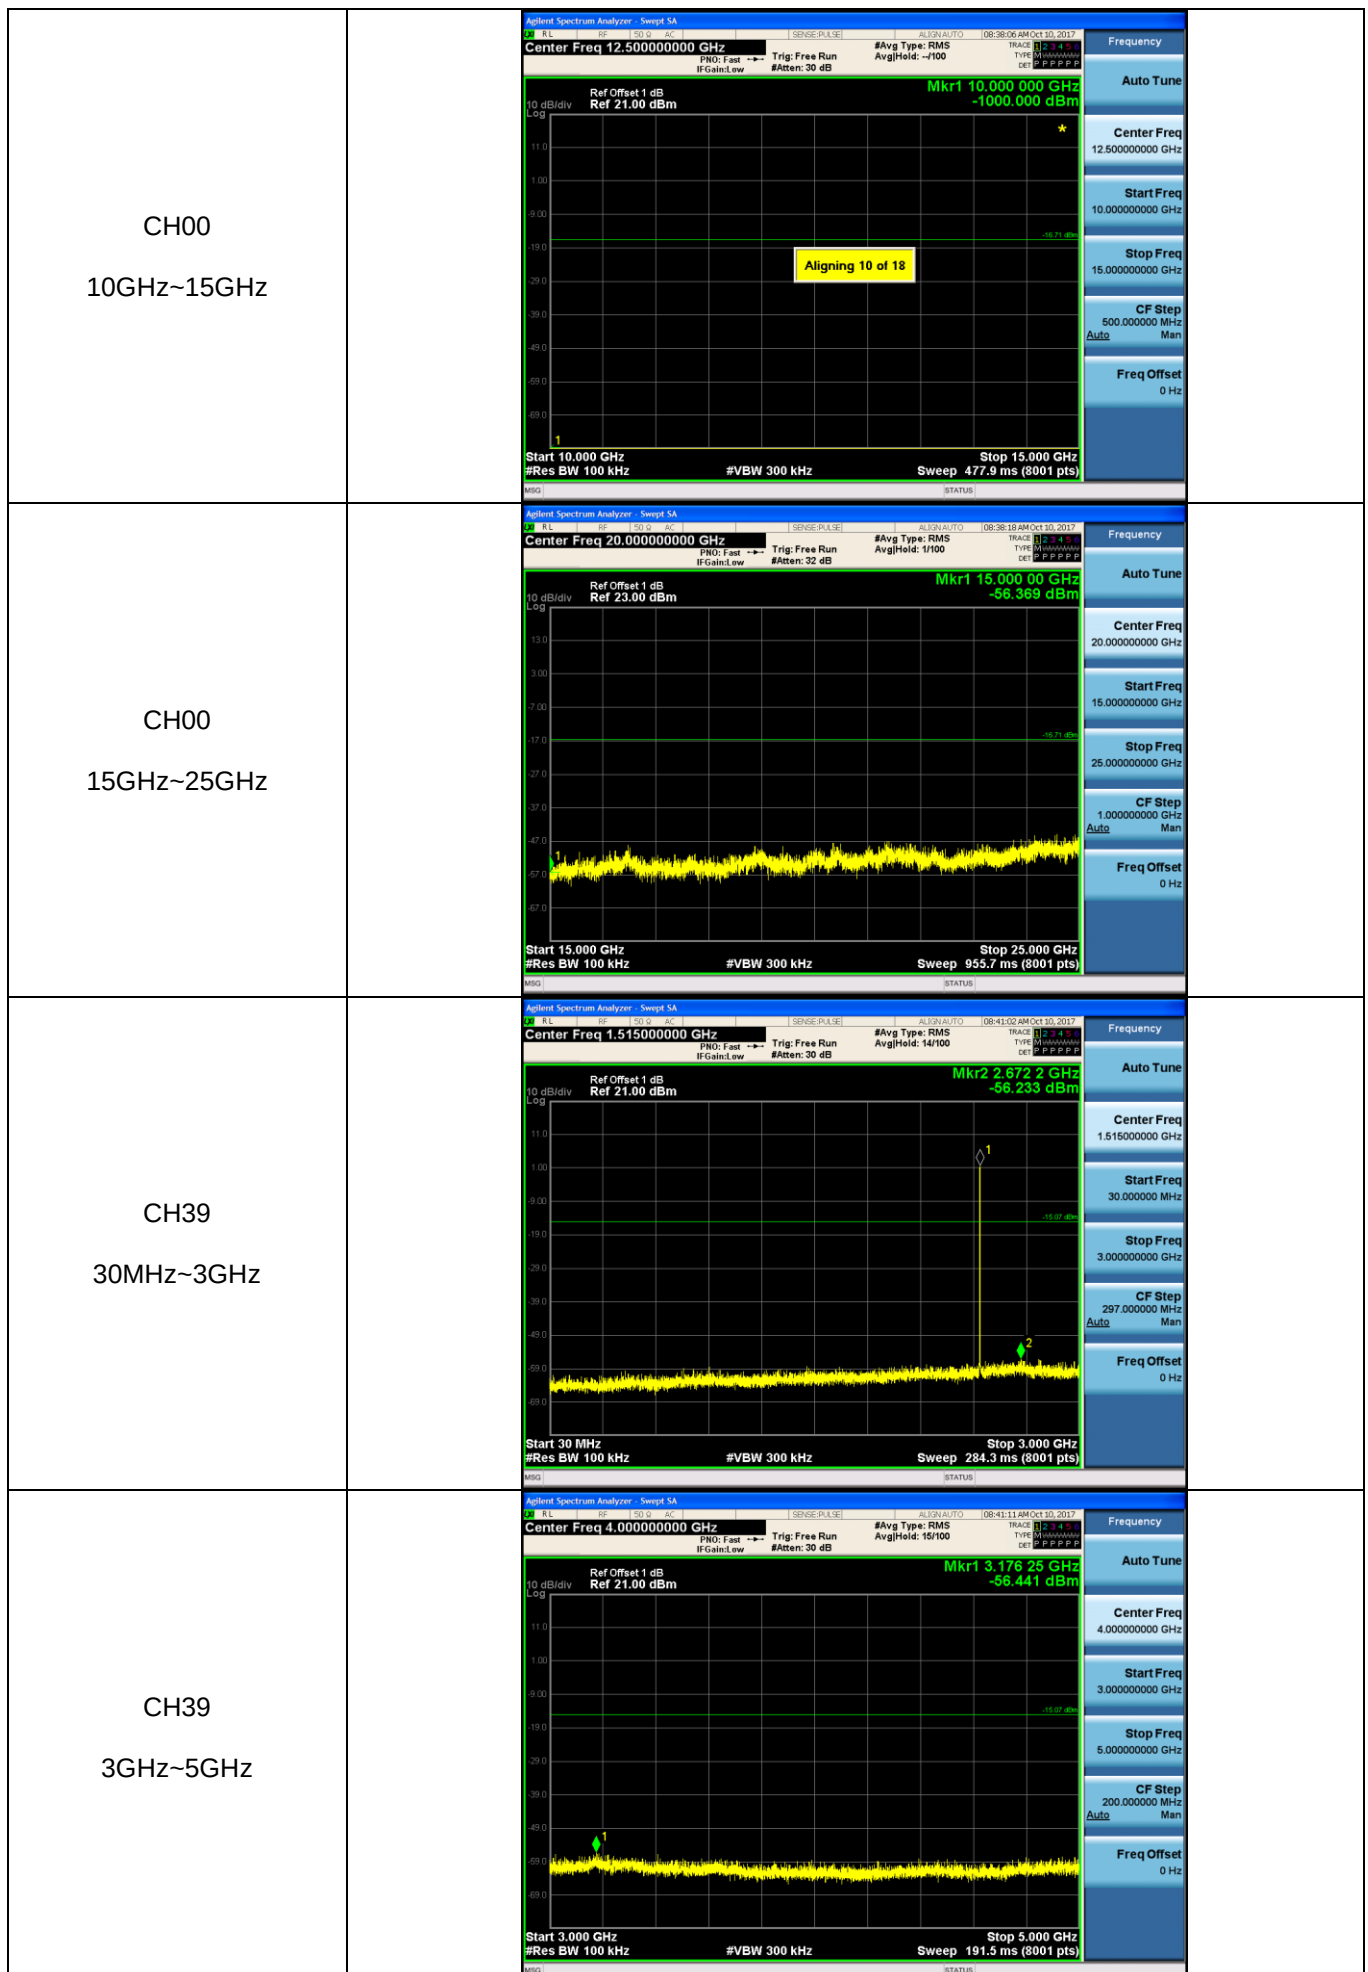


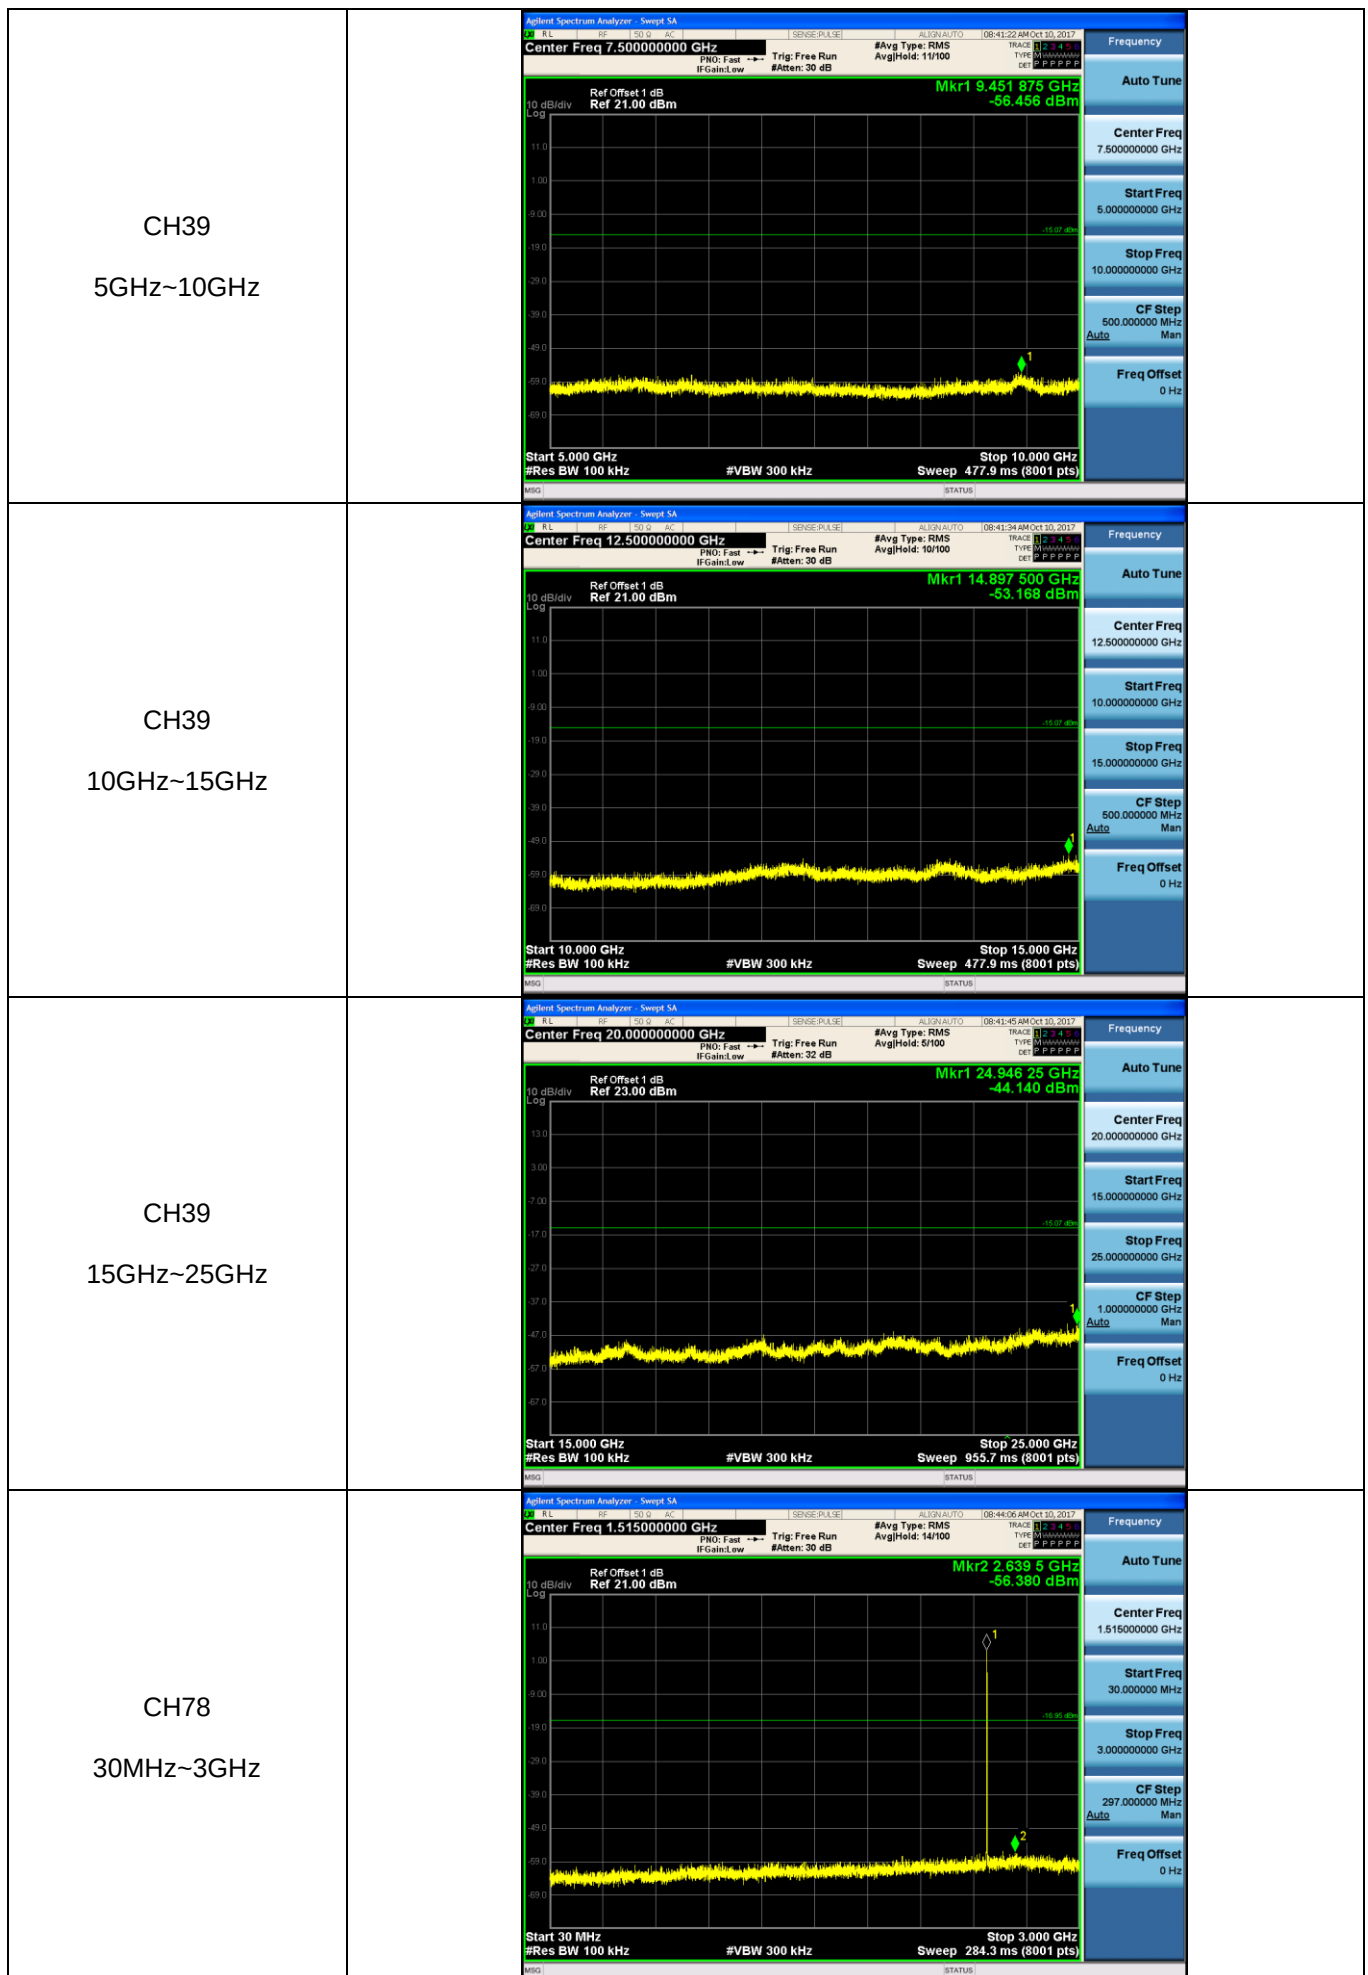


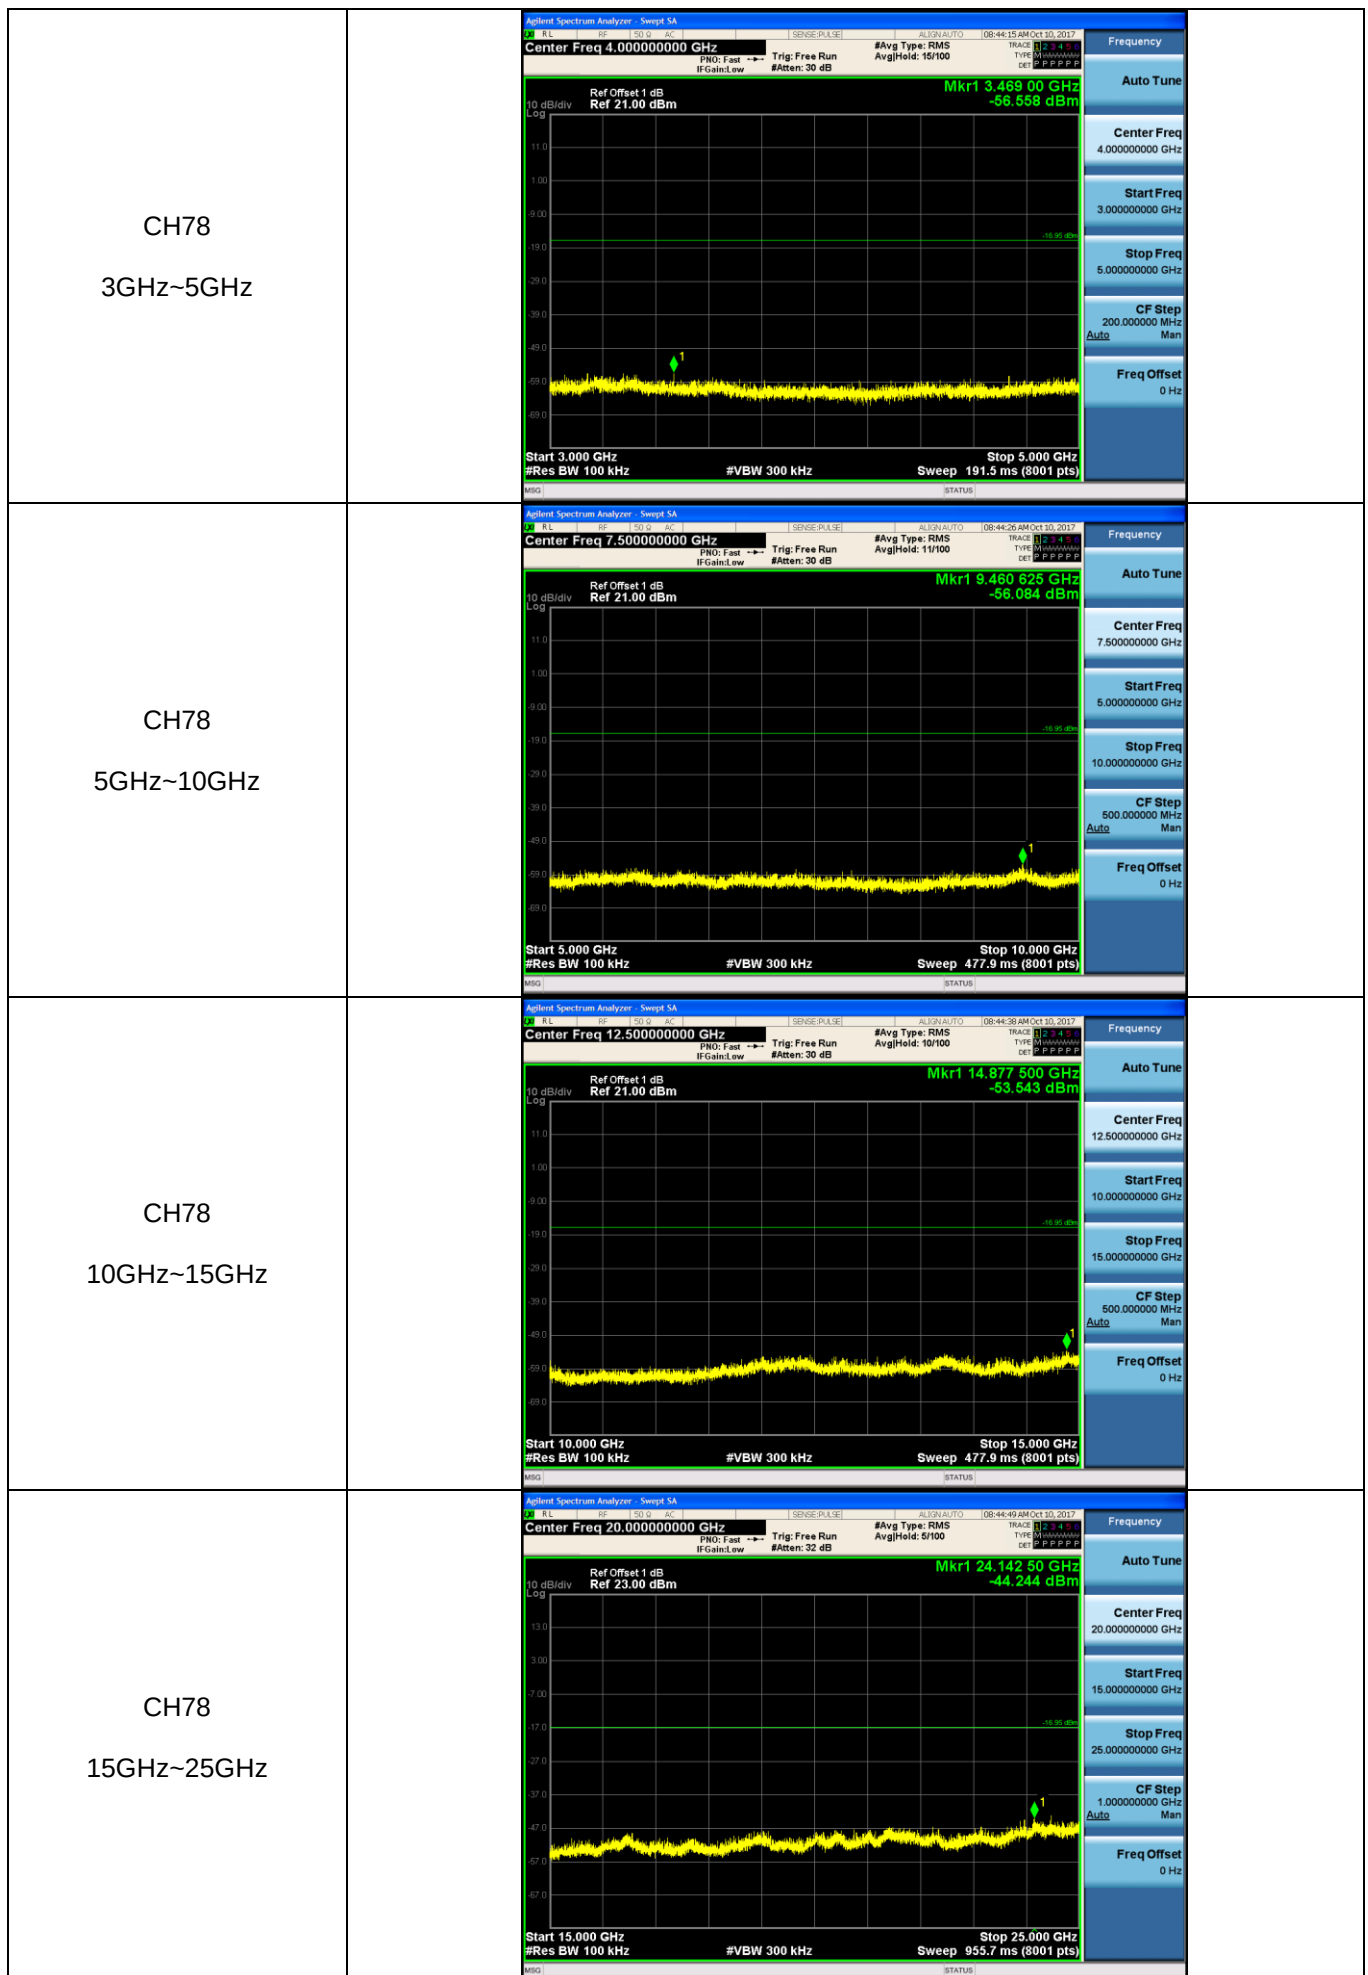

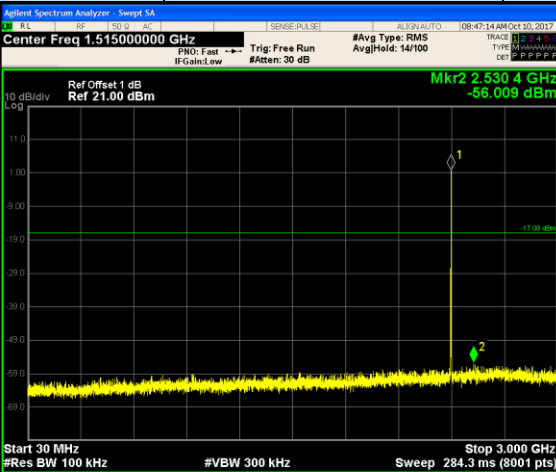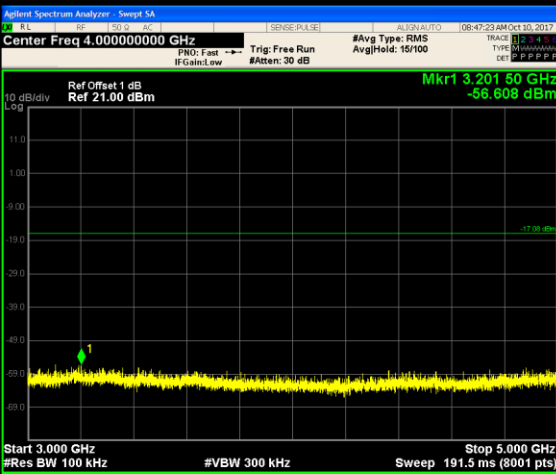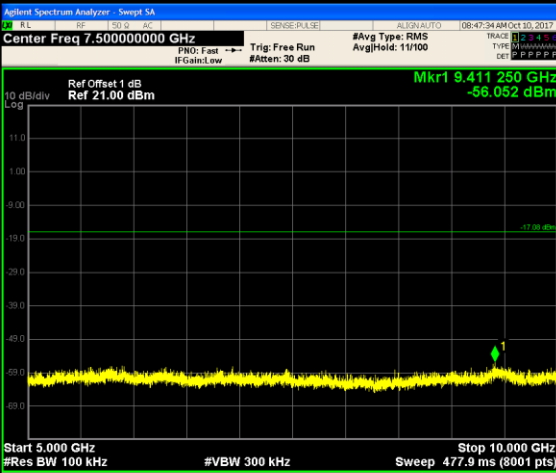Test Item:	SE	Modulation type:	8DPSK
CH00 30MHz~3GHz			
CH00 3GHz~5GHz			
CH00 5GHz~10GHz			

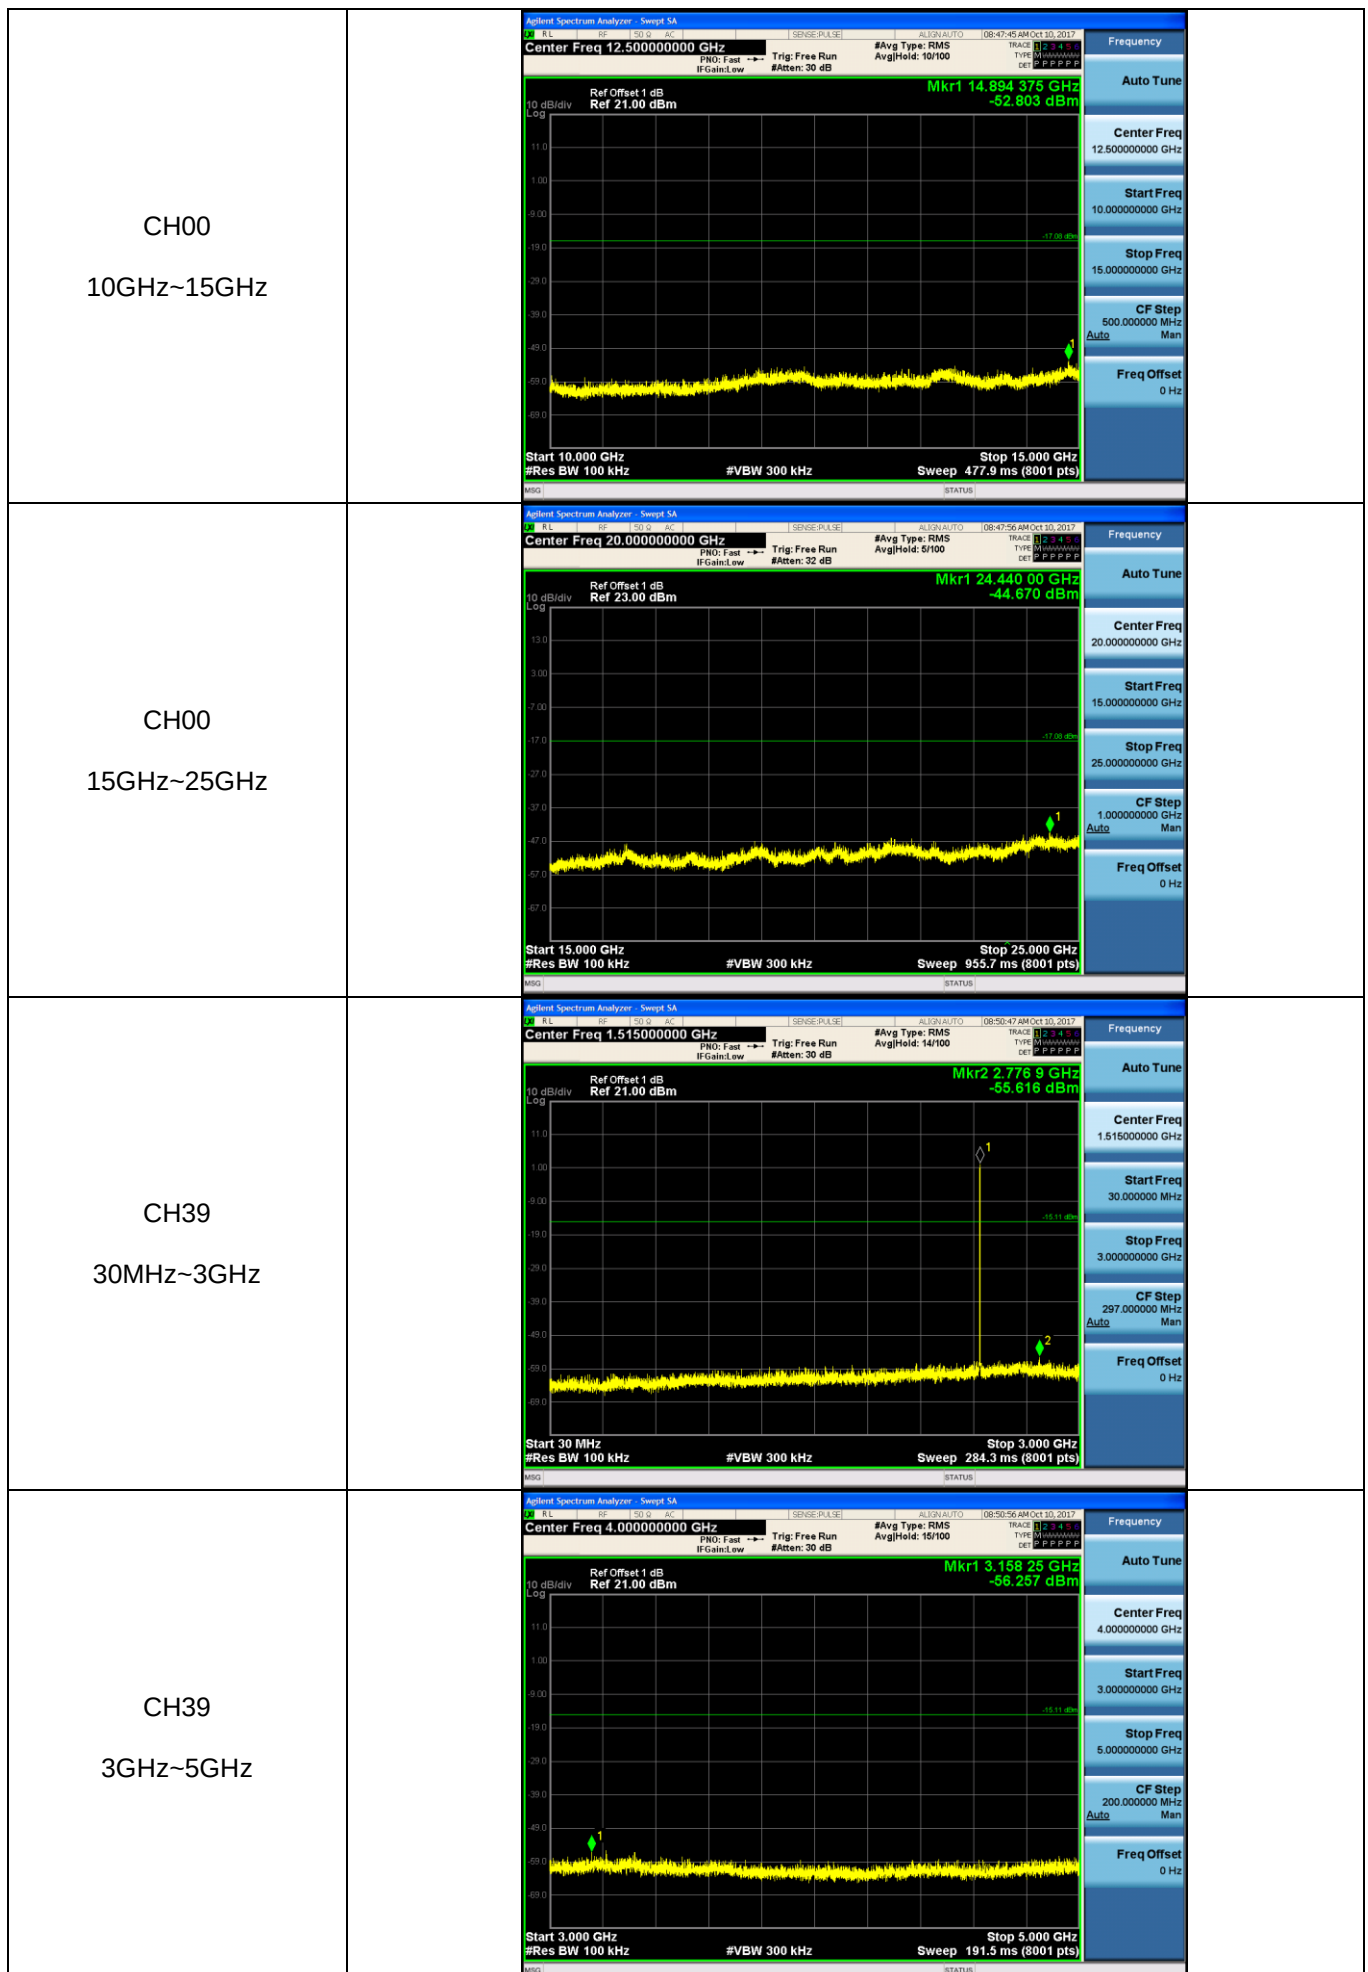

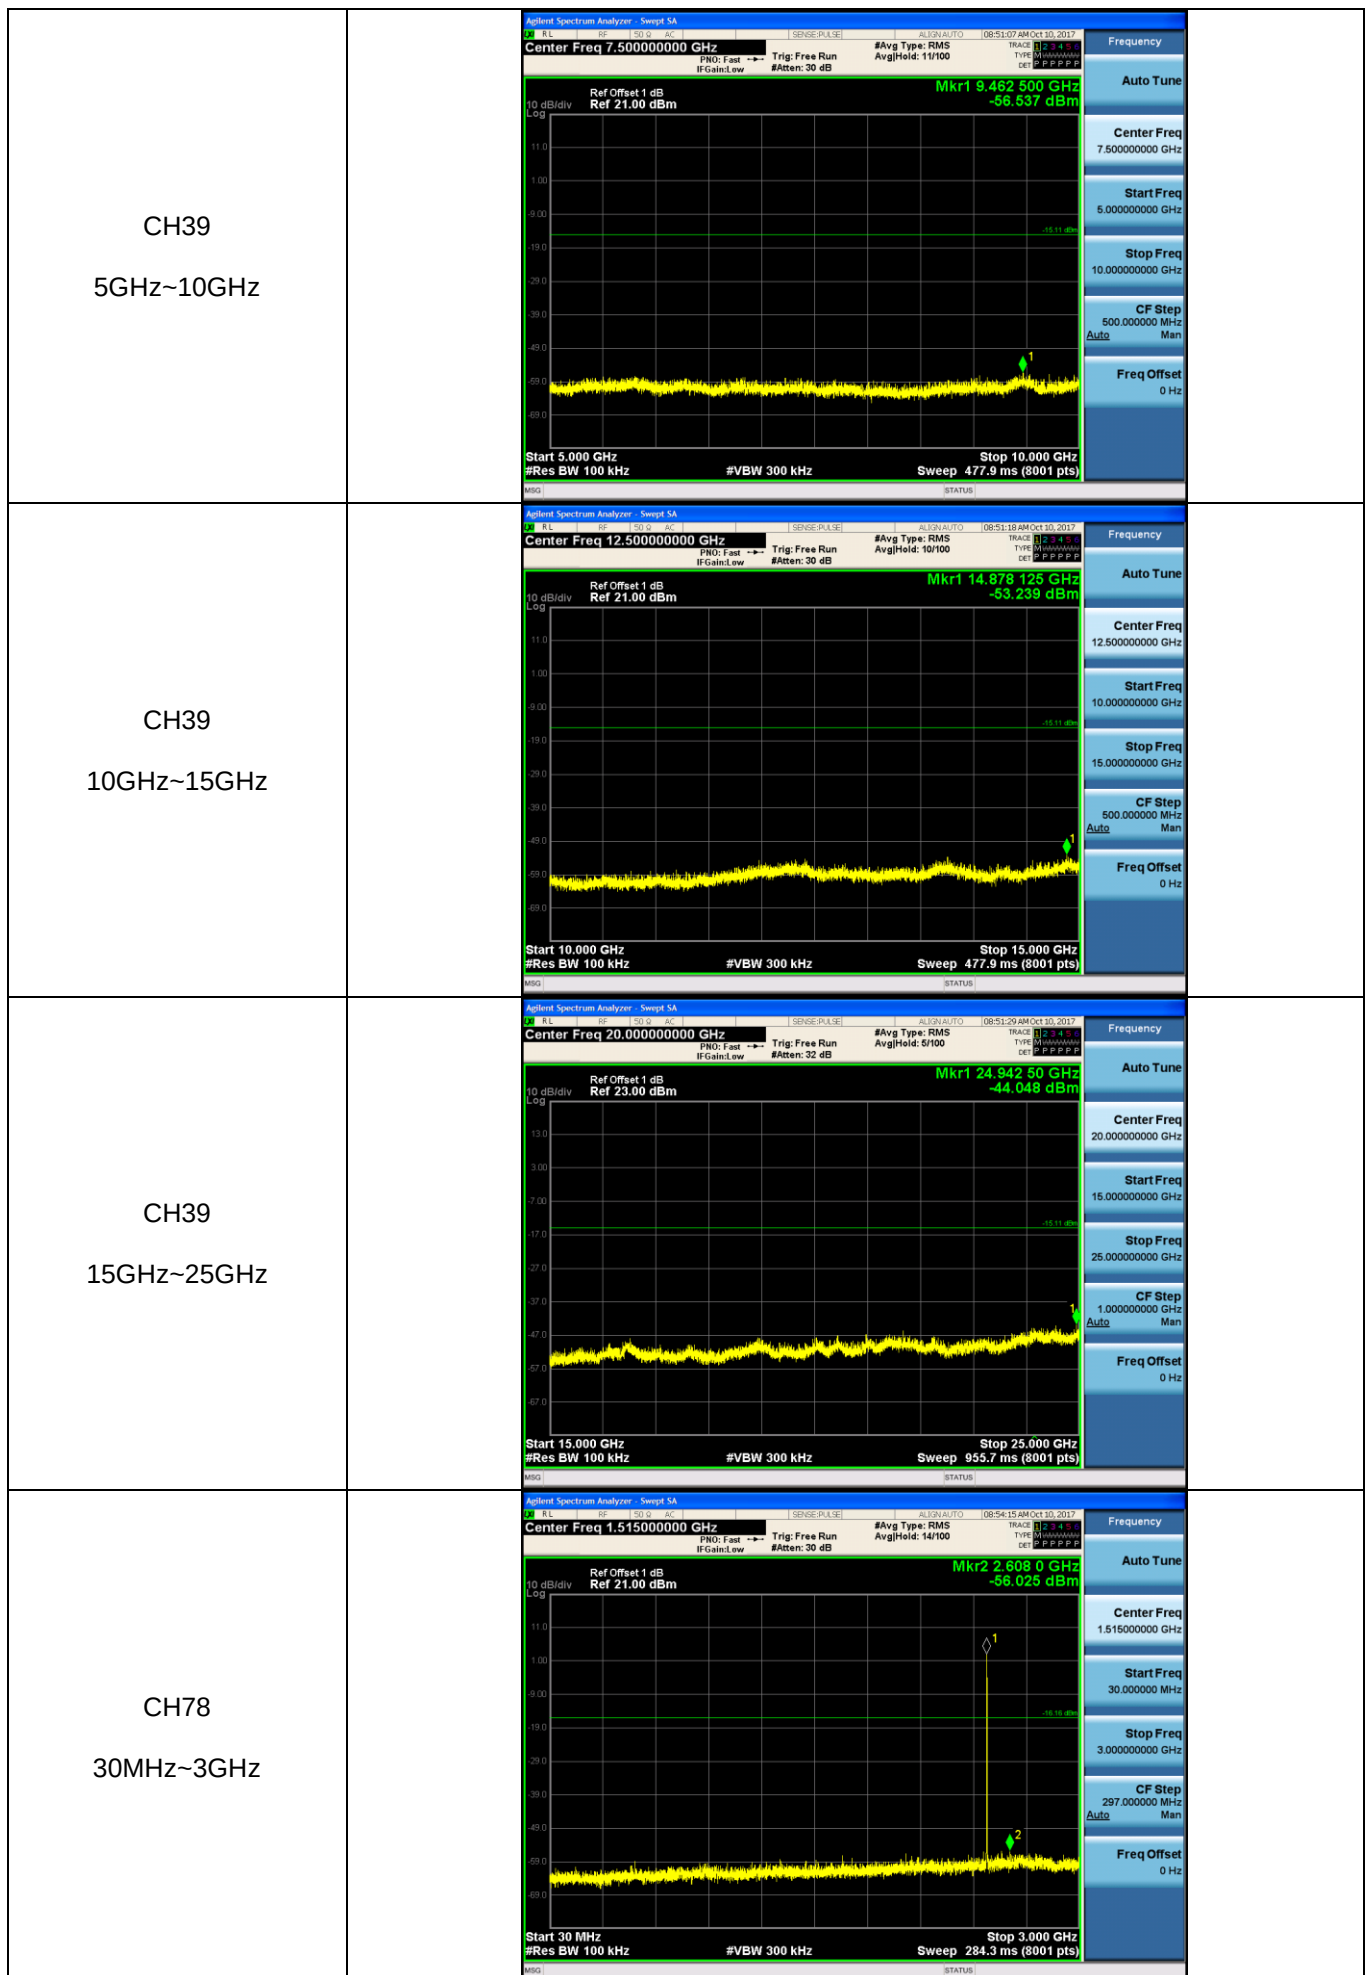

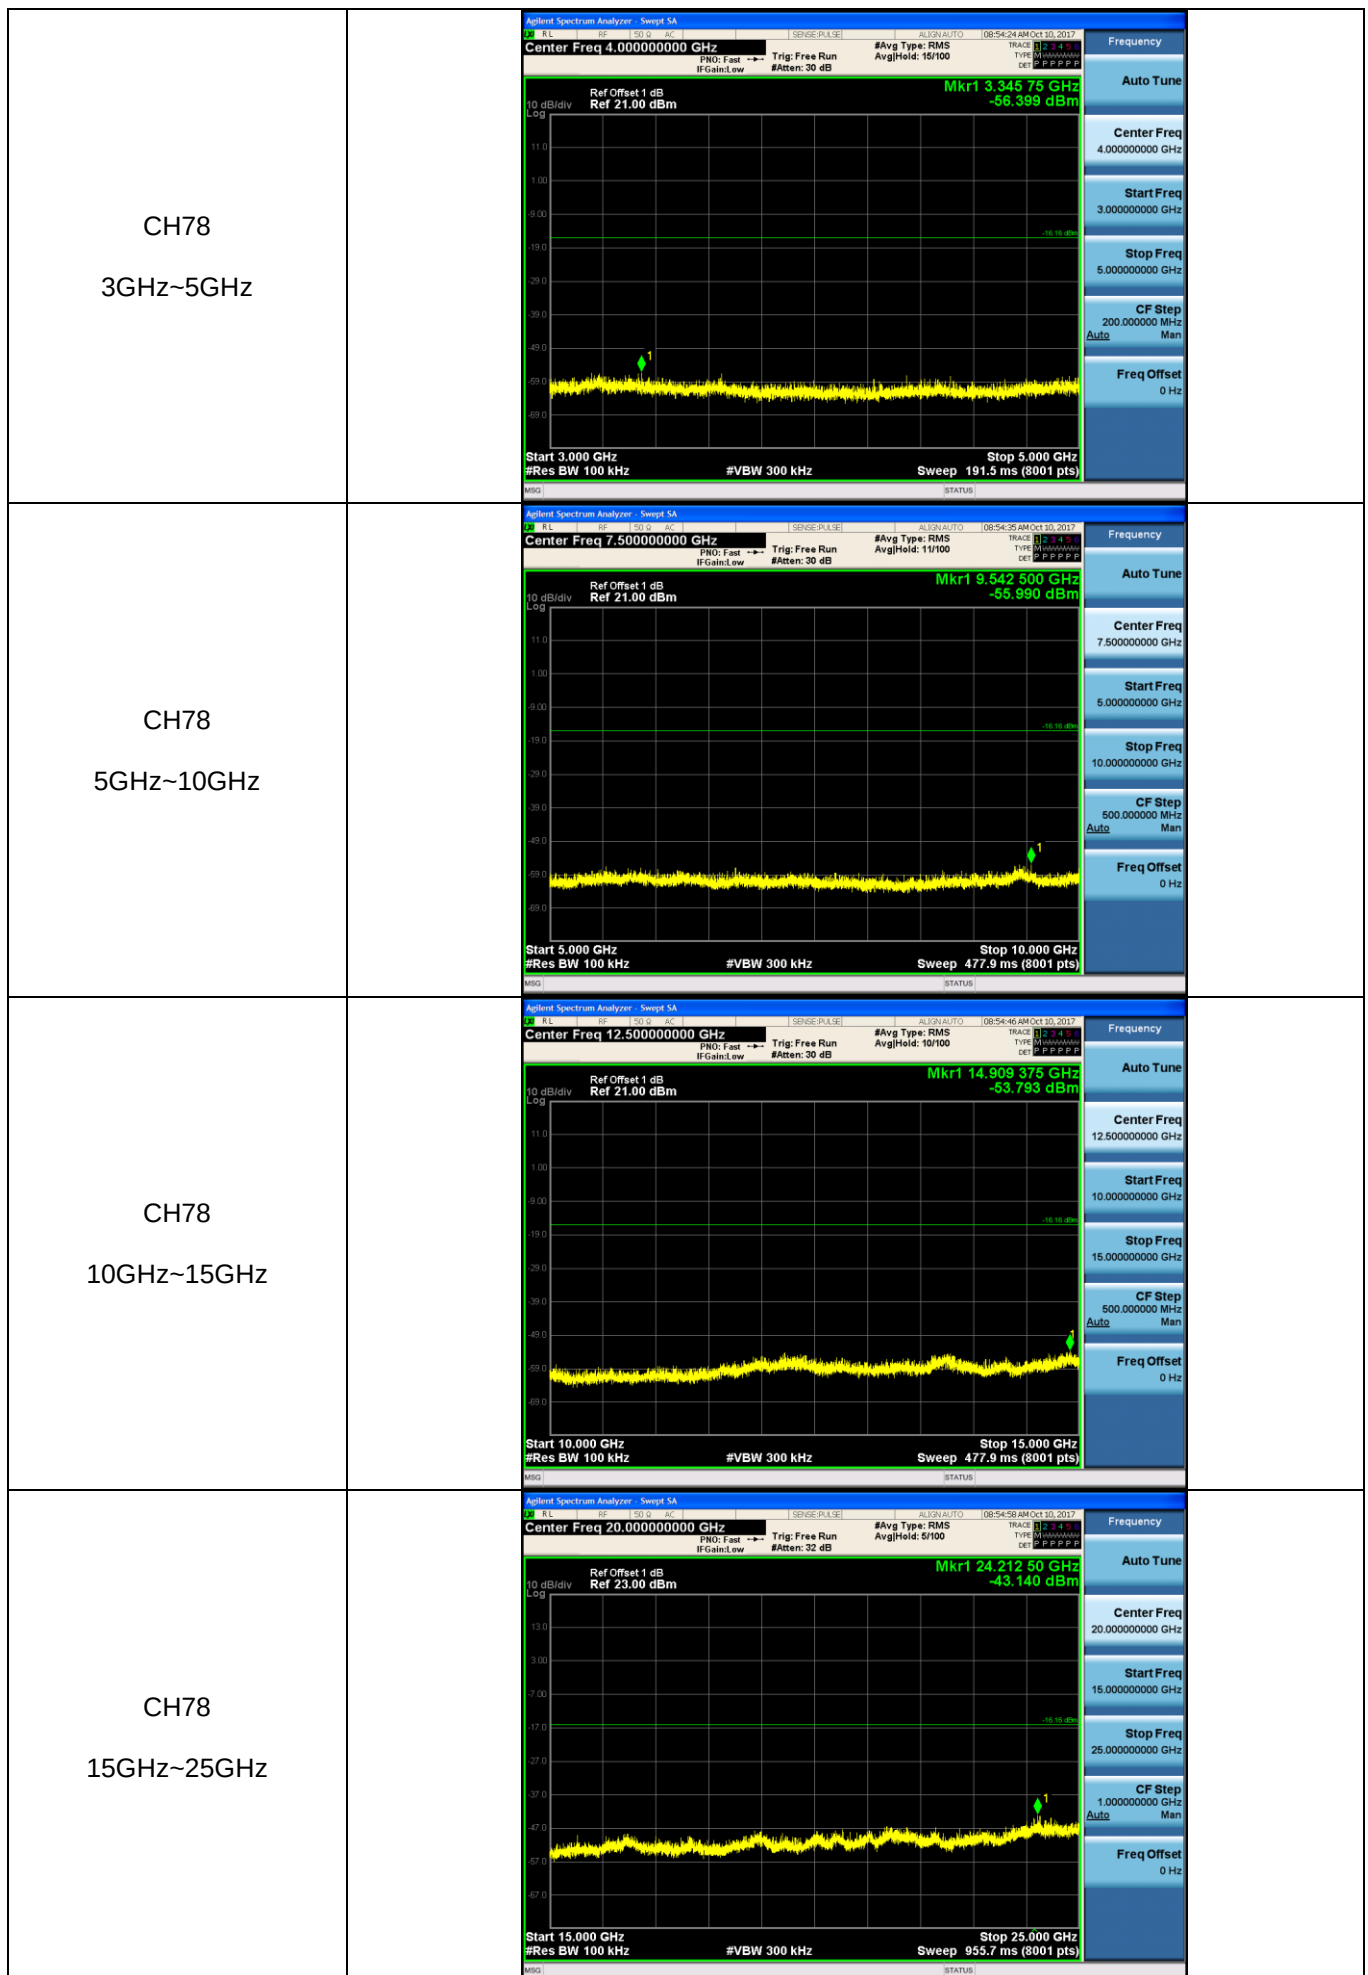

5.11. Spurious Emissions (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- Below 30 MHz

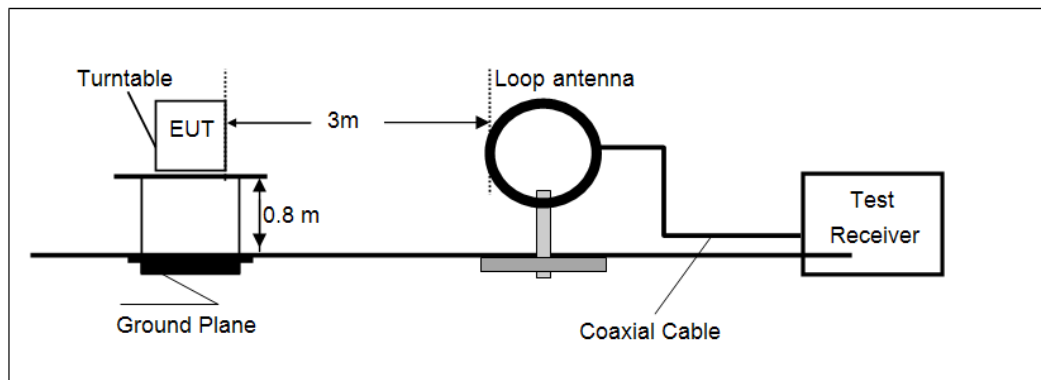

- 30 MHz ~1000 MHz

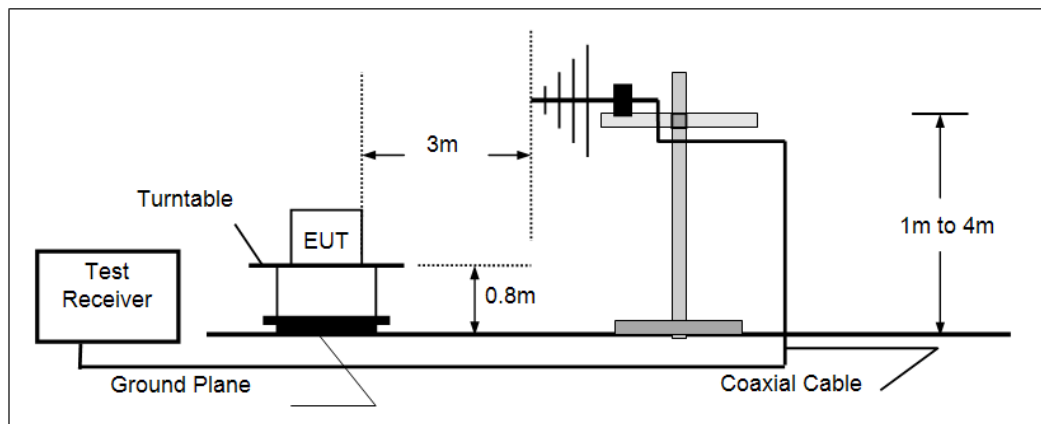

- Above 1 GHz

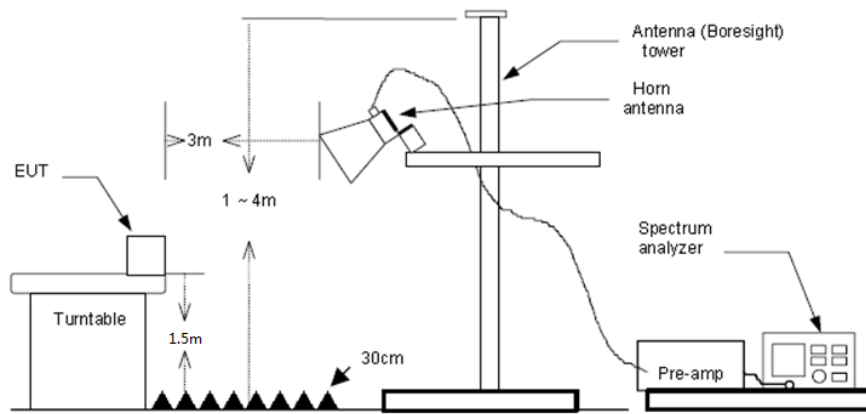

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10:2013.
2. The EUT is placed on a turntable which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
5. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz, RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) Above 1 GHz, RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Note:

- 1) Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) Below 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation High channel which it was worst case, so only the worst case's data on the test report.
- 4) Above 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report
- 5) The peak level is lower than average limit (54 dBuV/m), this data is too weak instrument of signal is unable to test.


➤ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

➤ 30 MHz ~ 1 GHz

Polarization:

Vertical

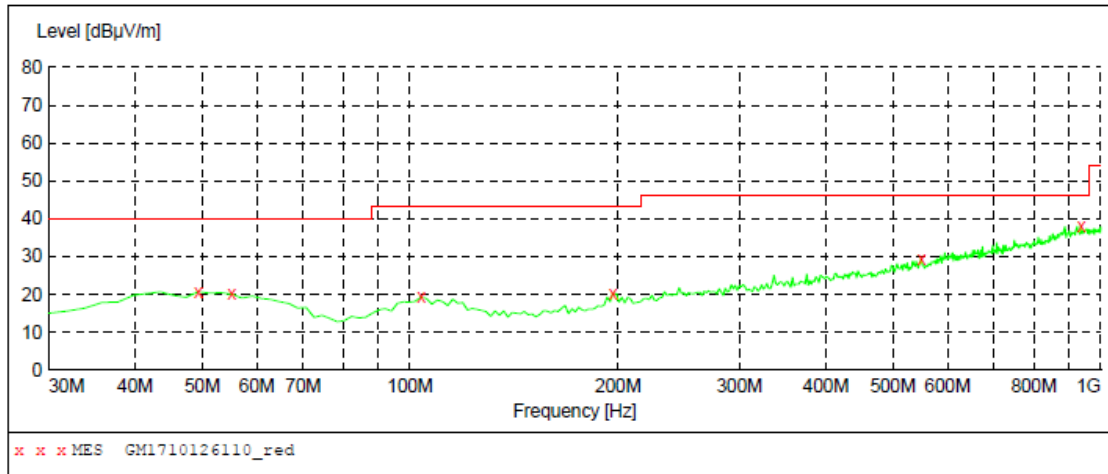
**MEASUREMENT RESULT: "GM1710126110_red"**

10/12/2017 9:59PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.400000	20.80	-8.7	40.0	19.2	QP	100.0	228.00	VERTICAL
55.220000	20.10	-9.2	40.0	19.9	QP	100.0	360.00	VERTICAL
103.720000	19.30	-10.5	43.5	24.2	QP	100.0	84.00	VERTICAL
196.840000	20.30	-9.8	43.5	23.2	QP	100.0	342.00	VERTICAL
549.920000	29.20	-0.8	46.0	16.8	QP	100.0	318.00	VERTICAL
935.980000	38.10	7.1	46.0	7.9	QP	100.0	252.00	VERTICAL

Polarization:

Horizontal

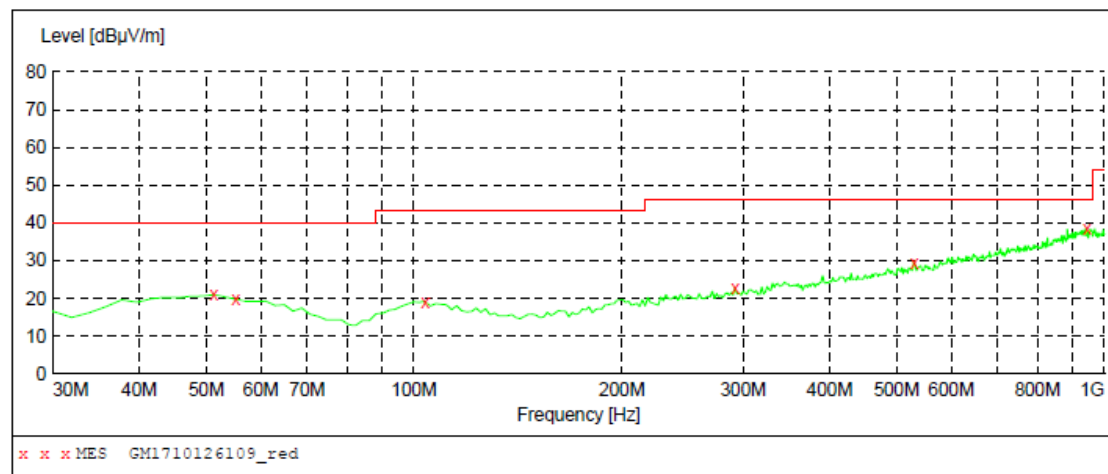**MEASUREMENT RESULT: "GM1710126109_red"**

10/12/2017 9:57PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
51.340000	21.00	-8.8	40.0	19.0	QP	100.0	112.00	HORIZONTAL
55.220000	19.80	-9.2	40.0	20.2	QP	100.0	56.00	HORIZONTAL
103.720000	19.20	-10.5	43.5	24.3	QP	100.0	282.00	HORIZONTAL
291.900000	22.70	-7.4	46.0	23.3	QP	300.0	81.00	HORIZONTAL
530.520000	29.60	-1.1	46.0	16.4	QP	100.0	31.00	HORIZONTAL
943.740000	38.40	7.2	46.0	7.6	QP	300.0	327.00	HORIZONTAL

➤ Above 1 GHz

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1510.40	36.67	25.70	5.31	36.60	31.08	74.00	-42.92	Vertical	Peak
3653.46	36.31	29.30	8.33	38.26	35.68	74.00	-38.32	Vertical	Peak
4871.10	42.39	31.46	9.59	36.76	46.68	74.00	-27.32	Vertical	Peak
5747.59	38.76	31.84	10.51	35.46	45.65	74.00	-28.35	Vertical	Peak
1442.76	35.97	25.86	5.12	36.52	30.43	74.00	-43.57	Horizontal	Peak
3266.35	35.77	28.40	7.80	38.32	33.65	74.00	-40.35	Horizontal	Peak
4760.78	31.70	31.44	9.52	37.01	35.65	74.00	-38.35	Horizontal	Peak
4871.10	39.55	31.46	9.59	36.76	43.84	74.00	-30.16	Horizontal	Peak

CH39									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1510.40	36.67	25.70	5.31	36.60	31.08	74.00	-42.92	Vertical	Peak
3653.46	36.31	29.30	8.33	38.26	35.68	74.00	-38.32	Vertical	Peak
4871.10	40.39	31.46	9.59	36.76	44.68	74.00	-29.32	Vertical	Peak
7319.96	35.60	36.30	11.99	34.92	48.97	74.00	-25.03	Vertical	Peak
1442.76	35.97	25.86	5.12	36.52	30.43	74.00	-43.57	Horizontal	Peak
3266.35	35.77	28.40	7.80	38.32	33.65	74.00	-40.35	Horizontal	Peak
4871.10	39.55	31.46	9.59	36.76	43.84	74.00	-30.16	Horizontal	Peak
7357.33	31.60	36.30	12.03	34.88	45.05	74.00	-28.95	Horizontal	Peak


CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1424.51	36.45	25.87	5.07	36.49	30.90	74.00	-43.10	Vertical	Peak
3786.01	34.98	29.56	8.48	38.23	34.79	74.00	-39.21	Vertical	Peak
4958.68	42.47	31.46	9.64	36.52	47.05	74.00	-26.95	Vertical	Peak
7961.43	32.39	36.95	12.49	34.63	47.20	74.00	-26.80	Vertical	Peak
1283.34	36.54	26.22	4.80	36.52	31.04	74.00	-42.96	Horizontal	Peak
3168.08	35.71	28.80	7.68	38.20	33.99	74.00	-40.01	Horizontal	Peak
4958.68	38.73	31.46	9.64	36.52	43.31	74.00	-30.69	Horizontal	Peak
7585.53	32.88	36.19	12.67	34.97	46.77	74.00	-27.23	Horizontal	Peak


6. TEST SETUP PHOTOS

Conducted Emissions



Radiated Emissions

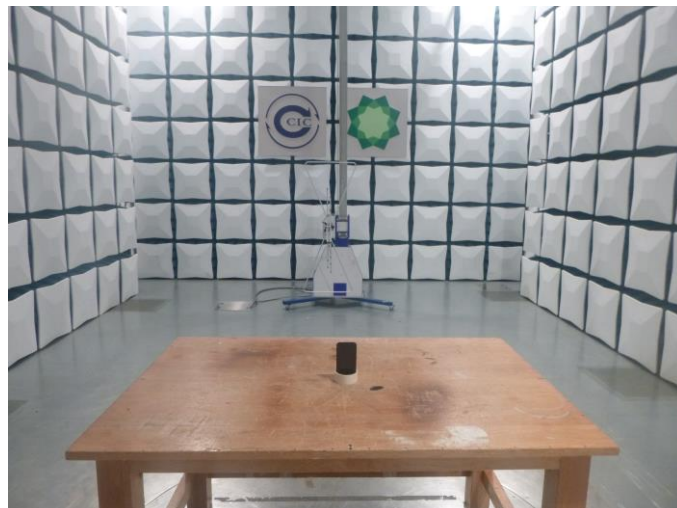

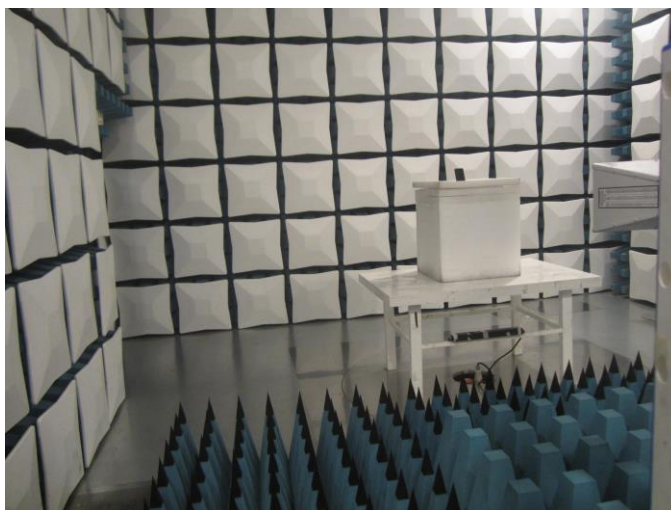

7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: TRE1709024801.

.....End of Report.....