



802.11 ax40 CH03 (2422MHz)

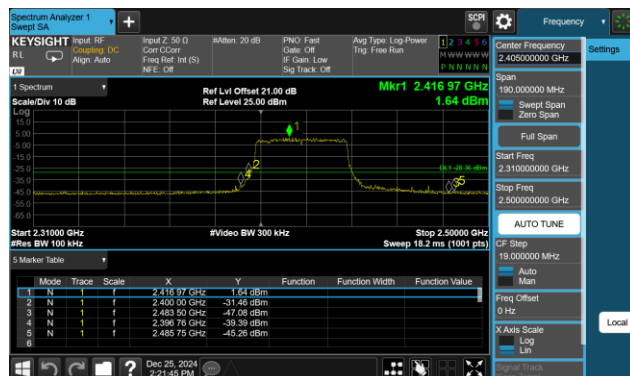


802.11 ax40 CH03 (2422MHz)

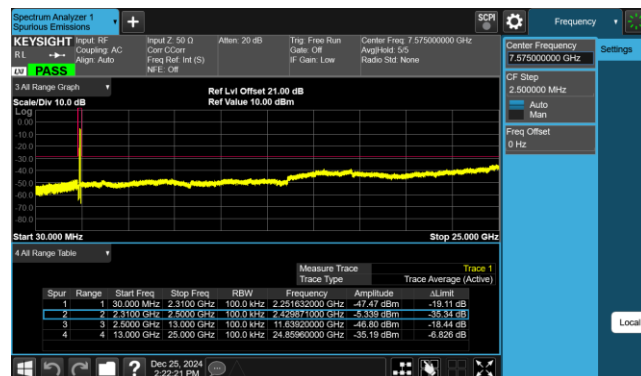


802.11 ax40 CH06 (2437MHz)




802.11 ax40 CH06 (2437MHz)

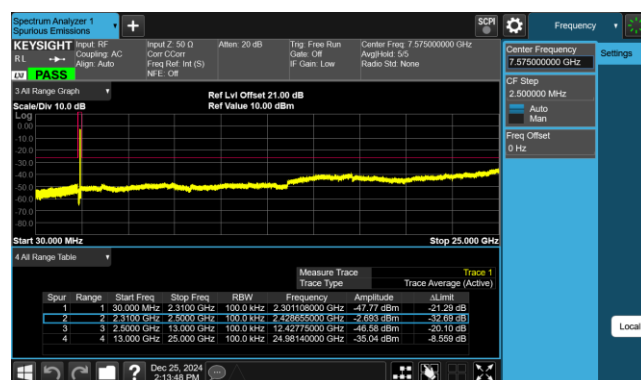

802.11 ax40 CH09 (2452MHz)

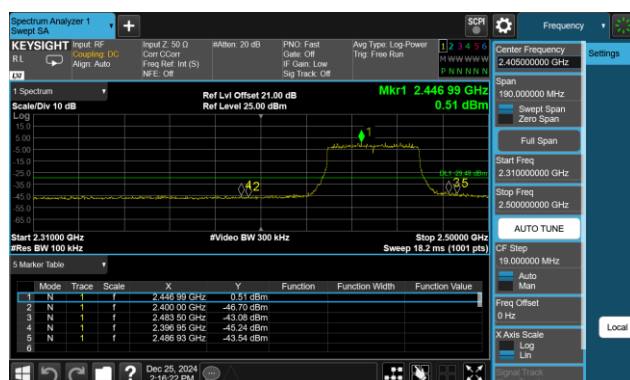

802.11 ax40 CH09 (2452MHz)

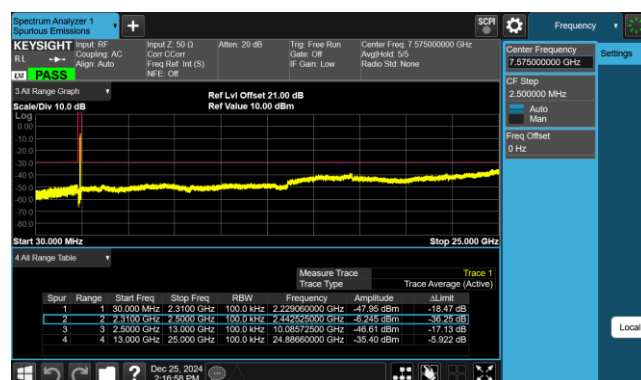


Ant 1


802.11 b CH01 (2412MHz)




802.11 b CH01 (2412MHz)

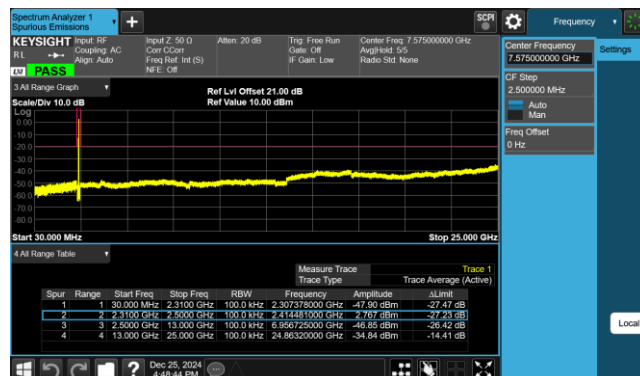


802.11 b CH06 (2437MHz)

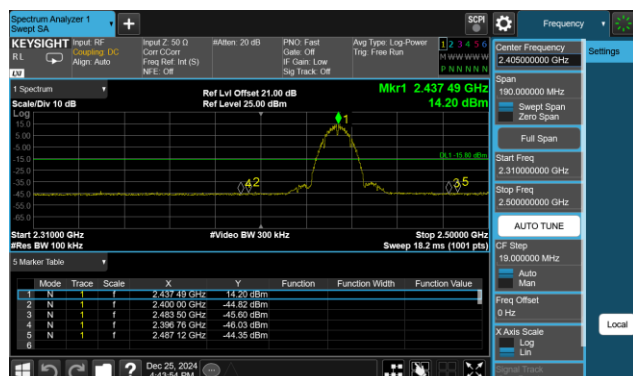


802.11 b CH06 (2437MHz)

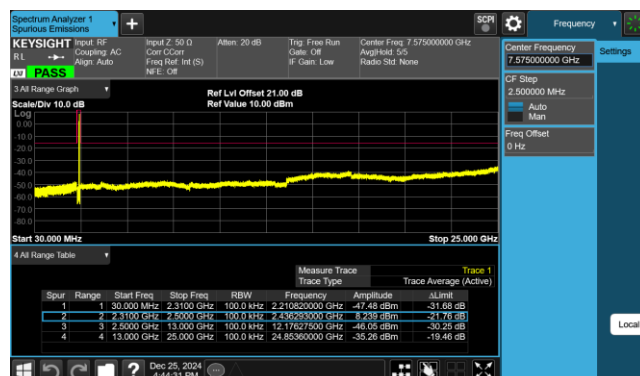


802.11 b CH11 (2462MHz)

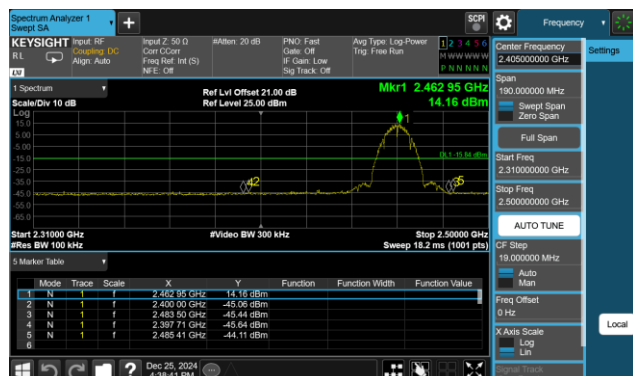


802.11 b CH11 (2462MHz)

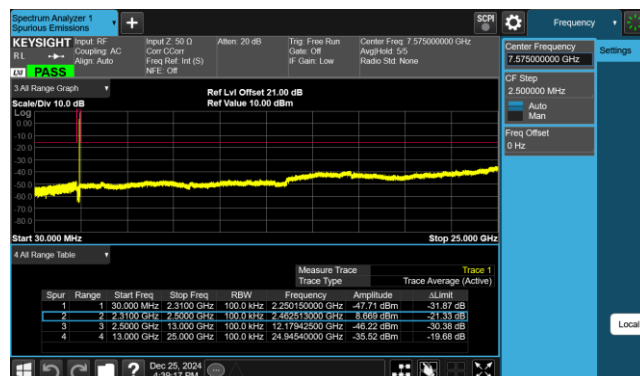


802.11 g CH01 (2412MHz)

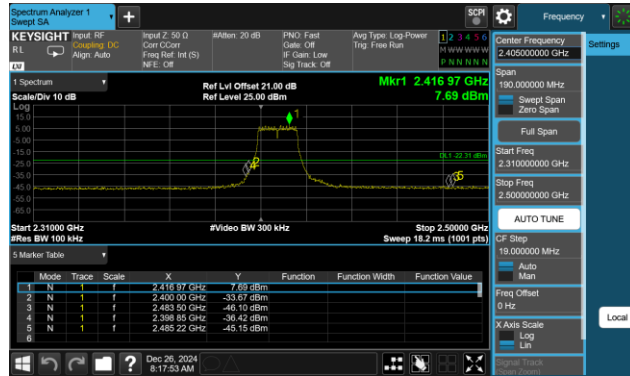


802.11 g CH01 (2412MHz)

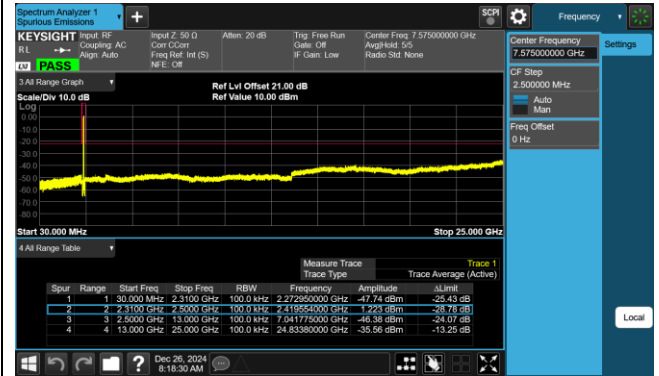


802.11 g CH06 (2437MHz)

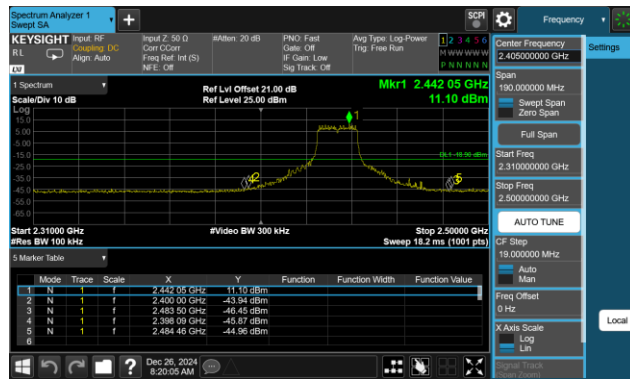


802.11 g CH06 (2437MHz)

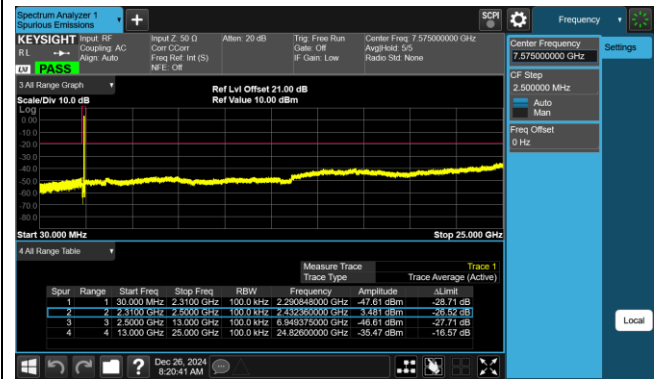


802.11 g CH11 (2462MHz)

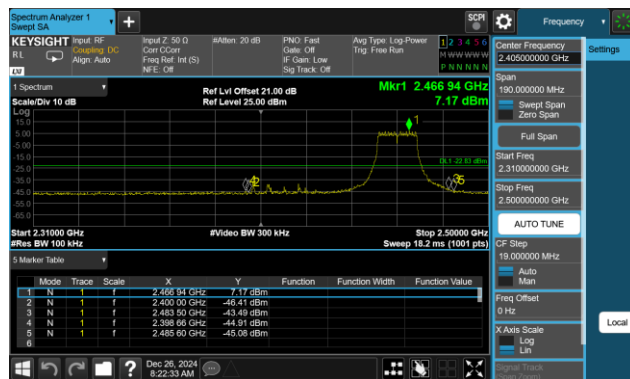


802.11 g CH11 (2462MHz)

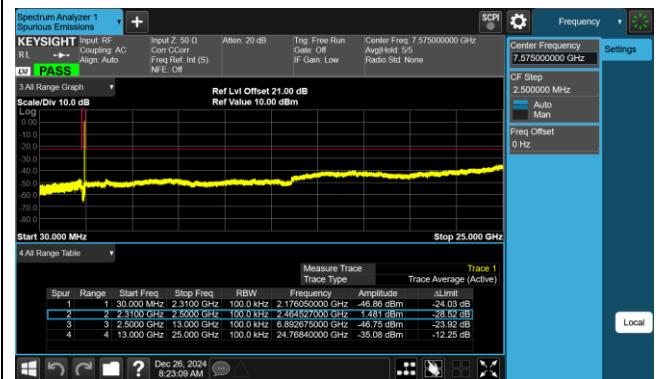


802.11 n20 CH01 (2412MHz)

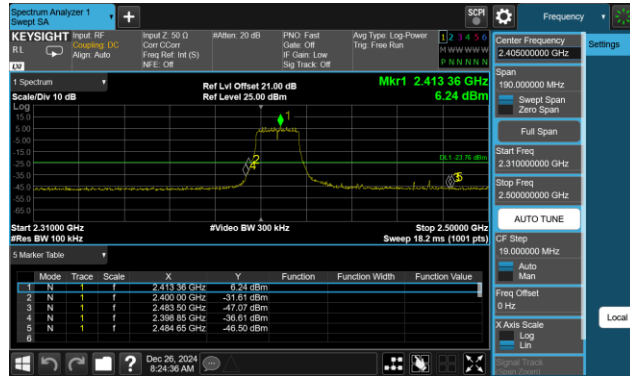


802.11 n20 CH01 (2412MHz)

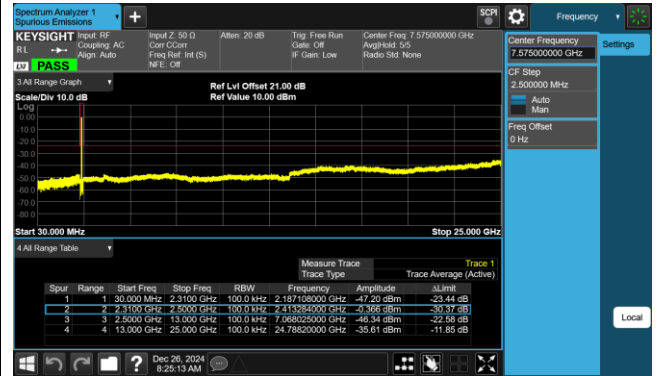


802.11 n20 CH06 (2437MHz)

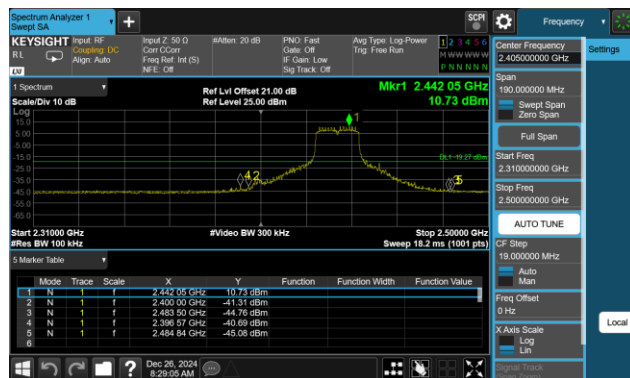


802.11 n20 CH06 (2437MHz)

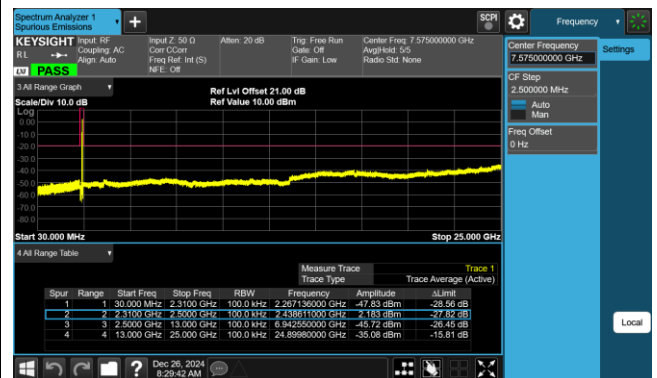

802.11 n20 CH11 (2462MHz)

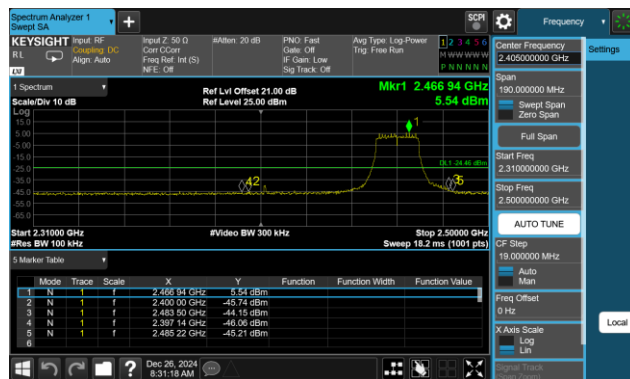


802.11 n20 CH11 (2462MHz)

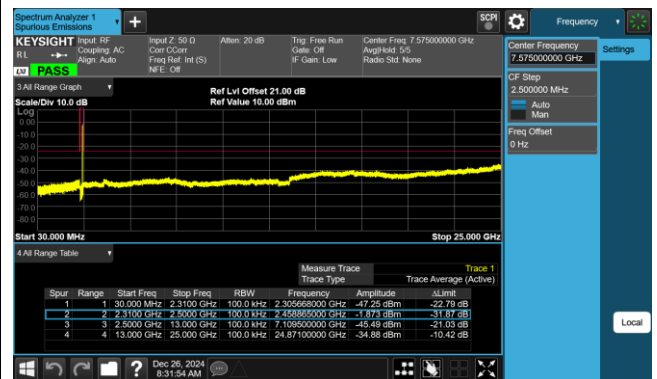


802.11 n40 CH03 (2422MHz)




802.11 n40 CH03 (2422MHz)

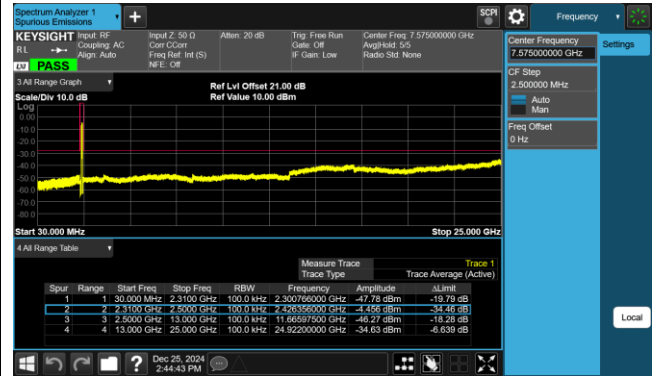


802.11 n40 CH06 (2437MHz)

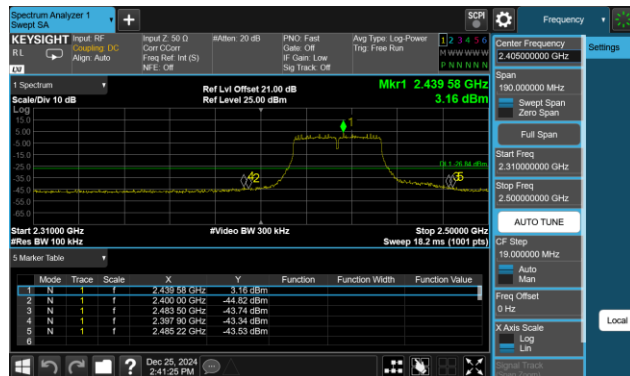


802.11 n40 CH06 (2437MHz)

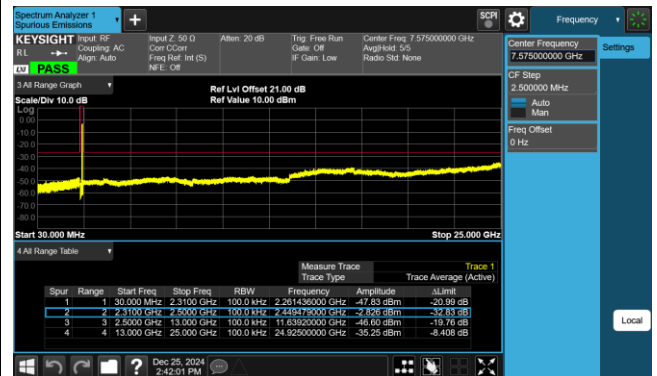


802.11 n40 CH09 (2452MHz)

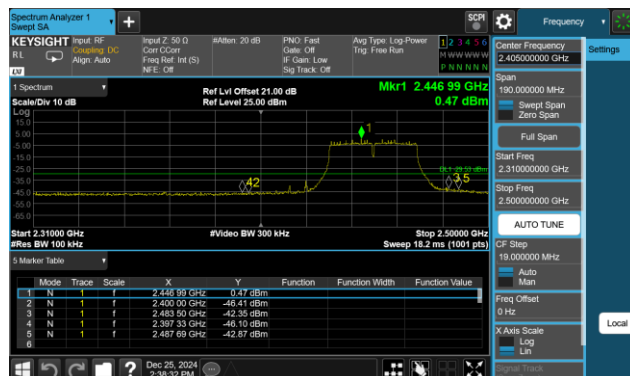


802.11 n40 CH09 (2452MHz)

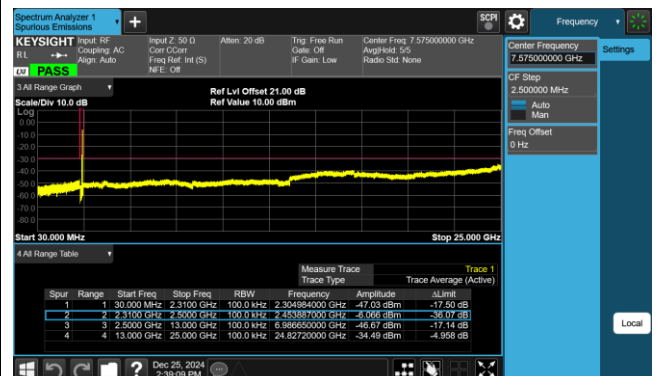


802.11 ax20 CH01 (2412MHz)

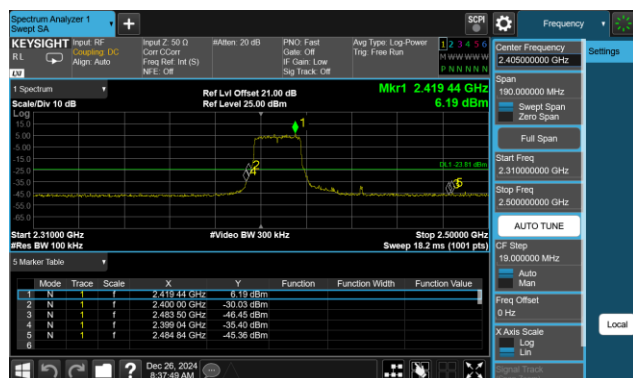


802.11 ax20 CH01 (2412MHz)

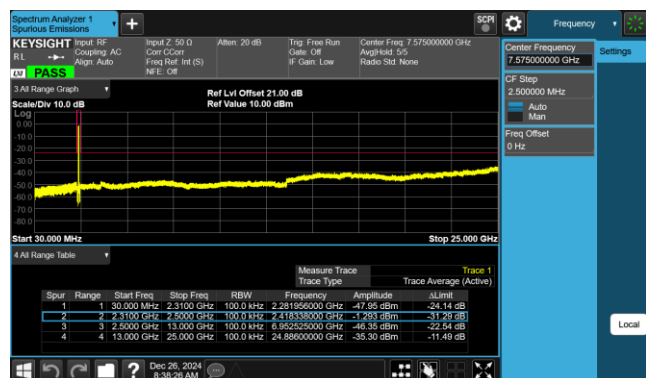


802.11 ax20 CH06 (2437MHz)

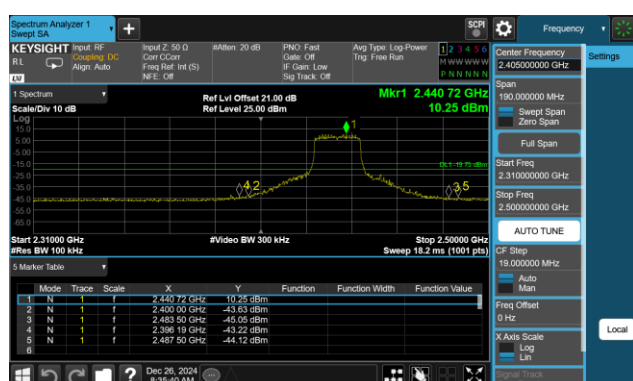


802.11 ax20 CH06 (2437MHz)

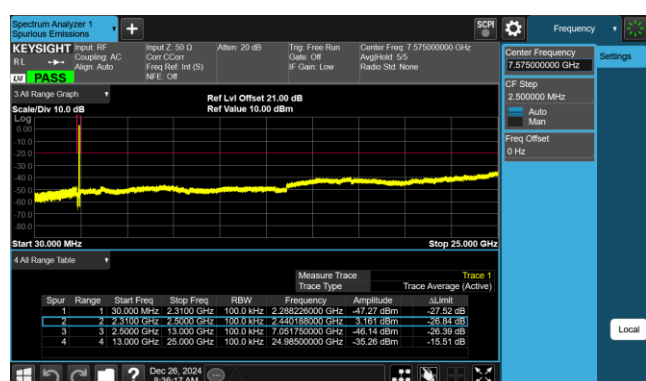

802.11 ax20 CH11 (2462MHz)

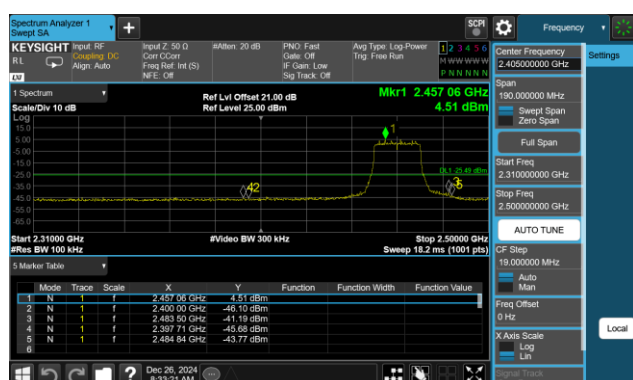


802.11 ax20 CH11 (2462MHz)

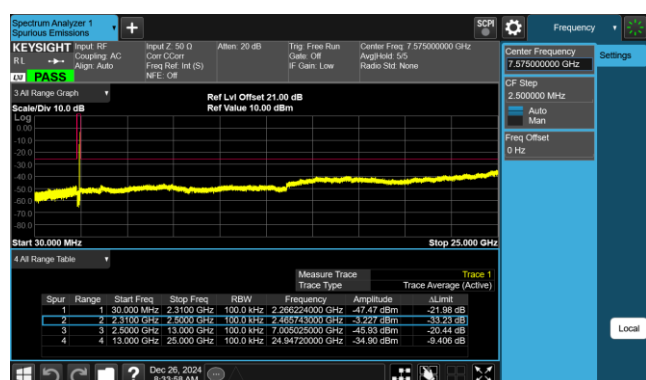

802.11 ax40 CH03 (2422MHz)




802.11 ax40 CH03 (2422MHz)

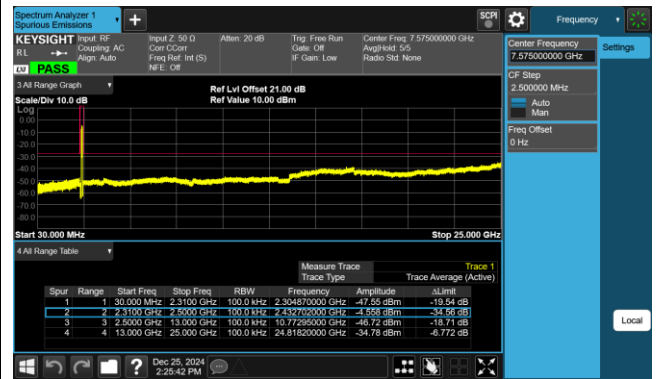


802.11 ax40 CH06 (2437MHz)




802.11 ax40 CH06 (2437MHz)

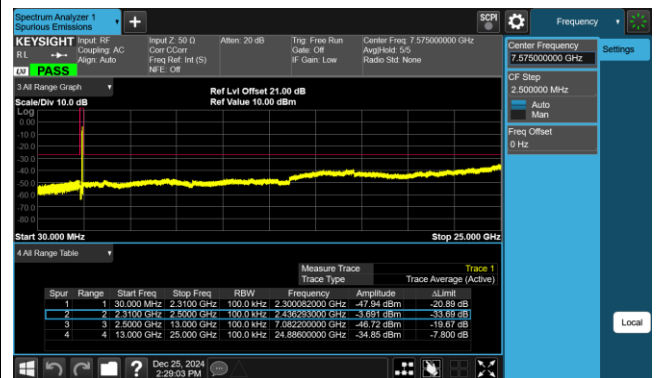

802.11 ax40 CH09 (2452MHz)

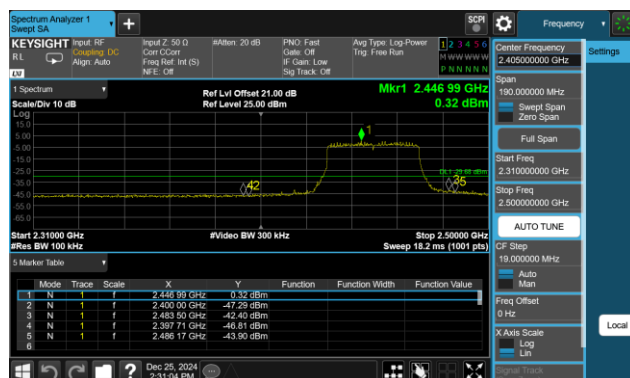

802.11 ax40 CH09 (2452MHz)

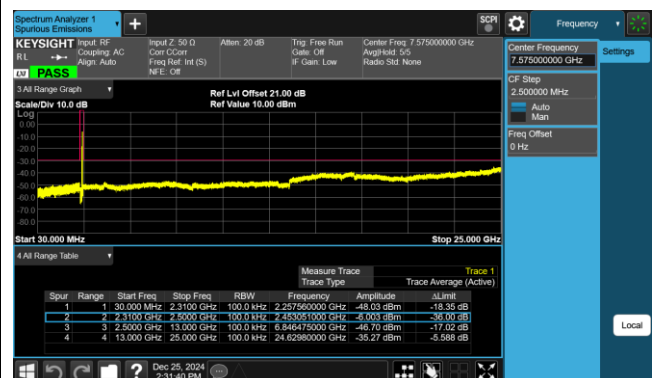

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4.Test Setup

Below 1GHz Test Setup:

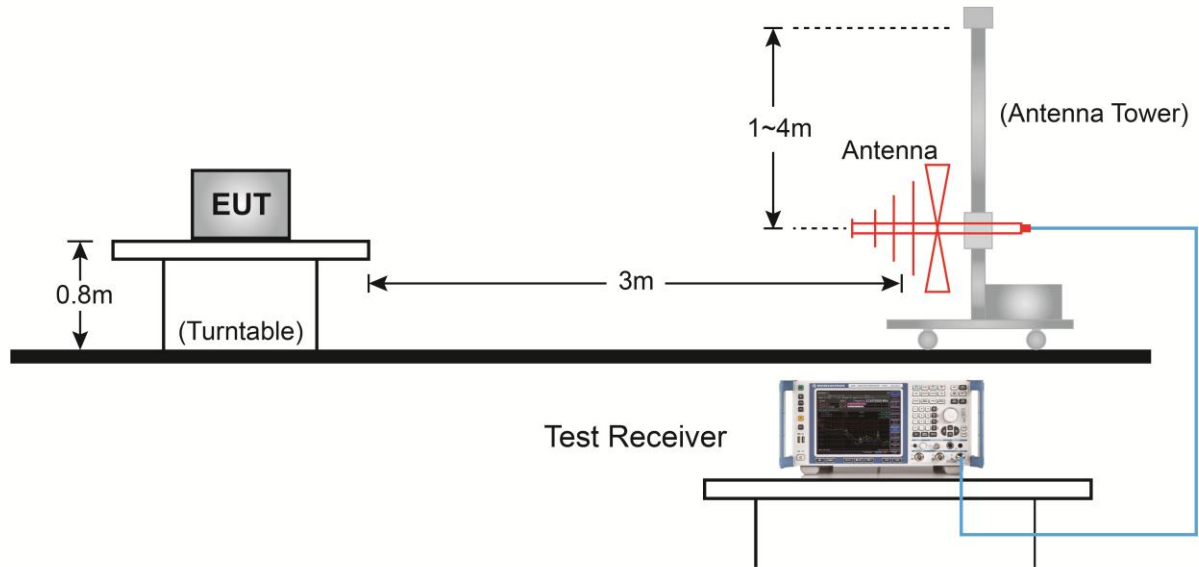


Above 1GHz Test Setup:

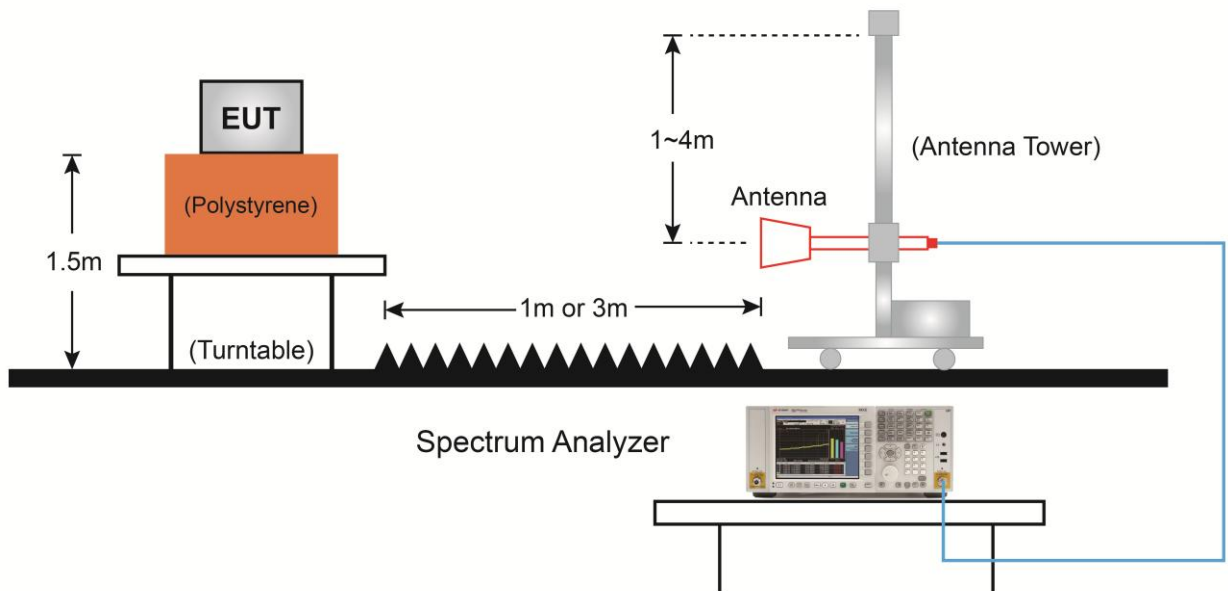

7.6.5. Test Result

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-23
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

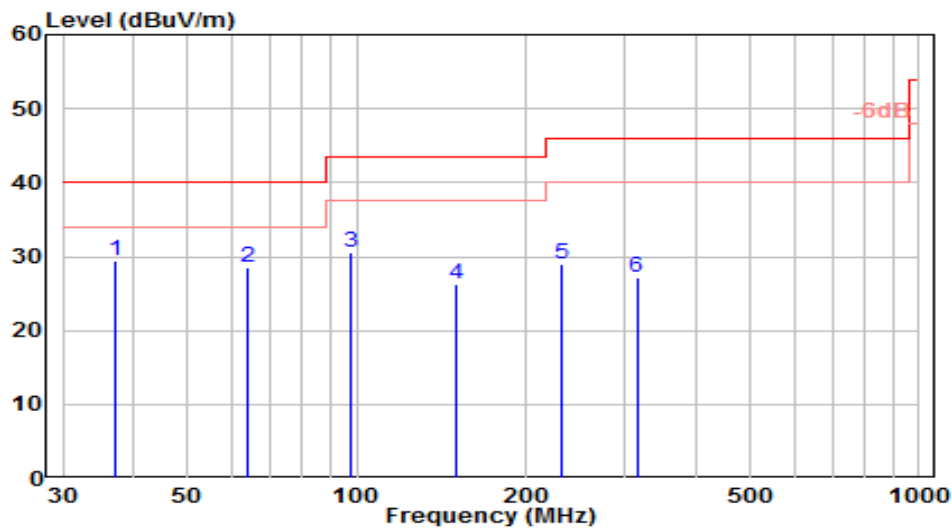


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	37.075	10.34	19.03	29.37	-10.63	40.00	150	260	QP
2		64.141	10.09	18.39	28.49	-11.51	40.00	150	80	QP
3		97.386	12.14	18.44	30.58	-12.92	43.50	150	315	QP
4		149.787	10.62	15.58	26.20	-17.30	43.50	150	80	QP
5		230.384	9.35	19.57	28.92	-17.08	46.00	100	325	QP
6		314.724	5.57	21.69	27.26	-18.74	46.00	100	320	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-23
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

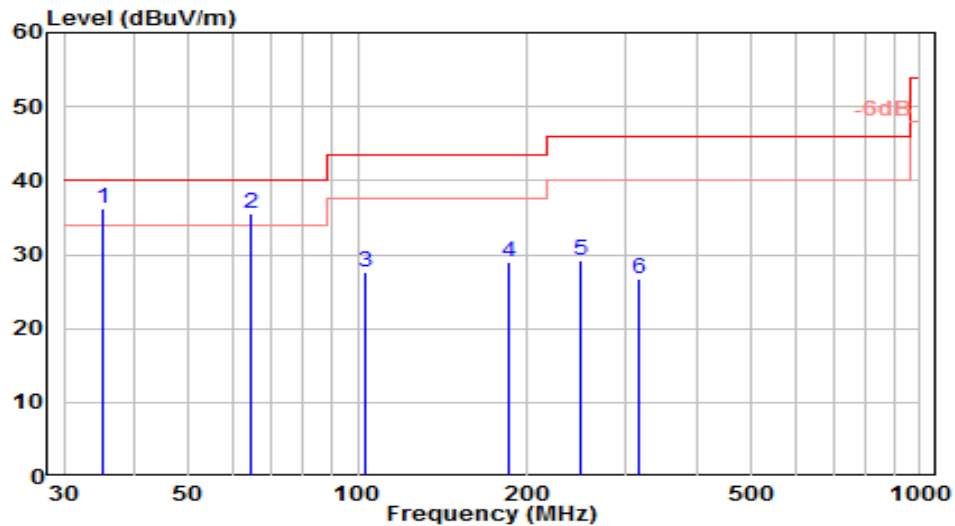


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.275	17.96	18.37	36.33	-3.67	40.00	100	5	QP
2		64.557	17.34	18.24	35.58	-4.42	40.00	100	95	QP
3		103.242	8.71	18.84	27.55	-15.95	43.50	100	125	QP
4		185.899	11.45	17.58	29.02	-14.48	43.50	100	60	QP
5		248.806	8.91	20.37	29.28	-16.72	46.00	100	270	QP
6		315.829	5.00	21.73	26.73	-19.27	46.00	150	105	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-23
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

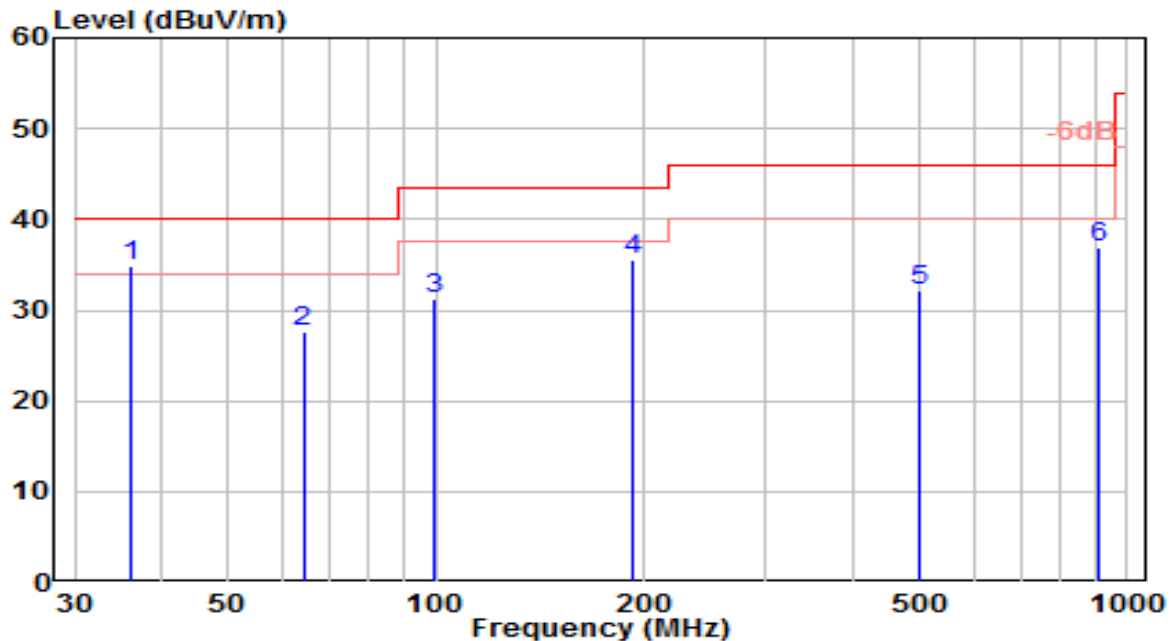


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	36.294	16.12	18.74	34.86	-5.14	40.00	100	200	QP
2		64.226	9.21	18.36	27.58	-12.42	40.00	100	65	QP
3		99.553	12.41	18.81	31.22	-12.28	43.50	150	255	QP
4		192.435	17.41	18.23	35.64	-7.86	43.50	100	305	QP
5		501.793	6.68	25.51	32.19	-13.81	46.00	100	300	QP
6		906.514	5.22	31.67	36.89	-9.11	46.00	150	300	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-23
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

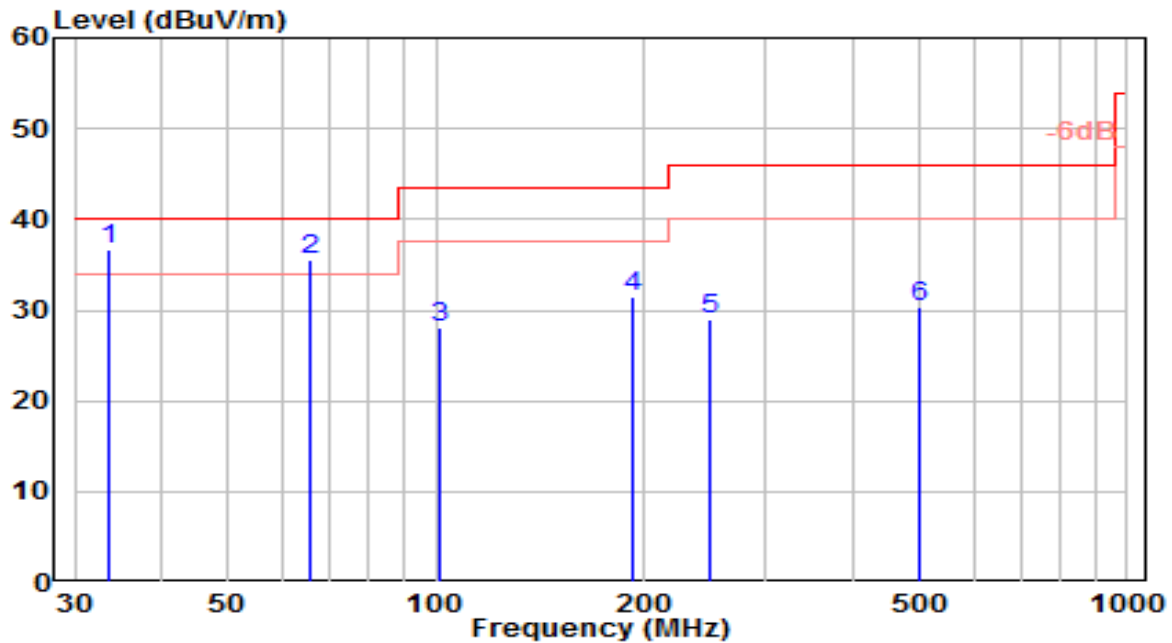


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	33.625	18.65	18.04	36.69	-3.31	40.00	100	210	QP
2		65.586	17.59	17.87	35.46	-4.54	40.00	100	60	QP
3		101.298	9.18	18.87	28.05	-15.45	43.50	100	175	QP
4		193.026	13.22	18.26	31.48	-12.02	43.50	100	160	QP
5		248.841	8.72	20.37	29.09	-16.91	46.00	100	265	QP
6		499.296	4.94	25.47	30.41	-15.59	46.00	100	130	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1_EAP650 D120-Outdoor	Test Voltage	By PoE

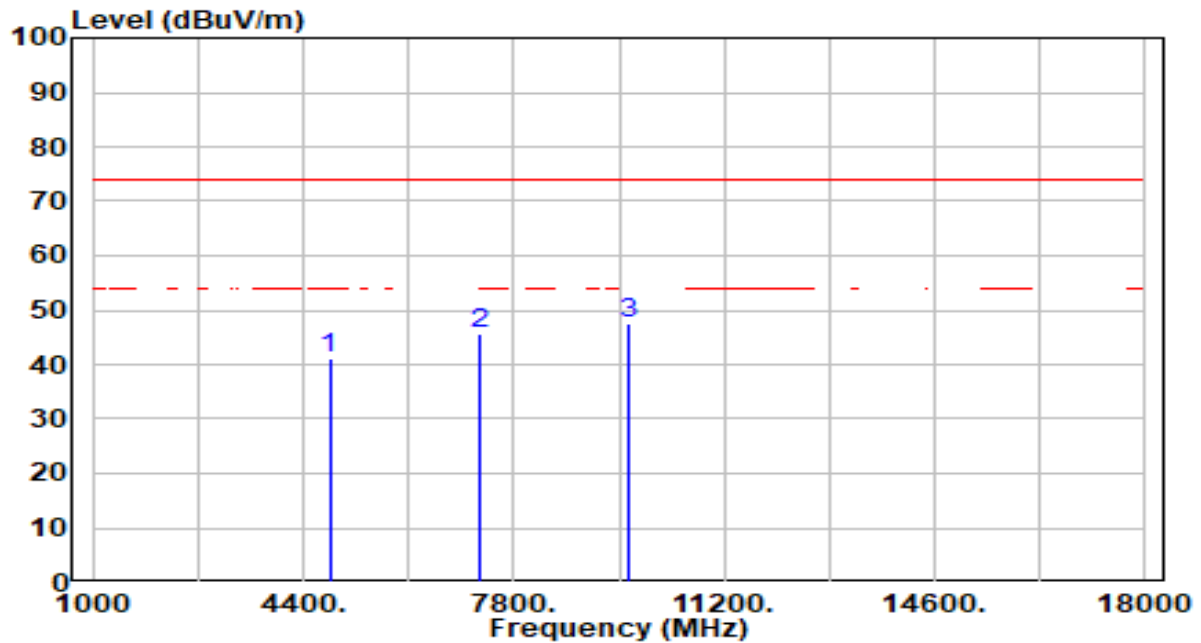


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.42	3.75	41.17	-32.83	74.00	200	181	Peak
2	7236.000	34.12	11.68	45.79	-28.21	74.00	200	91	Peak
3	* 9648.000	31.70	15.77	47.47	-26.53	74.00	200	284	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1_EAP650 D120-Outdoor	Test Voltage	By PoE

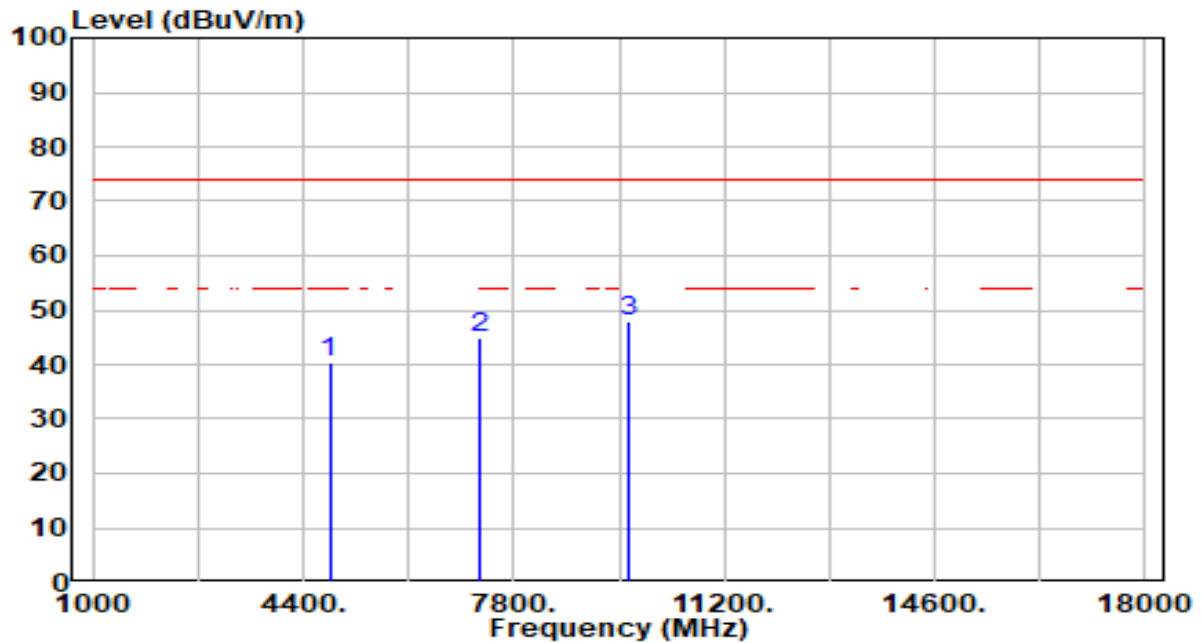


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	36.55	3.75	40.30	-33.70	74.00	200	170	Peak
2	7236.000	33.30	11.68	44.98	-29.02	74.00	200	238	Peak
3	* 9648.000	32.27	15.77	48.04	-25.96	74.00	200	24	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

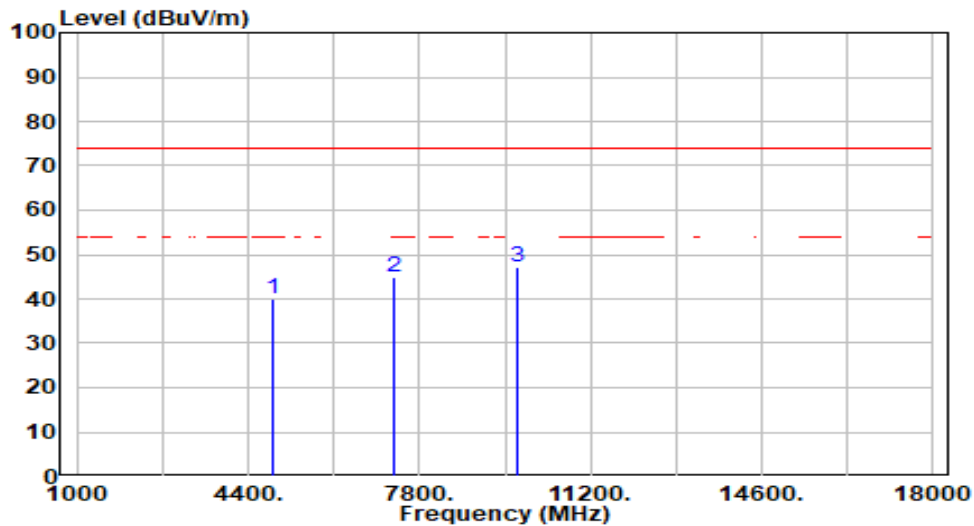


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.31	3.84	40.15	-33.85	74.00	200	178	Peak
2	7311.000	32.92	11.94	44.86	-29.14	74.00	200	0	Peak
3	* 9748.000	31.17	15.95	47.13	-26.87	74.00	200	306	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

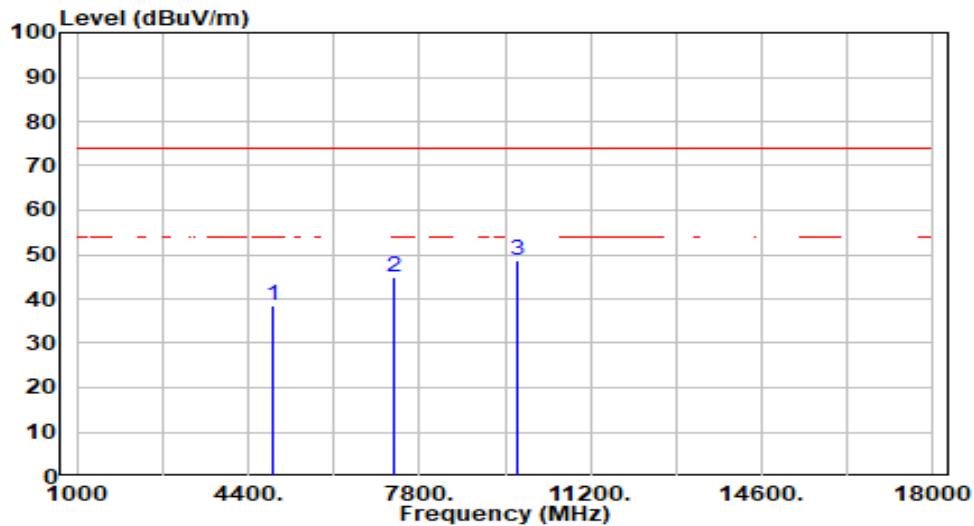


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.55	3.84	38.39	-35.61	74.00	200	212	Peak
2	7311.000	32.93	11.94	44.87	-29.13	74.00	200	30	Peak
3	* 9748.000	32.76	15.95	48.71	-25.29	74.00	200	287	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

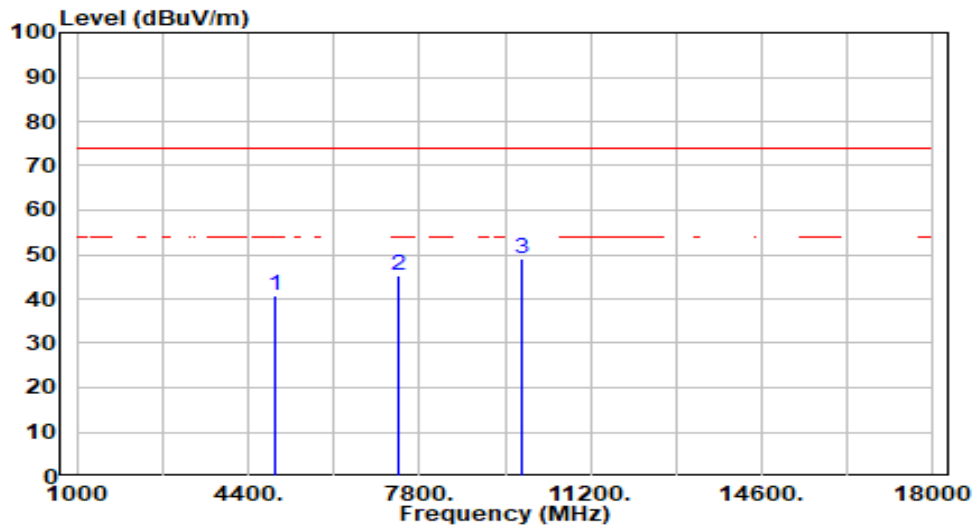


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	36.78	3.92	40.71	-33.29	74.00	200	180	Peak
2	7386.000	33.06	12.21	45.27	-28.73	74.00	200	37	Peak
3	* 9848.000	32.84	16.14	48.98	-25.02	74.00	200	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

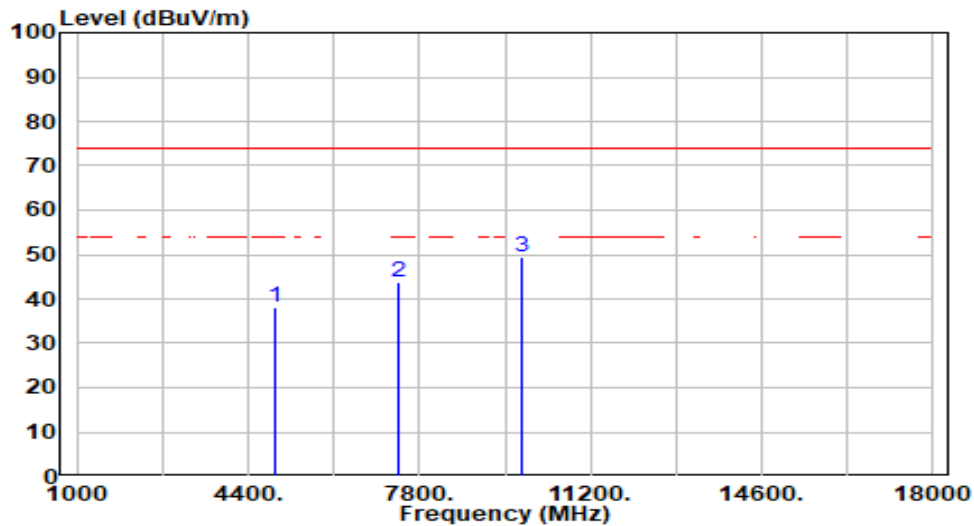


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.37	3.92	38.30	-35.70	74.00	200	233	Peak
2	7386.000	31.66	12.21	43.86	-30.14	74.00	200	184	Peak
3	* 9848.000	33.36	16.14	49.50	-24.50	74.00	200	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

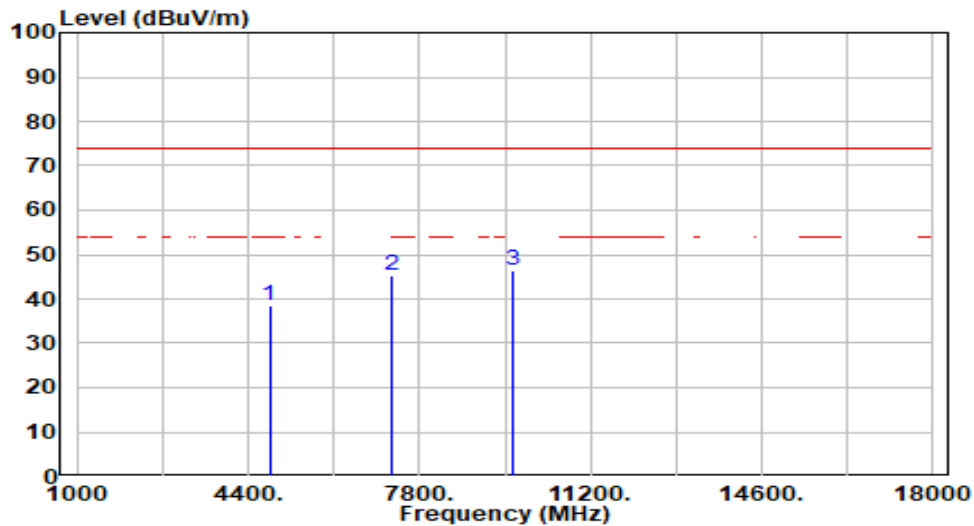


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.91	3.75	38.66	-35.34	74.00	200	155	Peak
2	7236.000	33.68	11.68	45.36	-28.64	74.00	200	202	Peak
3	* 9648.000	30.83	15.77	46.60	-27.40	74.00	200	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

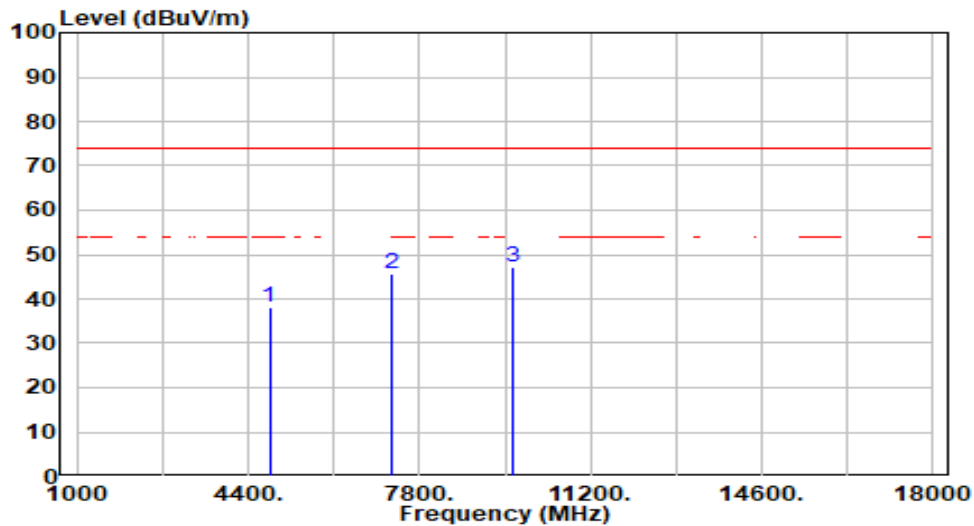


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.54	3.75	38.28	-35.72	74.00	200	264	Peak
2	7236.000	33.98	11.68	45.66	-28.34	74.00	200	78	Peak
3	* 9648.000	31.53	15.77	47.30	-26.70	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

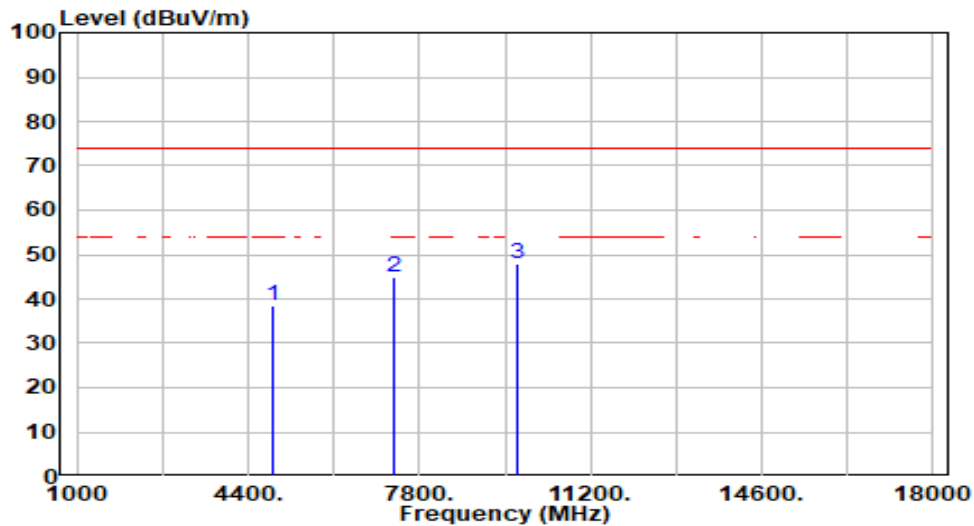


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.49	3.84	38.33	-35.67	74.00	200	163	Peak
2	7311.000	33.15	11.94	45.09	-28.91	74.00	200	333	Peak
3	* 9748.000	31.90	15.95	47.85	-26.15	74.00	200	49	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

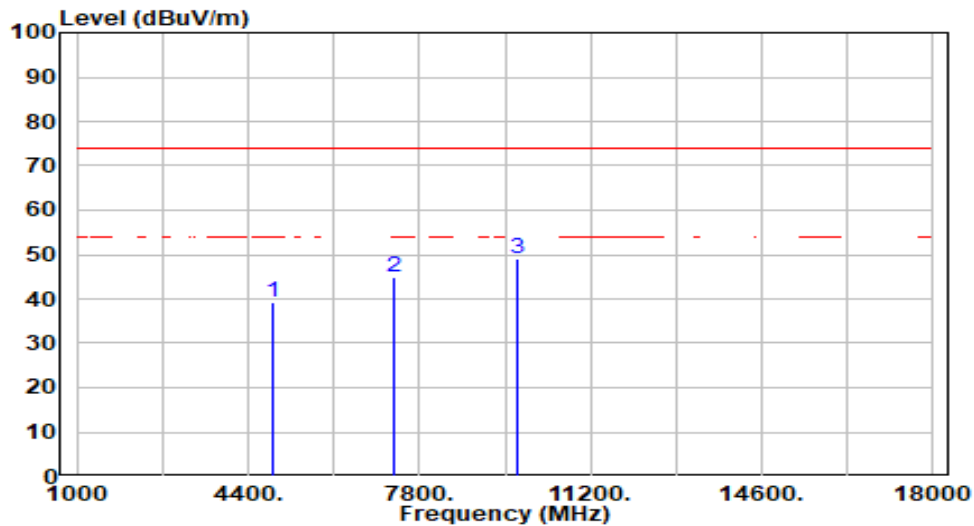


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.56	3.84	39.40	-34.60	74.00	200	169	Peak
2	7311.000	33.10	11.94	45.04	-28.96	74.00	200	12	Peak
3	* 9748.000	33.03	15.95	48.99	-25.01	74.00	200	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

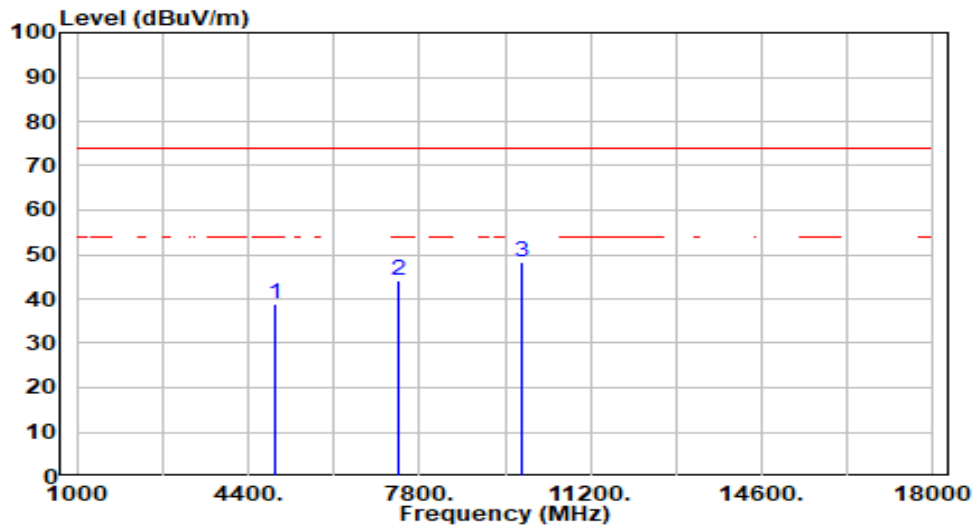


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.87	3.92	38.80	-35.20	74.00	200	139	Peak
2	7386.000	31.77	12.21	43.98	-30.02	74.00	200	185	Peak
3	* 9848.000	32.26	16.14	48.40	-25.60	74.00	200	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

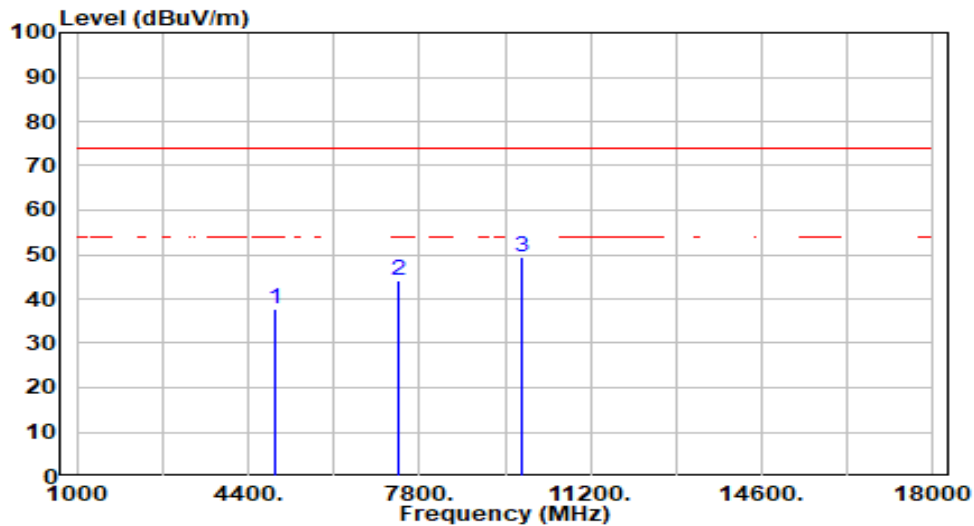


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.81	3.92	37.73	-36.27	74.00	200	109	Peak
2	7386.000	32.04	12.21	44.25	-29.75	74.00	200	316	Peak
3	* 9848.000	33.36	16.14	49.50	-24.50	74.00	200	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

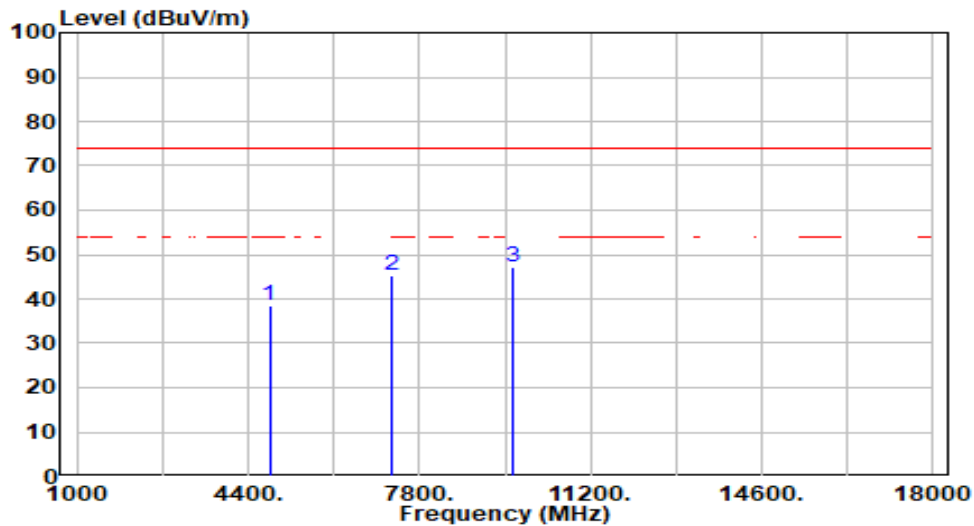


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.61	3.75	38.36	-35.64	74.00	200	41	Peak
2	7236.000	33.72	11.68	45.39	-28.61	74.00	200	41	Peak
3	* 9648.000	31.23	15.77	47.00	-27.00	74.00	200	263	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

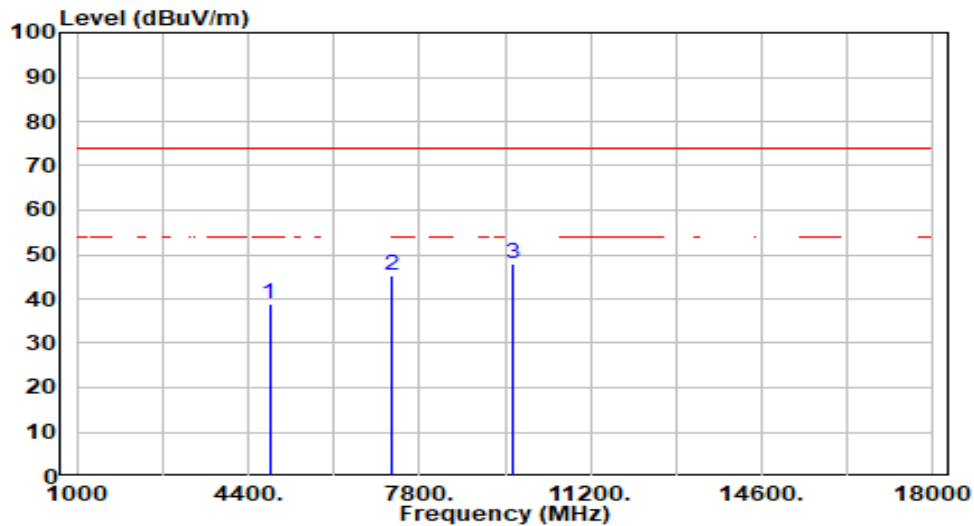


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.99	3.75	38.73	-35.27	74.00	200	122	Peak
2	7236.000	33.62	11.68	45.30	-28.70	74.00	200	230	Peak
3	* 9648.000	31.99	15.77	47.76	-26.24	74.00	200	261	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

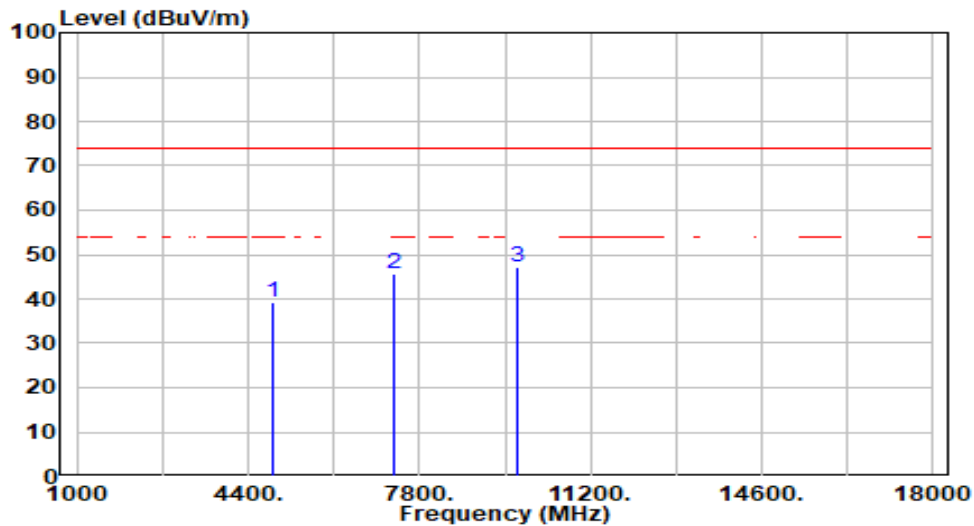


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.26	3.84	39.09	-34.91	74.00	200	173	Peak
2	7311.000	33.83	11.94	45.77	-28.23	74.00	200	130	Peak
3	* 9748.000	31.40	15.95	47.35	-26.65	74.00	200	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

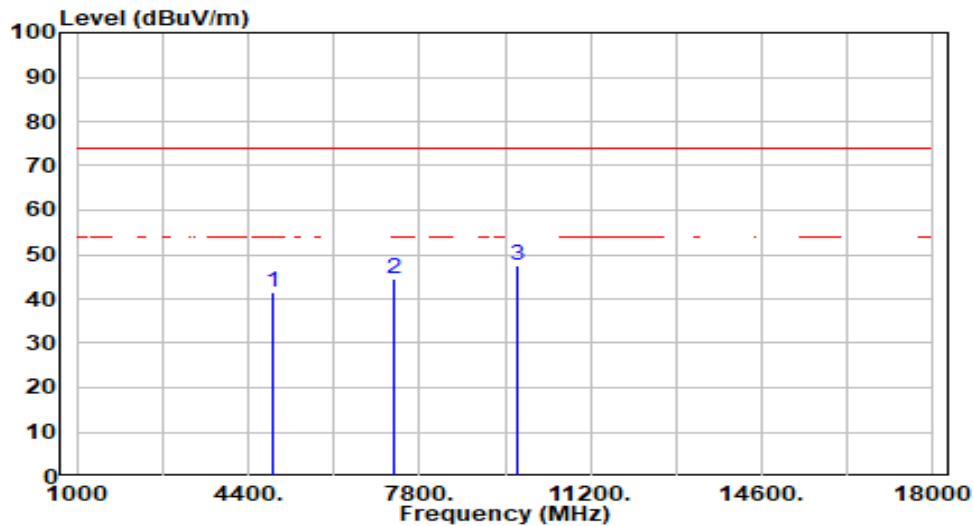


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.53	3.84	41.36	-32.64	74.00	200	214	Peak
2	7311.000	32.66	11.94	44.60	-29.40	74.00	200	115	Peak
3	* 9748.000	31.49	15.95	47.45	-26.55	74.00	200	28	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

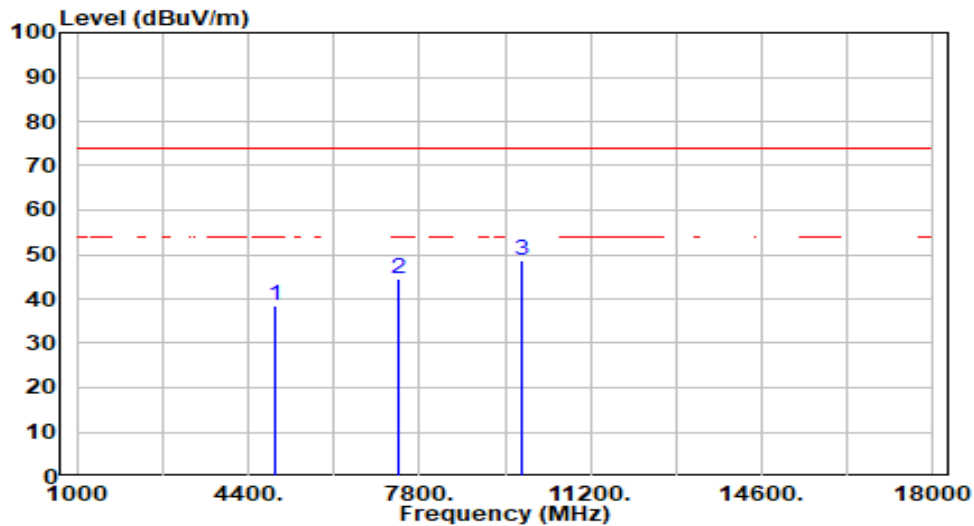


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.48	3.92	38.40	-35.60	74.00	200	171	Peak
2	7386.000	32.20	12.21	44.41	-29.59	74.00	200	113	Peak
3	* 9848.000	32.58	16.14	48.72	-25.28	74.00	200	73	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

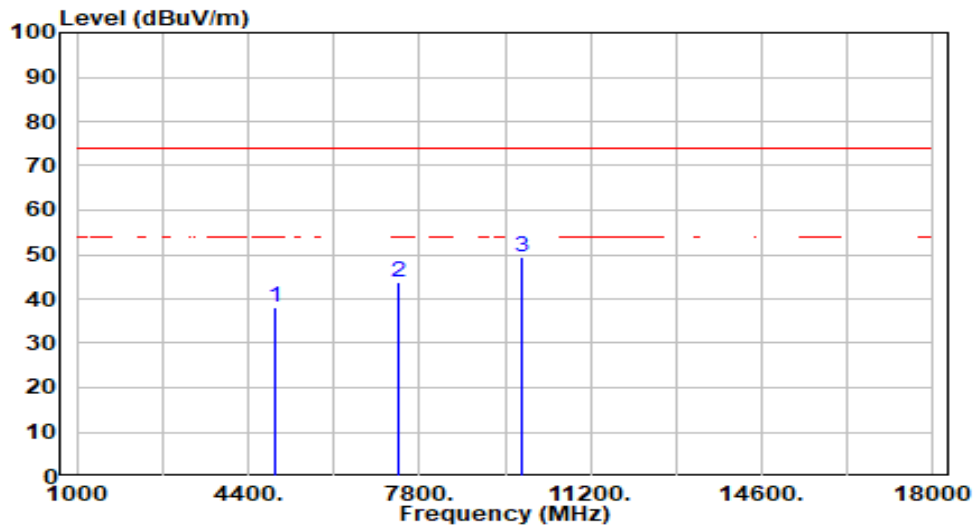


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.08	3.92	38.01	-35.99	74.00	200	106	Peak
2	7386.000	31.75	12.21	43.96	-30.04	74.00	200	117	Peak
3	* 9848.000	33.41	16.14	49.55	-24.45	74.00	200	92	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

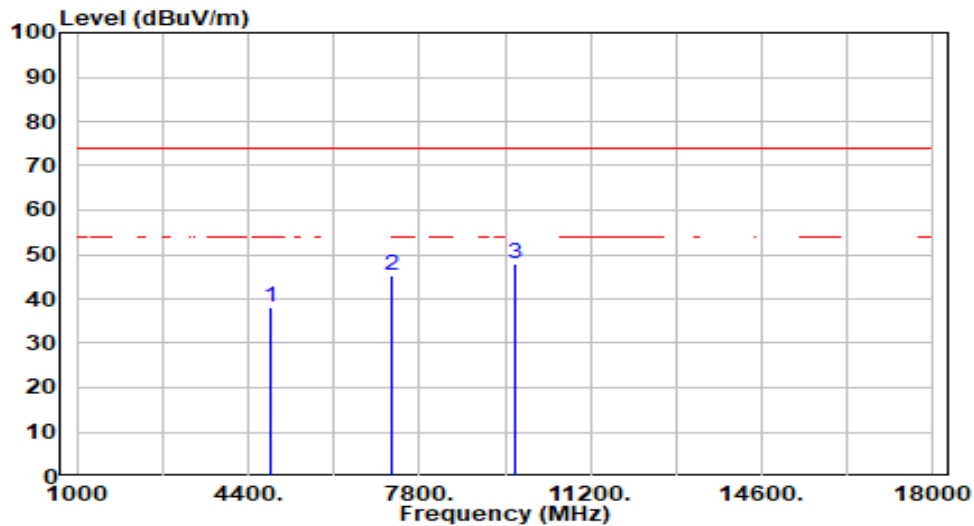


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.37	3.78	38.16	-35.84	74.00	200	217	Peak
2	7266.000	33.34	11.78	45.12	-28.88	74.00	200	292	Peak
3	* 9688.000	31.96	15.84	47.80	-26.20	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

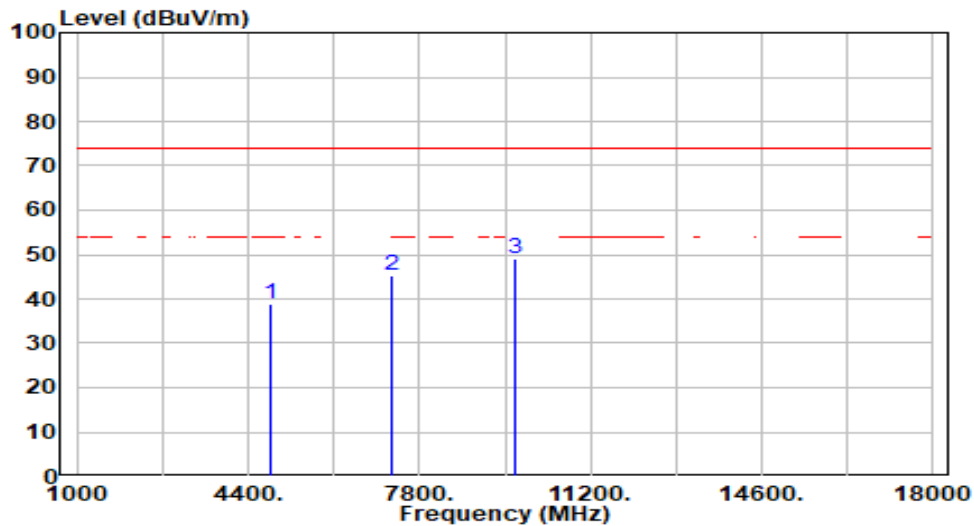


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.06	3.78	38.85	-35.15	74.00	200	360	Peak
2	7266.000	33.35	11.78	45.13	-28.87	74.00	200	332	Peak
3	* 9688.000	33.04	15.84	48.88	-25.12	74.00	200	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

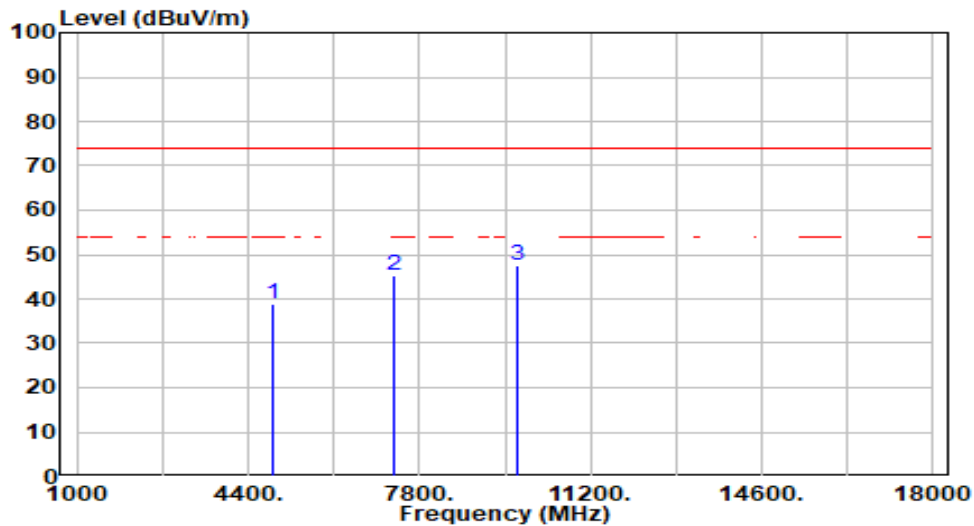


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.12	3.84	38.96	-35.04	74.00	200	187	Peak
2	7311.000	33.22	11.94	45.16	-28.84	74.00	200	270	Peak
3	* 9748.000	31.76	15.95	47.72	-26.28	74.00	200	306	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

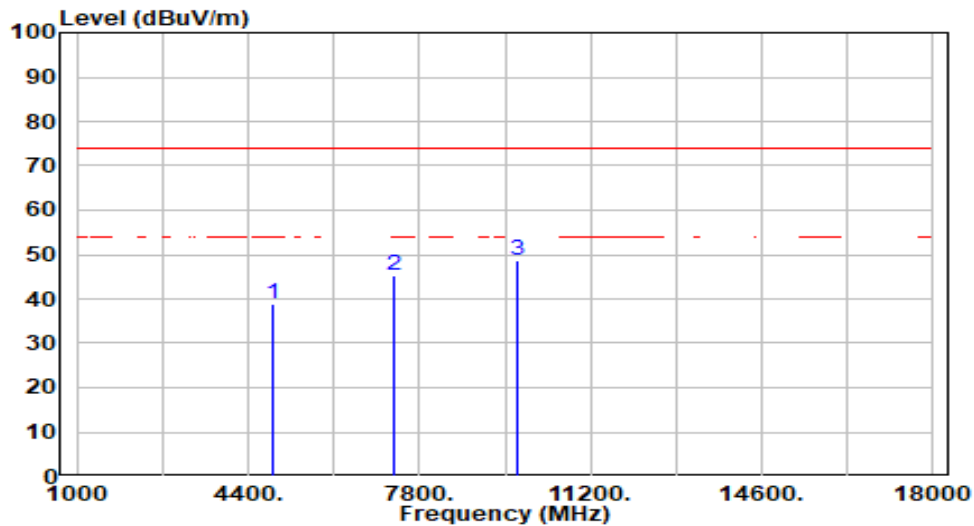


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.94	3.84	38.77	-35.23	74.00	200	3	Peak
2	7311.000	33.16	11.94	45.10	-28.90	74.00	200	312	Peak
3	* 9748.000	32.59	15.95	48.55	-25.45	74.00	200	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

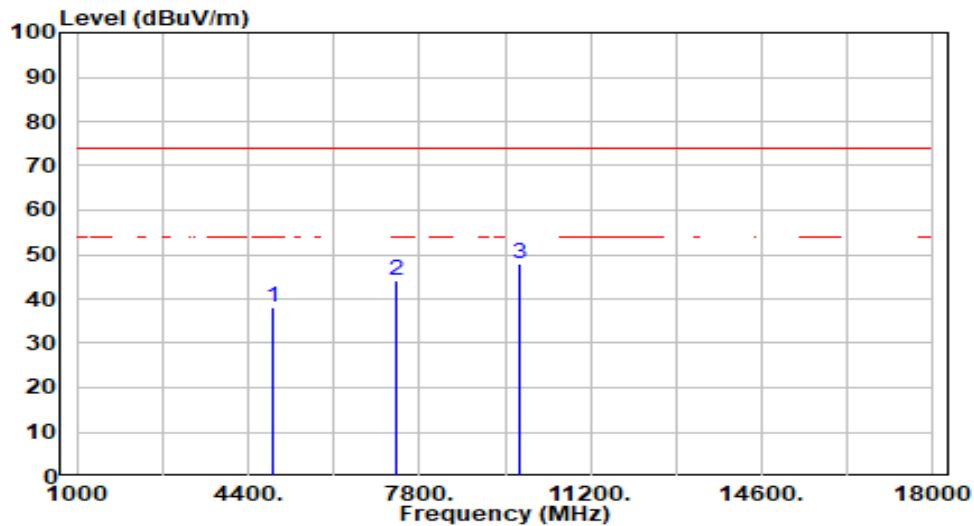


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.17	3.89	38.06	-35.94	74.00	200	203	Peak
2	7356.000	32.04	12.10	44.14	-29.86	74.00	200	357	Peak
3	* 9808.000	31.94	16.06	48.01	-25.99	74.00	200	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

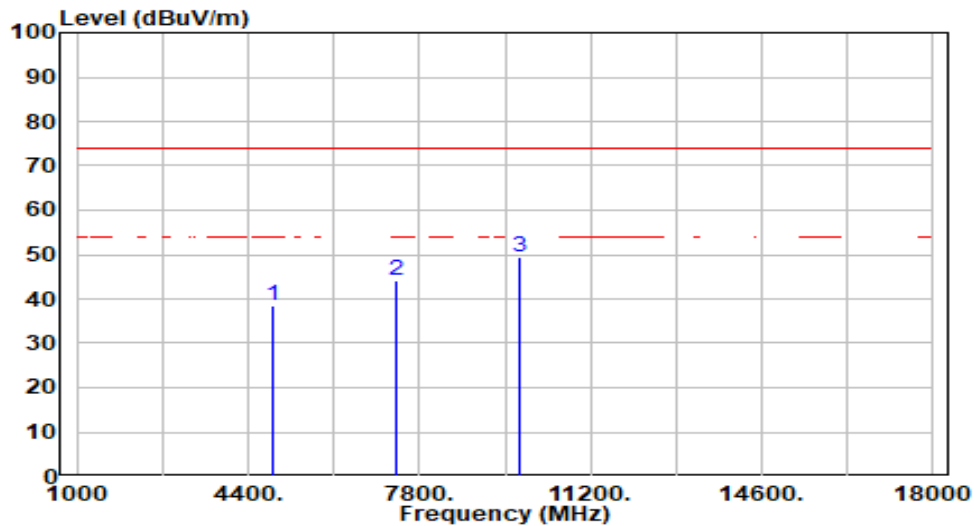


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.52	3.89	38.41	-35.59	74.00	200	276	Peak
2	7356.000	32.05	12.10	44.15	-29.85	74.00	200	12	Peak
3	* 9808.000	33.33	16.06	49.39	-24.61	74.00	200	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

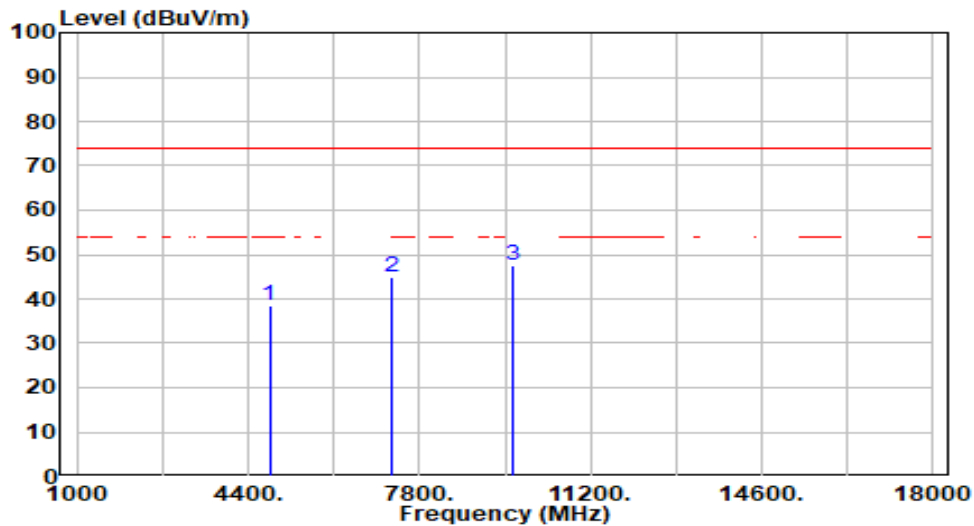


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.92	3.75	38.67	-35.33	74.00	200	68	Peak
2	7236.000	33.21	11.68	44.89	-29.11	74.00	200	229	Peak
3	* 9648.000	31.71	15.77	47.48	-26.52	74.00	200	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

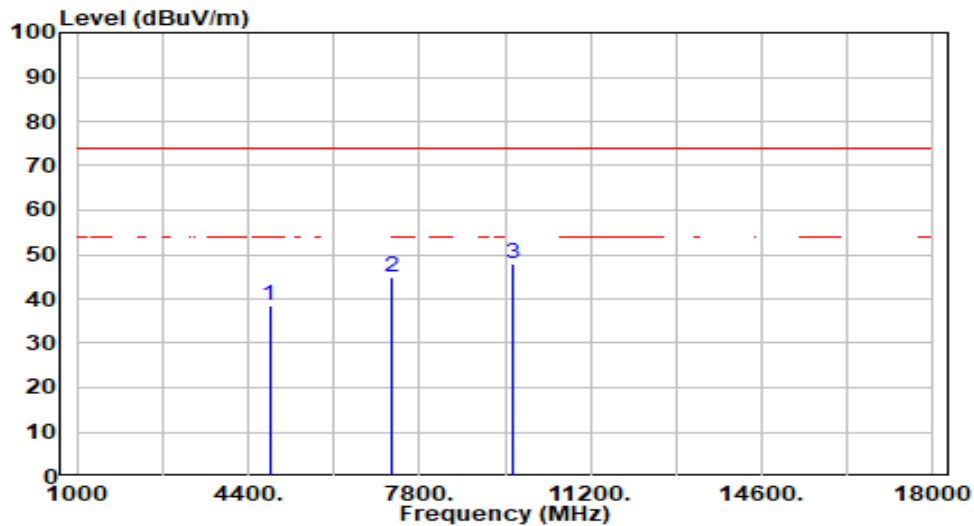


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.62	3.75	38.36	-35.64	74.00	200	144	Peak
2	7236.000	33.28	11.68	44.95	-29.05	74.00	200	297	Peak
3	* 9648.000	32.14	15.77	47.91	-26.09	74.00	200	294	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

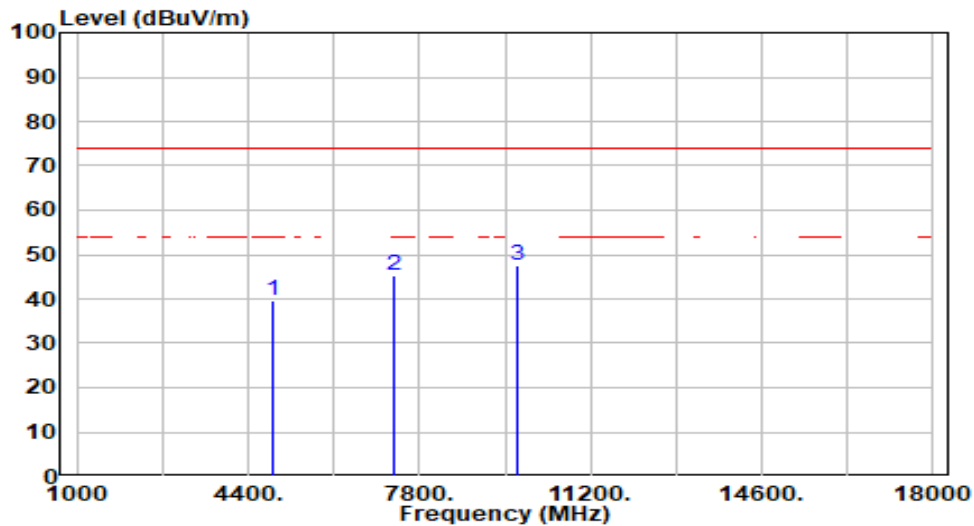


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.89	3.84	39.72	-34.28	74.00	200	171	Peak
2	7311.000	33.33	11.94	45.27	-28.73	74.00	200	336	Peak
3	* 9748.000	31.62	15.95	47.57	-26.43	74.00	200	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

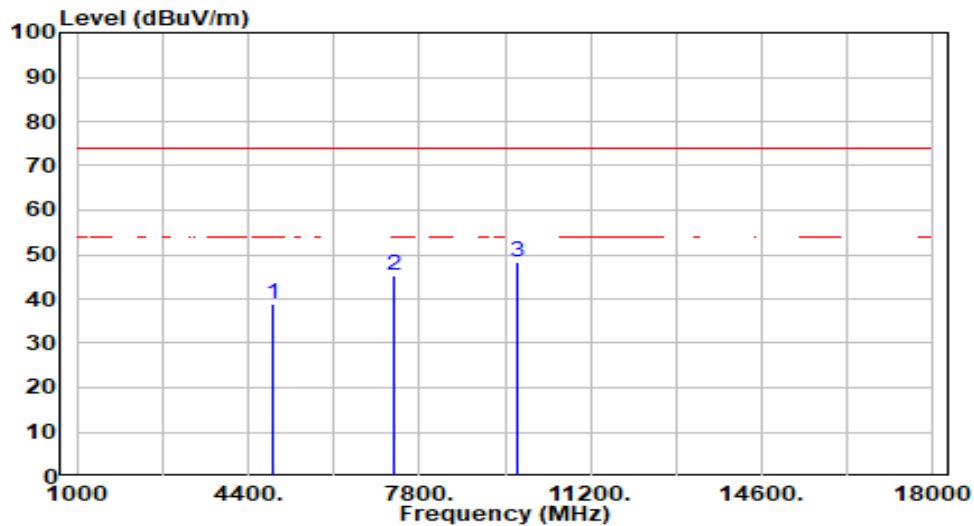


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.03	3.84	38.87	-35.13	74.00	200	207	Peak
2	7311.000	33.29	11.94	45.23	-28.77	74.00	200	172	Peak
3	* 9748.000	32.43	15.95	48.39	-25.61	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

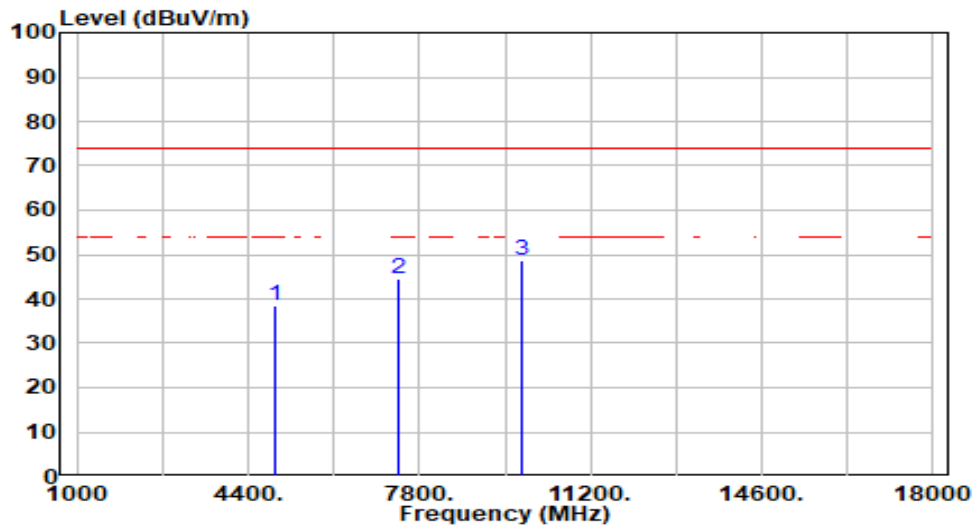


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.69	3.92	38.62	-35.38	74.00	200	128	Peak
2	7386.000	32.50	12.21	44.71	-29.29	74.00	200	167	Peak
3	* 9848.000	32.45	16.14	48.59	-25.41	74.00	200	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

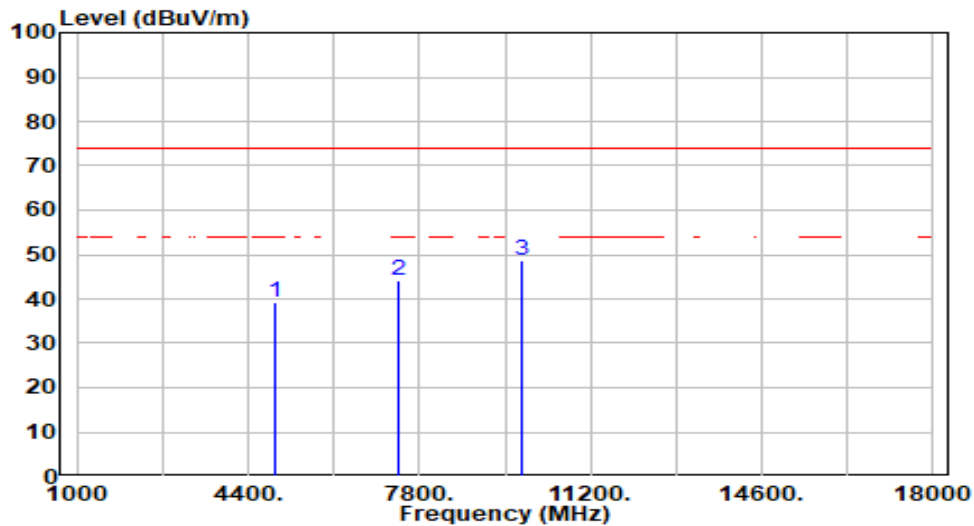


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.20	3.92	39.13	-34.87	74.00	200	265	Peak
2	7386.000	31.87	12.21	44.07	-29.93	74.00	200	265	Peak
3	* 9848.000	32.51	16.14	48.65	-25.35	74.00	200	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

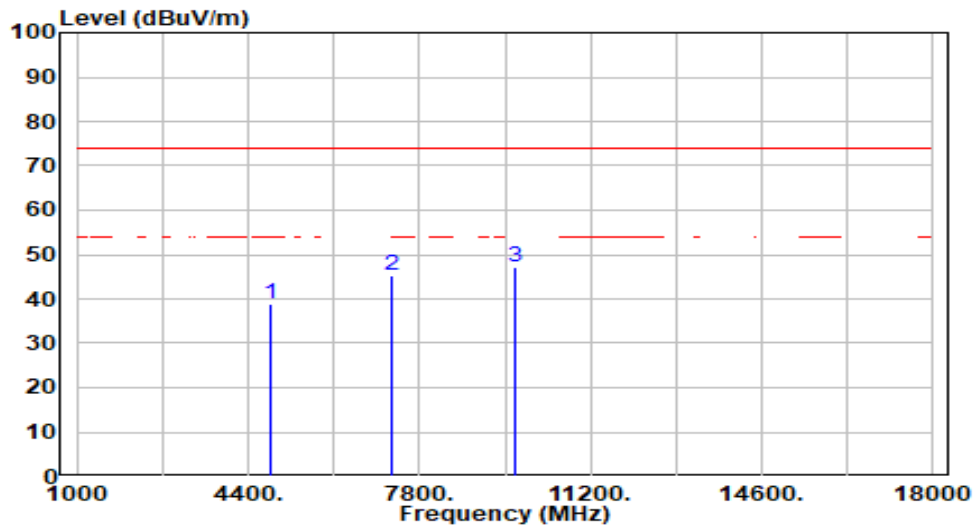


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.90	3.78	38.68	-35.32	74.00	200	285	Peak
2	7266.000	33.59	11.78	45.38	-28.62	74.00	200	311	Peak
3	* 9688.000	31.19	15.84	47.03	-26.97	74.00	200	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

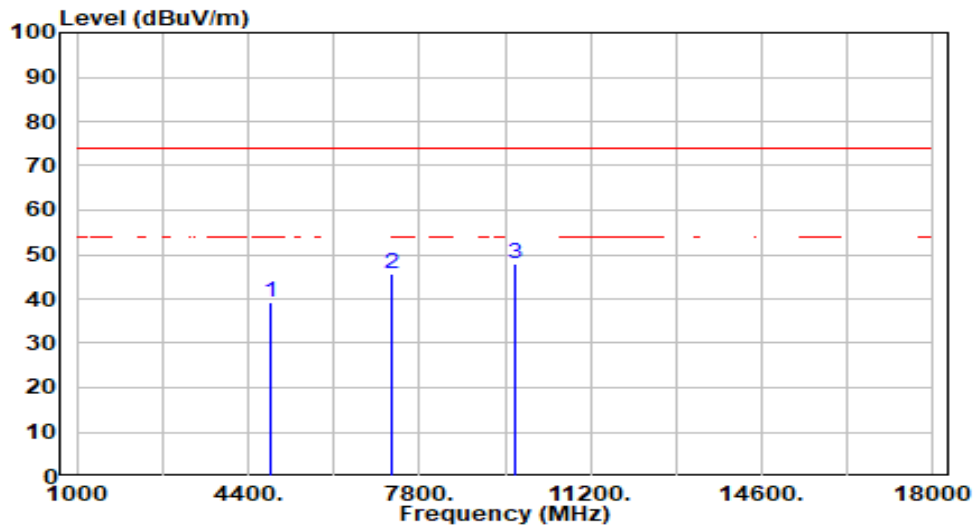


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.51	3.78	39.29	-34.71	74.00	200	88	Peak
2	7266.000	34.02	11.78	45.80	-28.20	74.00	200	269	Peak
3	* 9688.000	32.22	15.84	48.07	-25.93	74.00	200	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

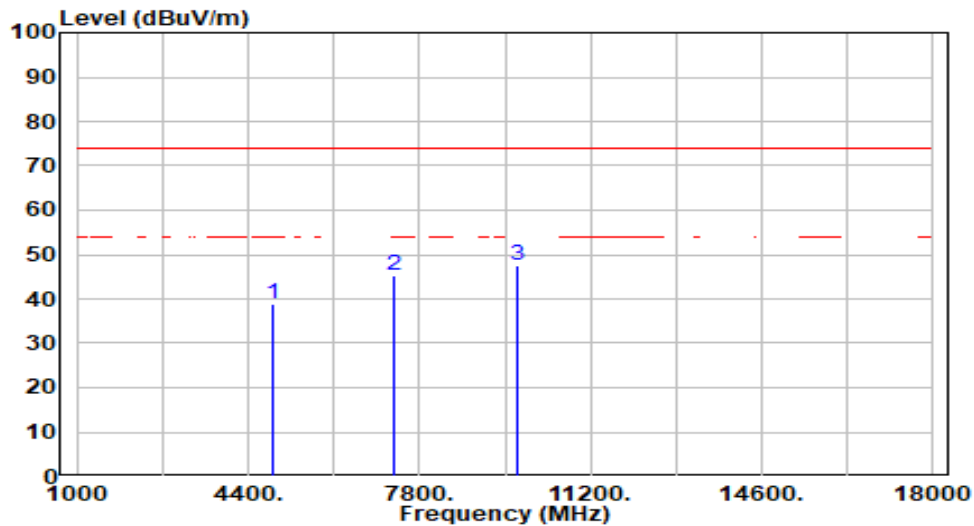


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.97	3.84	38.81	-35.19	74.00	200	296	Peak
2	7311.000	33.34	11.94	45.28	-28.72	74.00	200	271	Peak
3	* 9748.000	31.77	15.95	47.73	-26.27	74.00	200	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

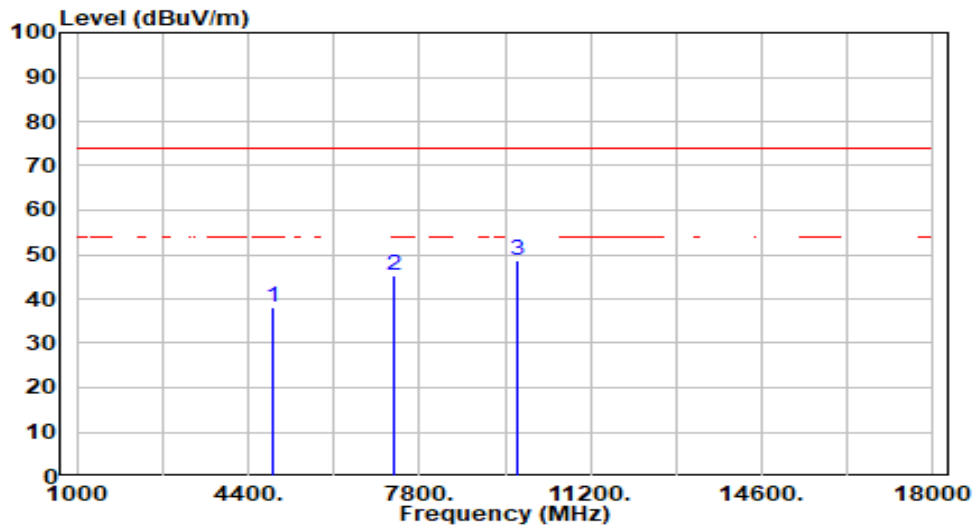


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.40	3.84	38.23	-35.77	74.00	200	261	Peak
2	7311.000	33.19	11.94	45.13	-28.87	74.00	200	233	Peak
3	* 9748.000	32.73	15.95	48.68	-25.32	74.00	200	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

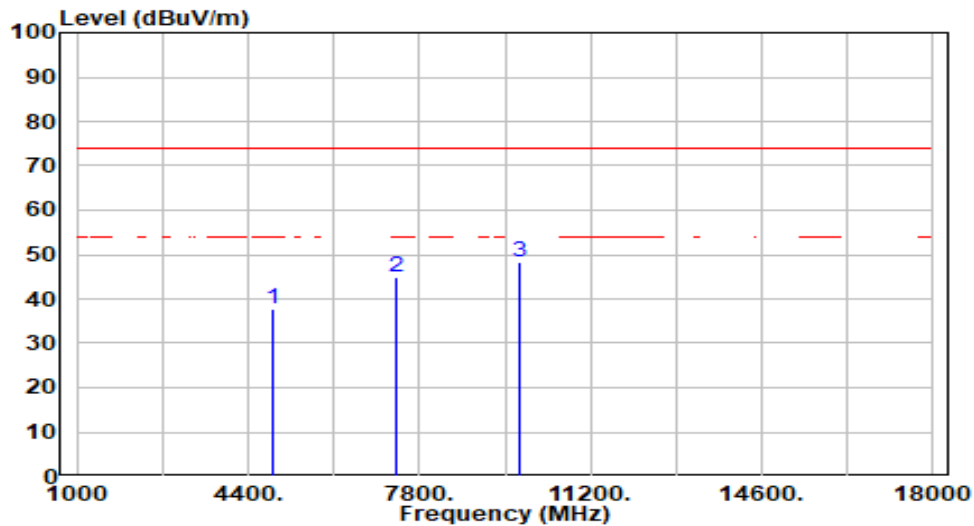


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.03	3.89	37.92	-36.08	74.00	200	304	Peak
2	7356.000	32.73	12.10	44.83	-29.17	74.00	200	196	Peak
3	* 9808.000	32.33	16.06	48.39	-25.61	74.00	200	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

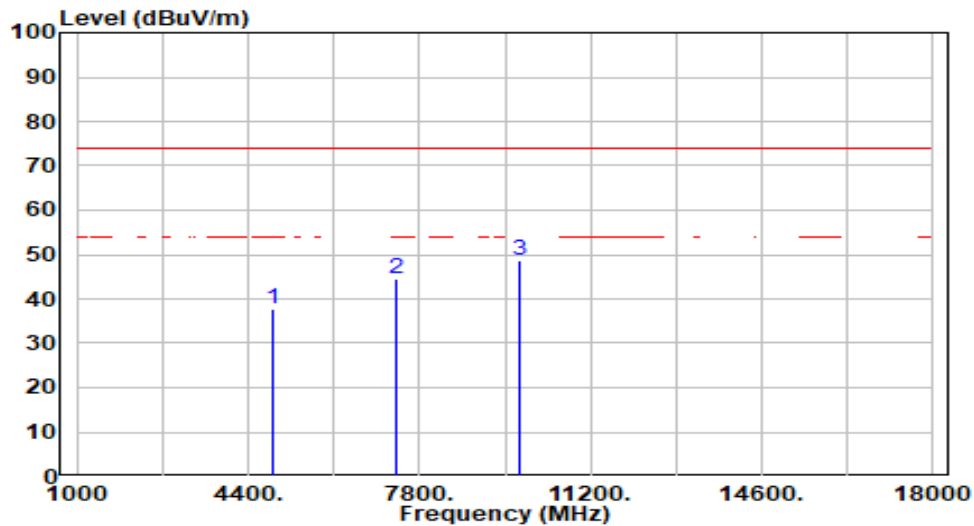


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.87	3.89	37.76	-36.24	74.00	200	360	Peak
2	7356.000	32.28	12.10	44.38	-29.62	74.00	200	182	Peak
3	* 9808.000	32.77	16.06	48.84	-25.16	74.00	200	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH_1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

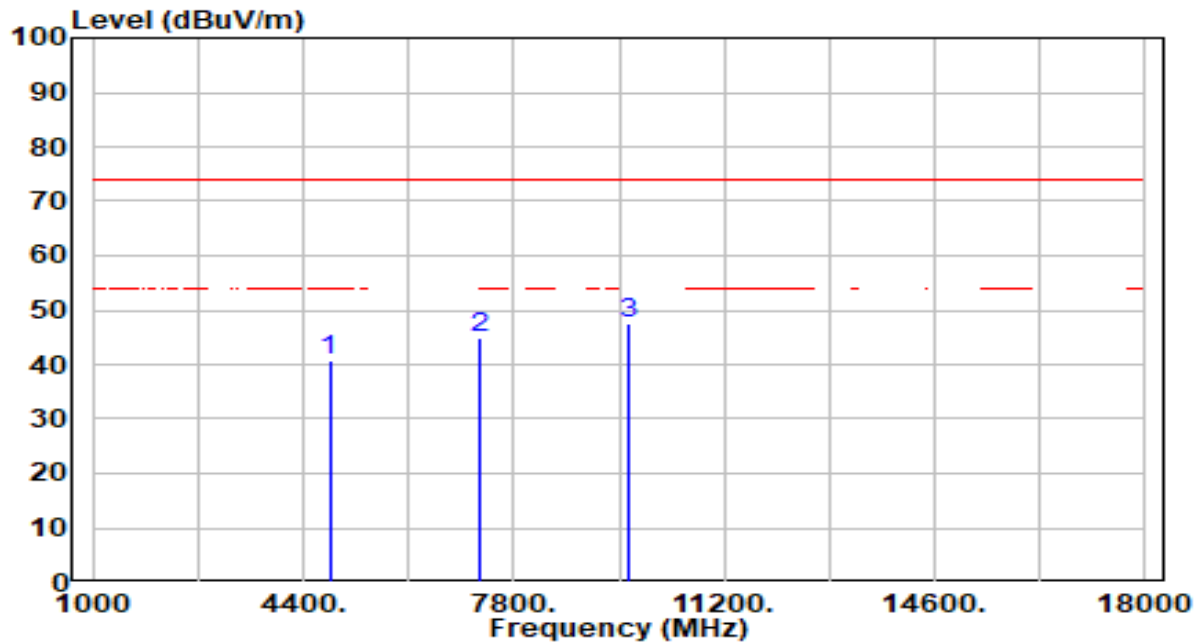


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.09	3.75	40.84	-33.16	74.00	200	133	Peak
2	7236.000	33.05	11.68	44.73	-29.27	74.00	200	80	Peak
3	* 9648.000	31.73	15.77	47.50	-26.50	74.00	200	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH_1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

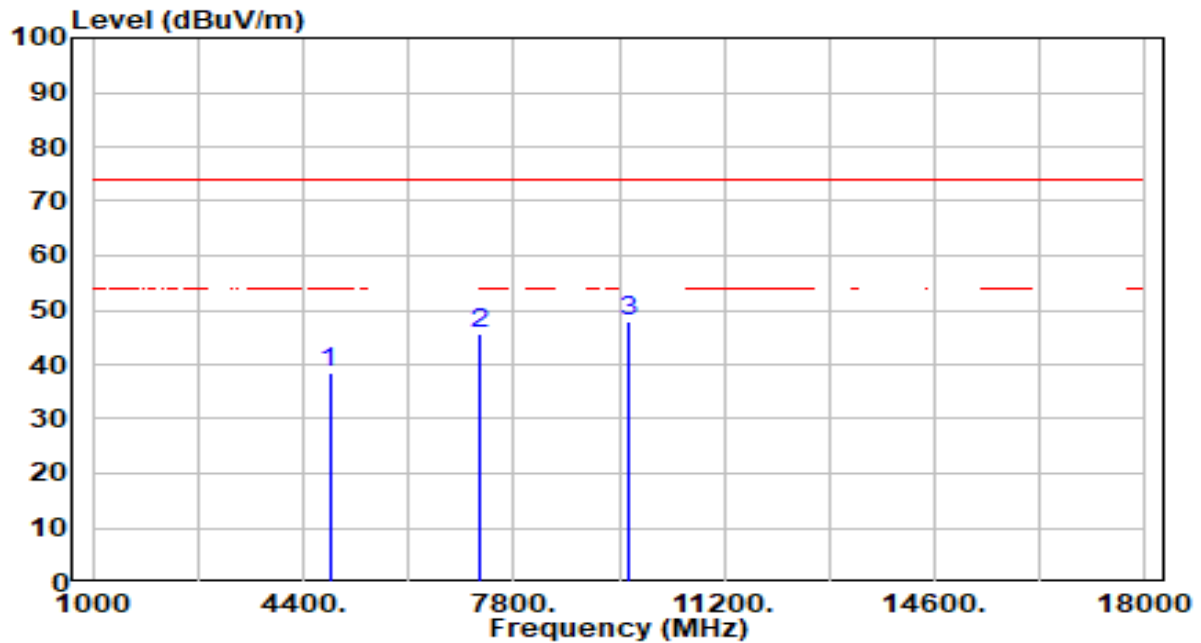


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.91	3.75	38.66	-35.34	74.00	200	238	Peak
2	7236.000	34.05	11.68	45.73	-28.27	74.00	200	256	Peak
3	* 9648.000	32.23	15.77	48.00	-26.00	74.00	200	249	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

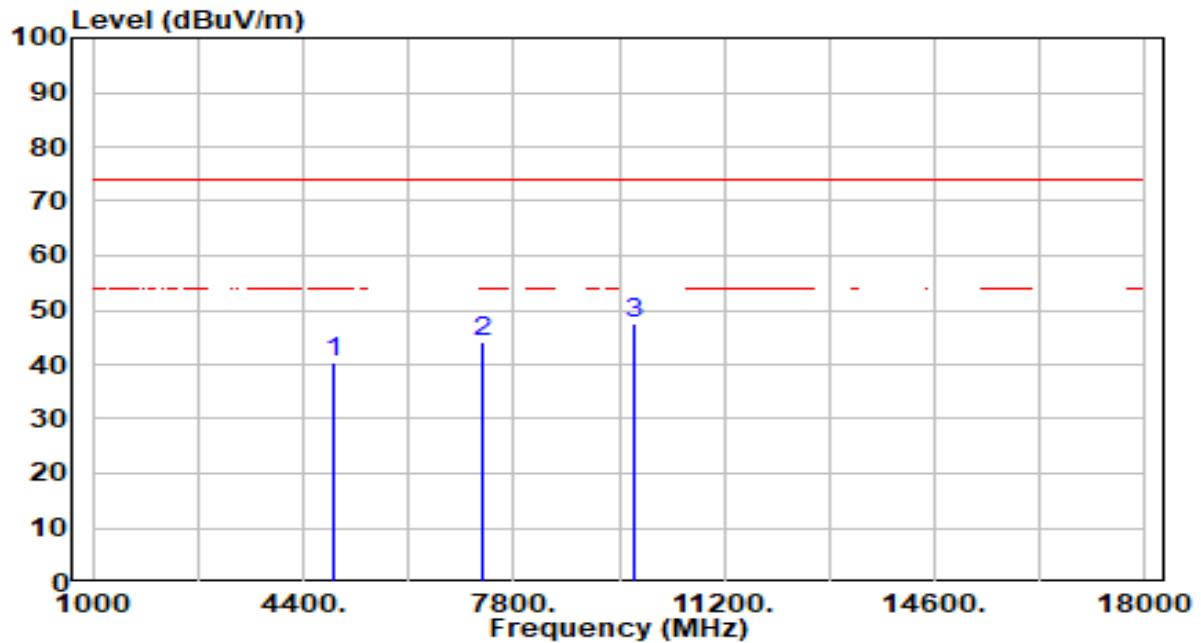


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.42	3.84	40.25	-33.75	74.00	200	120	Peak
2	7311.000	32.20	11.94	44.14	-29.86	74.00	200	36	Peak
3	* 9748.000	31.75	15.95	47.70	-26.30	74.00	200	294	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

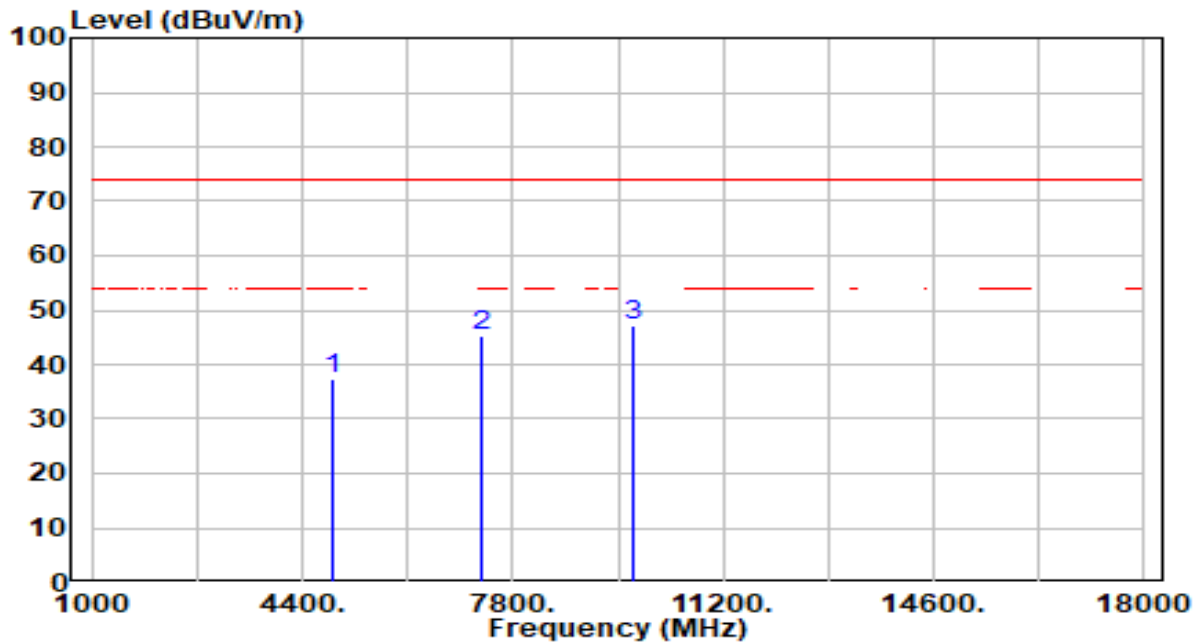


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.64	3.84	37.48	-36.52	74.00	200	133	Peak
2	7311.000	33.23	11.94	45.17	-28.83	74.00	200	93	Peak
3	* 9748.000	31.25	15.95	47.20	-26.80	74.00	200	292	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH_11_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

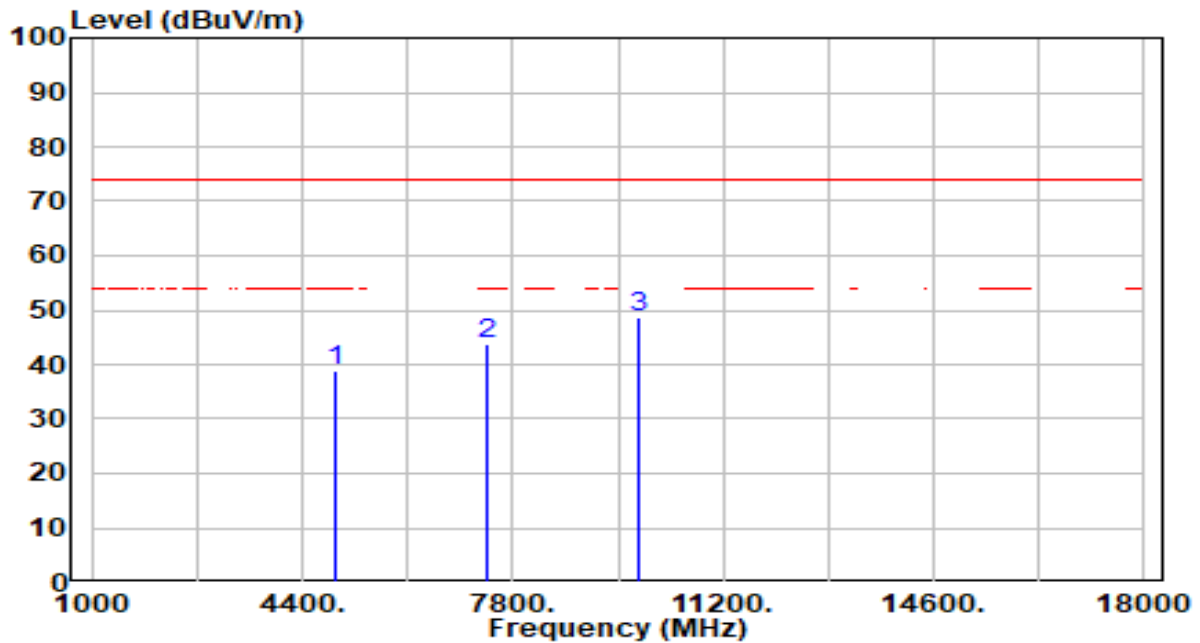


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.90	3.92	38.82	-35.18	74.00	200	108	Peak
2	7386.000	31.44	12.21	43.65	-30.35	74.00	200	69	Peak
3	* 9848.000	32.54	16.14	48.68	-25.32	74.00	200	165	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH_11_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

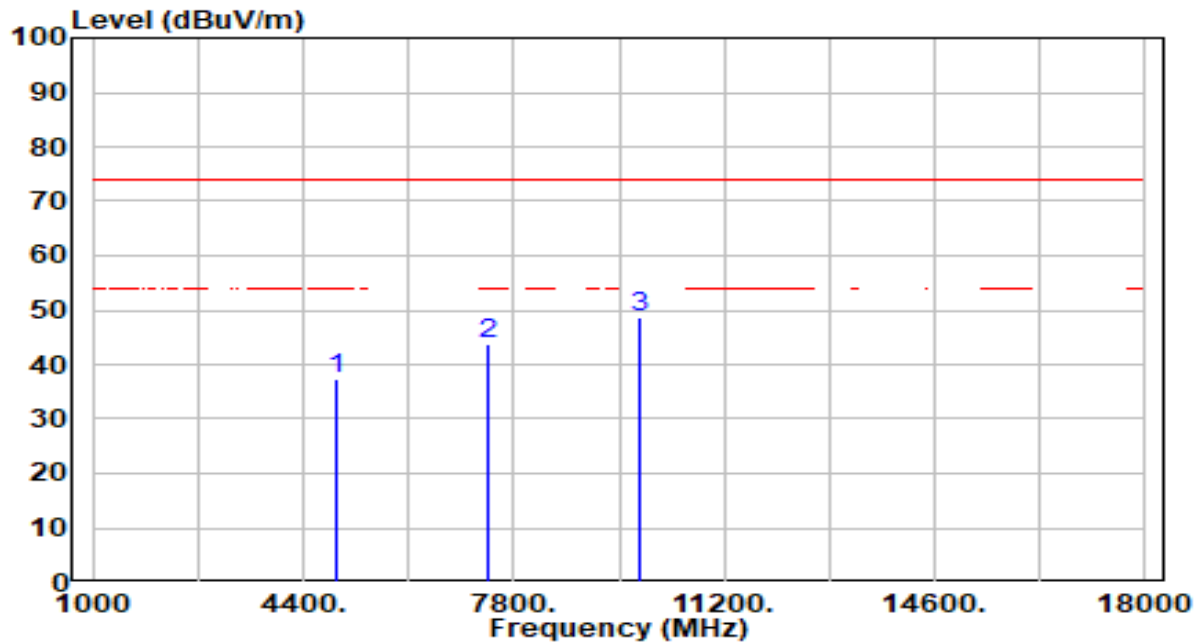


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.58	3.92	37.50	-36.50	74.00	200	48	Peak
2	7386.000	31.70	12.21	43.91	-30.09	74.00	200	259	Peak
3	* 9848.000	32.50	16.14	48.64	-25.36	74.00	200	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH_1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

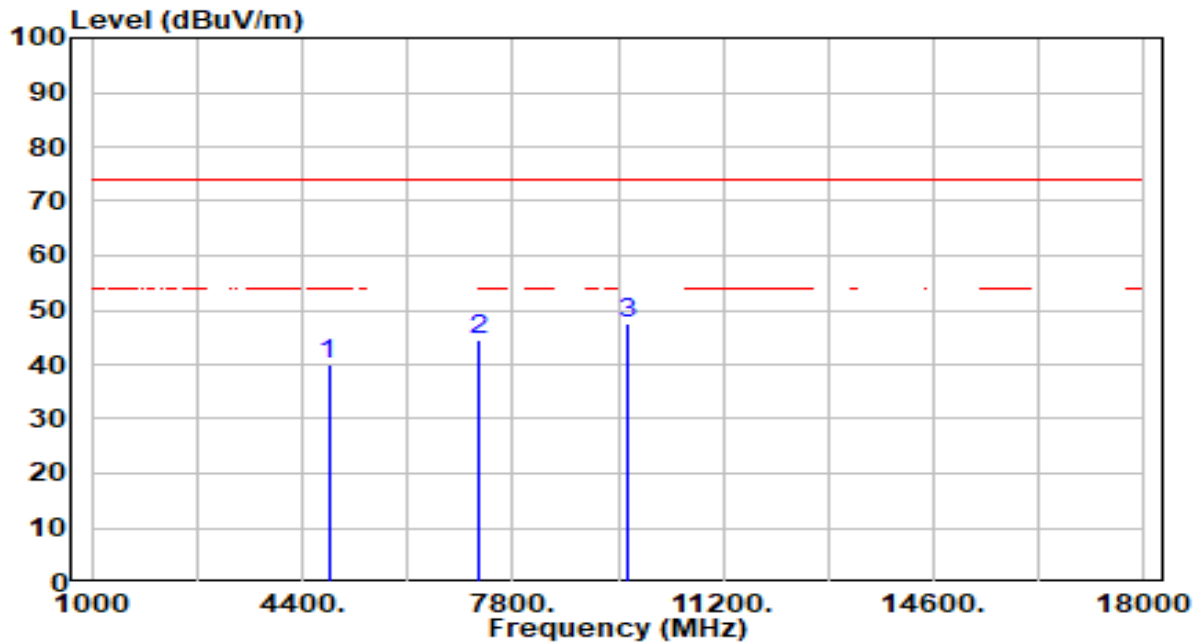


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	36.11	3.75	39.86	-34.14	74.00	200	140	Peak
2	7236.000	32.99	11.68	44.66	-29.34	74.00	200	70	Peak
3	* 9648.000	31.61	15.77	47.38	-26.62	74.00	200	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH_1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

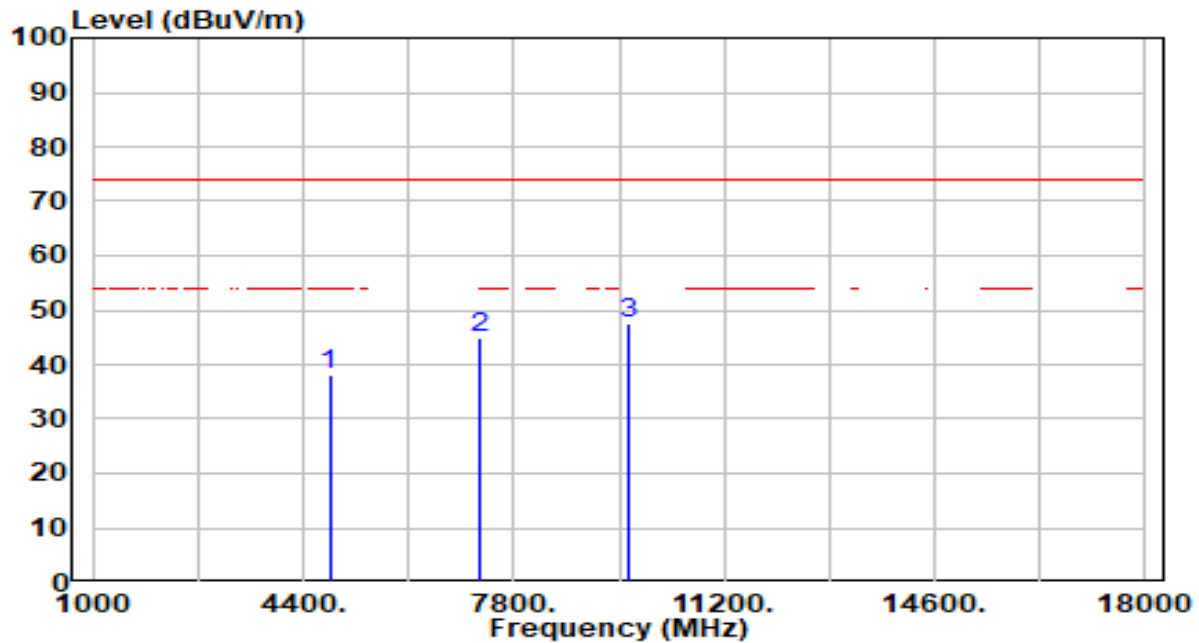


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.55	3.75	38.29	-35.71	74.00	200	360	Peak
2	7236.000	33.05	11.68	44.73	-29.27	74.00	200	168	Peak
3	* 9648.000	31.90	15.77	47.67	-26.33	74.00	200	179	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

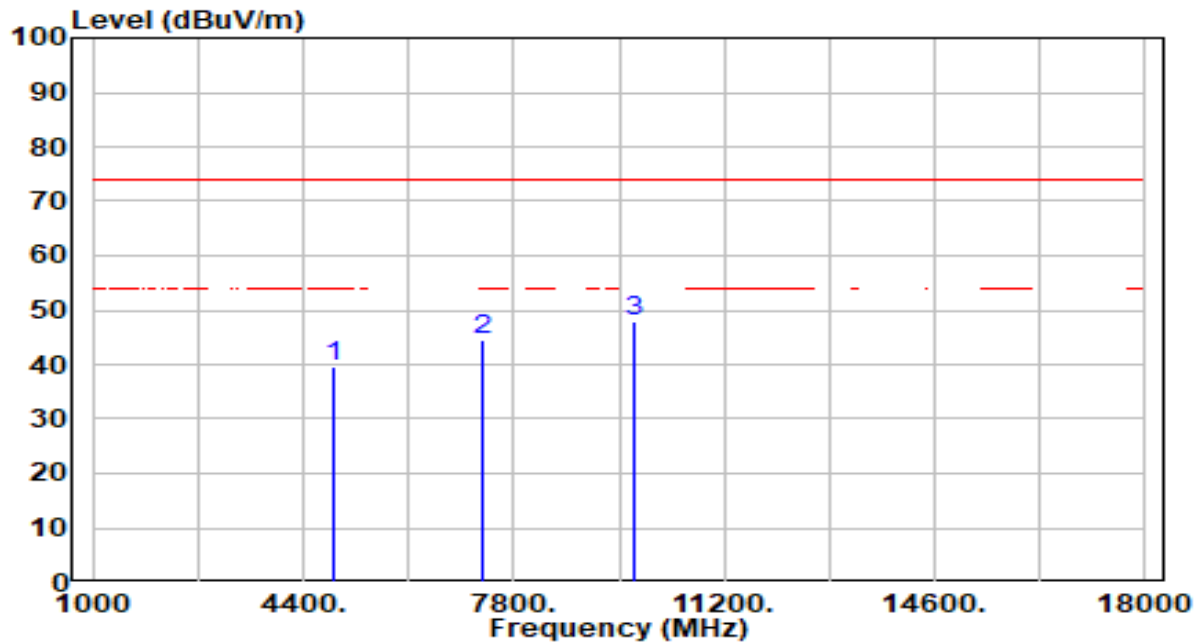


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.95	3.84	39.78	-34.22	74.00	200	144	Peak
2	7311.000	32.48	11.94	44.42	-29.58	74.00	200	215	Peak
3	* 9748.000	31.97	15.95	47.93	-26.07	74.00	200	329	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

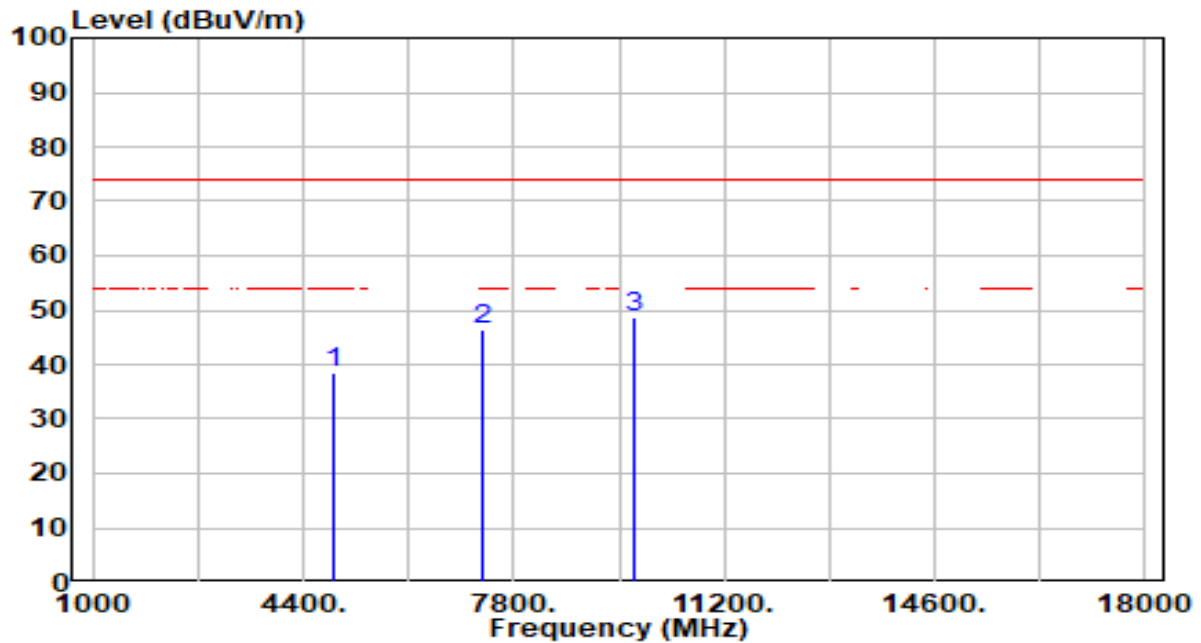


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.75	3.84	38.58	-35.42	74.00	200	209	Peak
2	7311.000	34.34	11.94	46.28	-27.72	74.00	200	10	Peak
3	* 9748.000	32.54	15.95	48.49	-25.51	74.00	200	301	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH_11_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

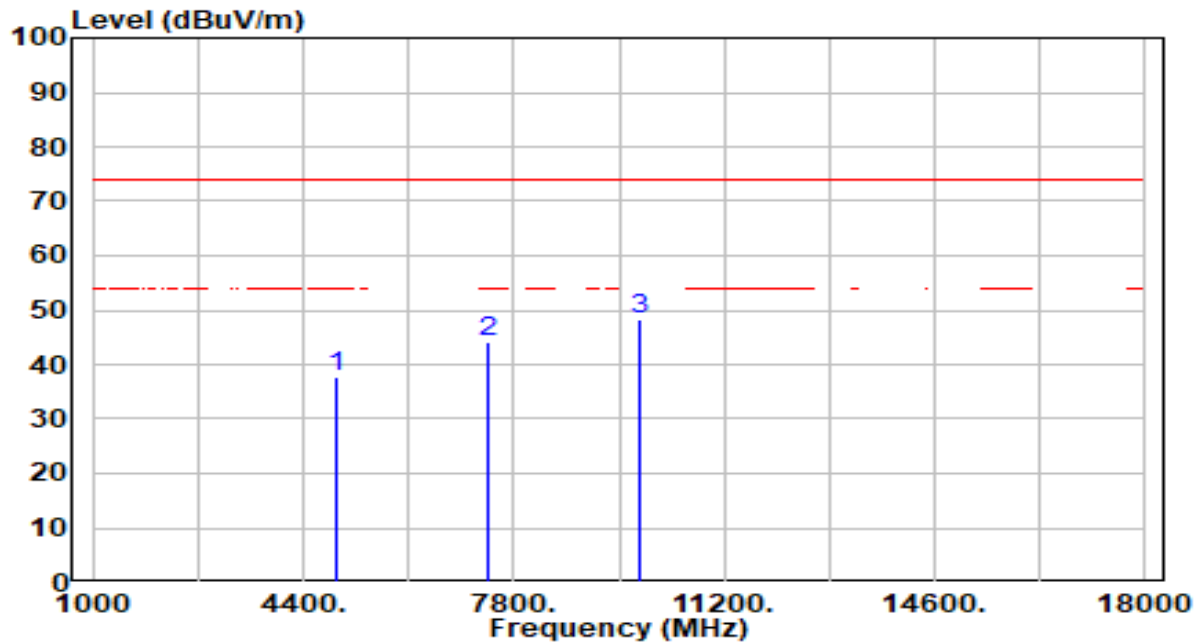


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.93	3.92	37.86	-36.14	74.00	200	80	Peak
2	7386.000	31.81	12.21	44.01	-29.99	74.00	200	190	Peak
3	* 9848.000	32.16	16.14	48.30	-25.70	74.00	200	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH_11_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

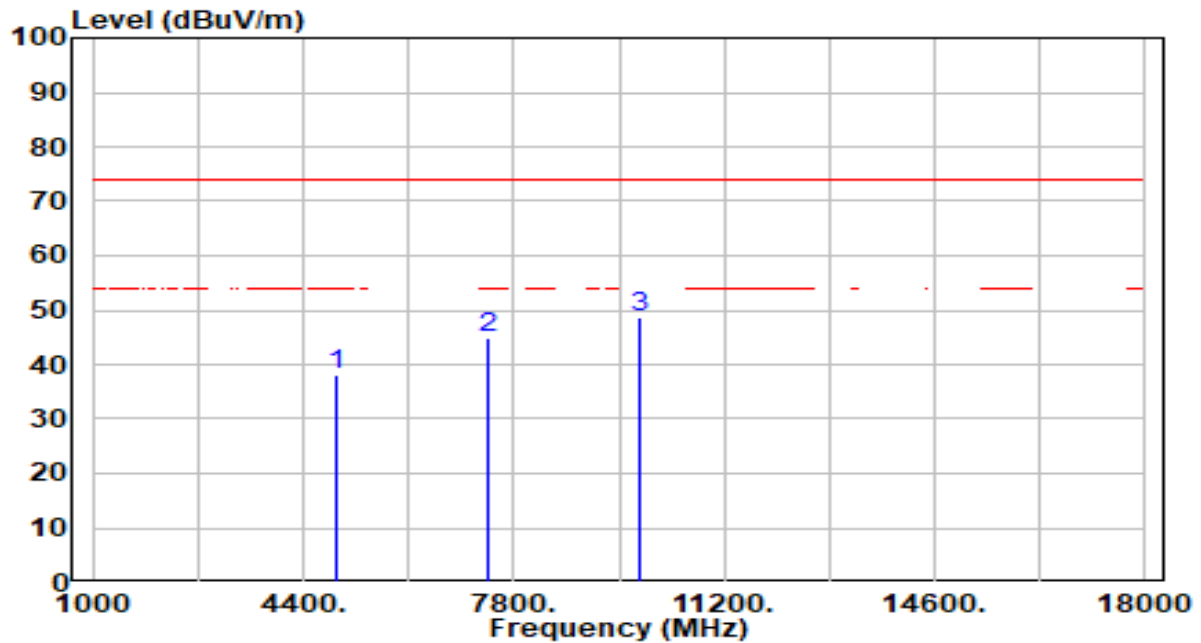


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.32	3.92	38.24	-35.76	74.00	200	0	Peak
2	7386.000	32.58	12.21	44.79	-29.21	74.00	200	245	Peak
3	* 9848.000	32.60	16.14	48.74	-25.26	74.00	200	319	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH_1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

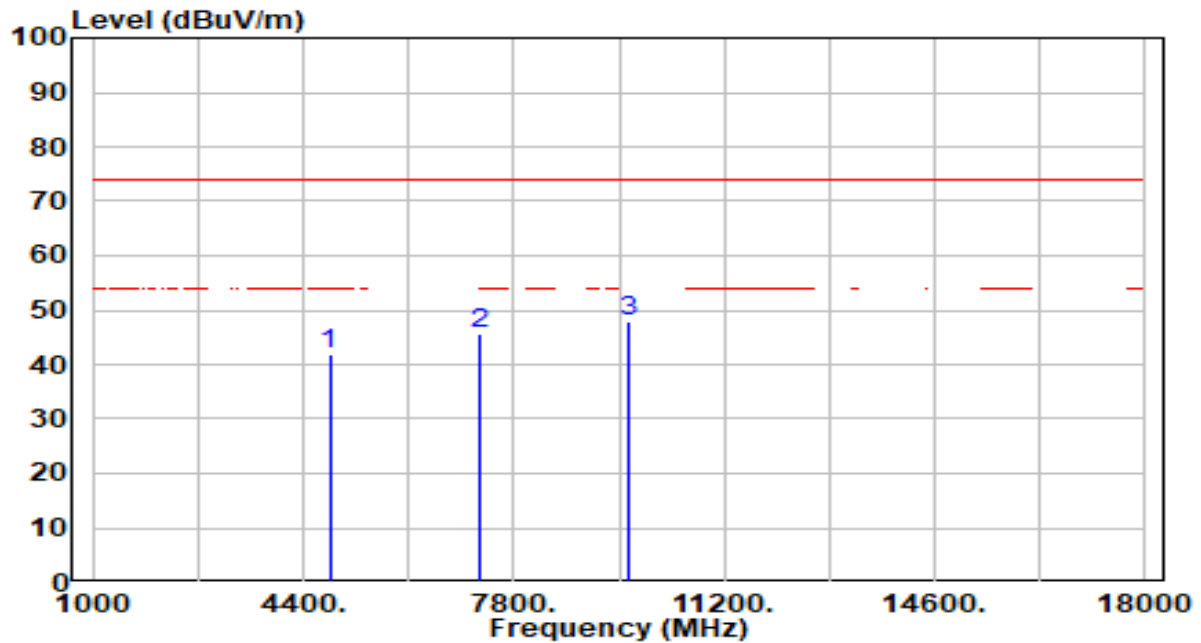


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.96	3.75	41.71	-32.29	74.00	200	126	Peak
2	7236.000	33.96	11.68	45.63	-28.37	74.00	200	176	Peak
3	* 9648.000	32.05	15.77	47.82	-26.18	74.00	200	16	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH_1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

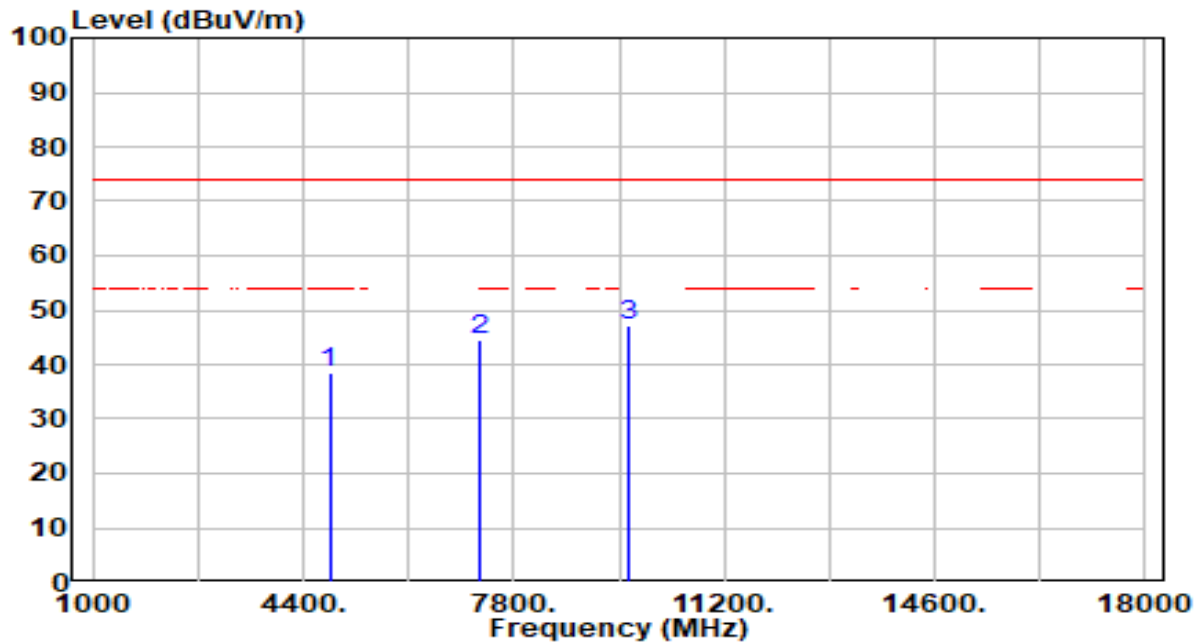


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.70	3.75	38.44	-35.56	74.00	200	294	Peak
2	7236.000	32.77	11.68	44.45	-29.55	74.00	200	181	Peak
3	* 9648.000	31.54	15.77	47.31	-26.69	74.00	200	96	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

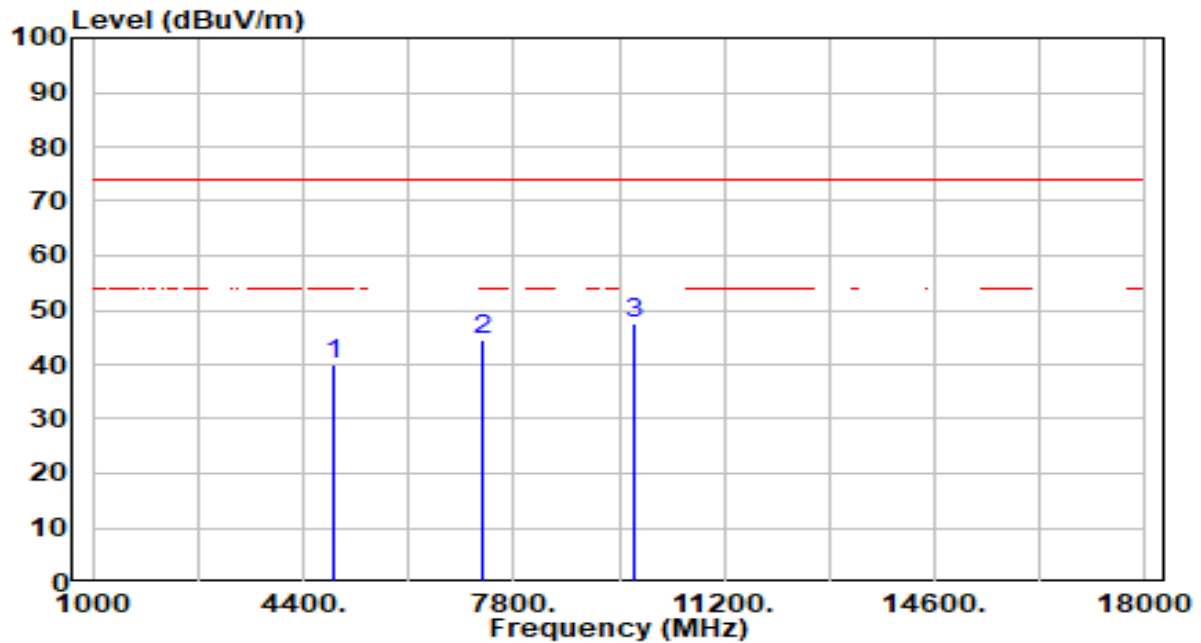


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.23	3.84	40.07	-33.93	74.00	200	222	Peak
2	7311.000	32.51	11.94	44.45	-29.55	74.00	200	218	Peak
3	* 9748.000	31.63	15.95	47.58	-26.42	74.00	200	333	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

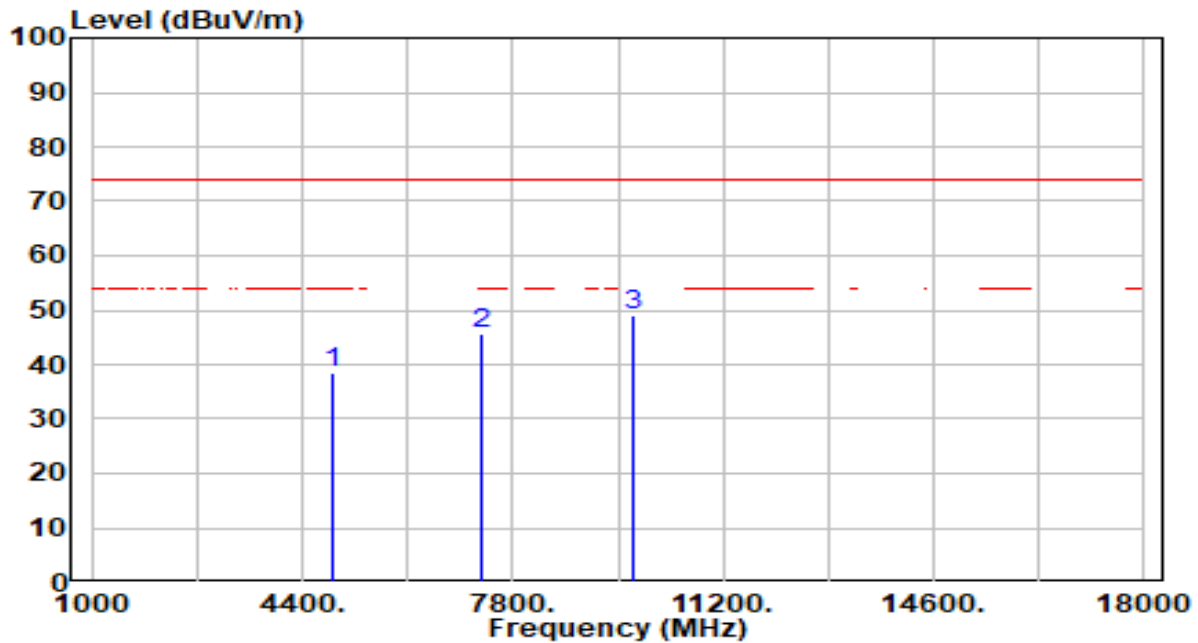


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.80	3.84	38.64	-35.36	74.00	200	234	Peak
2	7311.000	33.54	11.94	45.48	-28.52	74.00	200	241	Peak
3	* 9748.000	32.99	15.95	48.95	-25.05	74.00	200	24	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH_11_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

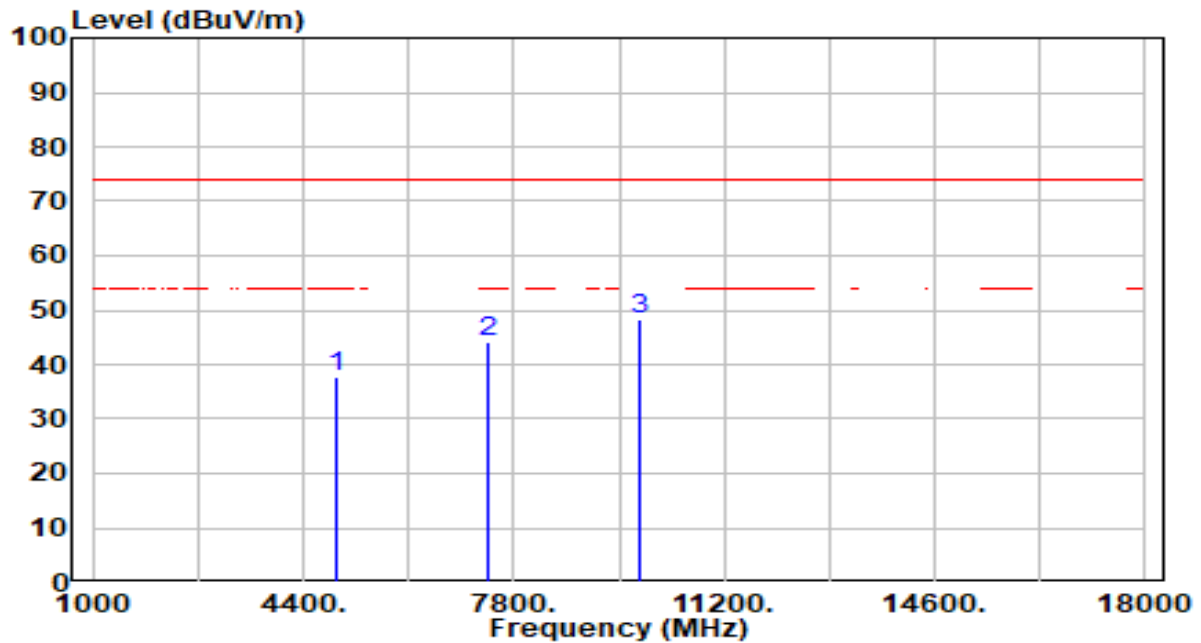


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.85	3.92	37.77	-36.23	74.00	200	267	Peak
2	7386.000	31.88	12.21	44.08	-29.92	74.00	200	348	Peak
3	* 9848.000	32.21	16.14	48.35	-25.65	74.00	200	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH_11_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

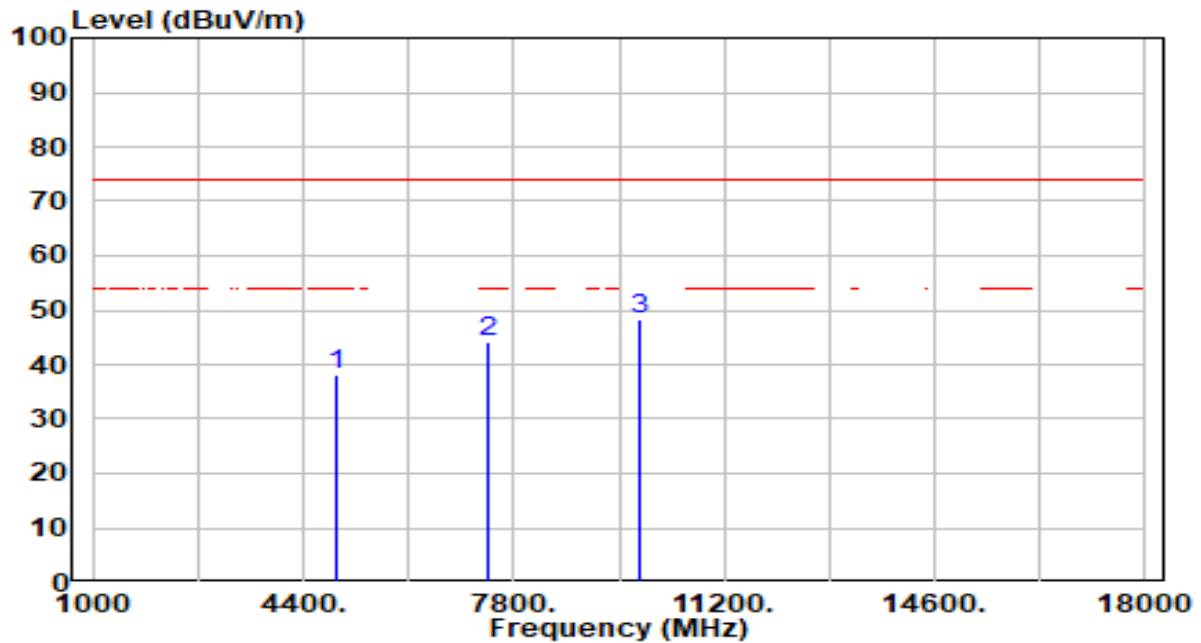


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.27	3.92	38.19	-35.81	74.00	200	181	Peak
2	7386.000	31.94	12.21	44.14	-29.86	74.00	200	138	Peak
3	* 9848.000	32.31	16.14	48.45	-25.55	74.00	200	188	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH_3_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

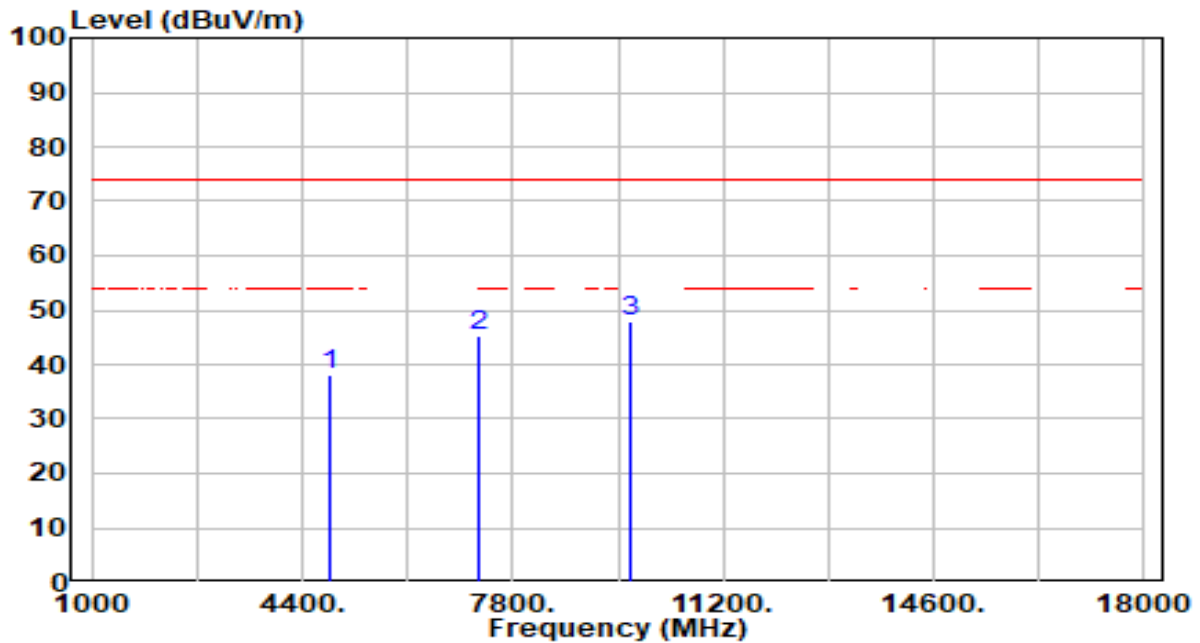


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.49	3.78	38.27	-35.73	74.00	200	138	Peak
2	7266.000	33.54	11.78	45.32	-28.68	74.00	200	130	Peak
3	* 9688.000	31.95	15.84	47.80	-26.20	74.00	200	162	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH_3_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

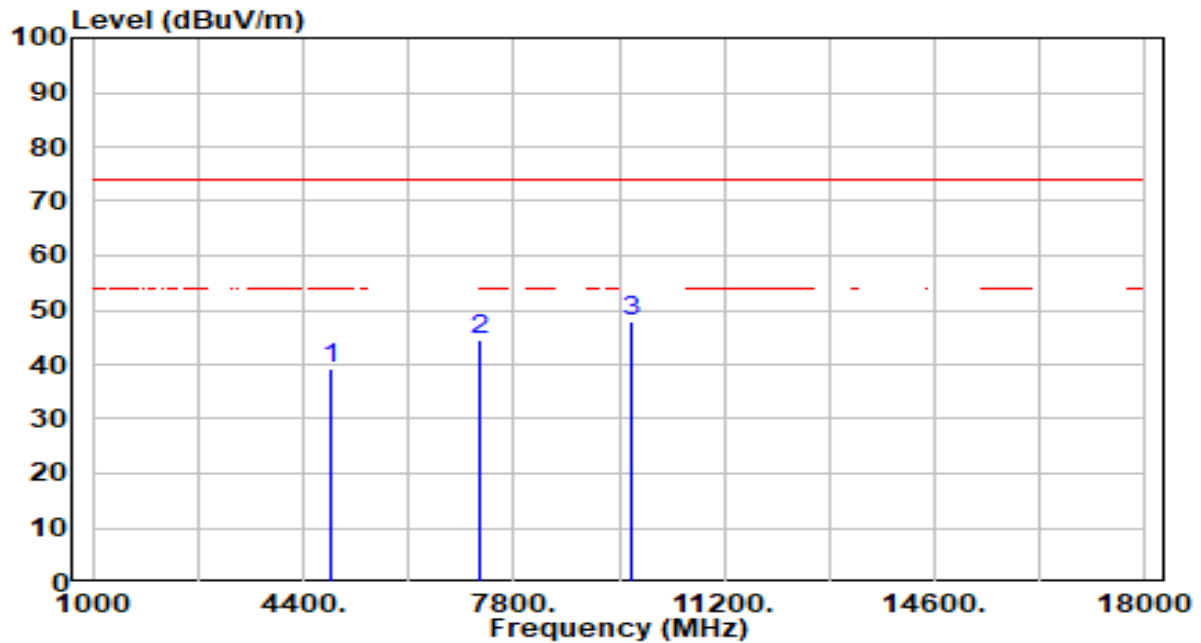


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.39	3.78	39.17	-34.83	74.00	200	261	Peak
2	7266.000	32.92	11.78	44.70	-29.30	74.00	200	70	Peak
3	* 9688.000	31.97	15.84	47.81	-26.19	74.00	200	275	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

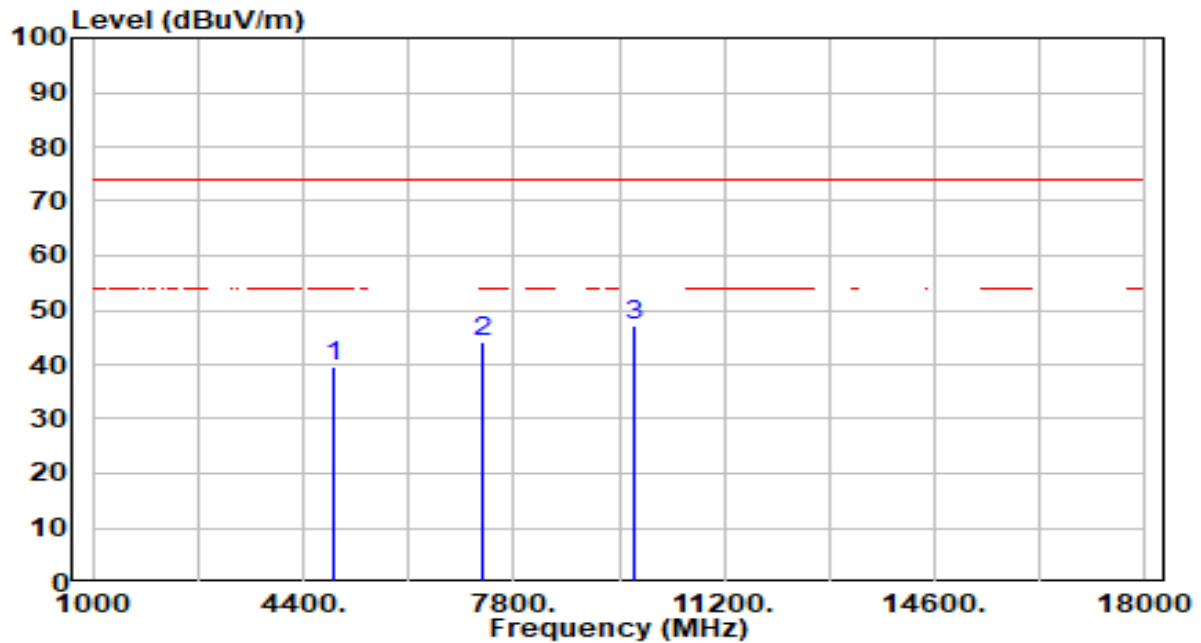


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.63	3.84	39.47	-34.53	74.00	200	327	Peak
2	7311.000	32.13	11.94	44.07	-29.93	74.00	200	31	Peak
3	* 9748.000	31.30	15.95	47.26	-26.74	74.00	200	309	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

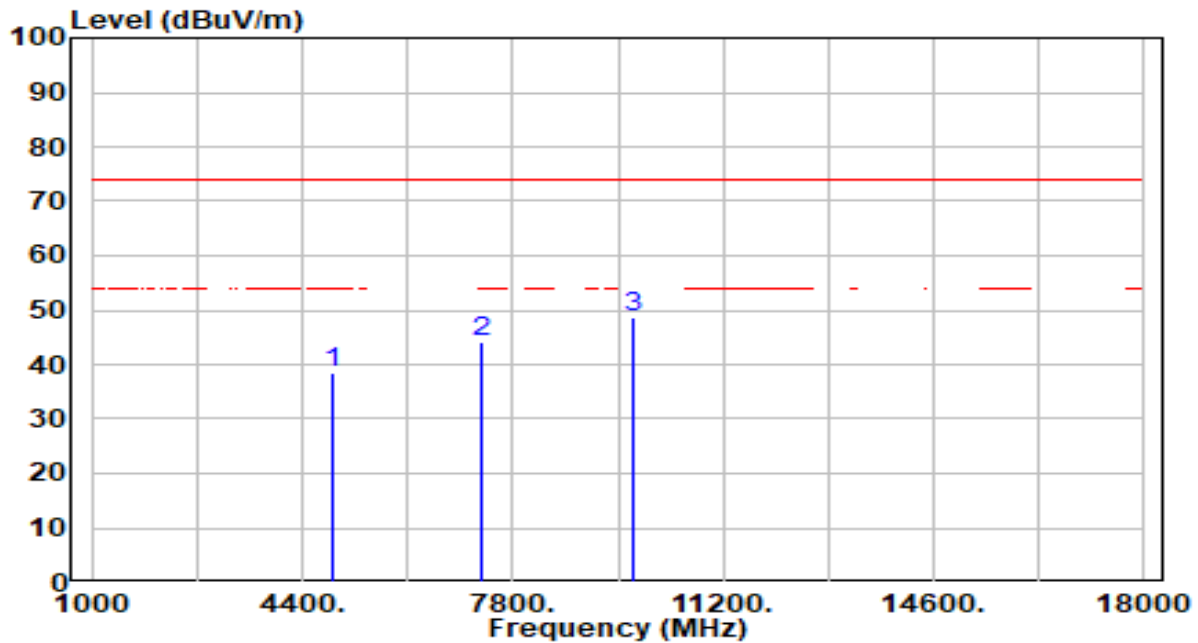


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.62	3.84	38.45	-35.55	74.00	200	333	Peak
2	7311.000	32.28	11.94	44.22	-29.78	74.00	200	178	Peak
3	* 9748.000	32.67	15.95	48.63	-25.37	74.00	200	104	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH_9_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

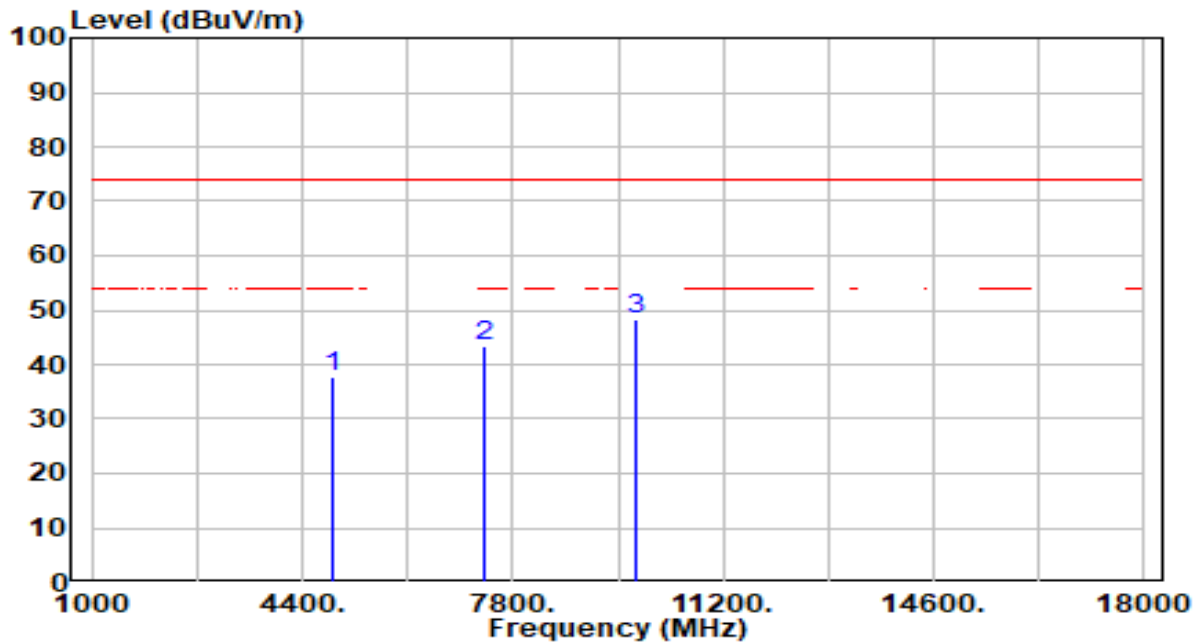


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.72	3.89	37.61	-36.39	74.00	200	346	Peak
2	7356.000	31.24	12.10	43.34	-30.66	74.00	200	147	Peak
3	* 9808.000	32.31	16.06	48.37	-25.63	74.00	200	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH_9_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

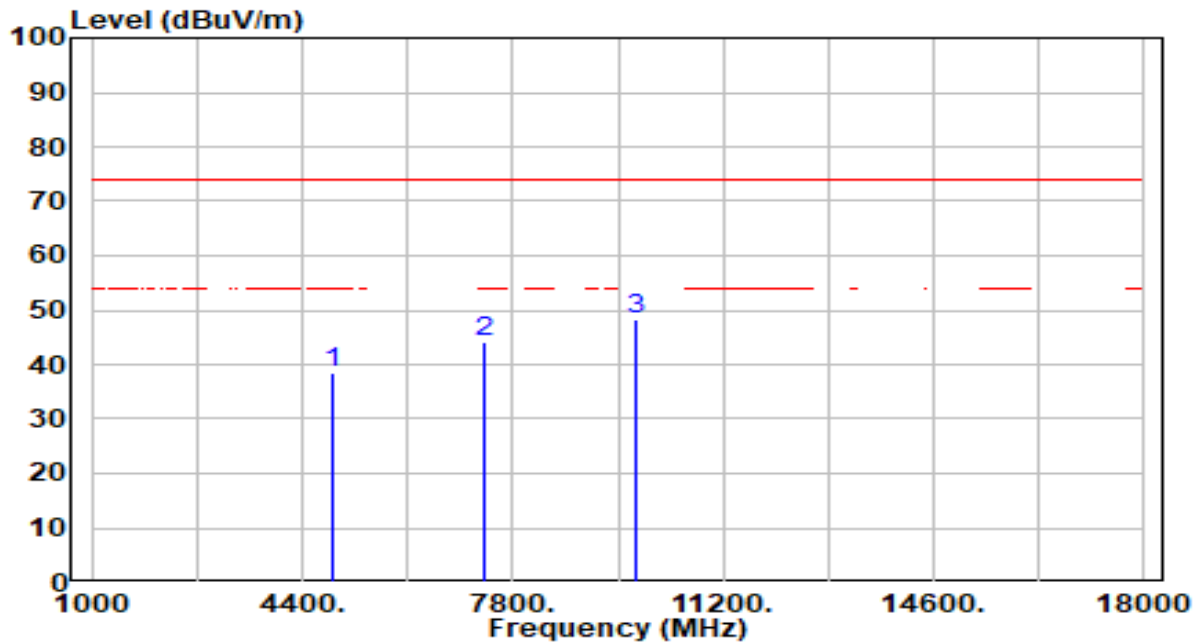


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.75	3.89	38.64	-35.36	74.00	200	175	Peak
2	7356.000	31.87	12.10	43.97	-30.03	74.00	200	309	Peak
3	* 9808.000	32.17	16.06	48.24	-25.76	74.00	200	101	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH_1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

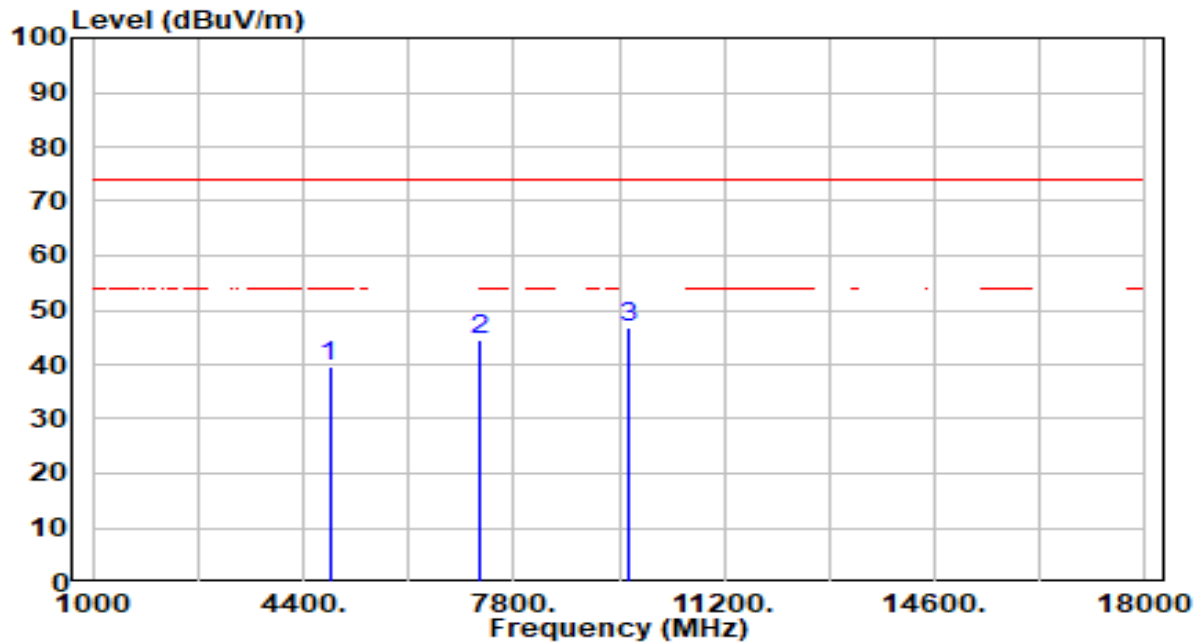


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.84	3.75	39.59	-34.41	74.00	200	134	Peak
2	7236.000	32.98	11.68	44.66	-29.34	74.00	200	268	Peak
3	* 9648.000	31.11	15.77	46.88	-27.12	74.00	200	289	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH_1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

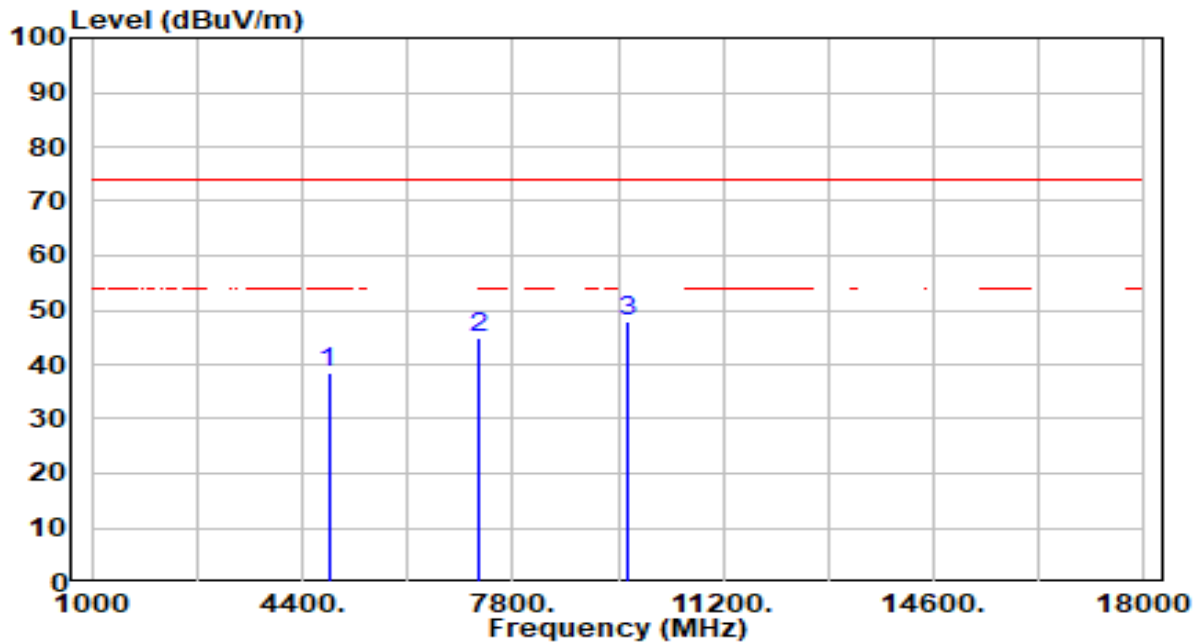


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.65	3.75	38.40	-35.60	74.00	200	230	Peak
2	7236.000	33.38	11.68	45.05	-28.95	74.00	200	280	Peak
3	* 9648.000	32.07	15.77	47.84	-26.16	74.00	200	61	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

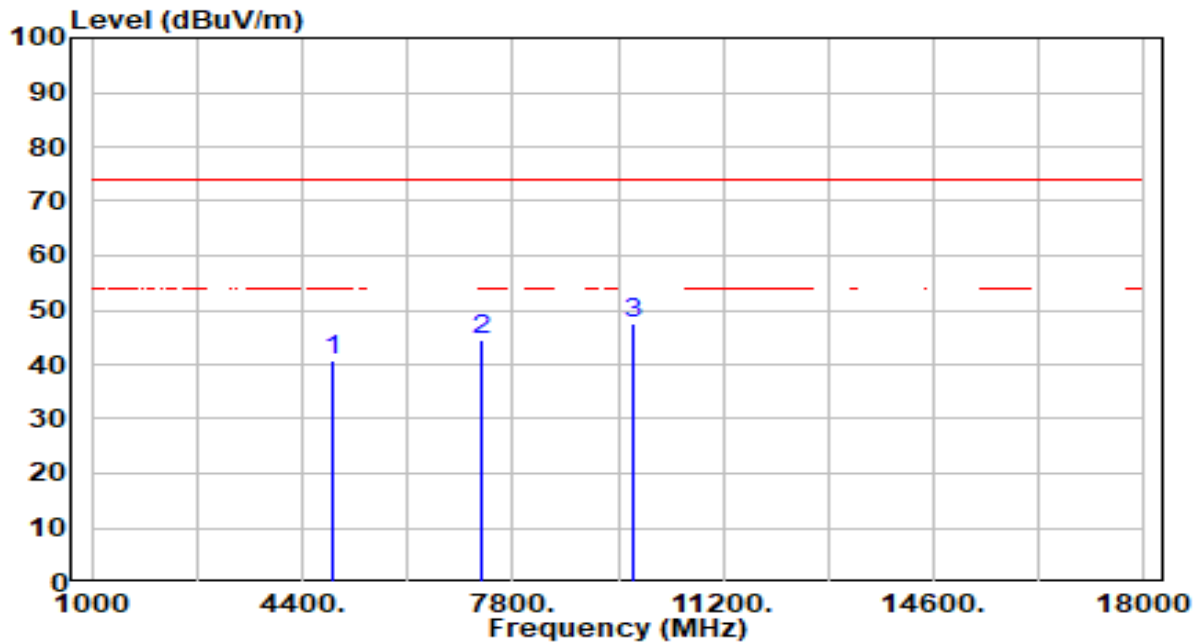


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.90	3.84	40.73	-33.27	74.00	200	144	Peak
2	7311.000	32.77	11.94	44.71	-29.29	74.00	200	16	Peak
3	* 9748.000	31.41	15.95	47.36	-26.64	74.00	200	190	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

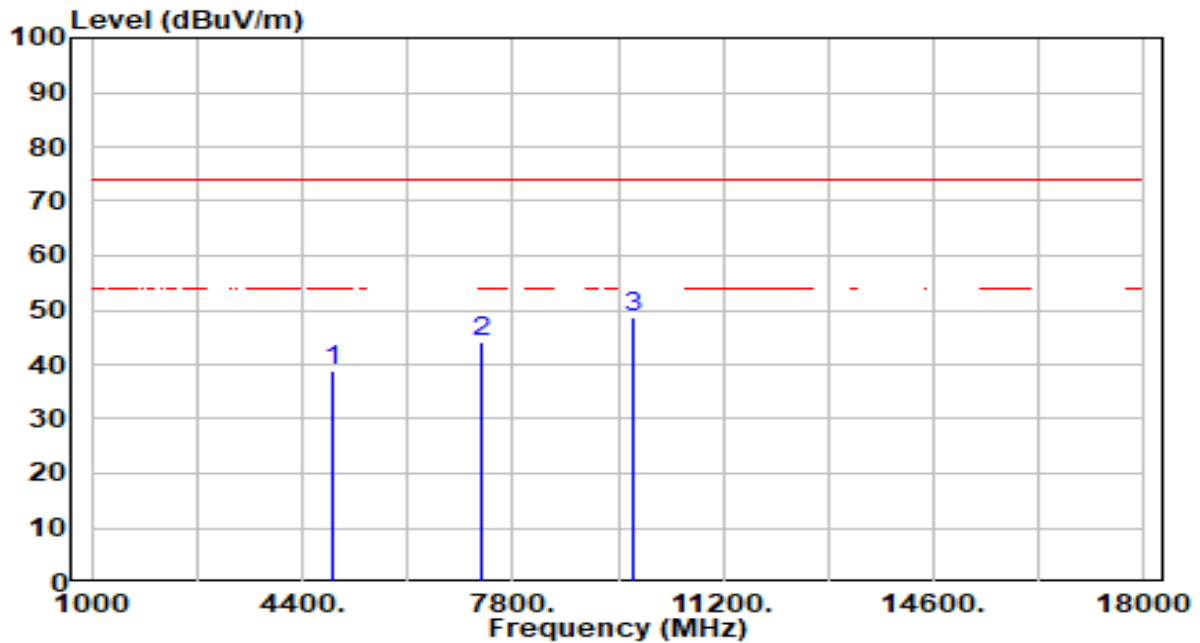


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.98	3.84	38.82	-35.18	74.00	200	360	Peak
2	7311.000	32.13	11.94	44.07	-29.93	74.00	200	146	Peak
3	* 9748.000	32.71	15.95	48.67	-25.33	74.00	200	316	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH_11_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

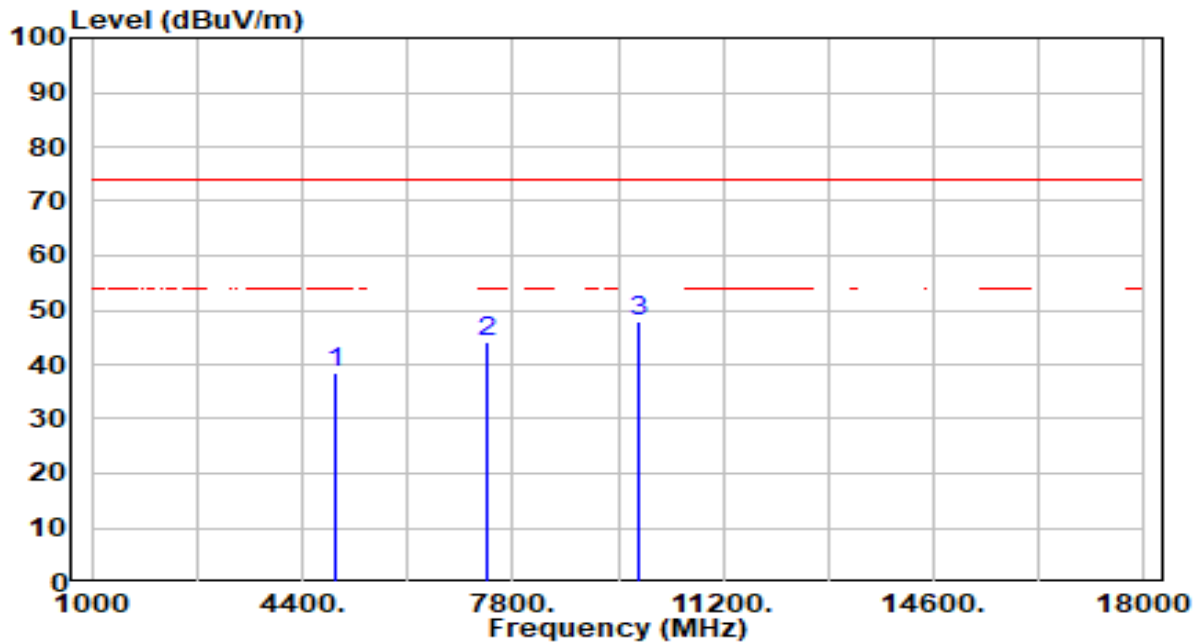


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.41	3.92	38.34	-35.66	74.00	200	268	Peak
2	7386.000	31.92	12.21	44.13	-29.87	74.00	200	322	Peak
3	* 9848.000	31.77	16.14	47.91	-26.09	74.00	200	293	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH_11_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

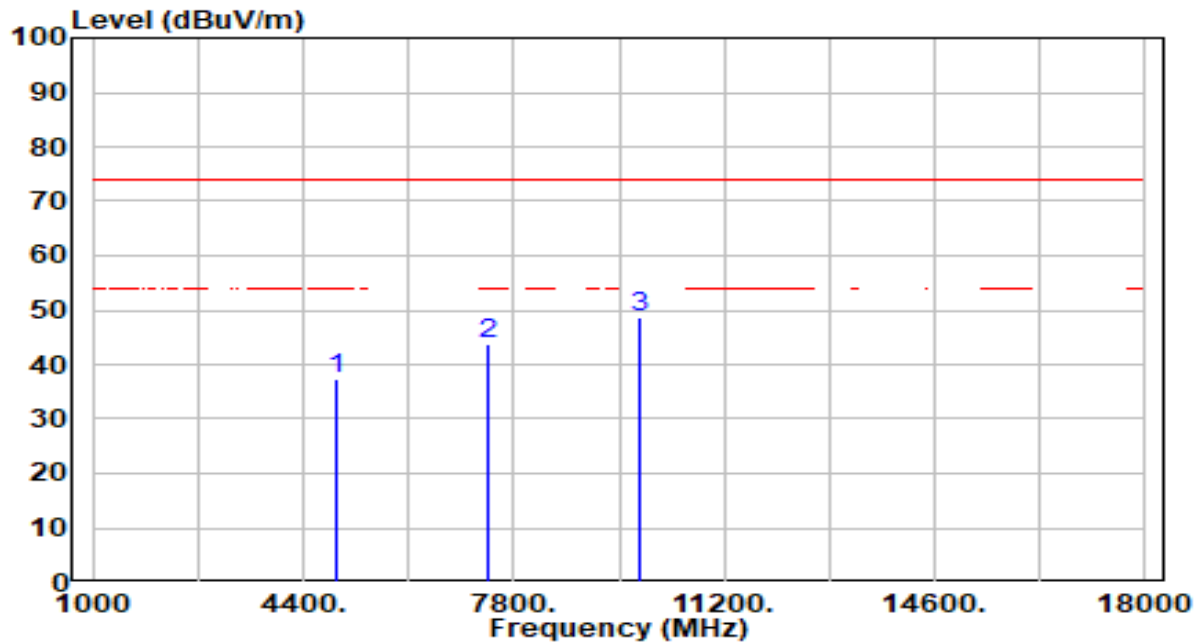


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.59	3.92	37.51	-36.49	74.00	200	336	Peak
2	7386.000	31.66	12.21	43.87	-30.13	74.00	200	343	Peak
3	* 9848.000	32.47	16.14	48.61	-25.39	74.00	200	214	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH_3_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

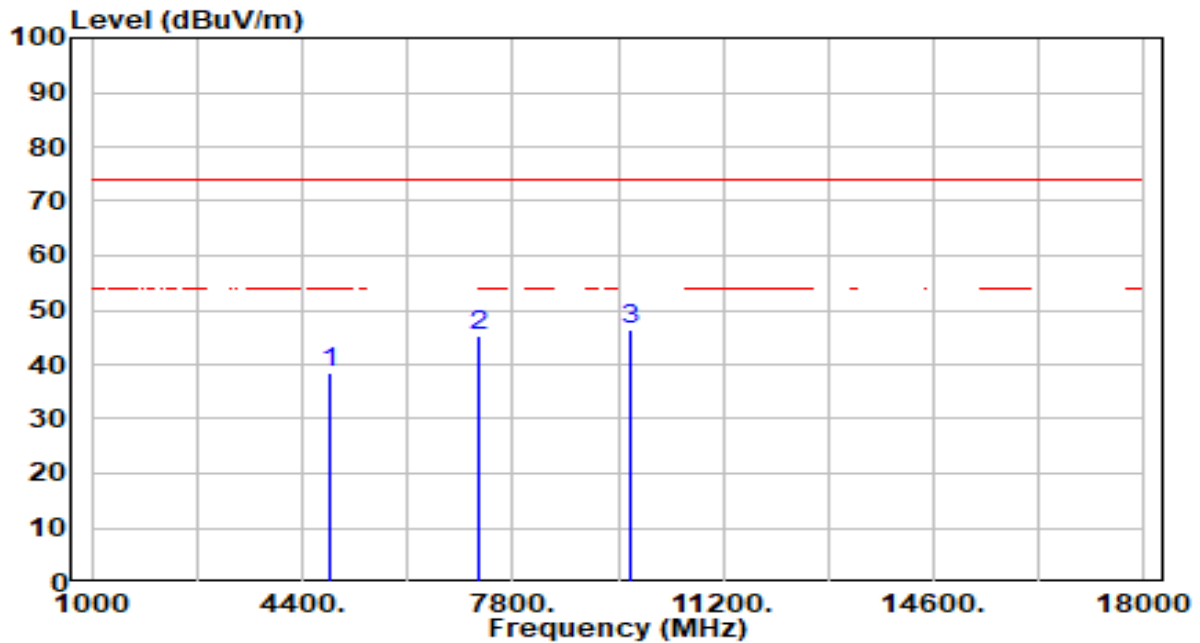


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.85	3.78	38.63	-35.37	74.00	200	120	Peak
2	7266.000	33.55	11.78	45.33	-28.67	74.00	200	316	Peak
3	* 9688.000	30.70	15.84	46.54	-27.46	74.00	200	27	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH_3_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

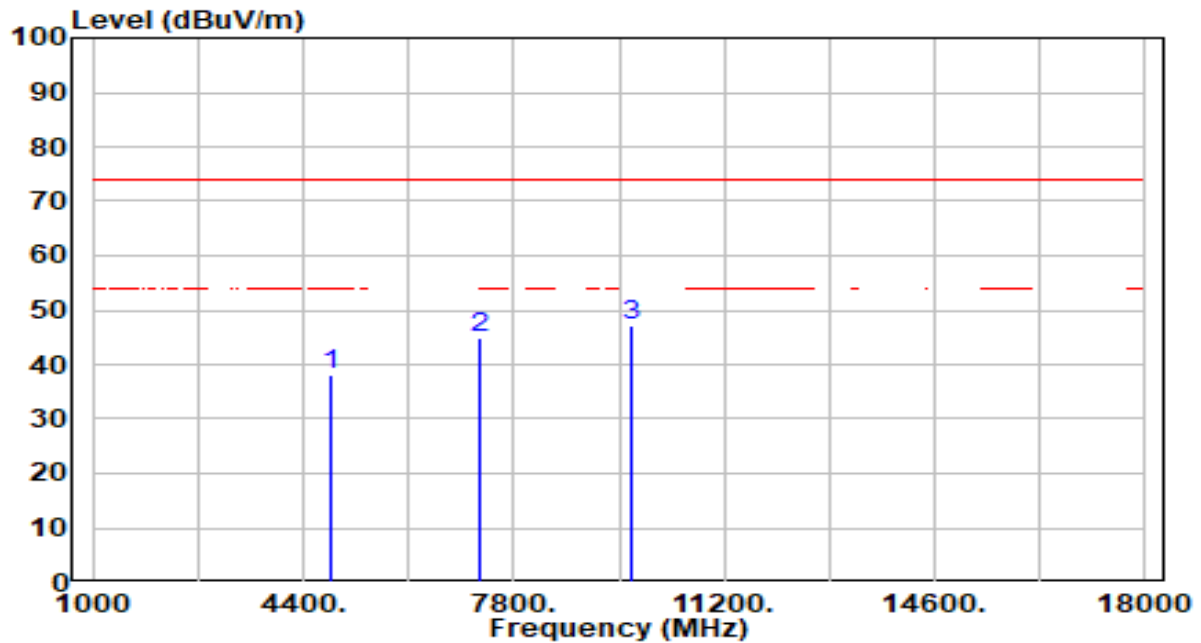


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.41	3.78	38.19	-35.81	74.00	200	10	Peak
2	7266.000	33.02	11.78	44.80	-29.20	74.00	200	276	Peak
3	* 9688.000	31.42	15.84	47.27	-26.73	74.00	200	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

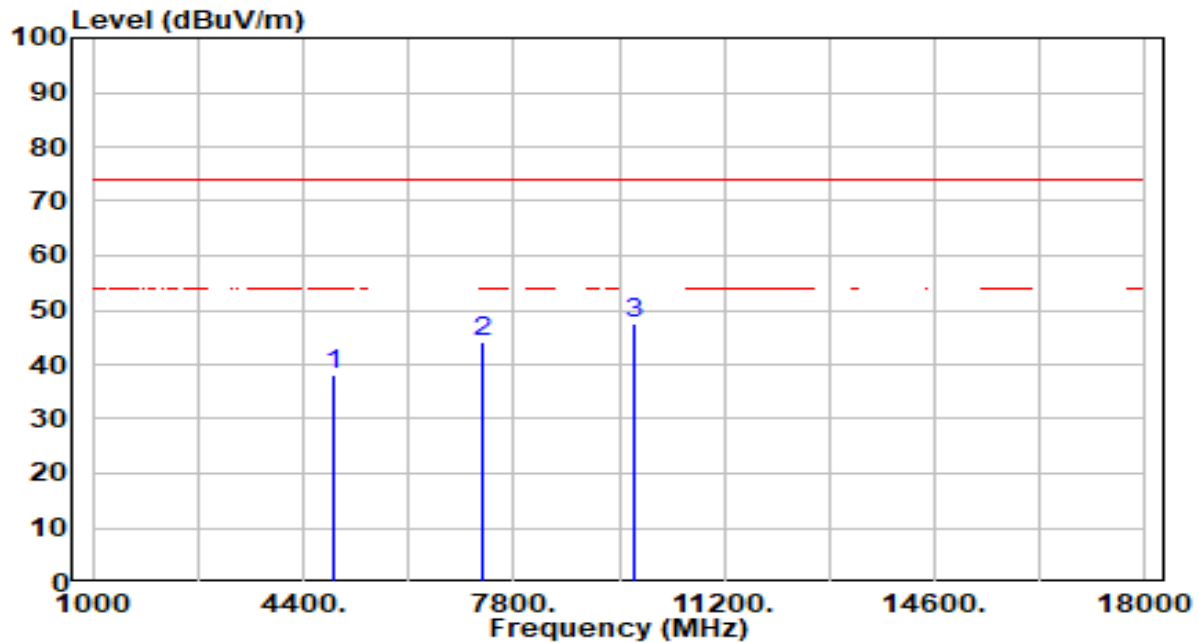


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.17	3.84	38.01	-35.99	74.00	200	3	Peak
2	7311.000	32.31	11.94	44.25	-29.75	74.00	200	133	Peak
3	* 9748.000	31.58	15.95	47.53	-26.47	74.00	200	242	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH_6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

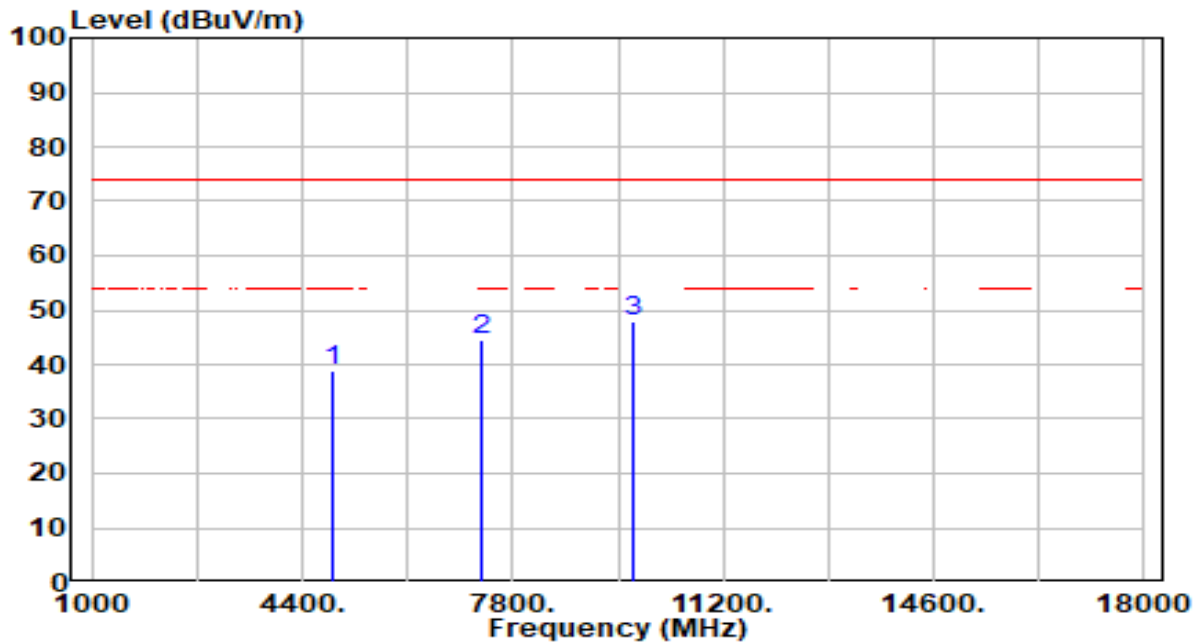


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.85	3.84	38.68	-35.32	74.00	200	344	Peak
2	7311.000	32.61	11.94	44.55	-29.45	74.00	200	113	Peak
3	* 9748.000	31.98	15.95	47.93	-26.07	74.00	200	226	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH_9_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

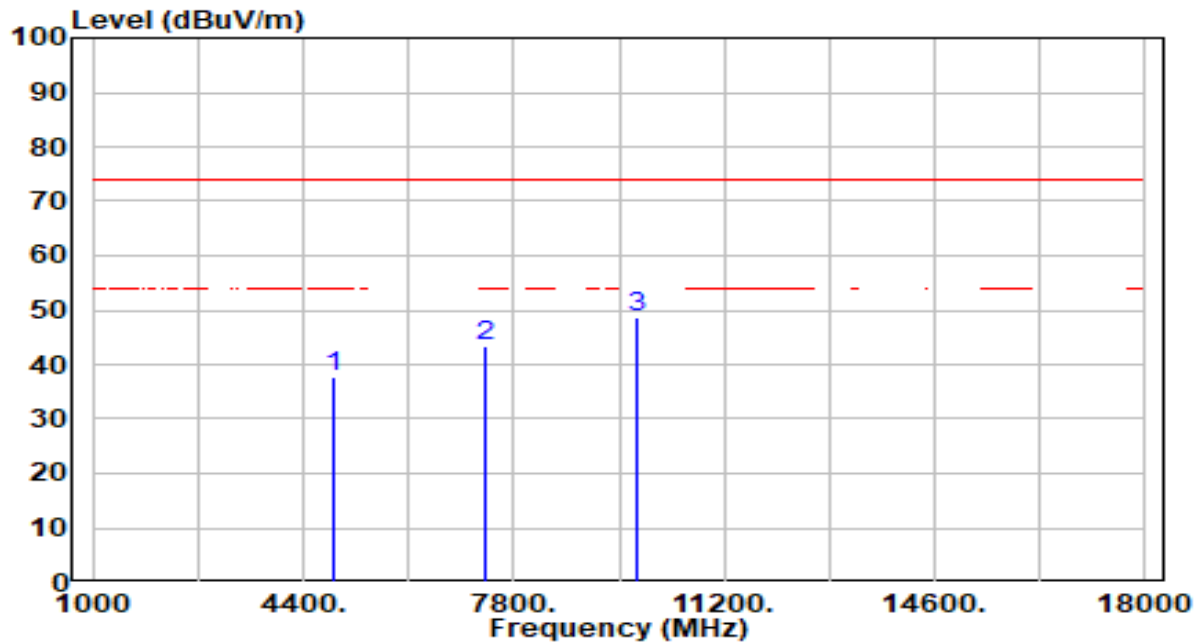


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.72	3.89	37.61	-36.39	74.00	200	137	Peak
2	7356.000	31.20	12.10	43.30	-30.70	74.00	200	310	Peak
3	* 9808.000	32.52	16.06	48.58	-25.42	74.00	200	34	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH_9_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

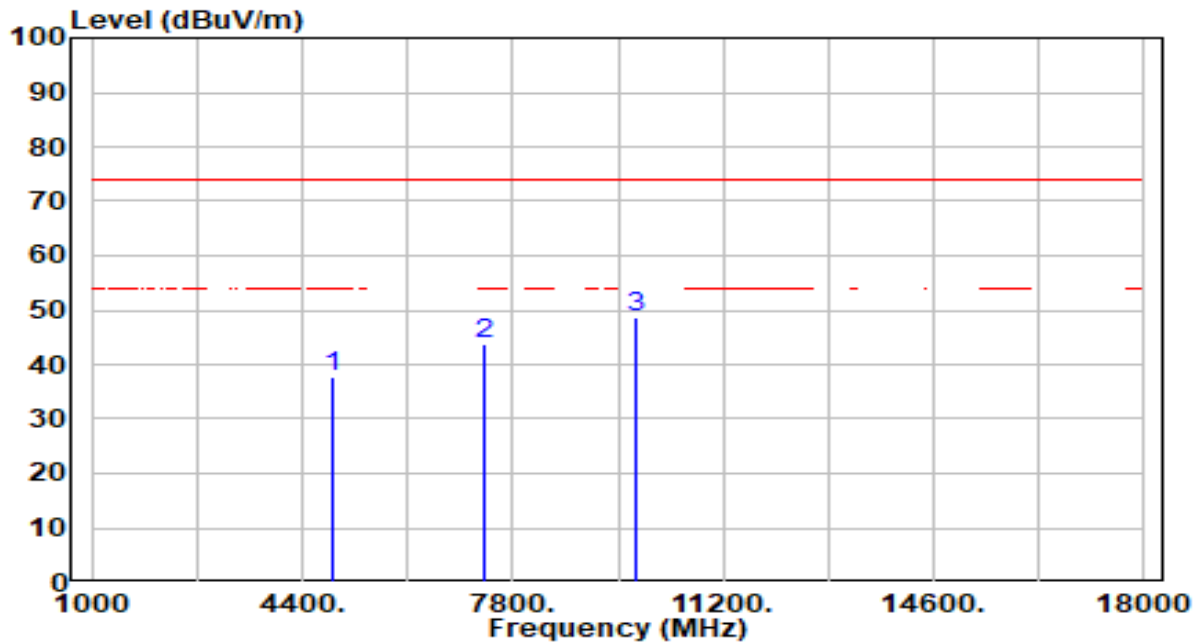


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.92	3.89	37.81	-36.19	74.00	200	100	Peak
2	7356.000	31.68	12.10	43.78	-30.22	74.00	200	86	Peak
3	* 9808.000	32.62	16.06	48.69	-25.31	74.00	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

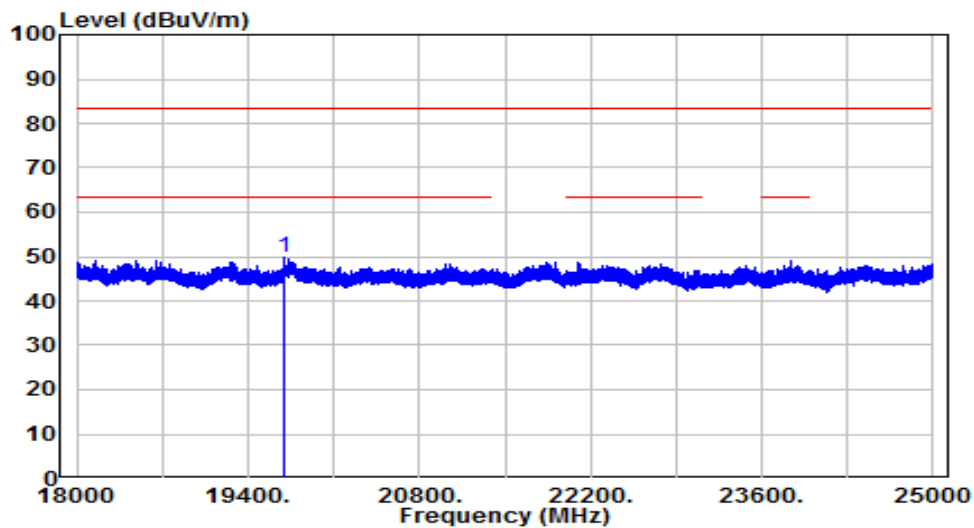


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	19699.470	38.94	10.94	49.88	-33.62	83.50	150	302	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

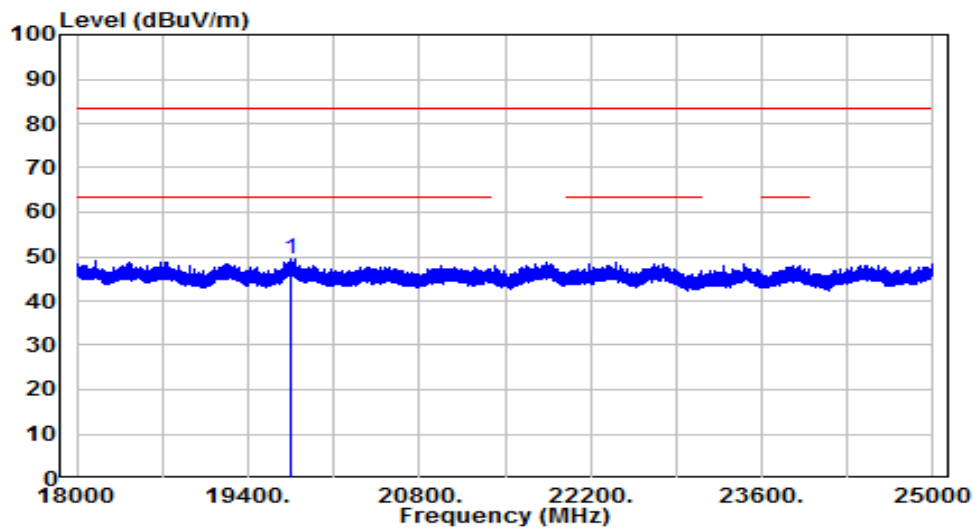


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	19753.940	38.53	10.95	49.48	-34.02	83.50	150	128	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

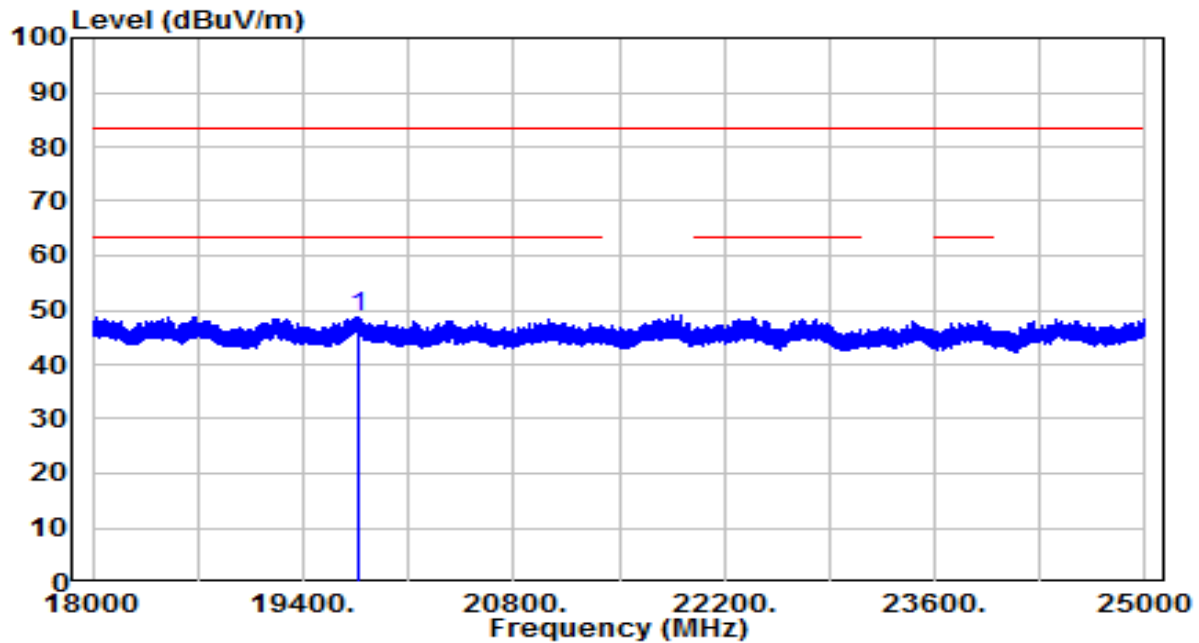


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	19772.090	37.78	10.95	48.73	-34.77	83.50	150	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-25
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

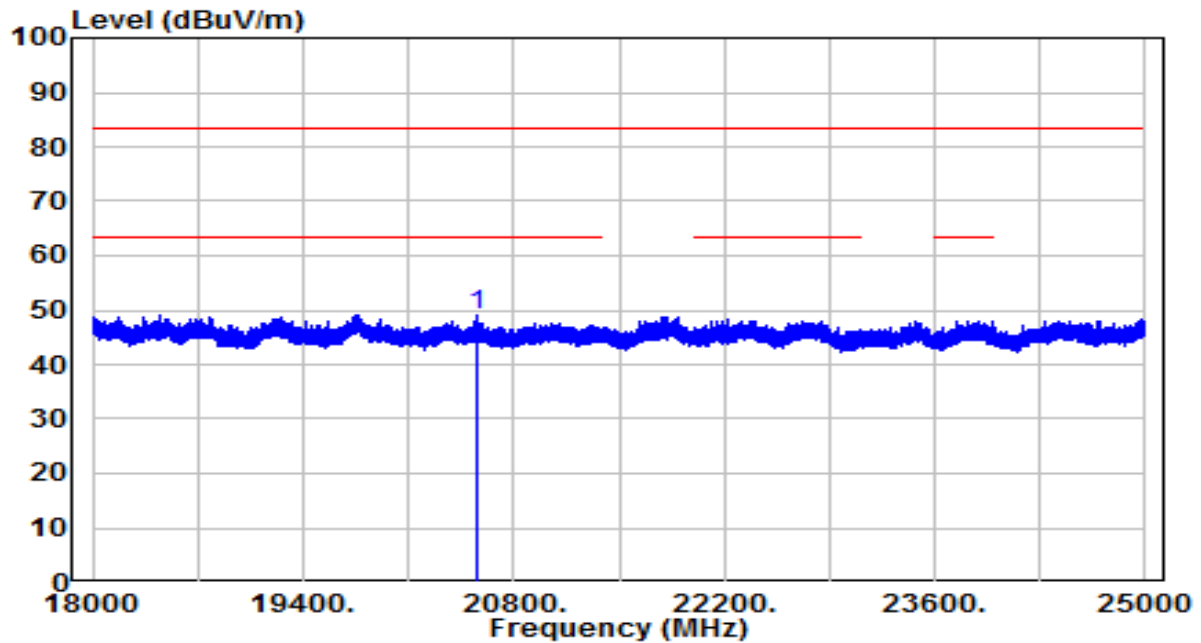

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20553.910	38.16	10.74	48.89	-34.61	83.50	150	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

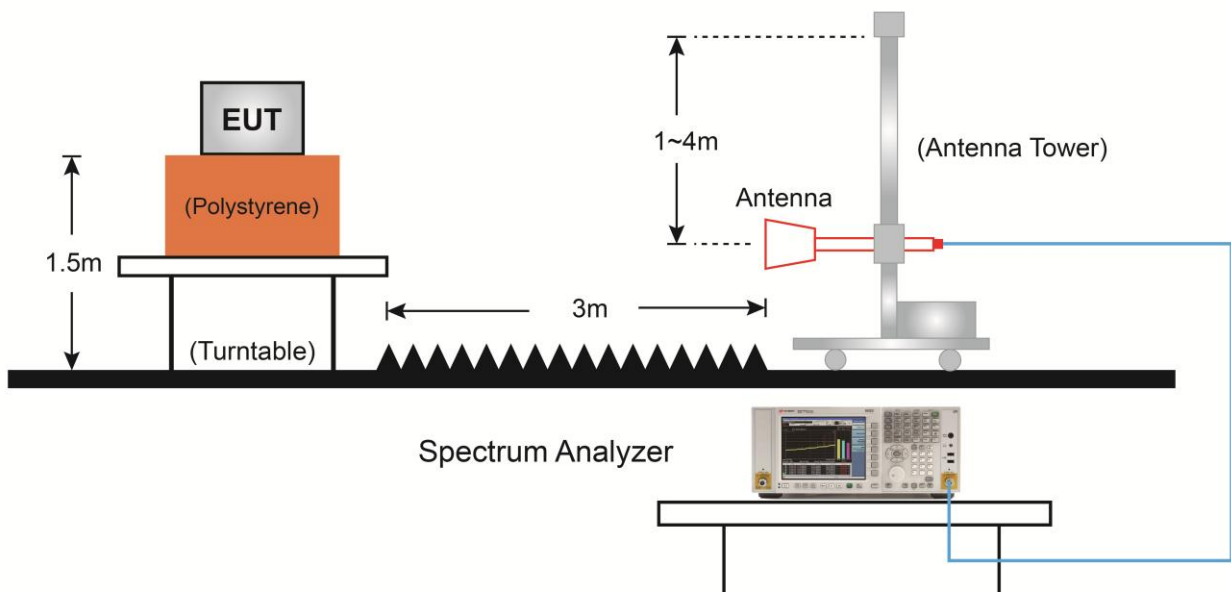7.7.4.Test Setup

7.7.5.Test Result

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

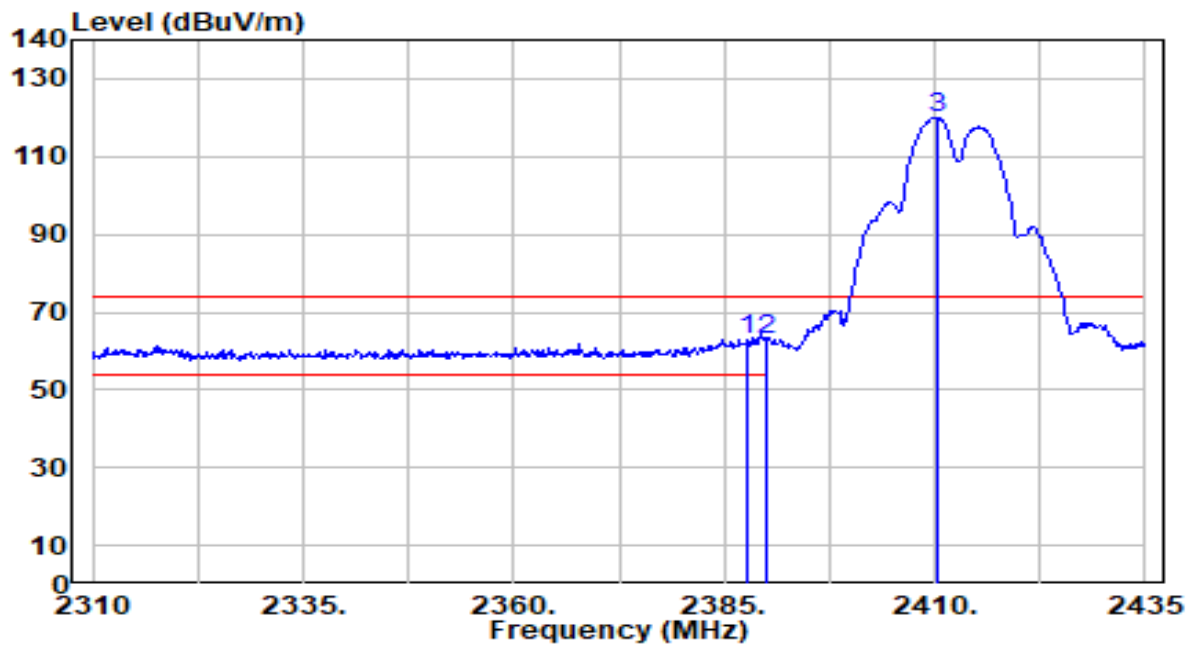


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	30.76	31.94	62.70	-11.30	74.00	190	150	Peak
2	* 2390.000	30.87	31.95	62.82	-11.18	74.00	190	150	Peak
3	2410.250	88.08	32.02	120.10	N/A	N/A	190	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

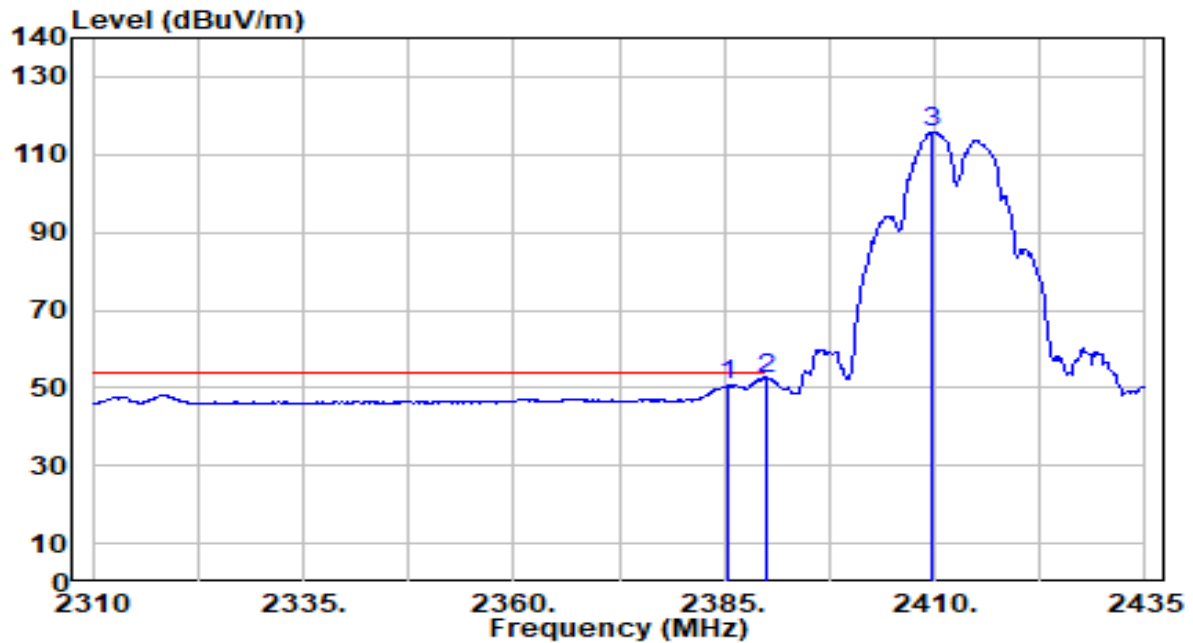


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.500	18.80	31.93	50.73	-3.27	54.00	190	150	Average
2	*	2390.000	20.60	31.95	52.55	-1.45	54.00	190	150	Average
3		2409.750	83.86	32.02	115.88	N/A	N/A	190	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

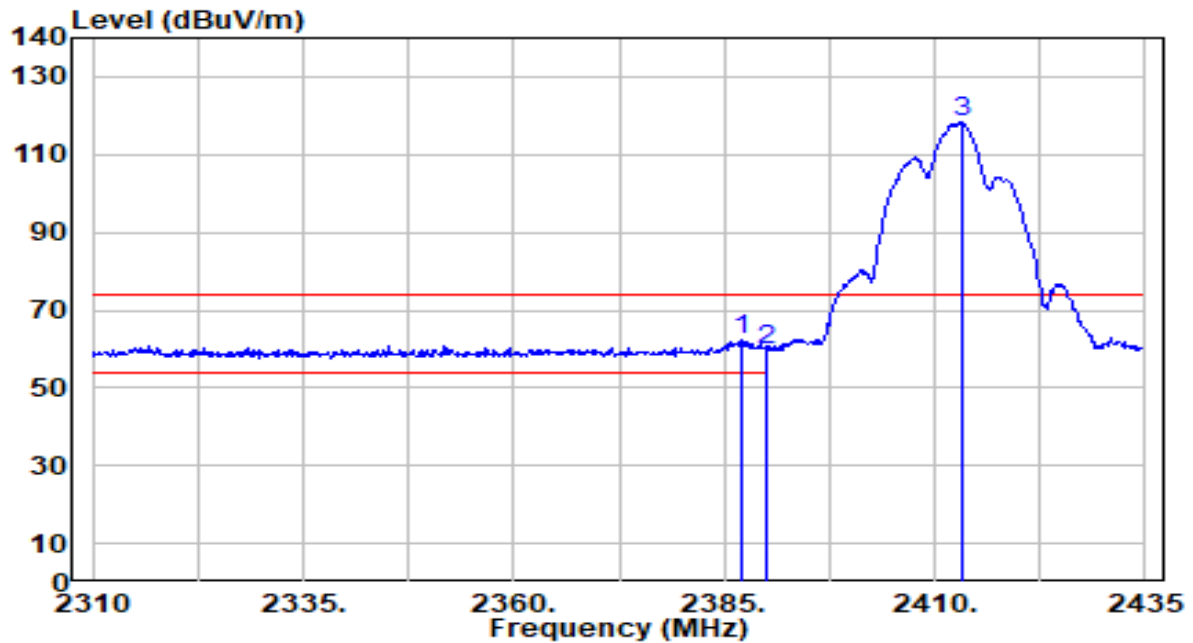


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	30.22	31.94	62.15	-11.85	74.00	200	160	Peak
2		2390.000	27.87	31.95	59.82	-14.18	74.00	200	160	Peak
3		2413.125	86.14	32.04	118.18	N/A	N/A	200	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

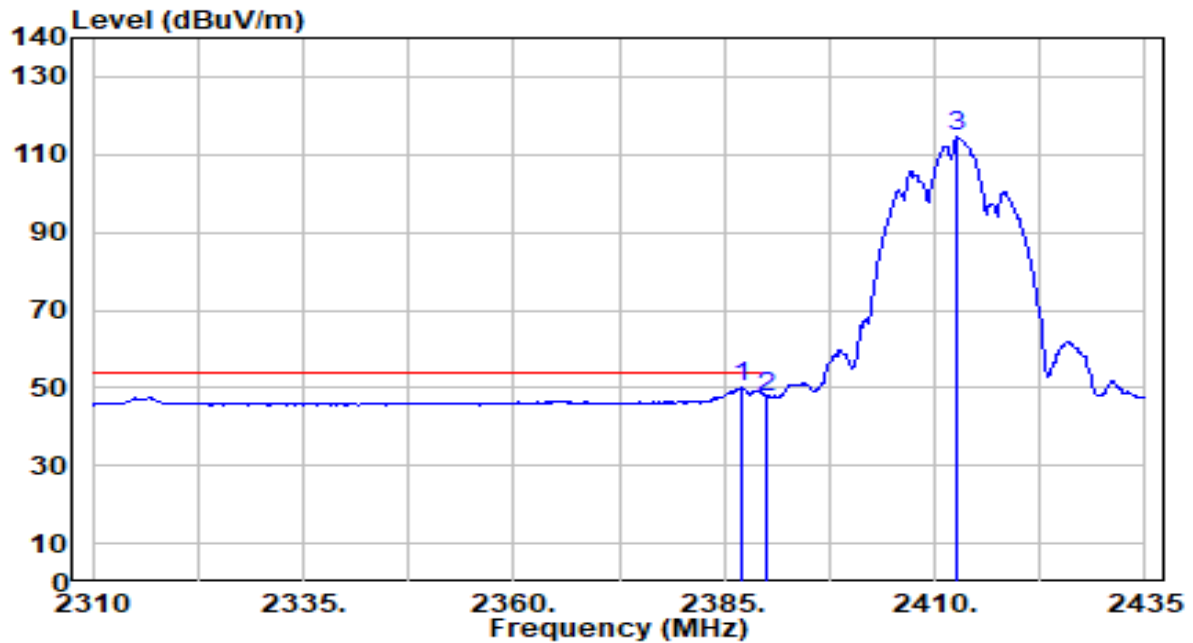


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.125	18.03	31.94	49.97	-4.03	54.00	200	160	Average
2		2390.000	15.80	31.95	47.75	-6.25	54.00	200	160	Average
3		2412.750	82.56	32.03	114.60	N/A	N/A	200	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

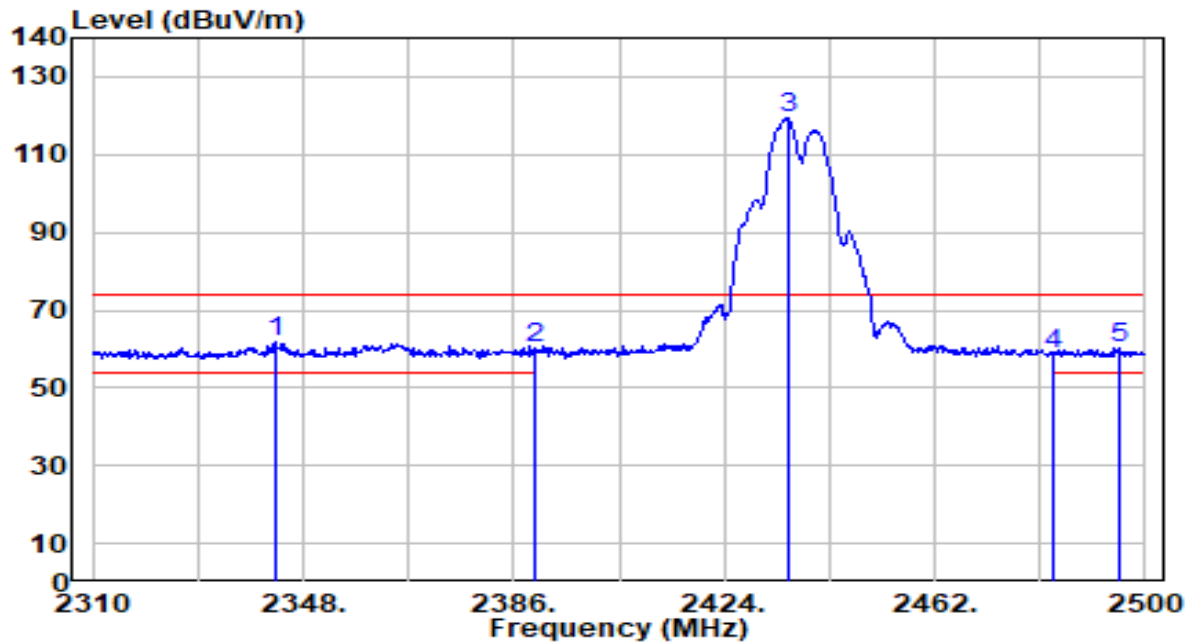


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2342.870	30.06	31.77	61.84	-12.16	74.00	210	150	Peak
2		2390.000	28.05	31.95	60.00	-14.00	74.00	210	150	Peak
3		2435.400	87.06	32.12	119.18	N/A	N/A	210	150	Peak
4		2483.500	26.43	32.30	58.72	-15.28	74.00	210	150	Peak
5		2495.440	27.64	32.34	59.98	-14.02	74.00	210	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

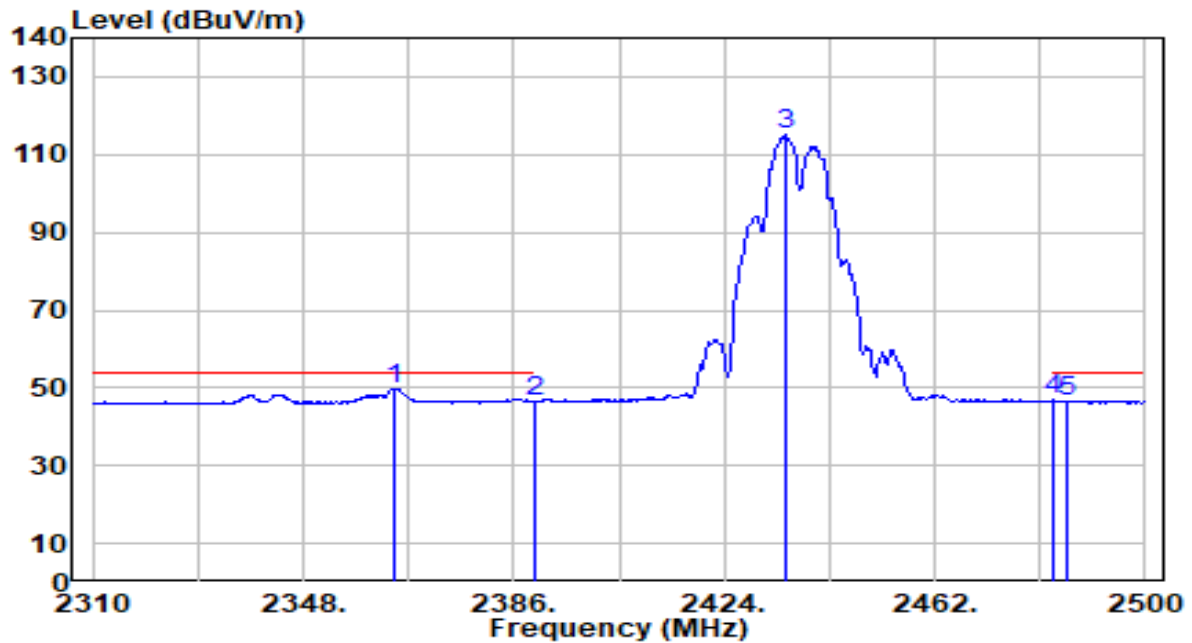


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2364.530	18.02	31.85	49.87	-4.13	54.00	210	150	Average
2		2390.000	14.64	31.95	46.59	-7.41	54.00	210	150	Average
3		2435.020	83.17	32.12	115.29	N/A	N/A	210	150	Average
4		2483.500	14.48	32.30	46.77	-7.23	54.00	210	150	Average
5		2485.750	14.38	32.31	46.68	-7.32	54.00	210	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

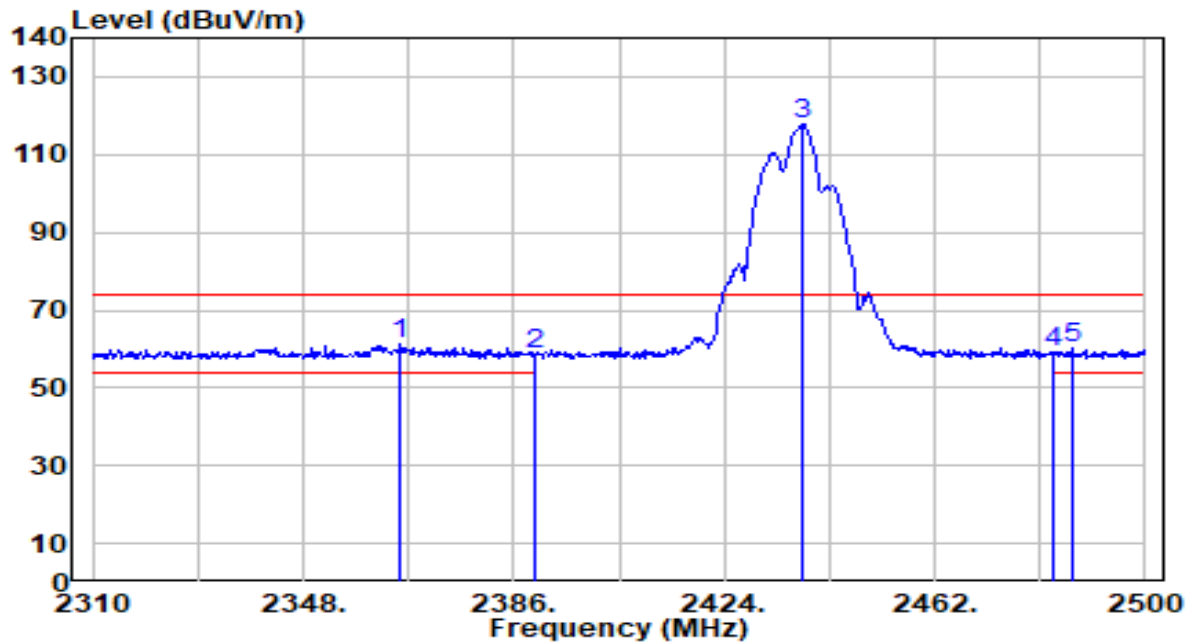


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2365.480	29.46	31.86	61.32	-12.68	74.00	220	210	Peak
2		2390.000	26.83	31.95	58.78	-15.22	74.00	220	210	Peak
3		2438.060	85.53	32.13	117.65	N/A	N/A	220	210	Peak
4		2483.500	26.65	32.30	58.95	-15.05	74.00	220	210	Peak
5		2487.080	27.99	32.31	60.31	-13.69	74.00	220	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

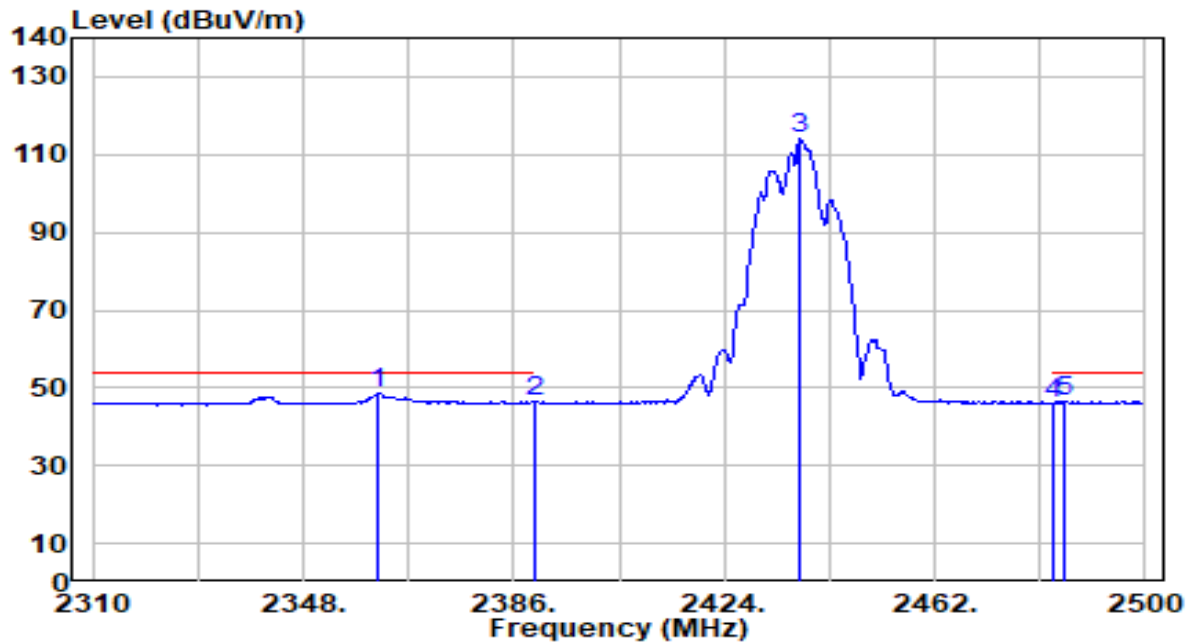


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2361.680	16.59	31.84	48.43	-5.57	54.00	220	210	Average
2		2390.000	14.37	31.95	46.32	-7.68	54.00	220	210	Average
3		2437.680	81.76	32.13	113.89	N/A	N/A	220	210	Average
4		2483.500	13.79	32.30	46.09	-7.91	54.00	220	210	Average
5		2485.370	14.20	32.31	46.50	-7.50	54.00	220	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

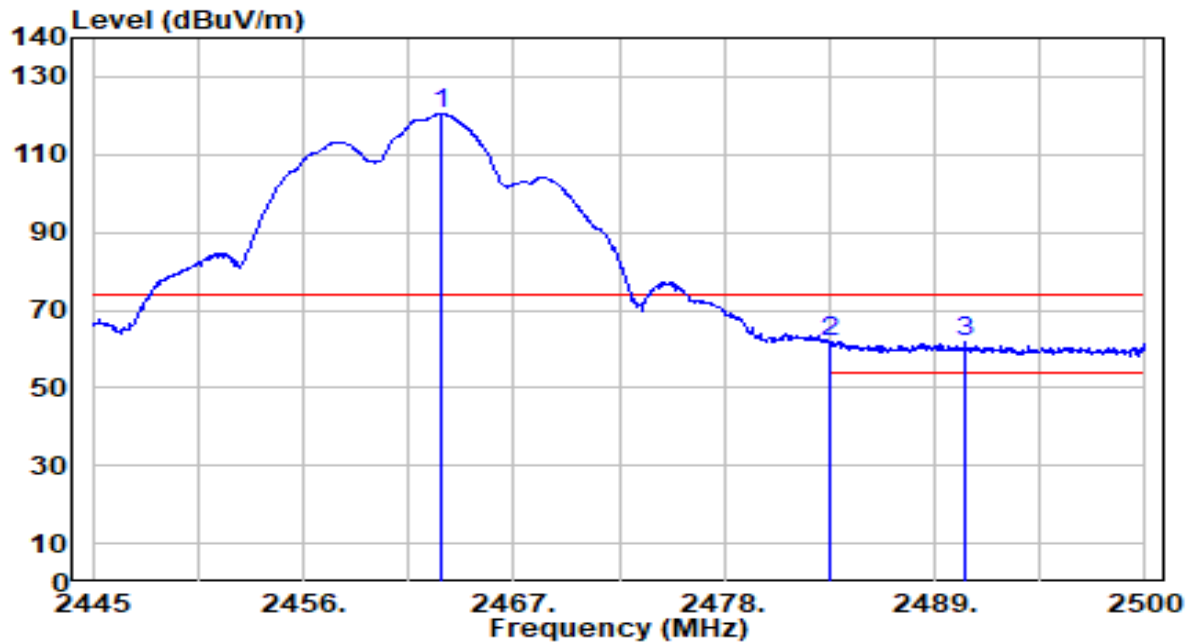


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.260	88.22	32.22	120.44	N/A	N/A	185	155	Peak
2	*	2483.500	29.75	32.30	62.04	-11.96	74.00	185	155	Peak
3		2490.595	29.37	32.32	61.69	-12.31	74.00	185	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

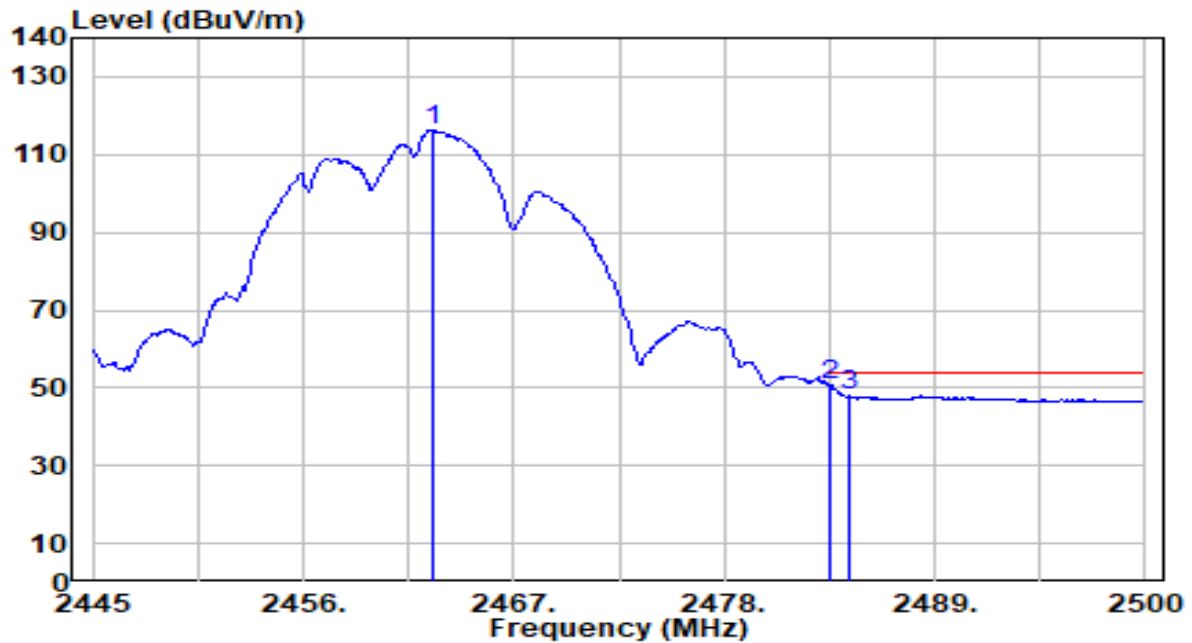


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.765	84.25	32.22	116.48	N/A	N/A	185	155	Average
2	*	2483.500	18.49	32.30	50.79	-3.21	54.00	185	155	Average
3		2484.490	15.54	32.30	47.84	-6.16	54.00	185	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

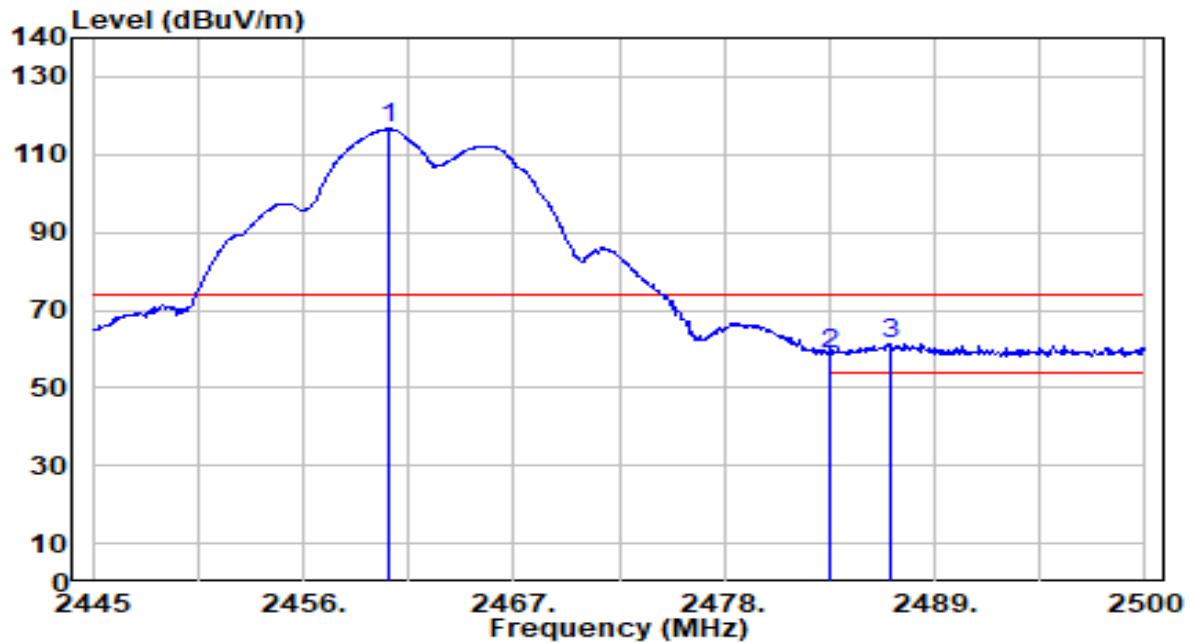


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.455	84.33	32.21	116.54	N/A	N/A	215	215	Peak
2	2483.500	26.24	32.30	58.54	-15.46	74.00	215	215	Peak
3	* 2486.635	28.88	32.31	61.19	-12.81	74.00	215	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

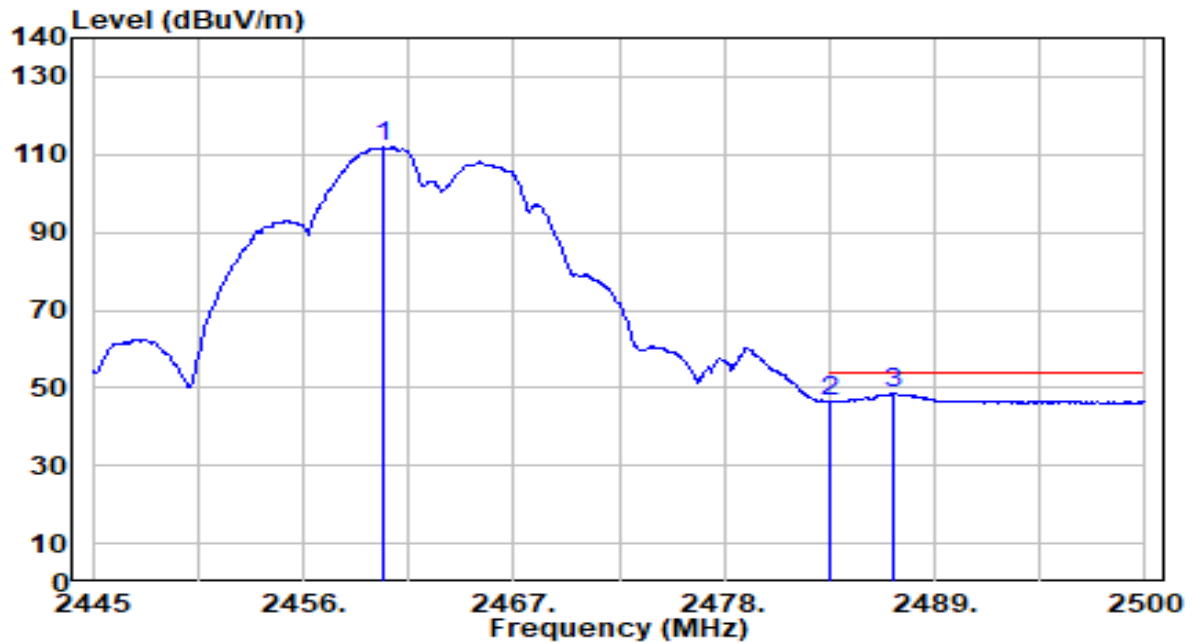


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.180	79.59	32.21	111.80	N/A	N/A	215	215	Average
2	2483.500	14.06	32.30	46.35	-7.65	54.00	215	215	Average
3	* 2486.800	16.15	32.31	48.46	-5.54	54.00	215	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

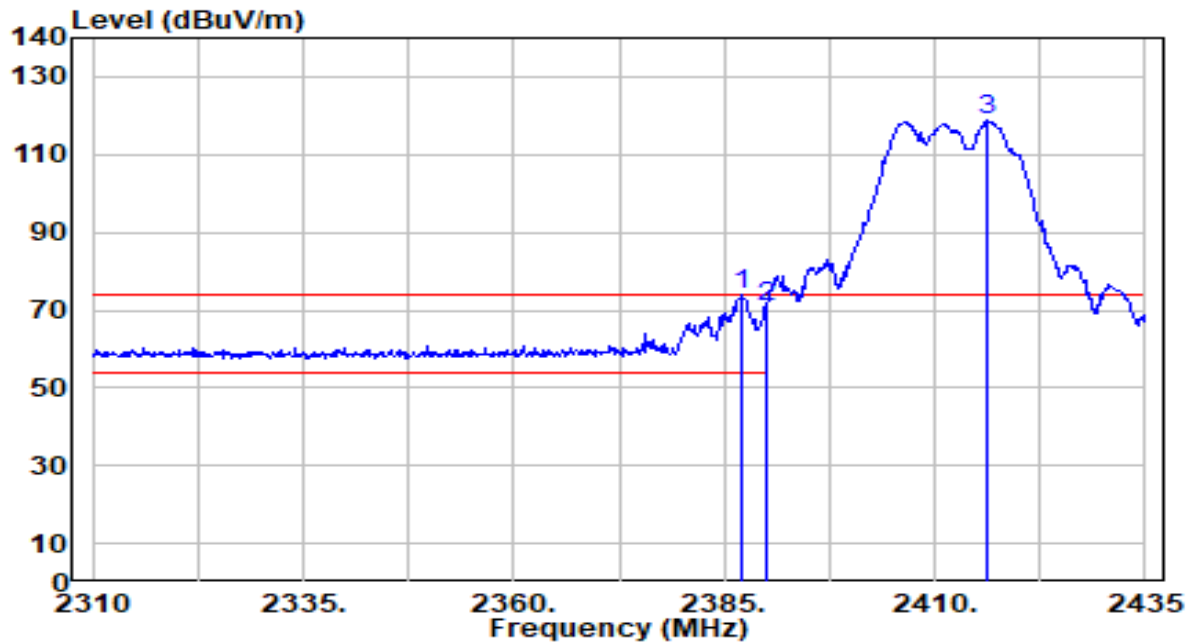


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.125	41.90	31.94	73.83	-0.17	74.00	190	150	Peak
2		2390.000	39.00	31.95	70.95	-3.05	74.00	190	150	Peak
3		2416.125	86.75	32.05	118.79	N/A	N/A	190	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

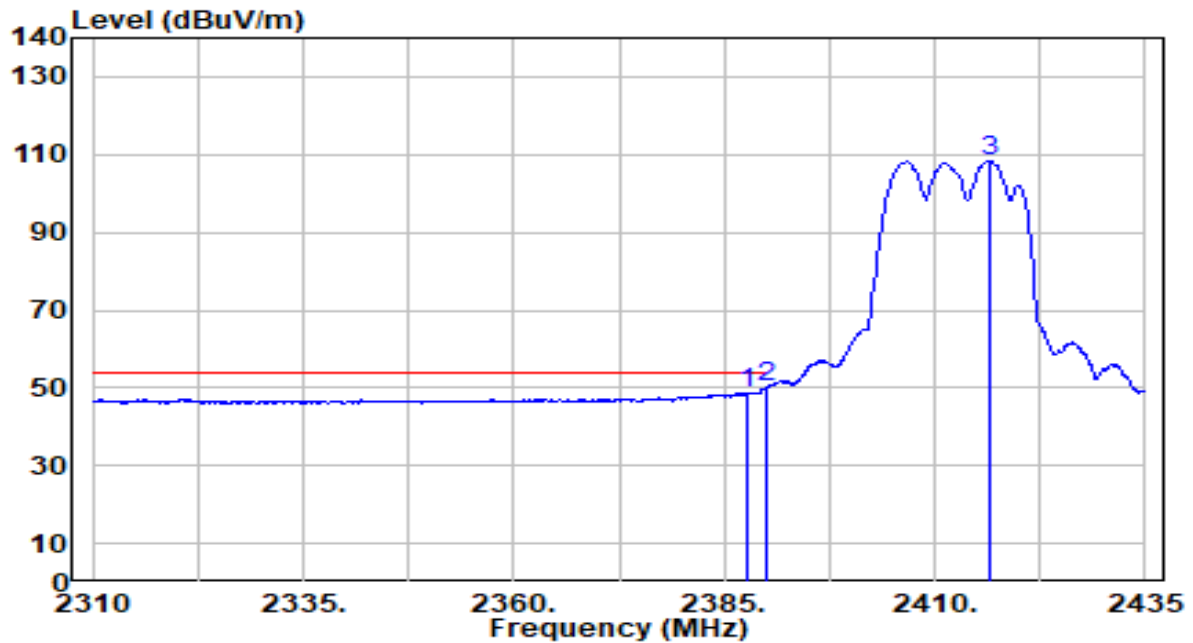


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.625	16.69	31.94	48.63	-5.37	54.00	190	150	Average
2	*	2390.000	18.15	31.95	50.10	-3.90	54.00	190	150	Average
3		2416.500	76.36	32.05	108.41	N/A	N/A	190	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

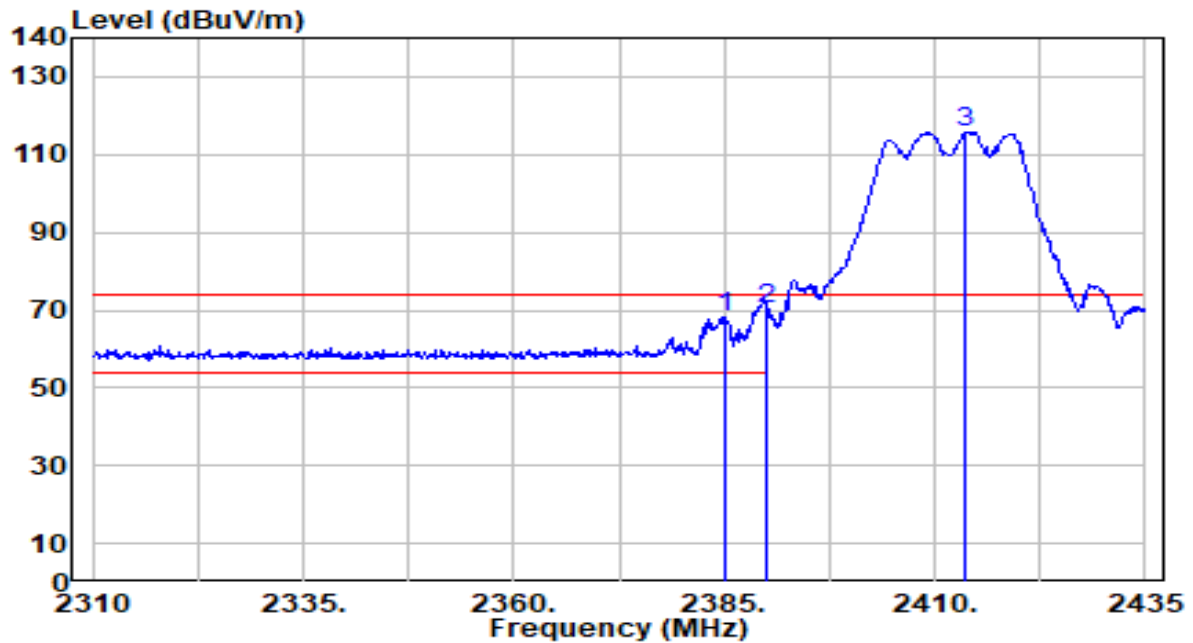


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.125	36.30	31.93	68.24	-5.76	74.00	200	150	Peak
2	*	2390.000	38.42	31.95	70.37	-3.63	74.00	200	150	Peak
3		2413.500	83.84	32.04	115.87	N/A	N/A	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

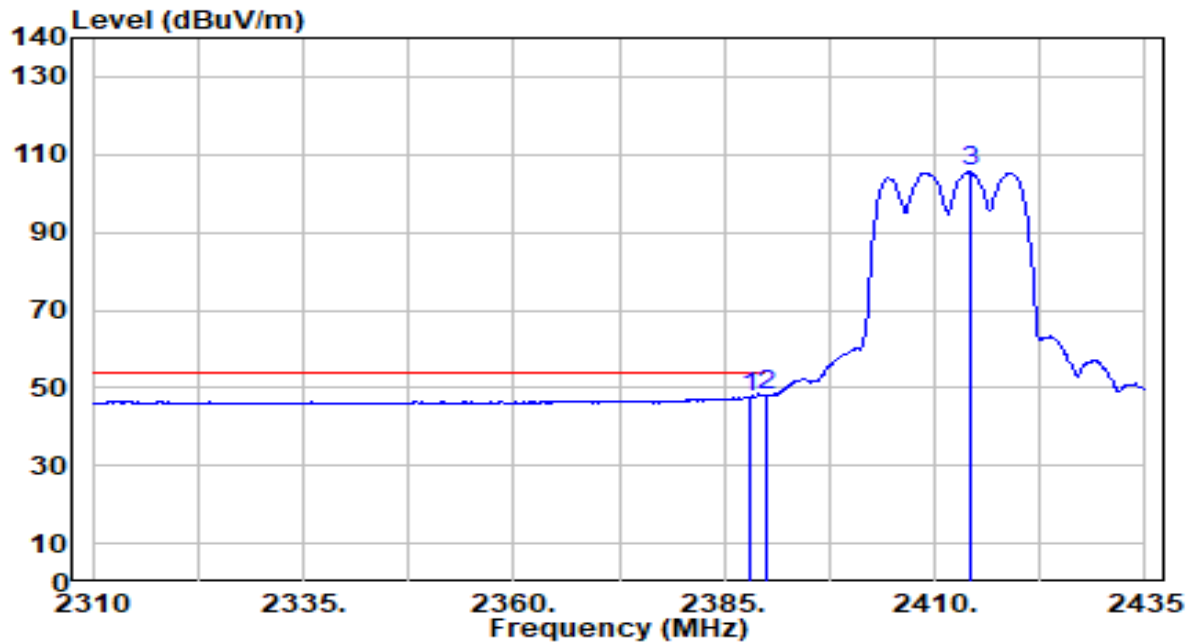


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	15.53	31.94	47.47	-6.53	54.00	200	150	Average
2	*	2390.000	16.11	31.95	48.05	-5.95	54.00	200	150	Average
3		2414.125	73.43	32.04	105.47	N/A	N/A	200	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

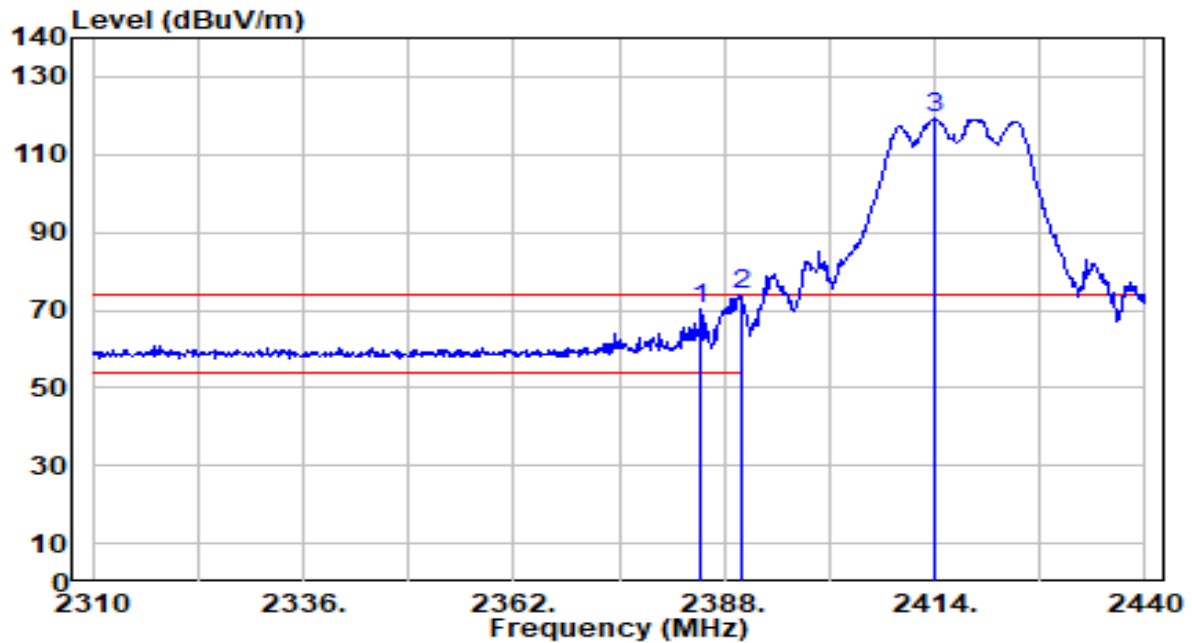


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.010	38.10	31.93	70.03	-3.97	74.00	190	150	Peak
2	* 2390.000	41.87	31.95	73.82	-0.18	74.00	190	150	Peak
3	2414.130	87.10	32.04	119.14	N/A	N/A	190	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

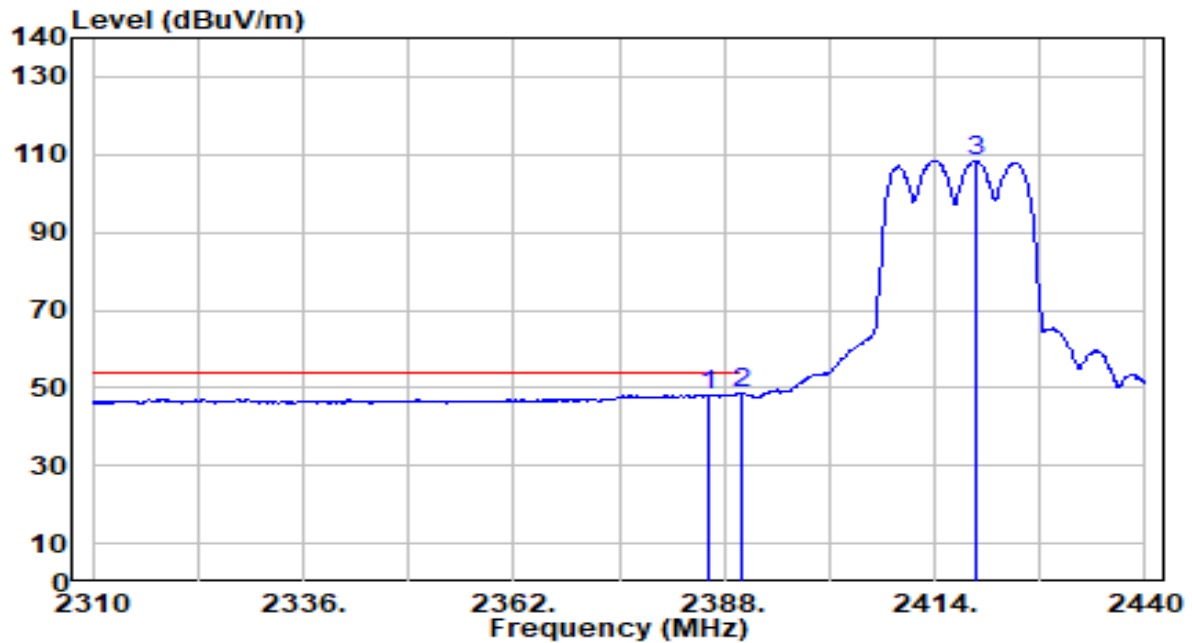


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.050	16.35	31.93	48.29	-5.71	54.00	190	150	Average
2	*	2390.000	16.44	31.95	48.39	-5.61	54.00	190	150	Average
3		2419.200	76.45	32.06	108.51	N/A	N/A	190	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

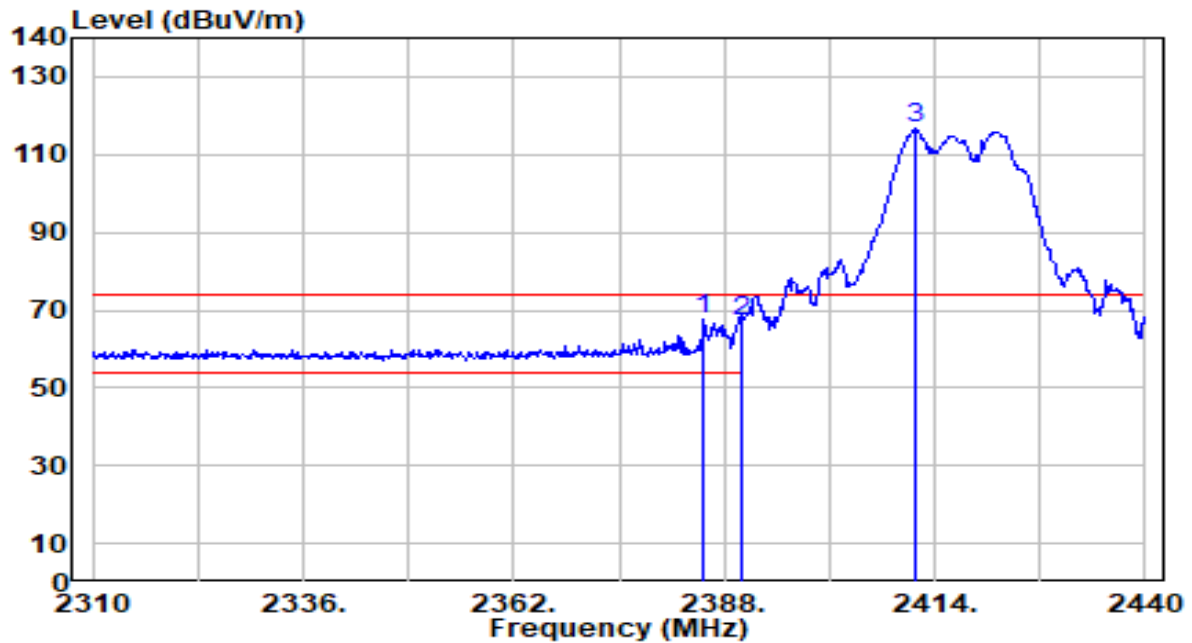


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.530	35.54	31.93	67.47	-6.53	74.00	200	150	Peak
2		2390.000	35.29	31.95	67.24	-6.76	74.00	200	150	Peak
3		2411.530	84.72	32.03	116.75	N/A	N/A	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

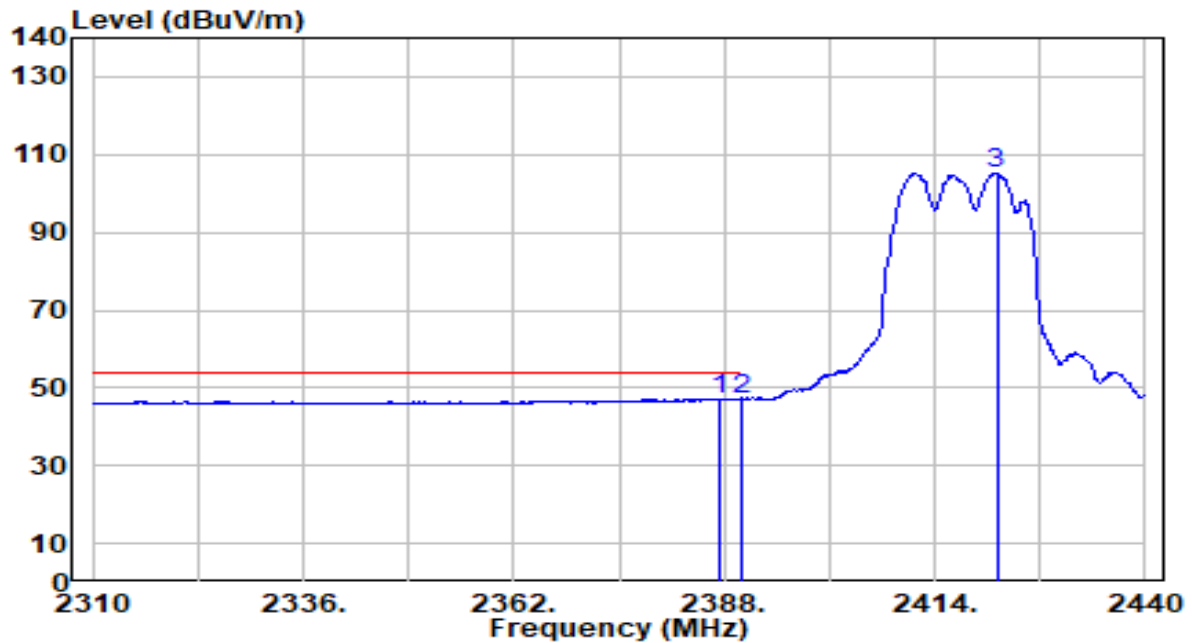


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.350	15.32	31.94	47.25	-6.75	54.00	200	150	Average
2		2390.000	15.17	31.95	47.12	-6.88	54.00	200	150	Average
3		2421.670	73.18	32.07	105.24	N/A	N/A	200	150	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

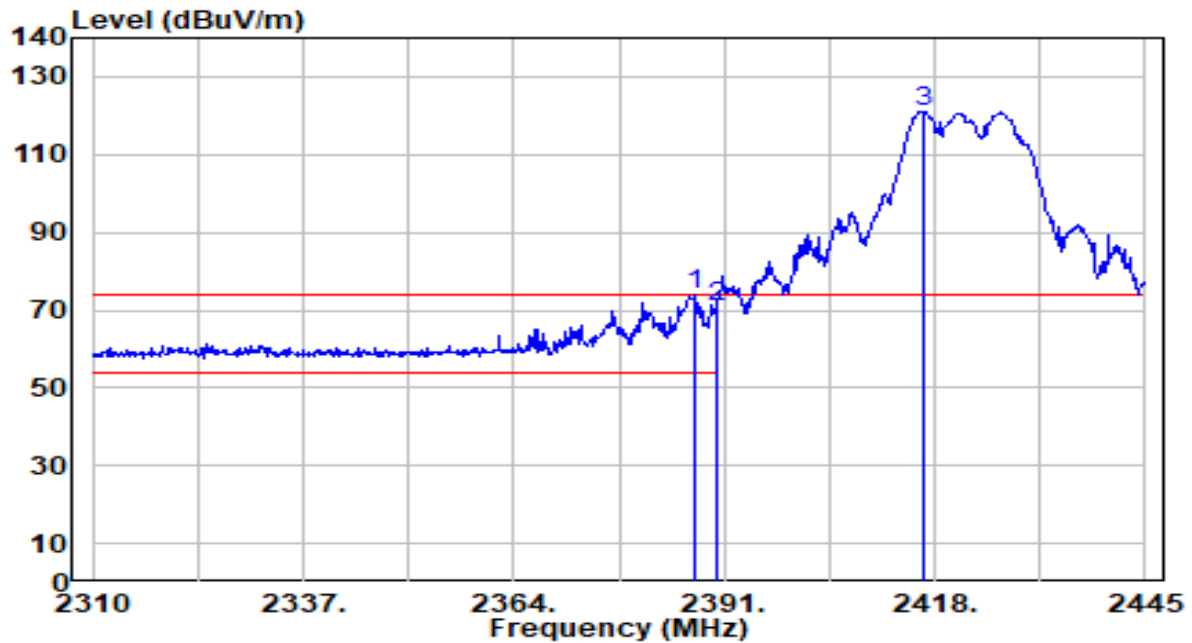


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.355	41.93	31.94	73.87	-0.13	74.00	190	150	Peak
2		2390.000	38.74	31.95	70.69	-3.31	74.00	190	150	Peak
3		2416.515	89.10	32.05	121.14	N/A	N/A	190	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

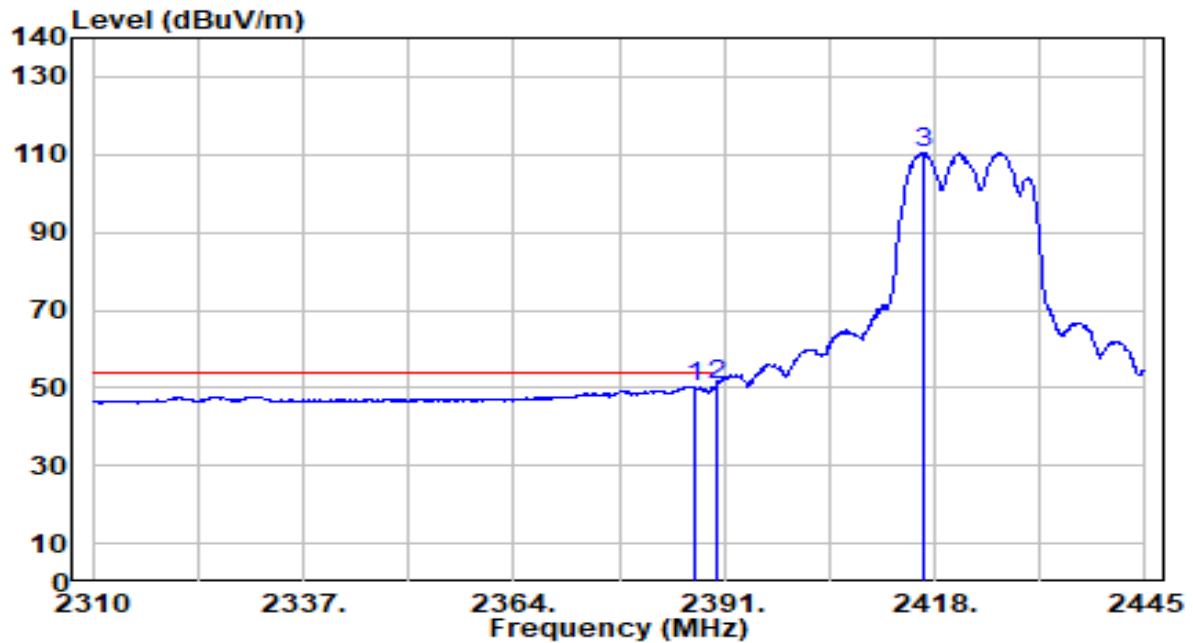


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.355	18.48	31.94	50.42	-3.58	54.00	190	150	Average
2	*	2390.000	18.87	31.95	50.82	-3.18	54.00	190	150	Average
3		2416.515	78.42	32.05	110.46	N/A	N/A	190	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

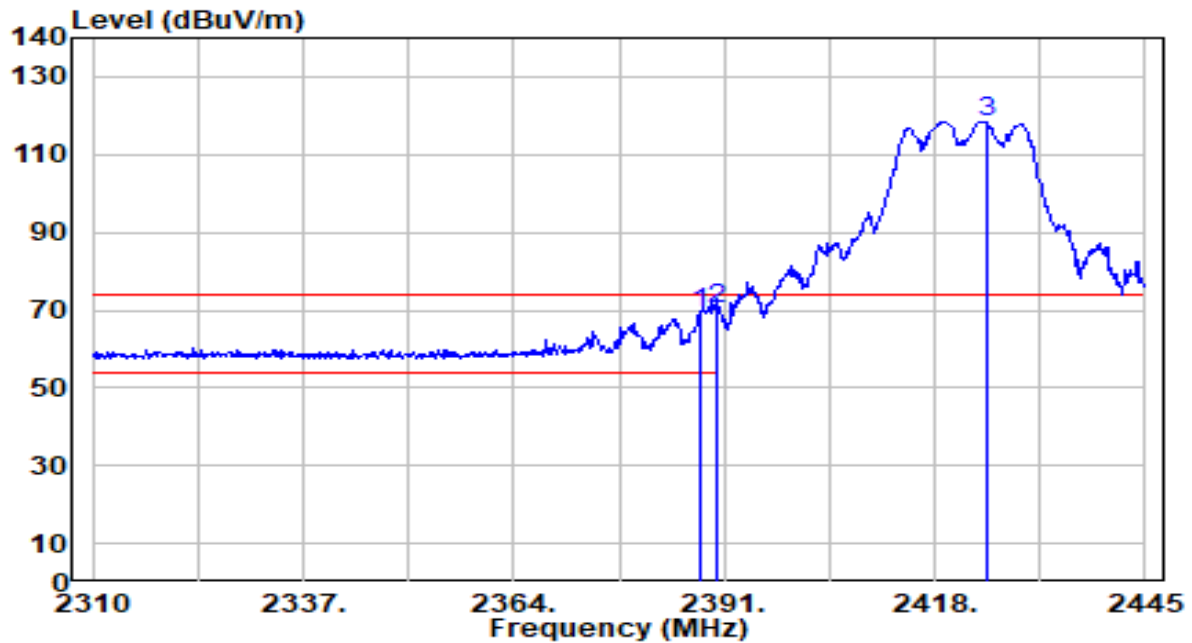


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.030	37.15	31.94	69.09	-4.91	74.00	200	150	Peak
2	*	2390.000	38.09	31.95	70.04	-3.96	74.00	200	150	Peak
3		2424.750	86.33	32.08	118.41	N/A	N/A	200	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

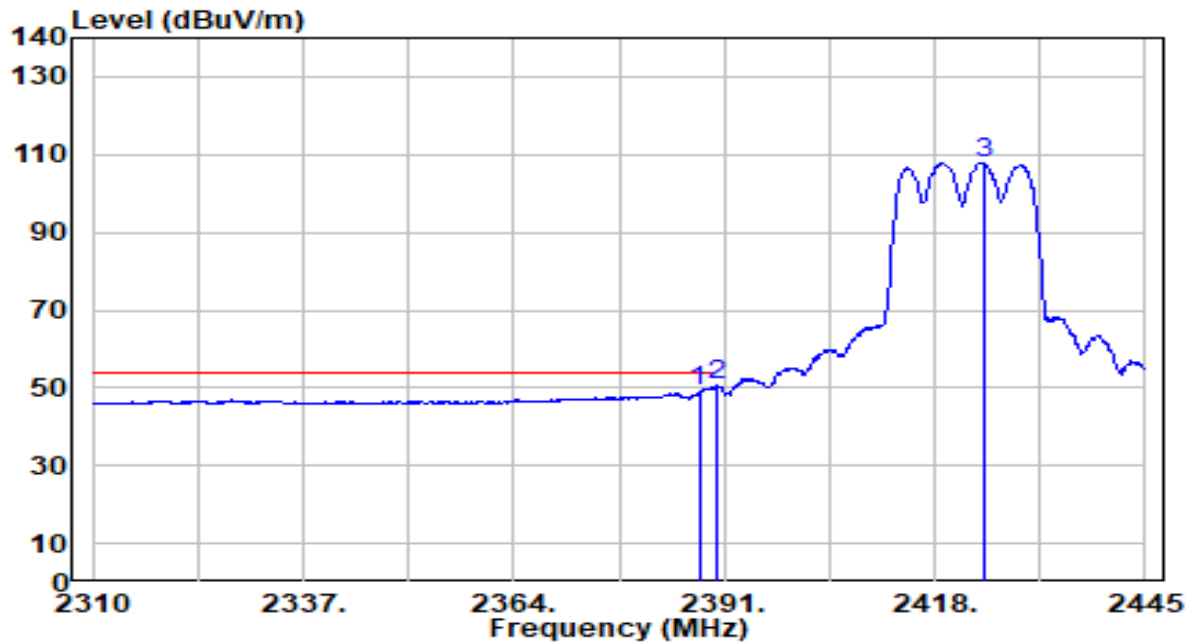


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.760	17.17	31.94	49.11	-4.89	54.00	200	150	Average
2	*	2390.000	18.51	31.95	50.45	-3.55	54.00	200	150	Average
3		2424.210	75.76	32.08	107.83	N/A	N/A	200	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

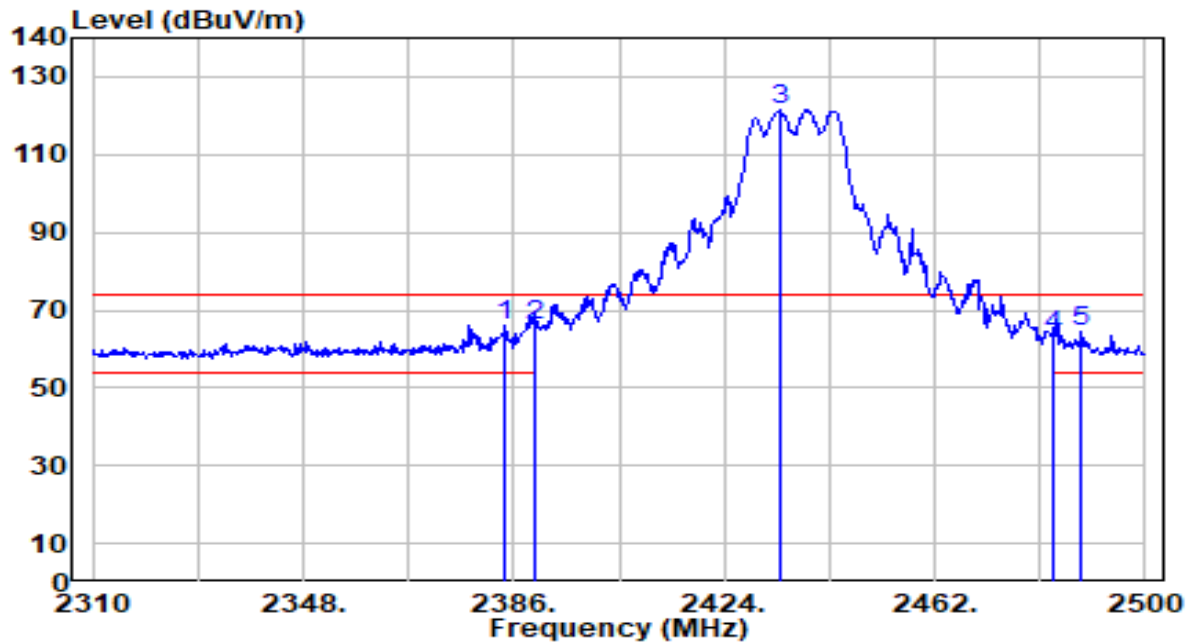


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.480	34.09	31.93	66.02	-7.98	74.00	205	155	Peak
2	* 2390.000	34.27	31.95	66.22	-7.78	74.00	205	155	Peak
3	2434.260	89.37	32.11	121.49	N/A	N/A	205	155	Peak
4	2483.500	31.06	32.30	63.36	-10.64	74.00	205	155	Peak
5	2488.600	32.36	32.32	64.68	-9.32	74.00	205	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

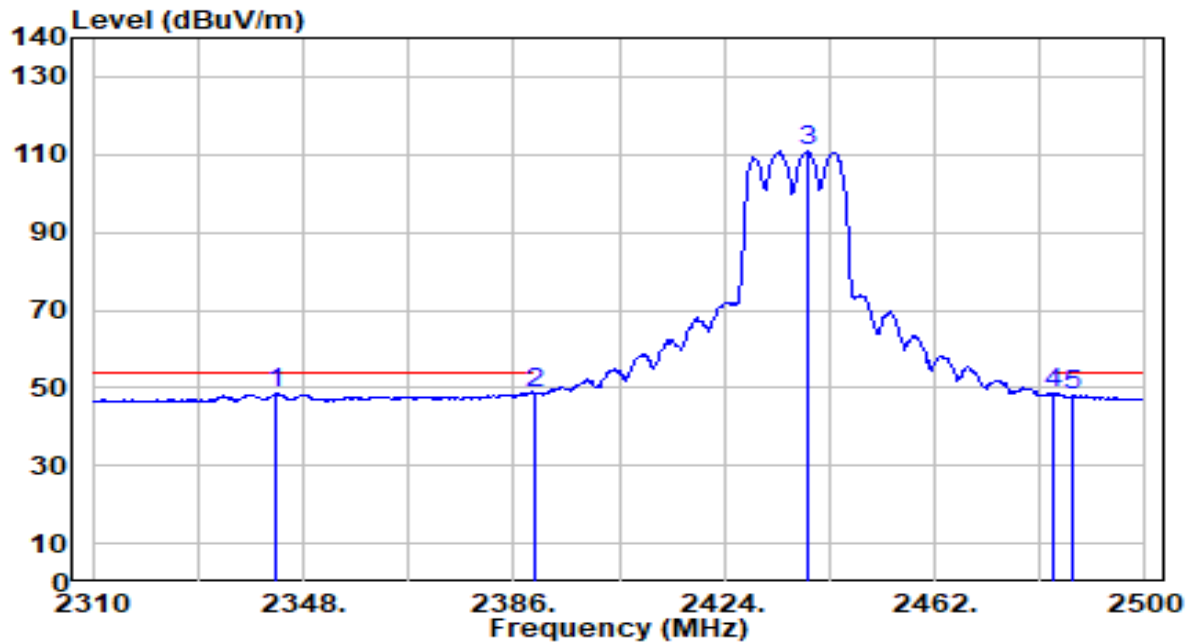


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2343.250	16.71	31.77	48.48	-5.52	54.00	205	155	Average
2	* 2390.000	16.57	31.95	48.52	-5.48	54.00	205	155	Average
3	2439.010	78.66	32.13	110.79	N/A	N/A	205	155	Average
4	2483.500	16.16	32.30	48.46	-5.54	54.00	205	155	Average
5	2486.700	15.63	32.31	47.94	-6.06	54.00	205	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

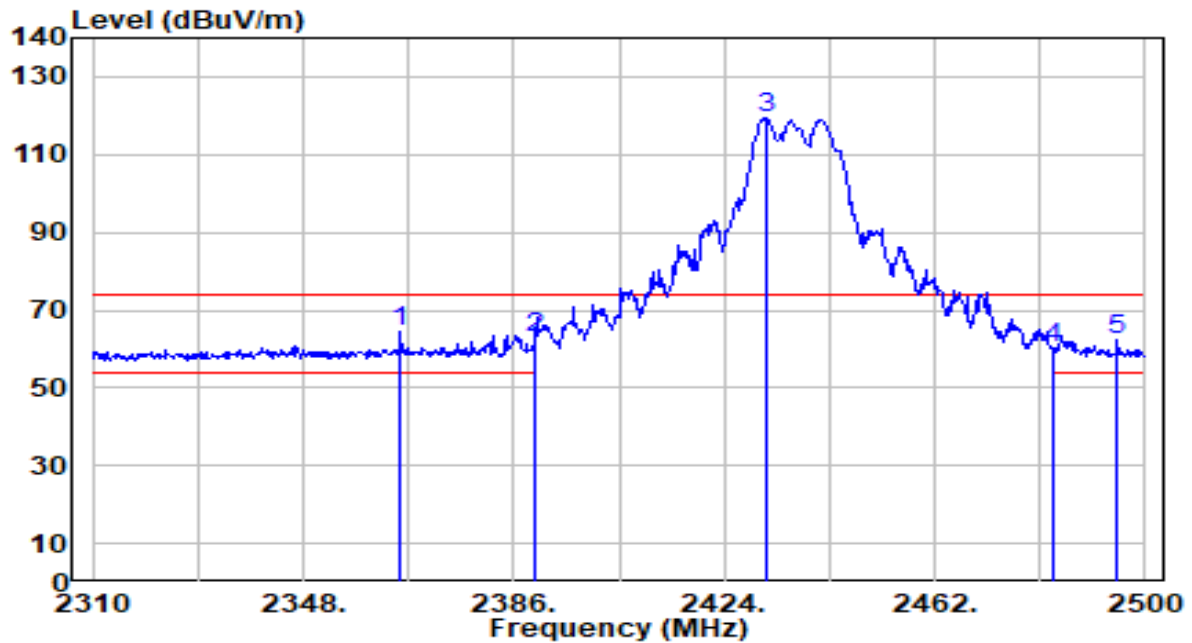


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2365.670	32.66	31.86	64.52	-9.48	74.00	195	205	Peak
2		2390.000	30.94	31.95	62.89	-11.11	74.00	195	205	Peak
3		2431.410	87.09	32.10	119.20	N/A	N/A	195	205	Peak
4		2483.500	28.06	32.30	60.36	-13.64	74.00	195	205	Peak
5		2495.060	29.94	32.34	62.28	-11.72	74.00	195	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

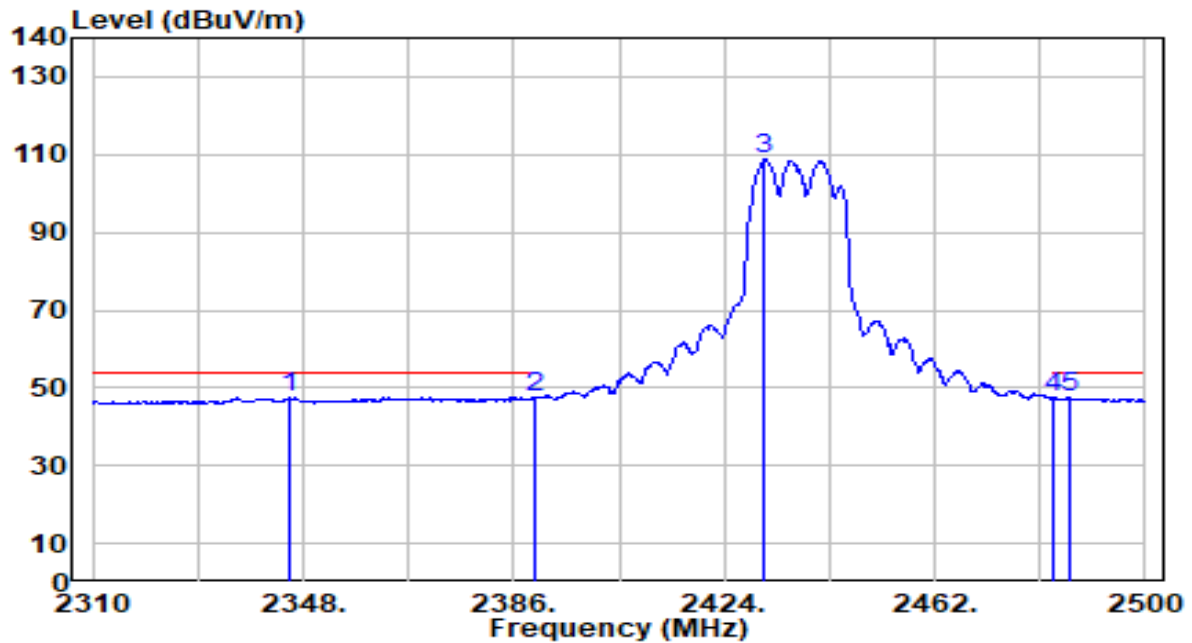


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2345.530	15.79	31.78	47.58	-6.42	54.00	195	205	Average
2		2390.000	15.47	31.95	47.42	-6.58	54.00	195	205	Average
3		2431.220	76.53	32.10	108.63	N/A	N/A	195	205	Average
4		2483.500	15.03	32.30	47.32	-6.68	54.00	195	205	Average
5		2486.320	15.05	32.31	47.36	-6.64	54.00	195	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

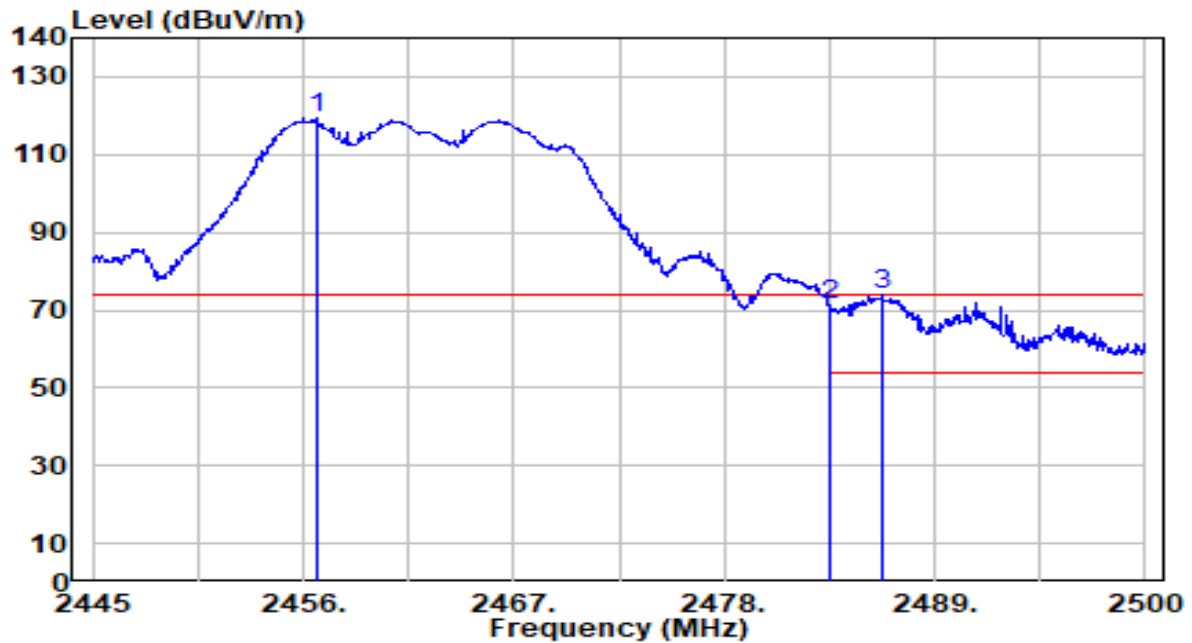


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.660	87.35	32.20	119.55	N/A	N/A	185	150	Peak
2	2483.500	39.17	32.30	71.47	-2.53	74.00	185	150	Peak
3	* 2486.250	41.52	32.31	73.83	-0.17	74.00	185	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

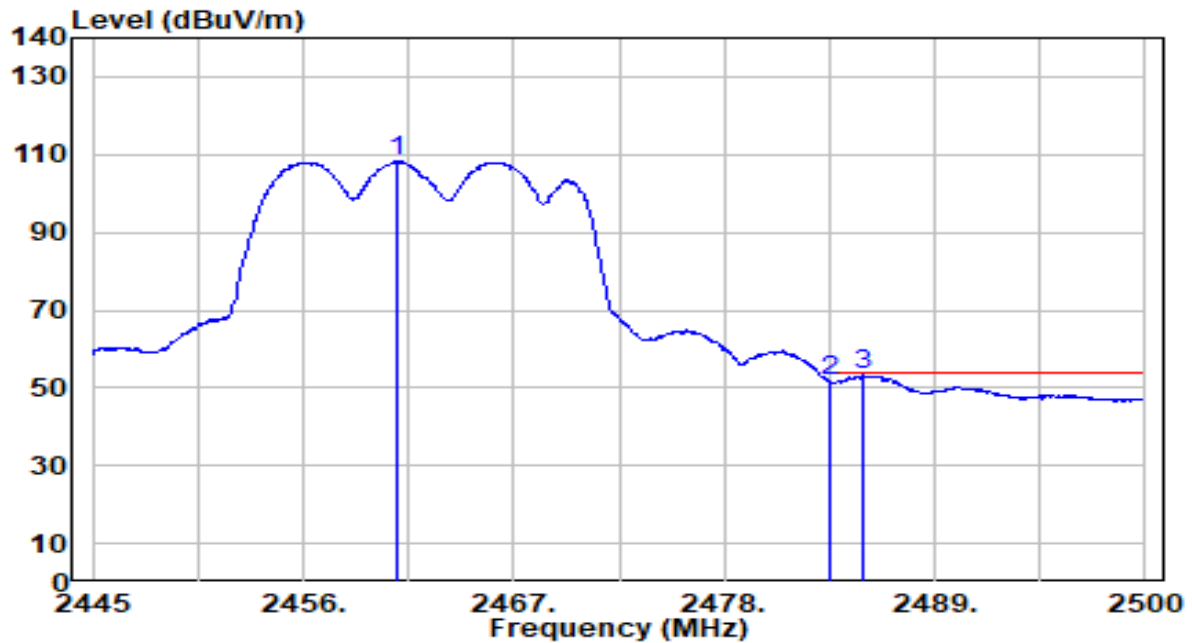


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.895	75.90	32.21	108.11	N/A	N/A	185	150	Average
2	2483.500	19.44	32.30	51.74	-2.26	54.00	185	150	Average
3	* 2485.315	20.90	32.31	53.20	-0.80	54.00	185	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

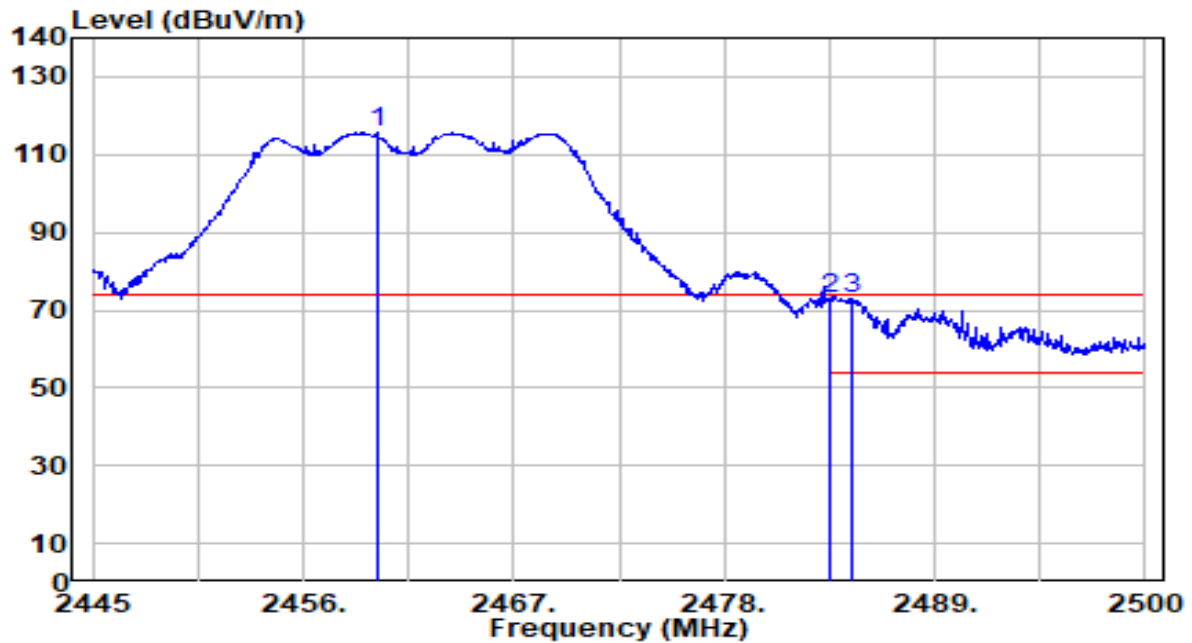


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.850	83.67	32.21	115.88	N/A	N/A	170	210	Peak
2	2483.500	40.49	32.30	72.78	-1.22	74.00	170	210	Peak
3	* 2484.710	40.60	32.30	72.90	-1.10	74.00	170	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

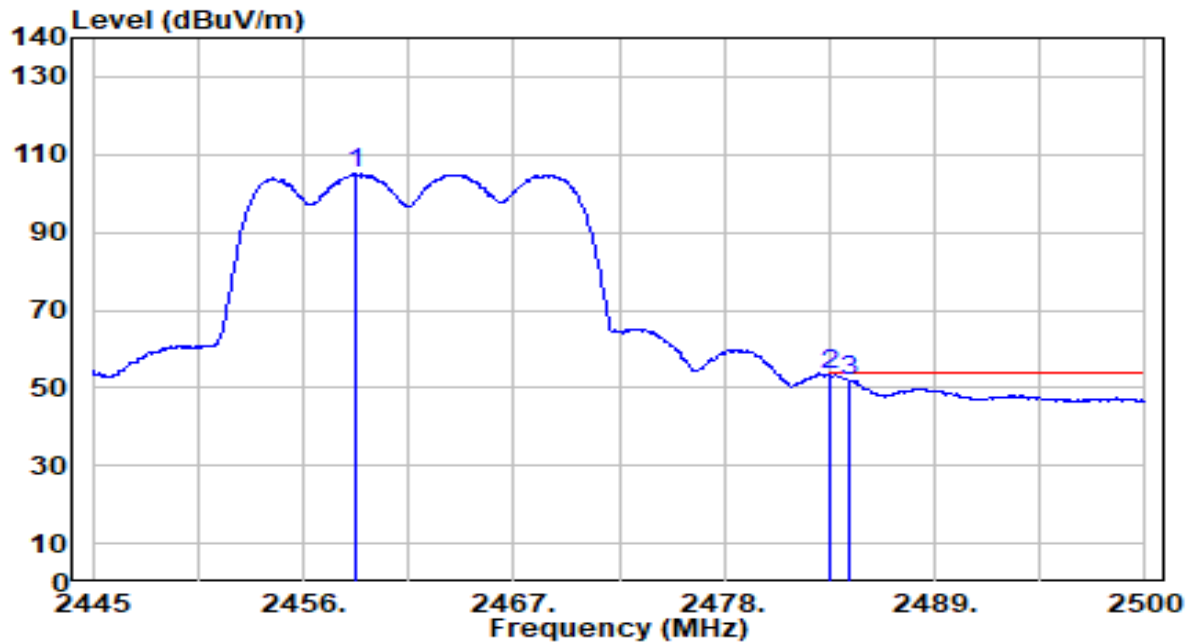


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.695	72.89	32.21	105.10	N/A	N/A	170	210	Average
2	*	2483.500	21.08	32.30	53.38	-0.62	54.00	170	210	Average
3		2484.545	19.72	32.30	52.02	-1.98	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

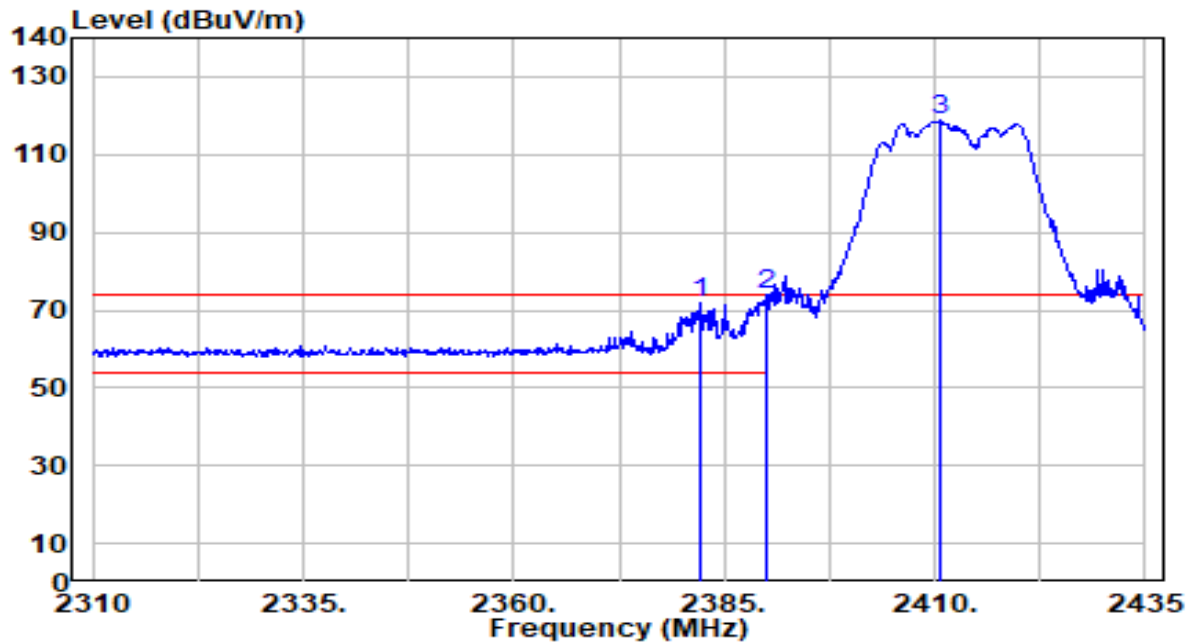


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2382.250	39.73	31.92	71.65	-2.35	74.00	190	150	Peak
2	*	2390.000	41.92	31.95	73.87	-0.13	74.00	190	150	Peak
3		2410.750	86.78	32.03	118.80	N/A	N/A	190	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

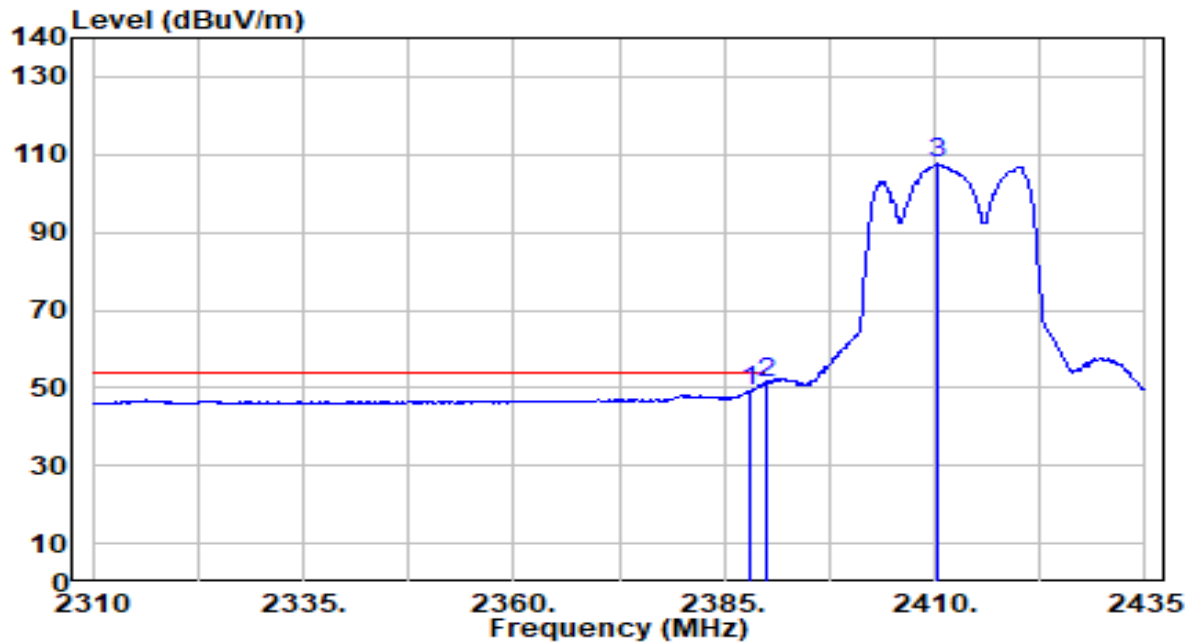


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	17.31	31.94	49.25	-4.75	54.00	190	150	Average
2	*	2390.000	19.37	31.95	51.32	-2.68	54.00	190	150	Average
3		2410.375	75.50	32.02	107.52	N/A	N/A	190	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

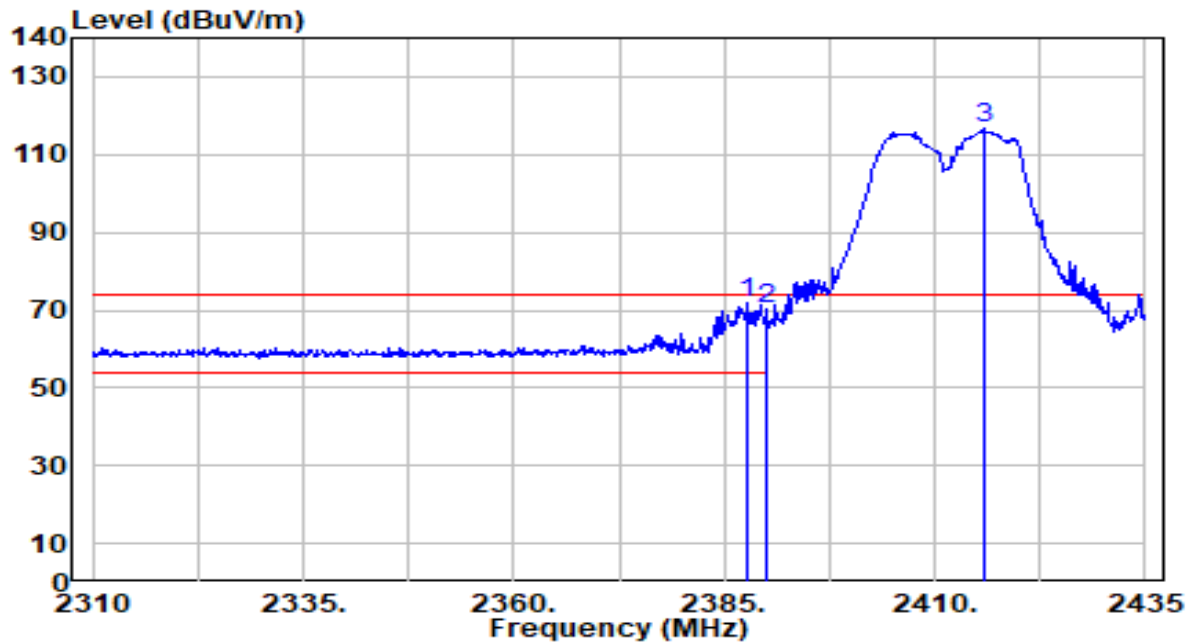


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.750	40.01	31.94	71.95	-2.05	74.00	200	150	Peak
2		2390.000	38.08	31.95	70.03	-3.97	74.00	200	150	Peak
3		2415.875	84.63	32.05	116.67	N/A	N/A	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

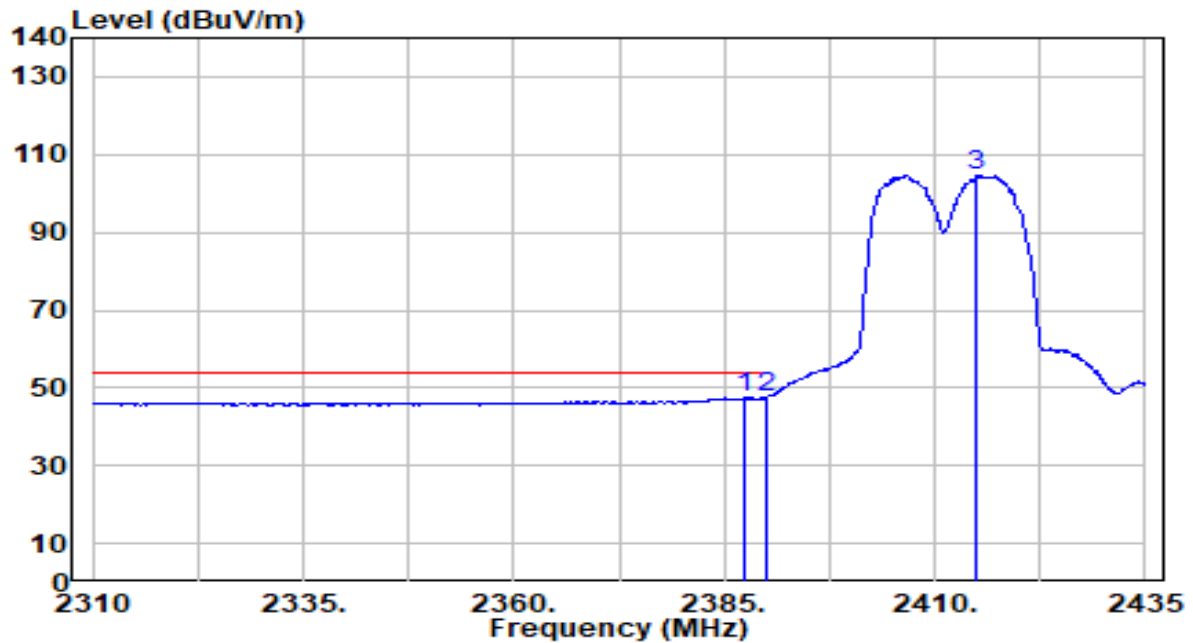


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.500	15.41	31.94	47.35	-6.65	54.00	200	150	Average
2	*	2390.000	15.60	31.95	47.55	-6.45	54.00	200	150	Average
3		2415.000	72.53	32.04	104.58	N/A	N/A	200	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

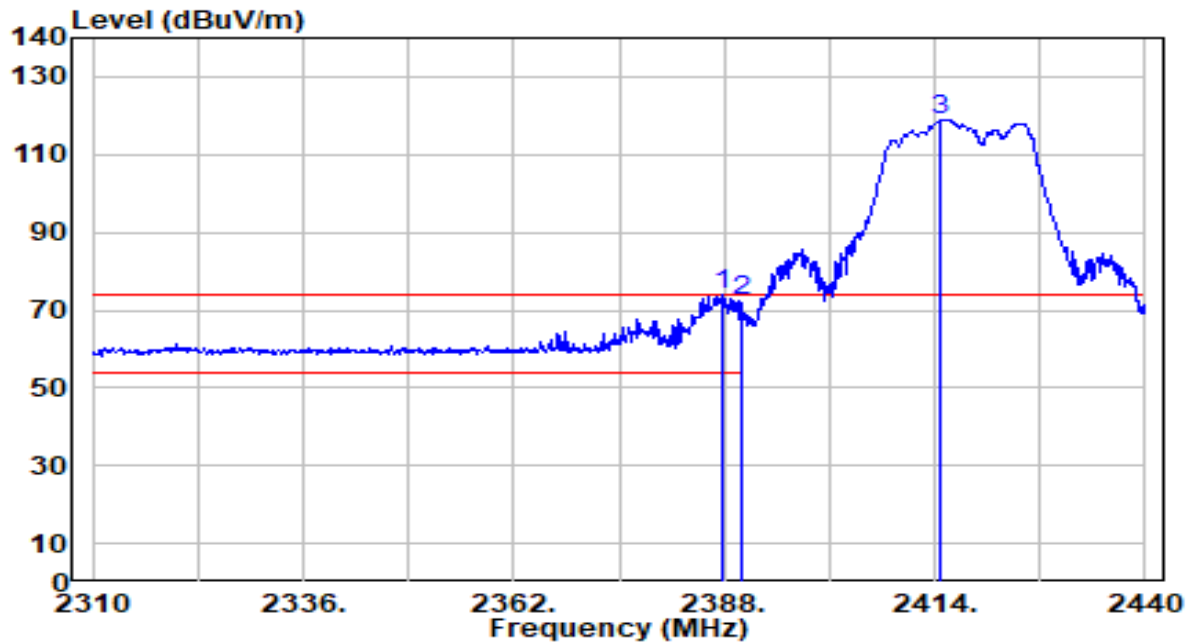


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.740	41.87	31.94	73.81	-0.19	74.00	190	150	Peak
2		2390.000	40.20	31.95	72.14	-1.86	74.00	190	150	Peak
3		2414.520	86.97	32.04	119.01	N/A	N/A	190	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

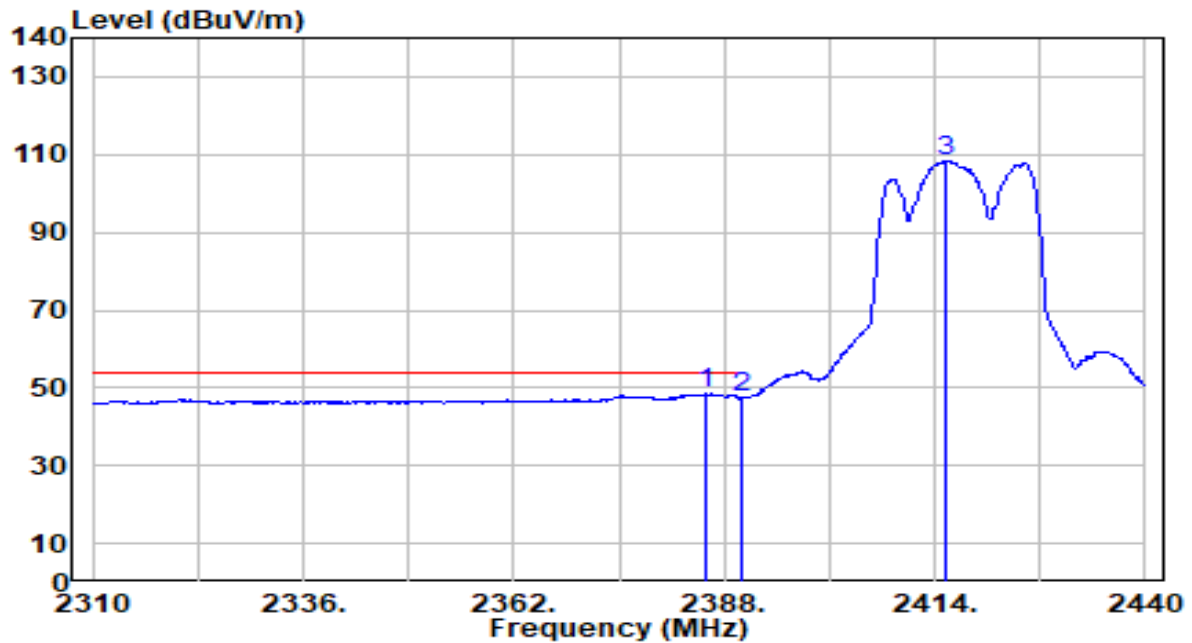


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.660	16.54	31.93	48.47	-5.53	54.00	190	150	Average
2		2390.000	15.51	31.95	47.46	-6.54	54.00	190	150	Average
3		2415.300	76.40	32.04	108.44	N/A	N/A	190	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

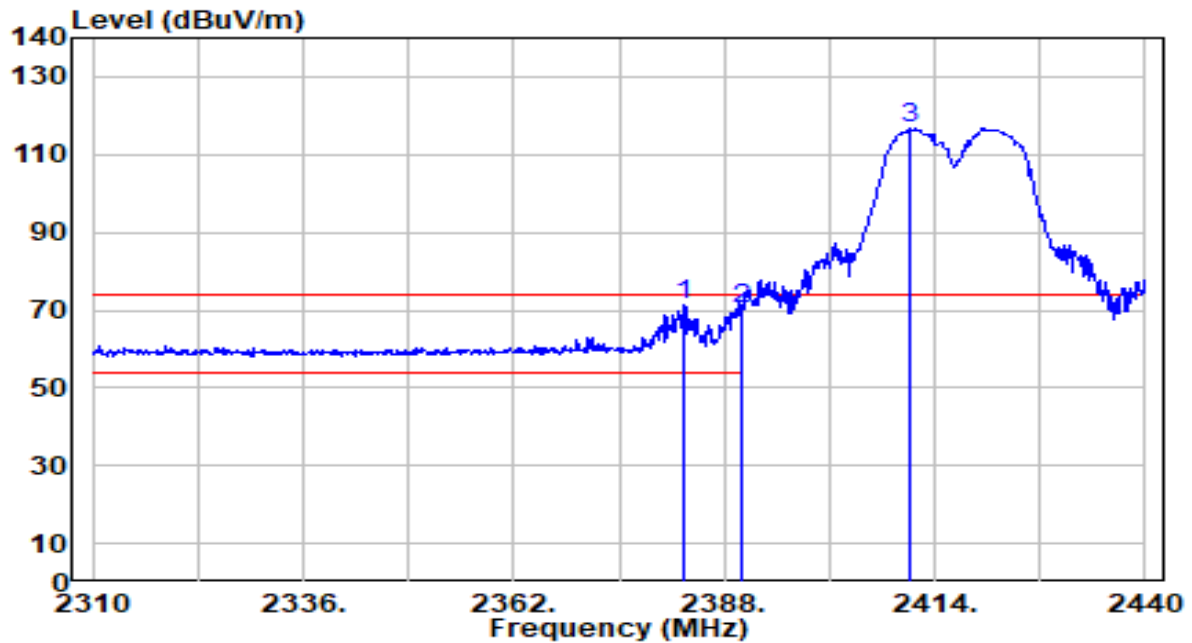


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.930	39.53	31.92	71.46	-2.54	74.00	200	150	Peak
2		2390.000	38.18	31.95	70.13	-3.87	74.00	200	150	Peak
3		2410.880	84.70	32.03	116.73	N/A	N/A	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

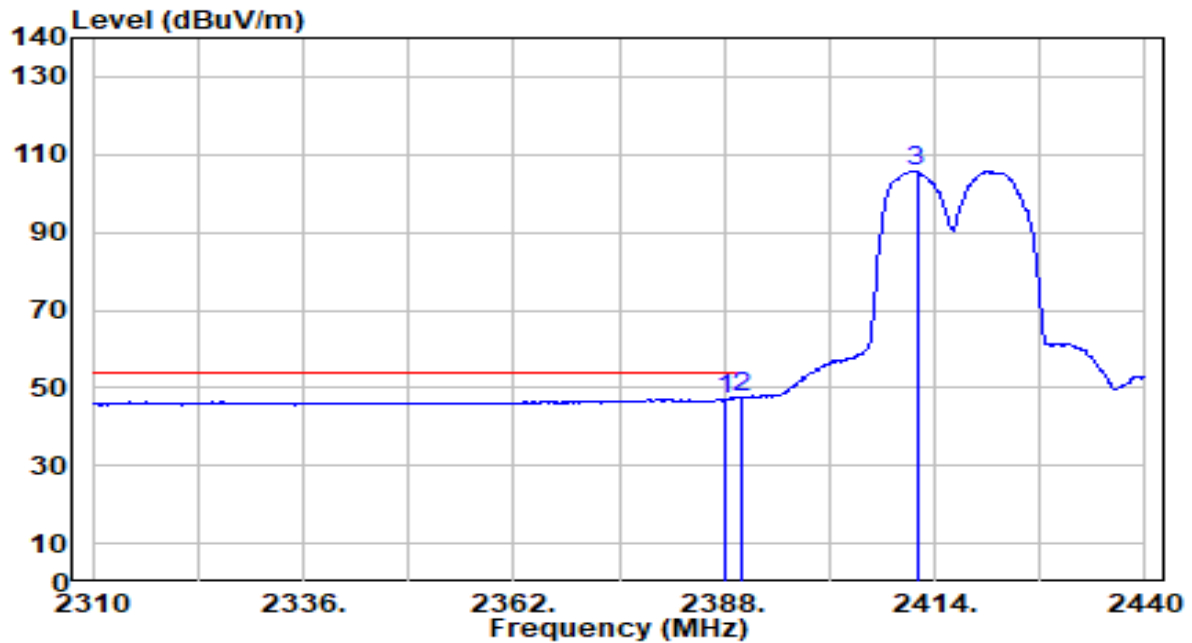


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	15.11	31.94	47.05	-6.95	54.00	200	150	Average
2	*	2390.000	15.65	31.95	47.60	-6.40	54.00	200	150	Average
3		2411.790	73.53	32.03	105.56	N/A	N/A	200	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

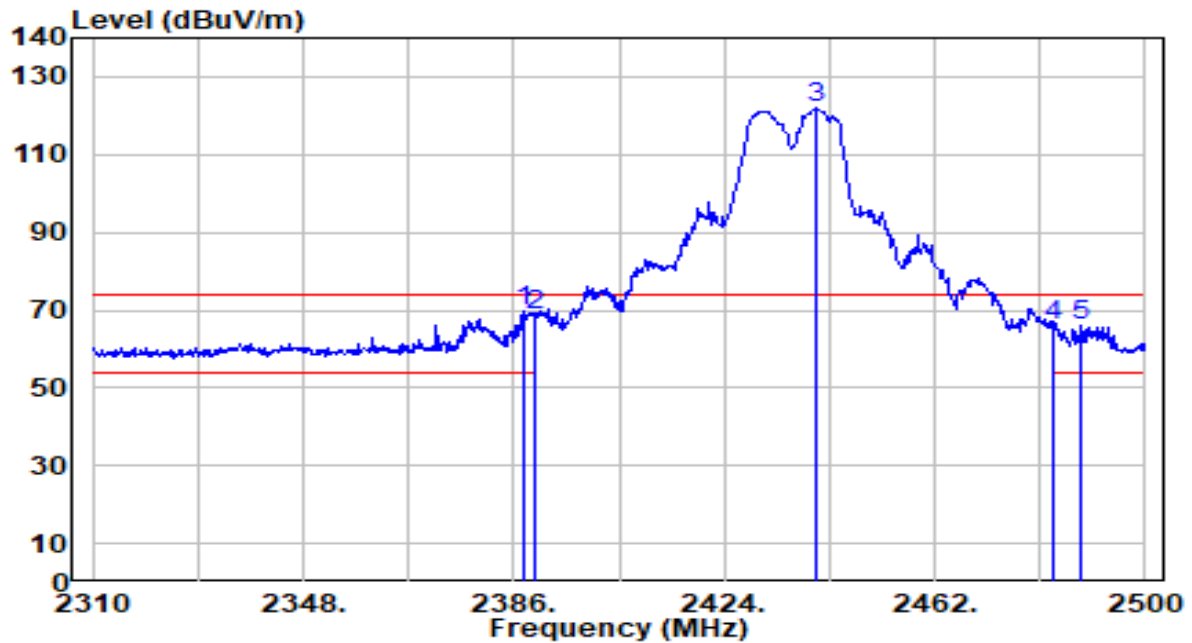


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.710	37.89	31.94	69.83	-4.17	74.00	205	155	Peak
2		2390.000	36.72	31.95	68.67	-5.33	74.00	205	155	Peak
3		2440.720	89.66	32.14	121.80	N/A	N/A	205	155	Peak
4		2483.500	33.86	32.30	66.15	-7.85	74.00	205	155	Peak
5		2488.410	33.53	32.32	65.85	-8.15	74.00	205	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

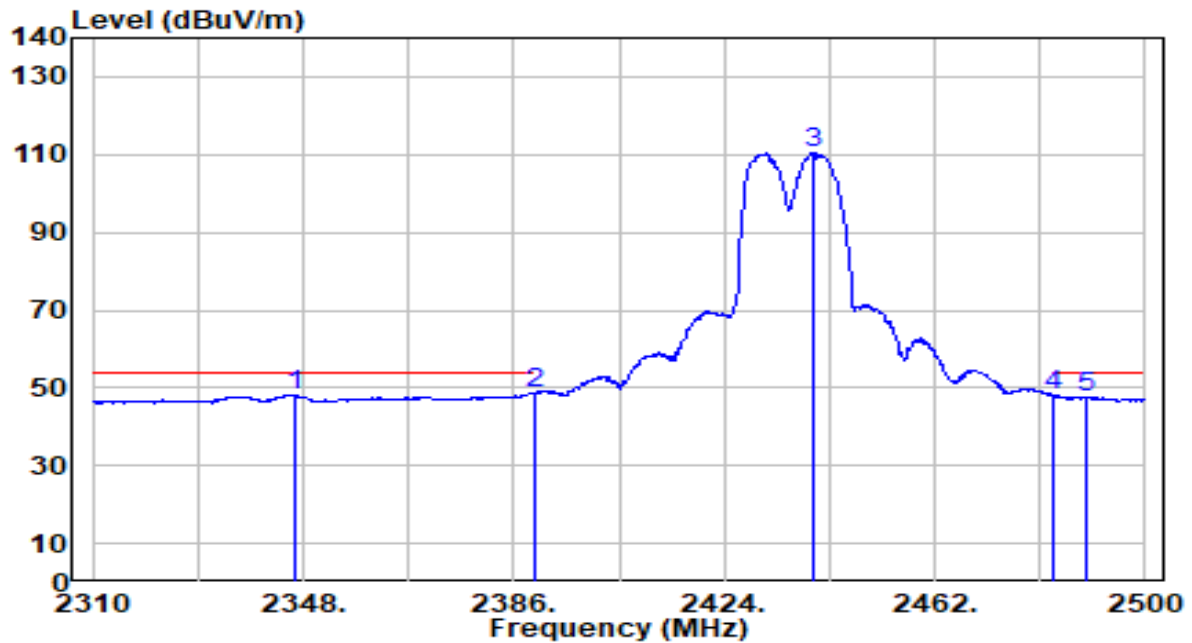


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2346.290	16.28	31.79	48.06	-5.94	54.00	205	155	Average
2	* 2390.000	16.79	31.95	48.74	-5.26	54.00	205	155	Average
3	2440.150	78.34	32.14	110.48	N/A	N/A	205	155	Average
4	2483.500	15.79	32.30	48.09	-5.91	54.00	205	155	Average
5	2489.170	15.27	32.32	47.59	-6.41	54.00	205	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

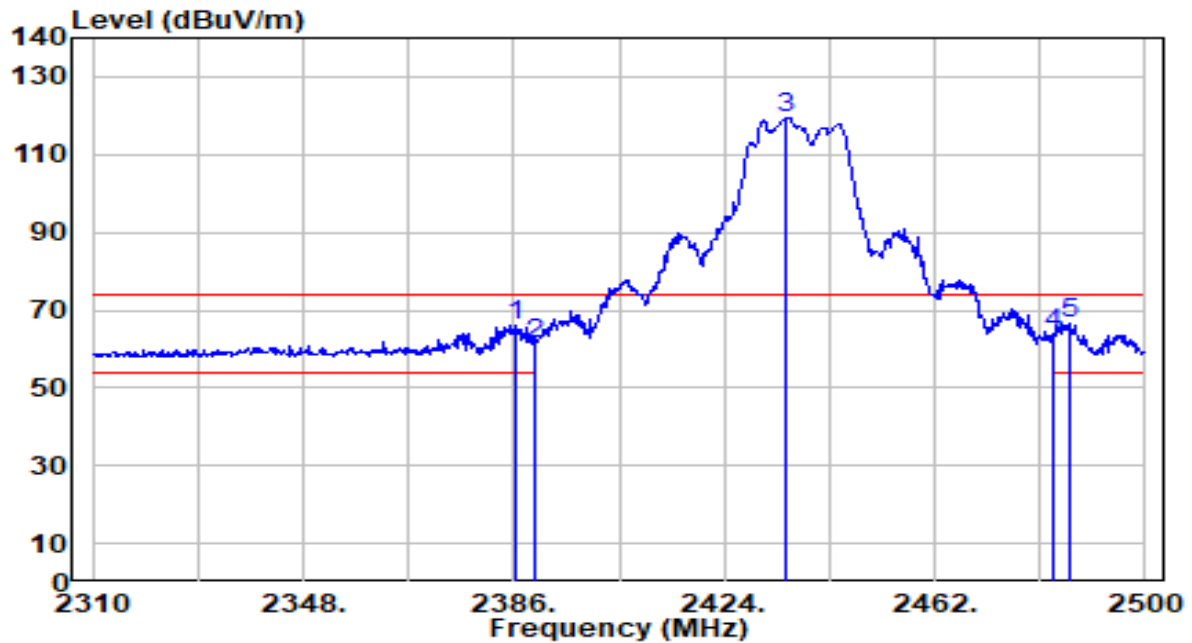


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.570	34.27	31.94	66.20	-7.80	74.00	195	205	Peak
2	2390.000	29.12	31.95	61.07	-12.93	74.00	195	205	Peak
3	2435.210	87.21	32.12	119.32	N/A	N/A	195	205	Peak
4	2483.500	31.88	32.30	64.18	-9.82	74.00	195	205	Peak
5	* 2486.320	34.33	32.31	66.64	-7.36	74.00	195	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

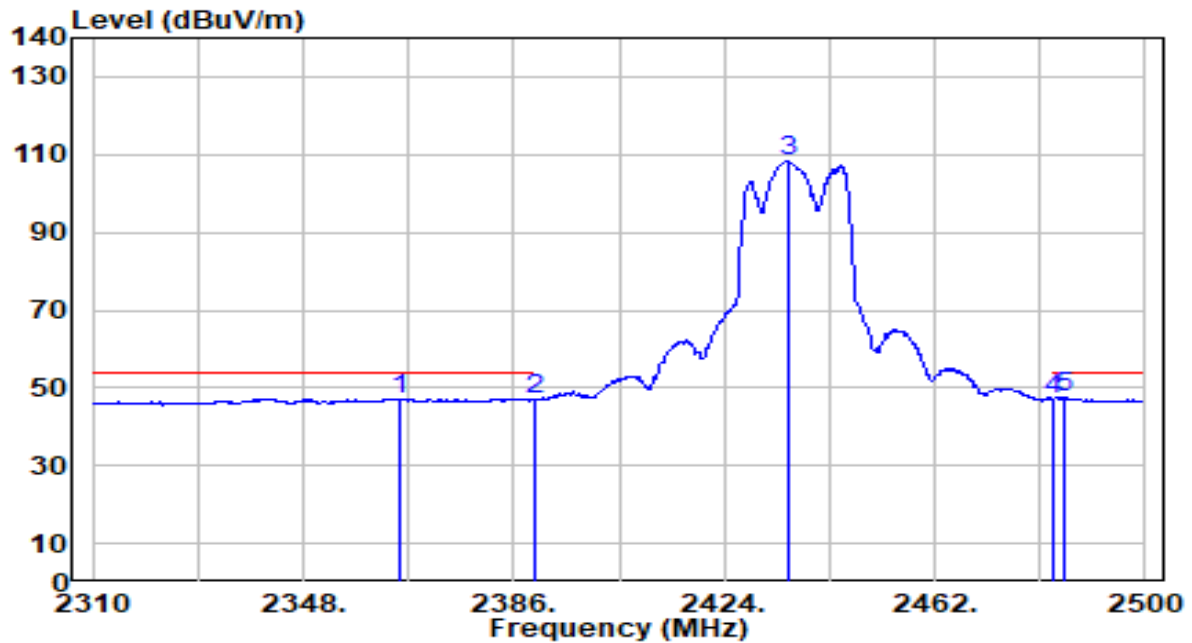


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2365.480	15.39	31.86	47.25	-6.75	54.00	195	205	Average
2	2390.000	14.91	31.95	46.85	-7.15	54.00	195	205	Average
3	2435.590	76.18	32.12	108.30	N/A	N/A	195	205	Average
4	2483.500	14.75	32.30	47.05	-6.95	54.00	195	205	Average
5	* 2485.180	15.15	32.30	47.45	-6.55	54.00	195	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

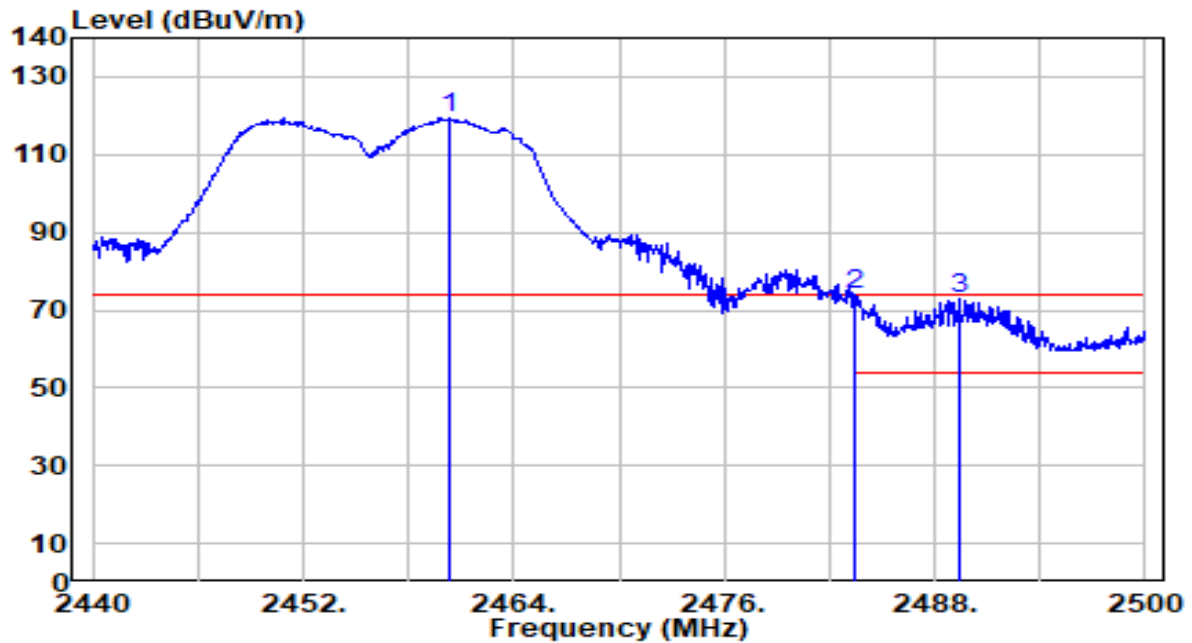


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.340	87.40	32.21	119.61	N/A	N/A	185	150	Peak
2	* 2483.500	41.55	32.30	73.85	-0.15	74.00	185	150	Peak
3	2489.380	40.33	32.32	72.65	-1.35	74.00	185	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

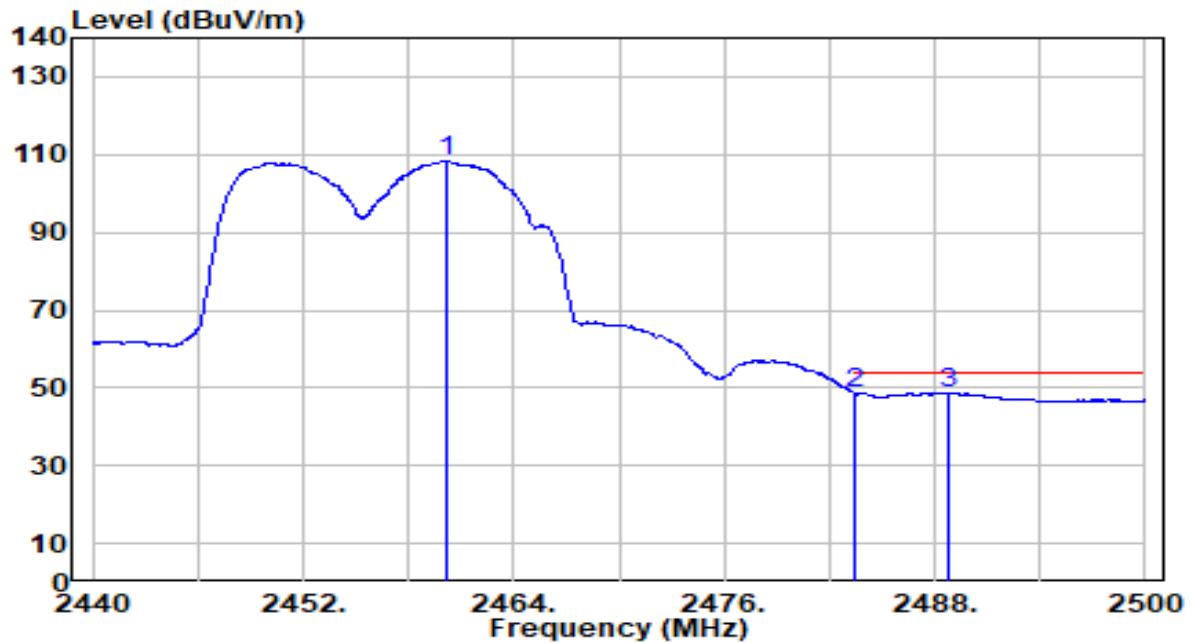


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.160	76.08	32.21	108.29	N/A	N/A	185	150	Average
2	*	2483.500	16.39	32.30	48.69	-5.31	54.00	185	150	Average
3		2488.720	16.36	32.32	48.68	-5.32	54.00	185	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

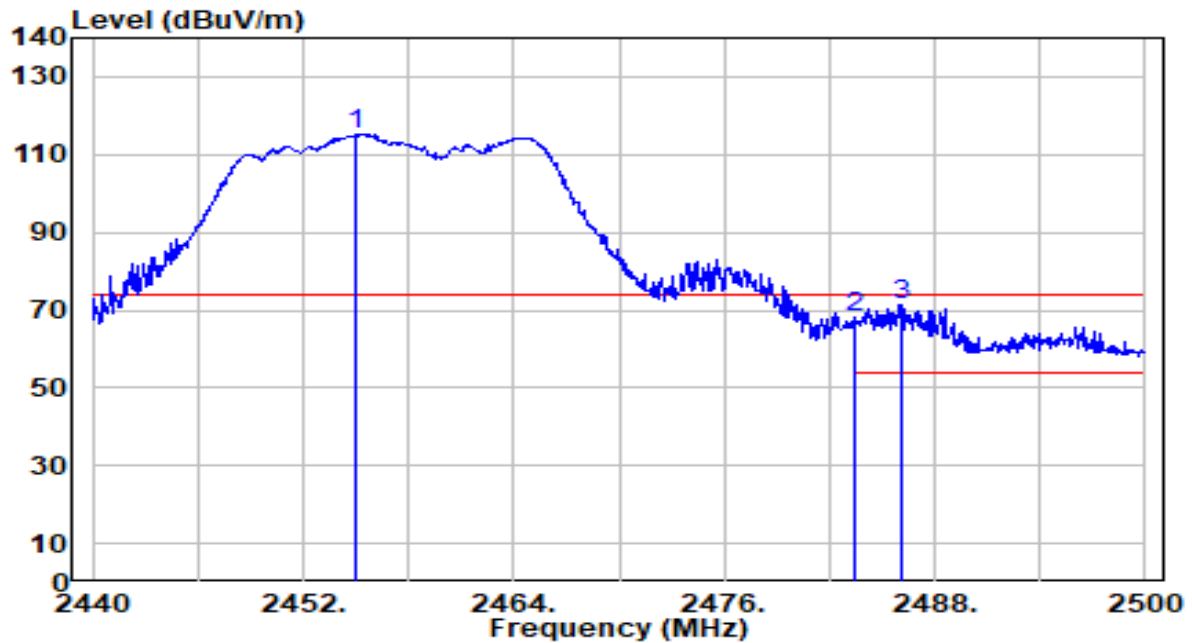


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.000	83.13	32.19	115.32	N/A	N/A	170	210	Peak
2	2483.500	35.78	32.30	68.08	-5.92	74.00	170	210	Peak
3	* 2486.140	39.20	32.31	71.51	-2.49	74.00	170	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

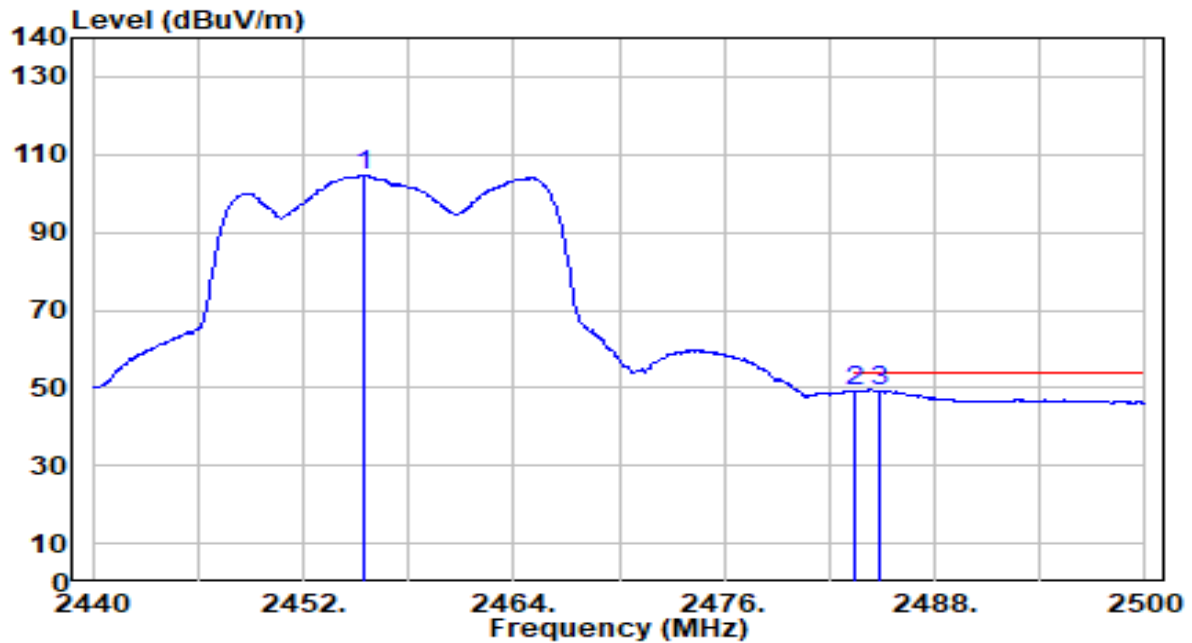


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.480	72.35	32.19	104.54	N/A	N/A	170	210	Average
2	2483.500	16.70	32.30	49.00	-5.00	54.00	170	210	Average
3	* 2484.880	16.95	32.30	49.26	-4.74	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

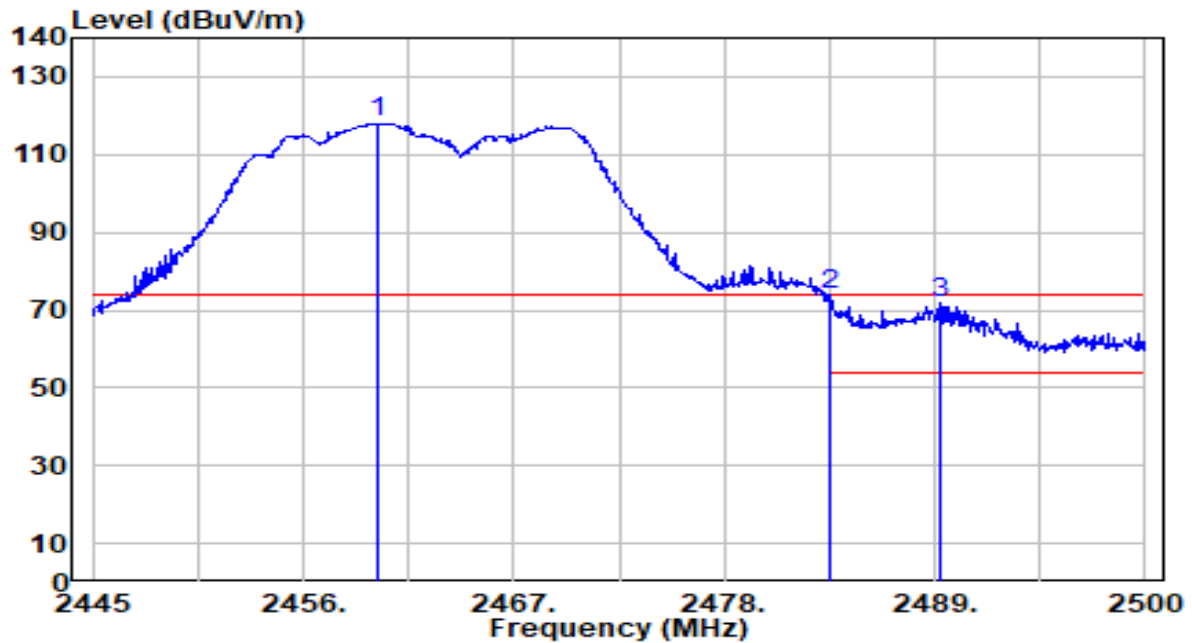


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.960	86.00	32.21	118.21	N/A	N/A	185	150	Peak
2	* 2483.500	41.46	32.30	73.76	-0.24	74.00	185	150	Peak
3	2489.220	39.52	32.32	71.84	-2.16	74.00	185	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

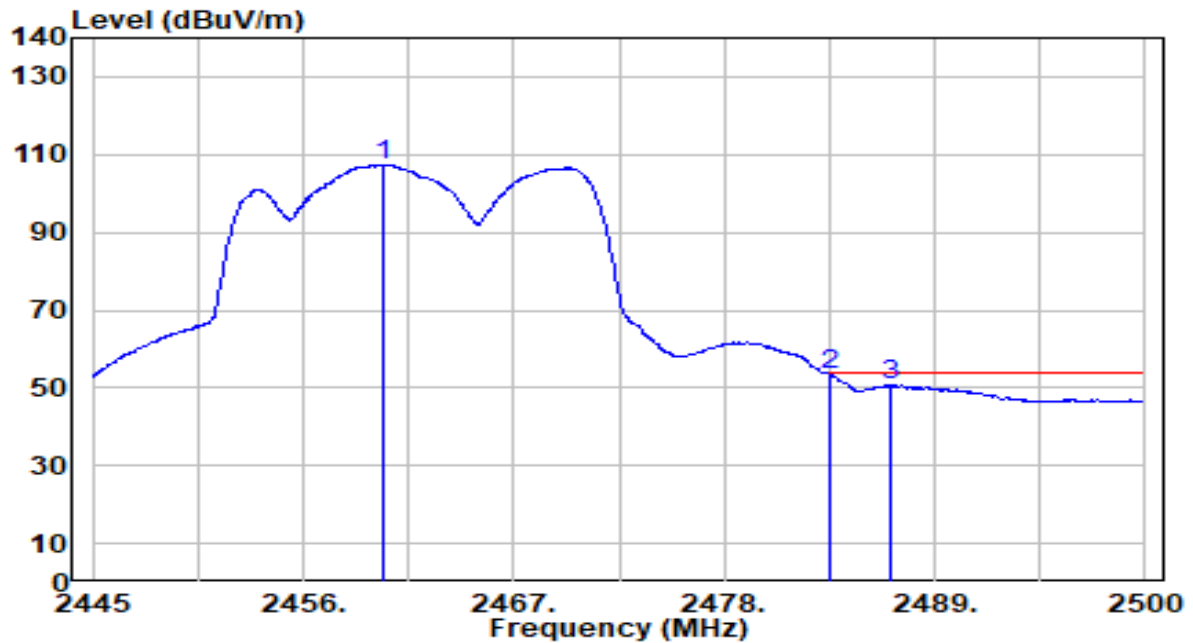


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.235	75.27	32.21	107.48	N/A	N/A	185	150	Average
2	*	2483.500	21.14	32.30	53.44	-0.56	54.00	185	150	Average
3		2486.745	18.39	32.31	50.70	-3.30	54.00	185	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

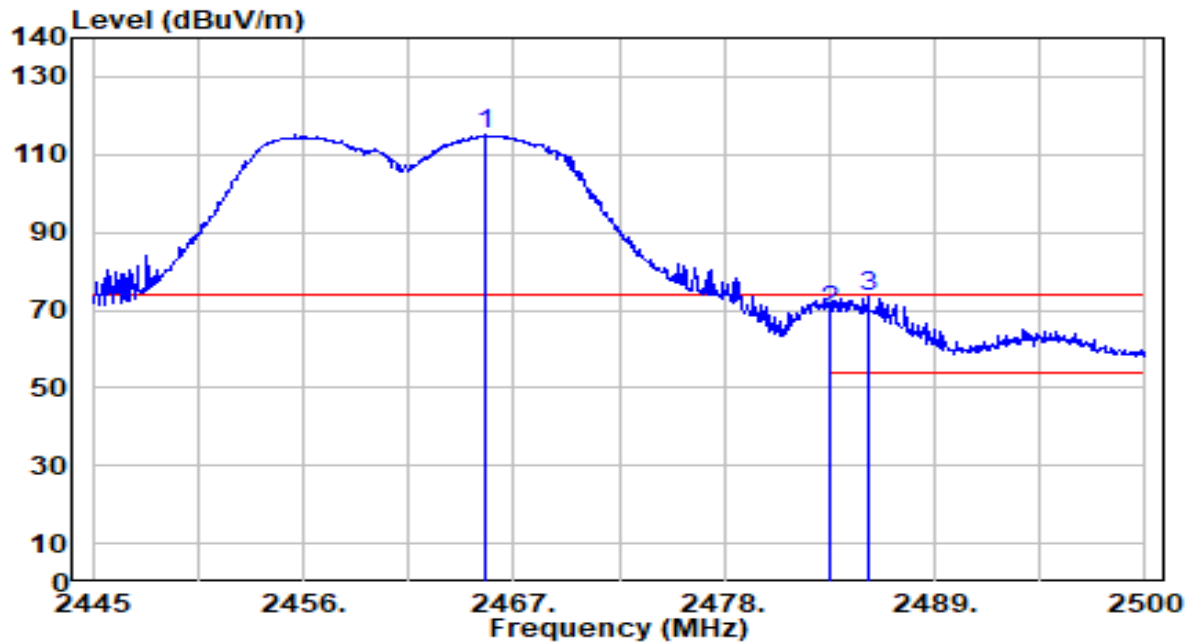


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.460	82.96	32.23	115.19	N/A	N/A	170	210	Peak
2	2483.500	37.49	32.30	69.79	-4.21	74.00	170	210	Peak
3	* 2485.480	41.03	32.31	73.34	-0.66	74.00	170	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

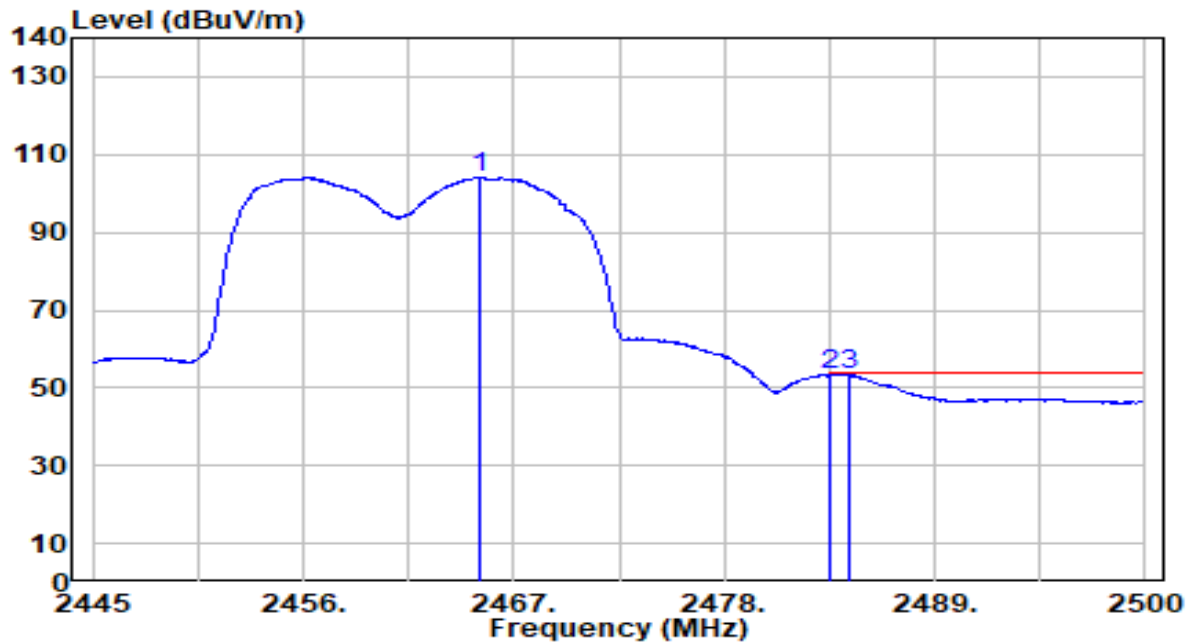


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.240	71.84	32.23	104.07	N/A	N/A	170	210	Average
2	2483.500	21.01	32.30	53.31	-0.69	54.00	170	210	Average
3	* 2484.490	21.24	32.30	53.54	-0.46	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

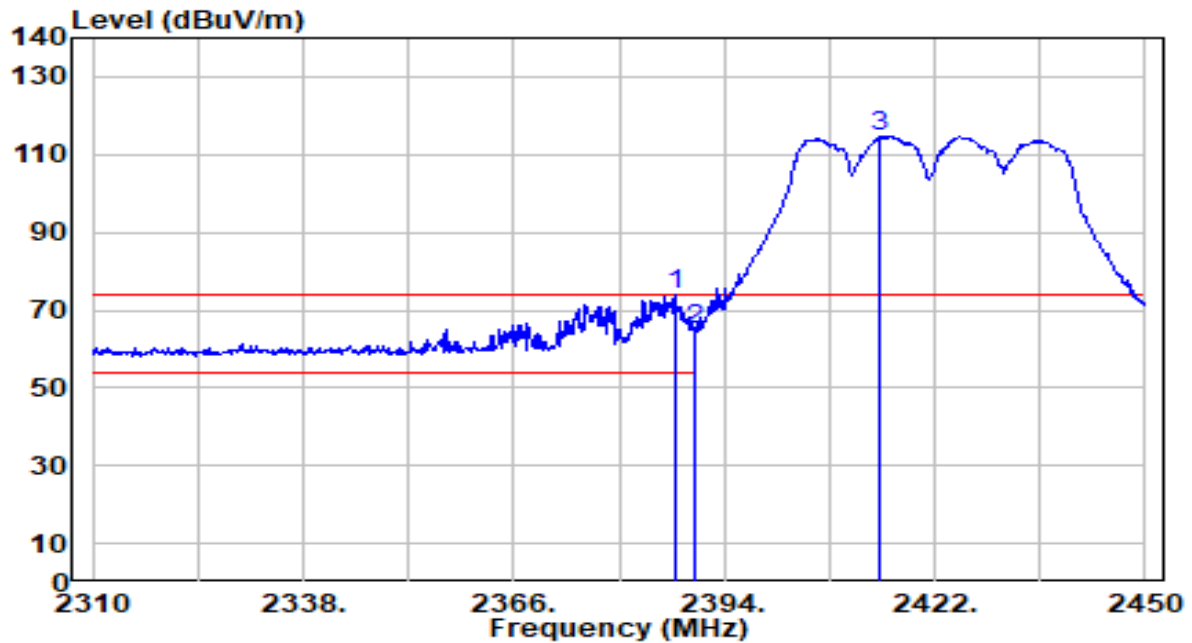


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.420	41.90	31.94	73.84	-0.16	74.00	195	150	Peak
2		2390.000	33.09	31.95	65.04	-8.96	74.00	195	150	Peak
3		2414.580	82.54	32.04	114.58	N/A	N/A	195	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

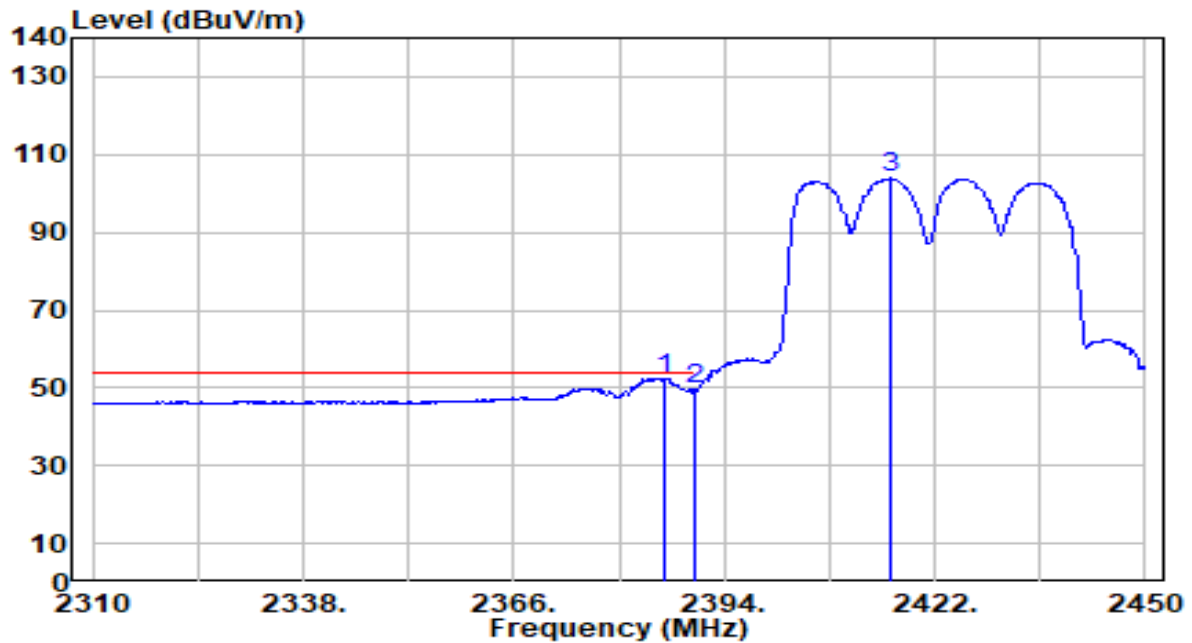


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.160	20.58	31.93	52.52	-1.48	54.00	195	150	Average
2		2390.000	17.49	31.95	49.44	-4.56	54.00	195	150	Average
3		2416.120	71.77	32.05	103.82	N/A	N/A	195	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

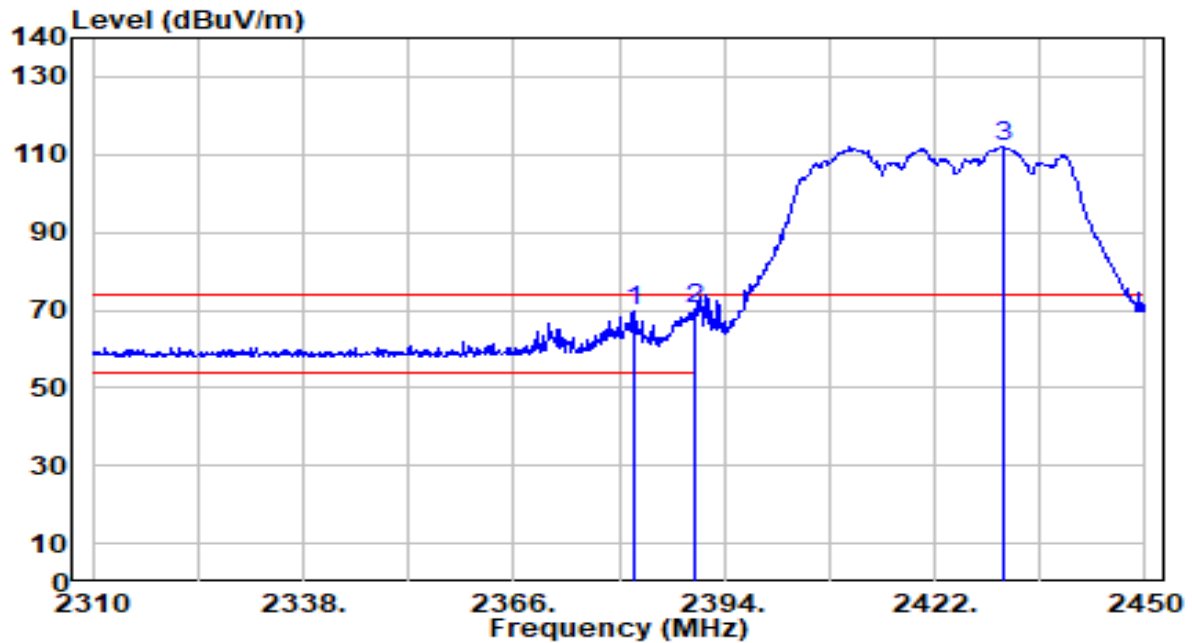


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2381.960	37.65	31.92	69.57	-4.43	74.00	200	150	Peak
2	*	2390.000	38.23	31.95	70.18	-3.82	74.00	200	150	Peak
3		2431.100	79.73	32.10	111.83	N/A	N/A	200	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

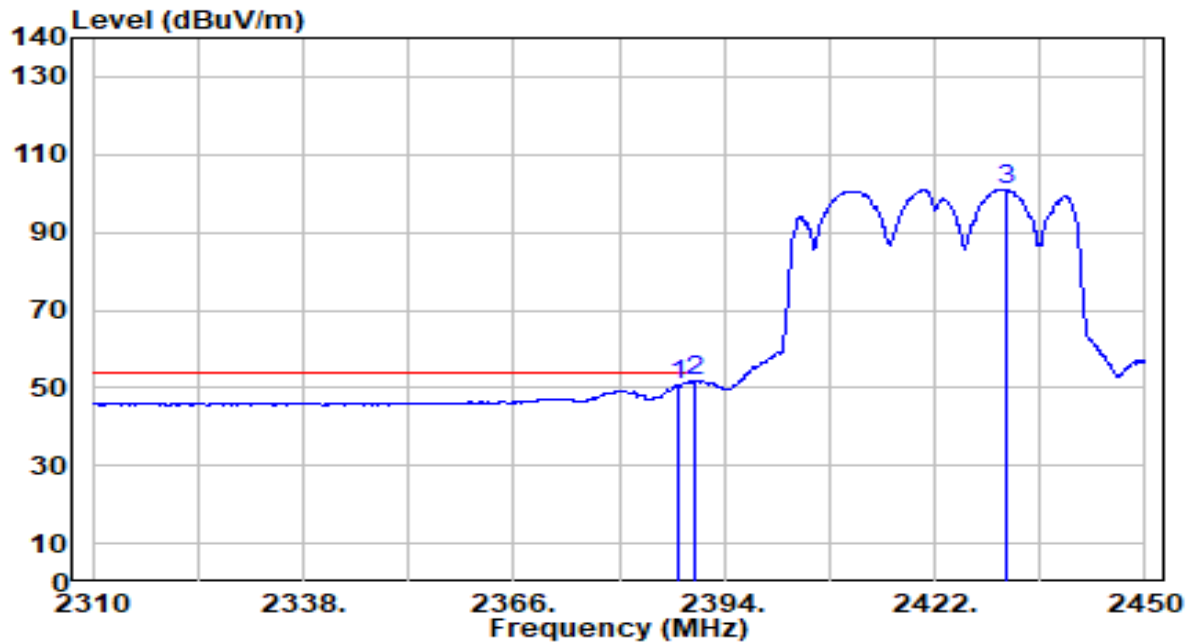


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.840	18.76	31.94	50.70	-3.30	54.00	200	150	Average
2	*	2390.000	19.79	31.95	51.74	-2.26	54.00	200	150	Average
3		2431.380	68.93	32.10	101.04	N/A	N/A	200	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

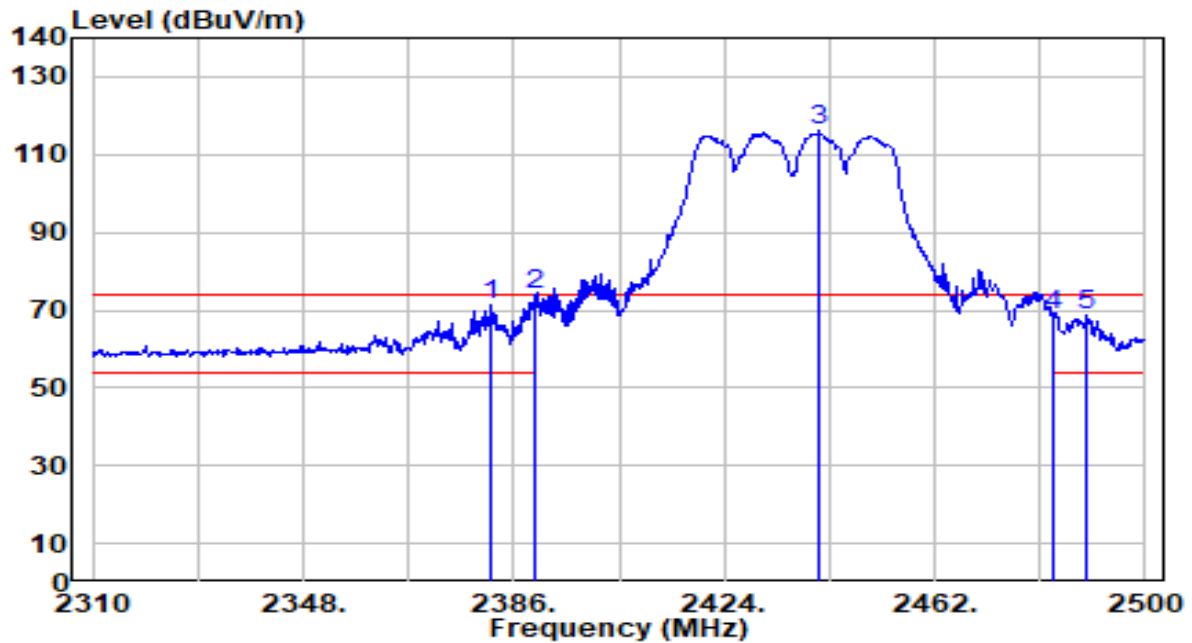


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.010	39.51	31.92	71.43	-2.57	74.00	205	155	Peak
2	* 2390.000	41.86	31.95	73.81	-0.19	74.00	205	155	Peak
3	2441.100	83.84	32.14	115.98	N/A	N/A	205	155	Peak
4	2483.500	36.40	32.30	68.70	-5.30	74.00	205	155	Peak
5	2489.550	36.11	32.32	68.43	-5.57	74.00	205	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

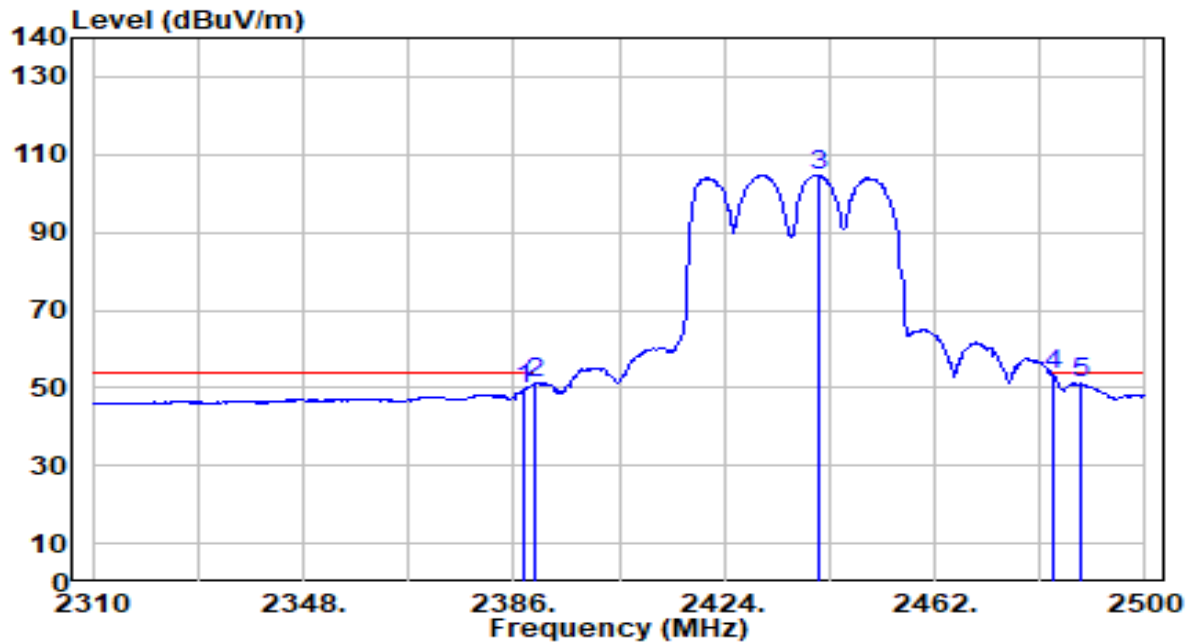


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	17.72	31.94	49.66	-4.34	54.00	205	155	Average
2	2390.000	19.09	31.95	51.04	-2.96	54.00	205	155	Average
3	2441.100	72.62	32.14	104.76	N/A	N/A	205	155	Average
4	* 2483.500	20.94	32.30	53.24	-0.76	54.00	205	155	Average
5	2488.600	18.96	32.32	51.28	-2.72	54.00	205	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

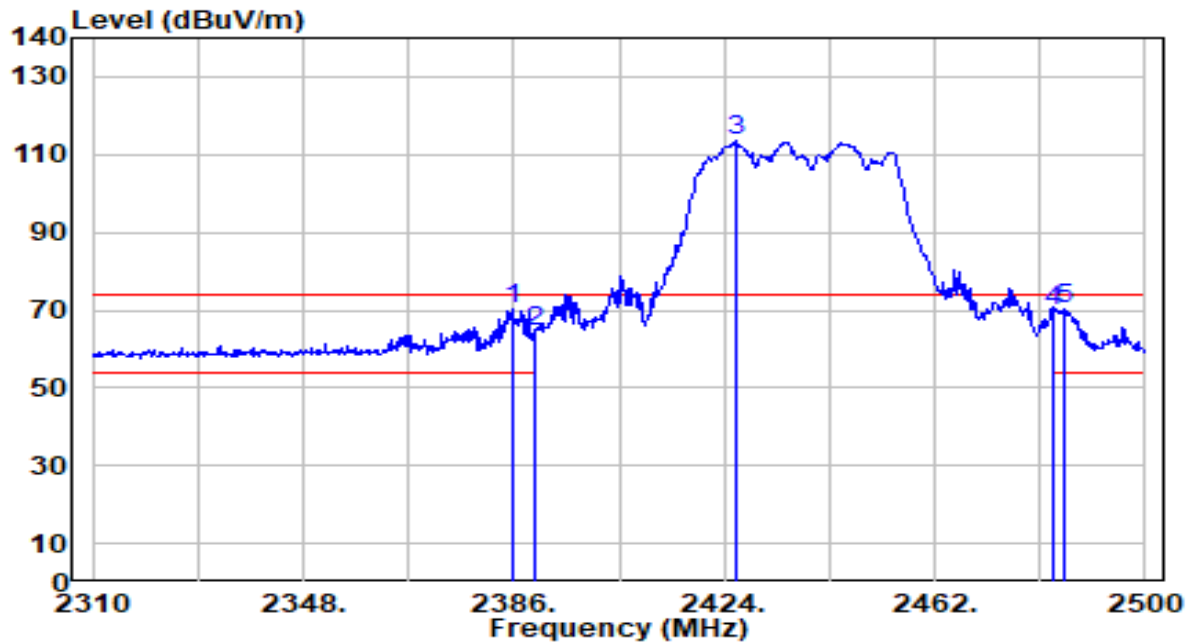


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	38.20	31.93	70.13	-3.87	74.00	195	205	Peak
2	2390.000	32.31	31.95	64.26	-9.74	74.00	195	205	Peak
3	2426.090	81.60	32.08	113.69	N/A	N/A	195	205	Peak
4	2483.500	37.32	32.30	69.62	-4.38	74.00	195	205	Peak
5	* 2485.180	38.17	32.30	70.47	-3.53	74.00	195	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

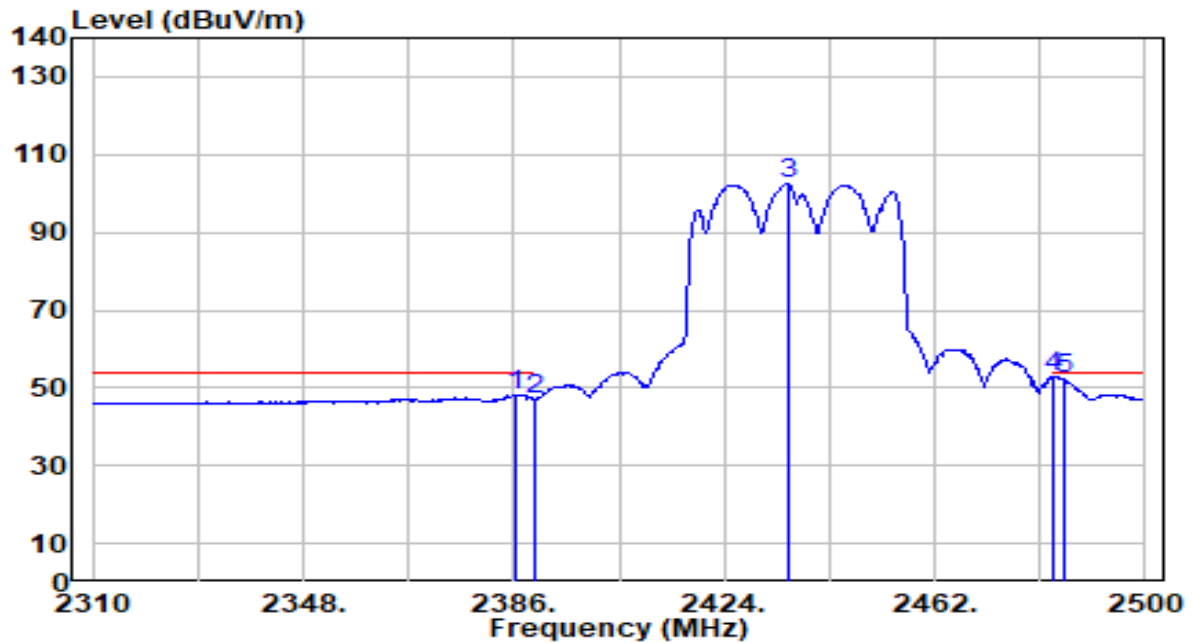


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.380	16.20	31.94	48.13	-5.87	54.00	195	205	Average
2	2390.000	14.91	31.95	46.86	-7.14	54.00	195	205	Average
3	2435.590	70.41	32.12	102.53	N/A	N/A	195	205	Average
4	* 2483.500	20.34	32.30	52.64	-1.36	54.00	195	205	Average
5	2485.180	20.23	32.30	52.54	-1.46	54.00	195	205	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

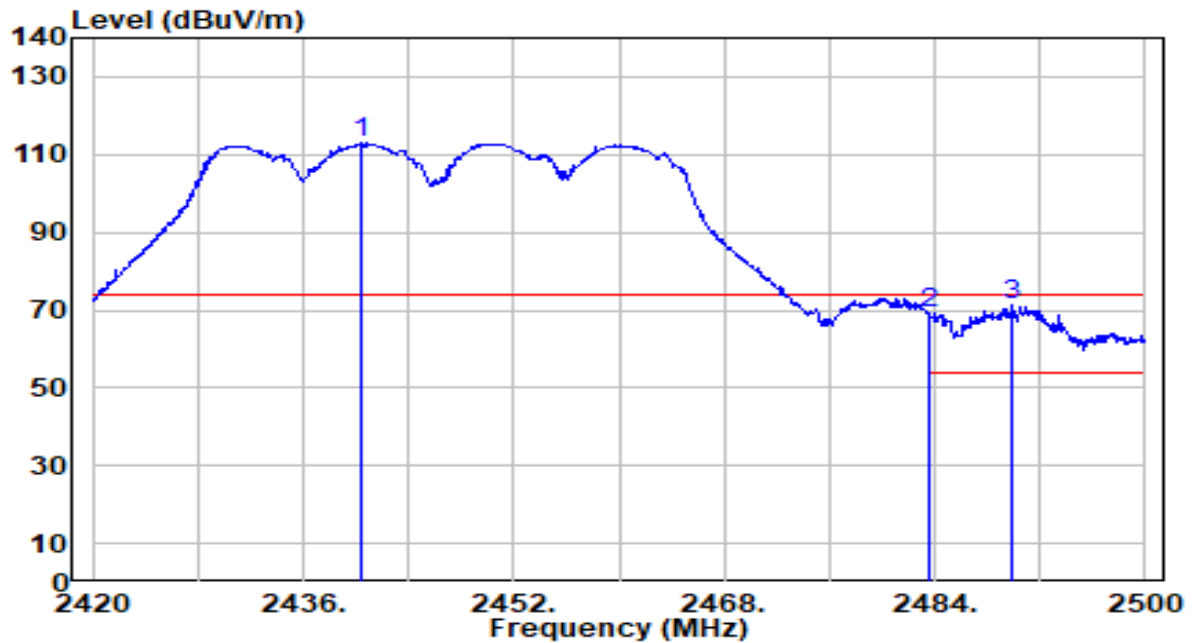


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2440.480	80.86	32.14	112.99	N/A	N/A	185	150	Peak
2	2483.500	36.83	32.30	69.13	-4.87	74.00	185	150	Peak
3	* 2489.920	39.15	32.32	71.47	-2.53	74.00	185	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

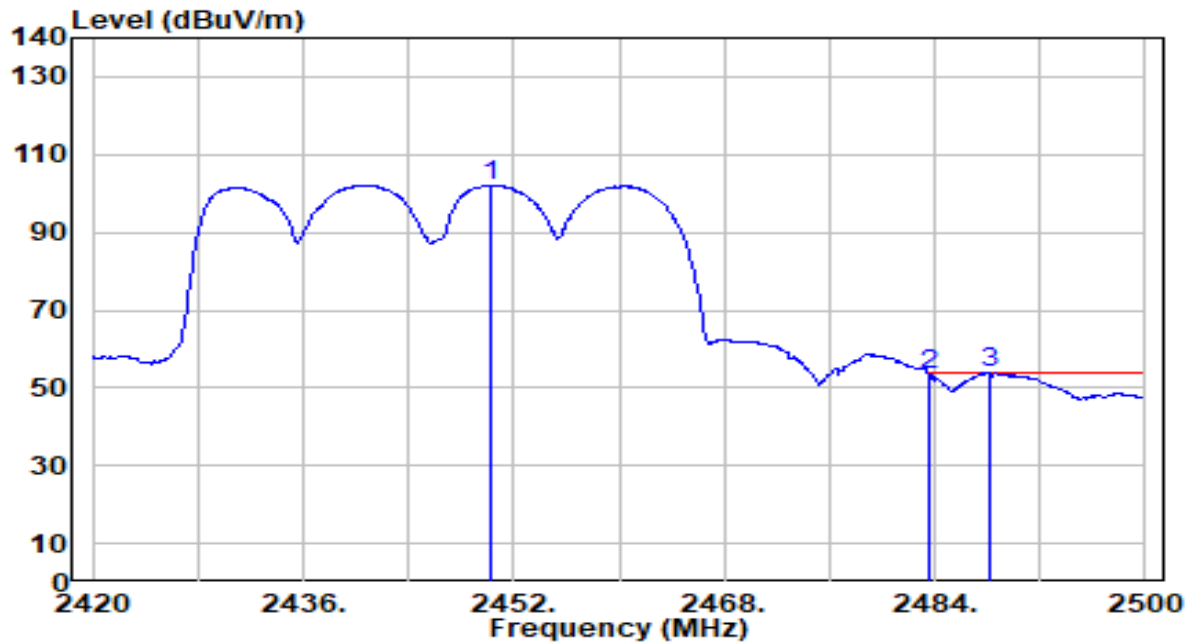


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.320	70.01	32.17	102.19	N/A	N/A	185	150	Average
2	2483.500	21.28	32.30	53.58	-0.42	54.00	185	150	Average
3	* 2488.160	21.55	32.32	53.86	-0.14	54.00	185	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

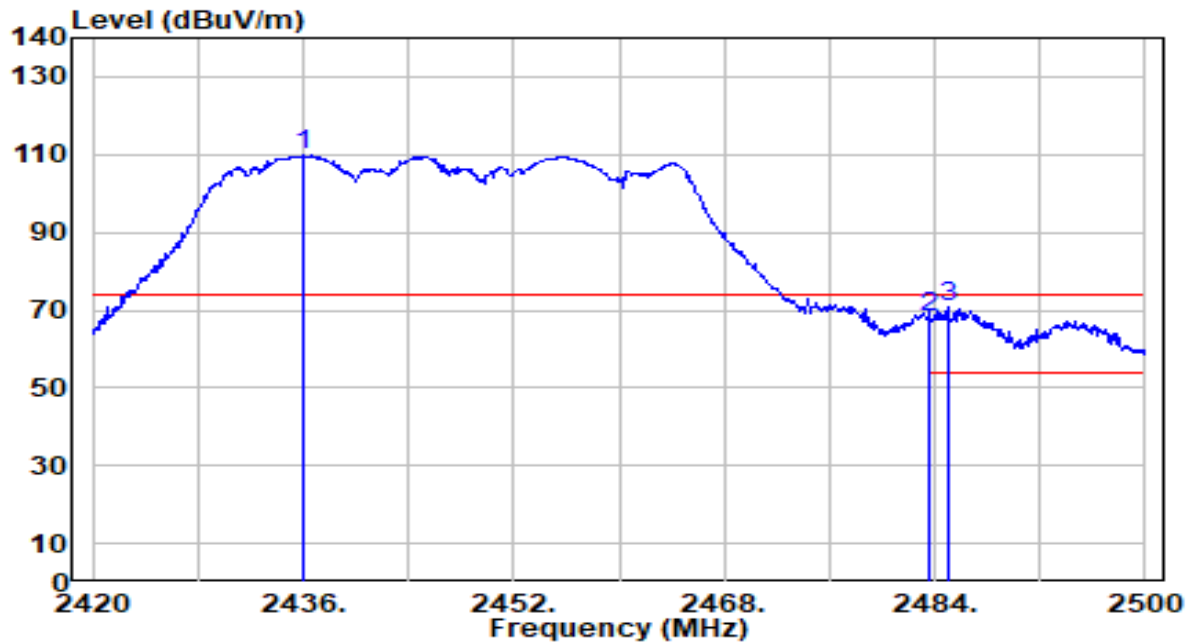


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2436.080	77.96	32.12	110.08	N/A	N/A	170	210	Peak
2	2483.500	35.65	32.30	67.94	-6.06	74.00	170	210	Peak
3	* 2484.960	38.33	32.30	70.63	-3.37	74.00	170	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

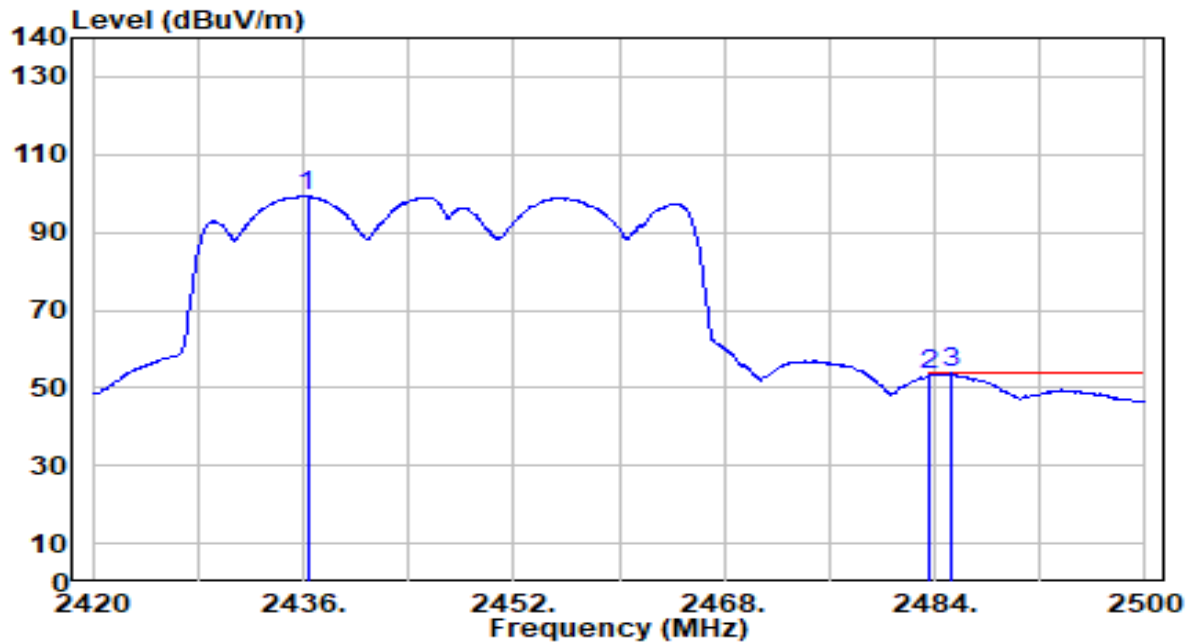


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2436.320	67.11	32.12	99.23	N/A	N/A	170	210	Average
2	2483.500	20.95	32.30	53.25	-0.75	54.00	170	210	Average
3	* 2485.200	21.34	32.30	53.65	-0.35	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

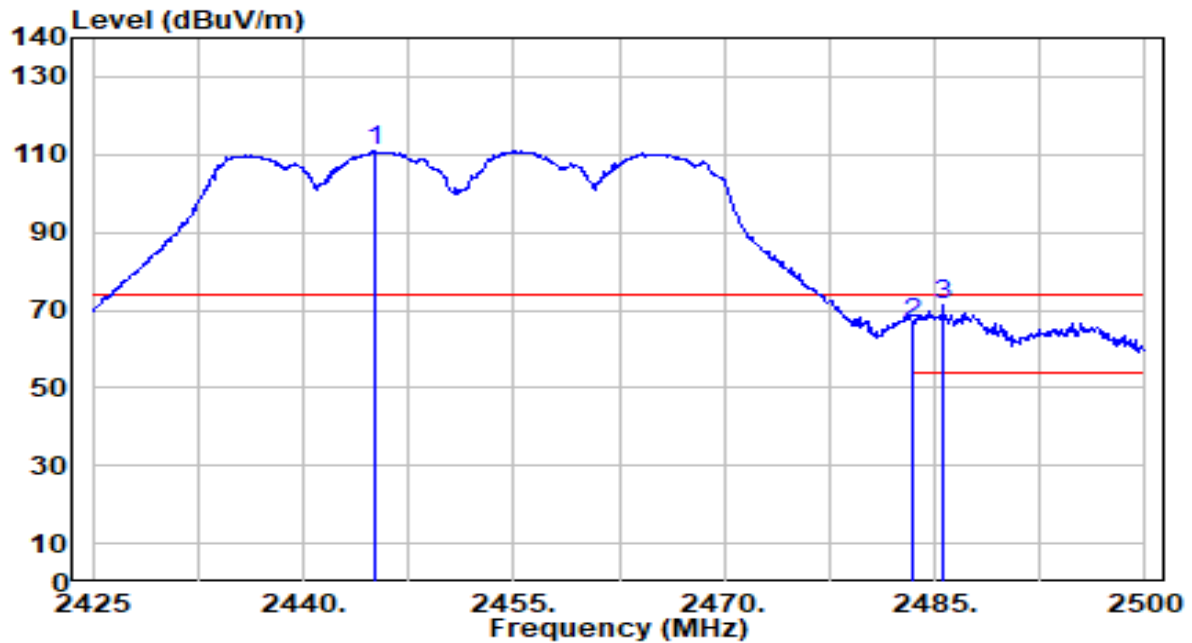


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.100	78.73	32.15	110.88	N/A	N/A	185	150	Peak
2	2483.500	34.28	32.30	66.58	-7.42	74.00	185	150	Peak
3	* 2485.600	38.86	32.31	71.16	-2.84	74.00	185	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

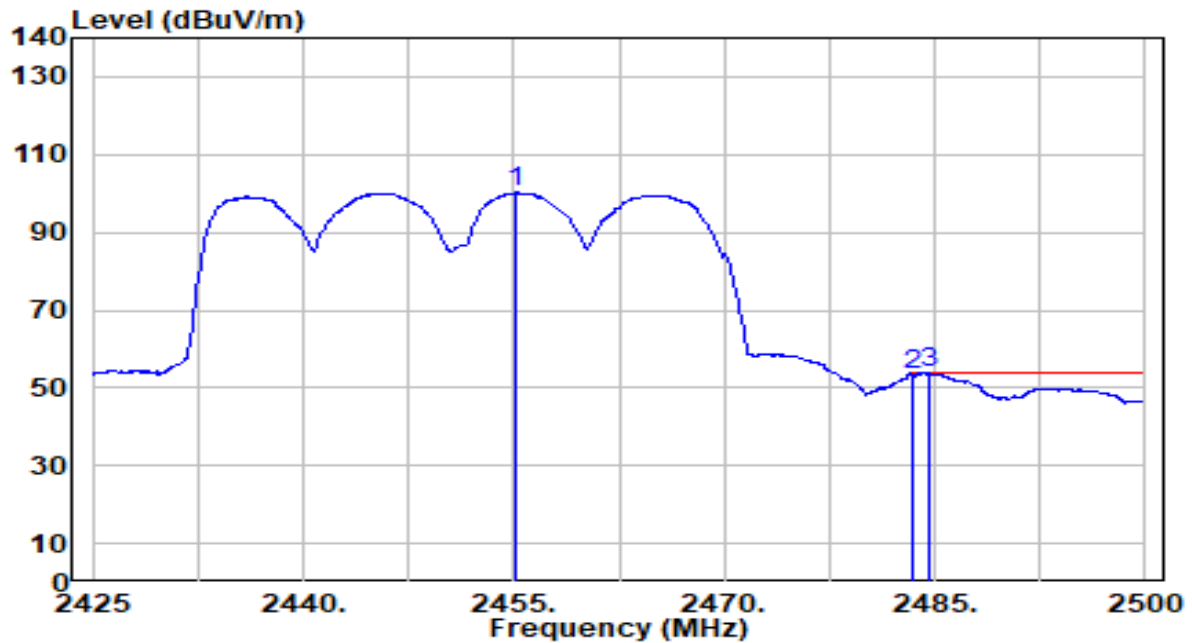


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.225	68.02	32.19	100.21	N/A	N/A	185	150	Average
2	2483.500	20.88	32.30	53.18	-0.82	54.00	185	150	Average
3	* 2484.625	21.47	32.30	53.77	-0.23	54.00	185	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

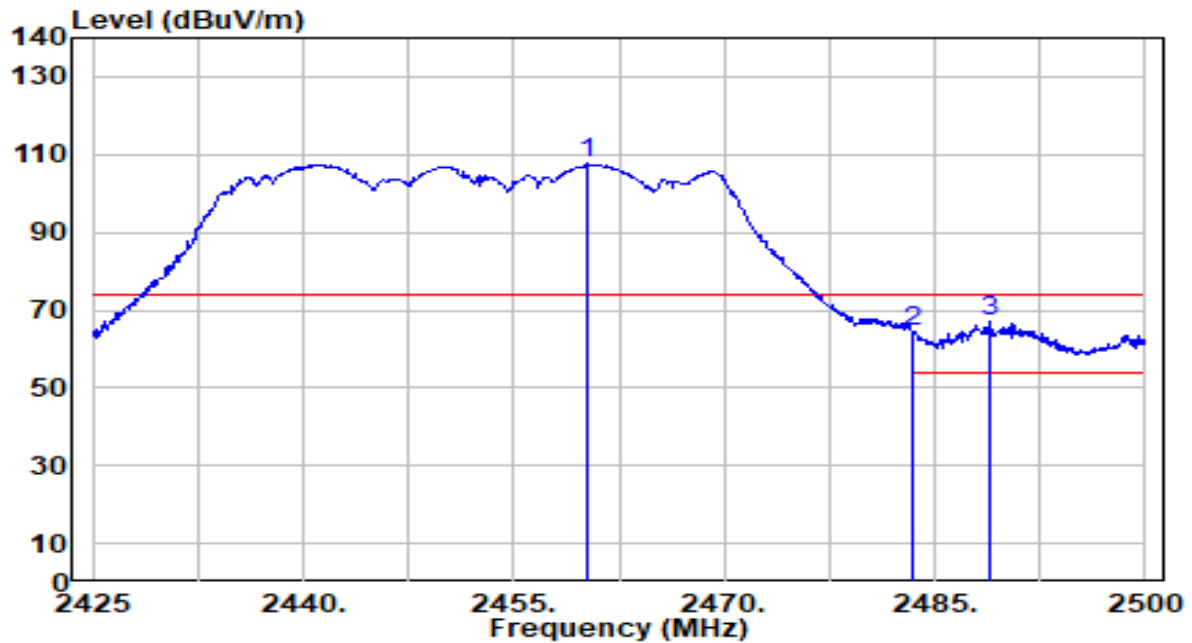


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.175	75.41	32.21	107.62	N/A	N/A	170	210	Peak
2	2483.500	32.27	32.30	64.56	-9.44	74.00	170	210	Peak
3	* 2488.900	34.65	32.32	66.97	-7.03	74.00	170	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

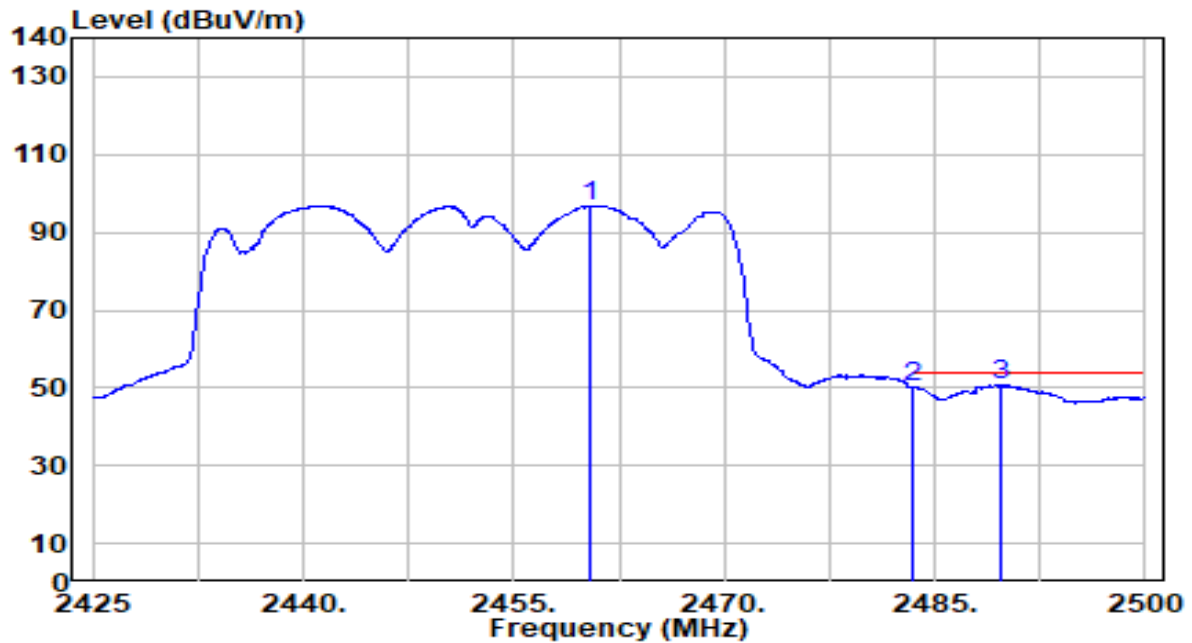


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.475	64.58	32.21	96.79	N/A	N/A	170	210	Average
2	2483.500	17.68	32.30	49.98	-4.02	54.00	170	210	Average
3	* 2489.725	18.24	32.32	50.57	-3.43	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

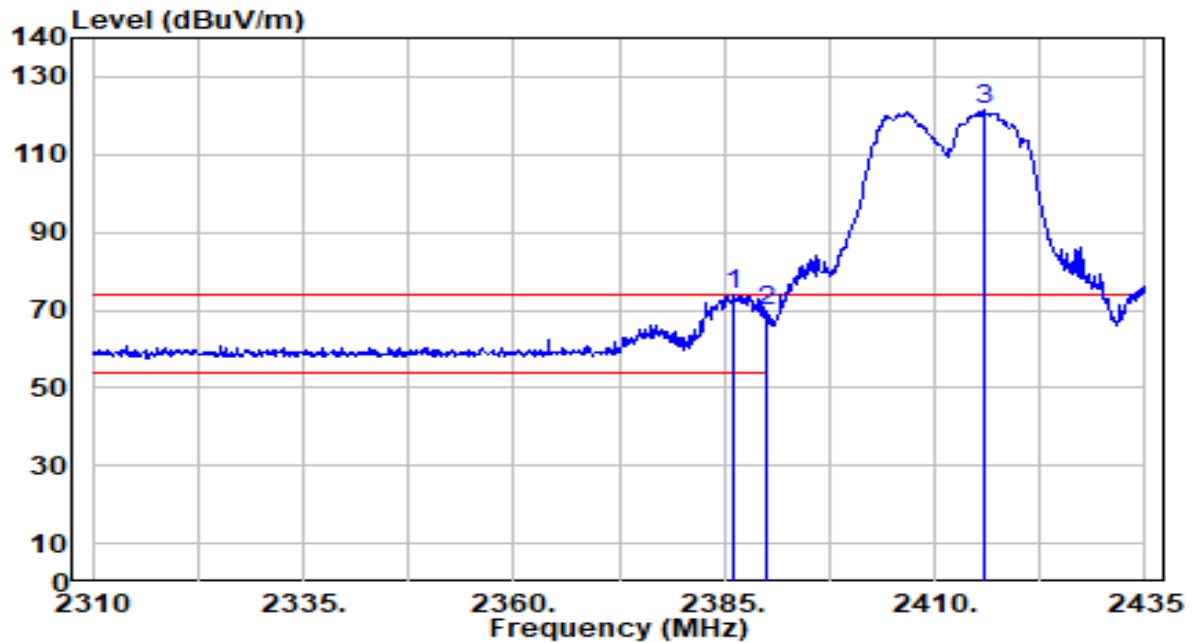


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.250	41.94	31.93	73.87	-0.13	74.00	190	150	Peak
2		2390.000	37.67	31.95	69.62	-4.38	74.00	190	150	Peak
3		2415.750	89.67	32.04	121.72	N/A	N/A	190	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

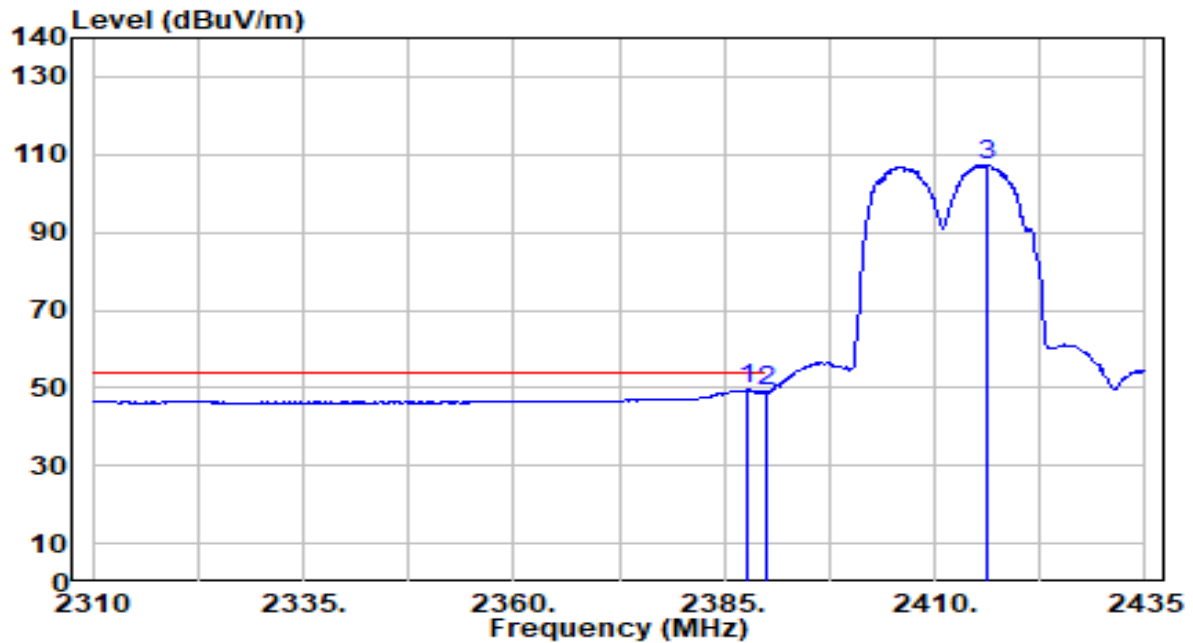


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.875	17.55	31.94	49.49	-4.51	54.00	190	150	Average
2		2390.000	16.94	31.95	48.89	-5.11	54.00	190	150	Average
3		2416.250	75.16	32.05	107.21	N/A	N/A	190	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

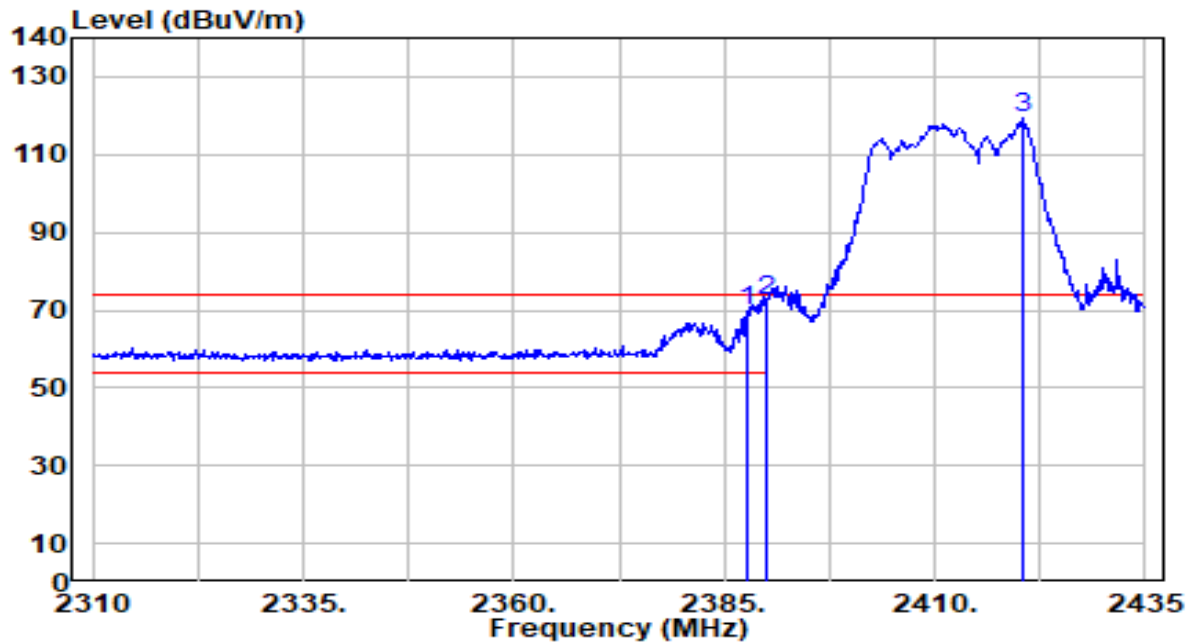


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.875	37.73	31.94	69.67	-4.33	74.00	200	150	Peak
2	*	2390.000	40.66	31.95	72.61	-1.39	74.00	200	150	Peak
3		2420.625	87.42	32.06	119.48	N/A	N/A	200	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

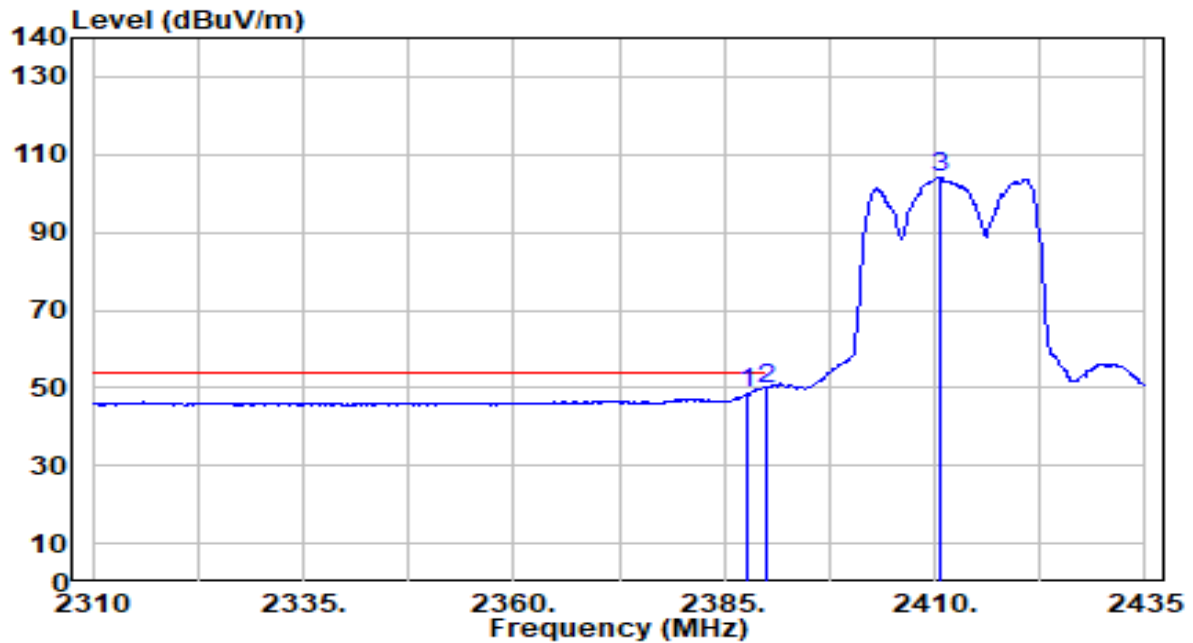


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.750	16.45	31.94	48.39	-5.61	54.00	200	150	Average
2	*	2390.000	17.76	31.95	49.71	-4.29	54.00	200	150	Average
3		2410.750	72.07	32.03	104.10	N/A	N/A	200	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

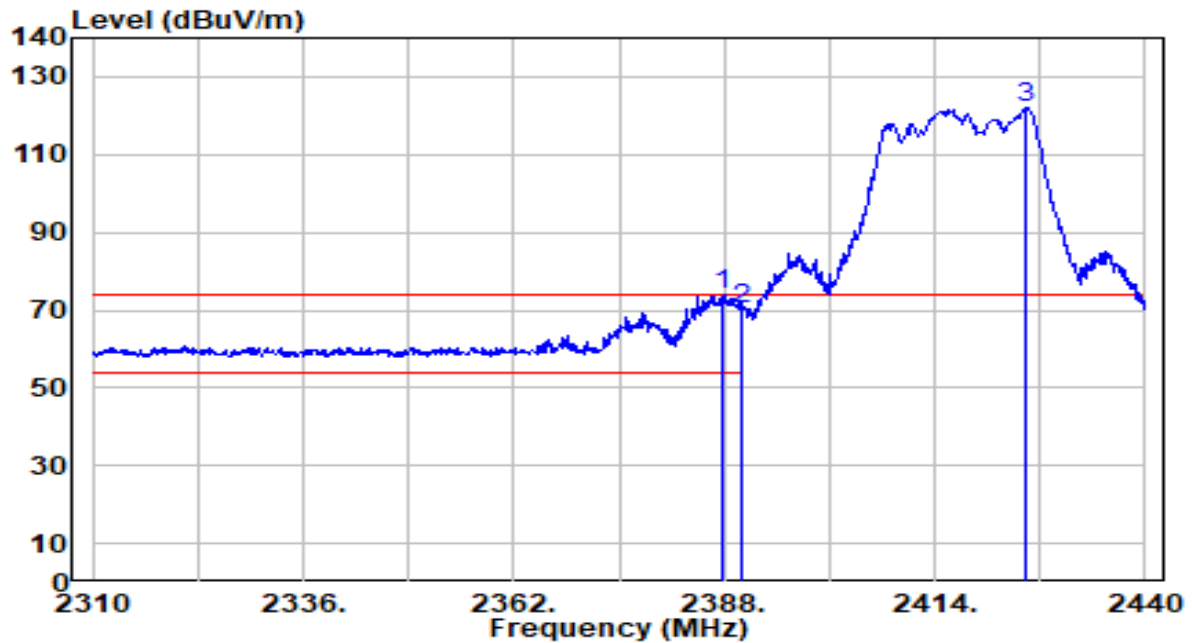


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.870	41.77	31.94	73.71	-0.29	74.00	190	150	Peak
2		2390.000	38.35	31.95	70.29	-3.71	74.00	190	150	Peak
3		2425.310	90.02	32.08	122.10	N/A	N/A	190	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

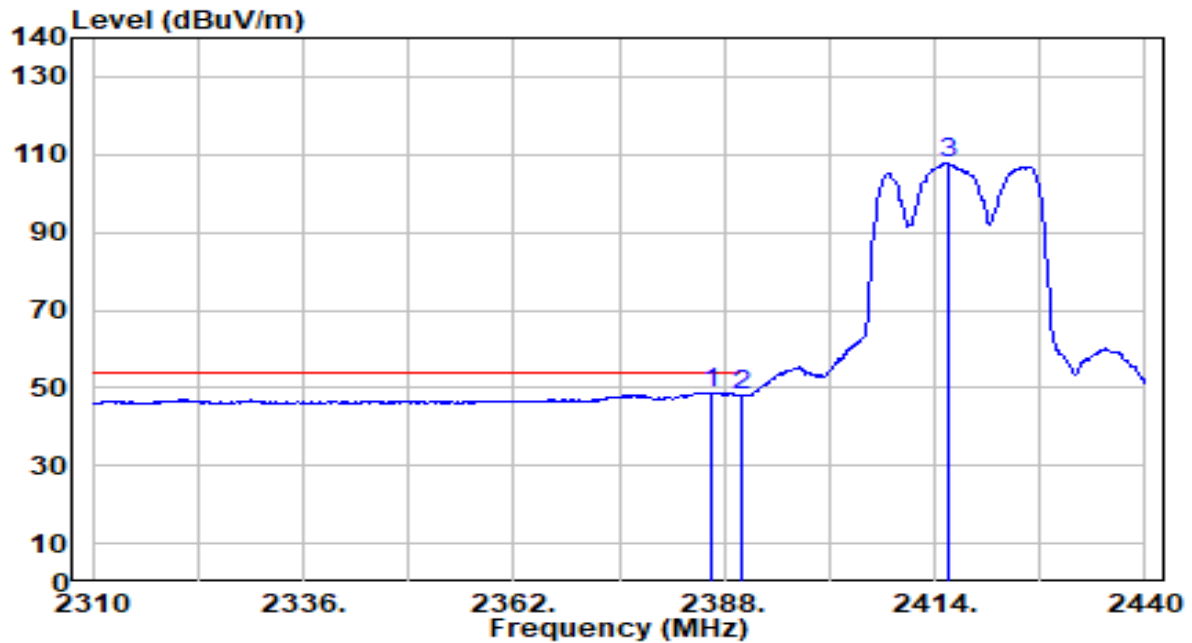


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.310	16.81	31.93	48.74	-5.26	54.00	190	150	Average
2		2390.000	16.12	31.95	48.07	-5.93	54.00	190	150	Average
3		2415.690	75.71	32.04	107.75	N/A	N/A	190	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

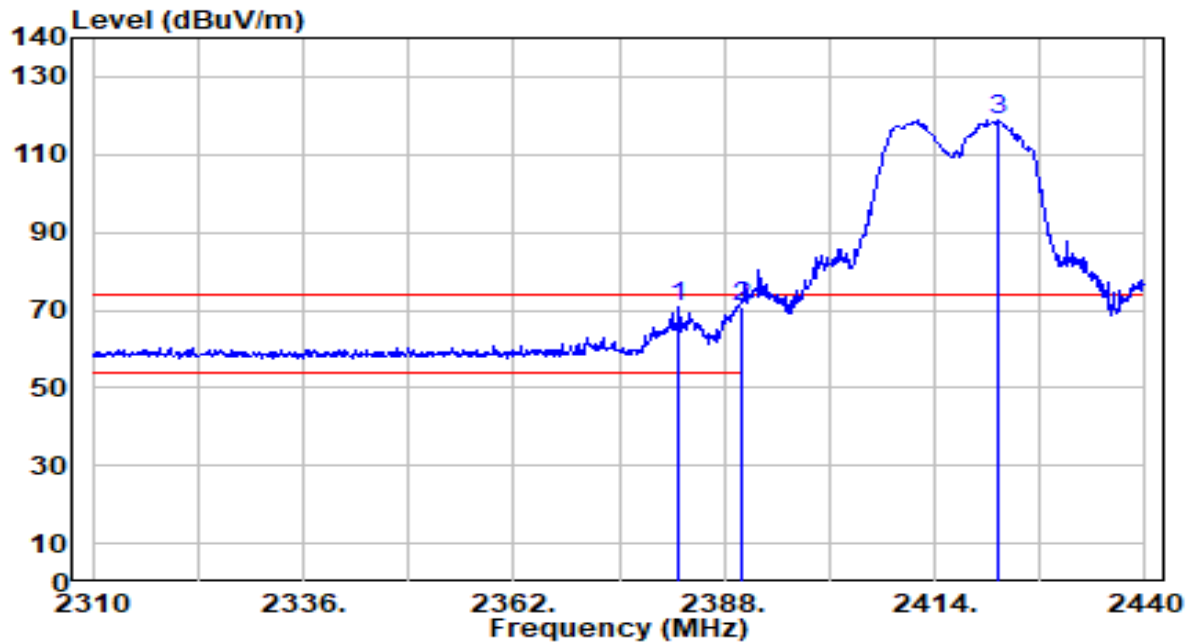


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2382.410	38.70	31.92	70.62	-3.38	74.00	200	150	Peak
2	*	2390.000	38.95	31.95	70.90	-3.10	74.00	200	150	Peak
3		2421.930	87.01	32.07	119.08	N/A	N/A	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

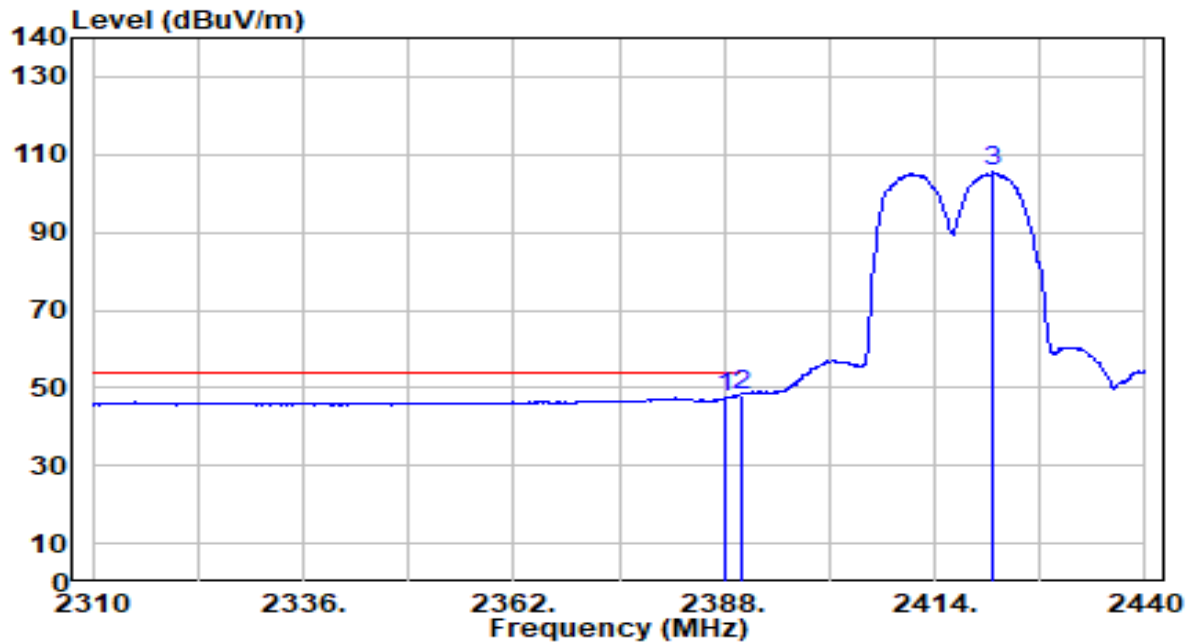


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	15.41	31.94	47.35	-6.65	54.00	200	150	Average
2	*	2390.000	16.25	31.95	48.19	-5.81	54.00	200	150	Average
3		2421.280	73.37	32.07	105.44	N/A	N/A	200	150	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

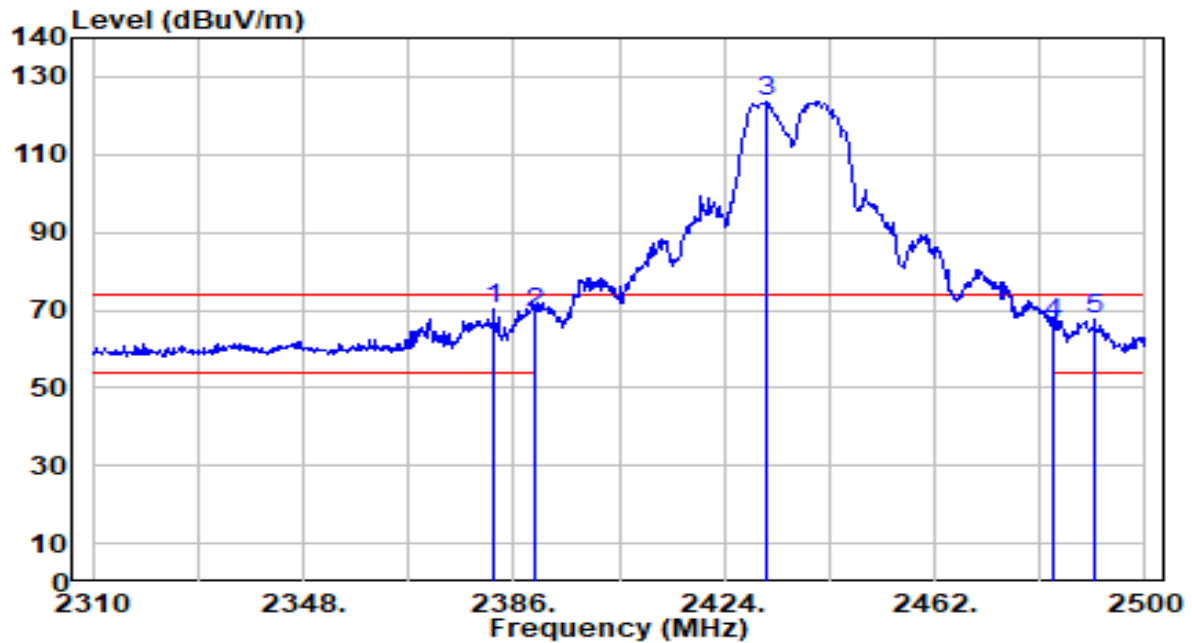


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.390	38.10	31.92	70.02	-3.98	74.00	205	155	Peak
2		2390.000	37.43	31.95	69.38	-4.62	74.00	205	155	Peak
3		2431.790	91.46	32.10	123.57	N/A	N/A	205	155	Peak
4		2483.500	34.07	32.30	66.37	-7.63	74.00	205	155	Peak
5		2490.880	35.29	32.33	67.62	-6.38	74.00	205	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

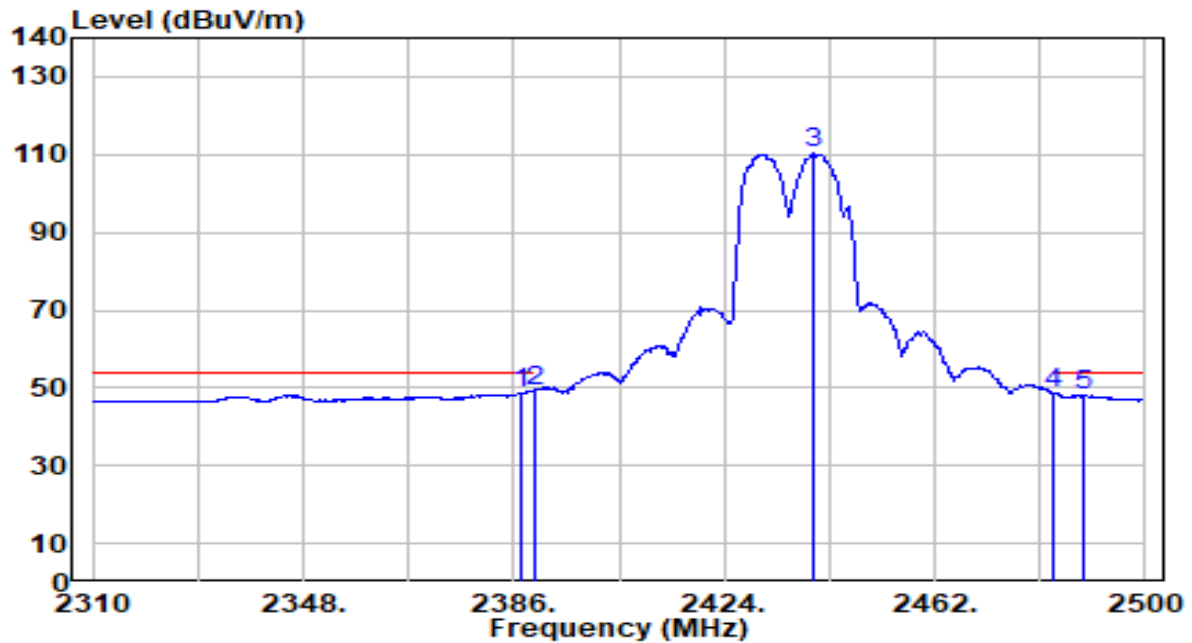


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.520	16.93	31.94	48.86	-5.14	54.00	205	155	Average
2	*	2390.000	17.39	31.95	49.34	-4.66	54.00	205	155	Average
3		2440.150	78.04	32.14	110.18	N/A	N/A	205	155	Average
4		2483.500	16.54	32.30	48.84	-5.16	54.00	205	155	Average
5		2488.790	15.80	32.32	48.12	-5.88	54.00	205	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

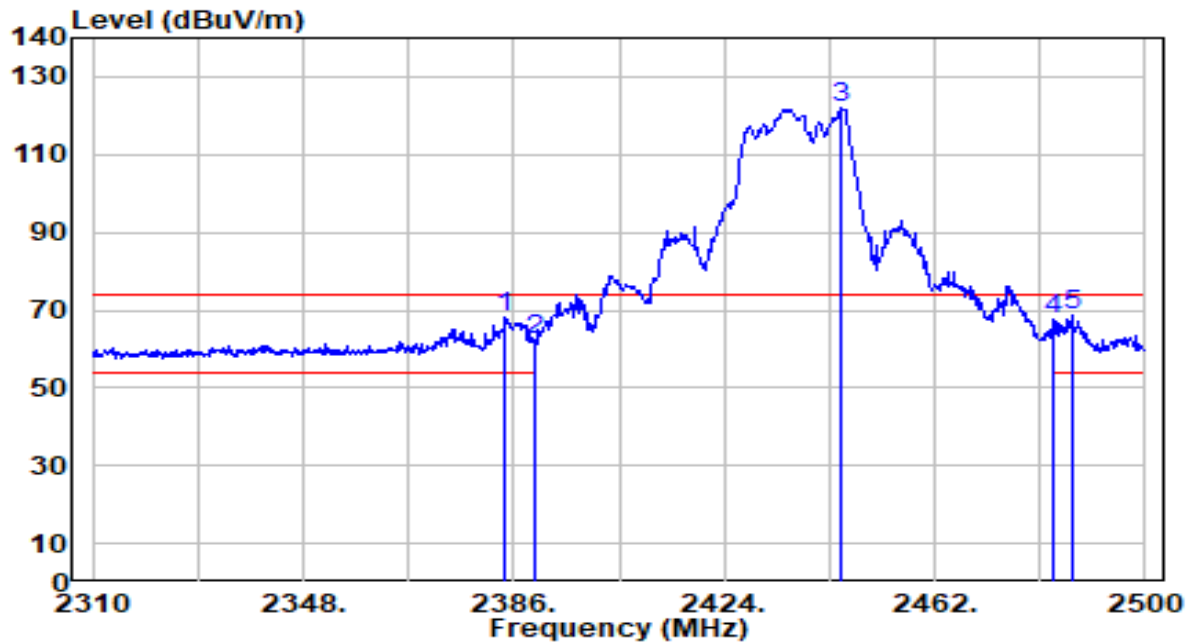


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.480	36.17	31.93	68.10	-5.90	74.00	195	205	Peak
2	2390.000	30.49	31.95	62.44	-11.56	74.00	195	205	Peak
3	2445.280	89.89	32.16	122.04	N/A	N/A	195	205	Peak
4	2483.500	35.23	32.30	67.52	-6.48	74.00	195	205	Peak
5	* 2486.700	36.32	32.31	68.63	-5.37	74.00	195	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

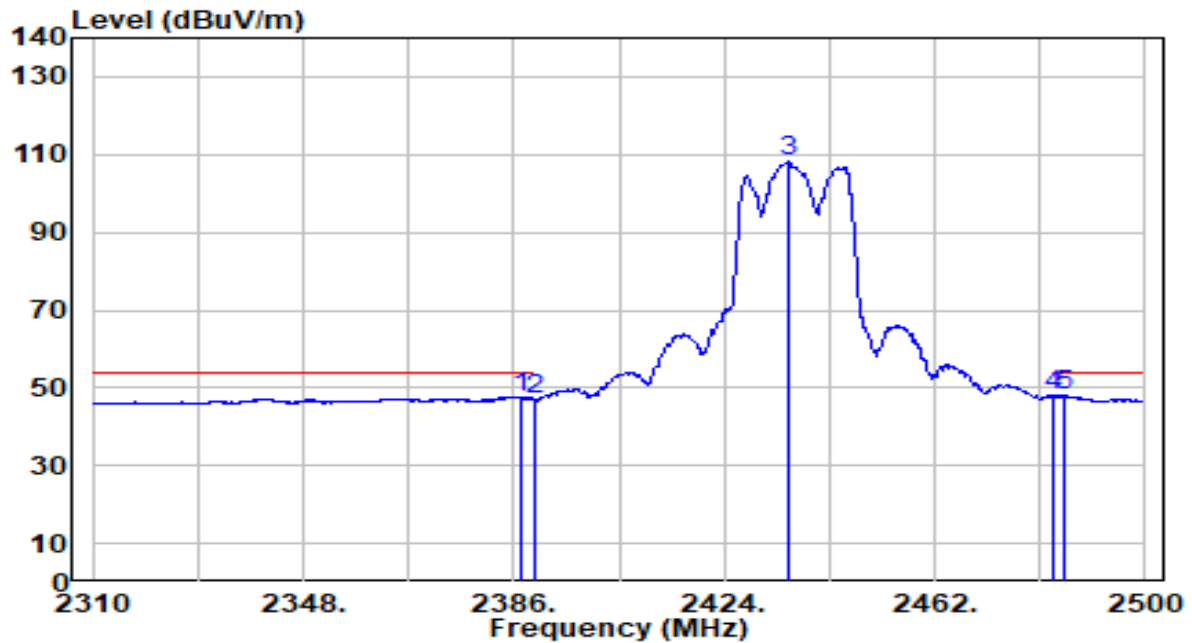


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	15.78	31.94	47.71	-6.29	54.00	195	205	Average
2	2390.000	15.17	31.95	47.12	-6.88	54.00	195	205	Average
3	2435.780	75.95	32.12	108.07	N/A	N/A	195	205	Average
4	2483.500	15.56	32.30	47.86	-6.14	54.00	195	205	Average
5	* 2485.180	15.75	32.30	48.05	-5.95	54.00	195	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

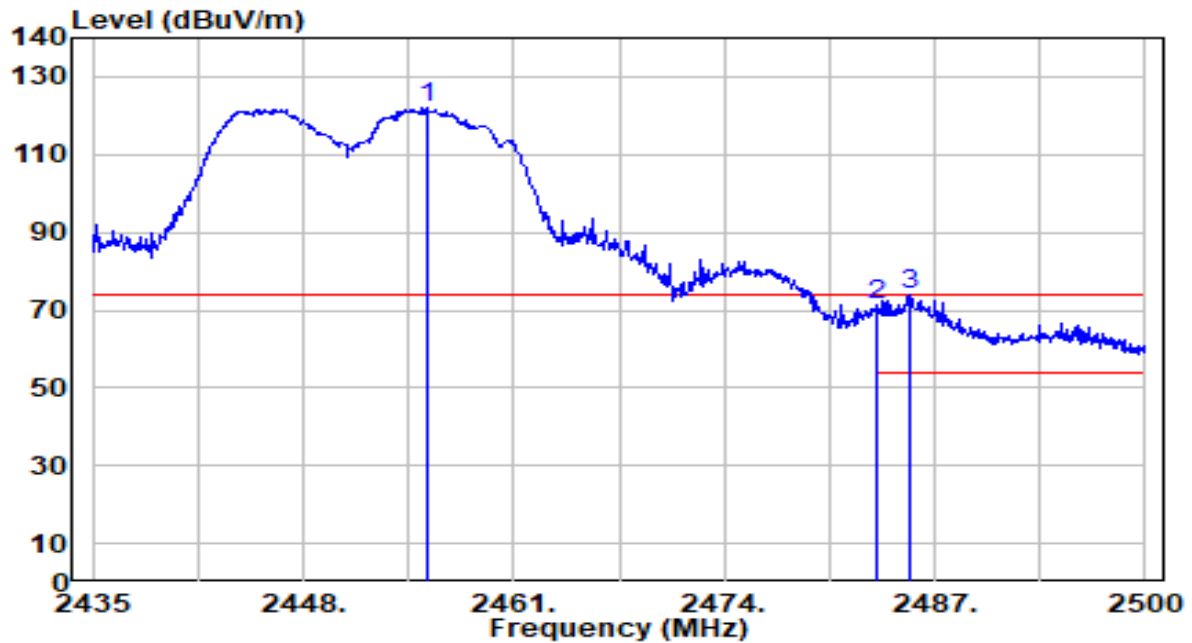


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.670	89.95	32.19	122.15	N/A	N/A	185	150	Peak
2	2483.500	39.24	32.30	71.54	-2.46	74.00	185	150	Peak
3	* 2485.505	41.45	32.31	73.75	-0.25	74.00	185	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

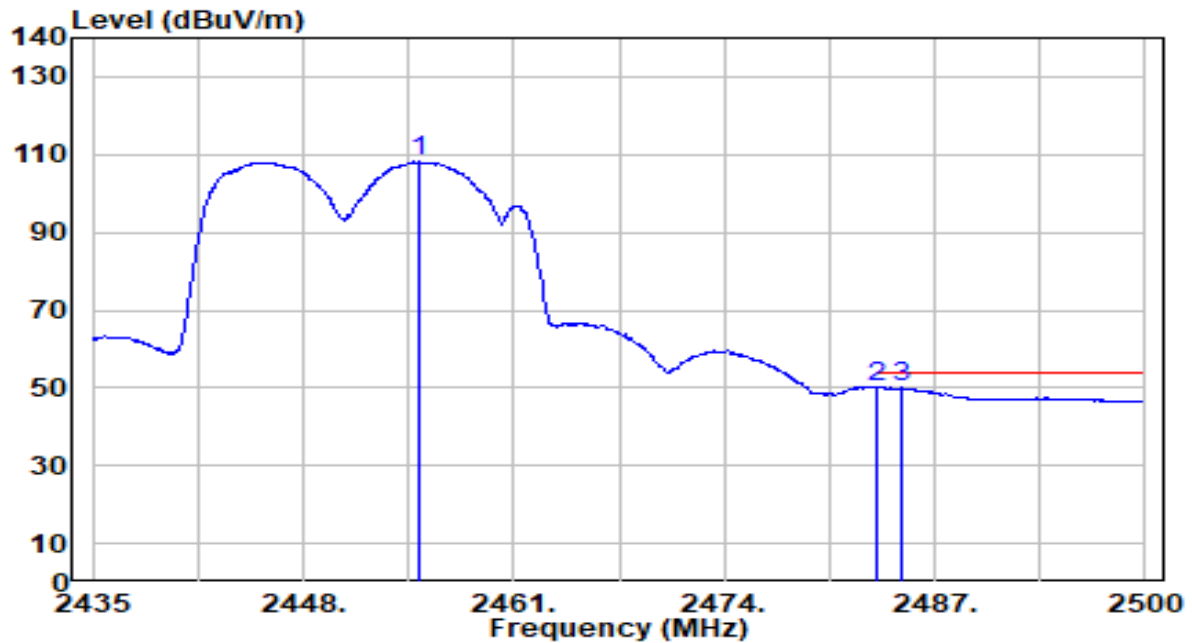


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.150	75.89	32.19	108.09	N/A	N/A	185	150	Average
2	*	2483.500	17.93	32.30	50.23	-3.77	54.00	185	150	Average
3		2484.920	17.77	32.30	50.07	-3.93	54.00	185	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

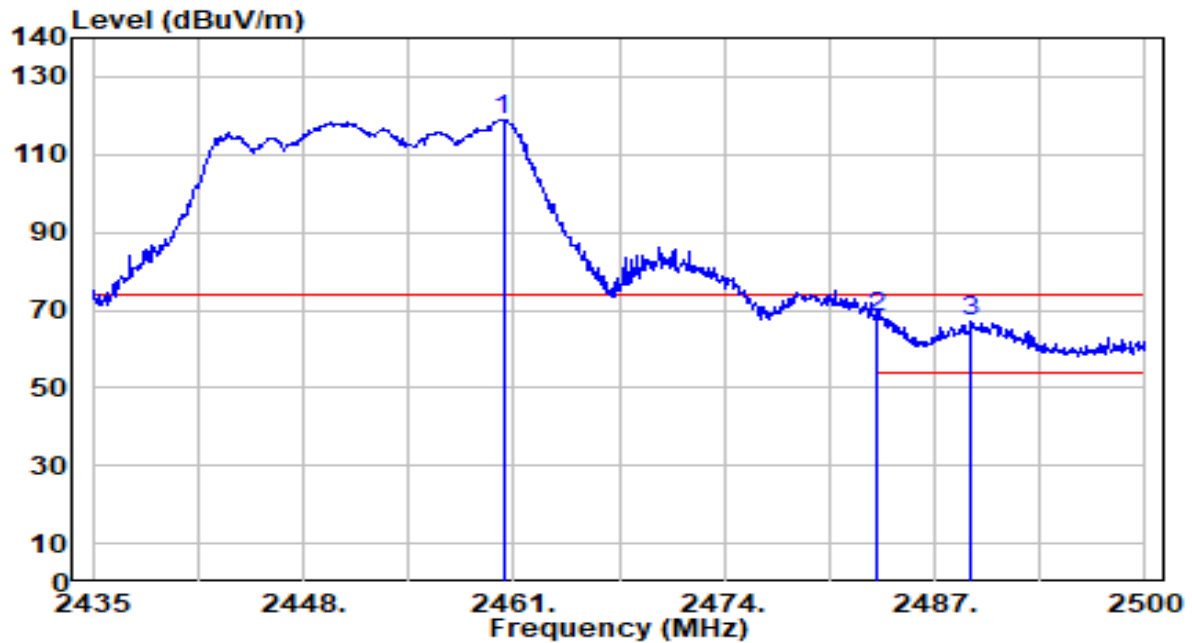


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.350	86.86	32.21	119.07	N/A	N/A	170	210	Peak
2	* 2483.500	36.09	32.30	68.39	-5.61	74.00	170	210	Peak
3	2489.275	34.55	32.32	66.87	-7.13	74.00	170	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

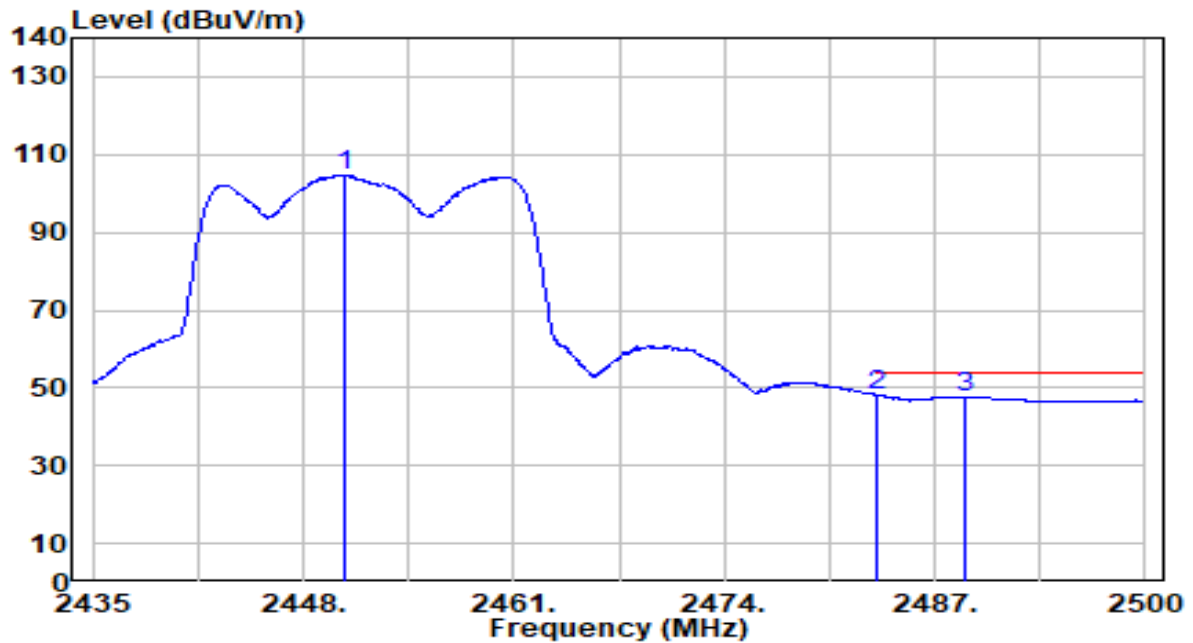


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2450.535	72.59	32.18	104.77	N/A	N/A	170	210	Average
2	*	2483.500	15.90	32.30	48.20	-5.80	54.00	170	210	Average
3		2488.950	15.46	32.32	47.78	-6.22	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

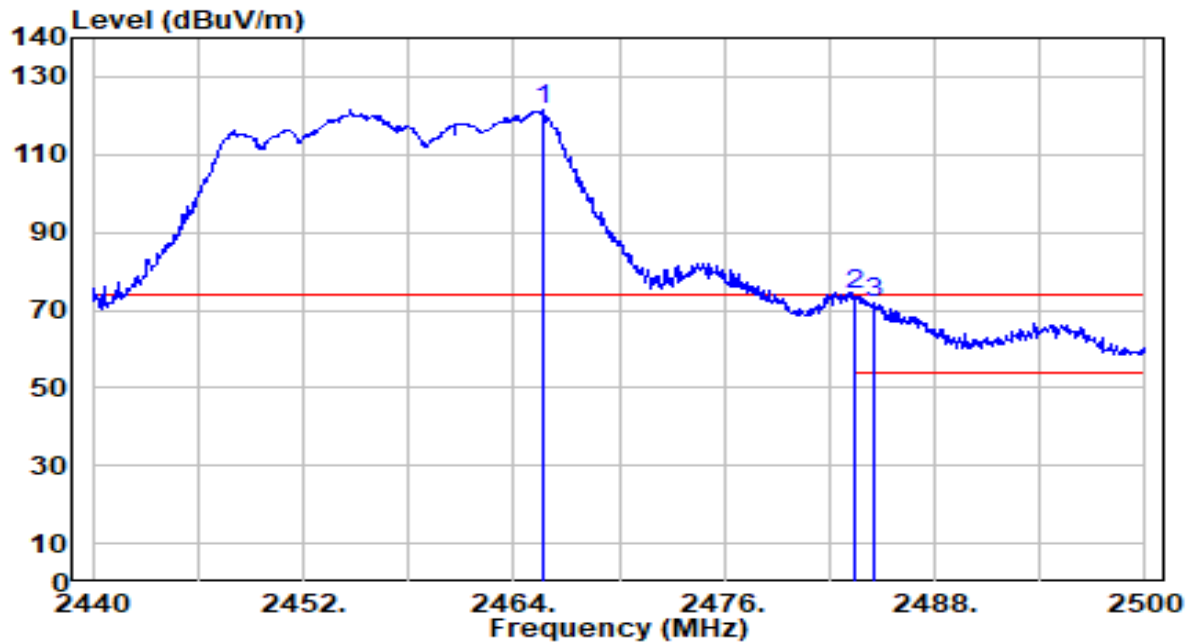


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.680	89.28	32.23	121.51	N/A	N/A	185	150	Peak
2	* 2483.500	41.46	32.30	73.76	-0.24	74.00	185	150	Peak
3	2484.580	39.43	32.30	71.73	-2.27	74.00	185	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

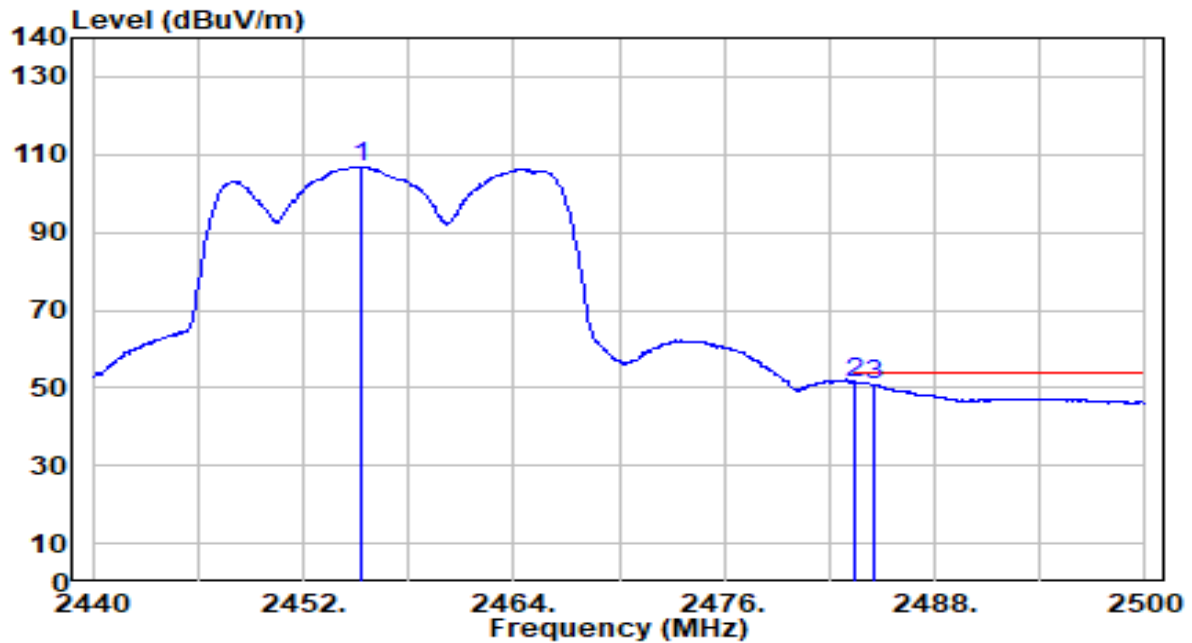


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.240	74.76	32.19	106.95	N/A	N/A	185	150	Average
2	*	2483.500	18.91	32.30	51.21	-2.79	54.00	185	150	Average
3		2484.580	18.51	32.30	50.81	-3.19	54.00	185	150	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

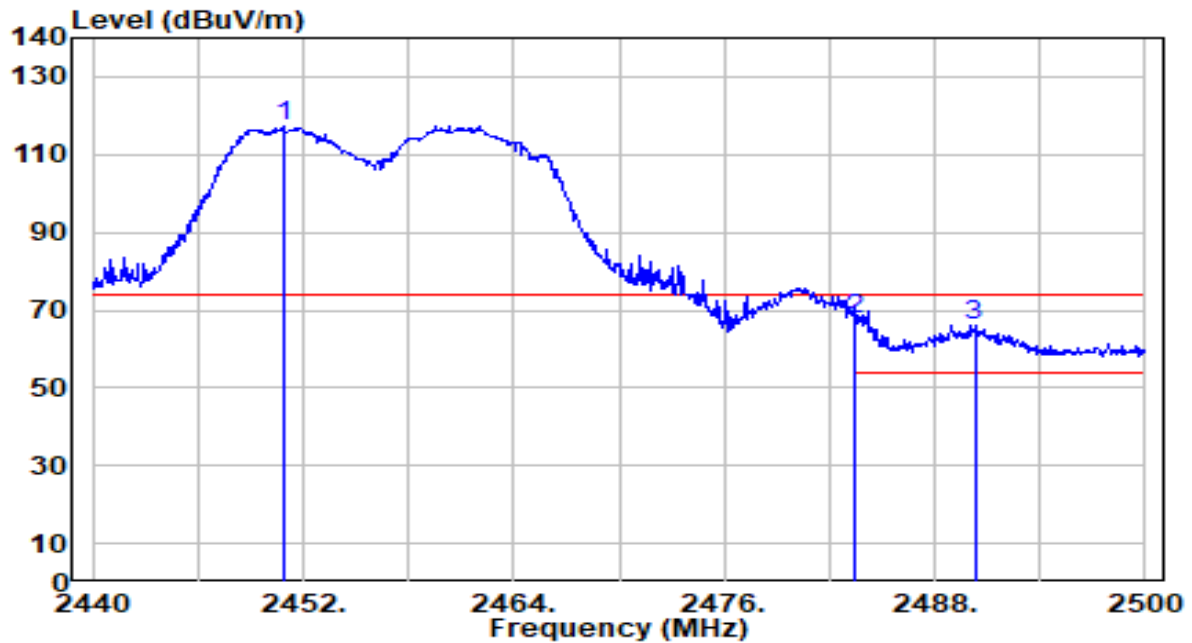


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.860	85.29	32.18	117.47	N/A	N/A	170	210	Peak
2	* 2483.500	35.36	32.30	67.66	-6.34	74.00	170	210	Peak
3	2490.280	33.86	32.32	66.18	-7.82	74.00	170	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

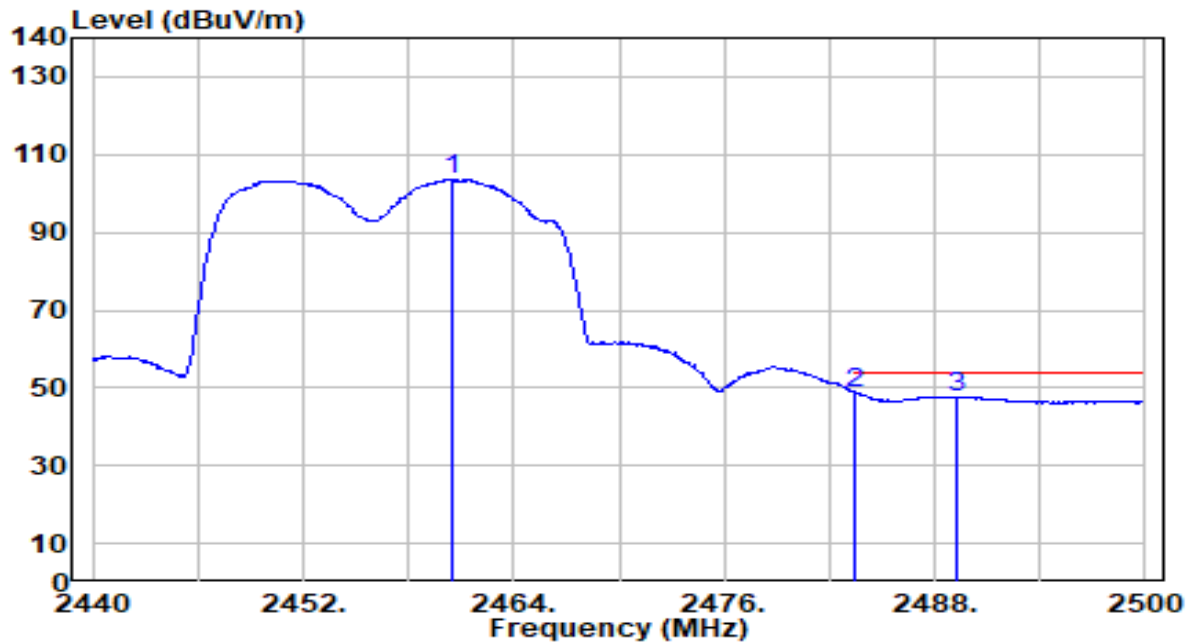


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.460	71.39	32.21	103.60	N/A	N/A	170	210	Average
2	*	2483.500	16.23	32.30	48.53	-5.47	54.00	170	210	Average
3		2489.260	15.48	32.32	47.79	-6.21	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

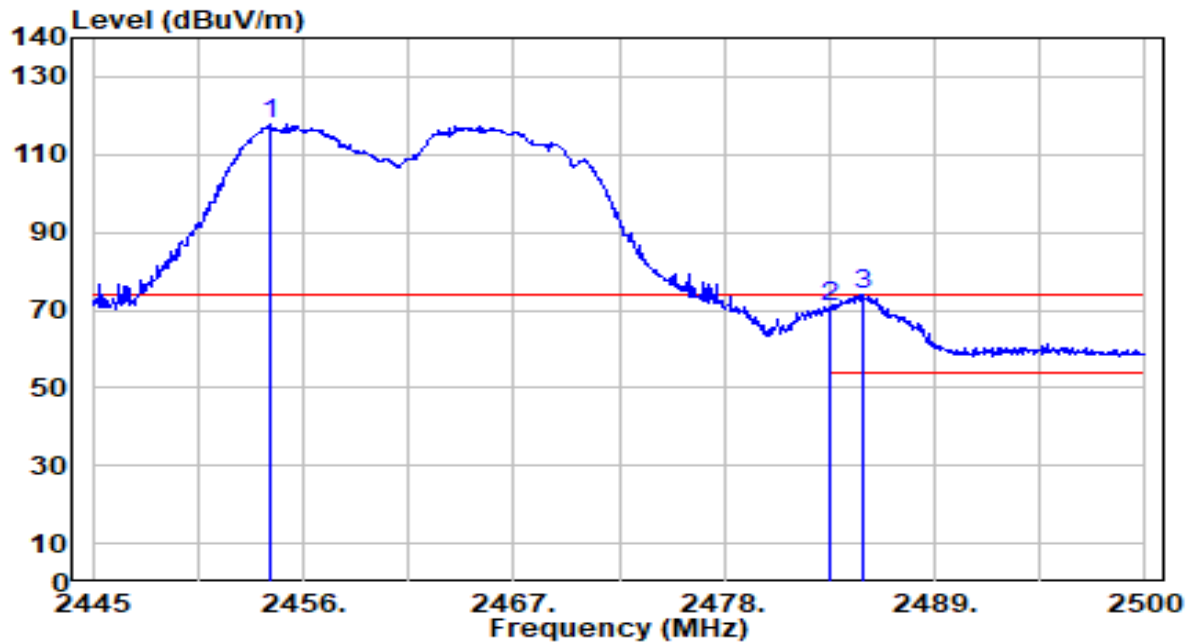


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.240	85.39	32.19	117.58	N/A	N/A	185	150	Peak
2	2483.500	38.31	32.30	70.61	-3.39	74.00	185	150	Peak
3	* 2485.260	41.57	32.30	73.87	-0.13	74.00	185	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

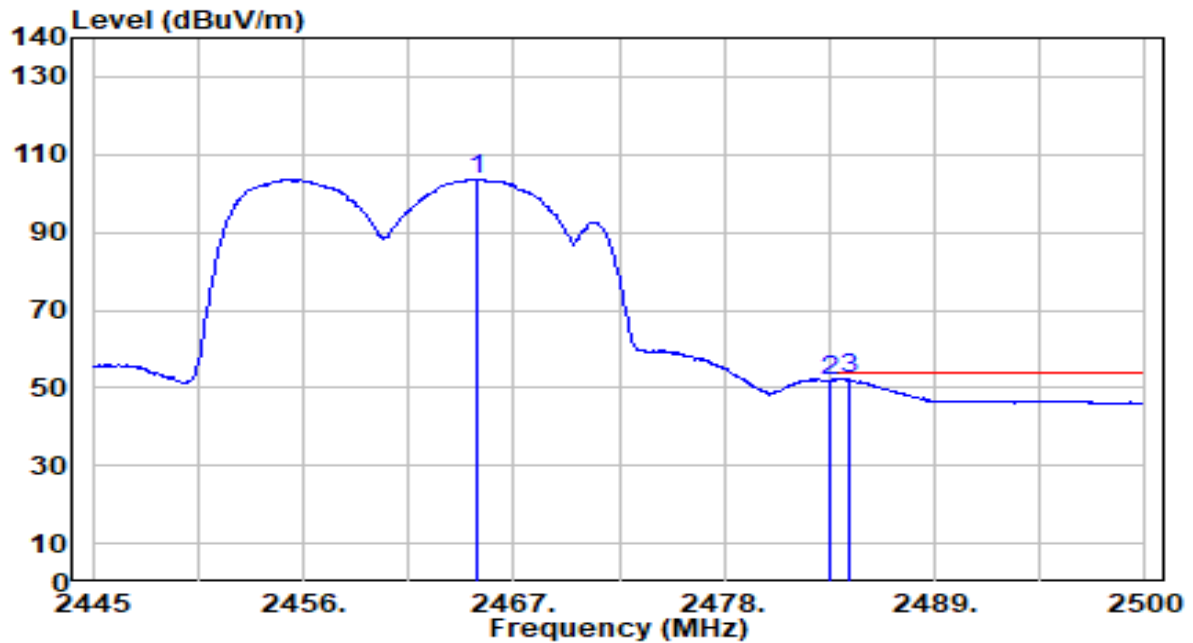


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.130	71.44	32.23	103.67	N/A	N/A	185	150	Average
2	2483.500	19.72	32.30	52.02	-1.98	54.00	185	150	Average
3	* 2484.545	19.78	32.30	52.08	-1.92	54.00	185	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

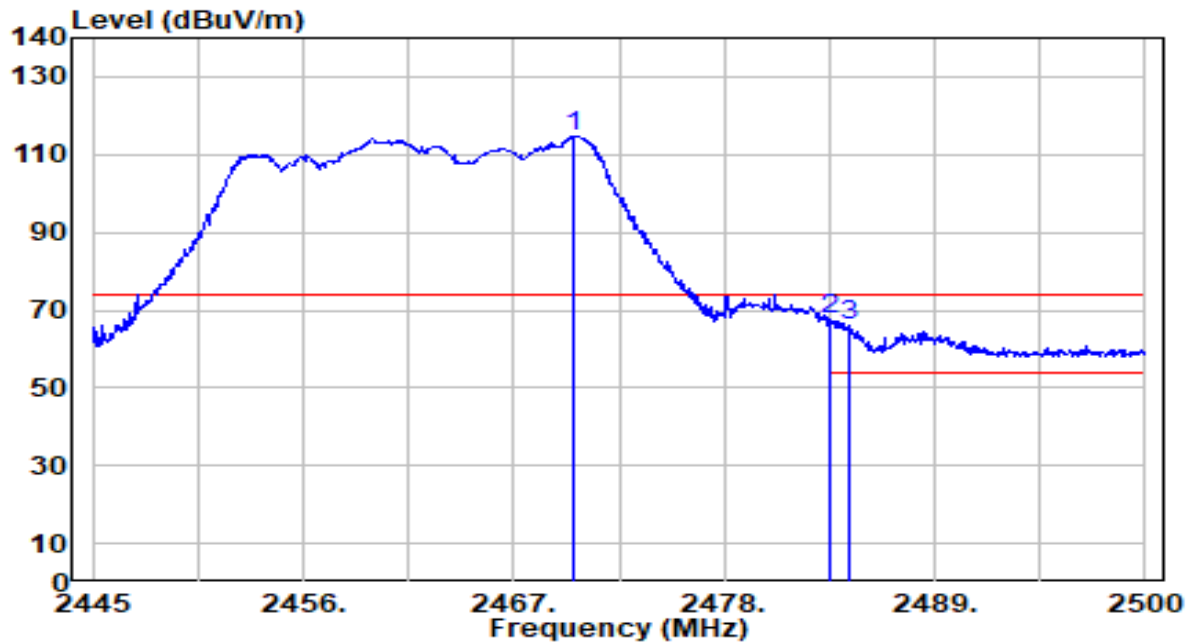


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2470.190	82.44	32.25	114.68	N/A	N/A	170	210	Peak
2	* 2483.500	35.44	32.30	67.74	-6.26	74.00	170	210	Peak
3	2484.490	33.82	32.30	66.13	-7.87	74.00	170	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

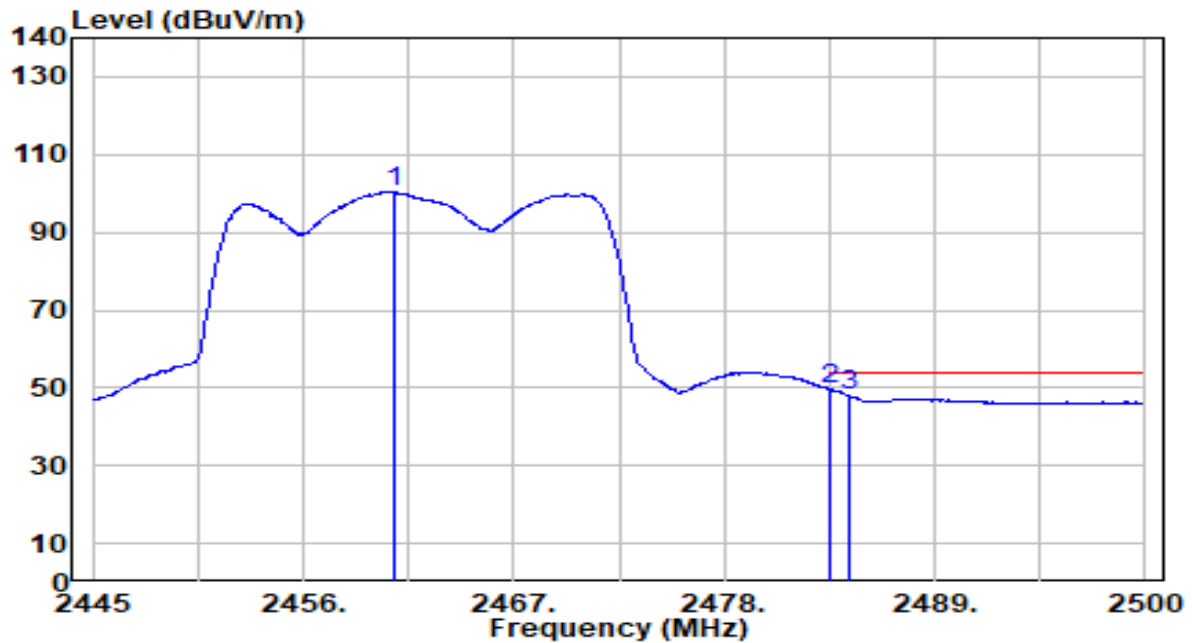


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.785	68.34	32.21	100.55	N/A	N/A	170	210	Average
2	*	2483.500	17.29	32.30	49.59	-4.41	54.00	170	210	Average
3		2484.545	15.61	32.30	47.91	-6.09	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

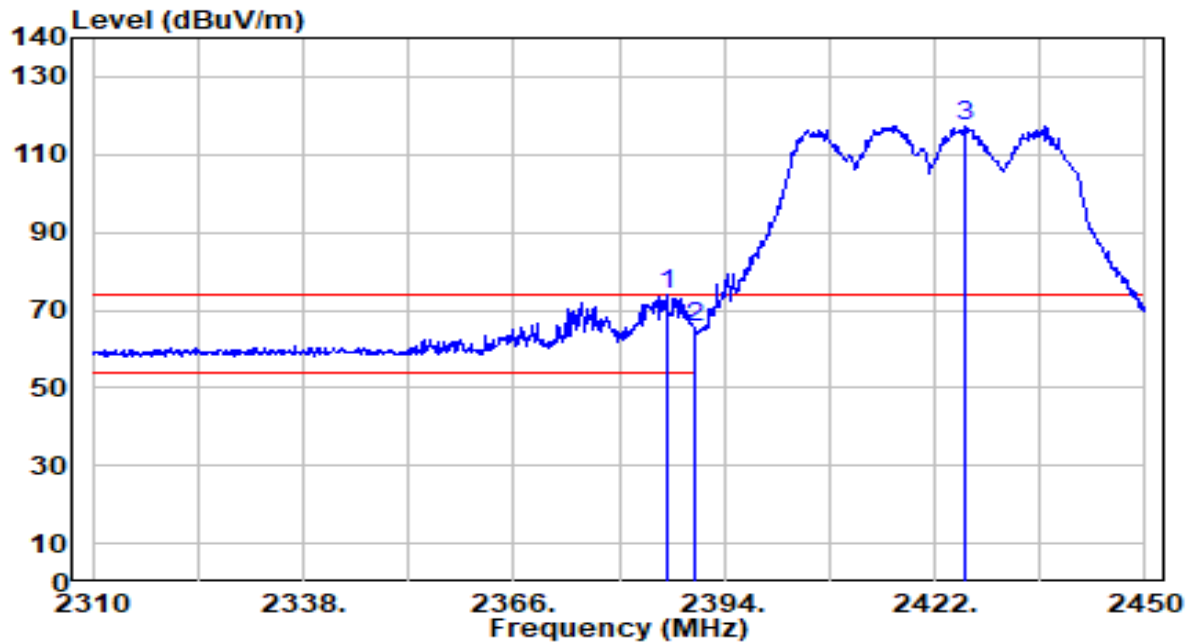


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.300	41.90	31.93	73.84	-0.16	74.00	190	150	Peak
2		2390.000	33.40	31.95	65.35	-8.65	74.00	190	150	Peak
3		2425.920	85.38	32.08	117.46	N/A	N/A	190	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

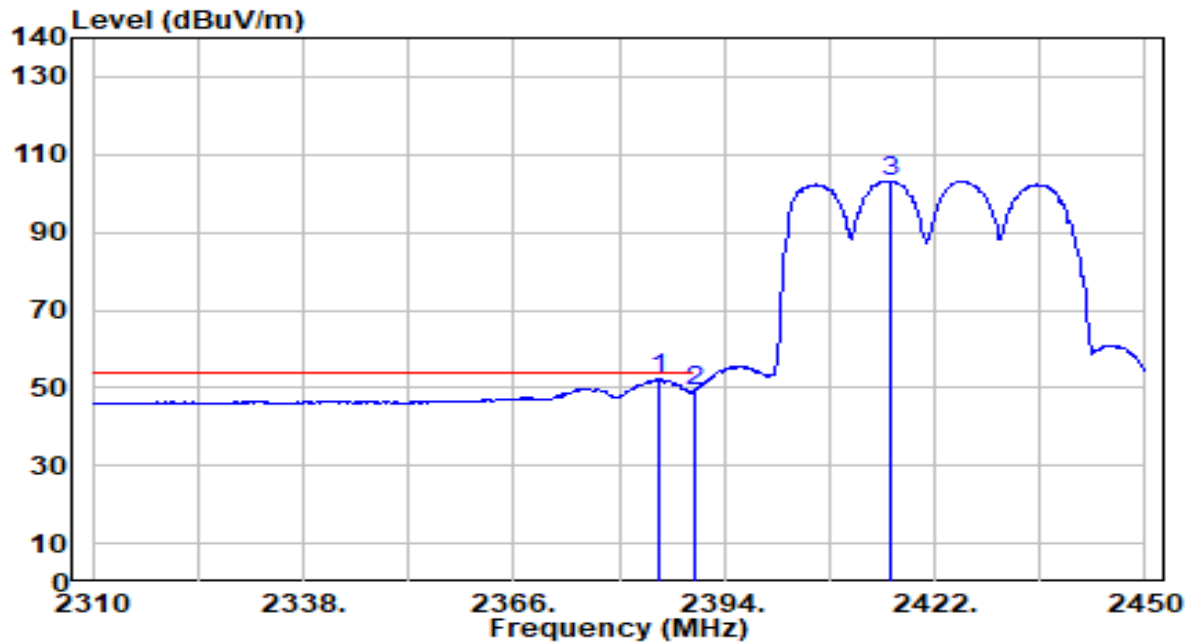


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.180	20.32	31.93	52.25	-1.75	54.00	190	150	Average
2		2390.000	17.23	31.95	49.18	-4.82	54.00	190	150	Average
3		2415.980	71.17	32.05	103.22	N/A	N/A	190	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

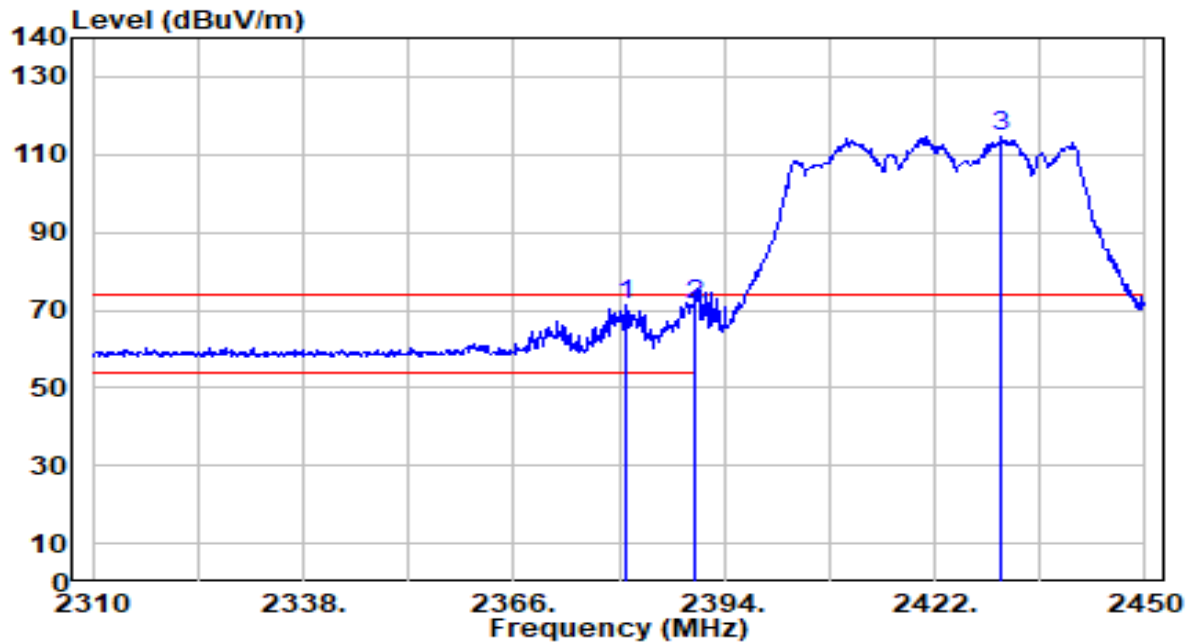


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2380.840	39.20	31.91	71.12	-2.88	74.00	200	150	Peak
2	*	2390.000	39.33	31.95	71.28	-2.72	74.00	200	150	Peak
3		2430.960	82.65	32.10	114.75	N/A	N/A	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

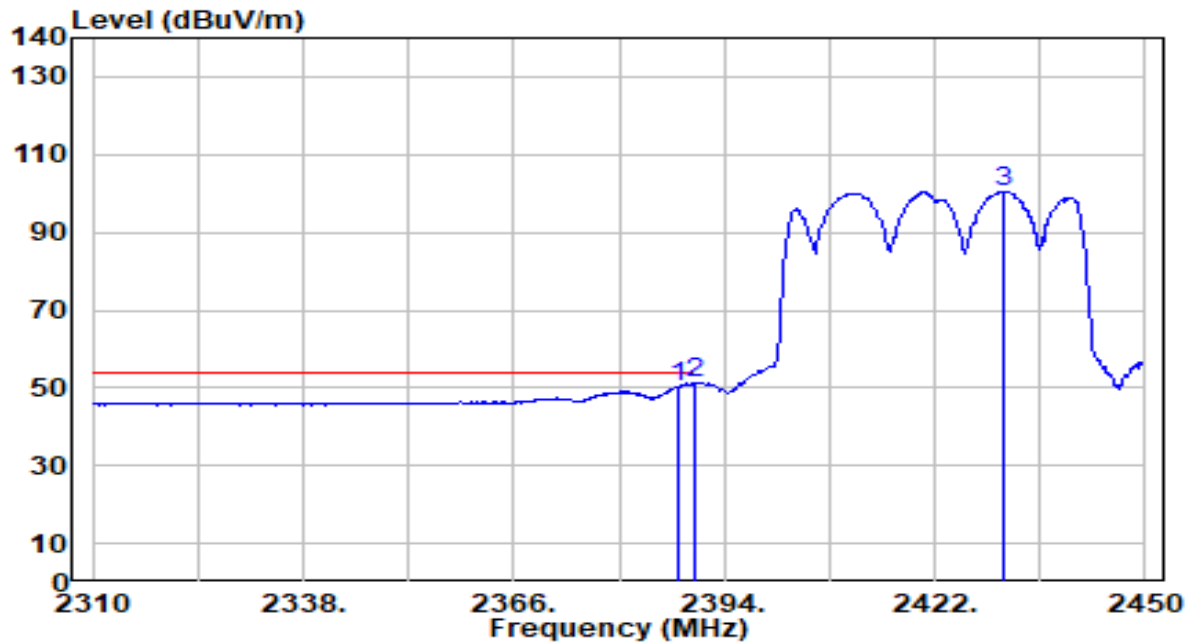


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.840	18.41	31.94	50.35	-3.65	54.00	200	150	Average
2	*	2390.000	19.06	31.95	51.01	-2.99	54.00	200	150	Average
3		2431.100	68.30	32.10	100.40	N/A	N/A	200	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

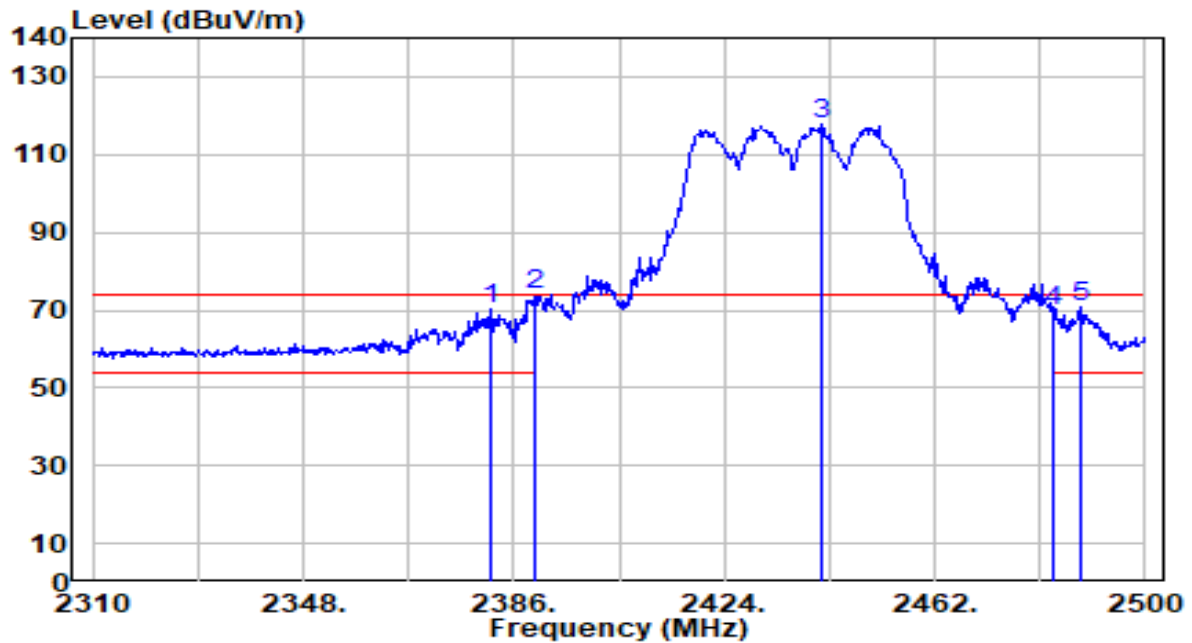


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2381.630	38.36	31.92	70.28	-3.72	74.00	205	155	Peak
2	* 2390.000	41.77	31.95	73.72	-0.28	74.00	205	155	Peak
3	2441.480	85.46	32.14	117.60	N/A	N/A	205	155	Peak
4	2483.500	37.45	32.30	69.75	-4.25	74.00	205	155	Peak
5	2488.220	38.38	32.32	70.70	-3.30	74.00	205	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

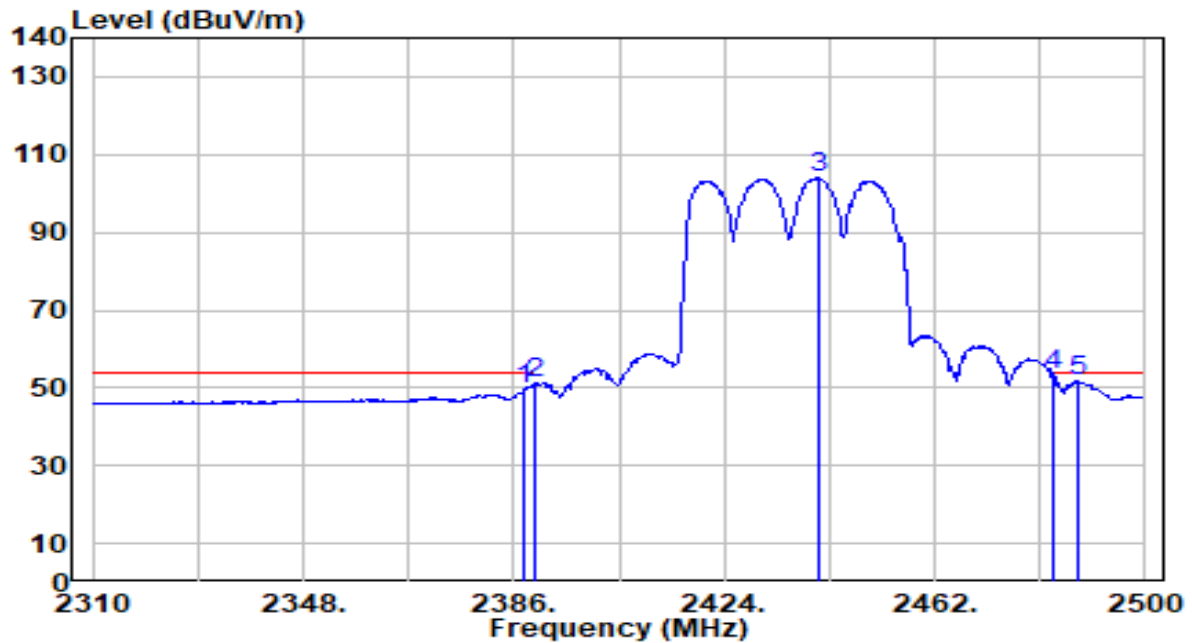


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	17.48	31.94	49.42	-4.58	54.00	205	155	Average
2	2390.000	19.11	31.95	51.06	-2.94	54.00	205	155	Average
3	2440.910	71.71	32.14	103.85	N/A	N/A	205	155	Average
4	* 2483.500	21.18	32.30	53.48	-0.52	54.00	205	155	Average
5	2487.840	19.32	32.31	51.63	-2.37	54.00	205	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

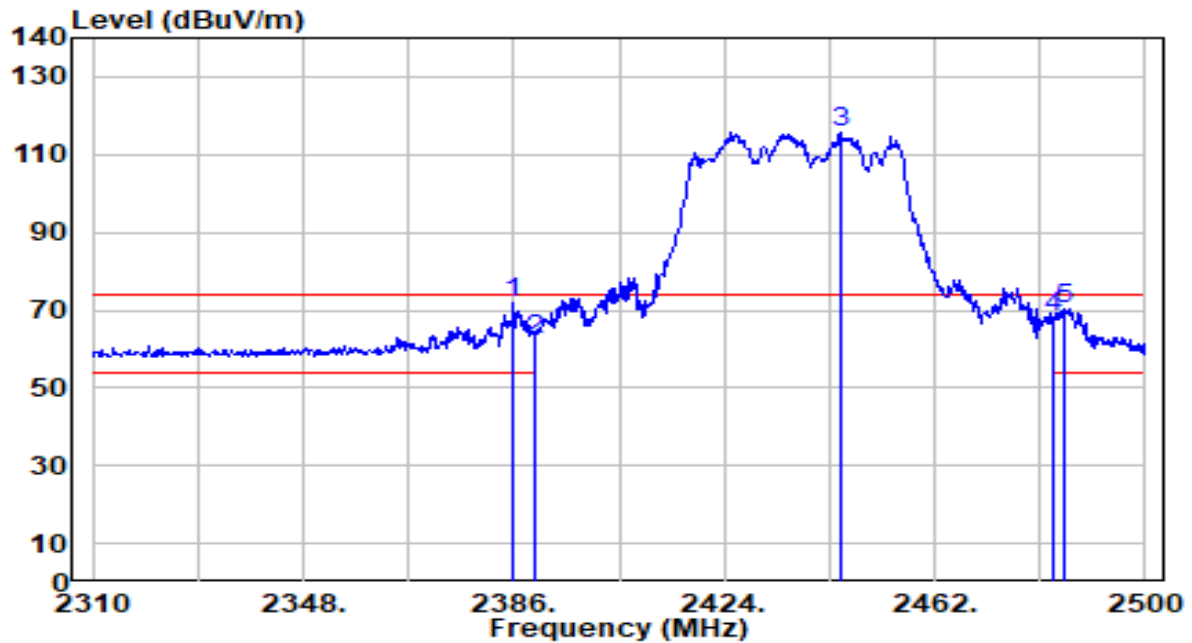


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.000	40.15	31.93	72.08	-1.92	74.00	195	205	Peak
2		2390.000	30.53	31.95	62.48	-11.52	74.00	195	205	Peak
3		2444.900	83.49	32.15	115.64	N/A	N/A	195	205	Peak
4		2483.500	35.68	32.30	67.98	-6.02	74.00	195	205	Peak
5		2485.180	38.09	32.30	70.39	-3.61	74.00	195	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

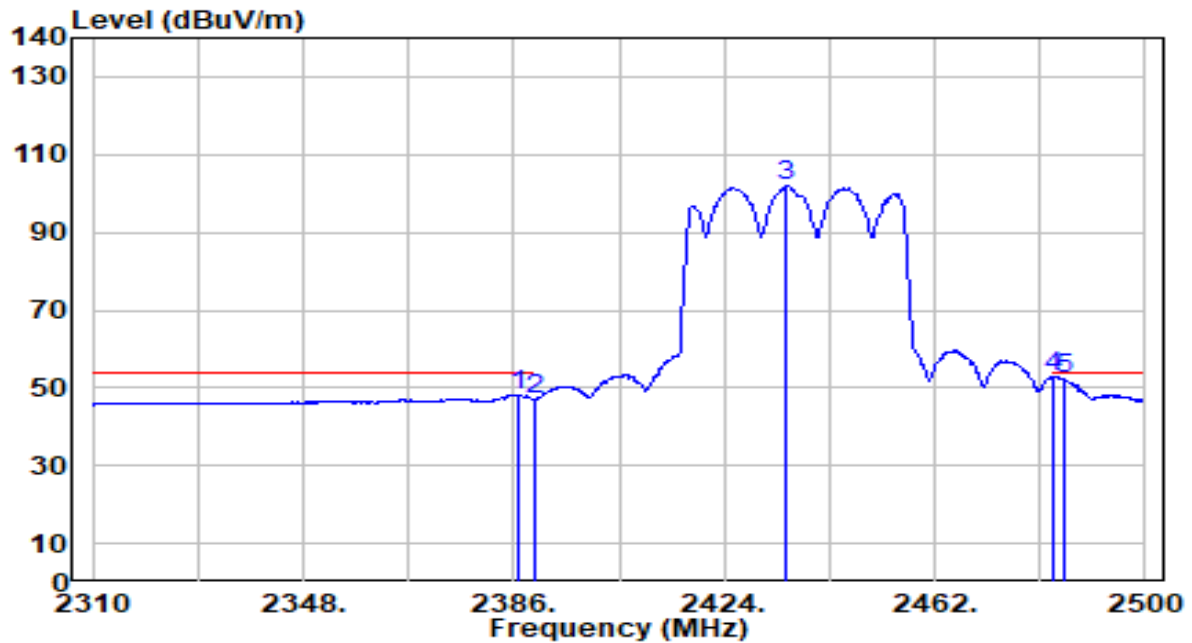


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	16.26	31.94	48.20	-5.80	54.00	195	205	Average
2	2390.000	14.99	31.95	46.94	-7.06	54.00	195	205	Average
3	2435.210	69.69	32.12	101.81	N/A	N/A	195	205	Average
4	* 2483.500	20.49	32.30	52.79	-1.21	54.00	195	205	Average
5	2485.180	19.81	32.30	52.12	-1.88	54.00	195	205	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

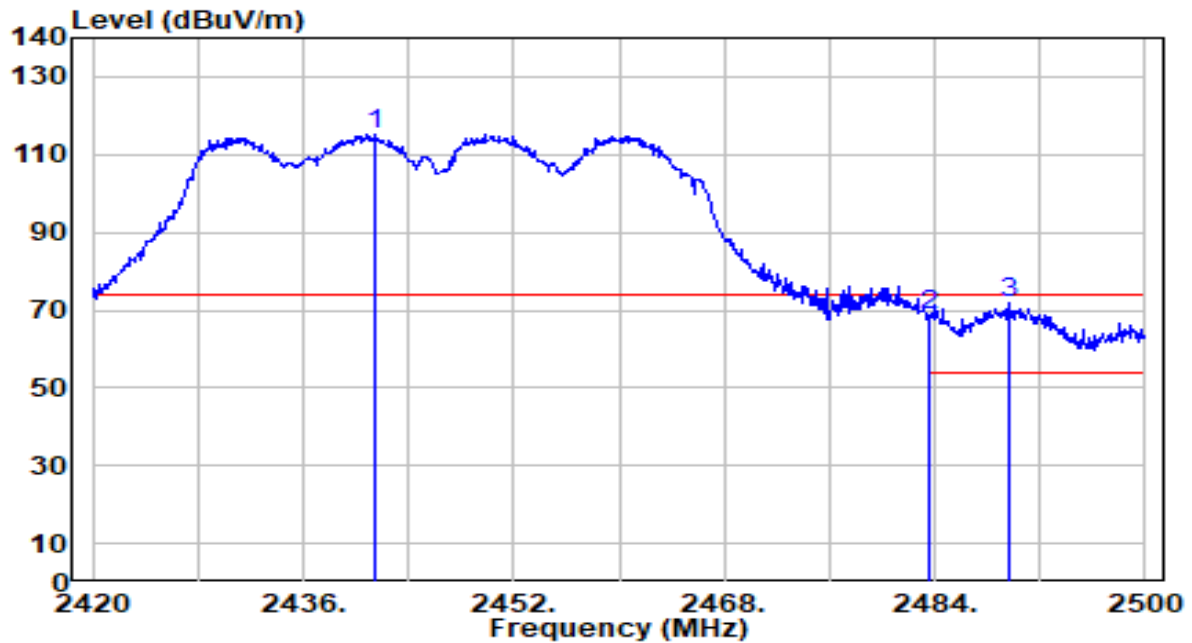


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2441.440	83.27	32.14	115.41	N/A	N/A	185	150	Peak
2	2483.500	36.48	32.30	68.78	-5.22	74.00	185	150	Peak
3	* 2489.600	39.37	32.32	71.69	-2.31	74.00	185	150	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

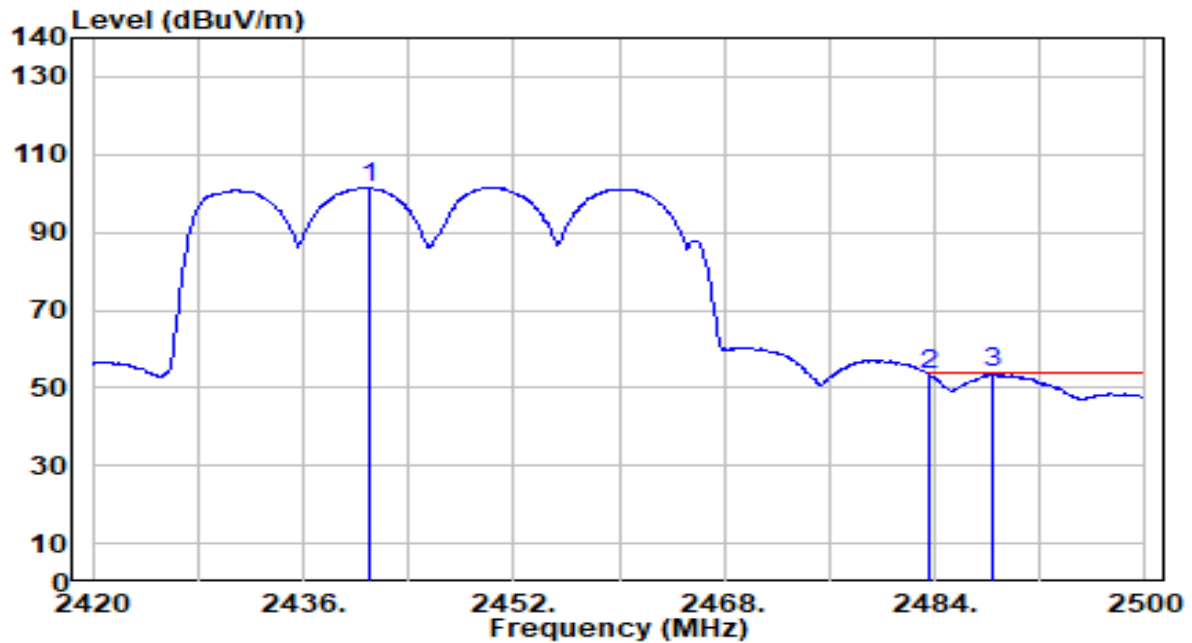


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2441.040	69.32	32.14	101.46	N/A	N/A	185	150	Average
2	2483.500	21.04	32.30	53.33	-0.67	54.00	185	150	Average
3	* 2488.320	21.39	32.32	53.71	-0.29	54.00	185	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

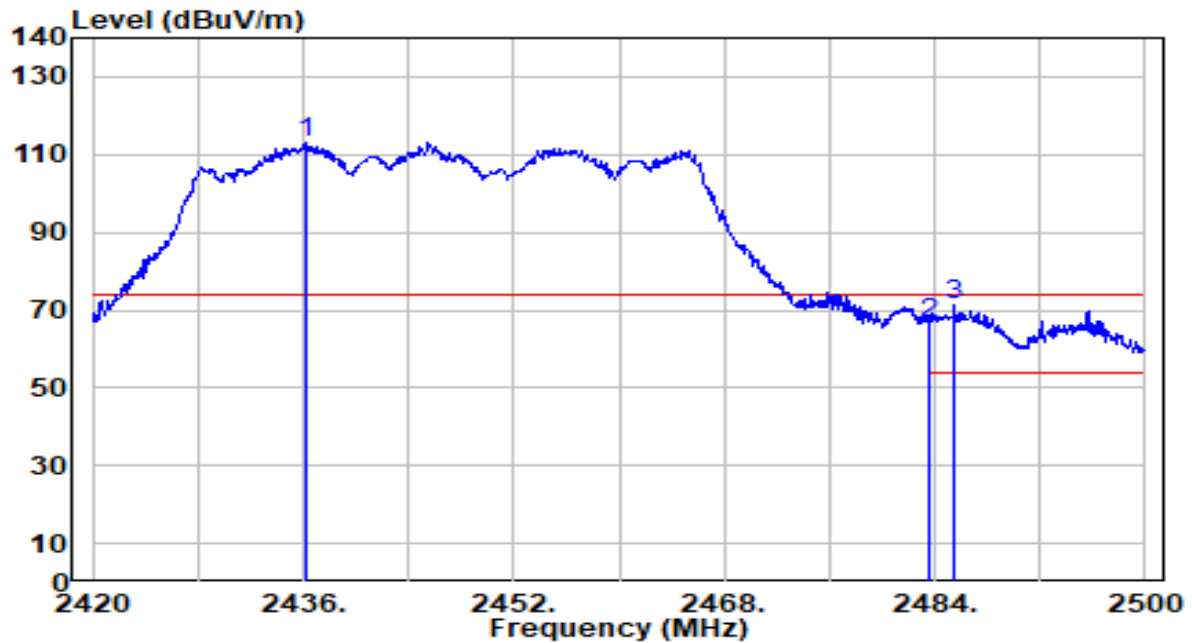


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2436.240	80.95	32.12	113.07	N/A	N/A	170	210	Peak
2	2483.500	34.14	32.30	66.44	-7.56	74.00	170	210	Peak
3	* 2485.520	38.83	32.31	71.13	-2.87	74.00	170	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

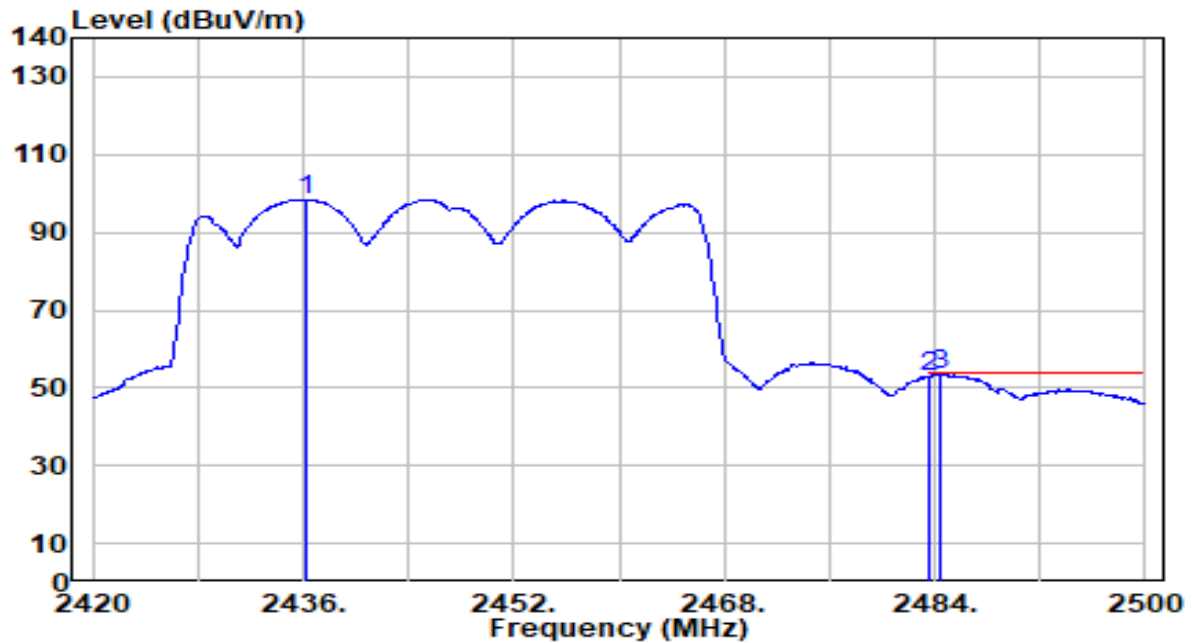


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2436.240	66.40	32.12	98.52	N/A	N/A	170	210	Average
2	2483.500	20.39	32.30	52.69	-1.31	54.00	170	210	Average
3	* 2484.480	21.03	32.30	53.33	-0.67	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

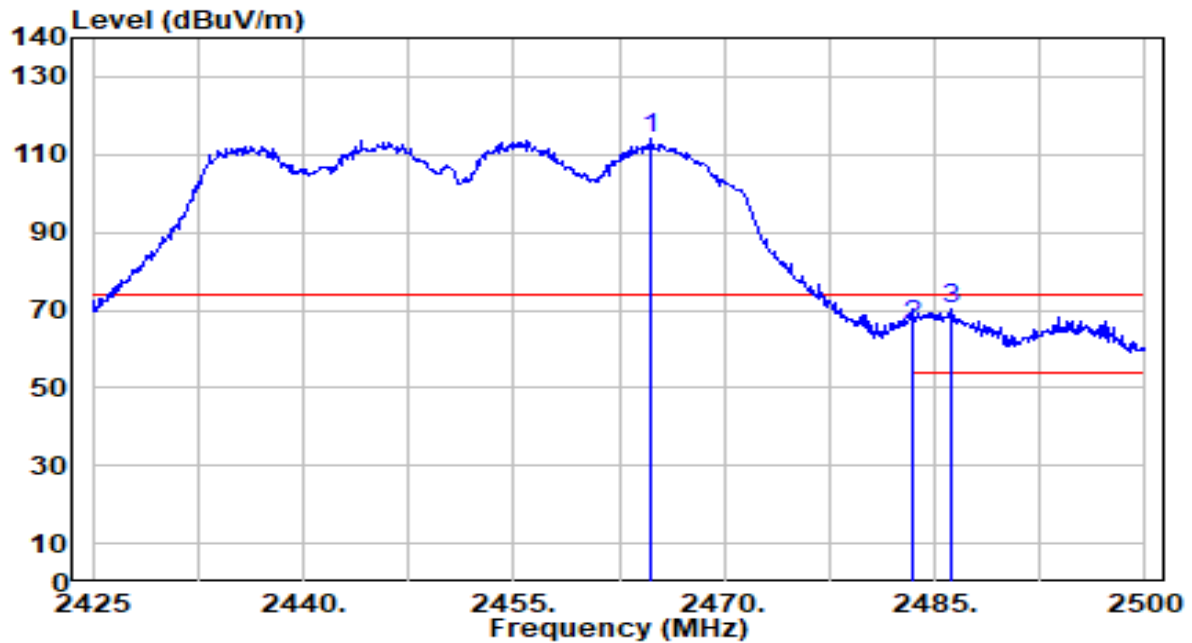


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.825	81.62	32.23	113.85	N/A	N/A	185	150	Peak
2	2483.500	33.91	32.30	66.21	-7.79	74.00	185	150	Peak
3	* 2486.200	37.89	32.31	70.20	-3.80	74.00	185	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

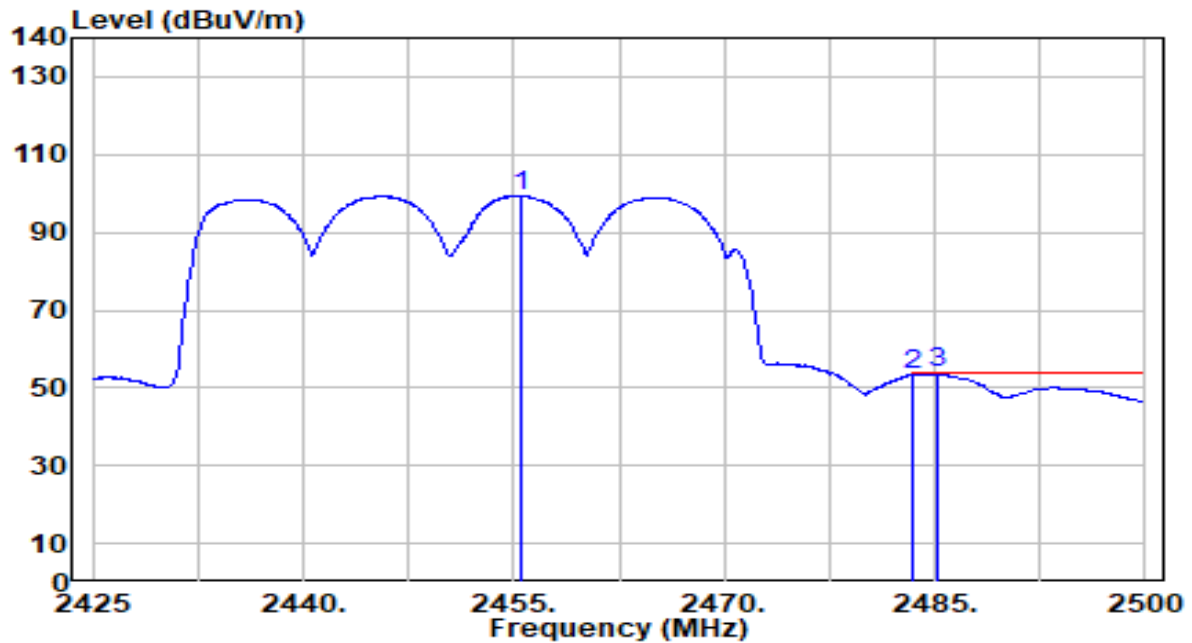


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.525	67.23	32.19	99.42	N/A	N/A	185	150	Average
2	2483.500	21.17	32.30	53.47	-0.53	54.00	185	150	Average
3	* 2485.150	21.41	32.30	53.71	-0.29	54.00	185	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

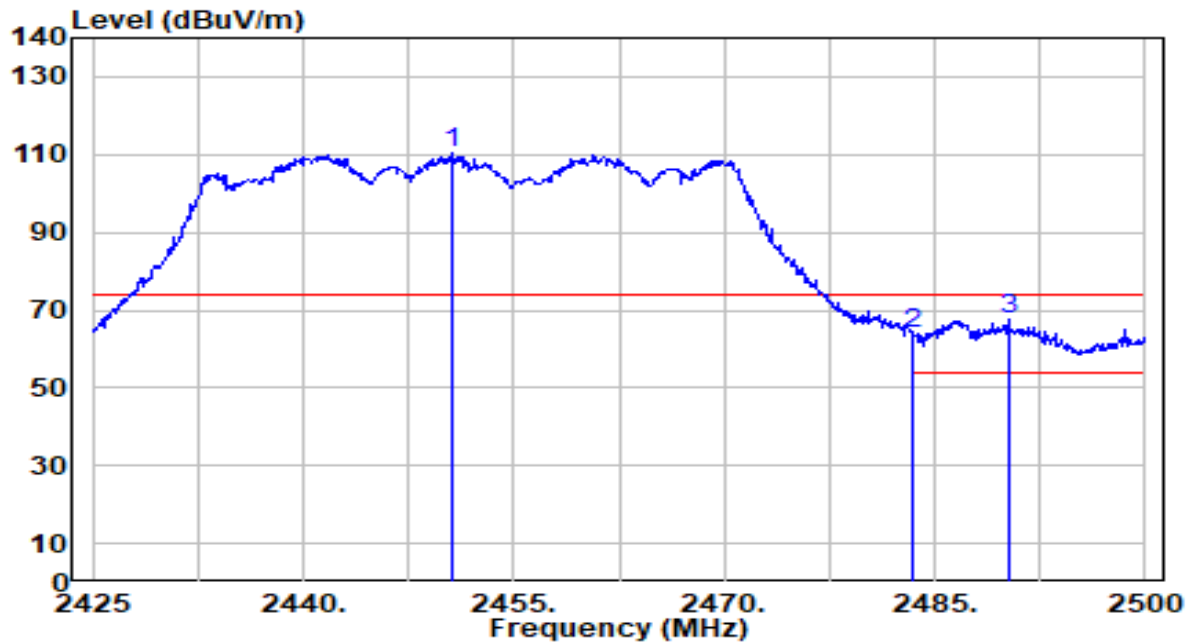


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.650	78.08	32.18	110.26	N/A	N/A	170	210	Peak
2	2483.500	31.71	32.30	64.01	-9.99	74.00	170	210	Peak
3	* 2490.250	35.06	32.32	67.39	-6.61	74.00	170	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	23°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1_Wi-Fi Antenna_Low Gain	Test Voltage	By PoE

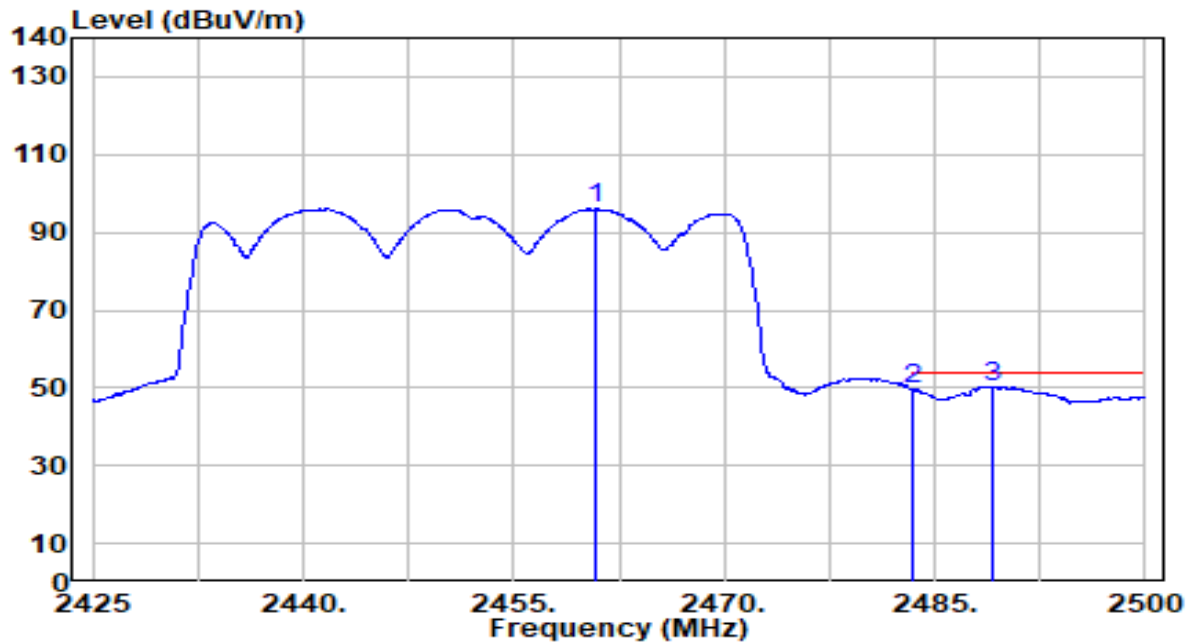


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.925	63.74	32.21	95.95	N/A	N/A	170	210	Average
2	2483.500	17.49	32.30	49.79	-4.21	54.00	170	210	Average
3	* 2489.125	18.00	32.32	50.32	-3.68	54.00	170	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

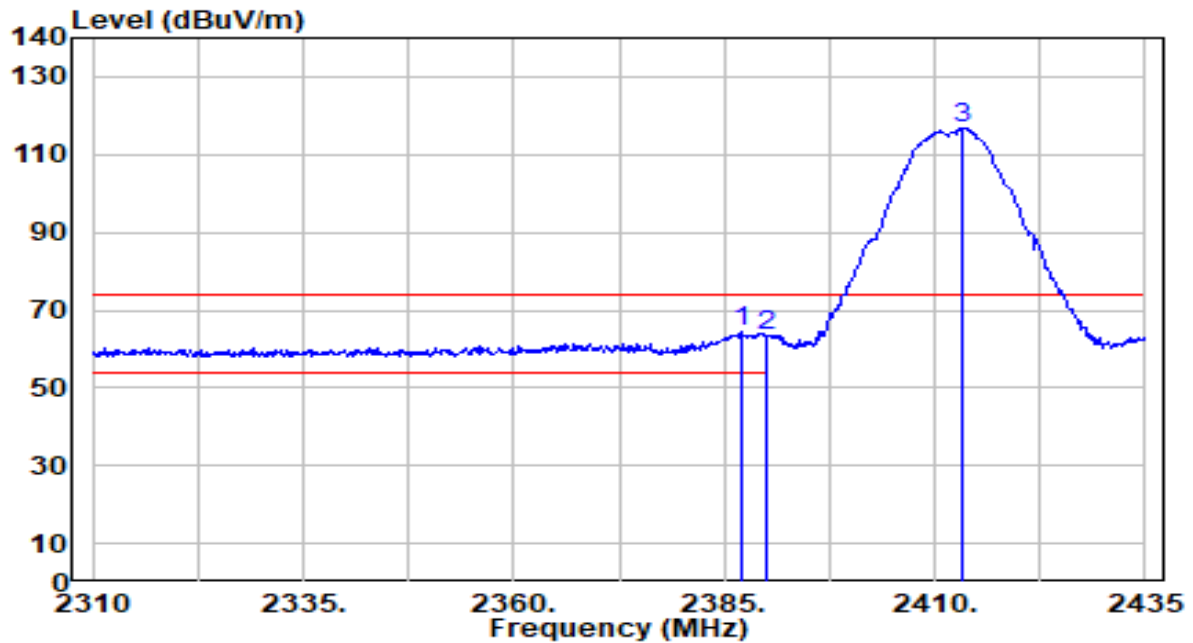


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	32.29	31.94	64.23	-9.77	74.00	185	180	Peak
2		2390.000	31.46	31.95	63.40	-10.60	74.00	185	180	Peak
3		2413.375	84.81	32.04	116.85	N/A	N/A	185	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

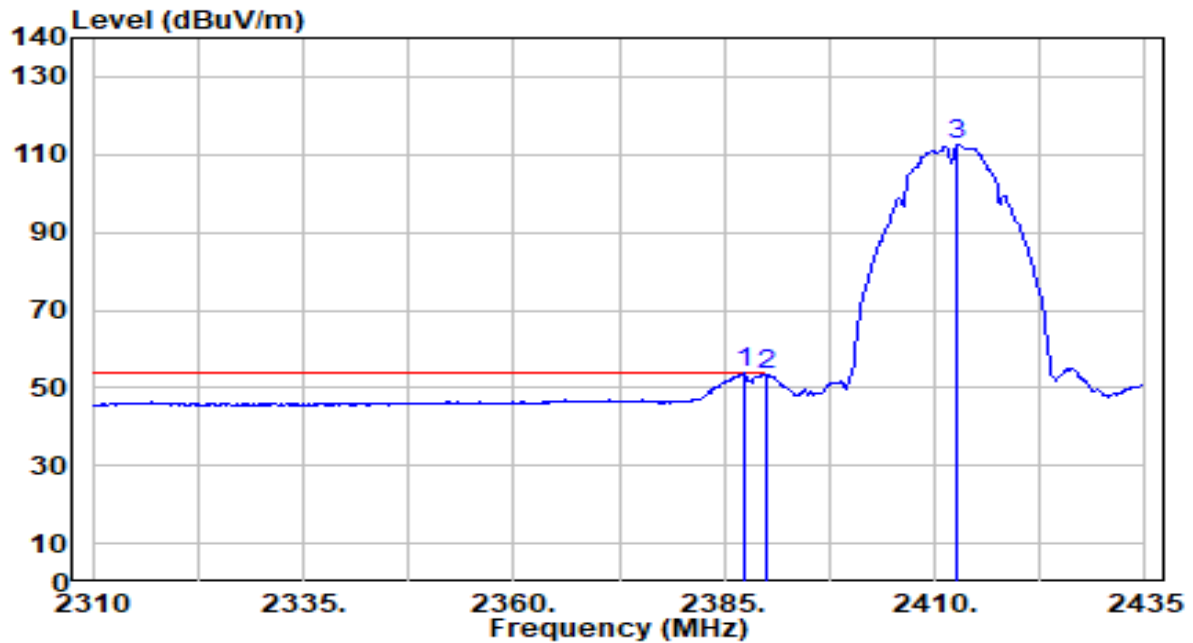


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.250	21.81	31.94	53.75	-0.25	54.00	185	180	Average
2		2390.000	21.29	31.95	53.24	-0.76	54.00	185	180	Average
3		2412.750	80.52	32.03	112.56	N/A	N/A	185	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor WiFi 6 Access Point	Date of Test	2024-12-15
Factor	BBHA 9120D	Temp. / Humidity	19°C /57%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1_Wi-Fi Antenna_High Gain	Test Voltage	By PoE

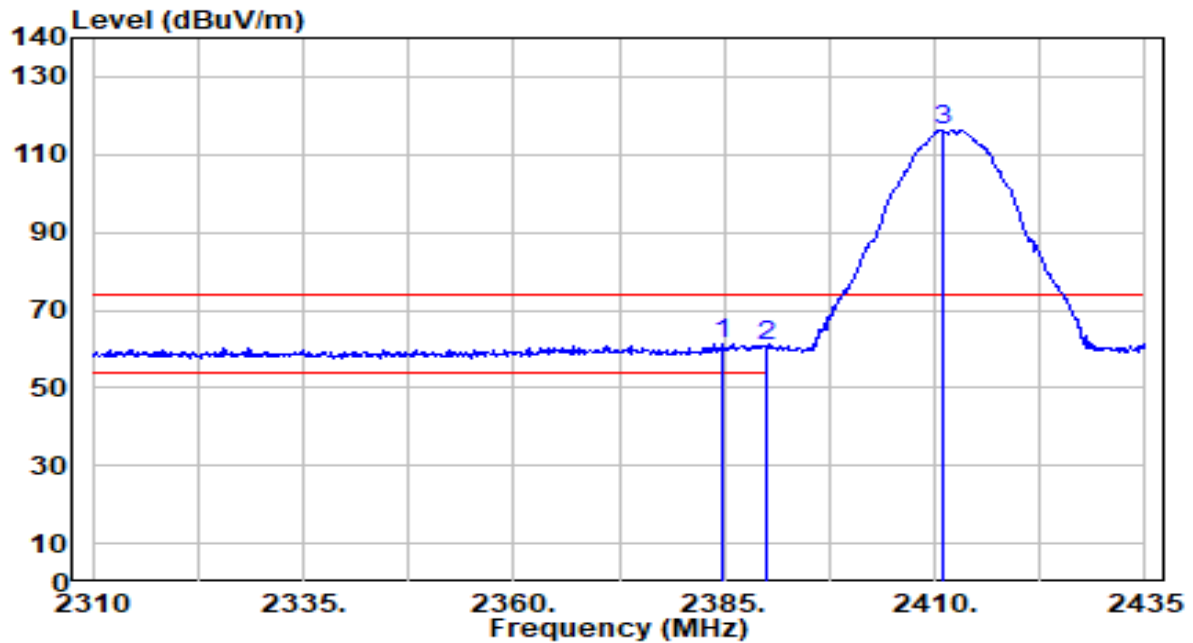

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.875	29.43	31.93	61.36	-12.64	74.00	185	180	Peak
2		2390.000	28.64	31.95	60.59	-13.41	74.00	185	180	Peak
3		2410.875	84.23	32.03	116.26	N/A	N/A	185	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.