



Power Density Evaluation Report

FCC ID : A4RG8V0U
Equipment : Phone
Model Name : G8V0U, GF5KQ
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2 (2.1093)

We, SPORTON INTERNATIONAL INC have been evaluated in accordance with 47 CFR Part 2.1093 for the device and pass the limit.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

Sporton International Inc.

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan

Table of Contents

1. Summary	4
2. Guidance Applied	4
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
4. RF Exposure Limits.....	6
4.1 Uncontrolled Environment.....	6
4.2 Controlled Environment.....	6
5. System Description and Setup	7
5.1 EUmmWave Probe / E-Field 5G Probe	8
5.2 Data Acquisition Electronics (DAE)	9
5.3 Scan configuration	9
6. Test Equipment List	9
7. System Verification Source	10
8. Power Density System Verification	11
9. System Verification Results	11
9.1 Computation of the Electric Field Polarization Ellipse	12
9.2 Total Field and Power Flux Density Reconstruction	12
9.3 Test Positions	13
10. RF Exposure Evaluation Results	13
11. 5G NR + LTE + WLAN + BT Sim-Tx analysis	16
12. Simultaneous-Tx analysis	17
12.1 Simultaneous transmission analysis for WiFi/BT + 5G NR.....	18
13. Uncertainty Assessment	28
14. References	29

Appendix A. Plots of System Performance Check
Appendix B. Plots of Power Density Measurement
Appendix C. DASY Calibration Certificate
Appendix D. Setup Photo



History of this test report

Report No.	Version	Description	Issued Date
FA121931-04E	01	Initial issue of report	Aug. 06, 2021



1. Summary

The maximum measured average power density found during testing for Google LLC, Phone, are as follows.

Standalone transmission				Simultaneous transmission with other transmitters
RF Transmitter		Measured PD (mW/cm ²)	Reported PD (mW/cm ²)	Summation of Exposure Ratio
5G FR2	n258	0.419	0.75	0.965
	n260	0.596	0.75	
	n261	0.493	0.75	
Result		PASS		

Reviewed by: Jason Wang

Report Producer: Wan Liu

2. Guidance Applied

The Power Density testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 1.1310
- FCC 47 CFR Part 2.1093
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- TCBC workshop notes
- IEC Draft TR 63170



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Phone
Model Name	G8V0U, GF5KQ
FCC ID	A4RG8V0U
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71: 663 MHz ~ 698 MHz 5G NR n77 : 3450MHz ~ 3550MHz, 3700 MHz ~ 3980 MHz 5G NR n258 : 24.25 GHz~24.45 GHz, 24.75GHz ~25.25GHz 5G NR n260 : 37 GHz~40 GHz 5G NR n261 : 27.5 GHz~28.35 GHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz WPT: 110KHz ~ 148.5KHz UWB: 6489.6 MHz, 7987.2 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC:ASK WPT: ASK UWB: BPM-BPSK

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure above 6GHz to radio frequency (RF) radiation as specified in §1.1310.

General Population Basic restriction for power density for frequencies between 1.5GHz/WIFI6E and 100 GHz is 1.0 mW/cm² = 10 W/m²


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

Table 1

5. System Description and Setup

The system to be used for the near field power density measurement



- SPEAG DASY6 system
- SPEAG cDASY6 5G module software
- EUmWVx probe
- 5G Phantom cover

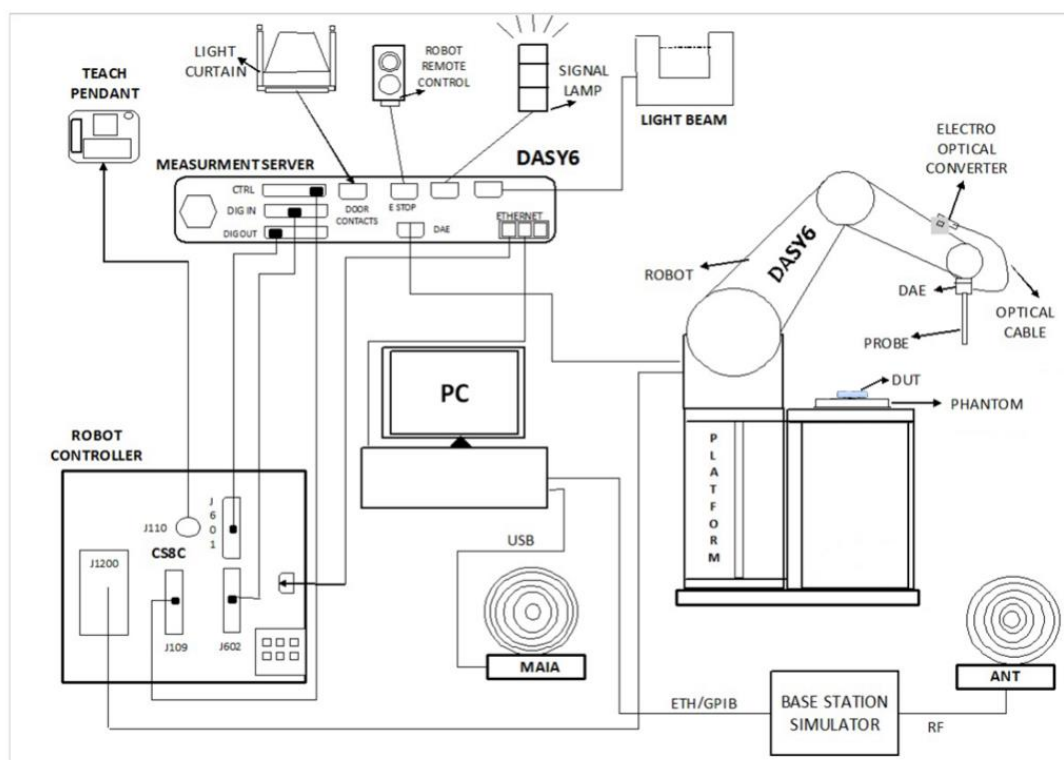

5.1 EUmmWave Probe / E-Field 5G Probe

The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm.


Frequency	750 MHz – 110 GHz
Probe Overall Length	320 mm
Probe Body Diameter	8.0 mm
Tip Length	23.0 mm
Tip Diameter	8.0 mm
Probe's two dipoles length	0.9 mm – Diode loaded
Dynamic Range	< 20 V/m - 10000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm
Distance between diode sensors and probe's tip	1.5 mm
Minimum Mechanical separation between probe tip and a Surface	0.5 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction.
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

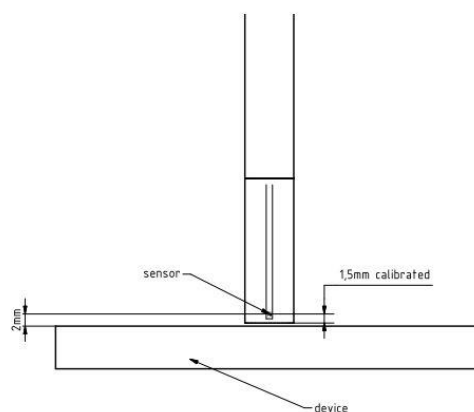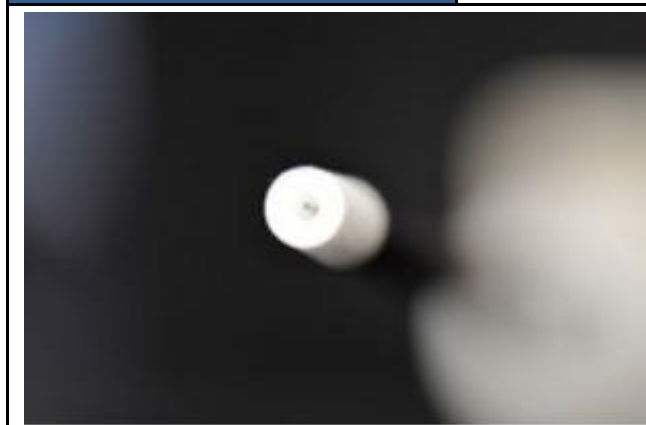

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

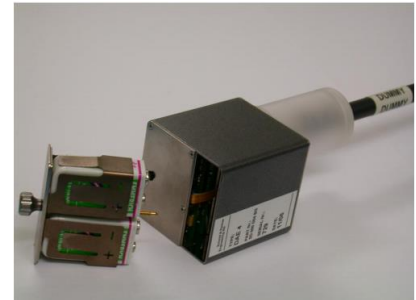

5.3 Scan configuration

Fine-resolution scans on 2 different planes are performed to reconstruct the E- and H-fields as well as the power density; the z-distance between the 2 planes is set to $\lambda/4$.

The (x, y) grid step is also set $\lambda/4$, the grid extent is set to sufficiently large to identify the field pattern and the peak.


6. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	5G Verification Source	30GHz	1009	May. 25, 2021	May. 24, 2022
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9441	Nov. 24, 2020	Nov. 23, 2021
SPEAG	Data Acquisition Electronics	DAE4	656	Jan. 22, 2021	Jan. 21, 2022
TESTO	Hygro meter	608-H1	34893240	Nov. 18, 2020	Nov. 17, 2021
TESTO	Hygro meter	608-H1	34913912	Nov. 18, 2020	Nov. 17, 2021
Aglient	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2020	Aug. 26, 2021
Custom Microwave	Standard Horn antenna	M15RH	V91113-A	NCR	NCR

7. System Verification Source

The System Verification sources at 30 GHz and above comprise horn-antennas and very stable signal generators.

Model	Ka-band horn antenna
Calibrated frequency:	30 GHz at 10mm from the case surface
Frequency accuracy	± 100 MHz
E-field polarization	linear
Harmonics	-20 dBc
Total radiated power	14 dBm
Power stability	0.05 dB
Power consumption	5 W
Size	00 x 100 x 100 mm
Weight	1 kg

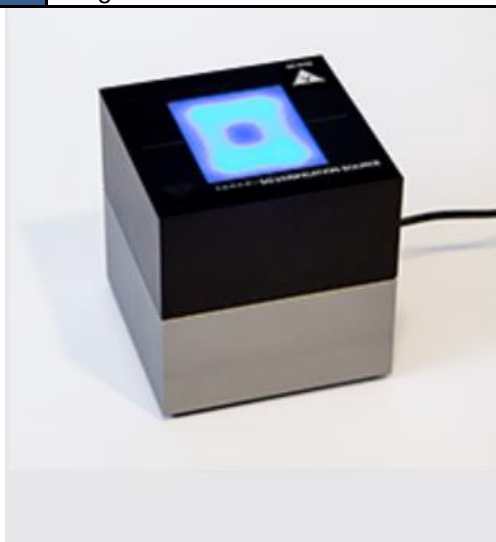



8. Power Density System Verification

The system performance check verifies that the system operates within its specifications.

The EUT is replaced by a calibrated source, the same spatial resolution, measurement region and the test separation used in the calibration was applied to system check. Through visual inspection into the measured power density distribution, both spatially (shape) and numerically (level) have no noticeable difference. The measured results should be within 0.66dB of the calibrated targets.

Frequency [GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	$0.25 \left(\frac{\lambda}{4}\right)$	120/120	16×16
30	$0.25 \left(\frac{\lambda}{4}\right)$	60/60	24×24
60	$0.25 \left(\frac{\lambda}{4}\right)$	32.5/32.5	26×26
90	$0.25 \left(\frac{\lambda}{4}\right)$	30/30	36×36

Settings for measurement of verification sources

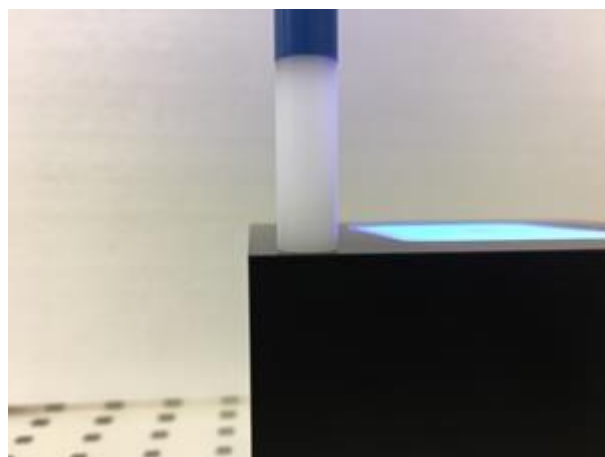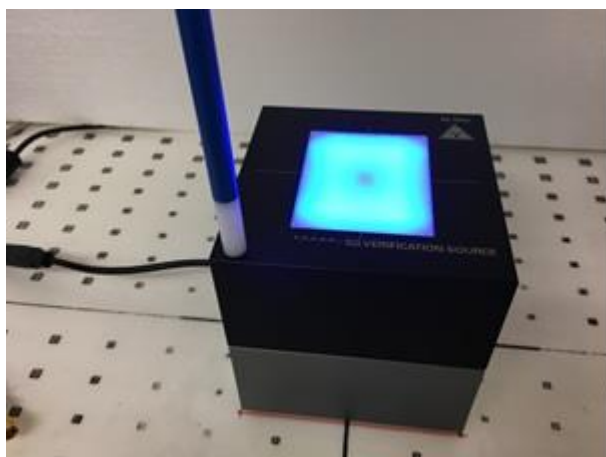

Verification Setup photo

9. System Verification Results

Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm^2 (W/m^2)	Targeted 4 cm^2 (W/m^2)	Deviation (dB)	Date	Test Site
30G	30GHz_1009	9441	656	10mm	26.6	29.5	-0.45	2021/7/6	SAR06-HY
30G	30GHz_1009	9441	656	10mm	27.1	29.5	-0.37	2021/7/17	SAR06-HY

9.1 Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis (a), the semi-minor axis (b), two angles describing the orientation of the normal vector of the ellipse (ϕ , θ), and one angle describing the tilt of the semi-major axis (ψ). For the two extreme cases, i.e., circular and linear polarizations, three parameters only (a , ϕ and θ) are sufficient for the description of the incident field.

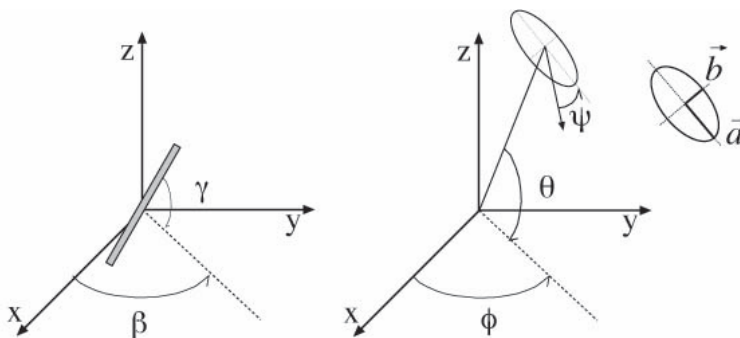


Illustration of the angles used for the numerical description of the sensor and the orientation of an ellipse in 3-D space.

For the reconstruction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be expressed as functions of the three angles (ϕ , θ and ψ). The parameters can be uniquely determined towards minimizing the error based on least-squares for the given set of angles and the measured data. In this way, the number of free parameters is reduced from five to three, which means that at least three sensor readings are necessary to gain sufficient information for the reconstruction of the ellipse parameters. However, to suppress the noise and increase the reconstruction accuracy, it is desirable that the system of equations be over determined. The solution to use a probe consisting of two sensors angled by r_1 and r_2 toward the probe axis and to perform measurements at three angular positions of the probe, i.e., at β_1 , β_2 and β_3 , results in over-determinations by a factor of two. If there is a need for more information or increased accuracy, more rotation angles can be added. The reconstruction of the ellipse parameters can be separated into linear and non-linear parts that are best solved by the Givens algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a shift of 90 degree ($r_2 = r_1 + 90$ degree), and to simplify, the first rotation angle of the probe (β_1) can be set to 0 degree.

9.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric and magnetic field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. SPEAG have developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmWV2 probe.

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. Two average power density values can be computed, the average total power density and the average incident power density, and the average total power density is used to determine compliance.

- $|Re\{S\}|$ is the total Poynting vector
- $\mathbf{n} \cdot Re\{S\}$ is the normal Poynting vector

The software post-processing reports to values, "S avg tot" and "S avg inc". "S avg tot" represents average total power density (all three xyz components included), and "S avg inc" represents average normal power density. The average total power density "S avg tot" is reported to determine the device compliance.

9.3 Test Positions

Band	Antenna Module	Measurement Plane					
		S1 (front) 2 mm	S2 (back) 2 mm	S3 (Left) 2 mm	S4 (Right) 2 mm	S5 (top) 2 mm	S6 (bottom) 2 mm
n258/n260/n261	Plane A sub-module	v	v	v	v	v	x
	Plane B sub-module	v	v	v	v	v	x

From the Part 0 and simulation report, beam IDs with highest PD and corresponding Plimit were selected to be tested for each antenna module and for each frequency band.

10. RF Exposure Evaluation Results

- The PD test was performed of a 2mm separation between sensor and EUT surface (the probe tip is 0.5mm to the EUT surface), 2 mm separation distance PD testing.
- According to TCBC Workshop in October 2018, 4 cm² averaging area are used.
- This device is enabled with Samsung S.LSI TAS feature, S.LSI TAS will manage and ensure LTE and 5G simultaneous transmission is compliant. The validation of the time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in Part 2 report.
- Pimit parameter for 5G mmW NR radio was calculated in RF Exposure Part 0 test report.
- According the KDB inquiry guidance, the back surface was measured on the camera bump 2 mm surface, and reporting simulation PD at 2 mm from antenna-adjacent housing.
- TAS algorithm makes use of the target power per slot in determining consumed SAR. The EIRP control can maintain the required amount of power for either CW tone or actual waveform to ensure the accuracy of actual transmit power. Plimit derived from CW tone signals can be confirmed to apply irrespective of the waveform ,therefore the device was configured to transmit CW wave signal for testing.
- Run PD test, from the beam ID with the highest simulated for selected side
 - Horizontal polarization (H-only), CW tone signal.
 - Vertical polarization (V-only), CW tone signal.
 - Horizontal + Vertical polarization (H+V) , CW tone signal
 - If step a to c result > 50% limit, then repeat for 2nd highest beam ID. If 2nd beam ID result is also > 50% limit, then repeat for 3rd beam ID
 - For Maximum among 2)–3), test low and high channel
 - For Maximum among 2)–4), test other sides, which is within 2.5 cm from the mmwave antenna module
 - Apply the ratio from simulation to scale PD values@2 mm separation distance to PD values@10 mm separation distance.
Repeat steps a)-f) for the rest of the bands and plane
- It's illustrated in Part 0 report that , for 5G mmW NR since there is total design-related uncertainty arising from TxAGC and device-to-device variation, the worst-case RF exposure should be determined by accounting for this device uncertainty of 2.3 dB, as well as PD design target of 4.42 W/m². Therefore, 5G mmW NR RF exposure for this DUT is evaluated by reported PD calculated as:

$$\text{Reported PD} = \text{PD design target} + 2.3 \text{ dB} = 7.5 \text{ W/m}^2 = 0.75 \text{ mW/cm}^2$$

Test Number	Antenna Module	H	V	Band	Frequency (GHz)	Exposure Surface	Power limit	Test Separation	Modulation	Epeak [V/m]	Hpeak [A/m]	Measured results Savg inc 4cm^2 (W/m2)	Measured results Savg tot 4cm^2 (W/m2)
	1= A-Plane	0	-	n258	24.75	Top (S5)	11	2mm	CW	59.7	0.151	1.2	1.68
	1= A-Plane	-	0	n258	24.75	Top (S5)	11	2mm	CW	55.7	0.161	1.26	1.59
	1= A-Plane	0	0	n258	24.75	Top (S5)	11	2mm	CW	76	0.261	2.58	3.43
	1= A-Plane	0	0	n258	24.75	Front (S1)	11	2mm	CW	42.6	0.088	1.05	1.2
	1= A-Plane	4	4	n258	24.75	Back (S2)	11	2mm	CW	29	0.069	0.844	0.993
	1= A-Plane	6	6	n258	24.75	Left (S3)	11	2mm	CW	10.4	0.027	0.099	0.107
	1= A-Plane	6	6	n258	24.75	Right (S4)	11	2mm	CW	29.4	0.088	0.936	1.04
01	1= A-Plane	0	0	n258	24.25	Top (S5)	11	2mm	CW	82.8	0.256	3.06	4.19
	1= A-Plane	0	0	n258	25.25	Top (S5)	11	2mm	CW	74.8	0.24	2.71	3.55
	0= B-Plane	0	-	n258	24.75	Back (S2)	8.81	2mm	CW	41.5	0.103	0.853	1.1
	0= B-Plane	-	6	n258	24.75	Back (S2)	8.81	2mm	CW	37.3	0.106	1.22	1.77
	0= B-Plane	6	6	n258	24.75	Back (S2)	8.81	2mm	CW	44.5	0.135	1.76	2.23
	0= B-Plane	6	6	n258	24.75	Front (S1)	8.81	2mm	CW	29.9	0.076	0.341	0.474
	0= B-Plane	6	6	n258	24.75	Left (S3)	8.81	2mm	CW	11.5	0.038	0.147	0.165
	0= B-Plane	0	0	n258	24.75	Right (S4)	8.81	2mm	CW	20.1	0.076	0.499	0.58
	0= B-Plane	3	3	n258	24.75	Top (S5)	8.81	2mm	CW	24.1	0.062	0.798	0.851
	0= B-Plane	6	6	n258	24.25	Back (S2)	8.81	2mm	CW	41.4	0.114	1.59	1.87
	0= B-Plane	5	5	n258	25.25	Back (S2)	8.81	2mm	CW	52.8	0.152	2.97	3.6
	1= A-Plane	3	-	n260	38.5	Top (S5)	11.38	2mm	CW	46.7	0.13	1.72	1.88
	1= A-Plane	-	2	n260	38.5	Top (S5)	11.38	2mm	CW	44.2	0.11	1.53	1.65
	1= A-Plane	2	2	n260	38.5	Top (S5)	11.38	2mm	CW	64.5	0.179	3.17	3.7
	1= A-Plane	2	2	n260	38.5	Front (S1)	11.38	2mm	CW	50	0.114	2	2.07
	1= A-Plane	3	3	n260	38.5	Back (S2)	11.38	2mm	CW	38.2	0.097	1.43	1.46
	1= A-Plane	1	1	n260	38.5	Left (S3)	11.38	2mm	CW	6.13	0.018	0.04	0.042
	1= A-Plane	0	0	n260	38.5	Right (S4)	11.38	2mm	CW	18.1	0.054	0.514	0.618
02	1= A-Plane	2	2	n260	37	Top (S5)	11.38	2mm	CW	94.7	0.261	5.37	5.96
	1= A-Plane	3	3	n260	40	Top (S5)	11.38	2mm	CW	75.8	0.195	4.19	4.74
	0= B-Plane	0	-	n260	38.5	Back (S2)	11.38	2mm	CW	54.4	0.141	0.999	1.29
	0= B-Plane	-	0	n260	38.5	Back (S2)	11.38	2mm	CW	49	0.147	0.799	1
	0= B-Plane	0	0	n260	38.5	Back (S2)	11.38	2mm	CW	73.5	0.177	2	2.5
	0= B-Plane	1	1	n260	38.5	Front (S1)	11.38	2mm	CW	25.8	0.059	0.303	0.362
	0= B-Plane	1	1	n260	38.5	Left (S3)	11.38	2mm	CW	11.9	0.03	0.086	0.09
	0= B-Plane	0	0	n260	38.5	Right (S4)	11.38	2mm	CW	30.5	0.079	0.767	1.01
	0= B-Plane	2	2	n260	38.5	Top (S5)	11.38	2mm	CW	35.4	0.073	1.12	1.37
	0= B-Plane	6	6	n260	37	Back (S2)	11.38	2mm	CW	58.7	0.142	1.7	2.14
	0= B-Plane	0	0	n260	40	Back (S2)	11.38	2mm	CW	71.5	0.186	2.27	3.16



Test Number	Antenna Module	H	V	Band	Frequency (GHz)	Exposure Surface	Power limit	Test Separation	Modulation	Epeak [V/m]	Hpeak [A/m]	Measured results Savg inc 4cm ² (W/m ²)	Measured results Savg tot 4cm ² (W/m ²)
	1= A-Plane	2	-	n261	27.925	Top (S5)	10.7	2mm	CW	59.2	0.159	2.22	2.56
	1= A-Plane	-	1	n261	27.925	Top (S5)	10.7	2mm	CW	62	0.174	2.28	2.6
	1= A-Plane	1	1	n261	27.925	Top (S5)	10.7	2mm	CW	65.4	0.226	2.95	3.67
	1= A-Plane	0	0	n261	27.925	Front (S1)	10.7	2mm	CW	34.3	0.088	1.05	1.23
	1= A-Plane	2	2	n261	27.925	Back (S2)	10.7	2mm	CW	30.4	0.082	0.287	0.476
	1= A-Plane	6	6	n261	27.925	Left (S3)	10.7	2mm	CW	9.43	0.028	0.124	0.128
	1= A-Plane	0	0	n261	27.925	Right (S4)	10.7	2mm	CW	22.5	0.061	0.601	0.645
	1= A-Plane	1	1	n261	27.5	Top (S5)	10.7	2mm	CW	74.5	0.182	2.94	3.7
03	1= A-Plane	1	1	n261	28.35	Top (S5)	10.7	2mm	CW	80.2	0.276	4.09	4.93
	0= B-Plane	3	-	n261	27.925	Back (S2)	9.1	2mm	CW	49.7	0.121	1.94	2.09
	0= B-Plane	-	3	n261	27.925	Back (S2)	9.1	2mm	CW	56.5	0.147	2.2	2.49
	0= B-Plane	3	3	n261	27.925	Back (S2)	9.1	2mm	CW	79	0.196	3.78	4.2
	0= B-Plane	6	6	n261	27.925	Front (S1)	9.1	2mm	CW	29.1	0.068	0.436	0.512
	0= B-Plane	6	6	n261	27.925	Left (S3)	9.1	2mm	CW	8.55	0.03	0.09	0.094
	0= B-Plane	0	0	n261	27.925	Right (S4)	9.1	2mm	CW	20.1	0.076	0.499	0.58
	0= B-Plane	3	3	n261	27.925	Top (S5)	9.1	2mm	CW	49.5	0.125	2.47	2.58
	0= B-Plane	5	5	n261	27.5	Back (S2)	9.1	2mm	CW	59.3	0.164	2.81	3.44
	0= B-Plane	3	3	n261	28.35	Back (S2)	9.1	2mm	CW	73.4	0.184	3.53	3.91

11. 5G NR + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR and LTE transmission are managed and controlled by Samsung S.LSI TAS feature, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

TAS managed and controlled for Multi-RATs (5G NR + LTE)

The power ratio factors are g_1 and g_2 for LTE and NR respectively. The main purpose of these power ratio factors is to split the available SAR budget among different RATs, so $g_1 + g_2 \leq 1$. The value of g_1 is computed based on the need of the anchor (LTE) and can be changed if the anchor changes its power request. Based on the SAR Budget portion allocated to the anchor, the value of g_2 will be computed. At steady state (where all RATs are being on for a while), the allocated power ratio factors will guarantee that the total exposure ratio never exceeds the highest exposure of either one.

The reported time-averaged PD is applicable for the worst-surface of the device, and for other surfaces the reported PD is determined as below

1. Calculate ratio of simulated PD for desired surface to simulated PD of worst surface for a given beam
 2. Repeat 1 to obtain ratios for all supported beams, and determine maximum ratio
 3. Repeat 1~2 to obtain the corresponding worst-case PD for other surfaces which are needed for TER analysis.
- *For body-worn and hotspot scenario, if SAR was measured at 15mm and 10mm, respectively, then the worst-case PD at 15mm and 10mm separation distance should be determined per surface as*
 - $15\text{mm_worst-case_PD} = \text{PD_ratio_15mm_to_2mm} * \text{reported time-averaged PD}$
 - $10\text{mm_worst-case_PD} = \text{PD_ratio_10mm_to_2mm} * \text{reported time-averaged PD}$

12. Simultaneous-Tx analysis

Config	TX Mode	Capable simultaneous TX Configurations
1	WWAN ON + FR2 (Cellular on)	WiFi 5GHz/6E MIMO (Ant 3+Ant 7) + Bluetooth(Ant 4)
2		WiFi 5GHz/6E MIMO (Ant 3+Ant 7) + Bluetooth(Ant 3)
3		WiFi 5GHz/6E MIMO (Ant 3+Ant 7) + Bluetooth(Ant 4+3)
4		WiFi 5GHz/6E MIMO (Ant 3+Ant 7)
5		WiFi 2.4GHz MIMO (Ant 4+3)
6		Bluetooth(Ant 4) (BDR/EDR/BLE)
7		Bluetooth(Ant 3) (BDR/EDR/BLE)
8		Bluetooth(Ant 4+3) (BDR/EDR)
9		WiFi 2.4GHz MIMO (Ant 4+3) + WiFi 5GHz/6E MIMO (Ant 3+Ant 7)

General Note:

1. The WLAN and Bluetooth SAR test results, referenced from the report of FCC ID: A4RG8V0U (Sporton SAR Report No. FA121931-04C).
2. The Sim-Tx configuration combination include in operation description will be match the title in the below Sum-Tx evaluation table
3. For LTE+5GNR+WiFi+BT, due to the TAS control, simultaneous transmission compliance can be assessed on LTE+WiFi/BT and 5GNR+WiFi/BT, and the validation of the time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in Part 2 report. For 5GNR FR2 with WiFi, total exposure ration is calculated

The $[\sum \text{ of (the highest measured or estimated SAR for each standalone antenna configuration, adjusted for maximum tune-up tolerance) / 1.6 W/kg}] + [\sum \text{ of MPE ratios}] \leq 1.0$.

12.1 Simultaneous transmission analysis for WiFi/BT + 5G NR

NR Band	Antenna Module	Exposure condition	Surface	Evaluation	Ratio*	PD_Design Target +Total uncertainty	PD_Design Target +Total uncertainty)*Ratio
				Distance		(W/m^2)	(W/m^2)
				(mm)			
n258	Plane A sub-module	Extremity	Front Surface	2 mm	0.535	7.5	4.01
			Back Surface	2 mm	0.64	7.5	4.8
			Left side	2 mm	0.041	7.5	0.31
			Right side	2 mm	0.288	7.5	2.16
			Top side	2 mm	1	7.5	7.5
			Bottom side	2 mm	Excluded		
n258	Plane B sub-module		Front Surface	2 mm	0.403	7.5	3.02
			Back Surface	2 mm	1	7.5	7.5
			Left side	2 mm	0.055	7.5	0.41
			Right side	2 mm	0.289	7.5	2.17
			Top side	2 mm	0.475	7.5	3.57
			Bottom side	2 mm	Excluded		
n260	Plane A sub-module		Front Surface	2 mm	0.617	7.5	4.63
			Back Surface	2 mm	0.485	7.5	3.64
			Left side	2 mm	0.024	7.5	0.18
			Right side	2 mm	0.225	7.5	1.68
			Top side	2 mm	1	7.5	7.5
			Bottom side	2 mm	Excluded		
n260	Plane B sub-module		Front Surface	2 mm	0.227	7.5	1.71
			Back Surface	2 mm	1	7.5	7.5
			Left side	2 mm	0.041	7.5	0.31
			Right side	2 mm	0.237	7.5	1.77
			Top side	2 mm	0.365	7.5	2.73
			Bottom side	2 mm	Excluded		
n261	Plane A sub-module		Front Surface	2 mm	0.51	7.5	3.82
			Back Surface	2 mm	0.543	7.5	4.07
			Left side	2 mm	0.049	7.5	0.37
			Right side	2 mm	0.257	7.5	1.93
			Top side	2 mm	1	7.5	7.5
			Bottom side	2 mm	Excluded		
n261	Plane B sub-module		Front Surface	2 mm	0.375	7.5	2.81
			Back Surface	2 mm	1	7.5	7.5
			Left side	2 mm	0.037	7.5	0.28
			Right side	2 mm	0.186	7.5	1.39
			Top side	2 mm	0.458	7.5	3.44
			Bottom side	2 mm	Excluded		

NR Band	Antenna Module	Exposure condition	Surface	Evaluation	Ratio*	PD_Design Target +Total uncertainty (W/m ²)	PD_Design Target +Total uncertainty)*Ratio (W/m ²)
				Distance			
				(mm)			
n258	Plane A sub-module	Head	Front Surface	2 mm	0.535	7.5	4.01
n258	Plane B sub-module		Front Surface	2 mm	0.403	7.5	3.02
n260	Plane A sub-module		Front Surface	2 mm	0.617	7.5	4.63
n260	Plane B sub-module		Front Surface	2 mm	0.227	7.5	1.71
n261	Plane A sub-module		Front Surface	2 mm	0.51	7.5	3.82
n261	Plane B sub-module		Front Surface	2 mm	0.375	7.5	2.81

NR Band	Antenna Module	Exposure condition	Surface	Evaluation	Ratio*	PD_Design Target +Total uncertainty (W/m ²)	PD_Design Target +Total uncertainty)*Ratio (W/m ²)
				Distance			
				(mm)			
n258	Plane A sub-module	Body Worn/Hotspot	worst-surface	10 mm	0.58	7.5	4.35
n258	Plane B sub-module		worst-surface	10 mm	0.561	7.5	4.21
n260	Plane A sub-module		worst-surface	10 mm	0.63	7.5	4.73
n260	Plane B sub-module		worst-surface	10 mm	0.549	7.5	4.12
n261	Plane A sub-module		worst-surface	10 mm	0.638	7.5	4.79
n261	Plane B sub-module		worst-surface	10 mm	0.627	7.5	4.7

*Ratio is highest ratio of (PD on desired exposure plane) / (PD on worst-surface) out of all beams and out of all channels illustrated in Power Density Simulation Report.

<Head Exposure Condition>
<WWAN with WLAN Table 4>

FR2 Band	Module	Exposure Position	1	5	7	Reported SAR/1.6 + PD/10 Summation
			PD	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 7+3	1+5+7
			4cm ² (W/m ²)	1g SAR (W/kg)	1g SAR (W/kg)	Summed
n258	Plane B sub-module	Right Cheek at 0mm	3.020	0.110	0.506	0.687
		Right Tilted at 0mm	3.020	0.094	0.396	0.608
		Left Cheek at 0mm	3.020	0.174	0.299	0.598
		Left Tilted at 0mm	3.020	0.104	0.262	0.531
	Plane A sub-module	Right Cheek at 0mm	4.010	0.110	0.506	0.786
		Right Tilted at 0mm	4.010	0.094	0.396	0.707
		Left Cheek at 0mm	4.010	0.174	0.299	0.697
		Left Tilted at 0mm	4.010	0.104	0.330	0.672
n260	Plane B sub-module	Right Cheek at 0mm	1.710	0.110	0.506	0.556
		Right Tilted at 0mm	1.710	0.094	0.396	0.477
		Left Cheek at 0mm	1.710	0.174	0.299	0.467
		Left Tilted at 0mm	1.710	0.104	0.330	0.442
	Plane A sub-module	Right Cheek at 0mm	4.630	0.110	0.506	0.848
		Right Tilted at 0mm	4.630	0.094	0.396	0.769
		Left Cheek at 0mm	4.630	0.174	0.299	0.759
		Left Tilted at 0mm	4.630	0.104	0.330	0.734
n261	Plane B sub-module	Right Cheek at 0mm	2.810	0.110	0.506	0.666
		Right Tilted at 0mm	2.810	0.094	0.396	0.587
		Left Cheek at 0mm	2.810	0.174	0.299	0.577
		Left Tilted at 0mm	2.810	0.104	0.330	0.552
	Plane A sub-module	Right Cheek at 0mm	3.820	0.110	0.506	0.767
		Right Tilted at 0mm	3.820	0.094	0.396	0.688
		Left Cheek at 0mm	3.820	0.174	0.299	0.678
		Left Tilted at 0mm	3.820	0.104	0.330	0.653

<WWAN with WLAN Table 3, BT Table 2>

FR2 Band	Module	Exposure Position	1	5	7	8	9	10	11	Reported SAR/1.6 + PD/10 Summation				
			PD	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 7+3	6GHz WLAN Ant 7+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 4+3	1+5	1+7	1+7+9	1+7+10	1+7+11
			4cm ² (W/m ²)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Summed	Summed	Summed	Summed	Summed
n258	Plane B sub-module	Right Cheek at 0mm	3.020	0.292	0.506	0.045	0.063	0.050	0.091	0.485	0.618	0.658	0.650	0.675
		Right Tilted at 0mm	3.020	0.267	0.396	0.160	0.047	0.025	0.076	0.469	0.550	0.579	0.565	0.597
		Left Cheek at 0mm	3.020	0.606	0.299	0.081	0.146	0.039	0.179	0.681	0.489	0.580	0.513	0.601
		Left Tilted at 0mm	3.020	0.475	0.330	0.195	0.109	0.019	0.092	0.599	0.508	0.576	0.520	0.566
	Plane A sub-module	Right Cheek at 0mm	4.010	0.292	0.506	0.045	0.063	0.050	0.091	0.584	0.717	0.757	0.749	0.774
		Right Tilted at 0mm	4.010	0.267	0.396	0.160	0.047	0.025	0.076	0.568	0.649	0.678	0.664	0.696
		Left Cheek at 0mm	4.010	0.606	0.299	0.081	0.146	0.039	0.179	0.780	0.588	0.679	0.612	0.700
		Left Tilted at 0mm	4.010	0.475	0.330	0.195	0.109	0.019	0.092	0.698	0.607	0.675	0.619	0.665
n260	Plane B sub-module	Right Cheek at 0mm	1.710	0.292	0.506	0.045	0.063	0.050	0.091	0.354	0.487	0.527	0.519	0.544
		Right Tilted at 0mm	1.710	0.267	0.396	0.160	0.047	0.025	0.076	0.338	0.419	0.448	0.434	0.466
		Left Cheek at 0mm	1.710	0.606	0.299	0.081	0.146	0.039	0.179	0.550	0.358	0.449	0.382	0.470
		Left Tilted at 0mm	1.710	0.475	0.330	0.195	0.109	0.019	0.092	0.468	0.377	0.445	0.389	0.435
	Plane A sub-module	Right Cheek at 0mm	4.630	0.292	0.506	0.045	0.063	0.050	0.091	0.646	0.779	0.819	0.811	0.836
		Right Tilted at 0mm	4.630	0.267	0.396	0.160	0.047	0.025	0.076	0.630	0.711	0.740	0.726	0.758
		Left Cheek at 0mm	4.630	0.606	0.299	0.081	0.146	0.039	0.179	0.842	0.650	0.741	0.674	0.762
		Left Tilted at 0mm	4.630	0.475	0.330	0.195	0.109	0.019	0.092	0.760	0.669	0.737	0.681	0.727
n261	Plane B sub-module	Right Cheek at 0mm	2.810	0.292	0.506	0.045	0.063	0.050	0.091	0.464	0.597	0.637	0.629	0.654
		Right Tilted at 0mm	2.810	0.267	0.396	0.160	0.047	0.025	0.076	0.448	0.529	0.558	0.544	0.576
		Left Cheek at 0mm	2.810	0.606	0.299	0.081	0.146	0.039	0.179	0.660	0.468	0.559	0.492	0.580
		Left Tilted at 0mm	2.810	0.475	0.330	0.195	0.109	0.019	0.092	0.578	0.487	0.555	0.499	0.545
	Plane A sub-module	Right Cheek at 0mm	3.820	0.292	0.506	0.045	0.063	0.050	0.091	0.565	0.698	0.738	0.730	0.755
		Right Tilted at 0mm	3.820	0.267	0.396	0.160	0.047	0.025	0.076	0.549	0.630	0.659	0.645	0.677
		Left Cheek at 0mm	3.820	0.606	0.299	0.081	0.146	0.039	0.179	0.761	0.569	0.660	0.593	0.681
		Left Tilted at 0mm	3.820	0.475	0.330	0.195	0.109	0.019	0.092	0.679	0.588	0.656	0.600	0.646

<Hotspot Exposure Condition>
<WWAN with WLAN Table 9, BT Table 4>

FR2 Band	Module	Exposure Position	1	7	9	10	11	Reported SAR/1.6 + PD/10 Summation		
			PD	5GHz WLAN Ant 7+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 4+3	1+7+9 Summed	1+7+10 Summed	1+7+11 Summed
			4cm ² (W/m ²)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
n258	Plane B sub-module	Front at 10mm	4.210	0.082	0.007	0.092	0.130	0.477	0.530	0.554
		Back at 10mm	4.210	0.430	0.192	0.170	0.157	0.810	0.796	0.788
		Left side at 10mm	4.210	0.253	0.055	0.280	0.154	0.614	0.754	0.675
		Right side at 10mm	4.210	0.130	0.001	0.001	0.036	0.503	0.503	0.525
		Top side at 10mm	4.210	0.221	0.144	0.001	0.106	0.649	0.560	0.625
		Bottom side at 10mm	4.210					0.421	0.421	0.421
	Plane A sub-module	Front at 10mm	4.350	0.082	0.007	0.092	0.130	0.491	0.544	0.568
		Back at 10mm	4.350	0.430	0.192	0.170	0.157	0.824	0.810	0.802
		Left side at 10mm	4.350	0.253	0.055	0.280	0.154	0.628	0.768	0.689
		Right side at 10mm	4.350	0.130	0.001	0.001	0.036	0.517	0.517	0.539
		Top side at 10mm	4.350	0.221	0.144	0.001	0.106	0.663	0.574	0.639
		Bottom side at 10mm	4.350					0.435	0.435	0.435
n260	Plane B sub-module	Front at 10mm	4.120	0.082	0.007	0.092	0.130	0.468	0.521	0.545
		Back at 10mm	4.120	0.430	0.192	0.170	0.157	0.801	0.787	0.779
		Left side at 10mm	4.120	0.253	0.055	0.280	0.154	0.605	0.745	0.666
		Right side at 10mm	4.120	0.130	0.001	0.001	0.036	0.494	0.494	0.516
		Top side at 10mm	4.120	0.221	0.144	0.001	0.106	0.640	0.551	0.616
		Bottom side at 10mm	4.120					0.412	0.412	0.412
	Plane A sub-module	Front at 10mm	4.730	0.082	0.007	0.092	0.130	0.529	0.582	0.606
		Back at 10mm	4.730	0.430	0.192	0.170	0.157	0.862	0.848	0.840
		Left side at 10mm	4.730	0.253	0.055	0.280	0.154	0.666	0.806	0.727
		Right side at 10mm	4.730	0.130	0.001	0.001	0.036	0.555	0.555	0.577
		Top side at 10mm	4.730	0.221	0.144	0.001	0.106	0.701	0.612	0.677
		Bottom side at 10mm	4.730					0.473	0.473	0.473
n261	Plane B sub-module	Front at 10mm	4.700	0.082	0.007	0.092	0.130	0.526	0.579	0.603
		Back at 10mm	4.700	0.430	0.192	0.170	0.157	0.859	0.845	0.837
		Left side at 10mm	4.700	0.253	0.055	0.280	0.154	0.663	0.803	0.724
		Right side at 10mm	4.700	0.130	0.001	0.001	0.036	0.552	0.552	0.574
		Top side at 10mm	4.700	0.221	0.144	0.001	0.106	0.698	0.609	0.674
		Bottom side at 10mm	4.700					0.470	0.470	0.470
	Plane A sub-module	Front at 10mm	4.790	0.082	0.007	0.092	0.130	0.535	0.588	0.612
		Back at 10mm	4.790	0.430	0.192	0.170	0.157	0.868	0.854	0.846
		Left side at 10mm	4.790	0.253	0.055	0.280	0.154	0.672	0.812	0.733
		Right side at 10mm	4.790	0.130	0.001	0.001	0.036	0.561	0.561	0.583
		Top side at 10mm	4.790	0.221	0.144	0.001	0.106	0.707	0.618	0.683
		Bottom side at 10mm	4.790					0.479	0.479	0.479

<WWAN with WLAN Table 7>

FR2 Band	Module	Exposure Position	1	5	7	Reported SAR/1.6 + PD/10 Summation	
			PD	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 7+3	1+5 Summed	1+7 Summed
			4cm ² (W/m ²)	1g SAR (W/kg)	1g SAR (W/kg)		
n258	Plane B sub-module	Front at 10mm	4.210	0.269	0.103	0.589	0.485
		Back at 10mm	4.210	0.369	0.541	0.652	0.759
		Left side at 10mm	4.210	0.614	0.318	0.805	0.620
		Right side at 10mm	4.210	0.109	0.164	0.489	0.524
		Top side at 10mm	4.210	0.191	0.278	0.540	0.595
		Bottom side at 10mm	4.210			0.421	0.421
	Plane A sub-module	Front at 10mm	4.350	0.269	0.103	0.603	0.499
		Back at 10mm	4.350	0.369	0.541	0.666	0.773
		Left side at 10mm	4.350	0.614	0.318	0.819	0.634
		Right side at 10mm	4.350	0.109	0.164	0.503	0.538
		Top side at 10mm	4.350	0.191	0.278	0.554	0.609
		Bottom side at 10mm	4.350			0.435	0.435
n260	Plane B sub-module	Front at 10mm	4.120	0.269	0.103	0.580	0.476
		Back at 10mm	4.120	0.369	0.541	0.643	0.750
		Left side at 10mm	4.120	0.614	0.318	0.796	0.611
		Right side at 10mm	4.120	0.109	0.164	0.480	0.515
		Top side at 10mm	4.120	0.191	0.278	0.531	0.586
		Bottom side at 10mm	4.120			0.412	0.412
	Plane A sub-module	Front at 10mm	4.730	0.269	0.103	0.641	0.537
		Back at 10mm	4.730	0.369	0.541	0.704	0.811
		Left side at 10mm	4.730	0.614	0.318	0.857	0.672
		Right side at 10mm	4.730	0.109	0.164	0.541	0.576
		Top side at 10mm	4.730	0.191	0.278	0.592	0.647
		Bottom side at 10mm	4.730			0.473	0.473
n261	Plane B sub-module	Front at 10mm	4.700	0.269	0.103	0.638	0.534
		Back at 10mm	4.700	0.369	0.541	0.701	0.808
		Left side at 10mm	4.700	0.614	0.318	0.854	0.669
		Right side at 10mm	4.700	0.109	0.164	0.538	0.573
		Top side at 10mm	4.700	0.191	0.278	0.589	0.644
		Bottom side at 10mm	4.700			0.470	0.470
	Plane A sub-module	Front at 10mm	4.790	0.269	0.103	0.647	0.543
		Back at 10mm	4.790	0.369	0.541	0.710	0.817
		Left side at 10mm	4.790	0.614	0.318	0.863	0.678
		Right side at 10mm	4.790	0.109	0.164	0.547	0.582
		Top side at 10mm	4.790	0.191	0.278	0.598	0.653
		Bottom side at 10mm	4.790			0.479	0.479

<WWAN with WLAN Table 8>

FR2 Band	Module	Exposure Position	1	5	7	Reported SAR/1.6 + PD/10 Summation
			PD	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 7+3	1+5+7 Summed
			4cm ² (W/m ²)	1g SAR (W/kg)	1g SAR (W/kg)	
n258	Plane B sub-module	Front at 10mm	4.210	0.133	0.082	0.555
		Back at 10mm	4.210	0.196	0.430	0.812
		Left side at 10mm	4.210	0.262	0.253	0.743
		Right side at 10mm	4.210	0.048	0.130	0.532
		Top side at 10mm	4.210	0.122	0.221	0.635
		Bottom side at 10mm	4.210			0.421
	Plane A sub-module	Front at 10mm	4.350	0.133	0.082	0.569
		Back at 10mm	4.350	0.196	0.430	0.826
		Left side at 10mm	4.350	0.262	0.253	0.757
		Right side at 10mm	4.350	0.048	0.130	0.546
		Top side at 10mm	4.350	0.122	0.221	0.649
		Bottom side at 10mm	4.350			0.435
n260	Plane B sub-module	Front at 10mm	4.120	0.133	0.082	0.546
		Back at 10mm	4.120	0.196	0.430	0.803
		Left side at 10mm	4.120	0.262	0.253	0.734
		Right side at 10mm	4.120	0.048	0.130	0.523
		Top side at 10mm	4.120	0.122	0.221	0.626
		Bottom side at 10mm	4.120			0.412
	Plane A sub-module	Front at 10mm	4.730	0.133	0.082	0.607
		Back at 10mm	4.730	0.196	0.430	0.864
		Left side at 10mm	4.730	0.262	0.253	0.795
		Right side at 10mm	4.730	0.048	0.130	0.584
		Top side at 10mm	4.730	0.122	0.221	0.687
		Bottom side at 10mm	4.730			0.473
n261	Plane B sub-module	Front at 10mm	4.700	0.133	0.082	0.604
		Back at 10mm	4.700	0.196	0.430	0.861
		Left side at 10mm	4.700	0.262	0.253	0.792
		Right side at 10mm	4.700	0.048	0.130	0.581
		Top side at 10mm	4.700	0.122	0.221	0.684
		Bottom side at 10mm	4.700			0.470
	Plane A sub-module	Front at 10mm	4.790	0.133	0.082	0.613
		Back at 10mm	4.790	0.196	0.430	0.870
		Left side at 10mm	4.790	0.262	0.253	0.801
		Right side at 10mm	4.790	0.048	0.130	0.590
		Top side at 10mm	4.790	0.122	0.221	0.693
		Bottom side at 10mm	4.790			0.479

<Body-Worn Exposure Condition>
<WWAN with WLAN Table 9, BT Table 4>

FR2 Band	Module	Exposure Position	1	7	9	10	11	Reported SAR/1.6 + PD/10 Summation		
			PD	5GHz WLAN Ant 7+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 4+3	1+7+9 Summed	1+7+10 Summed	1+7+11 Summed
			4cm ² (W/m ²)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
n258	Plane B sub-module	Front at 10mm	4.210	0.097	0.007	0.092	0.052	0.486	0.539	0.514
		Back at 10mm	4.210	0.439	0.192	0.170	0.157	0.815	0.802	0.794
	Plane A sub-module	Front at 10mm	4.350	0.097	0.007	0.092	0.052	0.500	0.553	0.528
		Back at 10mm	4.350	0.439	0.192	0.170	0.157	0.829	0.816	0.808
n260	Plane B sub-module	Front at 10mm	4.120	0.097	0.007	0.092	0.052	0.477	0.530	0.505
		Back at 10mm	4.120	0.439	0.192	0.170	0.157	0.806	0.793	0.785
	Plane A sub-module	Front at 10mm	4.730	0.097	0.007	0.092	0.052	0.538	0.591	0.566
		Back at 10mm	4.730	0.439	0.192	0.170	0.157	0.867	0.854	0.846
n261	Plane B sub-module	Front at 10mm	4.700	0.097	0.007	0.092	0.052	0.535	0.588	0.563
		Back at 10mm	4.700	0.439	0.192	0.170	0.157	0.864	0.851	0.843
	Plane A sub-module	Front at 10mm	4.790	0.097	0.007	0.092	0.052	0.544	0.597	0.572
		Back at 10mm	4.790	0.439	0.192	0.170	0.157	0.873	0.860	0.852

<WWAN with WLAN Table 7>

FR2 Band	Module	Exposure Position	1	5	7	Reported SAR/1.6 + PD/10 Summation	
			PD	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 7+3	1+5 Summed	1+7 Summed
			4cm ² (W/m ²)	1g SAR (W/kg)	1g SAR (W/kg)		
n258	Plane B sub-module	Front at 10mm	4.210	0.269	0.109	0.589	0.489
		Back at 10mm	4.210	0.369	0.492	0.652	0.729
	Plane A sub-module	Front at 10mm	4.350	0.269	0.109	0.603	0.503
		Back at 10mm	4.350	0.369	0.492	0.666	0.743
n260	Plane B sub-module	Front at 10mm	4.120	0.269	0.109	0.580	0.480
		Back at 10mm	4.120	0.369	0.492	0.643	0.720
	Plane A sub-module	Front at 10mm	4.730	0.269	0.109	0.641	0.541
		Back at 10mm	4.730	0.369	0.492	0.704	0.781
n261	Plane B sub-module	Front at 10mm	4.700	0.269	0.109	0.638	0.538
		Back at 10mm	4.700	0.369	0.492	0.701	0.778
	Plane A sub-module	Front at 10mm	4.790	0.269	0.109	0.647	0.547
		Back at 10mm	4.790	0.369	0.492	0.710	0.787

<WWAN with WLAN Table 8>

FR2 Band	Module	Exposure Position	1	5	7	Reported SAR/1.6 + PD/10 Summation
			PD	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 7+3	1+5+7 Summed
			4cm ² (W/m ²)	1g SAR (W/kg)	1g SAR (W/kg)	
n258	Plane B sub-module	Front at 10mm	4.210	0.133	0.097	0.565
		Back at 10mm	4.210	0.196	0.439	0.818
	Plane A sub-module	Front at 10mm	4.350	0.133	0.097	0.579
		Back at 10mm	4.350	0.196	0.439	0.832
n260	Plane B sub-module	Front at 10mm	4.120	0.133	0.097	0.556
		Back at 10mm	4.120	0.196	0.439	0.809
	Plane A sub-module	Front at 10mm	4.730	0.133	0.097	0.617
		Back at 10mm	4.730	0.196	0.439	0.870
n261	Plane B sub-module	Front at 10mm	4.700	0.133	0.097	0.614
		Back at 10mm	4.700	0.196	0.439	0.867
	Plane A sub-module	Front at 10mm	4.790	0.133	0.097	0.623
		Back at 10mm	4.790	0.196	0.439	0.876

<Product Specific Exposure Condition>

FR2 Band	Module	Exposure Position	1	7	Reported SAR/4 + PD/10 Summation
			PD	5GHz WLAN Ant 7+3	1+7 Summed
			4cm ² (W/m ²)	10g SAR (W/kg)	
n258	Plane B sub-module	Front at 0mm	3.020	0.216	0.356
		Back at 0mm	7.500	0.858	0.965
		Left side at 0mm	0.410	0.399	0.141
		Right side at 0mm	2.170	0.166	0.259
		Top side at 0mm	3.570	0.146	0.394
		Bottom side at 0mm			0.000
	Plane A sub-module	Front at 0mm	4.010	0.216	0.455
		Back at 0mm	4.800	0.858	0.695
		Left side at 0mm	0.310	0.399	0.131
		Right side at 0mm	2.160	0.166	0.258
		Top side at 0mm	7.500	0.146	0.787
		Bottom side at 0mm			0.000
n260	Plane B sub-module	Front at 0mm	1.710	0.216	0.225
		Back at 0mm	7.500	0.858	0.965
		Left side at 0mm	0.310	0.399	0.131
		Right side at 0mm	1.770	0.166	0.219
		Top side at 0mm	2.730	0.146	0.310
		Bottom side at 0mm			0.000
	Plane A sub-module	Front at 0mm	4.630	0.216	0.517
		Back at 0mm	3.640	0.858	0.579
		Left side at 0mm	0.180	0.399	0.118
		Right side at 0mm	1.680	0.166	0.210
		Top side at 0mm	7.500	0.146	0.787
		Bottom side at 0mm			0.000
n261	Plane B sub-module	Front at 0mm	2.810	0.216	0.335
		Back at 0mm	7.500	0.858	0.965
		Left side at 0mm	0.280	0.399	0.128
		Right side at 0mm	1.390	0.166	0.181
		Top side at 0mm	3.440	0.146	0.381
		Bottom side at 0mm			0.000
	Plane A sub-module	Front at 0mm	3.820	0.216	0.436
		Back at 0mm	4.070	0.858	0.622
		Left side at 0mm	0.370	0.399	0.137
		Right side at 0mm	1.930	0.166	0.235
		Top side at 0mm	7.500	0.146	0.787
		Bottom side at 0mm			0.000

FR2 Band	Module	Exposure Position	1	7	Reported SAR/4 + PD/10 Summation
			PD	5GHz WLAN Ant 7+3	1+7 Summed
			4cm ² (W/m ²)	10g SAR (W/kg)	
n258	Plane B sub-module	Front at 0mm	3.020	0.193	0.350
		Back at 0mm	7.500	0.765	0.941
		Left side at 0mm	0.410	0.356	0.130
		Right side at 0mm	2.170	0.148	0.254
		Top side at 0mm	3.570	0.130	0.390
		Bottom side at 0mm			0.000
	Plane A sub-module	Front at 0mm	4.010	0.193	0.449
		Back at 0mm	4.800	0.765	0.671
		Left side at 0mm	0.310	0.356	0.120
		Right side at 0mm	2.160	0.148	0.253
		Top side at 0mm	7.500	0.130	0.783
		Bottom side at 0mm			0.000
n260	Plane B sub-module	Front at 0mm	1.710	0.193	0.219
		Back at 0mm	7.500	0.765	0.941
		Left side at 0mm	0.310	0.356	0.120
		Right side at 0mm	1.770	0.148	0.214
		Top side at 0mm	2.730	0.130	0.306
		Bottom side at 0mm			0.000
	Plane A sub-module	Front at 0mm	4.630	0.193	0.511
		Back at 0mm	3.640	0.765	0.555
		Left side at 0mm	0.180	0.356	0.107
		Right side at 0mm	1.680	0.148	0.205
		Top side at 0mm	7.500	0.130	0.783
		Bottom side at 0mm			0.000
n261	Plane B sub-module	Front at 0mm	2.810	0.193	0.329
		Back at 0mm	7.500	0.765	0.941
		Left side at 0mm	0.280	0.356	0.117
		Right side at 0mm	1.390	0.148	0.176
		Top side at 0mm	3.440	0.130	0.377
		Bottom side at 0mm			0.000
	Plane A sub-module	Front at 0mm	3.820	0.193	0.430
		Back at 0mm	4.070	0.765	0.598
		Left side at 0mm	0.370	0.356	0.126
		Right side at 0mm	1.930	0.148	0.230
		Top side at 0mm	7.500	0.130	0.783
		Bottom side at 0mm			0.000

Test Engineer : Mood Huang and Carter Jhuang

13. Uncertainty Assessment

The budget is valid for evaluation distances $> \lambda/2\pi$. For specific tests and configurations, the Uncertainty could be considerably smaller.

Preliminary Module mmWave Uncertainty Budget Evaluation Distances to the Antennas $> \lambda / 2\pi$						
Error Description	Uncertainty Value ($\pm$ dB)	Probability	Divisor	(Ci)	Standard Uncertainty ($\pm$ dB)	(Vi) Veff
Measurement System						
Probe Calibration	0.49	N	1	1	0.49	∞
Hemispherical Isotropy	0.50	R	1.732	1	0.29	∞
Linearity	0.20	R	1.732	0	0.12	∞
System Detection Limits	0.04	R	1.732	1	0.02	∞
Modulation Response	0.40	R	1.732	1	0.23	∞
Readout Electronics	0.03	N	1	1	0.03	∞
Response Time	0.00	R	1.732	1	0.00	∞
Integration Time	0.00	R	1.732	1	0.00	∞
RF Ambient Noise	0.2	R	1.732	1	0.12	∞
RF Ambient Reflections	0.21	R	1.732	1	0.12	∞
Probe Positioner	0.04	R	1.732	1	0.02	∞
Probe Positioning	0.30	R	1.732	1	0.17	∞
Savg Reconstruction	0.60	R	1.732	1	0.35	∞
Test Sample Related						
Power Drift	0.2	R	1.732	1	0.12	∞
Input Power	0	N	1	0	0.00	∞
Combined Std. Uncertainty					0.76 dB	∞
Coverage Factor for 95 %					K=2	
Expanded STD Uncertainty					1.52 dB	



14. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [3] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [4] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.