

Shenzhen Xinglong new plastic products limited company

TEST REPORT

SCOPE OF WORK

FCC TESTING—FDLEDHP, IPLEDBTHP, LS-HB1905

REPORT NUMBER

190530004SZN-001

ISSUE DATE

June 15, 2019

[REVISED DATE]

[-----]

PAGES

43

DOCUMENT CONTROL NUMBER

FCC ID 249_C

© 2017 INTERTEK



Shenzhen Xinglong new plastic products limited company

Application
For
Certification

FCC ID: 2AG5CLEDHP**LIGHT UP Wireless Headphones, Flashing LED Wireless Headphones****Model: FDLEDHP, IPLEDBTHP, LS-HB1905****Brand Name: iHip, Liangzhisheng****2.4GHz Transceiver****Report No.: 190530004SZN-001**

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-17]

Prepared and Checked by:

Approved by:

Leo Li
Project Engineer

Kidd Yang
Technical Supervisor
Date: June 15, 2019

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Test Equipment List

MEASUREMENT/TECHNICAL REPORT

Shenzhen Xinglong new plastic products limited company

Model: FDLEDHP, IPLEDBTHP, LS-HB1905

FCC ID: 2AG5CLEDHP

This report concerns (check one:) Original Grant X Class II Change _____Equipment Type: DXX - Part 15 Low Power Communication Device TransmitterDeferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No X _____If yes, defer until: _____
dateCompany Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes _____ No X _____

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-17 Edition] provision.

Report prepared by:

Leo Li
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue,
Zhangkengjing Community, GuanHu Subdistrict,
LongHua District, ShenZhen, P.R. China
Tel / Fax: 86-755-8614 0743/86-755-8601 6661

Table of Contents

1.0 General Description	7
1.1 Product Description	7
1.2 Related Submittal(s) Grants	7
1.3 Test Methodology	7
1.4 Test Facility.....	7
2.0 System Test Configuration	9
2.1 Justification	9
2.2 EUT Exercising Software	9
2.3 Special Accessories	9
2.4 Equipment Modification.....	9
2.5 Measurement Uncertainty	10
2.6 Support Equipment List and Description	10
3.0 Emission Results	12
3.1 Radiated Test Results	13
3.1.1 Field Strength Calculation	13
3.1.2 Radiated Emission Configuration Photograph	14
3.1.3 Radiated Emissions	14
3.1.4 Transmitter Spurious Emissions	17
3.2 Conducted Emission Configuration Photograph	21
3.2.1 Conducted Emission	21
4.0 Equipment Photographs	25
5.0 Product Labelling	27
6.0 Technical Specifications	29
7.0 Instruction Manual	31
8.0 Miscellaneous Information	33
8.1 Bandedge Plot	34
8.2 Discussion of Pulse Desensitization	36
8.3 Calculation of Average Factor.....	37
8.4 Emissions Test Procedures.....	38
8.5 Emissions Test Procedures (cont'd)	39
9.0 Confidentiality Request	41
10.0 Test Equipment List	43

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Report	Bandedge Plot	bandedge.pdf
Test Report	20dB BW Plot	bw.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

EXHIBIT 1

GENERAL DESCRIPTION

1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a LIGHT UP Wireless Headphones/Flashing LED Wireless Headphones with Bluetooth 5.0 (Single Mode EDR) function operating in 2402-2480MHz. The EUT is powered by DC 3.7V by rechargeable battery. For more detail information pls. refer to the user manual.

Antenna Type: Integral antenna

Modulation Type: GFSK, $\pi/4$ -DQPSK and 8-DPSK

Antenna Gain: -0.68dBi Max

Bluetooth Version: 5.0 (Single Mode EDR)

The Model: IPLEDBTHP, LS-HB1905 are the same as the Model: FDLEDHP in hardware and electrical aspect. The difference in model number, production name and trade name serve as marketing strategy. Please refer to the below table.

Production name	Trade name	Model No.
LIGHT UP Wireless Headphones	iHip	FDLEDHP
Flashing LED Wireless Headphones	iHip	IPLEDBTHP
Flashing LED Wireless Headphones	Liangzhisheng	LS-HB1905

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the LIGHT UP Wireless Headphones/Flashing LED Wireless Headphones which has Bluetooth function, and related report for FCC SDOC is subjected to report number: 190530004SZN-002.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

1.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

EXHIBIT 2

SYSTEM TEST CONFIGURATION

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT is powered by DC 3.7V full rechargeable battery and charged by DC 5V through adapter during the test, only the worst data was reported in this report.

All packets DH1, DH3 & DH5 mode in modulation type GFSK, $\pi/4$ -DQPSK and 8-DPSK were tested and only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Special Accessories

No special accessories used.

2.4 Equipment Modification

Any modifications installed previous to testing by Shenzhen Xinglong new plastic products limited company will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

Description	Manufacturer	Remark
iPod (Provided by Intertek)	Apple	A1446
USB cable (Provided by applicant)	Provided by applicant	unshielded, 0.48m
Audio cable (Provided by applicant)	Provided by applicant	unshielded, 1.00m
Adapter (Provided by Intertek)	XIAOMI	MDY-08-EO
Adapter (Provided by Intertek)	NANFU	SR-C818QC
Micro SD card (Provided by Intertek)	SanDisk	SDSDQ-2048-P36M

EXHIBIT 3

EMISSION RESULTS

3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB
 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
634.310 MHz

Judgement: Passed by 16.5 dB

TEST PERSONNEL:

Sign on file

Leo Li, Project Engineer
Typed/Printed Name

10 June 2019
Date

Applicant: Shenzhen Xinglong new plastic products limited company

Date of Test: 10 June 2019


Model: FDLEDHP

Worst Case Operating Mode:

BT Link


ANT Polarity: Horizontal

FCC Part 15

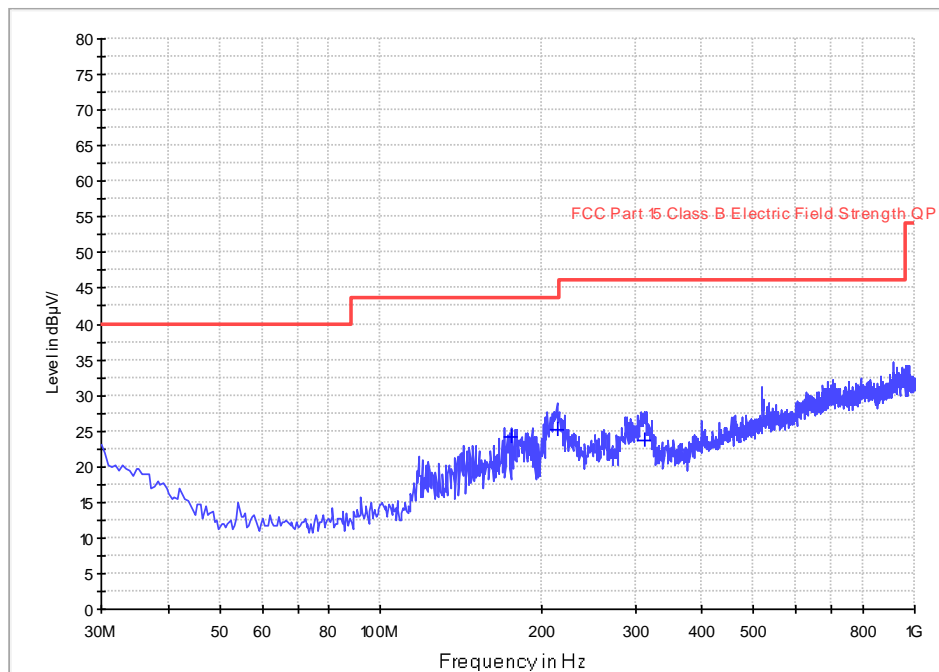

ANT Polarity: Vertical

FCC Part 15

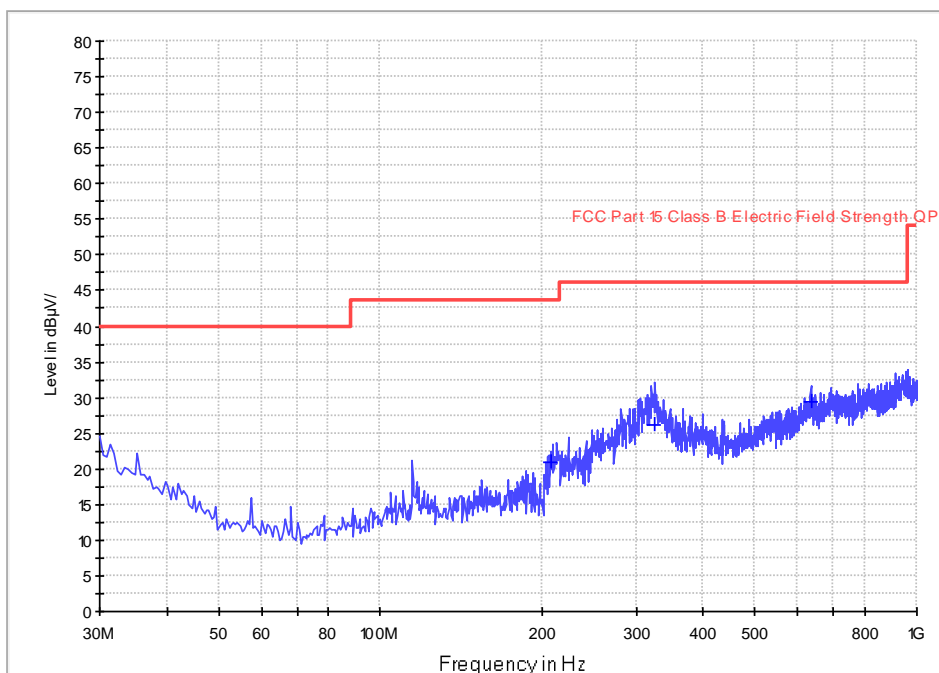

Applicant: Shenzhen Xinglong new plastic products limited company

Date of Test: 10 June 2019

Model: FDLEDHP

Worst Case Operating Mode:

BT Link

Table 1

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	176.470	34.3	20.0	9.9	24.2	43.5	-19.3
Horizontal	213.815	34.4	20.0	10.9	25.3	43.5	-18.2
Horizontal	313.240	29.5	20.0	14.3	23.8	46.0	-22.2
Vertical	207.995	30.2	20.0	10.6	20.8	43.5	-22.7
Vertical	325.365	31.7	20.0	14.6	26.3	46.0	-19.7
Vertical	634.310	27.8	20.0	21.7	29.5	46.0	-16.5

- NOTES:
1. Quasi-Peak detector is used except for others stated.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. All emissions are below the QP limit.

3.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
7206.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 9.8 dB

TEST PERSONNEL:

Sign on file

Leo Li, Project Engineer

Typed/Printed Name

10 June 2019

Date

Applicant: Shenzhen Xinglong new plastic products limited company

Date of Test: 10 June 2019

Model: FDLEDHP

Worst Case Operating Mode:

Transmitting

Table 2

Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2402.000	110.2	36.7	28.1	101.6	114.0	-12.4
Horizontal	4804.000	55.2	36.7	35.5	54.0	74.0	-20.0
Horizontal	7206.000	63.8	36.1	36.5	64.2	74.0	-9.8
Horizontal	9608.000	55.9	36.3	38.0	57.6	74.0	-16.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2402.000	110.2	36.7	28.1	22.5	79.1	94.0	-14.9
Horizontal	4804.000	55.2	36.7	35.5	22.5	31.5	54.0	-22.5
Horizontal	7206.000	63.8	36.1	36.5	22.5	41.7	54.0	-12.3
Horizontal	9608.000	55.9	36.3	38.0	22.5	35.1	54.0	-18.9

Notes: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Leo Li

Applicant: Shenzhen Xinglong new plastic products limited company

Date of Test: 10 June 2019

Model: FDLEDHP

Worst Case Operating Mode:

Transmitting

Table 3

Radiated Emissions

(2441MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2441.000	107.3	36.7	28.1	98.7	114.0	-15.3
Horizontal	4882.000	54.0	36.7	35.5	52.8	74.0	-21.2
Horizontal	7323.000	61.6	36.1	37.2	62.7	74.0	-11.3
Horizontal	9764.000	58.3	36.2	37.0	59.1	74.0	-14.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2441.000	107.3	36.7	28.1	22.5	76.2	94.0	-17.8
Horizontal	4882.000	54.0	36.7	35.5	22.5	30.3	54.0	-23.7
Horizontal	7323.000	61.6	36.1	37.2	22.5	40.2	54.0	-13.8
Horizontal	9764.000	58.3	36.2	37.0	22.5	36.6	54.0	-17.4

Notes: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Leo Li

Applicant: Shenzhen Xinglong new plastic products limited company

Date of Test: 10 June 2019

Model: FDLEDHP

Worst Case Operating Mode:

Transmitting

Table 4

Radiated Emissions

(2480MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2480.000	105.3	36.7	28.1	96.7	114.0	-17.3
Horizontal	4960.000	52.6	36.7	35.5	51.4	74.0	-22.6
Horizontal	7440.000	59.7	36.1	37.2	60.8	74.0	-13.2
Horizontal	9920.000	57.2	36.3	38.9	59.8	74.0	-14.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2480.000	105.3	36.7	28.1	22.5	74.2	94.0	-19.8
Horizontal	4960.000	52.6	36.7	35.5	22.5	28.9	54.0	-25.1
Horizontal	7440.000	59.7	36.1	37.2	22.5	38.3	54.0	-15.7
Horizontal	9920.000	57.2	36.3	38.9	22.5	37.3	54.0	-16.7

Notes: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Leo Li

3.2 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

3.2.1 Conducted Emission

Worst Case Conducted Configuration
at
0.686MHz

Judgement: Passed by 13.3dB margin

TEST PERSONNEL:

Sign on file

Leo Li, Project Engineer
Typed/Printed Name

10 June 2019
Date

Applicant: Shenzhen Xinglong new plastic products limited company

Date of Test: 10 June 2019


Model: FDLEDHP

Worst Case Operating Mode: BT Link

Phase: Live

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

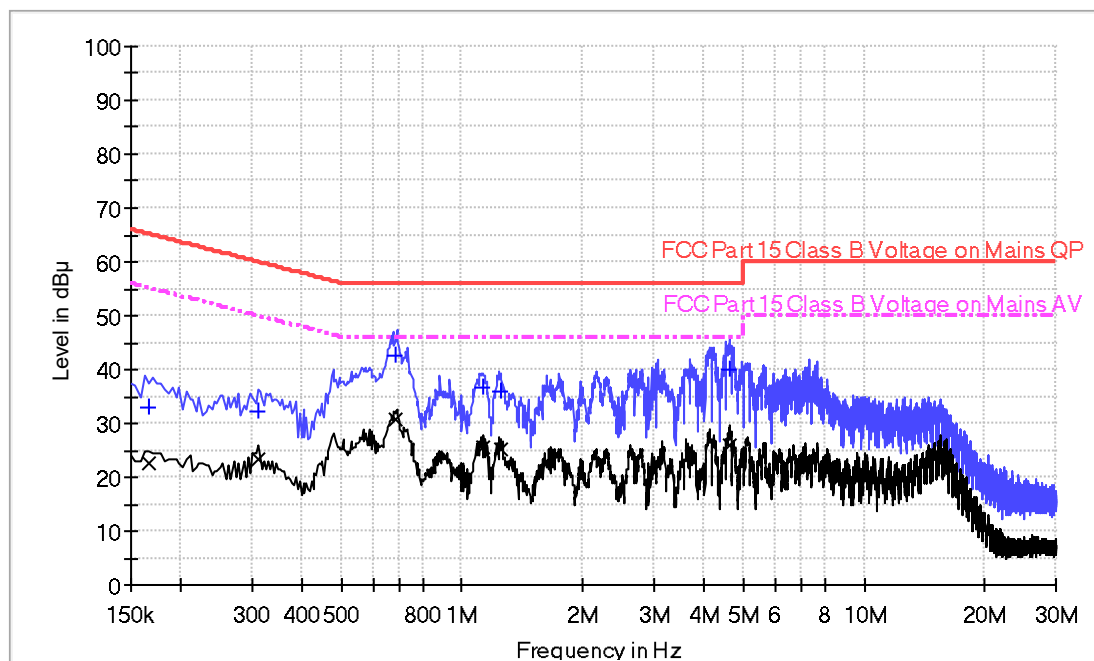

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.166000	33.1	9.000	L1	9.7	32.1	65.2
0.310000	32.1	9.000	L1	9.7	27.9	60.0
0.686000	42.7	9.000	L1	9.7	13.3	56.0
1.122000	36.7	9.000	L1	9.7	19.3	56.0
1.242000	35.9	9.000	L1	9.7	20.1	56.0
4.622000	39.9	9.000	L1	9.8	16.1	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.166000	22.5	9.000	L1	9.7	32.7	55.2
0.310000	23.3	9.000	L1	9.7	26.7	50.0
0.686000	30.8	9.000	L1	9.7	15.2	46.0
1.122000	25.5	9.000	L1	9.7	20.5	46.0
1.242000	25.1	9.000	L1	9.7	20.9	46.0
4.622000	25.9	9.000	L1	9.8	20.1	46.0

Applicant: Shenzhen Xinglong new plastic products limited company

Date of Test: 10 June 2019


Model: FDLEDHP

Worst Case Operating Mode: BT Link

Phase: Neutral

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.107: Emissions Requirement

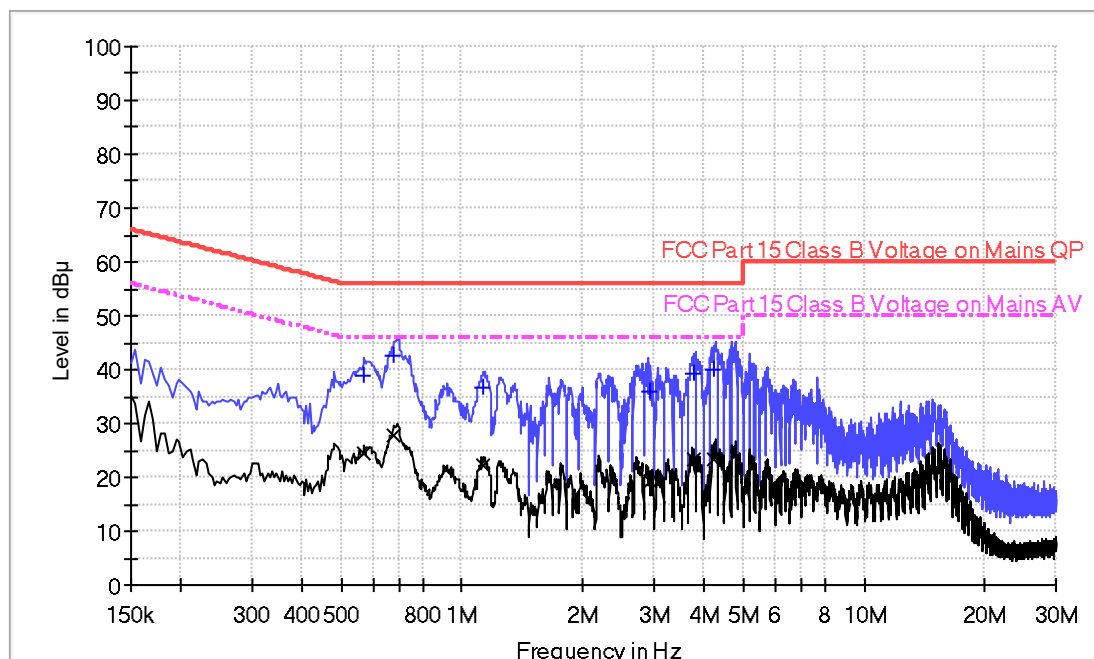

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.570000	38.7	9.000	N	9.7	17.3	56.0
0.674000	42.5	9.000	N	9.7	13.5	56.0
1.122000	36.6	9.000	N	9.7	19.4	56.0
2.934000	35.8	9.000	N	9.8	20.2	56.0
3.778000	39.4	9.000	N	9.8	16.6	56.0
4.246000	40.1	9.000	N	9.8	15.9	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.570000	24.3	9.000	N	9.7	21.7	46.0
0.674000	27.8	9.000	N	9.7	18.2	46.0
1.122000	22.1	9.000	N	9.7	23.9	46.0
2.934000	19.4	9.000	N	9.8	26.6	46.0
3.778000	23.2	9.000	N	9.8	22.8	46.0
4.246000	23.5	9.000	N	9.8	22.5	46.0

EXHIBIT 4

EQUIPMENT PHOTOGRAPHS

4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 5

PRODUCT LABELLING

5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

EXHIBIT 6

TECHNICAL SPECIFICATIONS

6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 7

INSTRUCTION MANUAL

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

EXHIBIT 8

MISCELLANEOUS INFORMATION

8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bandedge.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

(i) Lower channel 2402MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 101.6 \text{ dB}\mu\text{V/m} - 52.13 \text{ dB} \\ &= 49.47 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 79.1 \text{ dB}\mu\text{V/m} - 52.13 \text{ dB} \\ &= 26.97 \text{ dB}\mu\text{V/m} \end{aligned}$$

(ii) Upper channel 2480MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 96.7 \text{ dB}\mu\text{V/m} - 45.77 \text{ dB} \\ &= 50.93 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 74.2 \text{ dB}\mu\text{V/m} - 45.77 \text{ dB} \\ &= 28.43 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dBμV/m (Peak Limit) and 54dBμV/m (Average Limit).

8.1 Bandedge Plot (cont'd)

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately $625\mu s$ for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

Based on the Bluetooth Specification Version 5.0 (without BLE) and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)

Adjusted channel hop rate for DH5 mode = 133.33 hops/second

Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$

Time to cycle through all channels = $7.5 \times 20 \text{ channels} = 150 \text{ ms}$

Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$

Worst case dwell time = 7.5 ms

Duty cycle connection factor = $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

8.5 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

EXHIBIT 9

CONFIDENTIALITY REQUEST

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

EXHIBIT 10

TEST EQUIPMENT LIST

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	Biconilog Antenna	ETS	3142E	00166158	14-Sep-2018	14-Sep-2019
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	24-May-2019	24-May-2020
SZ061-08	Horn Antenna	ETS	3115	00092346	14-Sep-2018	14-Sep-2019
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	00083067	10-Mar-2019	10-Mar-2020
SZ056-03	Spectrum Analyzer	R&S	FSP30	101148	28-May-2019	28-May-2020
SZ185-01	EMI Receiver	R & S	ESCI	100547	4-Jan-2019	4-Jan-2020
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	15-Jan-2019	15-Jan-2020
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-2018	15-Dec-2020
SZ062-02	RF Cable	RADIALL	RG 213U	--	25-Dec-2018	25-Jun-2019
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	23-Feb-2019	23-Aug-2019
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	23-Feb-2019	23-Aug-2019
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	28-May-2019	28-May-2020
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	26-Oct-2018	26-Oct-2019
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	04-Jul-2018	04-Jul-2019
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2020
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1m	110127-2231000	29-Oct-2018	29-Oct-2019

***** End of Report*****