

FCC RF Test Report


APPLICANT : VeriFone, Inc.
EQUIPMENT : Point of Sales Terminal
BRAND NAME : VeriFone
MODEL NAME : VX685
FCC ID : B32VX685GC
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Jan. 30, 2014 and testing was completed on Feb. 18, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Site.....	7
1.8 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system.....	9
2.4 Measurement Results Explanation Example	9
3 TEST RESULT	10
3.1 Conducted Output Power Measurement.....	10
3.2 Peak-to-Average Ratio	12
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	18
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	21
3.5 Band Edge Measurement.....	29
3.6 Conducted Spurious Emission Measurement	32
3.7 Field Strength of Spurious Radiation Measurement	48
3.8 Frequency Stability Measurement.....	54
4 LIST OF MEASURING EQUIPMENT	57
5 UNCERTAINTY OF EVALUATION	58
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG413003	Rev. 01	Initial issue of report	Apr. 22, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4)	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	RSS-132 (5.4) RSS-133(6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(b) §24.238(b)	RSS-GEN(4.6.1) RSS-133(2.3)	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 15.33 dB at 1672.000 MHz
3.8	§2.1055 §22.355 §24.235	RSS-132(5.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1 General Description

1.1 Applicant

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 200 Rocklin CA 95765 USA

1.2 Manufacturer

1. Sanmina-SCI Systems (Kunshan) Co., Ltd.

312, Qingyang South Road, Economics & Technical Development Zone, Kunshan, Jiangsu Province, 215300, China

2. Inventec Appliances (Pudong) Co., Ltd.

No. 789, Pu Xing Road, Shanghai, P.R.C.

3. Flextronics Computing (Suzhou) Co., Ltd.

No. 1 Guanpu Road, Guoxiang Street, Wuzhong District, Suzhou, Jiangsu, China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Point of Sales Terminal
Brand Name	VeriFone
Model Name	VX685
Integrated WWAN Module	Brand Name: Cinterion Model Name: BGS2-W
FCC ID	B32VX685GC
EUT supports Radios application	GPRS/RFID
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz
Maximum Output Power to Antenna	GSM850 : 32.76 dBm GSM1900 : 30.59 dBm
Antenna Type	Monopole Antenna
Type of Modulation	GPRS: GMSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.78	0.0347 ppm	248KGXW
Part 24	GSM1900 GPRS class 8	GMSK	0.81	0.0261 ppm	248KGXW

1.7 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	722060/4086B-1

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT was rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850.
2. 30 MHz to 19000 MHz for GSM1900.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link	■ GPRS class 8 Link
GSM 1900	■ GPRS class 8 Link	■ GPRS class 8 Link


Note:

1. The maximum power levels are GPRS multi-slot class 8 mode for GMSK link, only these modes were used for all tests.
2. All test items were performed with Adapter 1 and Battery.

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS class 8	32.75	32.76	32.73	30.59	30.09	29.59
GPRS class 10	32.74	32.75	32.72	30.58	30.08	29.58

2.2 Connection Diagram of Test System

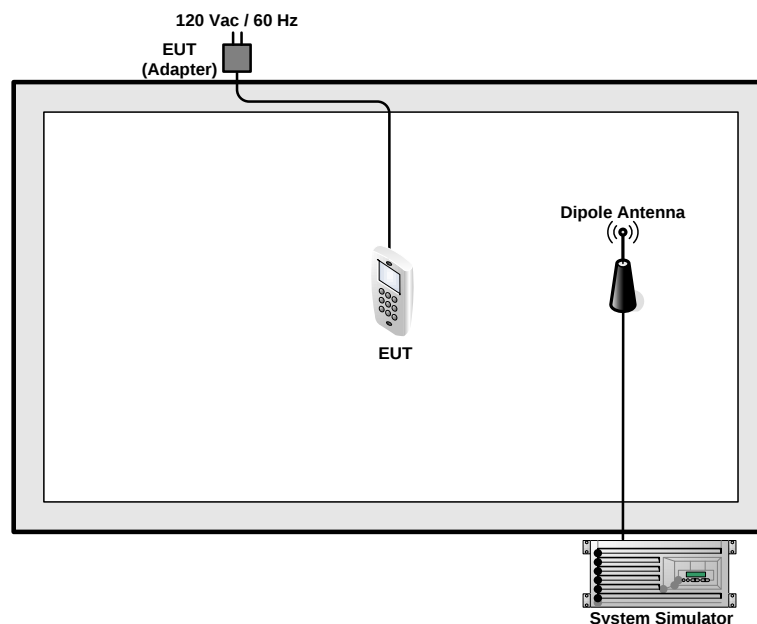

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

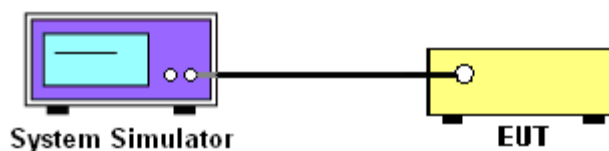

3.1.5 Test Result of Conducted Output Power

	Cellular Band			PCS Band		
Modes	GSM850 (GPRS class 8)			GSM1900 (GPRS class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
Conducted Power (dBm)	32.75	32.76	32.73	30.59	30.09	29.59
Conducted Power (Watts)	1.88	1.89	1.87	1.15	1.02	0.91

Note: maximum burst average power for GSM.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and System Simulator via power divider.
2. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector in spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector in spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator synchronized with the spectrum analyzer.
3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

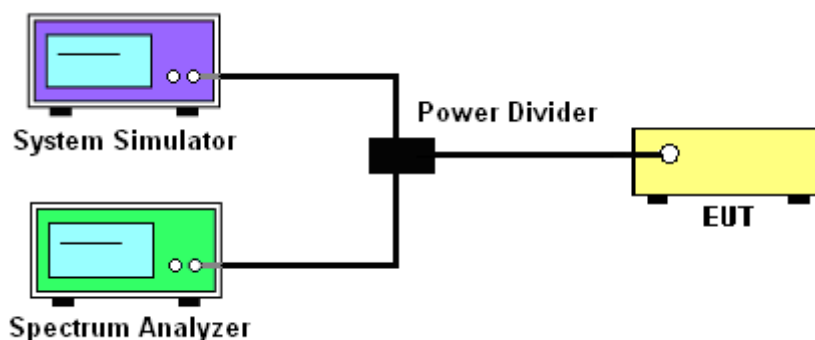

3.2.5 Test Result of Peak-to-Average Ratio


	Cellular Band			PCS Band		
Modes	GSM850 (GPRS class 8)			GSM1900 (GPRS class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	0.20	0.22	0.21	0.18	0.18	0.18




3.2.6 Test Result (Plots) of Peak-to-Average Ratio

Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

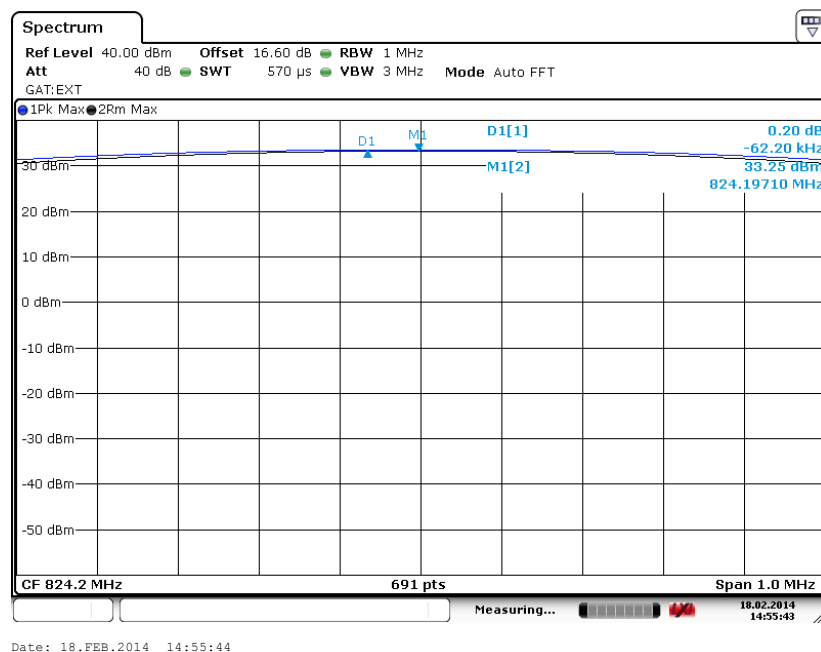


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

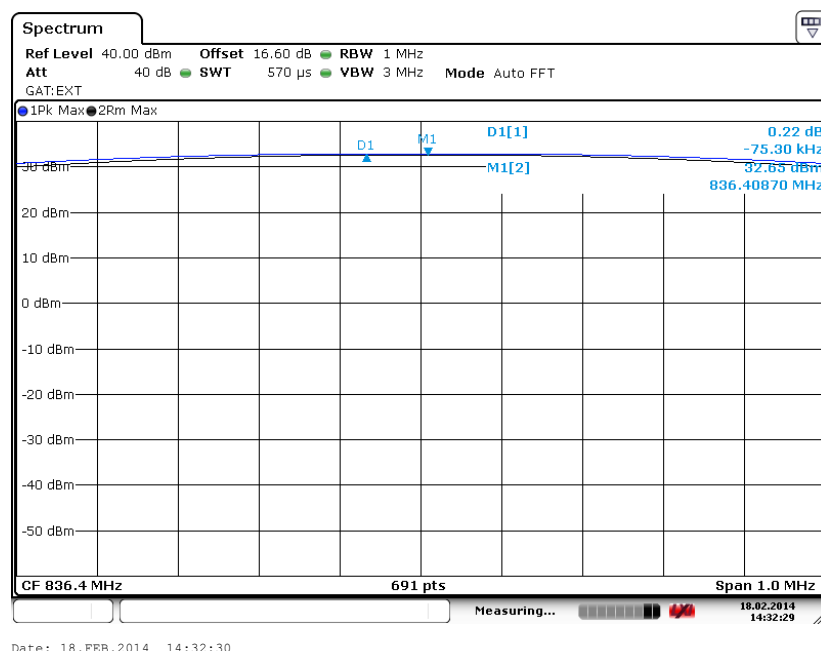



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

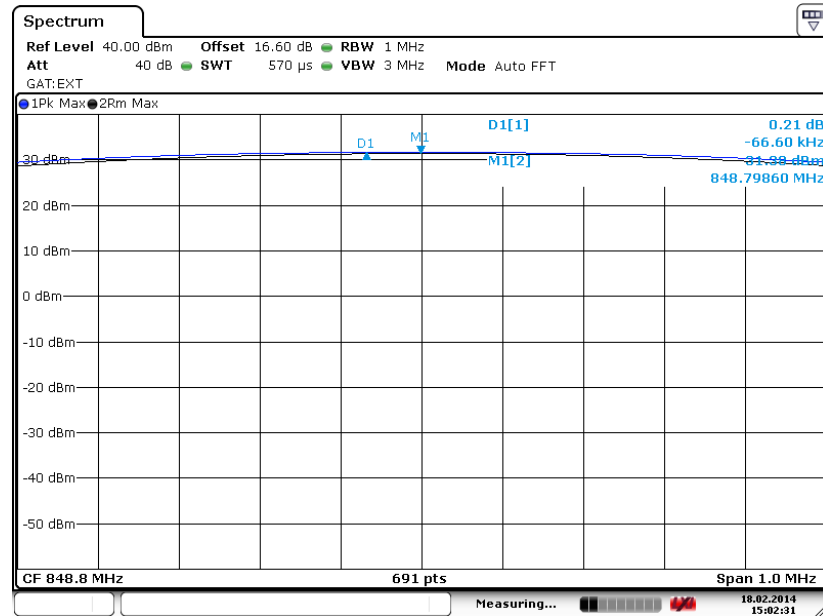


Date: 18.FEB.2014 15:02:32




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

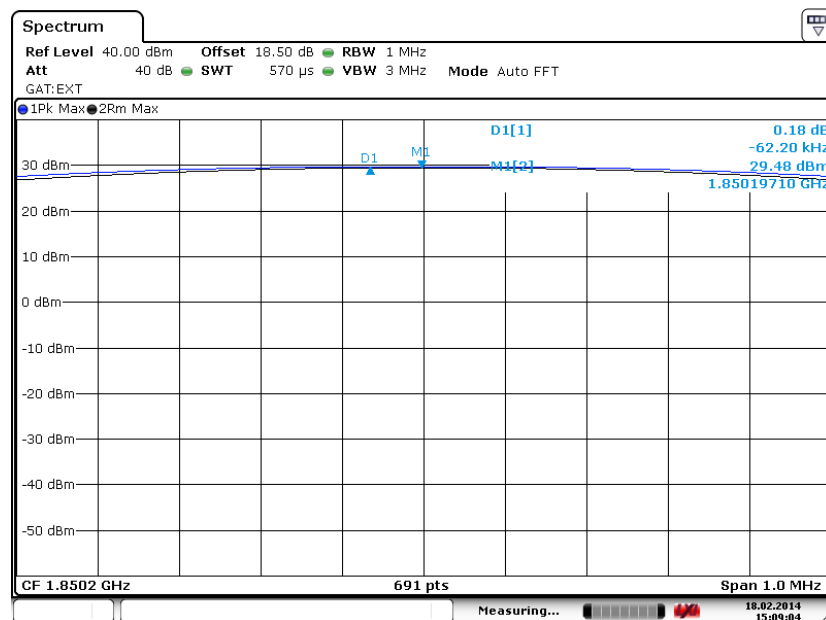

Date: 18.FEB.2014 15:09:04


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

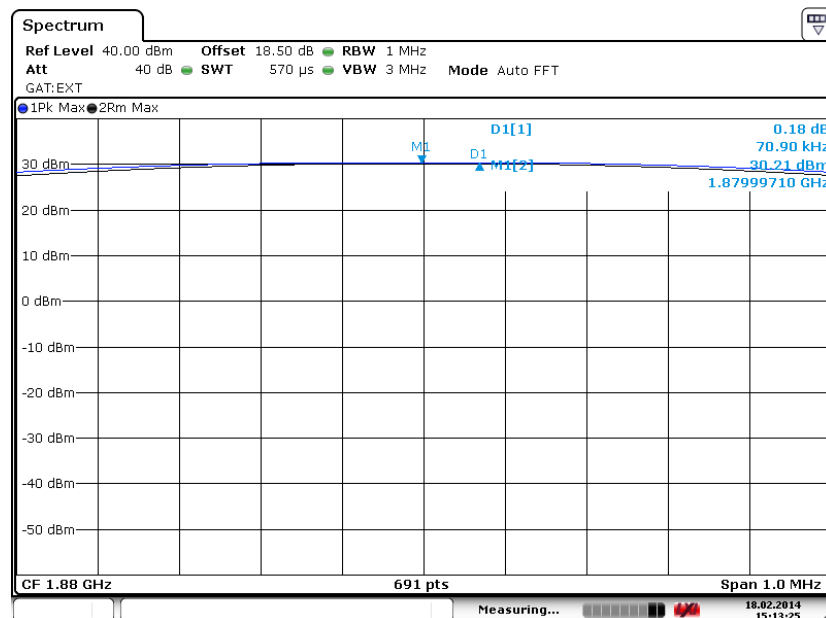

Date: 18.FEB.2014 15:13:25



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

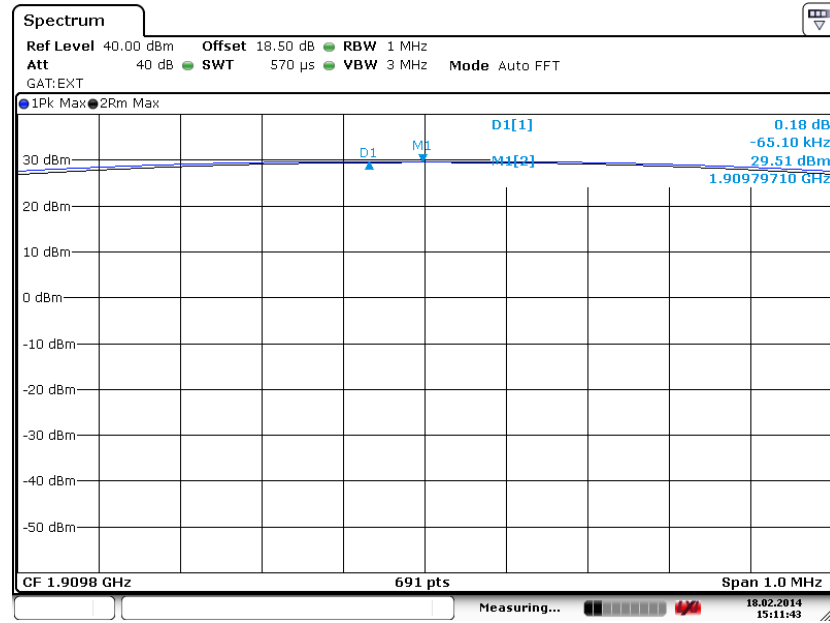

Date: 18.FEB.2014 15:11:43

3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 1MHz, VBW= 3MHz for GSM, RBW= 100 kHz, VBW= 300 kHz, used channel power option with bandwidth=5MHz for WCDMA, and RMS detector settings per KDB 971168 D01.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.3.4 Test Setup

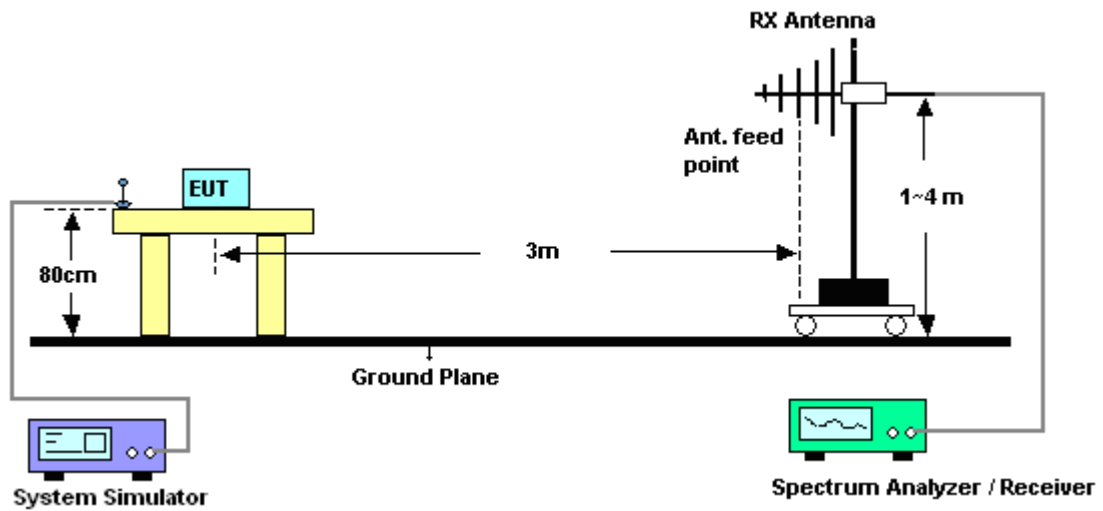

3.3.5 Test Result of ERP

GSM850 (GPRS class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-0.48	31.54	28.91	0.78
836.4	-1.25	32.04	28.64	0.73
848.8	-2.00	32.59	28.44	0.70
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-9.01	32.93	21.77	0.15
836.4	-9.06	32.82	21.61	0.14
848.8	-10.60	33.62	20.87	0.12

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.3.6 Test Result of EIRP

GSM1900 (GPRS class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-17.28	43.69	26.41	0.44
1880.0	-16.12	44.79	28.67	0.74
1909.8	-16.15	43.59	27.44	0.55
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-18.10	45.72	27.62	0.58
1880.0	-17.67	46.78	29.11	0.81
1909.8	-17.79	46.77	28.98	0.79

* EIRP = LVL (dBm) + Correction Factor (dB)

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

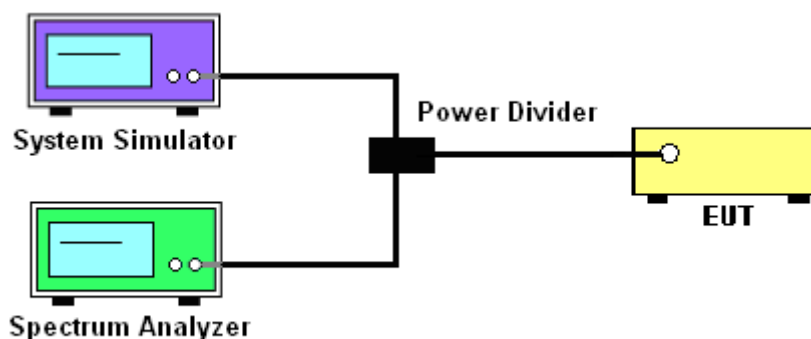


3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

	Cellular Band			PCS Band		
Modes	GSM850 (GPRS class 8)			GSM1900 (GPRS class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
99% OBW (kHz)	248.00	246.00	248.00	242.00	244.00	248.00
26dB BW (kHz)	316.00	316.00	318.00	318.00	316.00	316.00

3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
---------------	---------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

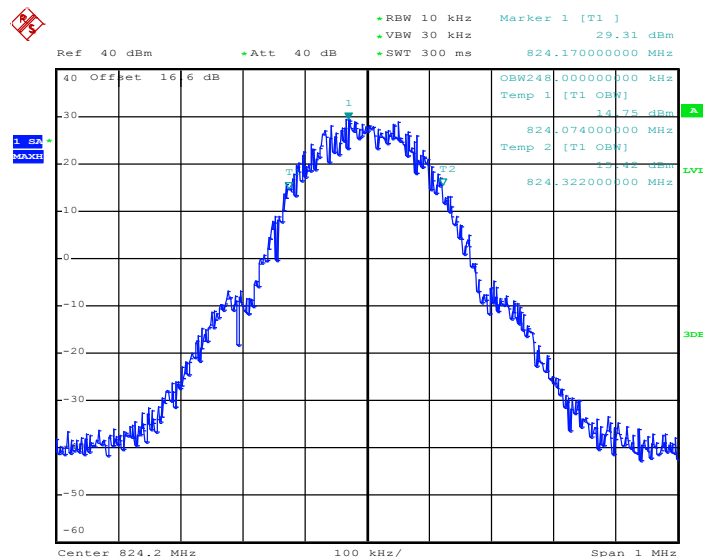

Date: 17.FEB.2014 15:16:50


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

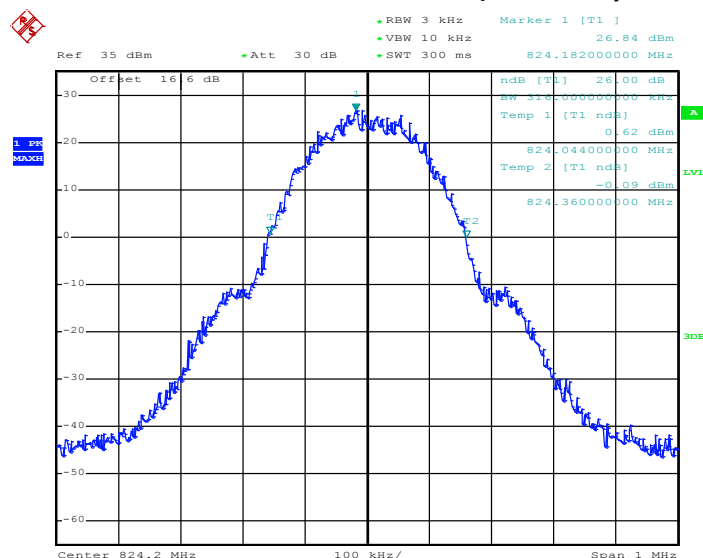

Date: 17.FEB.2014 15:09:15




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

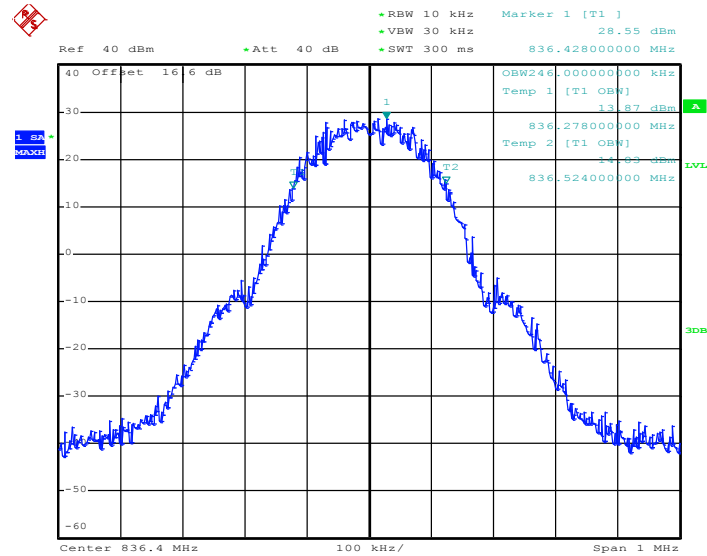

Date: 17.FEB.2014 15:17:18


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

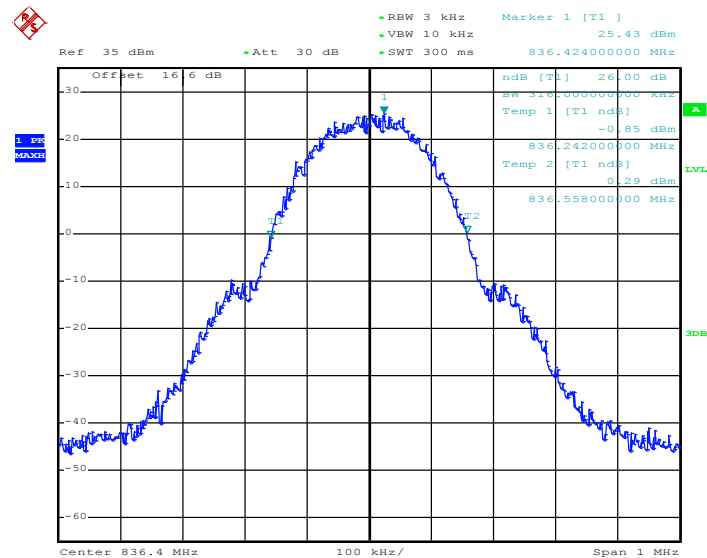

Date: 17.FEB.2014 15:09:44




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

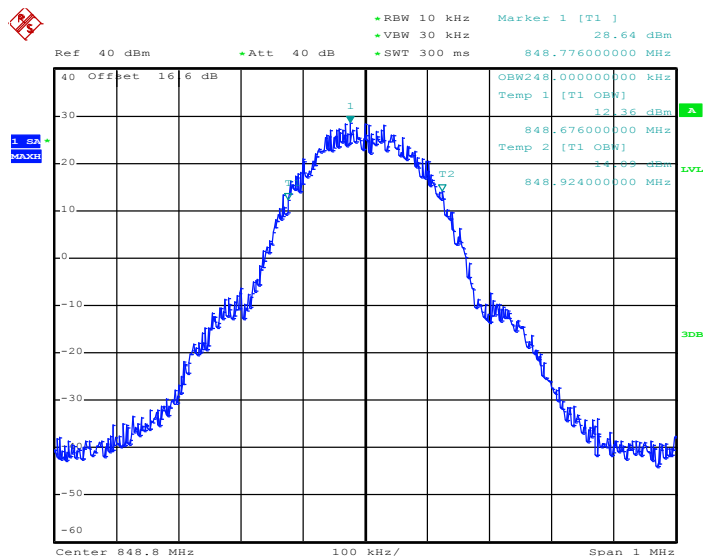

Date: 17.FEB.2014 15:17:47

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

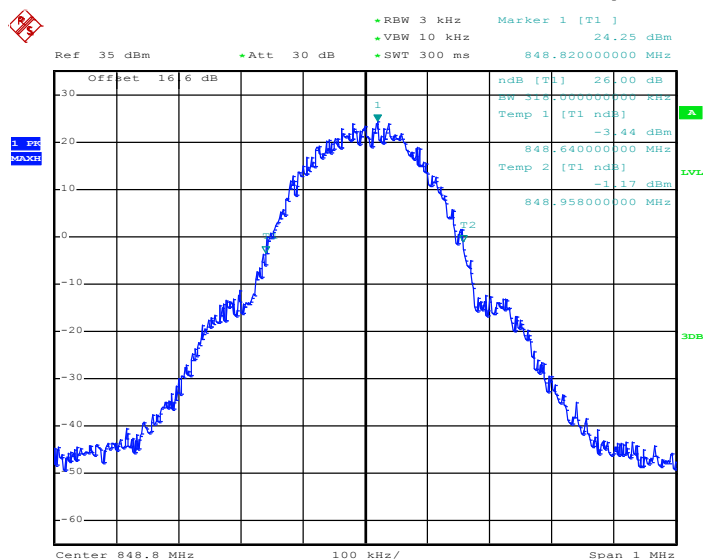


Date: 17.FEB.2014 15:10:12




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

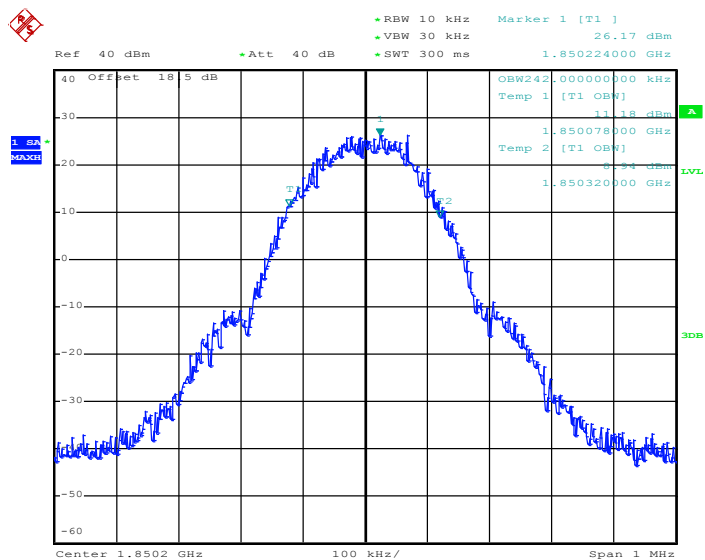

Date: 18.FEB.2014 07:34:24


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

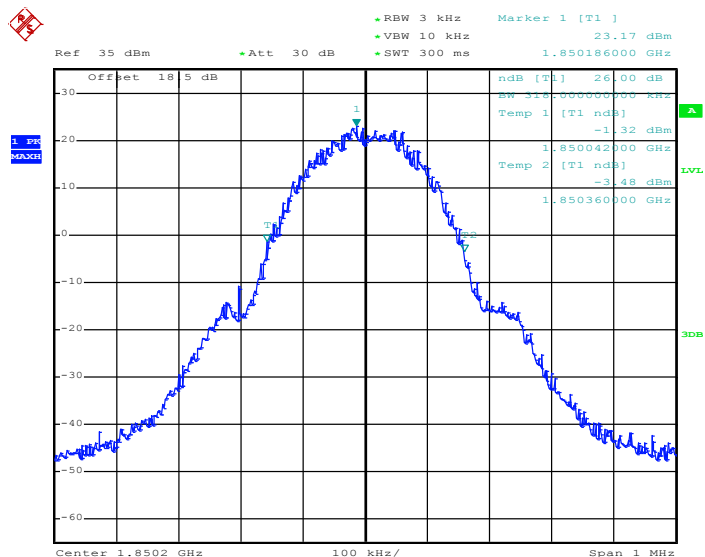

Date: 18.FEB.2014 07:27:24




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

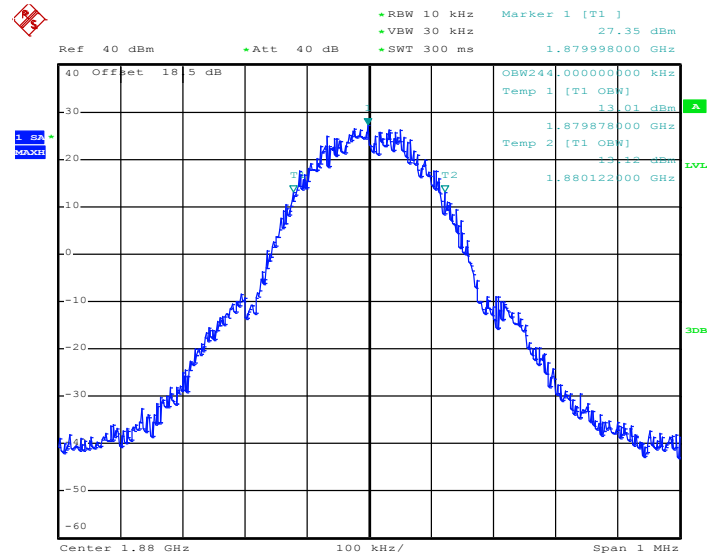

Date: 18.FEB.2014 07:34:53


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

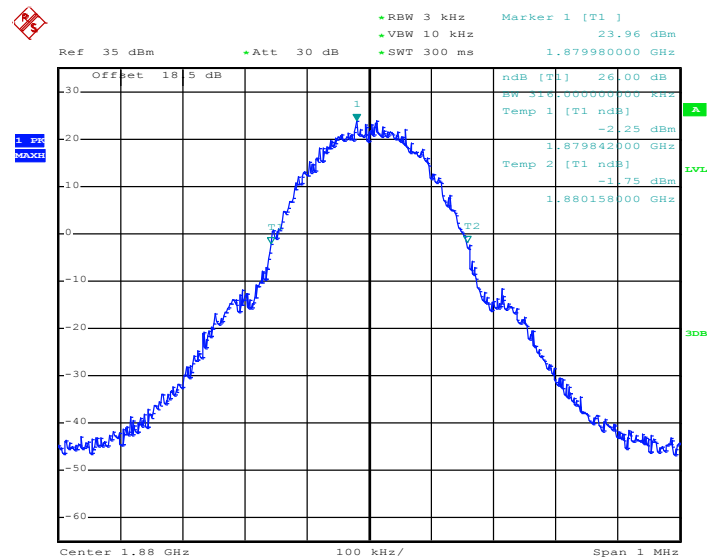

Date: 18.FEB.2014 07:27:52




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

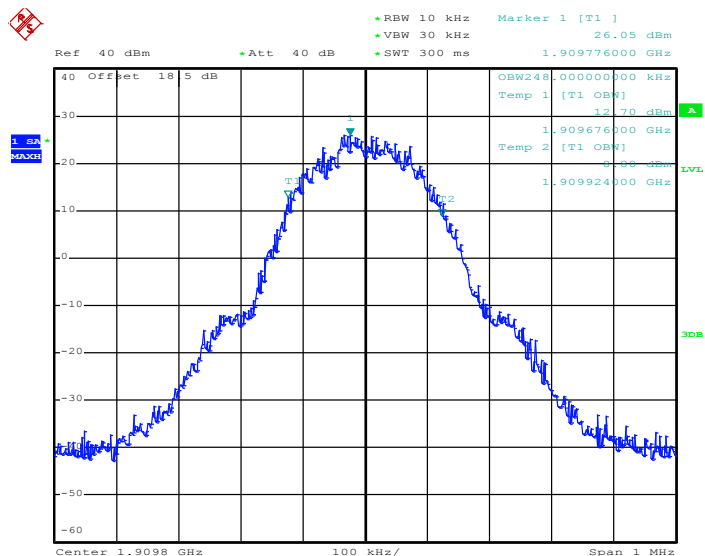

Date: 18.FEB.2014 07:35:22

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

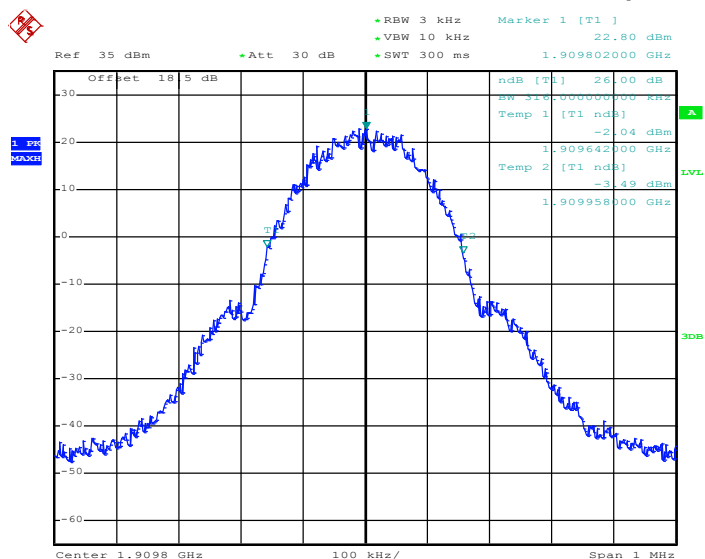

Date: 18.FEB.2014 07:28:21

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.5.4 Test Setup


<Conducted Band Edge >

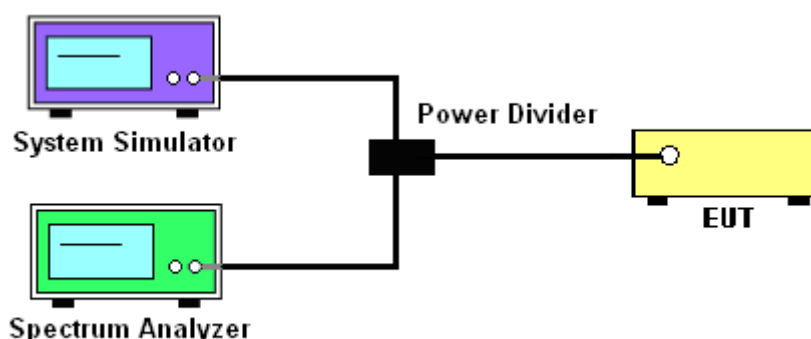

3.5.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

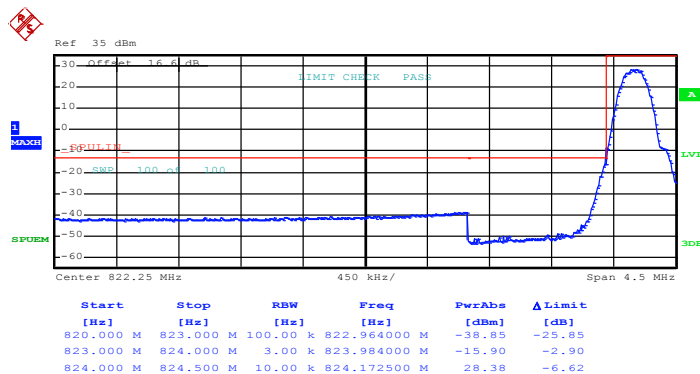

Date: 17.FEB.2014 16:20:24

Higher Band Edge Plot on Channel 251 (848.8 MHz)

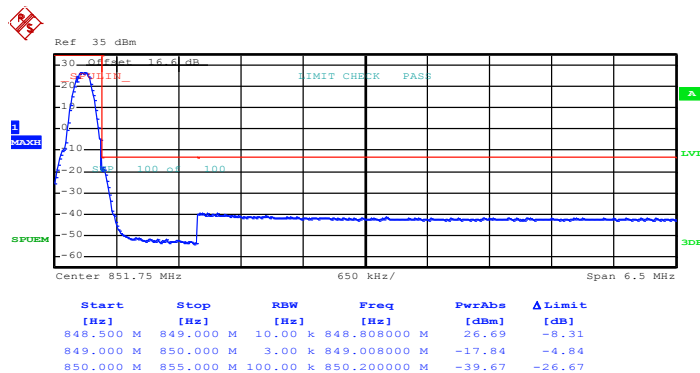


Date: 17.FEB.2014 16:26:24




Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

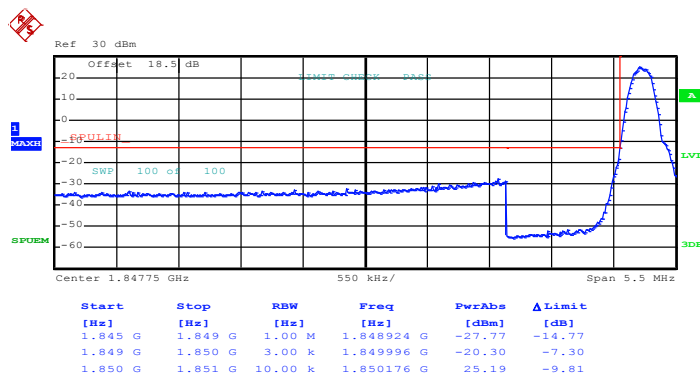

Date: 18.FEB.2014 08:09:29

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

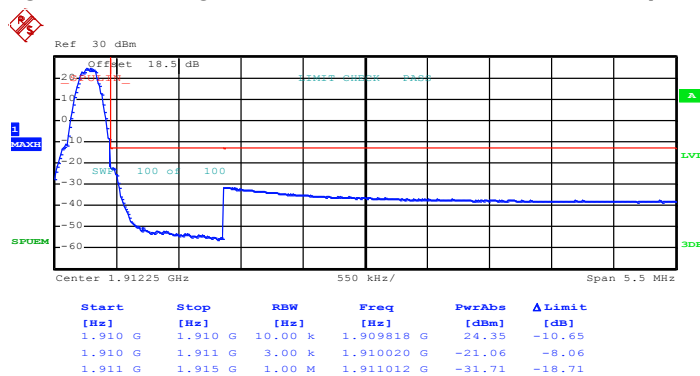

Date: 18.FEB.2014 08:05:31

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$

3.6.4 Test Setup

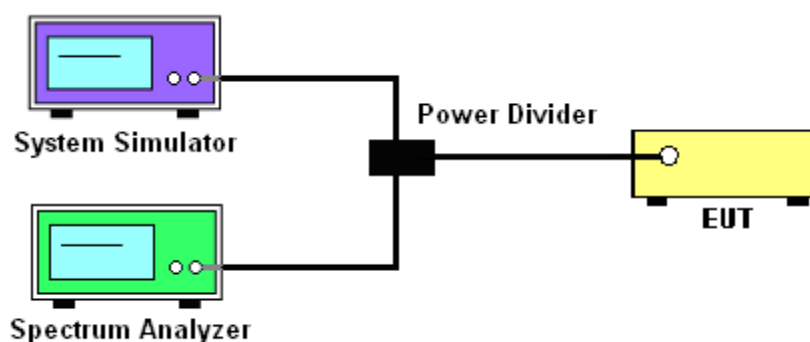


3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	GSM850	Channel :	CH128
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	824.2 MHz

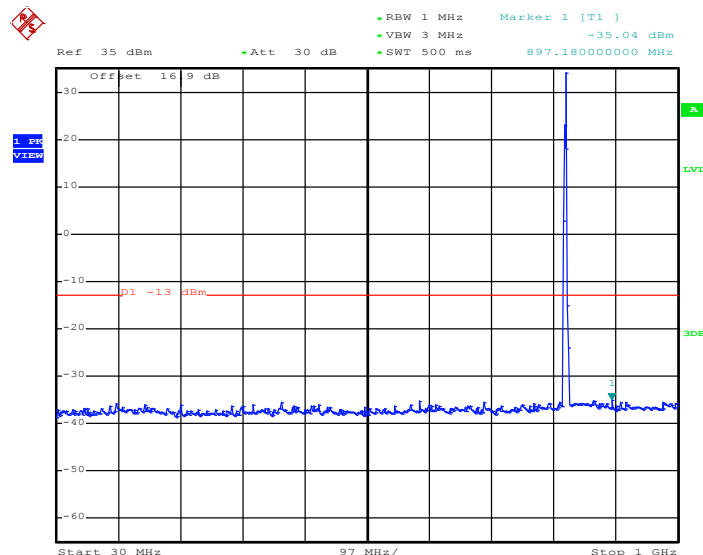Conducted Spurious Emission Plot between 30MHz ~ 1GHz


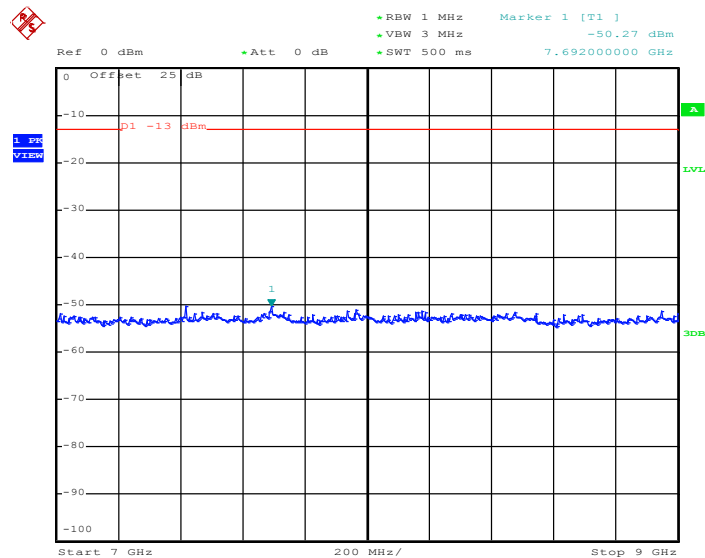
Date: 17.FEB.2014 15:25:24

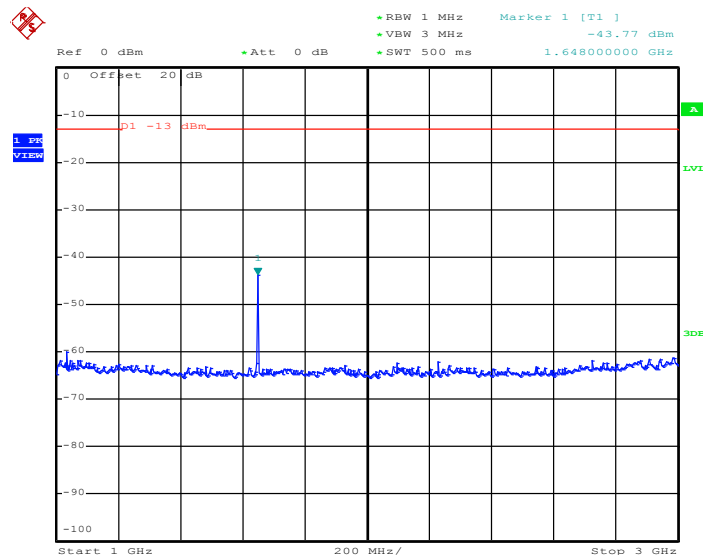Conducted Spurious Emission Plot between 1GHz ~ 3GHz


Date: 17.FEB.2014 15:25:37

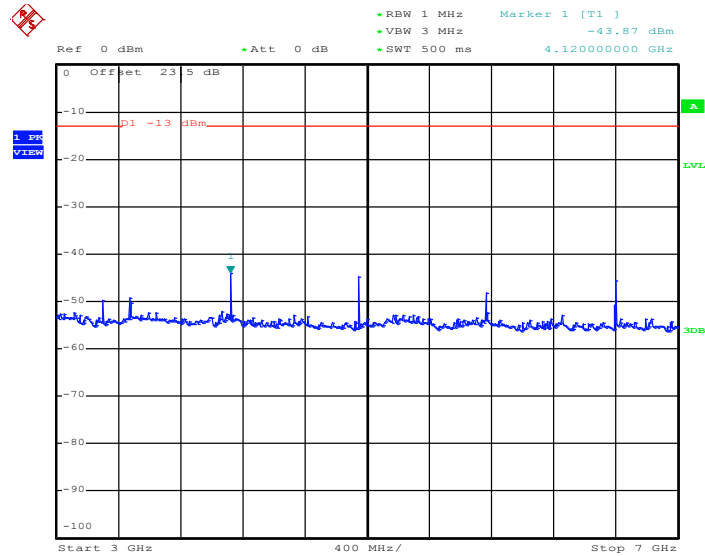Conducted Spurious Emission Plot between 3GHz ~ 7GHz


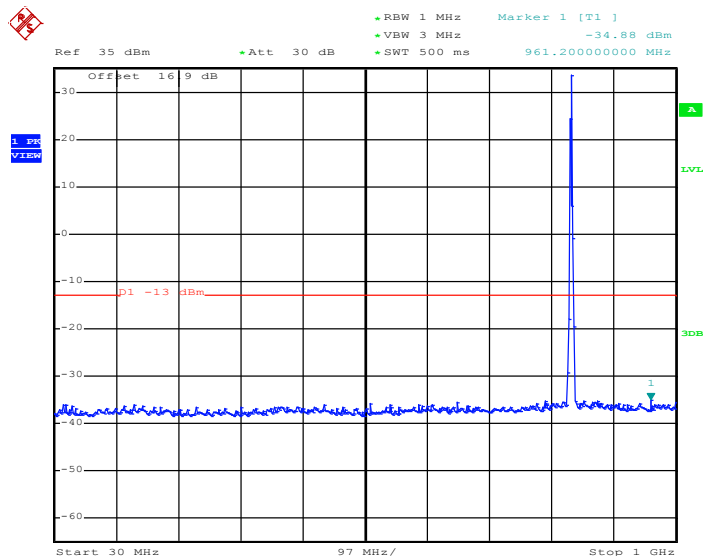
Date: 17.FEB.2014 15:25:45

Conducted Spurious Emission Plot between 7GHz ~ 9GHz


Date: 17.FEB.2014 15:25:54


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz




Date: 17.FEB.2014 15:22:39


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

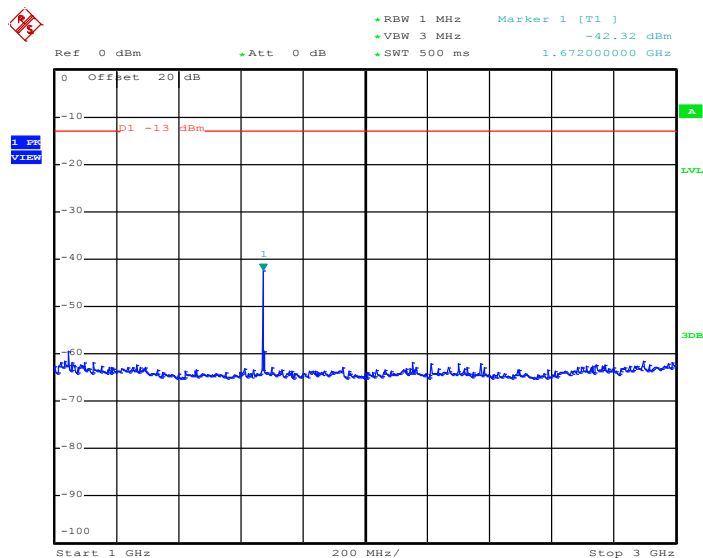

Date: 17.FEB.2014 15:22:52

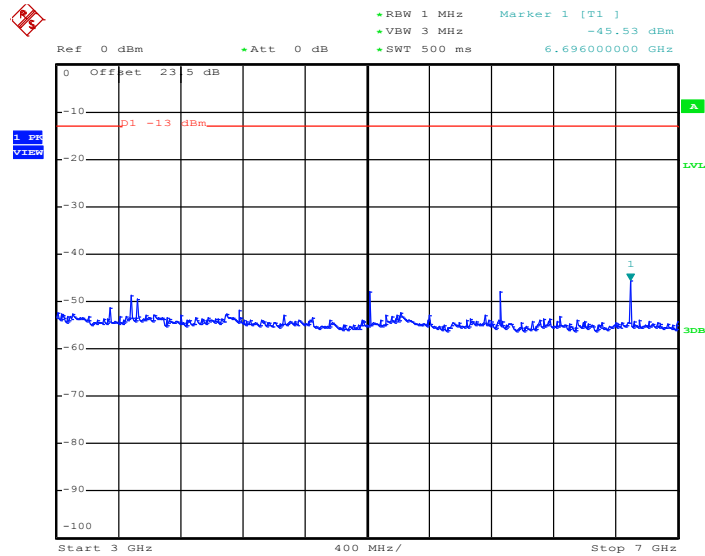Conducted Spurious Emission Plot between 3GHz ~ 7GHz


Date: 17.FEB.2014 15:23:00

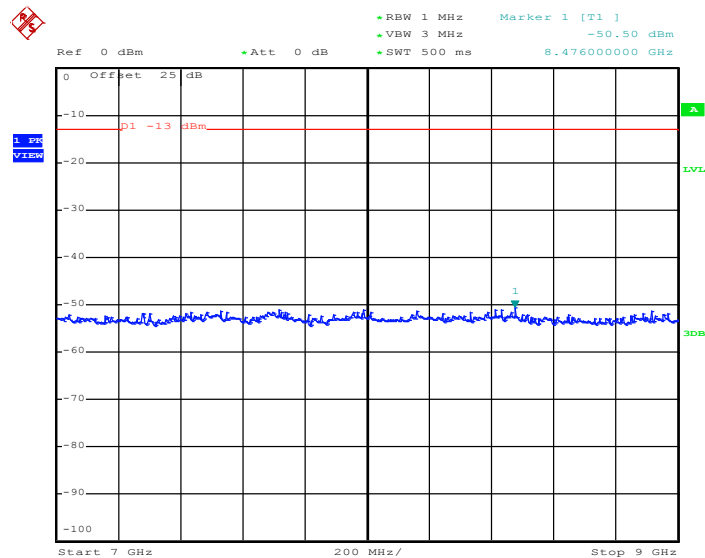Conducted Spurious Emission Plot between 7GHz ~ 9GHz


Date: 17.FEB.2014 15:23:09



Band :	GSM850	Channel :	CH251
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	848.8 MHz

Ref 35 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 500 ms Marker 1 [T1] -34.37 dBm 811.82000000 MHz

Offset 169 dB

1. dB VIEW

D1 -13 dBm

Start 30 MHz 97 MHz/ Stop 1 GHz


Date: 17.FEB.2014 16:08:02

The screenshot displays a Spectrum Analyzer interface. The top status bar shows the following parameters:


- RBW: 1 MHz
- VBW: 3 MHz
- SWT: 500 ms
- Marker 1 [T1]: -43.95 dBm
- Ref: 0 dBm
- Att: 0 dB
- Frequency: 1.696000000 GHz

The main display area shows a spectrum plot with a blue trace. A red horizontal line is drawn at -13 dBm, labeled "P1 -13 dBm". A green vertical line with a downward-pointing triangle marker is positioned at the signal peak, which is at approximately -44 dBm. The x-axis is labeled "Start 1 GHz", "200 MHz/", and "Stop 3 GHz". The y-axis is labeled "Offset 20 dB" and ranges from -10 to -100 dBm. A "VIEW" button is visible on the left side of the plot area.

Date: 17.FEB.2014 16:08:14

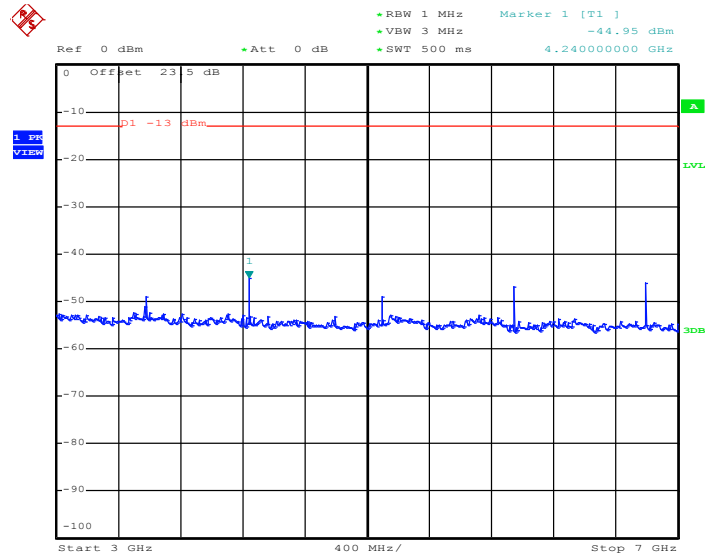Conducted Spurious Emission Plot between 3GHz ~ 7GHz


Date: 17.FEB.2014 16:08:22

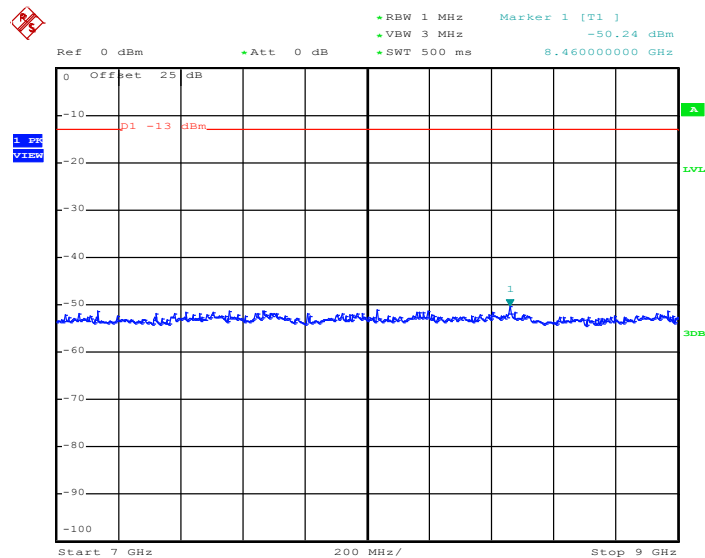
Conducted Spurious Emission Plot between 7GHz ~ 9GHz


Date: 17.FEB.2014 16:08:31




Band :	GSM1900	Channel :	CH512
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

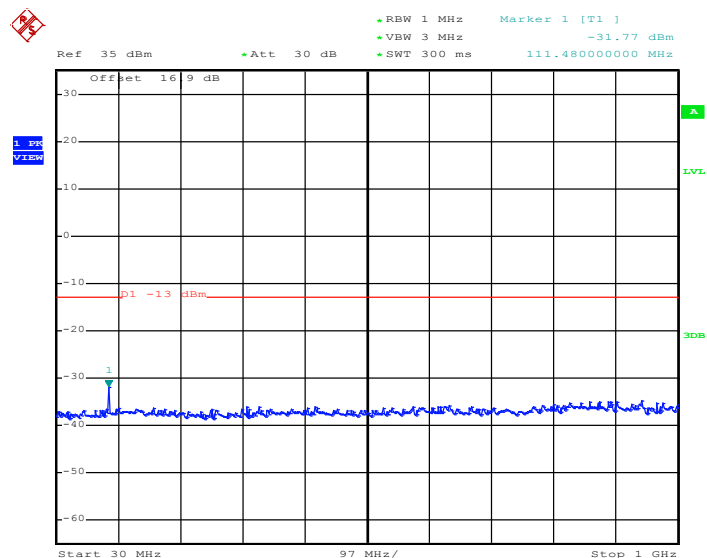


Date: 18.FEB.2014 07:50:44

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

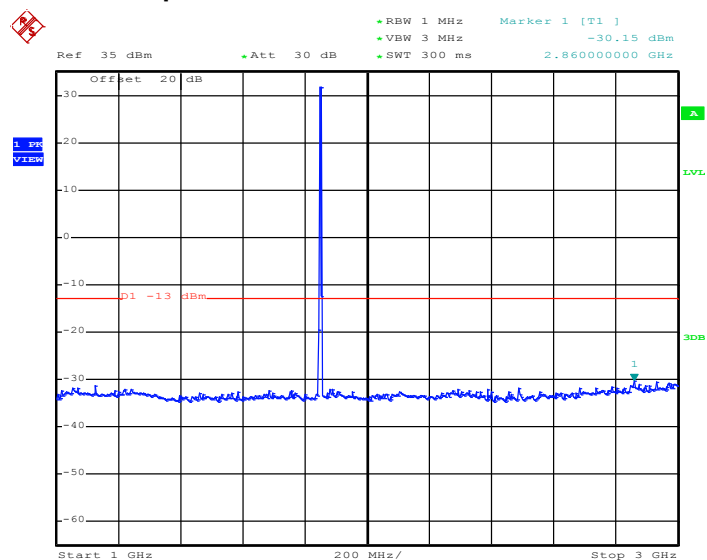


Date: 18.FEB.2014 07:50:53

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

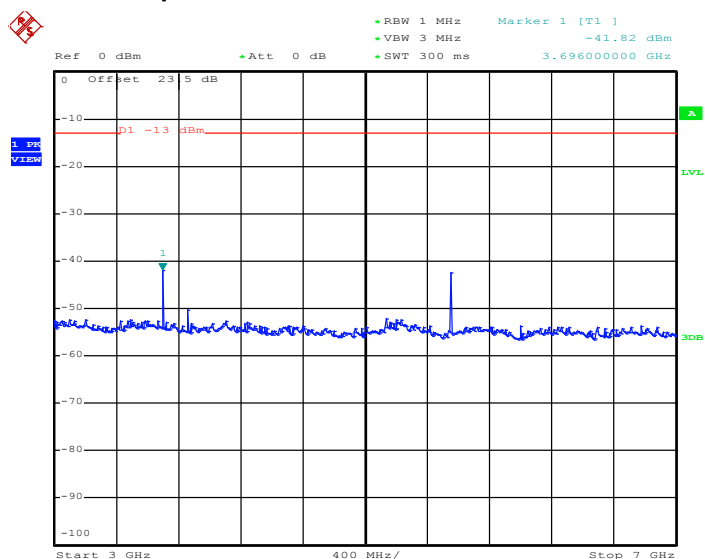

Date: 18.FEB.2014 07:51:06


Conducted Emission Plot between 7GHz ~ 13.6GHz

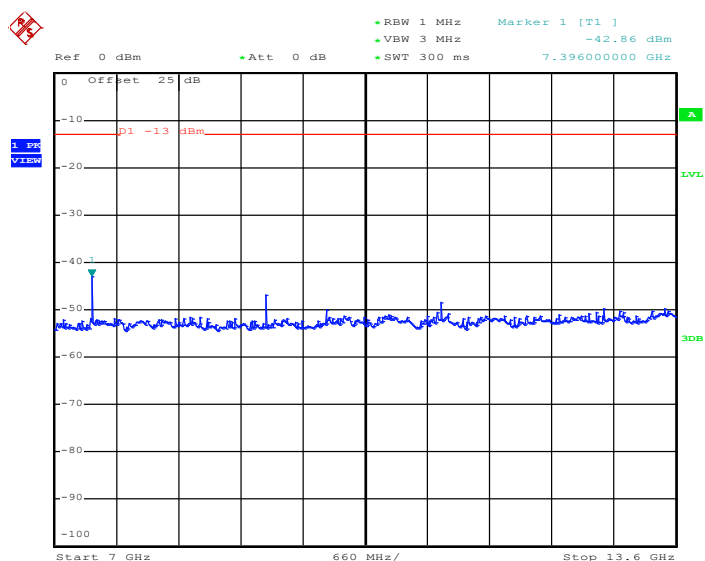

Date: 18.FEB.2014 07:51:14




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

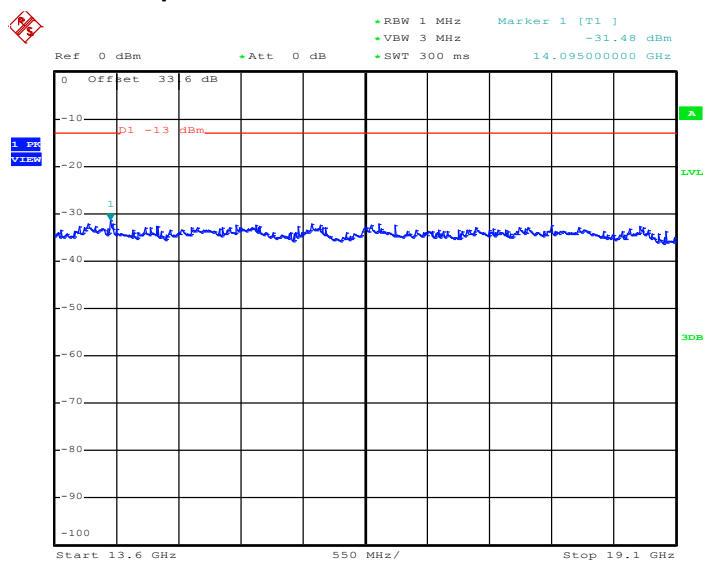

Date: 18.FEB.2014 07:51:22


Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

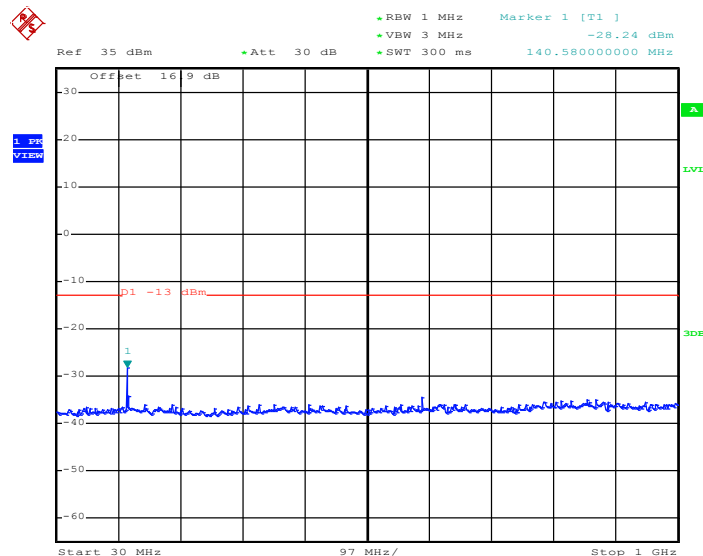


Date: 18.FEB.2014 07:44:22

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

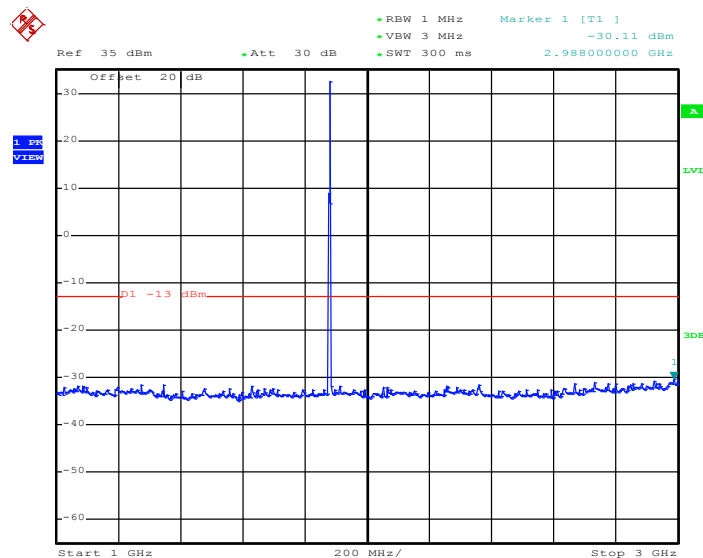


Date: 18.FEB.2014 07:44:30

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

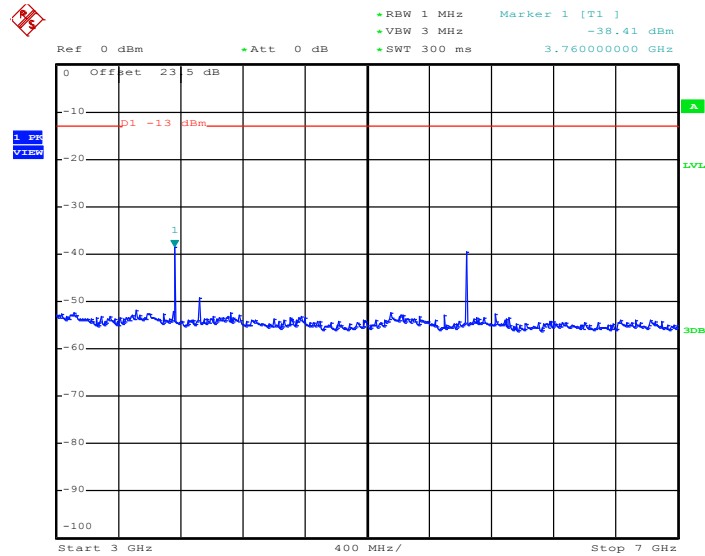

Date: 18.FEB.2014 07:44:42

Conducted Emission Plot between 7GHz ~ 13.6GHz

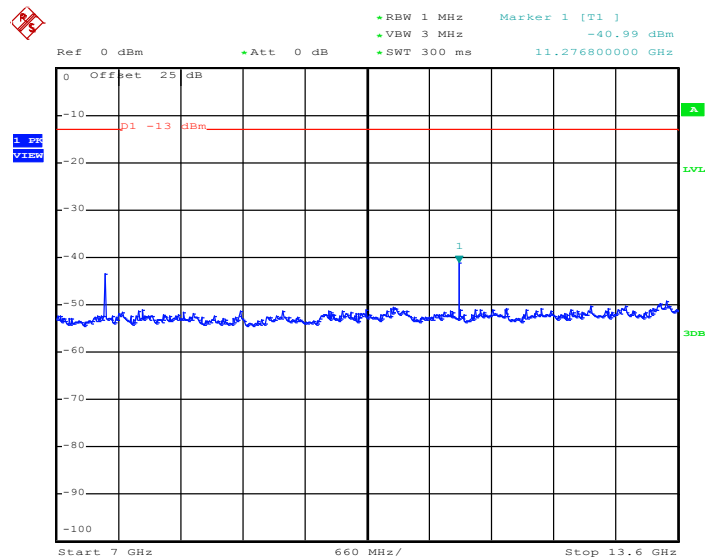

Date: 18.FEB.2014 07:44:50



Ref 0 dBm Att 0 dB RBW 1 MHz VBW 3 MHz SWT 300 ms Marker 1 [T1] -31.87 dBm 15.32700000 GHz

Offset 33 6 dB

1 -13 dBm


1

Start 13.6 GHz 550 MHz/ Stop 19.1 GHz


Date: 18.FEB.2014 07:44:59




Conducted Spurious Emission Plot between 30MHz ~ 1GHz



Date: 18.FEB.2014 07:58:15

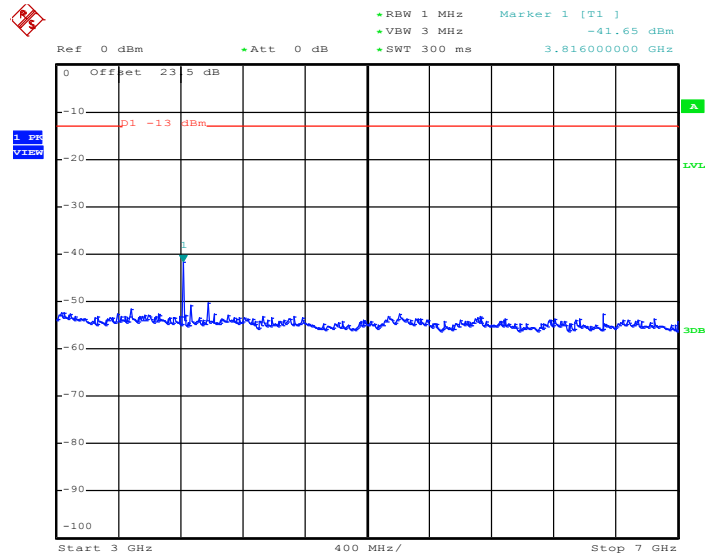Conducted Spurious Emission Plot between 3GHz ~ 7GHz


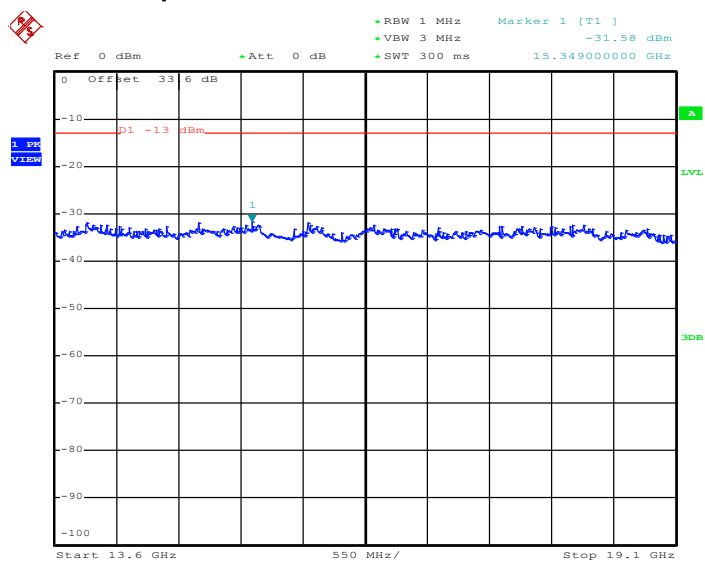
Date: 18.FEB.2014 07:58:29

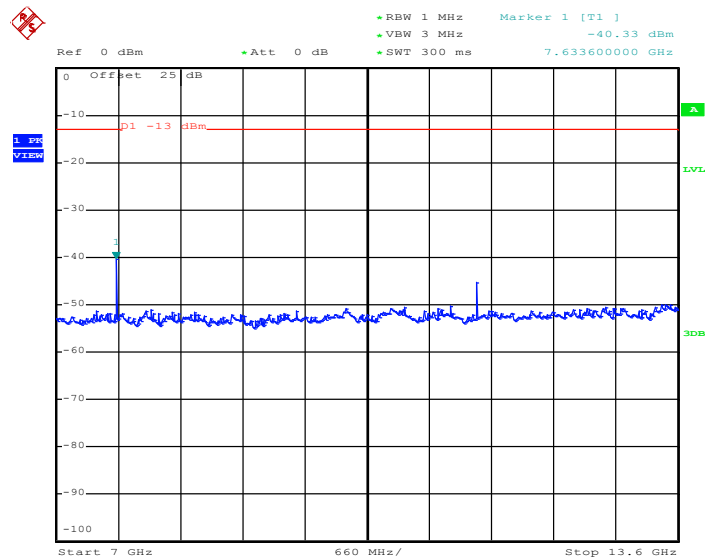Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz


Date: 18.FEB.2014 07:58:37



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz



Date: 18.FEB.2014 07:58:46

3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$
12. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
13. $\text{ERP (dBm)} = \text{EIRP} - 2.15$

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

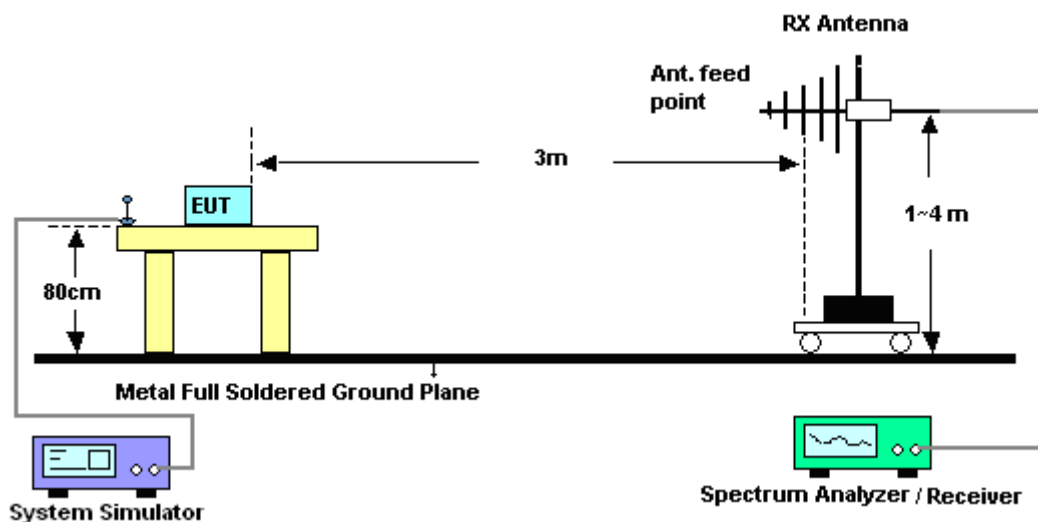


For radiated emissions above 1GHz

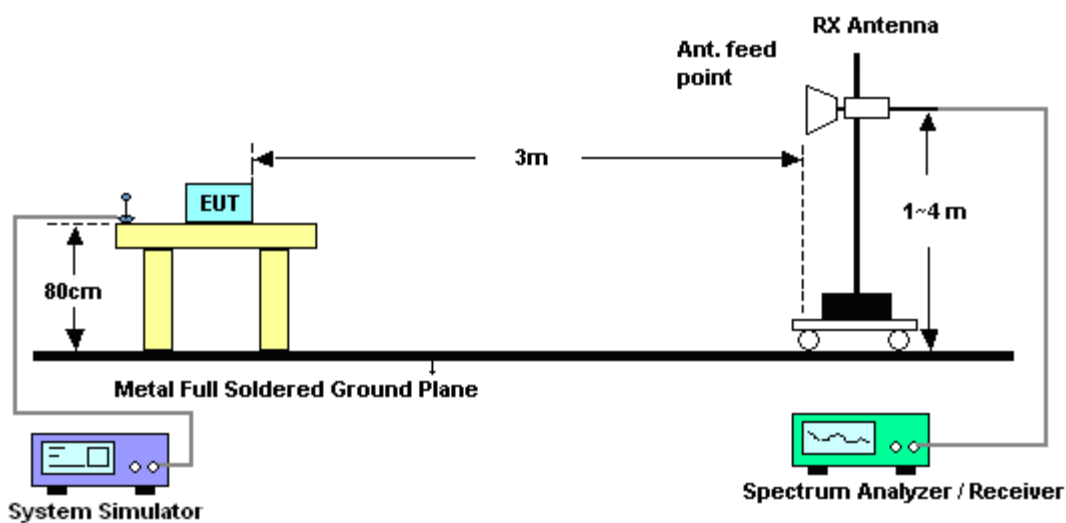

3.7.5 Test Result of Field Strength of Spurious Radiated


Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	48~56%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

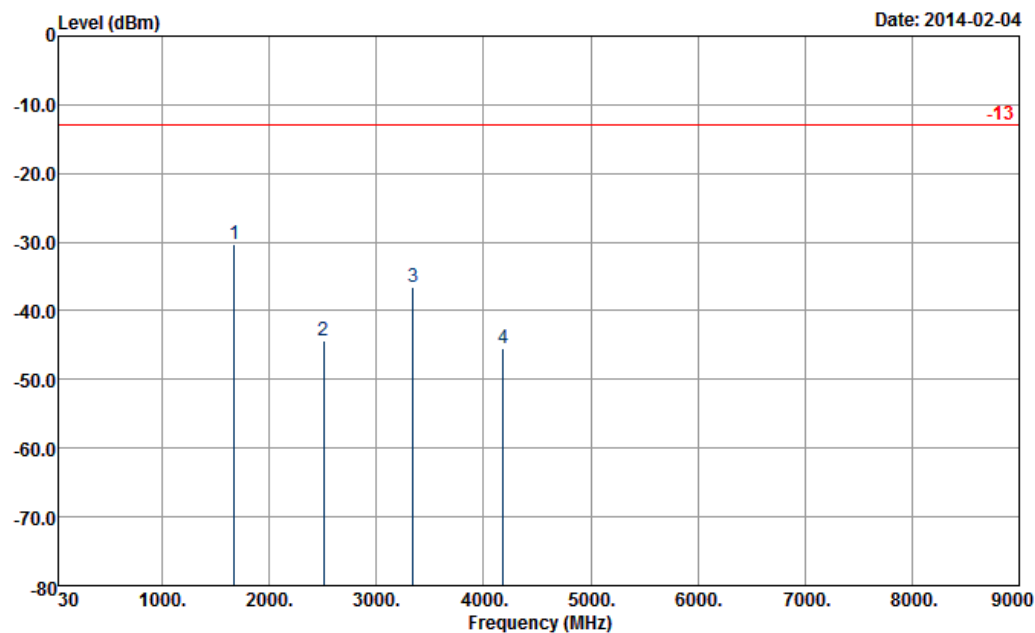

Site : 03CH07-HY
 Condition : -13 HF-EIRP(080306) HORIZONTAL
 Project : FG 413003


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-30.23	-13	-17.23	-38.98	-34.1	1.62	5.49	H	Pass
2509	-44.38	-13	-31.38	-57.87	-48.5	2.1	6.22	H	Pass
3345	-36.46	-13	-23.46	-50.59	-41.5	3.03	8.07	H	Pass
4182	-45.51	-13	-32.51	-62.12	-52.2	2.52	9.21	H	Pass

Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	48~56%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

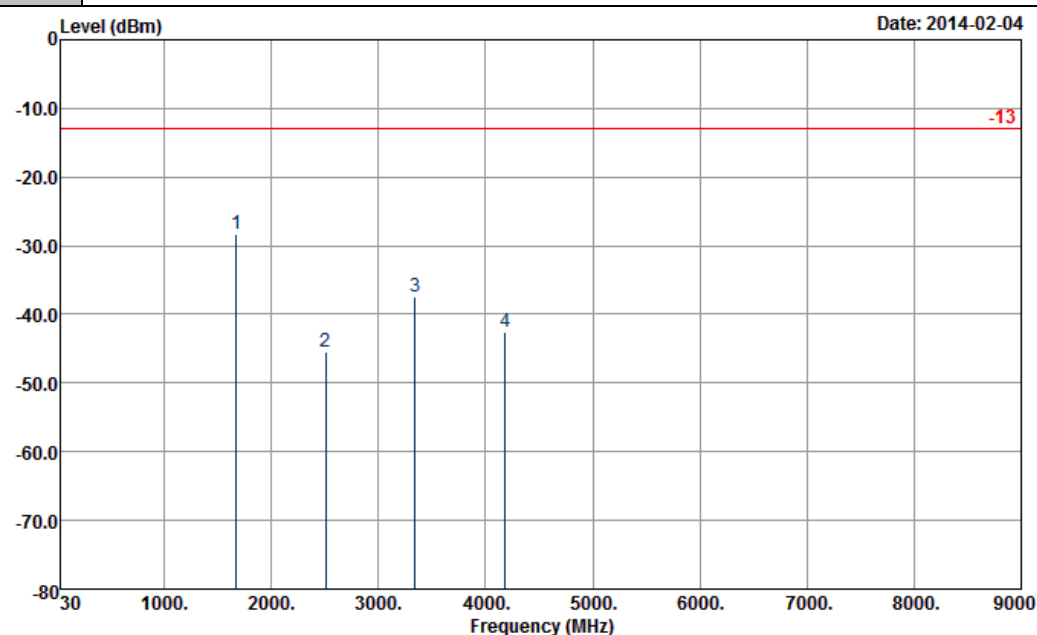

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-28.33	-13	-15.33	-39.6	-32.2	1.62	5.49	V	Pass
2509	-45.38	-13	-32.38	-59.06	-49.5	2.1	6.22	V	Pass
3345	-37.46	-13	-24.46	-53.27	-42.5	3.03	8.07	V	Pass
4182	-42.51	-13	-29.51	-59.8	-49.2	2.52	9.21	V	Pass


Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	48~56%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

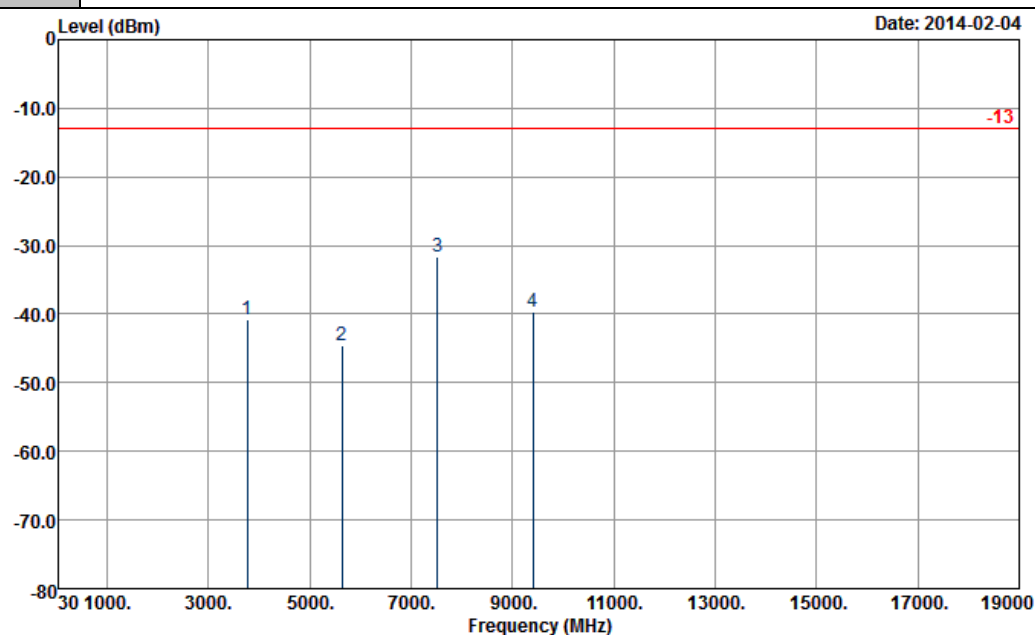

Site : 03CH07-HY
 Condition : -13 HF-EIRP(080306) HORIZONTAL
 Project : FG 413003

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-40.80	-13	-27.80	-56.21	-47.1	2.51	8.81	H	Pass
5636	-44.59	-13	-31.59	-65.67	-52.3	2.99	10.70	H	Pass
7520	-31.57	-13	-18.57	-58.83	-40.1	3.59	12.12	H	Pass
9396	-39.60	-13	-26.60	-66.23	-48.7	4.1	13.20	H	Pass

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	48~56%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

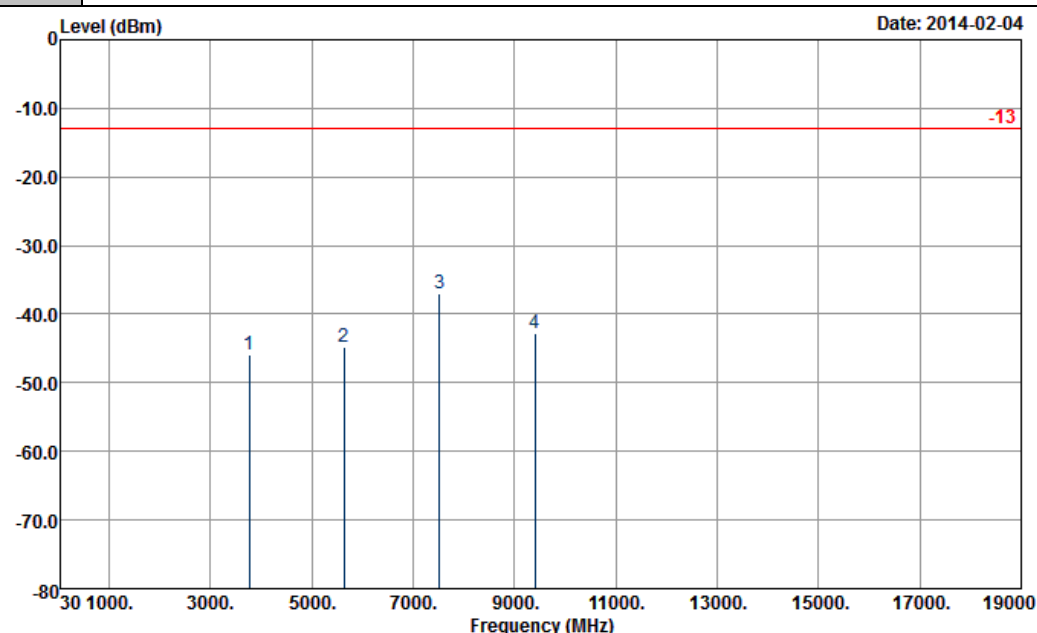

Site : 03CH07-HY
 Condition : -13 HF-EIRP(080306) VERTICAL
 Project : FG 413003

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.80	-13	-32.80	-62.32	-52.1	2.51	8.81	V	Pass
5636	-44.79	-13	-31.79	-65.59	-52.5	2.99	10.70	V	Pass
7520	-36.97	-13	-23.97	-64.29	-45.5	3.59	12.12	V	Pass
9396	-42.70	-13	-29.70	-69.13	-51.8	4.1	13.20	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

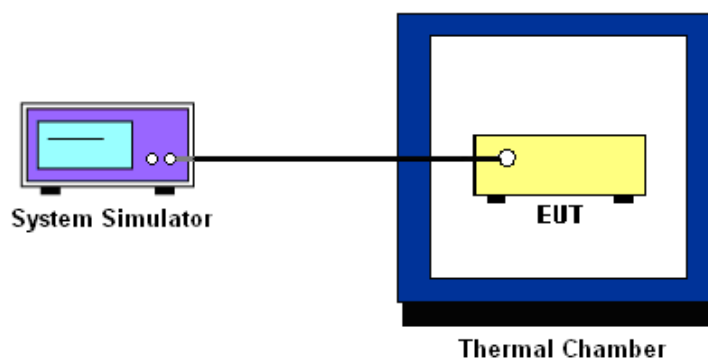

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GPRS class 8	Result
	Deviation (ppm)	
50	0.0287	PASS
40	0.0251	
30	0.0227	
20	0.0239	
10	0.0203	
0	0.0275	
-10	0.0263	
-20	0.0323	
-30	0.0347	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GPRS class 8	Result
	Deviation (ppm)	
50	0.0255	PASS
40	0.0191	
30	0.0170	
20	0.0138	
10	0.0170	
0	0.0181	
-10	0.0213	
-20	0.0261	
-30	0.0234	

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	4.20	0.0227	2.5	PASS
		3.7	0.0203		
		BEP	0.0239		
GSM 1900 CH661	GPRS class 8	4.20	0.0144		
		3.7	0.0165		
		BEP	0.0181		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.4 V.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Aug. 01, 2013	Feb. 17, 2014 ~ Feb. 18, 2014	Jul. 31, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Feb. 17, 2014 ~ Feb. 18, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 19, 2013	Feb. 17, 2014 ~ Feb. 18, 2014	Jul. 18, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Nov. 20, 2013	Feb. 04, 2014	Nov. 19, 2014	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	Feb. 04, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Feb. 04, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	15GHz- 40GHz	Oct. 03, 2013	Feb. 04, 2014	Oct. 02, 2014	Radiation (03CH07-HY)
Preamplifier	SONOMA	310N	187231	9kHz~1GHz	May 15, 2013	Feb. 04, 2014	May 14, 2014	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	Feb. 04, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Feb. 04, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604/	N/A	N/A	Feb. 04, 2014	N/A	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
---	------

