

# FCC PART 15B


## TEST REPORT

For

### Motic China Group Co., Ltd.

Motic Bldg., Torch Hi-Tech Industrial Dev Zone Xiamen, Fujian, China

**FCC ID: PVEMOTICAMU**

<b>Report Type:</b> Original Report	<b>Product Type:</b> MoticamU
<b>Test Engineer:</b> Jone Lv 	
<b>Report Number:</b> R2XM140701051-00	
<b>Report Date:</b> 2014-07-07	
<b>Reviewed By:</b>	Harry Wu EMC Leader 
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>4</b>
JUSTIFICATION .....	4
EUT EXERCISE SOFTWARE .....	4
EQUIPMENT MODIFICATIONS .....	4
SUPPORT EQUIPMENT LIST AND DETAILS .....	4
EXTERNAL CABLE.....	4
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>FCC §15.107 – AC LINE CONDUCTED EMISSIONS .....</b>	<b>7</b>
MEASUREMENT UNCERTAINTY .....	7
EUT SETUP .....	7
EMI TEST RECEIVER SETUP.....	8
TEST PROCEDURE .....	8
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	8
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST RESULTS SUMMARY .....	9
TEST DATA .....	9
<b>FCC §15.109 - RADIATED EMISSIONS .....</b>	<b>12</b>
MEASUREMENT UNCERTAINTY .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE .....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY .....	14
TEST DATA .....	14

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Motic China Group Co., Ltd's* product, model *MoticamU* (FCC ID: *PVEMOTICAMU*) (or the "EUT") in this report is a *MoticamU*, which measures approximately: 7.1 cm (L) x 6.0 cm (W) x 4.5 cm (H), rated input voltage: DC 5V from USB Port. The highest operating frequency is 24MHz.

*\* All measurement and test data in this report was gathered from production sample serial number: 140701051 (Assigned by BACL, Dongguan). The EUT was received on 2014-07-02.*

### Objective

This report is prepared on behalf of *Motic China Group Co., Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B, Class B.

### Related Submittal(s)/Grant(s)

No related grant(s).

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

No software was used in the test.

### Equipment Modifications

No modification was made to the EUT.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Notebook	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	SK-8115	CN-0DJ313-716716-05A-0DSO
SAST	Modem	AEM-2100	090200213

### External Cable

Cable Description	Length (m)	From / Port	To
Shielded Detachable Printer Cable	1.2	Parallel Port of Notebook	Printer
Shielded Detachable Serial Cable	1.2	Serial Port of Notebook	Modem
Shielded Detachable Keyboard Cable	1.5	Keyboard Port of Notebook	Keyboard
Shielded Detachable USB Cable	1.8	USB Port of Notebook	EUT

### Block Diagram of Test Setup

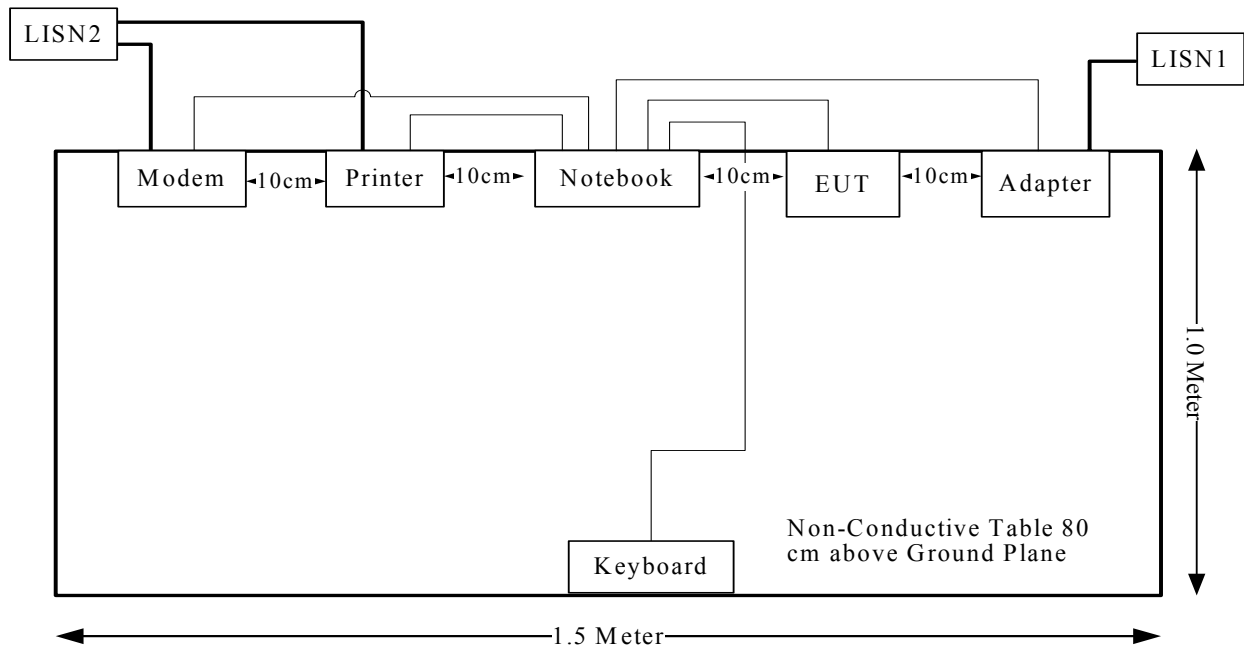

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

## FCC §15.107 – AC LINE CONDUCTED EMISSIONS

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

### EUT Setup

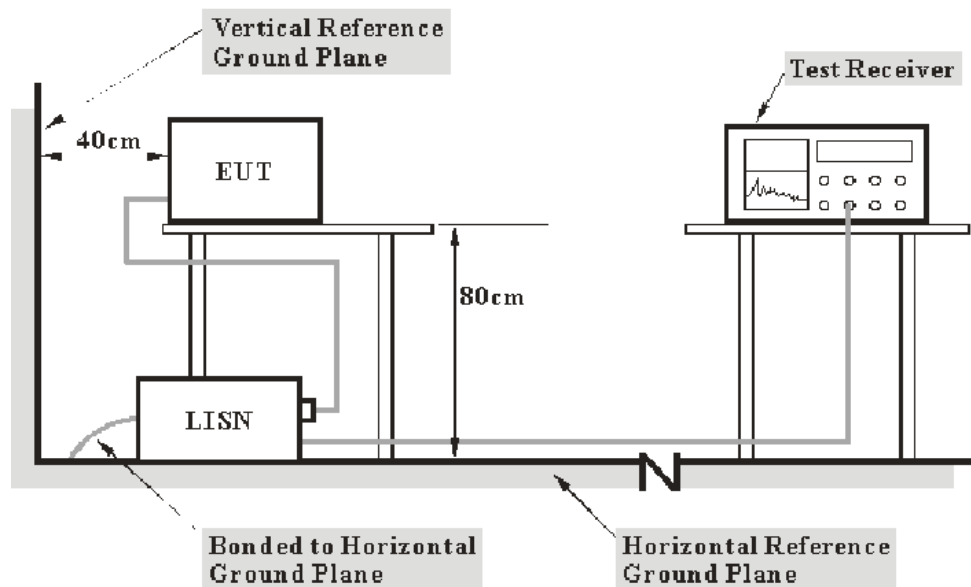

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$



**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-19
R&S	Two-line V-network	ENV216	3560.6550.12	2014-01-22	2015-01-21
R&S	L.I.S.N	ESH3-Z5	100113	N/A	N/A
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

**22.0 dB at 0.457684 MHz** in the **Line** conducted mode


**Test Data****Environmental Conditions**

<b>Temperature:</b>	28.3 °C
<b>Relative Humidity:</b>	58 %
<b>ATM Pressure:</b>	99.9 kPa

*The testing was performed by Jone Lv on 2014-07-03.*


Test mode: Running

AC 120V/60Hz, Line:

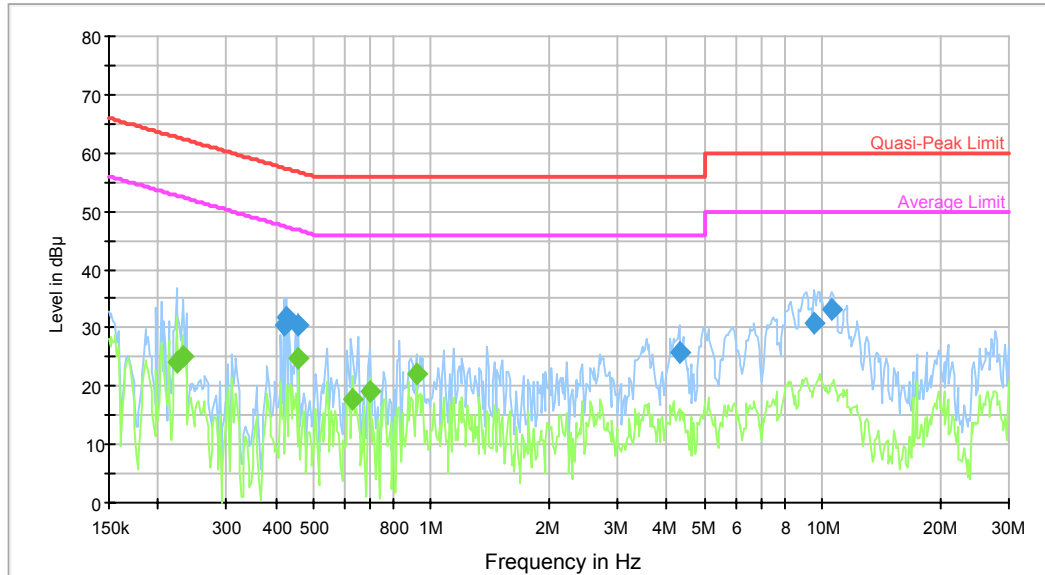

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.419276	30.4	9.000	L1	10.6	27.1	57.5	Compliance
0.426011	31.7	9.000	L1	10.6	25.7	57.3	Compliance
0.457684	30.4	9.000	L1	10.5	26.4	56.7	Compliance
4.295123	25.8	9.000	L1	10.7	30.2	56.0	Compliance
9.528593	30.9	9.000	L1	10.7	29.1	60.0	Compliance
10.568557	33.1	9.000	L1	10.7	26.9	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.223418	24.0	9.000	L1	10.7	28.7	52.7	Compliance
0.230654	25.0	9.000	L1	10.7	27.5	52.4	Compliance
0.457684	24.7	9.000	L1	10.5	22.0	46.7	Compliance
0.629488	17.8	9.000	L1	10.5	28.2	46.0	Compliance
0.698191	19.0	9.000	L1	10.6	27.0	46.0	Compliance
0.915445	22.2	9.000	L1	10.5	23.8	46.0	Compliance

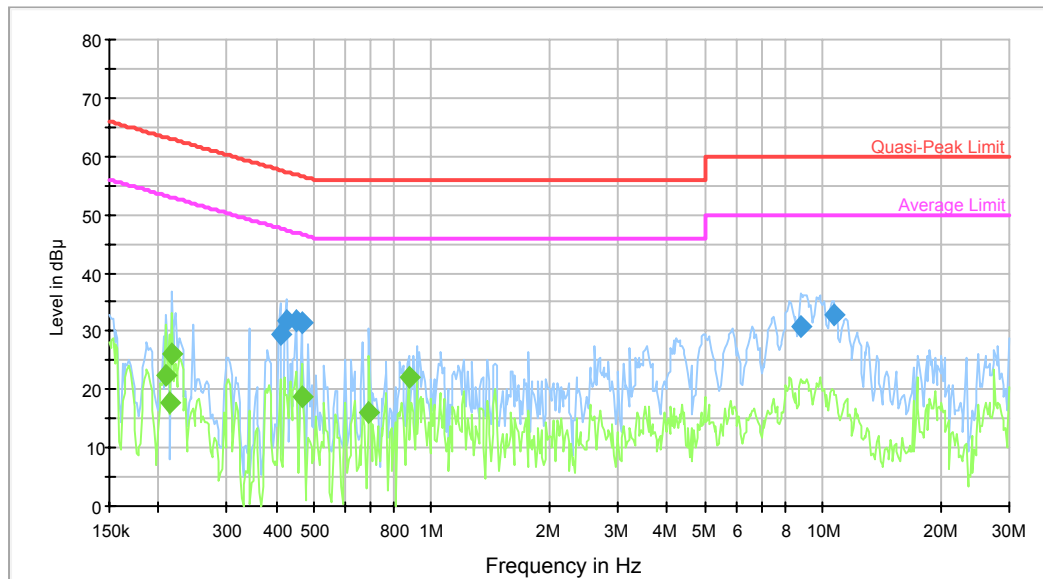**AC 120V/60Hz, Neutral:**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.409372	29.6	9.000	N	10.8	28.0	57.7	Compliance
0.426011	31.9	9.000	N	10.7	25.4	57.3	Compliance
0.450448	31.7	9.000	N	10.6	25.2	56.9	Compliance
0.465037	31.3	9.000	N	10.5	25.3	56.6	Compliance
8.798800	30.9	9.000	N	10.7	29.1	60.0	Compliance
10.653105	33.0	9.000	N	10.7	27.0	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.209621	22.5	9.000	N	11.3	30.7	53.2	Compliance
0.212988	17.6	9.000	N	11.3	35.5	53.1	Compliance
0.216409	26.2	9.000	N	11.3	26.7	53.0	Compliance
0.465037	18.7	9.000	N	10.5	27.9	46.6	Compliance
0.692650	16.2	9.000	N	10.6	29.8	46.0	Compliance
0.872708	22.1	9.000	N	10.6	23.9	46.0	Compliance

## FCC §15.109 - RADIATED EMISSIONS

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cisp}$  of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cisp}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 2 – Values of  $U_{cisp}$

Measurement	$U_{cisp}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

### EUT Setup

Below 1 GHz:

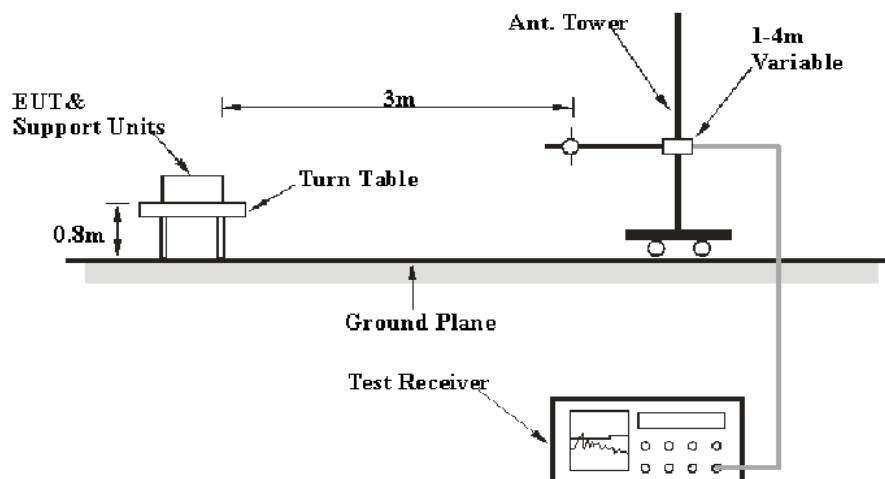

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109, Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

According to FCC 15.33 requirements, the system was measured from 30 MHz to 1 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP

### Test Procedure

For the radiated emissions test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in Quasi-peak detection mode for 30 MHz to 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-08
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109, Class B, with the worst margin reading of:

**3.30 dB at 250.1900 MHz** in the **Horizontal** polarization


## Test Data

### Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	54 %
ATM Pressure:	99.8 kPa

*The testing was performed by Jone Lv on 2014-07-04.*

Test mode: Running

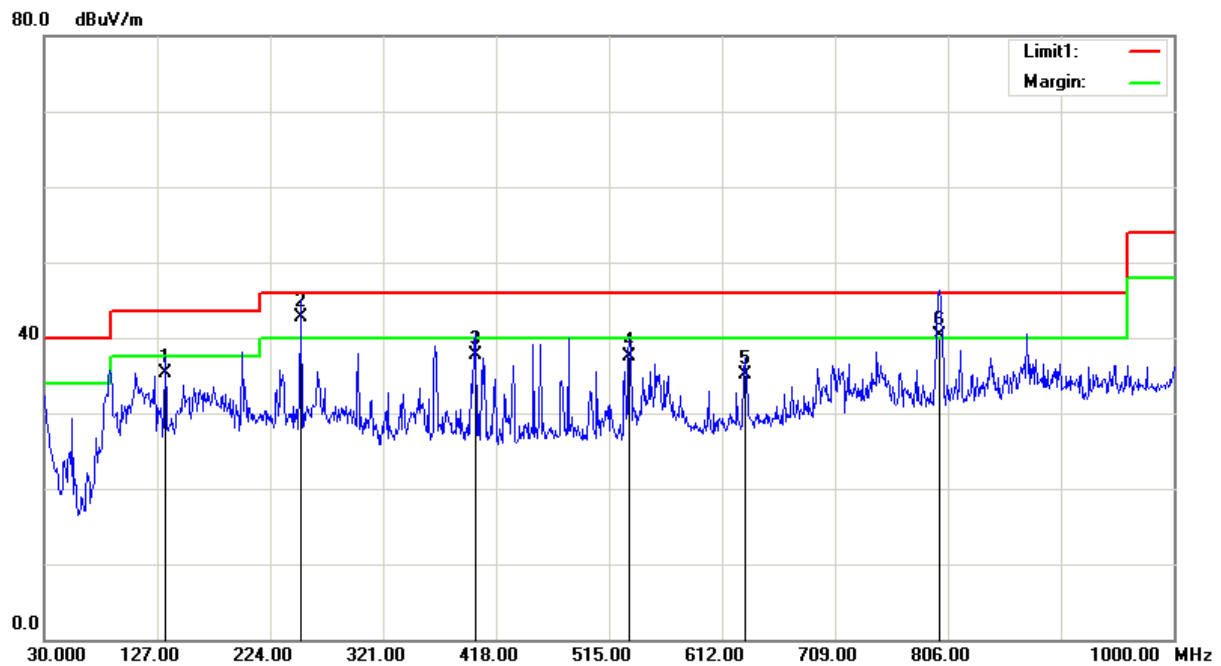
**Horizontal:**

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
133.7900	41.72	QP	-6.32	35.40	43.50	8.10
250.1900	50.27	QP	-7.57	42.70	46.00	3.30*
400.5400	41.19	QP	-3.39	37.80	46.00	8.20
532.4600	38.80	QP	-1.20	37.60	46.00	8.40
631.4000	34.63	QP	0.57	35.20	46.00	10.80
798.2400	37.88	QP	2.52	40.40	46.00	5.60*

\*Within measurement uncertainty!

**Vertical:**

80.0 dBuV/m

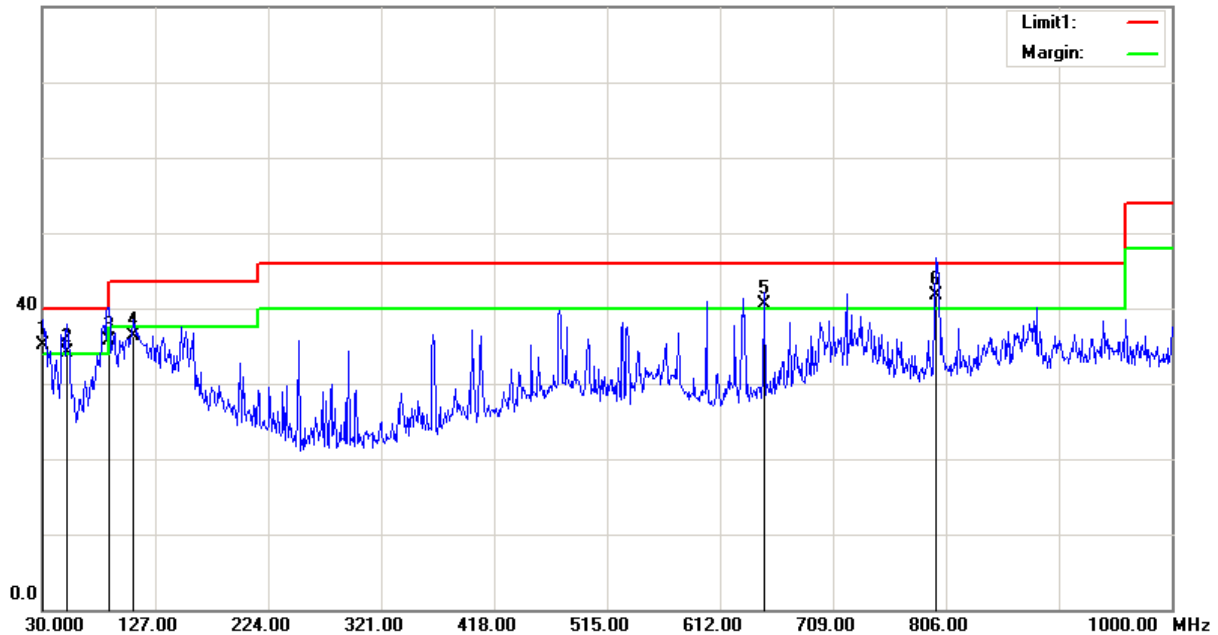

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	34.33	QP	0.77	35.10	40.00	4.90*
51.3400	46.44	QP	-12.24	34.20	40.00	5.80
87.2300	48.32	QP	-12.62	35.70	40.00	4.30*
108.5700	43.89	QP	-7.49	36.40	43.50	7.10
649.8300	39.69	QP	0.81	40.50	46.00	5.50*
797.2700	39.25	QP	2.55	41.80	46.00	4.20*

\*Within measurement uncertainty!

\*\*\*\*\* END OF REPORT \*\*\*\*\*