

RADIO TEST REPORT

Test Report No. 15457600H-C-R1

| | |
|---------------------|--------------------------------|
| Customer | Murata Manufacturing Co., Ltd. |
| Description of EUT | Wireless Vibration Sensor Unit |
| Model Number of EUT | LBAC0ZZ2TG |
| FCC ID | VPYLB2TG |
| Test Regulation | FCC Part 15 Subpart C |
| Test Result | Complied |
| Issue Date | May 19, 2025 |
| Remarks | - |

Representative Test EngineerYuichiro Yamazaki
Engineer**Approved By**Takumi Shimada
Engineer

CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 24.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 15457600H-C

This report is a revised version of 15457600H-C. 15457600H-C is replaced with this report.

| Revision | Test Report No. | Date | Page Revised Contents |
|-----------------|-----------------|----------------|---|
| - (Original) | 15457600H-C | March 12, 2025 | - |
| 1 | 15457600H-C-R1 | May 19, 2025 | Cover page, Section 2.1 Identification of EUT, Section 4.2 Configuration and Peripherals -Modified Description of EUT Vibration Sensor→Wireless Vibration Sensor Unit Section 2.2 Product Description -Modified explanatory note *1). *1) This Bluetooth (Low Energy) module already certified as FCC ID: YCP-32WB5MMGH02. → *1) This Bluetooth (Low Energy) module already certified as FCC ID: YCP-STM32WB5M001. APPENDIX 1: Test Data Radiated Spurious Emission -Add 20dBc data sheet for Mode: Tx 920.4 MHz. |

Reference: Abbreviations (Including words undescribed in this report)

| | | | |
|----------------|---|---------|---|
| A2LA | The American Association for Laboratory Accreditation | IEC | International Electrotechnical Commission |
| AC | Alternating Current | IEEE | Institute of Electrical and Electronics Engineers |
| AFH | Adaptive Frequency Hopping | IF | Intermediate Frequency |
| AM | Amplitude Modulation | ILAC | International Laboratory Accreditation Conference |
| Amp, AMP | Amplifier | ISED | Innovation, Science and Economic Development Canada |
| ANSI | American National Standards Institute | ISO | International Organization for Standardization |
| Ant, ANT | Antenna | JAB | Japan Accreditation Board |
| AP | Access Point | LAN | Local Area Network |
| ASK | Amplitude Shift Keying | LIMS | Laboratory Information Management System |
| Atten., ATT | Attenuator | MCS | Modulation and Coding Scheme |
| AV | Average | MRA | Mutual Recognition Arrangement |
| BPSK | Binary Phase-Shift Keying | N/A | Not Applicable |
| BR | Bluetooth Basic Rate | NIST | National Institute of Standards and Technology |
| BT | Bluetooth | NS | No signal detect. |
| BT LE | Bluetooth Low Energy | NSA | Normalized Site Attenuation |
| BW | BandWidth | NVLAP | National Voluntary Laboratory Accreditation Program |
| Cal Int | Calibration Interval | OBW | Occupied Band Width |
| CCK | Complementary Code Keying | OFDM | Orthogonal Frequency Division Multiplexing |
| Ch., CH | Channel | OFDMA | Orthogonal Frequency Division Multiple Access |
| CISPR | Comite International Special des Perturbations Radioelectriques | P/M | Power meter |
| CW | Continuous Wave | PCB | Printed Circuit Board |
| DBPSK | Differential BPSK | PER | Packet Error Rate |
| DC | Direct Current | PHY | Physical Layer |
| D-factor | Distance factor | PK | Peak |
| DFS | Dynamic Frequency Selection | PN | Pseudo random Noise |
| DQPSK | Differential QPSK | PP | Preamble Puncturing |
| DSSS | Direct Sequence Spread Spectrum | PRBS | Pseudo-Random Bit Sequence |
| EDR | Enhanced Data Rate | PSD | Power Spectral Density |
| EIRP, e.i.r.p. | Equivalent Isotropically Radiated Power | QAM | Quadrature Amplitude Modulation |
| EMC | ElectroMagnetic Compatibility | QP | Quasi-Peak |
| EMI | ElectroMagnetic Interference | QPSK | Quadri-Phase Shift Keying |
| EN | European Norm | RBW | Resolution Band Width |
| ERP, e.r.p. | Effective Radiated Power | RDS | Radio Data System |
| EU | European Union | RE | Radio Equipment |
| EUT | Equipment Under Test | RF | Radio Frequency |
| Fac. | Factor | RMS | Root Mean Square |
| FCC | Federal Communications Commission | RSS | Radio Standards Specifications |
| FHSS | Frequency Hopping Spread Spectrum | Rx | Receiving |
| FM | Frequency Modulation | SA, S/A | Spectrum Analyzer |
| Freq. | Frequency | SG | Signal Generator |
| FSK | Frequency Shift Keying | SVSWR | Site-Voltage Standing Wave Ratio |
| GFSK | Gaussian Frequency-Shift Keying | TR | Test Receiver |
| GNSS | Global Navigation Satellite System | Tx | Transmitting |
| GPS | Global Positioning System | VBW | Video BandWidth |
| Hori. | Horizontal | Vert. | Vertical |
| ICES | Interference-Causing Equipment Standard | WLAN | Wireless LAN |

| CONTENTS | PAGE |
|--|-------------|
| SECTION 1: Customer Information | 5 |
| SECTION 2: Equipment Under Test (EUT)..... | 5 |
| SECTION 3: Test Specification, Procedures & Results | 6 |
| SECTION 4: Operation of EUT during testing | 9 |
| SECTION 5: Radiated Spurious Emission..... | 12 |
| SECTION 6: Antenna Terminal Conducted Tests | 14 |
| APPENDIX 1: Test Data | 15 |
| 99 % Occupied Bandwidth and 6 dB Bandwidth..... | 15 |
| Maximum Peak Output Power | 16 |
| Average Output Power..... | 17 |
| Radiated Spurious Emission..... | 19 |
| Conducted Spurious Emission..... | 24 |
| Power Density | 25 |
| APPENDIX 2: Test Instruments | 26 |
| APPENDIX 3: Photographs of Test Setup | 27 |
| Radiated Spurious Emission..... | 27 |
| Worst Case Position | 28 |
| Antenna Terminal Conducted Tests | 29 |

SECTION 1: Customer Information

| | |
|------------------|--|
| Company Name | Murata Manufacturing Co., Ltd. |
| Address | 1-10-1 Higashikotari, Nagaokakyo-shi, Kyoto 617-8555 Japan |
| Telephone Number | +81-50-1737-2801 |
| Contact Person | Kenji Hayashikoshi |

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

| | |
|---------------|---|
| Description | Wireless Vibration Sensor Unit |
| Model Number | LBAC0ZZ2TG |
| Serial Number | Refer to SECTION 4.2 |
| Condition | Production prototype (Not for Sale: This sample is equivalent to mass-produced items.) |
| Modification | No Modification by the test lab |
| Receipt Date | November 29, 2024 for Antenna Terminal Conducted test February 12, 2025 for Radiated Emission test |
| Test Date | December 13, 2024 to February 12, 2025 |

2.2 Product Description

General Specification

| | |
|-----------------------|--------------------------|
| Rating | DC 3.3 V |
| Operating temperature | -20 deg. C to +60 deg. C |

Radio Specification

SubGHz

| | |
|------------------------|------------------------|
| Equipment Type | Transceiver |
| Frequency of Operation | 920.4 MHz to 924.4 MHz |
| Type of Modulation | GFSK |
| Antenna Gain | -8.9 dBi |

Bluetooth (Low Energy) *1)

| | |
|------------------------|----------------------|
| Equipment Type | Transceiver |
| Frequency of Operation | 2402 MHz to 2480 MHz |
| Type of Modulation | GFSK |

*1) This Bluetooth (Low Energy) module already certified as FCC ID: YCP-STM32WB5M001.

* SubGHz and Bluetooth do not transmit simultaneously.

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

| | |
|--------------------|--|
| Test Specification | FCC Part 15 Subpart C The latest version on the first day of the testing period |
| Title | FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz |

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Reference Standards

ANSI/USEMCSC C63.2-2023
ANSI C63.4-2014+C63.4a-2017
ANSI C63.5-2017
ANSI C63.10-2013
ANSI C63.25.1-2018
KDB 558074 D01 v05r02
KDB 662911 D01 v02r01 for FCC MIMO device
RSS-Gen Issue 5/Amendment 1/Amendment 2 for ISSED

3.3 Summary of Test Results

| Item | Specification | Worst Margin | Results | Remarks |
|--|--|---|----------|--|
| Conducted Emission | FCC: Section 15.207 ISED: RSS-Gen 8.8 | - | N/A | *1) |
| 6dB Bandwidth | FCC: Section 15.247(a)(2) ISED: RSS-247 5.2(a) | See data. | Complied | Conducted |
| Maximum Peak Output Power | FCC: Section 15.247(b)(3) ISED: RSS-247 5.4(d) | | Complied | Conducted |
| Power Density | FCC: Section 15.247(e) ISED: RSS-247 5.2(b) | | Complied | Conducted |
| Spurious Emission Restricted Band Edges | FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10 | 0.1 dB 2761.2 MHz, AV, Horizontal | Complied | Conducted (below 30 MHz) / Radiated (above 30 MHz) *2) |
| Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred. *1) The test is not applicable since the EUT is a battery operated device. *2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6. | | | | |

FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF Module regardless of input voltage.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.4 Addition to Standard

| Item | Specification | Worst Margin | Results | Remarks |
|------------------------|----------------|--------------|---------|-----------|
| 99% Occupied Bandwidth | ISED: - | N/A | - | Conducted |

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.5 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

| Measurement distance | Frequency range | Unit | Calculated Uncertainty (+/-) |
|----------------------|---------------------|------------|------------------------------|
| 3 m | 9 kHz to 30 MHz | dB | 3.3 |
| 10 m | | dB | 3.1 |
| 3 m | 30 MHz to 200 MHz | Horizontal | 4.7 |
| | | Vertical | 4.7 |
| | 200 MHz to 1000 MHz | Horizontal | 4.8 |
| | | Vertical | 6.0 |
| 10 m | 30 MHz to 200 MHz | Horizontal | 5.2 |
| | | Vertical | 5.1 |
| | 200 MHz to 1000 MHz | Horizontal | 5.2 |
| | | Vertical | 5.2 |
| 3 m | 1 GHz to 6 GHz | dB | 5.1 |
| | 6 GHz to 18 GHz | dB | 5.4 |
| 1 m | 10 GHz to 18 GHz | dB | 5.4 |
| | 18 GHz to 26.5 GHz | dB | 5.3 |
| | 26.5 GHz to 40 GHz | dB | 4.8 |
| 0.5 m | 26.5 GHz to 40 GHz | dB | 5.0 |

Antenna Terminal Conducted

| Item | Unit | Calculated Uncertainty (+/-) |
|---|--------|------------------------------|
| Antenna terminated conducted emission / Power density / Burst power | dB | 3.47 |
| Adjacent channel power (ACP) | dB | 2.28 |
| Bandwidth (OBW) | % | 0.96 |
| Time readout (time span upto 100 msec) | % | 0.11 |
| Time readout (time span upto 1000 msec) | % | 0.11 |
| Time readout (time span upto 60 sec) | % | 0.02 |
| Power measurement (Power meter < 8 GHz) | dB | 1.46 |
| Power measurement (Call box < 6 GHz) | dB | 1.69 |
| Frequency readout (Frequency counter) | ppm | 0.67 |
| Frequency readout (Spectrum analyzer frequency readout function) | ppm | 2.13 |
| Temperature (constant temperature bath) | deg. C | 0.69 |
| Humidity (constant temperature bath) | %RH | 2.98 |
| Modulation characteristics | % | 6.93 |
| Frequency for mobile | ppm | 0.08 |
| Contention-based protocol | dB | 2.26 |

3.6 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

| Test site | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Other rooms | Maximum measurement distance |
|----------------------------|----------------------------|--|------------------------|------------------------------|
| No.1 semi-anechoic chamber | 19.2 x 11.2 x 7.7 | 7.0 x 6.0 | No.1 Power source room | 10 m |
| No.2 semi-anechoic chamber | 7.5 x 5.8 x 5.2 | 4.0 x 4.0 | - | 3 m |
| No.3 semi-anechoic chamber | 12.0 x 8.5 x 5.9 | 6.8 x 5.75 | No.3 Preparation room | 3 m |
| No.3 shielded room | 4.0 x 6.0 x 2.7 | N/A | - | - |
| No.4 semi-anechoic chamber | 12.0 x 8.5 x 5.9 | 6.8 x 5.75 | No.4 Preparation room | 3 m |
| No.4 shielded room | 4.0 x 6.0 x 2.7 | N/A | - | - |
| No.5 semi-anechoic chamber | 6.0 x 6.0 x 3.9 | 6.0 x 6.0 | - | - |
| No.5 measurement room | 6.4 x 6.4 x 3.0 | 6.4 x 6.4 | - | - |
| No.6 shielded room | 4.0 x 4.5 x 2.7 | 4.0 x 4.5 | - | - |
| No.6 measurement room | 4.75 x 5.4 x 3.0 | 4.75 x 4.15 | - | - |
| No.7 shielded room | 4.7 x 7.5 x 2.7 | 4.7 x 7.5 | - | - |
| No.8 measurement room | 3.1 x 5.0 x 2.7 | 3.1 x 5.0 | - | - |
| No.9 measurement room | 8.8 x 4.6 x 2.8 | 2.4 x 2.4 | - | - |
| No.10 shielded room | 3.8 x 2.8 x 2.8 | 3.8 x 2.8 | - | - |
| No.11 measurement room | 4.0 x 3.4 x 2.5 | N/A | - | - |
| No.12 measurement room | 2.6 x 3.4 x 2.5 | N/A | - | - |
| Large Chamber | 16.9 x 22.1 x 10.17 | 16.9 x 22.1 | - | 10 m |
| Small Chamber | 5.3 x 6.69 x 3.59 | 5.3 x 6.69 | - | - |

3.7 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)


| Mode | Remarks* |
|--|----------|
| Transmitting (Tx) | - |
| <p>*Power of the EUT was set by the software as follows; Power Setting: 10 dBm Software: Murata SubGHz Tool Version: 1.1.7 (Date: April 18, 2022, Storage location: Driven by connected PC)</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p> | |

*The Details of Operating Mode(s)

| Test Item | Operating Mode | Tested Frequency |
|--|-------------------|------------------------|
| Radiated Spurious Emission, Maximum Peak Output Power, Power Density, 6dB Bandwidth, 99% Occupied Bandwidth | Transmitting (Tx) | 920.4 MHz 924.4 MHz |
| Conducted Spurious Emission *1) | Transmitting (Tx) | 920.4 MHz |
| <p>*1) This test was limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.</p> | | |

4.2 Configuration and Peripherals

Radiated Emission test

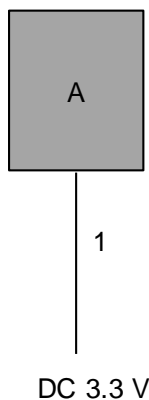

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.


Description of EUT and Support Equipment

| No. | Item | Model number | Serial Number | Manufacturer | Remarks |
|-----|--------------------------------|--------------|---------------|--------------------------------|---------|
| A | Wireless Vibration Sensor Unit | LBAC0ZZ2TG | 3DCT | Murata Manufacturing Co., Ltd. | EUT |

List of Cables Used

| No. | Name | Length (m) | Shield | | Remarks |
|-----|----------|------------|------------|------------|---------|
| | | | Cable | Connector | |
| 1 | DC Cable | 2.50 | Unshielded | Unshielded | - |

Antenna Terminal Conducted test

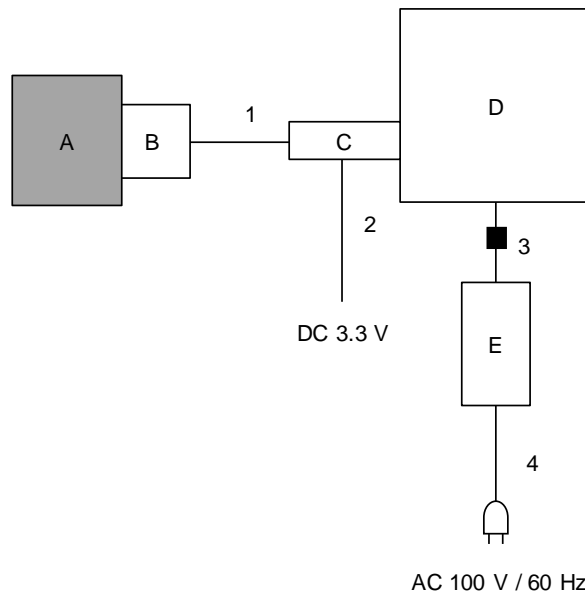

■ : Standard Ferrite Core

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

| No. | Item | Model number | Serial Number | Manufacturer | Remarks |
|-----|--------------------------------|--------------|------------------|--------------------------------|---------|
| A | Wireless Vibration Sensor Unit | LBAC0ZZ2TG | 3DCT | Murata Manufacturing Co., Ltd. | EUT |
| B | UART board | - | P2ML10181 | - | - |
| C | USB dongle | - | P2ML2223-4 | - | - |
| D | Laptop PC | CF-N8HWCDPS | 0BKSA07449 | Panasonic | - |
| E | AC Adapter | CF-AA6372B | 6372BM409X17298B | Panasonic | - |

List of Cables Used

| No. | Name | Length (m) | Shield | | Remarks |
|-----|------------|------------|------------|------------|---------|
| | | | Cable | Connector | |
| 1 | UART Cable | 0.25 | Unshielded | Unshielded | - |
| 2 | DC Cable | 0.50 | Unshielded | Unshielded | - |
| 3 | DC Cable | 1.00 | Unshielded | Unshielded | - |
| 4 | AC Cable | 0.80 | Unshielded | Unshielded | - |

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

| | | | |
|--------------|-------------------|------------------|-------------|
| Frequency | 30 MHz to 200 MHz | 200 MHz to 1 GHz | Above 1 GHz |
| Antenna Type | Biconical | Logperiodic | Horn |


In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

| | | | | |
|-----------------|---------------|--------------------------|---|------------------------------|
| Frequency | Below 1 GHz | Above 1 GHz | | 20 dBc |
| Instrument Used | Test Receiver | Spectrum Analyzer | | Spectrum Analyzer |
| Detector | QP | PK | AV | PK |
| IF Bandwidth | BW 120 kHz | RBW: 1 MHz VBW: 3 MHz | 11.12.2.5.1 RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces 11.12.2.5.2 The duty cycle was less than 98% for detected noise, a duty factor was added to the 11.12.2.5.1 results. | RBW: 100 kHz VBW: 300 kHz |

Figure 2: Test Setup


Below 1 GHz

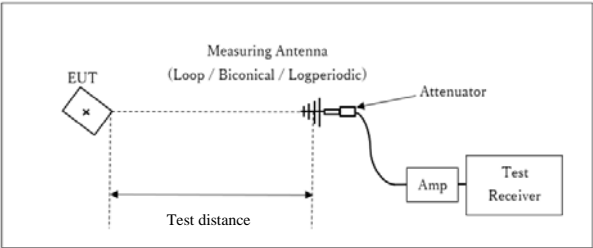

* : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

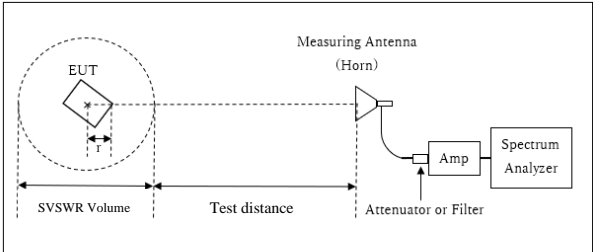

r : Radius of an outer periphery of EUT

* : Center of turn table

[1 GHz to 6 GHz]

Distance Factor: $20 \times \log (3.75 \text{ m}^* / 3.00 \text{ m}) = 1.94 \text{ dB}$

*(Test Distance + SVSWR Volume / 2) - r = 3.75 m

Test Distance: 3 m

SVSWR Volume: 1.5 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

r: 0.0 m

(The test was performed with r = 0.0 m since EUT is small and it was the rather conservative condition.)

[6 GHz to 10 GHz]

Distance Factor: $20 \times \log (3.75 \text{ m}^* / 3.00 \text{ m}) = 1.94 \text{ dB}$

*(Test Distance + SVSWR Volume / 2) - r = 3.75 m

Test Distance: 3.25 m

SVSWR Volume: 1 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

r: 0.0 m

(The test was performed with r = 0.0 m since EUT is small and it was the rather conservative condition.)

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test results are rounded off and limit are rounded down, so some differences might be observed.

Measurement Range : 30 MHz to 10 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

| Test | Span | RBW | VBW | Sweep time | Detector | Trace | Instrument Used |
|---------------------------------|---|------------------|--------------------|------------|----------------------|----------|------------------------------------|
| 6dB Bandwidth | 1 MHz | 100 kHz | 300 kHz | Auto | Peak | Max Hold | Spectrum Analyzer |
| 99% Occupied Bandwidth *1) | Enough width to display emission skirts | 1 to 5 % of OBW | Three times of RBW | Auto | Peak | Max Hold | Spectrum Analyzer |
| Maximum Peak Output Power | - | - | - | Auto | Peak/ Average *2) | - | Power Meter (Sensor: 50 MHz BW) |
| Peak Power Density | 1.5 times the 6dB Bandwidth | 3 kHz | 10 kHz | Auto | Peak | Max Hold | Spectrum Analyzer *3) |
| Conducted Spurious Emission *4) | 9 kHz to 150 kHz 150 kHz to 30 MHz | 200 Hz 10 kHz | 620 Hz 30 kHz | Auto | Peak | Max Hold | Spectrum Analyzer |

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

Test results are rounded off and limit are rounded down, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.


Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test Data

99 % Occupied Bandwidth and 6 dB Bandwidth

| | | |
|------------------------|---------------------|-----------------------|
| Test place | Ise EMC Lab. | No.6 measurement room |
| Date | December 13, 2024 | December 20, 2024 |
| Temperature / Humidity | 23 deg. C / 40 % RH | 22 deg. C / 37 % RH |
| Engineer | Junya Okuno | Yuichiro Yamazaki |
| Mode | Tx | |

| Frequency [MHz] | 99% Occupied Bandwidth [kHz] | 6dB Bandwidth [MHz] | Limit for 6dB Bandwidth [MHz] |
|--------------------|------------------------------------|------------------------|-------------------------------------|
| 920.4 | 482.3 | 0.548 | > 0.5000 |
| 924.4 | 481.2 | 0.552 | > 0.5000 |

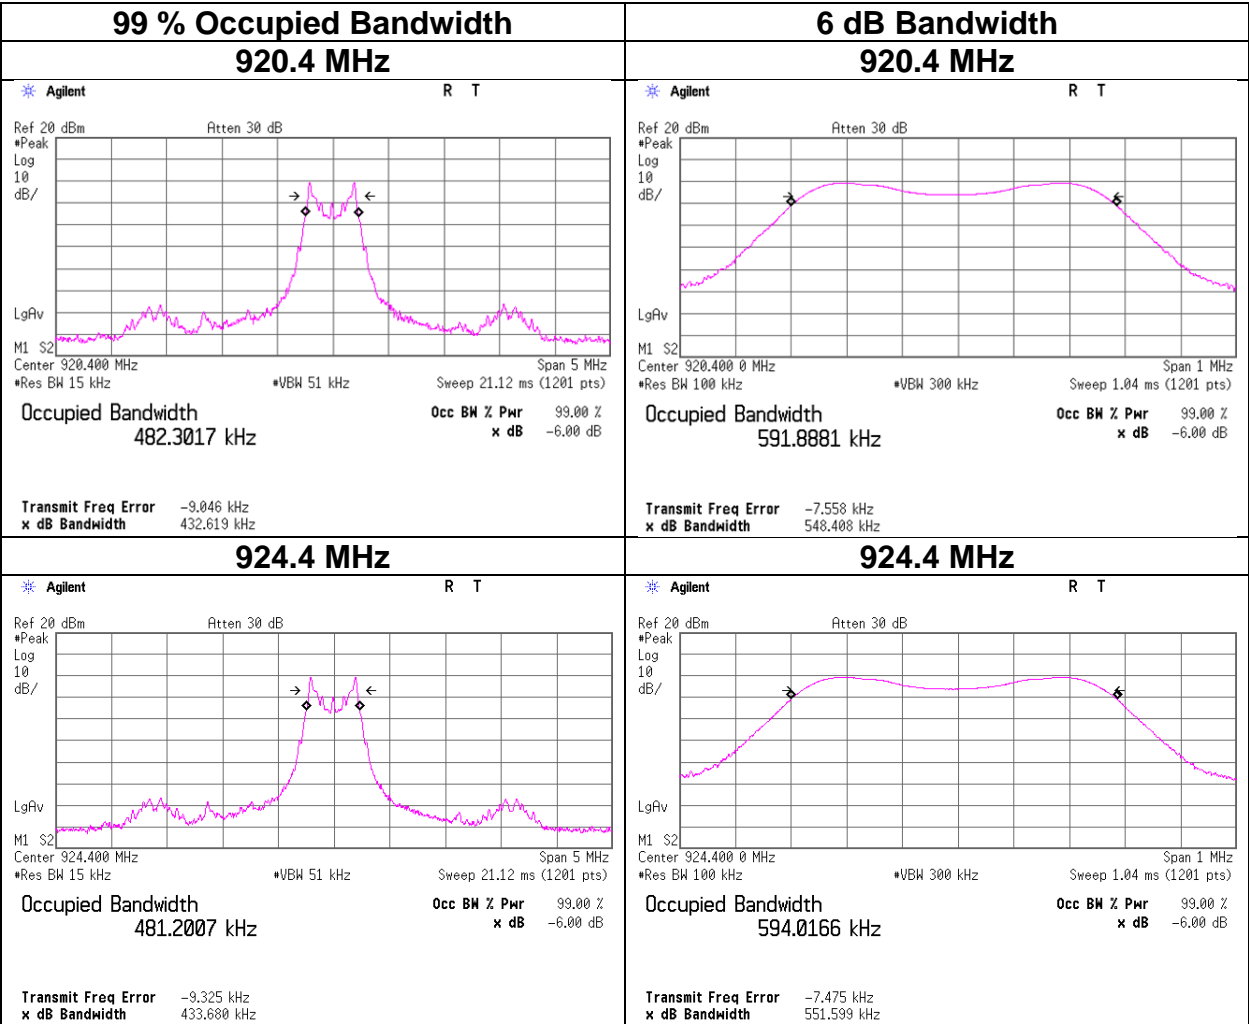

Maximum Peak Output Power

Test place Ise EMC Lab.
 No. 4 Preparation Room No.6 measurement room
Date December 13, 2024 December 20, 2024
Temperature / Humidity 23 deg. C / 40 % RH 22 deg. C / 37 % RH
Engineer Junya Okuno Yuichiro Yamazaki
Mode Tx

| Freq. | Reading | Cable Loss | Atten. Loss | Conducted Power | | | | | e.i.r.p. for RSS-247 | | | | | |
|-------|---------|------------|-------------|-----------------|-------------|-------|------|--------|----------------------|-------------|-------------|-------|-------|--------|
| | | | | Result | | Limit | | Margin | Antenna Gain | Result | | Limit | | Margin |
| | | | | [dBm] | [mW] | [dBm] | [mW] | | | [dB] | [dBm] | [mW] | [dBm] | |
| [MHz] | [dBm] | [dB] | [dB] | [dBm] | [mW] | [dBm] | [mW] | [dB] | [dB] | [dBm] | [mW] | [dBm] | [mW] | [dB] |
| 920.4 | -0.85 | 0.27 | 9.80 | 9.22 | 8.36 | 30.00 | 1000 | 20.78 | -8.90 | 0.32 | 1.08 | 36.02 | 4000 | 35.70 |
| 924.4 | -0.88 | 0.27 | 9.80 | 9.19 | 8.30 | 30.00 | 1000 | 20.81 | -8.90 | 0.29 | 1.07 | 36.02 | 4001 | 35.73 |

Sample Calculation:
Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss
e.i.r.p. Result = Conducted Power Result + Antenna Gain

Average Output Power
(Reference data for RF Exposure)


| | | |
|------------------------|------------------------|-----------------------|
| Test place | Ise EMC Lab. | |
| | No. 4 Preparation Room | No.6 measurement room |
| Date | December 13, 2024 | December 20, 2024 |
| Temperature / Humidity | 23 deg. C / 40 % RH | 22 deg. C / 37 % RH |
| Engineer | Junya Okuno | Yuichiro Yamazaki |
| Mode | Tx | |

| Freq. [MHz] | Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Result (Time average) | | Duty factor [dB] | Result (Burst power average) | |
|----------------|------------------|-----------------------|------------------------|--------------------------|-------------|------------------------|---------------------------------|-------------|
| | | | | [dBm] | [mW] | | [dBm] | [mW] |
| 920.4 | -0.95 | 0.27 | 9.80 | 9.12 | 8.17 | 0.00 | 9.12 | 8.17 |
| 924.4 | -0.99 | 0.27 | 9.80 | 9.08 | 8.09 | 0.00 | 9.08 | 8.09 |

Sample Calculation:
Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss
Result (Burst power average) = Time average + Duty factor

Burst rate confirmation

Test place Ise EMC Lab.
 No. 4 Preparation Room
Date December 13, 2024
Temperature / Humidity 23 deg. C / 40 % RH
Engineer Junya Okuno
Mode Tx

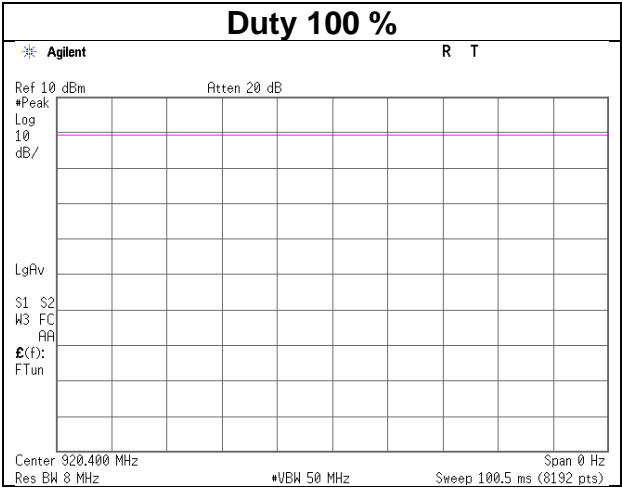

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

| | |
|------------------------|---------------------|
| Test place | Ise EMC Lab. |
| Semi Anechoic Chamber | No.2 |
| Date | February 12, 2025 |
| Temperature / Humidity | 21 deg. C / 42 % RH |
| Engineer | Takeshi Hiyaji |
| Mode | Tx 920.4 MHz |

| Polarity | Frequency | Reading (QP / PK) | Reading (AV) | Ant. Factor | Loss | Gain | Duty Factor | Result (QP / PK) | Result (AV) | Limit (QP / PK) | Limit (AV) | Margin (QP / PK) | Margin (AV) | Remark |
|-------------|-----------|----------------------|-----------------|----------------|------|------|----------------|---------------------|----------------|--------------------|---------------|---------------------|----------------|-------------|
| [Hori/Vert] | [MHz] | [dBuV] | [dBuV] | [dB/m] | [dB] | [dB] | [dB] | [dBuV/m] | [dBuV/m] | [dBuV/m] | [dBuV/m] | [dB] | [dB] | |
| Hori. | 40.9 | 23.6 | - | 14.7 | 7.0 | 28.5 | - | 16.7 | - | 40.0 | - | 23.3 | - | |
| Hori. | 173.0 | 22.0 | - | 15.8 | 8.2 | 28.1 | - | 17.9 | - | 43.5 | - | 25.6 | - | |
| Hori. | 263.4 | 21.5 | - | 12.5 | 8.8 | 27.7 | - | 15.1 | - | 46.0 | - | 30.9 | - | |
| Hori. | 332.7 | 22.3 | - | 14.8 | 9.2 | 27.9 | - | 18.4 | - | 46.0 | - | 27.6 | - | |
| Hori. | 469.6 | 22.9 | - | 17.0 | 10.1 | 29.0 | - | 21.0 | - | 46.0 | - | 25.0 | - | |
| Hori. | 723.9 | 22.6 | - | 20.1 | 11.0 | 29.2 | - | 24.5 | - | 46.0 | - | 21.5 | - | |
| Hori. | 2761.2 | 58.2 | 54.3 | 28.2 | 4.6 | 33.3 | - | 57.8 | 53.8 | 73.9 | 53.9 | 16.1 | 0.1 | |
| Hori. | 3681.6 | 46.3 | 39.5 | 29.2 | 5.0 | 33.0 | - | 47.6 | 40.7 | 73.9 | 53.9 | 26.4 | 13.2 | |
| Hori. | 4602.0 | 47.3 | 40.7 | 31.0 | 5.4 | 32.7 | - | 51.0 | 44.4 | 73.9 | 53.9 | 22.9 | 9.5 | |
| Hori. | 5522.4 | 41.0 | 34.0 | 31.7 | 5.7 | 32.4 | - | 46.0 | 39.0 | 73.9 | 53.9 | 28.0 | 14.9 | Floor noise |
| Hori. | 6442.8 | 41.9 | 34.1 | 35.8 | 4.0 | 32.5 | - | 49.3 | 41.5 | 73.9 | 53.9 | 24.6 | 12.4 | Floor noise |
| Hori. | 7363.2 | 41.9 | 34.9 | 35.4 | 4.3 | 32.5 | - | 49.2 | 42.1 | 73.9 | 53.9 | 24.8 | 11.8 | Floor noise |
| Hori. | 8283.6 | 42.3 | 34.5 | 35.5 | 4.6 | 32.8 | - | 49.6 | 41.8 | 73.9 | 53.9 | 24.3 | 12.1 | Floor noise |
| Hori. | 9204.0 | 43.2 | 35.6 | 35.6 | 4.9 | 33.2 | - | 50.6 | 42.9 | 73.9 | 53.9 | 23.3 | 11.0 | Floor noise |
| Vert. | 40.9 | 23.9 | - | 14.7 | 7.0 | 28.5 | - | 17.0 | - | 40.0 | - | 23.0 | - | |
| Vert. | 173.0 | 21.9 | - | 15.8 | 8.2 | 28.1 | - | 17.8 | - | 43.5 | - | 25.7 | - | |
| Vert. | 263.4 | 21.8 | - | 12.5 | 8.8 | 27.7 | - | 15.4 | - | 46.0 | - | 30.6 | - | |
| Vert. | 332.7 | 22.4 | - | 14.8 | 9.2 | 27.9 | - | 18.5 | - | 46.0 | - | 27.5 | - | |
| Vert. | 469.6 | 23.0 | - | 17.0 | 10.1 | 29.0 | - | 21.1 | - | 46.0 | - | 24.9 | - | |
| Vert. | 723.9 | 22.7 | - | 20.1 | 11.0 | 29.2 | - | 24.6 | - | 46.0 | - | 21.4 | - | |
| Vert. | 2761.2 | 57.3 | 54.1 | 28.2 | 4.6 | 33.3 | - | 56.9 | 53.6 | 73.9 | 53.9 | 17.0 | 0.3 | |
| Vert. | 3681.6 | 45.4 | 37.1 | 29.2 | 5.0 | 33.0 | - | 46.6 | 38.3 | 73.9 | 53.9 | 27.3 | 15.6 | |
| Vert. | 4602.0 | 45.3 | 38.3 | 31.0 | 5.4 | 32.7 | - | 49.0 | 42.0 | 73.9 | 53.9 | 24.9 | 11.9 | |
| Vert. | 5522.4 | 41.3 | 34.0 | 31.7 | 5.7 | 32.4 | - | 46.3 | 39.0 | 73.9 | 53.9 | 27.6 | 14.9 | Floor noise |
| Vert. | 6442.8 | 42.4 | 34.5 | 35.8 | 4.0 | 32.5 | - | 49.8 | 41.9 | 73.9 | 53.9 | 24.1 | 12.1 | Floor noise |
| Vert. | 7363.2 | 42.4 | 34.7 | 35.4 | 4.3 | 32.5 | - | 49.7 | 41.9 | 73.9 | 53.9 | 24.2 | 12.0 | Floor noise |
| Vert. | 8283.6 | 43.2 | 34.5 | 35.5 | 4.6 | 32.8 | - | 50.6 | 41.8 | 73.9 | 53.9 | 23.3 | 12.1 | Floor noise |
| Vert. | 9204.0 | 43.8 | 35.3 | 35.6 | 4.9 | 33.2 | - | 51.2 | 42.6 | 73.9 | 53.9 | 22.7 | 11.3 | Floor noise |

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

20dBc Data Sheet

| Polarity | Frequency | Reading (PK) | Ant Factor | Loss | Gain | Result | Limit | Margin | Remark |
|-------------|-----------|-----------------|---------------|------|------|----------|----------|--------|---------|
| [Hori/Vert] | [MHz] | [dBuV] | [dB/m] | [dB] | [dB] | [dBuV/m] | [dBuV/m] | [dB] | |
| Hori. | 920.4 | 92.1 | 22.1 | 11.5 | 28.8 | 96.8 | - | - | Carrier |
| Hori. | 902.0 | 28.2 | 22.1 | 11.4 | 28.8 | 32.9 | 76.8 | 43.9 | |
| Hori. | 1840.8 | 53.3 | 25.4 | 2.3 | 33.4 | 47.5 | 76.8 | 29.3 | |
| Vert. | 920.4 | 96.2 | 22.1 | 11.5 | 28.8 | 100.9 | - | - | Carrier |
| Vert. | 902.0 | 27.7 | 22.1 | 11.4 | 28.8 | 32.3 | 80.9 | 48.6 | |
| Vert. | 1840.8 | 56.7 | 25.4 | 2.3 | 33.4 | 51.0 | 80.9 | 30.0 | |



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
February 12, 2025
21 deg. C / 42 % RH
Takeshi Hiyaji
Tx 920.4 MHz

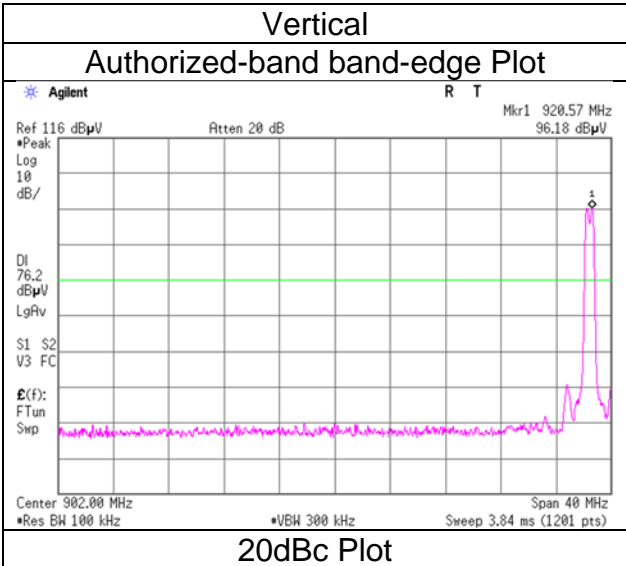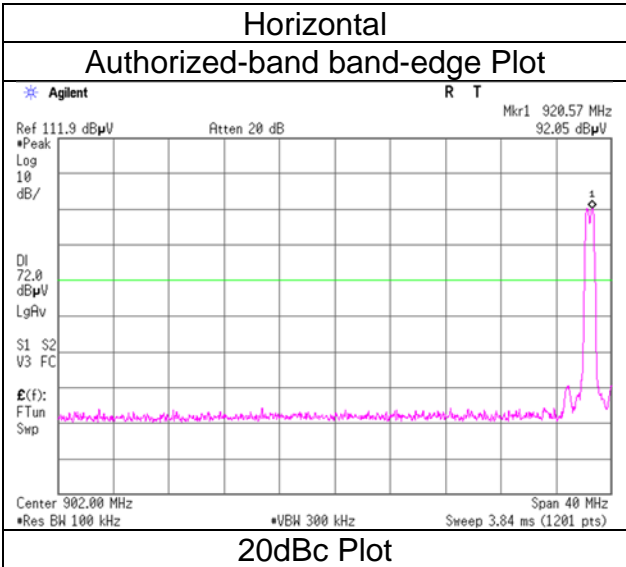

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
February 12, 2025
21 deg. C / 42 % RH
Takeshi Hiyaji
Tx 924.4 MHz

| Polarity | Frequency | Reading (QP / PK) | Reading (AV) | Ant. Factor | Loss | Gain | Duty Factor | Result (QP / PK) | Result (AV) | Limit (QP / PK) | Limit (AV) | Margin (QP / PK) | Margin (AV) | Remark |
|-------------|-----------|----------------------|-----------------|----------------|------|------|----------------|---------------------|----------------|--------------------|---------------|---------------------|----------------|-------------|
| [Hori/Vert] | [MHz] | [dBuV] | [dBuV] | [dBm] | [dB] | [dB] | [dB] | [dBuV/m] | [dBuV/m] | [dBuV/m] | [dBuV/m] | [dB] | [dB] | |
| Hori. | 39.0 | 22.4 | - | 15.4 | 7.0 | 28.5 | - | 16.2 | - | 40.0 | - | 23.8 | - | |
| Hori. | 143.9 | 21.9 | - | 14.7 | 8.0 | 28.3 | - | 16.4 | - | 43.5 | - | 27.2 | - | |
| Hori. | 285.0 | 21.6 | - | 13.6 | 9.0 | 27.7 | - | 16.4 | - | 46.0 | - | 29.6 | - | |
| Hori. | 339.4 | 22.4 | - | 14.9 | 9.3 | 28.0 | - | 18.6 | - | 46.0 | - | 27.4 | - | |
| Hori. | 597.8 | 23.1 | - | 19.3 | 10.5 | 29.3 | - | 23.6 | - | 46.0 | - | 22.4 | - | |
| Hori. | 960.0 | 21.2 | - | 22.1 | 11.9 | 28.7 | - | 26.6 | - | 46.0 | - | 19.4 | - | |
| Hori. | 2773.2 | 50.0 | 44.4 | 28.3 | 4.6 | 33.3 | - | 49.6 | 44.0 | 73.9 | 53.9 | 24.3 | 9.9 | |
| Hori. | 3697.6 | 46.0 | 40.5 | 29.3 | 5.0 | 33.0 | - | 47.3 | 41.8 | 73.9 | 53.9 | 26.6 | 12.1 | |
| Hori. | 4622.0 | 45.1 | 38.8 | 31.1 | 5.4 | 32.7 | - | 48.8 | 42.6 | 73.9 | 53.9 | 25.1 | 11.3 | |
| Hori. | 5546.4 | 42.6 | 33.9 | 31.7 | 5.7 | 32.4 | - | 47.6 | 38.9 | 73.9 | 53.9 | 26.4 | 15.0 | Floor noise |
| Hori. | 6470.8 | 42.9 | 34.4 | 35.9 | 4.0 | 32.5 | - | 50.4 | 41.9 | 73.9 | 53.9 | 23.6 | 12.0 | Floor noise |
| Hori. | 7395.2 | 43.2 | 34.8 | 35.4 | 4.3 | 32.5 | - | 50.4 | 42.1 | 73.9 | 53.9 | 23.5 | 11.9 | Floor noise |
| Hori. | 8319.6 | 42.3 | 34.6 | 35.6 | 4.6 | 32.8 | - | 49.7 | 42.0 | 73.9 | 53.9 | 24.2 | 11.9 | Floor noise |
| Hori. | 9244.0 | 42.8 | 35.2 | 35.6 | 4.9 | 33.2 | - | 50.2 | 42.6 | 73.9 | 53.9 | 23.7 | 11.3 | Floor noise |
| Vert. | 39.0 | 22.7 | - | 15.4 | 7.0 | 28.5 | - | 16.5 | - | 40.0 | - | 23.5 | - | |
| Vert. | 143.9 | 22.0 | - | 14.7 | 8.0 | 28.3 | - | 16.5 | - | 43.5 | - | 27.1 | - | |
| Vert. | 285.0 | 21.5 | - | 13.6 | 9.0 | 27.7 | - | 16.3 | - | 46.0 | - | 29.7 | - | |
| Vert. | 339.4 | 22.8 | - | 14.9 | 9.3 | 28.0 | - | 19.0 | - | 46.0 | - | 27.0 | - | |
| Vert. | 597.8 | 22.8 | - | 19.3 | 10.5 | 29.3 | - | 23.3 | - | 46.0 | - | 22.7 | - | |
| Vert. | 960.0 | 21.0 | - | 22.1 | 11.9 | 28.7 | - | 26.4 | - | 46.0 | - | 19.6 | - | |
| Vert. | 2773.2 | 49.2 | 43.8 | 28.3 | 4.6 | 33.3 | - | 48.9 | 43.4 | 73.9 | 53.9 | 25.1 | 10.5 | |
| Vert. | 3697.6 | 44.8 | 37.8 | 29.3 | 5.0 | 33.0 | - | 46.1 | 39.1 | 73.9 | 53.9 | 27.8 | 14.8 | |
| Vert. | 4622.0 | 45.0 | 38.3 | 31.1 | 5.4 | 32.7 | - | 48.8 | 42.1 | 73.9 | 53.9 | 25.2 | 11.8 | |
| Vert. | 5546.4 | 41.2 | 33.9 | 31.7 | 5.7 | 32.4 | - | 46.1 | 38.9 | 73.9 | 53.9 | 27.8 | 15.0 | Floor noise |
| Vert. | 6470.8 | 43.0 | 34.5 | 35.9 | 4.0 | 32.5 | - | 50.5 | 42.0 | 73.9 | 53.9 | 23.5 | 11.9 | Floor noise |
| Vert. | 7395.2 | 43.2 | 34.9 | 35.4 | 4.3 | 32.5 | - | 50.5 | 42.1 | 73.9 | 53.9 | 23.4 | 11.8 | Floor noise |
| Vert. | 8319.6 | 42.2 | 34.8 | 35.6 | 4.6 | 32.8 | - | 49.6 | 42.2 | 73.9 | 53.9 | 24.3 | 11.7 | Floor noise |
| Vert. | 9244.0 | 42.9 | 35.2 | 35.6 | 4.9 | 33.2 | - | 50.3 | 42.6 | 73.9 | 53.9 | 23.7 | 11.3 | Floor noise |

$$\text{Result (QP / PK)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amplifier)}$$

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

20dBc Data Sheet



| Polarity | Frequency | Reading (PK) | Ant Factor | Loss | Gain | Result | Limit | Margin | Remark |
|-------------|-----------|--------------|------------|------|------|----------|----------|--------|---------|
| [Hori/Vert] | [MHz] | [dBuV] | [dB/m] | [dB] | [dB] | [dBuV/m] | [dBuV/m] | [dB] | |
| Hori. | 924.4 | 95.7 | 22.1 | 11.5 | 28.8 | 100.5 | - | - | Carrier |
| Hori. | 928.0 | 30.2 | 22.1 | 11.5 | 28.8 | 35.1 | 80.5 | 45.4 | |
| Hori. | 1848.8 | 50.7 | 25.4 | 2.3 | 33.4 | 45.0 | 80.5 | 35.5 | |
| Vert. | 924.4 | 98.8 | 22.1 | 11.5 | 28.8 | 103.6 | - | - | Carrier |
| Vert. | 928.0 | 30.5 | 22.1 | 11.5 | 28.8 | 35.3 | 83.6 | 48.3 | |
| Vert. | 1848.8 | 58.9 | 25.4 | 2.3 | 33.4 | 53.1 | 83.6 | 30.5 | |

$$\text{Result} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))} - \text{Gain(Amprifier)}$$
Distance factor: 1 GHz - 10 GHz $20\log(3.75 \text{ m} / 3.0 \text{ m}) = 1.94 \text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
February 12, 2025
21 deg. C / 42 % RH
Takeshi Hiyaji
Tx 924.4 MHz

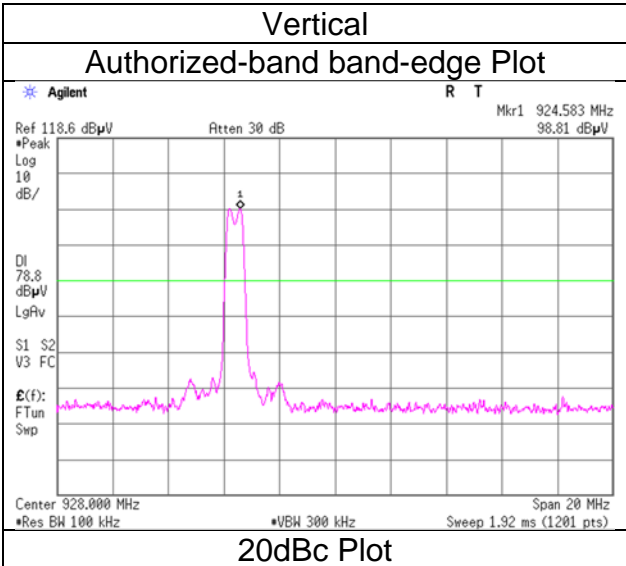
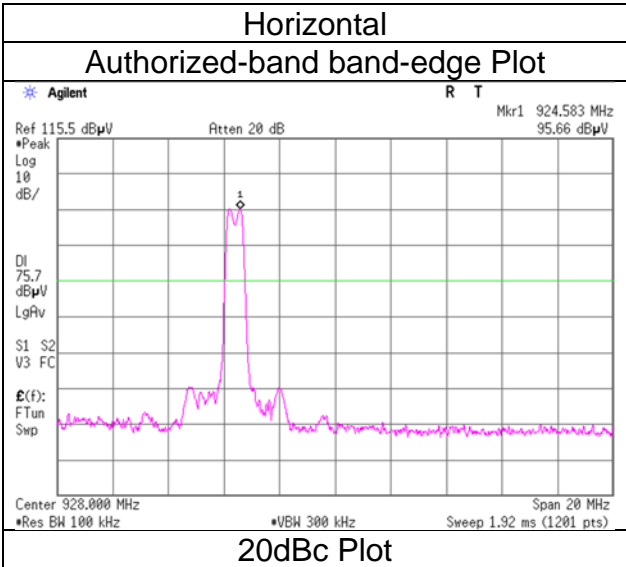


* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission (Plot data, Worst case mode for Maximum Peak Output Power)

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode


Ise EMC Lab.
No.2
February 12, 2025
21 deg. C / 42 % RH
Takeshi Hiyaji
Tx 920.4 MHz

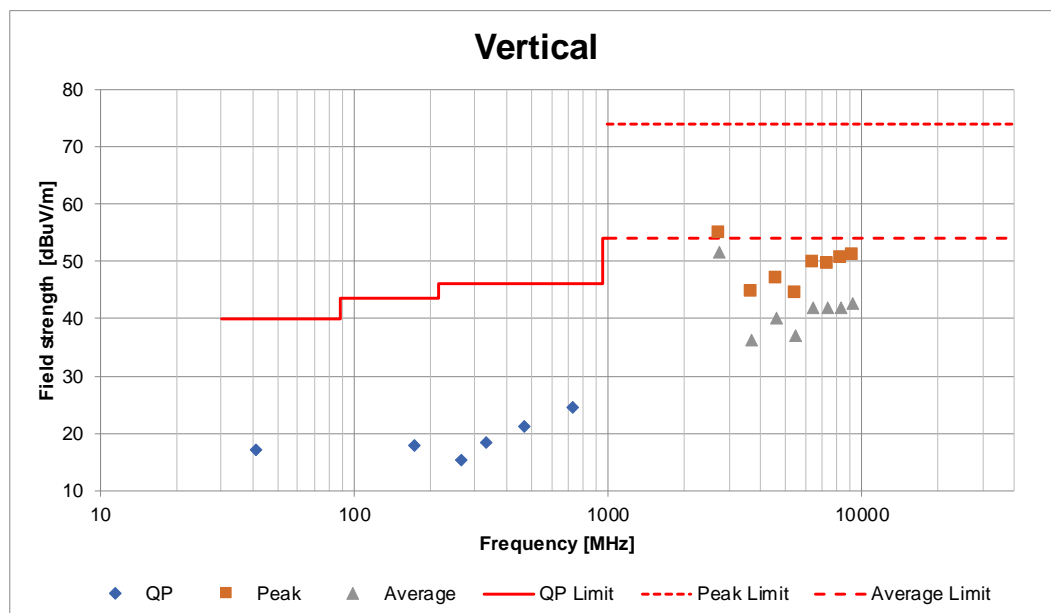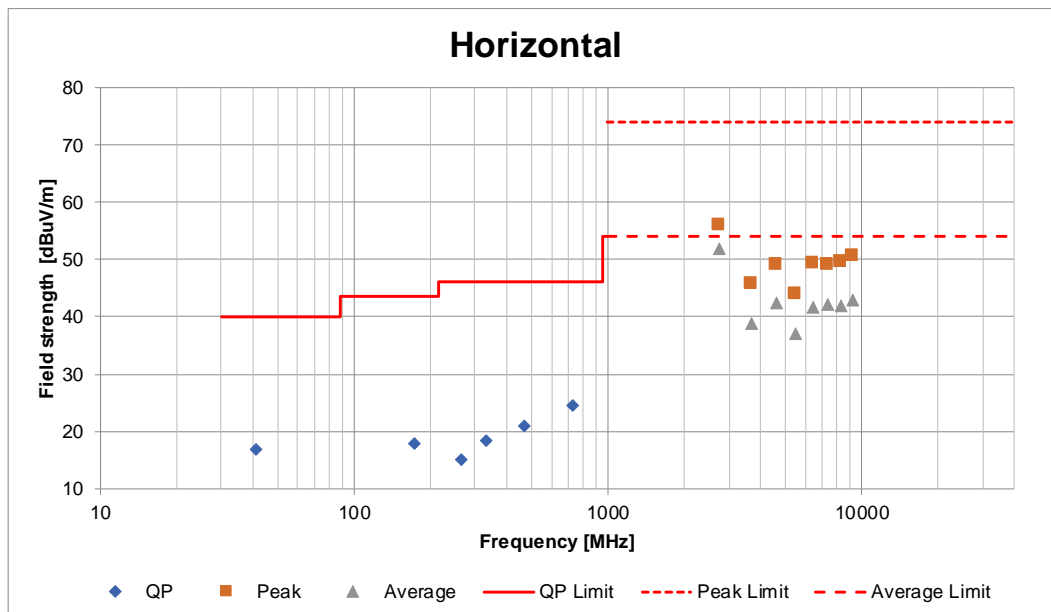

*These plots data contain sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place Ise EMC Lab.
 No. 4 Preparation Room
Date December 13, 2024
Temperature / Humidity 23 deg. C / 40 % RH
Engineer Junya Okuno
Mode Tx 920.4 MHz

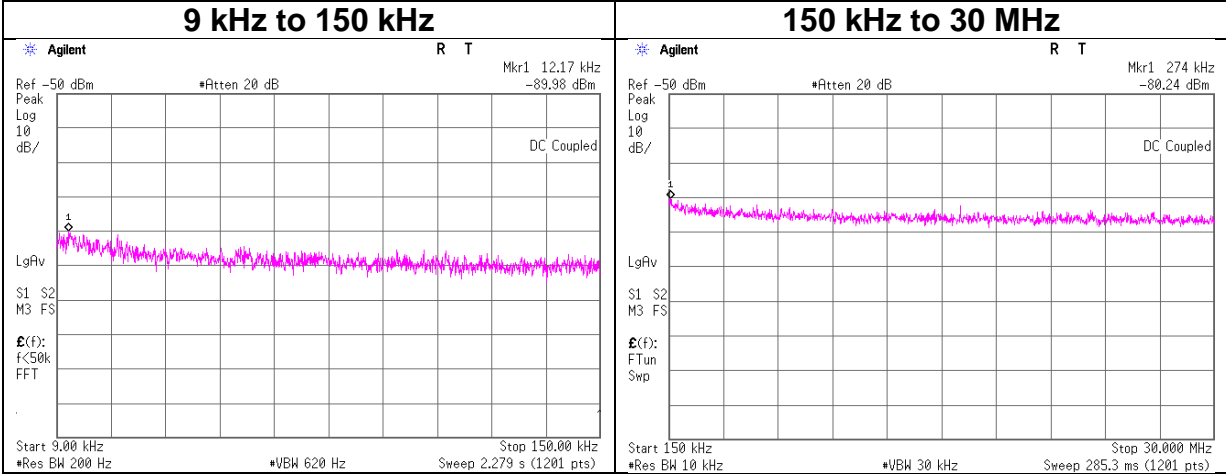

| Frequency | Reading | Cable Loss | Attenuator Loss | Antenna Gain* | N | EIRP | Distance | Ground bounce | E | Limit | Margin | Remark |
|-----------|---------|------------|-----------------|---------------|--------------------|-------|----------|---------------|---------------------------|----------|--------|--------|
| [kHz] | [dBm] | [dB] | [dB] | [dBi] | (Number of Output) | [dBm] | [m] | [dB] | (field strength) [dBuV/m] | [dBuV/m] | [dB] | |
| 12.17 | -90.0 | 0.00 | 9.7 | 2.0 | 1 | -78.3 | 300 | 6.0 | -17.0 | 45.8 | 62.8 | |
| 274.00 | -80.2 | 0.01 | 9.7 | 2.0 | 1 | -68.5 | 300 | 6.0 | -7.3 | 18.8 | 26.1 | |


E [dBuV/m] = EIRP [dBm] - 20 log (Distance [m]) + Ground bounce [dB] + 104.8 [dBuV/m]
EIRP[dBm] = Reading [dBm] + Cable loss [dB] + Attenuator Loss [dB] + Antenna gain [dBi] + 10 * log (N)
N: Number of output
*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Power Density

| | | |
|------------------------|------------------------|-----------------------|
| Test place | Ise EMC Lab. | |
| | No. 4 Preparation Room | No.6 measurement room |
| Date | December 13, 2024 | December 20, 2024 |
| Temperature / Humidity | 23 deg. C / 40 % RH | 22 deg. C / 37 % RH |
| Engineer | Junya Okuno | Yuichiro Yamazaki |
| Mode | Tx | |

| Freq. | Reading | Cable Loss | Atten. Loss | Result | Limit | Margin |
|-------|---------------|------------|-------------|---------------|---------------|--------|
| [MHz] | [dBm / 3 kHz] | [dB] | [dB] | [dBm / 3 kHz] | [dBm / 3 kHz] | [dB] |
| 920.4 | -3.95 | 0.27 | 9.80 | 6.12 | 8.00 | 1.88 |
| 924.4 | -4.09 | 0.27 | 9.80 | 5.98 | 8.00 | 2.02 |

Sample Calculation:
Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

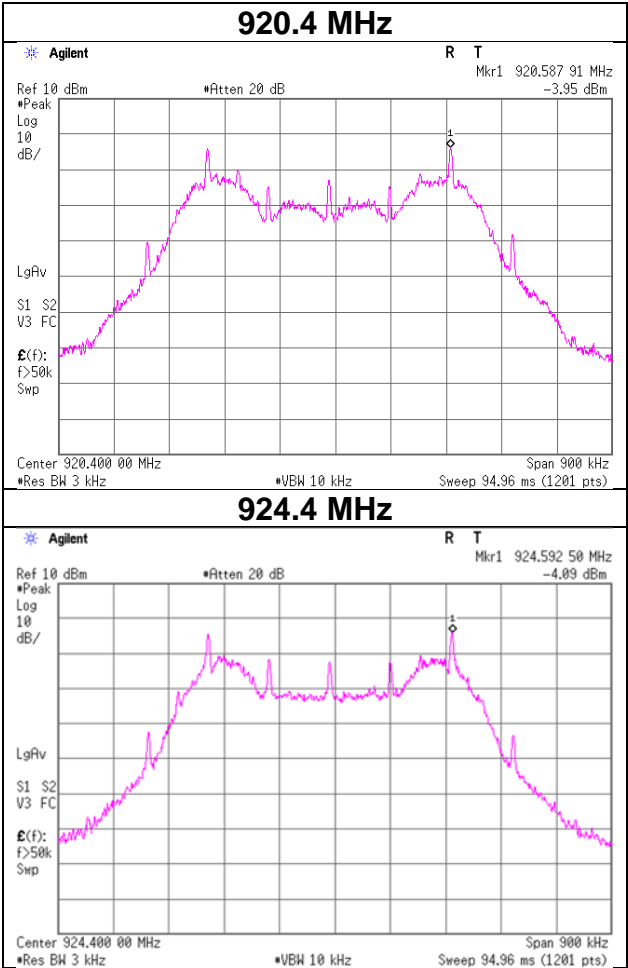

APPENDIX 2: Test Instruments

Test Equipment

| Test Item | LIMS ID | Description | Manufacturer | Model | Serial | Last Calibration Date | Cal Int |
|-----------|---------|-------------------------------------|--|-----------------------------|-------------|-----------------------|---------|
| AT | 141244 | Attenuator(10dB) | Weinschel - API Technologies Corp | WA8-10-34 | A198 | 02/04/2025 | 12 |
| AT | 141327 | Coaxial Cable | UL-ISE | - | - | 02/19/2025 | 12 |
| AT | 141545 | DIGITAL HiTESTER | HIOKI E. E. CORPORATION | 3805 | 51201148 | 02/01/2024 | 12 |
| AT | 141558 | Digital Tester(TRUE RMS MULTIMETER) | Fluke Corporation | 115 | 17930030 | 05/17/2024 | 12 |
| AT | 141805 | Power Meter | Anritsu Corporation | ML2495A | 6K00003338 | 08/22/2024 | 12 |
| AT | 141809 | Power Meter | Anritsu Corporation | ML2495A | 825002 | 05/22/2024 | 12 |
| AT | 141830 | Power sensor | Anritsu Corporation | MA2411B | 738285 | 05/22/2024 | 12 |
| AT | 141840 | Power sensor | Anritsu Corporation | MA2411B | 011737 | 08/22/2024 | 12 |
| AT | 141900 | Spectrum Analyzer | Keysight Technologies Inc | E4440A | MY46185823 | 11/13/2024 | 12 |
| AT | 141903 | Spectrum Analyzer | Keysight Technologies Inc | E4440A | MY46186390 | 01/30/2025 | 12 |
| AT | 244710 | Thermo-Hygrometer | HIOKI E. E. CORPORATION | LR5001 | 231202104 | 01/19/2025 | 12 |
| AT | 244712 | Thermo-Hygrometer | HIOKI E. E. CORPORATION | LR5001 | 231202106 | 01/19/2025 | 12 |
| AT | 248911 | Microwave Cable | Huber+Suhner | SF126E/11PC35/11PC35/1000MM | 537060/126E | 05/29/2024 | 12 |
| RE | 141227 | Microwave Cable | Junkosha | MMX221-00500DMSDMS | 1502S305 | 03/04/2024 | 12 |
| RE | 141265 | Logperiodic Antenna (200-1000MHz) | Schwarzbeck Mess-Elektronik OHG | VUSLP9111B | 9111B-190 | 07/10/2024 | 12 |
| RE | 141317 | Coaxial Cable | UL-ISE | - | - | 09/11/2024 | 12 |
| RE | 141331 | Attenuator(6dB) | TME | UFA-01 | - | 02/19/2025 | 12 |
| RE | 141427 | Biconical Antenna | Schwarzbeck Mess-Elektronik OHG | VHA9103B +BBA9106 | 08031 | 07/30/2024 | 12 |
| RE | 141512 | Horn Antenna 1-18GHz | Schwarzbeck Mess-Elektronik OHG | BBHA9120D | 254 | 10/17/2024 | 12 |
| RE | 141542 | Digital Tester | Fluke Corporation | FLUKE 26-3 | 78030611 | 08/06/2024 | 12 |
| RE | 141594 | Pre Amplifier | Keysight Technologies Inc | 8447D | 2944A10150 | 02/19/2025 | 12 |
| RE | 141950 | EMI Test Receiver | Rohde & Schwarz | ESU26 | 100412 | 11/28/2024 | 12 |
| RE | 141978 | Spectrum Analyzer | Keysight Technologies Inc | E4448A | MY46180899 | 05/09/2024 | 12 |
| RE | 142004 | AC2_Semi Anechoic Chamber(NSA) | TDK | Semi Anechoic Chamber 3m | DA-06902 | 12/12/2023 | 24 |
| RE | 142006 | AC2_Semi Anechoic Chamber(SVSWR) | TDK | Semi Anechoic Chamber 3m | DA-06902 | 04/17/2023 | 24 |
| RE | 142228 | Measure, Tape, Steel | KOMELON | KMC-36 | - | - | - |
| RE | 178648 | EMI measurement program | TSJ (Techno Science Japan) | TEPTO-DV | - | - | - |
| RE | 192072 | Band Rejection Filter(902-928MHz) | Wakoh Communication Industrial Co., Ltd. | WFR-481 | 19122541 | 03/19/2024 | 12 |
| RE | 238713 | Double Ridge Horn Antenna | Schwarzbeck Mess-Elektronik OHG | BBHA 9120 C | 688 | 09/02/2024 | 12 |
| RE | 242978 | High Pass Filter 1-13 GHz | Pasternak | PE87FL1018 | D.C. 2215 | 02/14/2025 | 12 |
| RE | 244707 | Thermo-Hygrometer | HIOKI E. E. CORPORATION | LR5001 | 231202102 | 01/19/2025 | 12 |

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

AT: Antenna Terminal Conducted test
RE: Radiated Emission