

Specification

Date : 2025-02-11

Controlled number : DZ-QF-RD004

PAGE NUMBER: S-1 Page 1 of 8

Material Name	DU1H_BT Antenna		
Material Code	01.1W07-DU1BTX0-BT00	Supplier Code	
Specification and model	DU1_BT Antenna, 2.4G Antenna, black line length 360MM±2MM, FPC black, white heat shrinkable	Applicable models	DU1H
Manufacturer	Shenzhen nanoant Communication Technology Co., Ltd.	Agent	
Supplier : Jiangxixi Check : Liguodong Approver : Qizhonglin			
Supplier Address/Contact information : Shenzhen Baoan District Xixiang Street Chentian Industrial Zone Chentian 4th , Building 34, Room 2001 , 0755-82928581			
Reason for approval	1、 New material : New model 2、 New Supplier : Improve quality ☐ Cut down the cost ☐ Improve delivery ☐ Supplier Resource Reserve ☐		
Material confirmation	Material Status	☐ Approve ☐ Disagree ☐ Limited approval Limited quantity : Reason for limit :	
	Submission of date	☐ Specification/Drawing Confirmation ☐ Relevant test reports have been submitted and qualified ☐ Device design problems and quality problems are solved	
	Buyer :	Date :	Supervisor review : Date :
	Structure/ID :	Date :	Supervisor review : Date :
	Hardware :	Date :	Supervisor review : Date :
	Quality :	Date :	Supervisor review : Date :
	PM :	Date :	Supervisor review : Date :
Judgment result of product department : ☐ Approve ☐ Disapprove Product Validation : Date :			

1.0 DESCRIPTIONS AND PART NUMBER:

1.1 DESCRIPTION;

The antenna mounts to the housing of the projector, And after that, the feed point on the prolongation of metal plate should firmly touch the contact provided on the PCB in the respective area.

1.2 PART NUMBER

Part number	Frequency Band	HH Part Number
	2.4G	

2.0 ELECTRICAL SPECIFICATIONS:

2.1 FREQUENCY BAND

WIFI 2.4G

2.2 IMPEDANCE - Nominal impedance: 50

2.3 ACTIVE TEST REPORT

Test equipment:

E5071C Network analyzer

SG24 Microwave anechoic chamber



1) Antenna position




2) Antenna Efdiciency

BT -2.4G

Gain&Efficiency 增益和效率			
frequency 频率(Hz)	gain 增益(dB)	efficiency 效率(dB)	efficiency 效率
2400M	3.11	-3.03	49.78%
2410M	3.37	-3.11	48.91%
2420M	3.4	-3.2	47.89%
2430M	3.28	-3.3	46.78%
2440M	3.2	-3.29	46.87%
2450M	3.14	-3.19	48.02%
2460M	3.16	-3.07	49.3%
2470M	3.25	-2.97	50.42%
2480M	3.22	-3	50.16%
2490M	3.34	-2.97	50.51%
2500M	3.51	-3.01	50.01%

3) Pattern

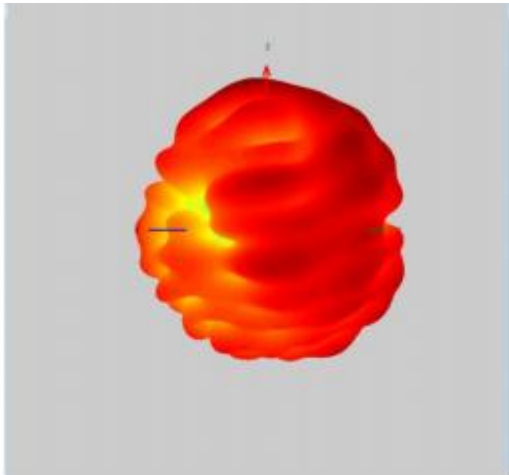

BT Antenna

4) Antenna S11



Date : 2025-02-11

Controlled number : DZ-QF-RD004


PAGE NUMBER: S-1 Page 5 of 8

5) Isolation


WIFI0/WIFI1




WIFI0/BT

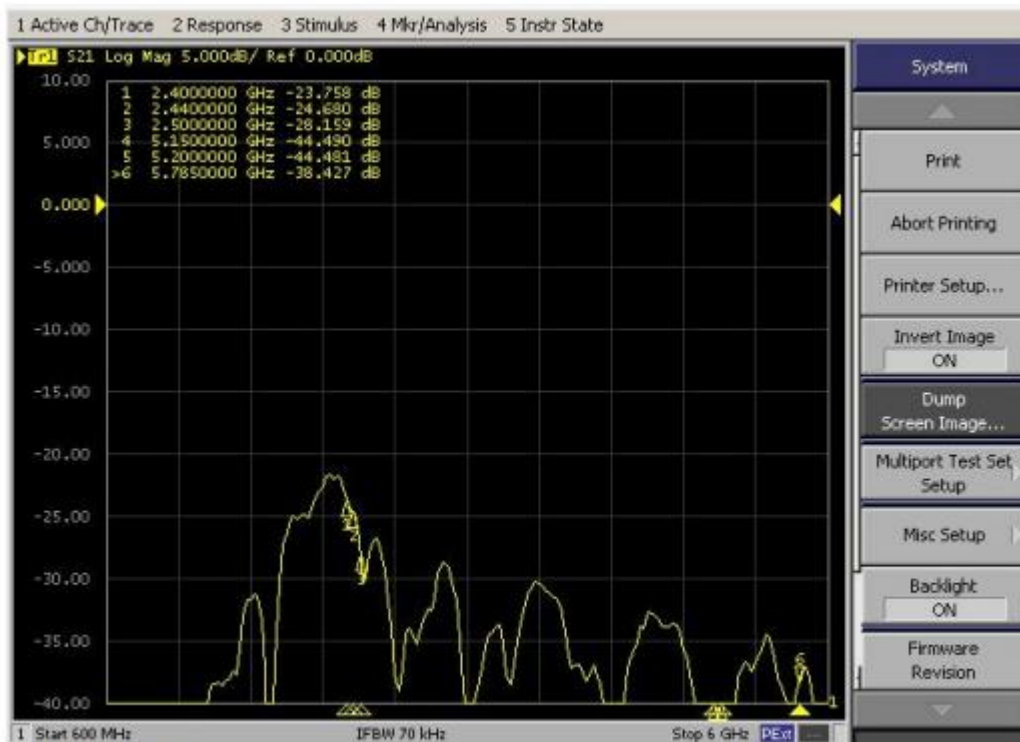


WiFi1/BT

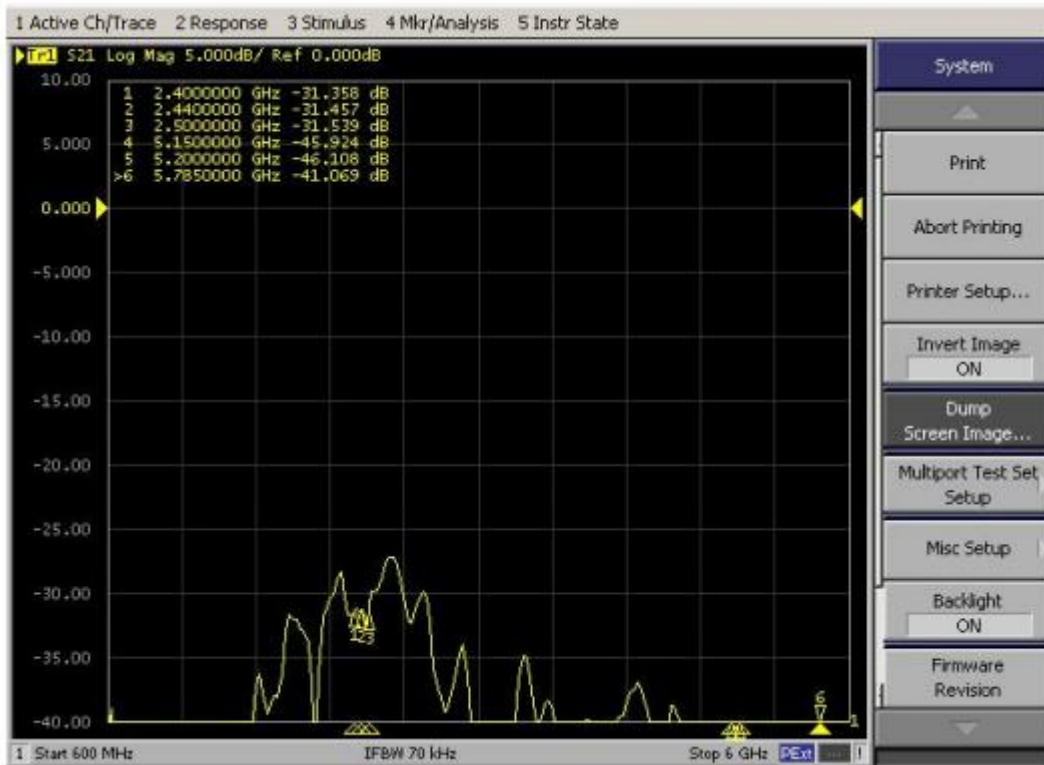


6) Treatment and suggestions

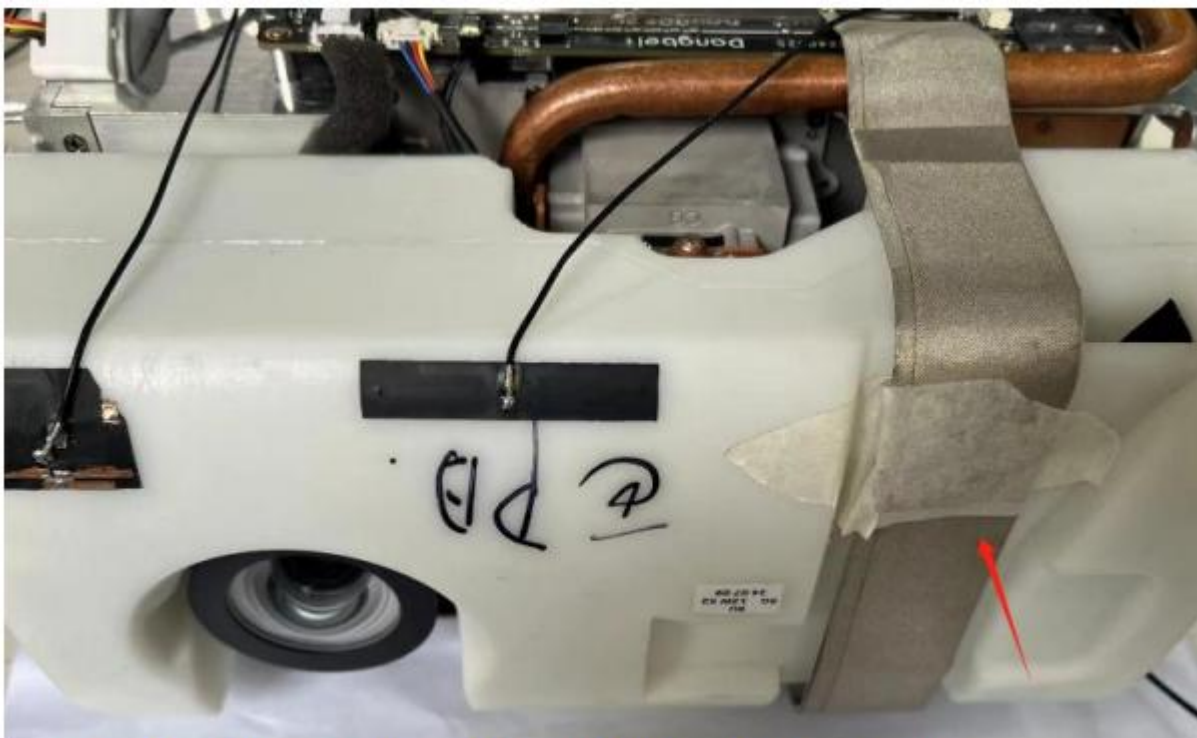

DLP cable shall be covered with conductive cloth for shielding

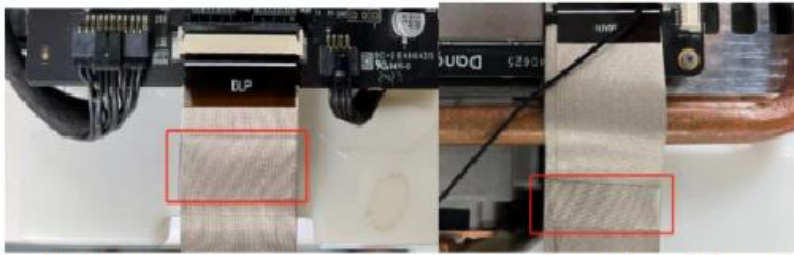

DLP cable shall be wrapped with conductive cloth and the metal frame shall be well grounded

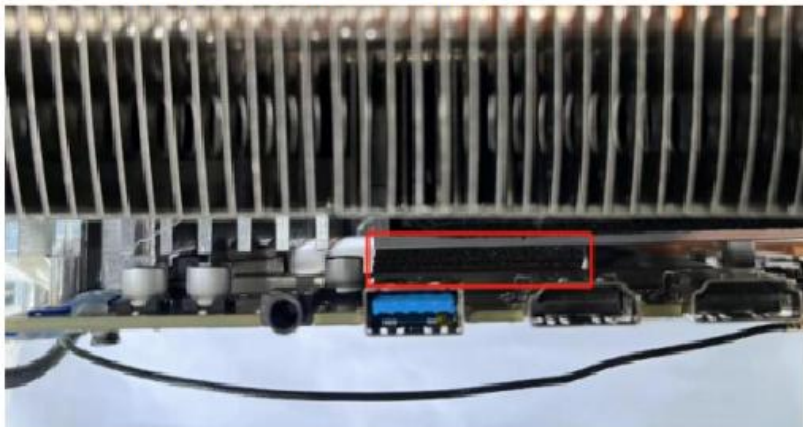

The main chip needs to be pasted with conductive wool to ensure good shielding

3.0 MECHANICAL SPECIFICATIONS:

3.1 MECHANICAL CONFIGURATION

The appearance of the antenna is in accordance with drawing

3.2 CONNECTOR TYPE

The connector type is an embedded type

4.0 ENVIRONMENTAL SPECIFICATIONS

4.1 TEMPERATURE

Operating Temperature Range: -40 °C ~ +85 °C

Storage Temperature Range: -40 °C ~ +120 °C

4.2 SALT SPRAY TEST

Antenna be exposed in a 35°C, 5% salt fog chamber for 24 hours then check the appearance and performance against the specifications in normal temperature.

4.3 STATIC HUMIDITY TEST

The antenna is subjected to the following test:

Temperatures: +70°C and 90%--95%RH

Test Duration: 24 Hours

The antenna should not undergo any structural or functional change and remain within the electrical/mechanical specification.

5.0 PACKAGING

The antennas will be packed in bags, There are 100 or 200 /300antennas per bag. The bags are packed in corrugated fibreboard over box

图纸 Drawing :

