

# MEASUREMENT REPORT

## of

### *Wireless LAN Access Point*

**Applicant** : EDIMAX TECHNOLOGY CO., LTD.  
**Product Name** : Wireless LAN Access Point  
**Model Name** : as Appendix A  
**FCC ID** : NDD9572060304  
**Report No.** : E3015359

Tested by :

***Training Research Co., Ltd.***

**TEL : 886-2-26935155      FAX : 886-2-26934440**

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

## CERTIFICATION

**We here by verify that:**

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

**Applicant** : EDIMAX TECHNOLOGY CO., LTD.  
**Applicant address** : 7, LANE 116, WU-KUNG SECOND ROAD, WU-KU  
INDUSTRIAL PARK, TAIPEI HSIEN, TAIWAN  
**Product Name** : Wireless LAN Access Point  
**Model Name** : as Appendix A  
**FCC ID** : NDD9572060304  
**Report No.** : E3015359  
**Test Date** : November 25, 2003

Prepared by: \_\_\_\_\_

*Jack Tsai*

Approved by: \_\_\_\_\_

*Frank Tsai*

**Conditions of issue :**

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**

**★ NVLAP LAB CODE: 200174-0**

## ***Federal Communications Commission***

### **Declaration of Conformity (DoC)**

**For the Following Equipment:****Product name : Wireless LAN Access Point****Model name : as Appendix A****Trade name : as Appendix A**

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number: E3015359

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,  
including interference that may cause undesired operation

<i><b>Manufacturer</b></i>	<i><b>USA local representative</b></i>
<b>Company name:</b> Edimax Technology Co., Ltd.	Edimax Computer Company
<b>Computer address:</b> 7, LANE 116, WU-KUNG SECOND ROAD, WU-KU INDUSTRIAL PARK, TAIPEI HSIEN, TAIWAN	3350 Scott Blvd., Bldg. 15, Santa Clara, CA 95054
<b>ZIP / Postal code</b> 221	
<b>Contact person:</b> Arthur Shen	
<b>Title:</b> RD Manager	
<b>Internet e-mail address:</b> arthur.shen@edimax.com.tw	
<b>Tel / Fax:</b> 886-2-22995648 / 886-2-22995647	1-408-496-1105 / 1-408-980-1530

## ***Tables of Contents***

<b>I. GENERAL .....</b>	<b>6</b>
1.1 Introduction .....	6
1.2 Description of EUT .....	6
1.3 Description of Support Equipment .....	7
1.4 Test method .....	10
1.5 Configuration of System Under Test .....	11
1.6 Verify the Frequency and Channel .....	13
1.7 Test Procedure .....	13
1.8 Location of the Test Site .....	14
1.9 General Test Condition .....	14
 <b>II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators .....</b>	 <b>15</b>
 <b>III. Section 15.203 : Antenna Requirement.....</b>	 <b>16</b>
 <b>IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units .....</b>	 <b>17</b>
4.1 Test Condition & Setup .....	17
4.2 List of Test Instruments .....	17
4.3 Test Result of Conducted Emissions .....	18
Channel 01 .....	18
Channel 06 .....	19
Channel 11 .....	20
Standby mode .....	21
 <b>V. Section 15.247(a) : Technical Description of the EUT .....</b>	 <b>22</b>
 <b>VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System .....</b>	 <b>23</b>
6.1 Test Condition & Setup .....	23
6.2 Test Instruments Configuration .....	23
6.3 List of Test Instruments .....	23
6.4 Test Result of Bandwidth .....	23

<b>VII. Section 15.247(b) : Power Output</b>	27
7.1 Test Condition & Setup	27
7.2 List of Test Instruments	27
7.3 Test Result	27
<b>VIII. Section 15.247(c) : Spurious Emissions (Radiated)</b>	28
8.1 Test Condition & Setup	28
8.2 List of Test Instruments	29
8.3 Test Result of Spurious Radiated Emissions	30
30MHz to 1GHz for Standby mode	30
30MHz to 1GHz for TX mode	31
1GHz to 25GHz for CH01	32
1GHz to 25GHz for CH06	33
1GHz to 25GHz for CH06	34
8.4 Test Result of Bandedge	35
Channel 01	36
Channel 11	37
<b>IX. Section 15.247(d) : Power Spectral Density</b>	38
9.1 Test Condition & Setup	38
9.2 Test Instruments Configuration	38
9.3 List of Test Instruments	38
9.4 Test Result of Power Spectral Density	38
Channel 01	39
Channel 06	40
Channel 11	41
<b>Appendix A: Brand name and Modem name List</b>	42

## **I . GENERAL**

### **1.1 Introduction**

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

### **1.2 Description of EUT**

**Product Name** : Wireless LAN Access Point

**Model Name** : as Appendix A

**Granted FCC ID** : NDD9572060304

**Frequency Range** : 2.412 GHz ~ 2.462GHz

**Support Channel** : 11 Channels

**Modulation Skill** : DBPSK, DQPSK, CCK

**Power Type** : By the power adaptor  
Manufacturer: DVE  
Model: DVR-1250-B11  
I/P: 120VAC, 60Hz,  
O/P: 12VDC, 500mA  
Power cable 185cm length, non-shielded, no ferrite core

**Data Cable** : RJ45 cross cable, 30m length, non-shielded, no ferrite core  
(Intentional test)  
RJ45 cross cable, 1m length, non-shielded, no ferrite core  
(Unintentional test)

### 1.3 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

**Notebook : IBM Think Pad X20**

Model No. : 2662-11T

Serial No. : FX-1192200/09

FCC ID : N/A, DoC Approved (Declaration of Confirmation) Approved

檢磁： 3892B565

**Adaptor : IBM**

Model No. : PA2450U

Serial No. : 02K6654

FCC ID : N/A, DoC Approved

Power type : I/P: 100 ~ 240vac, 50 ~ 60 Hz, 0.5A ~ 1.2A; O/P: 16Vdc, 4.5A

Power cord : Non-shielded, 1.80m length, Plastic, with ferrite core

**PC : IBM 6840; HP Pavilion**

Model No. : 6840MJV; P8574A

Serial No. : 96CC 0C1; TW21920435

FCC ID : N/A, DoC

檢磁 : 3892I279; 3902H097

Power type : 100 ~ 127VAC / 4A, 200 ~ 240VAC/2A, 50 ~ 60Hz, 5A, Switching

Power cord : Non-shielded, 2.33m length, Plastic hood, No ferrite core

**Printer : HP**

Model No. : C6464A, C2642A

Serial No. : TH16LEB5PK, SG69A196GV

FCC ID : None (DoC Approved), B94C2642X

檢磁 : 3892H381, None

Power type : Switching adaptor

Power cord : Non-shielded, 173cm length, No ferrite core

(between adaptor and AC source)

Non-shielded, 180cm length, with ferrite core

(between printer and adaptor)

Data cable : Shielded, 1.70m length, No ferrite core

**Monitor : HP 15' Color Monitor, HP pavilion mx70**

Model No. : D2827A, P1283A  
Serial No. : KR91379759, TWTBQ00397  
FCC ID : C5F7NFCMC1518X  
檢磁 : 3872B039  
Power type : 110 ~ 240 VAC / 50 ~ 60 Hz, Switching  
Power cord : Shielded, 1.83m length, No ferrite core  
Data cable : Shielded, 1.46m length, with two ferrite cores

**Modem : ACEEX**

Model No. : XDM-56V14  
FCC ID : IFAXDM-56V14  
Power type : Linear  
Power cord : Non-shielded, 1.9m length, No ferrite cord  
Data cable : RS232, Shielded, 1.2m length, No ferrite core  
RJ11C x 2, 7' length non-shielded, No ferrite core

**PS/2 Mouse : HP**

Model No. : M-S34  
Serial No. : LZB90714106, LZC84446151  
FCC ID : DZL211029  
檢磁 : 4862A011  
Power type : By PC  
Power cord : Non-shielded, 1.88m length, No ferrite core

**PS/2 Keyboard : HP**

Model No. : 5187-0343, SK-2501K  
Serial No. : BE21700404, M981216213  
FCC ID : DoC Approved, GYUR38SK  
檢磁 : 3892C981, 3862A621  
Power type : By PC  
Data cable : Shielded, 1.73m length, Plastic hood, No ferrite core



**USB gamepad : Rockfire**  
Model No. : QF-337uv  
Serial No. : 10600545, KR91379759  
FCC ID : None (CE approval)  
檢磁 : 3862A574  
Power type : By computer  
Data Cable : Shielded, 1.81m length, Plastic, with ferrite core

**Notebook : ASUSTek Computer**  
Model No. : AB00F  
Serial No. : 24NP016361  
FCC ID : DoC Approved  
BSMI : 41016012  
Power type : 100 ~ 240VAC, 1A 50/60 Hz, Switching  
**Adaptor : LITE-ON Electronics, Inc.**  
Model No. : PA-1530-01  
Serial No. : 00151184  
FCC ID : DoC Approved  
檢磁 : 3882B259  
Power cable : Non-shielded, 1.72m length, Plastic hood, No ferrite core  
(Between power adaptor and AC power source)  
Power cable : Shielded, 1.48m length, Plastic hood, with ferrite core  
(Between power adaptor and notebook)

**WLAN Card : Gemtek Technology Co., Ltd.**  
Model No. : C911003  
FCC ID : MXF-C911003


**LAN Card : D-Link**  
Model No. : DFE-530TX  
Serial No. : 0050BAE32FF3, 0050BAE3158B  
FCC ID : N/A, DoC Approved  
Power type : Powered by PC

#### **1.4 Test method**

- 1) The PC and test fixture is connected by RS-232 cable and the LAN of PC connected to EUT, Using the test fixture control EUT via PC.
- 2) The test fixture was moving when test mode set finish.
- 3) The test software provided by the manufacturer.
- 4) Set different channel (CH1/CH6/CH11) being tested, and making EUT to as follow mode:
  - (a) Radiated for intentional test:  
making EUT to the mode of continuous transmission
  - (b) Conducted and Radiated for unintentional test:  
making EUT to the linking (Rx/Tx) mode with far support equipments

## 1.5 Configuration of System Under Test


### 1.5.1 Conducted and Radiated for unintentional

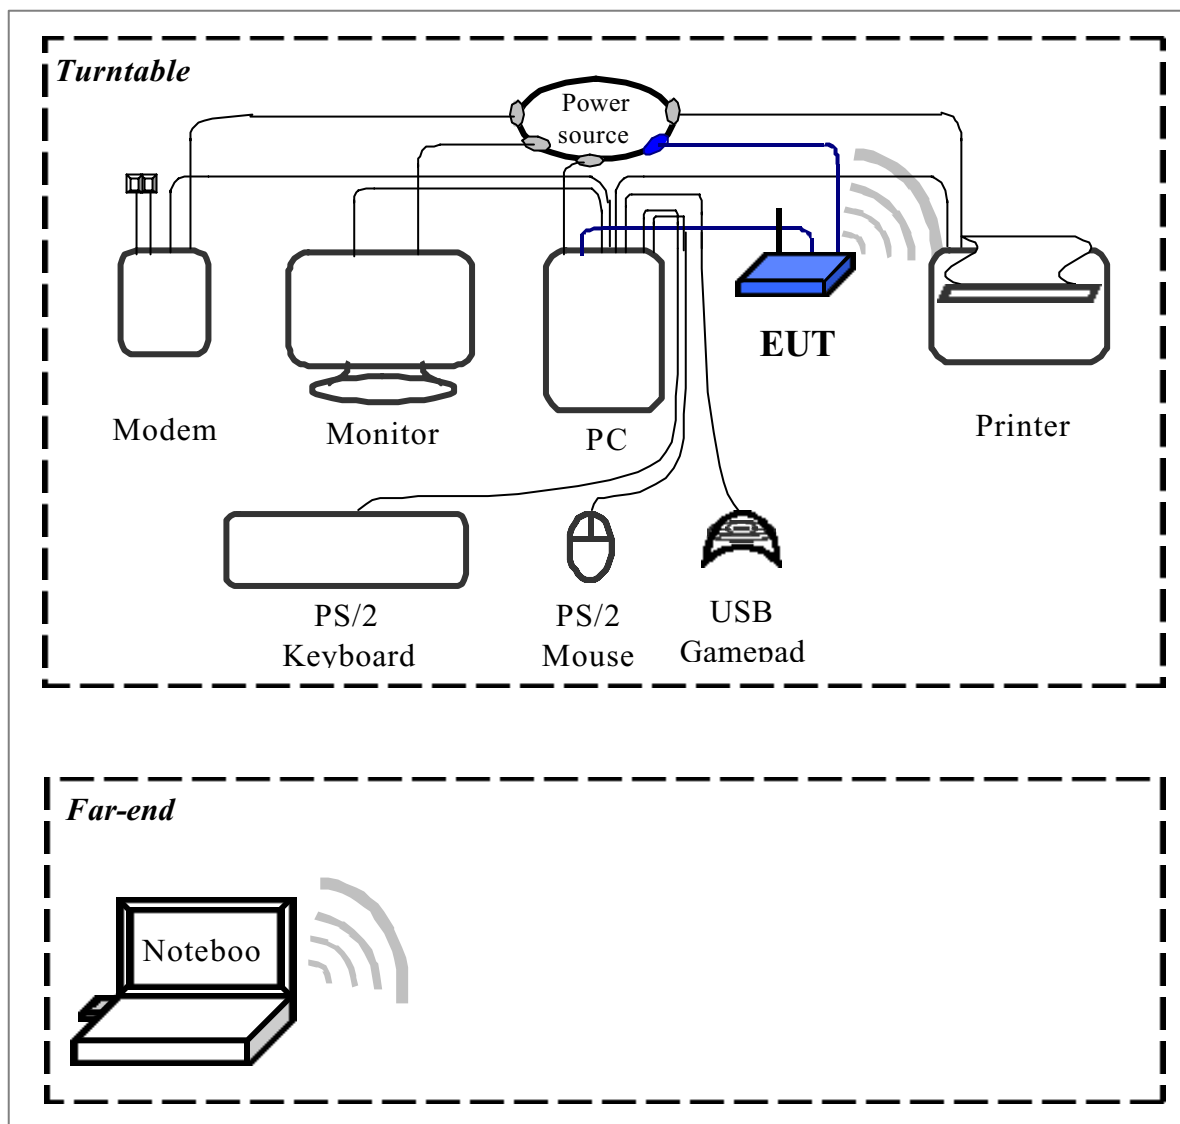

#### Connections of Equipment

- PC:**
- \*Parallel Port --- a printer
  - \*VGA Port --- a monitor
  - \*Serial Port --- an external modem
  - \*USB Port --- a USB gamepad
  - \*LAN Port --- EUT
  - \*PS/2-key Port --- a PS/2 keyboard
  - \*PS/2-mouse Port --- a PS/2 mouse

### 1.5.2 Radiated of intentional

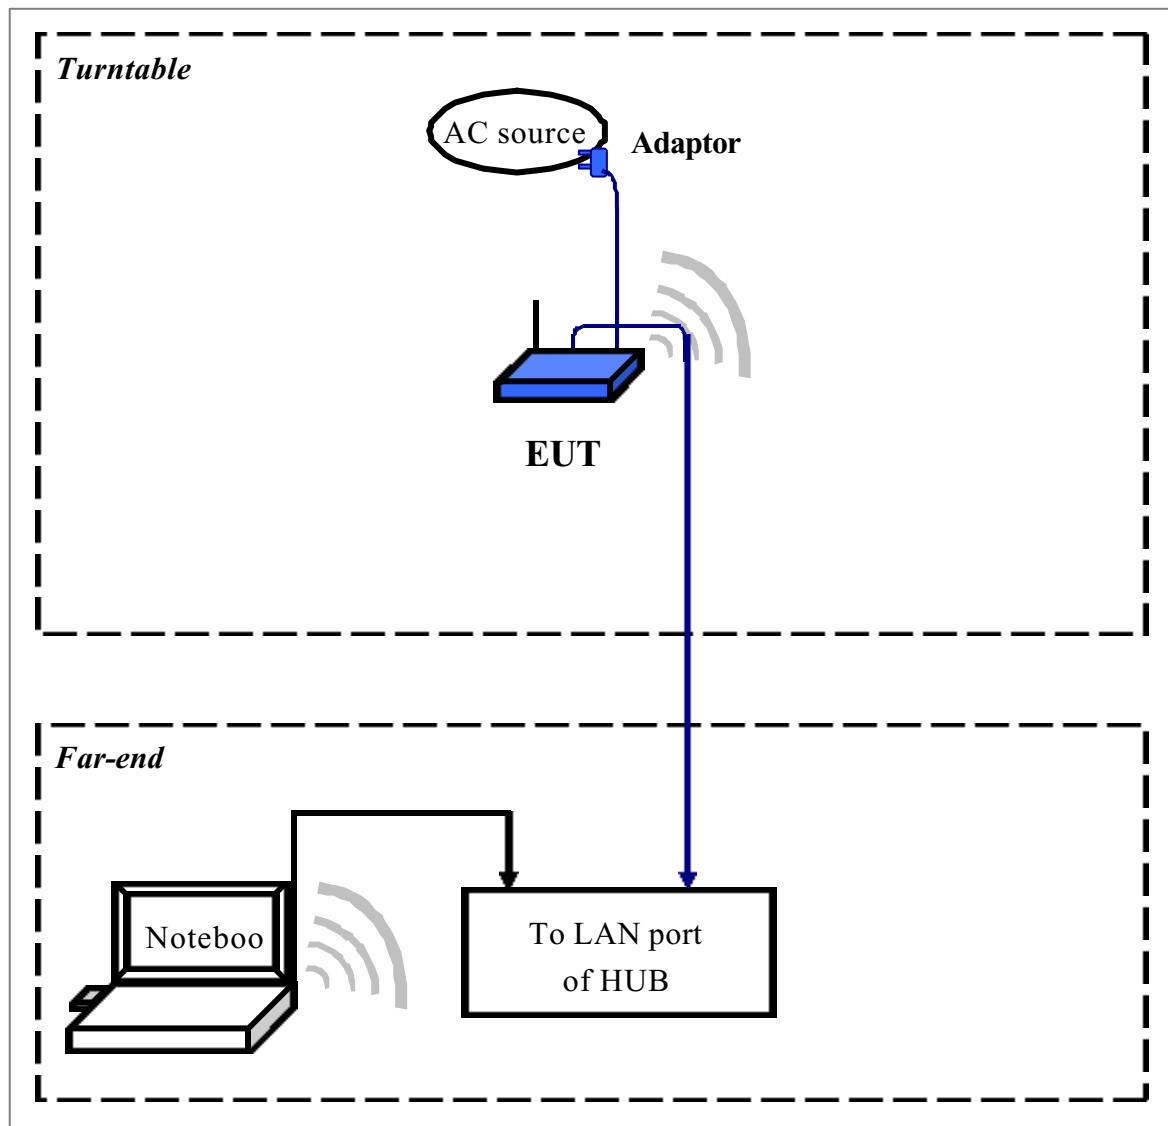

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by computer.

The setting up procedure was recorded in 1.4 test method.

### 1.6 Verify the Frequency and Channel

CH	1	2	3	4	5	6	7	8	9	10
0	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457
1	2462	---	---	---	---	---	---	---	---	---

- Note: 1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.  
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:  
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

### 1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on 1.4 test method, the detail setup was written on each test item.

### **1.8 Location of the Test Site**

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

### **1.9 General Test Condition**

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.4 test method.

## **II. Section 15.101(a): Equipment authorization of unintentional radiators**

The EUT equipped with a LAN interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Sect.15.107 (Conducted limits) and Sect.15.109 (Radiated emission limits) is same as Sect.15.207 and 15.247(C).

### **III. Section 15.203: Antenna requirement**

The EUT has an integral (detachable) antenna. **The detachable antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector.** The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

The antenna specification of list as follows, (Please Ref. to antenna specification)

Manufacturer	:	NINPUT OUTPUT ENTERPRISE CORP.
Part No.	:	W205-108-D200
Antenna Type	:	Dipole
Antenna Gain	:	2.0dBi (Max.)
Connector	:	Reverse SMA Plug
Cable	:	RG-178



## IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

### 4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There is a test condition apply in this test item, the test procedure description as <1.4>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

### 4.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>	
				Last time	Next time
EMI Receiver	8546A	HP	3520A00242	07/28/03	07/28/04
RF Filter Section	85460A	HP	3448A00217	07/28/03	07/28/04
LISN (EUT)	LISN-01	TRC	9912-03,04	07/21/03	07/21/04
LISN (Support E.)	LISN-01	TRC	9912-05	06/21/03	06/21/04
Auto Switch Box	ASB-01	TRC	9904-01	11/20/03	11/20/04

( $< 30\text{MHz}$ )

The level of confidence of 95%, the uncertainty of measurement of conducted emission is +2.43dB / -2.53dB.

### 4.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord.

Test Conditions: Temperature : 24.5 °C Humidity : 58.0 % RH

Test mode: Channel 1

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	3510.000	28.61	---	---	56.00	46.00	-17.39
	3702.000	28.59	---	---	56.00	46.00	-17.41
	4092.000	30.11	---	---	56.00	46.00	-15.89
	4523.000	30.43	---	---	56.00	46.00	-15.57
	12190.000	31.64	---	---	60.00	50.00	-18.36
	14120.000	34.77	---	---	60.00	50.00	-15.23
	16230.000	36.25	---	---	60.00	50.00	-13.75
	17710.000	34.36	---	---	60.00	50.00	-15.64
	20200.000	31.62	---	---	60.00	50.00	-18.38
	23120.000	31.71	---	---	60.00	50.00	-18.29
Line 2	156.000	38.55	---	---	65.83	55.83	-17.28
	163.000	37.15	---	---	65.63	55.63	-18.48
	205.000	35.88	---	---	64.43	54.43	-18.55
	257.000	33.78	---	---	62.94	52.94	-19.16
	3510.000	29.62	---	---	56.00	46.00	-16.38
	4210.000	30.88	---	---	56.00	46.00	-15.12
	14190.000	33.91	---	---	60.00	50.00	-16.09
	16230.000	35.97	---	---	60.00	50.00	-14.03
	17710.000	34.41	---	---	60.00	50.00	-15.59
	23120.000	34.26	---	---	60.00	50.00	-15.74

NOTE:

(1) Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*

(2) A "+" sign in the margin column means the emission is OVER the Class B Limit and

"-" sign of means UNDER the Class B limit

**Test mode: Channel 6**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBμV)</b>	<b>QP (dBμV)</b>	<b>Average (dBμV)</b>	<b>QP-limit (dBμV)</b>	<b>AVG-limit (dBμV)</b>	<b>Margin (dB)</b>
Line 1	2437.000	26.34	---	---	56.00	46.00	-19.66
	2925.000	26.36	---	---	56.00	46.00	-19.64
	3606.000	29.21	---	---	56.00	46.00	-16.79
	4092.000	30.13	---	---	56.00	46.00	-15.87
	5130.000	27.44	---	---	60.00	50.00	-22.56
	16230.000	33.95	---	---	60.00	50.00	-16.05
	18240.000	33.28	---	---	60.00	50.00	-16.72
	20200.000	31.23	---	---	60.00	50.00	-18.77
	23120.000	32.71	---	---	60.00	50.00	-17.29
	27080.000	29.57	---	---	60.00	50.00	-20.43
Line 2	145.770	54.86	26.93	25.96	65.29	55.29	-29.33
	189.000	51.45	---	---	64.89	54.89	-3.44
	199.000	41.75	---	---	64.60	54.60	-12.85
	236.000	30.81	---	---	63.54	53.54	-22.73
	288.000	26.64	---	---	62.06	52.06	-25.42
	3094.000	30.02	---	---	56.00	46.00	-15.98
	4288.000	31.04	---	---	56.00	46.00	-14.96
	16230.000	35.82	---	---	60.00	50.00	-14.18
	18240.000	34.82	---	---	60.00	50.00	-15.18
	23120.000	34.03	---	---	60.00	50.00	-15.97

**Test mode: Channel 11**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBμV)</b>	<b>QP (dBμV)</b>	<b>Average (dBμV)</b>	<b>QP-limit (dBμV)</b>	<b>AVG-limit (dBμV)</b>	<b>Margin (dB)</b>
Line 1	3253.000	29.40	---	---	56.00	46.00	-16.60
	3936.000	29.78	---	---	56.00	46.00	-16.22
	4619.000	27.90	---	---	56.00	46.00	-18.10
	12190.000	32.55	---	---	60.00	50.00	-17.45
	14250.000	34.75	---	---	60.00	50.00	-15.25
	16160.000	35.06	---	---	60.00	50.00	-14.94
	18240.000	34.56	---	---	60.00	50.00	-15.44
	23120.000	32.62	---	---	60.00	50.00	-17.38
Line 2	158.000	50.68	---	---	65.77	55.77	-5.09
	185.000	48.28	---	---	65.00	55.00	-6.72
	229.000	44.45	---	---	63.74	53.74	-9.29
	252.000	41.79	---	---	63.09	53.09	-11.30
	341.000	37.54	---	---	60.54	50.54	-13.00
	480.000	32.03	---	---	56.57	46.57	-14.54
	16230.000	34.44	---	---	60.00	50.00	-15.56
	18240.000	33.85	---	---	60.00	50.00	-16.15
	23120.000	34.28	---	---	60.00	50.00	-15.72

**Test mode: Standby**

<b>Power Connected Emissions</b>					<b>FCC Class B</b>		
<b>Conductor</b>	<b>Frequency (KHz)</b>	<b>Peak (dBμV)</b>	<b>QP (dBμV)</b>	<b>Average (dBμV)</b>	<b>QP-limit (dBμV)</b>	<b>AVG-limit (dBμV)</b>	<b>Margin (dB)</b>
Line 1	8520.000	37.75	---	---	60.00	50.00	-12.25
	9200.000	36.50	---	---	60.00	50.00	-13.50
	9930.000	38.37	---	---	60.00	50.00	-11.63
	11340.000	36.78	---	---	60.00	50.00	-13.22
	13640.000	32.71	---	---	60.00	50.00	-17.29
	18240.000	29.51	---	---	60.00	50.00	-20.49
	23120.000	32.67	---	---	60.00	50.00	-17.33
	26540.000	33.29	---	---	60.00	50.00	-16.71
Line 2	8520.000	35.90	---	---	60.00	50.00	-14.10
	9240.000	33.28	---	---	60.00	50.00	-16.72
	9930.000	36.09	---	---	60.00	50.00	-13.91
	11340.000	34.87	---	---	60.00	50.00	-15.13
	14190.000	30.57	---	---	60.00	50.00	-19.43
	18240.000	30.19	---	---	60.00	50.00	-19.81
	23120.000	34.24	---	---	60.00	50.00	-15.76
	26540.000	35.43	---	---	60.00	50.00	-14.57

## **V. Section 15.247 (a): Technical description of the EUT**


*Direct Sequence System* is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the Direct sequence spread spectrum system.

## VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

### 6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

### 6.2 Test Instruments Configuration

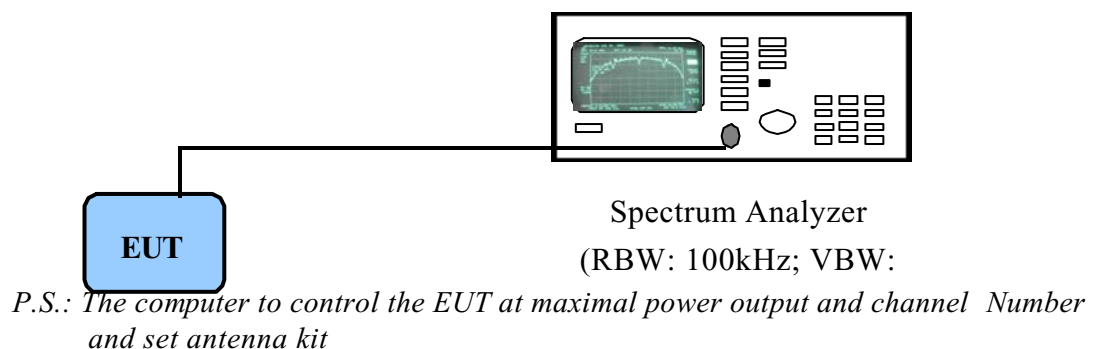

### 6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/30/03	09/30/04

### 6.4 Test Result of Bandwidth

Channel	Bandwidth
01	8.88 MHz
06	8.88 MHz
11	8.88 MHz


- Note: 1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth ( $RBW$ )=100kHz and set the  $span \gg RBW$ . The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
2. The attachments show these on the following pages.

**6dB Bandwidth of Channel 1: 8.88MHz (The minimum 6dB BW at least 500kHz)**






**6dB Bandwidth of Channel 6: 8.88MHz (The minimum 6dB BW at least 500kHz)**

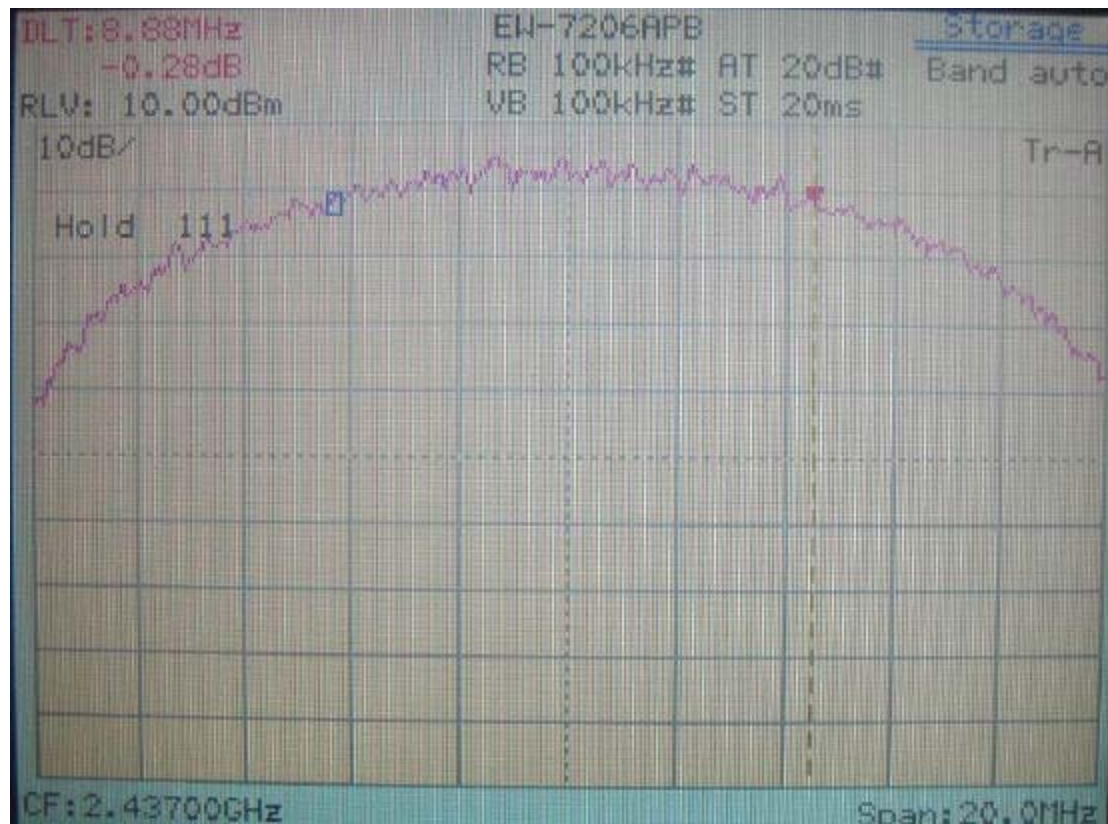


**6dB Bandwidth of Channel 11: 8.88MHz (The minimum 6dB BW at least 500kHz)**

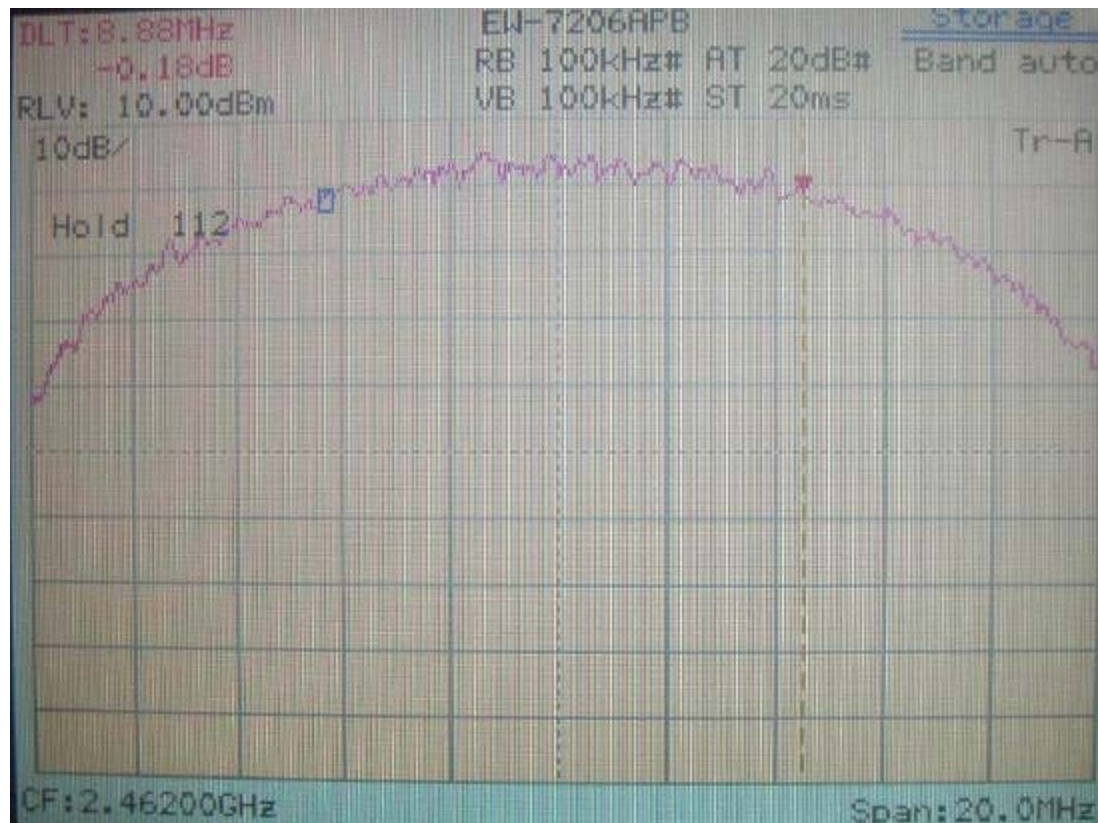

## VII. Section 15.247(b): Power Output

### 7.1 Test Condition & Setup

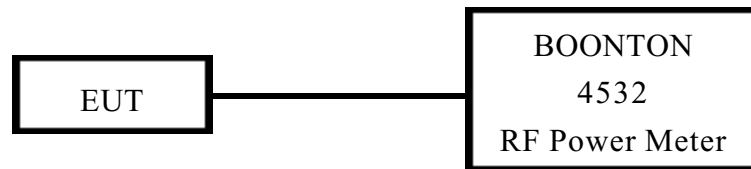

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every tests. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

### 7.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
RF Power Meter	4532	BOONTON	117501	04/12/03	04/12/04
Peak Power Sensor	57340	BOONTON	2698	04/12/03	04/12/04

### 7.3 Test Result

#### Formula:

Signal generator + |Cable loss| = Output peak power

Channel	Signal Generator	Cable Loss	Output peak power	
	dBm		dBm	mW
CH 01	17.52	0.70	18.22	66.374
CH 06	17.19	0.70	17.89	61.518
CH 11	17.06	0.70	17.76	59.704

## VIII. Section 15.247 (C): Spurious Emissions (Radiated)

### 8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions were noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8546A EMI Receiver, CHASE whole range Bi-log antenna (Model No.: CBL 6141A) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/CMT Horn Antenna (Model 3115 / RA42-K-F-4B-C) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.4 test method >

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBμV/m) is determined by algebraically adding the measured reading in dBμV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

**For frequency between 30MHz to 1000MHz**

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

$F_{Ia}$  : Actual Field Intensity

$F_{Ir}$  : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

**For frequency between 1GHz to 25GHz**

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

$F_{Ia}$  : Actual Field Intensity

$F_{Ir}$  : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

## 8.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	HP	3520A00242	07/28/03	07/28/04
RF Filter Section	85460A	HP	3448A00217	07/28/03	07/28/04
Bi-log Antenna	CBL 6141A	CHASE	4206	05/27/03	05/27/04
Auto Switch Box	ASB-01	TRC	9904-01	11/20/03	11/20/04
(>30MHz)					
Spectrum Analyzer	8564E	HP	3720A00840	07/23/03	07/23/04
Microwave Preamplifier	84125C	HP	US36433002	07/30/03	07/30/04
Horn Antenna	3115	EMCO	9104-3668	12/24/02	12/24/03
Horn Antenna	RA42-K-F-4B-C	CMT	961505-003	02/01/03	02/01/04
Anechoic Chamber (cable calibrated together)				05/20/03	05/20/04

The level of confidence of 95% , the uncertainty of measurement of radiated emission is +3.05dB / -3.84dB.

### 8.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 24.5 ° C Humidity : 58.0 % RH

#### 30MHz to 1GHz for Horizontal [Standby mode]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ( ° )			Limit (dBμV/m)	Margin (dB)
251.89	36.61	1.00	228	-2.64	33.97	46.00	-12.03
376.77	42.11	1.00	207	-0.27	41.84	46.00	-4.16
411.94	32.20	1.00	212	1.06	33.26	46.00	-12.74
501.66	34.91	1.00	197	4.42	39.33	46.00	-6.67
626.55	27.54	1.00	215	9.41	36.95	46.00	-9.05
719.91	25.31	1.00	223	12.36	37.67	46.00	-8.33

#### 30MHz to 1GHz for Vertical [Standby mode]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ( ° )			Limit (dBμV/m)	Margin (dB)
103.96	40.51	1.00	345	0.11	40.62	43.50	-2.88
199.75	33.72	1.00	339	-2.23	31.49	43.50	-12.01
300.39	37.24	1.00	150	-2.28	34.96	46.00	-11.04
376.77	35.83	1.00	277	-0.27	35.56	46.00	-10.44
502.87	30.86	1.00	221	4.48	35.34	46.00	-10.66
626.55	27.35	1.00	125	9.41	36.76	46.00	-9.24

## 30MHz to 1GHz for Horizontal [TX mode]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ( ° )			Limit (dBμV/m)	Margin (dB)
280.99	30.50	1.00	338	-2.24	28.26	46.00	-17.74
310.09	34.02	1.00	211	-2.12	31.90	46.00	-14.10
327.06	30.95	1.00	214	-1.82	29.13	46.00	-16.87
411.94	33.92	1.00	29	1.06	34.98	46.00	-11.02
433.76	30.37	1.00	331	1.66	32.03	46.00	-13.97
528.34	27.08	1.00	38	5.76	32.84	46.00	-13.16

## 30MHz to 1GHz for Vertical [TX mode]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ( ° )			Limit (dBμV/m)	Margin (dB)
103.96	32.25	1.00	357	0.11	32.36	43.50	-11.14
310.09	32.16	1.00	86	-2.12	30.04	46.00	-15.96
411.94	30.84	1.00	250	1.06	31.90	46.00	-14.10
433.76	28.10	1.00	278	1.66	29.76	46.00	-16.24
515.00	27.63	1.00	149	5.09	32.72	46.00	-13.28
719.91	24.52	1.00	103	12.36	36.88	46.00	-9.12

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)

## 1GHz to 25GHz for Horizontal [CH 1]

Radiated Emission				Corrected Amplitude		Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4823.12	1.00	51	3.76	41.70	---	74.00	53.96	-12.26
7233.75	1.00	164	10.07	44.68	---	74.00	53.96	-9.28
9650.42	1.00	22	11.47	46.24	---	74.00	53.96	-7.72

## 1GHz to 25GHz for Vertical [CH 1]

Radiated Emission				Corrected Amplitude		Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4823.12	1.00	140	3.76	41.70	---	74.00	53.96	-12.26
7233.75	1.00	167	10.07	46.01	---	74.00	53.96	-7.95
9647.89	1.00	227	11.46	53.74	48.40	74.00	53.96	-5.56

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF Radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.



## 1GHz to 25GHz for Horizontal [CH 6]

Radiated Emission				Corrected Amplitude		Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
2089.58	1.00	49	2.14	39.64	---	74.00	53.96	-14.32
4877.50	1.00	158	3.97	40.58	---	74.00	53.96	-13.38
7312.29	1.00	249	10.30	42.57	---	74.00	53.96	-11.39
9747.08	1.00	220	11.89	44.49	---	74.00	53.96	-9.47

## 1GHz to 25GHz for Vertical [CH 6]

Radiated Emission				Corrected Amplitude		Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4877.50	1.00	24	3.97	40.24	---	74.00	53.96	-13.72
7312.29	1.00	106	10.30	44.57	---	74.00	53.96	-9.39
9747.90	1.00	198	11.89	53.16	48.66	74.00	53.96	-5.30

## 1GHz to 25GHz for Horizontal [CH 11]

Radiated Emission				Corrected Amplitude		Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4925.83	1.00	76	4.13	39.40	---	74.00	53.96	-14.56
7390.83	1.00	316	10.41	43.19	---	74.00	53.96	-10.77
9849.79	1.00	281	11.93	45.87	---	74.00	53.96	-8.09

## 1GHz to 25GHz for Vertical [CH 11]

Radiated Emission				Corrected Amplitude		Class B ( 3m )		
Frequency (MHz)	Ant. H. (m)	Table ( ° )	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4925.83	1.00	54	4.13	40.24	---	74.00	53.96	-13.72
7384.79	1.00	241	10.42	43.53	---	74.00	53.96	-10.43
9847.88	1.00	2	11.93	52.21	47.04	74.00	53.96	-6.92


#### **8.4 Test Result of the Bandedge**

If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a),*

We perform this section by the *conducted* manner, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10<sup>th</sup> harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured.* If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a).* (Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz)

The following pages show our observations referring to the channel 1 and 11 respectively.


Test Condition & Setup: same as < 8.1 >

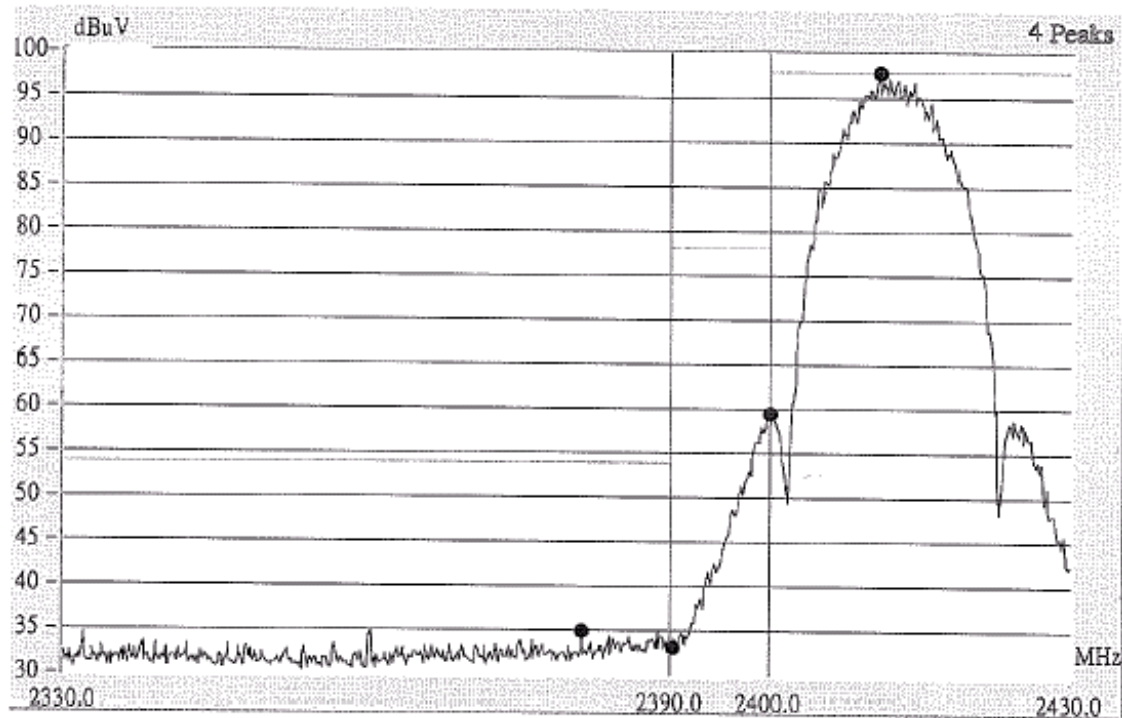**Channel 1 (The lowest one in the frequency bands)**


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B ( 3m )</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ( ° )</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2389.80	Hor	1.00	15	3.13	39.80	---	74.00	53.96	-14.16
2390.07	Hor	1.00	212	3.14	37.64	---	74.00	53.96	-16.32
2389.20	Ver	1.00	192	3.13	46.30	---	74.00	53.96	-7.66
2390.07	Ver	1.00	306	3.14	44.64	---	74.00	53.96	-9.32

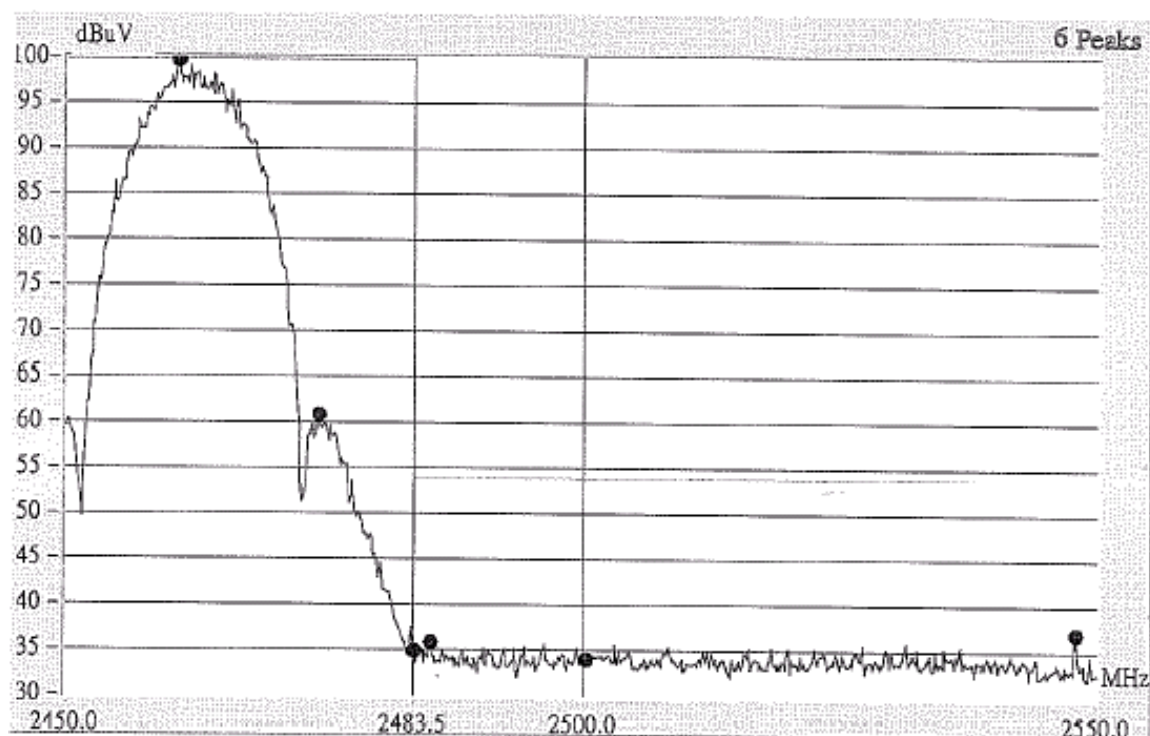**Channel 11 (The Highest one in the frequency bands)**


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B ( 3m )</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ( ° )</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2498.32	Hor	1.00	345	3.49	40.99	---	74.00	53.96	-12.97
2527.78	Hor	1.00	37	3.54	40.37	---	74.00	53.96	-13.59
2483.50	Ver	1.00	190	3.45	45.78	---	74.00	53.96	-8.18
2484.84	Ver	1.00	20	3.45	46.95	---	74.00	53.96	-7.01
2500.01	Ver	1.00	347	3.50	44.83	---	74.00	53.96	-9.13
2503.68	Ver	1.00	59	3.50	47.00	---	74.00	53.96	-6.96

## IX. Section 15.247(d): Power Spectral Density

### 9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

### 9.2 Test Instruments Configuration



*P.S.: The computer to control the EUT at maximal power output and channel Number and set antenna kit*

### 9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/30/03	09/30/04


### 9.4 Test Result of Power spectral density

<i>Channel</i>	<i>Frequency (GHz)</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	2.412	-9.46	0.70	-8.76	8.00	-16.76
CH 06	2.437	-9.24	0.70	-8.54	8.00	-16.54
CH 11	2.462	-9.21	0.70	-8.51	8.00	-16.51

Note:


1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),  
Ppq: actual peak power density in the spread spectrum band.
3.  $Ppq = Ppr + |Cable Loss|$

Channel 01

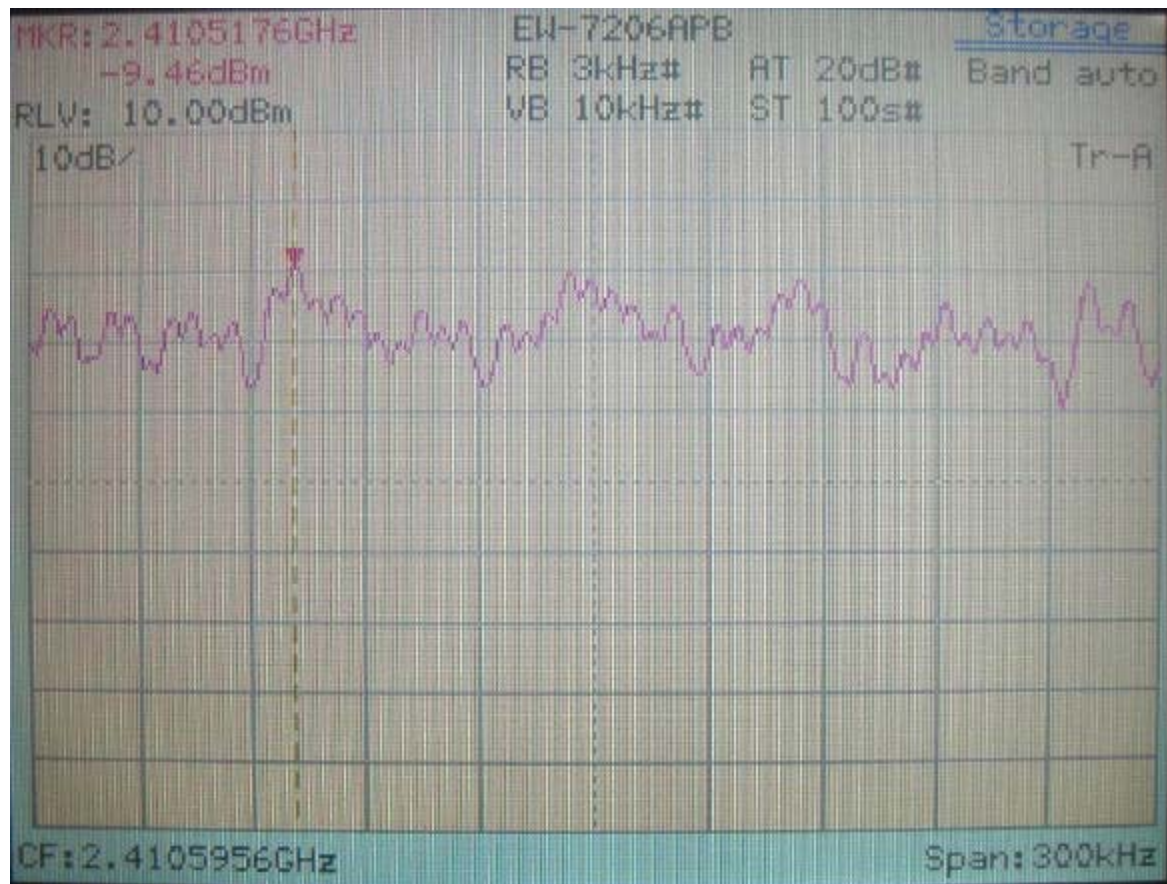




**Channel 06**

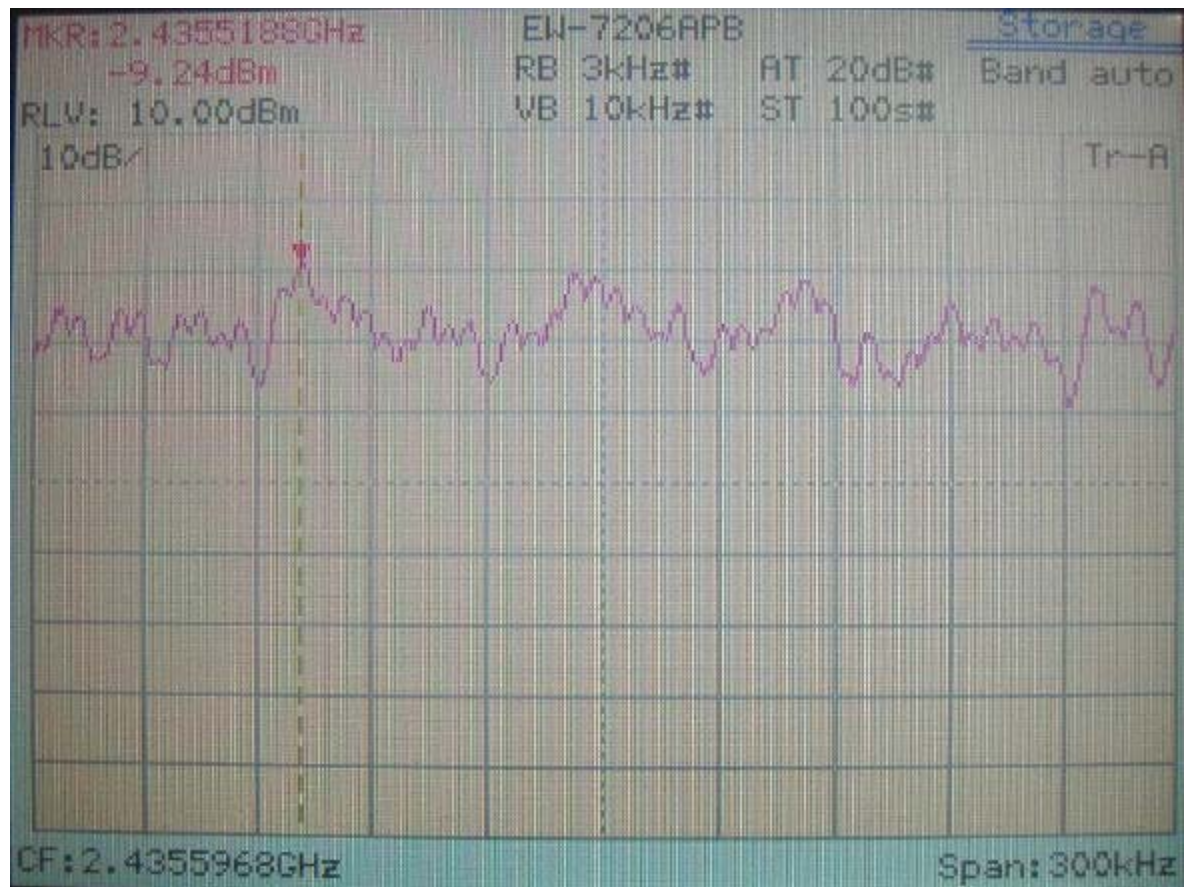



**Channel 11**

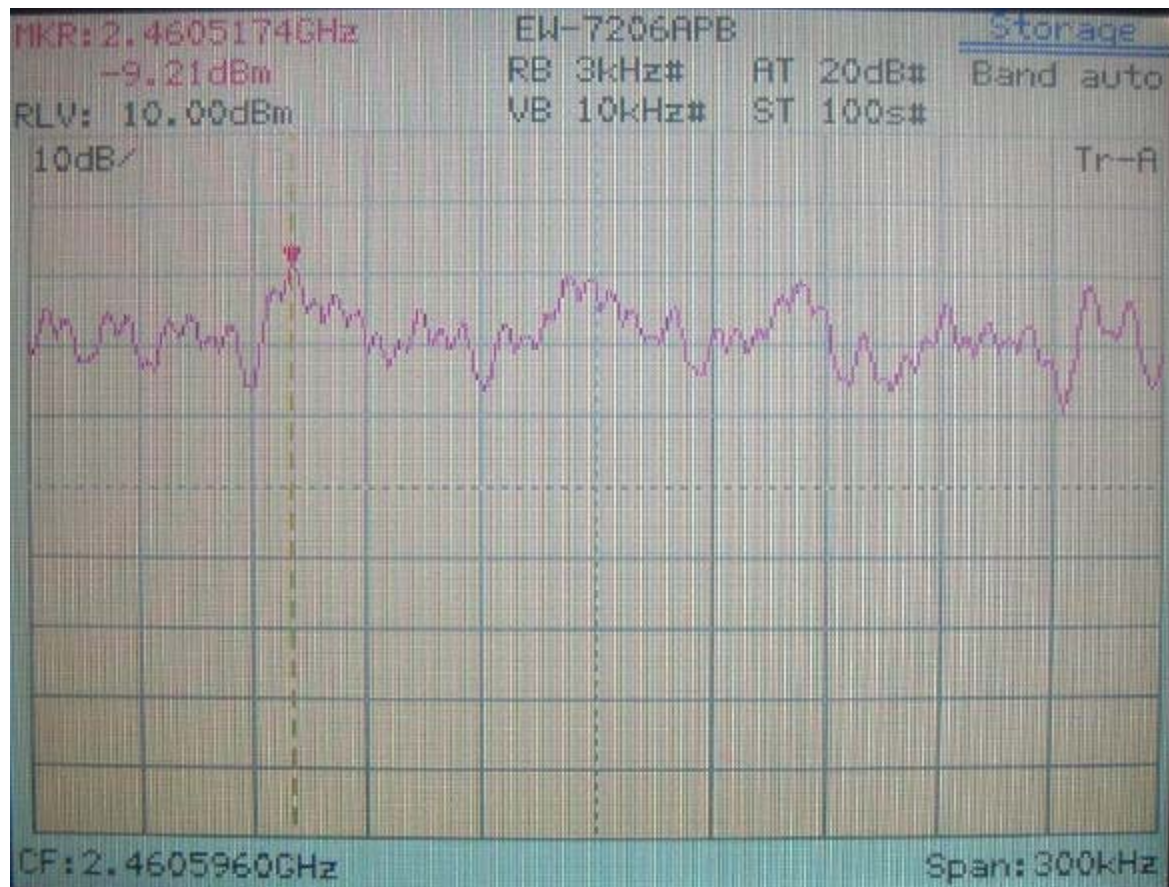

## Appendix A

### *Brand Name and Model Name List:*

Brand Name	Model Name
Edimax	EW-7206APB, EW-7207APB, GAP-E06B, GAP-E07B
GetNet	GW-9206APB, GW-9207APB
Planet	WAP-1963, WAP-1963A
U-Jet	UJ-AP820B , UJ-AP850R
Maxim	WAP-7206APB, WAP-7207APB
StarChip	SWL-7206APB,SWL-7207APB
JAHT	WP-2001B(ER), WP-2001B(E)
Xannet	EW-7206APB and EW-7207APB
Xnet	AW2000PE
Micronet	SP918BL, SP918BK
Sweex	LC000050
Binatone	WL1204
Peabird	PEAB-WL-AP
NorthQ	NQ7000
Hawking	HWBA11