




802.11 ax20 CH11 (2462MHz)

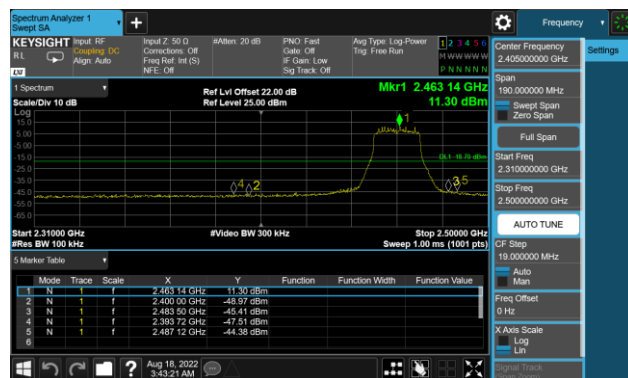

802.11 ax20 CH11 (2462MHz)

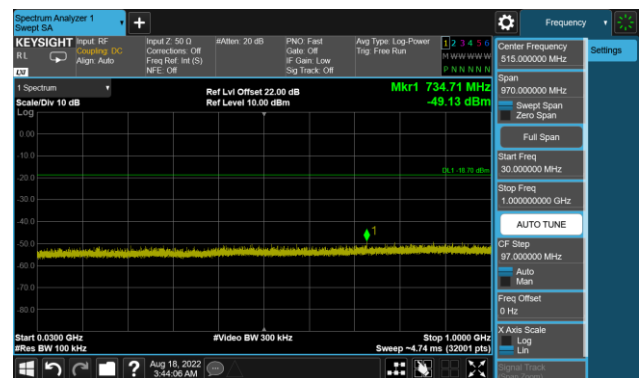


802.11 ax20 CH11 (2462MHz)

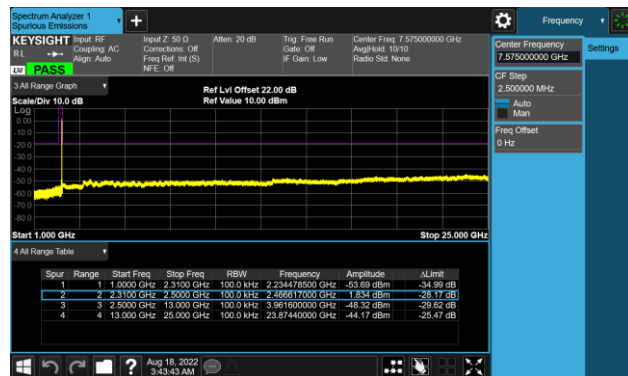


802.11 ax40 CH03 (2422MHz)



802.11 ax40 CH03 (2422MHz)

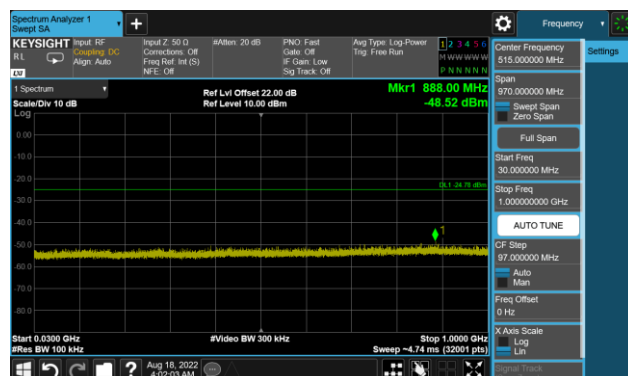


802.11 ax40 CH03 (2422MHz)

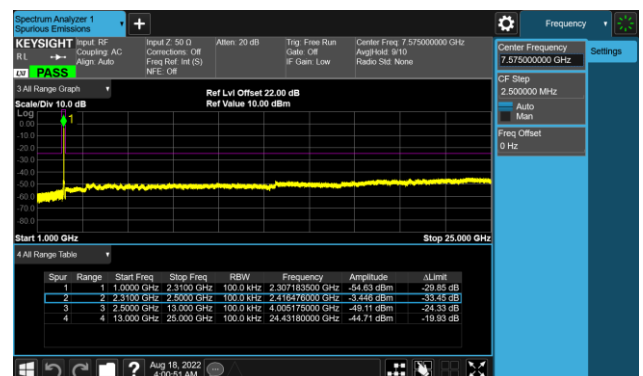


802.11 ax40 CH06 (2437MHz)




802.11 ax40 CH06 (2437MHz)

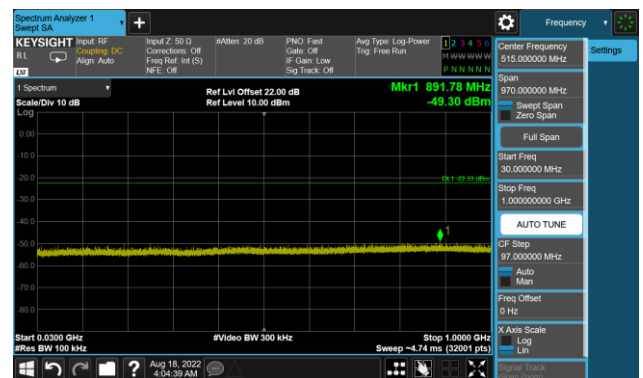


802.11 ax40 CH06 (2437MHz)

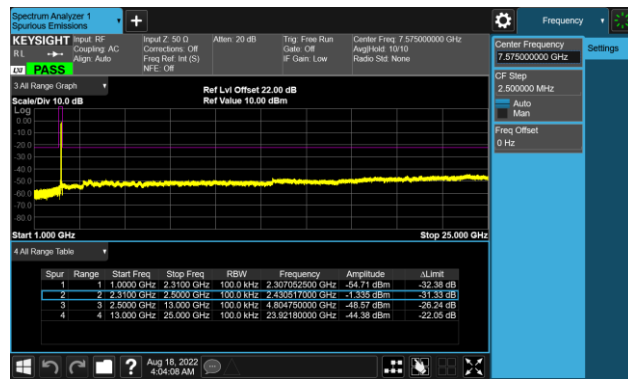


802.11 ax40 CH09 (2452MHz)

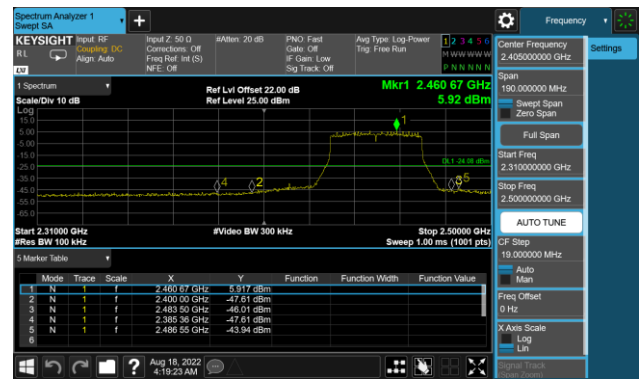

02.11 ax40 CH09 (2452MHz)

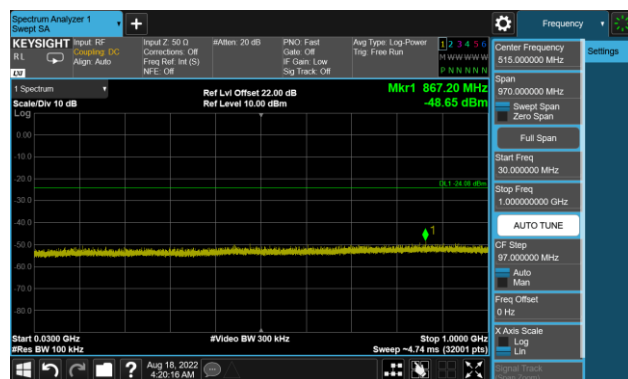

802.11 ax40 CH09 (2452MHz)

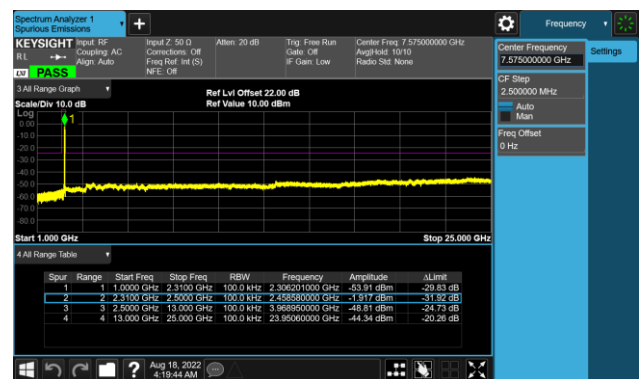

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10-2013 Section 11.11 & 11.12

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4.Test Setup

Below 1GHz Test Setup:

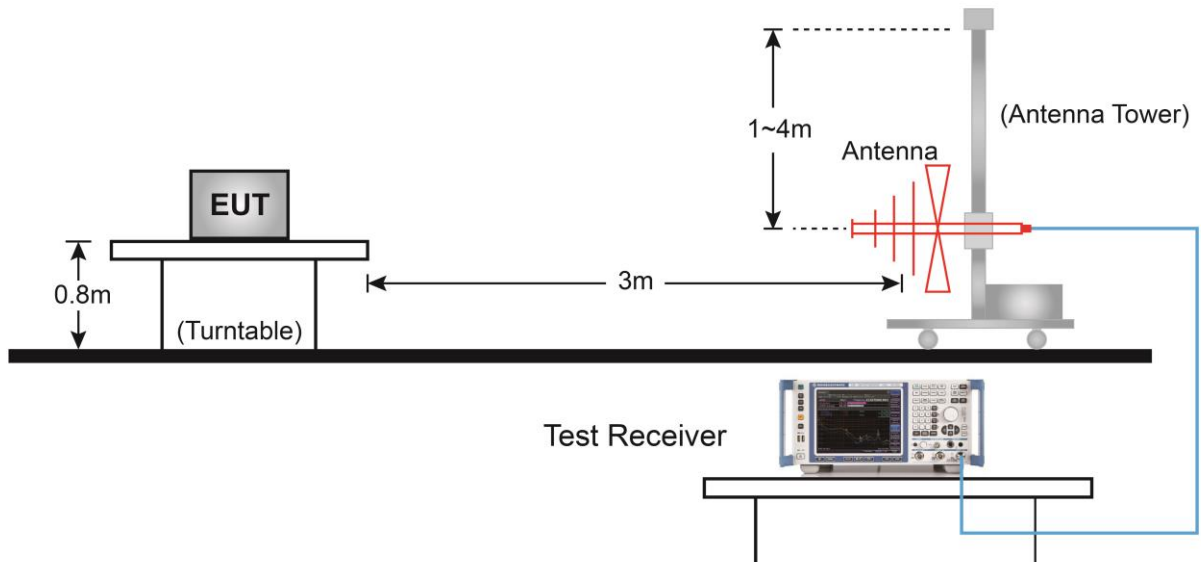


Above 1GHz Test Setup:

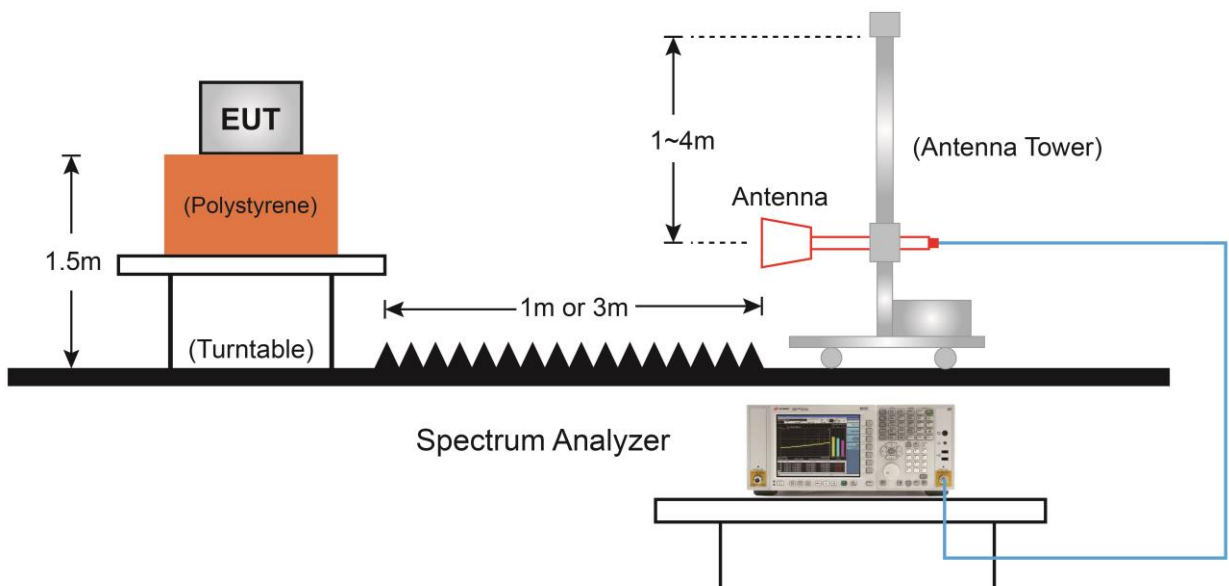

7.6.5. Test Result

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	VULB 9162	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

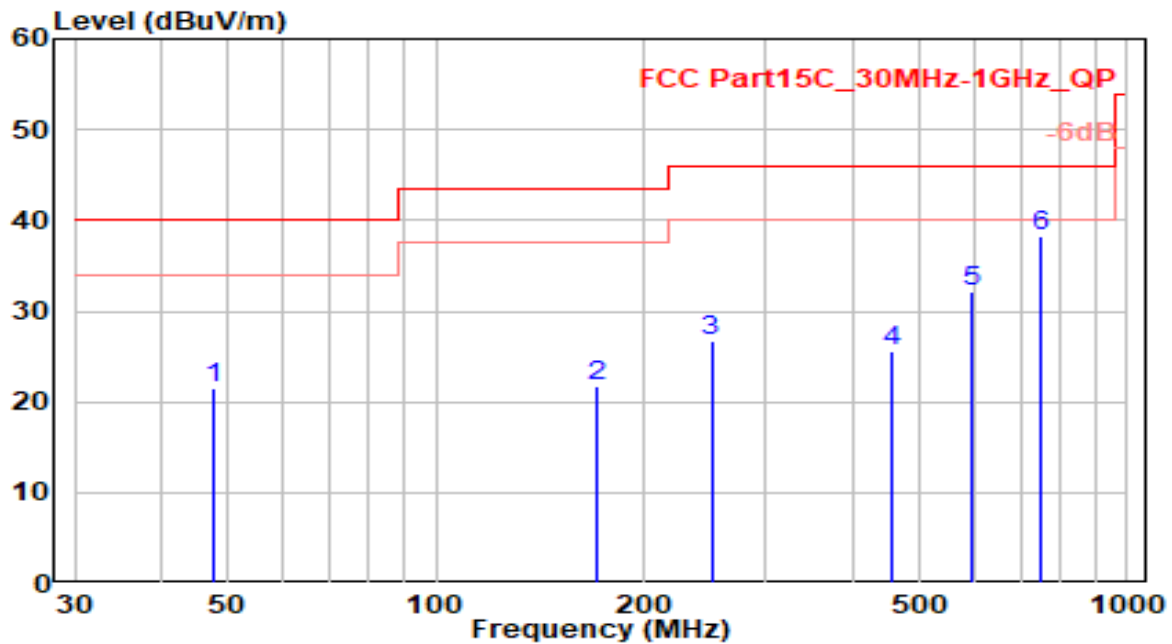


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	47.460	-0.10	21.54	21.44	-18.56	40.00	100	165	QP
2	170.650	5.07	16.66	21.73	-21.77	43.50	100	280	QP
3	250.190	5.99	20.83	26.82	-19.18	46.00	100	345	QP
4	457.770	0.95	24.63	25.58	-20.42	46.00	100	360	QP
5	594.540	4.57	27.56	32.13	-13.87	46.00	100	0	QP
6	* 750.710	8.59	29.61	38.20	-7.80	46.00	100	240	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	VULB 9162	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

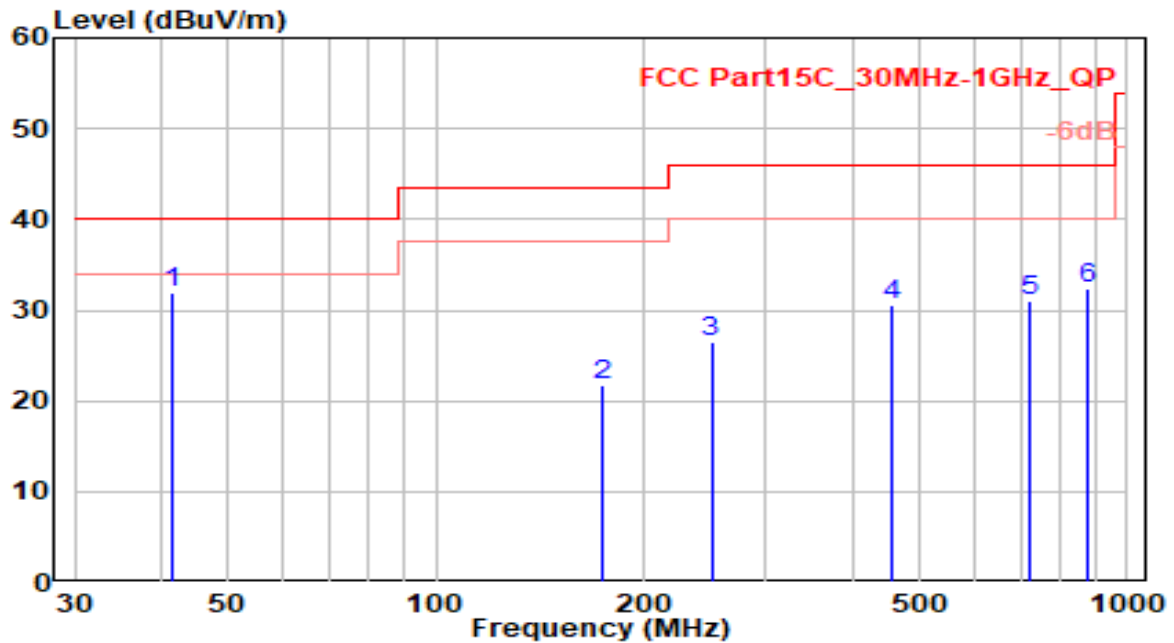


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.640	11.03	20.79	31.81	-8.19	40.00	100	360	QP
2		174.530	4.76	16.87	21.63	-21.87	43.50	100	15	QP
3		250.190	5.69	20.83	26.52	-19.48	46.00	100	360	QP
4		456.800	6.04	24.61	30.64	-15.36	46.00	100	155	QP
5		719.670	1.89	29.19	31.08	-14.92	46.00	100	165	QP
6		875.840	1.00	31.29	32.29	-13.71	46.00	100	55	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

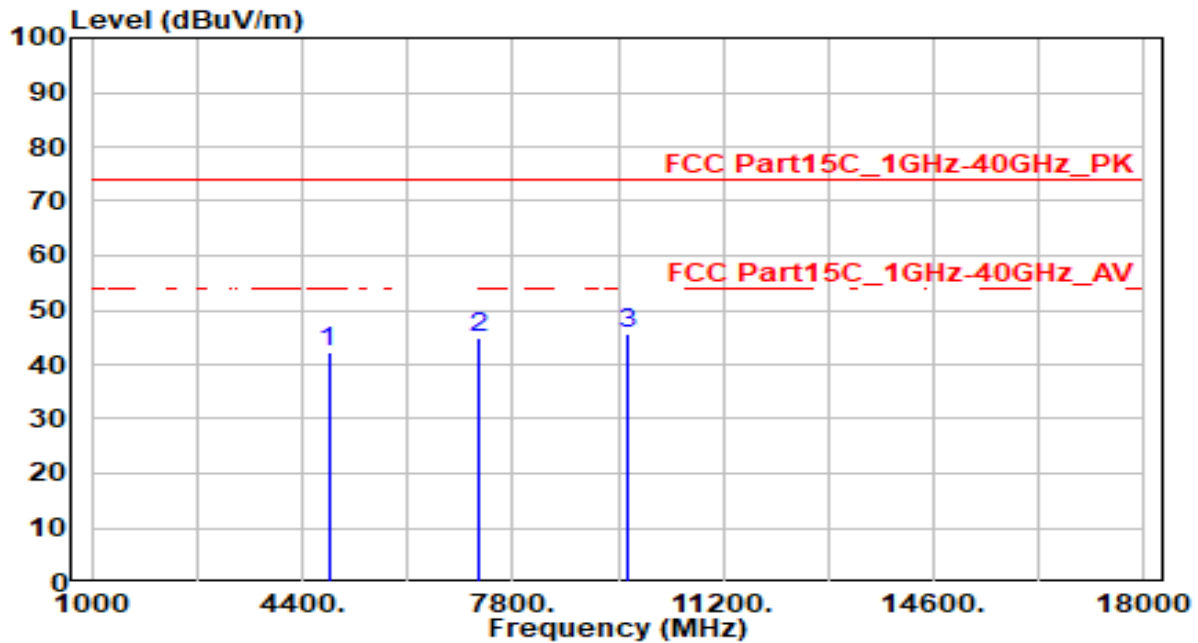


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.98	0.25	42.23	-31.77	74.00	200	55	Peak
2	7236.000	39.16	5.81	44.97	-29.03	74.00	195	360	Peak
3	* 9648.000	40.42	5.32	45.74	-28.26	74.00	170	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

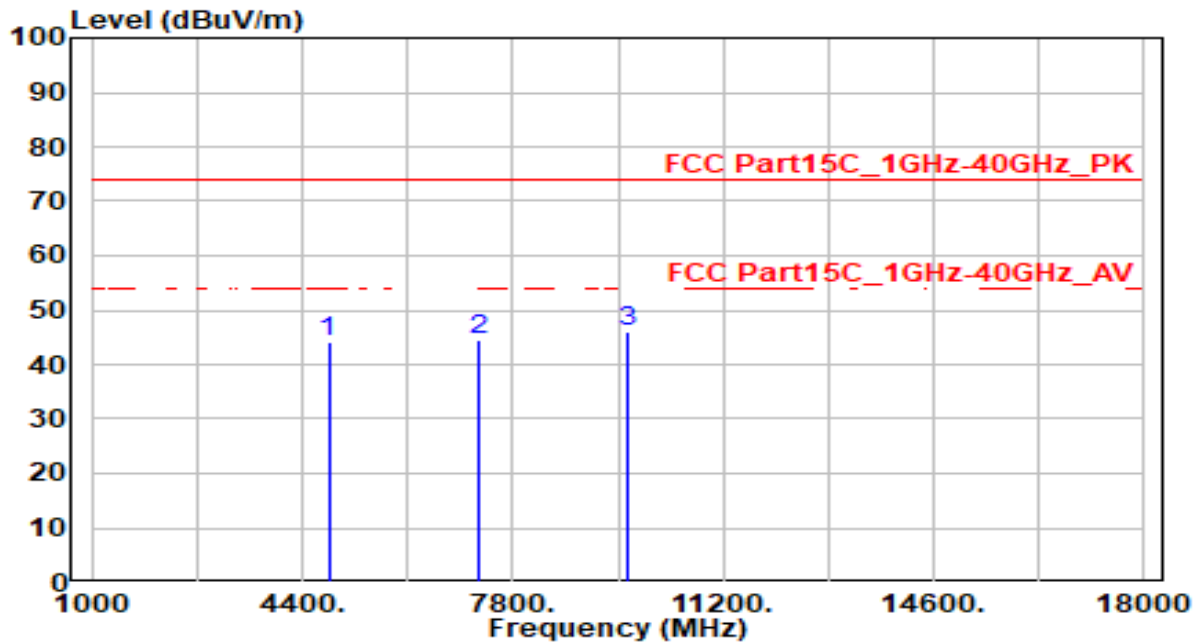


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	43.84	0.25	44.09	-29.91	74.00	200	105	Peak
2	7236.000	38.64	5.81	44.45	-29.55	74.00	100	40	Peak
3	* 9648.000	40.85	5.32	46.18	-27.82	74.00	200	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

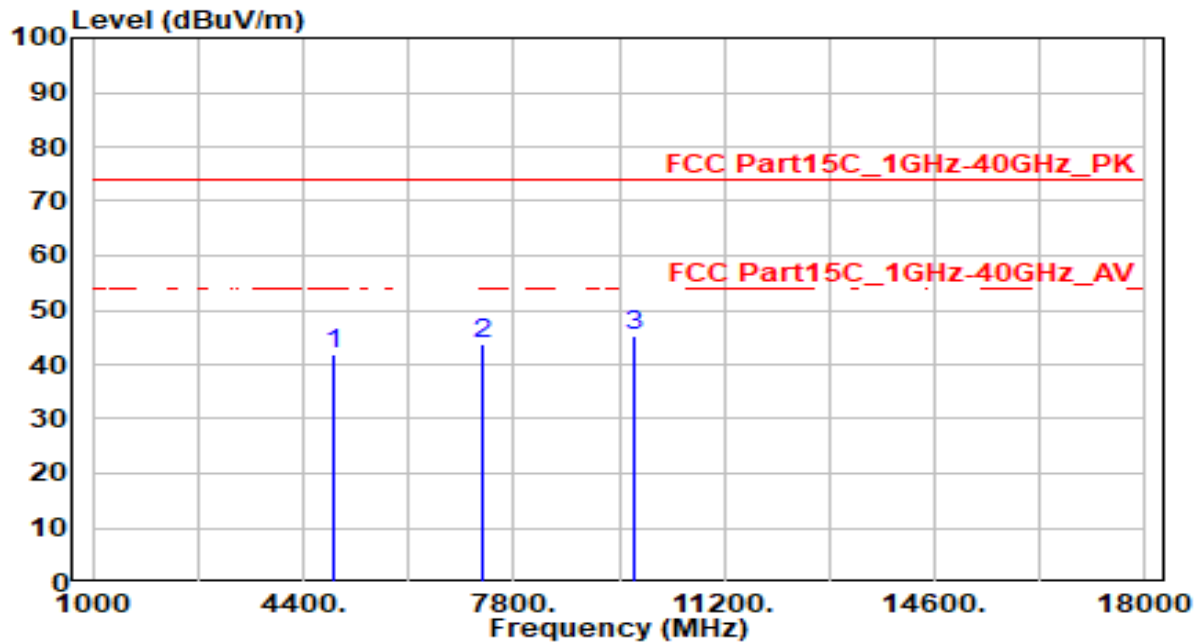


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.61	0.35	41.96	-32.04	74.00	100	300	Peak
2	7311.000	37.85	5.79	43.64	-30.36	74.00	100	325	Peak
3	* 9748.000	39.87	5.34	45.21	-28.79	74.00	100	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

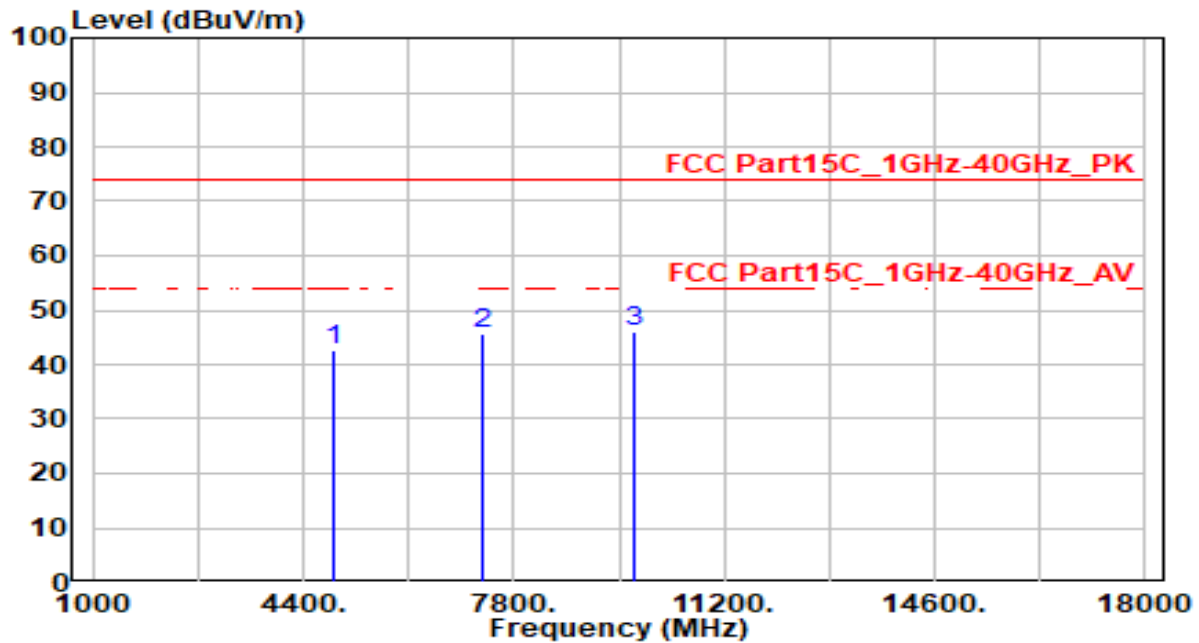


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.10	0.35	42.46	-31.54	74.00	100	50	Peak
2	7311.000	39.76	5.79	45.55	-28.45	74.00	100	245	Peak
3	* 9748.000	40.86	5.34	46.20	-27.80	74.00	100	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

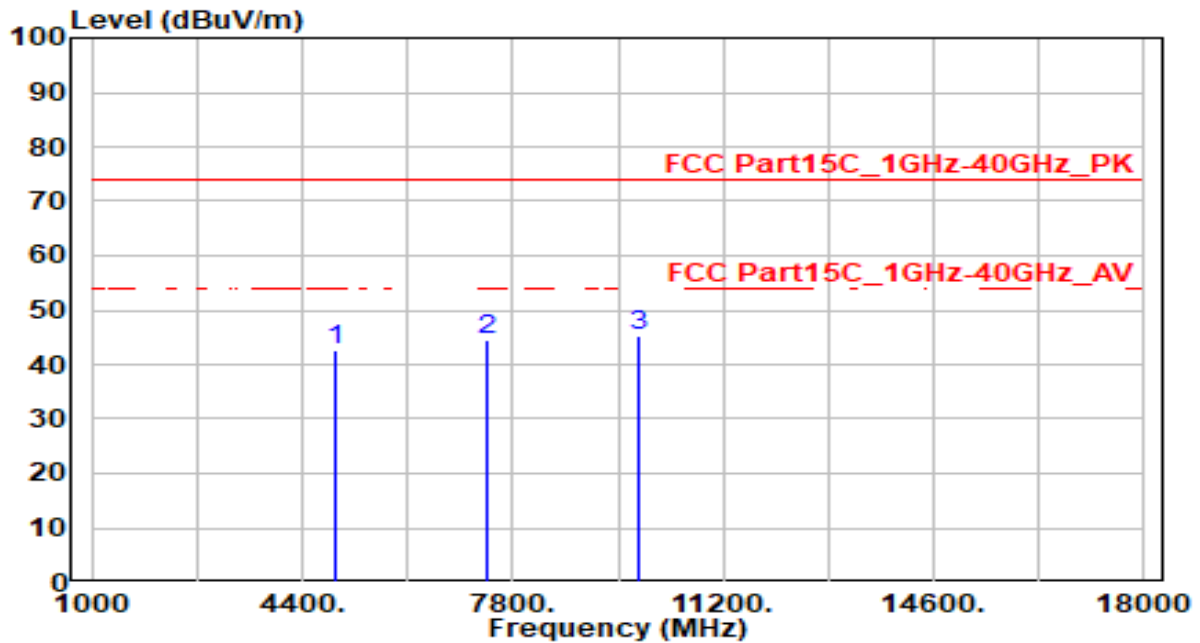


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.02	0.45	42.48	-31.52	74.00	100	30	Peak
2	7386.000	38.91	5.77	44.68	-29.32	74.00	100	75	Peak
3	* 9848.000	40.07	5.38	45.45	-28.55	74.00	100	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

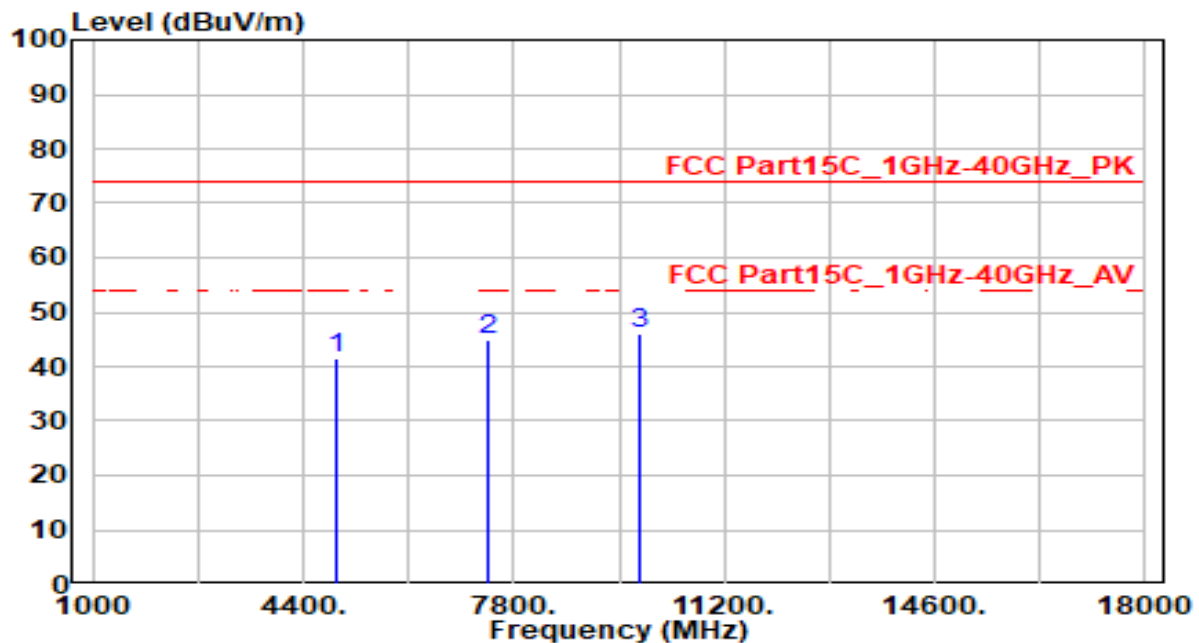


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.01	0.45	41.47	-32.53	74.00	100	30	Peak
2	7386.000	39.04	5.77	44.81	-29.19	74.00	100	205	Peak
3	* 9848.000	40.48	5.38	45.86	-28.14	74.00	100	220	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

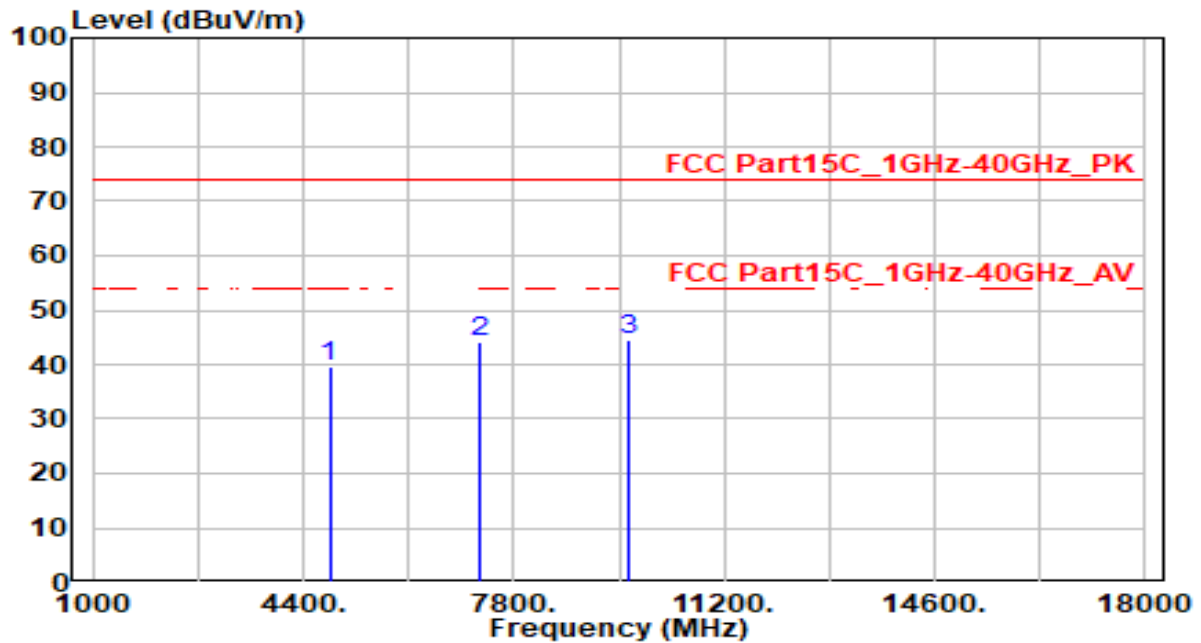


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.41	0.25	39.66	-34.34	74.00	100	60	Peak
2	7236.000	38.20	5.81	44.01	-29.99	74.00	100	190	Peak
3	* 9648.000	39.35	5.32	44.68	-29.32	74.00	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

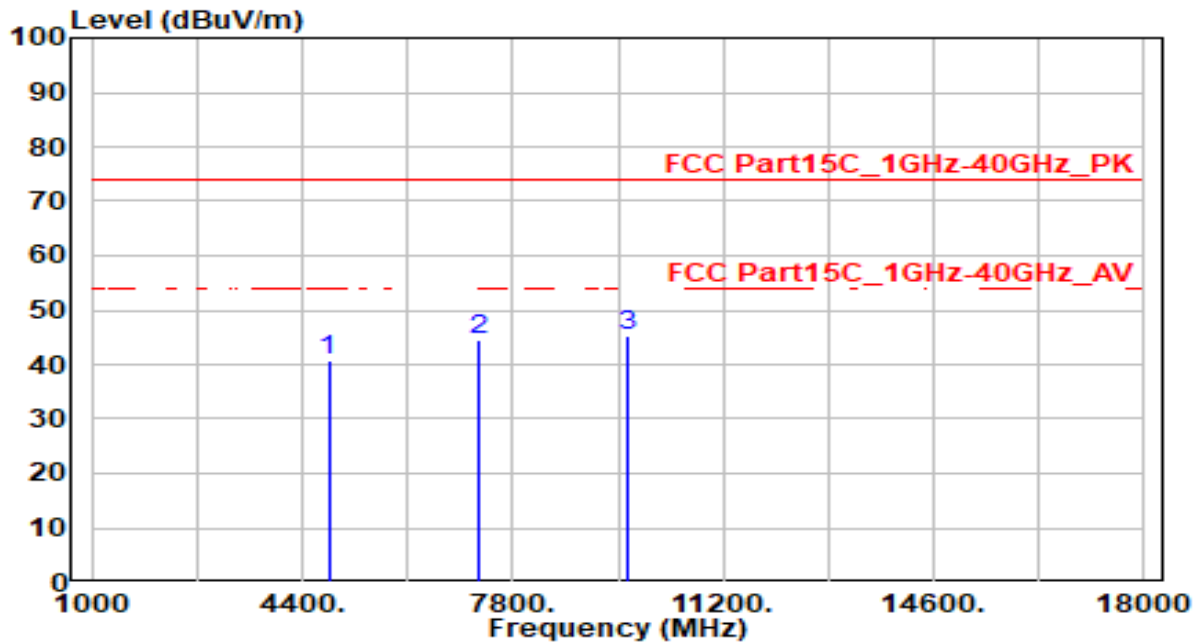


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.65	0.25	40.90	-33.10	74.00	100	115	Peak
2	7236.000	38.90	5.81	44.71	-29.29	74.00	100	75	Peak
3	* 9648.000	40.04	5.32	45.37	-28.63	74.00	100	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

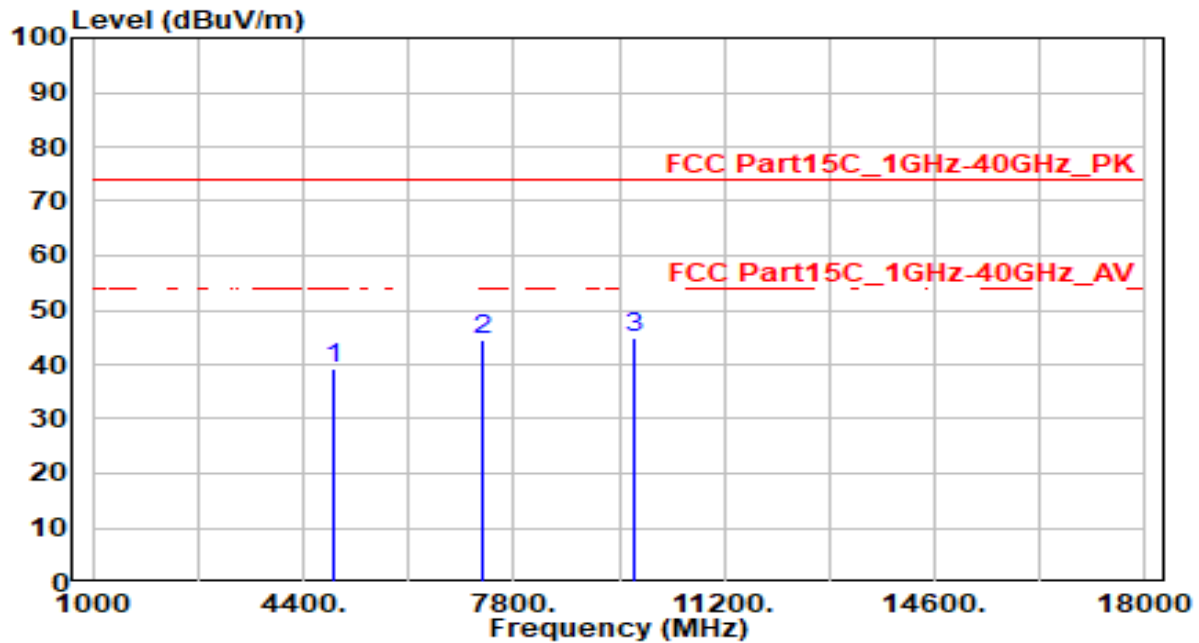


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.92	0.35	39.27	-34.73	74.00	100	15	Peak
2	7311.000	38.59	5.79	44.38	-29.62	74.00	100	190	Peak
3	* 9748.000	39.47	5.34	44.81	-29.19	74.00	100	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

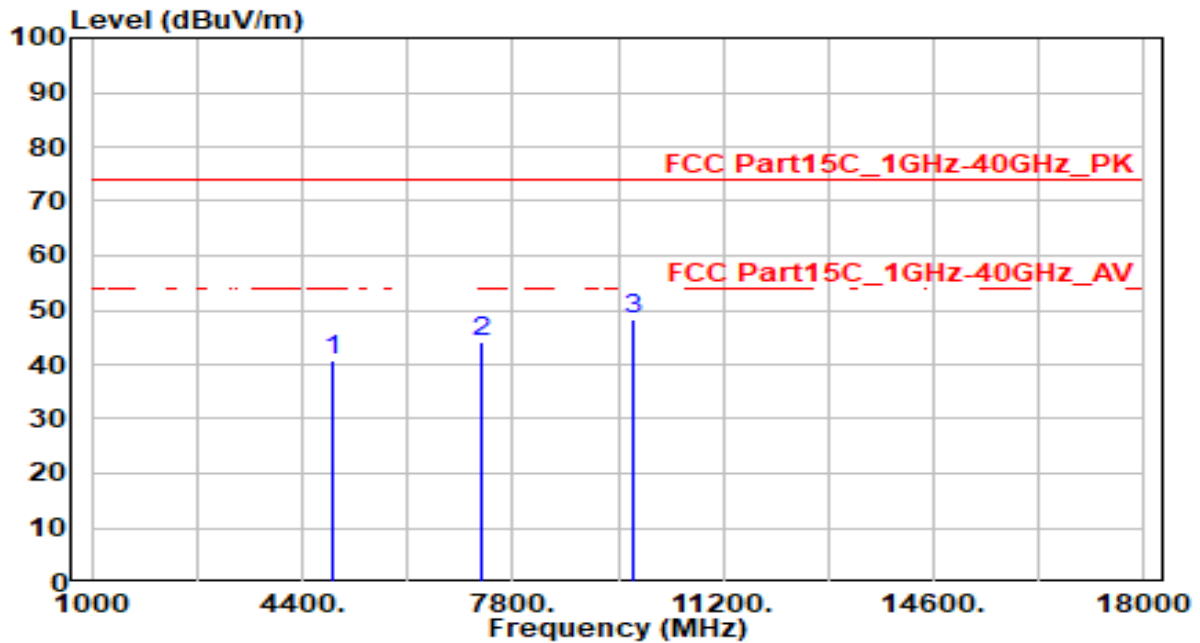


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.22	0.35	40.58	-33.42	74.00	100	45	Peak
2	7311.000	38.33	5.79	44.12	-29.88	74.00	100	275	Peak
3	* 9748.000	42.88	5.34	48.22	-25.78	74.00	100	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

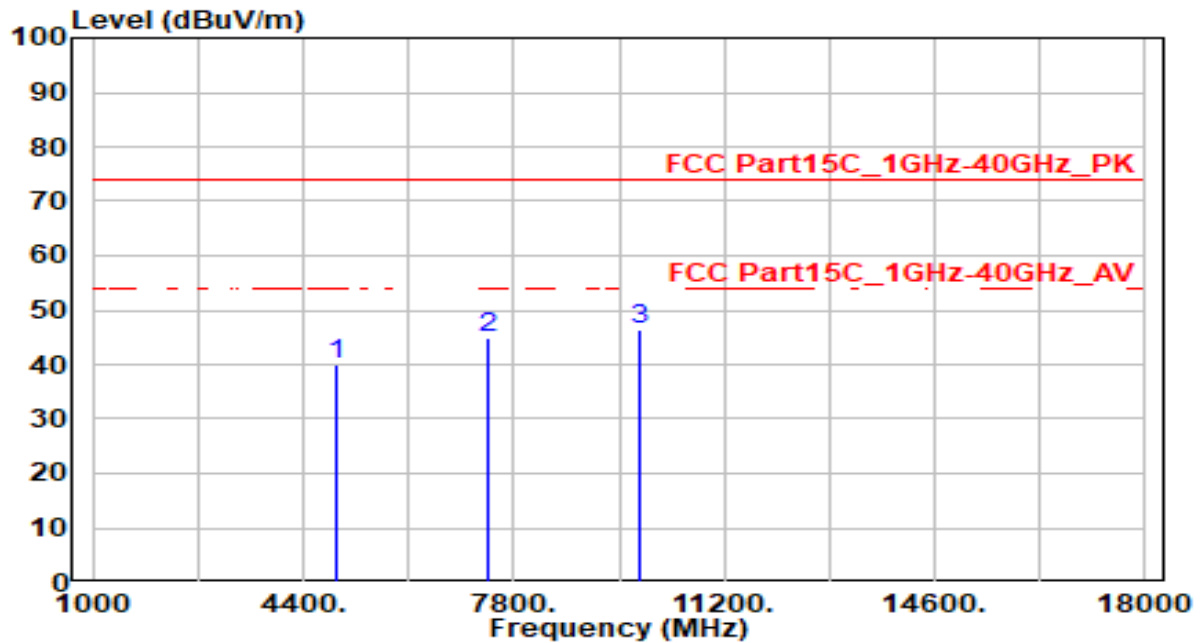


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.51	0.45	39.96	-34.04	74.00	100	135	Peak
2	7386.000	39.01	5.77	44.78	-29.22	74.00	100	55	Peak
3	* 9848.000	40.97	5.38	46.35	-27.65	74.00	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

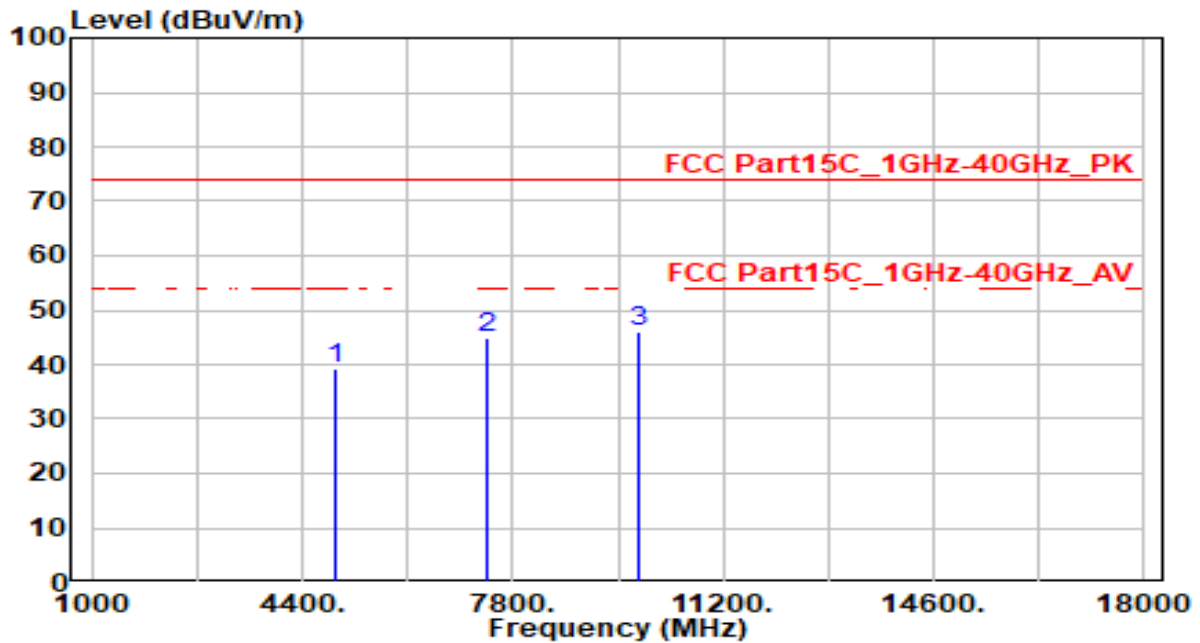


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.75	0.45	39.20	-34.80	74.00	100	40	Peak
2	7386.000	39.01	5.77	44.78	-29.22	74.00	100	0	Peak
3	* 9848.000	40.81	5.38	46.19	-27.81	74.00	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

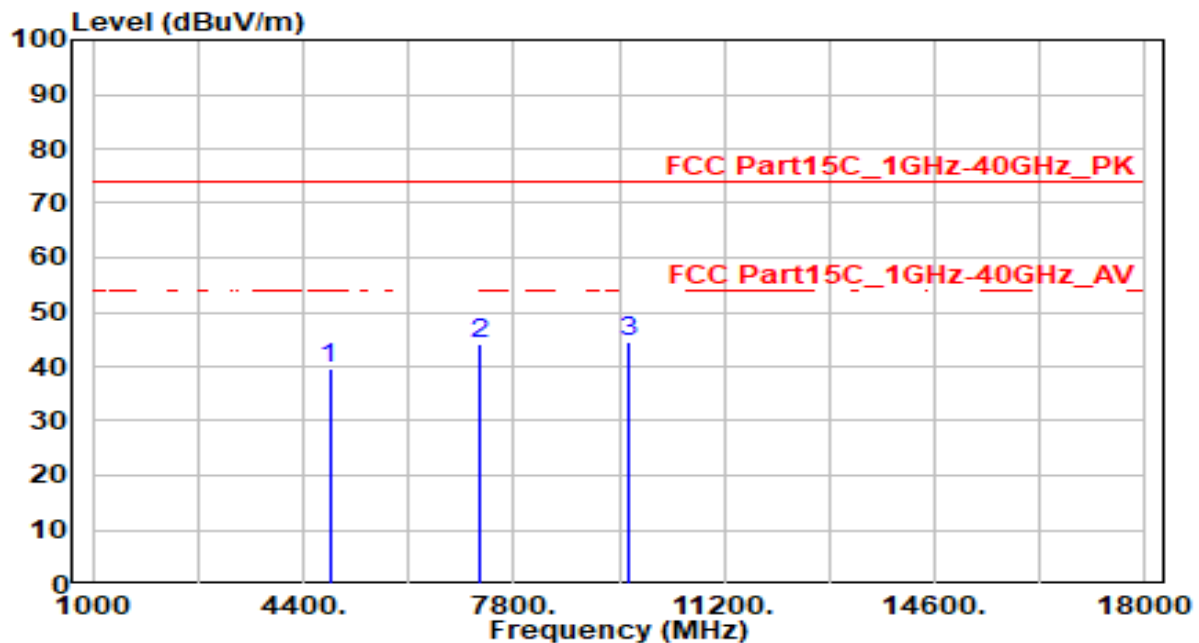


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.40	0.25	39.65	-34.35	74.00	100	35	Peak
2	7236.000	38.17	5.81	43.99	-30.01	74.00	100	325	Peak
3	* 9648.000	39.25	5.32	44.57	-29.43	74.00	100	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

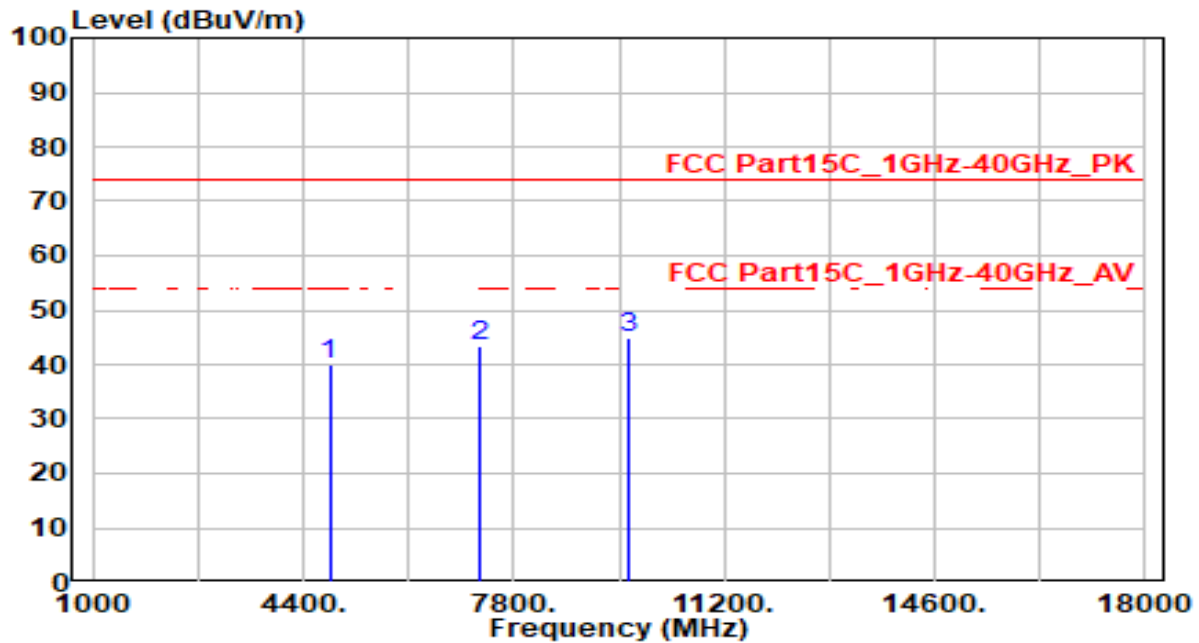


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.73	0.25	39.98	-34.02	74.00	100	180	Peak
2	7236.000	37.65	5.81	43.47	-30.53	74.00	100	315	Peak
3	* 9648.000	39.52	5.32	44.84	-29.16	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

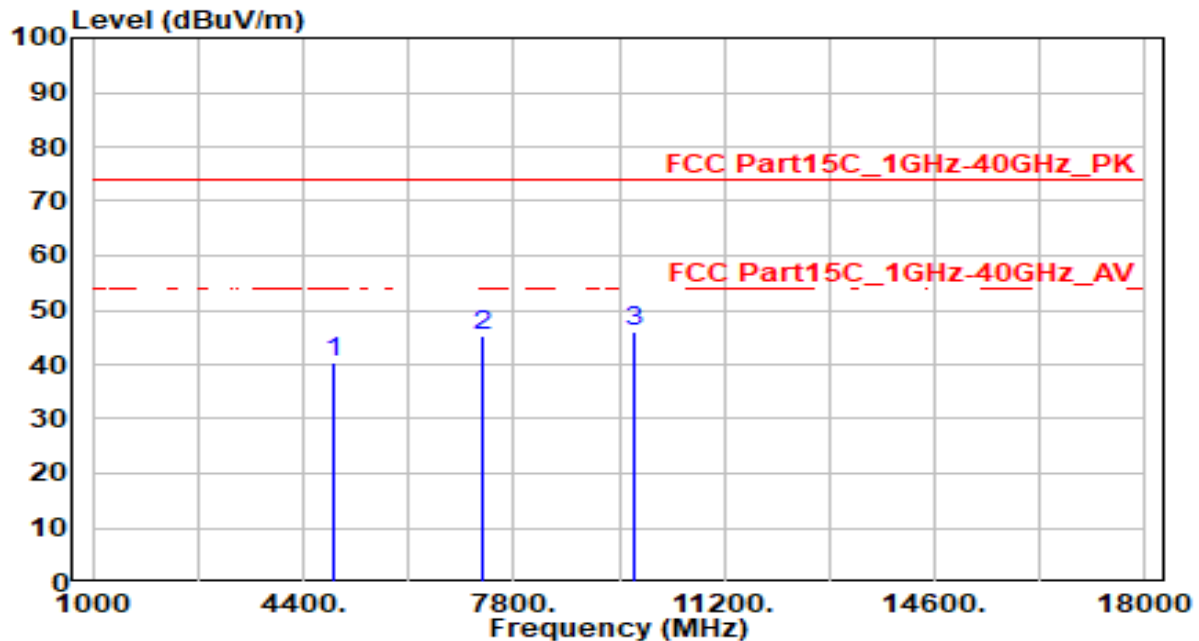


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.05	0.35	40.41	-33.59	74.00	100	105	Peak
2	7311.000	39.53	5.79	45.32	-28.68	74.00	100	360	Peak
3	* 9748.000	40.62	5.34	45.96	-28.04	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

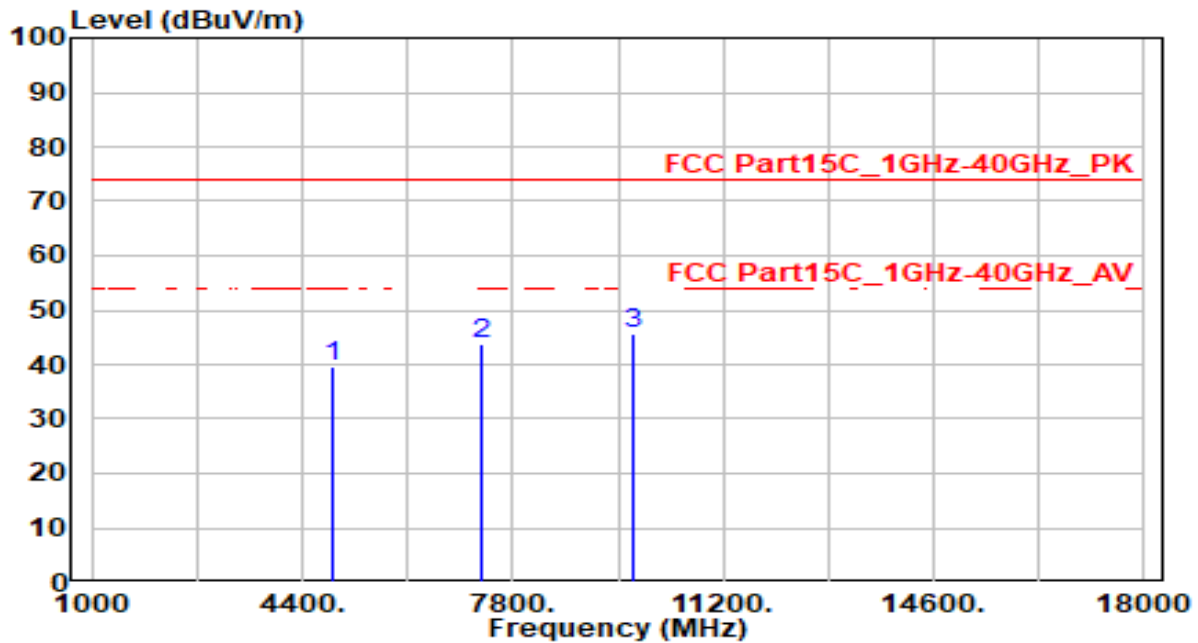


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.08	0.35	39.44	-34.56	74.00	100	170	Peak
2	7311.000	38.04	5.79	43.83	-30.17	74.00	100	0	Peak
3	* 9748.000	40.41	5.34	45.75	-28.25	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

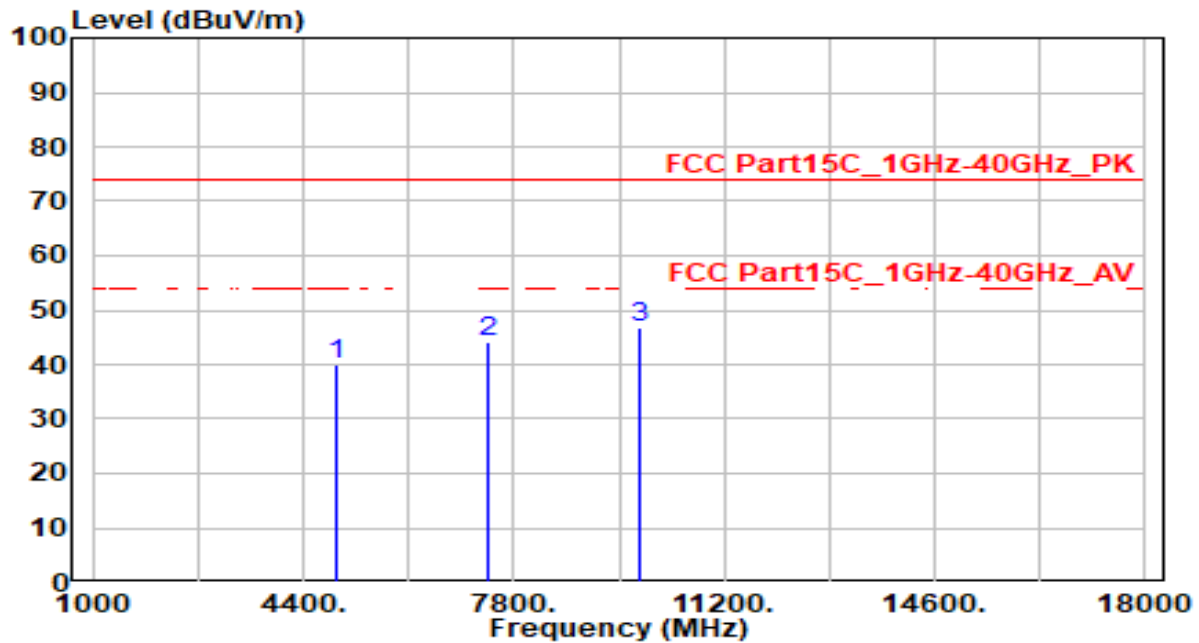


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.49	0.45	39.95	-34.05	74.00	100	5	Peak
2	7386.000	38.26	5.77	44.04	-29.96	74.00	100	195	Peak
3	* 9848.000	41.60	5.38	46.98	-27.02	74.00	100	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

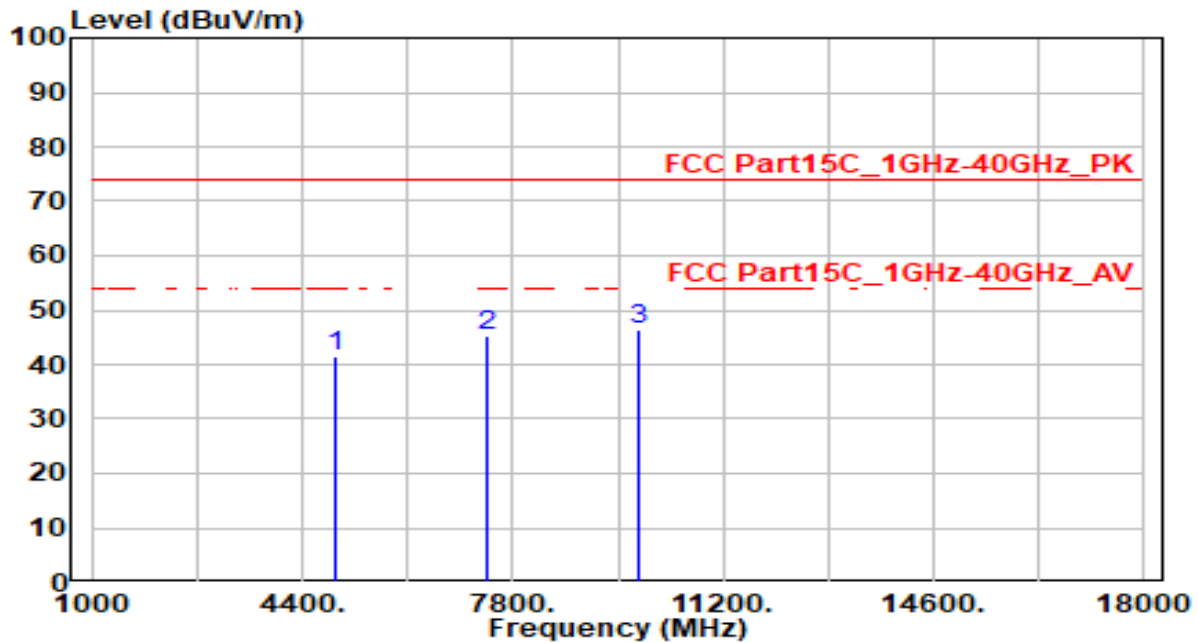


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	41.15	0.45	41.61	-32.39	74.00	100	335	Peak
2	7386.000	39.45	5.77	45.23	-28.77	74.00	100	15	Peak
3	* 9848.000	41.06	5.38	46.44	-27.56	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

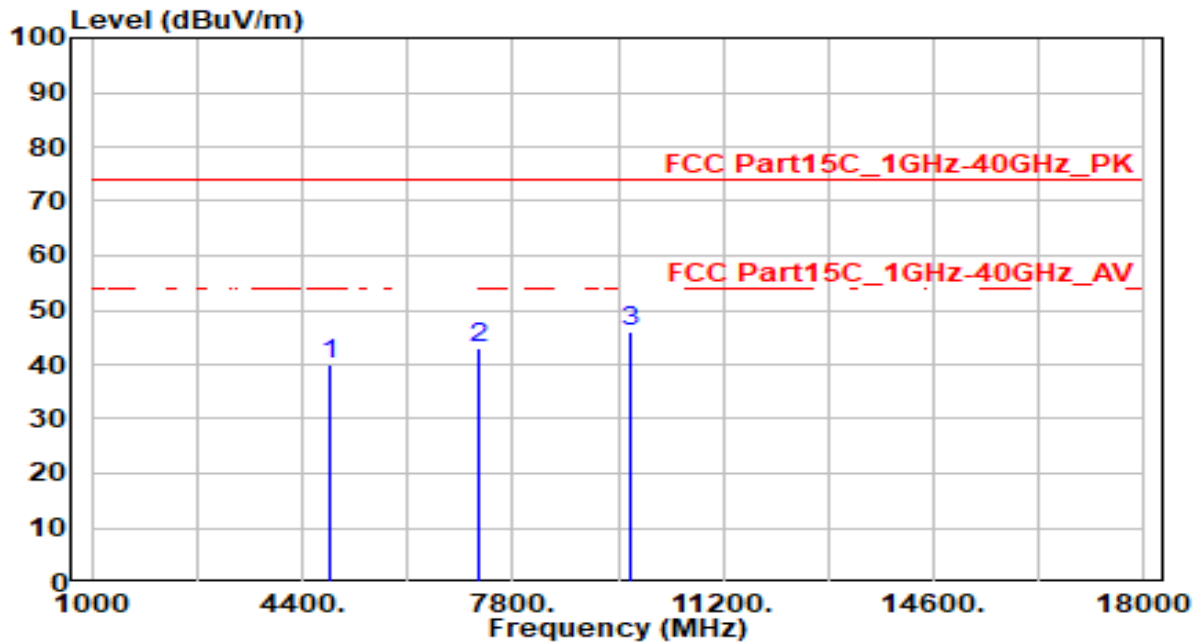


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.83	0.29	40.12	-33.88	74.00	100	360	Peak
2	7266.000	37.35	5.81	43.16	-30.84	74.00	100	360	Peak
3	* 9688.000	40.61	5.33	45.94	-28.06	74.00	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

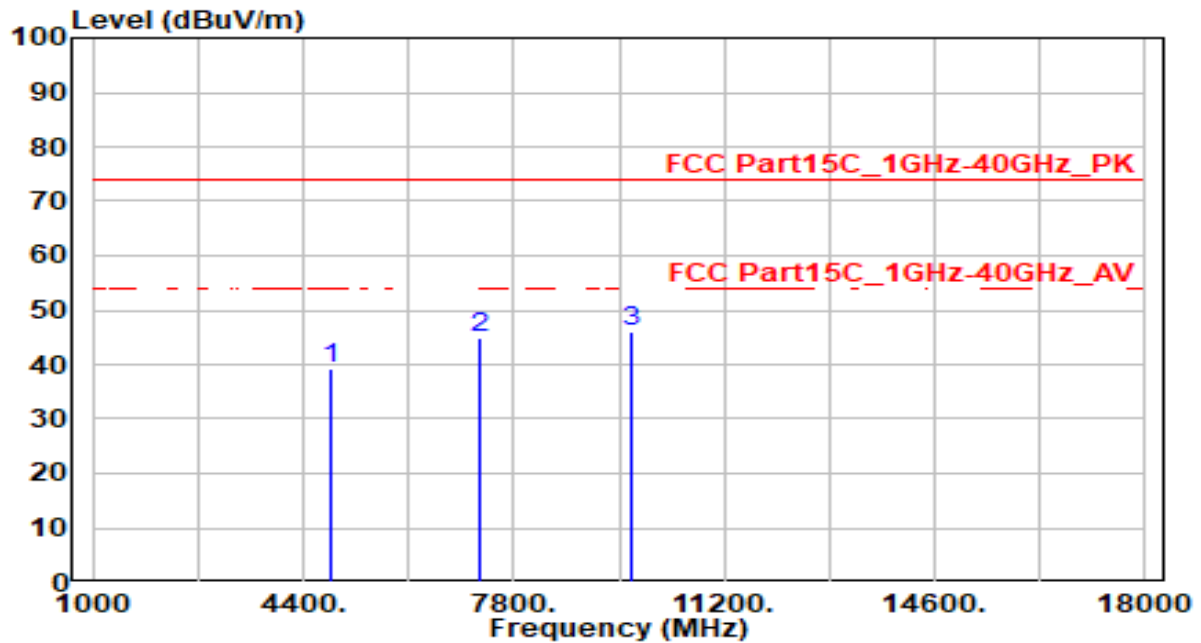


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4844.000	39.13	0.29	39.42	-34.58	74.00	100	330	Peak
2		7266.000	39.13	5.81	44.94	-29.06	74.00	100	360	Peak
3	*	9688.000	40.58	5.33	45.91	-28.09	74.00	100	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

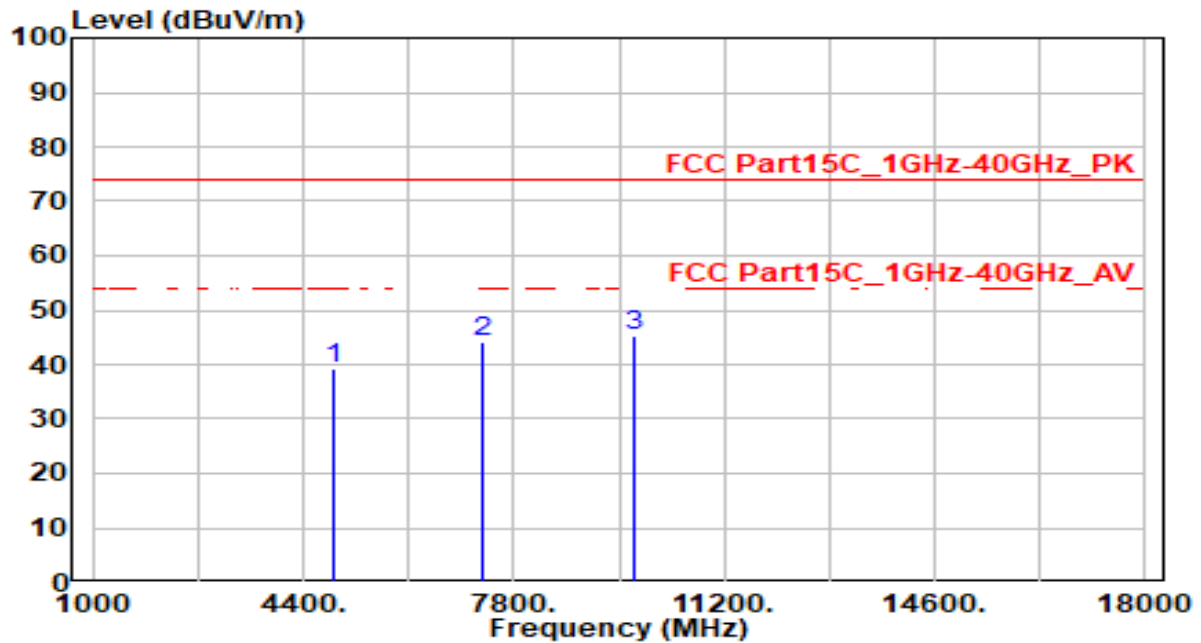


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.81	0.35	39.16	-34.84	74.00	100	50	Peak
2	7311.000	38.40	5.79	44.19	-29.81	74.00	100	300	Peak
3	* 9748.000	39.95	5.34	45.29	-28.71	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

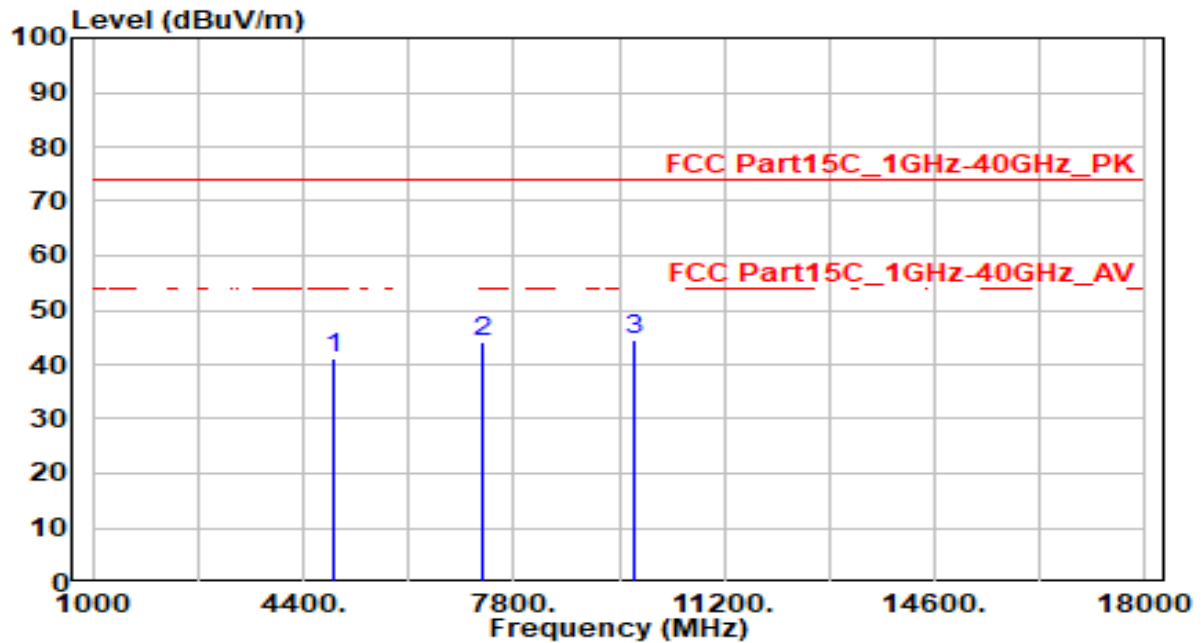


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.72	0.35	41.07	-32.93	74.00	100	55	Peak
2	7311.000	38.50	5.79	44.30	-29.70	74.00	100	40	Peak
3	* 9748.000	39.18	5.34	44.52	-29.48	74.00	100	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

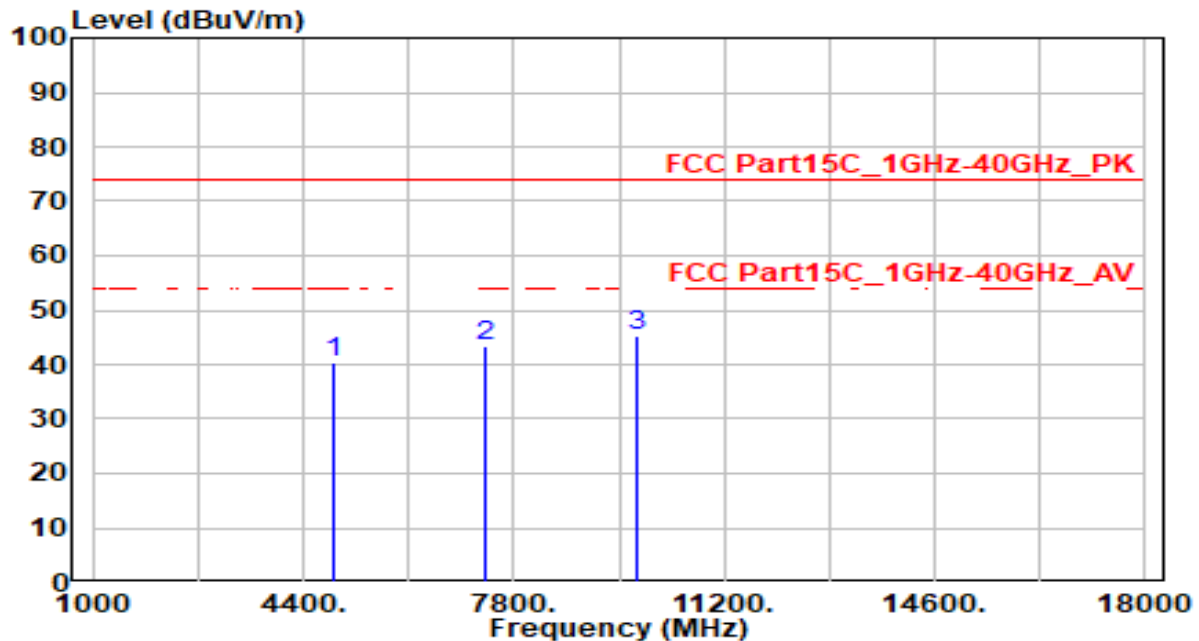


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.90	0.41	40.31	-33.69	74.00	100	105	Peak
2	7356.000	37.54	5.78	43.32	-30.68	74.00	100	10	Peak
3	* 9808.000	39.75	5.35	45.10	-28.90	74.00	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

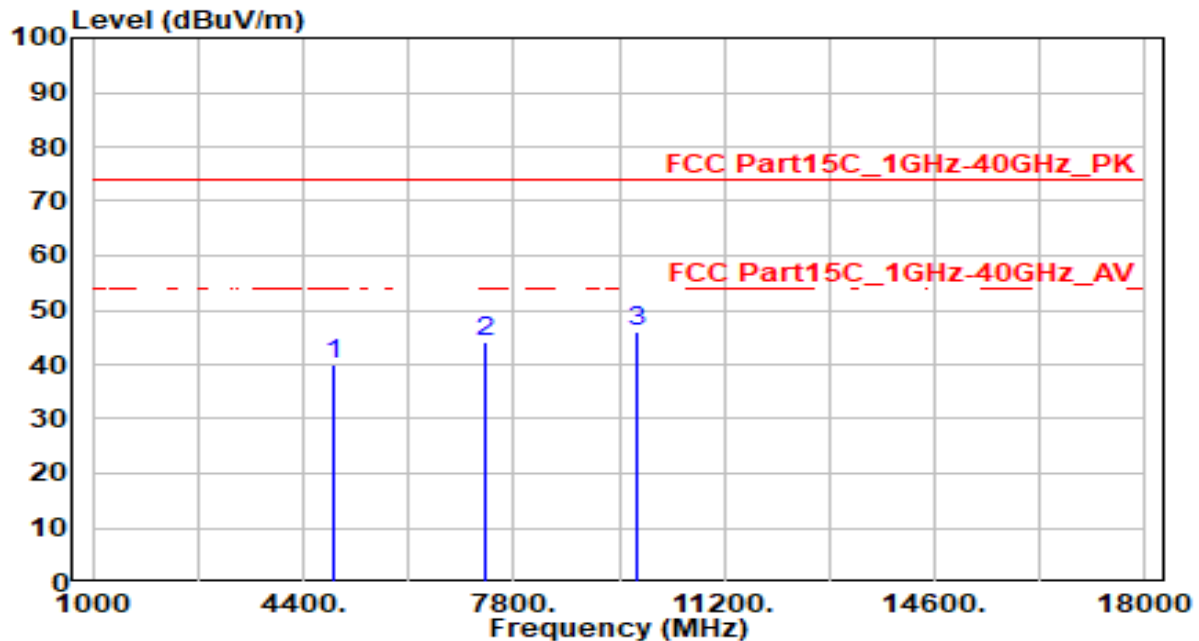


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.41	0.41	39.82	-34.18	74.00	100	0	Peak
2	7356.000	38.56	5.78	44.34	-29.66	74.00	100	150	Peak
3	* 9808.000	40.69	5.35	46.05	-27.95	74.00	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

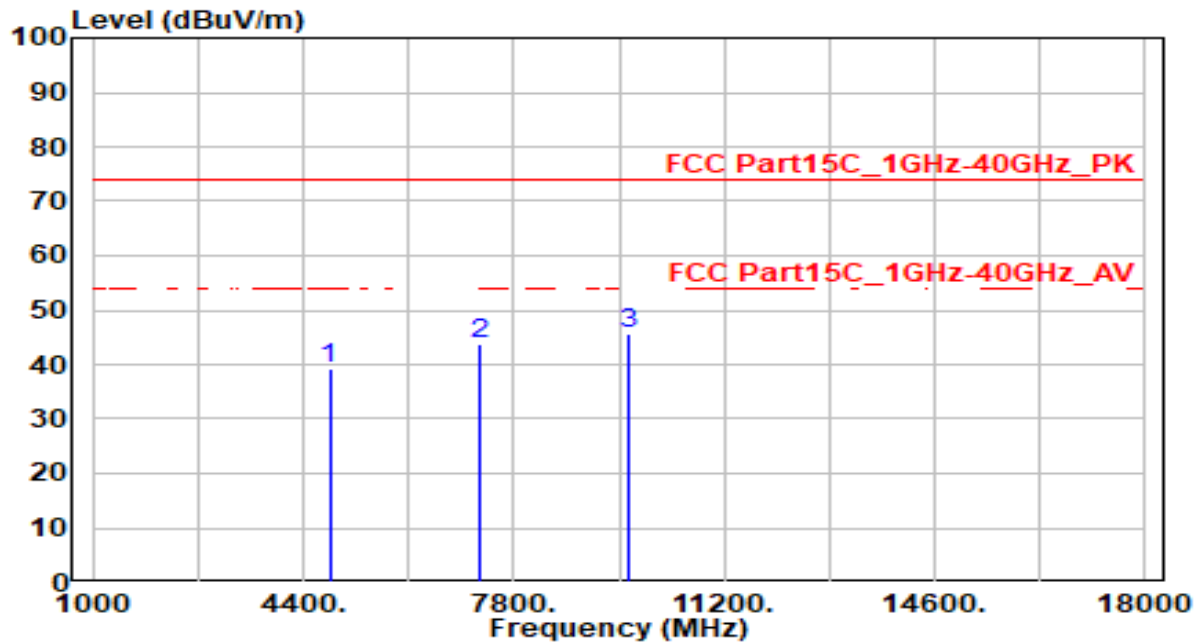


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	38.96	0.25	39.21	-34.79	74.00	100	360	Peak
2	7236.000	37.97	5.81	43.78	-30.22	74.00	100	360	Peak
3	* 9648.000	40.17	5.32	45.49	-28.51	74.00	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

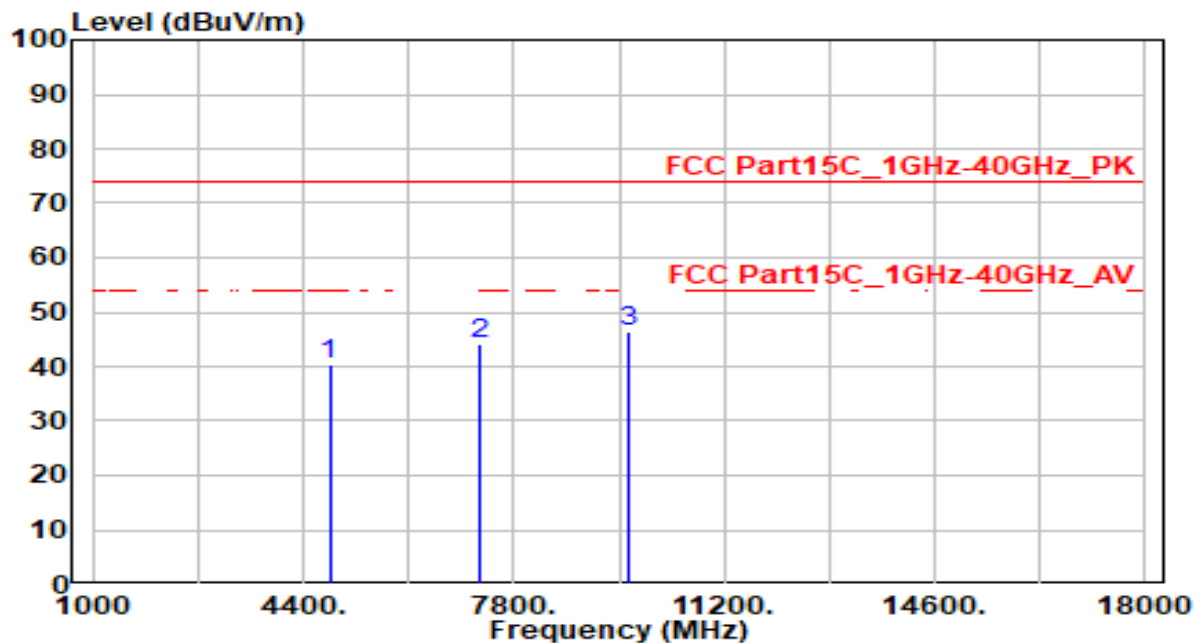


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.21	0.25	40.46	-33.54	74.00	100	215	Peak
2	7236.000	38.47	5.81	44.28	-29.72	74.00	100	90	Peak
3	* 9648.000	40.91	5.32	46.23	-27.77	74.00	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

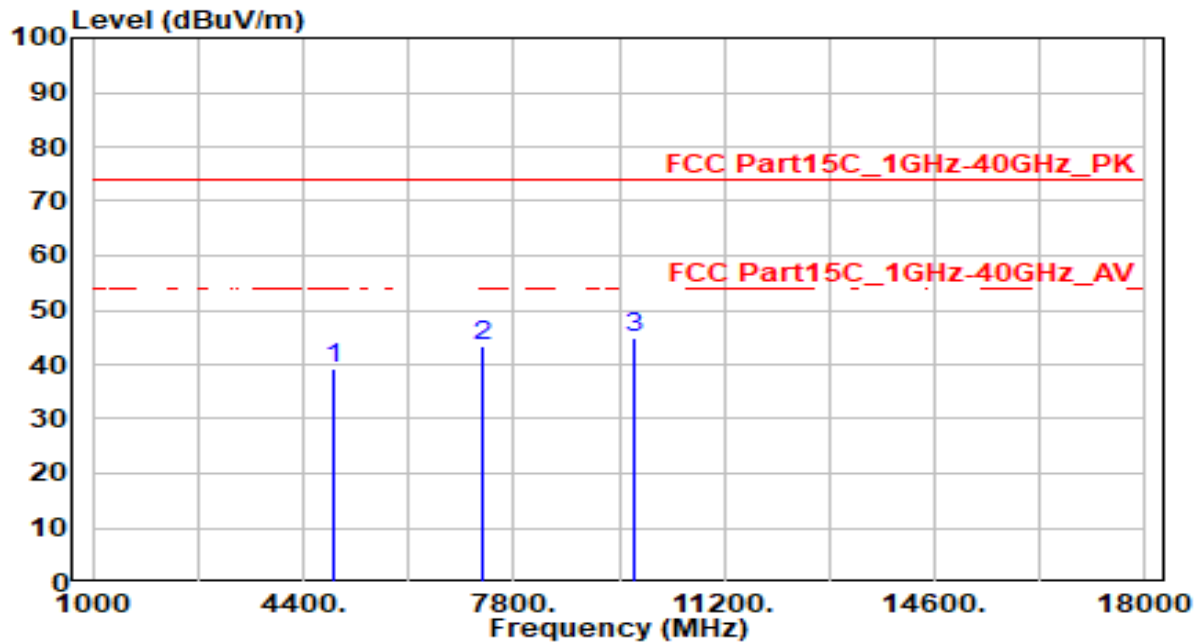


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.05	0.35	39.41	-34.59	74.00	100	340	Peak
2	7311.000	37.66	5.79	43.45	-30.55	74.00	100	285	Peak
3	* 9748.000	39.53	5.34	44.87	-29.13	74.00	100	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

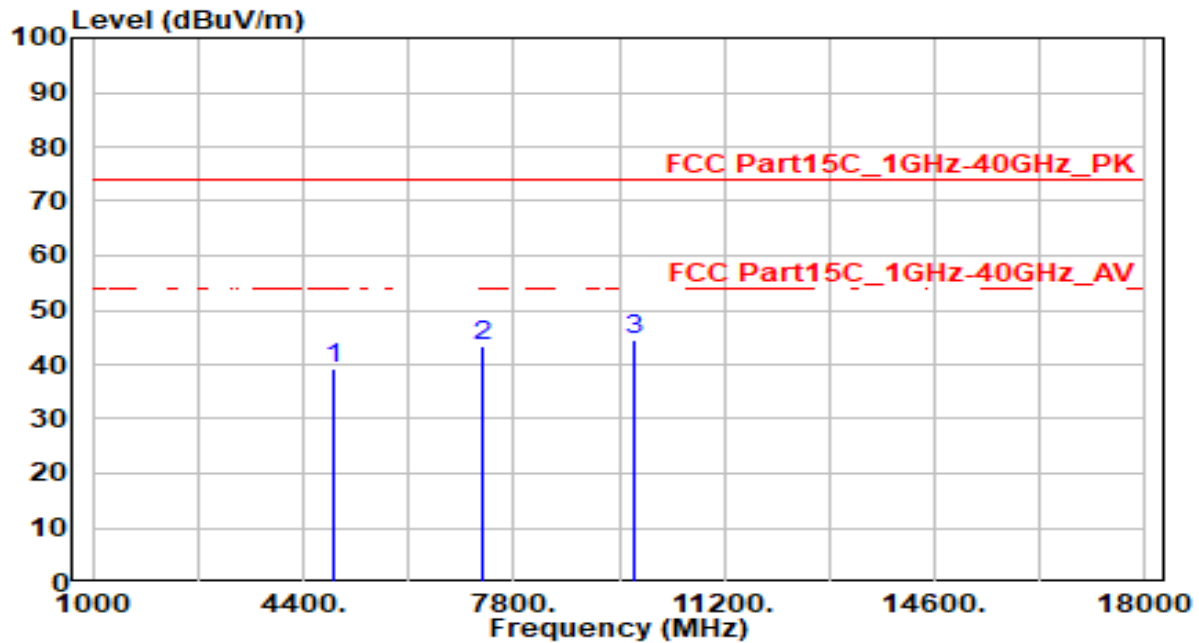


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.07	0.35	39.42	-34.58	74.00	100	45	Peak
2	7311.000	37.74	5.79	43.53	-30.47	74.00	100	310	Peak
3	* 9748.000	39.13	5.34	44.47	-29.53	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

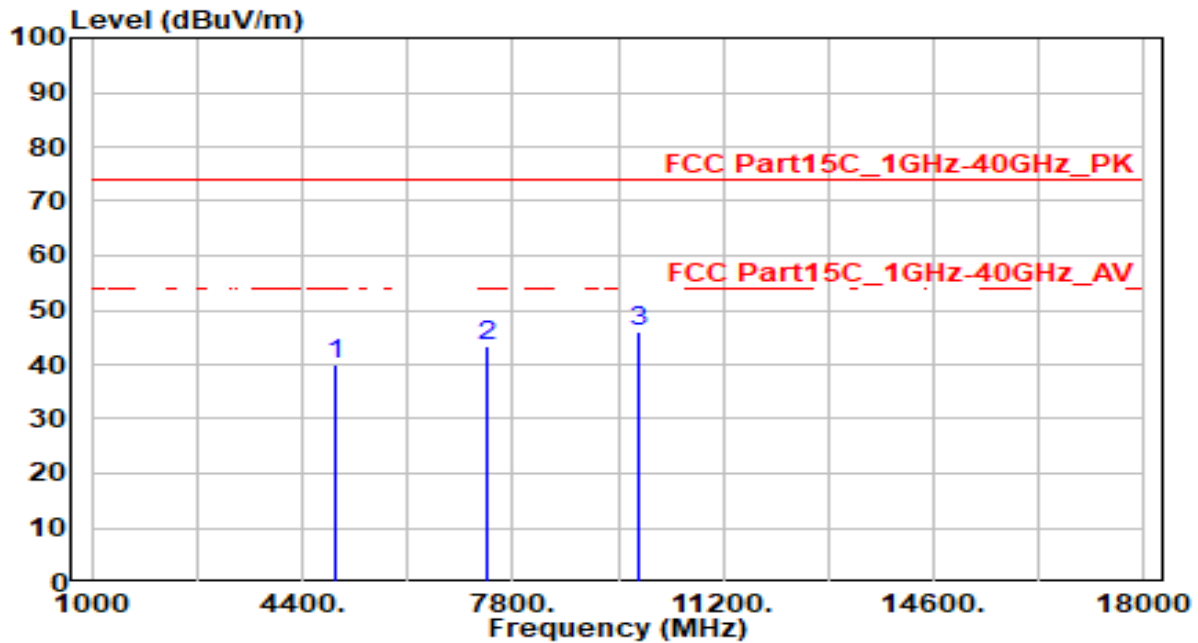


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.63	0.45	40.09	-33.91	74.00	100	60	Peak
2	7386.000	37.64	5.77	43.42	-30.58	74.00	100	345	Peak
3	* 9848.000	40.83	5.38	46.21	-27.79	74.00	100	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

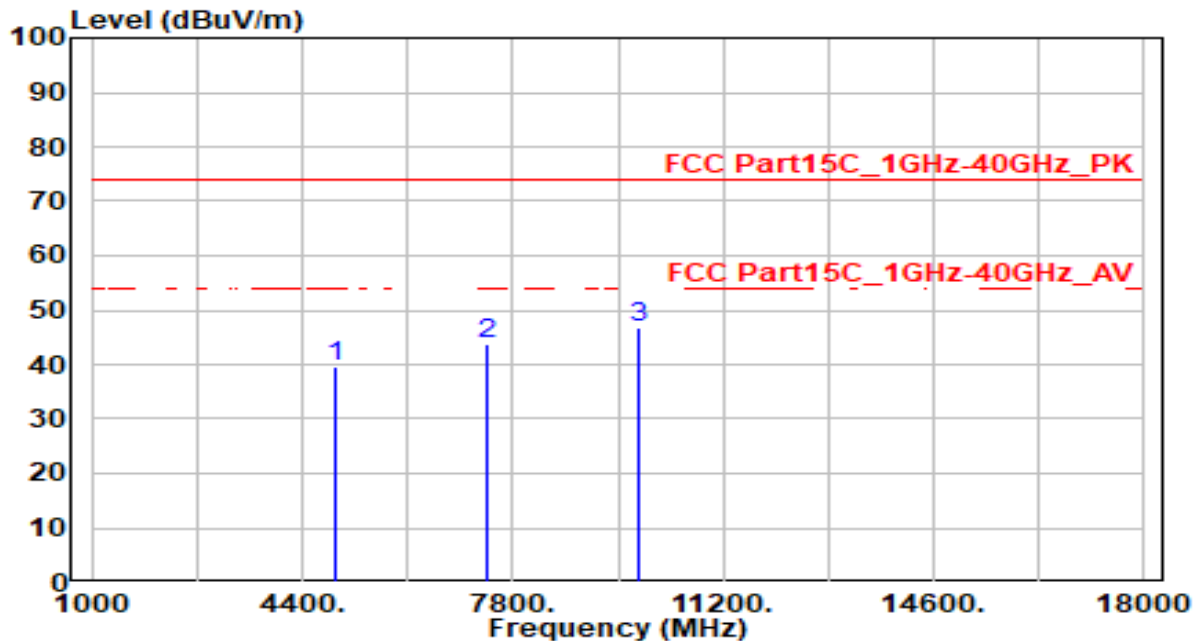


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.21	0.45	39.66	-34.34	74.00	100	195	Peak
2	7386.000	38.09	5.77	43.86	-30.14	74.00	100	145	Peak
3	* 9848.000	41.51	5.38	46.89	-27.11	74.00	100	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

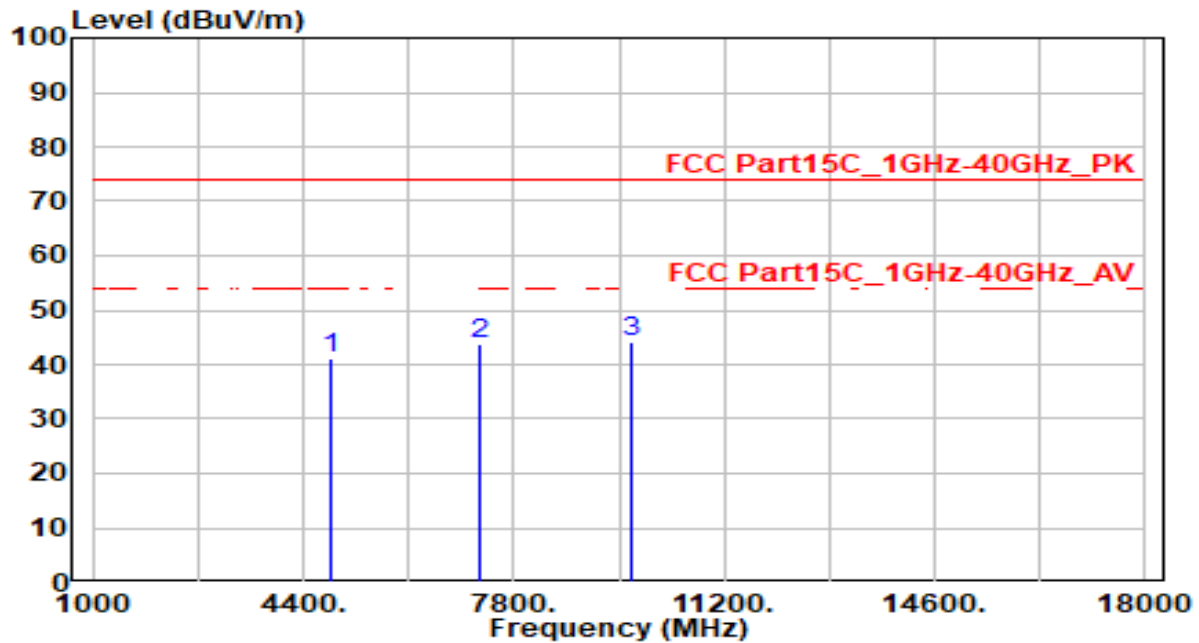


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.96	0.29	41.25	-32.75	74.00	100	140	Peak
2	7266.000	38.04	5.81	43.85	-30.15	74.00	100	330	Peak
3	* 9688.000	38.78	5.33	44.11	-29.89	74.00	100	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

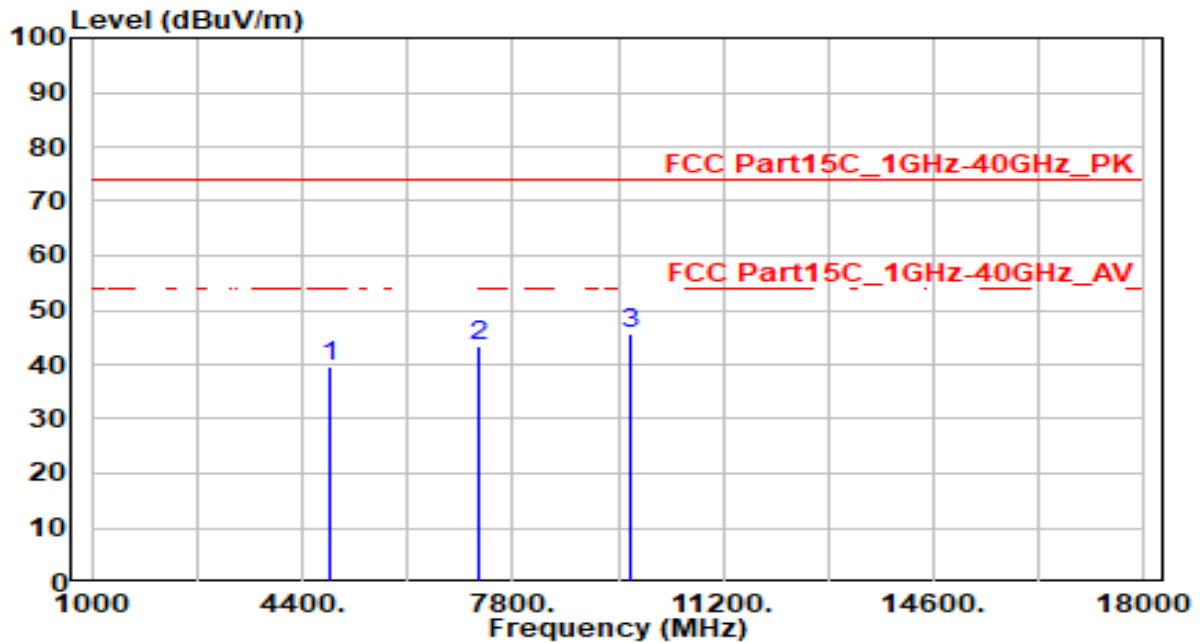


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.19	0.29	39.48	-34.52	74.00	100	65	Peak
2	7266.000	37.46	5.81	43.27	-30.73	74.00	100	145	Peak
3	* 9688.000	40.45	5.33	45.78	-28.22	74.00	100	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

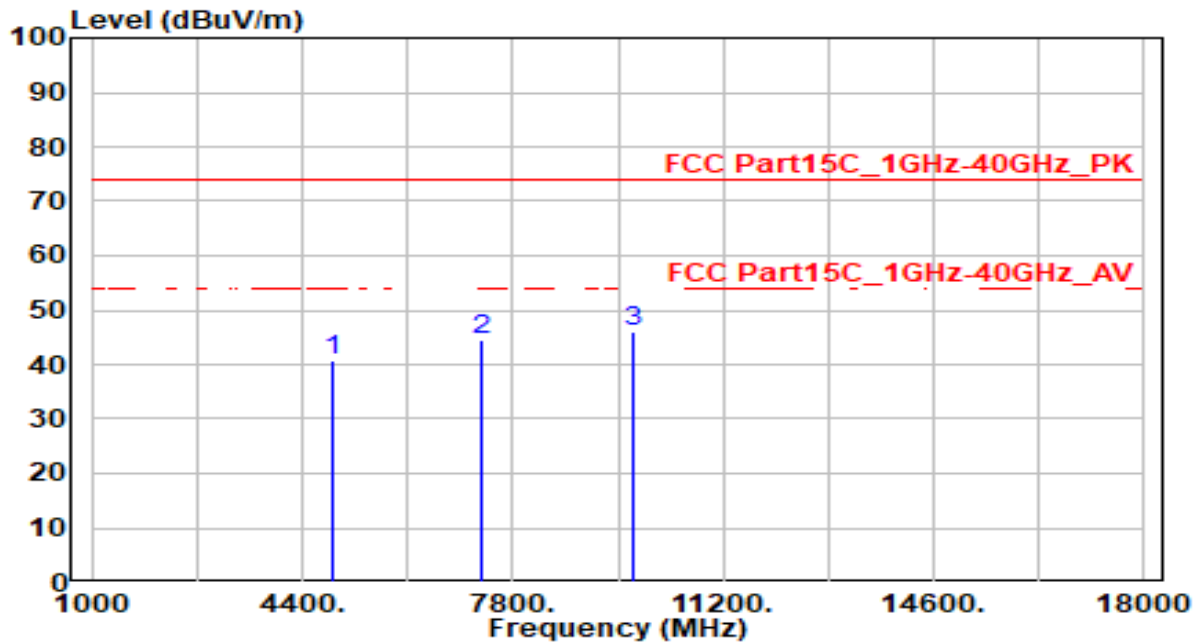


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.22	0.35	40.58	-33.42	74.00	100	360	Peak
2	7311.000	38.70	5.79	44.49	-29.51	74.00	100	225	Peak
3	* 9748.000	40.70	5.34	46.04	-27.96	74.00	100	245	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

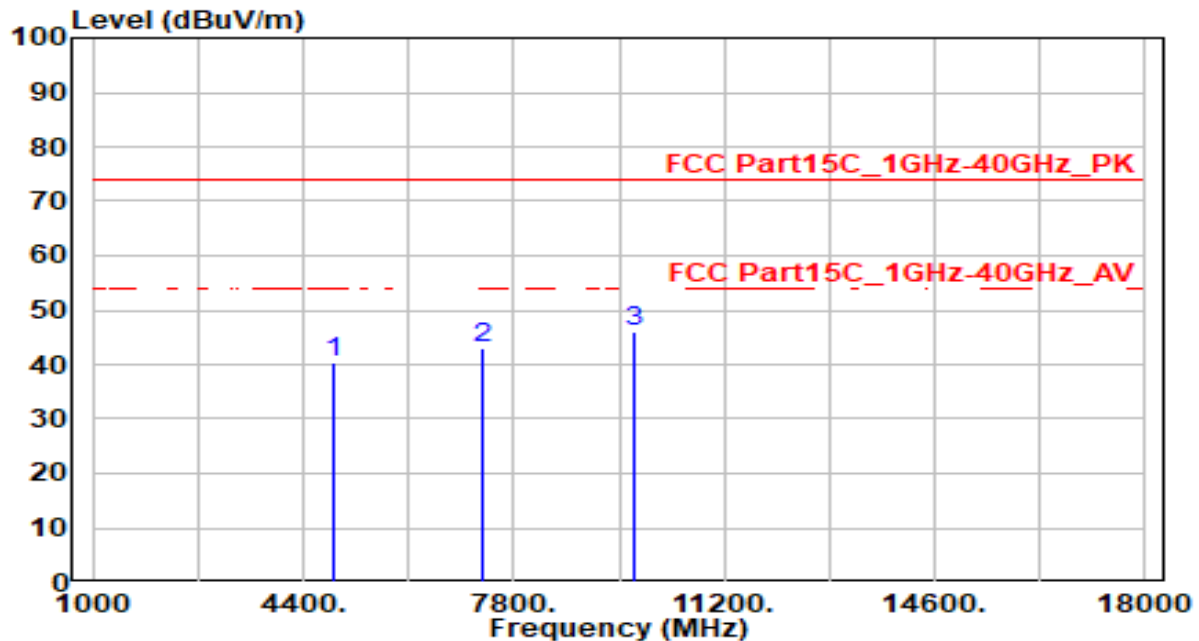


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.04	0.35	40.40	-33.60	74.00	100	105	Peak
2	7311.000	37.12	5.79	42.91	-31.09	74.00	100	0	Peak
3	* 9748.000	40.78	5.34	46.12	-27.88	74.00	100	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

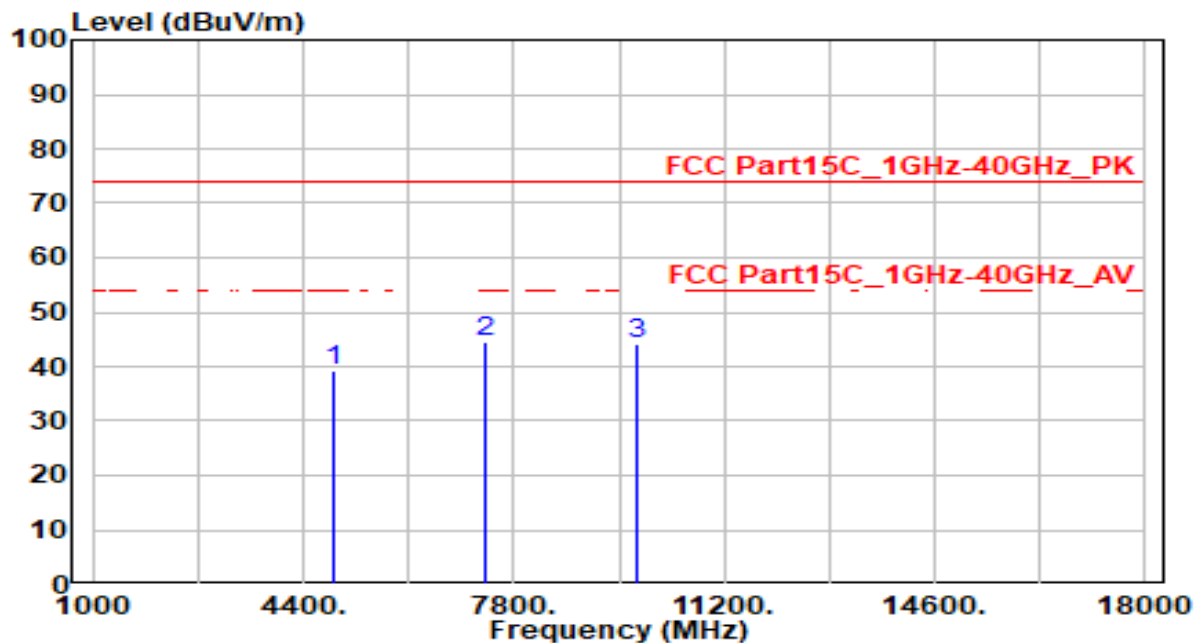


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	38.79	0.41	39.20	-34.80	74.00	100	275	Peak
2	*	7356.000	38.80	5.78	44.58	-29.42	74.00	100	20	Peak
3		9808.000	38.77	5.35	44.13	-29.87	74.00	100	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

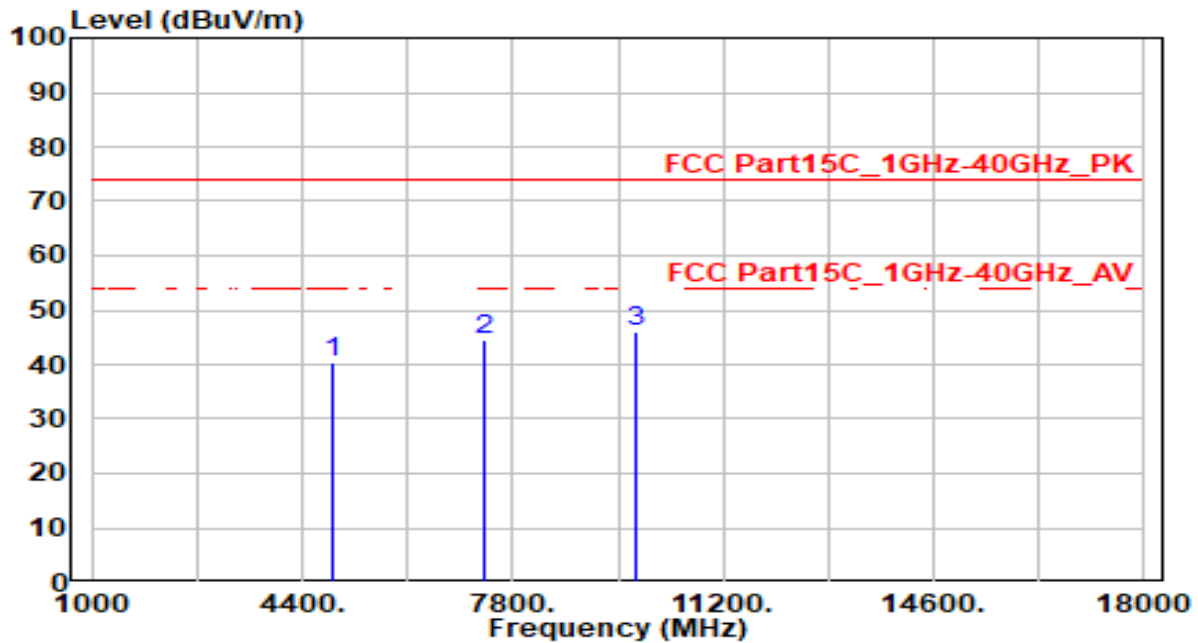

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.90	0.41	40.31	-33.69	74.00	100	190	Peak
2	7356.000	38.58	5.78	44.36	-29.64	74.00	100	115	Peak
3	* 9808.000	40.64	5.35	46.00	-28.00	74.00	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4.Test Setup

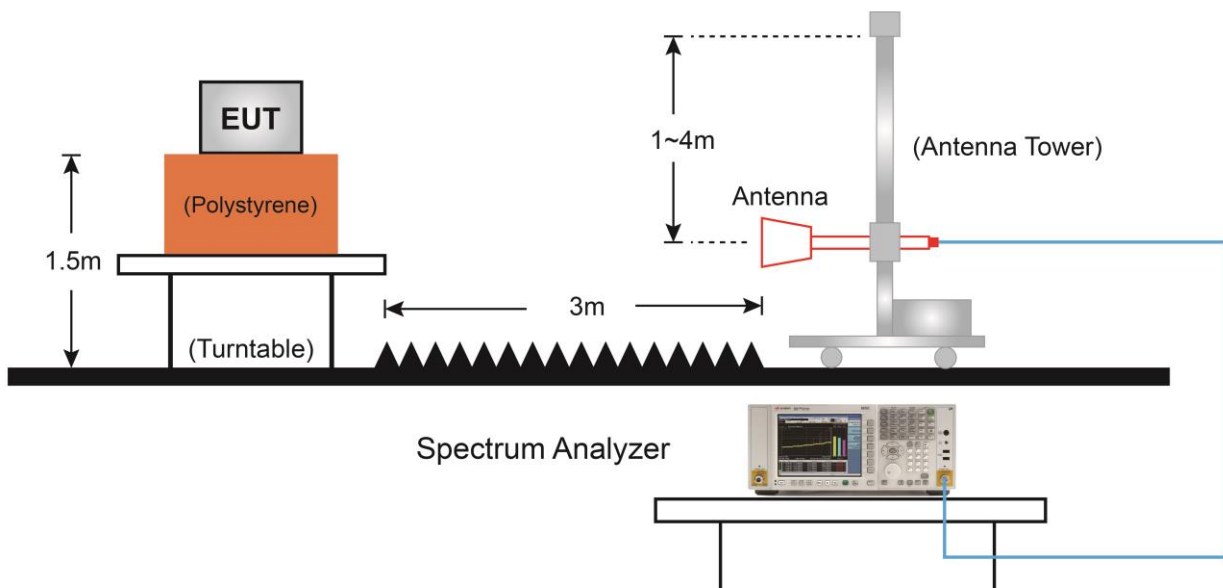

7.7.5. Test Result

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

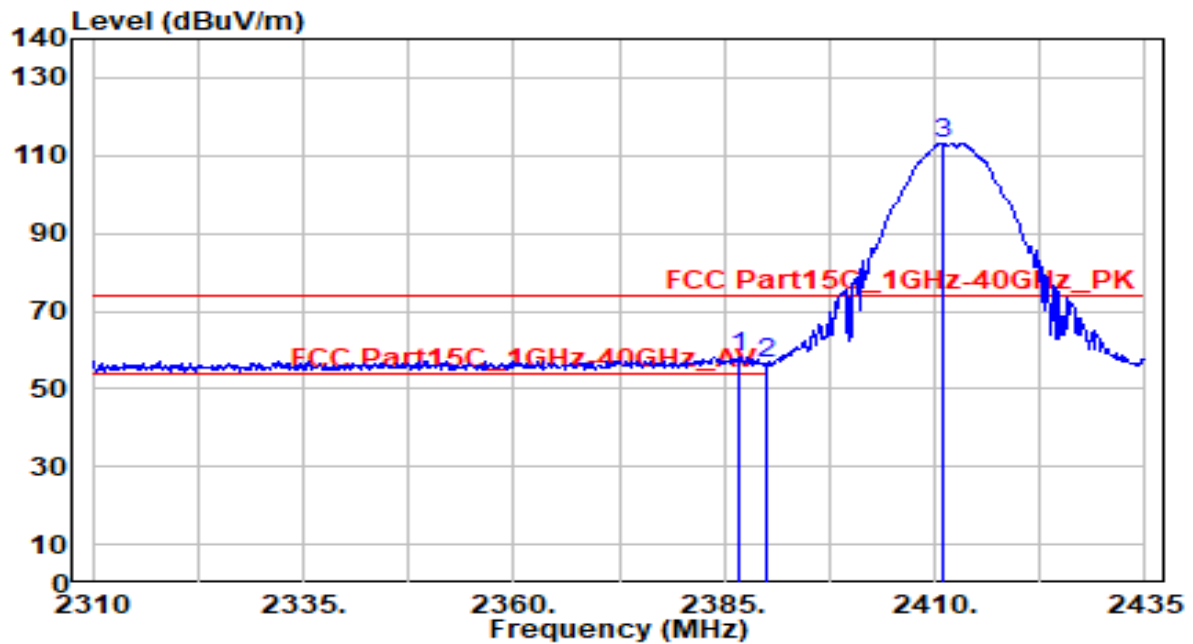


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.625	27.59	30.61	58.20	-15.80	74.00	100	130	Peak
2		2390.000	25.82	30.61	56.44	-17.56	74.00	100	130	Peak
3		2410.875	82.44	30.67	113.11	N/A	N/A	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

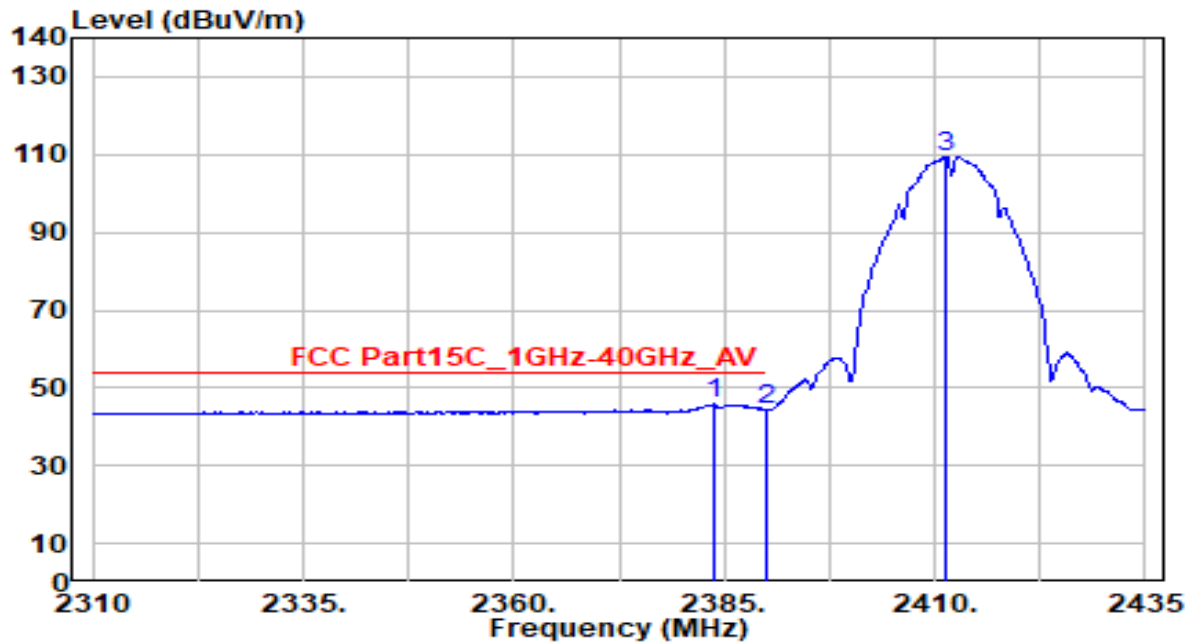


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.750	15.30	30.60	45.90	-8.10	54.00	100	130	Average
2		2390.000	13.55	30.61	44.16	-9.84	54.00	100	130	Average
3		2411.250	78.94	30.67	109.61	N/A	N/A	100	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

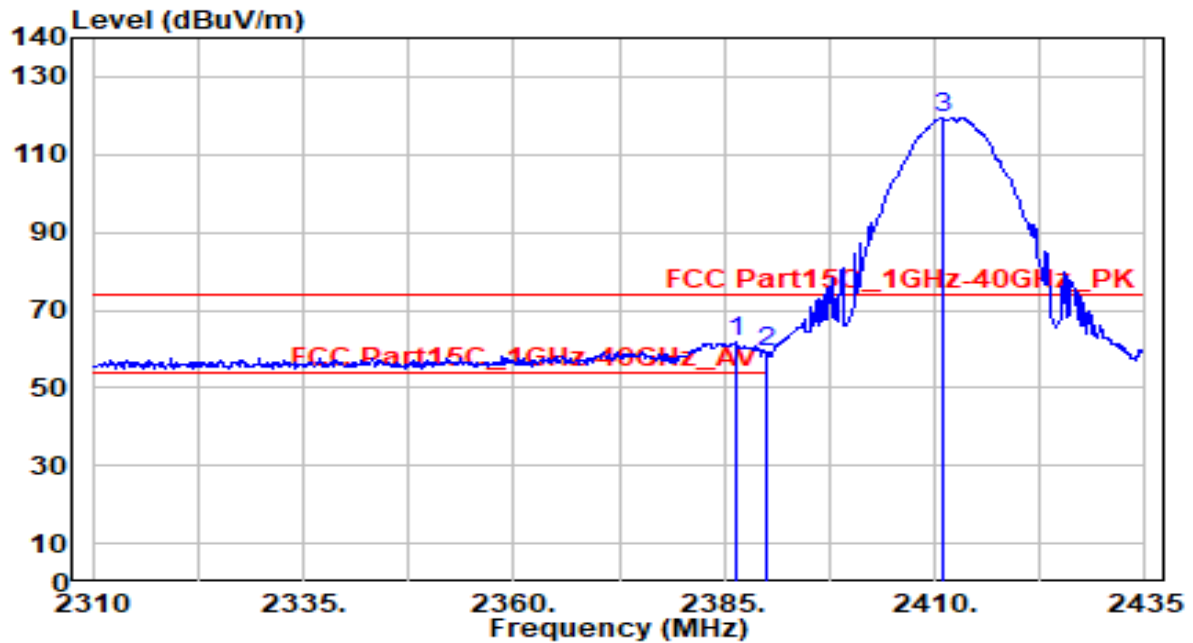


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.375	31.06	30.61	61.67	-12.33	74.00	175	245	Peak
2		2390.000	28.55	30.61	59.17	-14.83	74.00	175	245	Peak
3		2410.875	88.74	30.67	119.41	N/A	N/A	175	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

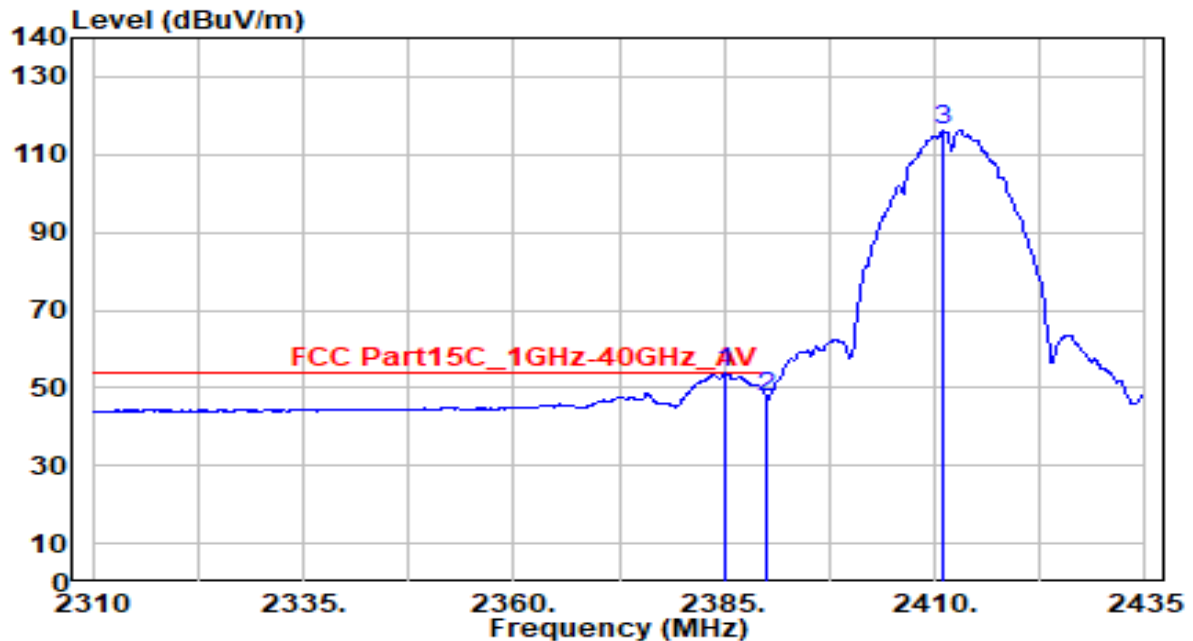


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.000	23.31	30.61	53.92	-0.08	54.00	1175	245	Average
2		2390.000	16.86	30.61	47.47	-6.53	54.00	1175	245	Average
3		2411.000	85.61	30.67	116.28	N/A	N/A	1175	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

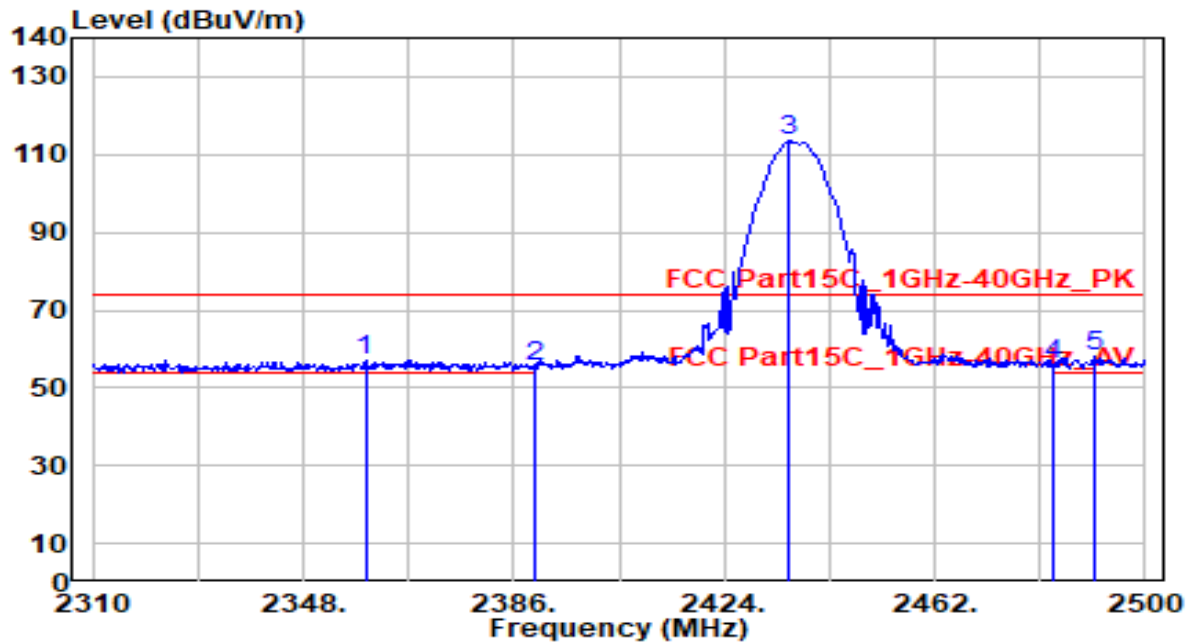


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2359.210	26.72	30.57	57.29	-16.71	74.00	100	125	Peak
2	2390.000	25.09	30.61	55.70	-18.30	74.00	100	125	Peak
3	2435.780	82.79	30.75	113.54	N/A	N/A	100	125	Peak
4	2483.500	24.91	30.91	55.82	-18.18	74.00	100	125	Peak
5	* 2490.690	27.13	30.94	58.07	-15.93	74.00	100	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

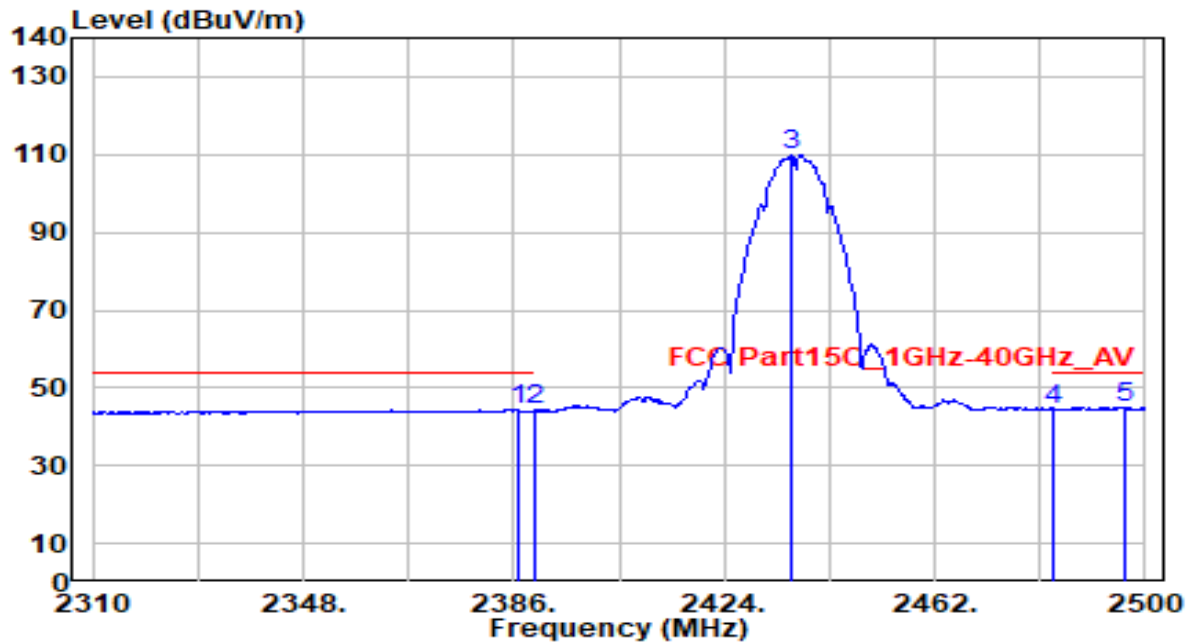


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	13.82	30.61	44.43	-9.57	54.00	100	125	Average
2	2390.000	13.54	30.61	44.15	-9.85	54.00	100	125	Average
3	2436.160	79.30	30.75	110.06	N/A	N/A	100	125	Average
4	2483.500	13.63	30.91	44.55	-9.45	54.00	100	125	Average
5	* 2496.200	14.05	30.96	45.00	-9.00	54.00	100	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

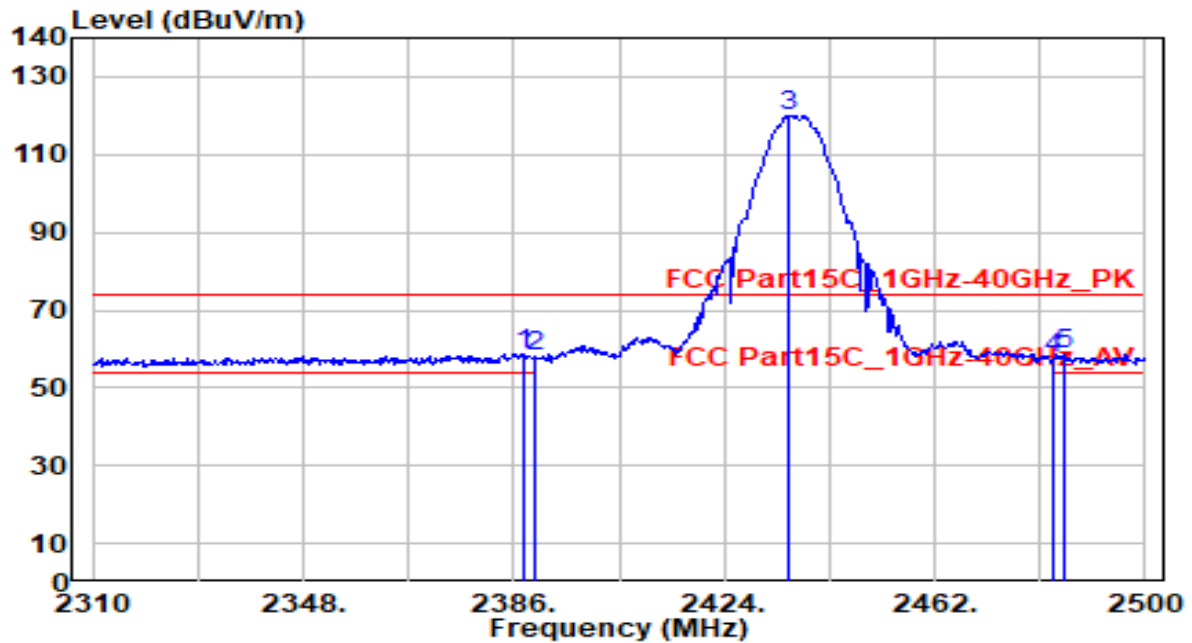


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.710	28.29	30.61	58.90	-15.10	74.00	185	245	Peak
2		2390.000	27.43	30.61	58.04	-15.96	74.00	185	245	Peak
3		2435.780	89.43	30.75	120.18	N/A	N/A	185	245	Peak
4		2483.500	26.57	30.91	57.48	-16.52	74.00	185	245	Peak
5		2485.560	27.95	30.92	58.87	-15.13	74.00	185	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

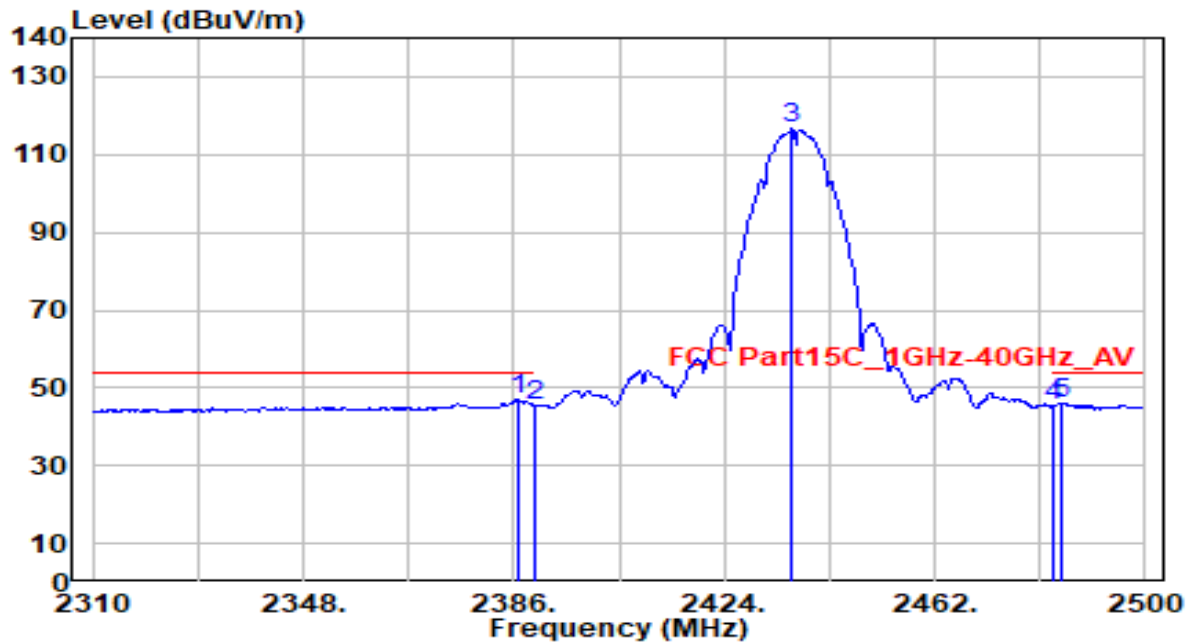


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.760	16.55	30.61	47.16	-6.84	54.00	185	245	Average
2		2390.000	15.05	30.61	45.67	-8.33	54.00	185	245	Average
3		2436.160	85.93	30.75	116.68	N/A	N/A	185	245	Average
4		2483.500	14.28	30.91	45.19	-8.81	54.00	185	245	Average
5		2484.800	15.28	30.92	46.19	-7.81	54.00	185	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

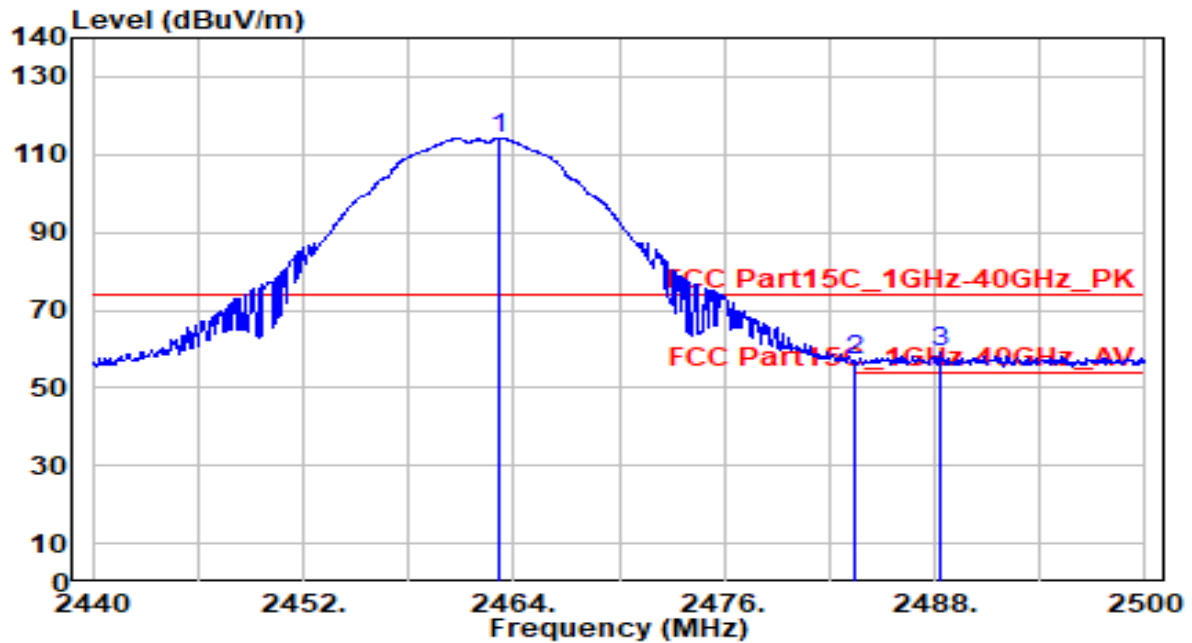


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.160	83.32	30.84	114.16	N/A	N/A	100	135	Peak
2	2483.500	26.25	30.91	57.16	-16.84	74.00	100	135	Peak
3	* 2488.300	27.98	30.93	58.91	-15.09	74.00	100	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

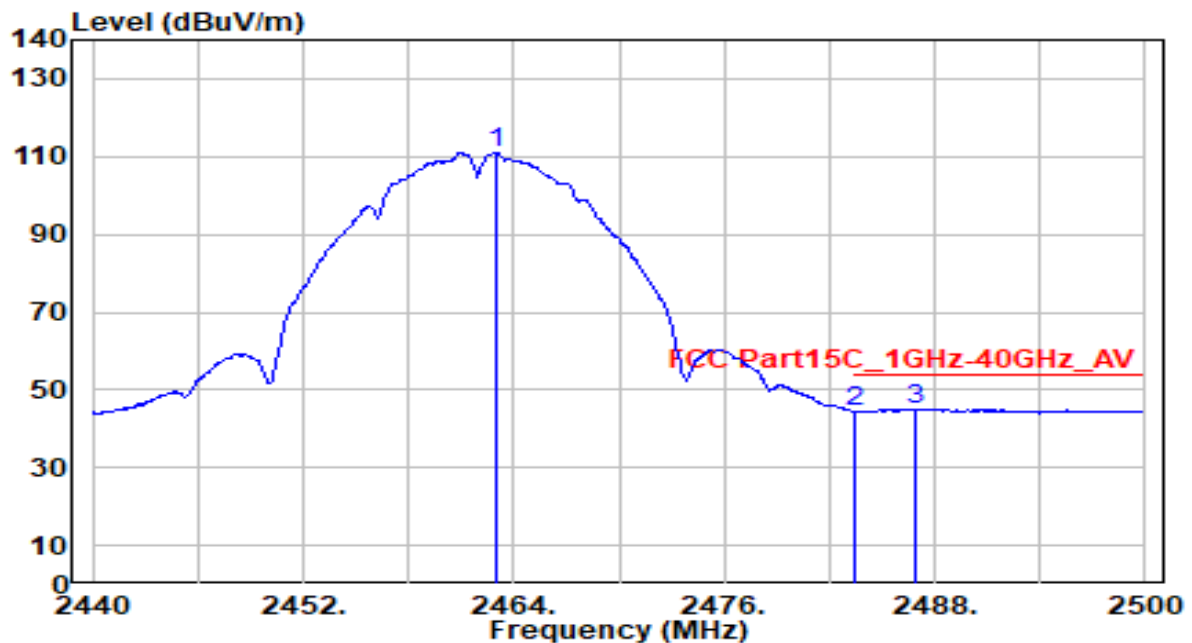


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.980	80.24	30.84	111.08	N/A	N/A	100	135	Average
2	2483.500	13.57	30.91	44.49	-9.51	54.00	100	135	Average
3	* 2486.860	14.18	30.93	45.10	-8.90	54.00	100	135	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

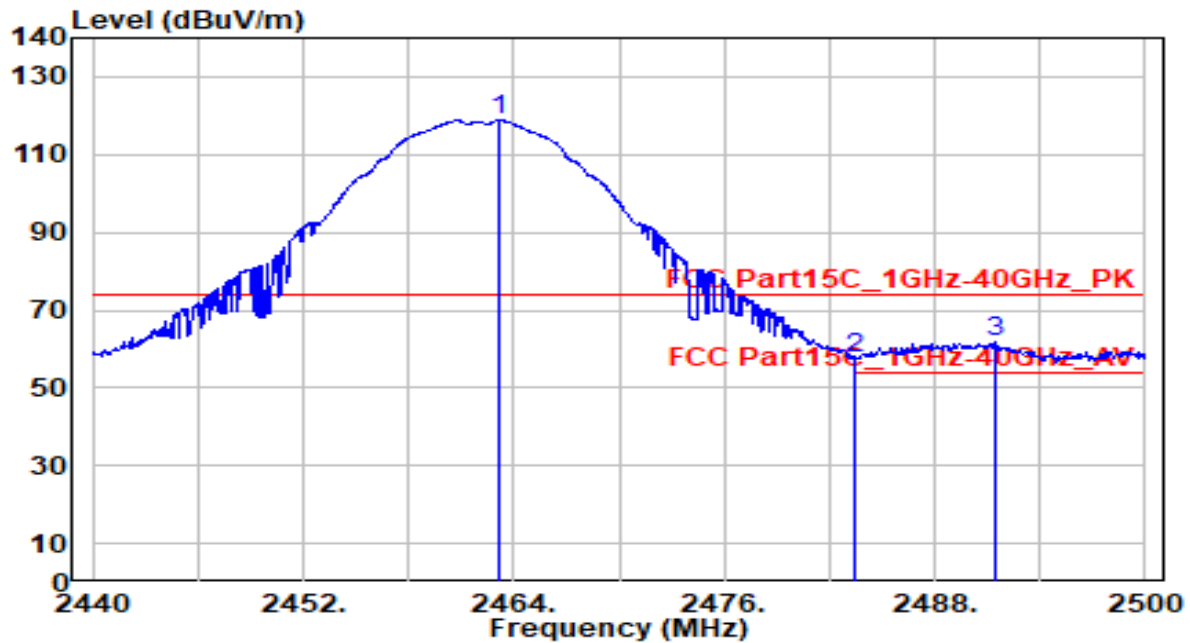


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.220	87.90	30.84	118.74	N/A	N/A	170	245	Peak
2	2483.500	26.92	30.91	57.83	-16.17	74.00	170	245	Peak
3	* 2491.420	30.67	30.94	61.62	-12.38	74.00	170	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11b_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

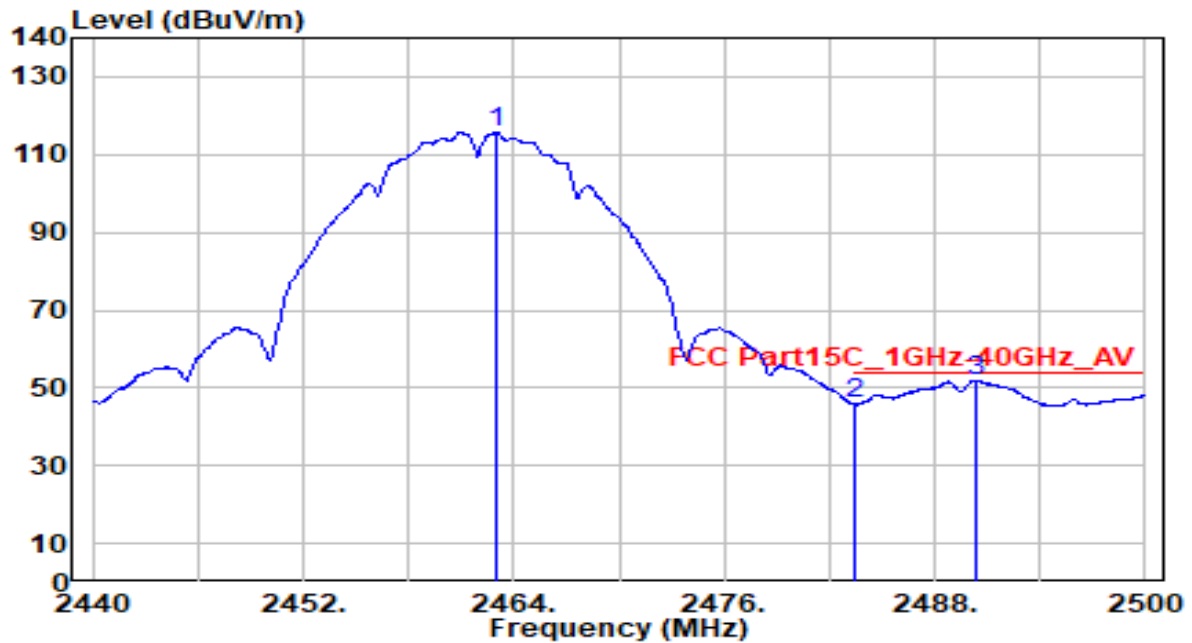


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.980	84.77	30.84	115.62	N/A	N/A	170	245	Average
2	2483.500	14.90	30.91	45.81	-8.19	54.00	170	245	Average
3	* 2490.340	21.03	30.94	51.96	-2.04	54.00	170	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

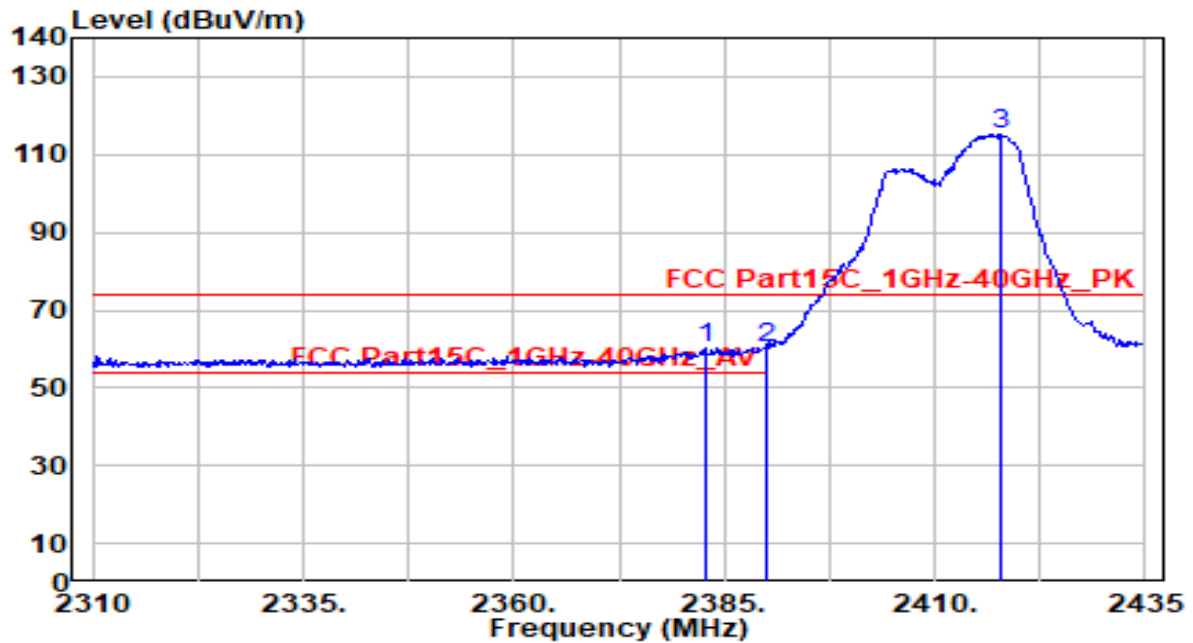


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.750	29.61	30.60	60.21	-13.79	74.00	100	175	Peak
2	* 2390.000	29.69	30.61	60.31	-13.69	74.00	100	175	Peak
3	2417.750	84.68	30.69	115.37	N/A	N/A	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

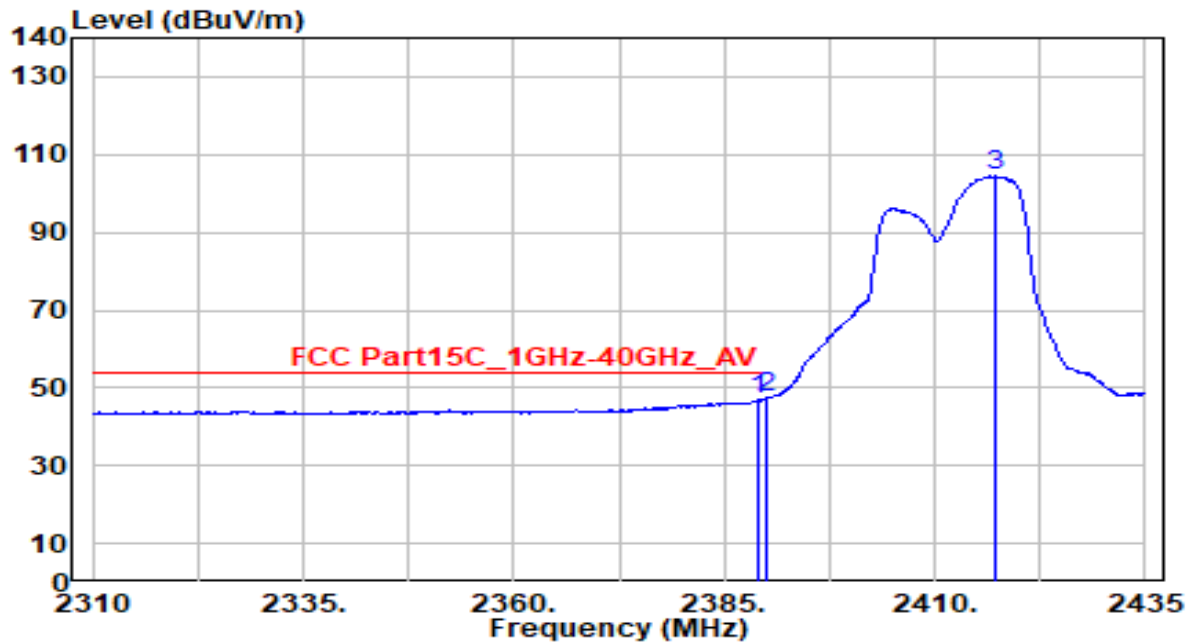


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	16.32	30.61	46.93	-7.07	54.00	100	175	Average
2	*	2390.000	16.83	30.61	47.45	-6.55	54.00	100	175	Average
3		2417.125	73.80	30.69	104.49	N/A	N/A	100	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

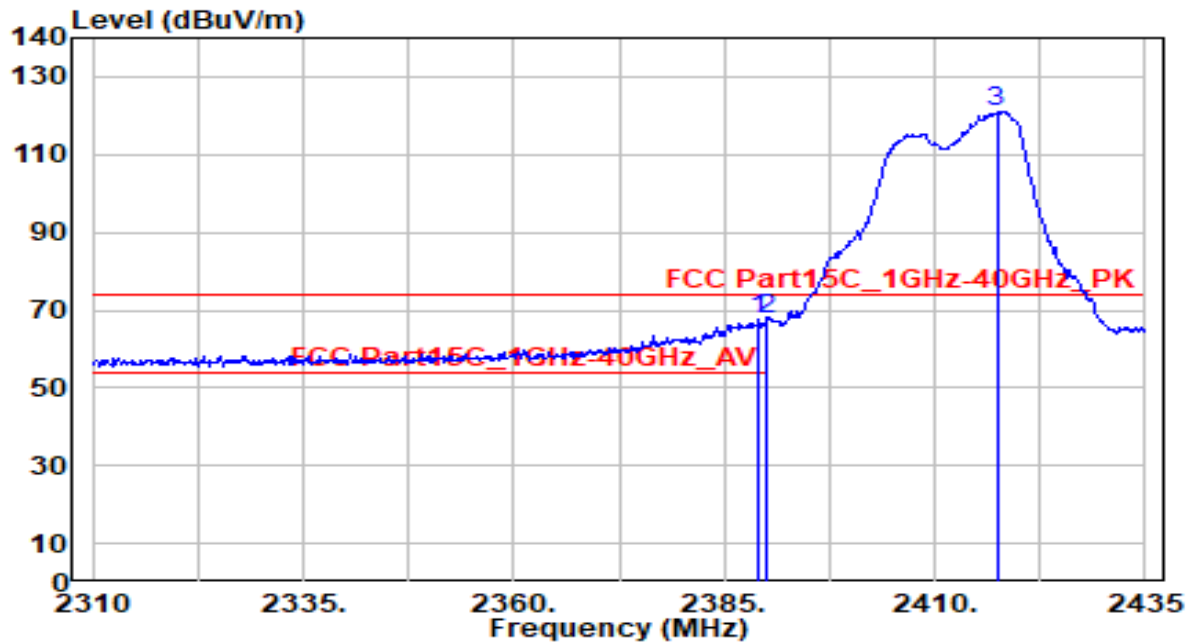


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	36.77	30.61	67.38	-6.62	74.00	170	205	Peak
2	* 2390.000	37.04	30.61	67.66	-6.34	74.00	170	205	Peak
3	2417.375	90.42	30.69	121.11	N/A	N/A	170	205	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

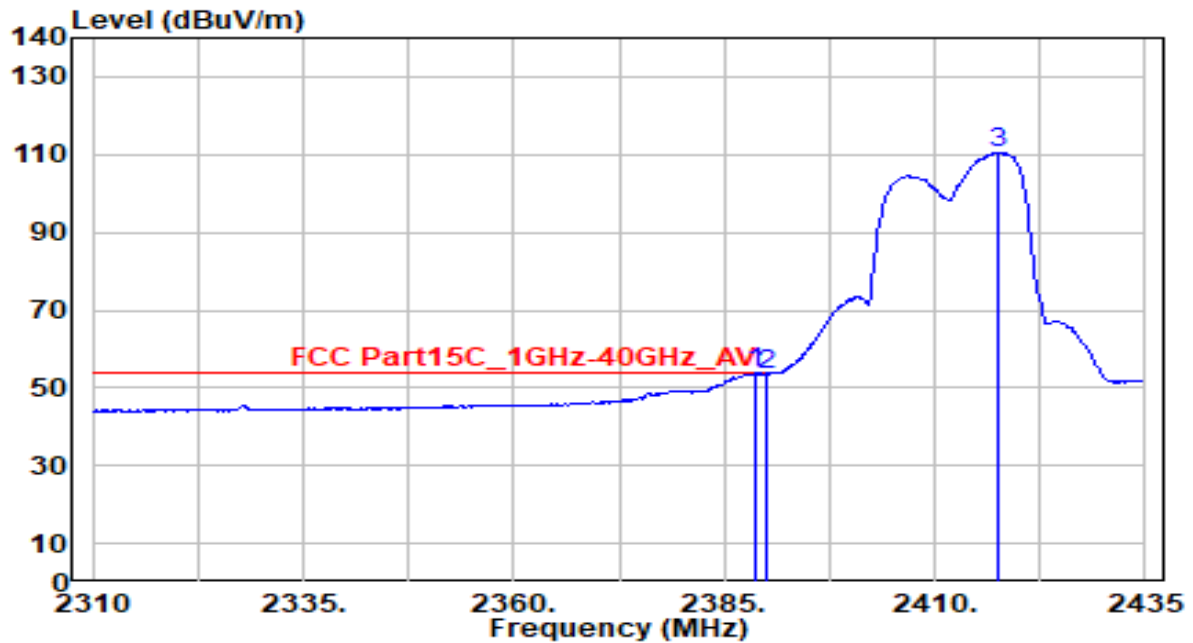


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.750	23.29	30.61	53.90	-0.10	54.00	170	205	Average
2		2390.000	22.99	30.61	53.60	-0.40	54.00	170	205	Average
3		2417.625	79.67	30.69	110.35	N/A	N/A	170	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

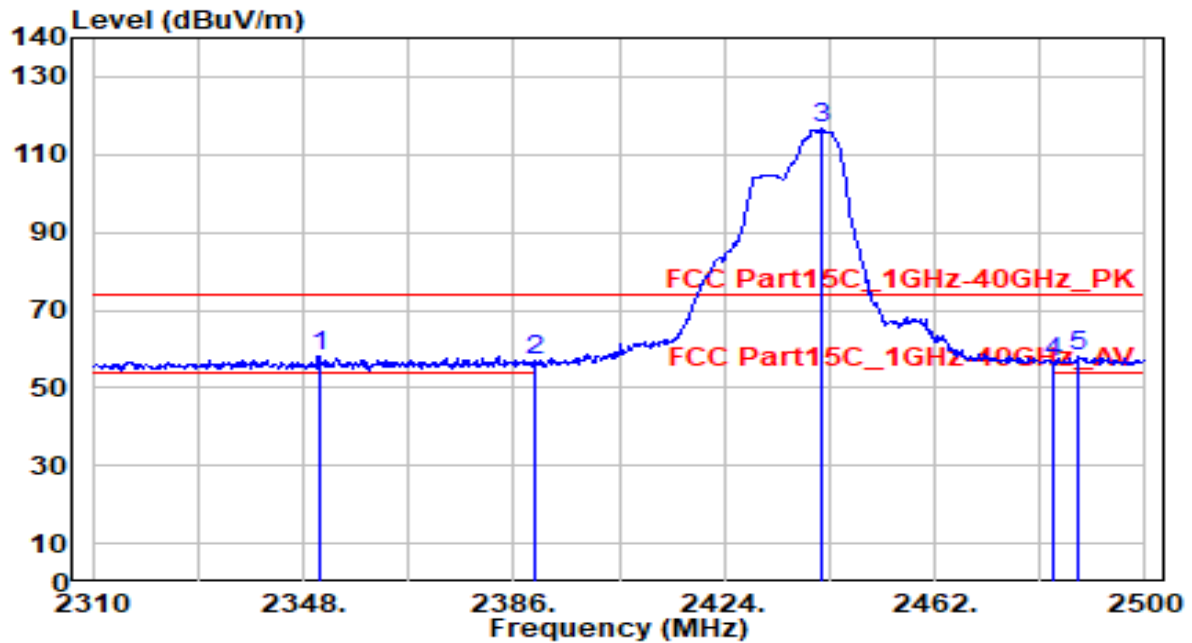


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2350.850	27.60	30.56	58.15	-15.85	74.00	115	180	Peak
2		2390.000	26.67	30.61	57.29	-16.71	74.00	115	180	Peak
3		2441.480	85.81	30.77	116.58	N/A	N/A	115	180	Peak
4		2483.500	25.84	30.91	56.76	-17.24	74.00	115	180	Peak
5		2488.030	27.00	30.93	57.93	-16.07	74.00	115	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

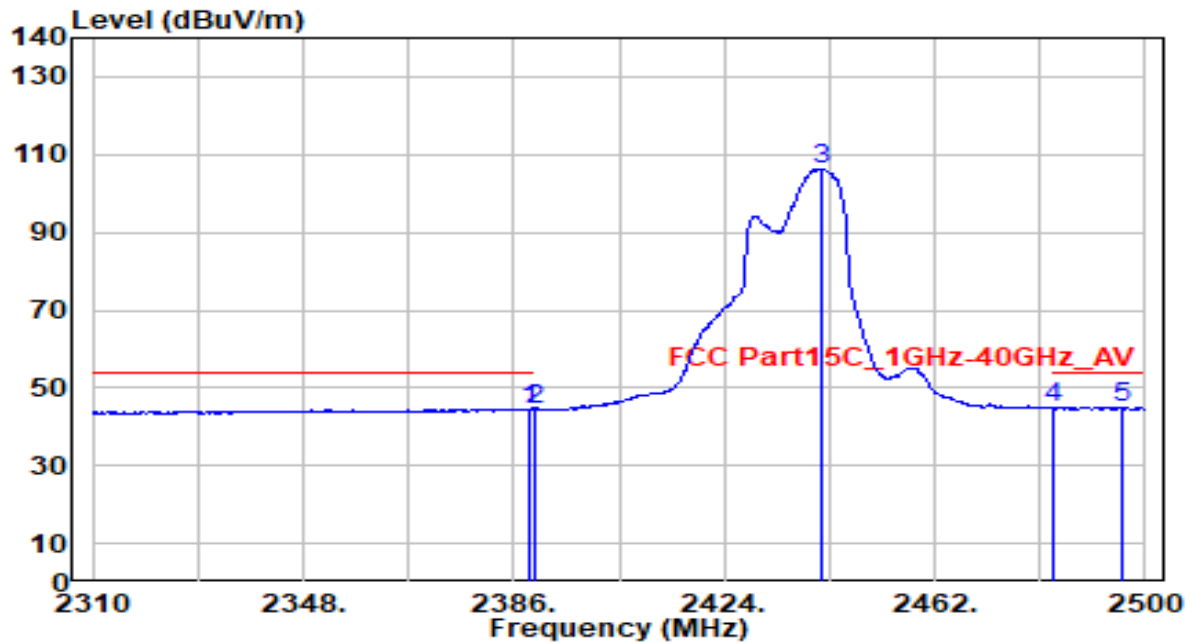


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	14.01	30.61	44.62	-9.38	54.00	115	180	Average
2	2390.000	14.00	30.61	44.62	-9.38	54.00	115	180	Average
3	2441.480	75.41	30.77	106.17	N/A	N/A	115	180	Average
4	2483.500	13.86	30.91	44.78	-9.22	54.00	115	180	Average
5	* 2496.010	14.13	30.96	45.09	-8.91	54.00	115	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

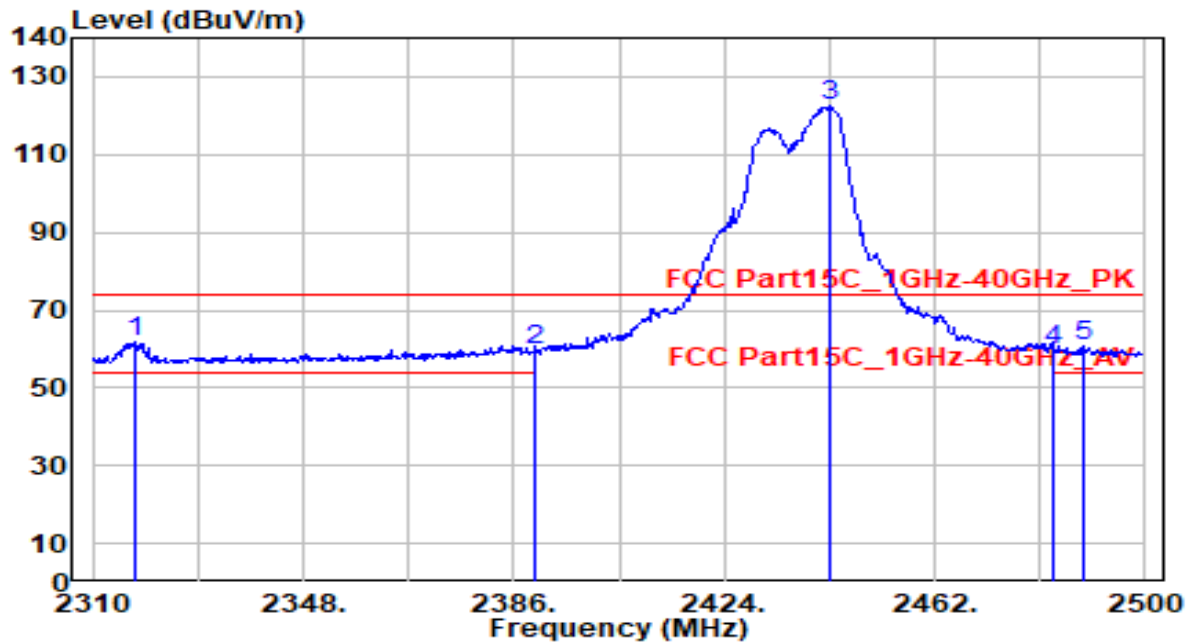


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2317.600	31.06	30.51	61.57	-12.43	74.00	190	205	Peak
2		2390.000	28.89	30.61	59.50	-14.50	74.00	190	205	Peak
3		2443.000	91.75	30.78	122.52	N/A	N/A	190	205	Peak
4		2483.500	28.84	30.91	59.76	-14.24	74.00	190	205	Peak
5		2488.790	29.64	30.93	60.57	-13.43	74.00	190	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

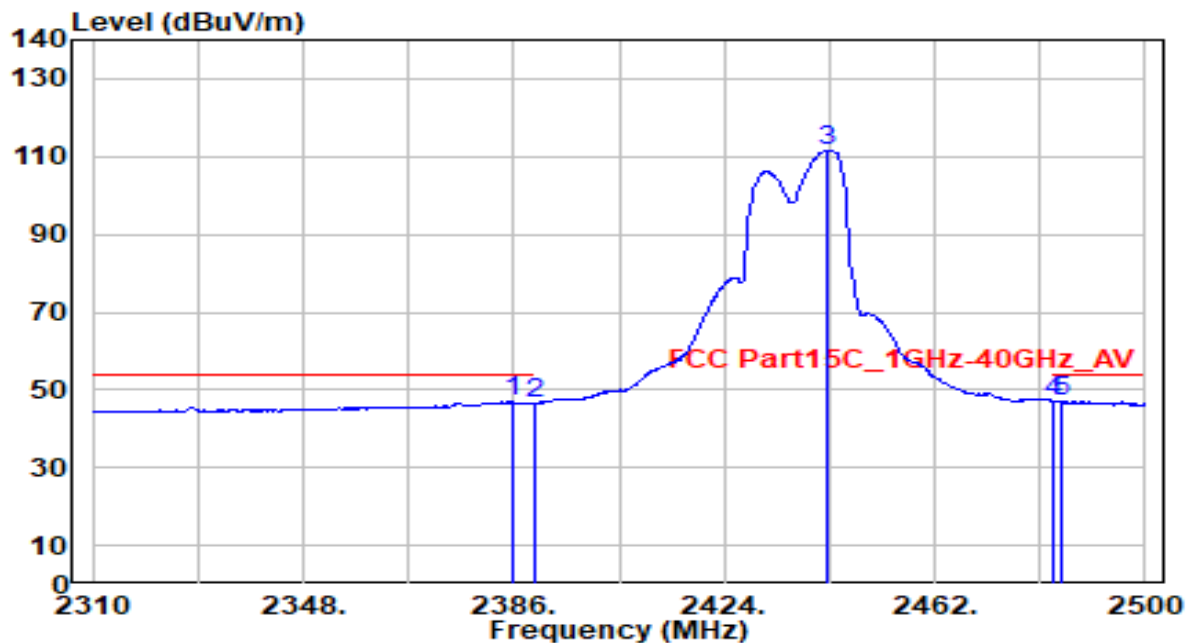


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	16.38	30.61	46.99	-7.01	54.00	190	205	Average
2	2390.000	16.09	30.61	46.71	-7.29	54.00	190	205	Average
3	2442.810	80.85	30.77	111.63	N/A	N/A	190	205	Average
4	2483.500	16.17	30.91	47.08	-6.92	54.00	190	205	Average
5	* 2484.850	16.33	30.92	47.25	-6.75	54.00	190	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

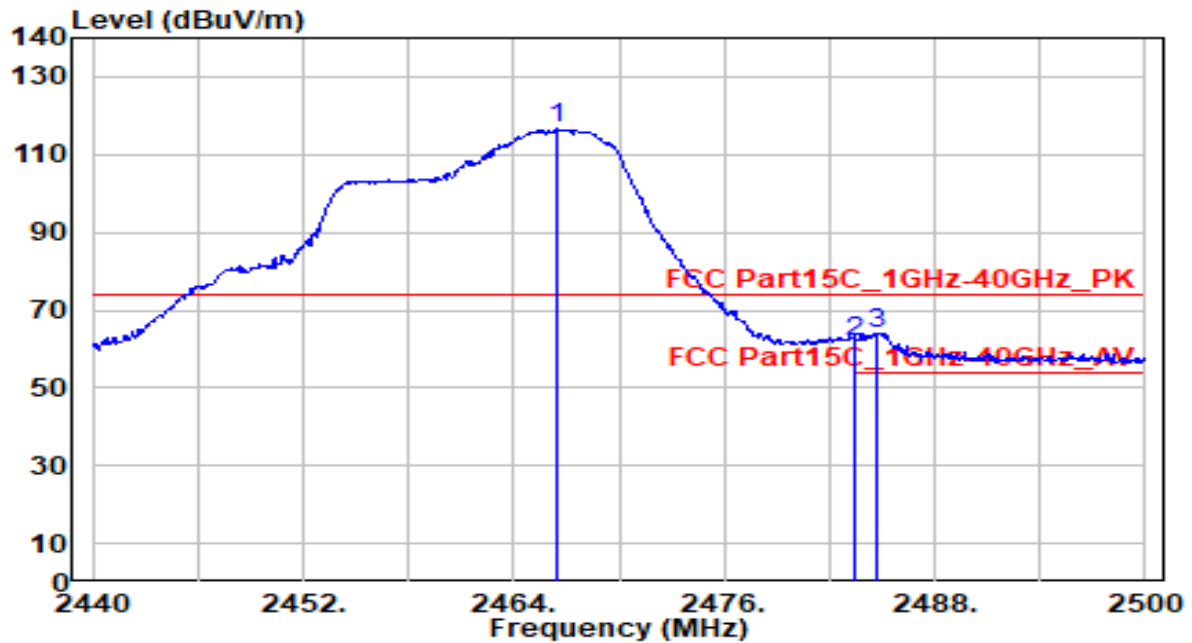


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.460	85.99	30.86	116.84	N/A	N/A	105	180	Peak
2	2483.500	31.03	30.91	61.95	-12.05	74.00	105	180	Peak
3	* 2484.700	33.24	30.92	64.16	-9.84	74.00	105	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

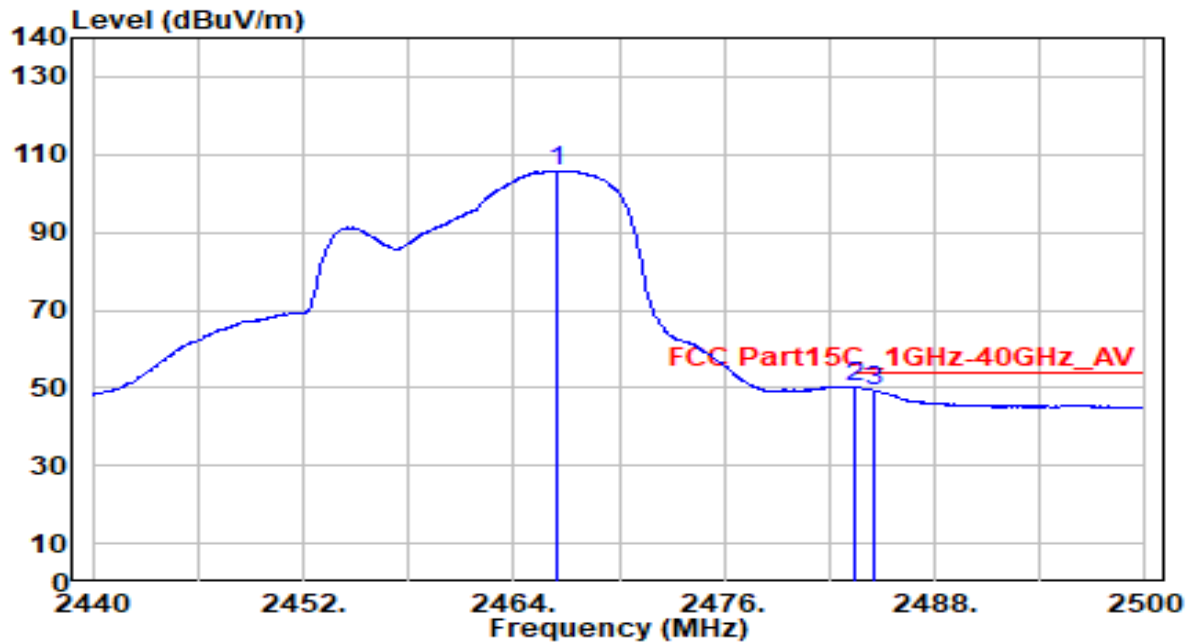


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2466.520	75.00	30.86	105.86	N/A	N/A	105	180	Average
2	*	2483.500	19.17	30.91	50.08	-3.92	54.00	105	180	Average
3		2484.580	18.40	30.92	49.31	-4.69	54.00	105	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

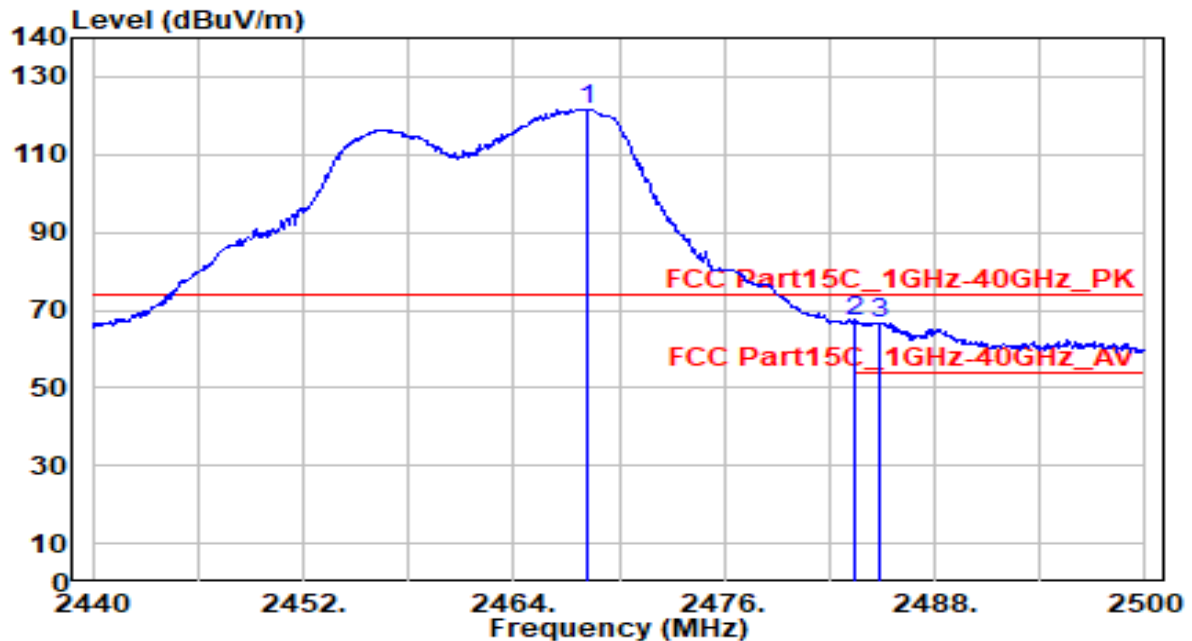


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2468.200	90.78	30.86	121.64	N/A	N/A	195	210	Peak
2	*	2483.500	36.20	30.91	67.11	-6.89	74.00	195	210	Peak
3		2484.820	35.91	30.92	66.83	-7.17	74.00	195	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11g_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

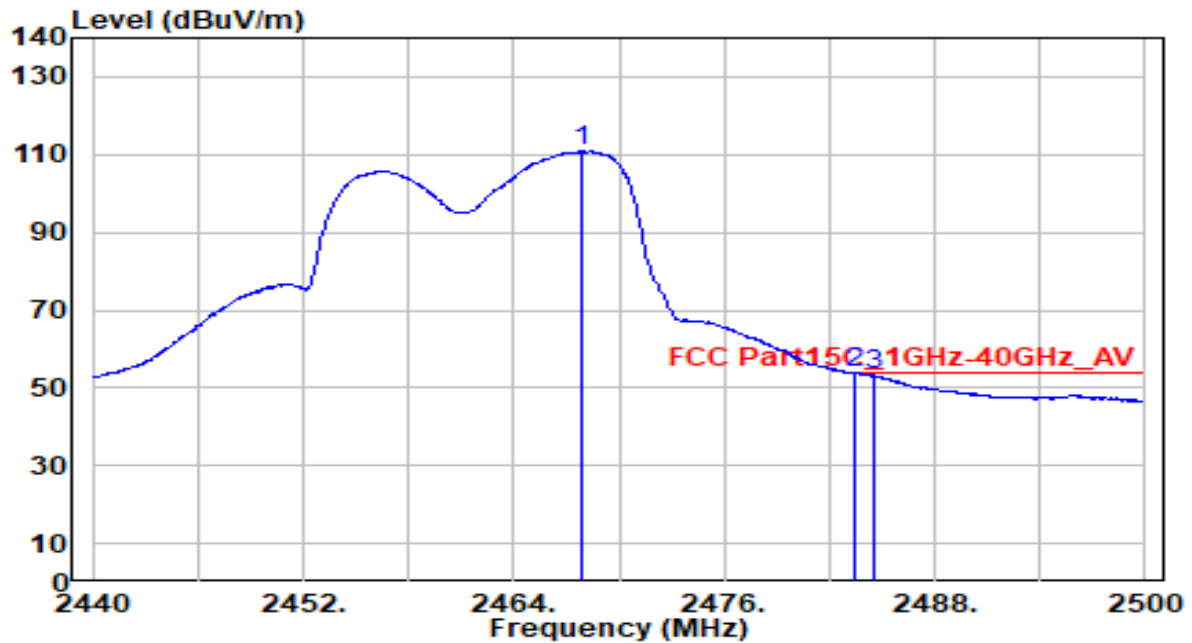


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2467.900	79.91	30.86	110.77	N/A	N/A	195	210	Average
2	*	2483.500	22.96	30.91	53.87	-0.13	54.00	195	210	Average
3		2484.520	22.45	30.92	53.37	-0.63	54.00	195	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

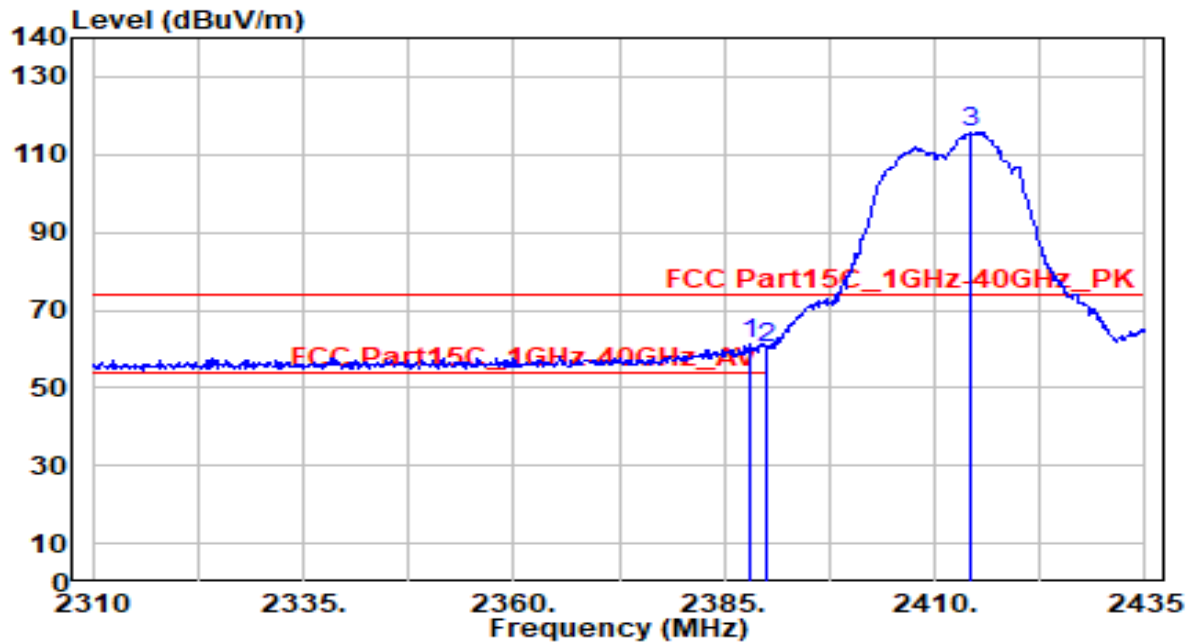


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	30.45	30.61	61.06	-12.94	74.00	130	125	Peak
2		2390.000	29.82	30.61	60.44	-13.56	74.00	130	125	Peak
3		2414.375	85.01	30.68	115.68	N/A	N/A	130	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

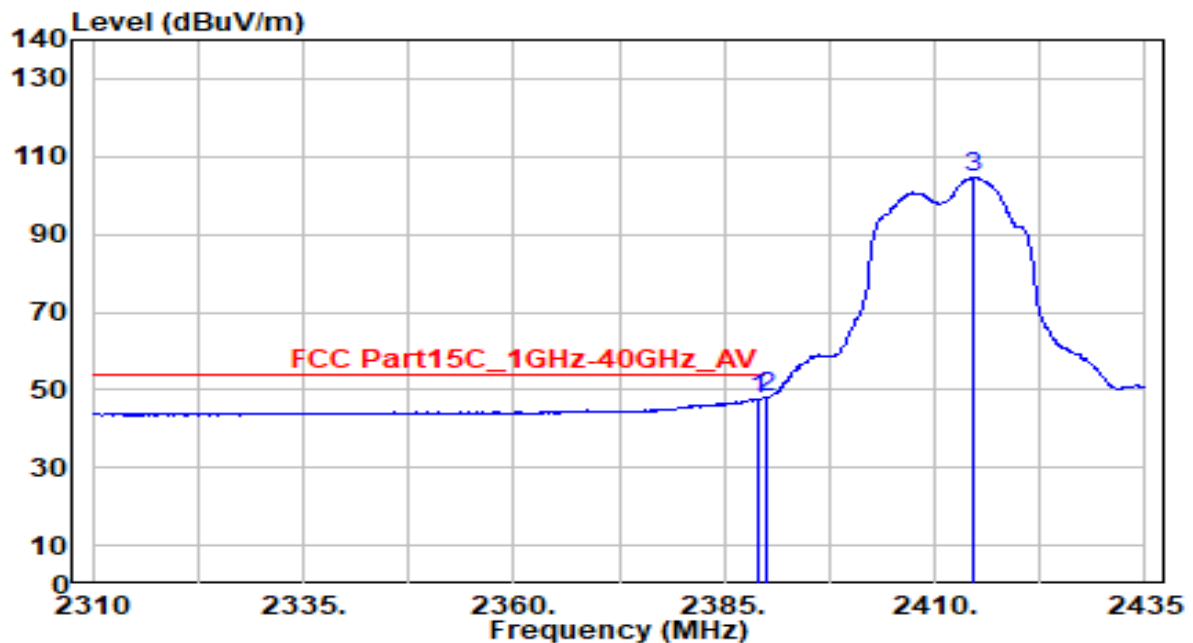


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	17.15	30.61	47.77	-6.23	54.00	130	125	Average
2	*	2390.000	17.43	30.61	48.04	-5.96	54.00	130	125	Average
3		2414.625	73.95	30.68	104.62	N/A	N/A	130	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

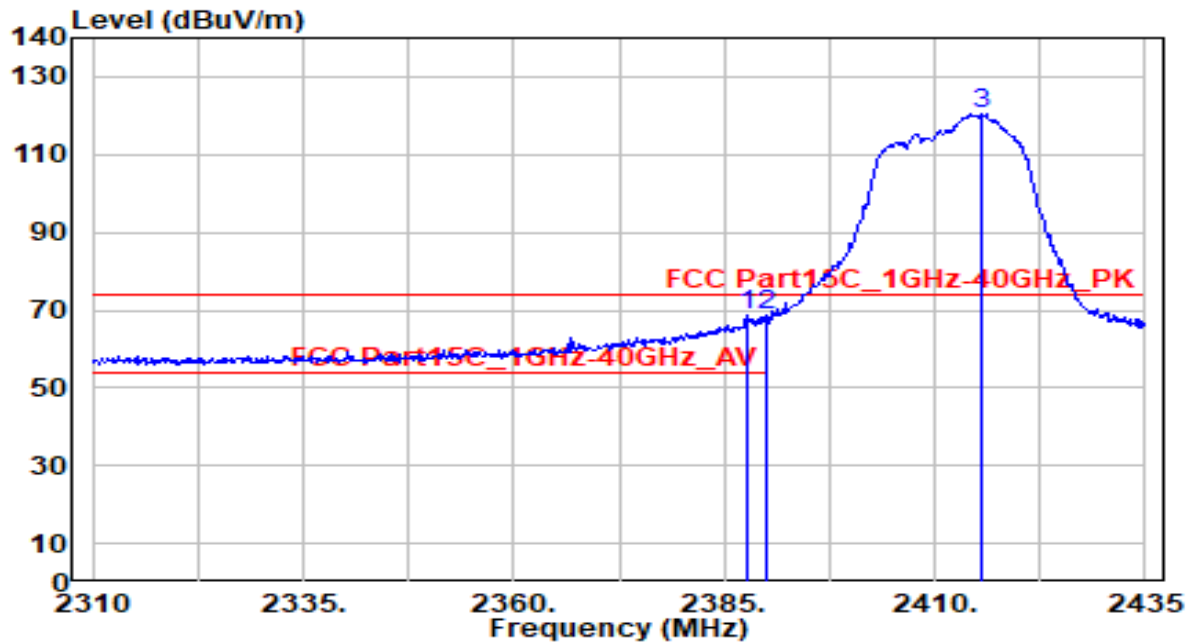


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.750	38.02	30.61	68.63	-5.37	74.00	105	305	Peak
2		2390.000	37.84	30.61	68.46	-5.54	74.00	105	305	Peak
3		2415.625	89.77	30.68	120.45	N/A	N/A	105	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

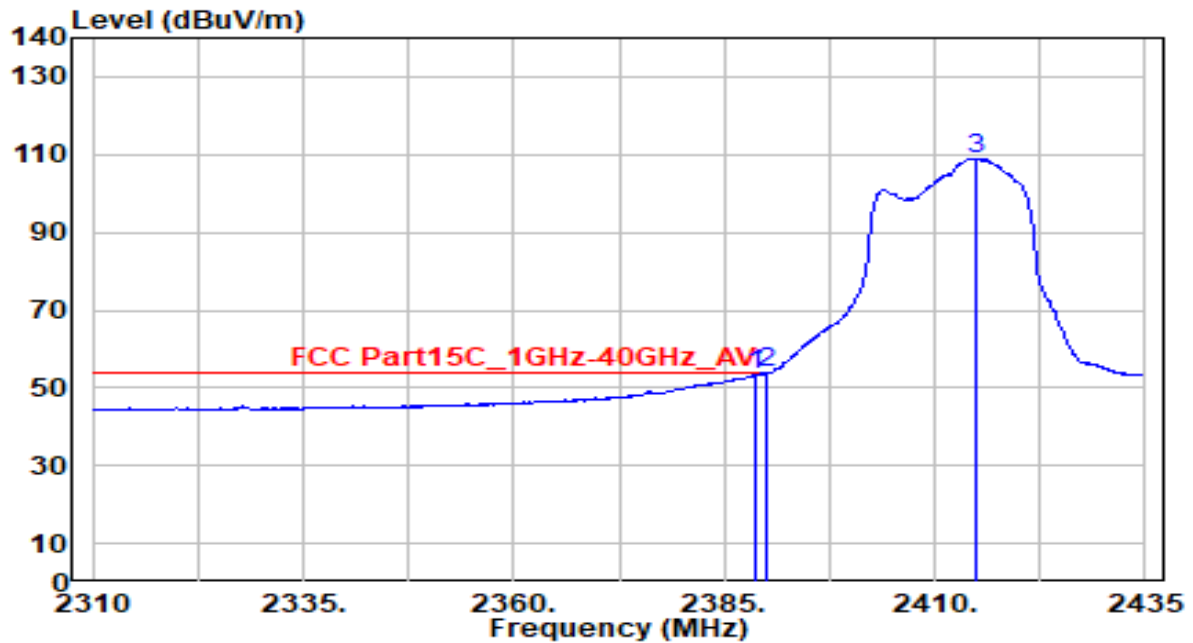


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.750	22.79	30.61	53.40	-0.60	54.00	105	305	Average
2	* 2390.000	23.21	30.61	53.82	-0.18	54.00	105	305	Average
3	2415.000	78.33	30.68	109.01	N/A	N/A	105	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

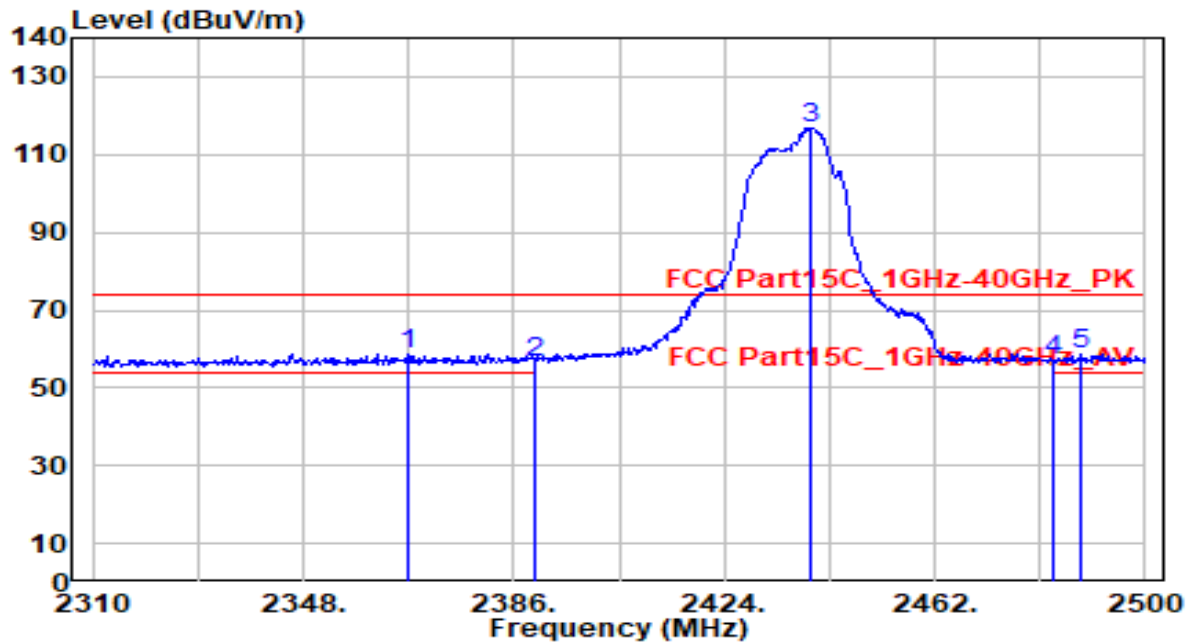


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2367.000	28.12	30.58	58.70	-15.30	74.00	120	125	Peak
2		2390.000	25.88	30.61	56.50	-17.50	74.00	120	125	Peak
3		2439.770	85.88	30.76	116.65	N/A	N/A	120	125	Peak
4		2483.500	26.24	30.91	57.15	-16.85	74.00	120	125	Peak
5		2488.410	27.68	30.93	58.61	-15.39	74.00	120	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

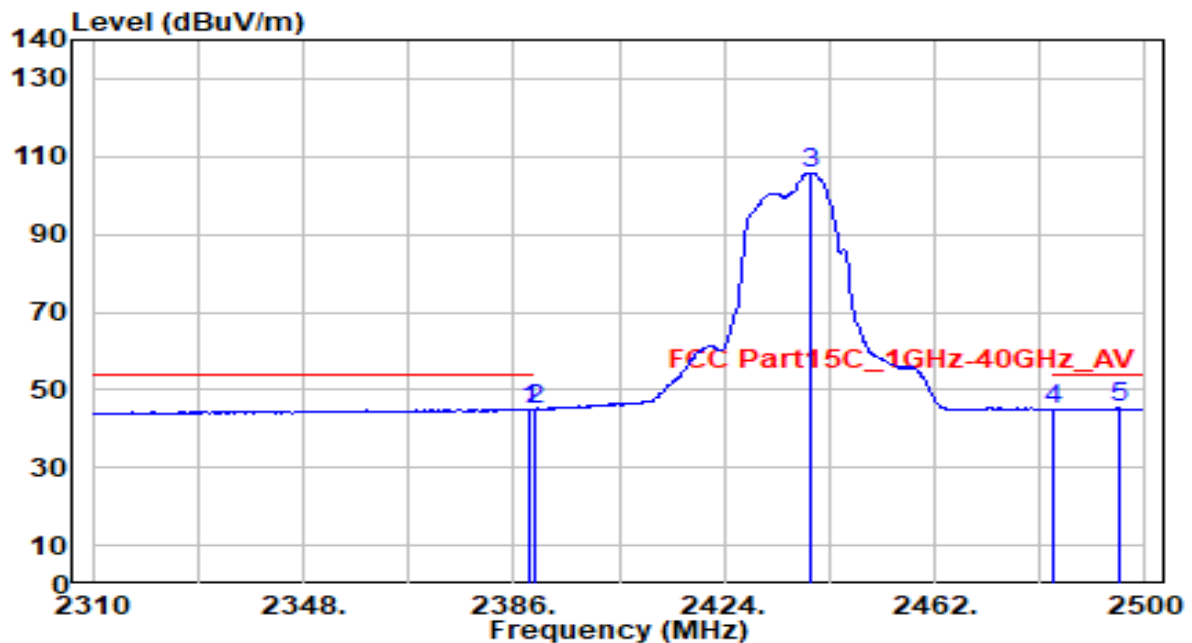


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	14.54	30.61	45.16	-8.84	54.00	120	125	Average
2	2390.000	14.43	30.61	45.05	-8.95	54.00	120	125	Average
3	2439.580	74.98	30.76	105.75	N/A	N/A	120	125	Average
4	2483.500	14.13	30.91	45.04	-8.96	54.00	120	125	Average
5	* 2495.440	14.23	30.95	45.19	-8.81	54.00	120	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

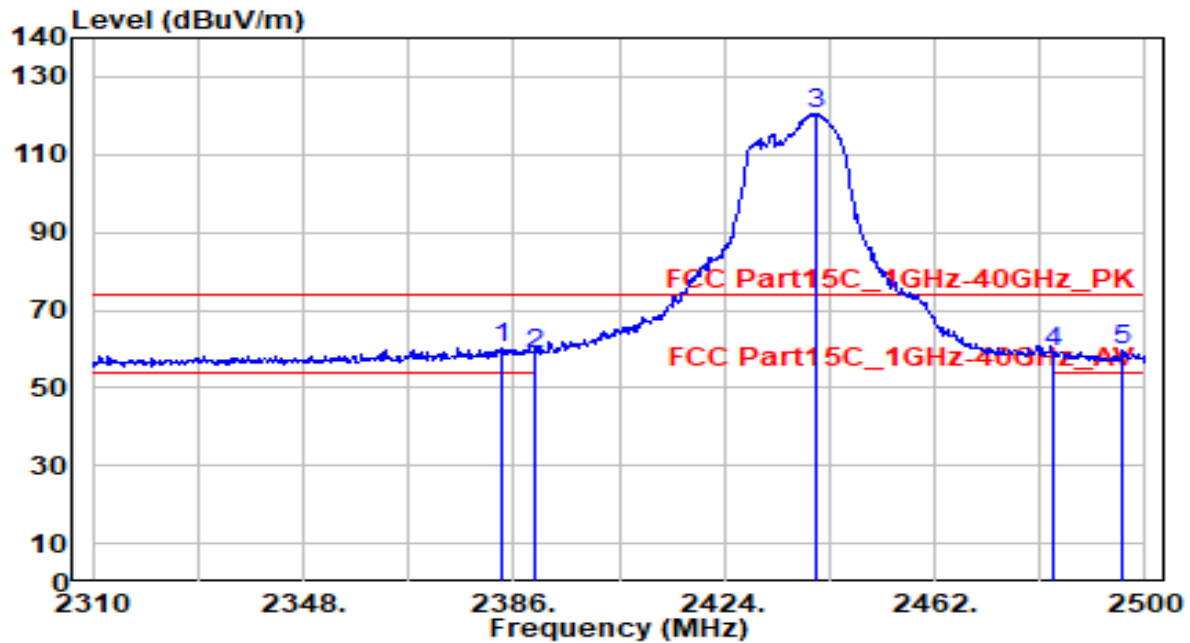


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.910	29.76	30.61	60.37	-13.63	74.00	100	310	Peak
2		2390.000	28.14	30.61	58.76	-15.24	74.00	100	310	Peak
3		2440.530	89.70	30.77	120.46	N/A	N/A	100	310	Peak
4		2483.500	28.40	30.91	59.32	-14.68	74.00	100	310	Peak
5		2496.010	28.52	30.96	59.47	-14.53	74.00	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

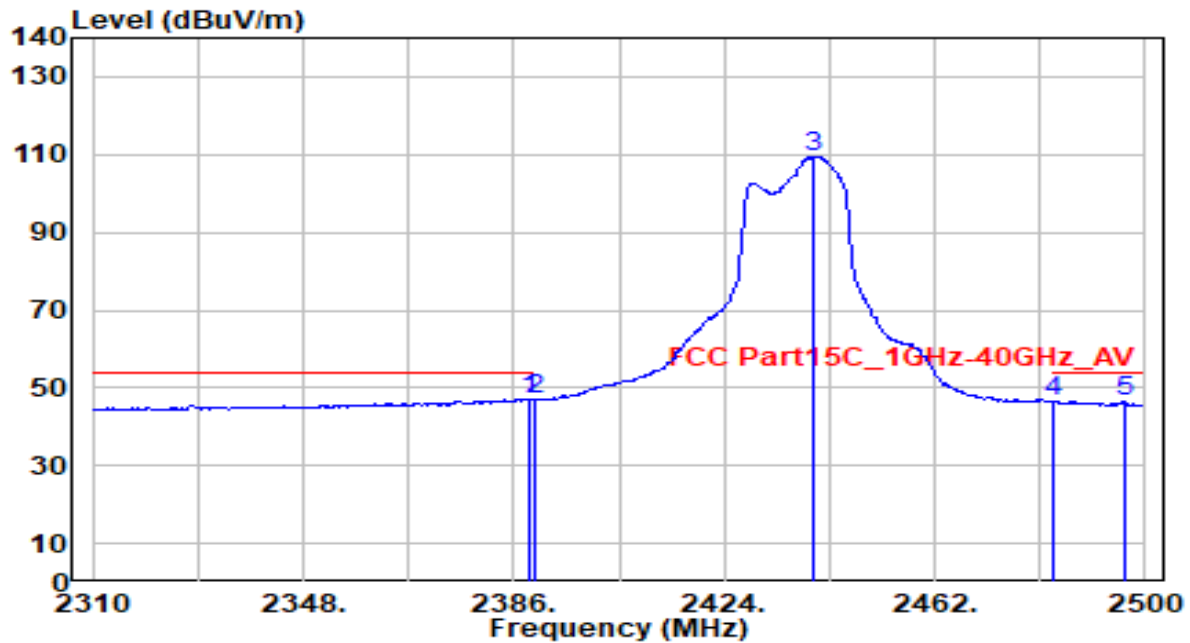


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	16.41	30.61	47.02	-6.98	54.00	100	310	Average
2		2390.000	16.32	30.61	46.94	-7.06	54.00	100	310	Average
3		2440.150	78.80	30.77	109.57	N/A	N/A	100	310	Average
4		2483.500	15.36	30.91	46.28	-7.72	54.00	100	310	Average
5		2496.200	15.46	30.96	46.42	-7.58	54.00	100	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

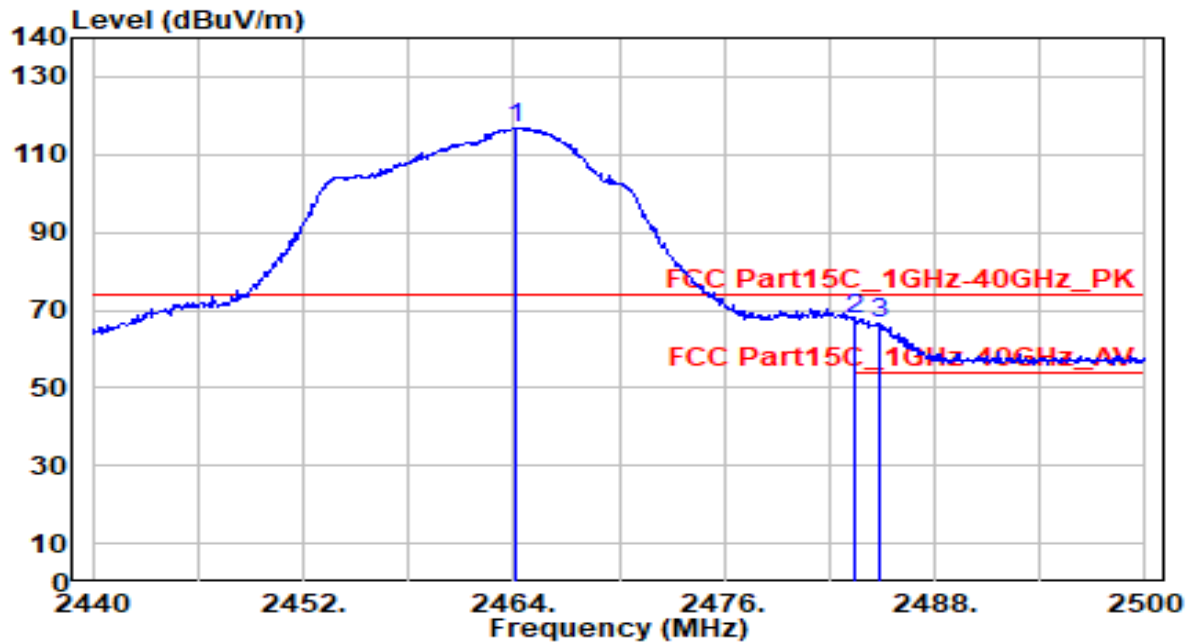


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.060	85.91	30.85	116.76	N/A	N/A	100	120	Peak
2	*	2483.500	36.74	30.91	67.66	-6.34	74.00	100	120	Peak
3		2484.820	35.63	30.92	66.55	-7.45	74.00	100	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

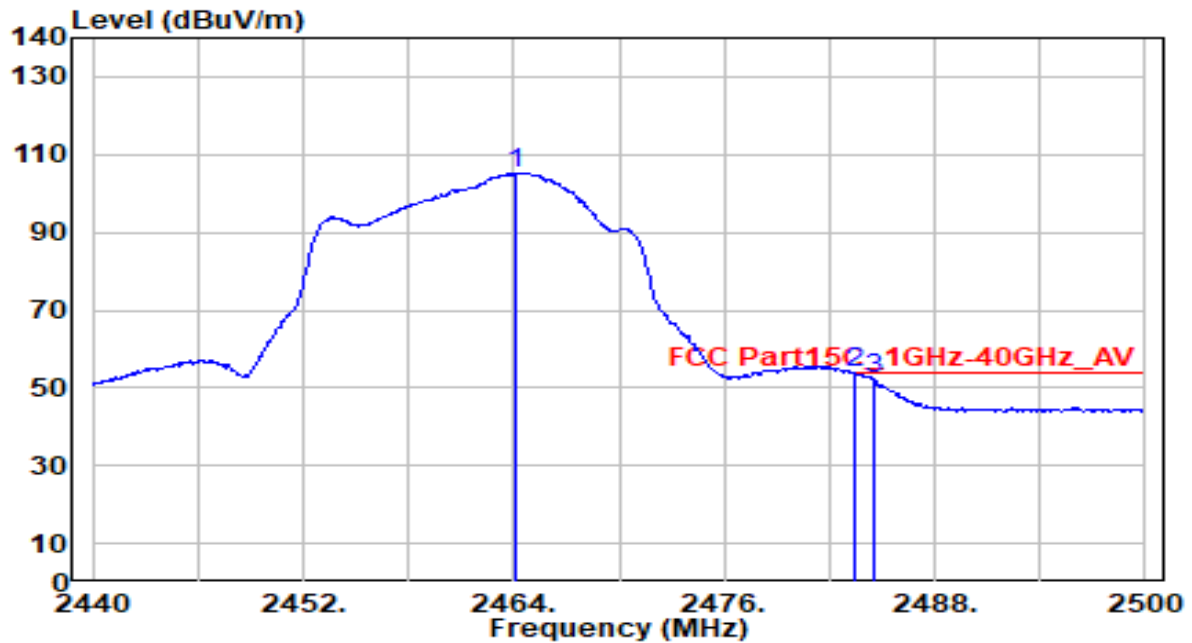


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.120	74.54	30.85	105.39	N/A	N/A	100	120	Average
2	* 2483.500	22.74	30.91	53.65	-0.35	54.00	100	120	Average
3	2484.520	21.16	30.92	52.08	-1.92	54.00	100	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

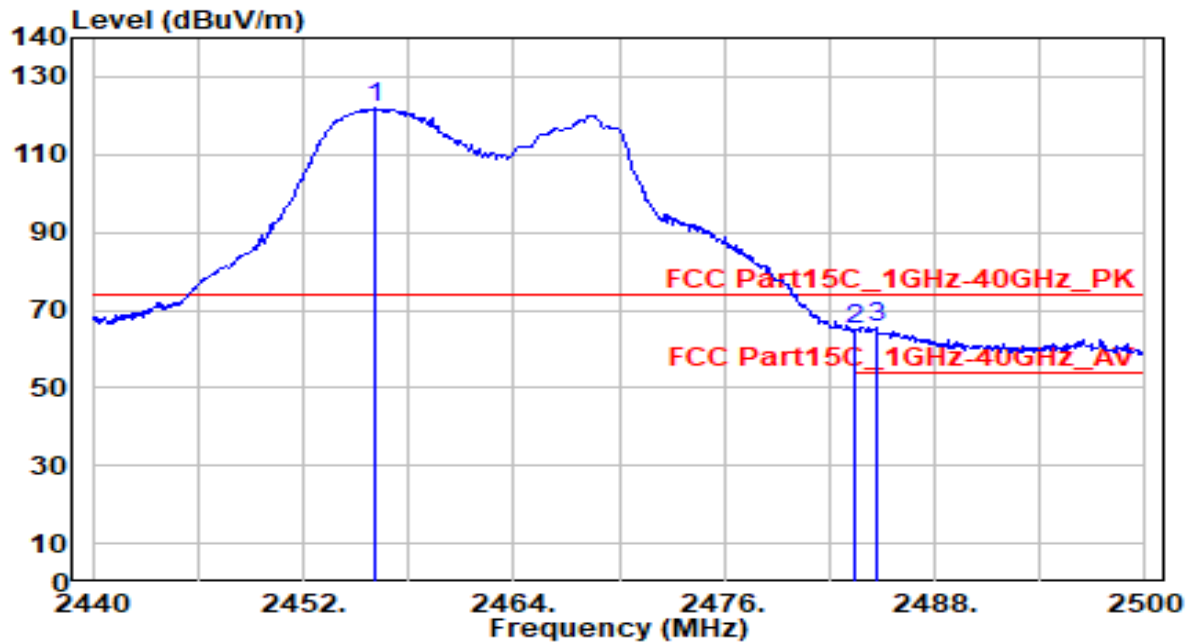


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.020	90.97	30.82	121.79	N/A	N/A	255	210	Peak
2	2483.500	34.10	30.91	65.01	-8.99	74.00	255	210	Peak
3	* 2484.640	34.42	30.92	65.34	-8.66	74.00	255	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

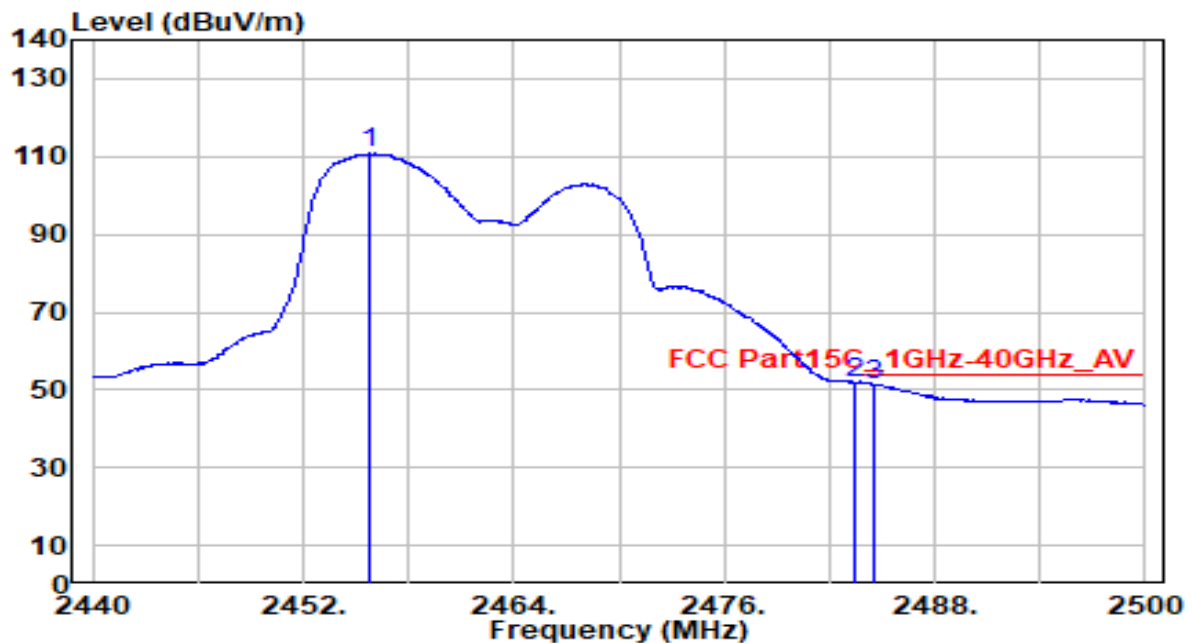


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.780	80.01	30.82	110.82	N/A	N/A	255	210	Average
2	*	2483.500	21.02	30.91	51.93	-2.07	54.00	255	210	Average
3		2484.580	20.59	30.92	51.50	-2.50	54.00	255	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

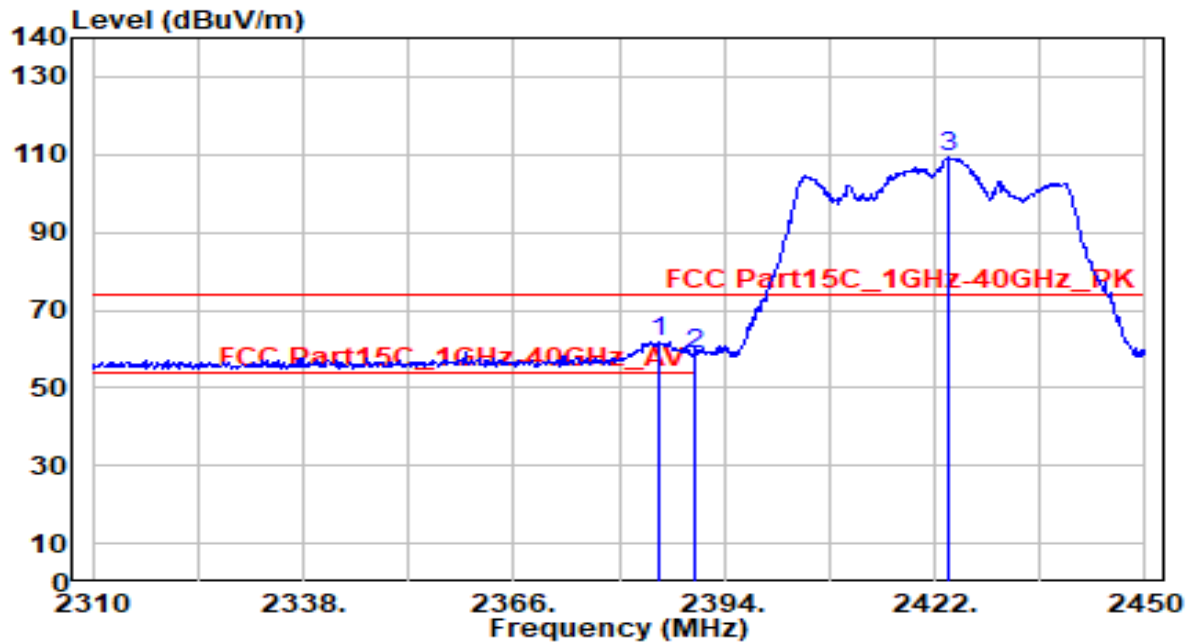


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.180	31.26	30.61	61.87	-12.13	74.00	100	130	Peak
2		2390.000	28.17	30.61	58.78	-15.22	74.00	100	130	Peak
3		2423.960	78.53	30.71	109.24	N/A	N/A	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

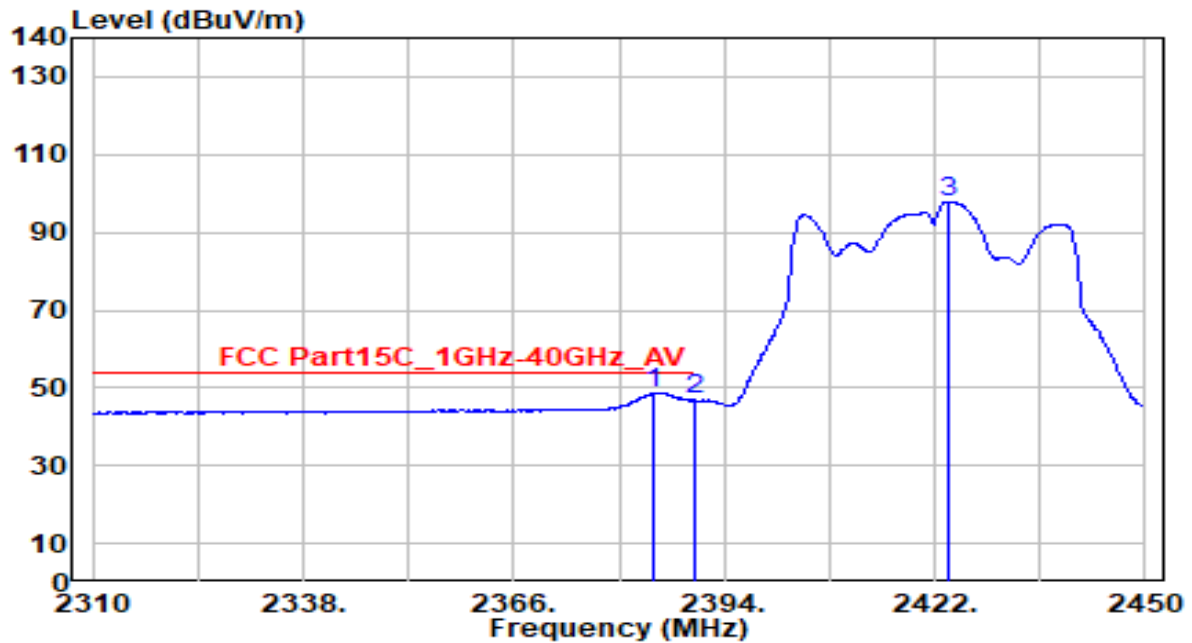


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.760	18.16	30.61	48.77	-5.23	54.00	100	130	Average
2		2390.000	16.23	30.61	46.85	-7.15	54.00	100	130	Average
3		2423.680	67.18	30.71	97.89	N/A	N/A	100	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

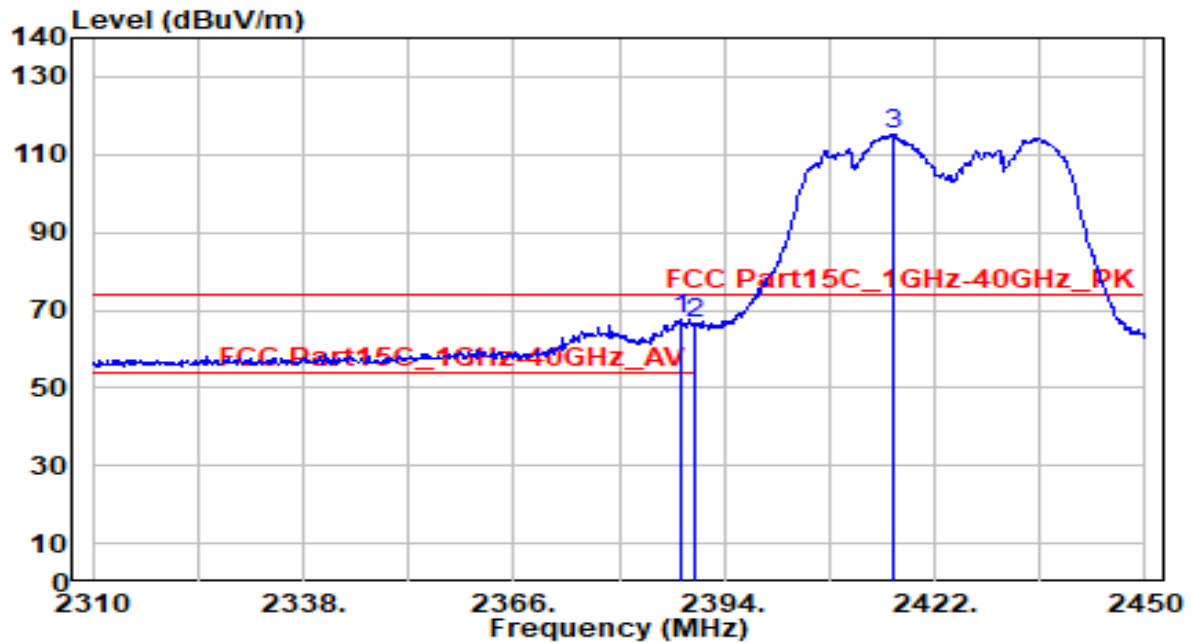


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.120	36.85	30.61	67.46	-6.54	74.00	190	220	Peak
2		2390.000	35.75	30.61	66.37	-7.63	74.00	190	220	Peak
3		2416.540	84.35	30.68	115.04	N/A	N/A	190	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

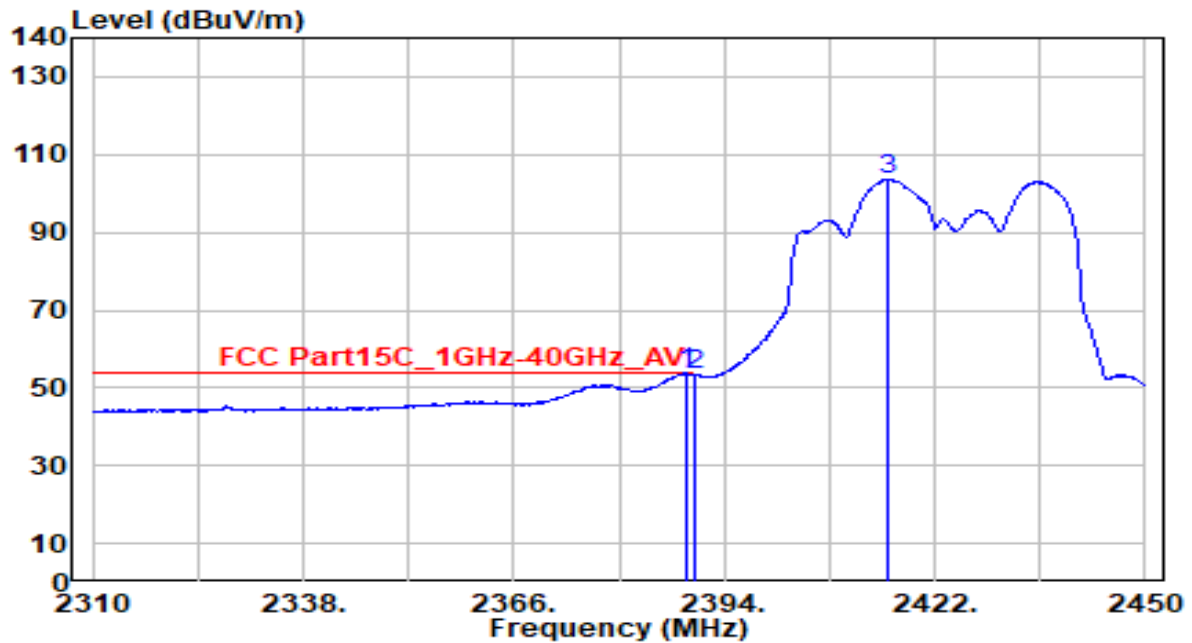


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.820	23.20	30.61	53.81	-0.19	54.00	190	220	Average
2		2390.000	22.59	30.61	53.21	-0.79	54.00	190	220	Average
3		2415.840	72.86	30.68	103.54	N/A	N/A	190	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

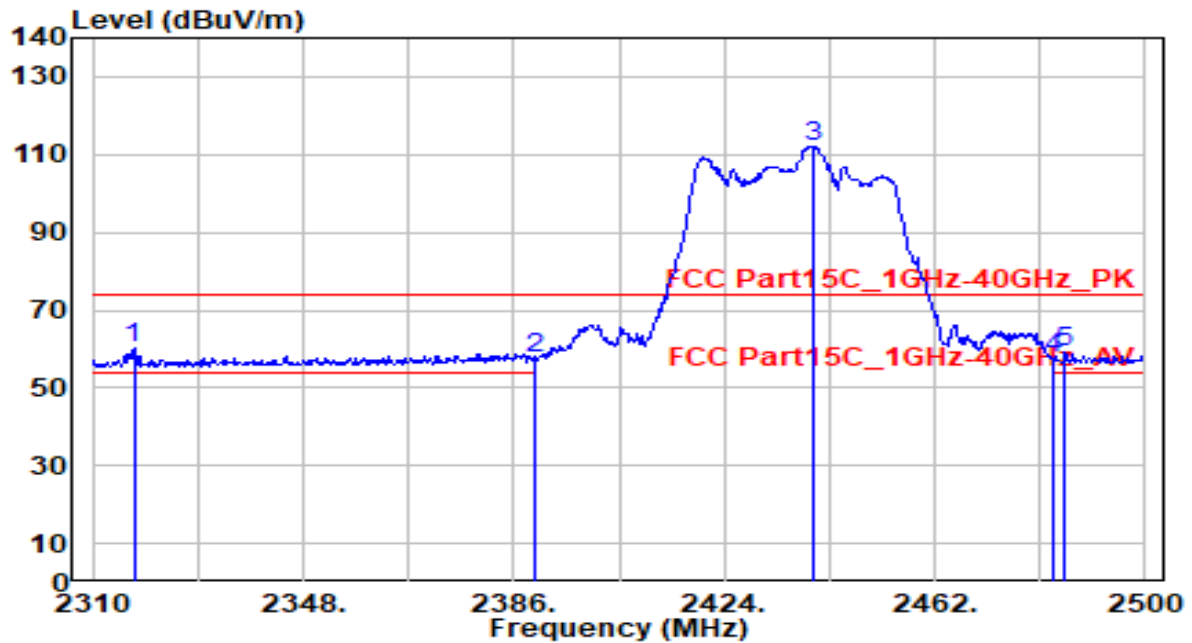


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2317.410	29.62	30.51	60.13	-13.87	74.00	120	130	Peak
2		2390.000	26.81	30.61	57.42	-16.58	74.00	120	130	Peak
3		2440.150	81.29	30.77	112.06	N/A	N/A	120	130	Peak
4		2483.500	26.61	30.91	57.52	-16.48	74.00	120	130	Peak
5		2485.560	28.34	30.92	59.26	-14.74	74.00	120	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

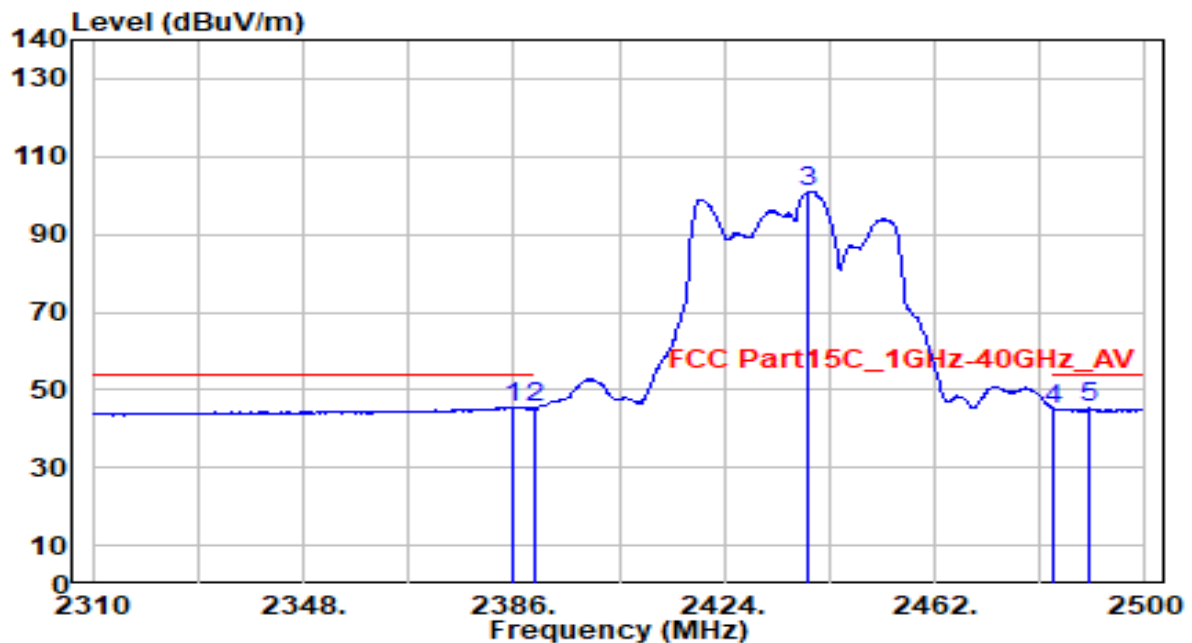


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.000	14.98	30.61	45.58	-8.42	54.00	120	130	Average
2		2390.000	14.57	30.61	45.19	-8.81	54.00	120	130	Average
3		2439.200	70.12	30.76	100.88	N/A	N/A	120	130	Average
4		2483.500	14.19	30.91	45.11	-8.89	54.00	120	130	Average
5		2489.930	14.33	30.94	45.27	-8.73	54.00	120	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

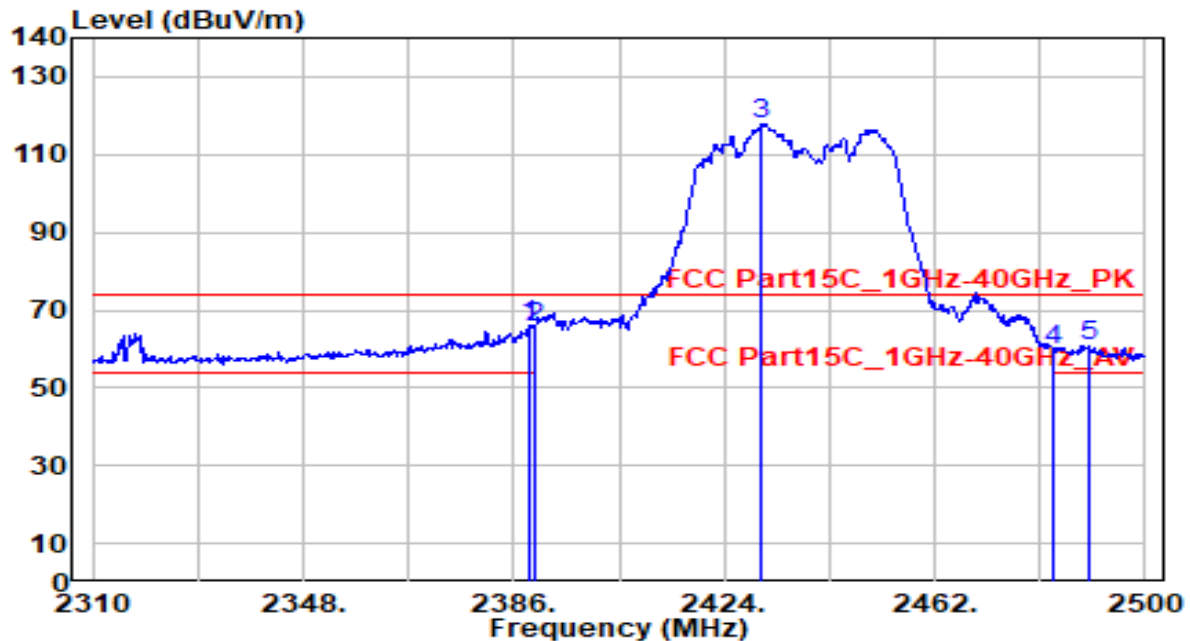


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	35.62	30.61	66.24	-7.76	74.00	205	225	Peak
2		2390.000	35.02	30.61	65.63	-8.37	74.00	205	225	Peak
3		2430.650	86.90	30.73	117.63	N/A	N/A	205	225	Peak
4		2483.500	28.64	30.91	59.55	-14.45	74.00	205	225	Peak
5		2489.740	29.77	30.93	60.71	-13.29	74.00	205	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

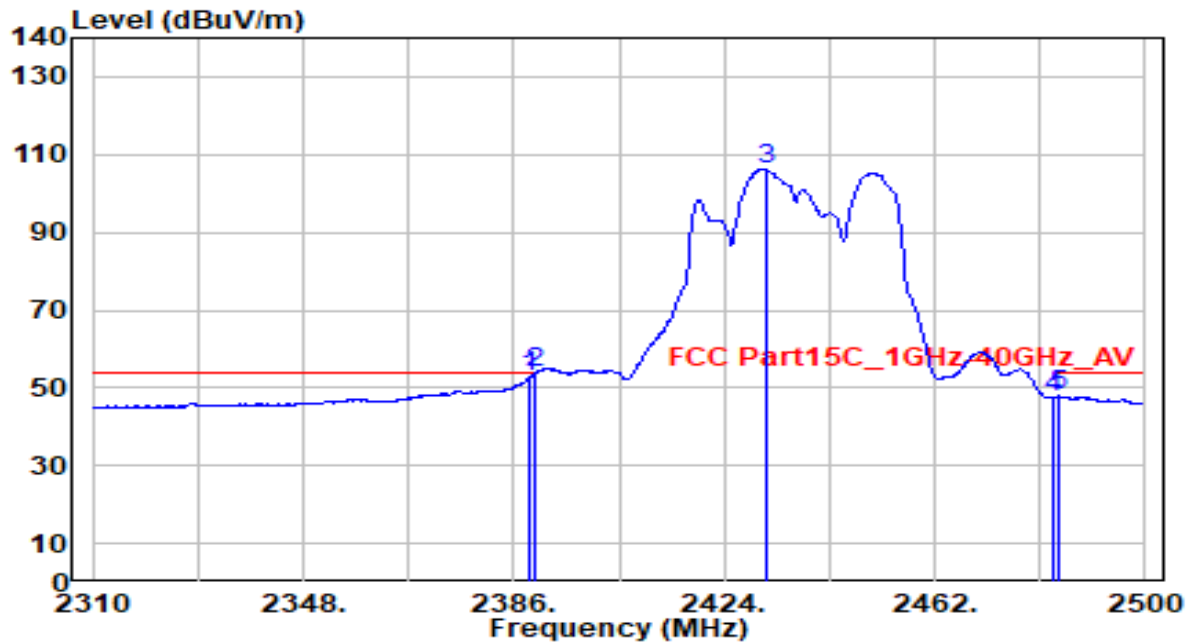


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	22.16	30.61	52.77	-1.23	54.00	205	225	Average
2	* 2390.000	23.28	30.61	53.89	-0.11	54.00	205	225	Average
3	2431.410	75.42	30.74	106.15	N/A	N/A	205	225	Average
4	2483.500	16.86	30.91	47.78	-6.22	54.00	205	225	Average
5	2484.230	16.91	30.92	47.83	-6.17	54.00	205	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

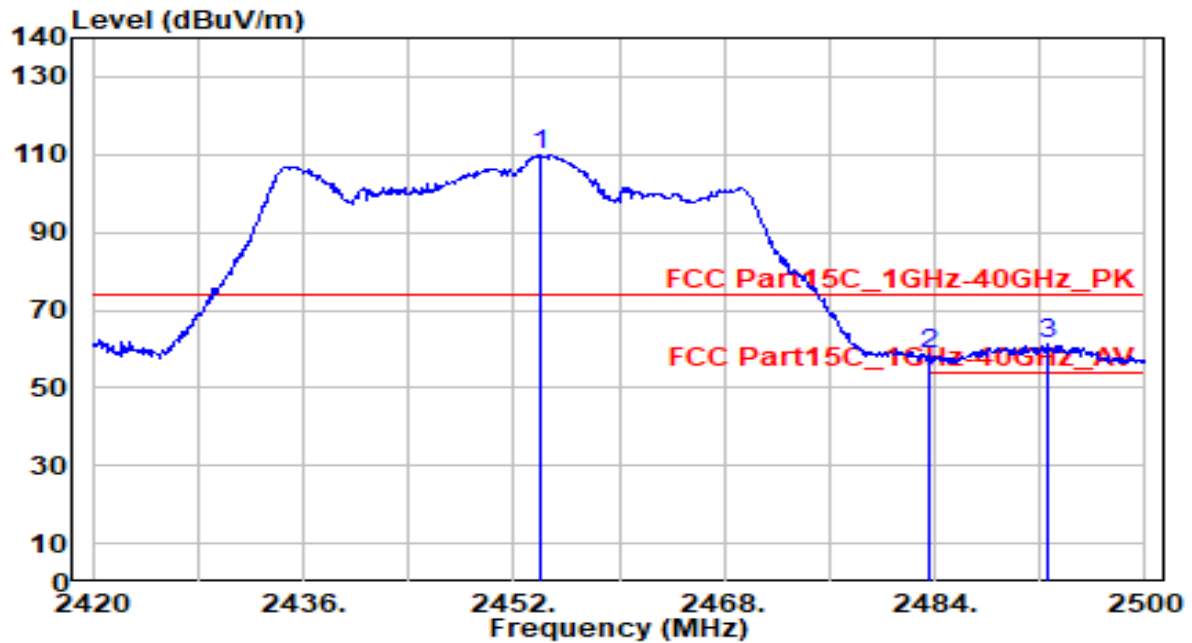


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.080	79.10	30.81	109.91	N/A	N/A	100	120	Peak
2	2483.500	27.52	30.91	58.43	-15.57	74.00	100	120	Peak
3	* 2492.640	30.52	30.94	61.46	-12.54	74.00	100	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

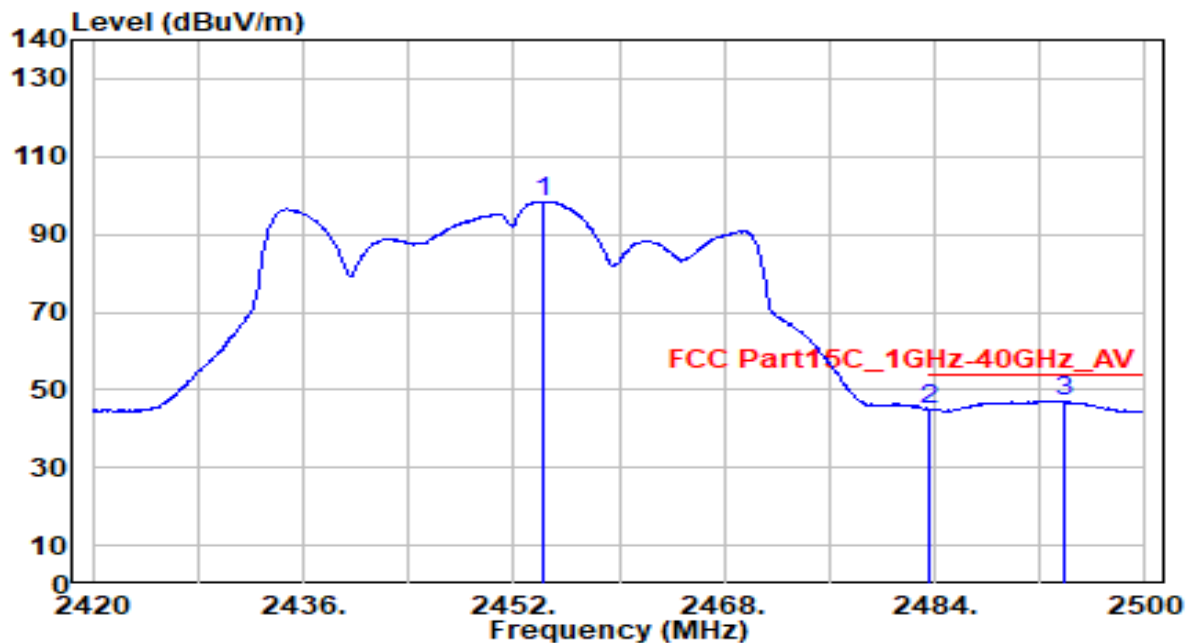


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.240	67.52	30.81	98.33	N/A	N/A	100	120	Average
2	2483.500	14.16	30.91	45.08	-8.92	54.00	100	120	Average
3	* 2493.920	16.29	30.95	47.24	-6.76	54.00	100	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-11
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

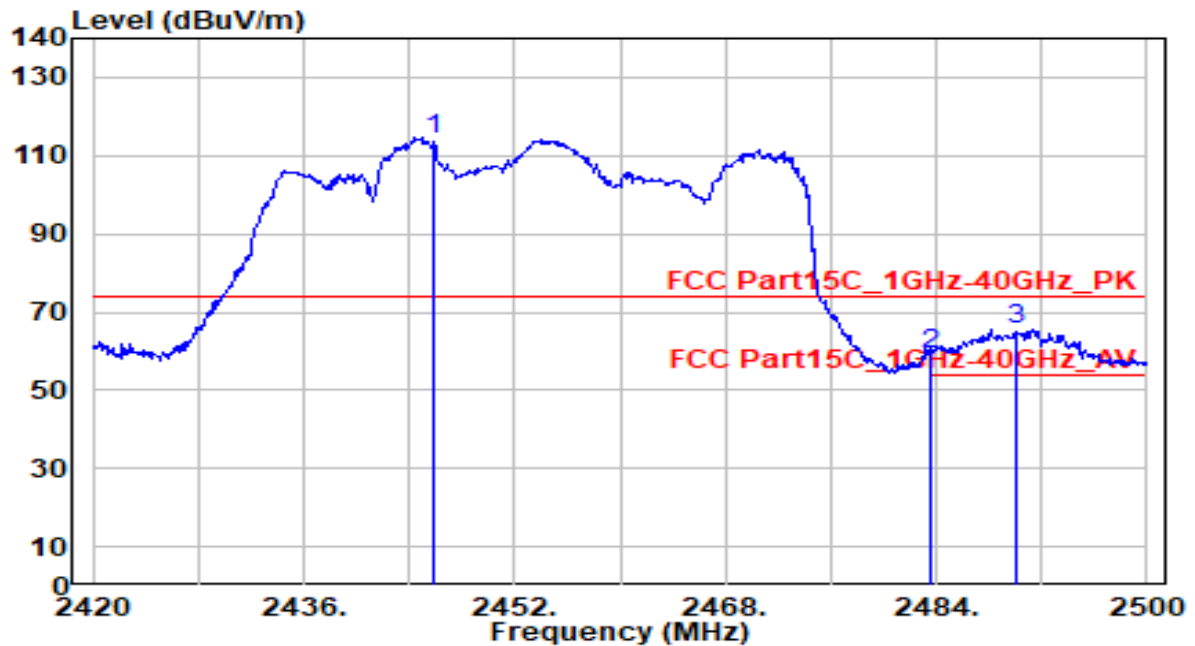


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.900	83.13	30.78	113.91	N/A	N/A	200	225	Peak
2	2483.500	28.52	30.91	59.43	-14.57	74.00	200	225	Peak
3	* 2490.000	34.51	30.94	65.45	-8.55	74.00	200	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11n-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

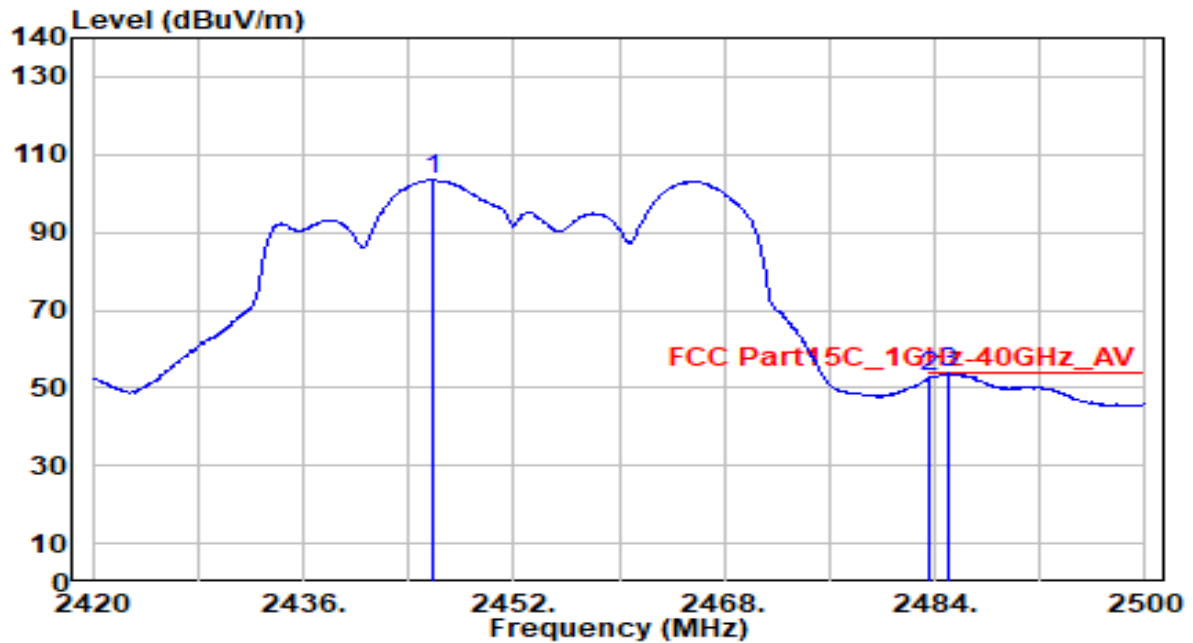


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.920	72.65	30.79	103.43	N/A	N/A	200	225	Average
2	2483.500	21.76	30.91	52.68	-1.32	54.00	200	225	Average
3	* 2485.040	22.90	30.92	53.82	-0.18	54.00	200	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

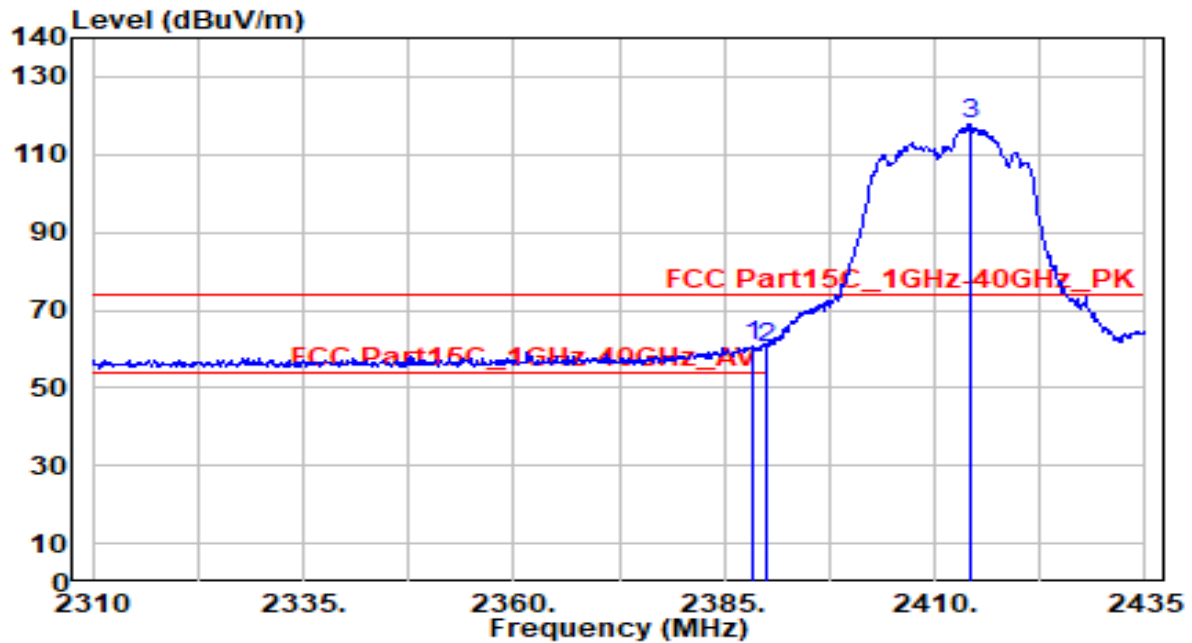


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.250	30.25	30.61	60.86	-13.14	74.00	130	125	Peak
2		2390.000	29.76	30.61	60.37	-13.63	74.00	130	125	Peak
3		2414.250	87.30	30.68	117.97	N/A	N/A	130	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

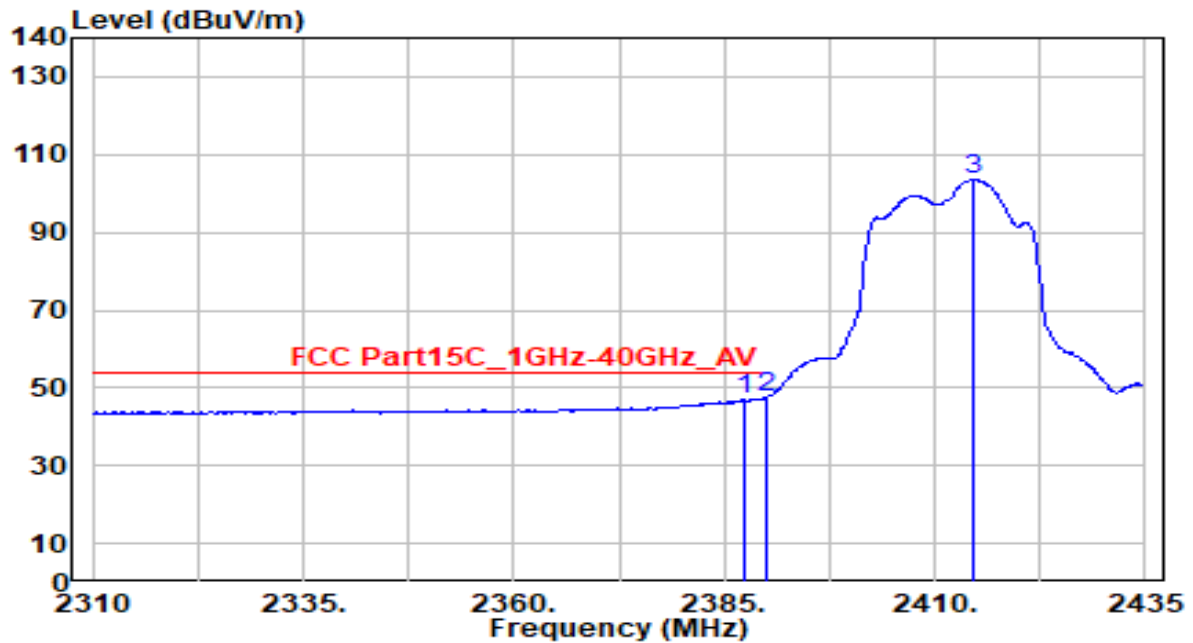


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.500	16.62	30.61	47.23	-6.77	54.00	130	125	Average
2	*	2390.000	16.78	30.61	47.39	-6.61	54.00	130	125	Average
3		2414.500	72.74	30.68	103.42	N/A	N/A	130	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

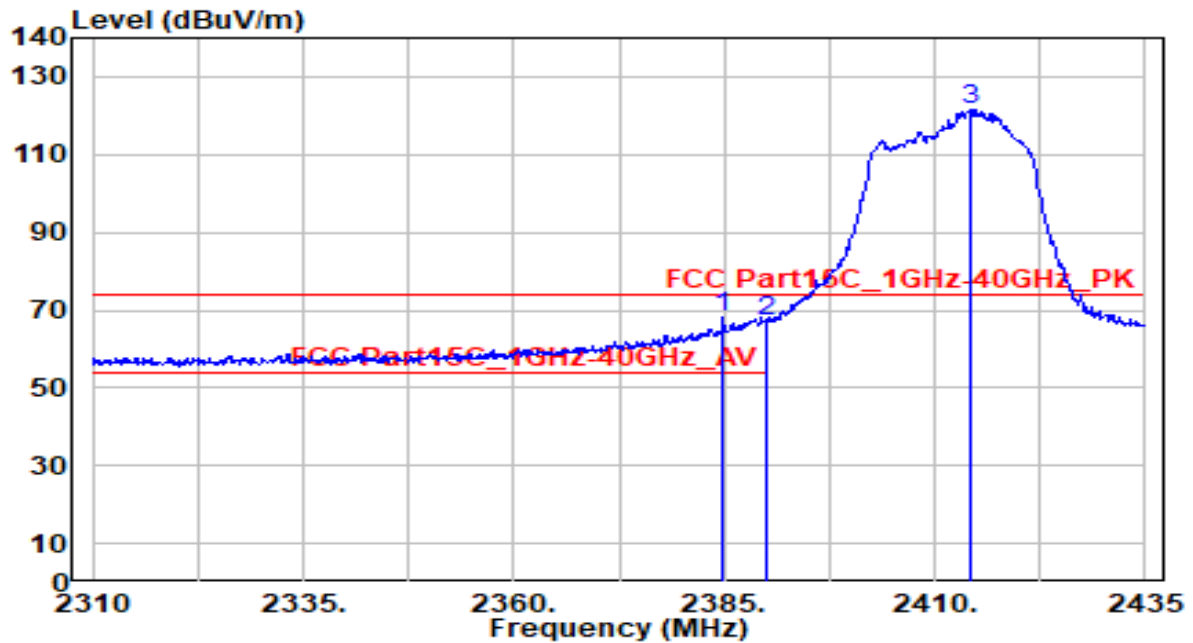


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.750	37.53	30.61	68.13	-5.87	74.00	105	305	Peak
2		2390.000	36.55	30.61	67.16	-6.84	74.00	105	305	Peak
3		2414.125	91.02	30.68	121.70	N/A	N/A	105	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 1_4TX	Test Voltage	AC 120V/60Hz

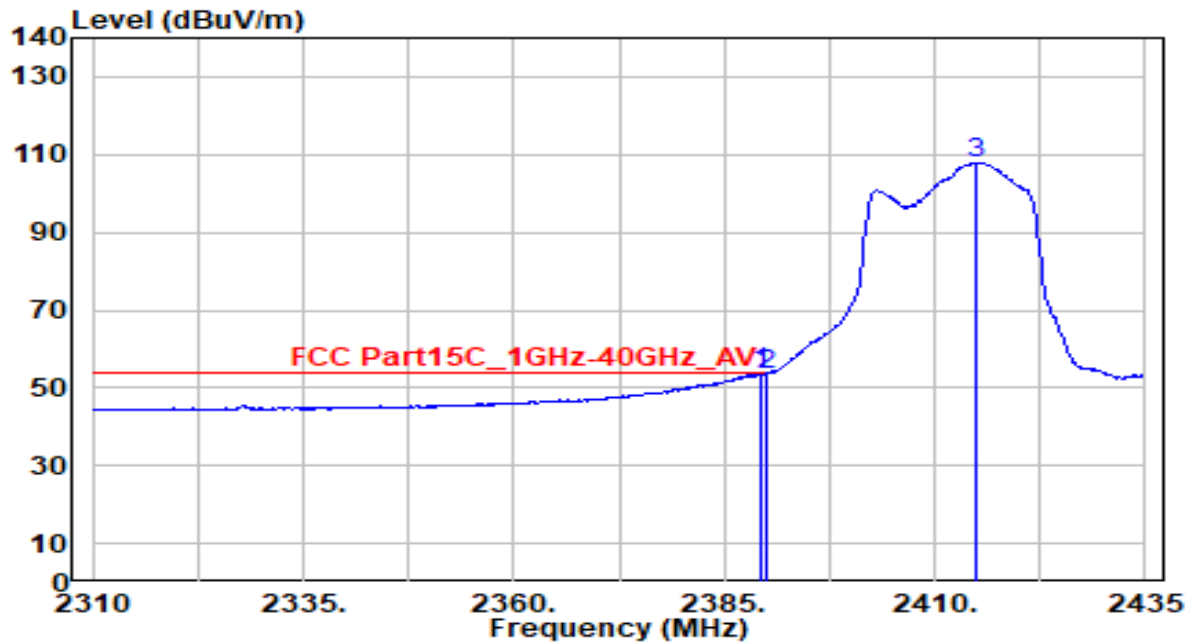


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.250	23.27	30.61	53.88	-0.12	54.00	105	305	Average
2		2390.000	22.78	30.61	53.39	-0.61	54.00	105	305	Average
3		2415.000	77.21	30.68	107.89	N/A	N/A	105	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

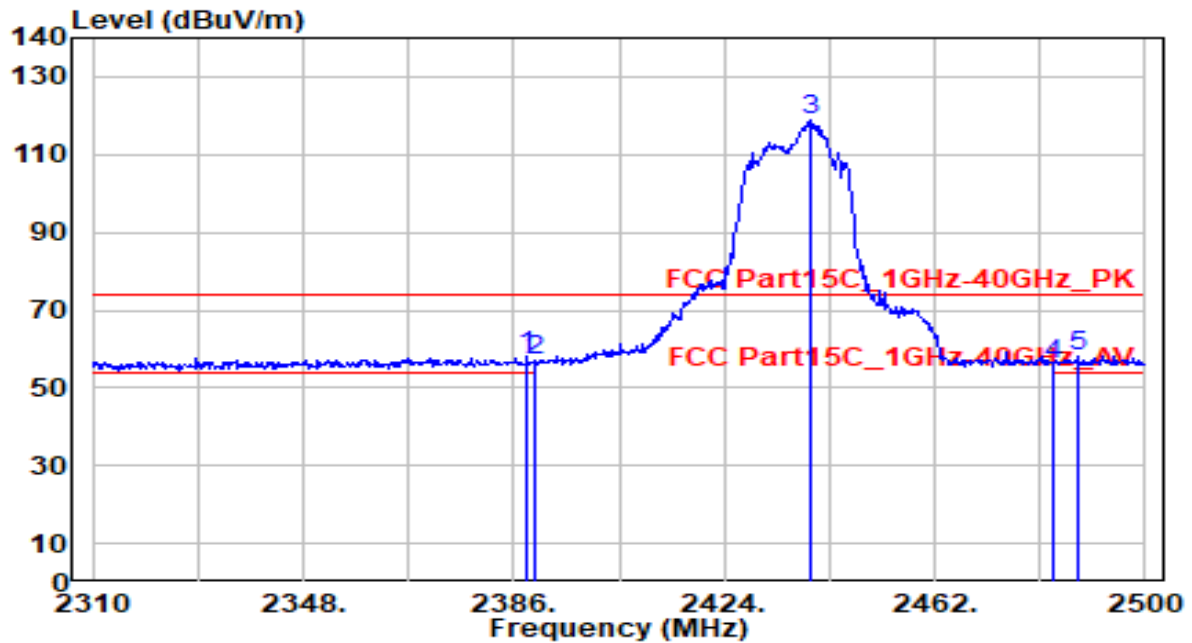


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	27.24	30.61	57.85	-16.15	74.00	125	125	Peak
2	2390.000	26.44	30.61	57.05	-16.95	74.00	125	125	Peak
3	2439.390	88.17	30.76	118.93	N/A	N/A	125	125	Peak
4	2483.500	25.13	30.91	56.04	-17.96	74.00	125	125	Peak
5	* 2488.030	27.14	30.93	58.07	-15.93	74.00	125	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

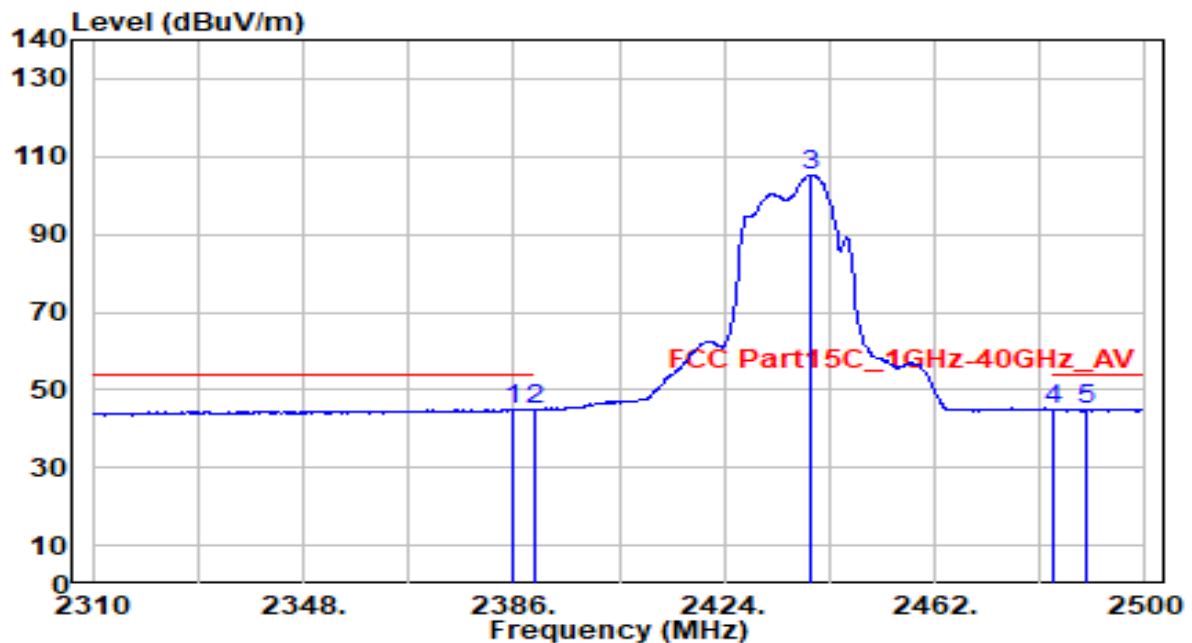


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	14.37	30.61	44.97	-9.03	54.00	125	125	Average
2	2390.000	14.27	30.61	44.89	-9.11	54.00	125	125	Average
3	2439.580	74.38	30.76	105.15	N/A	N/A	125	125	Average
4	2483.500	13.88	30.91	44.79	-9.21	54.00	125	125	Average
5	* 2489.550	14.20	30.93	45.13	-8.87	54.00	125	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

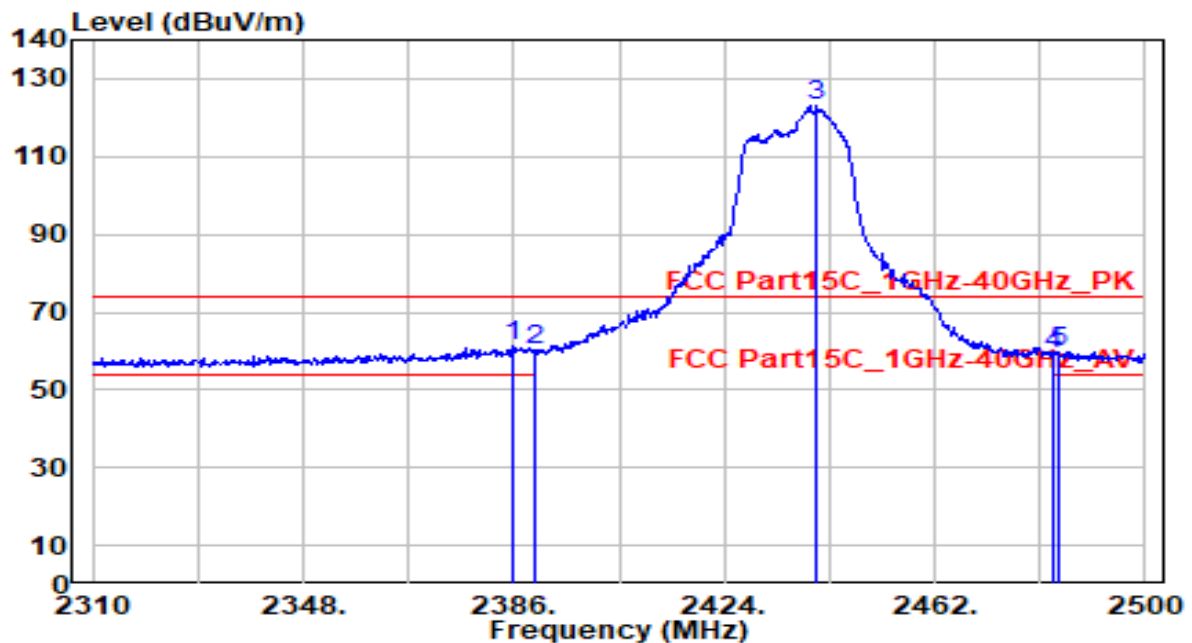


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.620	30.59	30.61	61.20	-12.80	74.00	105	305	Peak
2		2390.000	29.68	30.61	60.30	-13.70	74.00	105	305	Peak
3		2440.720	92.27	30.77	123.04	N/A	N/A	105	305	Peak
4		2483.500	28.33	30.91	59.24	-14.76	74.00	105	305	Peak
5		2484.420	28.85	30.92	59.76	-14.24	74.00	105	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

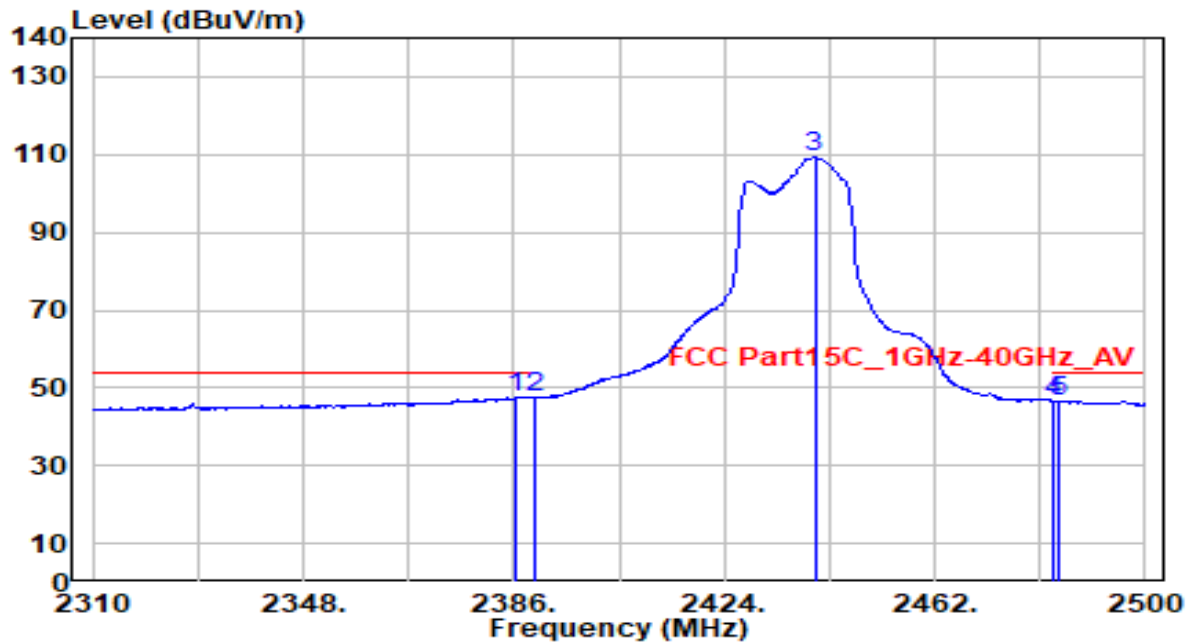


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.570	17.12	30.61	47.72	-6.28	54.00	105	305	Average
2		2390.000	17.05	30.61	47.67	-6.33	54.00	105	305	Average
3		2440.340	78.58	30.77	109.35	N/A	N/A	105	305	Average
4		2483.500	15.73	30.91	46.64	-7.36	54.00	105	305	Average
5		2484.610	15.83	30.92	46.74	-7.26	54.00	105	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

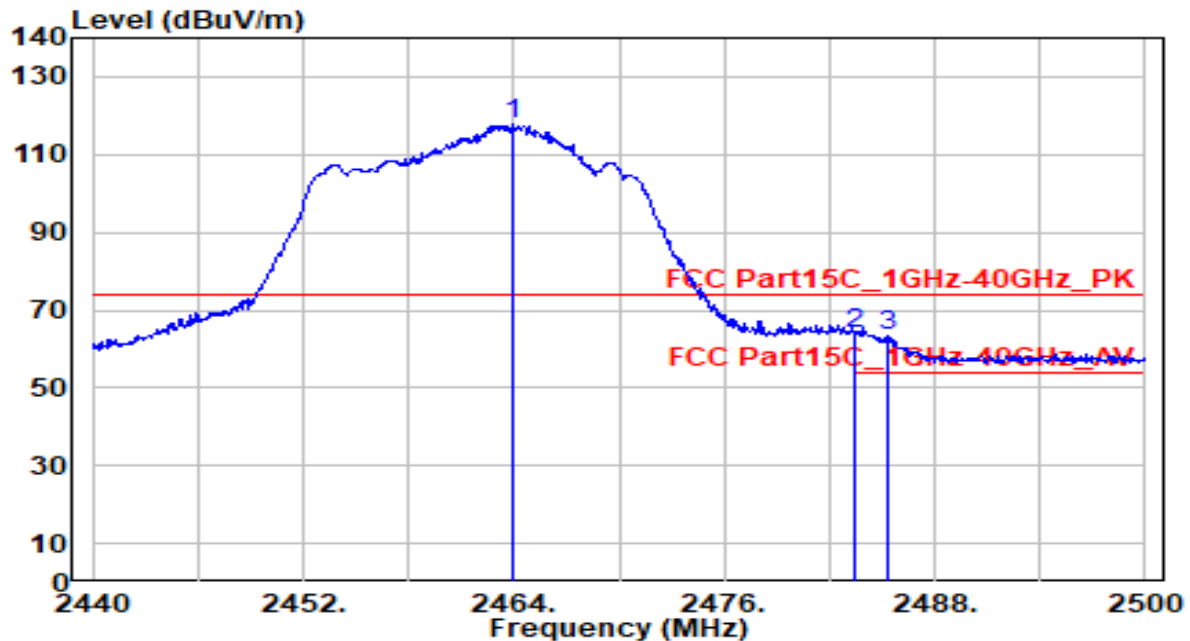


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.940	86.78	30.85	117.63	N/A	N/A	100	125	Peak
2	* 2483.500	32.95	30.91	63.87	-10.13	74.00	100	125	Peak
3	2485.300	32.58	30.92	63.50	-10.50	74.00	100	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

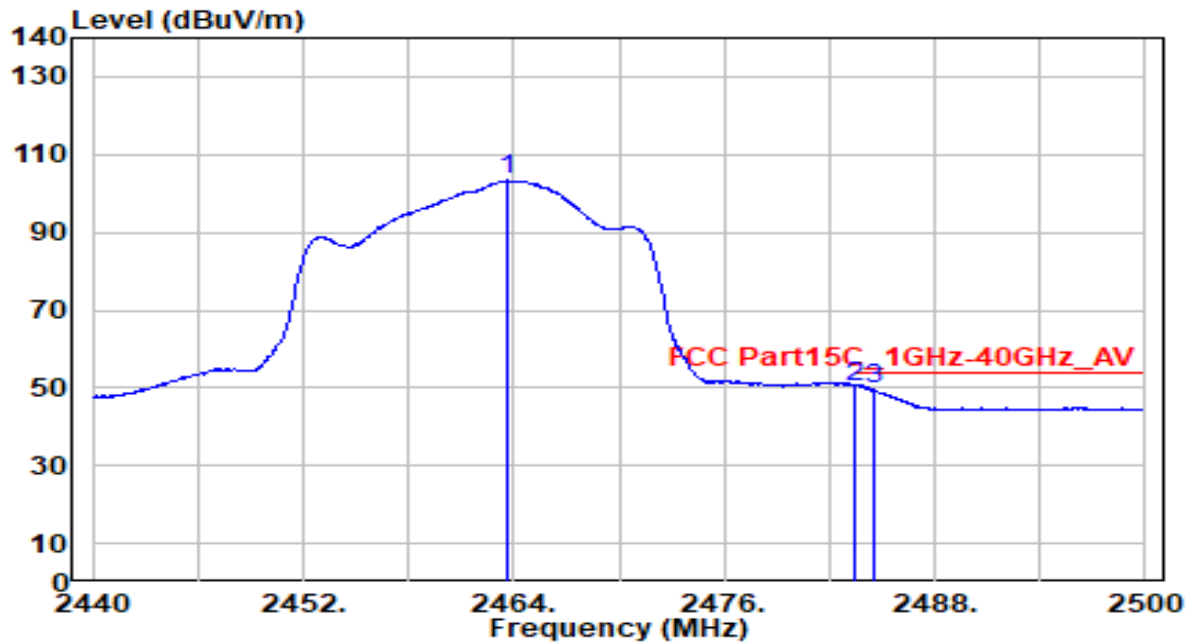


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.700	72.44	30.85	103.29	N/A	N/A	100	125	Average
2	*	2483.500	19.53	30.91	50.44	-3.56	54.00	100	125	Average
3		2484.520	18.60	30.92	49.51	-4.49	54.00	100	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

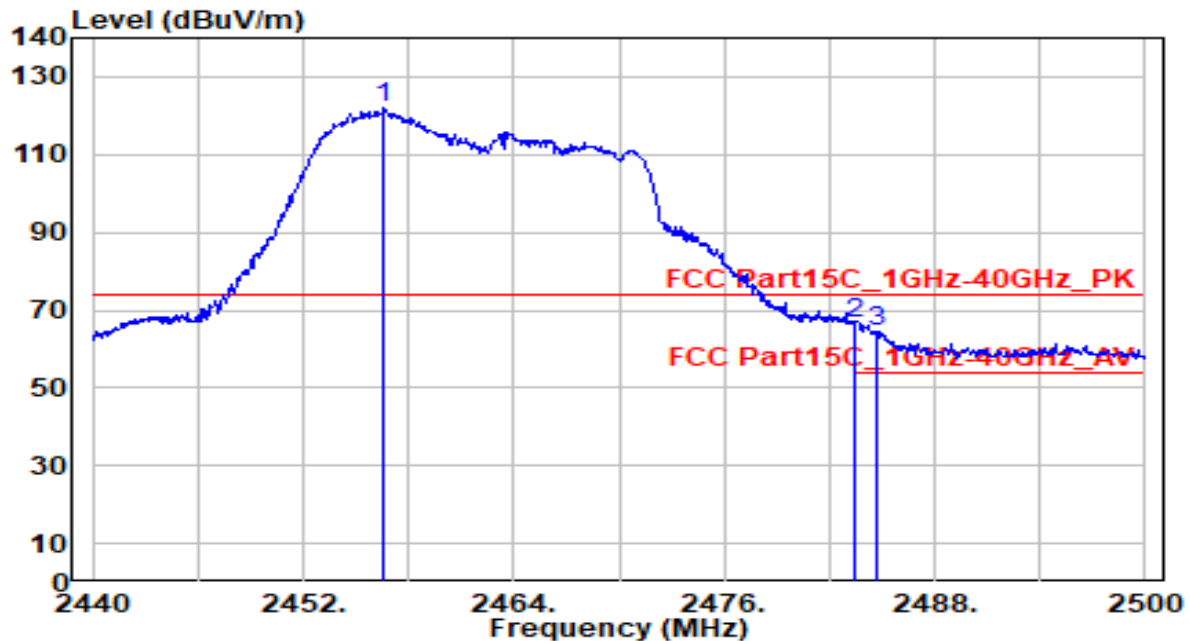


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.620	91.43	30.82	122.25	N/A	N/A	205	225	Peak
2	* 2483.500	35.56	30.91	66.48	-7.52	74.00	205	225	Peak
3	2484.700	33.57	30.92	64.48	-9.52	74.00	205	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_CH 11_4TX	Test Voltage	AC 120V/60Hz

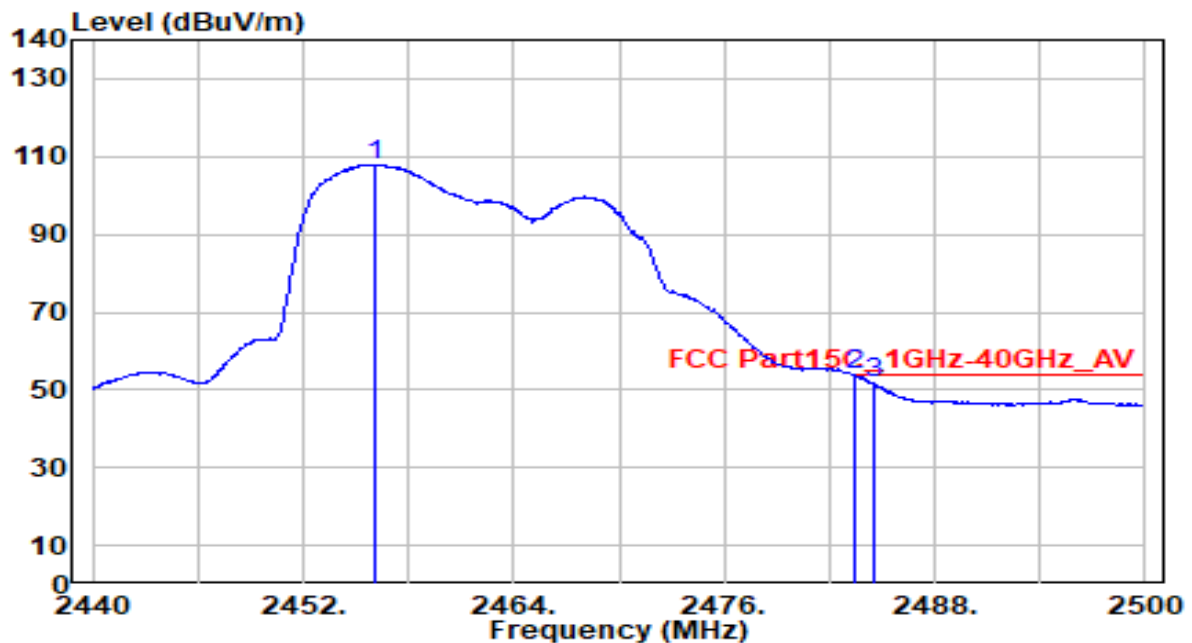


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.020	77.20	30.82	108.02	N/A	N/A	205	225	Average
2	*	2483.500	22.98	30.91	53.89	-0.11	54.00	205	225	Average
3		2484.520	20.67	30.92	51.59	-2.41	54.00	205	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

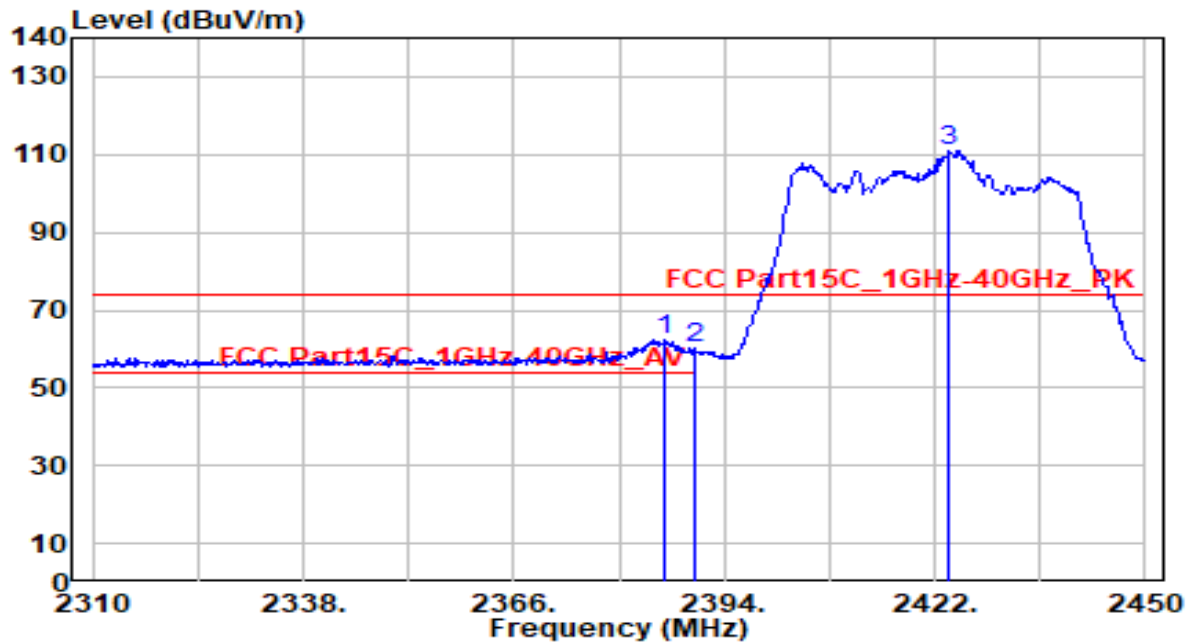


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.020	31.68	30.61	62.29	-11.71	74.00	120	130	Peak
2		2390.000	29.77	30.61	60.39	-13.61	74.00	120	130	Peak
3		2423.960	80.22	30.71	110.93	N/A	N/A	120	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

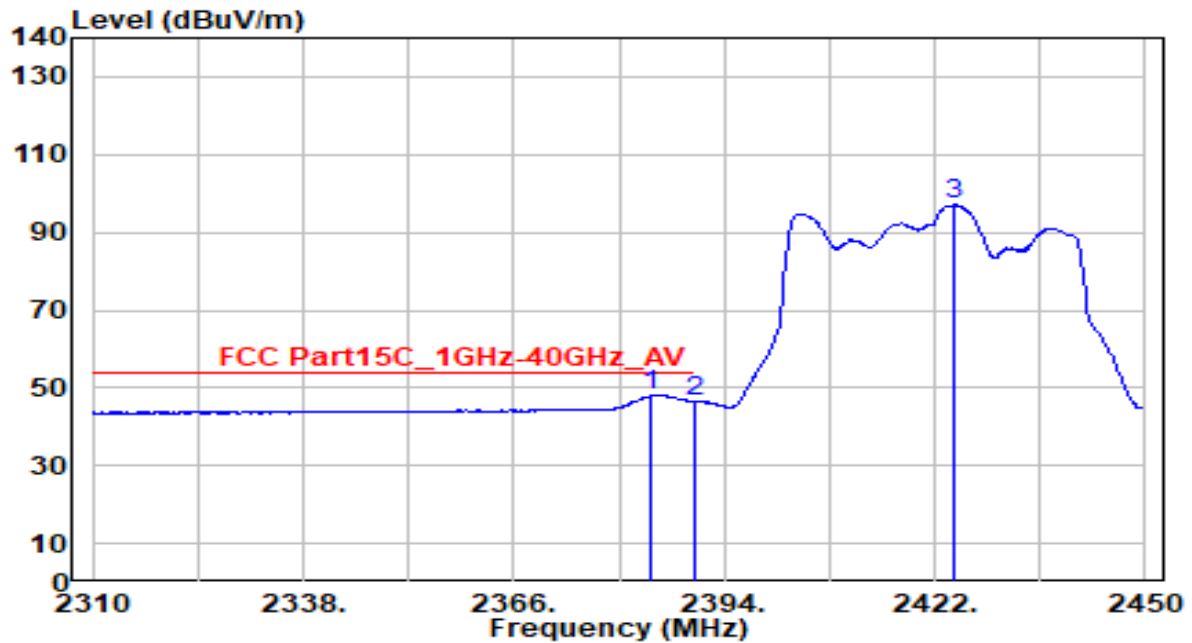


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.200	17.66	30.61	48.26	-5.74	54.00	120	130	Average
2		2390.000	15.93	30.61	46.55	-7.45	54.00	120	130	Average
3		2424.520	66.36	30.71	97.08	N/A	N/A	120	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

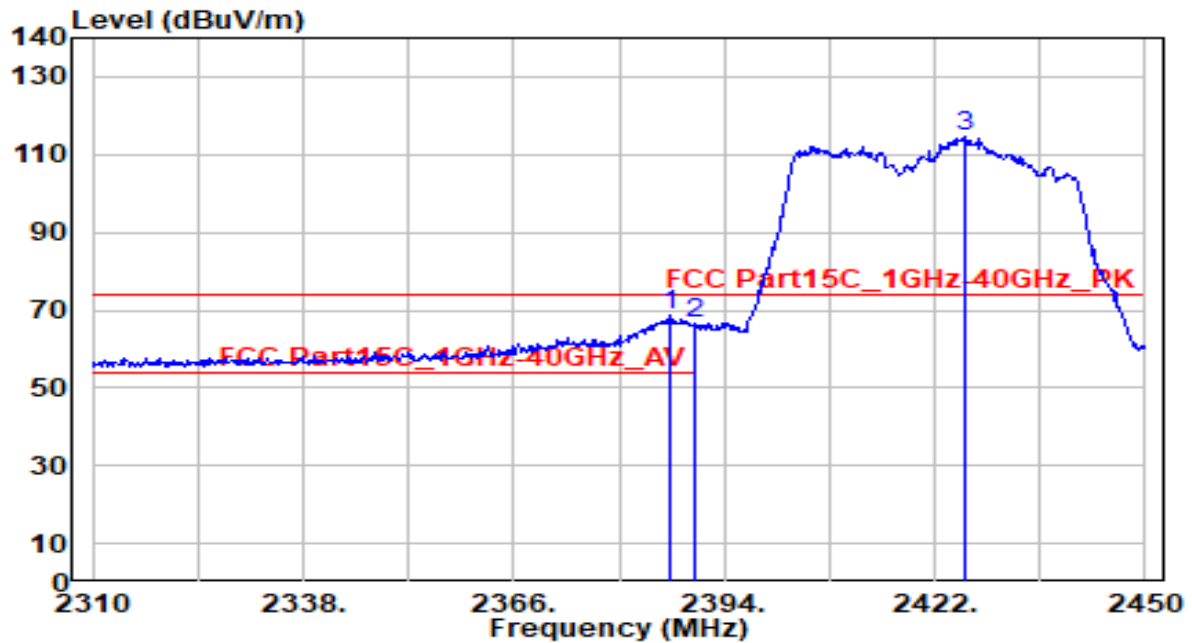


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.860	37.92	30.61	68.53	-5.47	74.00	125	305	Peak
2		2390.000	36.02	30.61	66.64	-7.36	74.00	125	305	Peak
3		2425.920	83.74	30.72	114.45	N/A	N/A	125	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 3_4TX	Test Voltage	AC 120V/60Hz

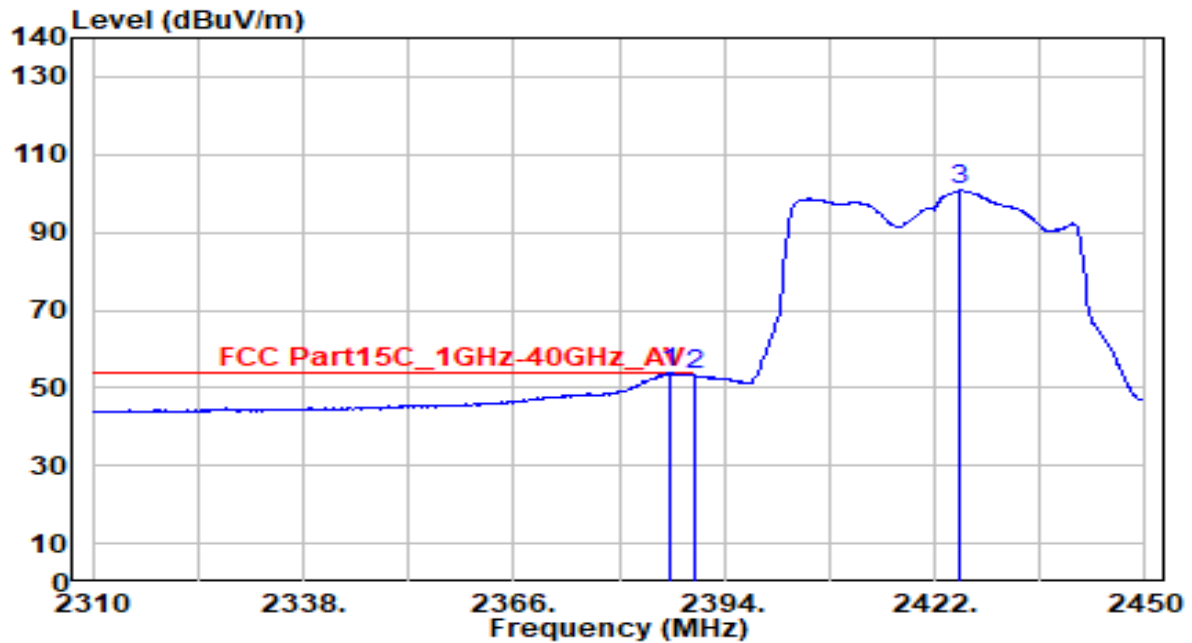


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.720	23.29	30.61	53.90	-0.10	54.00	125	305	Average
2		2390.000	22.50	30.61	53.12	-0.88	54.00	125	305	Average
3		2425.360	70.03	30.71	100.75	N/A	N/A	125	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

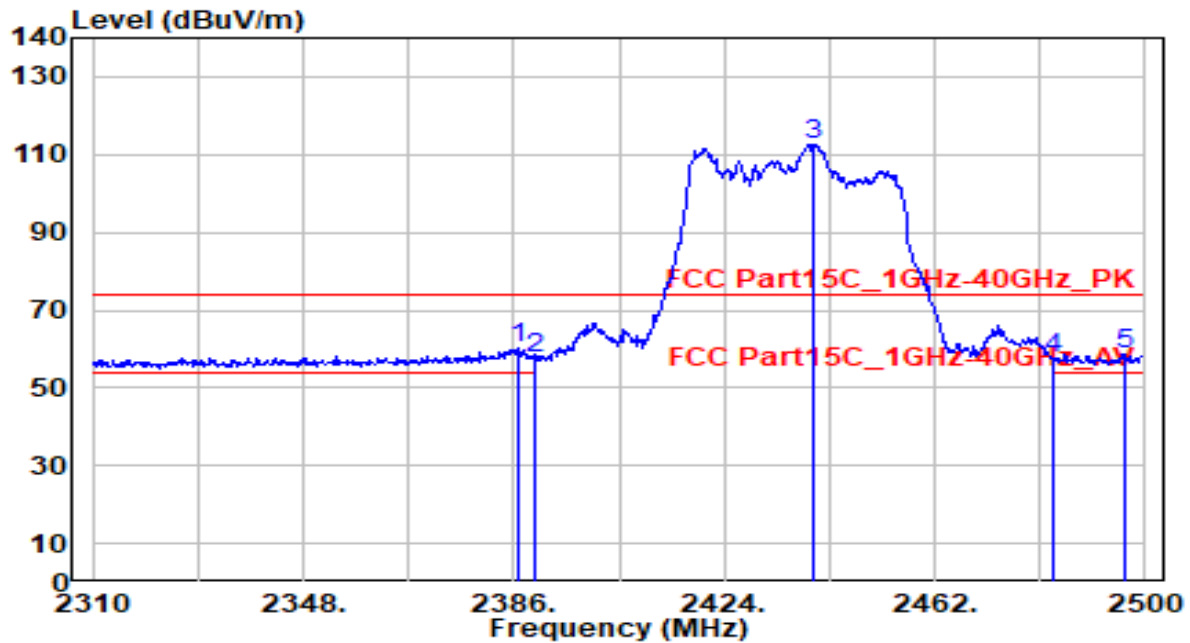


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.950	29.53	30.61	60.14	-13.86	74.00	130	125	Peak
2		2390.000	27.02	30.61	57.63	-16.37	74.00	130	125	Peak
3		2440.150	81.79	30.77	112.56	N/A	N/A	130	125	Peak
4		2483.500	26.66	30.91	57.57	-16.43	74.00	130	125	Peak
5		2496.390	27.94	30.96	58.90	-15.10	74.00	130	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

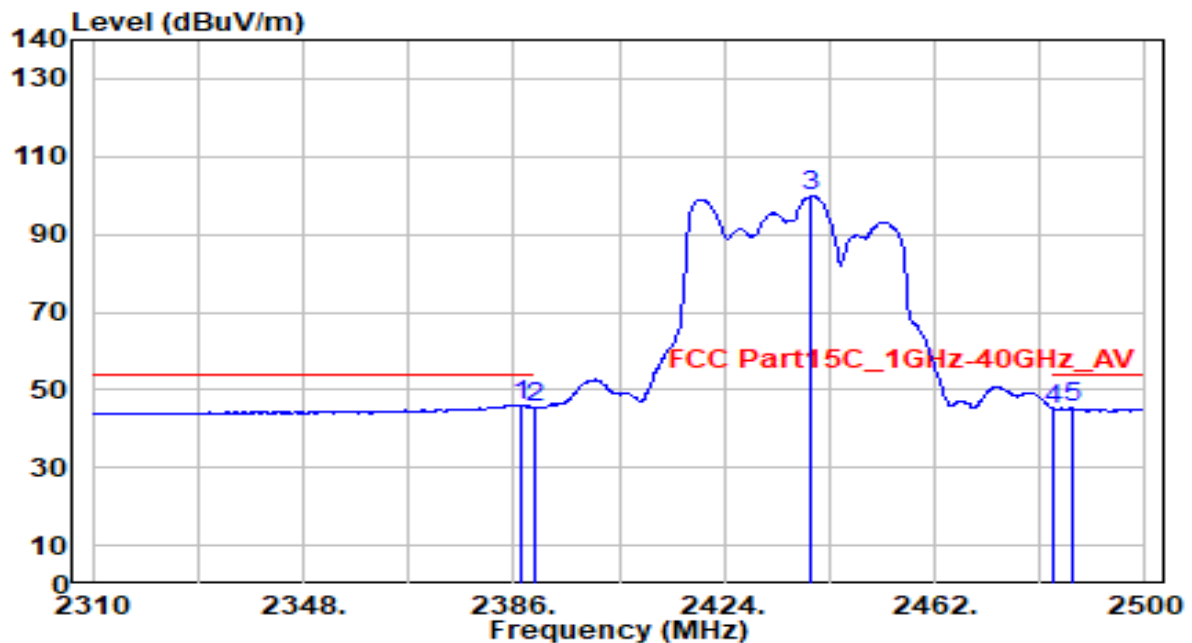


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.330	15.61	30.61	46.22	-7.78	54.00	130	125	Average
2		2390.000	14.81	30.61	45.42	-8.58	54.00	130	125	Average
3		2439.770	69.15	30.76	99.92	N/A	N/A	130	125	Average
4		2483.500	14.25	30.91	45.16	-8.84	54.00	130	125	Average
5		2486.700	14.37	30.92	45.30	-8.70	54.00	130	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

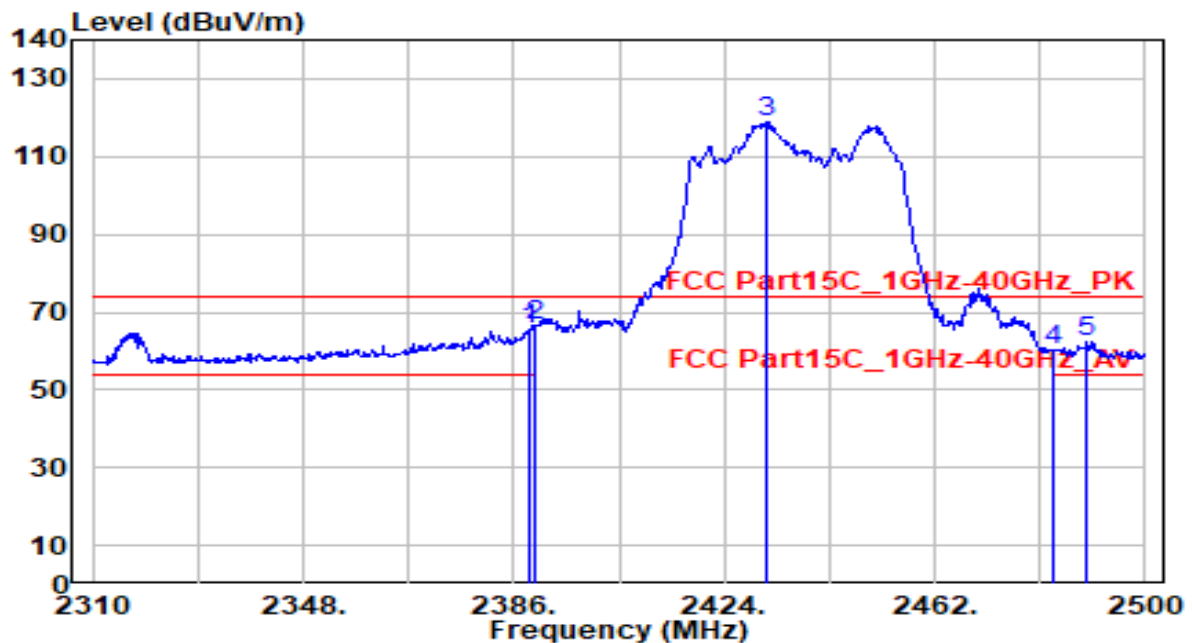


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	34.97	30.61	65.58	-8.42	74.00	205	225	Peak
2	* 2390.000	36.16	30.61	66.77	-7.23	74.00	205	225	Peak
3	2431.410	88.26	30.74	118.99	N/A	N/A	205	225	Peak
4	2483.500	29.18	30.91	60.09	-13.91	74.00	205	225	Peak
5	2489.550	31.47	30.93	62.40	-11.60	74.00	205	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 6_4TX	Test Voltage	AC 120V/60Hz

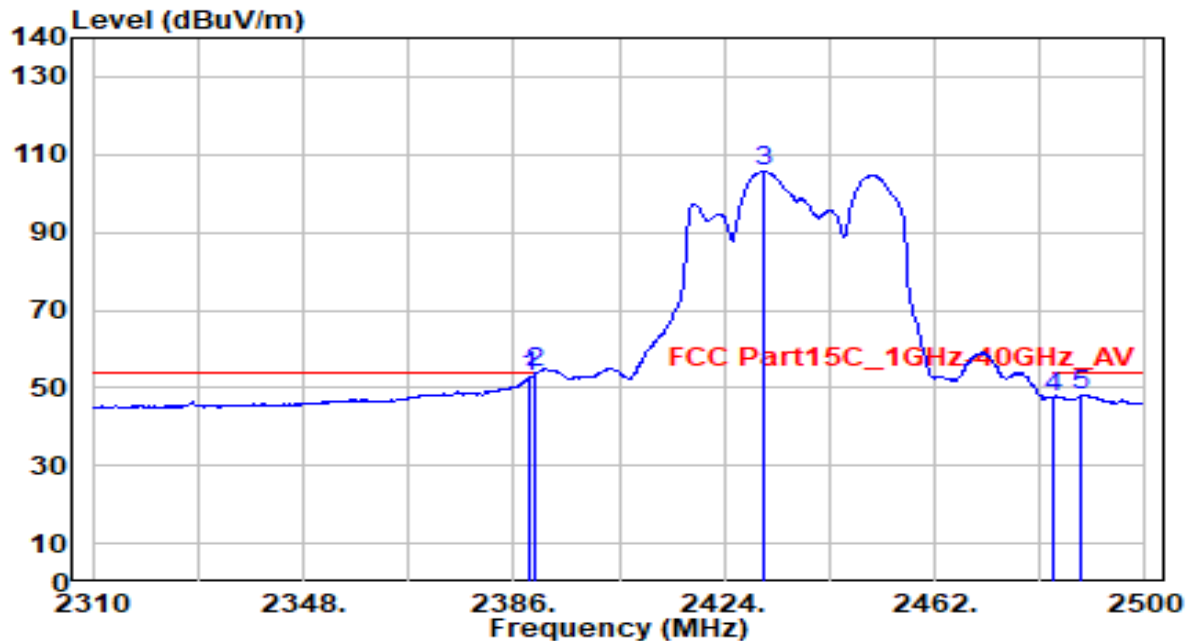


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	22.22	30.61	52.83	-1.17	54.00	205	225	Average
2	* 2390.000	23.27	30.61	53.88	-0.12	54.00	205	225	Average
3	2431.030	75.04	30.73	105.78	N/A	N/A	205	225	Average
4	2483.500	16.84	30.91	47.75	-6.25	54.00	205	225	Average
5	2488.600	17.32	30.93	48.26	-5.74	54.00	205	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

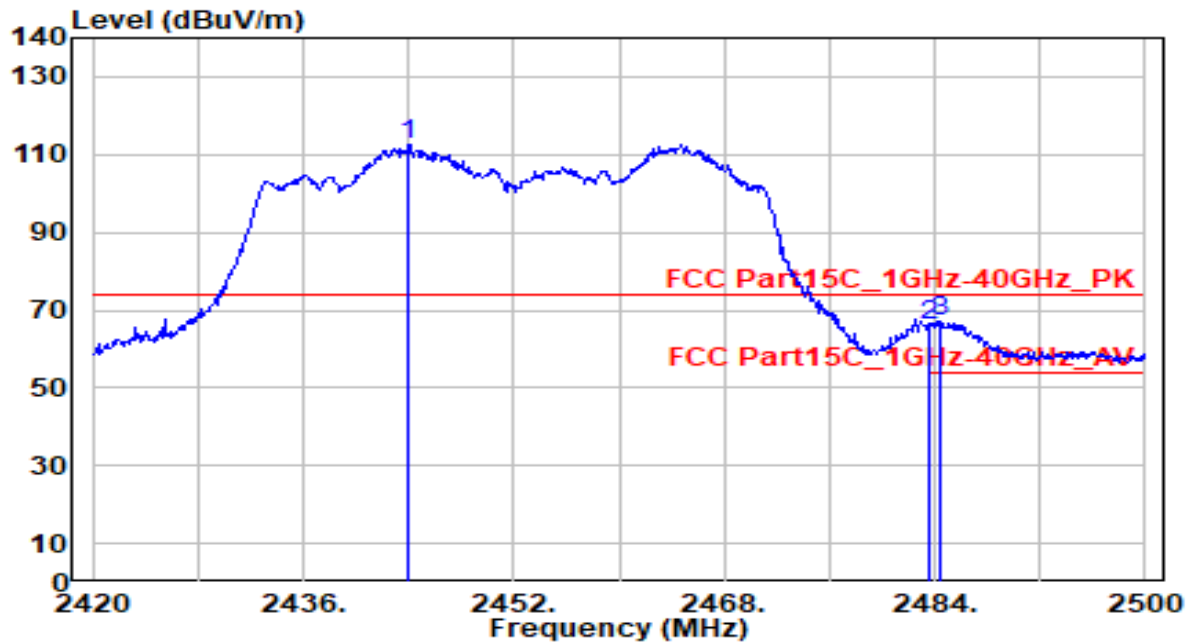


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2444.000	81.81	30.78	112.59	N/A	N/A	100	175	Peak
2	2483.500	35.31	30.91	66.23	-7.77	74.00	100	175	Peak
3	* 2484.480	36.36	30.92	67.28	-6.72	74.00	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

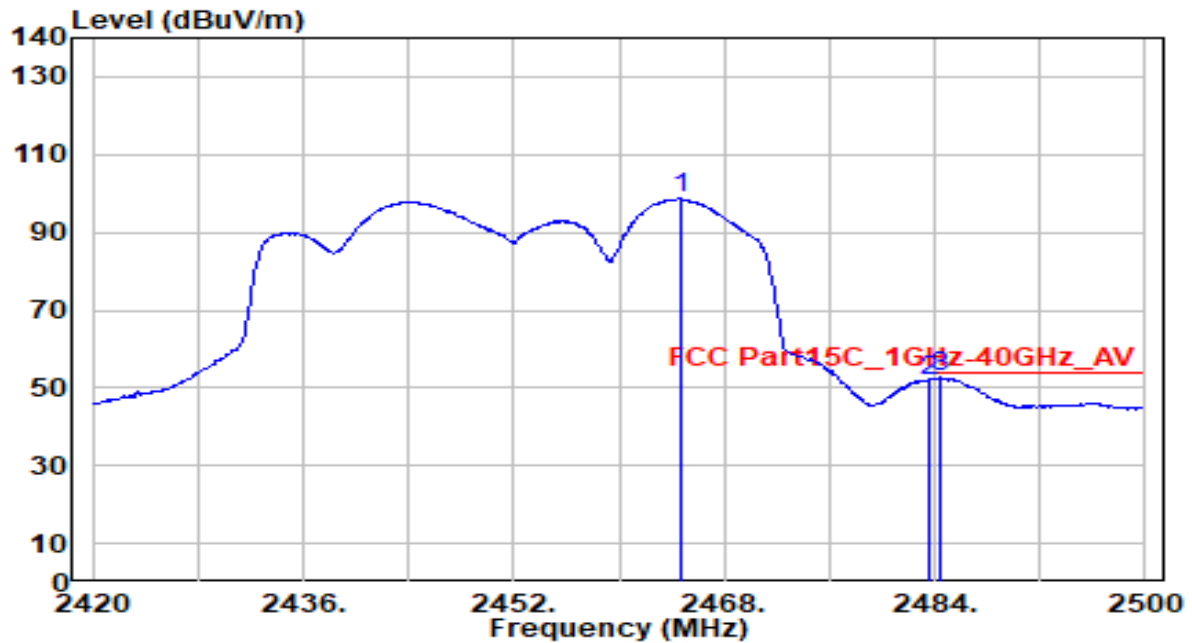


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.800	67.76	30.85	98.61	N/A	N/A	100	175	Average
2	2483.500	21.06	30.91	51.98	-2.02	54.00	100	175	Average
3	* 2484.480	21.67	30.92	52.59	-1.41	54.00	100	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

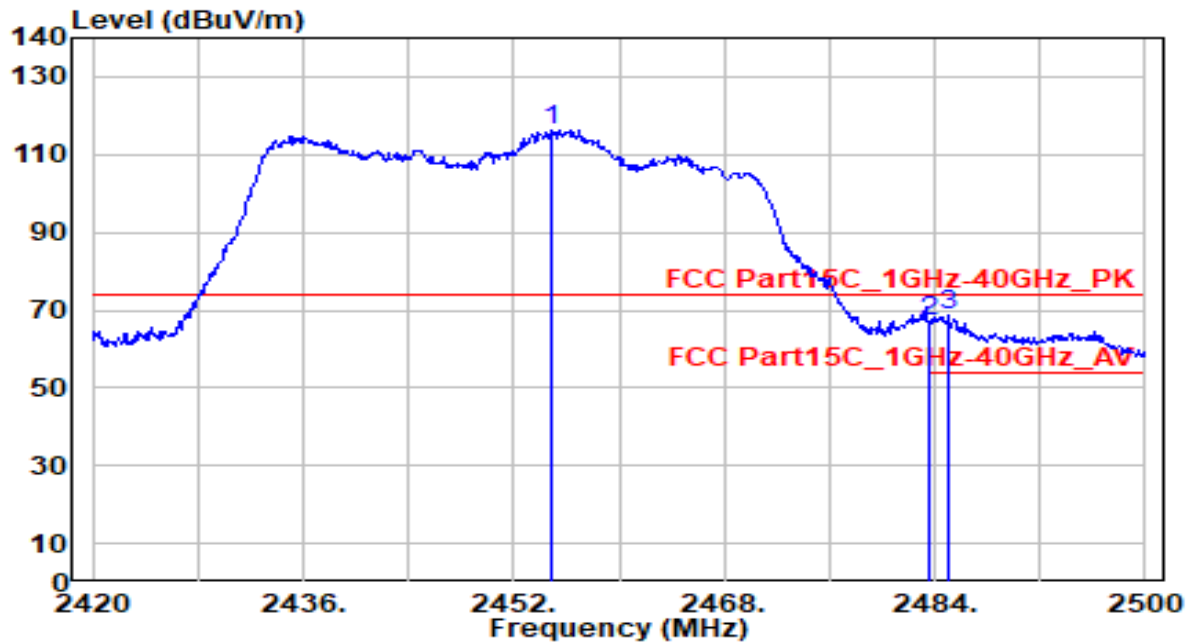


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.880	85.44	30.82	116.26	N/A	N/A	100	310	Peak
2	2483.500	36.42	30.91	67.34	-6.66	74.00	100	310	Peak
3	* 2485.040	37.51	30.92	68.43	-5.57	74.00	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	DRH18-E	Temp. / Humidity	22°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_CH 9_4TX	Test Voltage	AC 120V/60Hz

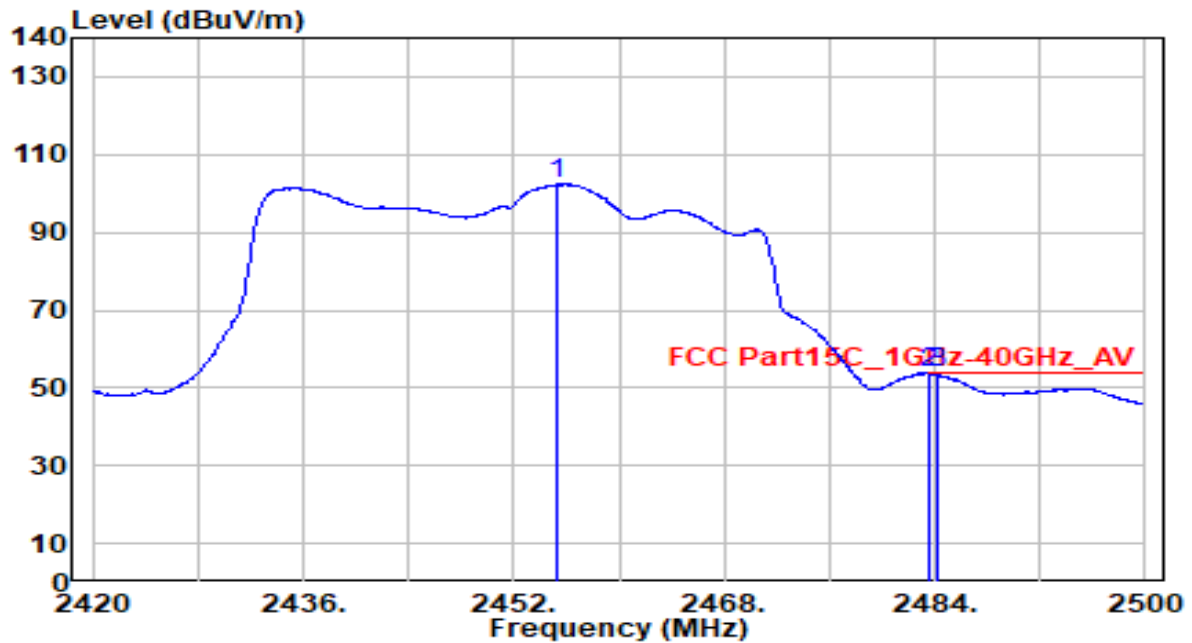

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.360	71.53	30.82	102.35	N/A	N/A	100	310	Average
2	2483.500	22.94	30.91	53.86	-0.14	54.00	100	310	Average
3	* 2484.160	22.99	30.92	53.90	-0.10	54.00	100	310	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

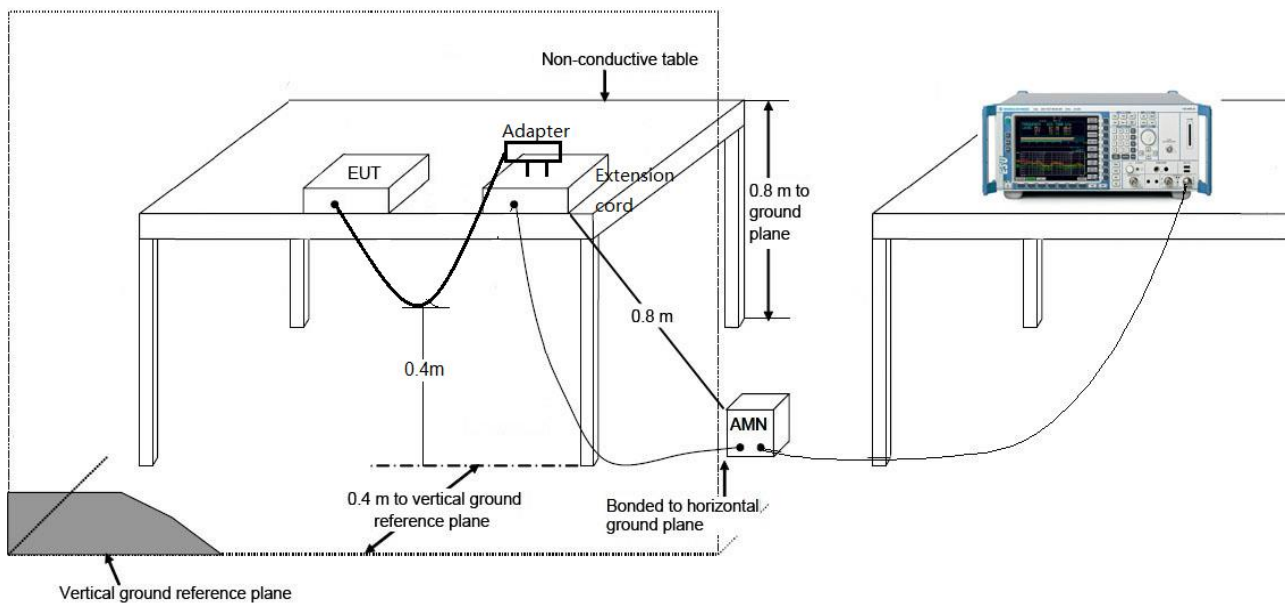

7.8.3. Test Result

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.4°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH6_4TX	Test Voltage	AC 120V/ 60Hz

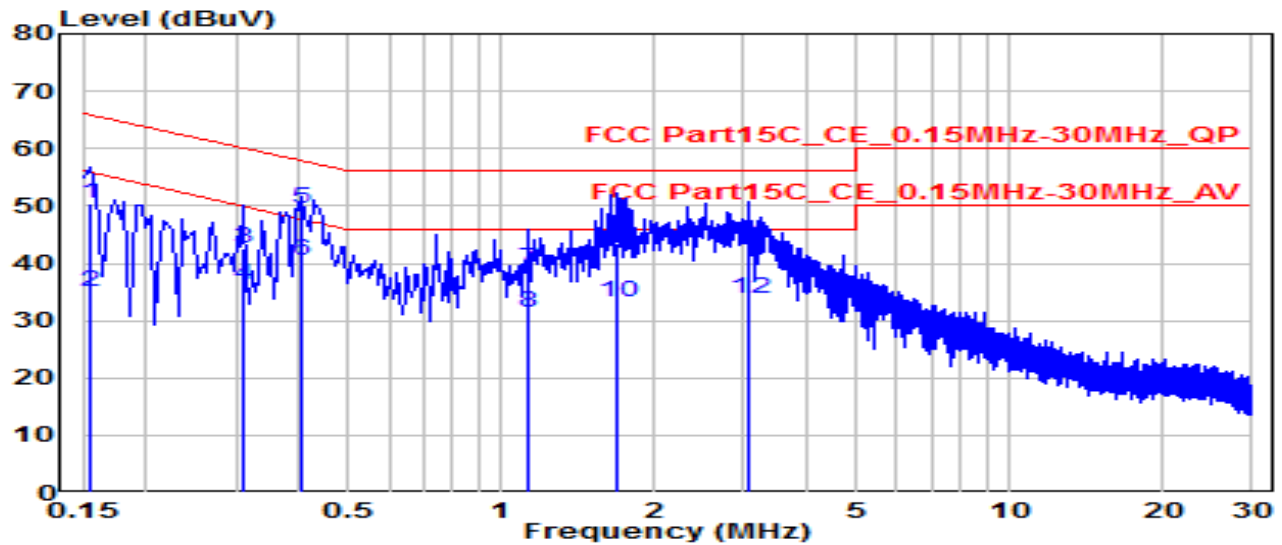


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	40.74	9.62	50.36	-15.40	65.75	QP
2	0.154	25.38	9.62	35.00	-20.76	55.75	Average
3	0.312	32.99	9.63	42.62	-17.30	59.92	QP
4	0.312	26.46	9.63	36.09	-13.83	49.92	Average
5	* 0.406	39.83	9.63	49.46	-8.26	57.72	QP
6	* 0.406	30.94	9.63	40.57	-7.15	47.72	Average
7	1.126	29.23	9.67	38.91	-17.09	56.00	QP
8	1.126	21.62	9.67	31.30	-14.70	46.00	Average
9	1.689	33.93	9.68	43.61	-12.39	56.00	QP
10	1.689	23.40	9.68	33.09	-12.91	46.00	Average
11	3.066	33.35	9.71	43.07	-12.93	56.00	QP
12	3.066	23.96	9.71	33.67	-12.33	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.4°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH6_4TX	Test Voltage	AC 120V/ 60Hz

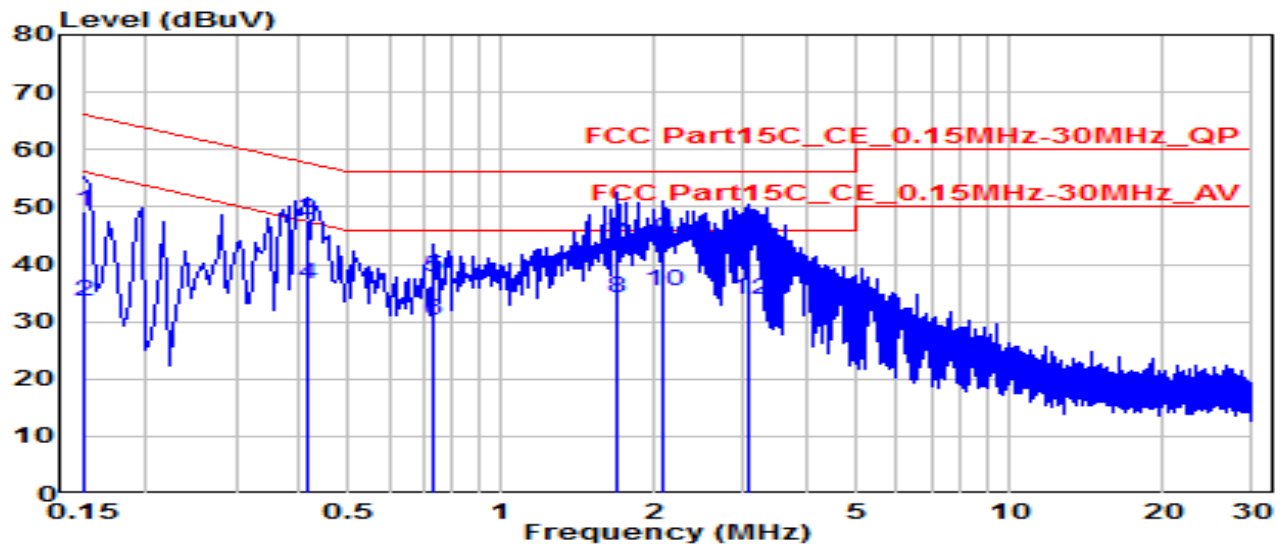


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	39.72	9.62	49.34	-16.66	66.00	QP
2	0.150	23.87	9.62	33.49	-22.51	56.00	Average
3	* 0.415	38.11	9.64	47.75	-9.79	57.54	QP
4	* 0.415	26.78	9.64	36.42	-11.12	47.54	Average
5	0.735	28.11	9.65	37.77	-18.23	56.00	QP
6	0.735	20.56	9.65	30.21	-15.79	46.00	Average
7	1.680	33.89	9.68	43.58	-12.42	56.00	QP
8	1.680	24.49	9.68	34.18	-11.82	46.00	Average
9	2.085	34.64	9.69	44.33	-11.67	56.00	QP
10	2.085	25.61	9.69	35.30	-10.70	46.00	Average
11	3.057	35.09	9.71	44.80	-11.20	56.00	QP
12	3.057	24.19	9.71	33.90	-12.10	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.4°C /52%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH6_4TX	Test Voltage	AC 240V/ 60Hz

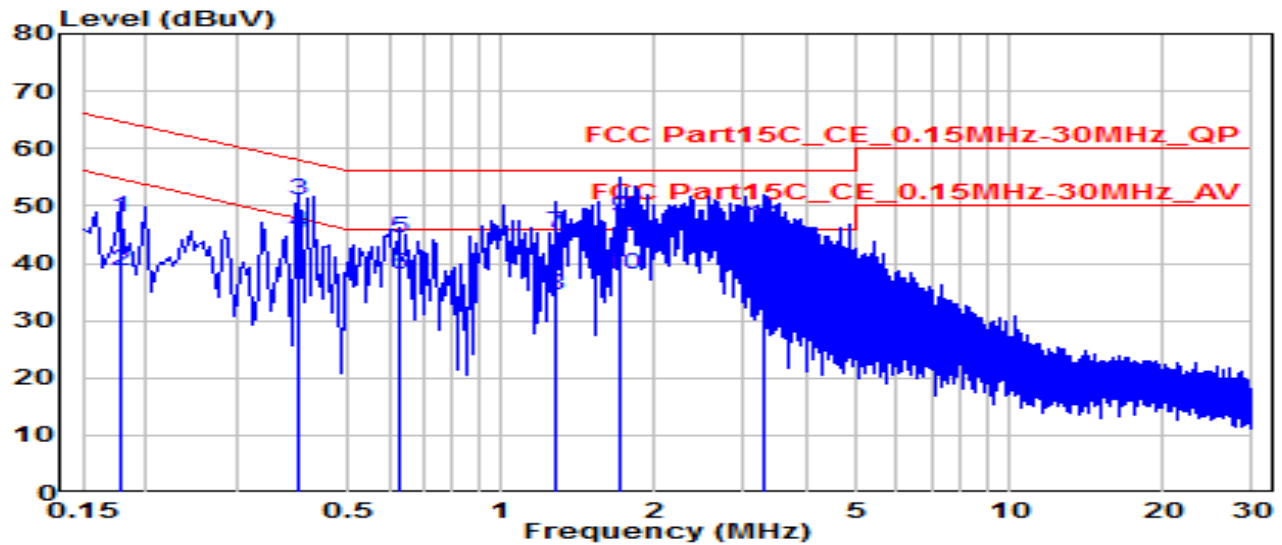


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.177	38.31	9.62	47.94	-16.69	64.63	QP
2	0.177	29.07	9.62	38.70	-15.93	54.63	Average
3	* 0.397	41.29	9.63	50.93	-6.98	57.91	QP
4	* 0.397	35.54	9.63	45.17	-2.73	47.91	Average
5	0.627	34.81	9.65	44.46	-11.54	56.00	QP
6	0.627	28.50	9.65	38.15	-7.85	46.00	Average
7	1.279	35.74	9.68	45.41	-10.59	56.00	QP
8	1.279	24.69	9.68	34.37	-11.63	46.00	Average
9	1.711	38.19	9.68	47.88	-8.12	56.00	QP
10	1.711	28.32	9.68	38.00	-8.00	46.00	Average
11	3.268	36.88	9.72	46.59	-9.41	56.00	QP
12	3.268	25.69	9.72	35.41	-10.59	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AXE11000 Whole Home Mesh Wi-Fi 6E System	Date of Test	2022-08-17
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.4°C /52%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	802.11n-20MHz_TX_CH6_4TX	Test Voltage	AC 240V/ 60Hz

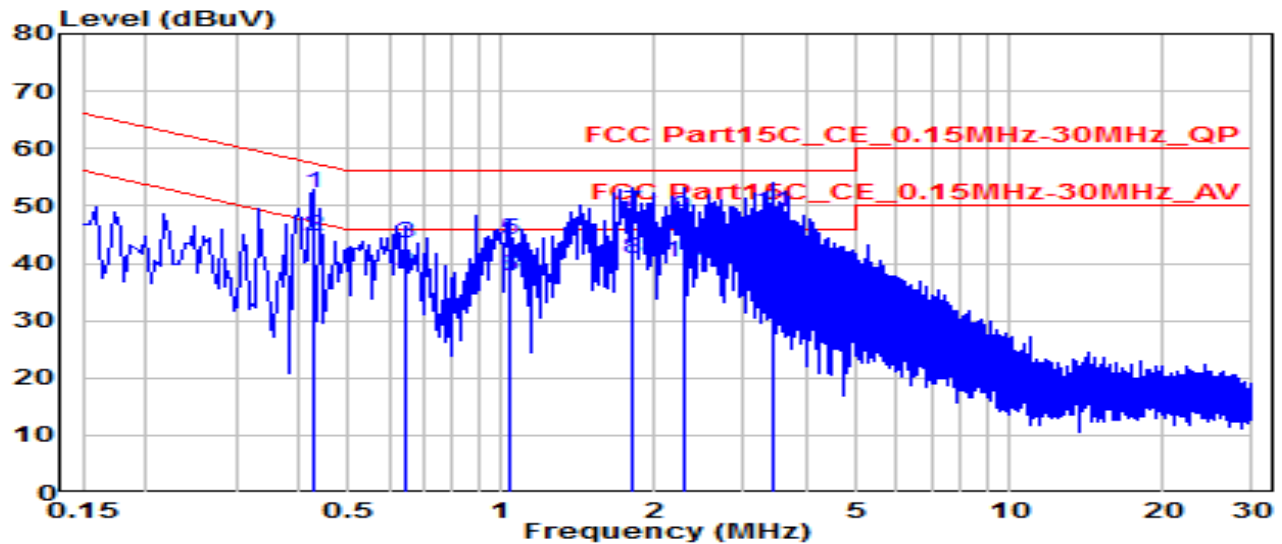

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.424	42.57	9.64	52.20	-5.16	57.36	QP
2	*	0.424	34.96	9.64	44.60	-2.76	47.36	Average
3		0.649	33.93	9.65	43.58	-12.42	56.00	QP
4		0.649	28.39	9.65	38.04	-7.96	46.00	Average
5		1.032	34.35	9.67	44.02	-11.98	56.00	QP
6		1.032	28.18	9.67	37.85	-8.15	46.00	Average
7		1.801	39.16	9.69	48.84	-7.16	56.00	QP
8		1.801	31.16	9.69	40.85	-5.15	46.00	Average
9		2.274	38.18	9.70	47.87	-8.13	56.00	QP
10		2.274	30.41	9.70	40.11	-5.89	46.00	Average
11		3.403	39.32	9.72	49.04	-6.96	56.00	QP
12		3.403	27.81	9.72	37.53	-8.47	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

The End

Appendix A : Test Setup Photograph

Refer to “2206TW0121-Setup Photo” file.

Appendix B : External Photograph

Refer to “2206TW0121-External Photo” file.

Appendix C : Internal Photograph

Refer to “2206TW0121-Internal Photo” file.