

FCC TEST REPORT

FCC ID: 2AB9SM52

Product : Bluetooth speaker

Model Name : M52,F&M Liquide

Brand : Jonter, Tumbletrade Inc

Report No. : PT800091151210E-FC01

Prepared for

Shenzhen Jonter Digital Co.,Ltd
3F/4B, Hezhou Jinfo Industrial Park, Hezhou, Xixiang Street, Baoan District,
Shenzhen, Guangdong, China

Prepared by

DongGuan Precise Testing Service Co.,Ltd.
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community
Dongcheng District, Dongguan, Guangdong, China

TEST RESULT CERTIFICATION


Applicant's name : Shenzhen Jonter Digital Co.,Ltd
Address : 3F/4B, Hezhou Jinfo Industrial Park, Hezhou, Xixiang Street, Baoan District, Shenzhen, Guangdong, China
Manufacture's name : Shenzhen Jonter Digital Co.,Ltd
Address : 3F/4B, Hezhou Jinfo Industrial Park, Hezhou, Xixiang Street, Baoan District, Shenzhen, Guangdong, China
Product name : Bluetooth speaker
Model name : M52, F&M Liquide
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013,DA 00-705
Test Date : Dec. 11 - Dec. 17, 2015
Date of Issue : Dec. 18, 2015
Test Result : Pass

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


Testing Engineer

August Qiu




Technical Manager

Hack Ye



Authorized Signatory

Chris Du



Contents

	Page
2 TEST SUMMARY.....	5
3 GENERAL INFORMATION.....	6
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST	7
3.3 TEST MODE.....	8
4 EQUIPMENT DURING TEST	9
4.1 EQUIPMENTS LIST.....	9
4.2 MEASUREMENT UNCERTAINTY	10
5 CONDUCTED EMISSION.....	11
5.1 E.U.T. OPERATION.....	11
5.2 EUT SETUP	11
5.3 MEASUREMENT DESCRIPTION.....	12
5.4 CONDUCTED EMISSION TEST RESULT	12
6 RADIATED SPURIOUS EMISSIONS	14
6.1 EUT OPERATION	14
6.2 TEST SETUP.....	15
6.3 SPECTRUM ANALYZER SETUP.....	16
6.4 TEST PROCEDURE	17
6.5 SUMMARY OF TEST RESULTS.....	18
7 BAND EDGE MEASUREMENT	21
7.1 TEST PROCEDURE.....	21
7.2 TEST RESULT.....	22
8 20 DB BANDWIDTH MEASUREMENT	25
8.1 TEST PROCEDURE.....	25
8.2 TEST RESULT.....	25
9 MAXIMUM PEAK OUTPUT POWER	31
9.1 TEST PROCEDURE.....	31
9.2 TEST RESULT.....	31
10 HOPPING CHANNEL SEPARATION.....	37
10.1 TEST PROCEDURE.....	37
10.2 TEST RESULT	37



11	NUMBER OF HOPPING FREQUENCY	43
11.1	TEST PROCEDURE.....	43
11.2	TEST RESULT	43
12	DWELL TIME	44
12.1	TEST PROCEDURE.....	44
12.2	TEST RESULT	44
13	ANTENNA REQUIREMENT	47
14	TEST SETUP	48
15	EUT PHOTOS.....	50



2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable

3 General Information

3.1 General Description of E.U.T.

Product Name	: Bluetooth speaker
Model Name	: M52, F&M Liquide
Model Description	: Only the colors and model names are different.
Bluetooth Version:	: V4.0(With BLE)
	For BT3.0:
Frequency Range:	: 2402-2480MHz, 79 channels
	For BLE:
	: 2402-2480MHz, 40 channels
Antenna installation:	: PCB Printed Antenna
Antenna Gain:	: 0dBi
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
The lowest oscillator:	: 26MHz
Power supply	: DC 3.7V 2000mA power by battery, DC 5V charging by USB port



3.2 Channel List

BT 3.0							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	-	-
BLE							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Modulation	Test mode	Low channel	Middle channel	High channel
GFSK	Transmitting	2402MHz	2441MHz	2480MHz
Pi/4DQPSK	Transmitting	2402MHz	2441MHz	2480MHz
8DPSK	Transmitting	2402MHz	2441MHz	2480MHz
Tests Carried Out Under FCC part 15.207				
Test Item		Test Mode		
Conduction Emission, 0.15MHz to 30MHz		BT Communication		

4 Equipment During Test

4.1 Equipments List

RF Conducted Test							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2015	Aug.03, 2016	1 year
2	EXA Signal Analyzer	Keysight	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2015	Aug.03, 2016	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2015	July 14, 2016	1 year
2	Trilog Broadband Antenna	SCHWARZB ECK	VULB9160	9160-3355	July 15, 2015	July 14, 2016	1 year
3	Amplifier	EM	EM-30180	060538	July 15, 2015	July 14, 2016	1 year
4	Horn Antenna	SCHWARZB ECK	BBHA9120 D	9120D-1246	July 15, 2015	July 14, 2016	1 year
5	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2015	July 14, 2016	1 year
6	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2015	July 14, 2016	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
2	LISN	SCHWARZB ECK	NSLK 8128	8128-289	July 15, 2015	July 14, 2016	1 year
3	Cable	LARGE	RF300	-	July 15, 2015	July 14, 2016	1 year



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method:	: ANSI C63.4:2014
Test Result:	: PASS
Frequency Range:	: 150kHz to 30MHz
Class/Severity:	: Class B
Limit:	: 66-56 dB μ V between 0.15MHz & 0.5MHz
	: 56 dB μ V between 0.5MHz & 5MHz
	: 60 dB μ V between 5MHz & 30MHz
Detector:	: Peak for pre-scan (9kHz Resolution Bandwidth)


5.1 E.U.T. Operation

Operating Environment :

Temperature:	: 25.5 °C
Humidity:	: 51 % RH
Atmospheric Pressure:	: 101.2kPa
EUT Operation :	: Refer to section 3.3

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

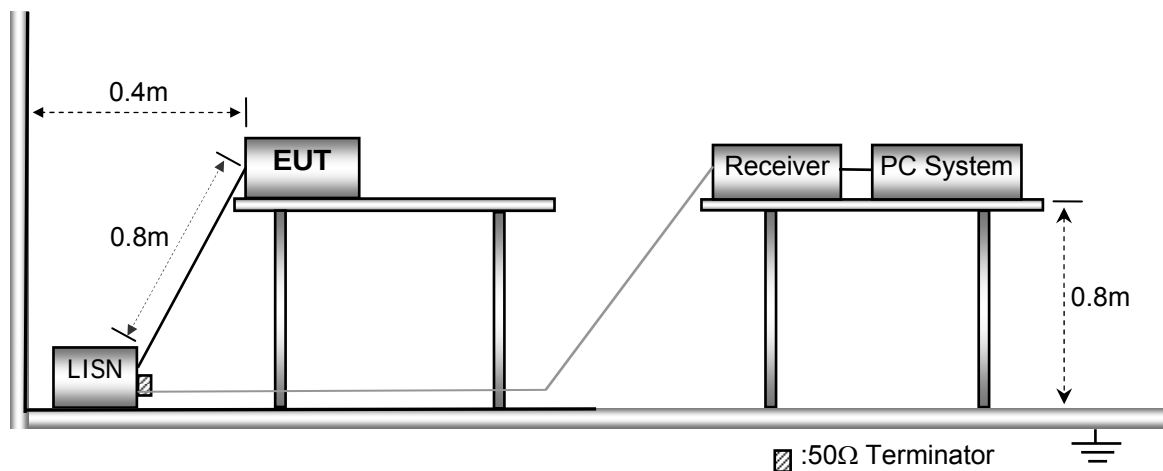


5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.4 Conducted Emission Test Result


Live line:

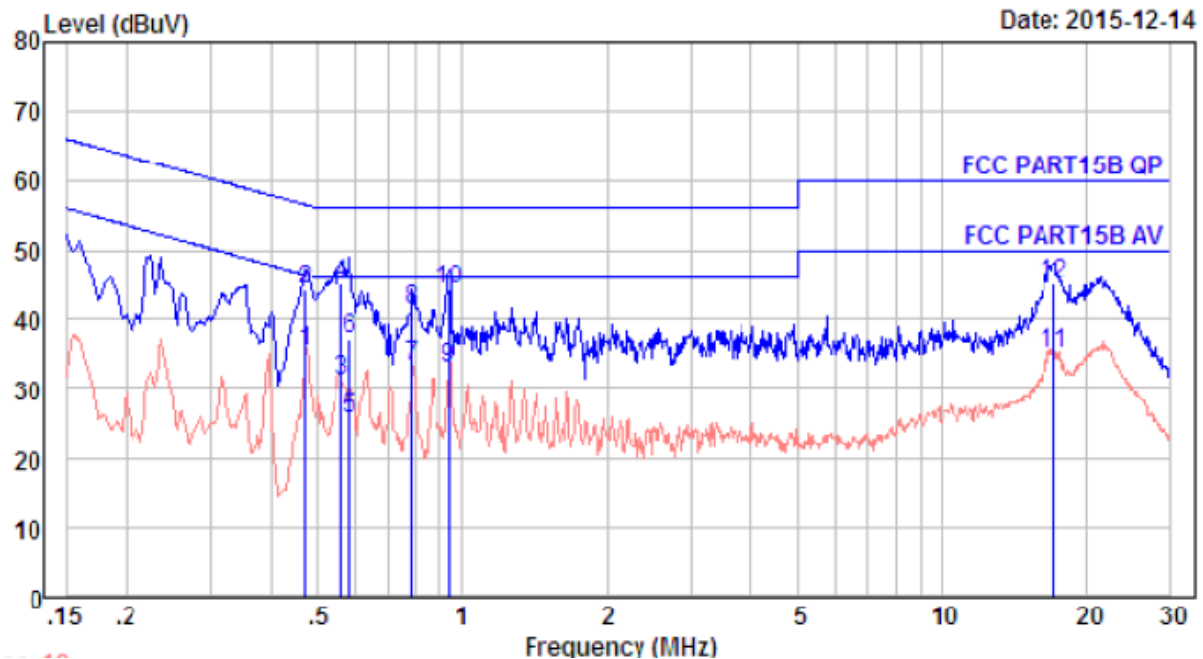

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.471	10.64	0.60	24.09	35.33	46.49	-11.16	Average
2.	0.471	10.64	0.60	33.09	44.33	56.49	-12.16	QP
3.	0.561	10.65	0.60	20.03	31.28	46.00	-14.72	Average
4.	0.561	10.65	0.60	34.03	45.28	56.00	-10.72	QP
5.	0.585	10.66	0.60	14.30	25.56	46.00	-20.44	Average
6.	0.585	10.66	0.60	25.90	37.16	56.00	-18.84	QP
7.	0.783	10.66	0.60	22.11	33.37	46.00	-12.63	Average
8.	0.783	10.66	0.60	30.11	41.37	56.00	-14.63	QP
9.	0.943	10.67	0.60	21.94	33.21	46.00	-12.79	Average
10.	0.943	10.67	0.60	32.94	44.21	56.00	-11.79	QP
11.	17.109	10.78	0.60	23.84	35.22	50.00	-14.78	Average
12.	17.109	10.78	0.60	33.84	45.22	60.00	-14.78	QP



Neutral line:

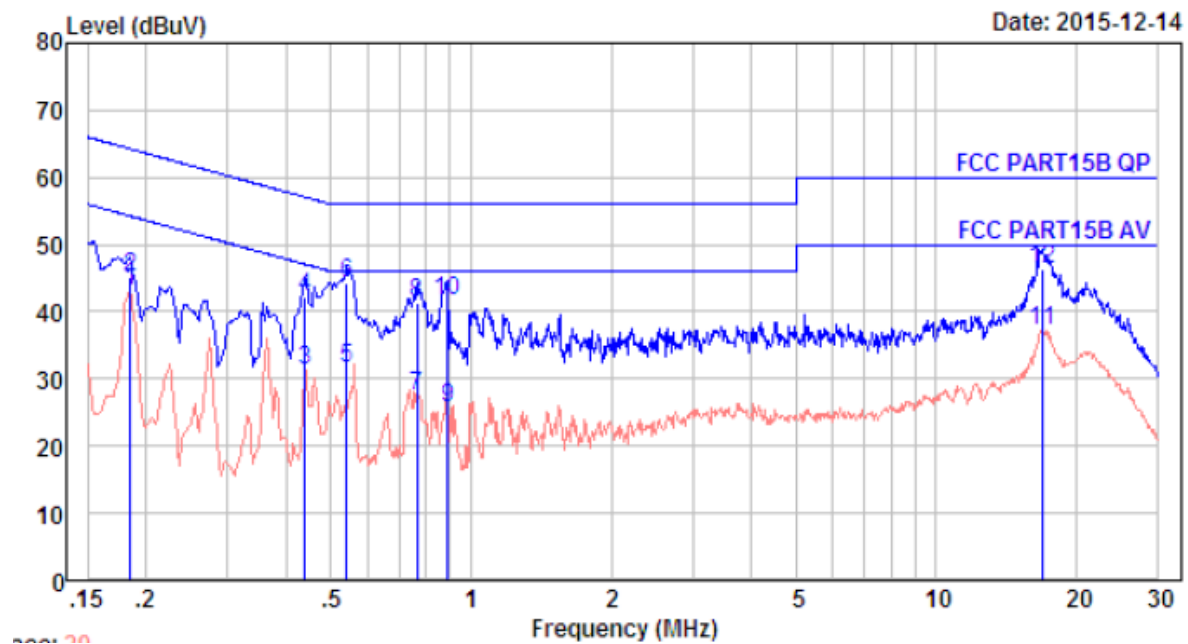

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.185	10.61	0.60	31.93	43.14	54.24	-11.10	Average
2.	0.185	10.61	0.60	33.93	45.14	64.24	-19.10	QP
3.	0.440	10.64	0.60	19.96	31.20	47.07	-15.87	Average
4.	0.440	10.64	0.60	30.96	42.20	57.07	-14.87	QP
5.	0.541	10.65	0.60	20.30	31.55	46.00	-14.45	Average
6.	0.541	10.65	0.60	33.00	44.25	56.00	-11.75	QP
7.	0.767	10.66	0.60	16.09	27.35	46.00	-18.65	Average
8.	0.767	10.66	0.60	30.09	41.35	56.00	-14.65	QP
9.	0.890	10.67	0.60	14.29	25.56	46.00	-20.44	Average
10.	0.890	10.67	0.60	30.29	41.56	56.00	-14.44	QP
11.	17.018	10.78	0.60	25.95	37.33	50.00	-12.67	Average
12.	17.018	10.78	0.60	34.95	46.33	60.00	-13.67	QP

6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: : ANSI C63.10:2013, DA 00-705
 Test Result: : PASS
 Measurement Distance: : 3m
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C
 Humidity: : 51.1 % RH
 Atmospheric Pressure: : 101.2kPa
 EUT Operation : : Refer to section 3.3


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

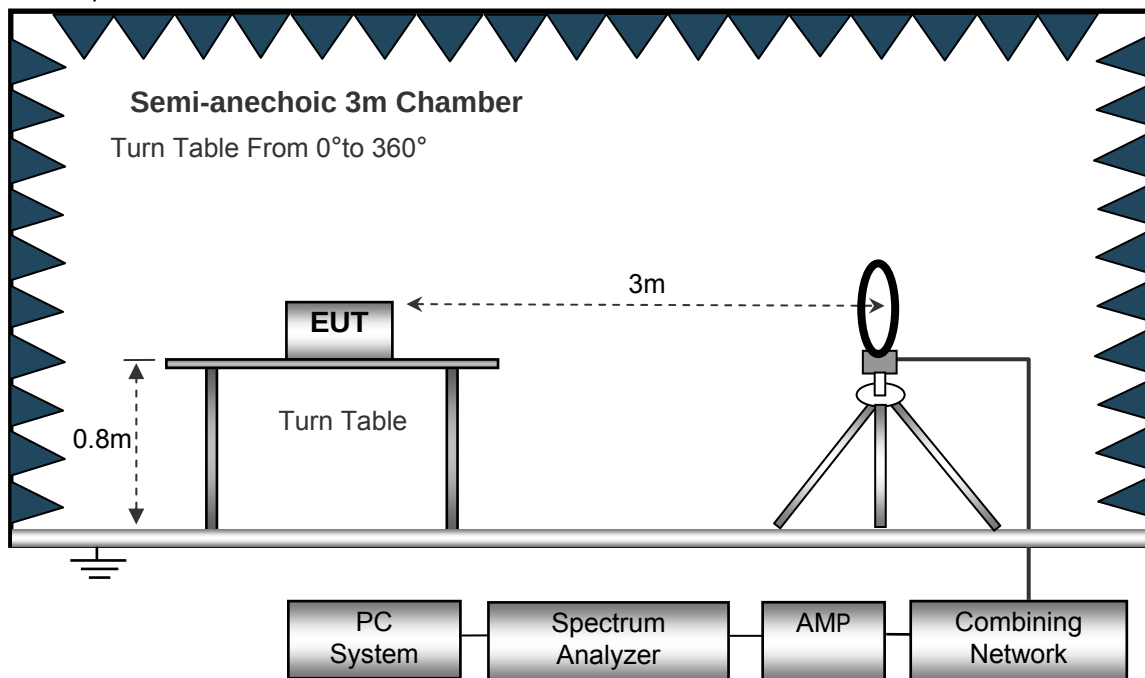

The test setup for emission measurement from 30 MHz to 1 GHz.

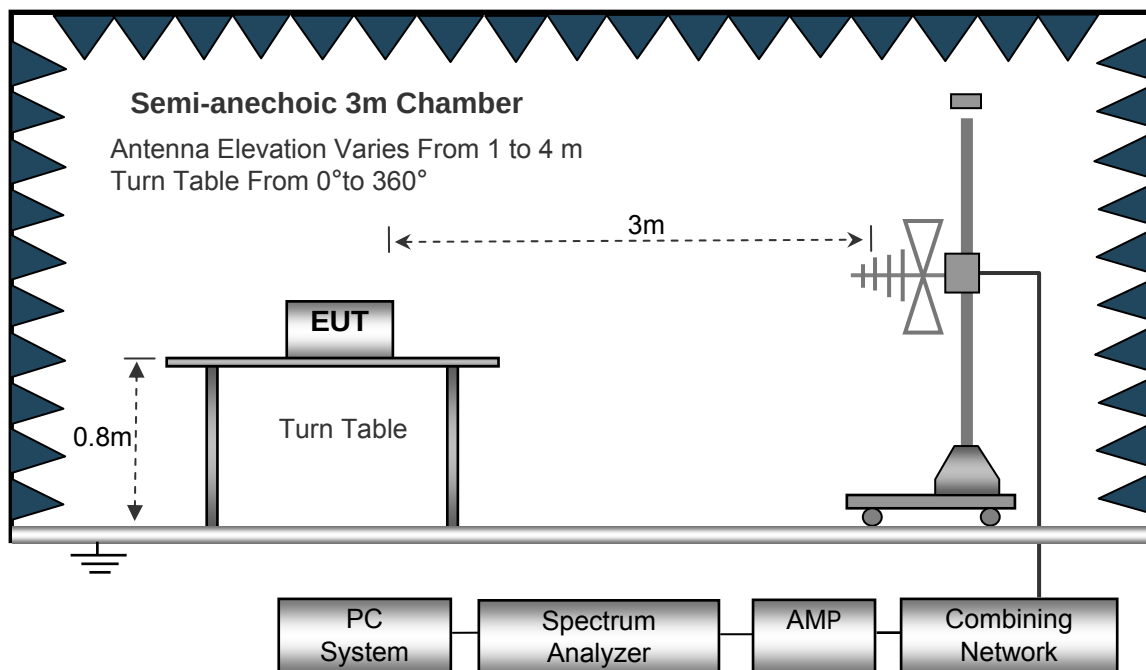

The test setup for emission measurement above 1 GHz.

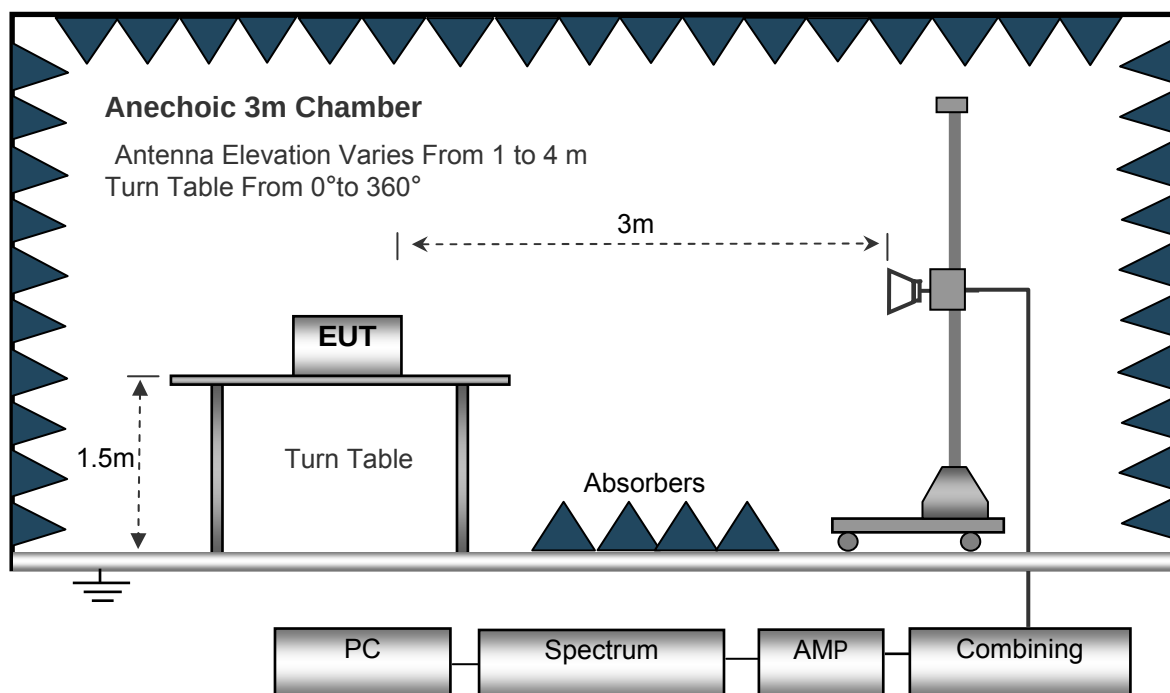

6.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth 10kHz
Video Bandwidth 10kHz
Resolution Bandwidth 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth 100kHz
Video Bandwidth 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth 1MHz
Video Bandwidth 3MHz
Detector Ave.
Resolution Bandwidth 1MHz
Video Bandwidth 10Hz

6.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

6.5 Summary of Test Results

Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel						
135.98	46.89	QP	-15.51	31.38	43.50	-12.12
135.98	43.71	QP	-15.51	28.20	43.50	-15.30
4804.00	49.87	PK	-1.06	48.81	74.00	-25.19
4804.00	43.69	Ave	-1.06	42.63	54.00	-11.37
7206.00	49.53	PK	1.33	50.86	74.00	-23.14
7206.00	44.79	Ave	1.33	46.12	54.00	-7.88
2329.11	45.02	PK	-13.19	31.83	74.00	-42.17
2329.11	39.30	Ave	-13.19	26.11	54.00	-27.89
2350.09	42.91	PK	-13.14	29.77	74.00	-44.23
2350.09	38.12	Ave	-13.14	24.98	54.00	-29.02
2484.27	42.47	PK	-13.08	29.39	74.00	-44.61
2484.27	40.29	Ave	-13.08	27.21	54.00	-26.79
Remark: Corrected Factor=ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel						
135.98	45.90	QP	-15.51	30.39	43.50	-13.11
135.98	43.92	QP	-15.51	28.41	43.50	-15.09
4882.00	48.95	PK	-0.93	48.02	74.00	-25.98
4882.00	43.48	Ave	-0.93	42.55	54.00	-11.45
7323.00	49.77	PK	1.67	51.44	74.00	-22.56
7323.00	45.28	Ave	1.67	46.95	54.00	-7.05
2323.23	44.82	PK	-13.19	31.63	74.00	-42.37
2323.23	39.85	Ave	-13.19	26.66	54.00	-27.34
2363.71	42.46	PK	-13.14	29.32	74.00	-44.68
2363.71	38.37	Ave	-13.14	25.23	54.00	-28.77
2488.46	42.22	PK	-13.08	29.14	74.00	-44.86
2488.46	39.78	Ave	-13.08	26.70	54.00	-27.30
Remark: Corrected Factor=ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel						
135.98	45.55	QP	-15.51	30.04	43.50	-13.46
135.98	44.46	QP	-15.51	28.95	43.50	-14.55
4960.00	49.93	PK	-0.87	49.06	74.00	-24.94
4960.00	42.70	Ave	-0.87	41.83	54.00	-12.17
7440.00	49.50	PK	1.84	51.34	74.00	-22.66
7440.00	44.60	Ave	1.84	46.44	54.00	-7.56
2324.20	45.47	PK	-13.19	32.28	74.00	-41.72
2324.20	39.06	Ave	-13.19	25.87	54.00	-28.13
2389.64	43.10	PK	-13.14	29.96	74.00	-44.04
2389.64	38.01	Ave	-13.14	24.87	54.00	-29.13
2498.04	41.94	PK	-13.08	28.86	74.00	-45.14
2498.04	39.23	Ave	-13.08	26.15	54.00	-27.85
Remark: Corrected Factor=ANT Factor + Cable Loss – Amp Gain						

Test Frequency :Above 18GHz

The measurements were more than 20 dB below the limit and not reported

7 Band Edge Measurement


Test Requirement	: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	: Refer to section 3.3

7.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
 2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
- Detector function = peak, Trace = max hold

7.2 Test Result


GFSK Band edge-left side

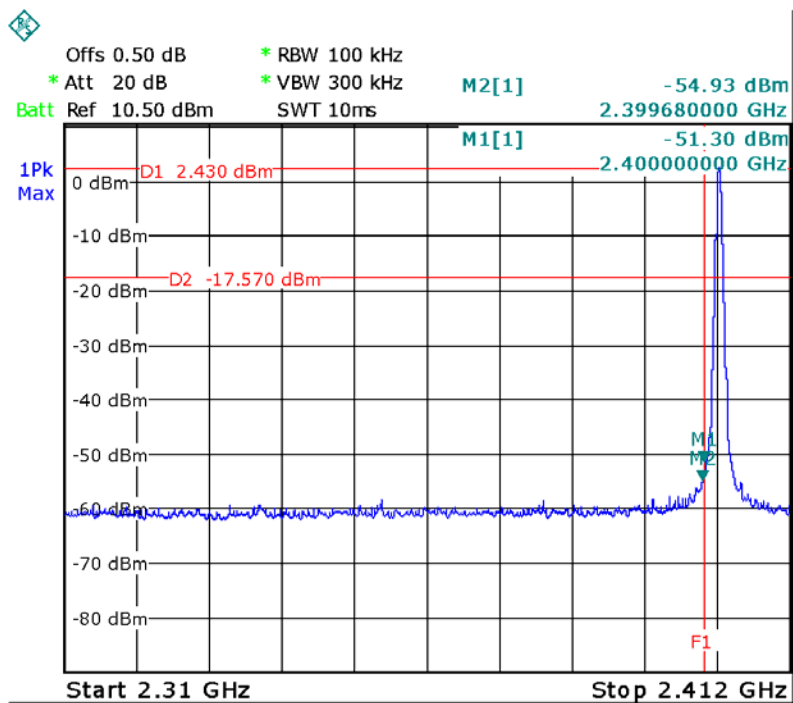


GFSK Band edge-right side

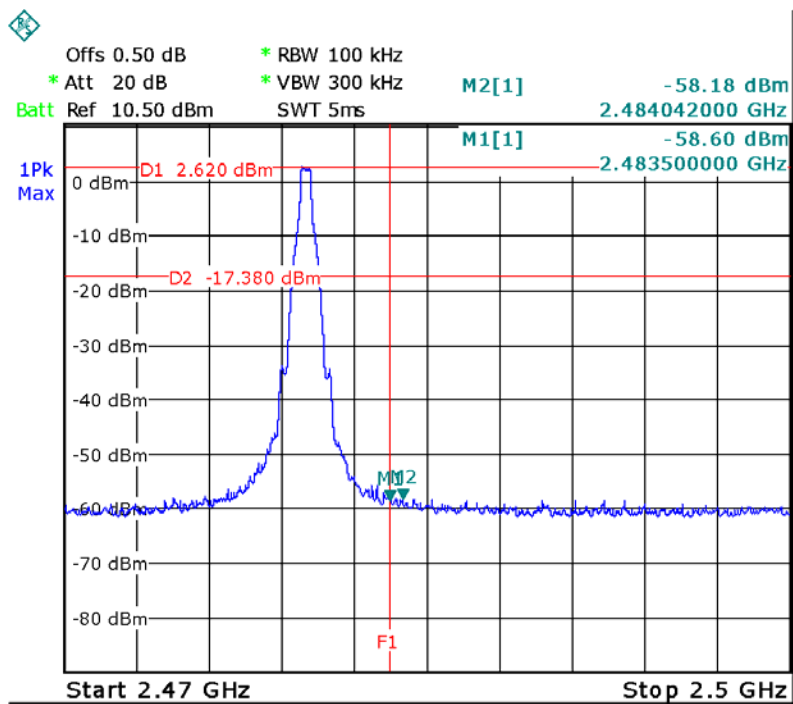


Pi/4 DQPSK Band edge-left side

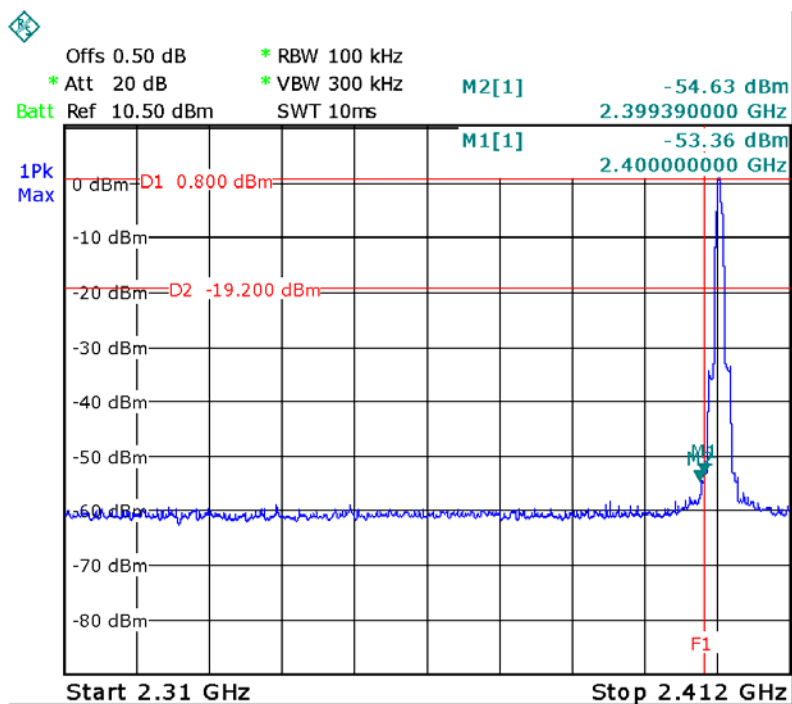


Pi/4 DQPSK Band edge-right side

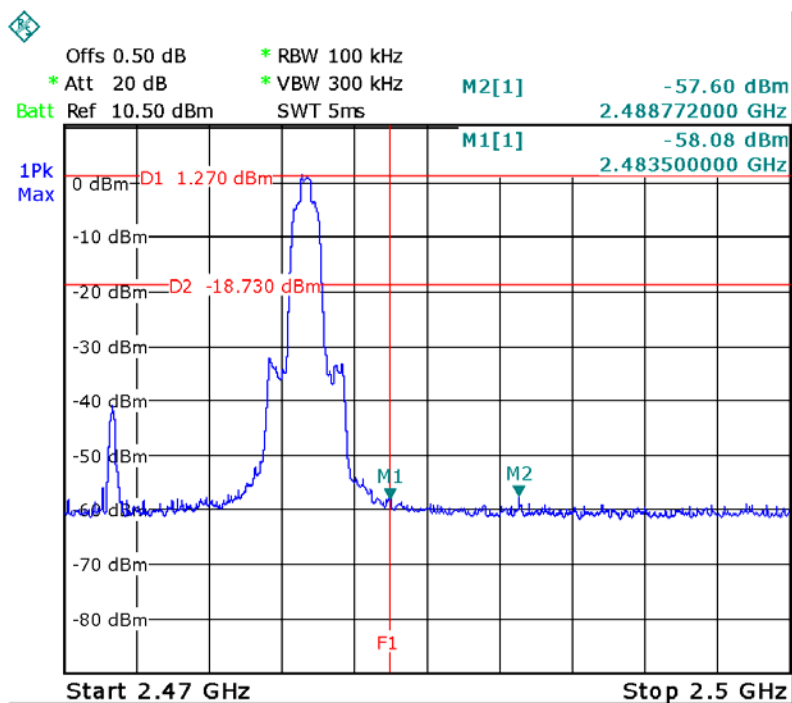

8DPSK Band edge-left side

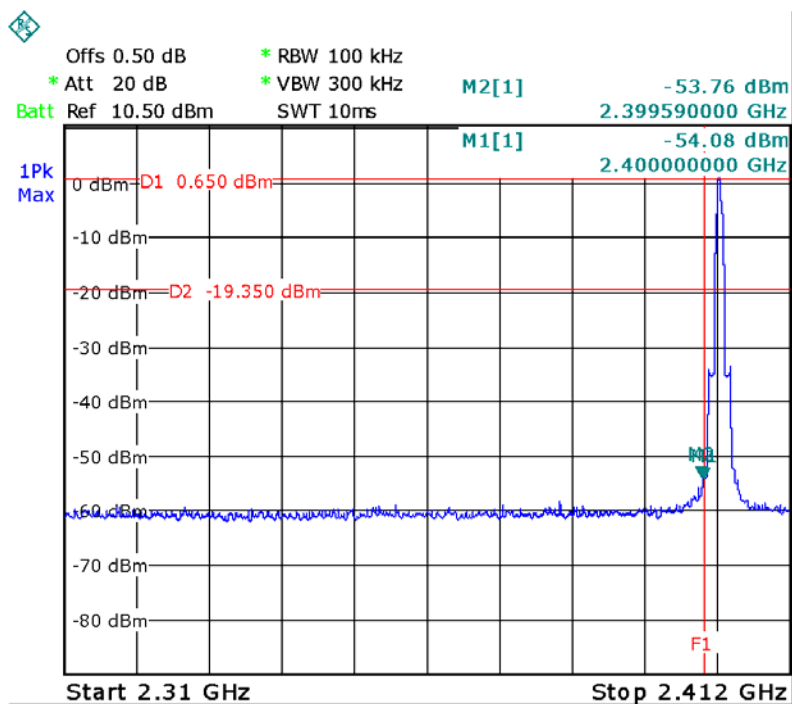

8DPSK Band edge-right side

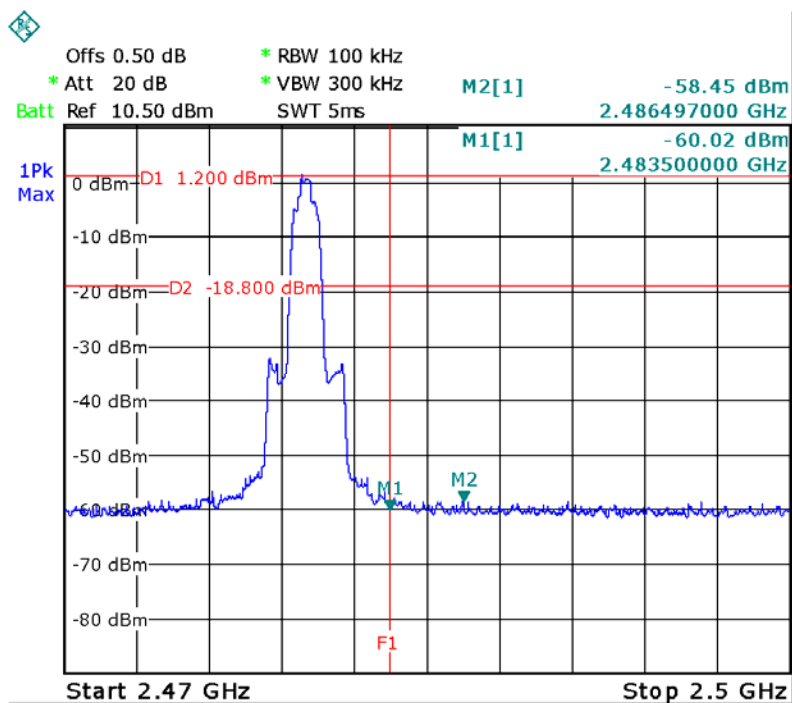

8 20 dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247
 Test Method : ANSI C63.10:2013,DA 00-705
 Test Mode : Refer to section 3.3


8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz


8.2 Test Result

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.934
GFSK	Middle	0.934
GFSK	High	0.934
Pi/4 DQPSK	Low	1.252
Pi/4 DQPSK	Middle	1.252
Pi/4 DQPSK	High	1.252
8DPSK	Low	1.264
8DPSK	Middle	1.264
8DPSK	High	1.264


GFSK Low Channel

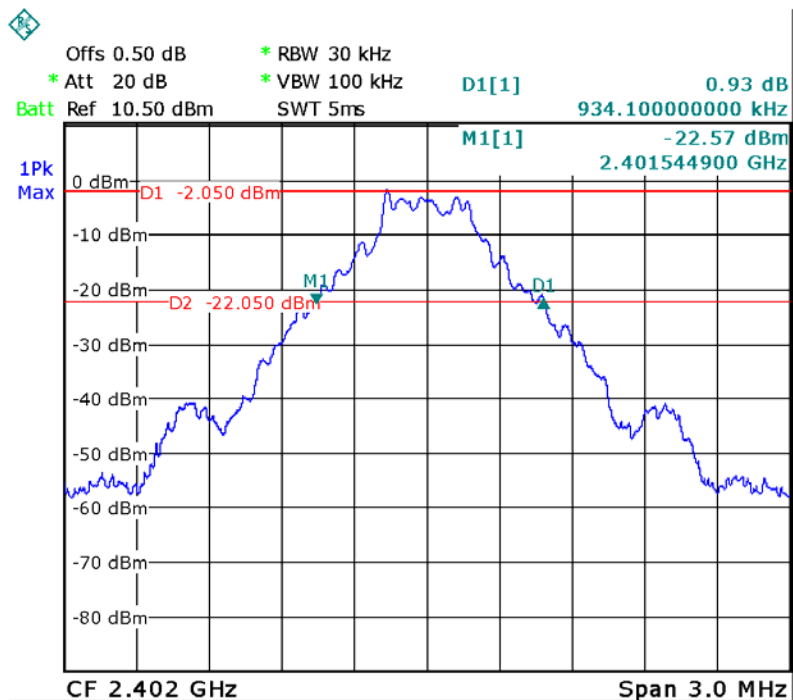


GFSK Middle Channel

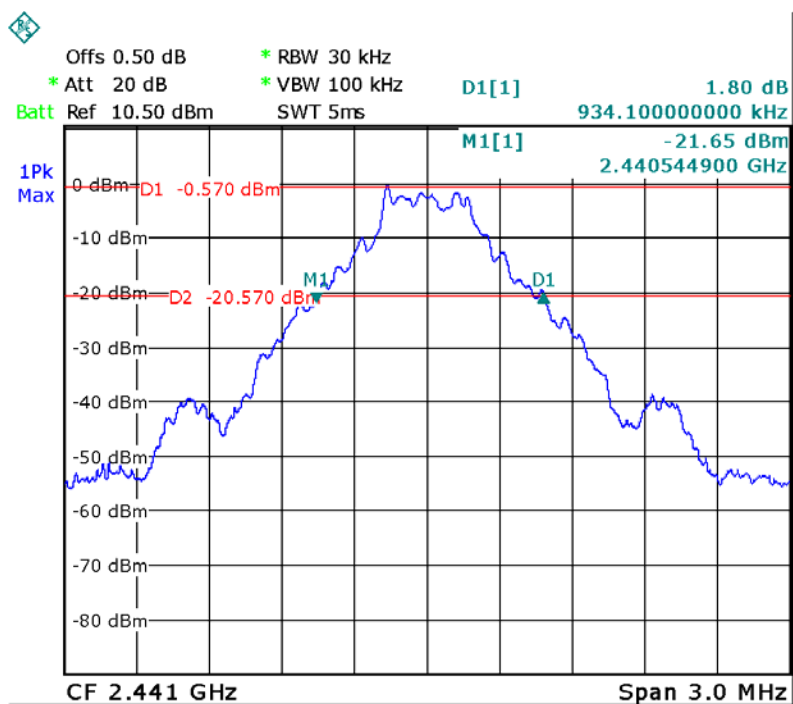


GFSK High Channel

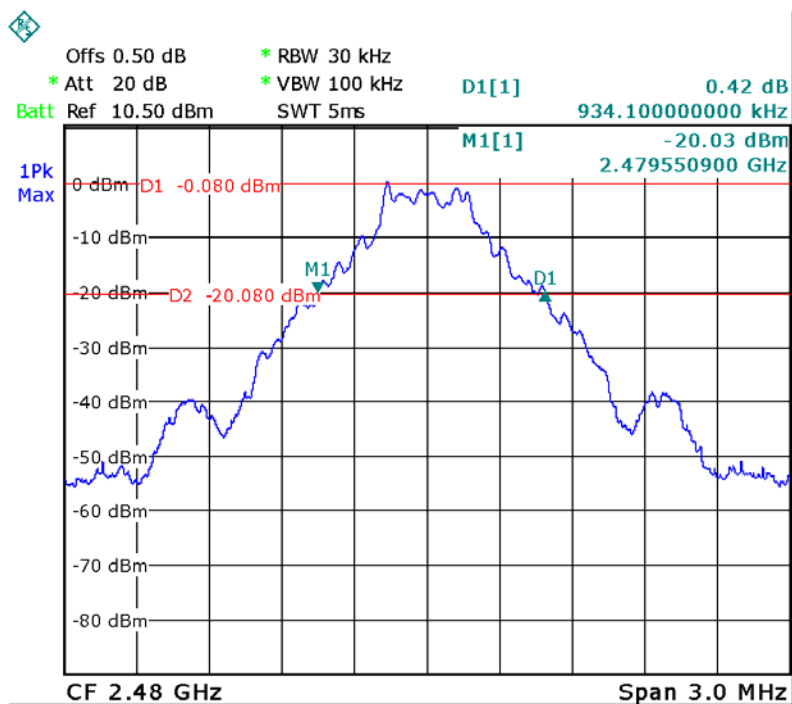


Pi/4DQPSK Low Channel

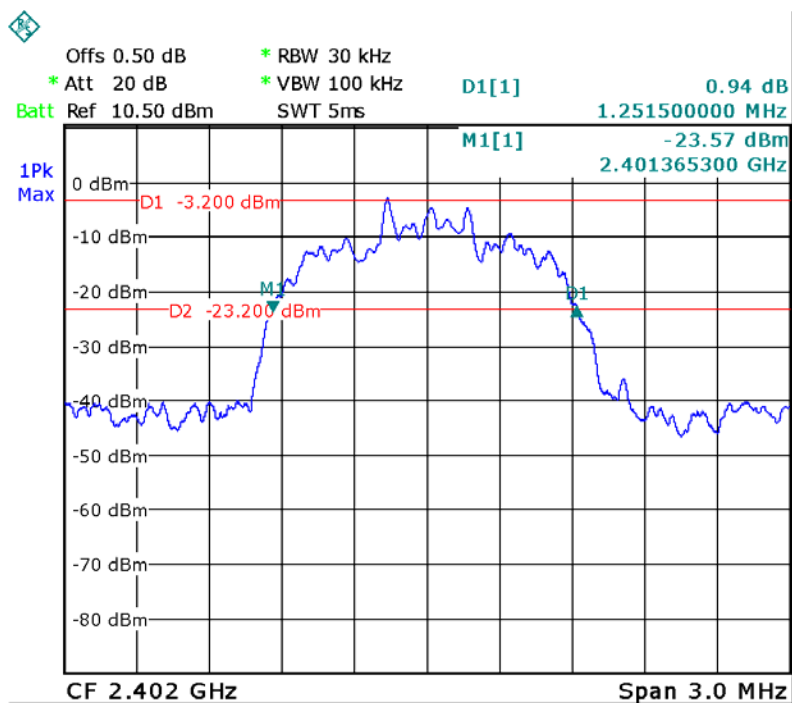


Pi/4DQPSK Middle Channel

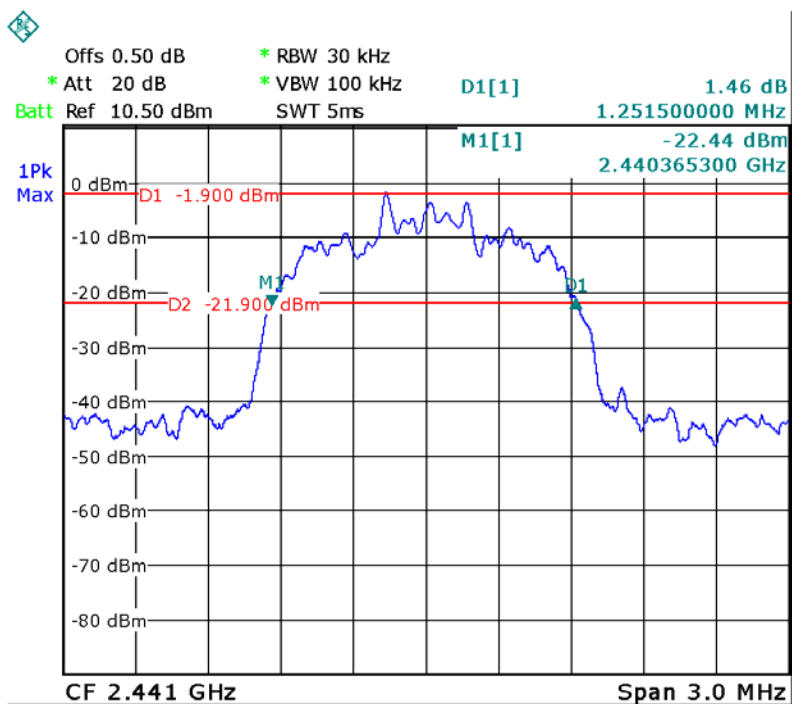


Pi/4DQPSK High Channel

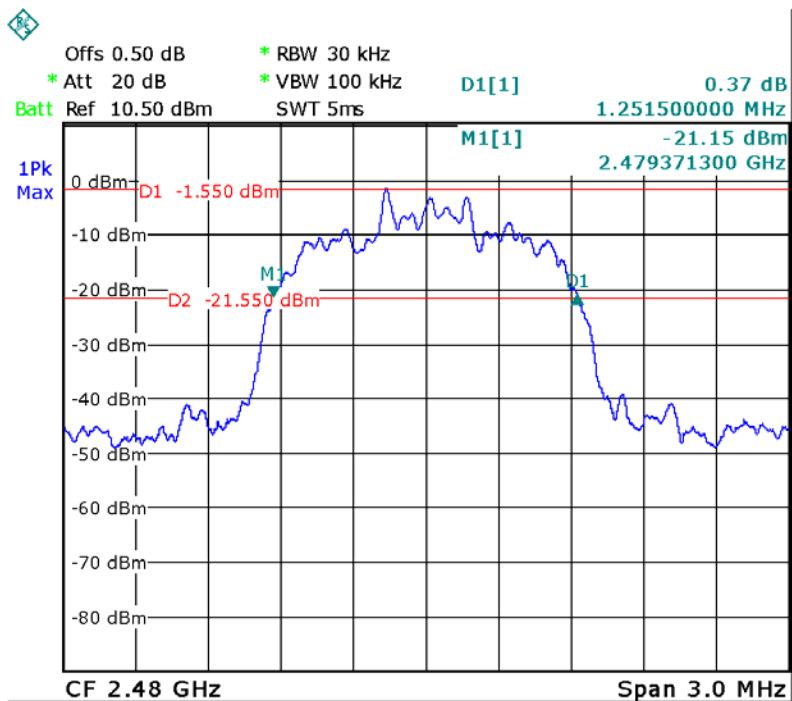


8DPSK Low Channel

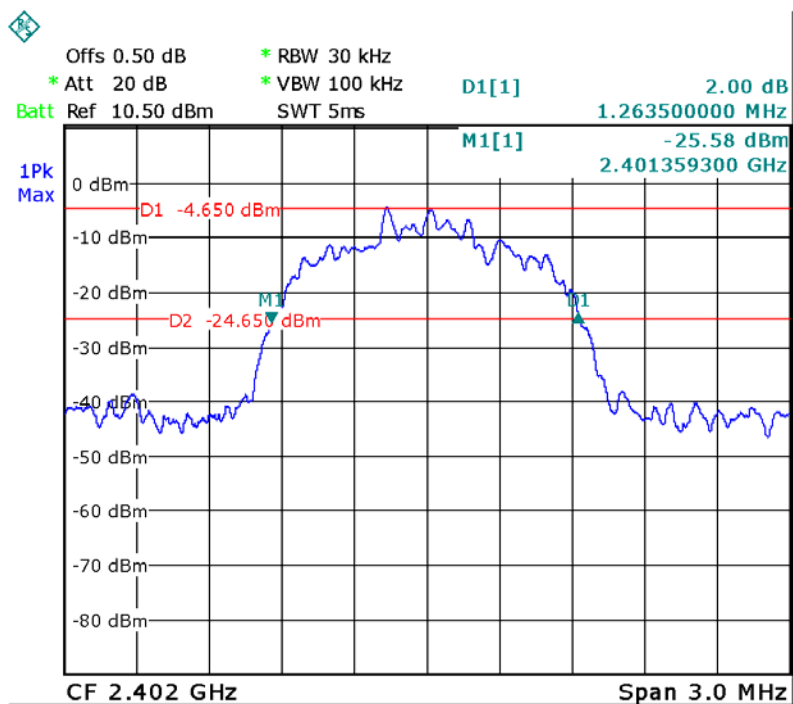

8DPSK Middle Channel

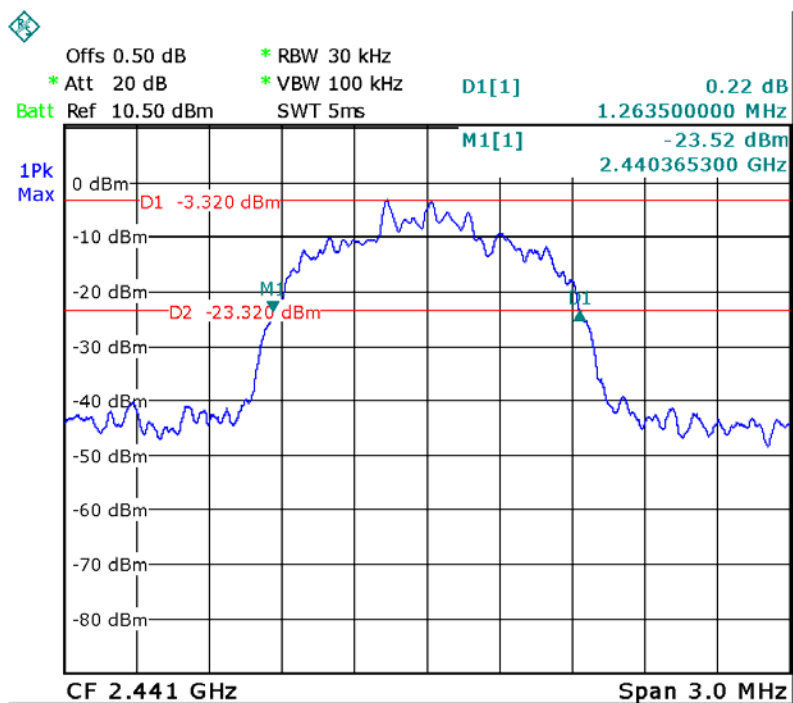

8DPSK High Channel

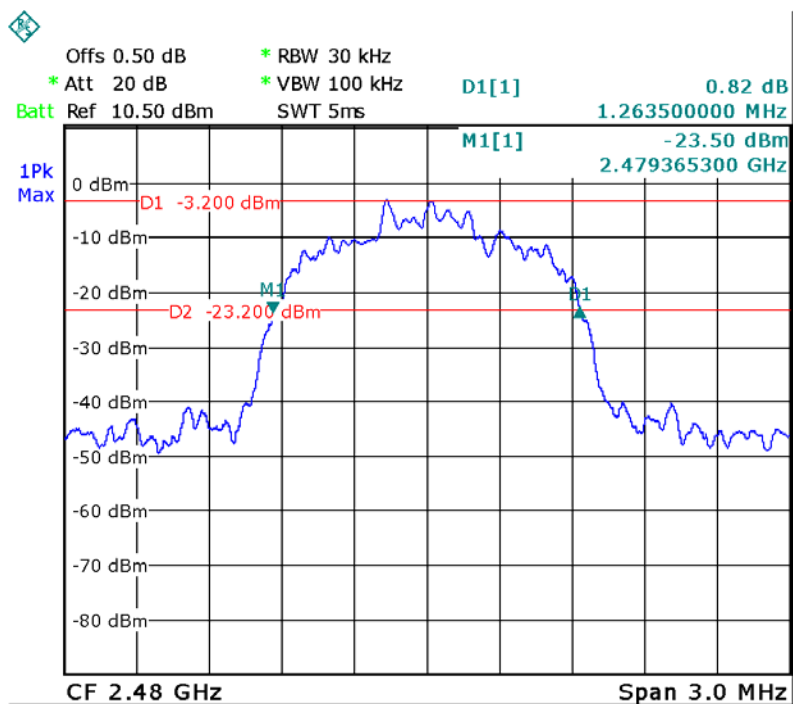

9 Maximum Peak Output Power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013,DA 00-705

Test Limit : Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.

Test Mode : Refer to section 3.3


9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


9.2 Test Result

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	2.32	30
GFSK	Middle	0.30	30
GFSK	High	2.75	30
Pi/4 DQPSK	Low	1.16	20.97
Pi/4 DQPSK	Middle	-0.47	20.97
Pi/4 DQPSK	High	1.92	20.97
8DPSK	Low	1.39	20.97
8DPSK	Middle	-0.37	20.97
8DPSK	High	1.78	20.97


GFSK Low Channel

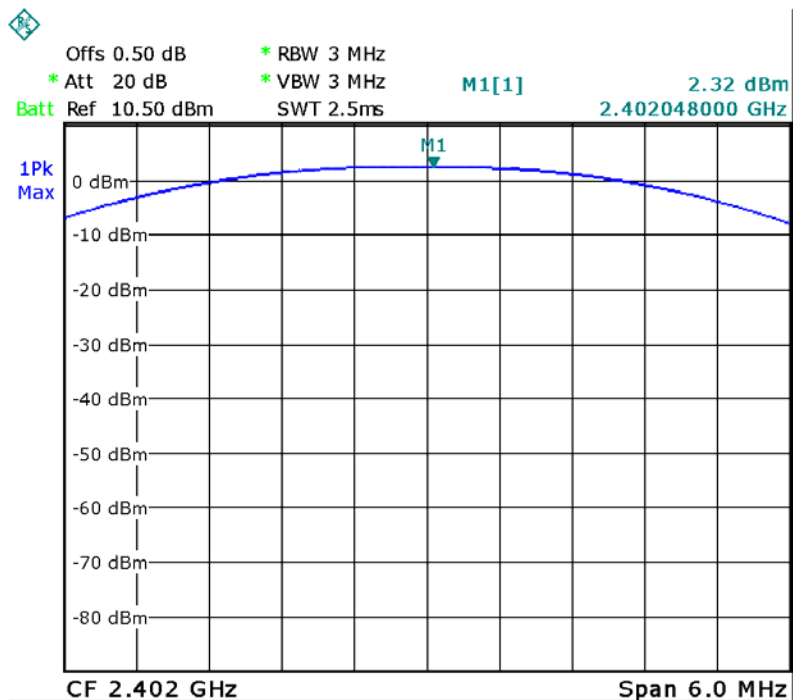


GFSK Middle Channel

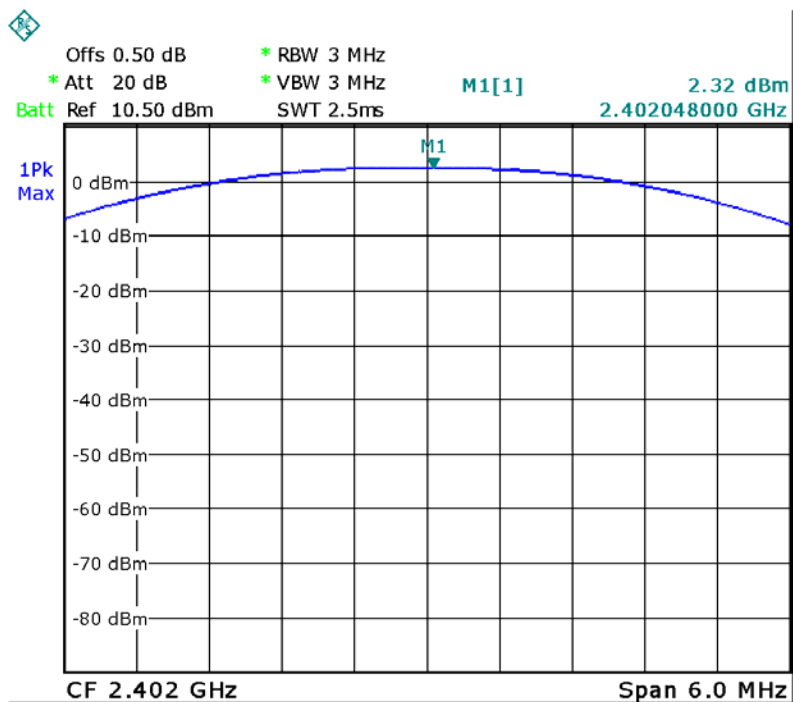


GFSK High Channel

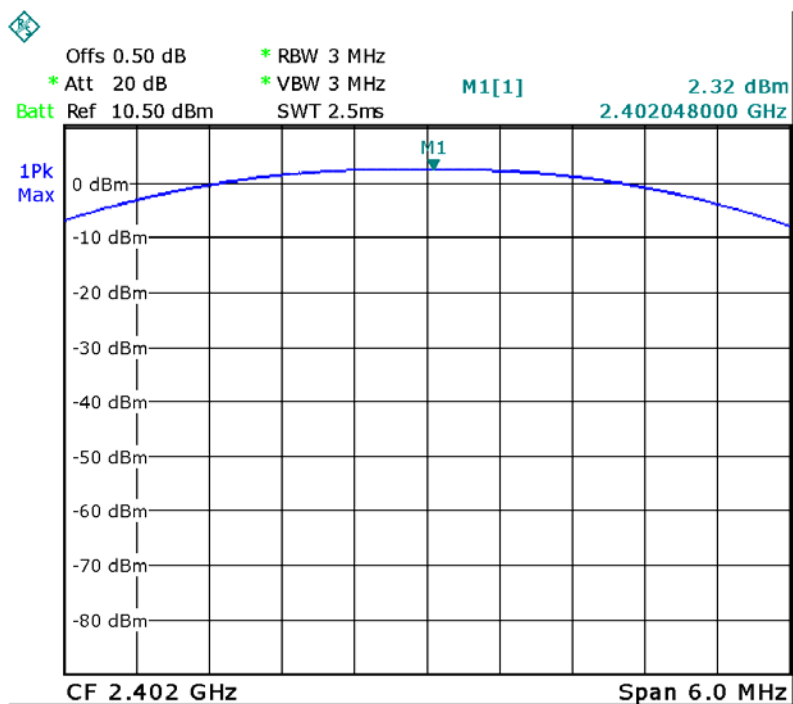


Pi/4DQPSK Low Channel

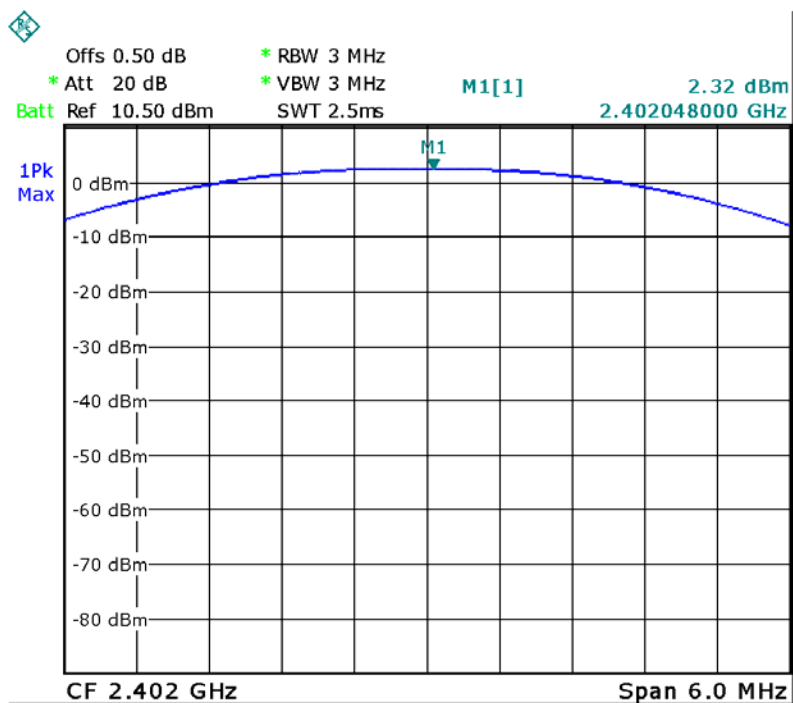


Pi/4DQPSK Middle Channel

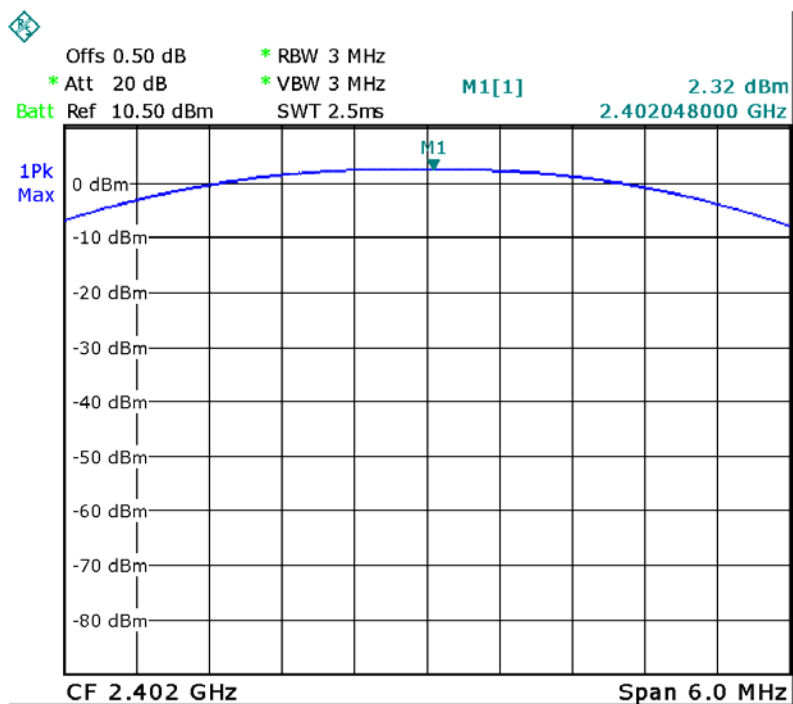


Pi/4DQPSK High Channel

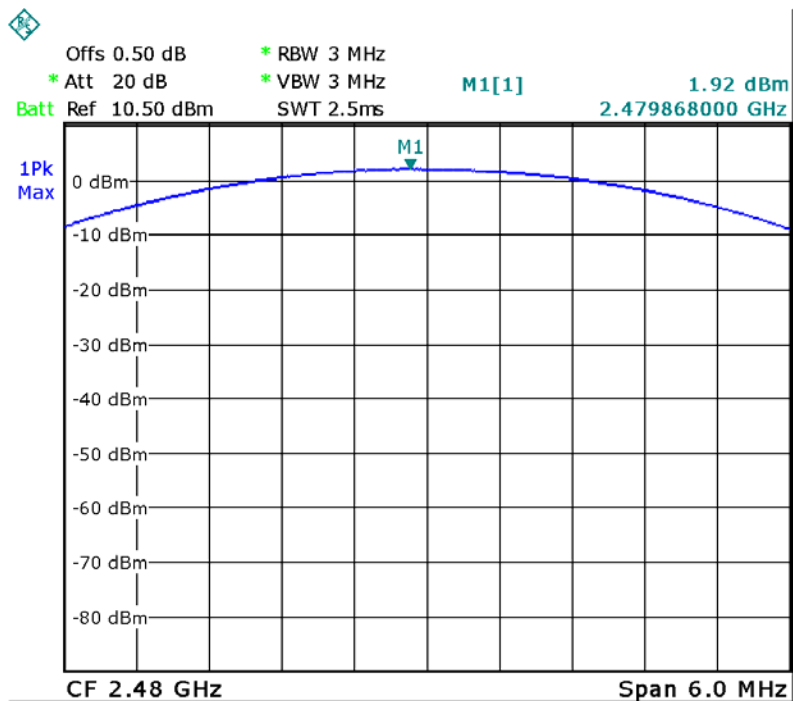


8DPSK Low Channel

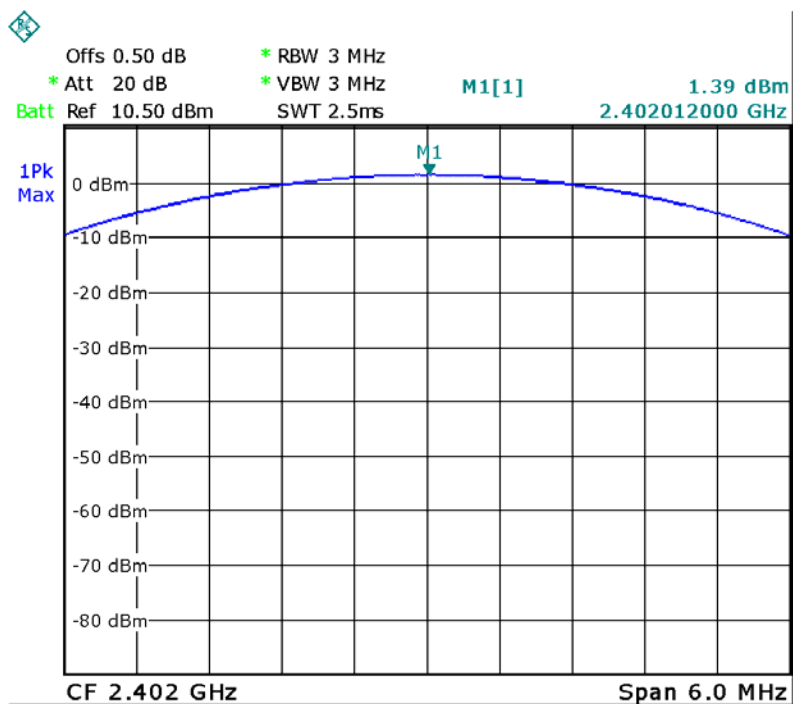

8DPSK Middle Channel

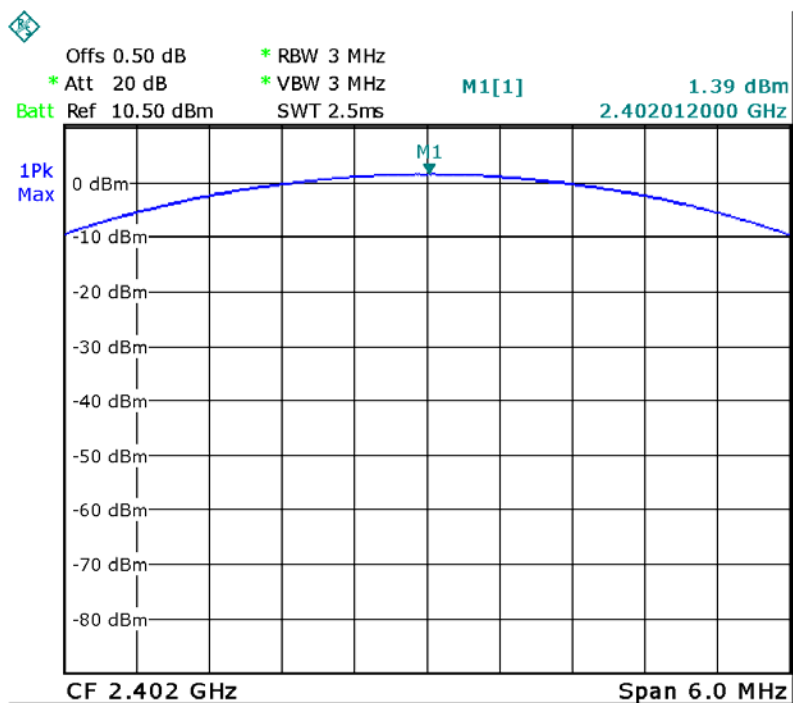

8DPSK High Channel

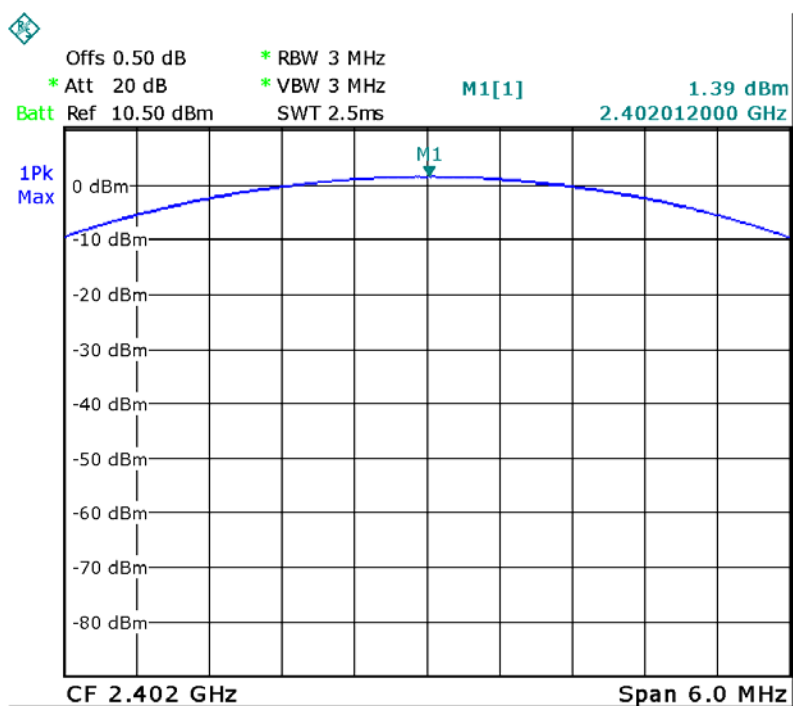

10 Hopping Channel Separation

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode	: Hopping


10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30 KHz. VBW = 100 KHz, Span = 3 MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


10.2 Test Result

Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1.000	PASS
GFSK	Middle	1.000	PASS
GFSK	High	1.000	PASS
π/4 DQPSK	Low	1.000	PASS
π/4 DQPSK	Middle	1.000	PASS
π/4 DQPSK	High	1.000	PASS
8DPSK	Low	1.000	PASS
8DPSK	Middle	1.000	PASS
8DPSK	High	1.000	PASS


GFSK Low Channel

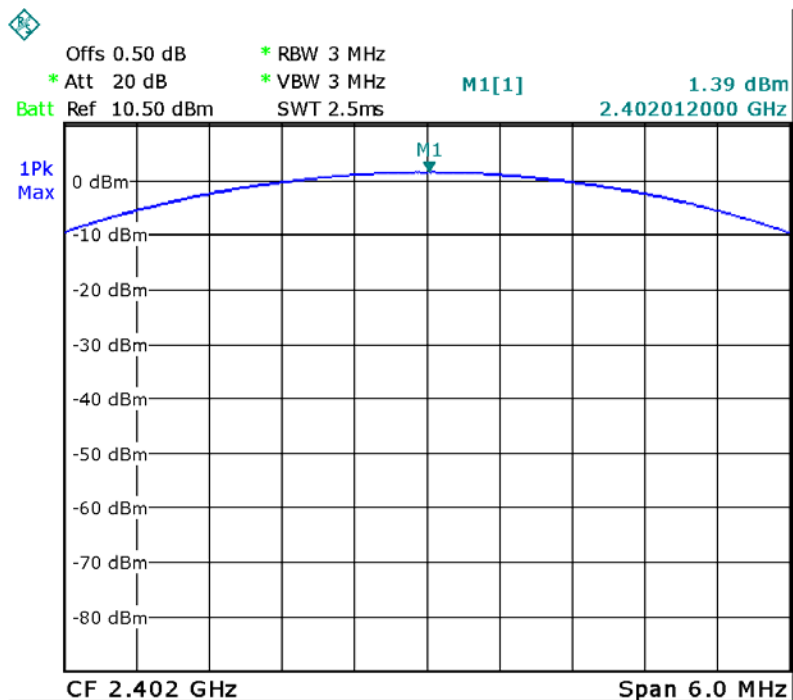


GFSK Middle Channel

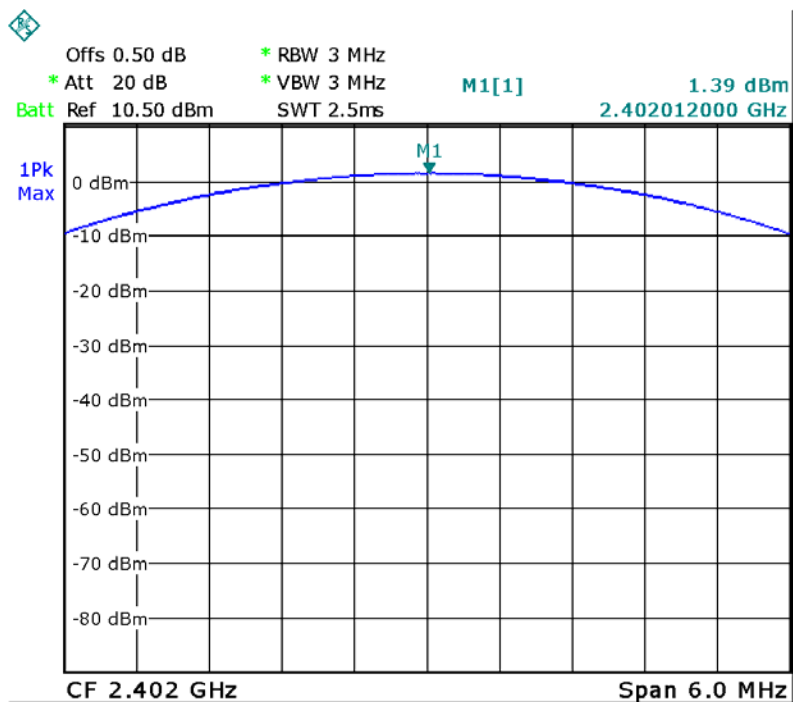


GFSK High Channel

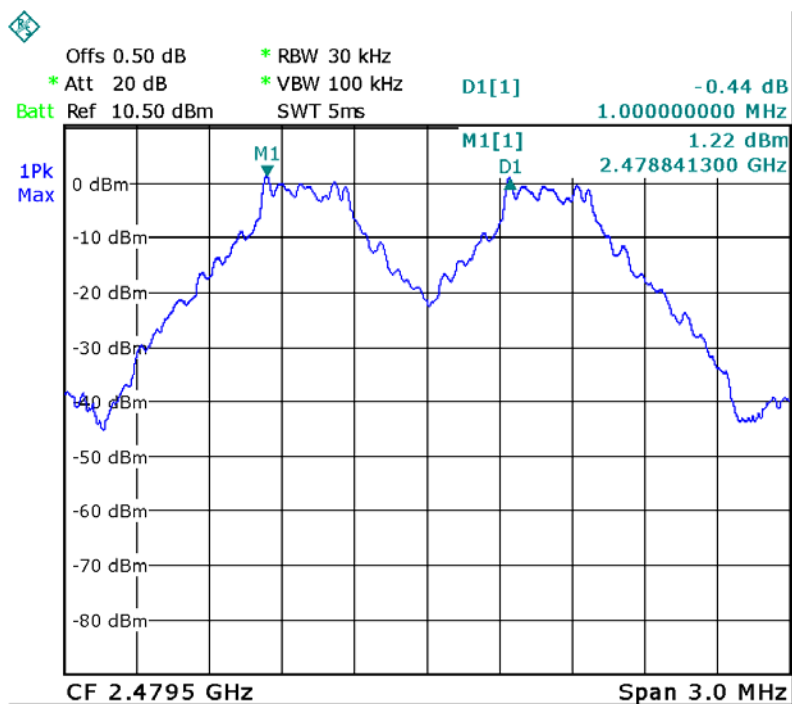


Pi/4DQPSK Low Channel

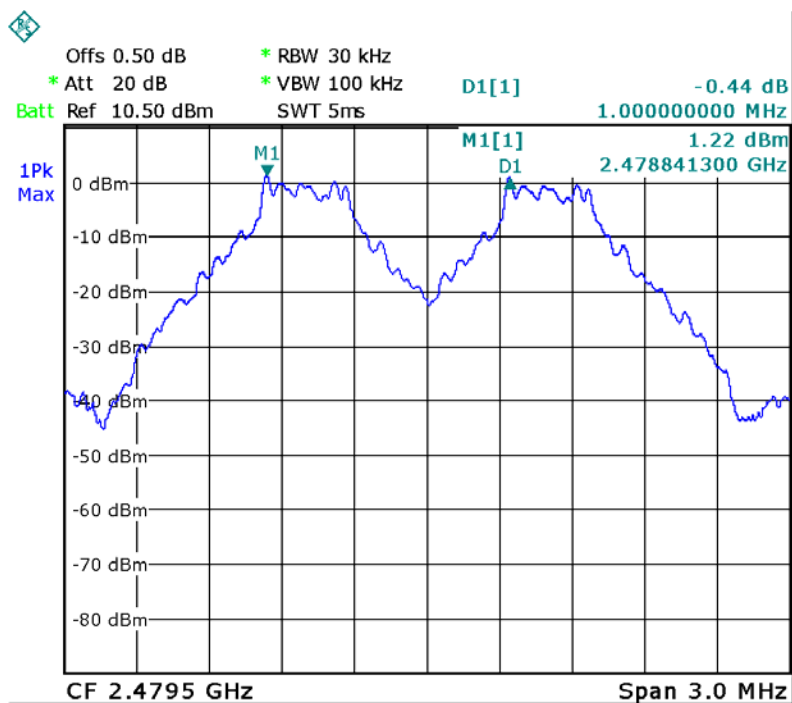


Pi/4DQPSK Middle Channel

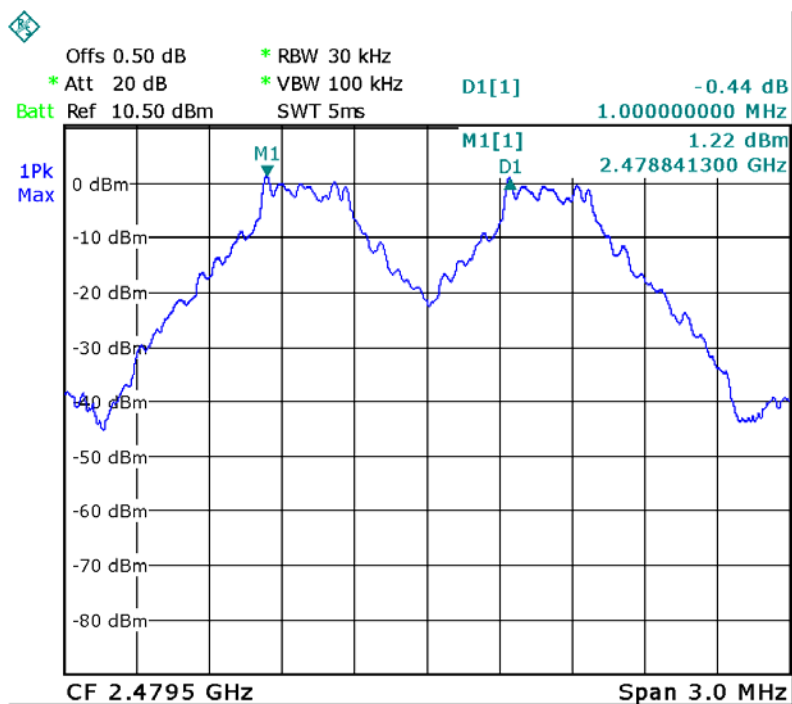


Pi/4DQPSK High Channel

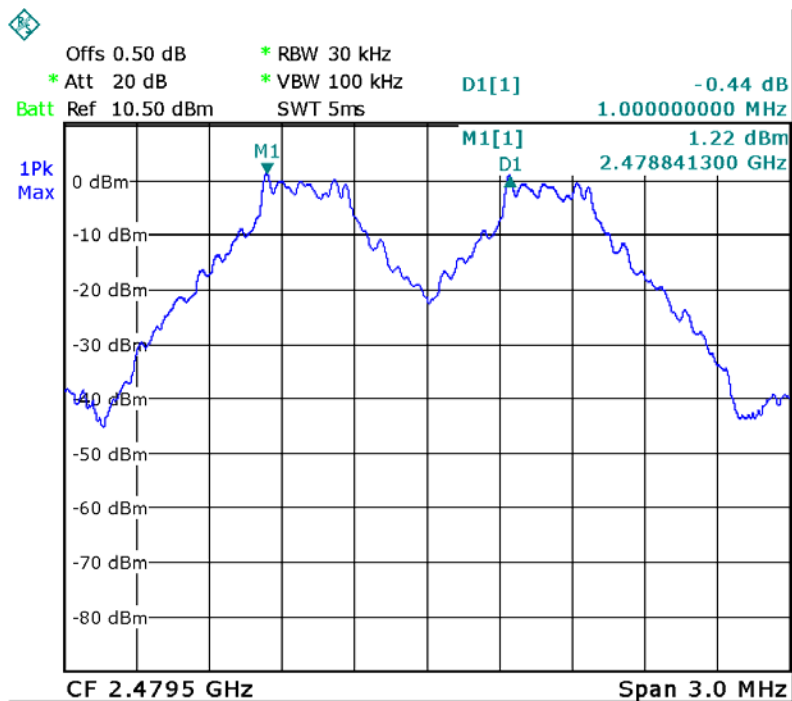


8DPSK Low Channel

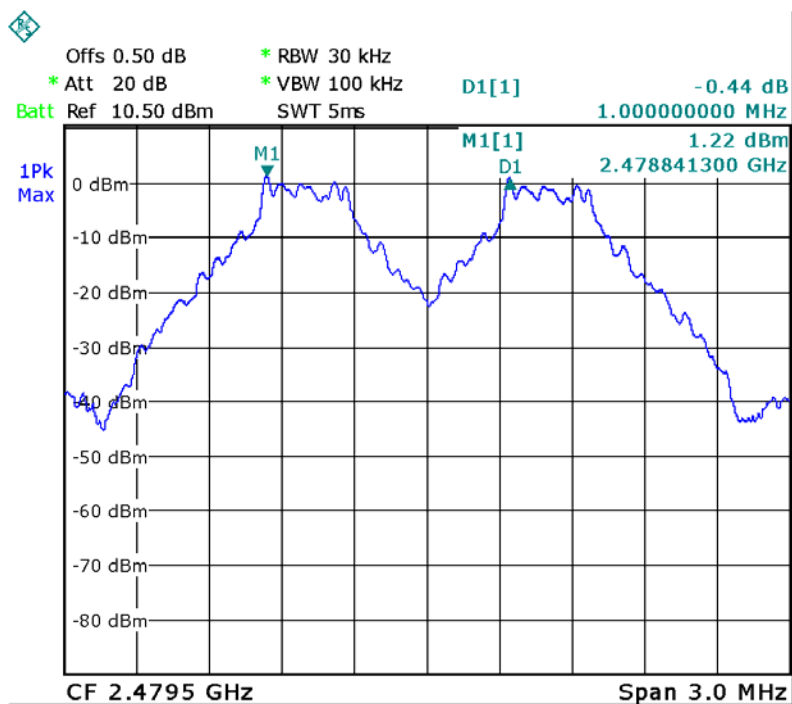

8DPSK Middle Channel

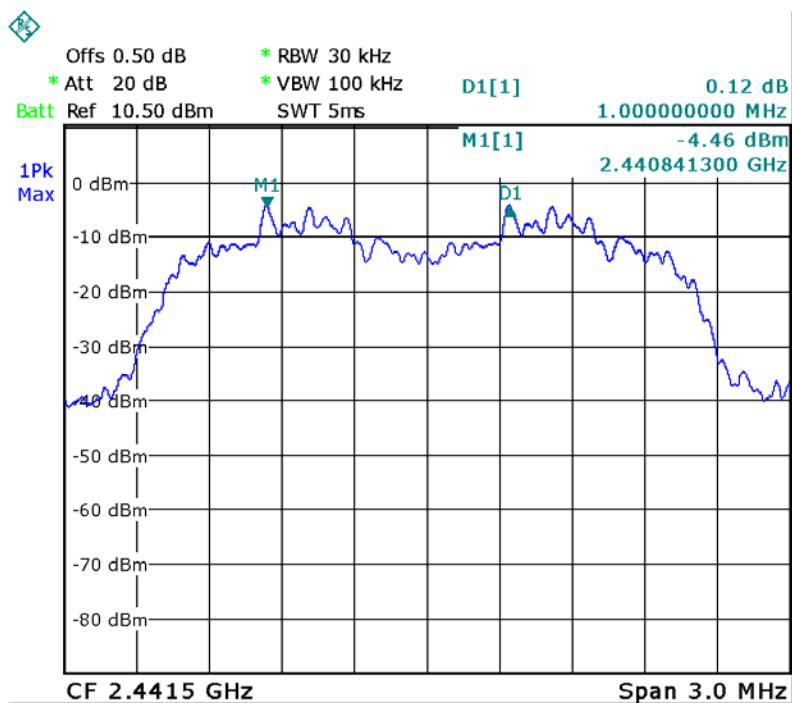

8DPSK High Channel

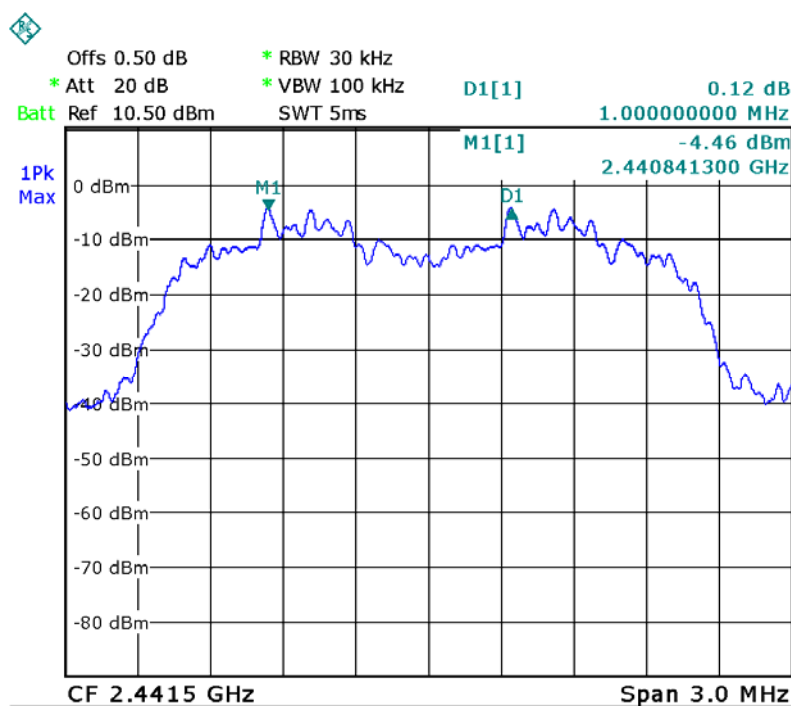


11 Number of Hopping Frequency

Test Requirement : FCC CFR47 Part 15 Section 15.247
 Test Method : ANSI C63.10:2013,DA 00-705
 Test Limit : Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
 Test Mode : Hopping(GFSK)

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

11.2 Test Result

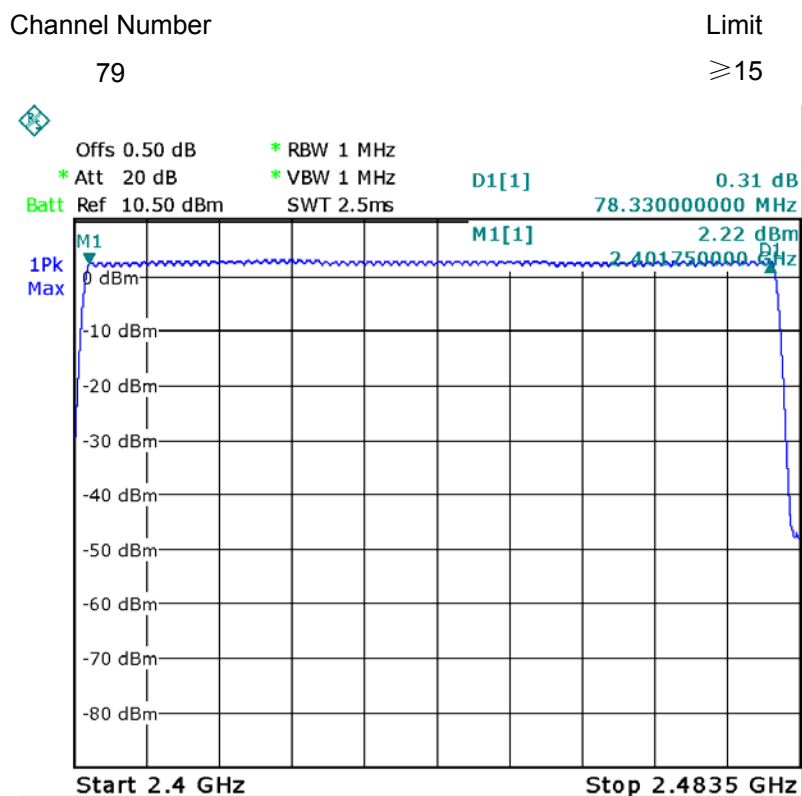

12 Dwell Time

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013,DA 00-705
Test Limit	: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Mode	: Hopping
Remark	: The worst case(8DPSK,DH5) was recorded

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

12.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time. Only the worst data(DH5) were show as follow.	




Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
8DPSK	DH5	Low	2.880	0.307	0.4
		middle	2.880	0.307	0.4
		High	2.880	0.307	0.4


8DPSK Low Channel

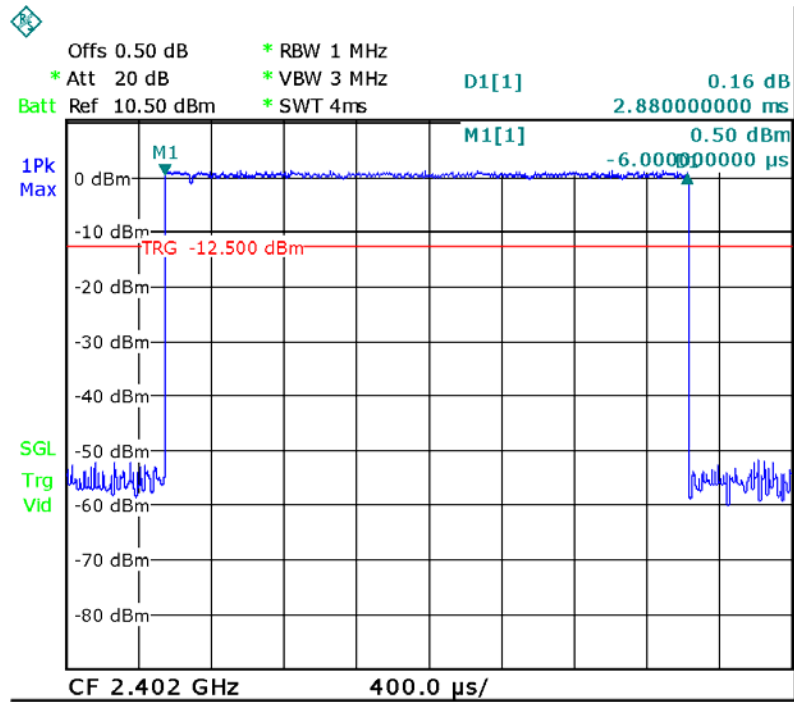

8DPSK Middle Channel

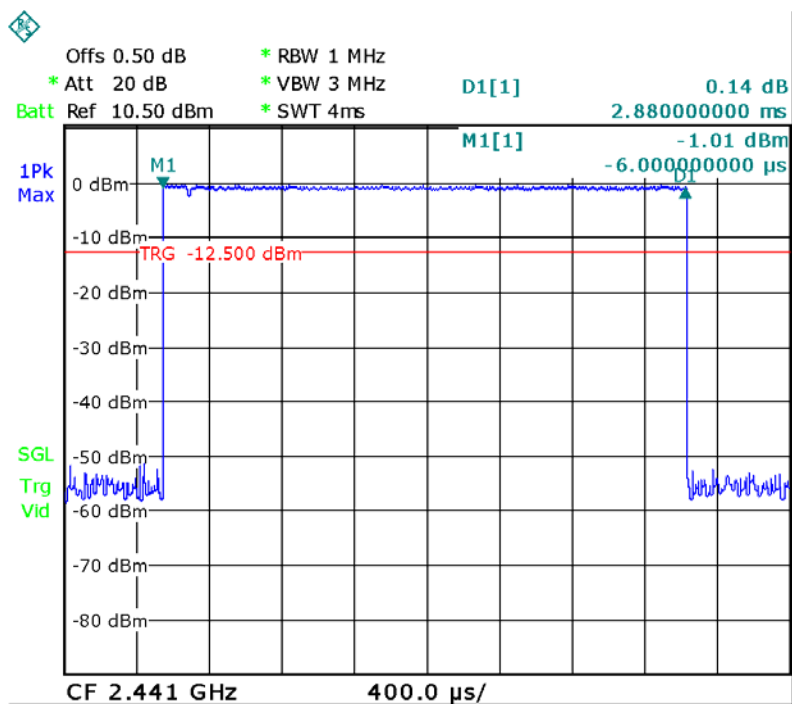

8DPSK High Channel

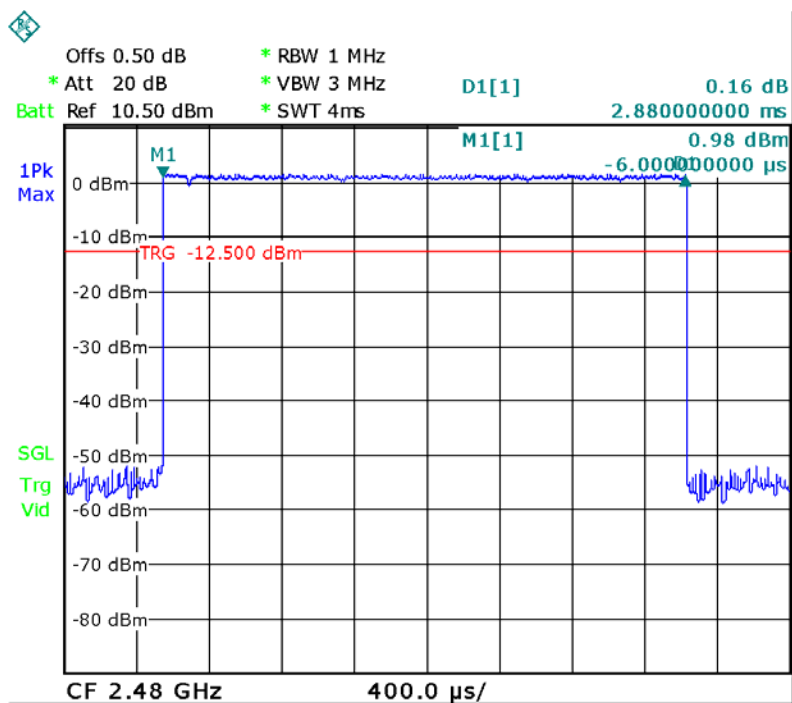



13 Antenna Requirement


According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an PCB printed antenna which meet the requirement of this section.

14 Test Setup

Conducted Emissions



Radiated Spurious Emissions
From 30MHz-1000MHz

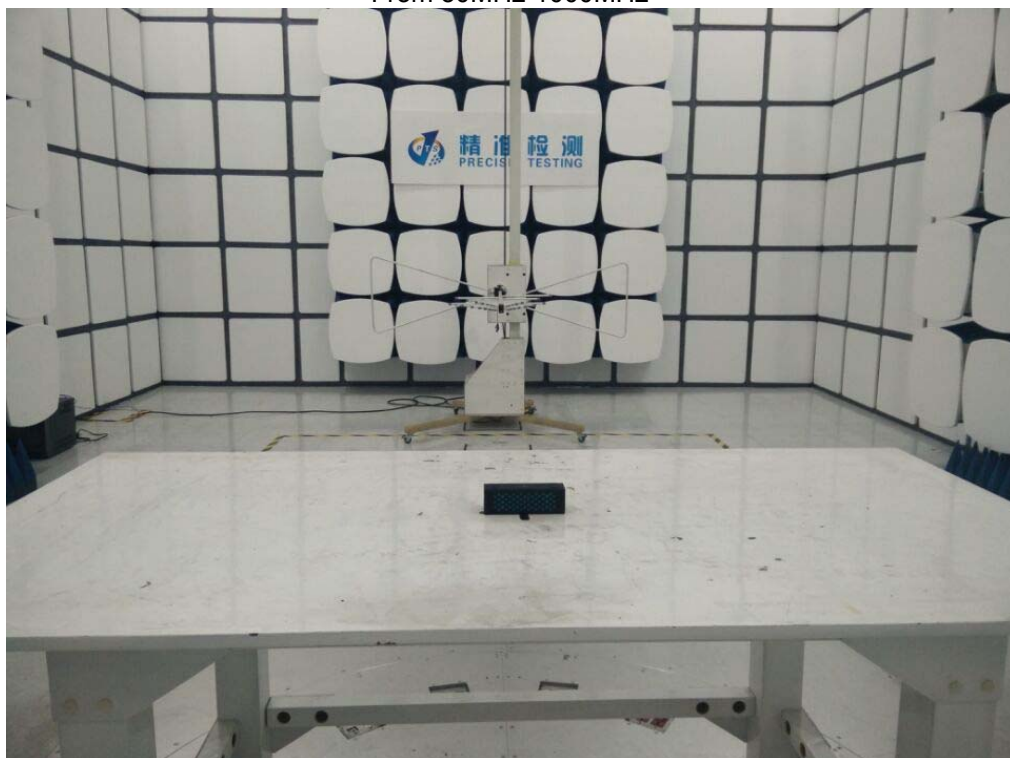



Above 1GHz





15 EUT Photos

External Photos











Internal Photos



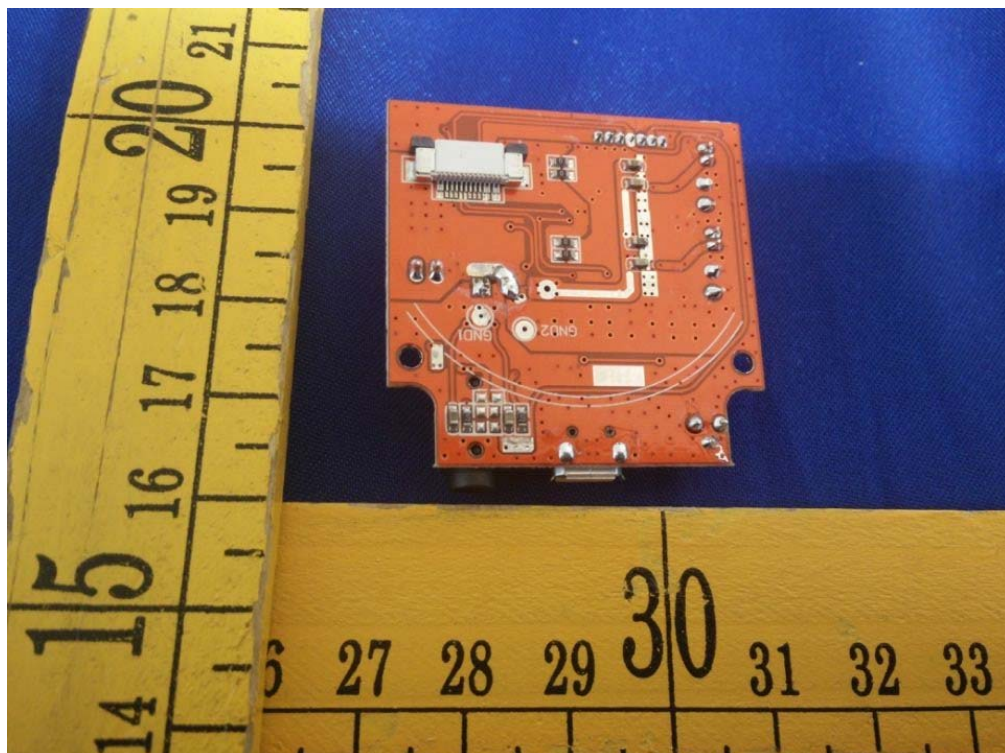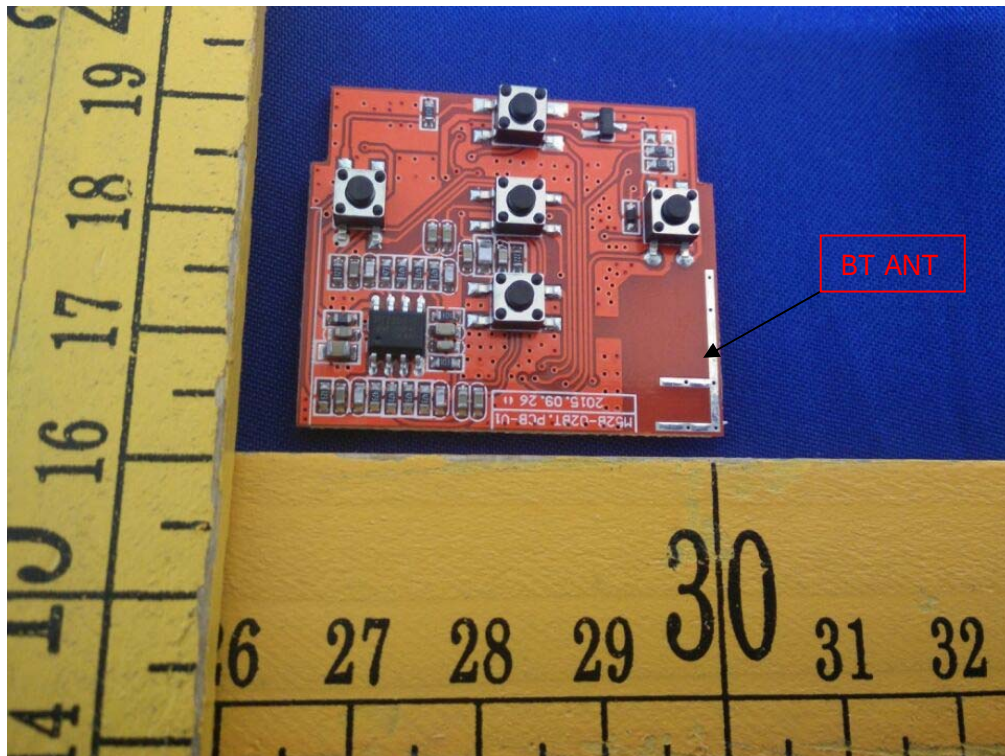



*****THE END REPORT*****