



SAR TEST REPORT

Test Report No. : 10517785S-A

Applicant : Toshiba Corporation
Type of Equipment : WLAN and BT Module installed on Toshiba Computer PT15A series
Model No. : 3160NGW
FCC ID : CJ6UPA5165WB
Test regulation : FCC47CFR 2.1093
Test Result : Complied

Reported SAR(1g) Value **The highest reported SAR(1g)**
 WLAN 11b/g/n Body : 0.703W/kg
 WLAN 11a/n/ac Body : 1.16W/kg

The highest reported SAR(1g) Value for the device is 1.16 W/kg.

Simultaneous transmission test was excluded.

The highest sum of SAR(1g) for the simultaneous transmitting antennas Value for the device is 1.412 W/kg.

SAR to peak location separation ratio ≤ 0.04 .

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: October 16 to 24, 2014

**Representative
test engineer:**

S. Ohyama
Shuichi Ohyama
Engineer

Consumer Technology Division

Approved by :

T. Hatakeda
Takahiro Hatakeda
Leader

Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

13-EM-F0429

Original Test Report No.: 10517785S-A

[illegible]

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.)	4
2.1 Identification of E.U.T.....	4
2.2 Product Description	4
SECTION 3 : Test standard information	7
3.1 Test Specification	7
3.2 Procedure	7
3.3 Exposure limit	8
3.4 Test Location	8
SECTION 4 : Test result	9
4.1 Stand-alone SAR result.....	9
SECTION 5 : Description of the operating mode	10
5.1 Output power operating modes	10
5.2 Output power measurement results.....	12
5.3 SAR testing operating modes	21
5.4 Confirmation after SAR testing	23
SECTION 6 SAR test exclusion considerations	24
6.1 Standalone SAR test exclusion considerations	24
SECTION 7: Description of the Body setup	28
7.1 Test position for Body setup.....	28
SECTION 8 : Test surrounding	29
8.1 Measurement uncertainty	29
SECTION 9 : Measurement results	31
9.1 WLAN Body SAR (2.4G)	31
9.2 WLAN Body SAR (5G)	34
SECTION 10 Simultaneous Transmission	43
10.1 Possible simultaneous transmission combination	43
10.2 Estimated SAR for simultaneous transmission SAR analysis.....	44
10.3 Simultaneous transmission SAR analysis	45
SECTION 11 Test instruments.....	49
APPENDIX 1 : SAR Measurement data	50
1. Evaluation procedure	50
2. Measurement data	51
APPENDIX2 : System Check	93
1. System check result Body 2450MHz.....	93
2. System Check Dipole (D2450V2,S/N:713)	96
3. System check result Body 5200MHz.....	106
4. System check result Body 5300MHz.....	112
5. System check result Body 5600MHz.....	117
6. System check result Body 5800MHz.....	122
7. System Check Dipole (D5GHzV2,S/N:1020).....	127
8. System check uncertainty	143
APPENDIX 3 : System specifications	145
1. Configuration and peripherals.....	145
2. Specifications.....	146
3. Dosimetric E-Field Probe Calibration (EX3DV4, S/N: 3917)	150
4. Dosimetric E-Field Probe Calibration (EX3DV4, S/N: 3825)	161
APPENDIX 4: Photographs of test setup	172
1. Photographs of EUT	172
2. Antenna position	173
3. Photographs of setup.....	174

SECTION 1: Customer information

Company Name : Toshiba Corporation
Address : 2-9, Suehiro-cho, Ome-shi Tokyo 198-8710 Japan
Telephone Number : +81-428-34-1051
Facsimile Number : +81-428-30-7346
Contact Person : Toru Kawasaki

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : WLAN and BT Module installed on Toshiba Computer PT15A series
Model No. : 3160NGW
Serial No. : Installed on PT15A series of Serial No: 9E037670H
(used for Antenna typeA)
9E036575H
(used for Antenna typeB)

Receipt Date of Sample : October 8, 2014
Country of Manufacture : China
Condition of EUT : Production model
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model: 3160NGW (referred to as the EUT in this report) is WLAN and BT Module installed on Toshiba Computer PT15A series.

General Specification

<EUT>

Feature of EUT : WLAN and BT Module installed on Toshiba Computer PT15A series.

<Host device>

Feature of Host device : 12.5 inch display's 2-in-1 Convertible PC
Clock frequency(ies) in the system : SATA 3GHz (max)
Rating : Li-ion battery DC 11.4V 36Wh/3060mAh
Option battery : None
Body-worn Accessories : None

Radio Specification

Q'ty of Antenna	2 pcs (Antenna #1 and Antenna #2)				
Type of Antenna	Antenna typeA (P/N: 48.EL41J.SGA(Antenna1) and 48.EL41K.SGA(Antenna2) made by WNC) Antenna typeB (P/N: D-APP5P-GFC200(Antenna1) and D-APP5P-GFC201 (Antenna2) made by ACON)				
Mode	IEEE802.11b	IEEE802.11g	IEEE802.11a	IEEE802.11n	IEEE802.11ac
Frequency of operation	2412-2462MHz		5180-5320MHz (5GHz-L) 5500-5700MHz (5GHz-M) 5745-5825MHz (5GHz-H)	2412-2462MHz (20Mband) 2422-2452MHz (40Mband) 5180-5320MHz (20Mband: 5GHz-L) 5500-5700MHz (20Mband: 5GHz-M) 5745-5825MHz (20Mband: 5GHz-H) 5190-5310MHz (40Mband: 5GHz-L) 5510-5710MHz (40Mband: 5GHz-M) 5755-5795MHz (40Mband: 5GHz-H) 5210, 5290MHz (80Mband: 5GHz-L) 5530, 5610, 5690MHz (80M Band: 5GHz-M) 5775MHz (80M Band: 5GHz-H)	5180-5320MHz (20Mband: 5GHz-L) 5500-5720MHz (20Mband: 5GHz-M) 5745-5825MHz (20Mband: 5GHz-H) 5190-5310MHz (40Mband: 5GHz-L) 5510-5710MHz (40Mband: 5GHz-M) 5755-5795MHz (40Mband: 5GHz-H) 5210, 5290MHz (80Mband: 5GHz-L) 5530, 5610, 5690MHz (80M Band: 5GHz-M) 5775MHz (80M Band: 5GHz-H)
Clock frequencies in the system (radio part)	Controller clock 40MHz, Baseband clock 22MHz				Controller clock 40MHz, Baseband clock 20MHz
Type of modulation	(DSSS) DBPSK, DQPSK, CCK, BPSK	(OFDM) 64QAM, 16QAM, QPSK			(OFDM) 256QAM, 64QAM, 16QAM, QPSK
Bandwidth & Channel spacing	20MHz, 5MHz/CH		20MHz, 20MHz/CH	2.4GHz [20MHz, 5MHz/CH] or [40MHz, 5MHz/CH] 5GHz [20MHz, 20MHz/CH] or [40MHz, 40MHz/CH] (FAT)	[20MHz, 20MHz/CH] or [40MHz, 40MHz/CH] or [80MHz, 80MHz/CH]
Antenna type	PIFA				
Antenna Connector type	W-FL connector				
Antenna Gain	-1.36dBi max: 2.4-2.5GHz (Antenna typeA #1) 2.33dBi max: 5.15-5.35GHz (Antenna typeA #1) 2.35dBi max: 5.47-5.725GHz (Antenna typeA #1) 1.84dBi max: 5.725-5.875GHz (Antenna typeA #1) 2.19dBi max: 2.4-2.5GHz (Antenna typeB #1) 0.70dBi max: 5.15-5.35GHz (Antenna typeB #1)) 1.91dBi max: 5.47-5.725GHz (Antenna typeB #1) 0.89dBi max: 5.725-5.875GHz (Antenna typeB #1)				
Power Supply	DC3.3V				

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

	Bluetooth
Frequency of operation	2402-2480MHz
Clock frequencies in the system (radio part)	Baseband clock 26MHz
Type of modulation	GFSK: $\pi/4$ - DQPSK, 8DPSK: Bluetooth v4.0
Bandwidth & Channel spacing	79MHz, 1MHz/CH [BT] 79MHz, 2MHz/CH [LE]
Antenna type	PIFA
Antenna Connector type	W-FL connector
Antenna Gain	1.41dBi max (Antenna typeA) 1.09dBi max (Antenna typeB)
Power Supply	DC3.3V

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

SECTION 3 : Test standard information

3.1 Test Specification

Title : **FCC47CFR 2.1093**

Radiofrequency radiation exposure evaluation: portable devices.

: **IEEE Std 1528-2003:**

IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices.

: **Published RF exposure KDB procedures**

- ☒ **KDB447498D01(v05r02)** Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
- ☐ **KDB447498D02(v02)** SAR Measurement Procedures for USB Dongle Transmitters
- ☐ **KDB648474D04(v01r02)** SAR Evaluation Considerations for Wireless Handsets
- ☐ **KDB941225D01(v02)** SAR Measurement Procedures for 3G Devices
- ☐ **KDB941225D02(v02r02)** 3GPP R6 HSPA and R7 HSPA+ SAR Guidance
- ☐ **KDB941225D03(v01)** Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE
- ☐ **KDB941225D04(v01)** Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode
- ☐ **KDB941225D05(v02r03)** SAR for LTE Devices
- ☐ **KDB941225D06(v01r01)** SAR test procedures for devices incorporating SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities (Hot Spot SAR)
- ☐ **KDB941225D07(v01r01)** SAR Evaluation Procedures for UMPC Mini-Tablet Devices
- ☒ **KDB616217D04(v01r01)** SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
- ☒ **KDB865664D01(v01r03)** SAR Measurement Requirements for 100MHz to 6 GHz
- ☒ **KDB248227D01(v01r02)** SAR Measurement Procedures for 802.11a/b/g Transmitters

Reference

[1]SPEAG uncertainty document (AN 15-7/AN19-17) for DASY 5 System from SPEAG (Schmid & Partner Engineering AG).

[2] IEEE Std 1528-2013: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

(The reference for Uncertainty in SAR correction for deviations in permittivity and conductivity, in clause E.3.2.)

3.2 Procedure

Transmitter	WLAN
Test Procedure	Published RF exposure KDB procedures
	SAR
Category	FCC47CFR 2.1093
Note: UL Japan, Inc. 's SAR Work Procedures 13-EM-W0429 and 13-EM-W0430	

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

3.3 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg

3.4 Test Location

*Shielded room for SAR testings

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

SECTION 4 : Test result

4.1 Stand-alone SAR result

Reported SAR

Measured SAR is scaled to the maximum tune-up tolerance limit by the following formulas.

Reported SAR= Maximum tune-up tolerance limit [mW] / Measured power [mW] · Measured SAR [W/kg]

Maximum tune-up tolerance limit is by the specification from a customer.

Mode	Frequency	Measured power [mW]*1	Maximum tune-up tolerance limit [mW]	Measured SAR [W/kg]	Reported SAR [W/kg]
WLAN 11b	2437MHz	31.26	31.62	0.695	0.703
WLAN 11a	5310MHz	21.28	22.39	1.10	1.16

Note

*1 The sample used by the SAR test is within the tune-up tolerance but not more than 2 dB lower than the maximum tune-up tolerance limit. That is, measured power is included the tune-up tolerance range.

WLAN Maximum tune-up tolerance limit

Mode	Maximum tune-up tolerance limit [dBm]	Maximum tune-up tolerance limit [mW]
WLAN 11b	15	31.62
WLAN 11g	15	31.62
WLAN 11n (2.4G)	15	31.62
WLAN 11a	13.5	22.39
WLAN 11n (5G)	13.5	22.39
WLAN 11ac	13.5	22.39
Bluetooth	7.78	6.00

SECTION 5 : Description of the operating mode

5.1 Output power operating modes

Mode	Frequency Band	Test Frequency	Modulation
IEEE802.11b	2412-2462MHz	2412MHz (1ch) 2437MHz(6ch) 2462MHz(11ch)	DSSS (DBPSK,DQPSK,CCK)
IEEE802.11g IEEE802.11n20 (2.4G)	2412-2462MHz	2412MHz (1ch) 2437MHz(6ch) 2462MHz(11ch)	OFDM (BPSK,QPSK,16QAM, 64QAM,256QAM)
IEEE802.11n40 (2.4G)	2422-2452MHz	2422MHz (3ch) 2437MHz(6ch) 2452MHz(9ch)	
IEEE802.11a IEEE802.11n20 (5G) IEEE802.11ac20	5180-5240MHz	5180MHz (36ch) 5200MHz (40ch) 5220MHz (44ch) 5240MHz (48ch)	
	5260-5320MHz	5260MHz (52ch) 5280MHz (56ch) 5300MHz (60ch) 5320MHz (64ch)	
	5500-5700MHz	5500MHz (100ch) 5520MHz (104ch) 5540MHz (108ch) 5560MHz (112ch) 5580MHz (116ch) 5600MHz (120ch) 5620MHz (124ch) 5640MHz (128ch) 5660MHz (132ch) 5680MHz (136ch) 5700MHz (140ch) 5720MHz (144ch)	
	5745-5825MHz	5745MHz (149ch) 5765MHz (153ch) 5785MHz (157ch) 5805MHz (161ch) 5825MHz (165ch)	
IEEE802.11n40 (5G) IEEE802.11ac40	5180-5240MHz	5190MHz (38ch) 5230MHz (46ch)	
	5260-5320MHz	5270MHz (54ch) 5310MHz (62ch)	
	5500-5700MHz	5510MHz (102ch) 5550MHz (110ch) 5590MHz (118ch) 5630MHz (126ch) 5670MHz (134ch) 5710MHz (142ch)	
	5745-5825MHz	5755MHz (151ch) 5795MHz (159ch)	

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Mode	Frequency Band	Test Frequency	Modulation
IEEE802.11ac80	5180-5240MHz	5210MHz (42ch)	OFDM (BPSK.QPSK.16QAM, 64QAM,256QAM)
	5260-5320MHz	5290MHz (58ch)	
	5500-5700MHz	5530MHz (106ch) 5610MHz (122ch) 5690MHz (138ch)	
	5745-5825MHz	5775MHz (155ch)	
WLAN			
*Power of the EUT was set by the software as follows; Software / version: DRTU / 1.7.3-951 Power control setting: Refer to Section 5.2 *The above setting is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.			

5.2 Output power measurement results

Output power measurement for WLAN

1) WLAN (11b/g/n (2.4G))

[IEEE802.11b] Rate Check

Rate [Mbps]	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
1.0	2437	3.70	1.17	10.08	14.95	31.26	16.0
2.0	2437	3.65	1.17	10.08	14.90	30.90	16.0
5.5	2437	3.61	1.17	10.08	14.86	30.62	16.0
11.0	2437	3.61	1.17	10.08	14.86	30.62	16.0

:Worst data rate

IEEE802.11b 1Mbps

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
1	2412	3.58	1.17	10.08	14.83	30.41	16.0
6	2437	3.70	1.17	10.08	14.95	31.26	16.0
11	2462	3.65	1.18	10.08	14.91	30.97	16.0

[IEEE802.11g] Rate Check

Rate [Mbps]	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
6.0	2437	3.45	1.17	10.08	14.70	29.51	16.0
9.0	2437	3.69	1.17	10.08	14.94	31.19	16.0
12.0	2437	3.64	1.17	10.08	14.89	30.83	16.0
18.0	2437	3.39	1.17	10.08	14.64	29.11	16.0
24.0	2437	3.21	1.17	10.08	14.46	27.93	16.0
36.0	2437	3.23	1.17	10.08	14.48	28.05	16.0
48.0	2437	3.12	1.17	10.08	14.37	27.35	16.0
54.0	2437	3.10	1.17	10.08	14.35	27.23	16.0

:Worst data rate

IEEE802.11g 9Mbps

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
1	2412	3.57	1.17	10.08	14.82	30.34	16.0
6	2437	3.69	1.17	10.08	14.94	31.19	16.0
11	2462	3.36	1.18	10.08	14.62	28.97	16.0

IEEE802.11g 6Mbps

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
1	2412	3.37	1.17	10.08	14.62	28.97	16.0
6	2437	3.32	1.17	10.08	14.57	28.64	16.0
11	2462	3.47	1.18	10.08	14.73	29.72	16.0

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

[IEEE802.11n-20] Rate Check

Rate [Mbps]	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
MCS0	2437	3.39	1.17	10.08	14.64	29.11	16.0
MCS1	2437	3.35	1.17	10.08	14.60	28.84	16.0
MCS2	2437	3.34	1.17	10.08	14.59	28.77	16.0
MCS3	2437	3.27	1.17	10.08	14.52	28.31	16.0
MCS4	2437	3.34	1.17	10.08	14.59	28.77	16.0
MCS5	2437	3.13	1.17	10.08	14.38	27.42	16.0
MCS6	2437	3.15	1.17	10.08	14.40	27.54	16.0
MCS7	2437	3.08	1.17	10.08	14.33	27.10	16.0

:Worst data rate

IEEE802.11n-20 MCS0

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
1	2412	3.56	1.17	10.08	14.81	30.27	16.0
6	2437	3.39	1.17	10.08	14.64	29.11	16.0
11	2462	3.35	1.18	10.08	14.61	28.93	16.0

[IEEE802.11n-40] Rate Check

Rate [Mbps]	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
MCS0	2437	3.46	1.17	10.08	14.71	29.58	16.0
MCS1	2437	3.43	1.17	10.08	14.68	29.38	16.0
MCS2	2437	3.37	1.17	10.08	14.62	28.97	16.0
MCS3	2437	3.01	1.17	10.08	14.26	26.67	16.0
MCS4	2437	2.88	1.17	10.08	14.13	25.88	16.0
MCS5	2437	2.74	1.17	10.08	13.99	25.06	16.0
MCS6	2437	2.70	1.17	10.08	13.95	24.83	16.0
MCS7	2437	2.68	1.17	10.08	13.93	24.72	16.0

:Worst data rate

IEEE802.11n-40 MCS0

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
3	2422	3.20	1.17	10.08	14.45	27.86	16.0
6	2437	3.46	1.17	10.08	14.71	29.58	16.0
9	2452	2.92	1.18	10.08	14.18	26.18	16.0

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

2) WLAN (11a/n/ac (5G))
5.2GHz

[IEEE802.11a] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
6.0	5200	1.42	1.85	10.14	13.41	21.93	16.0
9.0	5200	1.32	1.85	10.14	13.31	21.43	16.0
12.0	5200	1.31	1.85	10.14	13.30	21.38	16.0
18.0	5200	1.29	1.85	10.14	13.28	21.28	16.0
24.0	5200	1.26	1.85	10.14	13.25	21.13	16.0
36.0	5200	1.10	1.85	10.14	13.09	20.37	16.0
48.0	5200	0.99	1.85	10.14	12.98	19.86	16.0
54.0	5200	1.15	1.85	10.14	13.14	20.61	16.0

:Worst data rate

IEEE802.11a 6Mbps

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
36	5180	1.21	1.85	10.14	13.20	20.89	16.0
40	5200	1.42	1.85	10.14	13.41	21.93	16.0
44	5220	1.12	1.86	10.14	13.12	20.51	16.0
48	5240	0.86	1.86	10.14	12.86	19.32	16.0

[IEEE802.11n-20] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
MCS0	5200	1.37	1.85	10.14	13.36	21.68	16.0
MCS1	5200	1.36	1.85	10.14	13.35	21.63	16.0
MCS2	5200	1.33	1.85	10.14	13.32	21.48	16.0
MCS3	5200	1.24	1.85	10.14	13.23	21.04	16.0
MCS4	5200	0.82	1.85	10.14	12.81	19.10	16.0
MCS5	5200	0.68	1.85	10.14	12.67	18.49	16.0
MCS6	5200	0.72	1.85	10.14	12.71	18.66	16.0
MCS7	5200	0.69	1.85	10.14	12.68	18.54	16.0

:Worst data rate

IEEE802.11n-20 MCS0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
36	5180	1.41	1.85	10.14	13.40	21.88	16.0
40	5200	1.37	1.85	10.14	13.36	21.68	16.0
44	5220	1.10	1.86	10.14	13.10	20.42	16.0
48	5240	0.73	1.86	10.14	12.73	18.75	16.0

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

[IEEE802.11n-40] Rate Check

Rate [Mbps]	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
MCS0	5230	0.77	1.86	10.14	12.77	18.92	16.0
MCS1	5230	0.76	1.86	10.14	12.76	18.88	16.0
MCS2	5230	0.66	1.86	10.14	12.66	18.45	16.0
MCS3	5230	0.54	1.86	10.14	12.54	17.95	16.0
MCS4	5230	0.42	1.86	10.14	12.42	17.46	16.0
MCS5	5230	0.46	1.86	10.14	12.46	17.62	16.0
MCS6	5230	0.35	1.86	10.14	12.35	17.18	16.0
MCS7	5230	0.38	1.86	10.14	12.38	17.30	16.0

:Worst data rate

IEEE802.11n-40 MCS0

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
38	5190	1.24	1.85	10.14	13.23	21.04	16.0
46	5230	0.77	1.86	10.14	12.77	18.92	16.0

[IEEE802.11ac-20] Rate Check

Rate [Mbps]	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
VHT0	5200	1.16	1.85	10.14	13.15	20.65	16.0
VHT1	5200	1.08	1.85	10.14	13.07	20.28	16.0
VHT2	5200	0.86	1.85	10.14	12.85	19.28	16.0
VHT3	5200	0.78	1.85	10.14	12.77	18.92	16.0
VHT4	5200	0.69	1.85	10.14	12.68	18.54	16.0
VHT5	5200	0.93	1.85	10.14	12.92	19.59	16.0
VHT6	5200	0.99	1.85	10.14	12.98	19.86	16.0
VHT7	5200	0.93	1.85	10.14	12.92	19.59	16.0

:Worst data rate

IEEE802.11ac-20 VHT0

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
36	5180	1.26	1.85	10.14	13.25	21.13	16.0
40	5200	1.16	1.85	10.14	13.15	20.65	16.0
44	5220	1.18	1.86	10.14	13.18	20.80	16.0
48	5240	0.90	1.86	10.14	12.90	19.50	16.0

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

[IEEE802.11ac-40] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
VHT0	5230	1.27	1.86	10.14	13.27	21.23	16.5
VHT1	5230	1.19	1.86	10.14	13.19	20.84	16.5
VHT2	5230	0.95	1.86	10.14	12.95	19.72	16.5
VHT3	5230	1.10	1.86	10.14	13.10	20.42	16.5
VHT4	5230	0.94	1.86	10.14	12.94	19.68	16.5
VHT5	5230	0.87	1.86	10.14	12.87	19.36	16.5
VHT6	5230	0.95	1.86	10.14	12.95	19.72	16.5
VHT7	5230	0.93	1.86	10.14	12.93	19.63	16.5

:Worst data rate

IEEE802.11ac-40 VHT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
38	5190	1.18	1.85	10.14	13.17	20.75	16.0
46	5230	1.27	1.86	10.14	13.27	21.23	16.5

[IEEE802.11ac-80] Rate Check

Rate [Mbps]	Freq. [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
VHT0	5210	1.22	1.85	10.14	13.21	20.94	16.0
VHT1	5210	0.96	1.85	10.14	12.95	19.72	16.0
VHT2	5210	0.98	1.85	10.14	12.97	19.82	16.0
VHT3	5210	1.11	1.85	10.14	13.10	20.42	16.0
VHT4	5210	1.07	1.85	10.14	13.06	20.23	16.0
VHT5	5210	0.95	1.85	10.14	12.94	19.68	16.0
VHT6	5210	0.93	1.85	10.14	12.92	19.59	16.0
VHT7	5210	0.87	1.85	10.14	12.86	19.32	16.0
VHT8	5210	0.85	1.85	10.14	12.84	19.23	16.0
VHT9	5210	0.78	1.85	10.14	12.77	18.92	16.0

:Worst data rate

IEEE802.11ac-80 VHT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
42	5210	1.11	1.85	10.14	13.10	20.42	16.0

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

5.3GHz

IEEE802.11a 6Mbps

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
52	5260	1.27	1.86	10.14	13.27	21.23	16.5
56	5280	1.29	1.87	10.14	13.30	21.38	16.0
60	5300	1.29	1.87	10.14	13.30	21.38	15.5
64	5320	1.30	1.87	10.14	13.31	21.43	15.5

IEEE802.11n-20 MCS0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
52	5260	1.22	1.86	10.14	13.22	20.99	16.5
56	5280	1.23	1.87	10.14	13.24	21.09	16.0
60	5300	1.24	1.87	10.14	13.25	21.13	15.5
64	5320	1.26	1.87	10.14	13.27	21.23	15.5

IEEE802.11ac-20 VHT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
52	5260	1.19	1.86	10.14	13.19	20.84	16.5
56	5280	1.17	1.87	10.14	13.18	20.80	15.5
60	5300	1.16	1.87	10.14	13.17	20.75	15.0
64	5320	1.16	1.87	10.14	13.17	20.75	14.5

IEEE802.11n-40 HT0

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
54	5270	1.35	1.87	10.14	13.36	21.68	16.0
62	5310	1.27	1.87	10.14	13.28	21.28	16.0

IEEE802.11ac-40 VHT0

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
54	5270	1.06	1.87	10.14	13.07	20.28	16.0
62	5310	1.07	1.87	10.14	13.08	20.32	15.0

IEEE802.11ac-80 VHT0

Ch	Frequency [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
58	5290	1.44	1.87	10.14	13.45	22.13	15.5

Sample Calculation:

$$\text{Result} = \text{Reading} + \text{Cable Loss} + \text{Attenuator}$$

5.6GHz

IEEE802.11a 6Mbps

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
100	5500	1.26	1.91	10.14	13.31	21.43	13.5
104	5520	1.20	1.91	10.14	13.25	21.13	13.5
108	5540	1.13	1.91	10.14	13.18	20.80	13.5
112	5560	1.42	1.91	10.14	13.47	22.23	13.5
116	5580	1.32	1.92	10.14	13.38	21.78	13.0
120	5600	1.22	1.92	10.14	13.28	21.28	13.0
124	5620	1.10	1.92	10.14	13.16	20.70	13.0
128	5640	1.36	1.93	10.14	13.43	22.03	13.5
132	5660	1.24	1.93	10.14	13.31	21.43	13.5
136	5680	1.10	1.93	10.14	13.17	20.75	13.5
140	5700	1.16	1.93	10.14	13.23	21.04	13.5

IEEE802.11n-20 HT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
100	5500	1.23	1.91	10.14	13.28	21.28	13.5
104	5520	1.22	1.91	10.14	13.27	21.23	13.0
108	5540	1.13	1.91	10.14	13.18	20.80	13.0
112	5560	1.39	1.91	10.14	13.44	22.08	13.5
116	5580	1.29	1.92	10.14	13.35	21.63	13.0
120	5600	1.20	1.92	10.14	13.26	21.18	13.0
124	5620	1.07	1.92	10.14	13.13	20.56	13.0
128	5640	1.31	1.93	10.14	13.38	21.78	13.5
132	5660	1.24	1.93	10.14	13.31	21.43	13.5
136	5680	1.09	1.93	10.14	13.16	20.70	13.0
140	5700	1.22	1.93	10.14	13.29	21.33	13.5

IEEE802.11ac-20 VHT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
100	5500	1.18	1.91	10.14	13.23	21.04	13.5
104	5520	1.41	1.91	10.14	13.46	22.18	13.5
108	5540	1.41	1.91	10.14	13.46	22.18	13.5
112	5560	1.33	1.91	10.14	13.38	21.78	13.0
116	5580	1.28	1.92	10.14	13.34	21.58	13.0
120	5600	1.16	1.92	10.14	13.22	20.99	13.0
124	5620	1.40	1.92	10.14	13.46	22.18	13.5
128	5640	1.33	1.93	10.14	13.40	21.88	13.5
132	5660	1.18	1.93	10.14	13.25	21.13	13.5
136	5680	1.03	1.93	10.14	13.10	20.42	13.5
140	5700	1.15	1.93	10.14	13.22	20.99	13.5
144	5720	1.12	1.93	10.14	13.19	20.84	13.5

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

IEEE802.11n-40 HT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
102	5510	1.28	1.91	10.14	13.33	21.53	13.5
110	5550	1.15	1.91	10.14	13.20	20.89	13.5
118	5590	1.33	1.92	10.14	13.39	21.83	13.5
126	5630	1.11	1.92	10.14	13.17	20.75	13.5
134	5670	1.36	1.93	10.14	13.43	22.03	14.0

IEEE802.11ac-40 VHT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
102	5510	1.41	1.91	10.14	13.46	22.18	14.5
110	5550	1.31	1.91	10.14	13.36	21.68	14.0
118	5590	1.10	1.92	10.14	13.16	20.70	13.5
126	5630	1.35	1.92	10.14	13.41	21.93	14.0
134	5670	1.09	1.93	10.14	13.16	20.70	14.0
142	5710	1.07	1.93	10.14	13.14	20.61	14.0

IEEE802.11ac-80 VHT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
106	5530	1.36	1.91	10.14	13.41	21.93	14.0
122	5610	1.40	1.92	10.14	13.46	22.18	14.0
138	5690	1.33	1.93	10.14	13.40	21.88	14.0

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

5.8GHz

IEEE802.11a 6Mbps

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
149	5745	1.30	1.94	10.13	13.37	21.73	13.5
153	5765	1.25	1.94	10.13	13.32	21.48	13.5
157	5785	1.24	1.95	10.13	13.32	21.48	13.5
161	5805	1.16	1.95	10.13	13.24	21.09	13.5
165	5825	1.38	1.95	10.13	13.46	22.18	14.0

IEEE802.11n-20 MCS0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
149	5745	1.36	1.94	10.13	13.43	22.03	13.5
153	5765	1.21	1.94	10.13	13.28	21.28	13.5
157	5785	1.12	1.95	10.13	13.20	20.89	13.5
161	5805	1.18	1.95	10.13	13.26	21.18	13.5
165	5825	1.39	1.95	10.13	13.47	22.23	14.0

IEEE802.11ac-20 VHT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
149	5745	1.32	1.94	10.13	13.39	21.83	13.5
153	5765	1.28	1.94	10.13	13.35	21.63	13.5
157	5785	1.10	1.95	10.13	13.18	20.80	13.5
161	5805	1.38	1.95	10.13	13.46	22.18	13.5
165	5825	1.34	1.95	10.13	13.42	21.98	13.5

IEEE802.11n-40 HT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
151	5755	1.11	1.94	10.13	13.18	20.80	13.5
158	5795	1.28	1.95	10.13	13.36	21.68	13.5

IEEE802.11ac-40 VHT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
151	5755	1.27	1.94	10.13	13.34	21.58	14.0
158	5795	1.40	1.95	10.13	13.48	22.28	14.0

IEEE802.11ac-80 VHT0

Ch	Frequency [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Power control setting[dBm]
		AVG			[dBm] AVG	[mW] AVG	
155	5775	1.42	1.94	10.13	13.49	22.34	14.0

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

5.3 SAR testing operating modes

The operating mode for SAR testing was decided by the output power

1) SAR measurement for WLAN

Decision of SAR test channel

The operating mode for SAR testing was decided by the output power

Mode		GHz	Channel	"Default Test Channel"			
				FCC 15.247		UNII	
				802.11b	802.11g		
802.11 b/g/n20		2.412	1	√	Δ		
		2.437	6	√	Δ		
		2.462	11	√	Δ		
802.11a/n20	UNII	5.18	36			√	
		5.20	40				*
		5.22	44				*
		5.24	48			√	
		5.26	52			√	
		5.28	56				*
		5.30	60				*
		5.32	64			√	
		5.50	100				*
		5.52	104			√	
		5.54	108				*
		5.56	112				*
		5.58	116			√	
		5.60	120				*
		5.62	124			√	
		5.64	128				*
		5.66	132				*
		5.68	136			√	
		5.70	140				*
	UNII or FCC 15.247	5.745	149	√		√	
		5.765	153		*		*
		5.785	157	√			*
		5.805	161		*	√	
	FCC 15.247	5.825	165	√			

√ = "default test channels"

* = Possible 802.11a channels with maximum average output > the "default test channels"

Δ = Possible 802.11g channels with maximum average output 1/4 dB ≥ the "default test channels"

= when output power is reduced for channel 1 and/or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested

Mode	Test Frequency	Modulation	Crest factor	Note
IEEE802.11b	2437MHz(6ch)	DBPSK(1Mbps)	1	*3
IEEE802.11g IEEE802.11n20 (2.4G)	Not required			*1
IEEE802.11n40 (2.4G)	2437MHz(6ch)	BPSK(MCS0)	1	*3*4
IEEE802.11a	5200MHz(40ch)	BPSK(6Mbps)	1	*3
	5260MHz(52ch)	BPSK(6Mbps)	1	
	5320MHz(62ch)			
	5560MHz(112ch)	BPSK(6Mbps)	1	*5
	5825MHz(165ch)	BPSK(6Mbps)	1	*3
IEEE802.11n20 (5G) IEEE802.11ac20 IEEE802.11ac40	Not required			*2
IEEE802.11n40 (5G)	5190MHz(38ch)	BPSK(MCS0)	1	*3*4
	5270MHz(54ch)	BPSK(MCS0)	1	*4
	5310MHz(62ch)			
	5670MHz(134ch)	BPSK(MCS0)	1	*3*4
	5795MHz(159ch)	BPSK(MCS0)	1	*3*4
IEEE802.11ac80	5210MHz(42ch)	256QAM(VHT0)	1	*4
	5290MHz(58ch)	256QAM(VHT0)	1	*4
	5530MHz(106ch)	256QAM(VHT0)	1	*3*4
	5775MHz(155ch)	256QAM(VHT0)	1	*3*4
Bluetooth	Not required			*6

WLAN

*Power of the EUT was set by the software as follows;

Software / version: DRTU / 1.7.3-951

Power control setting: Refer to Section 5.2

*The above setting is the worst case. Any conditions under the normal use do not exceed the condition of setting.

In addition, end users cannot change the settings of the output power of the product.

- *1 The 11b mode was maximum average power. According to KDB248227D01, the 11g and 11n SAR is not required for other mode because the maximum average output power for other mode is less than 1/4dB higher than that measured 11b mode.
- *2 The 11a mode was maximum average power. According to KDB248227D01, the 11n and 11ac SAR is not required for other mode because the maximum average output power for other mode is less than that measured 11a mode.
- *3 The other channel was not required since maximum average output power channel SAR value is less than 0.8W/kg.
- *4 Because 11n40 and 11ac80 modes are maximum band width, SAR test of 11n40 and 11ac80 modes were measured.
- *5 The other channel was not required since maximum average output power channel SAR value is less than 0.4W/kg.
- *6 Bluetooth test was not required according with Section 6.1

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

5.4 Confirmation after SAR testing

It was checked that the power drift [W] is within +/-5%. The verification of power drift during the SAR test is that DASY5 system calculates the power drift by measuring the E-field at the same location at beginning and the end of the scan measurement for each test position.

DASY5 system calculation Power drift value[dB] = $20\log(E_a)/(E_b)$

Before SAR testing : E_b [V/m]

After SAR testing : E_a [V/m]

Limit of power drift[W] = +/-5%

$X[\text{dB}] = 10\log[P] = 10\log(1.05/1) = 10\log(1.05) - 10\log(1) = 0.212\text{dB}$

from E-field relations with power.

$p = E^2/\eta = E^2/$

Therefore, The correlation of power and the E-field

$X_{\text{dB}} = 10\log(P) = 10\log(E^2) = 20\log(E)$

Therefore,

The calculated power drift of DASY5 System must be the less than +/-0.212dB.

SECTION 6 SAR test exclusion considerations

6.1 Standalone SAR test exclusion considerations

According to KDB 447498 § 4.1.5 if the antenna is at close proximity to user then the outer surface of the EUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the SAR exclusion calculations is 0mm.

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$

for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

WLAN 2.4GHz

Antenna 1

Band	Standalone SAR tested	Position	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of exclusion *3
WLAN (2.4GHz band)	☒	Top	11b DBPSK(1Mbps)	2462 [MHz] (11ch)	15 [dBm] 31.62 [mW] 32 [mW]*6	5 [mm]	10.0
WLAN (2.4GHz band)	☒	Rear	11b DBPSK(1Mbps)	2462 [MHz] (11ch)	15 [dBm] 31.62 [mW] 32 [mW]*6	5 [mm]	10.0
WLAN (2.4GHz band)	☒	Left	11b DBPSK(1Mbps)	2462 [MHz] (11ch)	15 [dBm] 31.62 [mW] 32 [mW]*6	5 [mm]	10.0

WLAN 5.2GHz

Antenna 1

Band	Standalone SAR tested	Position	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of exclusion *3
WLAN (5GHz band)	☒	Top	11a BPSK(6Mbps)	5240 [MHz] (48ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.1
WLAN (5GHz band)	☒	Rear	11a BPSK(6Mbps)	5240 [MHz] (48ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.1
WLAN (5GHz band)	☒	Left	11a BPSK(6Mbps)	5240 [MHz] (48ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.1

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 5.3GHz

Antenna 1

Band	Standalone SAR tested	Positiom	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of exclusion *3
WLAN (5GHz band)	☒	Top	11a BPSK(6Mbps)	5320 [MHz] (64ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.1
WLAN (5GHz band)	☒	Rear	11a BPSK(6Mbps)	5320 [MHz] (64ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.1
WLAN (5GHz band)	☒	Left	11a BPSK(6Mbps)	5320 [MHz] (64ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.1

WLAN 5.6GHz

Antenna 1

Band	Standalone SAR tested	Positiom	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of exclusion *3
WLAN (5GHz band)	☒	Top	11a BPSK(6Mbps)	5700 [MHz] (140ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.5
WLAN (5GHz band)	☒	Rear	11a BPSK(6Mbps)	5700 [MHz] (140ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.5
WLAN (5GHz band)	☒	Left	11a BPSK(6Mbps)	5700 [MHz] (140ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.5

WLAN 5.8GHz

Antenna 1

Band	Standalone SAR tested	Positiom	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of exclusion *3
WLAN (5GHz band)	☒	Top	11a BPSK(6Mbps)	5825 [MHz] (165ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.6
WLAN (5GHz band)	☒	Rear	11a BPSK(6Mbps)	5825 [MHz] (165ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.6
WLAN (5GHz band)	☒	left	11a BPSK(6Mbps)	5825 [MHz] (165ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	5 [mm]	10.6

Bluetooth

Antenna 2

Standalone SAR tested	Positiom	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of exclusion *3
☐	Top	2480 [MHz] (79ch)	7.78 [dBm] 6.00 [mW] 6 [mW]*6	5 [mm]	1.9
☐	Rear	2480 [MHz] (79ch)	7.78 [dBm] 6.00 [mW] 6 [mW]*6	5 [mm]	1.9

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

2) At 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following.

a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·(f(MHz)/150)] mW, at 100 MHz to 1500 MHz

b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·10] mW at > 1500 MHz and ≤ 6 GHz

WLAN 2.4GHz

Antenna 1

Band	Standalone SAR tested	Positiom	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of threshold*4
WLAN (2.4GHz band)	☐	Bottom	11b DBPSK(1Mbps)	2462 [MHz] (11ch)	15 [dBm] 31.62 [mW] 32 [mW]*6	187 [mm]	1466 [mW]
WLAN (2.4GHz band)	☐	Right	11b DBPSK(1Mbps)	2462 [MHz] (11ch)	15 [dBm] 31.62 [mW] 32 [mW]*6	284 [mm]	2436 [mW]

WLAN 5.2GHz

Antenna 1

Band	Standalone SAR tested	Positiom	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of threshold*4
WLAN (5GHz band)	☐	Bottom	11a BPSK(6Mbps)	5240 [MHz] (48ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	187 [mm]	1436 [mW]
WLAN (5GHz band)	☐	Right	11a BPSK(6Mbps)	5240 [MHz] (48ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	284 [mm]	2406 [mW]

WLAN 5.3GHz

Antenna 1

Band	Standalone SAR tested	Positiom	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of threshold*4
WLAN (5GHz band)	☐	Bottom	11a BPSK(6Mbps)	5320 [MHz] (64ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	187 [mm]	1435 [mW]
WLAN (5GHz band)	☐	Right	11a BPSK(6Mbps)	5320 [MHz] (64ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	284 [mm]	2405 [mW]

WLAN 5.6GHz

Antenna 1

Band	Standalone SAR tested	Positiom	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of threshold*4
WLAN (5GHz band)	☐	Bottom	11a BPSK(6Mbps)	5700 [MHz] (140ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	187 [mm]	1433 [mW]
WLAN (5GHz band)	☐	Right	11a BPSK(6Mbps)	5700 [MHz] (140ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	284 [mm]	2403 [mW]

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 5.8GHz

Antenna 1

Band	Standalone SAR tested	Positiom	Mode	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of threshold*4
WLAN (5GHz band)	☐	Top	11a BPSK(6Mbps)	5825 [MHz] (165ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	187 [mm]	1432 [mW]
WLAN (5GHz band)	☐	Right	11a BPSK(6Mbps)	5825 [MHz] (165ch)	13.5 [dBm] 22.39 [mW] 22 [mW]*6	284 [mm]	2402 [mW]

Bluetooth

Antenna 2

Standalone SAR tested	Positiom	Upper frequency of band *1	Maximum tune-up tolerance limit *5	Min distance *2	Calculation of threshold*4
☐	Left	2480 [MHz] (79ch)	7.78 [dBm] 6.00 [mW] 6 [mW]*6	93 [mm]	525 [mW]
☐	Right	2480 [MHz] (79ch)	7.78 [dBm] 6.00 [mW] 6 [mW]*6	201 [mm]	1605 [mW]
☐	Bottom	2480 [MHz] (79ch)	7.78 [dBm] 6.00 [mW] 6 [mW]*6	187 [mm]	1465 [mW]

*1 The upper frequency of the frequency band was used in order to calculate standalone SAR test exclusion considerations.

*2 When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Refer to Appendix 4.

*3 $[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$

If it is Calculation of exclusion ≤ 3.0 standalone SAR test is excluded.

*4 $[(3 \cdot 50)/(\sqrt{f(\text{GHz})}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)] \text{ mW}$ at > 100 MHz and $\leq 1500 \text{ MHz}$

$[(3 \cdot 50)/(\sqrt{f(\text{GHz})}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10] \text{ mW}$ at > 1500 MHz and $\leq 6 \text{ GHz}$

If it is maximum tune-up tolerance limit < Threshold, standalone SAR test is excluded.

*5 Maximum tune-up tolerance limit is by the specification from a customer.

*6 Maximum tune-up tolerance limit(mW) is rounded to one decimal place.

SECTION 7: Description of the Body setup

7.1 Test position for Body setup

i) Procedure for SAR testing

-The tested procedure was performed according to the KDB447498 D01 (Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies)

ii) Test mode

WLAN 2.4G	Data transmission mode (11b/n-40)
WLAN 5G	Data transmission mode (11a/n-40/ac-80)

iii) Test position

No.	Position	Test distance	WLAN		
			Tested	Antenna	Separation from antenna to edge
1	Top	0mm	☒	1	3.8mm
2	Rear	0mm	☒	1	3.1mm
3	Left	0mm	☒	1	9.5mm

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

SECTION 8 : Test surrounding

8.1 Measurement uncertainty

This measurement uncertainty budget is suggested by IEEE Std 1528(2013)[2] and determined by Schmid & Partner Engineering AG (DASY5 Uncertainty Budget[1]). Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01 Section 2.8.1., when the highest measured SAR(1g) within a frequency band is < 1.5W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std.1528 (2013) is not required in SAR reports submitted for equipment approval.

<0.3 – 3GHz range Body>

Error Description	Uncertai value ±	Probability distribution	divisor	(ci) 1g	Standard (1g)	vi or veff
Measurement System						
Probe calibration	± 6.00	Normal	1	1	± 6.00	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	0.7	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	0.7	± 3.9	∞
Boundary effects	± 1.0	Rectangular	√3	1	± 0.6	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Modulation response	± 2.4	Rectangular	√3	1	± 1.4	∞
Readout electronics	± 0.3	Normal	1	1	± 0.3	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 2.6	Rectangular	√3	1	± 1.5	∞
RF ambient Noise	± 3.0	Rectangular	√3	1	± 1.7	∞
RF ambient Reflections	± 3.0	Rectangular	√3	1	± 1.7	∞
Probe Positioner	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
MaxSAR Eval.	± 2.0	Rectangular	√3	1	± 1.2	∞
Test Sample Related						
Device positioning	± 2.9	Normal	1	1	± 2.9	6
Device holder uncertainty	± 3.6	Normal	1	1	± 3.6	2
Power drift	± 5.0	Rectangular	√3	1	± 2.9	∞
Power Scaling	+ 0.0	Rectangular	√3	1	± 0.0	∞
Phantom and Setup						
Phantom uncertainty	± 6.1	Rectangular	√3	1	± 3.5	∞
Algorithm for correcting SAR for deviations in permittivity and conductivity	± 1.9	Normal	1	1	± 1.9	∞
Liquid conductivity (meas.)	+ 1.9	Rectangular	1	0.78	+ 1.5	∞
Liquid permittivity (meas.)	- 2.8	Rectangular	1	0.23	- 0.6	∞
Liquid conductivity - temp.unc (below 2deg.C.)	± 5.2	Rectangular	√3	0.78	± 2.3	∞
Liquid permittivity - temp.unc (below 2deg.C.)	± 0.8	Rectangular	√3	0.23	± 0.1	∞
Combined Standard Uncertainty						
					± 11.376	
Expanded Uncertainty (k=2)						
					± 22.8	

*. Table of uncertainties are listed for ISO/IEC 17025.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

<3 – 6GHz range Body>

Error Description	Uncertain value ±	Probability distribution	divisor	(ci) lg	Standard (1g)	vi or veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	± 6.55	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	0.7	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	0.7	± 3.9	∞
Boundary effects	± 2.0	Rectangular	√3	1	± 1.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Modulation response	± 2.4	Rectangular	√3	1	± 1.4	∞
Readout electronics	± 0.3	Normal	1	1	± 0.3	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 2.6	Rectangular	√3	1	± 1.5	∞
RF ambient Noise	± 3.0	Rectangular	√3	1	± 1.7	∞
RF ambient Reflections	± 3.0	Rectangular	√3	1	± 1.7	∞
Probe Positioner	± 0.8	Rectangular	√3	1	± 0.5	∞
Probe positioning	± 6.7	Rectangular	√3	1	± 3.9	∞
Max.SAR Eval.	± 4.0	Rectangular	√3	1	± 2.3	∞
Test Sample Related						
Device positioning	± 2.9	Normal	1	1	± 2.9	34
Device holder uncertainty	± 3.6	Normal	1	1	± 3.6	2
Power drift	± 5.0	Rectangular	√3	1	± 2.9	∞
Power Scaling	+ 0.0	Rectangular	√3	1	± 0.0	∞
Phantom and Setup						
Phantom uncertainty	± 6.6	Rectangular	√3	1	± 3.8	∞
Algorithm for correcting SAR for deviations in permittivity and conductivity	± 1.9	Normal	1	1	± 1.9	∞
Liquid conductivity (meas.)	- 4.5	Rectangular	1	0.78	+ 3.5	∞
Liquid permittivity (meas.)	- 4.7	Rectangular	1	0.23	- 1.1	∞
Liquid conductivity - temp.unc (below 2deg.C.)	± 2.4	Rectangular	√3	0.78	± 1.1	∞
Liquid permittivity - temp.unc (below 2deg.C.)	± 0.8	Rectangular	√3	0.23	± 0.1	∞
Combined Standard Uncertainty						
					± 12.742	
Expanded Uncertainty (k=2)						
					± 25.5	

*. Table of uncertainties are listed for ISO/IEC 17025.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

SECTION 9 : Measurement results

9.1 WLAN Body SAR (2.4G)

(1)Method of measurement

- Step.1 The searching for the worst antenna and position
The test was performed at the worst transmit rate and channel of 11b mode.
Step.2 The changing to 11n-40 mode
The test was performed at the worst antenna and position of Step.1

Note:

- 1)The other channel was not required since maximum average output power channel SAR value is less than 0.8W/kg.
2) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.
When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

(2)Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.
The dielectric parameters measurement is reported in each correspondent section.

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
-	-	-	-	-	2000	ϵ_r	53.3	-	-	-	*1
						σ [mho/m]	1.52	-	-	-	
24-Oct	24	53	MSL 2450	23.5	2437	ϵ_r	52.7	51.3	-2.8	+/-5	*2
						σ [mho/m]	1.94	1.98	1.9	+/-5	
24-Oct	24	53	MSL 2450	23.5	2450	ϵ_r	52.7	51.1	-3.0	+/-5	*1
						σ [mho/m]	1.95	1.99	2.0	+/-5	
-	-	-	-	-	3000	ϵ_r	52.0	-	-	-	*1
						σ [mho/m]	2.73	-	-	-	

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in KDB 865664D01.

*2 The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

(3)SAR correction for deviations of complex permittivity from target

$$\Delta \text{SAR} = c\varepsilon \Delta \varepsilon + c\sigma \Delta \sigma$$

<1g>

$$C\varepsilon = -7.854 \times 10^{-4} f^3 + 9.402 \times 10^{-3} f^2 - 2.742 \times 10^{-2} f - 0.2026$$

$$C\sigma = 9.804 \times 10^{-3} f^3 - 8.661 \times 10^{-2} f^2 + 2.981 \times 10^{-2} f + 0.7829$$

<10g>

$$C\varepsilon = 3.456 \times 10^{-3} f^3 - 3.531 \times 10^{-2} f^2 + 7.675 \times 10^{-2} f - 0.1860$$

$$C\sigma = 4.479 \times 10^{-3} f^3 - 1.586 \times 10^{-2} f^2 - 0.1972 f + 0.7717$$

'f' is the frequency in GHz.

The measured SAR results are not corrected because ΔSAR has a positive sign.

When ΔSAR is positive sign, SAR value will become small if corrected calculation of SAR is performed.

Therefore, corrected calculation is not performed.

Date		24-Oct
	f(GHz)=	2.437
	$\Delta \varepsilon(\%)$ =	-2.80
	$\Delta \sigma(\%)$ =	1.90
1g	$C\varepsilon$ =	-0.2250
	$C\sigma$ =	0.4831
	$\Delta \text{SAR}(\%)$ =	1.55
10g	$C\varepsilon$ =	-0.1586
	$C\sigma$ =	0.2618
	$\Delta \text{SAR}(\%)$ =	0.94

(4)Result of Body SAR

Antenna Type A

Antenna 1

BODY SAR MEASUREMENT RESULTS														
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) Δ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]	
Channel	[MHz]		[dBm]	[mW]	[dBm]	[mW]		Antenna	Position	Separation [mm]				
Step.1 Position searching														
6	2437	11b 1Mbps	14.95	31.26	15.00	31.62	Flat	1	Top	0	0.109	N/A	0.110	
6	2437	11b 1Mbps	14.95	31.26	15.00	31.62	Flat	1	Rear	0	0.695	N/A	0.703	
6	2437	11b 1Mbps	14.95	31.26	15.00	31.62	Flat	1	Left	0	0.435	N/A	0.440	
Step.2 Mode change at the worst position														
6	2437	11n40 MCS0	14.71	29.58	15.00	31.62	Flat	1	Rear	0	0.604	N/A	0.646	

Antenna Type B

Antenna 1

BODY SAR MEASUREMENT RESULTS													
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) Δ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]
Channel	[MHz]		[dBm]	[mW]	[dBm]	[mW]		Antenna	Position	Separation [mm]			
Step.1 Position searching													
6	2437	11b 1Mbps	14.95	31.26	15.00	31.62	Flat	1	Top	0	0.253	N/A	0.256
6	2437	11b 1Mbps	14.95	31.26	15.00	31.62	Flat	1	Rear	0	0.670	N/A	0.678
6	2437	11b 1Mbps	14.95	31.26	15.00	31.62	Flat	1	Left	0	0.170	N/A	0.172

*1 Refer to clause 9.1 (3).

*2 Reported SAR= Maximum tune-up tolerance limit [mW] / Measured power [mW] · Measured SAR(Δ SAR correct) [W/kg]

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

9.2 WLAN Body SAR (5G)

(1)Method of measurement

- Step.1 The searching for the worst antenna and position
The test was performed at the worst transmit rate and channel of 11a mode.
- Step.2 The changing to 11n-40 and 11ac80 mode
The test was performed at the worst antenna and position of Step.1
- Step.3 The changing to the other channels
The test was performed at the worst SAR value of test mode and test channel of Step.1 and Step.2.
- Step.4 The repeat measurement
The test was performed at the worst measurement SAR value $> 0.8\text{W/kg}$ of test mode and test channel of Step.1 to Step.3.

Note:

- 1)
- a) In case of 5180-5240MHz, 5260-5320MHz and 5745-5825MHz frequency range.
The other channel was not required since maximum average output power channel SAR value is less than 0.8W/kg .
- b) In case of 5500-5700MHz frequency range of 11a mode.
The other channel was not required since maximum average output power channel SAR value is less than 0.4W/kg
- c) In case of 5500-5700MHz frequency range of 11n40 and 11ac80 mode.
The other channel was not required since maximum average output power channel SAR value is less than 0.8W/kg
- 2) Repeated measurement is not required when the original highest measured SAR is $< 0.80\text{ W/kg}$.
When the original highest measured SAR is $\geq 0.80\text{ W/kg}$, repeat that measurement once.
Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{ W/kg}$ ($\sim 10\%$ from the 1-g SAR limit).

(2) Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.

The dielectric parameters measurement is reported in each correspondent section.

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
-	-	-	-	-	3000	ϵ_r	52.0	-	-	-	*1
						σ [mho/m]	2.73	-	-	-	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5190	ϵ_r	49.0	48.1	-1.9	+/-5	*2
						σ [mho/m]	5.28	5.26	-0.3	+/-5	
16-Oct	24	50	MBBL 3.5-5.8	23.5	5200	ϵ_r	49.0	47.7	-2.7	+/-5	*1
						σ [mho/m]	5.30	5.33	0.6	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5200	ϵ_r	49.0	48.4	-1.2	+/-5	*2
						σ [mho/m]	5.30	5.34	0.8	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5210	ϵ_r	49.0	47.8	-2.4	+/-5	*2
						σ [mho/m]	5.35	5.23	-2.3	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5260	ϵ_r	48.9	48.1	-1.8	+/-5	*2
						σ [mho/m]	5.37	5.31	-1.1	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5270	ϵ_r	48.9	48.7	-0.4	+/-5	*2
						σ [mho/m]	5.38	5.42	0.6	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5290	ϵ_r	48.9	47.8	-2.2	+/-5	*2
						σ [mho/m]	5.41	5.38	-0.5	+/-5	
17-Oct	24	48	MBBL 3.5-5.8	23.5	5300	ϵ_r	48.9	47.6	-2.7	+/-5	*1
						σ [mho/m]	5.42	5.59	3.1	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5300	ϵ_r	48.9	48.0	-1.8	+/-5	*2
						σ [mho/m]	5.42	5.43	0.1	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5310	ϵ_r	48.9	48.1	-1.7	+/-5	*2
						σ [mho/m]	5.43	5.19	-4.5	+/-5	
17-Oct	24	48	MBBL 3.5-5.8	23.5	5320	ϵ_r	48.9	47.6	-2.6	+/-5	*2
						σ [mho/m]	5.44	5.40	-0.9	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5320	ϵ_r	48.9	47.7	-2.3	+/-5	*2
						σ [mho/m]	5.44	5.56	2.2	+/-5	
-	-	-	-	-	5500	ϵ_r	48.6	-	-	-	*1
						σ [mho/m]	5.65	-	-	-	
17-Oct	24	48	MBBL 3.5-5.8	23.5	5530	ϵ_r	48.6	46.6	-4.1	+/-5	*2
						σ [mho/m]	5.69	5.78	1.6	+/-5	
17-Oct	24	48	MBBL 3.5-5.8	23.5	5560	ϵ_r	48.5	46.5	-4.2	+/-5	*2
						σ [mho/m]	5.72	5.65	-1.2	+/-5	
24-Oct	24	53	MBBL 3.5-5.8	23.5	5560	ϵ_r	48.5	48.2	-0.8	+/-5	*2
						σ [mho/m]	5.72	5.68	-0.8	+/-5	
17-Oct	24	48	MBBL 3.5-5.8	23.5	5600	ϵ_r	48.5	46.3	-4.5	+/-5	*1
						σ [mho/m]	5.77	5.77	0.0	+/-5	
24-Oct	24	53	MBBL 3.5-5.8	23.5	5600	ϵ_r	48.5	47.8	-1.4	+/-5	*1
						σ [mho/m]	5.77	5.88	1.9	+/-5	
17-Oct	24	48	MBBL 3.5-5.8	23.5	5670	ϵ_r	48.4	46.1	-4.7	+/-5	*2
						σ [mho/m]	5.85	5.81	-0.7	+/-5	

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

20-Oct	24	56	MBBL 3.5-5.8	23.5	5775	ϵ_r	48.2	47.4	-1.7	+/-5	*2
						σ [mho/m]	5.97	5.96	-0.2	+/-5	
20-Oct	24	56	MBBL 3.5-5.8	23.5	5795	ϵ_r	48.2	47.4	-1.8	+/-5	*2
						σ [mho/m]	5.99	5.95	-0.8	+/-5	
20-Oct	24	56	MBBL 3.5-5.8	23.5	5800	ϵ_r	48.2	47.2	-2.2	+/-5	*1
						σ [mho/m]	6.00	5.92	-1.4	+/-5	
23-Oct	24	50	MBBL 3.5-5.8	23.5	5800	ϵ_r	48.2	46.9	-2.7	+/-5	*1
						σ [mho/m]	6.00	5.86	-2.3	+/-5	
20-Oct	24	56	MBBL 3.5-5.8	23.5	5825	ϵ_r	48.2	48.8	1.4	+/-5	*2
						σ [mho/m]	6.03	6.20	2.8	+/-5	
23-Oct	24	50	MBBL 3.5-5.8	23.5	5825	ϵ_r	48.2	47.0	-2.5	+/-5	*2
						σ [mho/m]	6.03	5.90	-2.1	+/-5	

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in KDB 865664D01.

*2 The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

(3)SAR correction for deviations of complex permittivity from target

$$\Delta \text{SAR} = c\varepsilon \Delta \varepsilon + c\sigma \Delta \sigma$$

<1g>

$$C\varepsilon = -7.854 \times 10^{-4} f^3 + 9.402 \times 10^{-3} f^2 - 2.742 \times 10^{-2} f - 0.2026$$

$$C\sigma = 9.804 \times 10^{-3} f^3 - 8.661 \times 10^{-2} f^2 + 2.981 \times 10^{-2} f + 0.7829$$

<10g>

$$C\varepsilon = 3.456 \times 10^{-3} f^3 - 3.531 \times 10^{-2} f^2 + 7.675 \times 10^{-2} f - 0.1860$$

$$C\sigma = 4.479 \times 10^{-3} f^3 - 1.586 \times 10^{-2} f^2 - 0.1972 f + 0.7717$$

'f' is the frequency in GHz.

The measured SAR results are not corrected because ΔSAR has a positive sign.

When ΔSAR is positive sign, SAR value will become small if corrected calculation of SAR is performed.

Therefore, corrected calculation is not performed.

Date	22-Oct	Date	16-Oct	Date	22-Oct
f(GHz)=	5.19	f(GHz)=	5.2	f(GHz)=	5.2
$\Delta \varepsilon(\%)$ =	-1.90	$\Delta \varepsilon(\%)$ =	-2.70	$\Delta \varepsilon(\%)$ =	-1.20
$\Delta \sigma(\%)$ =	-0.30	$\Delta \sigma(\%)$ =	0.60	$\Delta \sigma(\%)$ =	0.80
1g Cε=	-0.2015	1g Cε=	-0.2014	1g Cε=	-0.2014
Cσ=	-0.0247	Cσ=	-0.0255	Cσ=	-0.0255
$\Delta \text{SAR}(\%)$ =	0.39	$\Delta \text{SAR}(\%)$ =	0.53	$\Delta \text{SAR}(\%)$ =	0.22
10g Cε=	-0.2556	10g Cε=	-0.2557	10g Cε=	-0.2557
Cσ=	-0.0528	Cσ=	-0.0528	Cσ=	-0.0528
$\Delta \text{SAR}(\%)$ =	0.50	$\Delta \text{SAR}(\%)$ =	0.66	$\Delta \text{SAR}(\%)$ =	0.26

Date	22-Oct	Date	22-Oct	Date	22-Oct
f(GHz)=	5.21	f(GHz)=	5.26	f(GHz)=	5.27
$\Delta \varepsilon(\%)$ =	-2.40	$\Delta \varepsilon(\%)$ =	-1.80	$\Delta \varepsilon(\%)$ =	-0.40
$\Delta \sigma(\%)$ =	-2.30	$\Delta \sigma(\%)$ =	-1.10	$\Delta \sigma(\%)$ =	0.60
1g Cε=	-0.2013	1g Cε=	-0.2010	1g Cε=	-0.2009
Cσ=	-0.0263	Cσ=	-0.0298	Cσ=	-0.0305
$\Delta \text{SAR}(\%)$ =	0.54	$\Delta \text{SAR}(\%)$ =	0.39	$\Delta \text{SAR}(\%)$ =	0.06
10g Cε=	-0.2558	10g Cε=	-0.2563	10g Cε=	-0.2564
Cσ=	-0.0528	Cσ=	-0.0525	Cσ=	-0.0525
$\Delta \text{SAR}(\%)$ =	0.74	$\Delta \text{SAR}(\%)$ =	0.52	$\Delta \text{SAR}(\%)$ =	0.07

Date	22-Oct	Date	22-Oct	Date	17-Oct
f(GHz)=	5.29	f(GHz)=	5.31	f(GHz)=	5.32
$\Delta \varepsilon(\%)$ =	-2.20	$\Delta \varepsilon(\%)$ =	-1.70	$\Delta \varepsilon(\%)$ =	-2.60
$\Delta \sigma(\%)$ =	-0.50	$\Delta \sigma(\%)$ =	-4.50	$\Delta \sigma(\%)$ =	-0.90
1g Cε=	-0.2008	1g Cε=	-0.2007	1g Cε=	-0.2006
Cσ=	-0.0318	Cσ=	-0.0330	Cσ=	-0.0336
$\Delta \text{SAR}(\%)$ =	0.46	$\Delta \text{SAR}(\%)$ =	0.49	$\Delta \text{SAR}(\%)$ =	0.55
10g Cε=	-0.2565	10g Cε=	-0.2566	10g Cε=	-0.2567
Cσ=	-0.0523	Cσ=	-0.0520	Cσ=	-0.0519
$\Delta \text{SAR}(\%)$ =	0.59	$\Delta \text{SAR}(\%)$ =	0.67	$\Delta \text{SAR}(\%)$ =	0.71

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Date	22-Oct	Date	17-Oct	Date	17-Oct
f(GHz)=	5.32	f(GHz)=	5.53	f(GHz)=	5.56
$\Delta\epsilon_r(\%)$ =	-2.30	$\Delta\epsilon_r(\%)$ =	-4.10	$\Delta\epsilon_r(\%)$ =	-4.20
$\Delta\sigma(\%)$ =	2.20	$\Delta\sigma(\%)$ =	1.60	$\Delta\sigma(\%)$ =	-1.20
1g C _ε =	-0.2006	1g C _ε =	-0.1995	1g C _ε =	-0.1994
C _σ =	-0.0336	C _σ =	-0.0429	C _σ =	-0.0437
Δ SAR(%)=	0.39	Δ SAR(%)=	0.75	Δ SAR(%)=	0.89
10g C _ε =	-0.2567	10g C _ε =	-0.2569	10g C _ε =	-0.2568
C _σ =	-0.0519	C _σ =	-0.0464	C _σ =	-0.0452
Δ SAR(%)=	0.48	Δ SAR(%)=	0.98	Δ SAR(%)=	1.13

Date	24-Oct	Date	17-Oct	Date	20-Oct
f(GHz)=	5.56	f(GHz)=	5.67	f(GHz)=	5.775
$\Delta\epsilon_r(\%)$ =	-0.80	$\Delta\epsilon_r(\%)$ =	-4.70	$\Delta\epsilon_r(\%)$ =	-1.70
$\Delta\sigma(\%)$ =	-0.80	$\Delta\sigma(\%)$ =	-0.70	$\Delta\sigma(\%)$ =	-0.20
1g C _ε =	-0.1994	1g C _ε =	-0.1990	1g C _ε =	-0.1987
C _σ =	-0.0437	C _σ =	-0.0454	C _σ =	-0.0452
Δ SAR(%)=	0.19	Δ SAR(%)=	0.97	Δ SAR(%)=	0.35
10g C _ε =	-0.2568	10g C _ε =	-0.2560	10g C _ε =	-0.2548
C _σ =	-0.0452	C _σ =	-0.0399	C _σ =	-0.0334
Δ SAR(%)=	0.24	Δ SAR(%)=	1.23	Δ SAR(%)=	0.44

Date	20-Oct	Date	23-Oct
f(GHz)=	5.795	f(GHz)=	5.825
$\Delta\epsilon_r(\%)$ =	-1.80	$\Delta\epsilon_r(\%)$ =	-2.50
$\Delta\sigma(\%)$ =	-0.80	$\Delta\sigma(\%)$ =	-2.10
1g C _ε =	-0.1986	1g C _ε =	-0.1985
C _σ =	-0.0450	C _σ =	-0.0445
Δ SAR(%)=	0.39	Δ SAR(%)=	0.59
10g C _ε =	-0.2545	10g C _ε =	-0.2540
C _σ =	-0.0320	C _σ =	-0.0299
Δ SAR(%)=	0.48	Δ SAR(%)=	0.70

The measured SAR results are corrected because Δ SAR has a negative sign.
Corrected SAR(1g) = Measured SAR(1g) * 1.0040

Date	20-Oct
f(GHz)=	5.825
$\Delta\epsilon_r(\%)$ =	1.40
$\Delta\sigma(\%)$ =	2.80
1g C _ε =	-0.1985
C _σ =	-0.0445
Δ SAR(%)=	-0.40
10g C _ε =	-0.2540
C _σ =	-0.0299
Δ SAR(%)=	-0.44

(4)Result of Body SAR

5.2GHz Band

Antenna Type A

Antenna 1

BODY SAR MEASUREMENT RESULTS													
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) $\angle$ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]
Channel	[MHz]		[dBm]	[mW]	[dBm]	[mW]		Antenna	Position	Separation [mm]			
Step.1 Position searching													
40	5200	11a 6Mbps	13.41	21.93	13.50	22.39	Flat	1	Top	0	0.254	N/A	0.259
40	5200	11a 6Mbps	13.41	21.93	13.50	22.39	Flat	1	Rear	0	0.489	N/A	0.499
40	5200	11a 6Mbps	13.41	21.93	13.50	22.39	Flat	1	Left	0	0.096	N/A	0.098

Antenna Type B

Antenna 1

BODY SAR MEASUREMENT RESULTS													
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) Δ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]
Channel	[MHz]		[dBm]	[mW]	[dBm]	[mW]		Antenna	Position	Separation [mm]			
Step.1 Position searching													
40	5200	11a 6Mbps	13.41	21.93	13.50	22.39	Flat	1	Top	0	0.123	N/A	0.126
40	5200	11a 6Mbps	13.41	21.93	13.50	22.39	Flat	1	Rear	0	0.573	N/A	0.585
40	5200	11a 6Mbps	13.41	21.93	13.50	22.39	Flat	1	Left	0	0.444	N/A	0.453
Step.2 Mode change at the worst position													
38	5190	11n40 MCS0	13.23	21.04	13.50	22.39	Flat	1	Rear	0	0.563	N/A	0.599
42	5210	11ac80 VHT0	13.21	20.94	13.50	22.39	Flat	1	Rear	0	0.777	N/A	0.831

*1 Refer to clause 9.2 (3).

*2 Reported SAR= Maximum tune-up tolerance limit [mW] / Measured power [mW] · Measured SAR(Δ SAR correct) [W/kg]

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

5.3GHz Band
Antenna Type A
Antenna 1

BODY SAR MEASUREMENT RESULTS													
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) $\angle$ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]
Channel	[MHz]		[dBm]	[mW]	[dBm]	[mW]		Antenna	Position	Separation [mm]			
Step.1 Position searching													
64	5320	11a 6Mbps	13.31	21.43	13.50	22.39	Flat	1	Top	0	0.079	N/A	0.083
64	5320	11a 6Mbps	13.31	21.43	13.50	22.39	Flat	1	Rear	0	0.248	N/A	0.259
64	5320	11a 6Mbps	13.31	21.43	13.50	22.39	Flat	1	Left	0	0.070	N/A	0.073

Antenna Type B
Antenna 1

BODY SAR MEASUREMENT RESULTS													
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) Δ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]
Channel	[MHz]		[dBm]	[mW]	[dBm]	[mW]		Antenna	Position	Separation [mm]			
Step.1 Position searching													
64	5320	11a 6Mbps	13.31	21.43	13.50	22.39	Flat	1	Top	0	0.347	N/A	0.363
64	5320	11a 6Mbps	13.31	21.43	13.50	22.39	Flat	1	Rear	0	0.836	N/A	0.873
64	5320	11a 6Mbps	13.31	21.43	13.50	22.39	Flat	1	Left	0	0.666	N/A	0.696
Step.2 Mode change at the worst position													
54	5270	11n40 MCS0	13.36	21.68	13.50	22.39	Flat	1	Rear	0	0.819	N/A	0.846
58	5290	11ac80 VHT0	13.45	22.13	13.50	22.39	Flat	1	Rear	0	0.793	N/A	0.802
Step.3 Channel change (SAR level in Step.1 to 2 > 0.8 W/kg)													
52	5260	11a 6Mbps	13.27	21.23	13.50	22.39	Flat	1	Rear	0	1.10	N/A	1.16
62	5310	11n40 MCS0	13.28	21.28	13.50	22.39	Flat	1	Rear	0	0.885	N/A	0.931
Step.3 Repeat measurement of worst mode (Measured SAR level in Step.1 to Step.3 > 0.8 w/kg)													
52	5260	11a 6Mbps	13.27	21.23	13.50	22.39	Flat	1	Rear	0	1.02	N/A	1.08

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

5.6GHz Band
Antenna Type A
Antenna 1

BODY SAR MEASUREMENT RESULTS													
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) $\angle$ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]
Channel	[MHz]		[dBm]	[mW]	[dBm]	[mW]		Antenna	Position	Separation [mm]			
Step.1 Position searching													
112	5560	11a 6Mbps	13.47	22.23	13.50	22.39	Flat	1	Top	0	0.190	N/A	0.191
112	5560	11a 6Mbps	13.47	22.23	13.50	22.39	Flat	1	Rear	0	0.286	N/A	0.288
112	5560	11a 6Mbps	13.47	22.23	13.50	22.39	Flat	1	Left	0	0.058	N/A	0.059
Step.2 Mode change at the worst position													
134	5670	11n40 MCS0	13.43	22.03	13.50	22.39	Flat	1	Rear	0	0.377	N/A	0.383
106	5530	11ac80 VHT0	13.41	21.93	13.50	22.39	Flat	1	Rear	0	0.353	N/A	0.360

Antenna Type B
Antenna 1

BODY SAR MEASUREMENT RESULTS													
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) Δ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]
Channel	[MHz]		[dBm]	[mW]	[dBm]	[mW]		Antenna	Position	Separation [mm]			
Step.1 Position searching													
112	5560	11a 6Mbps	13.47	22.23	13.50	22.39	Flat	1	Top	0	0.177	N/A	0.178
112	5560	11a 6Mbps	13.47	22.23	13.50	22.39	Flat	1	Rear	0	0.277	N/A	0.279
112	5560	11a 6Mbps	13.47	22.23	13.50	22.39	Flat	1	Left	0	0.225	N/A	0.227

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

5.8GHz Band
Antenna Type A
Antenna 1

BODY SAR MEASUREMENT RESULTS													
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) Δ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]
Step.1 Position searching													
165	5825	11a 6Mbps	13.46	22.18	13.50	22.39	Flat	1	Top	0	0.307	0.308	0.311
165	5825	11a 6Mbps	13.46	22.18	13.50	22.39	Flat	1	Rear	0	0.560	0.562	0.567
165	5825	11a 6Mbps	13.46	22.18	13.50	22.39	Flat	1	Left	0	0.196	0.197	0.199
Step.2 Mode change at the worst position													
158	5795	11n40 MCS0	13.36	21.68	13.50	22.39	Flat	1	Rear	0	0.457	N/A	0.472
155	5775	11ac80 VHT0	13.49	22.34	13.50	22.39	Flat	1	Rear	0	0.397	N/A	0.398

Antenna Type B
Antenna 1

BODY SAR MEASUREMENT RESULTS													
Frequency		Modulation	Measured power		Maximum tune-up tolerance limit		Phantom Section	EUT Set-up Conditions			Measured SAR(1g) [W/kg]	Measured SAR(1g) Δ SAR correct [W/kg] *1	Reported SAR(1g) *2 [W/kg]
Channel	[MHz]		[dBm]	[mW]	[dBm]	[mW]		Antenna	Position	Separation [mm]			
Step.1 Position searching													
165	5825	11a 6Mbps	13.46	22.18	13.50	22.39	Flat	1	Top	0	0.305	N/A	0.308
165	5825	11a 6Mbps	13.46	22.18	13.50	22.39	Flat	1	Rear	0	0.458	N/A	0.462
165	5825	11a 6Mbps	13.46	22.18	13.50	22.39	Flat	1	Left	0	0.448	N/A	0.452

*1 Refer to clause 9.2 (3).

*2 Reported SAR= Maximum tune-up tolerance limit [mW] / Measured power [mW] · Measured SAR(Δ SAR correct) [W/kg]

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

SECTION 10 Simultaneous Transmission

10.1 Possible simultaneous transmission combination

Usage Scenario	Modes	Mode of Operation	BAND	802.11b/g/n WLAN Antenna1	802.11b/g/n WLAN Antenna2	802.11a/n/ac WLAN Antenna1	802.11a/n/ac WLAN Antenna2	BT 2.4 GHz
Body SAR	2.4GHz WLAN SISO + BT (WLAN 1 Tx)	802.11b/g/n WLAN Antenna1	2.4 GHz	YES	No	No	No	YES
		802.11b/g/n WLAN Antenna2	2.4 GHz	No	No	No	No	No
	5 GHz Bands WLAN SISO + BT (WLAN 1 Tx)	802.11a/n/ac WLAN Antenna1	5 GHz Bands	No	No	YES	No	YES
		802.11a/n/ac WLAN Antenna2	5 GHz Bands	No	No	No	No	No

1. Bluetooth transmits using the Antenna2
2. Bluetooth can transmit simultaneously with the WLAN Antenna1, in either of the WLAN bands.
3. With a maximum output power of **6.0 mW** (7.78 dBm), Bluetooth qualifies for Standalone SAR test exclusion based on the formula for Standalone SAR test exclusion considerations outlined in KDB 447498 D01 . For the exact value that this formula yields, please refer to **Section 6** of this report.

10.2 Estimated SAR for simultaneous transmission SAR analysis

Considerations for using estimated SAR values:

1. According to KDB 447498 § 4.1.5 if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations is 0mm.
2. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
3. Output power is the maximum rated power (including tune-up or manufacturing tolerances) and includes source-based averaging.
4. If the antenna separation distance is > 50mm then the estimated SAR value is 0.4 W/Kg.
5. Formulas round separation distance to nearest mm and power to nearest mW before calculating estimated SAR

Estimated SAR for WLAN 1 Tx (SISO) and Bluetooth

Antenna	Tx	Frequency (MHz)	Output power		Separation distances(mm)						Estimated SAR Value					
			dBm	mW	Top	Rear	Left	Right	Bottom	Front	Top	Rear	Left	Right	Bottom	Front
WLAN - Antenna 1																
WLAN Ant.1	WiFi	2462	15.00	32	0.00	0.00	0.00	283.5	187.2		Measure	Measure	Measure	>200 mm	0.400	N/A
WLAN Ant.1	WiFi	5240	13.50	22	0.00	0.00	0.00	283.5	187.2		Measure	Measure	Measure	>200 mm	0.400	N/A
WLAN Ant.1	WiFi	5320	13.50	22	0.00	0.00	0.00	283.5	187.2		Measure	Measure	Measure	>200 mm	0.400	N/A
WLAN Ant.1	WiFi	5700	13.50	22	0.00	0.00	0.00	283.5	187.2		Measure	Measure	Measure	>200 mm	0.400	N/A
WLAN Ant.1	WiFi	5825	13.50	22	0.00	0.00	0.00	283.5	187.2		Measure	Measure	Measure	>200 mm	0.400	N/A
Bluetooth - Antenna 2																
Ant.2	Bluetooth	2480	7.78	6	0.00	0.00	92.5	200.5	187.2		0.252	0.252	0.400	>200 mm	0.400	N/A

10.3 Simultaneous transmission SAR analysis

(1) Top position for WLAN + Bluetooth

Test Position	WLAN Antenna1	Bluetooth	Σ 1-g SAR (mW/g)
Top, 2.4 GHz Antenna typeA	0.110	0.252	0.362
Top, 2.4 GHz Antenna typeB	0.256	0.252	0.508
Top, 5.2 GHz Antenna typeA	0.259	0.252	0.511
Top, 5.2 GHz Antenna typeB	0.126	0.252	0.378
Top, 5.3 GHz Antenna typeA	0.083	0.252	0.335
Top, 5.3 GHz Antenna typeB	0.363	0.252	0.615
Top, 5.6 GHz Antenna typeA	0.191	0.252	0.443
Top, 5.6 GHz Antenna typeA	0.178	0.252	0.430
Top, 5.8 GHz Antenna typeA	0.311	0.252	0.563
Top, 5.8 GHz Antenna typeB	0.308	0.252	0.560

- Values shaded green are estimated SAR

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

(2) Rear position for WLAN + Bluetooth

Test Position	WLAN Antenna1	Bluetooth	Σ 1-g SAR (mW/g)
Rear, 2.4 GHz Antenna typeA	0.703	0.252	0.955
Rear, 2.4 GHz Antenna typeB	0.678	0.252	0.930
Rear, 5.2 GHz Antenna typeA	0.499	0.252	0.751
Rear, 5.2 GHz Antenna typeB	0.831	0.252	1.083
Rear, 5.3 GHz Antenna typeA	0.492	0.252	0.744
Rear, 5.3 GHz Antenna typeB	1.16	0.252	1.412
Rear, 5.6 GHz Antenna typeA	0.383	0.252	0.635
Rear, 5.6 GHz Antenna typeA	0.279	0.252	0.531
Rear, 5.8 GHz Antenna typeA	0.567	0.252	0.819
Rear, 5.8 GHz Antenna typeB	0.462	0.252	0.714

- Values shaded green are estimated SAR

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

(3) Left position for WLAN + Bluetooth

Test Position	WLAN Antenna1	Bluetooth	Σ 1-g SAR (mW/g)
Left, 2.4 GHz Antenna typeA	0.440	0.400	0.840
Left, 2.4 GHz Antenna typeB	0.172	0.400	0.572
Left, 5.2 GHz Antenna typeA	0.098	0.400	0.498
Left, 5.2 GHz Antenna typeB	0.453	0.400	0.853
Left, 5.3 GHz Antenna typeA	0.073	0.400	0.473
Left, 5.3 GHz Antenna typeB	0.696	0.400	1.096
Left, 5.6 GHz Antenna typeA	0.059	0.400	0.459
Left, 5.6 GHz Antenna typeA	0.227	0.400	0.627
Left, 5.8 GHz Antenna typeA	0.199	0.400	0.599
Left, 5.8 GHz Antenna typeB	0.452	0.400	0.852

- Values shaded green are estimated SAR

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

(4) Bottom position for WLAN + Bluetooth

Test Position	WLAN Antenna1	Bluetooth	Σ 1-g SAR (mW/g)
Bottom, 2.4 GHz Antenna typeA	0.400	0.400	0.800
Bottom, 2.4 GHz Antenna typeB	0.400	0.400	0.800
Bottom, 5.2 GHz Antenna typeA	0.400	0.400	0.800
Bottom, 5.2 GHz Antenna typeB	0.400	0.400	0.800
Bottom, 5.3 GHz Antenna typeA	0.400	0.400	0.800
Bottom, 5.3 GHz Antenna typeB	0.400	0.400	0.800
Bottom, 5.6 GHz Antenna typeA	0.400	0.400	0.800
Bottom, 5.6 GHz Antenna typeA	0.400	0.400	0.800
Bottom, 5.8 GHz Antenna typeA	0.400	0.400	0.800
Bottom, 5.8 GHz Antenna typeB	0.400	0.400	0.800

- Values shaded green are estimated SAR

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

SECTION 11 Test instruments

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MVNA-01	Vector Network Analyzer	Schmid&Partner Engineering AG	PLANAR R140	0030913	SAR	2014/01/09 * 12
MOS-37	Digital thermometer	LKM electronic	DTM3000	-	SAR	2014/07/06 * 12
MDPK-03	Dielectric assessment kit	Schmid&Partner Engineering AG	DAK-3.5 Probe	0008	SAR	2014/03/04 * 12
COTS-MSAR-04	Dielectric assessment kit	Schmid&Partner Engineering AG	DAK		SAR	-
MPM-15	Power Meter	Agilent	N1914A	MY53060017	SAR	2014/06/20 * 12
MPSE-20	Power sensor	Agilent	N8482H	MY53050001	SAR	2014/06/20 * 12
MPSE-21	Power sensor	Agilent	N8482H	MY52460010	SAR	2014/07/02 * 12
MHDC-22	Directional Coupler	Agilent	87300B	14893A	SAR	Pre Check
MRFA-24	Pre Amplifier	R&K	R&K CGA020M602-2633R	B30550	SAR	2014/06/19 * 12
MSG-13	Signal Generator	Rohde & Schwarz	SMA 100A	103764	SAR	2014/06/19 * 12
MDA-07	Dipole Antenna	Schmid&Partner Engineering AG	D2450V2	713	SAR(D2450)	2013/09/10 * 24
MDA-08	Dipole Antenna	Schmid&Partner Engineering AG	D5GHzV2	1020	SAR(D5G)	2014/01/17 * 12
MDAE-02	Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE4	1369	SAR	2014/05/14 * 12
MPB-08	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3917	SAR	2014/05/14 * 12
MPF-04	2mm Oval Flat Phantom	Schmid&Partner Engineering AG	QDOVA001BB	1207	SAR	2014/06/03 * 12
MDH-04	Device holder	Schmid&Partner Engineering AG	Mounting device for transmitter	-	SAR	Pre Check
MOS-30	Thermo-Hygrometer	Custom	CTH-201	3001	SAR	2014/07/06 * 12
MOS-35	Digital thermometer	HANNA	Checktemp 4	-	SAR	2014/07/06 * 12
COTS-MSAR-03	Dasy5	Schmid&Partner Engineering AG	DASY5	-	SAR	-
MRBT-03	SAR robot	Schmid&Partner Engineering AG	TX60 Lspeag	F13/5PP1D1/A/01	SAR	2014/06/24 * 12
MDAE-01	Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE4	509	SAR	2014/07/28 * 12
MPB-07	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3825	SAR	2013/12/13 * 12
MPF-02	2mm Oval Flat Phantom	Schmid&Partner Engineering AG	QDOVA001BB	1045	SAR	2014/05/30 * 12
MDH-01	Device holder	Schmid&Partner Engineering AG	Mounting device for transmitter	-	SAR	Pre Check
MOS-10	Digital thermometer	HANNA	Checktemp-2	MOS-10	SAR	2014/08/06 * 12
MOS-26	Thermo-Hygrometer	CUSTOM	CTH-201	A08Q29	SAR	2014/05/20 * 12
MRBT-02	SAR robot	Schmid&Partner Engineering AG	TX60 Lspeag	F10/5E3LA1/A/01	SAR	2014/05/09 * 12
MSL2450					Daily check	Target value $\pm$ 5%
MBBL3.5-5.8					Daily check	Target value $\pm$ 5%
SAR Room					Daily check	Ambient Noise<0.012W/kg

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

APPENDIX 1 : SAR Measurement data

1. Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and the horizontal grid spacing was 15 mm x 15 mm, 12 mm x 12 mm or 10mm x 10mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point found in the Step 2 (area scan), a volume of 30mm x 30mm x 30mm or more was assessed by measuring 7 x 7 x 7 points at least for below 3GHz and a volume of 28 mm x 28mm x 22.5mm or more was assessed by measuring 8 x 8 x 6(ratio step method (*1)) points at least for 5GHz band.

And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

(1). The data at the surface were extrapolated, since the center of the dipoles is 1mm(EX3DV4) away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

(2). The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

(3). All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the E-field at the same location as in Step 1.

***1. Ratio step method parameters used;**

The first measurement point: 2mm from the phantom surface, the initial grid separation: 2mm, subsequent graded grid ratio: 1.5
These parameters comply with the requirement of the KDB 865664D01.

2. Measurement data

i) WLAN Body 2.4GHz Band

WLAN 11b 1Mbps Ant.1 Top 0mm 2437MHz

Communication System: UID 0, WLAN 2.4G 11b/g/n (0); Communication System Band: WLAN 2.4G 11b/g/n;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.262$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.203 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.752 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

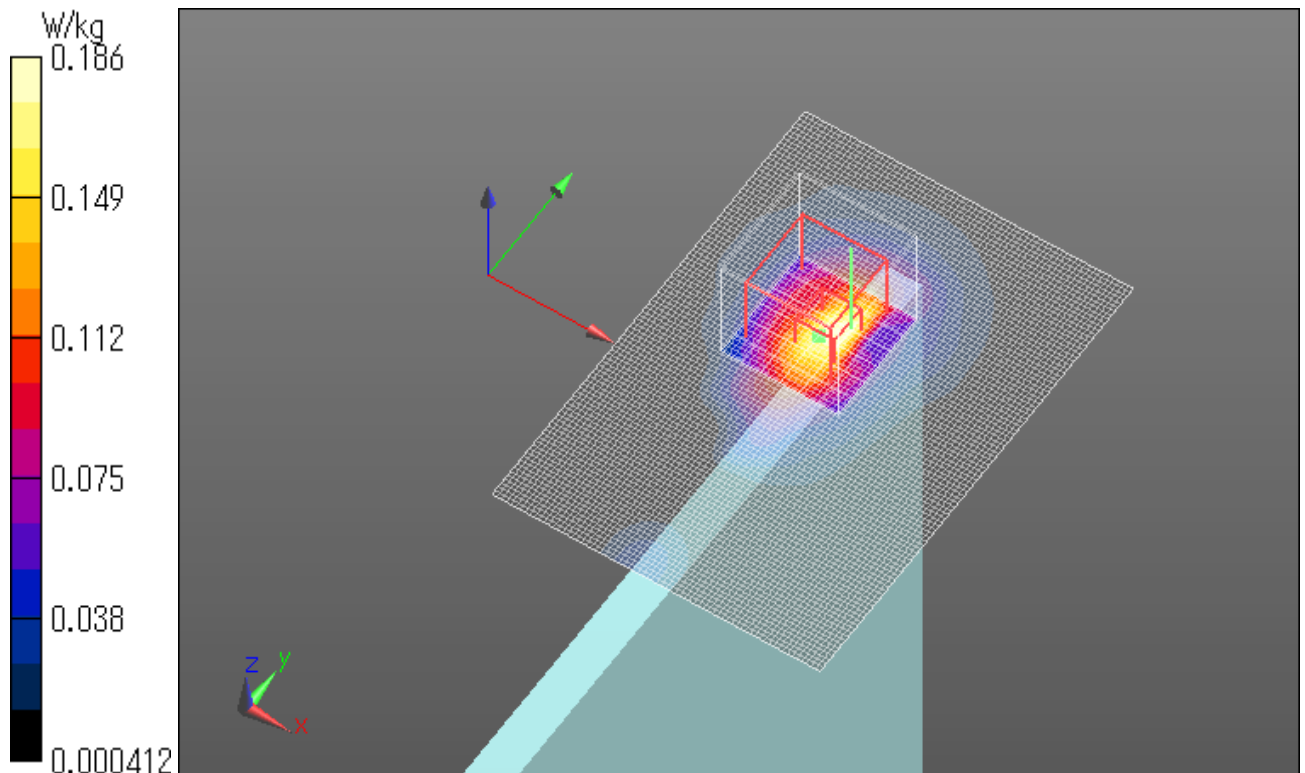

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11b 1Mbps Ant.1 Rear 0mm 2437MHz

Communication System: UID 0, WLAN 2.4G 11b/g/n (0); Communication System Band: WLAN 2.4G 11b/g/n;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.262$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.25 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.32 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

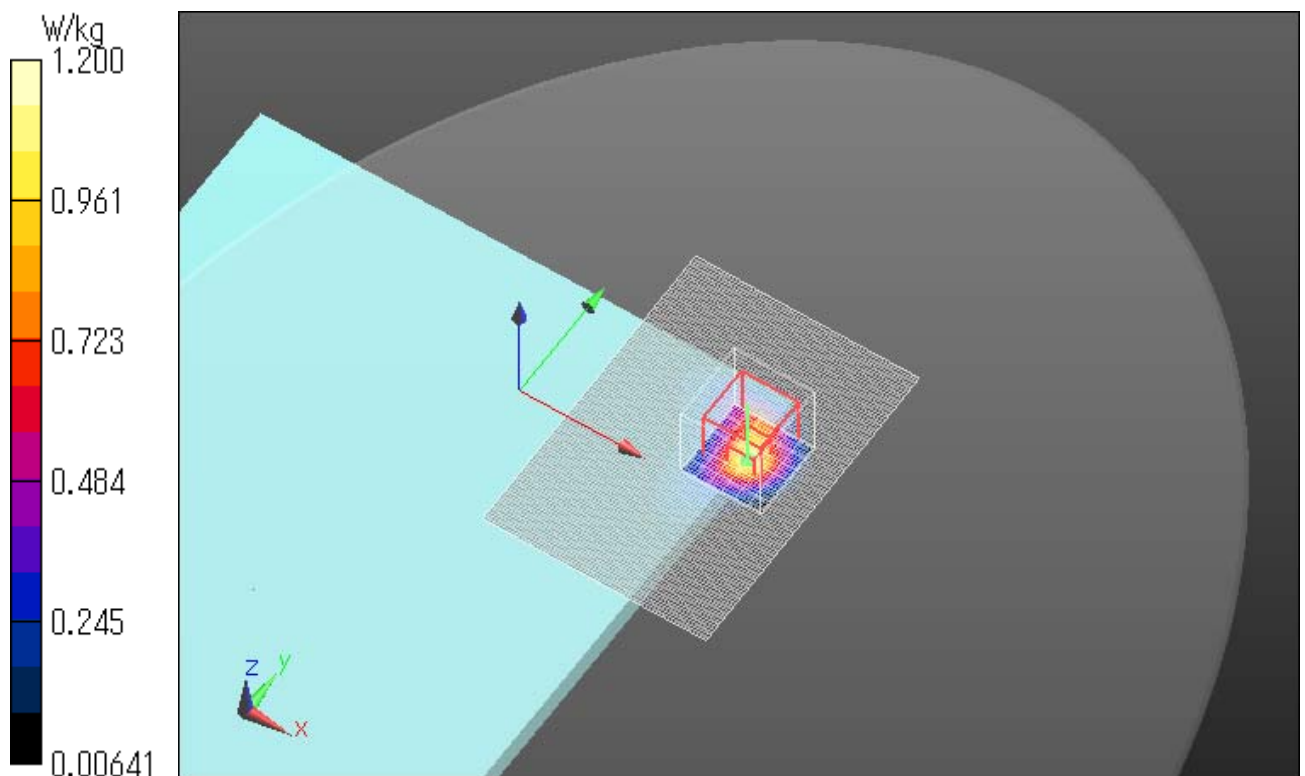

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11b 1Mbps Ant.1 Left 0mm 2437MHz

Communication System: UID 0, WLAN 2.4G 11b/g/n (0); Communication System Band: WLAN 2.4G 11b/g/n;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.262$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.679 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.72 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.760 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

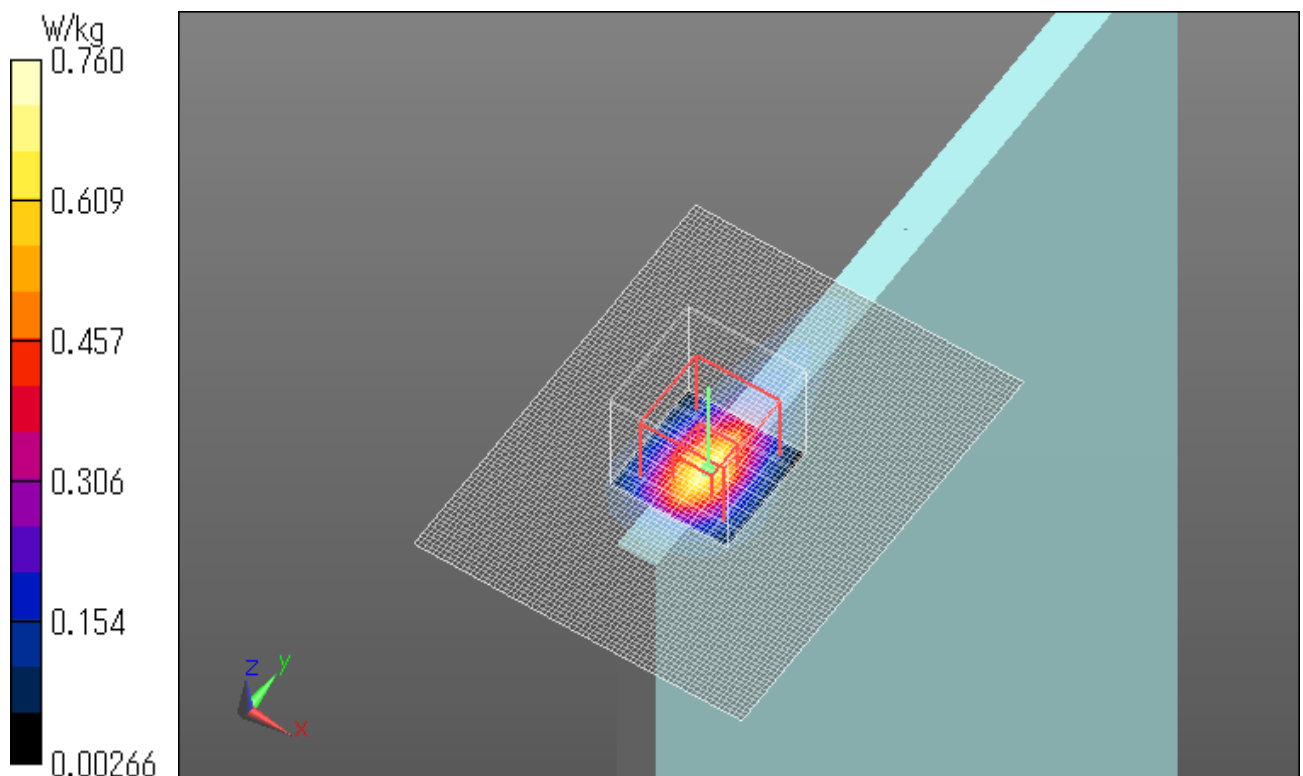

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11n40 MCS0 Ant.1 Rear 0mm 2437MHz

Communication System: UID 0, WLAN 2.4G 11b/g/n (0); Communication System Band: WLAN 2.4G 11b/g/n;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.262$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.34 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.85 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

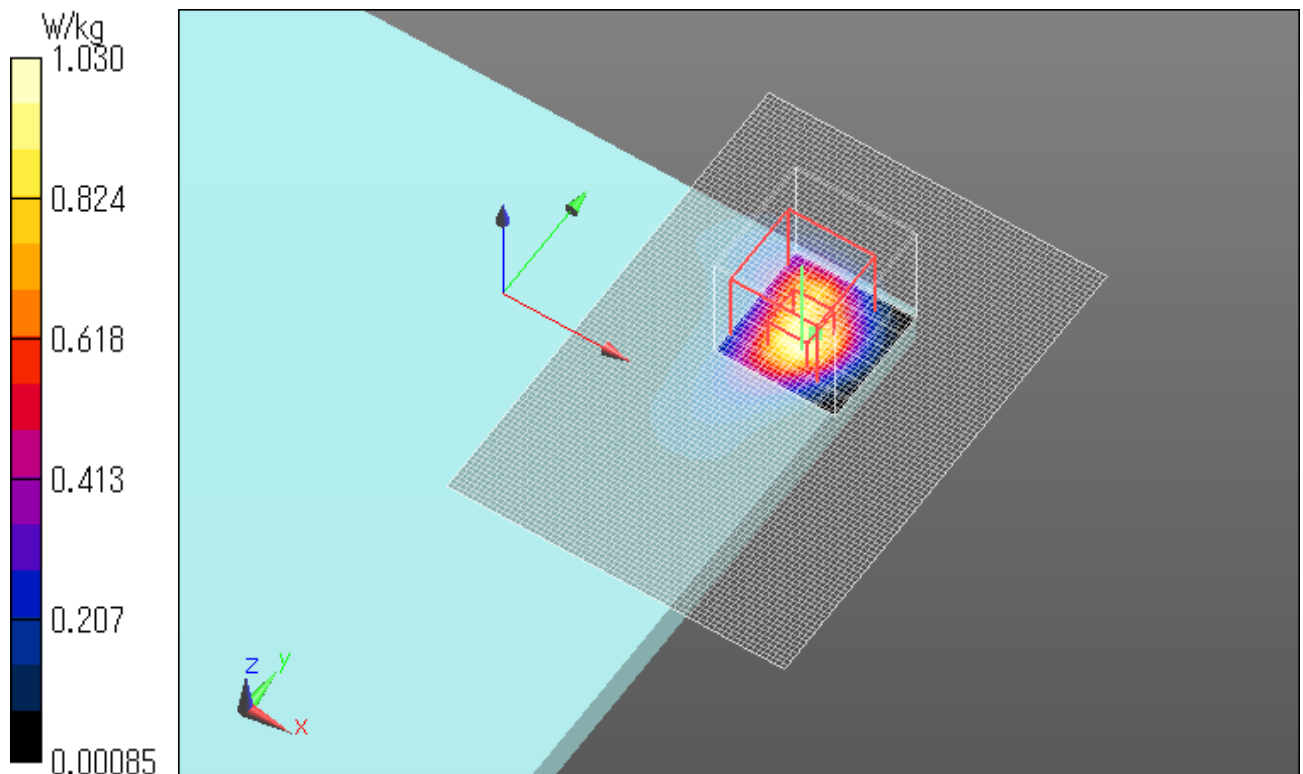

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11b 1Mbps Ant.1 Top 0mm 2437MHz

Communication System: UID 0, WLAN 2.4G 11b/g/n (0); Communication System Band: WLAN 2.4G 11b/g/n;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.262$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.462 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.47 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.459 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

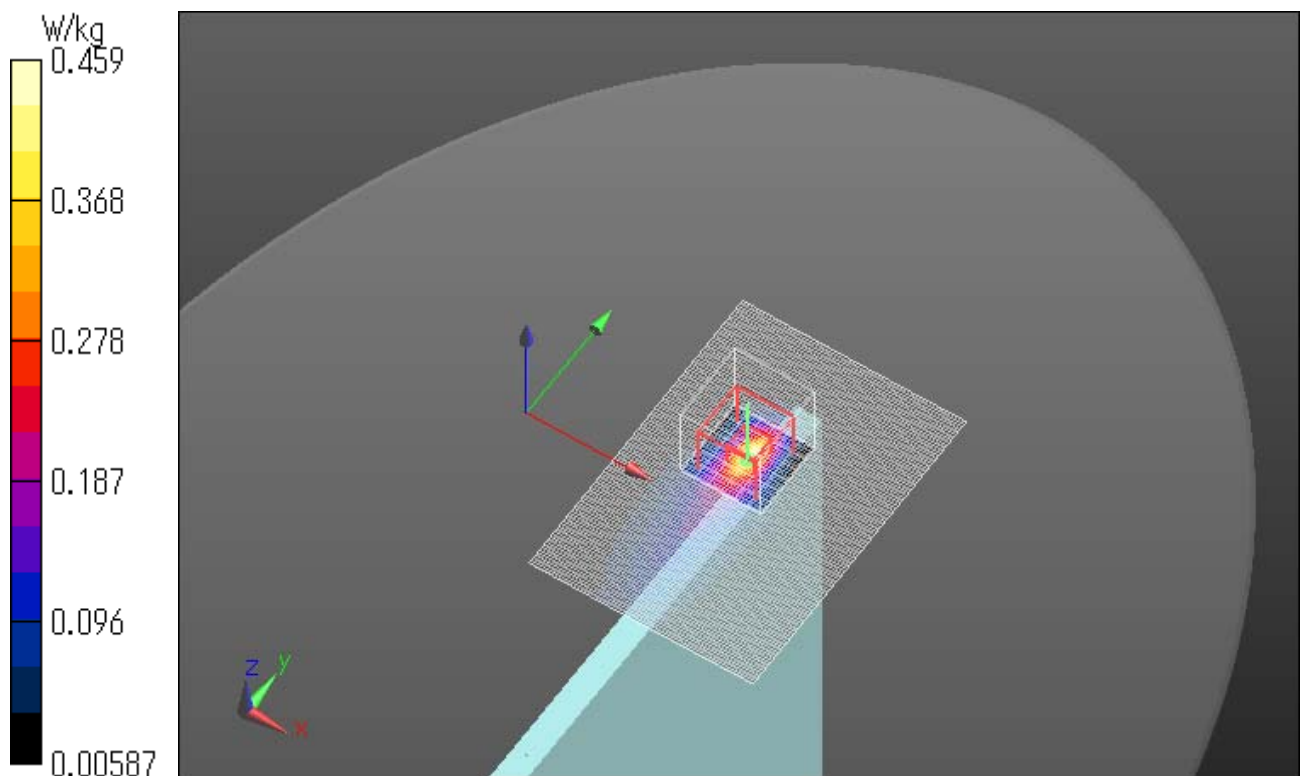

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11b 1Mbps Ant.1 Rear 0mm 2437MHz

Communication System: UID 0, WLAN 2.4G 11b/g/n (0); Communication System Band: WLAN 2.4G 11b/g/n;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.262$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.45 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.78 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

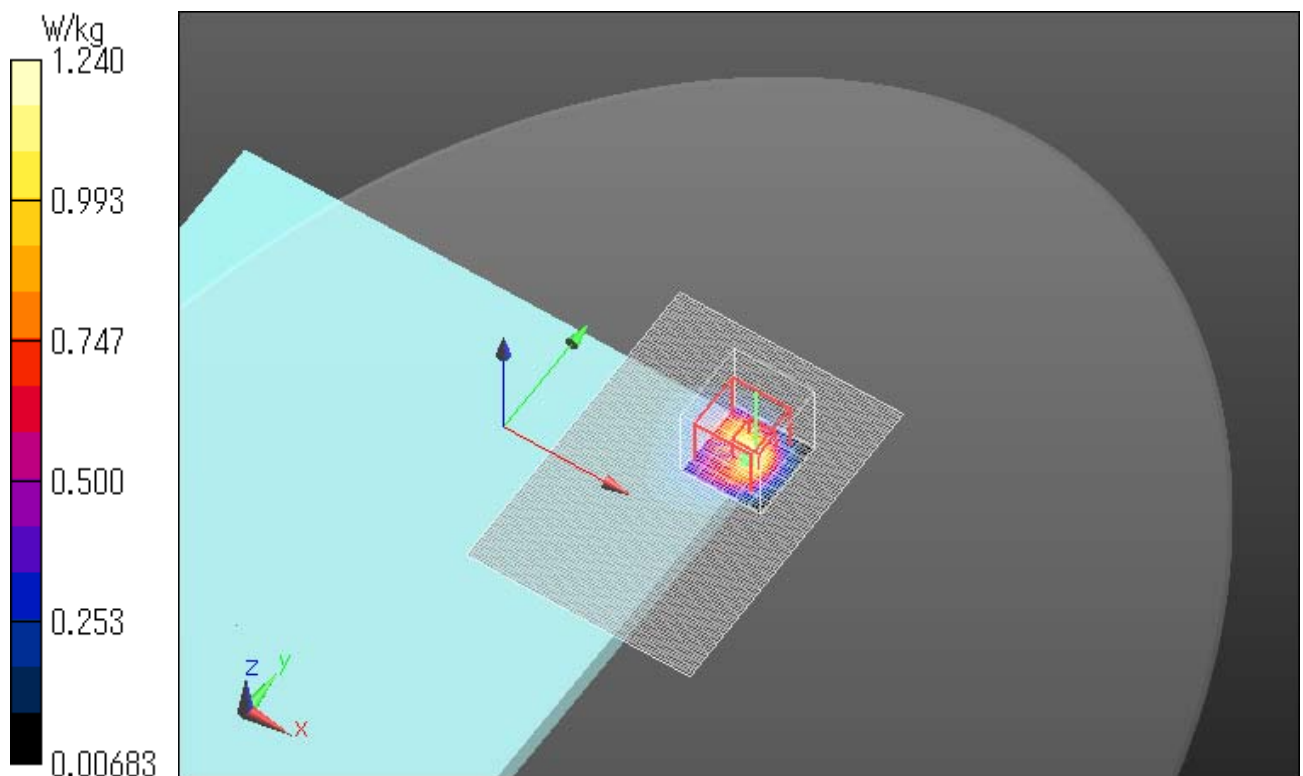

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11b 1Mbps Ant.1 Left 0mm 2437MHz

Communication System: UID 0, WLAN 2.4G 11b/g/n (0); Communication System Band: WLAN 2.4G 11b/g/n;

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 51.262$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.278 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.57 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

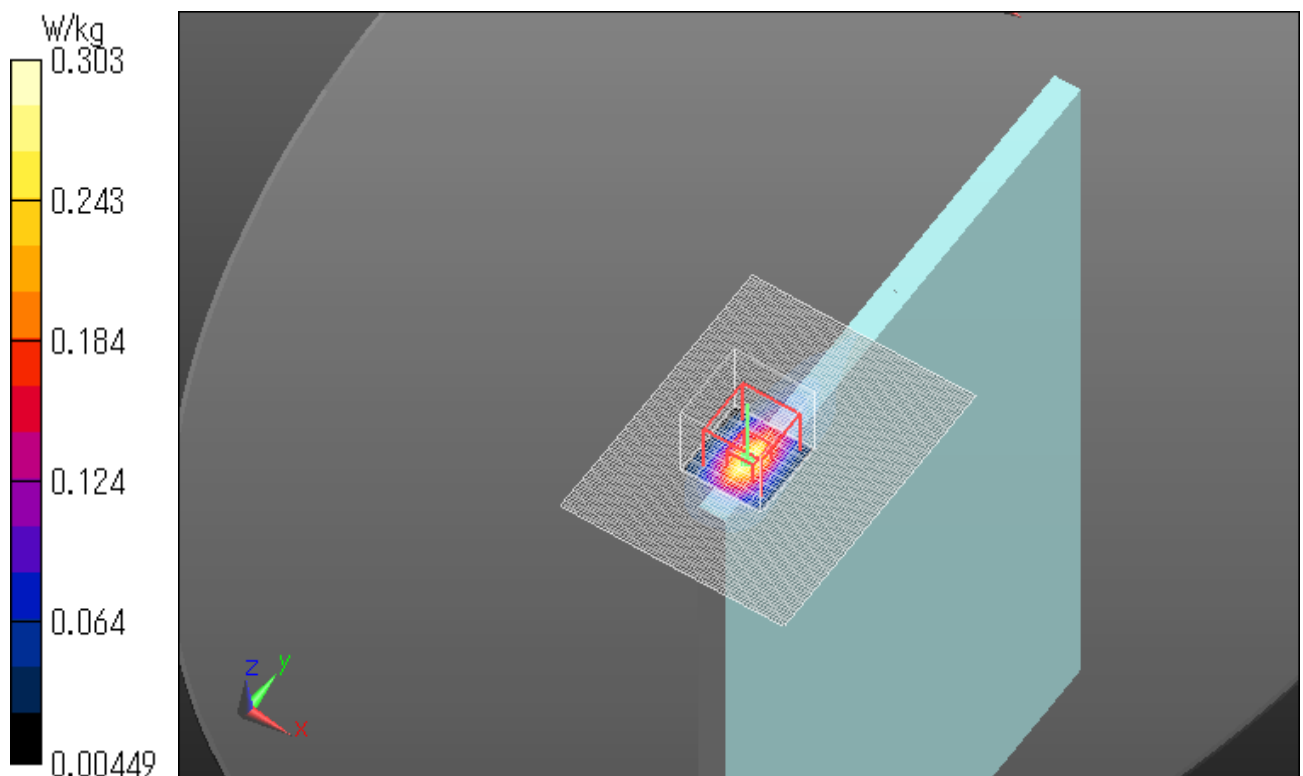

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

ii) WLAN Body 5.2GHz Band

WLAN 11a 6Mbps Ant.1 Top 0mm 5200MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.332$ S/m; $\epsilon_r = 47.66$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.647 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 12.01 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.555 W/kg

Date: 2014/10/16

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

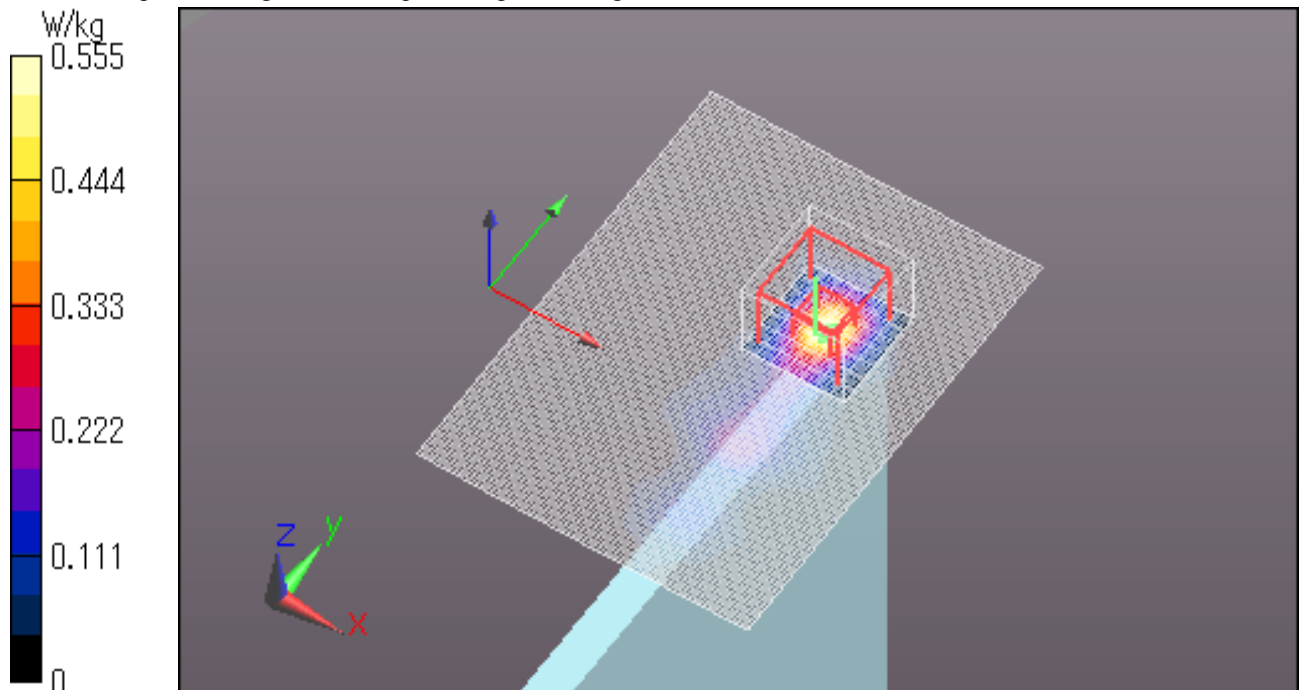

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11a 6Mbps Ant.1 Rear 0mm 5200MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.332 \text{ S/m}$; $\epsilon_r = 47.66$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.999 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 16.48 V/m ; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.489 W/kg ; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

Date: 2014/10/16

Ambient Temp. : 24.0 degree.C . Liquid Temp.; 23.5 degree.C .

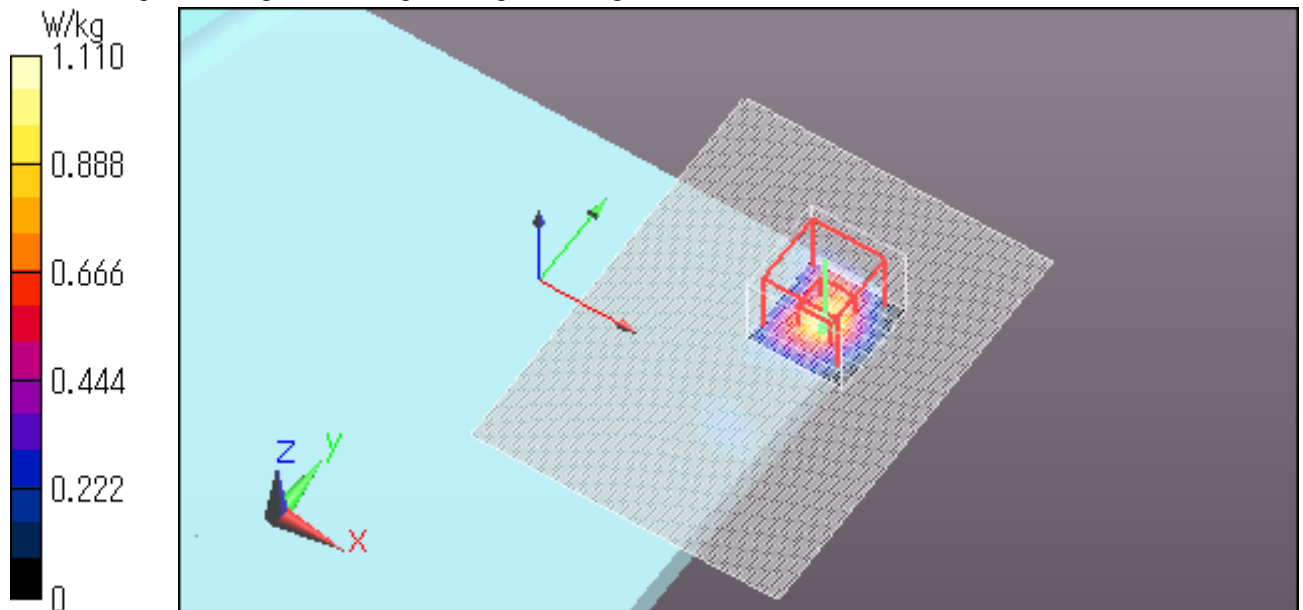

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11a 6Mbps Ant.1 Left 0mm 5200MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.332$ S/m; $\epsilon_r = 47.66$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.294 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.023 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.252 W/kg

Date: 2014/10/16

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

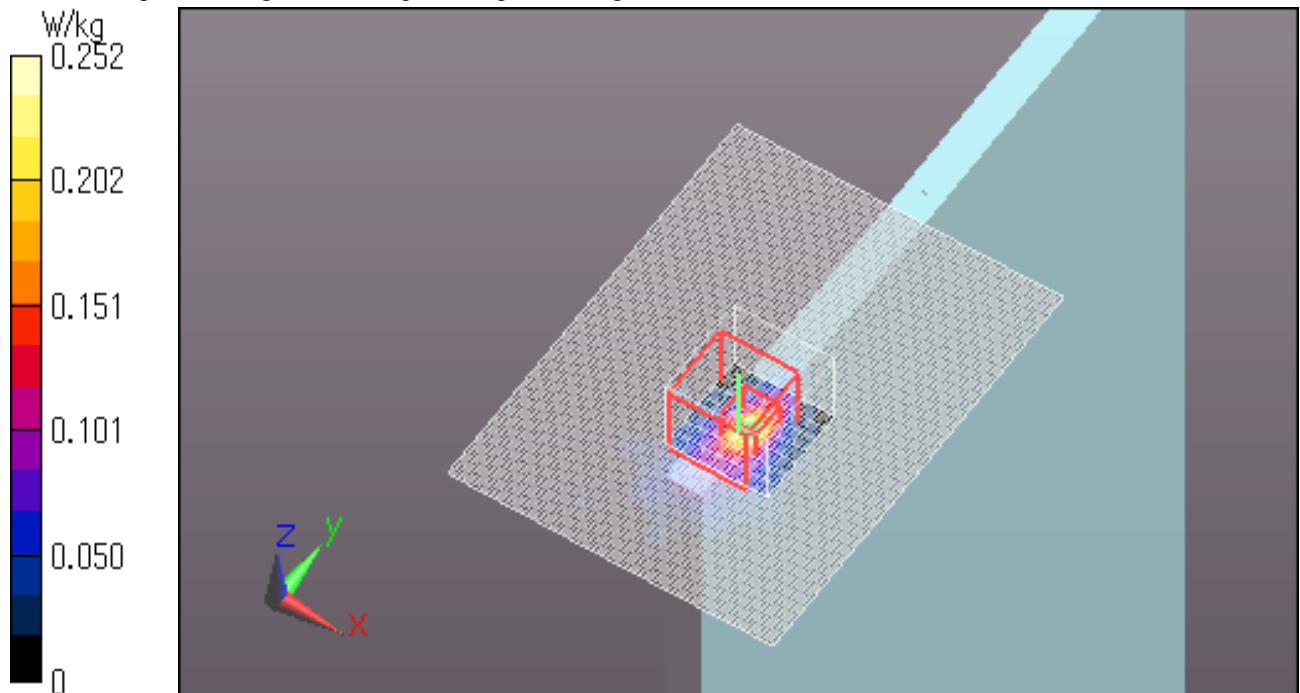

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Top 0mm 5200MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.344$ S/m; $\epsilon_r = 48.429$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.324 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.819 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

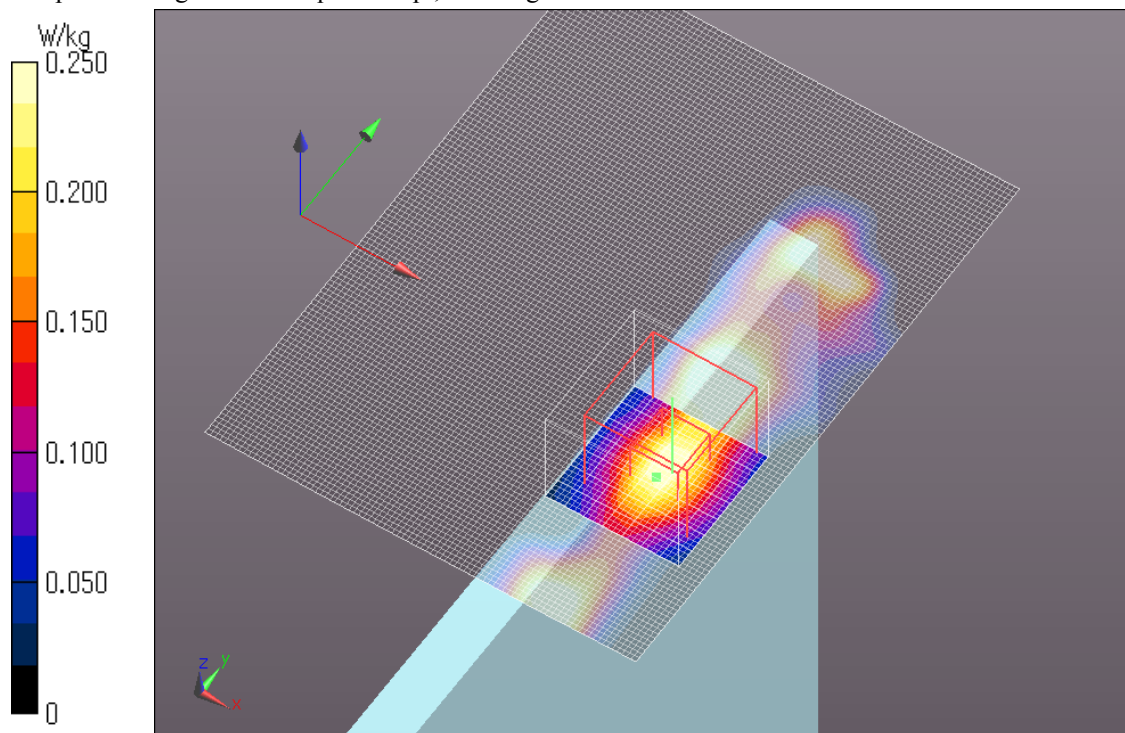

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Rear 0mm 5200MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.344$ S/m; $\epsilon_r = 48.429$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.46 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 13.10 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

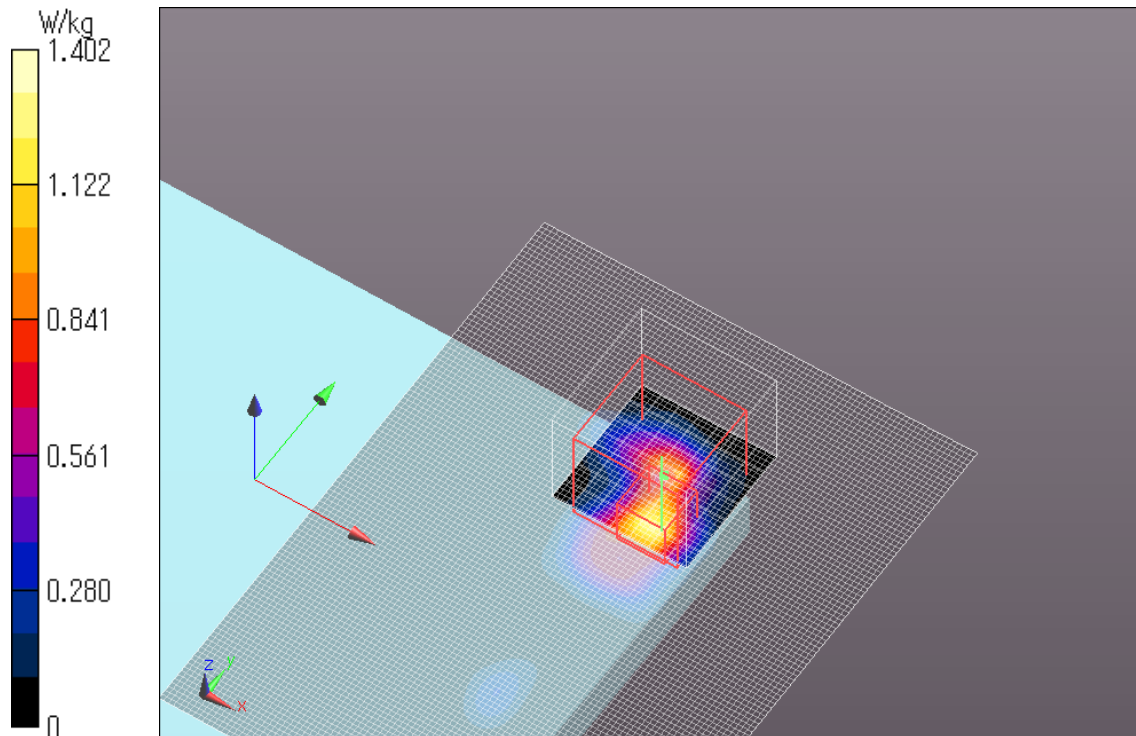

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Left 0mm 5200MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.344$ S/m; $\epsilon_r = 48.429$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 16.81 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

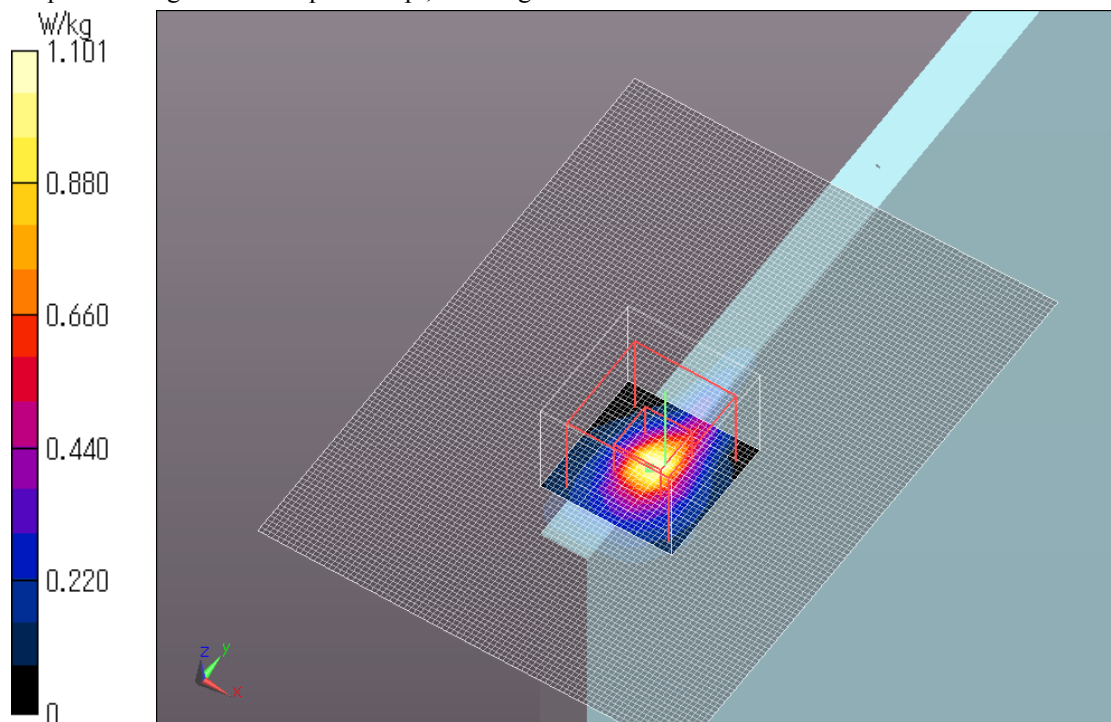

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11n40 MCS0 Ant.1 Rear 0mm 5190MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.261$ S/m; $\epsilon_r = 48.084$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.45 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 17.60 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

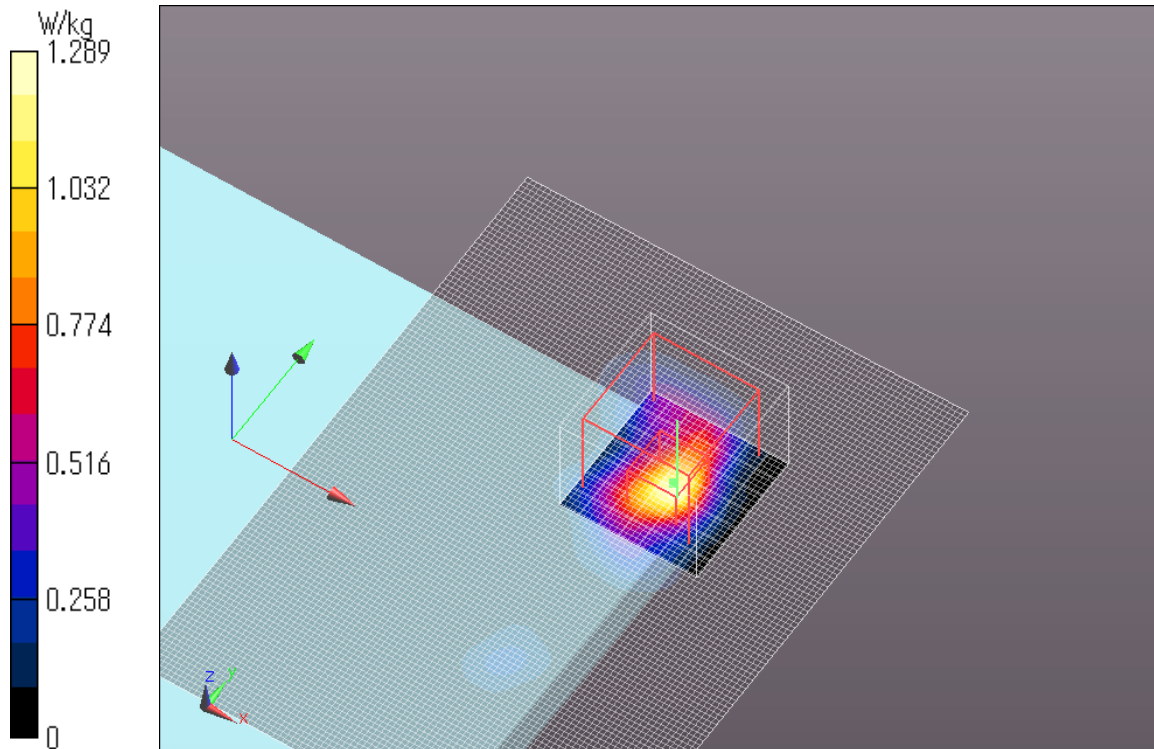

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11ac80 VHT0 Ant.1 Rear 0mm 5210MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5210$ MHz; $\sigma = 5.226$ S/m; $\epsilon_r = 47.772$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.69 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 17.92 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 3.28 W/kg

SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 1.80 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

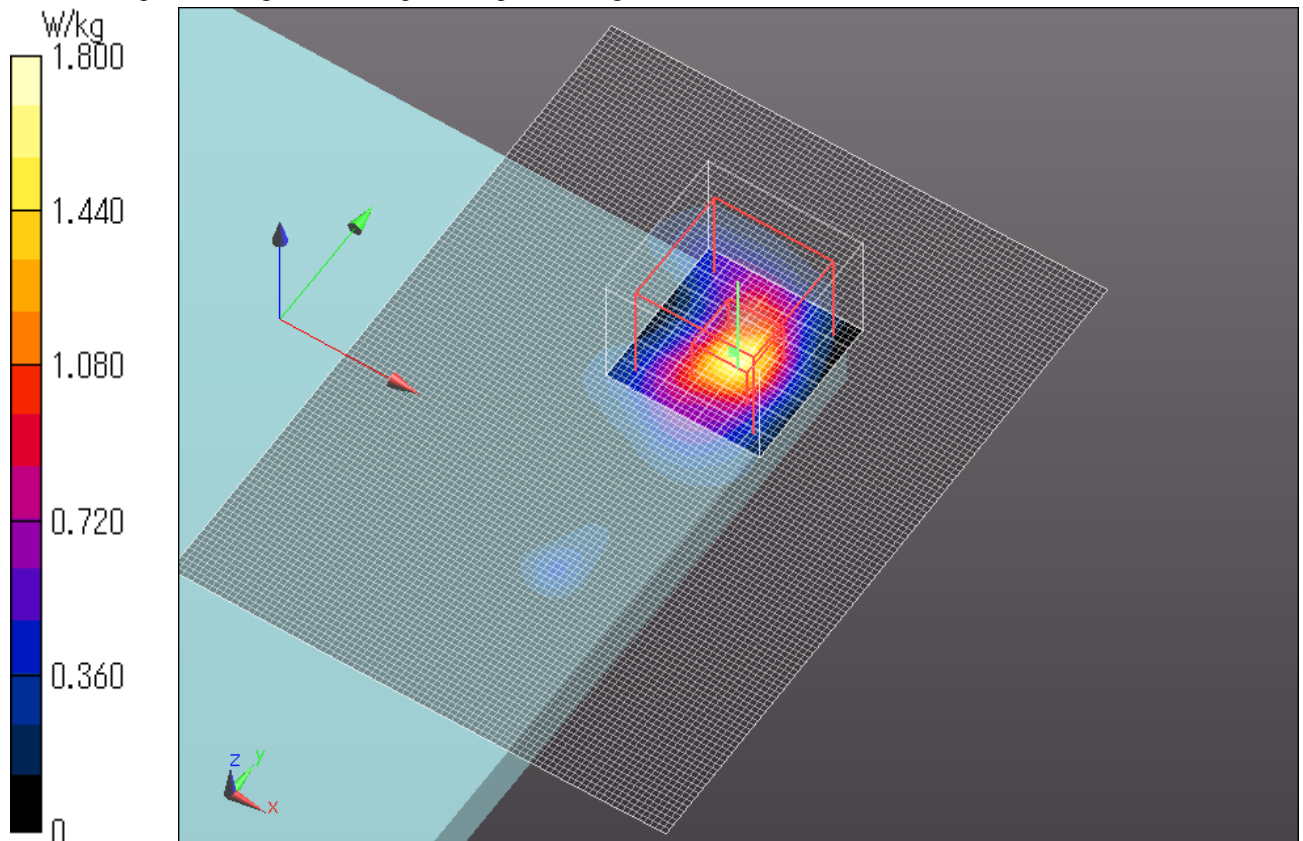

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

iii) WLAN Body 5.3GHz Band

WLAN 11a 6Mbps Ant.1 Top 0mm 5320MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.395$ S/m; $\epsilon_r = 47.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.272 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.119 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.191 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

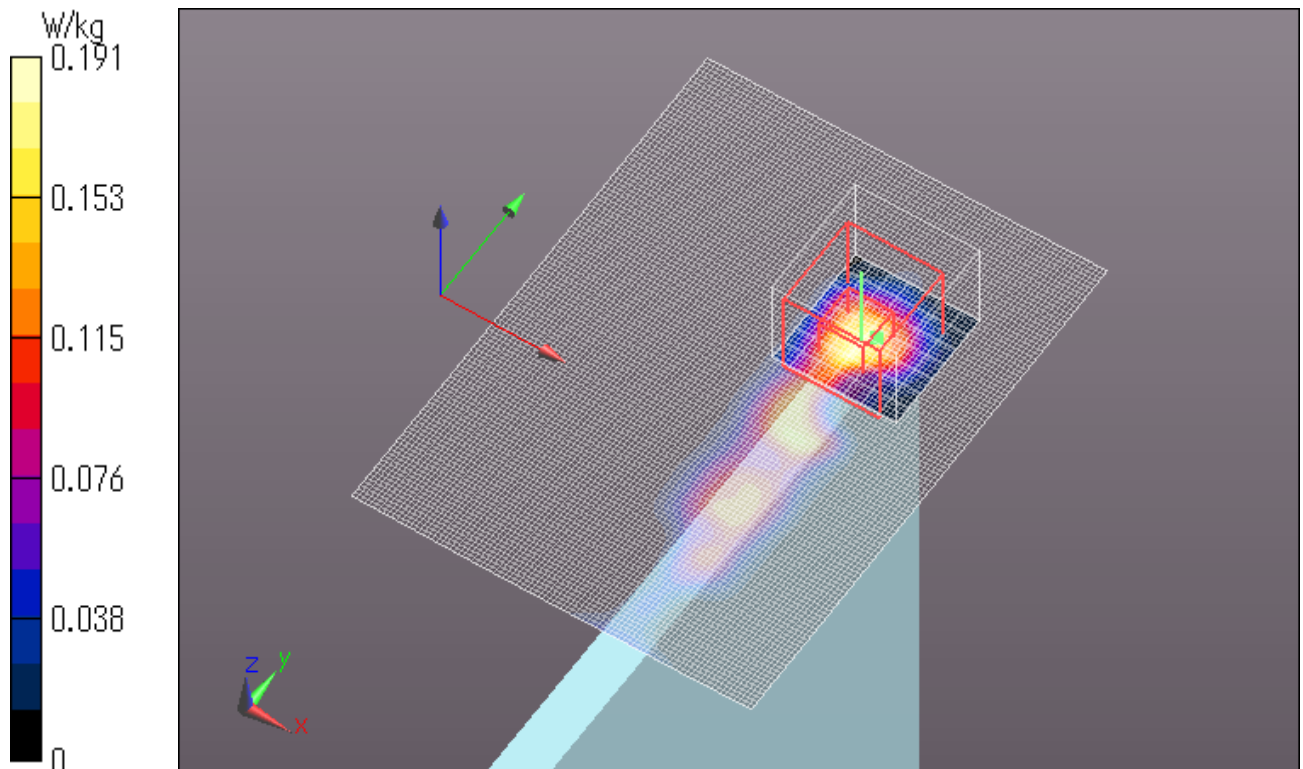

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11a 6Mbps Ant.1 Rear 0mm 5320MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.395$ S/m; $\epsilon_r = 47.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.657 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.560 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.597 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

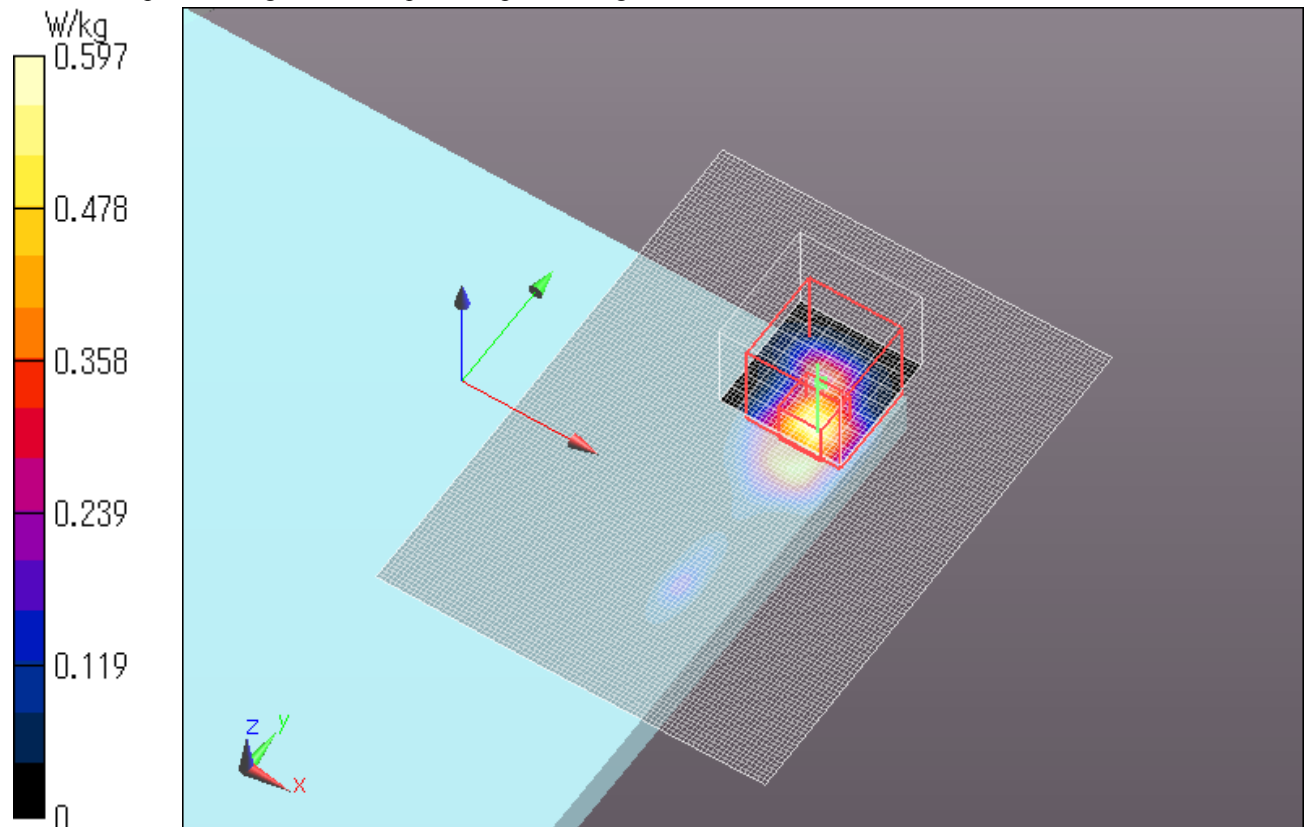

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11a 6Mbps Ant.1 Left 0mm 5320MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.395$ S/m; $\epsilon_r = 47.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0736 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.977 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.443 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

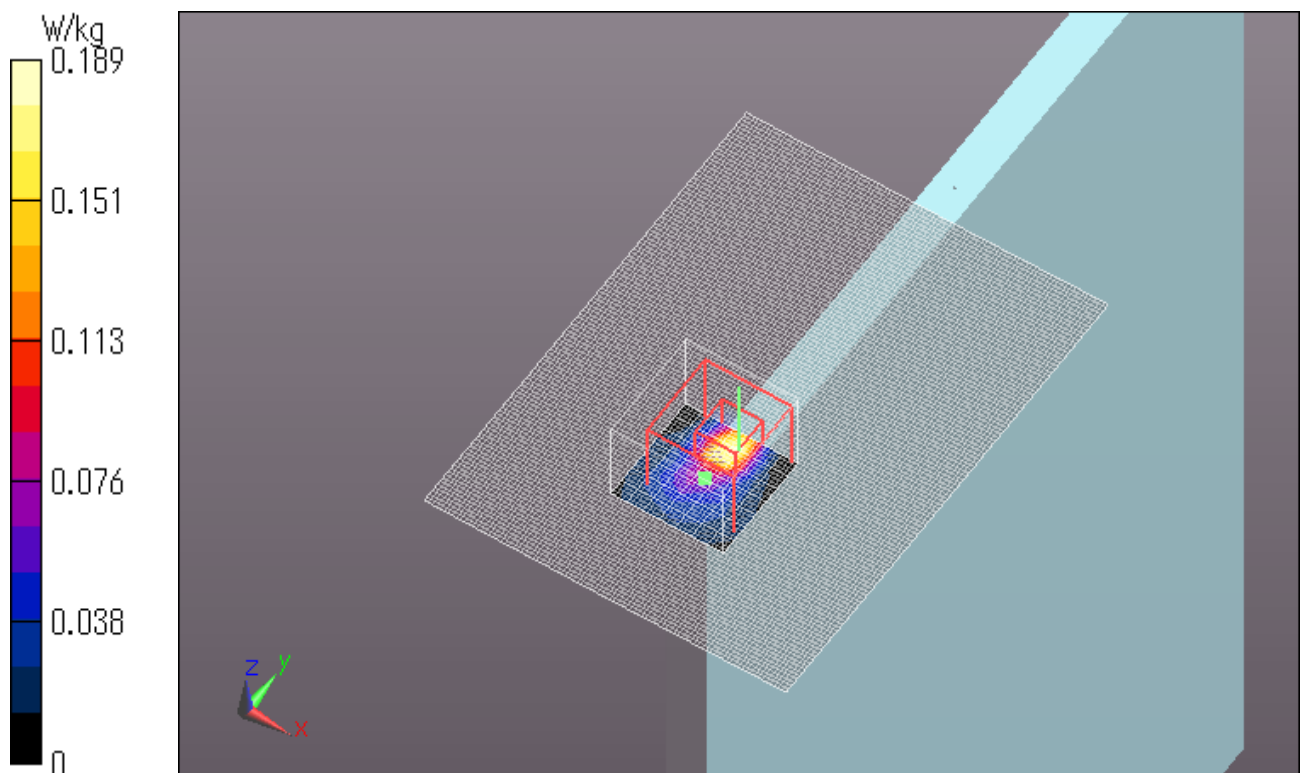

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Top 0mm 5320MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.564$ S/m; $\epsilon_r = 47.733$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.728 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.26 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.736 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.26 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.617 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

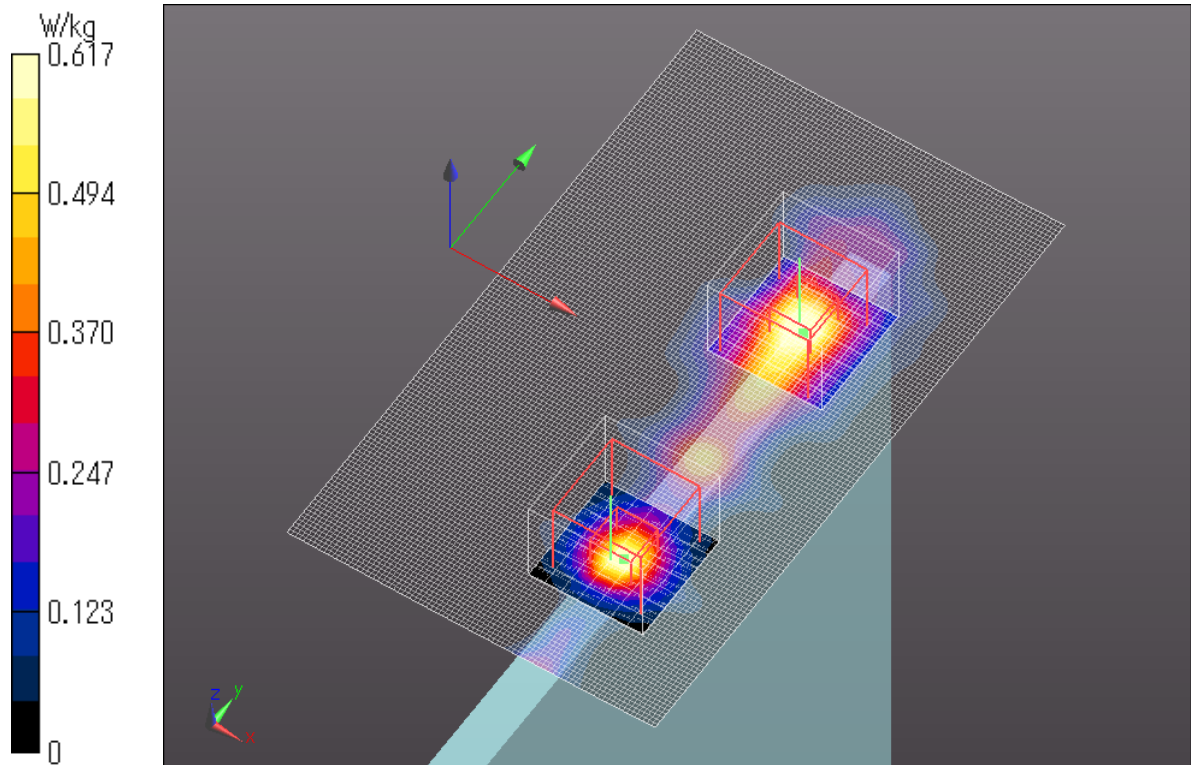

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Rear 0mm 5320MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.564$ S/m; $\epsilon_r = 47.733$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.71 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 20.12 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 0.836 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

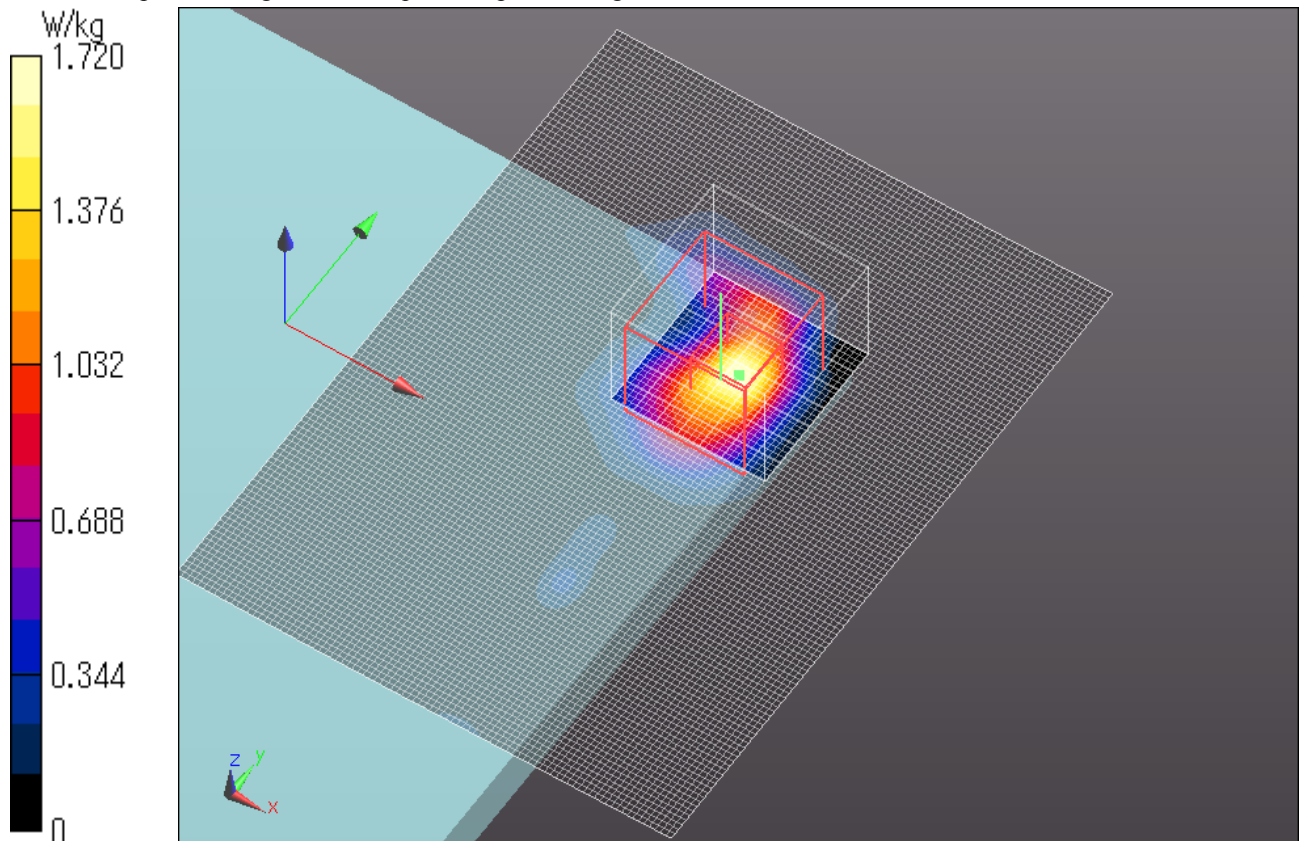

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Left 0mm 5320MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.564$ S/m; $\epsilon_r = 47.733$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 19.32 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

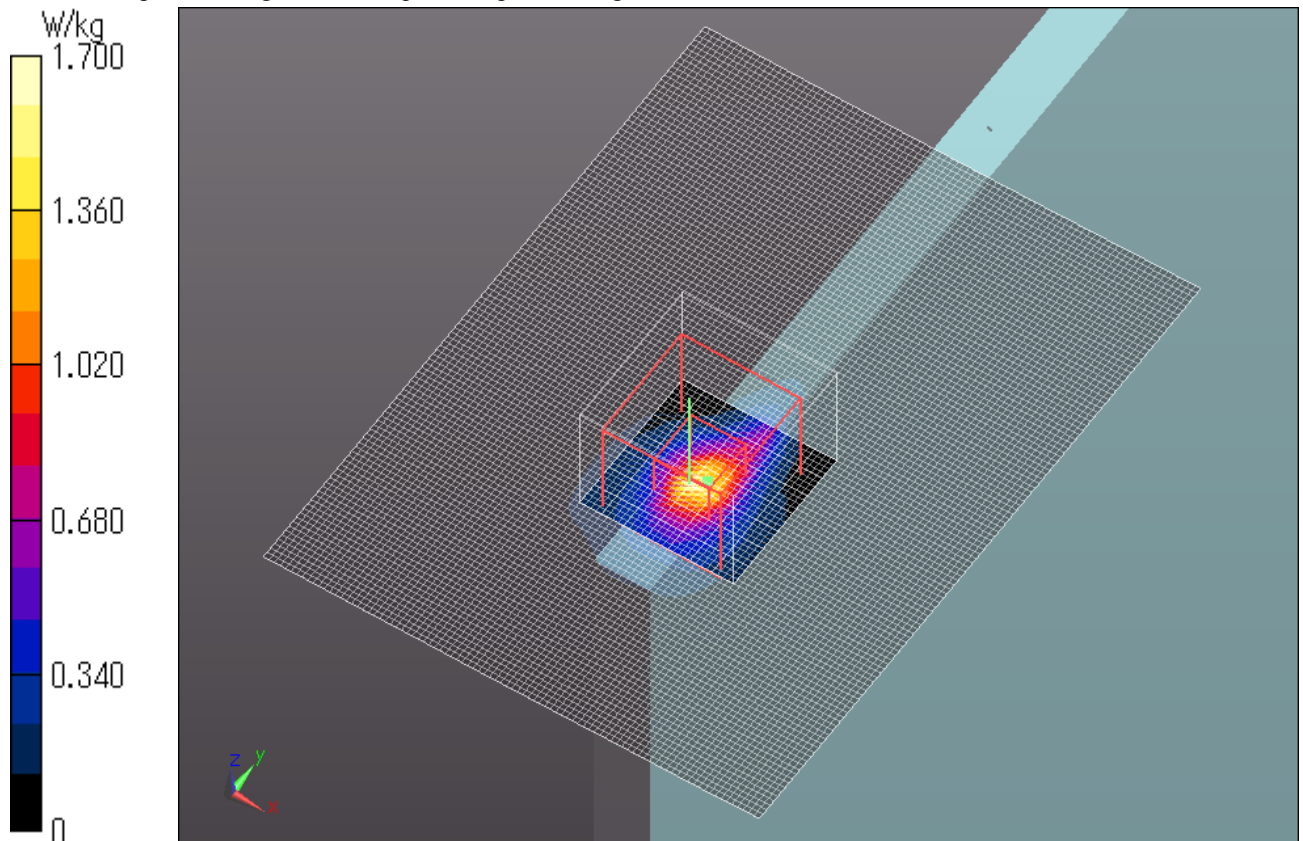

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11n40 MCS0 Ant.1 Rear 0mm 5270MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5270$ MHz; $\sigma = 5.418$ S/m; $\epsilon_r = 48.736$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.67 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 20.16 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 3.46 W/kg

SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 1.80 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

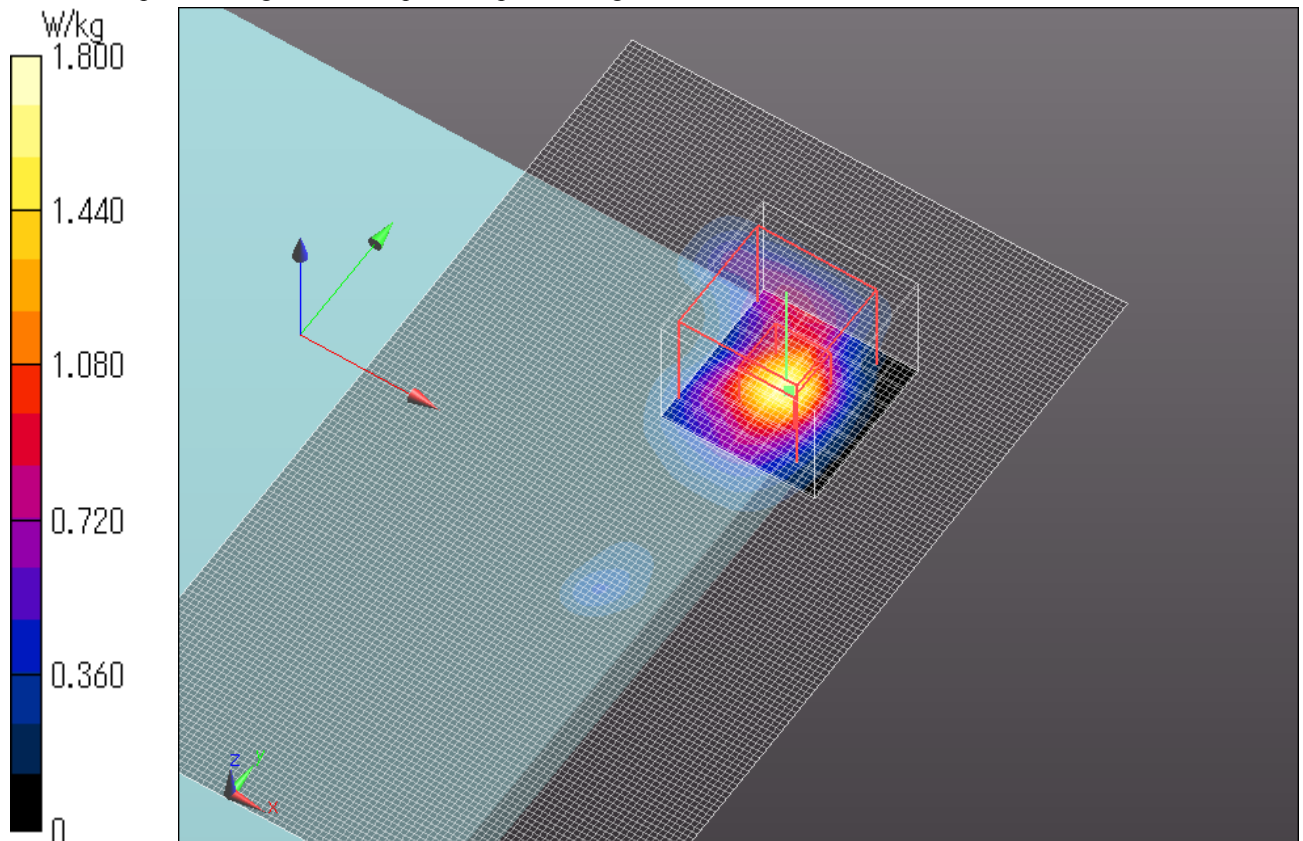

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11ac80 VHT0 Ant.1 Rear 0mm 5290MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.382$ S/m; $\epsilon_r = 47.823$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.62 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.64 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 1.63 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.64 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 3.08 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

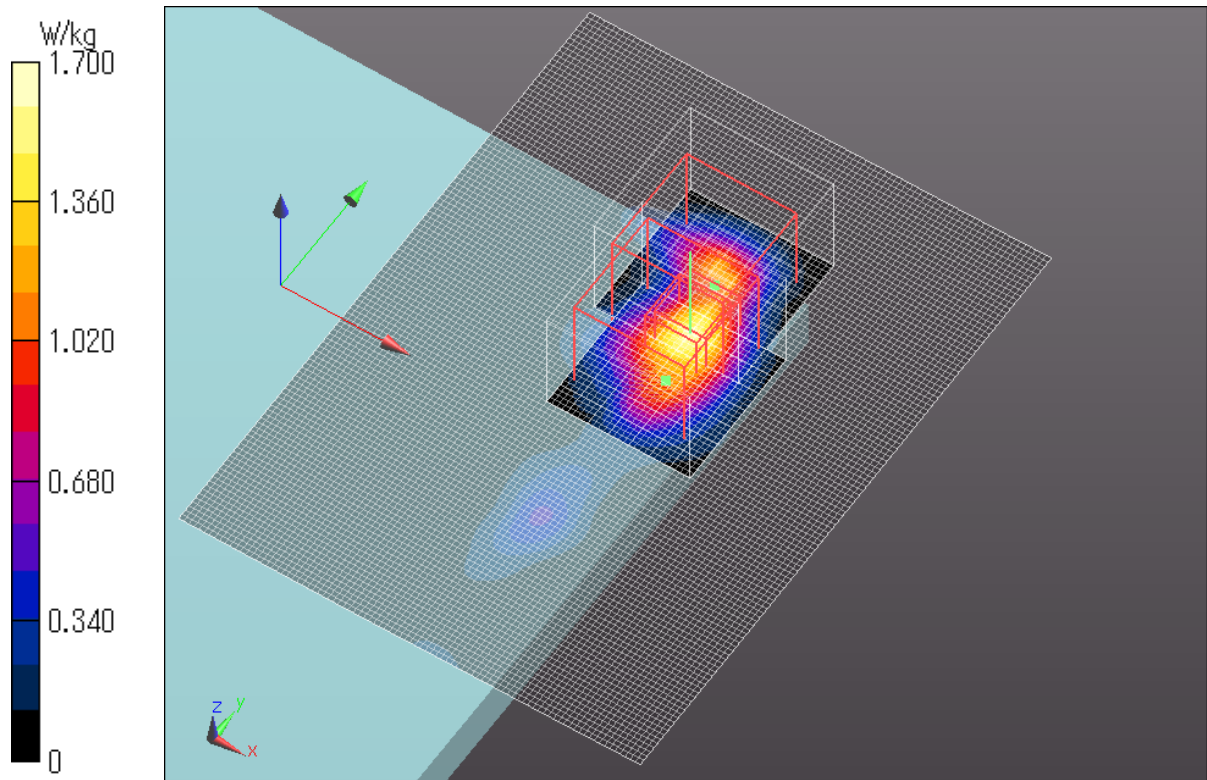

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Rear 0mm 5260MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.312$ S/m; $\epsilon_r = 48.051$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.41 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 23.19 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 4.57 W/kg

SAR(1 g) = 1.10 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 2.36 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

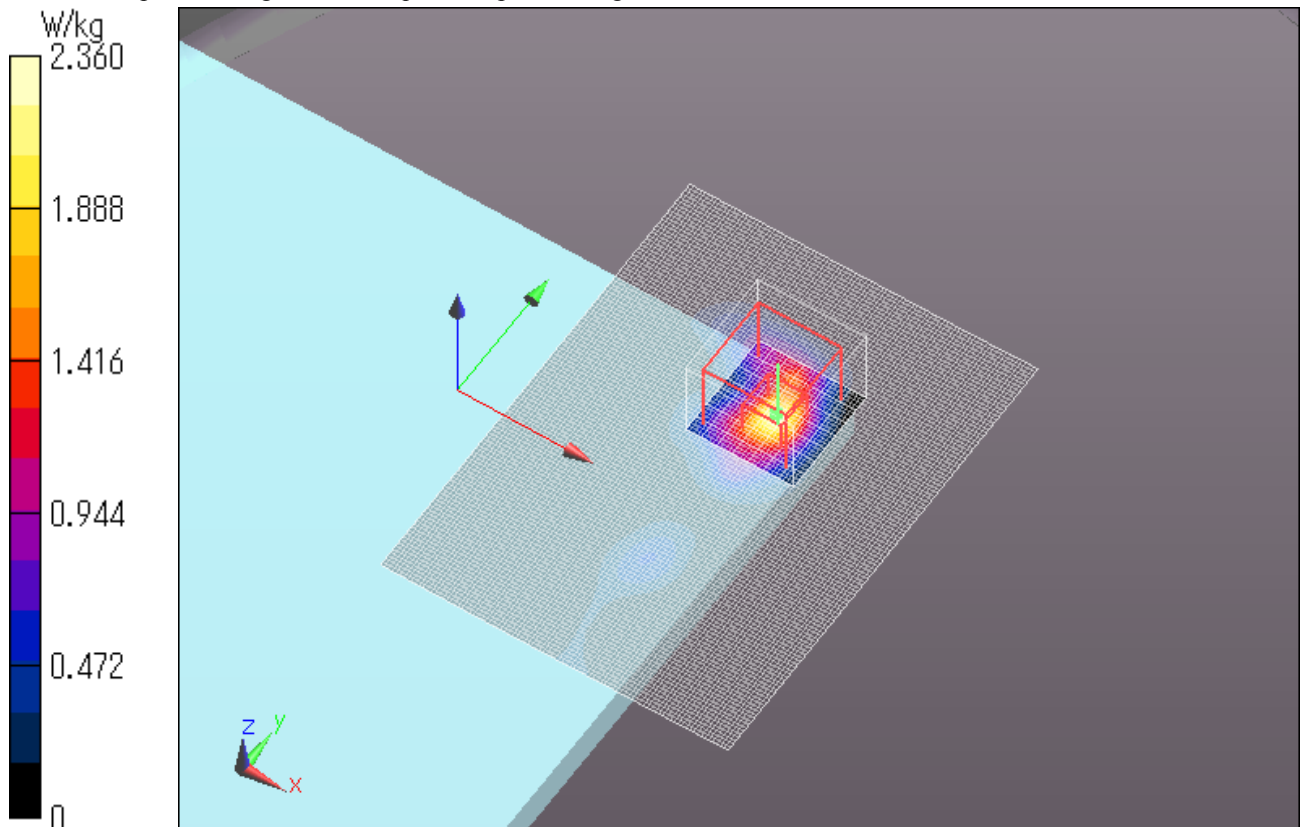

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11n40 MCS0 Ant.1 Rear 0mm 5310MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5310$ MHz; $\sigma = 5.185$ S/m; $\epsilon_r = 48.053$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.61 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 20.60 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 3.48 W/kg

SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 1.84 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

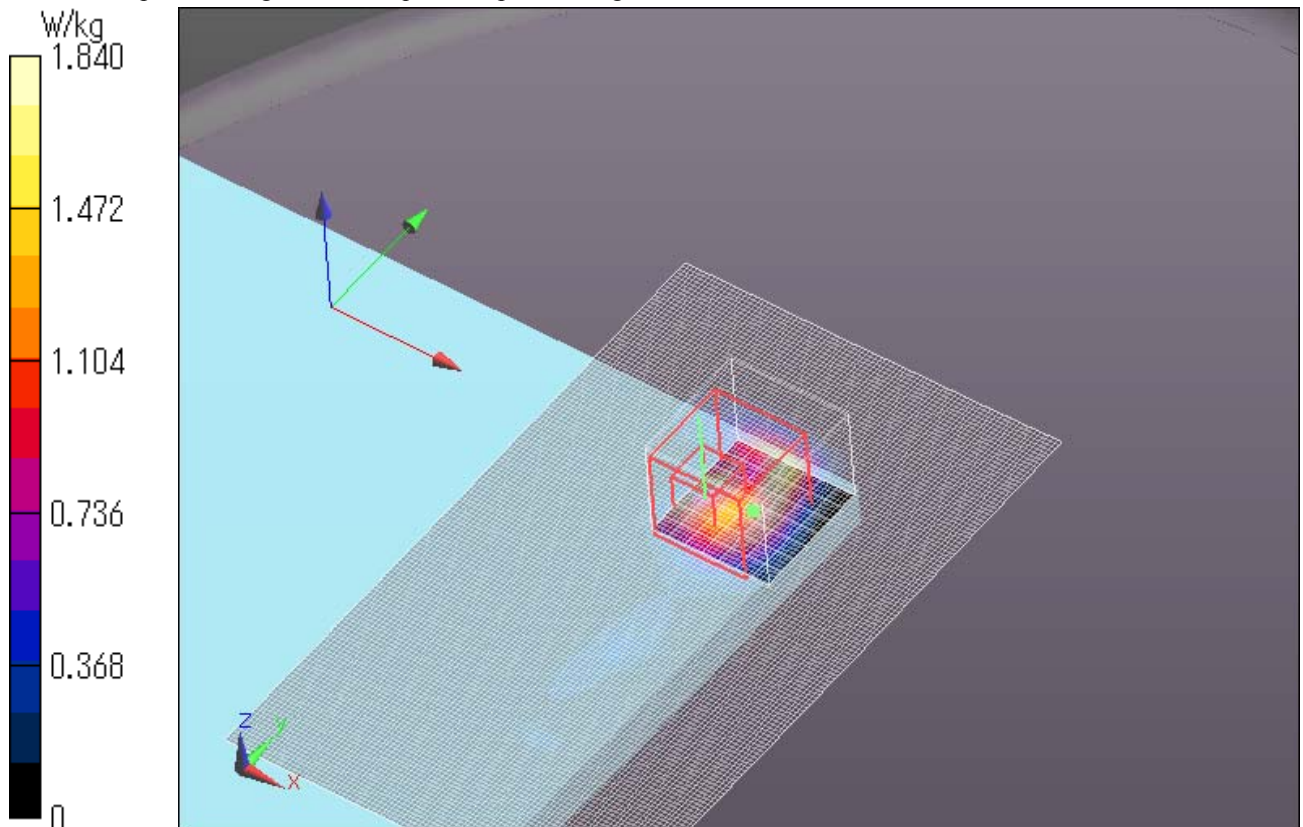

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Rear 0mm 5260MHz repeat

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.312$ S/m; $\epsilon_r = 48.051$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.77 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 21.59 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.97 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 2.05 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 21.59 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 2.15 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

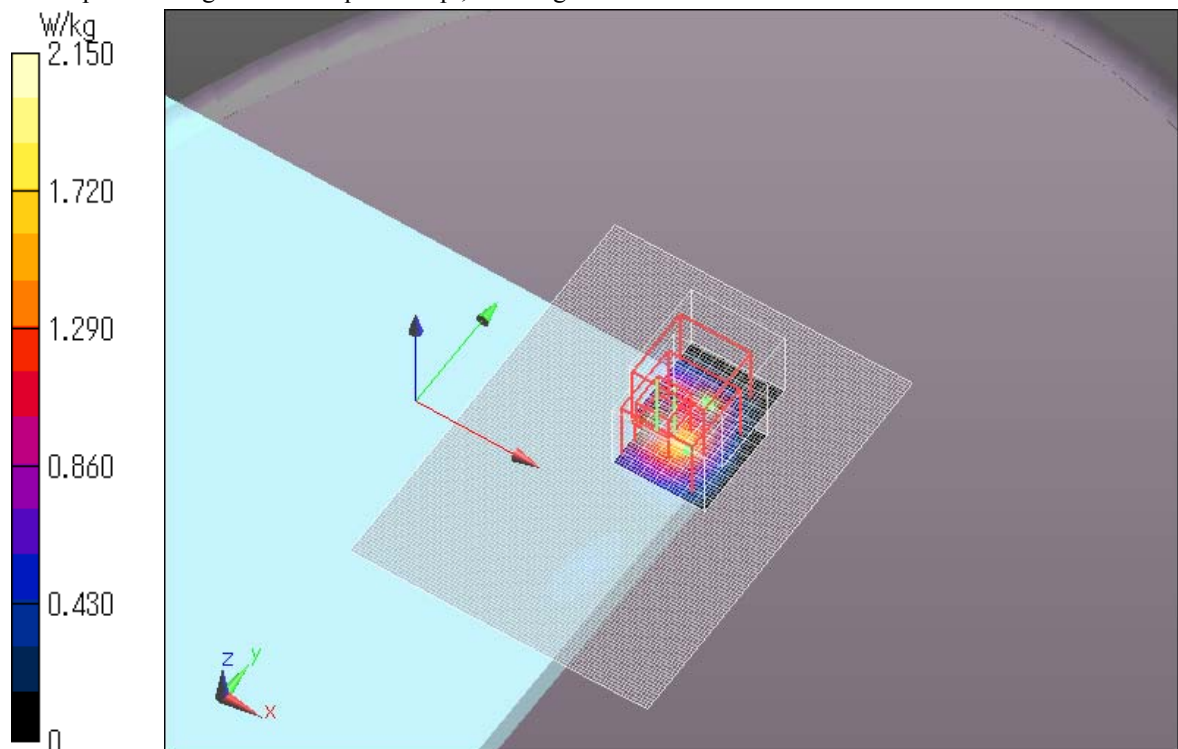

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

iv) WLAN Body 5.6GHz Band

WLAN 11a 6Mbps Ant.1 Top 0mm 5560MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W56); Frequency: 5560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.653$ S/m; $\epsilon_r = 46.493$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.436 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.356 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.804 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.441 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

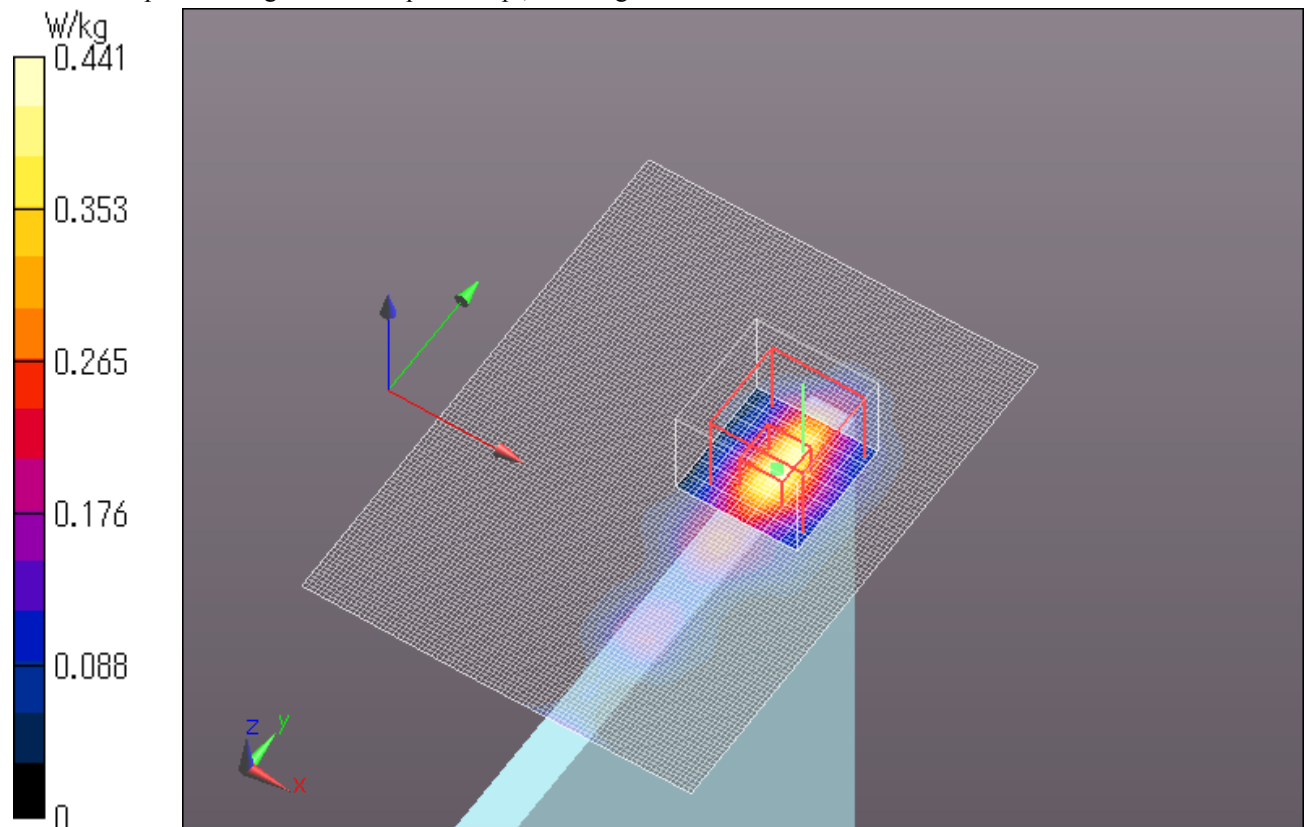

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11a 6Mbps Ant.1 Rear 0mm 5560MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W56); Frequency: 5560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.653$ S/m; $\epsilon_r = 46.493$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.698 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.47 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.617 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

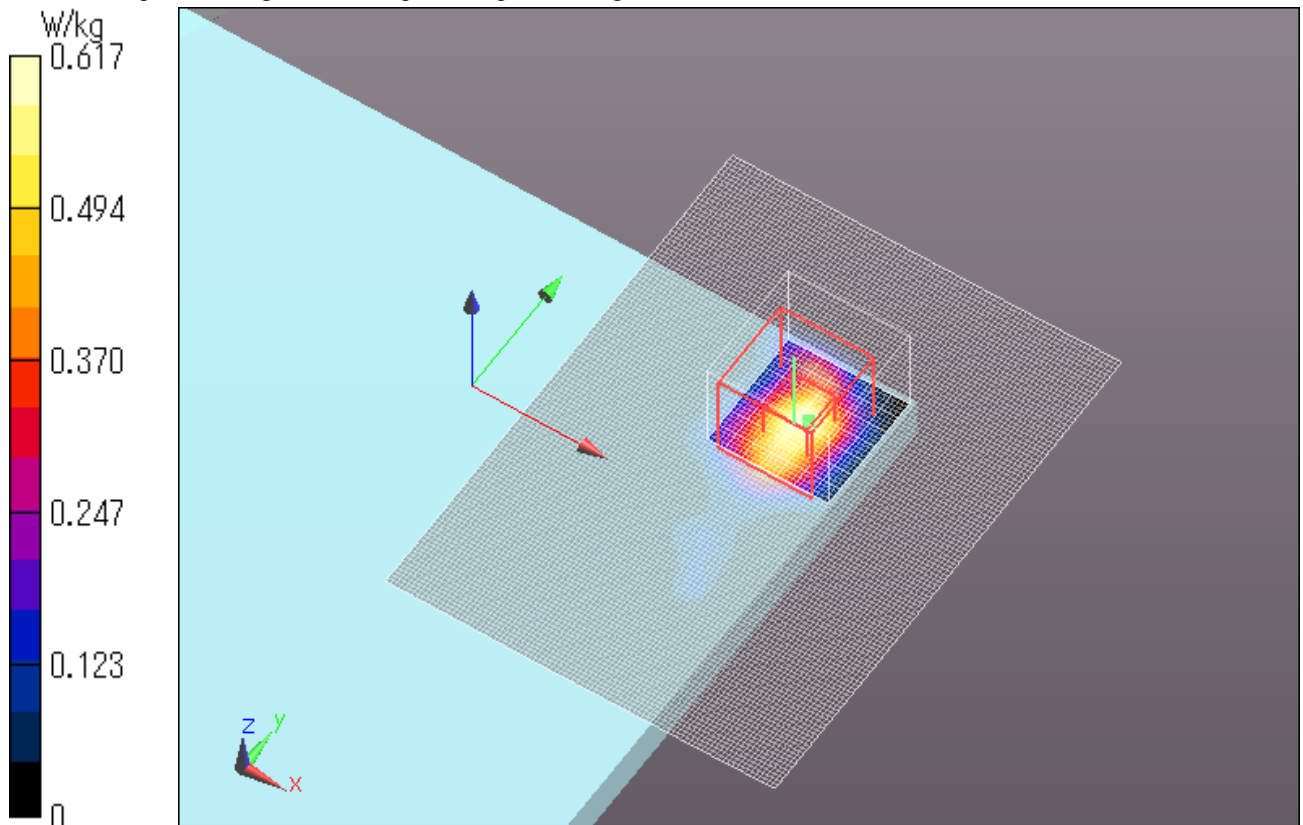

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11a 6Mbps Ant.1 Left 0mm 5560MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W56); Frequency: 5560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.653$ S/m; $\epsilon_r = 46.493$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.110 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.608 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

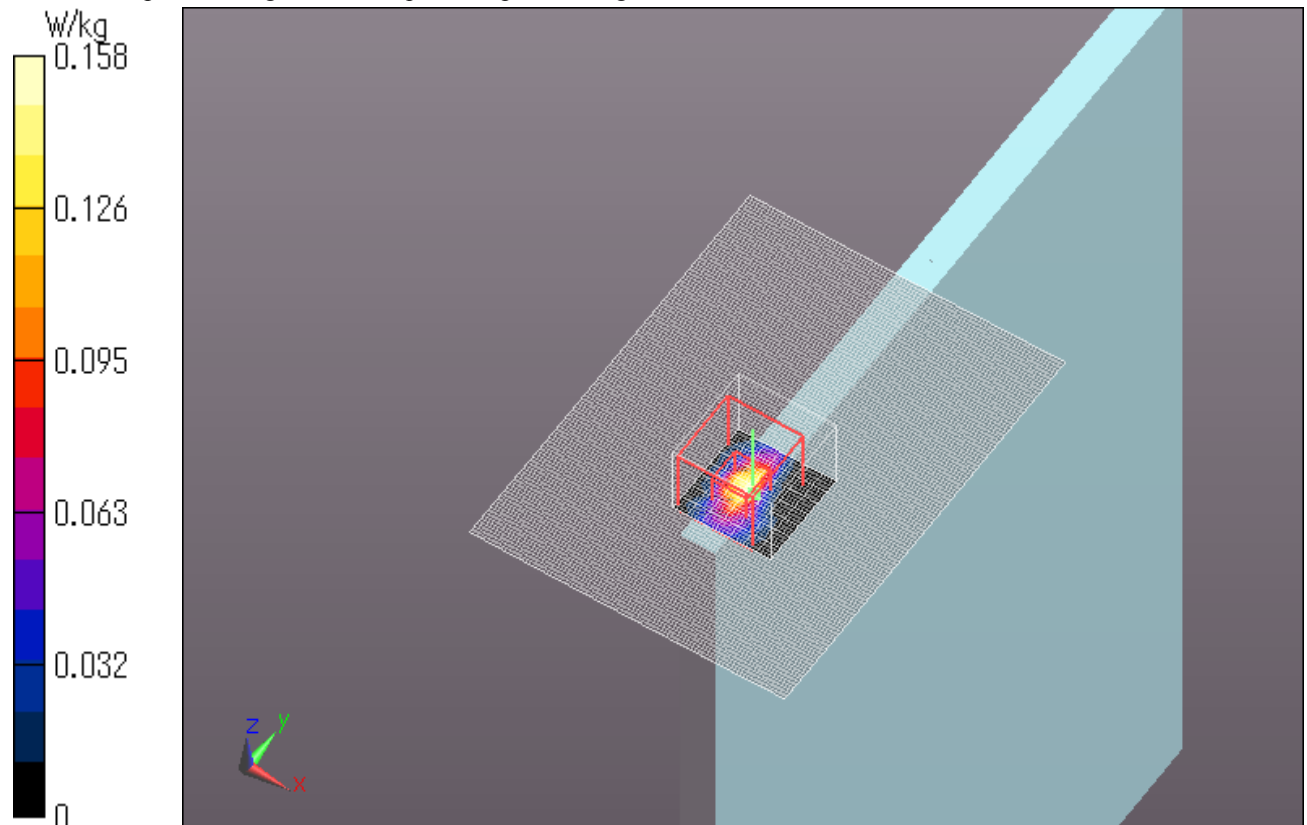

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11n40 MCS0 Ant.1 Rear 0mm 5670MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W56); Frequency: 5670 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.811$ S/m; $\epsilon_r = 46.098$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.64 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.815 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

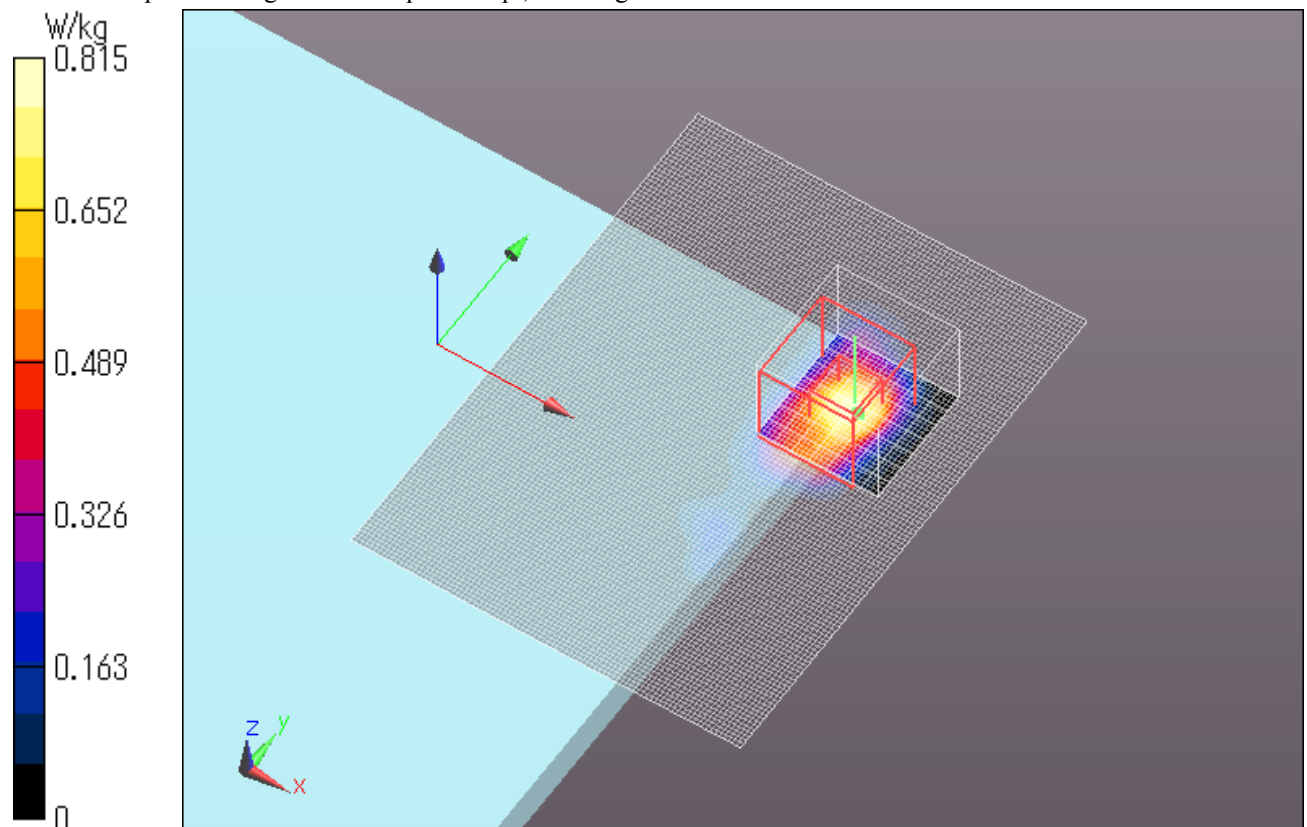

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11ac80 VHT0 Ant.1 Rear 0mm 5530MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W56); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.779$ S/m; $\epsilon_r = 46.557$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.92, 3.92, 3.92); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.870 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.98 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.755 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

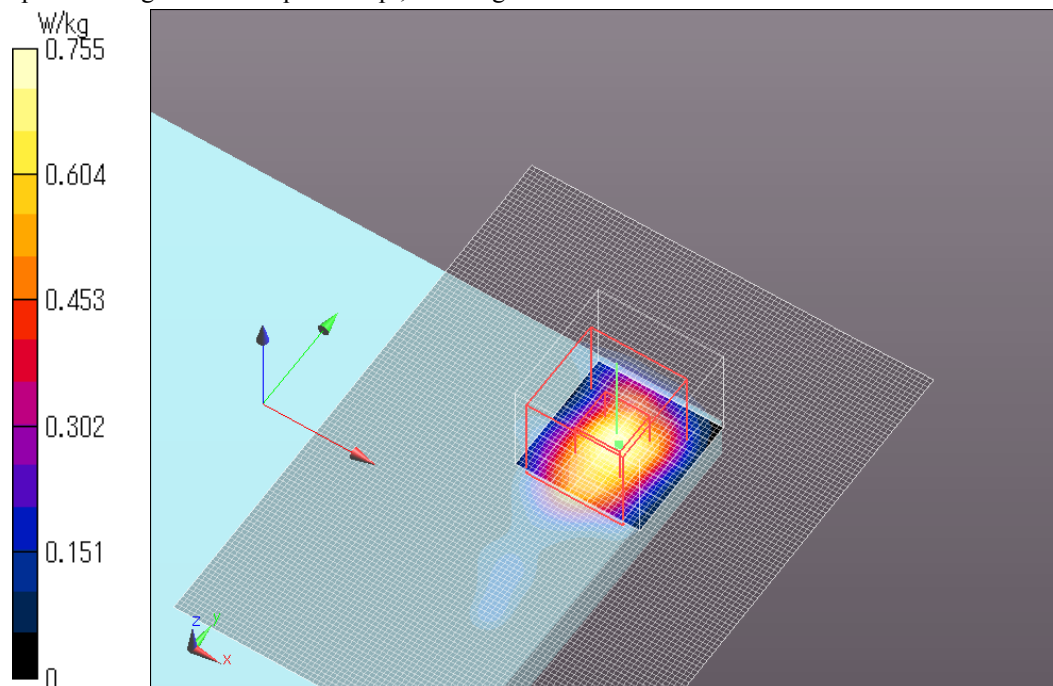

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Top 0mm 5560MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W56); Frequency: 5560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.679$ S/m; $\epsilon_r = 48.175$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.821 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.172 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.380 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

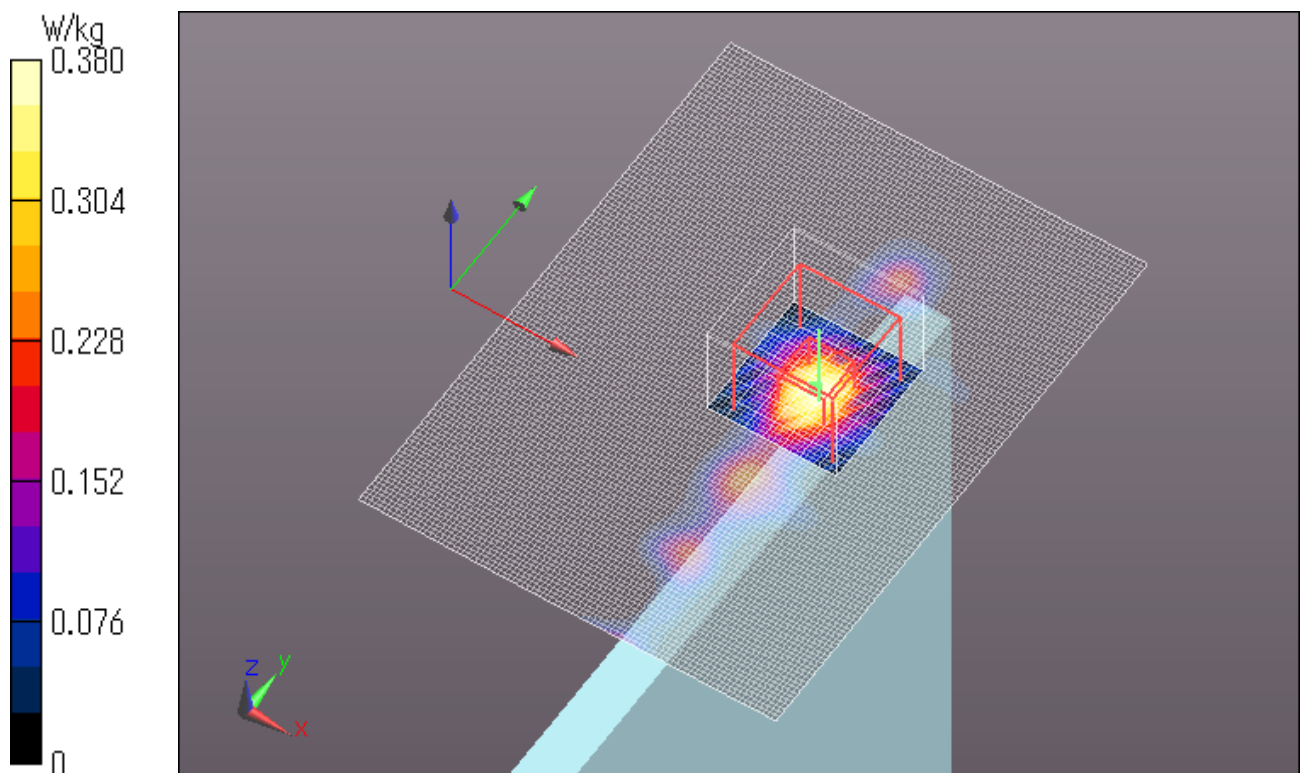

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Rear 0mm 5560MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W56); Frequency: 5560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.679$ S/m; $\epsilon_r = 48.175$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.676 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.117 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.642 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.117 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.638 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

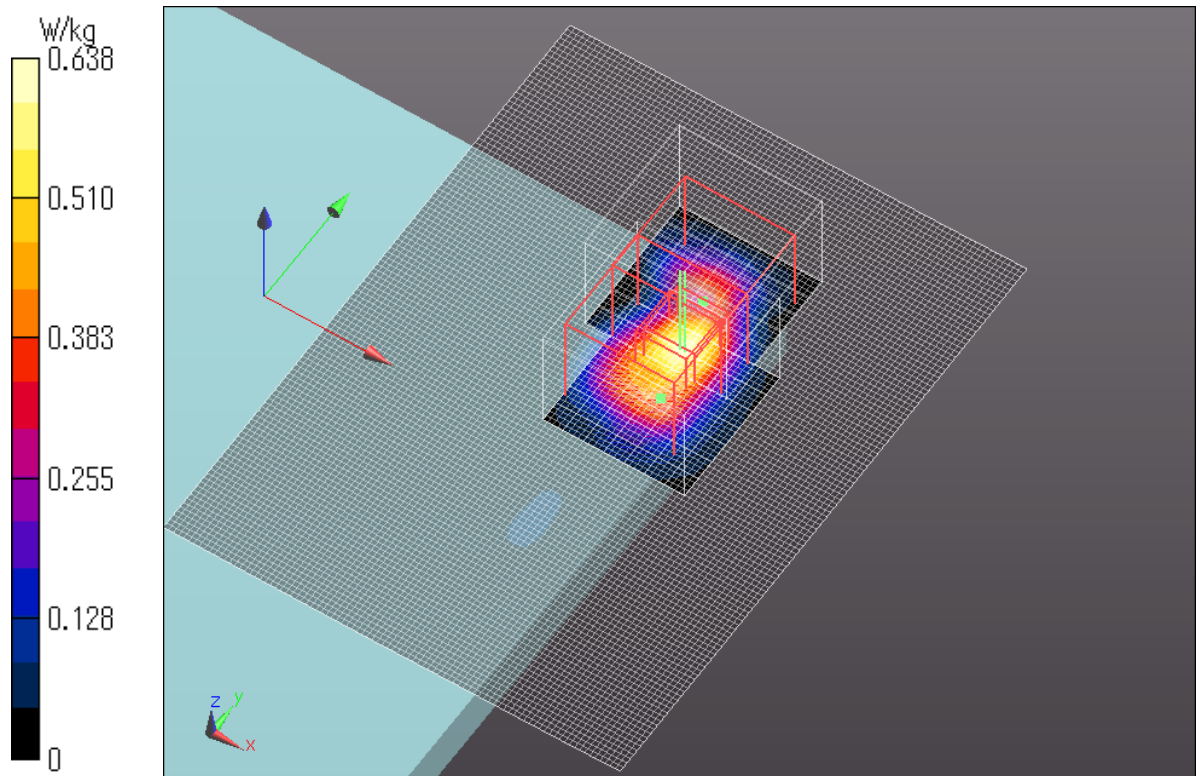

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Left 0mm 5560MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W56); Frequency: 5560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.679$ S/m; $\epsilon_r = 48.175$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.376 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 11.25 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

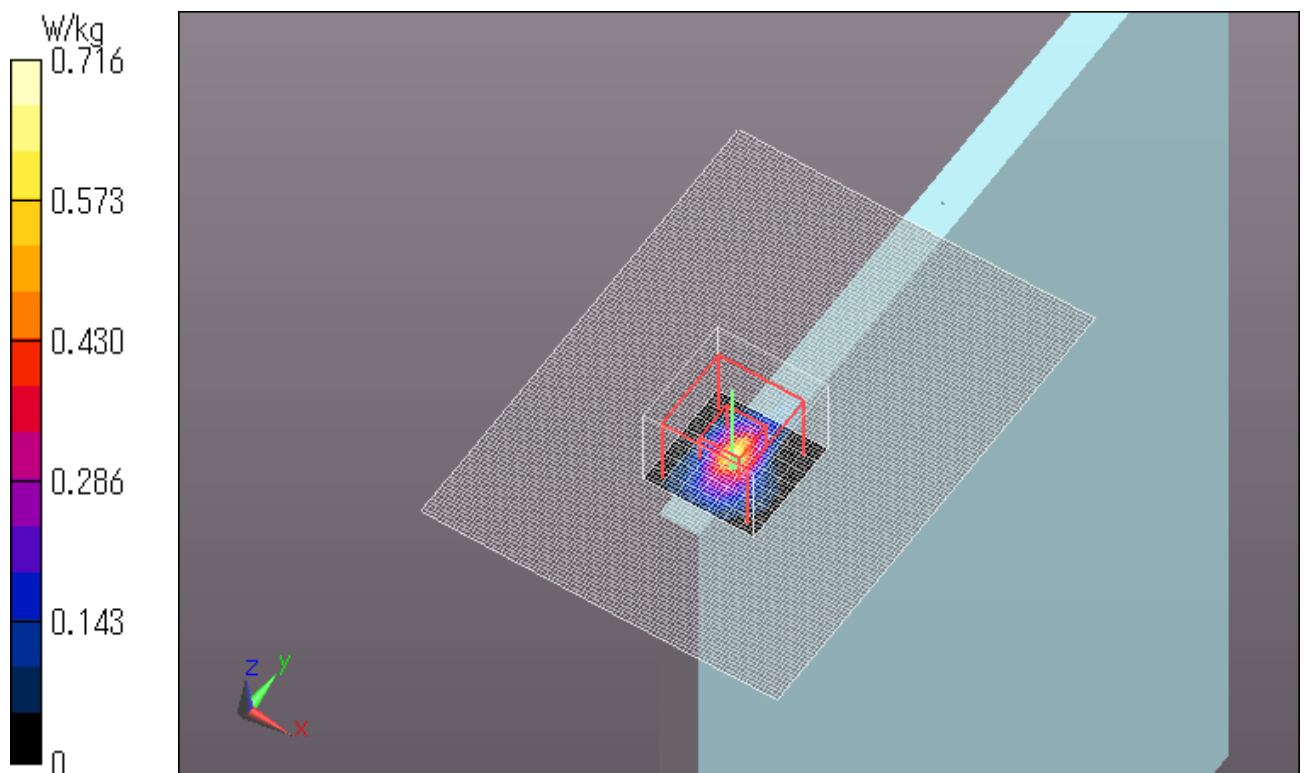

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

v) WLAN Body 5.8GHz Band

WLAN 11a 6Mbps Ant.1 Top 0mm 5825MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W58); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.862$ S/m; $\epsilon_r = 46.444$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.735 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 11.61 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

Date: 2014/10/20

Ambient Temp.: 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

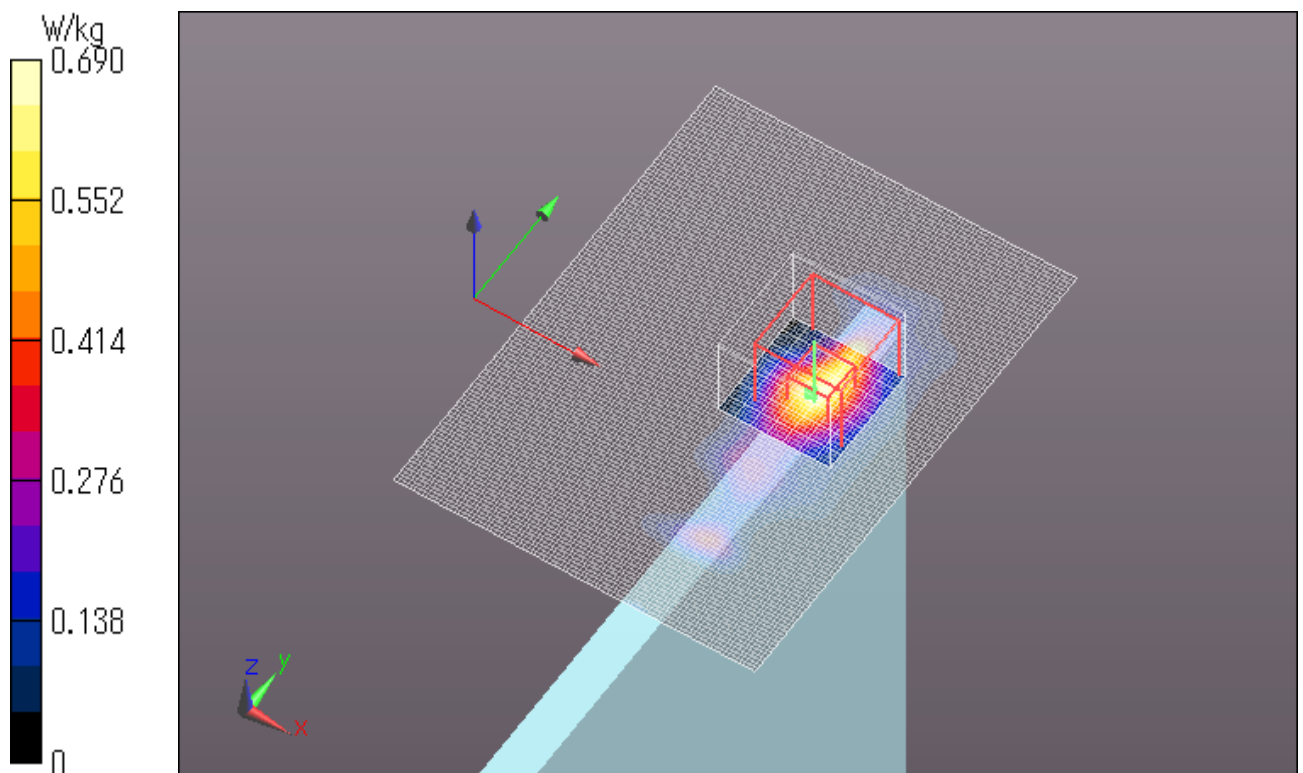

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11a 6Mbps Ant.1 Rear 0mm 5825MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W58); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.862$ S/m; $\epsilon_r = 46.444$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 16.33 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

Date: 2014/10/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

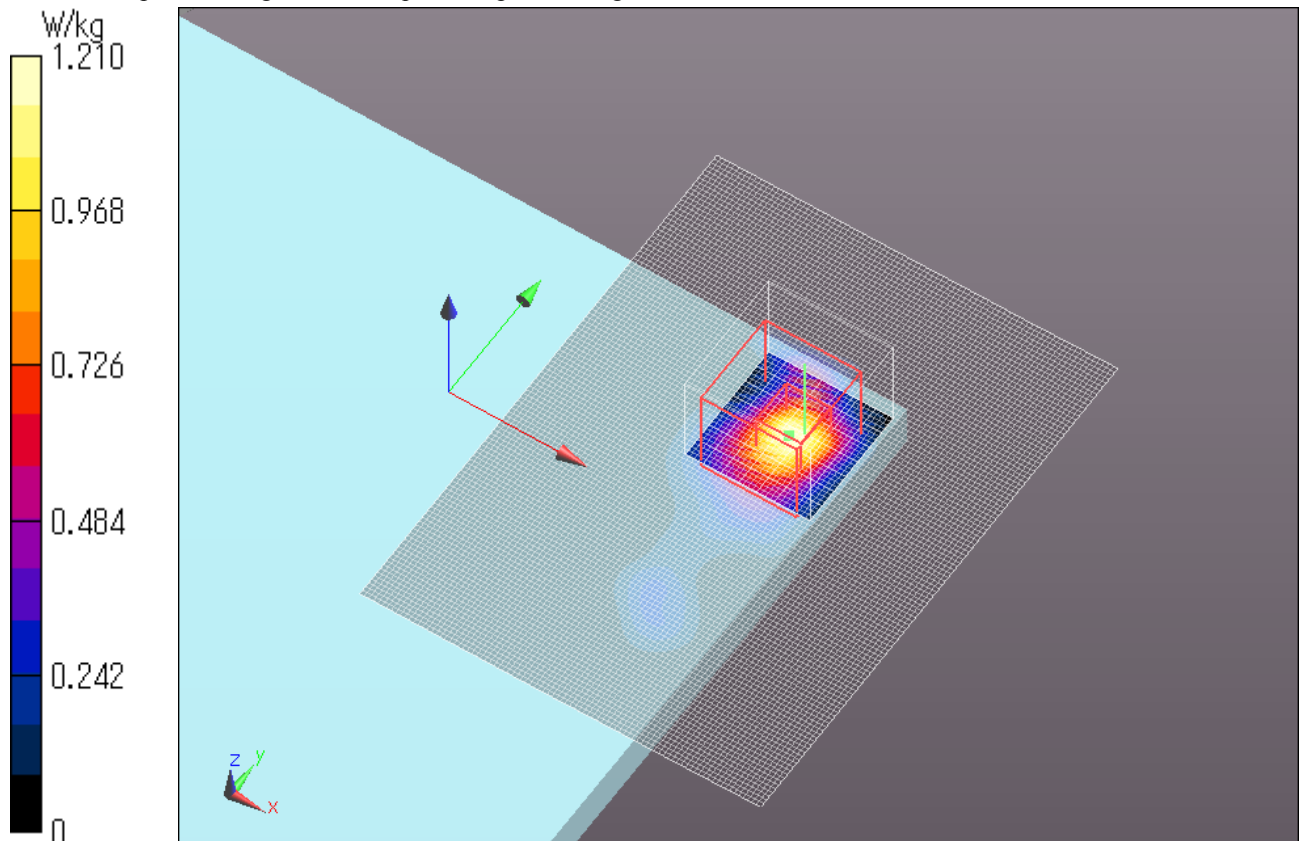

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11a 6Mbps Ant.1 Left 0mm 5825MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W58); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.862$ S/m; $\epsilon_r = 46.444$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.553 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.57 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.555 W/kg

Date: 2014/10/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

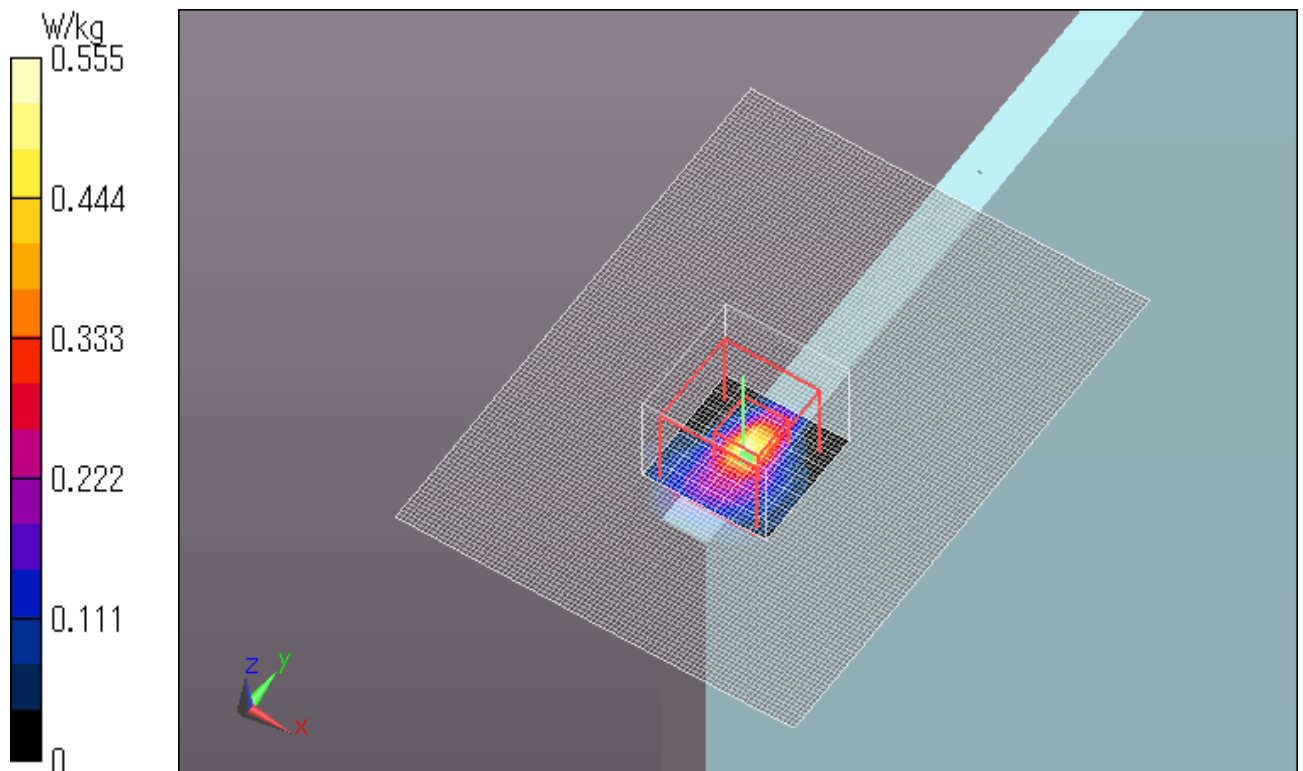

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11n40 MCS0 Ant.1 Rear 0mm 5795MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W58); Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.945$ S/m; $\epsilon_r = 47.36$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.54 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 5.09 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

Date: 2014/10/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

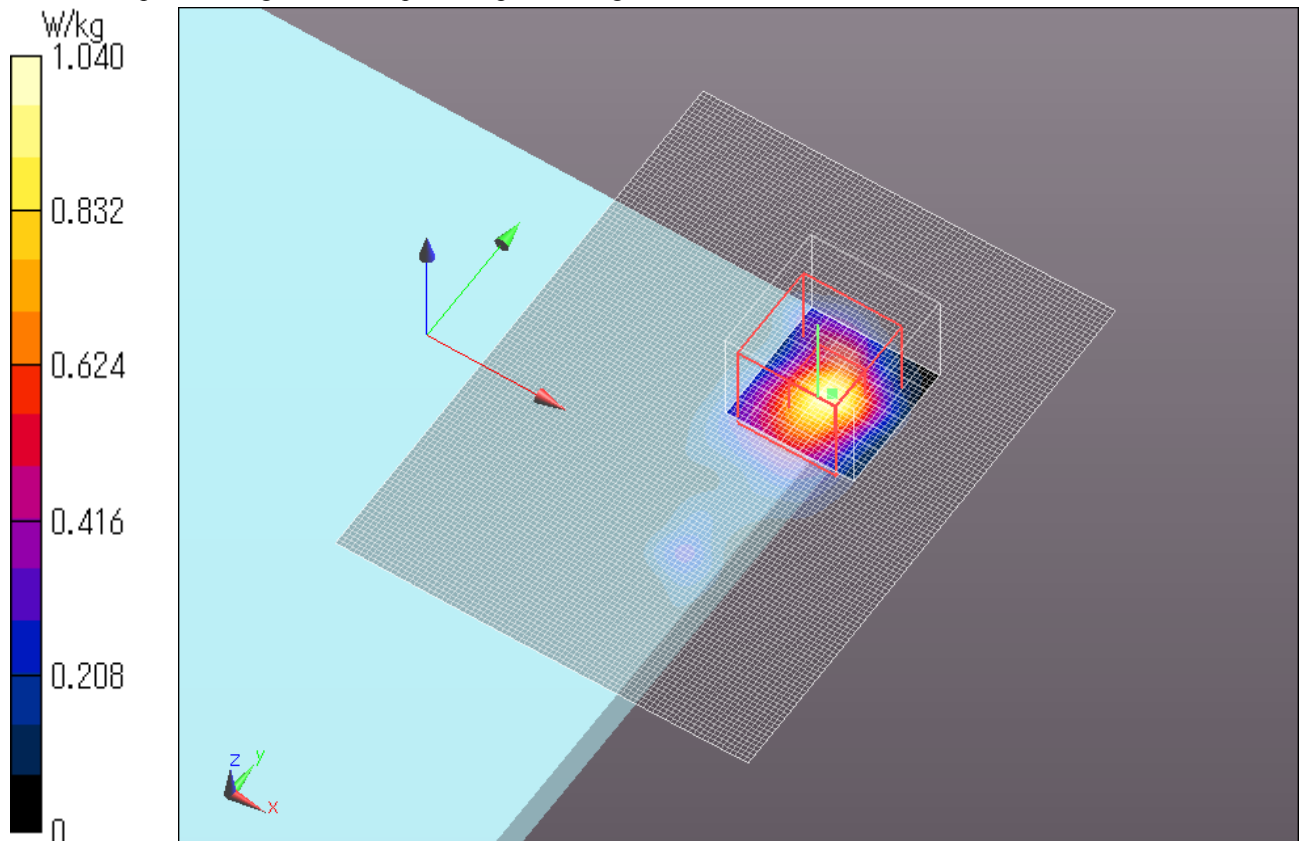

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

WLAN 11ac80 VHT0 Ant.1 Rear 0mm 5775MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11ac80(W58); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.958$ S/m; $\epsilon_r = 47.423$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.83 V/m; Power Drift = -0.20 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.911 W/kg

Date: 2014/10/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

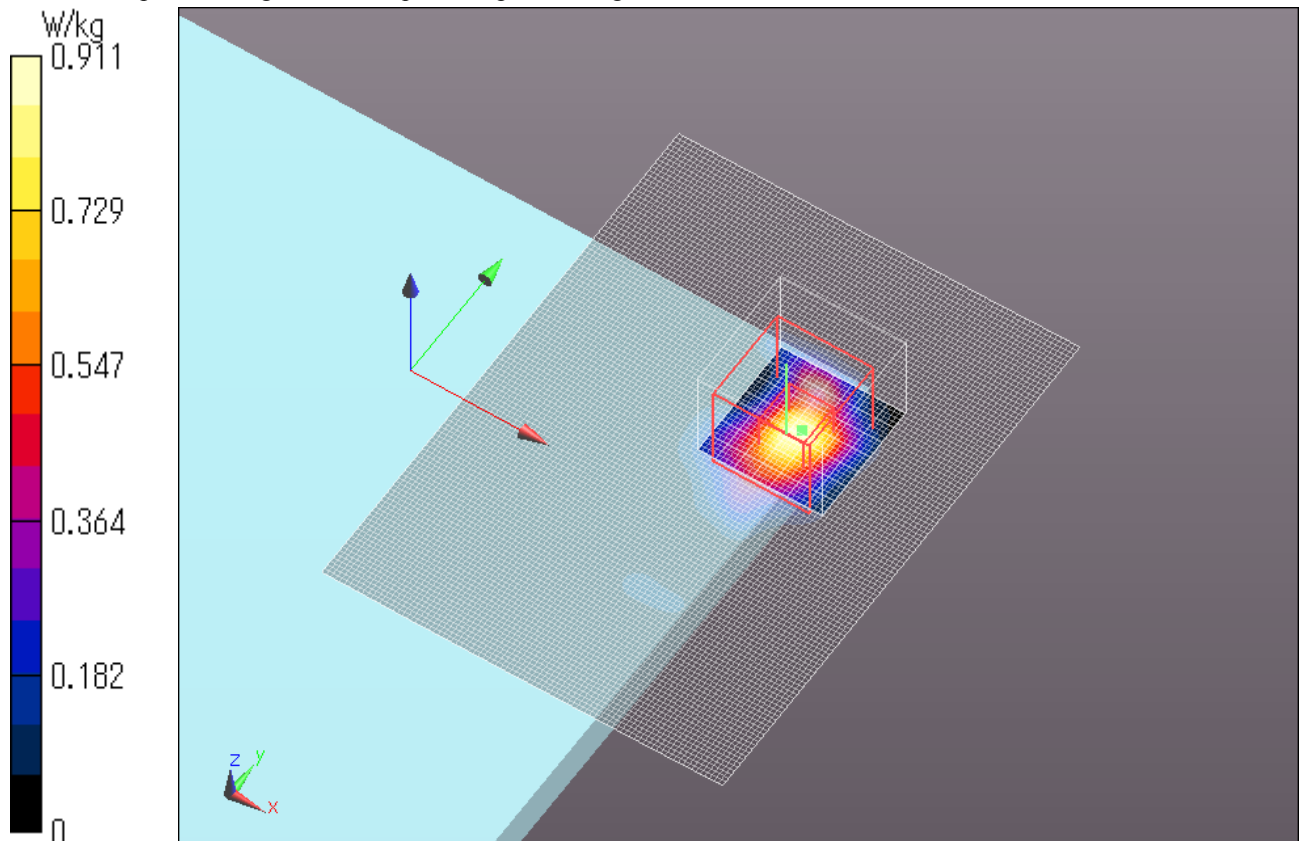

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Top 0mm 5825MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W58); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.904$ S/m; $\epsilon_r = 46.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.595 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.64 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.619 W/kg

Date: 2014/10/23

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

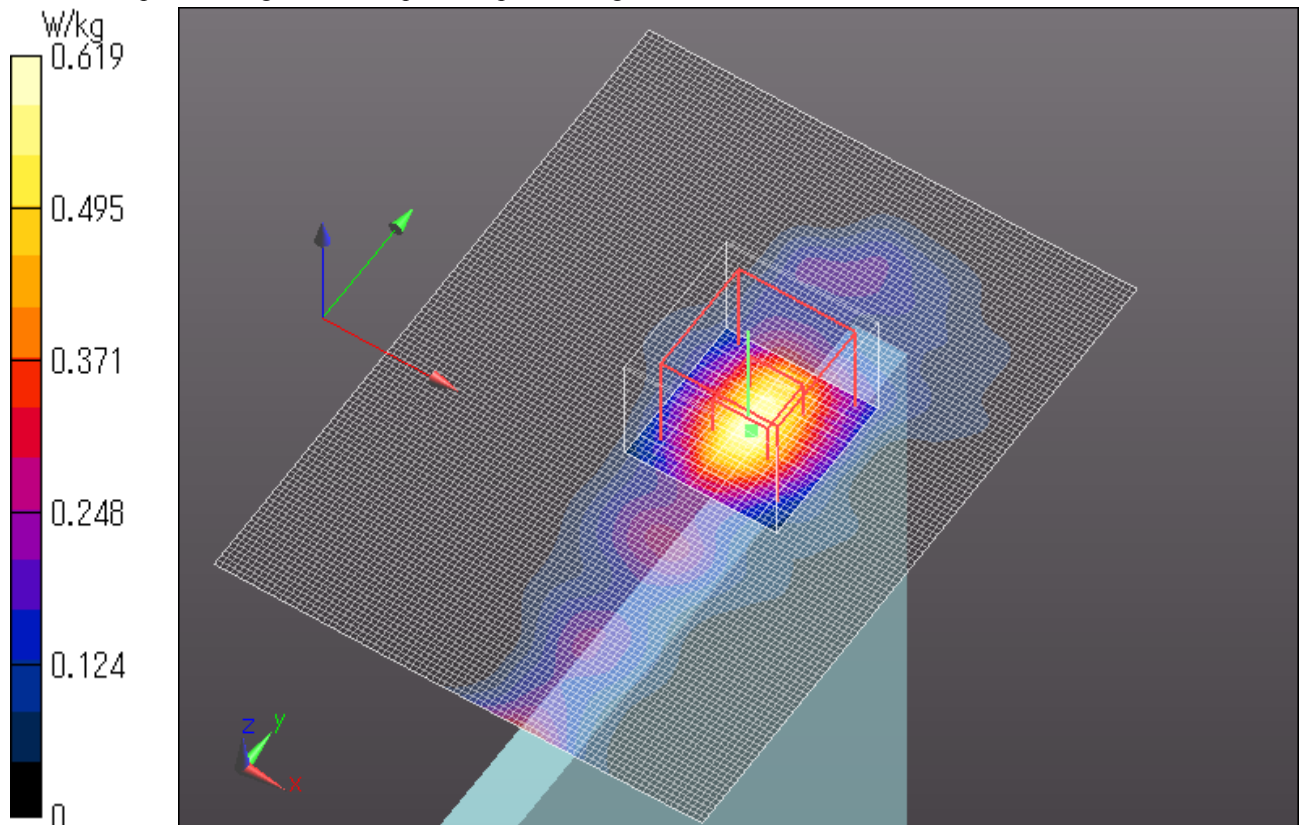

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Rear 0mm 5825MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W58); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.904$ S/m; $\epsilon_r = 46.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.30 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.30 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

Date: 2014/10/23

Ambient Temp.: 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

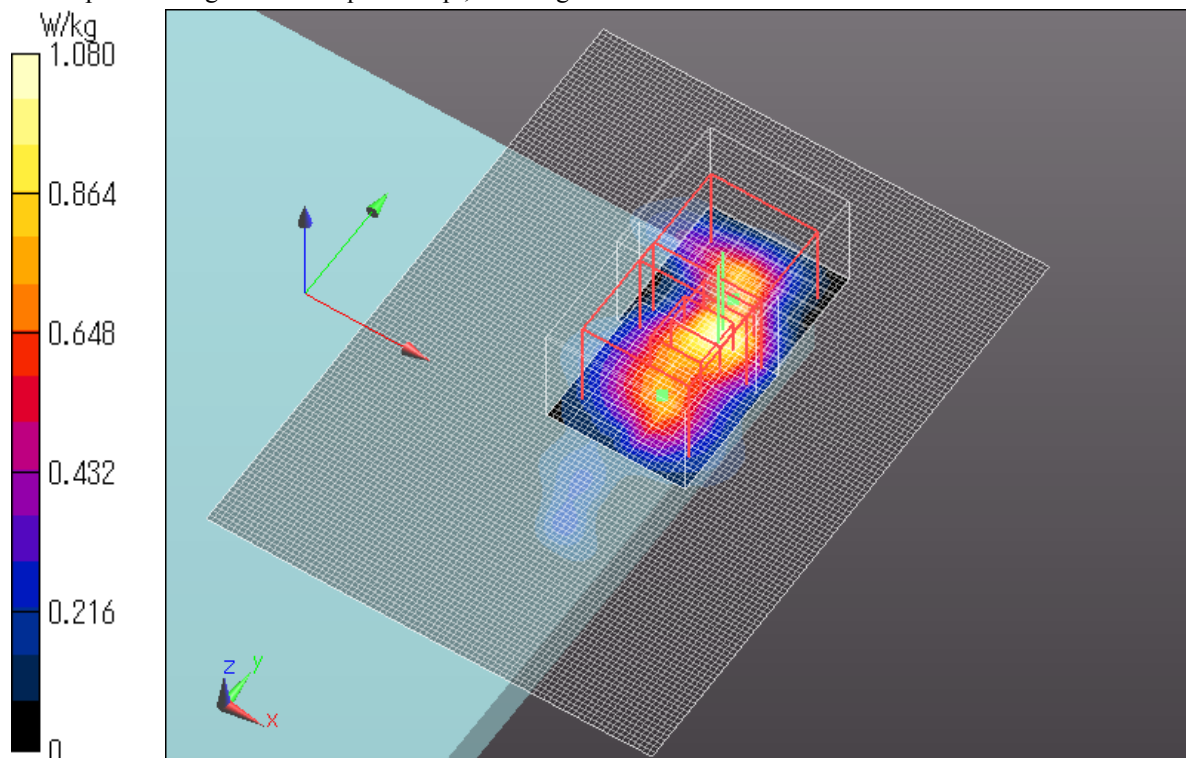

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

TypeB WLAN 11a 6Mbps Ant.1 Left 0mm 5825MHz

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W58); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.904$ S/m; $\epsilon_r = 46.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.798 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 15.76 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

Date: 2014/10/23

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

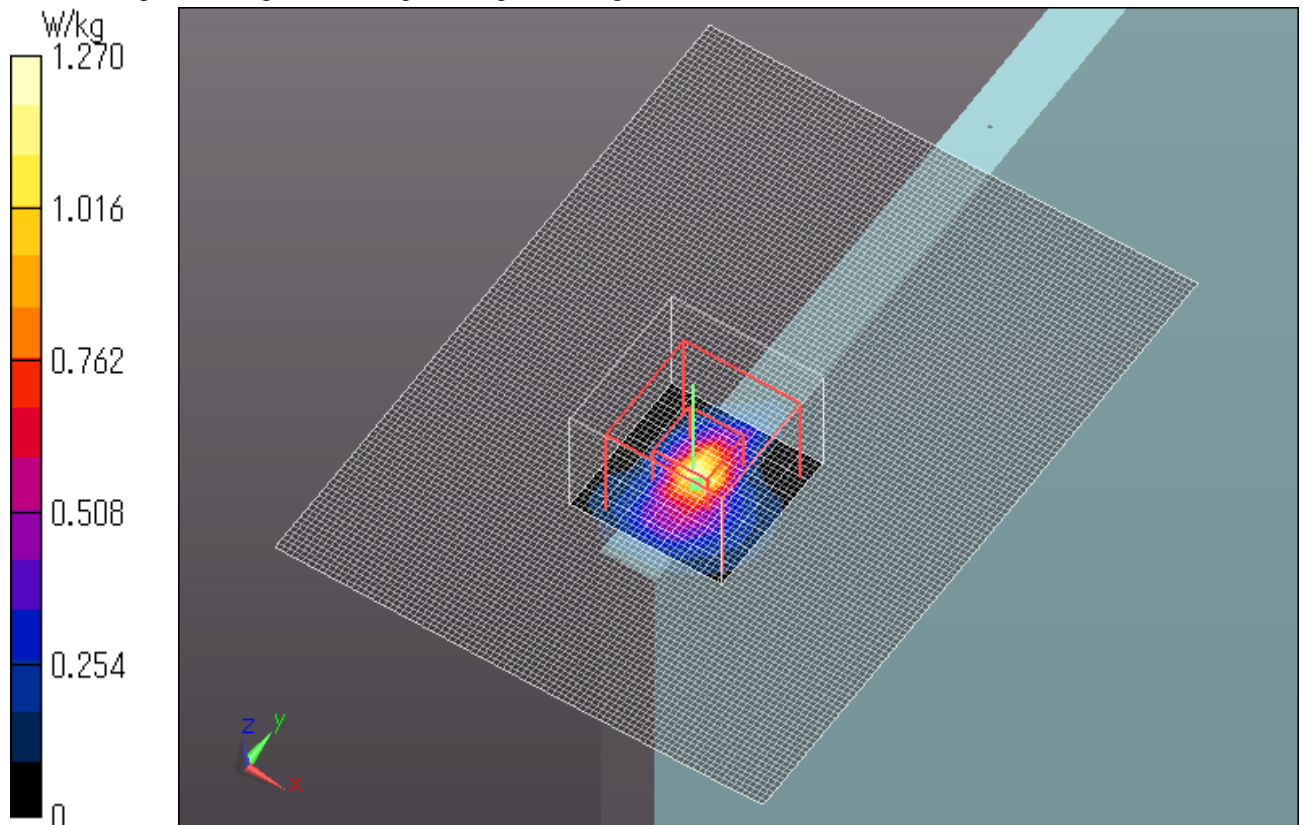

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

APPENDIX2 : System Check

1. System check result Body 2450MHz

(1) Simulated Tissue Liquid Parameter confirmation

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
24-Oct	24	53	MSL 2450	23.5	2450	ϵ_r	52.7	51.2	-2.9	+/-5	*1
						σ [mho/m]	1.95	1.99	2.0	+/-5	

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in KDB 865664D01.

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
24-Oct	24	53	MSL 2450	23.5	2450	ϵ_r	52.2	51.2	-2.0	+/-6	*2 *3
						σ [mho/m]	2.00	1.99	-0.5	+/-6	

ϵ_r : Relative Permittivity / σ : Conductivity

*2 The target value is the calibrated dipole Body TSL parameters. (D2450V2 SN:713, Measured Body TSL parameters)

*3 The limit is for deviation provided by manufacture.

(2) SAR correction for deviations of complex permittivity from target

The measured SAR results are corrected with target value of KDB865664D01.

Corrected SAR(1g) = Measured SAR(1g) x (100- Δ SAR)/100

$$\Delta \text{SAR} = C\epsilon \Delta \epsilon_r + C\sigma \Delta \sigma$$

<1g>

$$C\epsilon = -7.854 \times 10^{-4} f^3 + 9.402 \times 10^{-3} f^2 - 2.742 \times 10^{-2} f + 0.2026$$

$$C\sigma = 9.804 \times 10^{-3} f^3 - 8.661 \times 10^{-2} f^2 + 2.981 \times 10^{-2} f + 0.7829$$

<10g>

$$C\epsilon = 3.456 \times 10^{-3} f^3 - 3.531 \times 10^{-2} f^2 + 7.675 \times 10^{-2} f - 0.1860$$

$$C\sigma = 4.479 \times 10^{-3} f^3 - 1.586 \times 10^{-2} f^2 - 0.1972 f + 0.7717$$

'f' is the frequency in GHz.

Date	24-Oct
f(GHz)=	2.45
$\Delta \epsilon_r(\%)$ =	-2.9
$\Delta \sigma(\%)$ =	2.0
1g $C\epsilon$ =	-0.2249
$C\sigma$ =	0.4802
$\Delta \text{SAR}(\%)$ =	1.61
10g $C\epsilon$ =	-0.1591
$C\sigma$ =	0.2592
$\Delta \text{SAR}(\%)$ =	0.98

(3) System check result (for calibration by manufacture)

SYSTEM CHECK								
Date	Frequency [MHz]	SAR 1g [W/kg]						
		Forward Power 250mW		Conversion 1W	Target Value(1W)	Deviation [%]	Limit [%]	Remark
		Measured	ΔSAR corrected	Calculation				
24-Oct	2450.00	13.40	13.18	52.74	49.70	6.1	+/-10	*4

*4 The target value is the parameter defined in SAR for nominal Body TSL parameters in manufacturer calibrated dipole (D5GHzV2 SN:1020)

Please refer to " SAR result with Body TSL of Appendix 2.2. System Check Dipole (D5GHzV2,S/N: 1020)".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 2450MHz System Check DATA / Dipole2450MHz / Forward Conducted Power : 250mW

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz;
Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 51.159$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 20.1 W/kg

Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 99.04 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.2 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

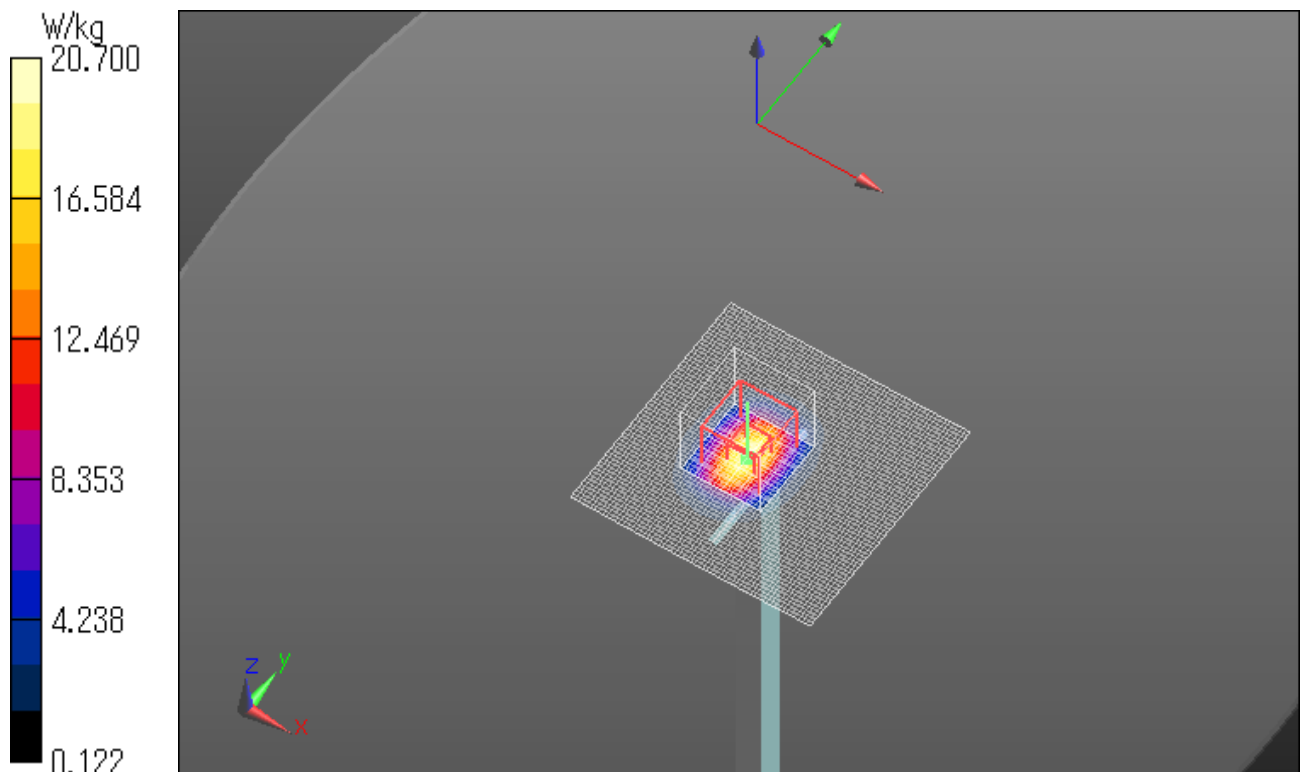

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 2450MHz System Check DATA / Dipole2450MHz / Forward Conducted Power : 250mW

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 51.159$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2); Calibrated: 2014/05/14;

Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn1369; Calibrated: 2014/05/14

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 9.10 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

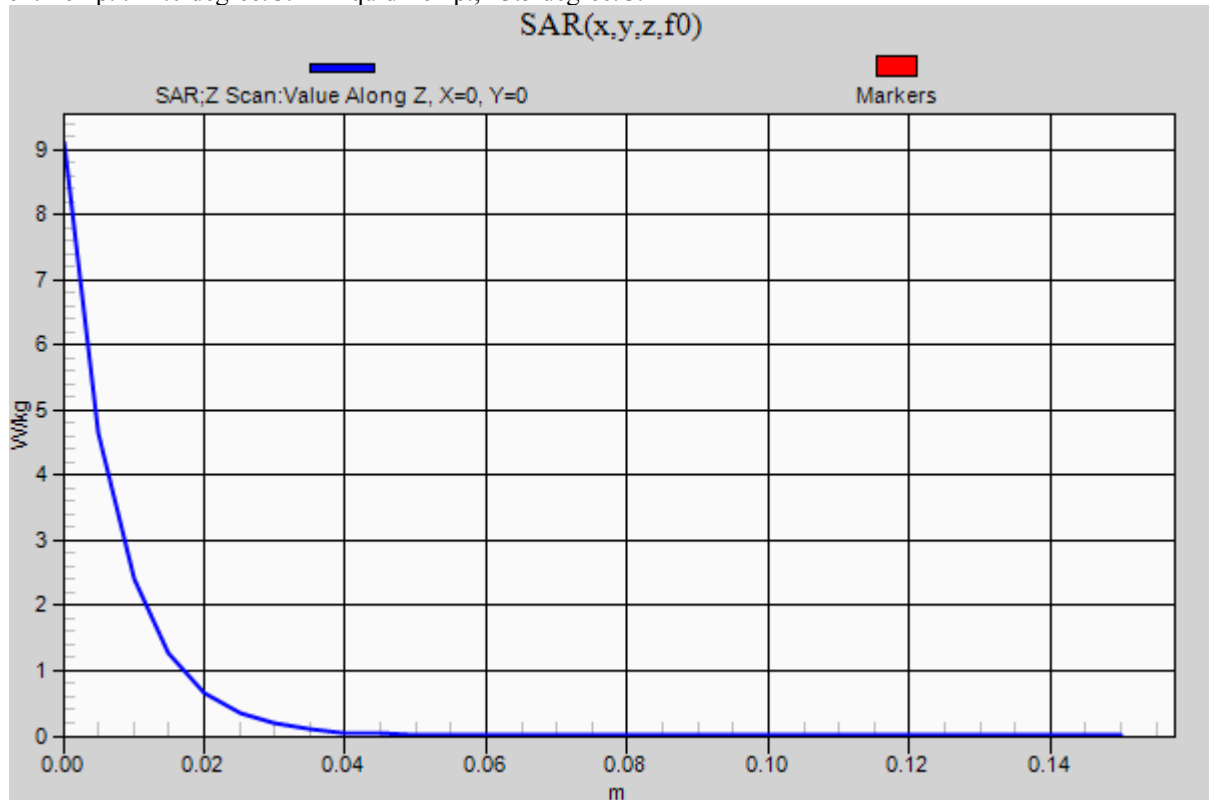

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

2. System Check Dipole (D2450V2,S/N:713)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **UL Japan (PTT)**

Certificate No: **D2450V2-713_Sep13**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 713**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **September 10, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37282783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01736)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41082317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-08	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Iseai Ei-Nasug	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 10, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-713_Sep13

Page 1 of 8

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.4 $\pm$ 6 %	1.83 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.6 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.05 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.1 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.2 $\pm$ 6 %	2.00 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.6 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.89 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.4 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 Ω + 0.7 j Ω
Return Loss	-34.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.7 Ω + 2.8 j Ω
Return Loss	-30.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.162 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 06, 2002

DASY5 Validation Report for Head TSL

Date: 10.09.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 713

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.095 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.05 W/kg

Maximum value of SAR (measured) = 17.0 W/kg

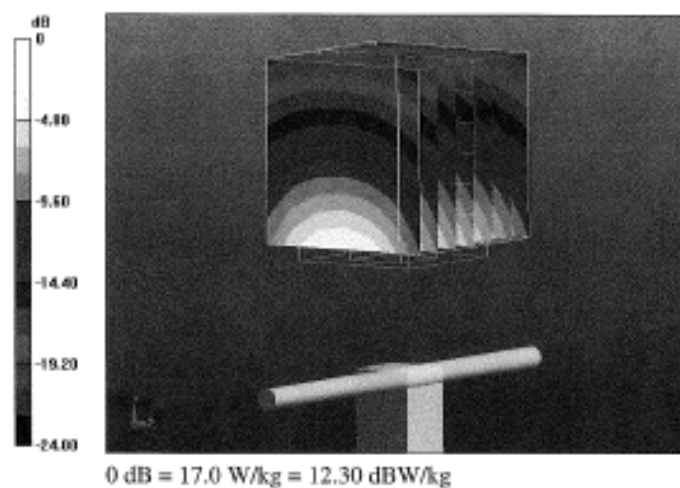

Impedance Measurement Plot for Head TSL

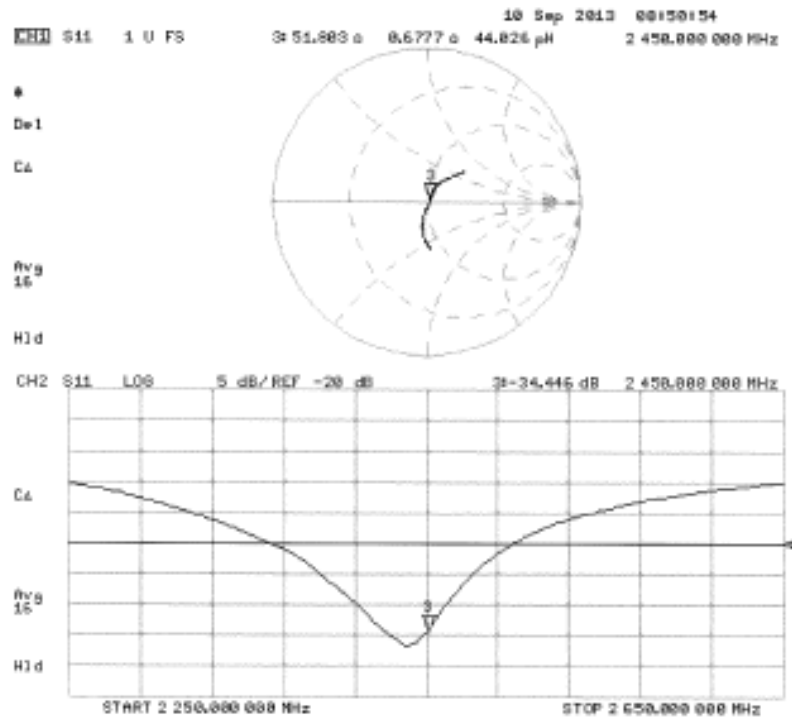

DASY5 Validation Report for Body TSL

Date: 10.09.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 713

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ S/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.095 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 26.1 W/kg


SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.89 W/kg

Maximum value of SAR (measured) = 16.7 W/kg

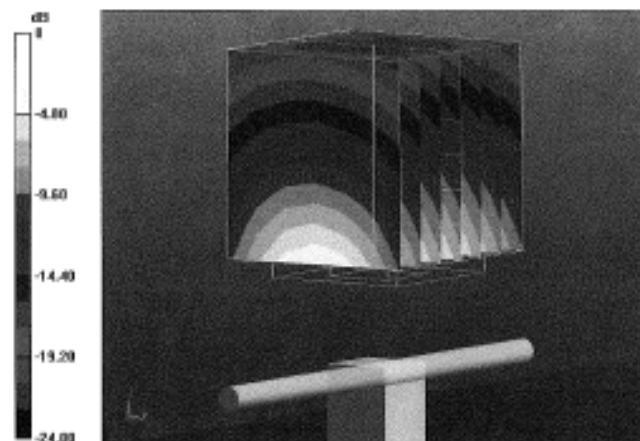

0 dB = 16.7 W/kg = 12.23 dBW/kg

Impedance Measurement Plot for Body TSL

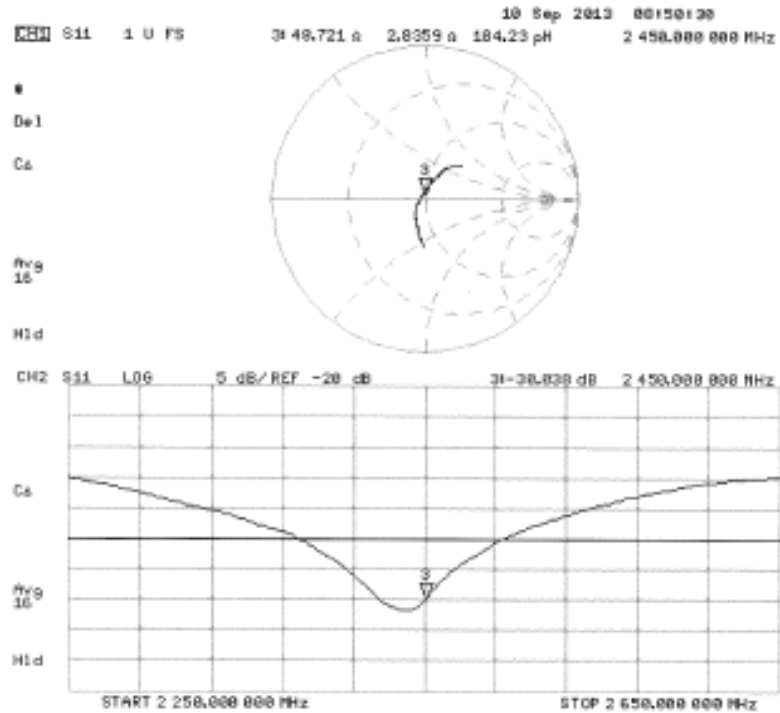

D2450V2 Calibration for Impedance and Return-loss

1. Test environment

Date	September 18, 2014		
Ambient Temperature	24.0 deg.C	Relative humidity	50%RH

2. Equipment used

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MNA-01	Network Analyzer	Agilent/HP	E8358A	US41080381	SAR	2014/08/21 * 12
MNCK-01	Type N Calibration Kit	Agilent	85032F	MY41495257	SAR	2014/08/18 * 12
EST-46	3.5mm ECONOMY CALIBRATION KIT	Agilent	85052D	MY43252869	SAR	2014/08/15 * 12
MPSAM-03	SAM Phantom	Schmid&Partner Engineering AG	QD000P40CD	1764	SAR	2014/06/03 * 12
MPF-03	2mmOval Flat Phantom ERI 5.0	Schmid&Partner Engineering AG	QDOVA001BB	1203	SAR	2014/06/03 * 12
MOS-30	Thermo-Hygrometer	Custom	CTH-201	3001	SAR	2014/07/06 * 12
MOS-35	Digital thermometer	HANNA	Checktemp 4	-	SAR	2014/07/06 * 12
HSL2450						Daily check
MSL2450						Daily check
SAR room1						Daily check

3. Test Result

Impedance,Transformed to feed point	Head	Deviation	Tolerance	Result
Calibration (SPEAG) 2013/09/10	51.8 Ω +0.7j Ω	-	-	-
Calibration(ULJ)2014/9/18	51.5 Ω +0.9j Ω	-0.3 Ω +0.2j Ω	+/-5 Ω +/-5j Ω	Complied

Return loss	Head	Deviation	Tolerance	Result
Calibration (SPEAG) 2013/09/10	-34.4dB	-	-	-
Calibration(ULJ)2014/9/18	-35.3dB	-0.9dB	-34.4 *+/-20%	Complied

Impedance,Transformed to feed point	Body	Deviation	Tolerance	Result
Calibration (SPEAG) 2013/09/10	48.7 Ω +2.8j Ω	-	-	-
Calibration(ULJ)2014/9/18	49.6 Ω +2.8j Ω	+0.9 Ω +/-0j Ω	+/-5 Ω +/-5j Ω	Complied

Return loss	Body	Deviation	Tolerance	Result
Calibration (SPEAG) 2013/09/10	-30.0dB	-	-	-
Calibration(ULJ)2014/9/18	-31.0dB	-1.0dB	-30.0 *+/-20%	Complied

*Tolerance : According to the KDB450824D02

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999


Facsimile: +81 596 24 8124

Measurement Plots

<Head Liquid>

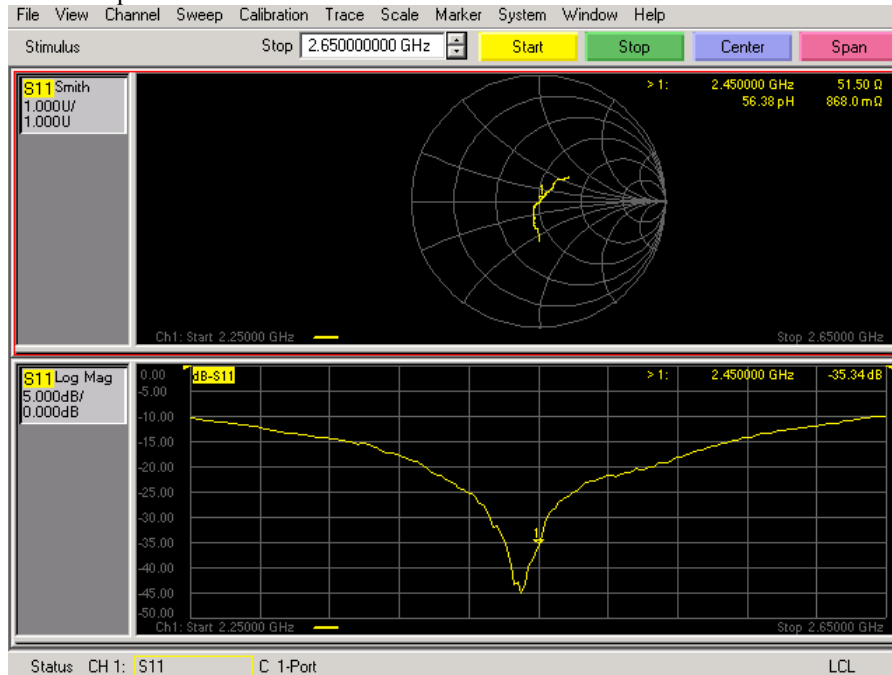

<Body Liquid>

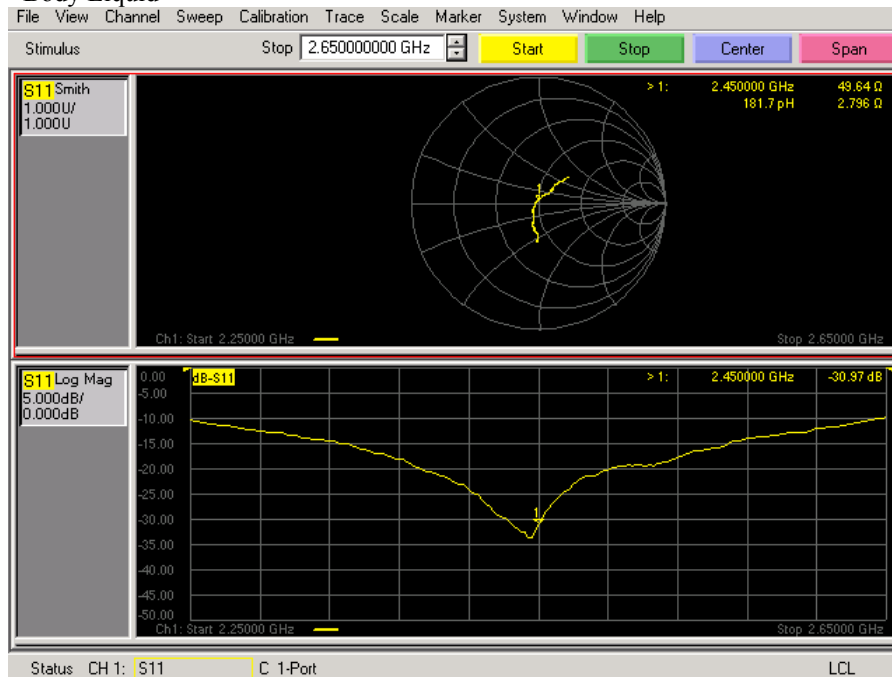

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

3. System check result Body 5200MHz

(1) Simulated Tissue Liquid Parameter confirmation

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
-	-	-	-	-	3000	ϵ_r	52.0	-	-	-	*1
						σ [mho/m]	2.73	-	-	-	
16-Oct	24	50	MBBL 3.5-5.8	23.5	5200	ϵ_r	49.0	47.7	-2.7	+/-5	*2
						σ [mho/m]	5.30	5.33	0.6	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5200	ϵ_r	49.0	48.4	-1.2	+/-5	*2
						σ [mho/m]	5.30	5.34	0.8	+/-5	
-	-	-	-	-	5800	ϵ_r	48.2	-	-	-	*1
						σ [mho/m]	6.00	-	-	-	

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in KDB 865664D01.

*2 The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
16-Oct	24	50	MBBL 3.5-5.8	23.5	5200	ϵ_r	47.3	47.7	0.8	+/-6	*3*4
						σ [mho/m]	5.44	5.33	-2.0	+/-6	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5200	ϵ_r	47.3	48.4	2.4	+/-6	*3*4
						σ [mho/m]	5.44	5.34	-1.8	+/-6	

ϵ_r : Relative Permittivity / σ : Conductivity

*3 The target value is the calibrated dipole Body TSL parameters. (D5GHzV2 SN:1020, Measured Body TSL parameters)

*4 The limit is for deviation provided by manufacture.

(2) SAR correction for deviations of complex permittivity from target

$$\Delta \text{SAR} = c\varepsilon \Delta \varepsilon + c\sigma \Delta \sigma$$

<1g>

$$C\varepsilon = -7.854 \times 10^{-4} f^3 + 9.402 \times 10^{-3} f^2 - 2.742 \times 10^{-2} f + 0.2026$$

$$C\sigma = 9.804 \times 10^{-3} f^3 - 8.661 \times 10^{-2} f^2 + 2.981 \times 10^{-2} f + 0.7829$$

<10g>

$$C\varepsilon = 3.456 \times 10^{-3} f^3 - 3.531 \times 10^{-2} f^2 + 7.675 \times 10^{-2} f + 0.1860$$

$$C\sigma = 4.479 \times 10^{-3} f^3 - 1.586 \times 10^{-2} f^2 - 0.1972 f + 0.7717$$

'f' is the frequency in GHz.

The measured SAR results are corrected with target value of KDB865664D01.

$$\text{Corrected SAR}(1g) = \text{Measured SAR}(1g) \times (100 - \Delta \text{SAR}) / 100$$

Date		16-Oct	22-Oct
	f(GHz)=	5.2	5.2
	$\Delta \varepsilon(\%)$ =	-2.7	-1.2
	$\Delta \sigma(\%)$ =	0.6	0.8
1g	Cε=	-0.2014	-0.2014
	Cσ=	-0.0255	-0.0255
	$\Delta \text{SAR}(\%)$ =	0.53	0.22
10g	Cε=	-0.2557	-0.2557
	Cσ=	-0.0528	-0.0528
	$\Delta \text{SAR}(\%)$ =	0.66	0.26

(3) System check result (for calibration by manufacture)

SYSTEM CHECK								
Date	Frequency [MHz]	SAR 1g [W/kg]			Target Value(1W)	Deviation [%]	Limit [%]	Remark
		Forward Power 100mW		Conversion 1W				
		Measured	ΔSAR corrected	Calculation				
16-Oct	5200.00	7.79	7.75	77.49	74.50	4.0	+/-10	*5
22-Oct	5200.00	7.90	7.88	78.83	74.50	5.8	+/-10	*5

*5 The target value is the parameter defined in SAR for nominal Body TSL parameters in manufacturer calibrated dipole (D5GHzV2 SN:1020)

Please refer to " SAR result with Body TSL of Appendix 2.2. System Check Dipole (D5GHzV2,S/N: 1020)".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5200MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.332$ S/m; $\epsilon_r = 47.66$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 15.3 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 58.66 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.79 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

Date: 2014/10/16

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

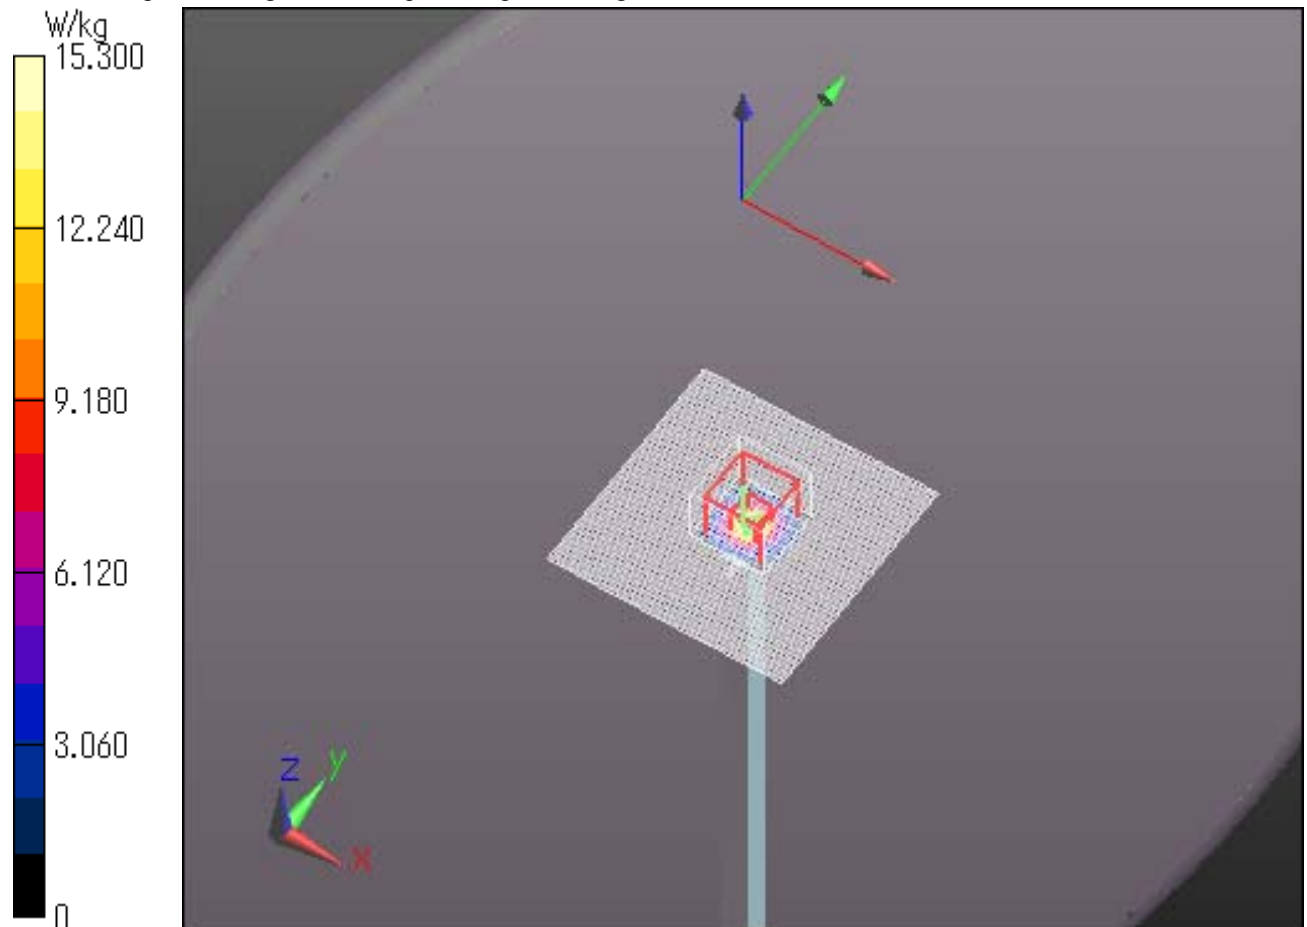

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5200MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.332$ S/m; $\epsilon_r = 47.66$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13;

Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 23.3 W/kg

Date: 2014/10/16

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

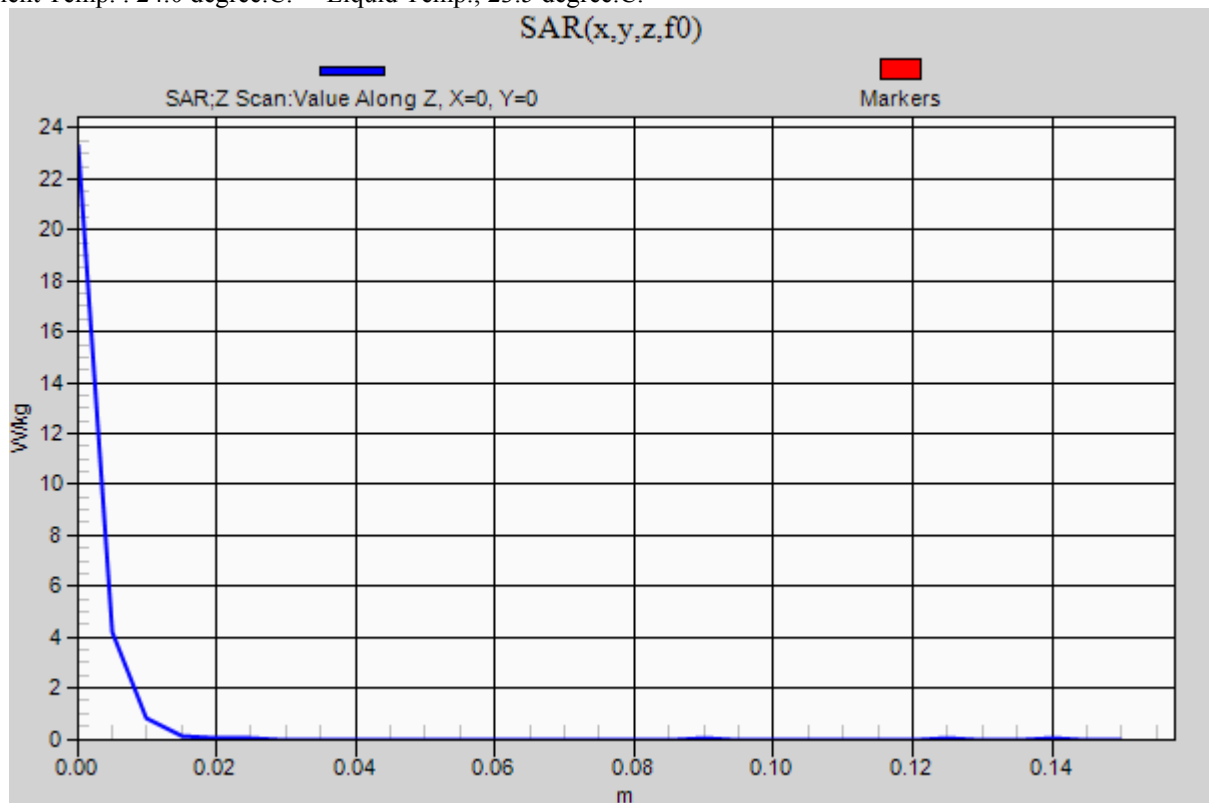

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5200MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.344$ S/m; $\epsilon_r = 48.429$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 15.9 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 60.03 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

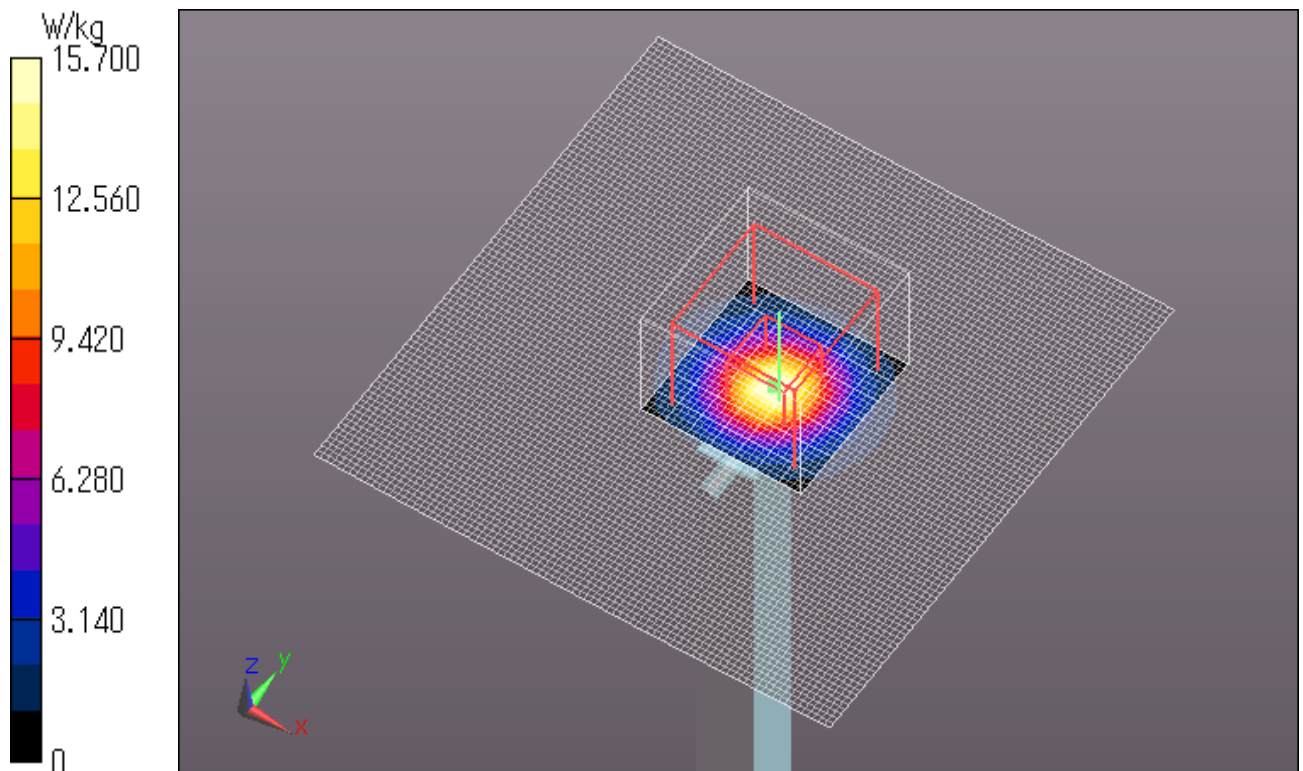

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5200MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.344$ S/m; $\epsilon_r = 48.429$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/12/13;

Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 18.1 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

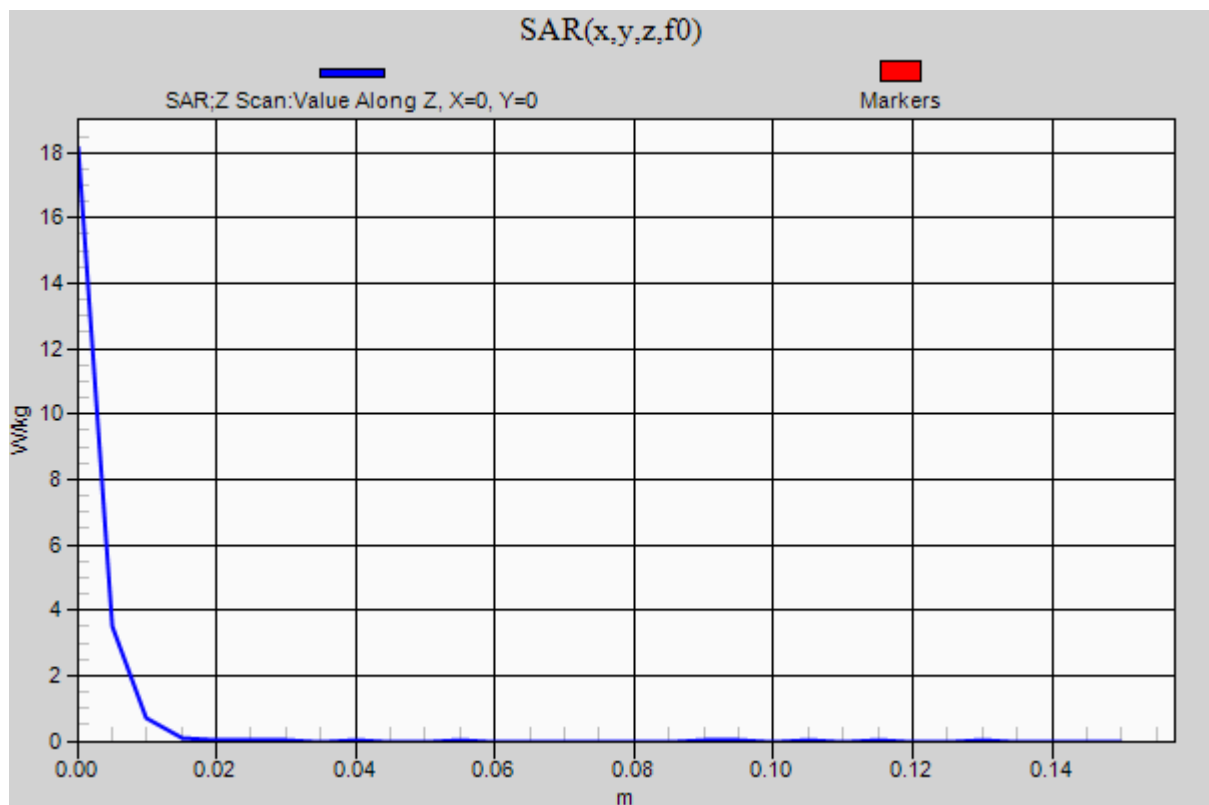

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

4. System check result Body 5300MHz

(1) Simulated Tissue Liquid Parameter confirmation

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
-	-	-	-	-	3000	ϵ_r	52.0	-	-	-	*1
						σ [mho/m]	2.73	-	-	-	
17-Oct	24	48	MBBL 3.5-5.8	23.5	5300	ϵ_r	48.9	47.6	-2.7	+/-5	*2
						σ [mho/m]	5.42	5.59	3.1	+/-5	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5300	ϵ_r	48.9	48.0	-1.8	+/-5	*2
						σ [mho/m]	5.42	5.43	0.1	+/-5	
-	-	-	-	-	5800	ϵ_r	48.2	-	-	-	*1
						σ [mho/m]	6.00	-	-	-	

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in KDB 865664D01.

*2 The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
17-Oct	24	48	MBBL 3.5-5.8	23.5	5300	ϵ_r	47.2	47.6	0.9	+/-6	*3*4
						σ [mho/m]	5.57	5.59	0.3	+/-6	
22-Oct	24	50	MBBL 3.5-5.8	23.5	5300	ϵ_r	47.2	48.0	1.8	+/-6	*3*4
						σ [mho/m]	5.57	5.43	-2.6	+/-6	

ϵ_r : Relative Permittivity / σ : Conductivity

*3 The target value is the calibrated dipole Body TSL parameters. (D5GHzV2 SN:1020, Measured Body TSL parameters)

*4 The limit is for deviation provided by manufacture.

(2) SAR correction for deviations of complex permittivity from target

The measured SAR results are corrected with target value of KDB865664D01.

Corrected SAR(1g) = Measured SAR(1g) x (100- Δ SAR)/100

$$\Delta \text{SAR} = c\epsilon \Delta \epsilon_r + c\sigma \Delta \sigma$$

<1g>

$$C\epsilon = -7.854 \times 10^{-4} f^3 + 9.402 \times 10^{-3} f^2 - 2.742 \times 10^{-2} f + 0.2026$$

$$C\sigma = 9.804 \times 10^{-3} f^3 - 8.661 \times 10^{-2} f^2 + 2.981 \times 10^{-2} f + 0.7829$$

<10g>

$$C\epsilon = 3.456 \times 10^{-3} f^3 - 3.531 \times 10^{-2} f^2 + 7.675 \times 10^{-2} f - 0.1860$$

$$C\sigma = 4.479 \times 10^{-3} f^3 - 1.586 \times 10^{-2} f^2 - 0.1972 f + 0.7717$$

'f' is the frequency in GHz.

Date	17-Oct	22-Oct
f(GHz)=	5.3	5.3
$\Delta \epsilon_r(\%)$ =	-2.7	-1.8
$\Delta \sigma(\%)$ =	3.1	0.1
1g C ϵ =	-0.2008	-0.2008
1g C σ =	-0.0324	-0.0324
1g Δ SAR(%)=	0.44	0.36
10g C ϵ =	-0.2566	-0.2566
10g C σ =	-0.0521	-0.0521
10g Δ SAR(%)=	0.53	0.46

(3) System check result (for calibration by manufacture)

SYSTEM CHECK							
Date	Frequency [MHz]	SAR 1g [W/kg]					
		Forward Power 100mW		Conversion 1W		Target Value(1W)	Deviation [%]
		Measured	Δ SAR corrected	Calculation			
17-Oct	5300.00	8.06	8.02	80.25	75.80	5.9	+/-10
22-Oct	5300.00	8.03	8.00	80.01	75.80	5.6	+/-10

*5 The target value is the parameter defined in SAR for nominal Body TSL parameters in manufacturer calibrated dipole (D5GHzV2 SN:1020)

Please refer to " SAR result with Body TSL of Appendix 2 2. System Check Dipole (D5GHzV2,S/N: 1020)".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5300MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.586$ S/m; $\epsilon_r = 47.603$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 17.7 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 57.00 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 16.1 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

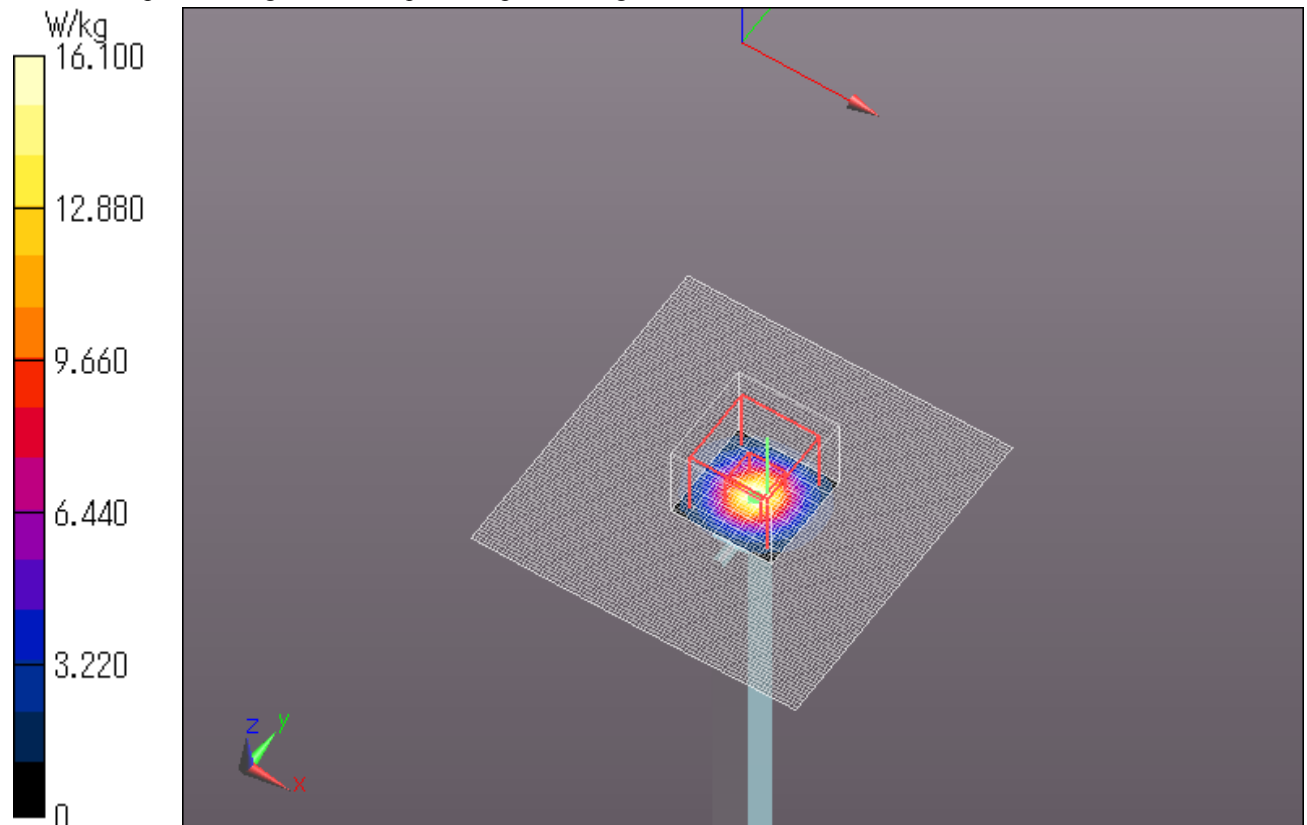

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5300MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.586$ S/m; $\epsilon_r = 47.603$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13;

Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 20.7 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

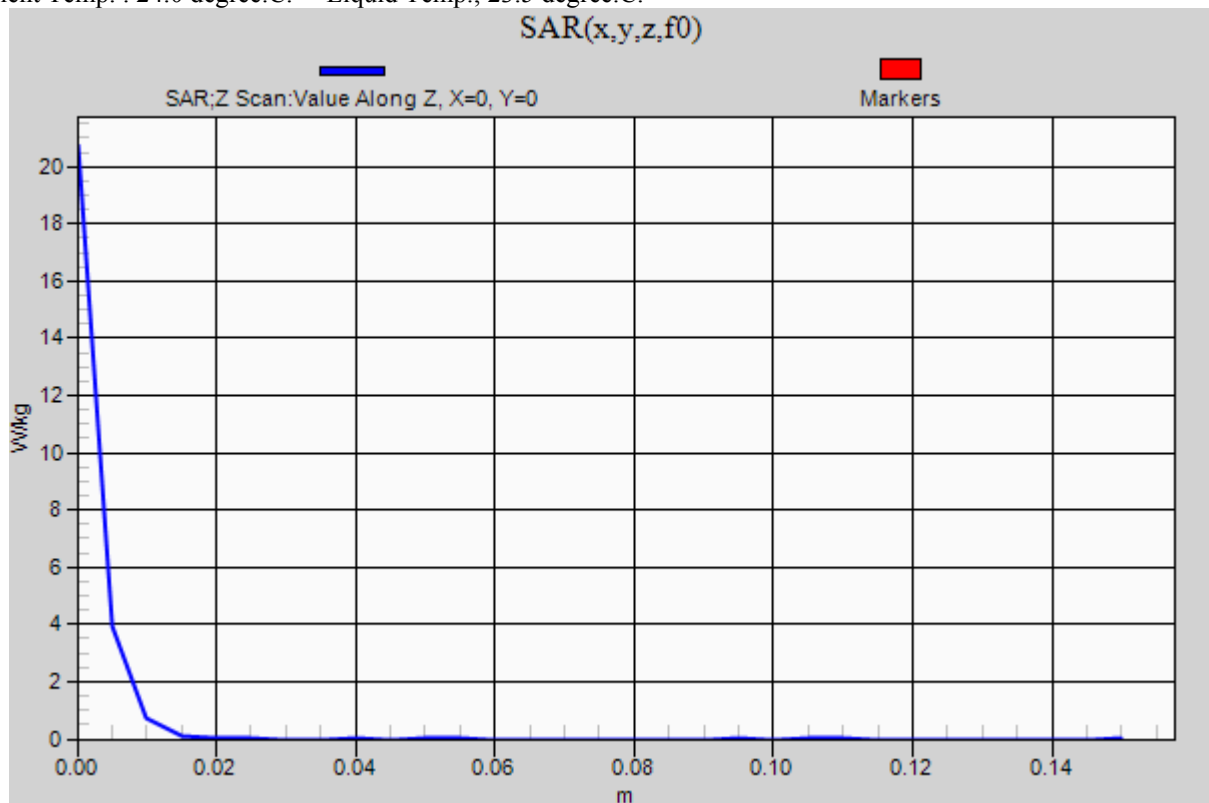

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5300MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.425$ S/m; $\epsilon_r = 48.035$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 16.3 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 60.50 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 32.8 W/kg

SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.18 W/kg

Maximum value of SAR (measured) = 16.0 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

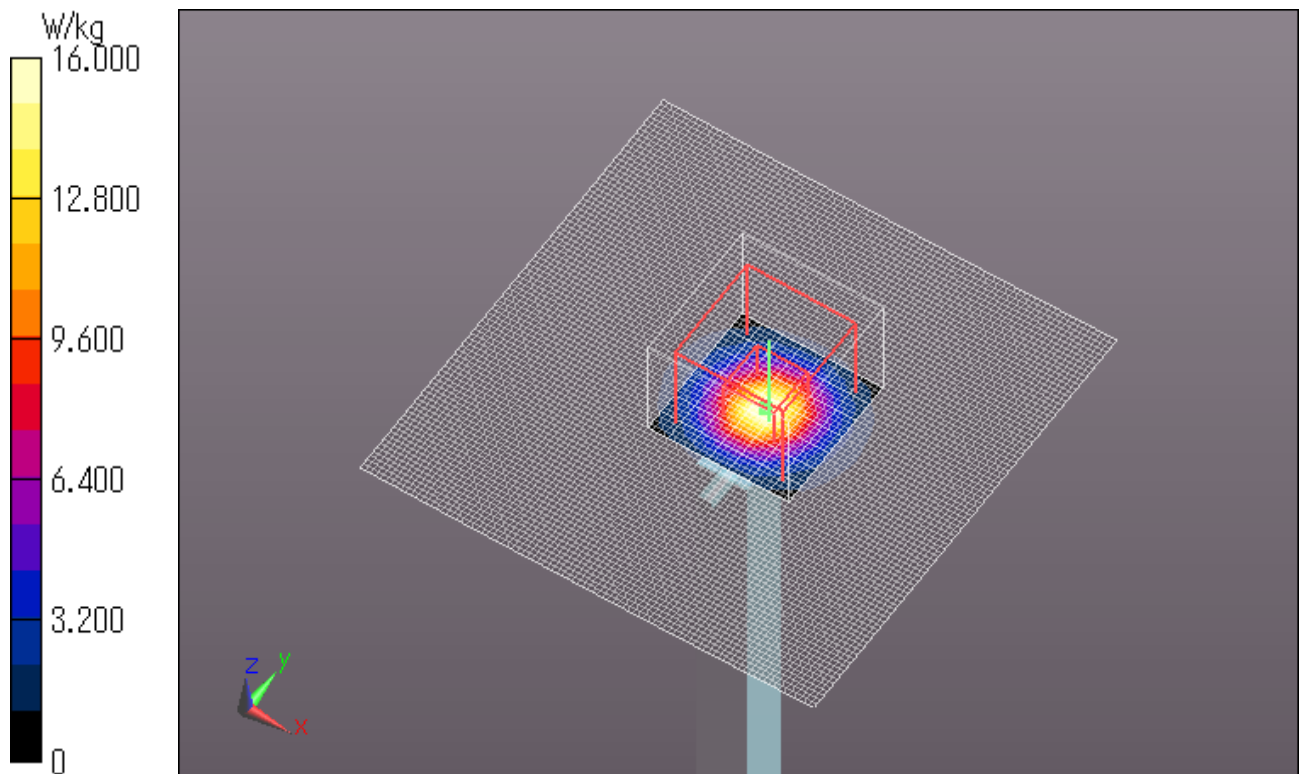

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5300MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.425$ S/m; $\epsilon_r = 48.035$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.23, 4.23, 4.23); Calibrated: 2013/12/13;

Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 18.2 W/kg

Date: 2014/10/22

Ambient Temp. : 24.0 degree.C. Liquid Temp.: 23.5 degree.C.

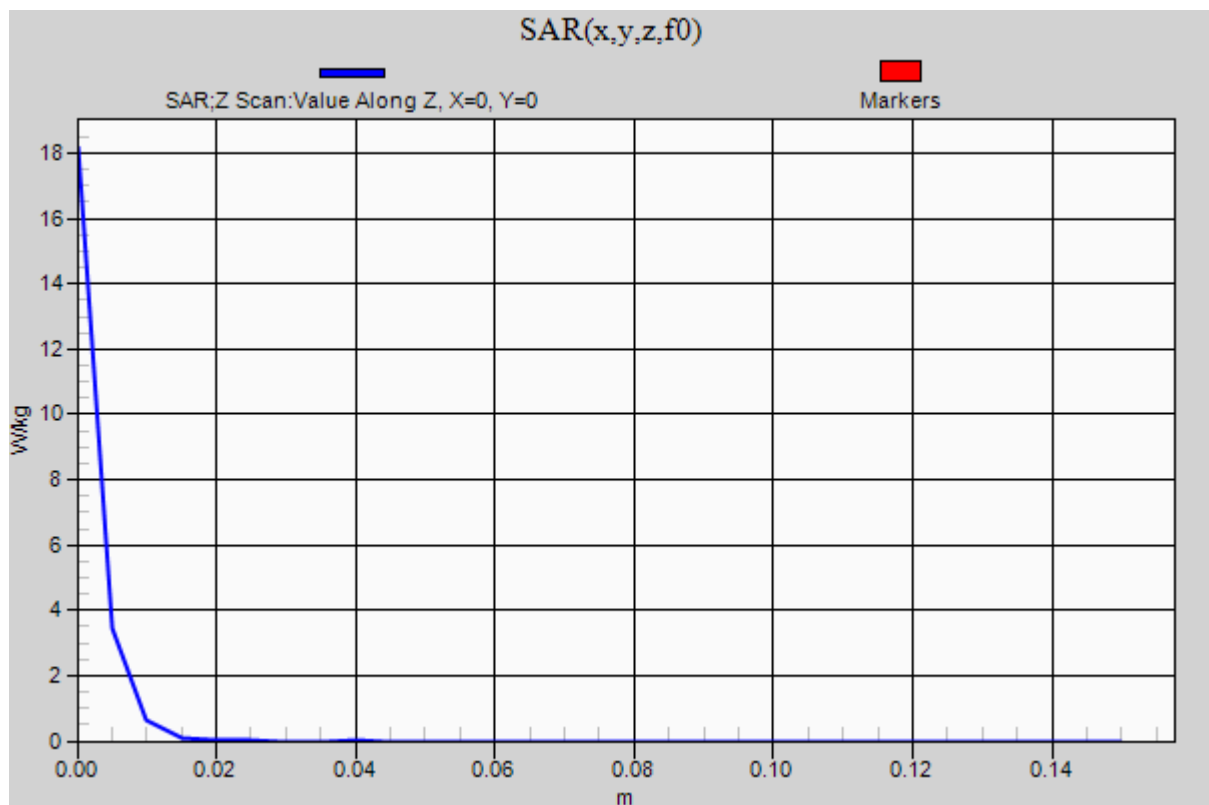

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

5. System check result Body 5600MHz

(1) Simulated Tissue Liquid Parameter confirmation

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
-	-	-	-	-	3000	ϵ_r	52.0	-	-	-	*1
						σ [mho/m]	2.73	-	-	-	
17-Oct	24	48	MBBL 3.5-5.8	23.5	5600	ϵ_r	48.5	46.3	-4.5	+/-5	*2
						σ [mho/m]	5.77	5.77	0.0	+/-5	
24-Oct	24	53	MBBL 3.5-5.8	23.5	5600	ϵ_r	48.5	47.8	-1.4	+/-5	*2
						σ [mho/m]	5.77	5.88	1.9	+/-5	
-	-	-	-	-	5800	ϵ_r	48.2	-	-	-	*1
						σ [mho/m]	6.00	-	-	-	

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in KDB 865664D01.

*2 The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
17-Oct	24	48	MBBL 3.5-5.8	23.5	5600	ϵ_r	46.6	46.3	-0.6	+/-6	*3*4
						σ [mho/m]	5.98	5.77	-3.5	+/-6	
24-Oct	24	53	MBBL 3.5-5.8	23.5	5600	ϵ_r	46.6	47.8	2.6	+/-6	*3*4
						σ [mho/m]	5.98	5.88	-1.7	+/-6	

ϵ_r : Relative Permittivity / σ : Conductivity

*3 The target value is the calibrated dipole Body TSL parameters. (D5GHzV2 SN:1020, Measured Body TSL parameters)

*4 The limit is for deviation provided by manufacture.

(2) SAR correction for deviations of complex permittivity from target

The measured SAR results are corrected with target value of KDB865664D01.

Corrected SAR(1g) = Measured SAR(1g) x (100- Δ SAR)/100

$$\Delta \text{SAR} = c\epsilon \Delta \epsilon_r + c\sigma \Delta \sigma$$

<1g>

$$C\epsilon = -7.854 \times 10^{-4} f^3 + 9.402 \times 10^{-3} f^2 - 2.742 \times 10^{-2} f + 0.2026$$

$$C\sigma = 9.804 \times 10^{-3} f^3 - 8.661 \times 10^{-2} f^2 + 2.981 \times 10^{-2} f + 0.7829$$

<10g>

$$C\epsilon = 3.456 \times 10^{-3} f^3 - 3.531 \times 10^{-2} f^2 + 7.675 \times 10^{-2} f + 0.1860$$

$$C\sigma = 4.479 \times 10^{-3} f^3 - 1.586 \times 10^{-2} f^2 - 0.1972 f + 0.7717$$

'f' is the frequency in GHz.

Date	17-Oct	24-Oct
f(GHz)=	5.6	5.6
$\Delta \epsilon_r(\%)$ =	-4.5	-1.40
$\Delta \sigma(\%)$ =	0.0	1.90
1g $C\epsilon$ =	-0.1992	-0.1992
$C\sigma$ =	-0.0445	-0.0445
$\Delta \text{SAR}(\%)$ =	0.90	0.19
10g $C\epsilon$ =	-0.2566	-0.2566
$C\sigma$ =	-0.0434	-0.0434
$\Delta \text{SAR}(\%)$ =	1.15	0.28

(3) System check result (for calibration by manufacture)

SYSTEM CHECK								
Date	Frequency [MHz]	SAR 1g [W/kg]			Target Value(1W)	Deviation [%]	Limit [%]	Remark
		Forward Power 100mW		Conversion 1W				
		Measured	Δ SAR corrected	Calculation				
17-Oct	5600.00	8.00	7.93	79.28	80.30	-1.3	+/-10	*5
24-Oct	5600.00	7.70	7.69	77.00	80.30	-4.1	+/-10	*5

*5 The target value is the parameter defined in SAR for nominal Body TSL parameters in manufacturer calibrated dipole (D5GHzV2 SN:1020)

Please refer to "SAR result with Body TSL of Appendix 2.2. System Check Dipole (D5GHzV2,S/N: 1020)".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5600MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.771$ S/m; $\epsilon_r = 46.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 16.1 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 58.68 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 33.6 W/kg

SAR(1 g) = 8 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 16.1 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

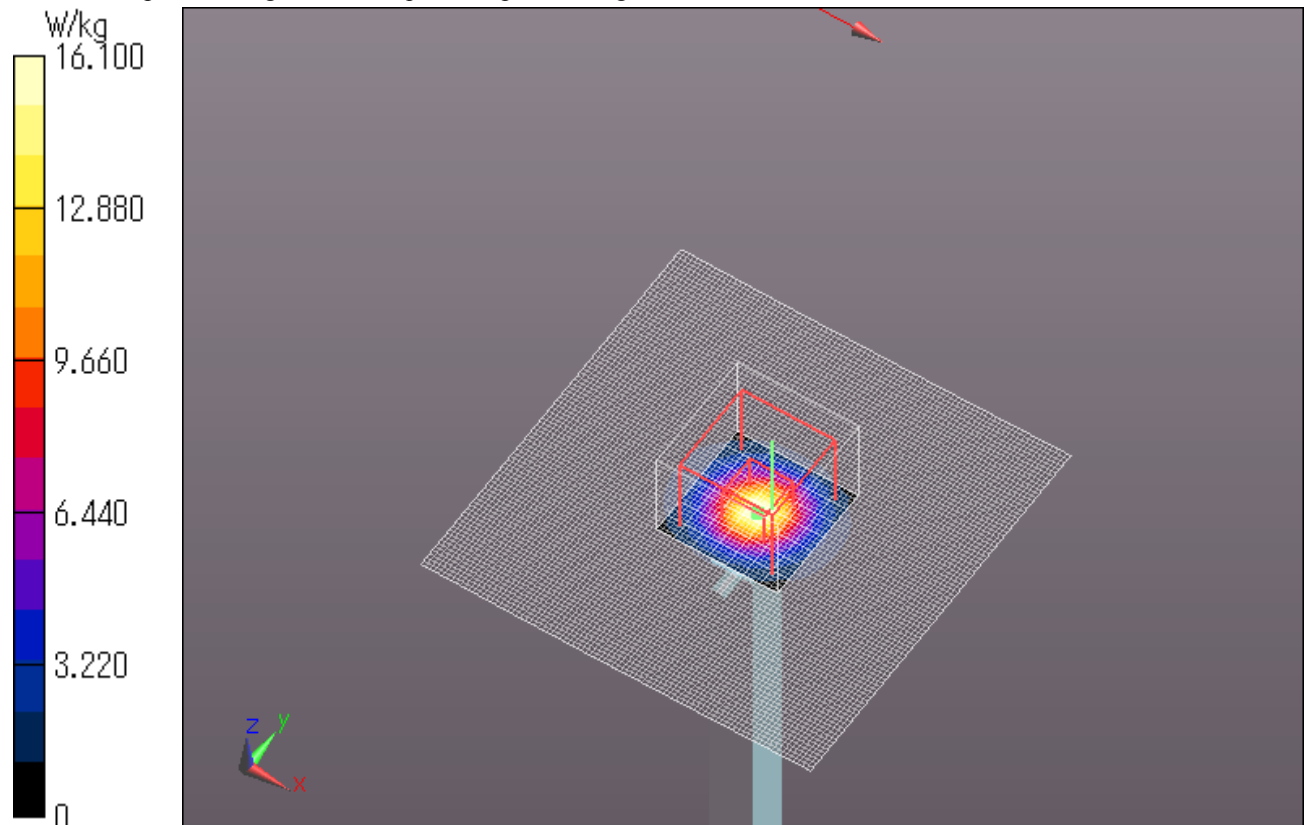

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5600MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.771$ S/m; $\epsilon_r = 46.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13;

Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 22.6 W/kg

Date: 2014/10/17

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

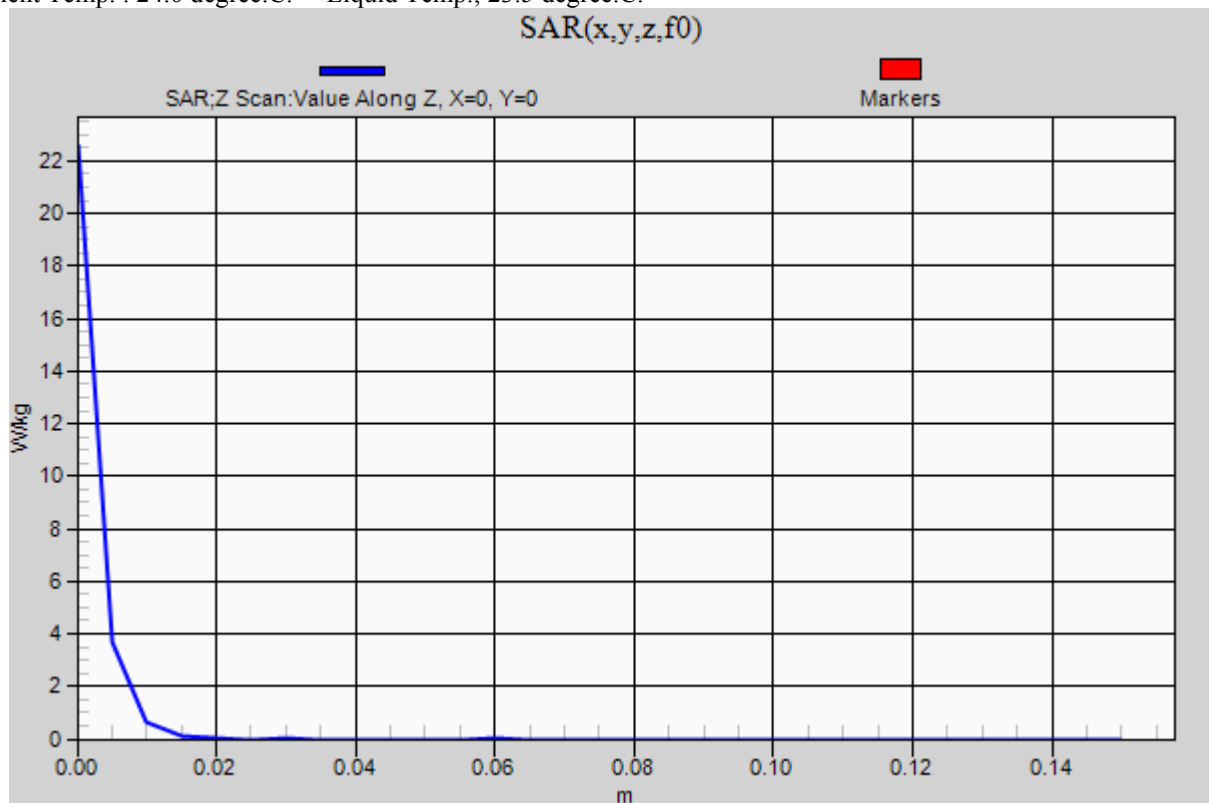

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5600MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.88$ S/m; $\epsilon_r = 47.813$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 16.7 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 53.26 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 7.7 W/kg; SAR(10 g) = 2.11 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

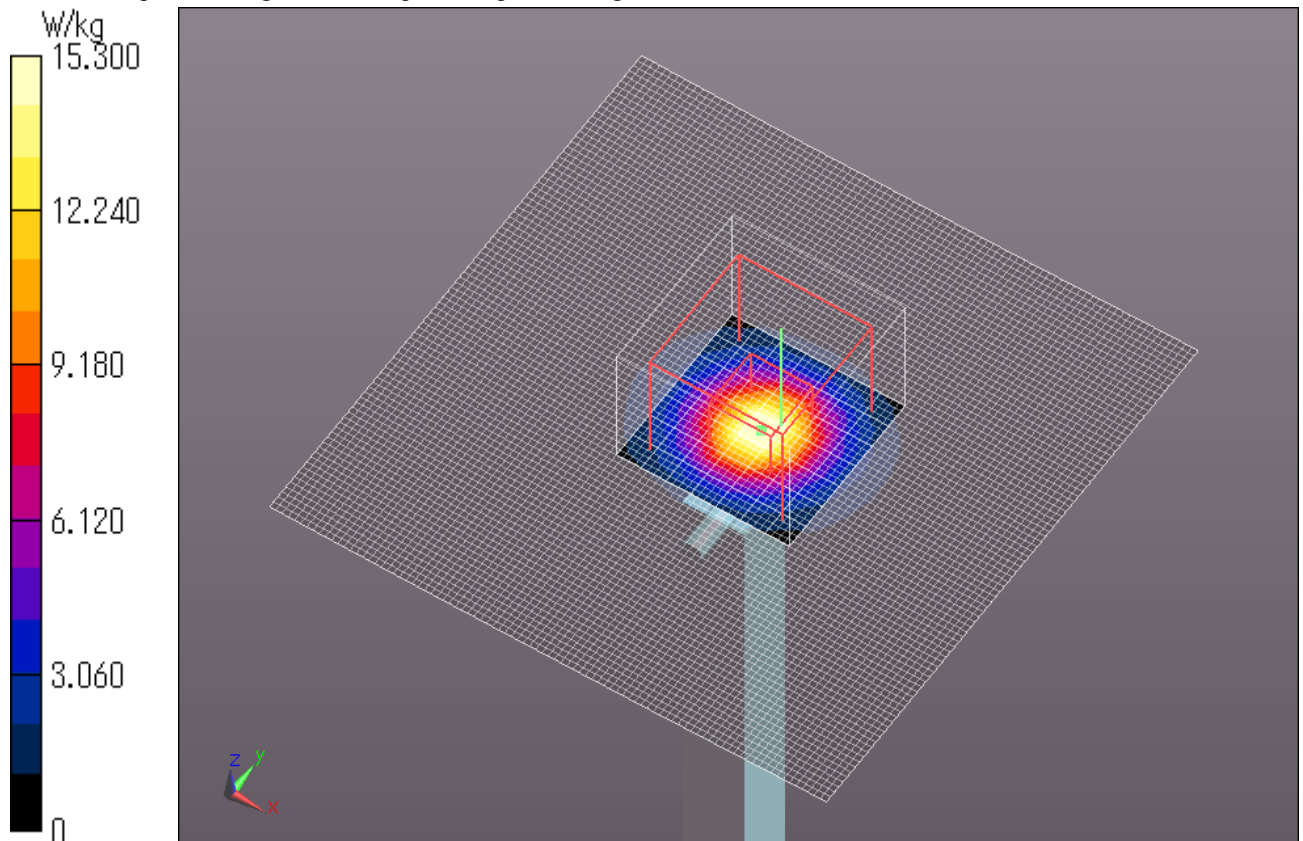

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5600MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.88$ S/m; $\epsilon_r = 47.813$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/12/13;

Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 17.1 W/kg

Date: 2014/10/24

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

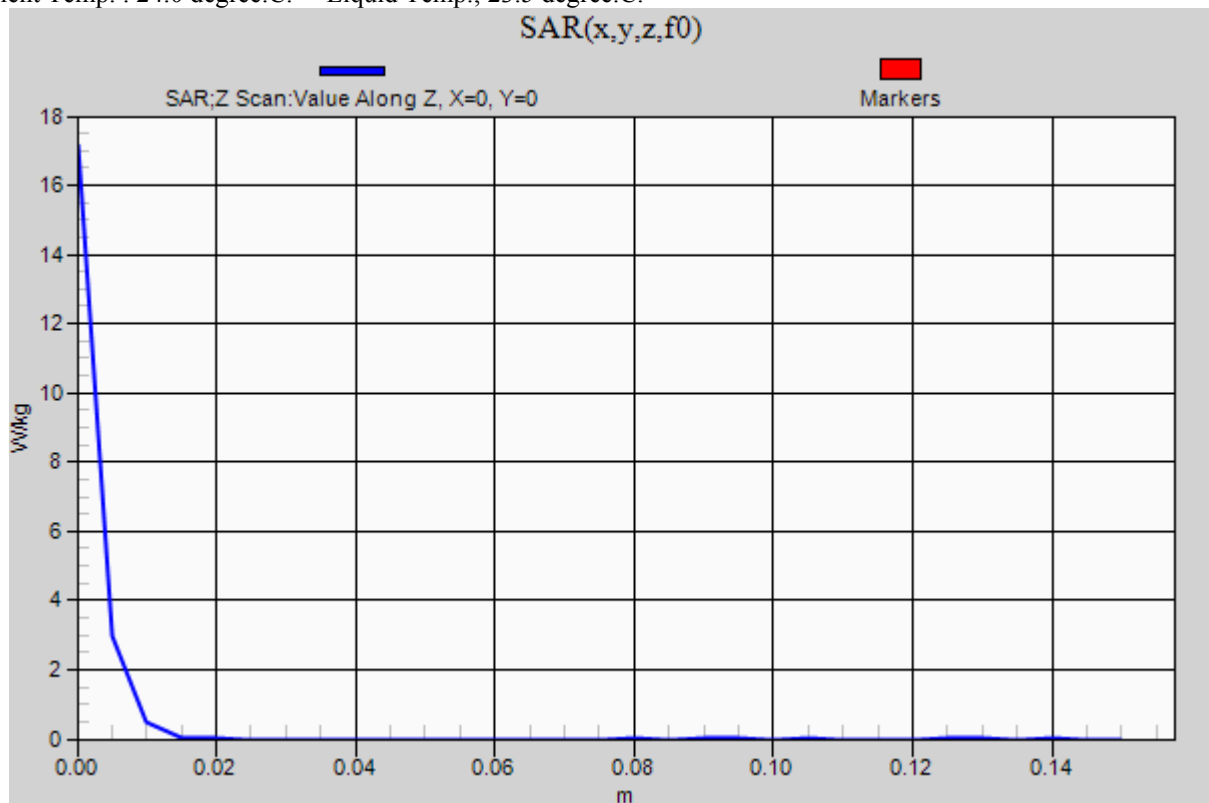

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

6. System check result Body 5800MHz

(1) Simulated Tissue Liquid Parameter confirmation

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
20-Oct	24	46	MBBL 3.5-5.8	23.5	5800	ϵ_r	48.2	47.2	-2.2	+/-5	*1
						σ [mho/m]	6.00	5.92	-1.4	+/-5	
23-Oct	24	50	MBBL 3.5-5.8	23.5	5800	ϵ_r	48.2	46.9	-2.7	+/-5	*1
						σ [mho/m]	6.00	5.86	-2.3	+/-5	

ϵ_r : Relative Permittivity / σ : Conductivity

*1 The Target value is a parameter defined in KDB 865664D01.

DIELECTRIC PARAMETERS MEASUREMENT RESULTS											
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Parameters	Target Value	Measured	Deviation [%]	Limit [%]	Remark
20-Oct	24	46	MBBL 3.5-5.8	23.5	5800	ϵ_r	46.3	47.2	1.9	+/-6	*2 *3
						σ [mho/m]	6.23	5.92	-5.0	+/-6	
23-Oct	24	50	MBBL 3.5-5.8	23.5	5800	ϵ_r	46.3	46.9	1.3	+/-6	*2 *3
						σ [mho/m]	6.23	5.86	-5.9	+/-6	

ϵ_r : Relative Permittivity / σ : Conductivity

*2 The target value is the calibrated dipole Body TSL parameters. (D5GHzV2 SN:1020, Measured Body TSL parameters)

*3 The limit is for deviation provided by manufacture.

(2) SAR correction for deviations of complex permittivity from target

The measured SAR results are corrected with target value of KDB865664D01.

Corrected SAR(1g) = Measured SAR(1g) x (100- Δ SAR)/100

$$\Delta \text{SAR} = c\epsilon \Delta \epsilon_r + c\sigma \Delta \sigma$$

<1g>

$$C\epsilon = -7.854 \times 10^{-4} f^3 + 9.402 \times 10^{-3} f^2 - 2.742 \times 10^{-2} f - 0.2026$$

$$C\sigma = 9.804 \times 10^{-3} f^3 - 8.661 \times 10^{-2} f^2 + 2.981 \times 10^{-2} f + 0.7829$$

<10g>

$$C\epsilon = 3.456 \times 10^{-3} f^3 - 3.531 \times 10^{-2} f^2 + 7.675 \times 10^{-2} f - 0.1860$$

$$C\sigma = 4.479 \times 10^{-3} f^3 - 1.586 \times 10^{-2} f^2 - 0.1972 f + 0.7717$$

'f' is the frequency in GHz.

Date	20-Oct	23-Oct
f(GHz)=	5.8	5.8
$\Delta \epsilon_r(\%)$ =	-2.2	-2.7
$\Delta \sigma(\%)$ =	-1.4	-2.3
1g		
$C\epsilon$ =	-0.1986	-0.1986
$C\sigma$ =	-0.0449	-0.0449
$\Delta \text{SAR}(\%)$ =	0.50	0.64
10g		
$C\epsilon$ =	-0.2544	-0.2544
$C\sigma$ =	-0.0317	-0.0317
$\Delta \text{SAR}(\%)$ =	0.60	0.76

(3) System check result (for calibration by manufacture)

SYSTEM CHECK									
Date	Frequency [MHz]	SAR 1g [W/kg]				Target Value(1W)	Deviation [%]	Limit [%]	Remark
		Forward Power 100mW		Conversion 1W	Calculation				
		Measured	ΔSAR corrected						
20-Oct	5800.00	6.92	6.89	68.85	74.80	-7.9	+/-10	*4	
23-Oct	5800.00	7.12	7.07	71.20	74.80	-4.8	+/-10	*4	

*4 The target value is the parameter defined in SAR for nominal Body TSL parameters in manufacturer calibrated dipole (D5GHzV2 SN:1020)

Please refer to " SAR result with Body TSL of Appendix 2 2. System Check Dipole (D5GHzV2,S/N: 1020)".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5800MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5800$ MHz; $\sigma = 5.917$ S/m; $\epsilon_r = 47.159$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 13.9 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 54.82 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 31.9 W/kg

SAR(1 g) = 6.92 W/kg; SAR(10 g) = 1.89 W/kg

Maximum value of SAR (measured) = 14.3 W/kg

Date: 2014/10/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

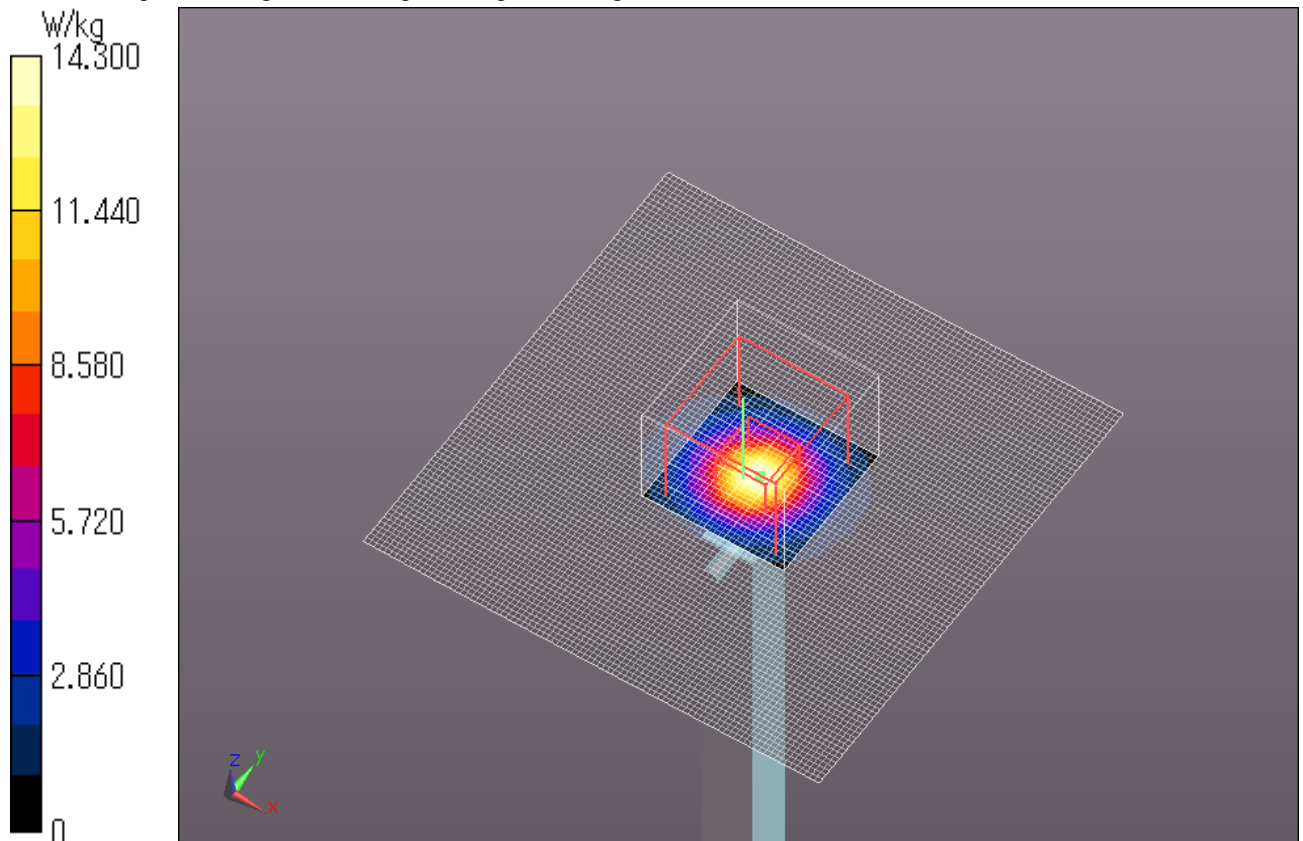

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5800MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5800$ MHz; $\sigma = 5.917$ S/m; $\epsilon_r = 47.159$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13;

Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 26.4 W/kg

Date: 2014/10/20

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

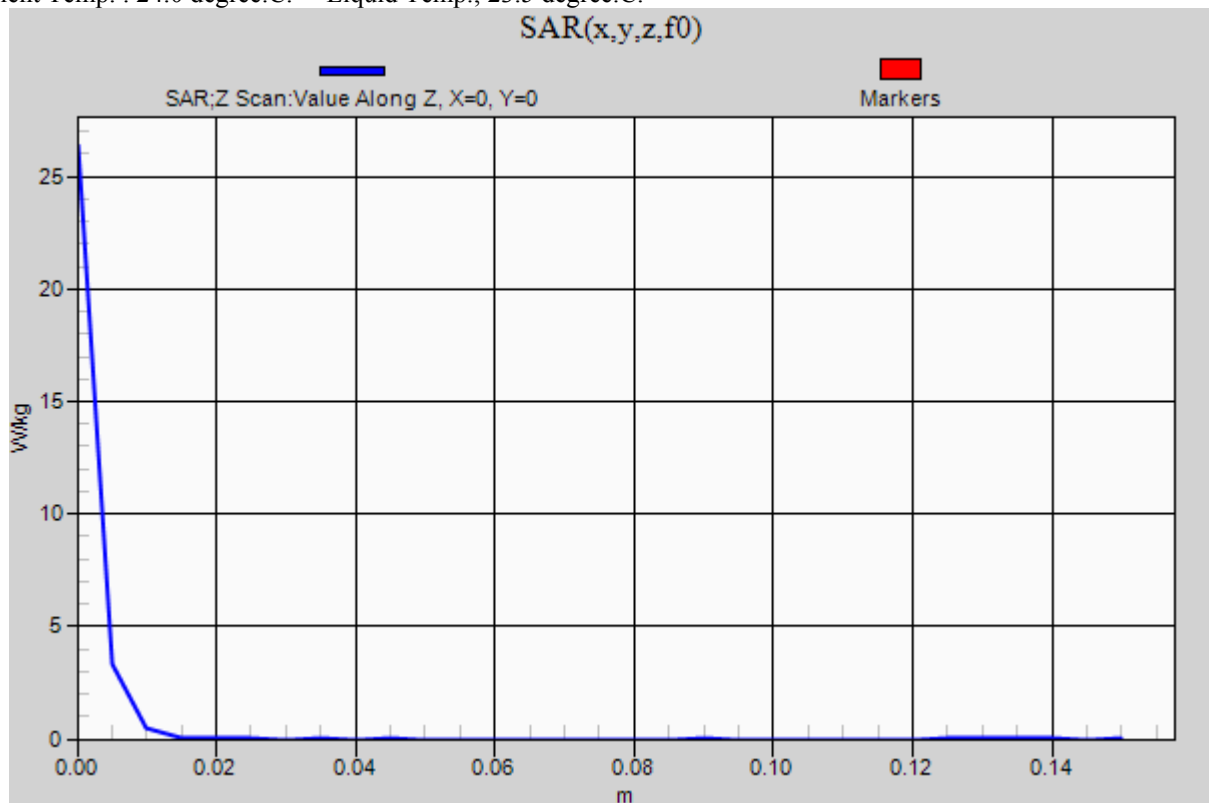

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5800MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5800$ MHz; $\sigma = 5.862$ S/m; $\epsilon_r = 46.901$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045

Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 15.8 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 51.68 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.12 W/kg; SAR(10 g) = 1.94 W/kg

Maximum value of SAR (measured) = 14.6 W/kg

Date: 2014/10/23

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

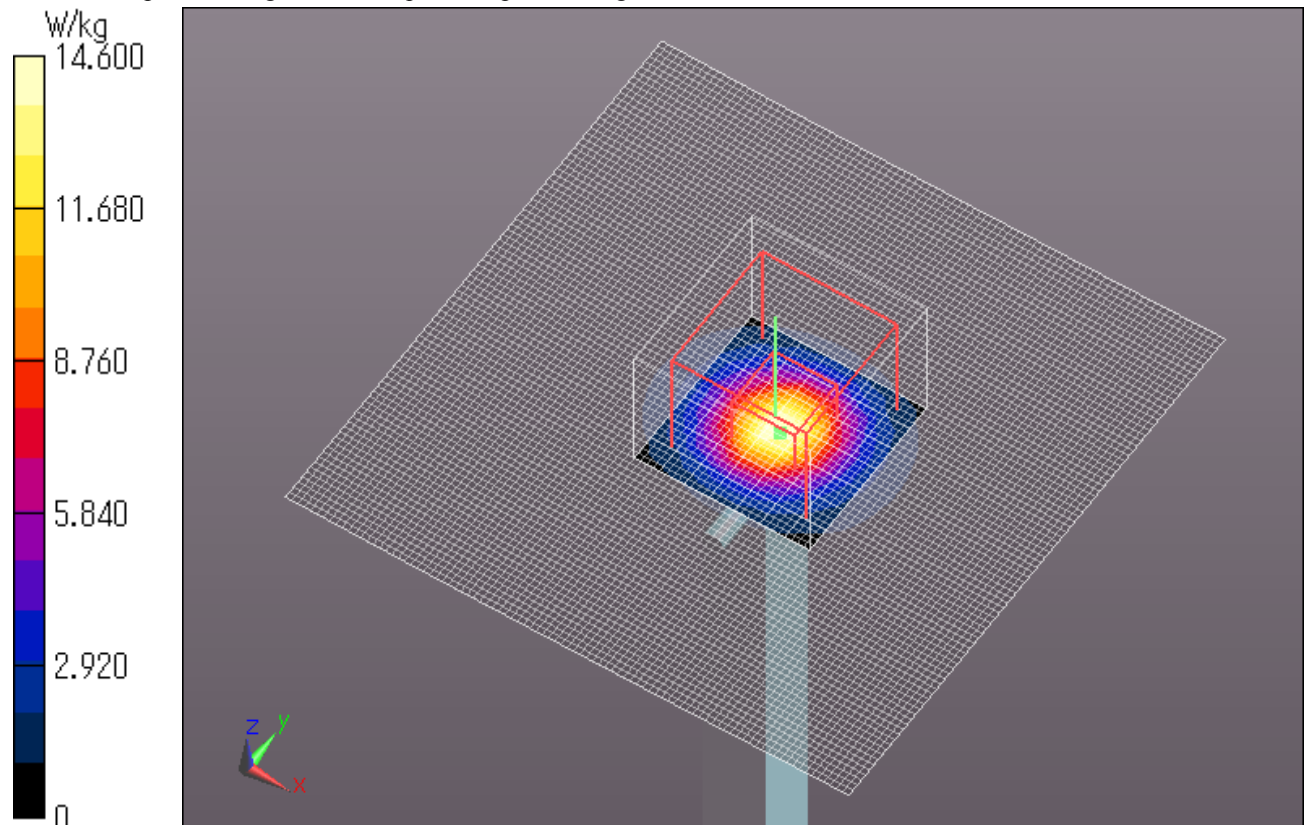

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Body 5800MHz System Check DATA / Dipole5GHz / Forward Conducted Power : 100mW

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5800$ MHz; $\sigma = 5.862$ S/m; $\epsilon_r = 46.901$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/12/13;

Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn509; Calibrated: 2014/07/28

Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1045


Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 15.5 W/kg

Date: 2014/10/23

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

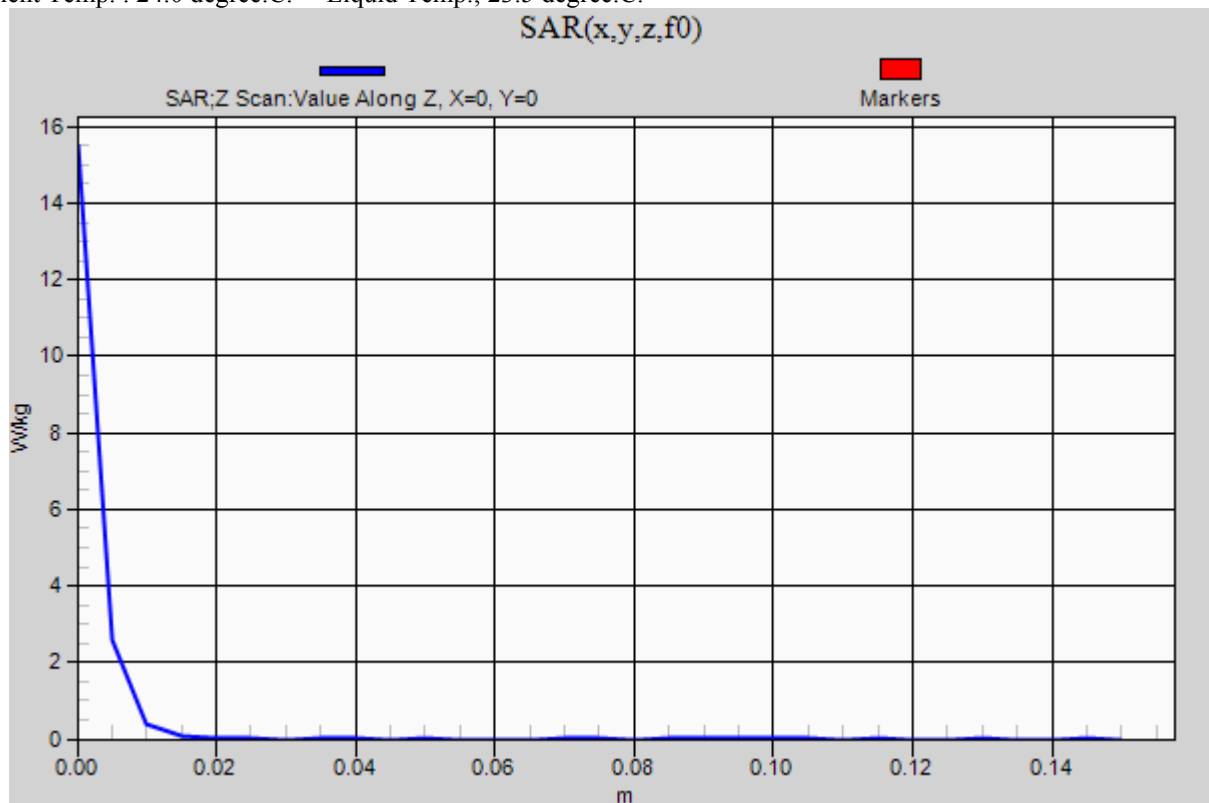

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124