



Test Report: 5W50143 Issue 2

Applicant: Codan Limited
81 Graves Street,
Newton SA 5074,
Australia

Apparatus: 2011 and 2012 HF SSB Transceivers

FCC ID: DYYNGT-11

In Accordance With: FCC Part 90
Private Land Mobile Radio Services

Tested By: Nemko Canada Inc.
303 River Road
Ottawa, Ontario
K1V 1H2

Authorized By:

A handwritten signature in blue ink, appearing to read 'Sim Jagpal'.

Sim Jagpal, Resource Manager

Date: January 31, 2006

Total Number of Pages: 36

Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 90. Conducted measurements were performed in accordance with ANSI TIA-603-B-2002. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

Apparatus Assessed:	2011 and 2012 HF SSB Transceivers
Specification:	FCC Part 90 Private Land Mobile Radio Services
Compliance Status:	Complies
Exclusions:	None
Non-compliances:	None
Report Release History:	Issue 2 – Addition of Carrier suppression values

Author: Jason Nixon, Telecom Specialist

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

TABLE OF CONTENTS

Report Summary.....	2
Section 1 : Equipment Under Test.....	4
1.1 Product Identification	4
1.2 Samples Submitted for Assessment.....	4
1.3 Theory of Operation	4
1.4 Technical Specifications of the EUT	5
1.5 Block Diagram of the EUT.....	5
Section 2 : Test Conditions.....	6
2.1 Specifications	6
2.2 Deviations From Laboratory Test Procedures	6
2.3 Test Environment	6
2.4 Test Equipment.....	6
Section 3 : Observations	7
3.1 Modifications Performed During Assessment	7
3.2 Record Of Technical Judgements	7
3.3 EUT Parameters Affecting Compliance	7
3.4 Test Deleted.....	7
3.5 Additional Observations.....	7
Section 4 : Results Summary	8
4.1 FCC Part 90 : Test Results	9
Appendix A : Test Results.....	10
Clause 90.205 Output Power	10
Clause 90.209 Occupied Bandwidth.....	11
Clause 90.210 Spurious emissions at the antenna terminal	23
Clause 90.210 Field Strength of spurious radiation.....	30
Clause 90.213 Frequency Stability	32
Appendix B : Setup Photographs	34
Appendix C : Block Diagram of Test Setups.....	35

Section 1 : Equipment Under Test

1.1 Product Identification

The Equipment Under Test was identified as follows:

2011 (NGT VR) SSB Transceiver
2012 (NGT SRx) SSB Transceiver

1.2 Samples Submitted for Assessment

The following samples of the apparatus have been submitted for type assessment:

Sample No.	Description	Serial No.
1	Transceiver Supply (M/N: TS3020)	1249
5	Codan Speaker (P/N: 15-00649)	_____
6	NGT Test Jig	_____
8	Handset Cable (P/N: 08-06022-001)	_____
9	NGT SRx Handset (M/N: 2020)	5538142B0152
10	NGT VR Handset (M/N: 2020)	5803142B0633
16	NGT SRx RF-Unit (M/N: 2012)	5438143A0024
18	NGT VR RF-Unit (M/N: 2011)	5835024F0633

The first samples were received on: December 15, 2005



1.3 Theory of Operation

The Codan Limited 2010 and 2012 HF SSB Transceivers are push-to-talk radio (PTT button, display and keypad on 2020 Handset) with a 50Ω connector, no integral or detachable antenna.

1.4 Technical Specifications of the EUT

Manufacturer:	Codan Limited
Operating Frequency:	Tx: 1.6 – 30MHz Rx: 250kHz – 30MHz
Emission Designator:	J2B, J3E, H3E
Rated Power:	125W PEP
Modulation:	Upper Single Sideband Suppressed Carrier, Upper Single Sideband Full Carrier, Morse Code, AFSK
Antenna Connector:	PL259 connector
Power Source:	13.6VDC

1.5 Block Diagram of the EUT

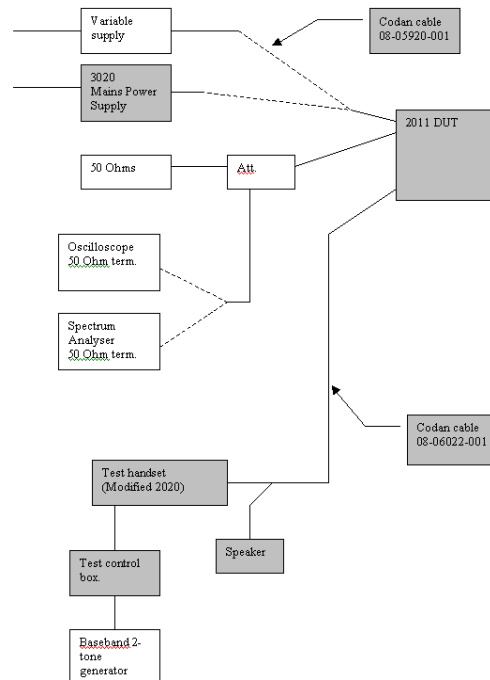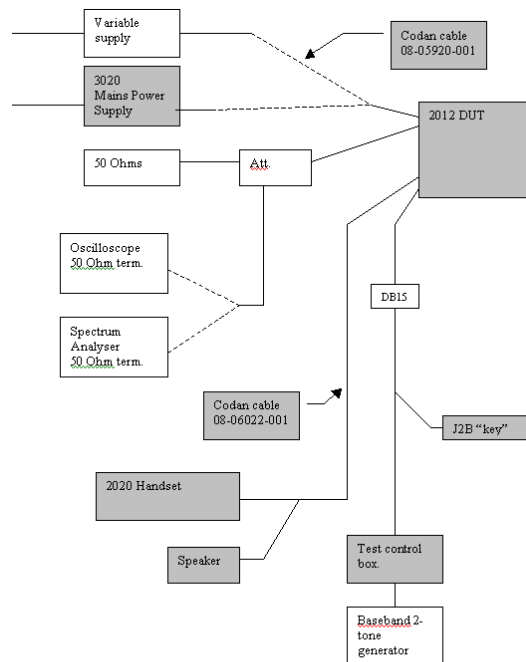

Section 2 : Test Conditions

2.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 2 Subpart J, Equipment Authorization Procedures
FCC Part 90 Private Land Mobile Radio Services

2.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

2.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	:	15 – 30 °C
Humidity range	:	20 - 75 %
Pressure range	:	86 - 106 kPa
Power supply range	:	+/- 5% of rated voltages

2.4 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	HP	8565E	FA000981	15 Sept 05	15 Sept 06
20dB Attenuator	Narda	769-20	FA001394	COU	COU
20dB Attenuator	Narda	776B-20	FA001153	COU	COU
10dB Attenuator	Narda	768-10	—	COU	COU
10dB Attenuator	Narda	768-10	—	COU	COU
Signal Generator	Tektronics	AWG2021	FA001529	NCR	NCR
Vector Signal Analyzer	HP	89410A	FA001571	11 Feb 05	11 Feb 06
Frequency Counter	HP	5352B	FA001915	14 Oct 05	14 Oct 06
Receiver	Rohde & Schwarz	ESVS-30	FA001437	July 27/05	July 27/06
Biconical (2) Antenna	EMCO	3109	FA000904	Aug. 26/05	Aug. 26/06
Active Loop Antenna	Rohde & Schwarz	HFH2-Z2	FA000631	May 20/05	May 20/06
Receiver	Rohde & Schwarz	ESHS 10	FA001918	Feb. 28/05	Feb. 28/06

COU- Cal on Use

NCR – No Cal Required

Section 3 : Observations

3.1 Modifications Performed During Assessment

No modifications were performed during assessment.

3.2 Record Of Technical Judgements

The following technical judgement was made during this assessment:

3.2.1 Technical Judgement 1

The 2011 (NGT VR) has only 20 channels available and no possibility for connection of accessories while the 2012 (NGT SRx) has 400 channels available and a modified control and audio PCB to allow for connection of accessories. Both 2011 and 2012 uses identical IF and RF boards. Therefore it was judged that the test results taken for the 2012 would be representative of the 2011, except for cabinet radiation and conducted emissions, these tests were performed on both units.

3.3 EUT Parameters Affecting Compliance

The user of the apparatus could not alter parameters that would affect compliance.

3.4 Test Deleted

No Tests were deleted from this assessment.

3.5 Additional Observations

There were no additional observations made during this assessment.

Section 4 : Results Summary

This section contains the following:

FCC Part 90 : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

- N No : not applicable / not relevant.
- Y Yes : Mandatory i.e. the apparatus shall conform to these tests.
- N/T Not Tested, mandatory but not assessed. (See section 3.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

4.1 FCC Part 90 : Test Results

Clause	Test Method	Test Description	Required	Result
90.205	2.1046	Output power	Y	PASS
90.207	2.1047	Modulation Characteristics	Y	PASS
90.209	2.1049	Occupied bandwidth	Y	PASS
90.210	2.1051	Spurious Emissions at the antenna terminal	Y	PASS
90.210	2.1053	Field strength of spurious radiation	Y	PASS
90.213	2.1055	Frequency stability	Y	PASS
90.214	—	Transient Behavior	N	
90.219	—	Use of boosters	N	

Notes:

Appendix A : Test Results

Clause 90.205 Output Power

Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation. Except where otherwise specifically provided for, the maximum power that will be authorized for new stations authorized after August 16, 1995 is as follows in FCC Part 90.205(a) through (r).

Test Conditions:

Sample Number:	16	Temperature:	24
Date:	January 4, 2006	Humidity:	14
Modification State:	0	Tester:	Jason Nixon
		Laboratory:	Wireless

Test Results:

Frequency (MHz)	Maximum PEP (dBm)	Maximum PEP (Watts)	Maximum PEP Rated (Watts)
1.63 (J3E)	51.33	135.8	125
14.3 (J3E)	51.33	135.8	125
28.3 (J3E)	51.53	142.2	125
1.63 (H3E)	51.33	135.8	125
14.3 (H3E)	51.53	142.2	125
28.3 (H3E)	51.37	137.1	125

Clause 90.207 Modulation Characteristics

(a) Voice modulated communication equipment: A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 cps shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

(b) Equipment which employs modulation limiting: A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

(c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power: A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.


(d) Other types of equipment: A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.


Test Conditions:

Sample Number:	16	Temperature:	24
Date:	January 4, 2006	Humidity:	14
Modification State:	0	Tester:	Jason Nixon
		Laboratory:	Wireless

Test Results:

See Attached Plots.

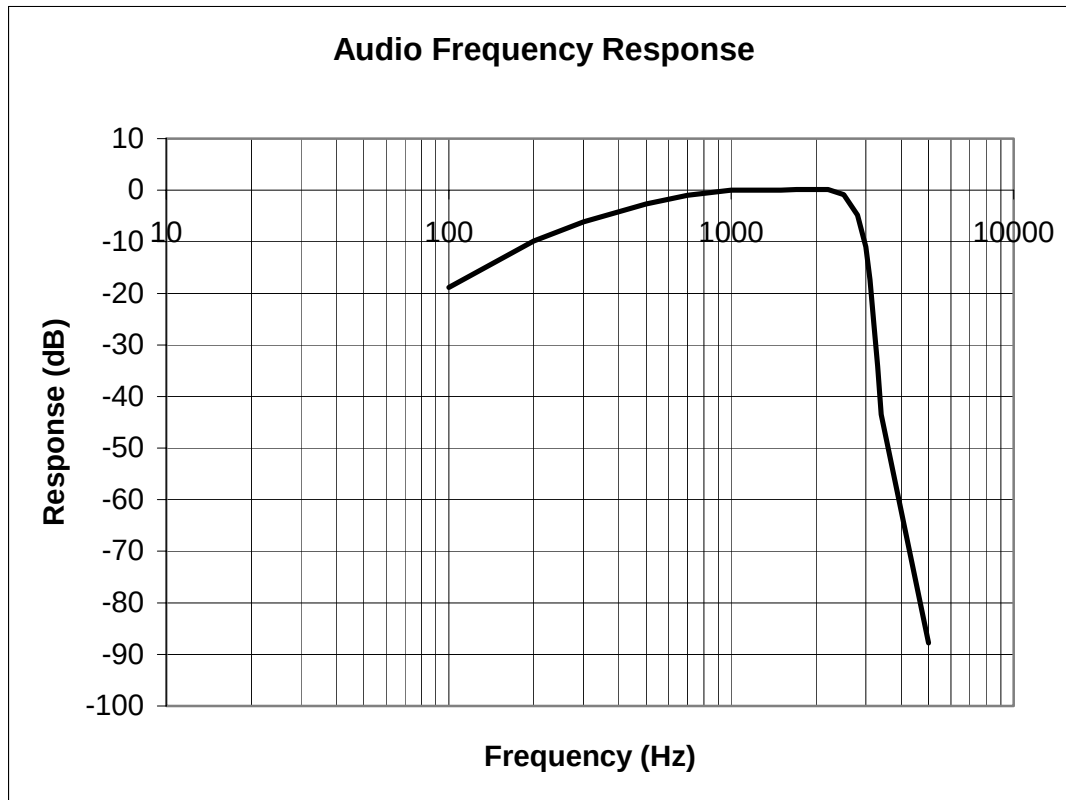

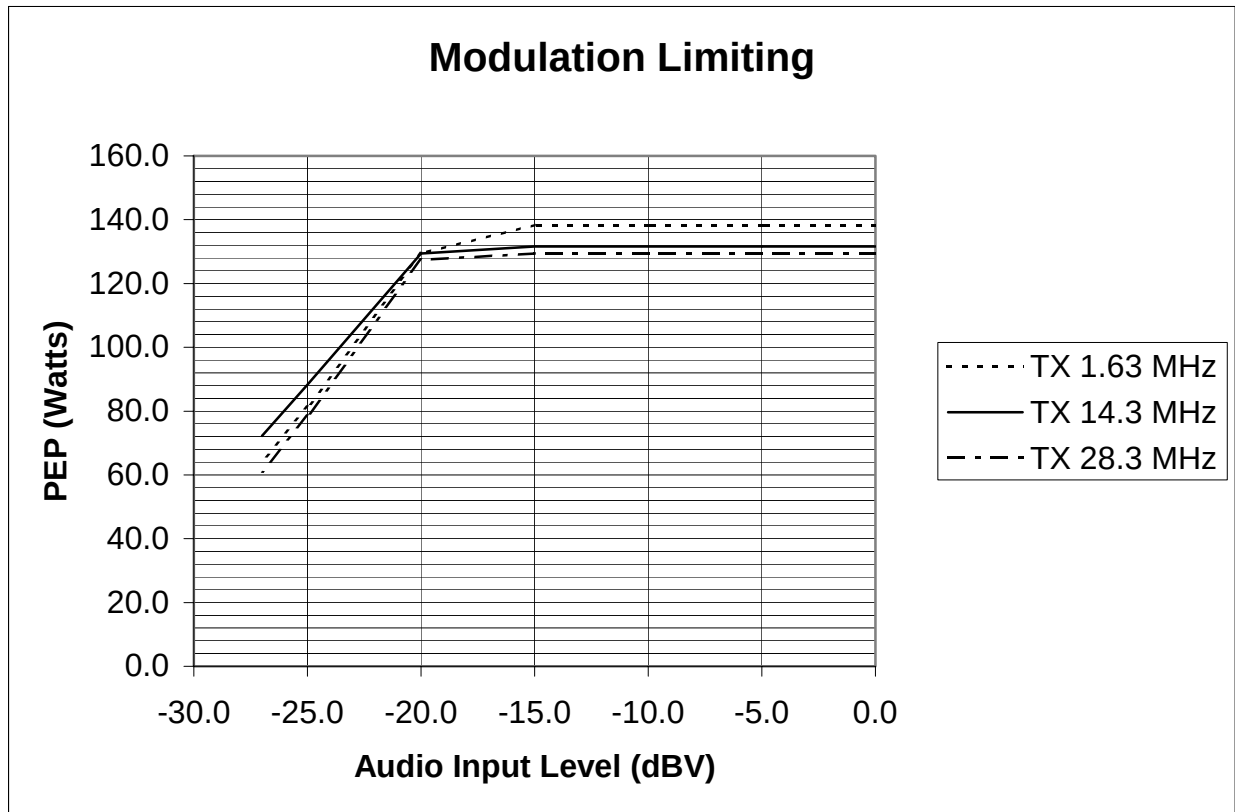

Clause 90.209 Occupied Bandwidth

(5) Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following Table.

Standard Channel Spacing/Bandwidth

Frequency Band (MHz)	Channel Spacing (kHz)	Authorized Bandwidth (kHz)
Below 25	--	--
25-50	20	20
72-76	20	20
150-174	7.5	20/11.25/6
216-220	6.25	20/11.25/6
220-222	5	4
406-512	6.25	20/11.25/6
806-809/851-854	12.5	20
809-824/854-869	25	20
896-901/935-940	12.5	13.6
902-928	--	--
929-930	25	20
1427-1432	12.5	12.5
2450-2483.5	--	--
Above 2500	--	--

Test Conditions:

Sample Number:	16	Temperature:	24
Date:	January 4, 2006	Humidity:	14
Modification State:	0	Tester:	Jason Nixon
		Laboratory:	Wireless


Test Results:

See Attached Plots.


Additional Observations:

The level N (dB) of the carrier with respect to peak envelope power is -60.2dB.
The requirement for Carrier Suppression is $N > 40\text{dB}$.


Emission Mask Low Channel – USB Suppressed Carrier (J3E) (2012)

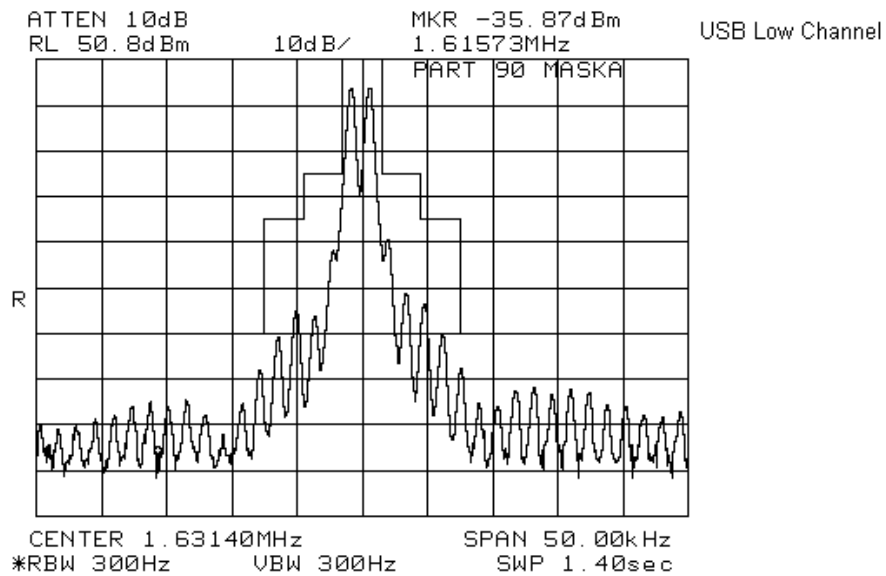


Emission Mask Mid Channel – USB Suppressed Carrier (J3E) (2012)

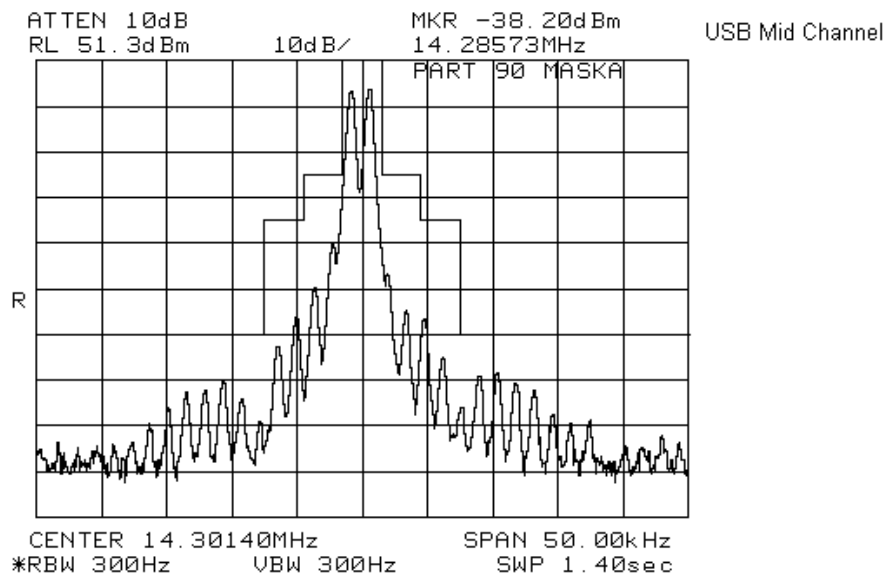


Emission Mask High Channel – USB Suppressed Carrier (J3E) (2012)

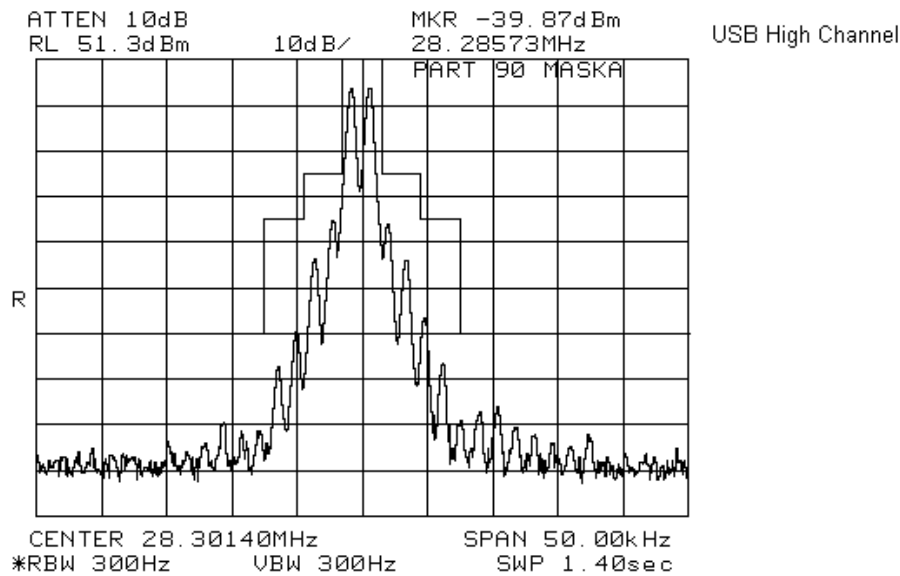


Emission Mask Low Channel – Morse Code (J2B) (2012)

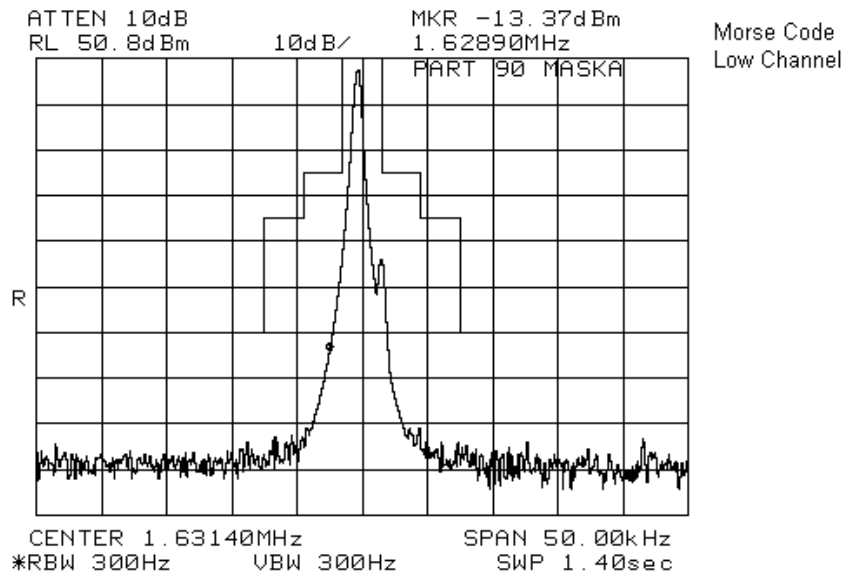



Emission Mask Mid Channel – Morse Code (J2B) (2012)

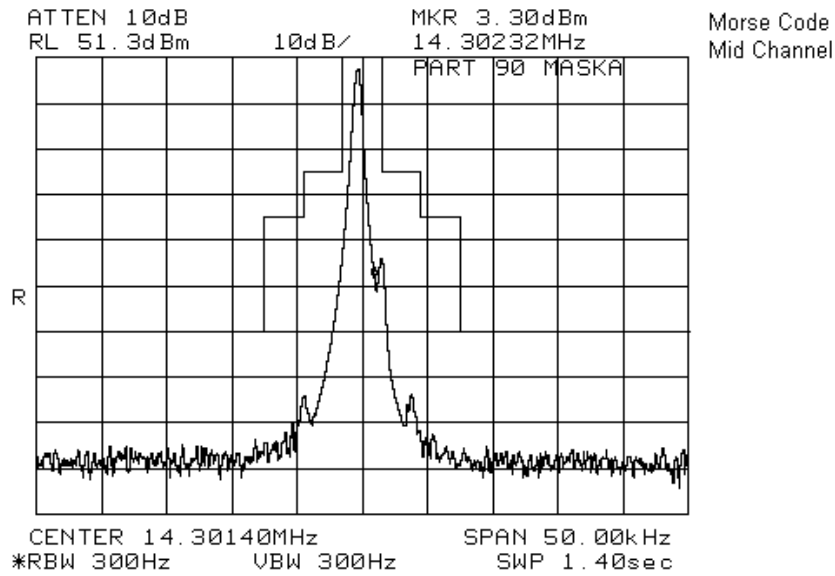



Emission Mask High Channel – Morse Code (J2B) (2012)

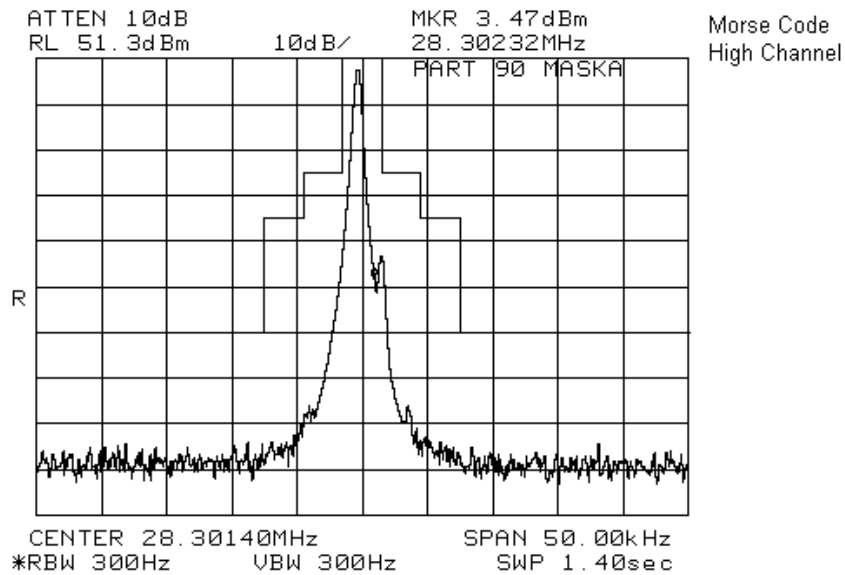



Emission Mask Low Channel – AFSK (J2B) (2012)

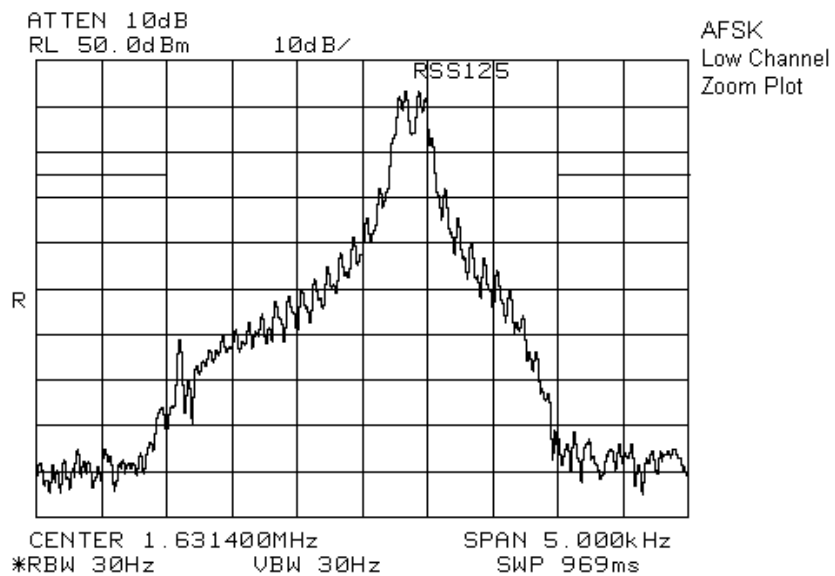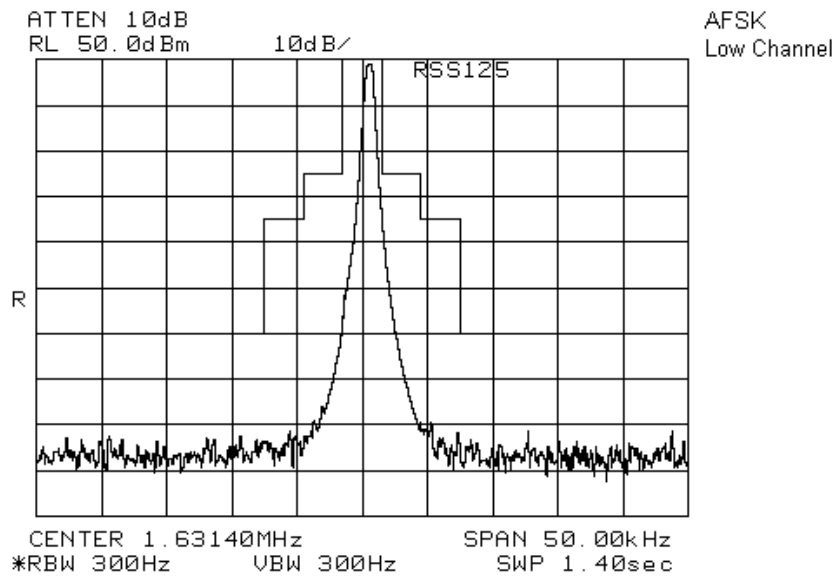


Emission Mask Mid Channel – AFSK (J2B) (2012)

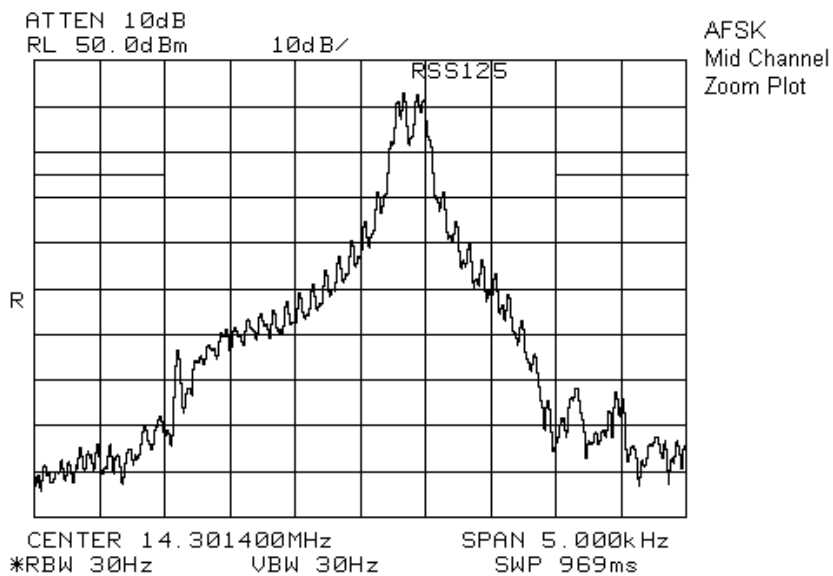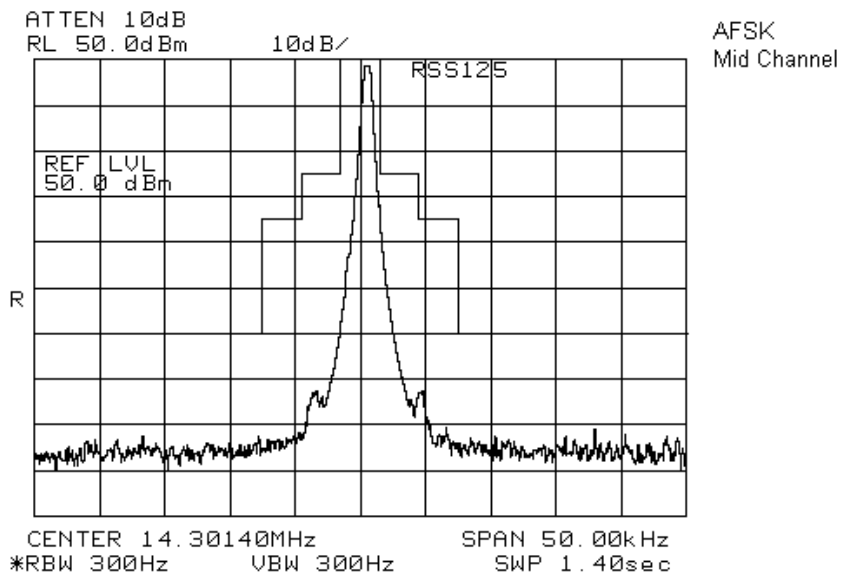


Emission Mask High Channel – AFSK (J2B) (2012)

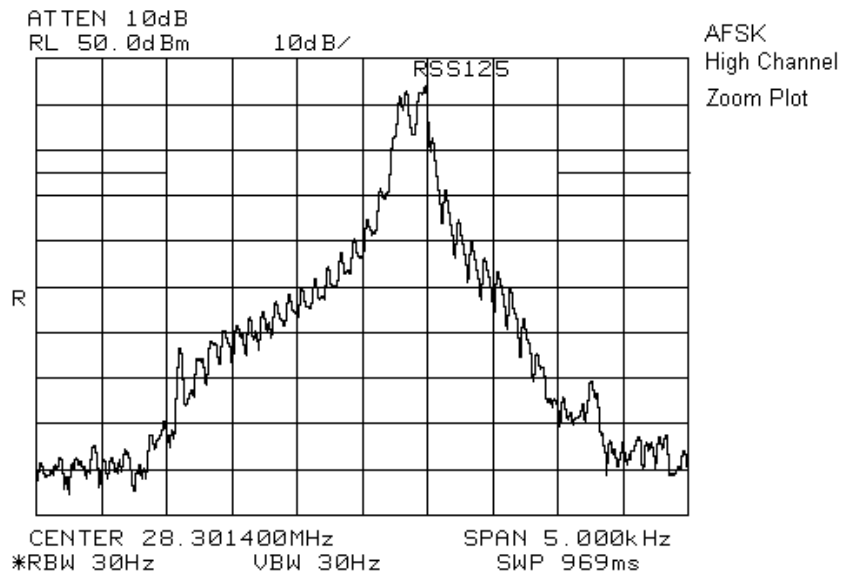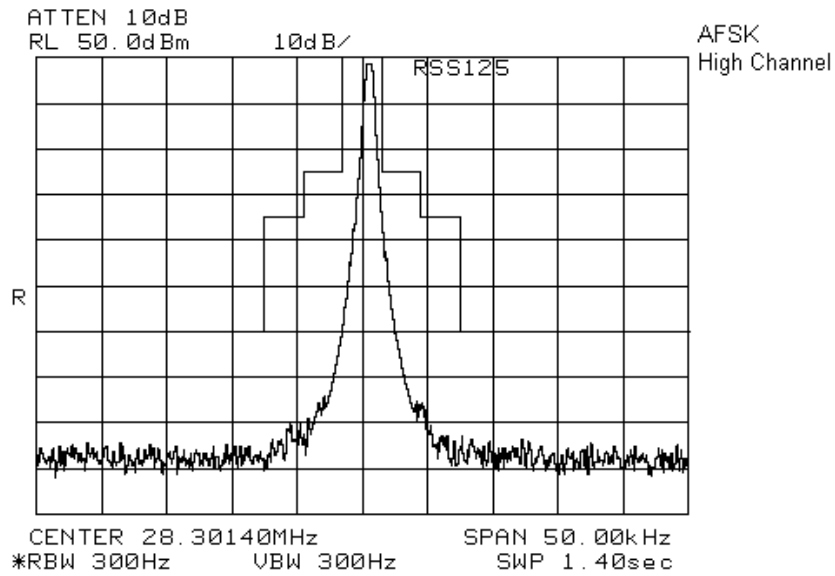


Emission Mask Low Channel – USB Full Carrier (H3E) (2012)

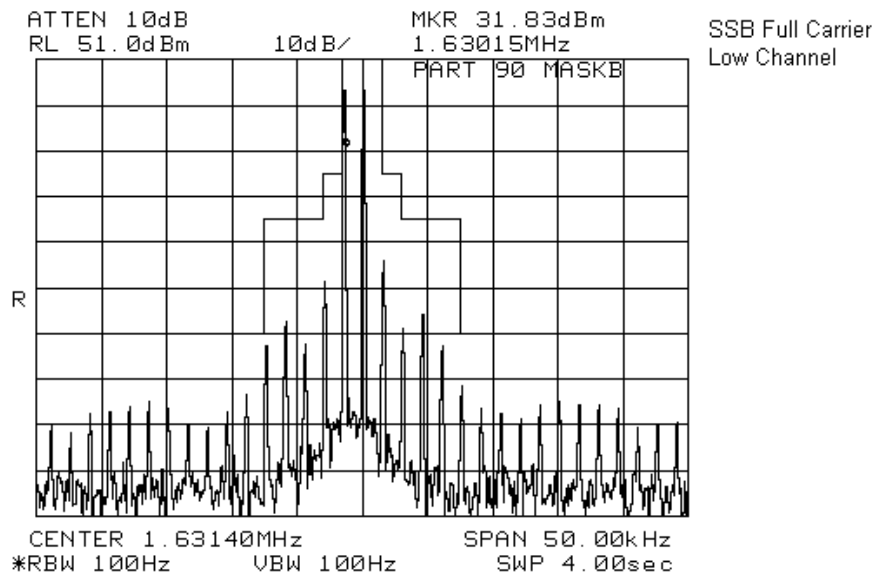

Emission Mask Mid Channel – USB Full Carrier (H3E) (2012)

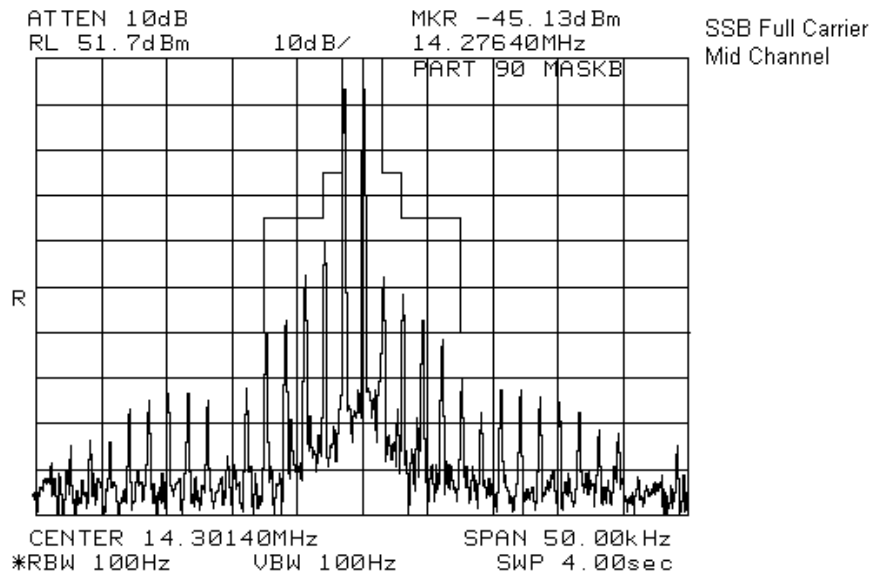

Emission Mask High Channel – USB Full Carrier (H3E) (2012)

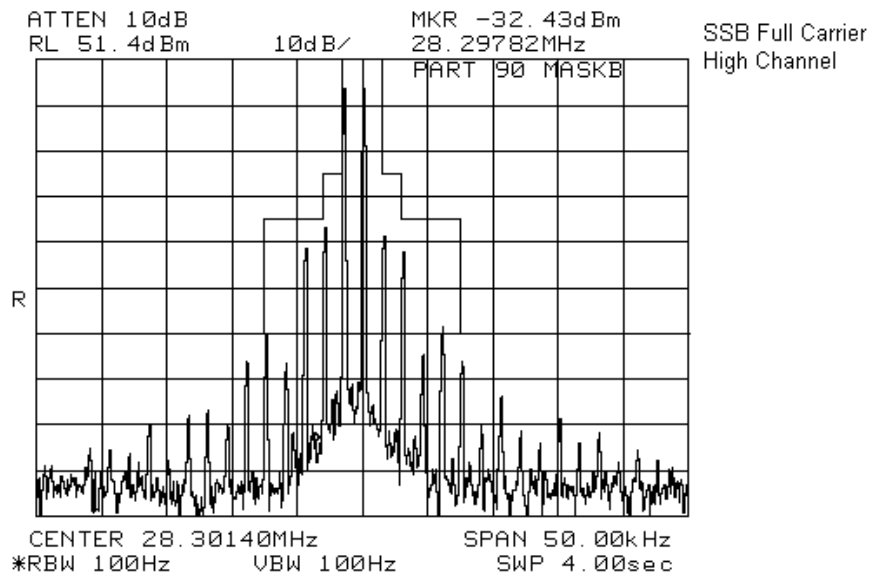

Clause 90.210 Spurious emissions at the antenna terminal

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere, the Table below specifies the emission masks for equipment operating in the frequency bands governed under this part.

Test Conditions:



Sample Number:	16, 18	Temperature:	24
Date:	January 4, 2006	Humidity:	14
Modification State:	0	Tester:	Jason Nixon
		Laboratory:	Wireless

Test Results:



See Attached Plots.

Additional Observations:



Conducted Emissions Low Channel (2012)

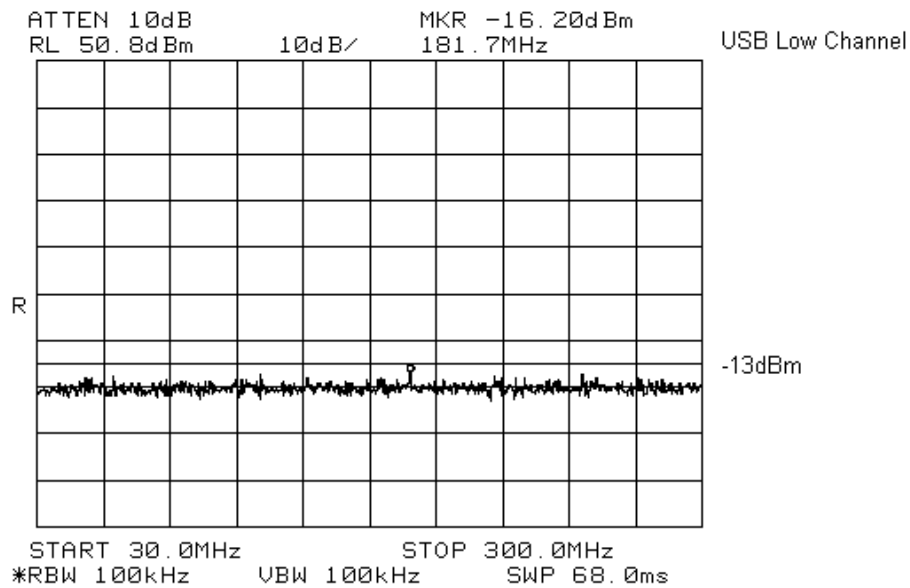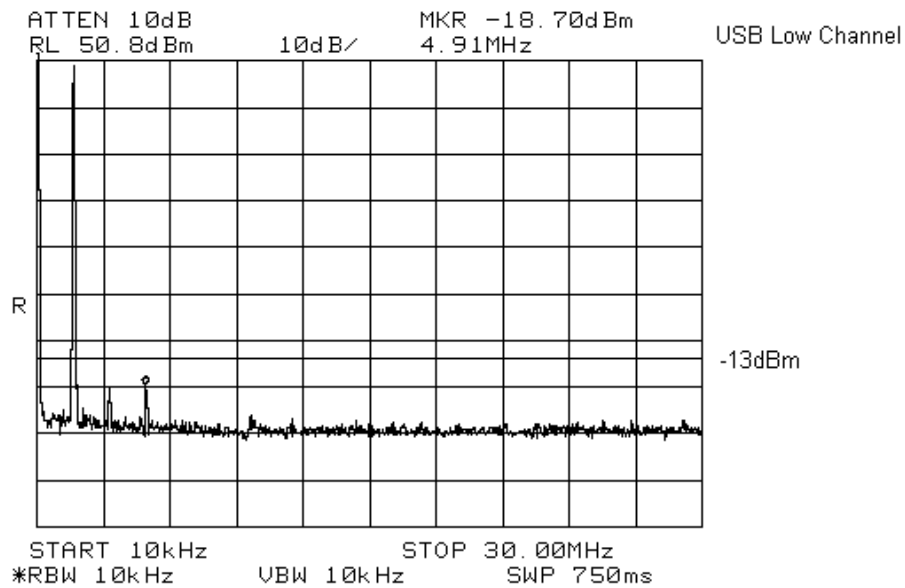



Conducted Emissions Mid Channel (2012)

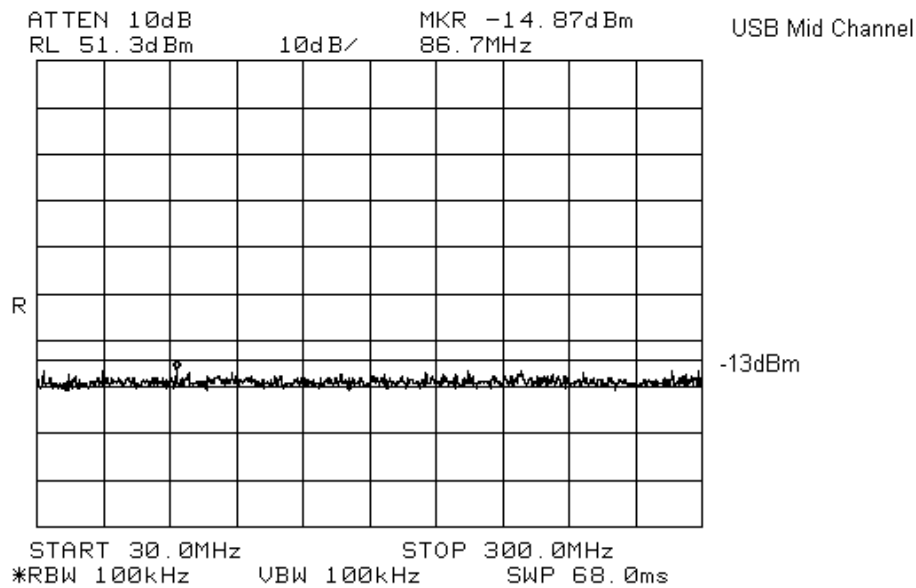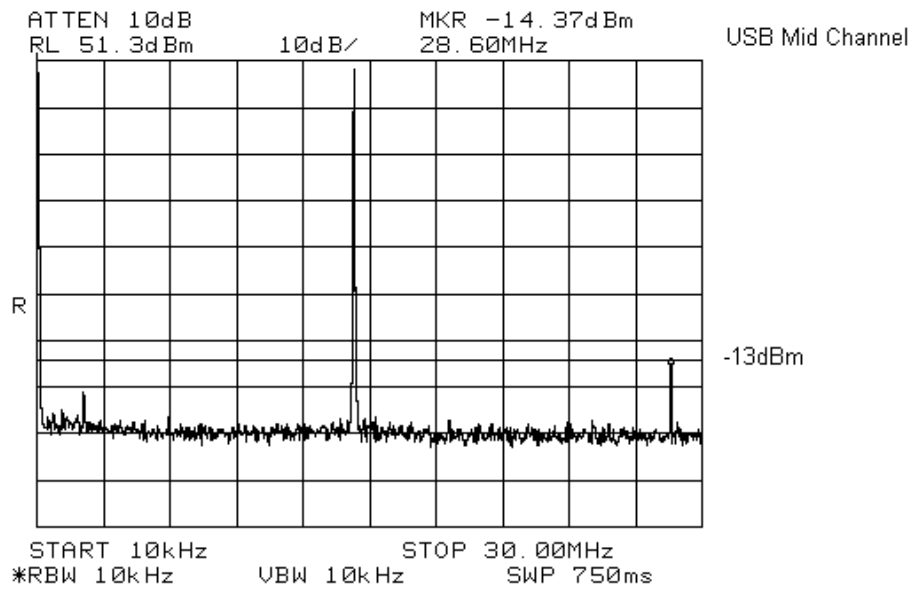



Conducted Emissions High Channel (2012)

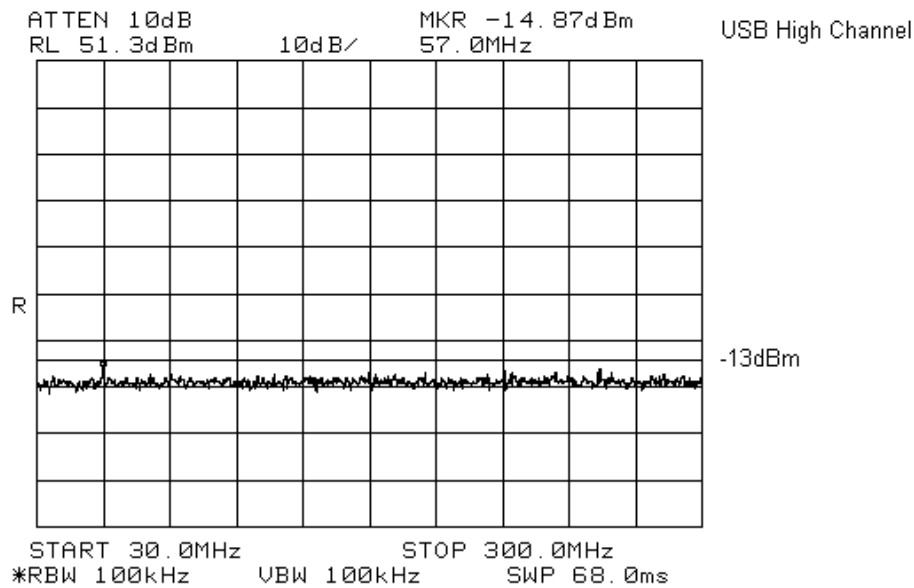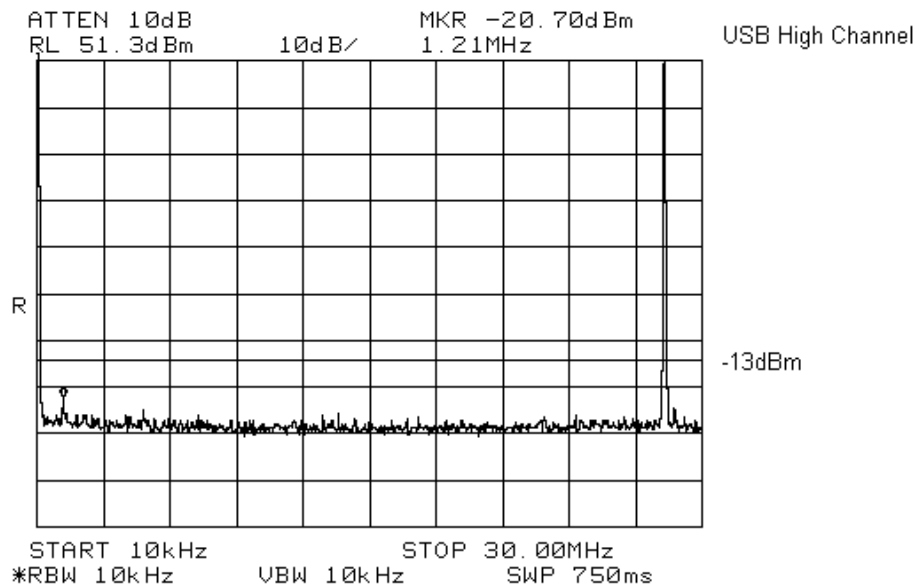



Conducted Emissions Low Channel (2011)

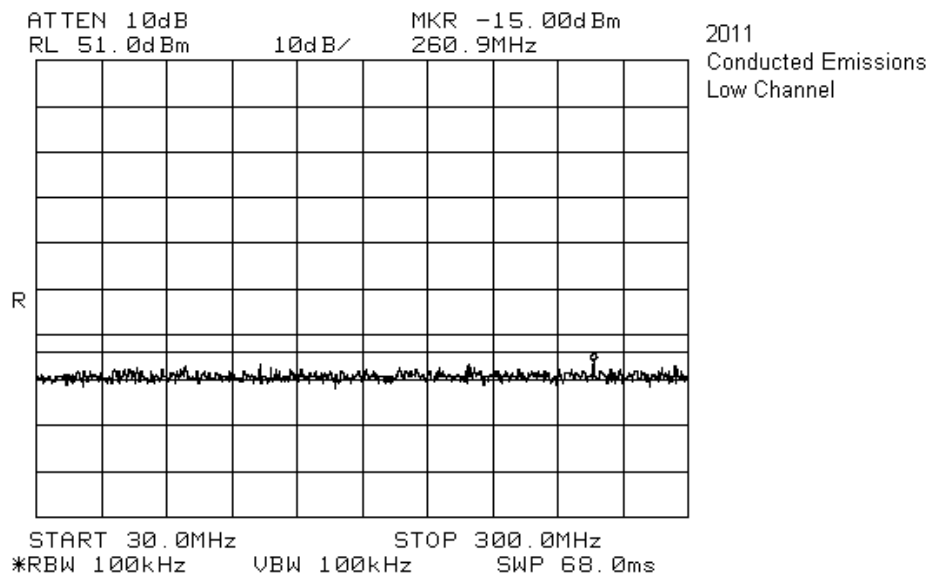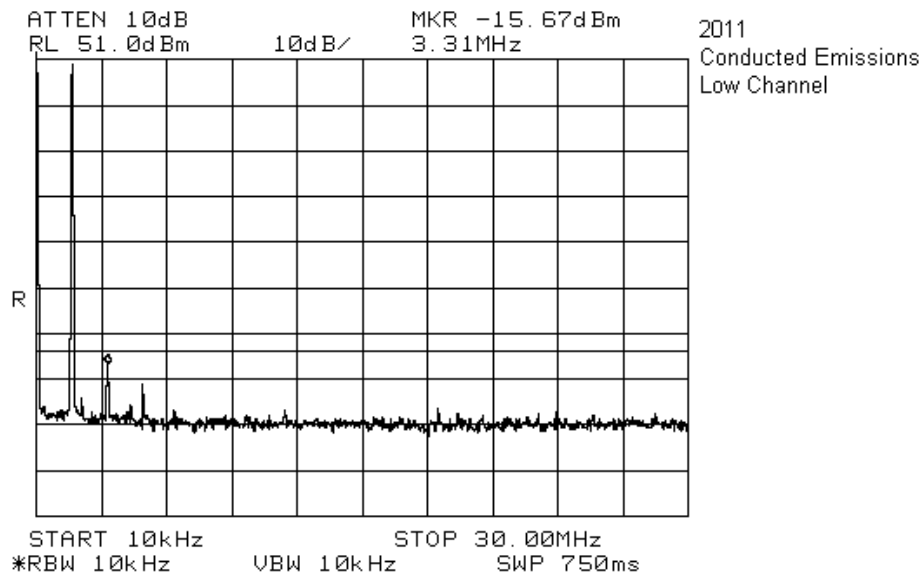

Conducted Emissions Mid Channel (2011)

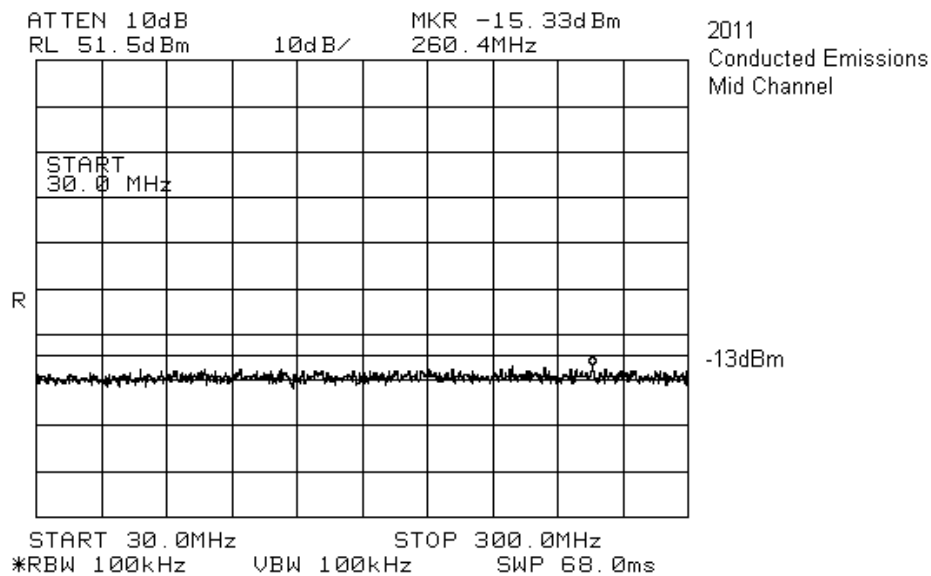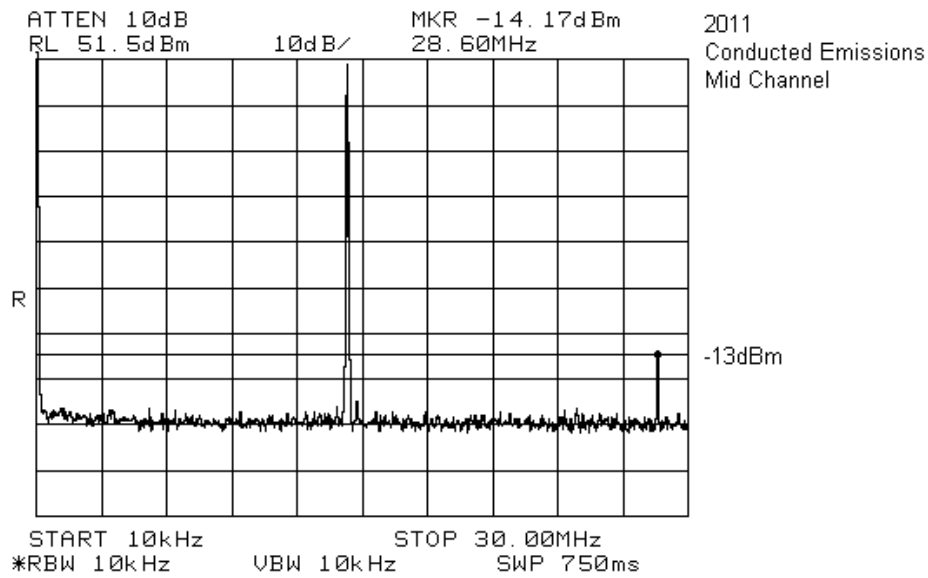

Conducted Emissions High Channel (2011)

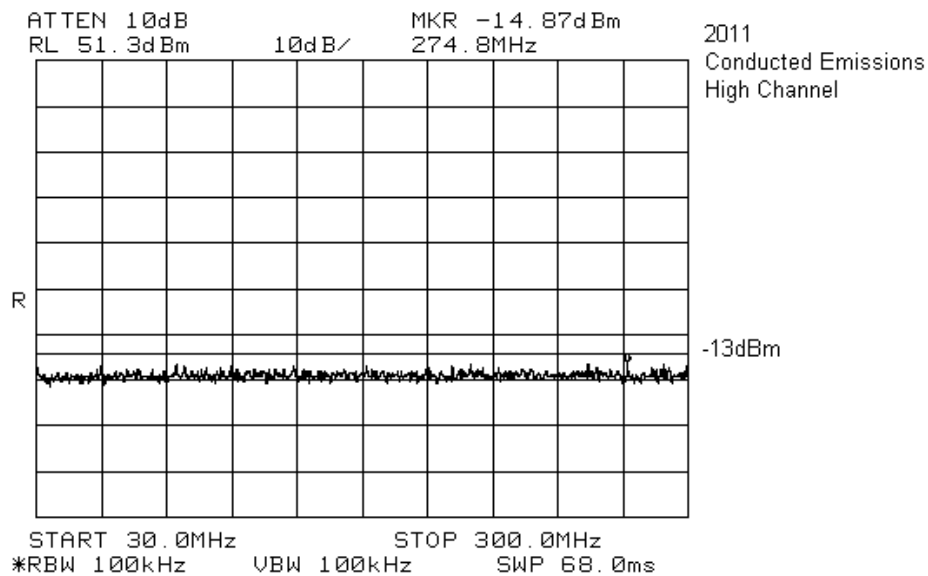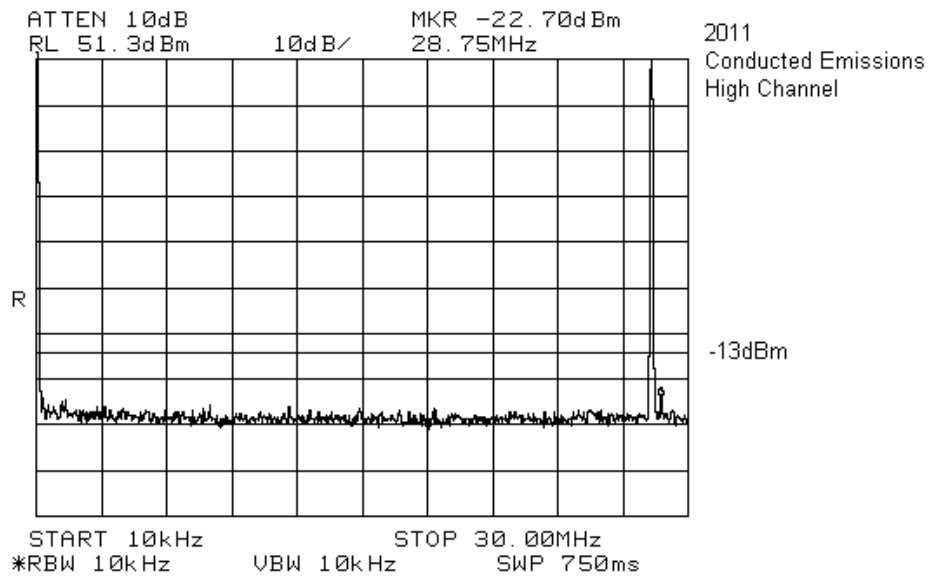

Clause 90.210 Field Strength of spurious radiation

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere, the Table below specifies the emission masks for equipment operating in the frequency bands governed under this part.

Test Conditions:

Sample Number:	16, 18	Temperature:	10
Date:	January 11, 2006	Humidity:	80
Modification State:	0	Tester:	Jason Nixon
		Laboratory:	OATS

Test Results:

See Attached Table for Results

Additional Observations:

The Spectrum was searched from 9kHz to the 300MHz Harmonic.

All measurements were performed using a Peak Detector with 10kHz RBW below 30MHz and a 100kHz RBW above 30MHz at a distance of 3 meters.

Only measurements within 25dB below the limit have been reported.

2012

Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dBμV)	Sig. Sub. Factor	Level (dBm)	Limit (dBm)	Margin (dB)
Mid Channel							
42.9034	BC2	V	51.3	-88.4	-37.1	-13.0	24.1
42.9034	BC2	H	39.7	-80.5	-40.8	-13.0	27.8
100.1034	BC2	V	51.4	-90.2	-38.8	-13.0	25.8
100.1034	BC2	H	54.0	-88.2	-34.2	-13.0	21.2
High Channel							
84.9044	BC2	V	54.1	-89.4	-35.3	-13.0	22.3
84.9044	BC2	H	51.5	-89.7	-38.2	-13.0	25.2
113.2052	BC2	V	47.7	-86.6	-38.9	-13.0	25.9
113.2052	BC2	H	53.0	-88.3	-35.3	-13.0	22.3
141.5063	BC2	V	48.2	-81.3	-33.1	-13.0	20.1
141.5063	BC2	H	24.8	-85.7	-60.9	-13.0	47.9
Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole							

2011

Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dBμV)	Sig. Sub. Factor	Level (dBm)	Limit (dBm)	Margin (dB)
Mid Channel							
100.1034	BC2	V	43.5	-90.2	-46.7	-13.0	33.7
100.1034	BC2	H	50.4	-88.2	-37.8	-13.0	24.8
High Channel							
56.6022	BC2	V	52.7	-89.7	-37.0	-13.0	24.0
56.6022	BC2	H	46.0	-87.9	-41.9	-13.0	28.9
84.9044	BC2	V	54.1	-89.4	-35.3	-13.0	22.3
84.9044	BC2	H	56.2	-89.7	-33.5	-13.0	20.5
113.2052	BC2	V	50.1	-86.6	-36.5	-13.0	23.5
113.2052	BC2	H	53.4	-88.3	-34.9	-13.0	21.9
141.5063	BC2	V	38.5	-81.3	-42.8	-13.0	29.8
141.5063	BC2	H	50.2	-85.7	-35.5	-13.0	22.5
56.6022	BC2	V	52.7	-89.7	-37.0	-13.0	24.0
Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole							

Clause 90.213 Frequency Stability

a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following Table.

Minimum Frequency Stability

parts per million (ppm)

Frequency range (MHz)	Fixed and base stations 2 watts output power	Mobile stations Over power	2 watts or less output
Below 25	100	100	200
25-50	20	20	50
72-76	5	---	50
150-174	50	5	50
216-220	1.0	---	1.0
220-222	0.1	1.5	1.5
421-512	2.5	5	5
806-809	1.0	1.5	1.5
809-824	1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	0.1	1.5	1.5
902-928	2.5	2.5	2.5
929-930	1.5	---	---
935-940	0.1	1.5	1.5
1427-1435	300	300	300
Above 2450	---	---	---

Test Conditions:

Sample Number:	16	Temperature:	22
Date:	January 5, 2006	Humidity:	22
Modification State:	0	Tester:	Jason Nixon
		Laboratory:	Wireless

Test Results: See Attached Table.

Test Condition	Frequency (Hz)	Frequency Drift (Hz)	Frequency drift (ppm)
+50°C	28301803	0	0
+40°C	28301804	1	0.04
+30°C	28301806	3	0.11
+20°C, +15%	28301805	2	0.07
+20°C, Nominal	28301803	—	—
+20°C, -15%	28301803	0	0
+10°C	28301809	6	0.21
0°C	28301811	8	0.28
-10°C	28301814	11	0.39
-20°C	28301814	11	0.39
-30°C	28301811	8	0.28

Test signal:

Transmit was set to 28.3MHz and modulated with a 1800Hz tone.

Appendix B : Setup Photographs

Radiated Spurious Emissions Setup: (2012)




(2011)




Appendix C : Block Diagram of Test Setups

Test Site For Radiated Emissions

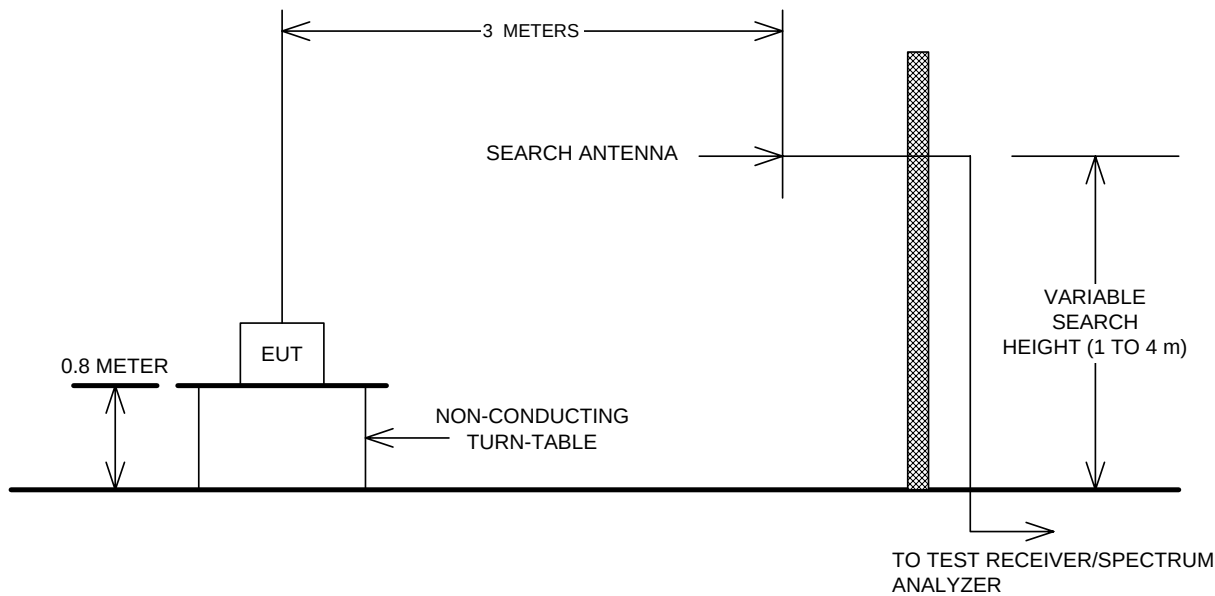

Conducted Emissions, Output power, Occupied Bandwidth, Audio Frequency Response and Modulation Limiting

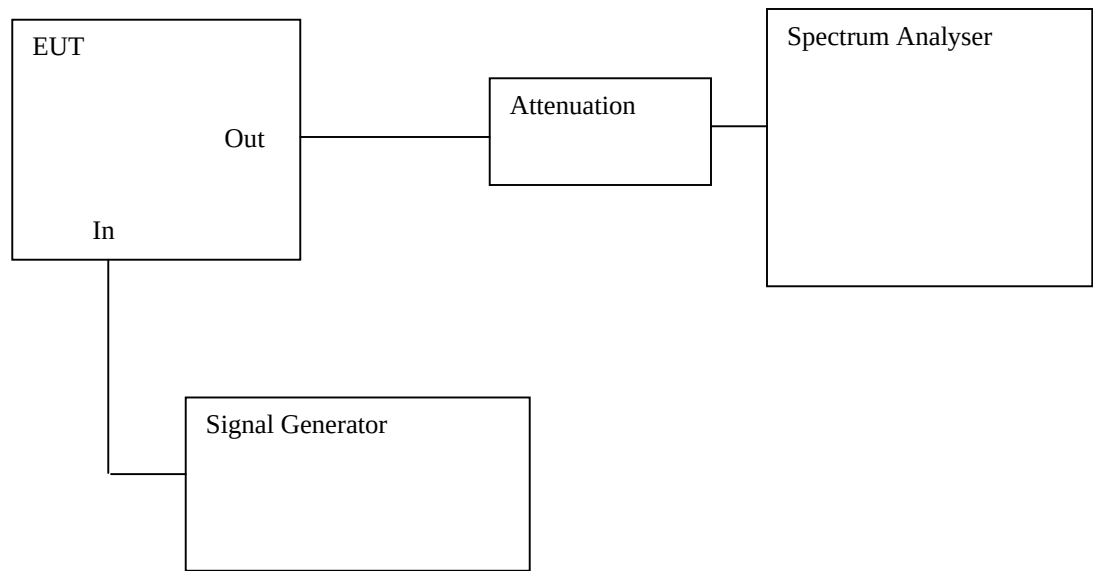

Frequency Stability

Environmental Test Chamber

