



**CFR 47 FCC PART 15 SUBPART C**

**TEST REPORT**

*For*

**WIFI Module**

**MODEL NUMBER: W2ZM2510**

**FCC ID: 2AC23-W2Z**

**REPORT NUMBER: 4789160174-1**

**ISSUE DATE: November 13, 2019**

*Prepared for*

**Hui Zhou Gaoshengda Technology Co.,LTD  
NO.75 Zhongkai Development Area Huizhou, Guangdong China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch  
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake  
Hi-Tech Development Zone Dongguan, People's Republic of China  
Tel: +86 769 22038881  
Fax: +86 769 33244054  
Website: www.ul.com**



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	11/13/2019	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass
This test report is only published to and used by the applicant, and it is not for evidence purpose in China.			



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>6</b>
<b>2. TEST METHODOLOGY</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY</b>	<b>8</b>
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. CMEASUREMENT UNCERTAINTY	8
<b>5. EQUIPMENT UNDER TEST</b>	<b>9</b>
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. CHANNEL LIST	10
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE POWER SETTING PARAMETER	11
5.6. THE WORSE CASE CONFIGURATIONS	11
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.8. DESCRIPTION OF TEST SETUP	13
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED</b>	<b>14</b>
<b>7. MEASUREMENT METHODS</b>	<b>15</b>
<b>8. ANTENNA PORT TEST RESULTS</b>	<b>16</b>
8.1. ON TIME AND DUTY CYCLE	16
8.2. 6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH	19
8.2.1. 802.11b SISO MODE	20
8.2.2. 802.11g SISO MODE	24
8.2.3. 802.11n HT20 MIMO MODE	28
8.2.4. 802.11n HT40 MIMO MODE	32
8.3. PEAK CONDUCTED OUTPUT POWER	36
8.3.1. 802.11b SISO MODE	37
8.3.2. 802.11g SISO MODE	38
8.3.3. 802.11n HT20 MIMO MODE	39
8.3.4. 802.11n HT40 MIMO MODE	40
8.4. POWER SPECTRAL DENSITY	41
8.4.1. 802.11b SISO MODE	42
8.4.1. 802.11g SISO MODE	45
8.4.2. 802.11n HT20 MIMO MODE	48
8.4.3. 802.11n HT40 MIMO MODE	52
8.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	56



8.5.1.	802.11b SISO MODE .....	58
8.5.2.	802.11g SISO MODE .....	61
8.5.3.	802.11n HT20 MIMO MODE .....	64
8.5.4.	802.11n HT40 MIMO MODE .....	70
<b>9.</b>	<b>RADIATED TEST RESULTS .....</b>	<b>76</b>
9.1.	<i>RESTRICTED BANDEDGE</i> .....	82
9.1.1.	802.11b SISO MODE .....	82
9.1.2.	802.11g SISO MODE .....	88
9.1.3.	802.11n HT20 MIMO MODE .....	95
9.1.4.	802.11n HT40 MIMO MODE .....	102
9.2.	<i>SPURIOUS EMISSIONS (3~18GHz)</i> .....	110
9.2.1.	802.11b SISO MODE .....	110
9.2.2.	802.11g SISO MODE .....	116
9.2.3.	802.11n HT20 MIMO MODE .....	122
9.2.4.	802.11n HT40 MIMO MODE .....	128
9.3.	<i>SPURIOUS EMISSIONS (1~3GHz)</i> .....	134
9.3.1.	802.11b SISO MODE .....	134
9.3.2.	802.11g SISO MODE .....	140
9.3.3.	802.11n HT20 MIMO MODE .....	146
9.3.4.	802.11n HT40 MIMO MODE .....	152
9.4.	<i>SPURIOUS EMISSIONS (18~26GHz)</i> .....	158
9.4.1.	802.11n HT20 MIMO MODE .....	158
9.5.	<i>SPURIOUS EMISSIONS (0.03 ~ 1 GHz)</i> .....	160
9.5.1.	802. 11n HT20 MIMO MODE .....	160
9.6.	<i>SPURIOUS EMISSIONS BELOW 30M</i> .....	162
9.6.1.	802. 11n HT20 MIMO MODE .....	162
<b>10.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>165</b>
10.1.	802. 11n HT20 MIMO MODE .....	166
<b>11.</b>	<b>ANTENNA REQUIREMENTS .....</b>	<b>168</b>



## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: NO.75 Zhongkai Development Area Huizhou, Guangdong China

### Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD  
Address: NO.75 Zhongkai Development Area Huizhou, Guangdong China

### EUT Description

EUT Name: WIFI Module  
Model: W2ZM2510  
Series Model: W2ZM2510P  
Model difference: Refer to section 5.1.  
Brand Name: GSD  
Sample Status: Normal  
Sample ID: 2536989  
Sample Received Date: September 06, 2019  
Date of Tested: September 06~ November 13, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Checked By:

Kebo Zhang  
Engineer Project Associate

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15 and ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED(Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note:

1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

### 4.2. CMEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	2.2dB
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.00dB
Radiation Emission test (1GHz to 26GHz)( include Fundamental emission)	5.78dB (1GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	





## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	WIFI Module
Model	W2ZM2510
Series Model	W2ZM2510P
Model difference	W2ZM2510P have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with W2ZM2510. The difference lies only the model number and W2ZM2510 has 8 pin fixed ends, W2ZM2510P has 5 pin fixed ends.
Radio Technology	IEEE802.11b/g/n HT20/HT40
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Rated Input	DC 5V

### 5.2. MAXIMUM OUTPUT POWER

Number of Transmit Chains (NTX)	IEE Std. 802.11	Frequency (MHz)	Channel Number	Max PK Conducted Power (dBm)
2	IEEE 802.11b	2412-2462	1-11[11]	18.70
2	IEEE 802.11g	2412-2462	1-11[11]	23.32
2	IEEE 802.11nHT20	2412-2462	1-11[11]	23.83
2	IEEE 802.11nHT40	2422-2452	3-9[7]	22.77



### 5.3. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WiFi TX(802.11b)	Low, Middle, High CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11g)	Low, Middle, High CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT20)	Low, Middle, High CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT40)	Low, Middle, High CH 3, CH 6, CH 9	2422MHz, 2437MHz, 2452MHz



### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		QATool_Dbg					
Modulation Mode	Transmit Antenna Number	Test Channel Power Setting					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	0	1B	1B	1B	/		
	1	1B	1B	1B			
802.11g	0	1B	1B	1B			
	1	1B	1B	1B			
802.11n HT20	0	1B	1B	1B			
	1	1B	1B	1B			
802.11n HT40	0	/	/	/	18	18	16
	1	/	/	/	18	18	16

### 5.6. THE WORSE CASE CONFIGURATIONS

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either ANTENNA 0 or ANTENNA 1. All antenna ports have the same power; output power measurement for SISO modes on both antennas are reported.

For 2TX MIMO modes, ANTENNA 0 and ANTENNA 1, used at the same time.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

Note: Only 802.11n HT20 and 802.11n HT40 support MIMO mode, for 802.11b and 802.11g, all antennas had been test, but only the worst data for Antenna 0 was recorded.

For 802.11n HT20 and 802.11n HT40, all antennas had the same power in MIMO mode and SISO mode, so only the worst data for MIMO mode was recorded.



### 5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
0	2412-2462	Printed Antenna	3
1	2412-2462	Printed Antenna	3

Note: Directional gain=  $G_{ANT} + 10 \log(N_{ANT})$  dBi=6.0dBi

$G_{ANT}$  : Antenna Gain

$N_{ANT}$  : Antenna numbers

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒2TX, 2RX	Antenna 0 or Antenna 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒2TX, 2RX	Antenna 0 or Antenna 1 can be used as transmitting/receiving antenna
IEEE 802.11n HT20	☒2TX, 2RX	Antenna 0 and Antenna 1 can be used as transmitting/receiving antenna
IEEE 802.11n HT40	☒2TX, 2RX	Antenna 0 and Antenna 1 can be used as transmitting/receiving antenna



## 5.8. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	PC	Dell	Vostro 3902	8KNDDDB2
2	USB TO UART	/	/	/

### I/O CABLES

Item	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/

Note: The USB cable is for debugging only.


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

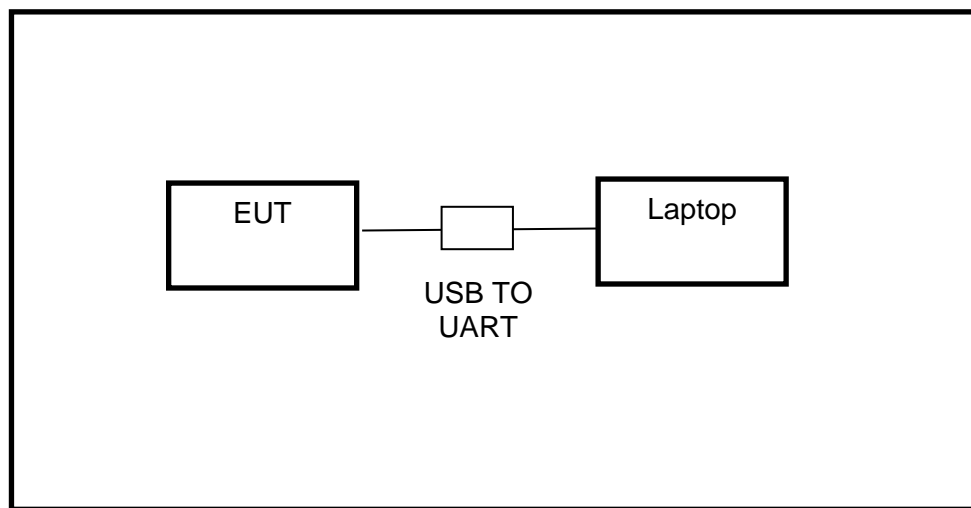



## 6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	101983	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.10,2018	Dec.10,2019
Software						
Used	Description		Manufacturer	Name		Version
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance		Farad	EZ-EMC		Ver. UL-3A1
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A09099	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Jan.07, 2019	Jan.07, 2022
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Dec.10,2018	Dec.10,2019
Software						
Used	Description		Manufacturer	Name		Version
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1



Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Power Meter	Keysight	N1911A	MY55416024	Dec.10,2018	Dec.10,2019
<input checked="" type="checkbox"/>	Power Sensor	Keysight	U2021XA	MY5100022	Dec.10,2018	Dec.10,2019

## 7. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6dB Bandwidth	KDB 558074 D01 DTS Meas Guidance v05r02	8.2
2	Peak Output Power	KDB 558074 D01 DTS Meas Guidance v05r02	8.3.1.3/8.3.2.3
3	Power Spectral Density	KDB 558074 D01 DTS Meas Guidance v05r02	8.4
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 DTS Meas Guidance v05r02	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 DTS Meas Guidance v05r02	8.6
6	Band-edge	KDB 558074 D01 DTS Meas Guidance v05r02	8.7
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2



## 8. ANTENNA PORT TEST RESULTS

### 8.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only

#### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

#### TEST SETUP

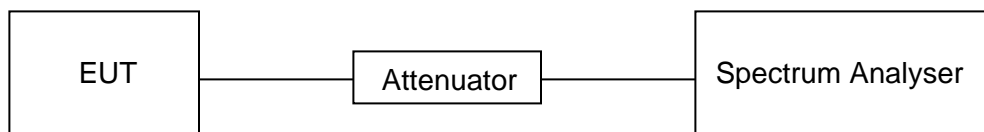

#### TEST ENVIRONMENT

Temperature	24.4°C	Relative Humidity	51%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

#### RESULTS

##### ANTENNA 0

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (KHz)	Final setting For VBW (KHz)
11b	100.1	100.1	1.000	100.00%	0	0.01	0.01
11g	100.2	100.2	1.000	100.00%	0	0.01	0.01
11n20	0.67	0.72	0.931	93.06%	0.3105	1.49	2
11n40	0.345	0.375	0.920	92.00%	0.3621	2.90	3

Note:

Duty Cycle Correction Factor=10log (1/x).



Where: x is Duty Cycle (Linear)



Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

Antenna 0 and Antenna 1 has the same duty cycle, only Antenna 0 data show here.



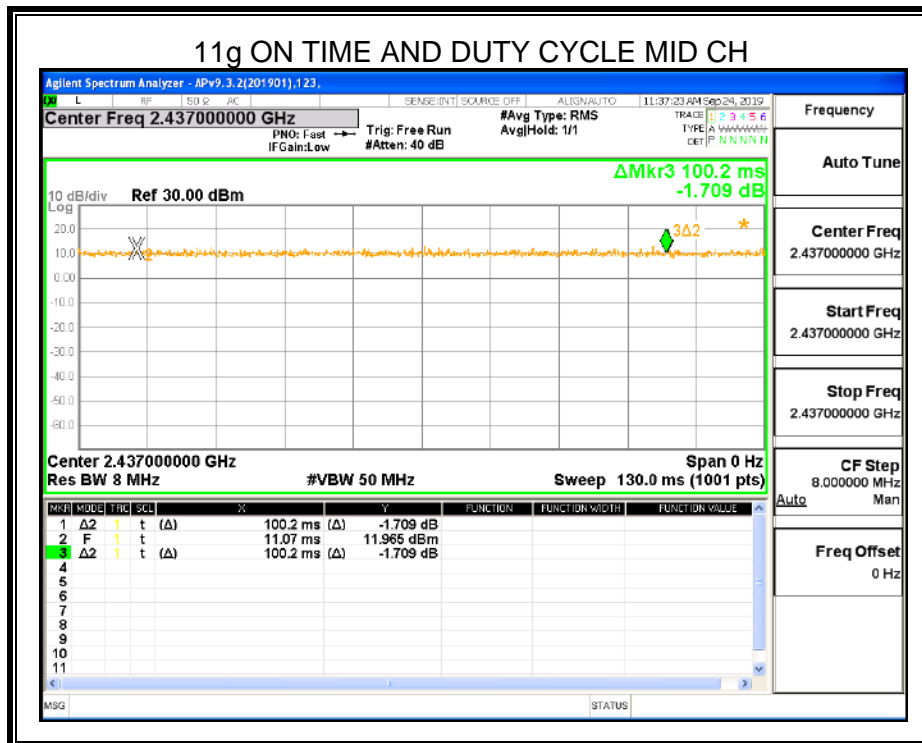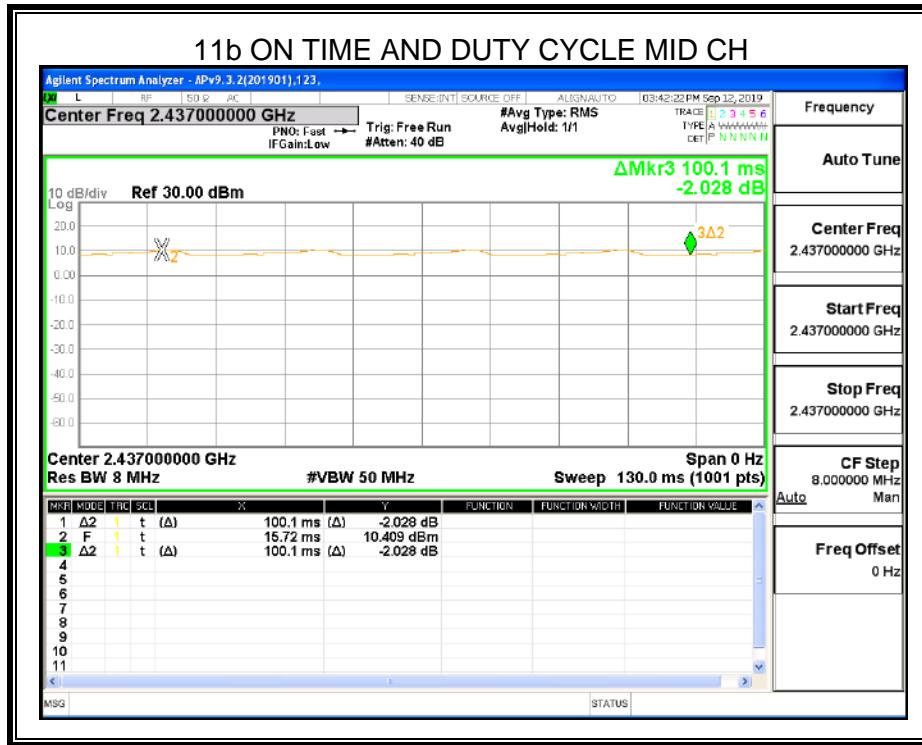

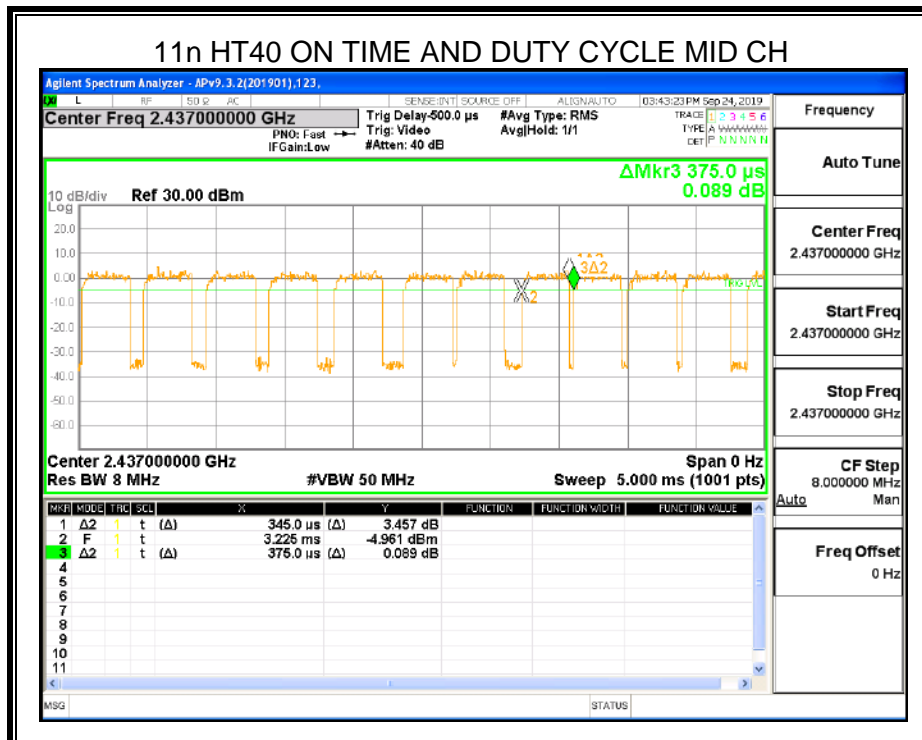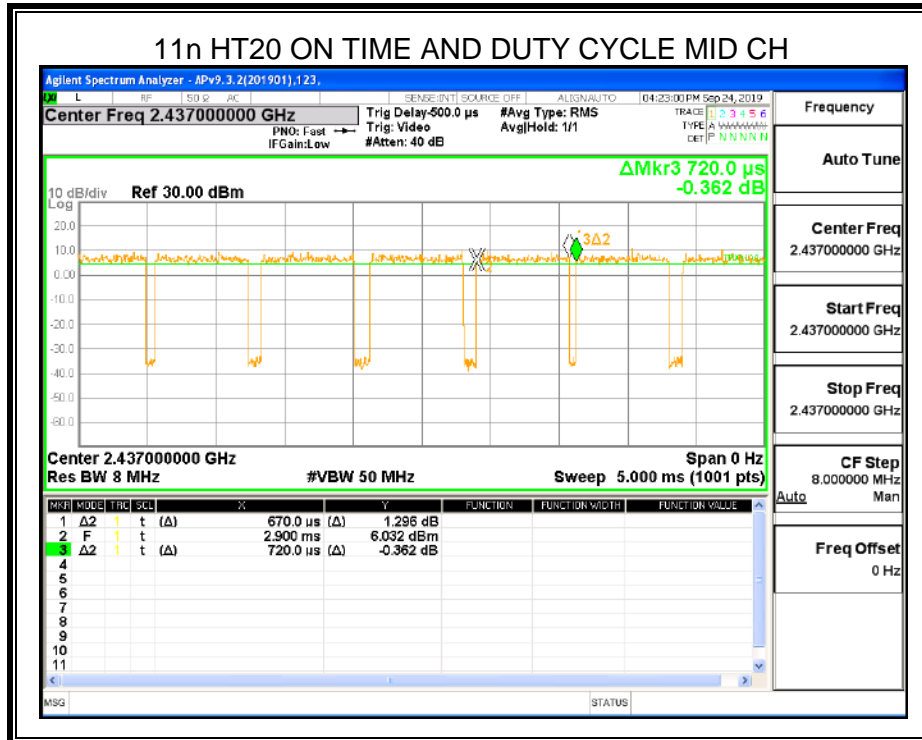



## 8.2. 6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5
ISED RSS-Gen Clause 6.7	99% Occupied Bandwidth	For reporting purposes only.	2400-2483.5


### TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth :100kHz For 99% Occupied Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Occupied Bandwidth : approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

### TEST SETUP





## TEST ENVIRONMENT


Temperature	24.4°C	Relative Humidity	51%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V




## RESULTS



### 8.2.1. 802.11b SISO MODE


#### ANTENNA 0

Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	8.04	14.078	≥500	Pass
Middle	8.52	14.096	≥500	Pass
High	8.56	14.100	≥500	Pass

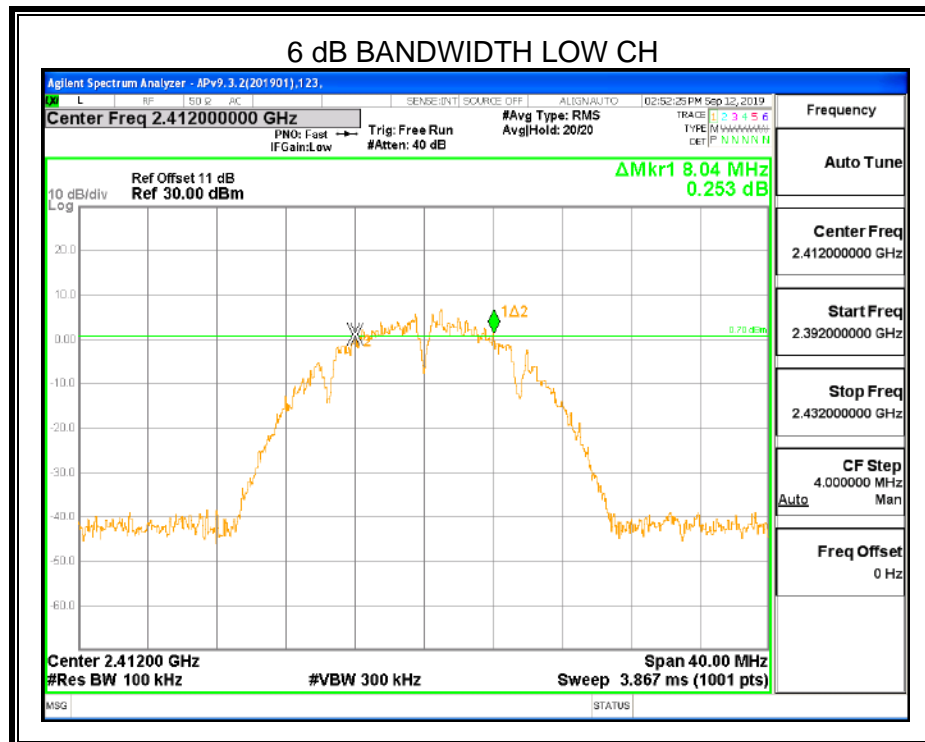

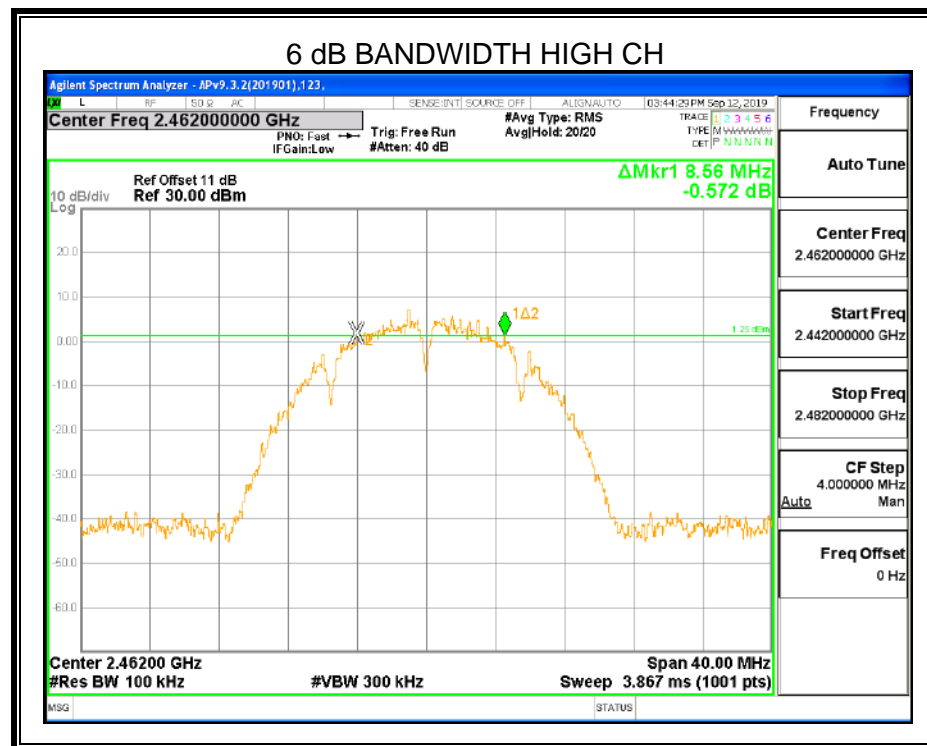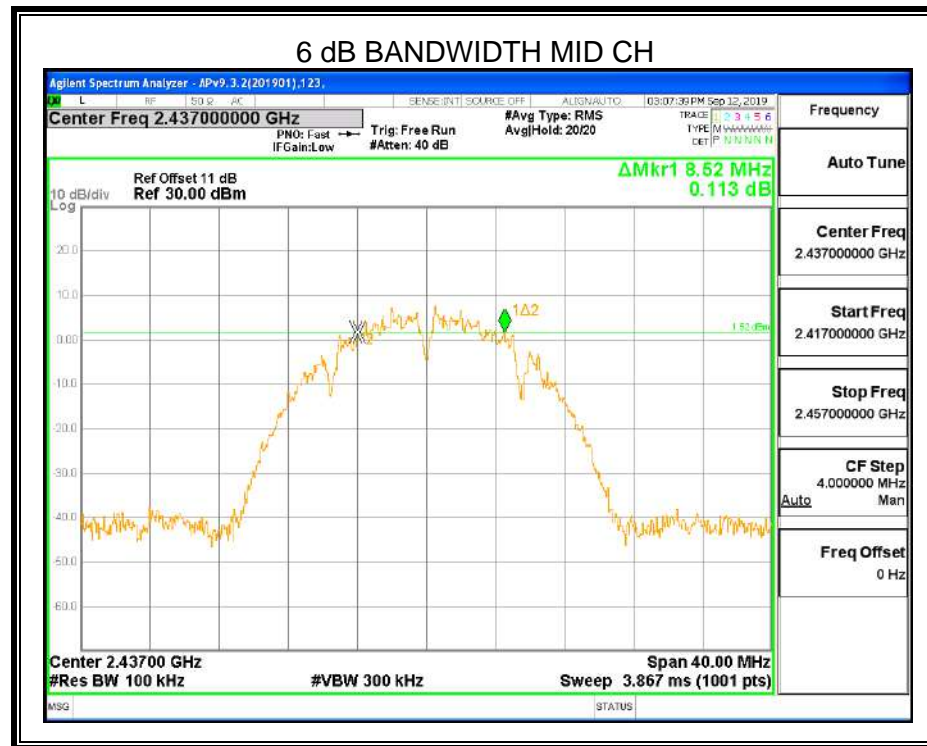

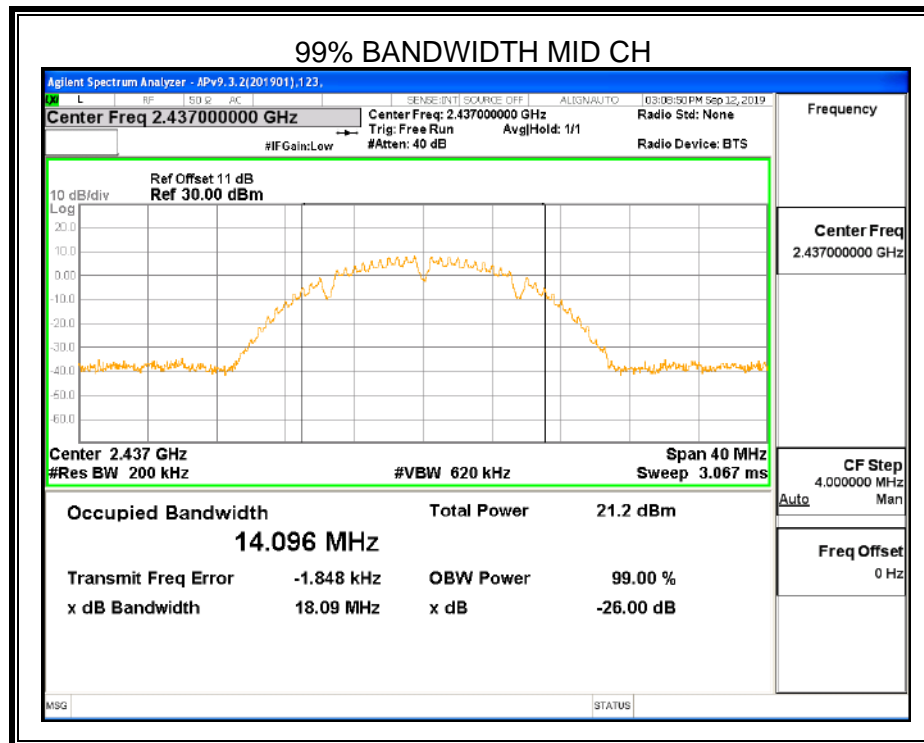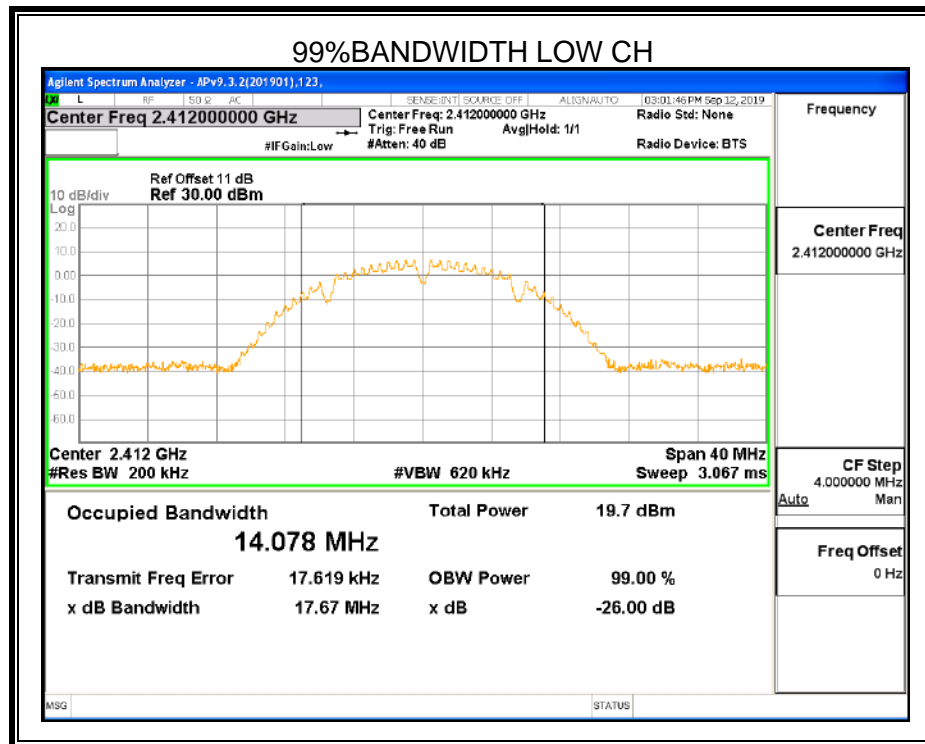

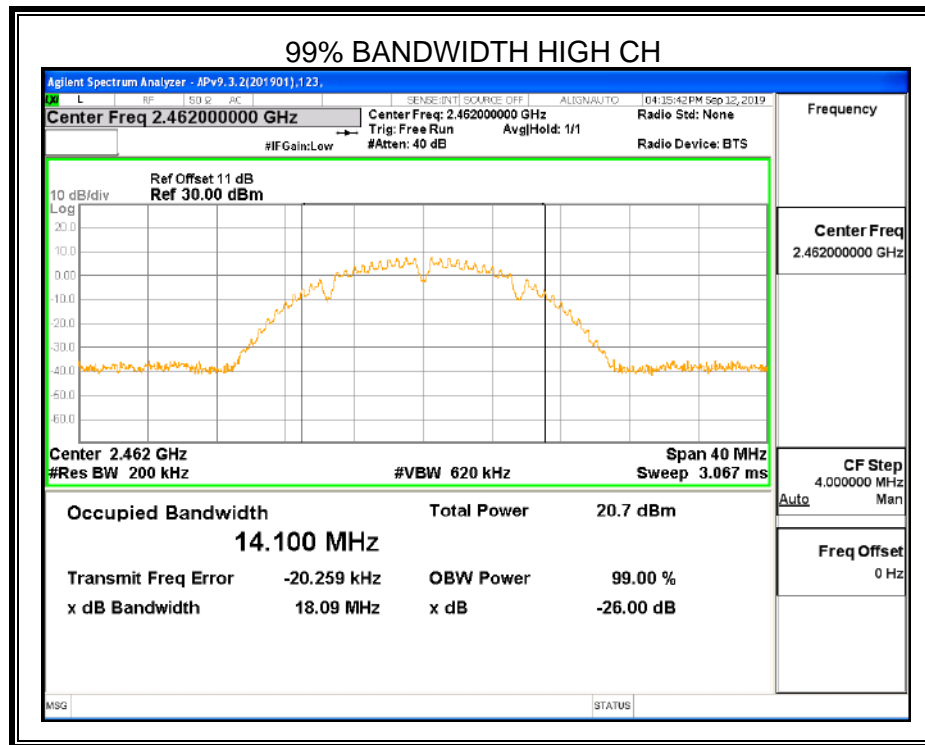


Note: All the modes and antenna ports had been tested, only the worst data recorded in the report.





## 8.2.2. 802.11g SISO MODE



### ANTENNA 0


Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	16.32	16.353	≥500	Pass
Middle	16.32	16.366	≥500	Pass
High	16.32	16.361	≥500	Pass

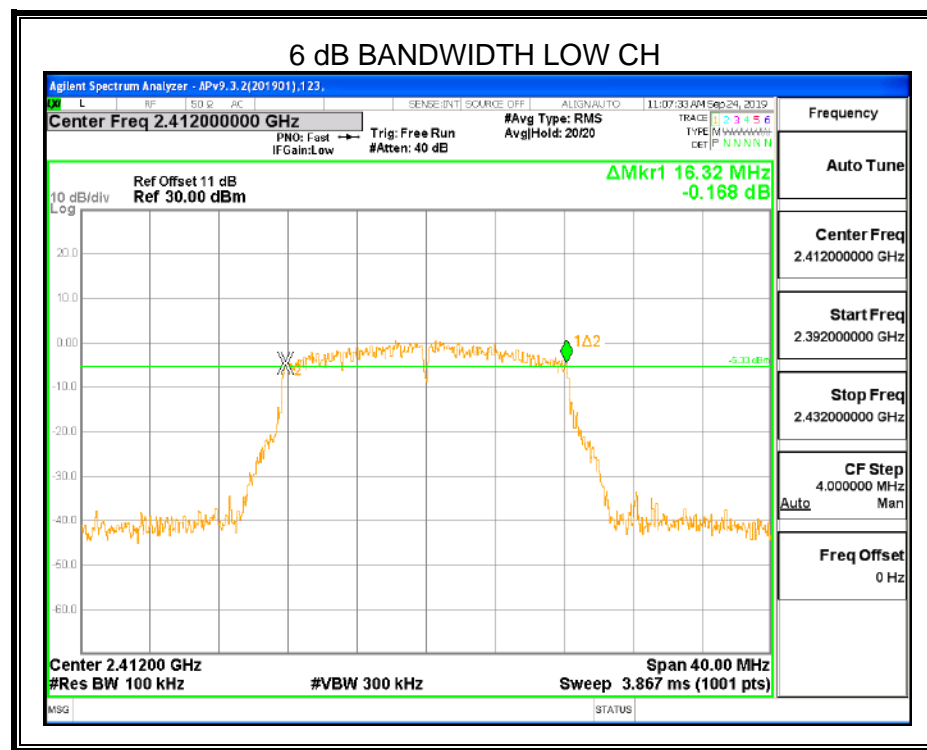



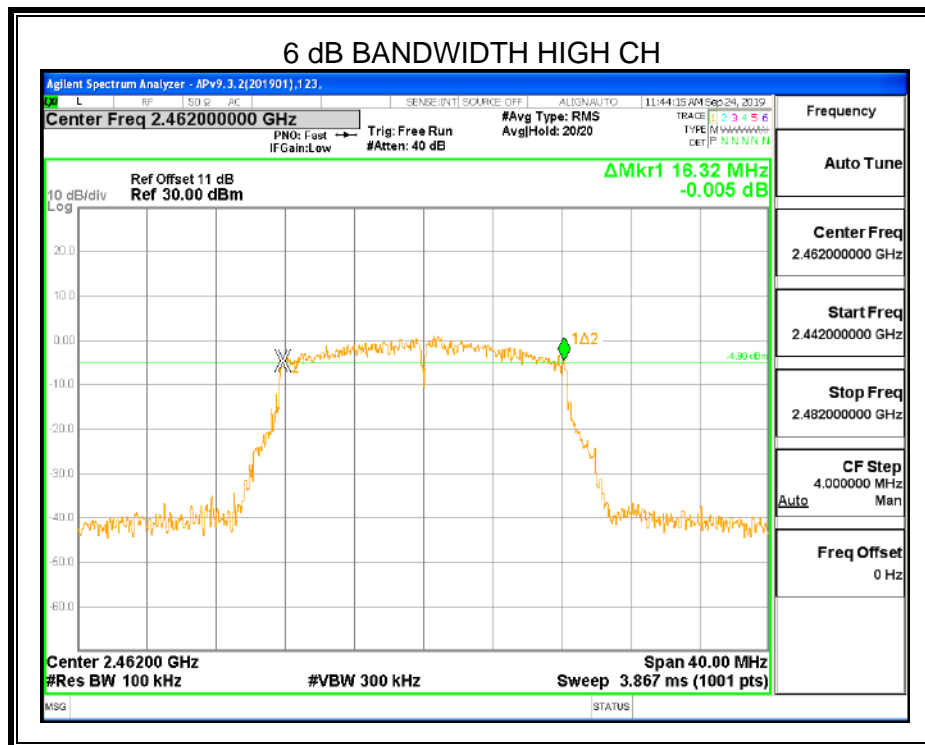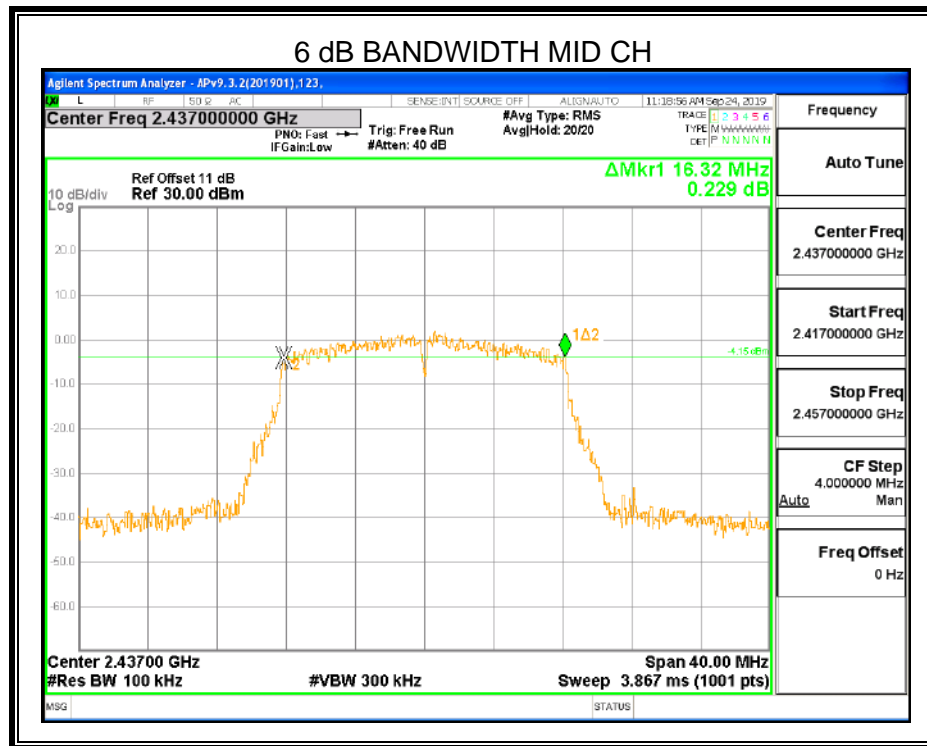

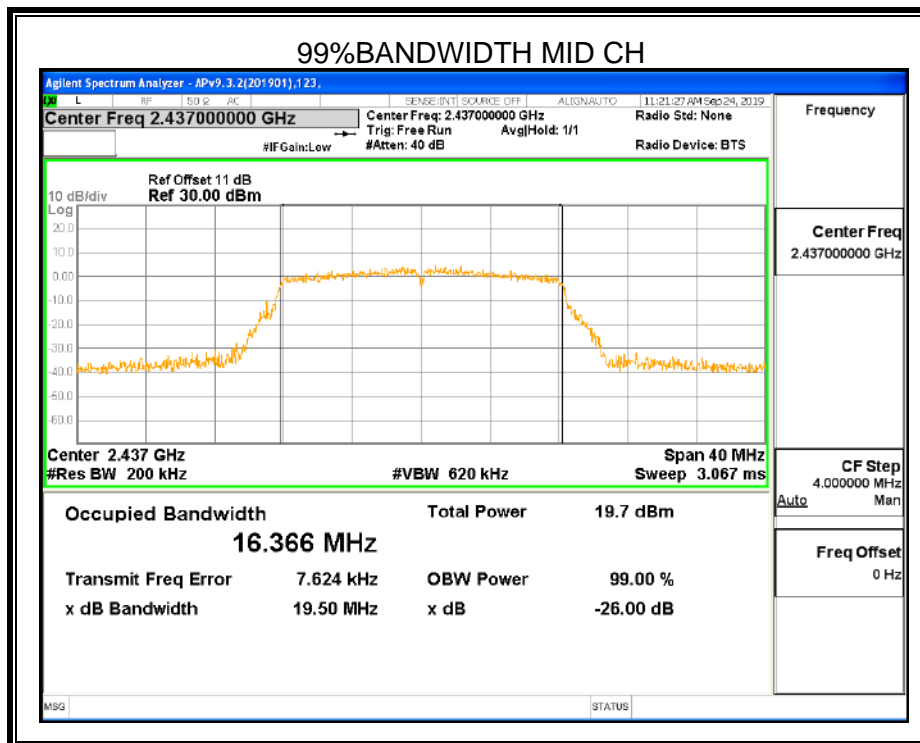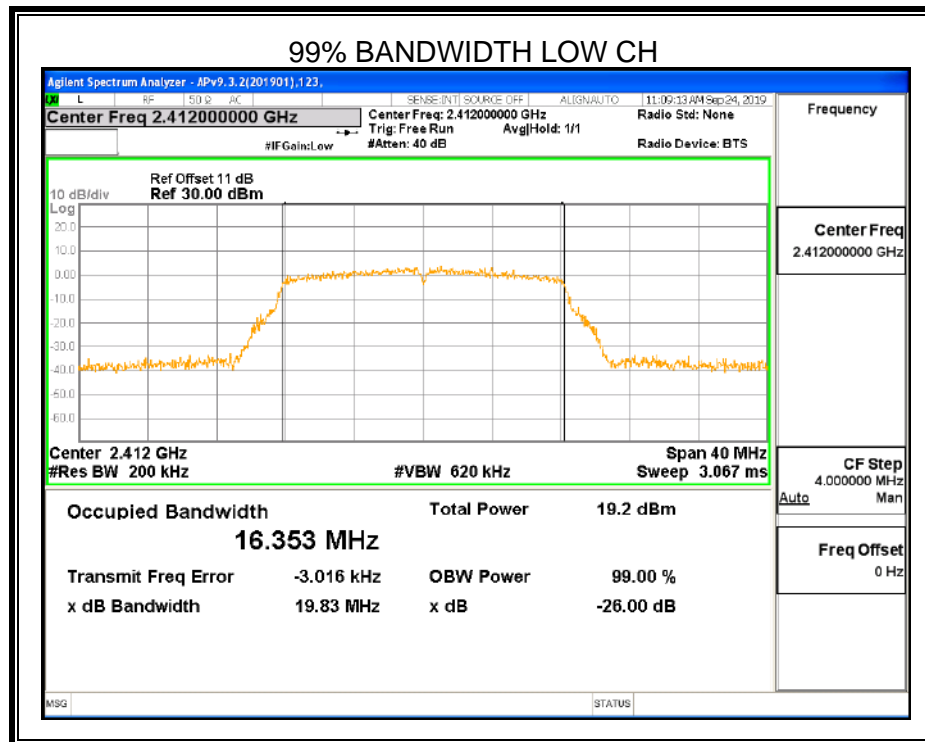

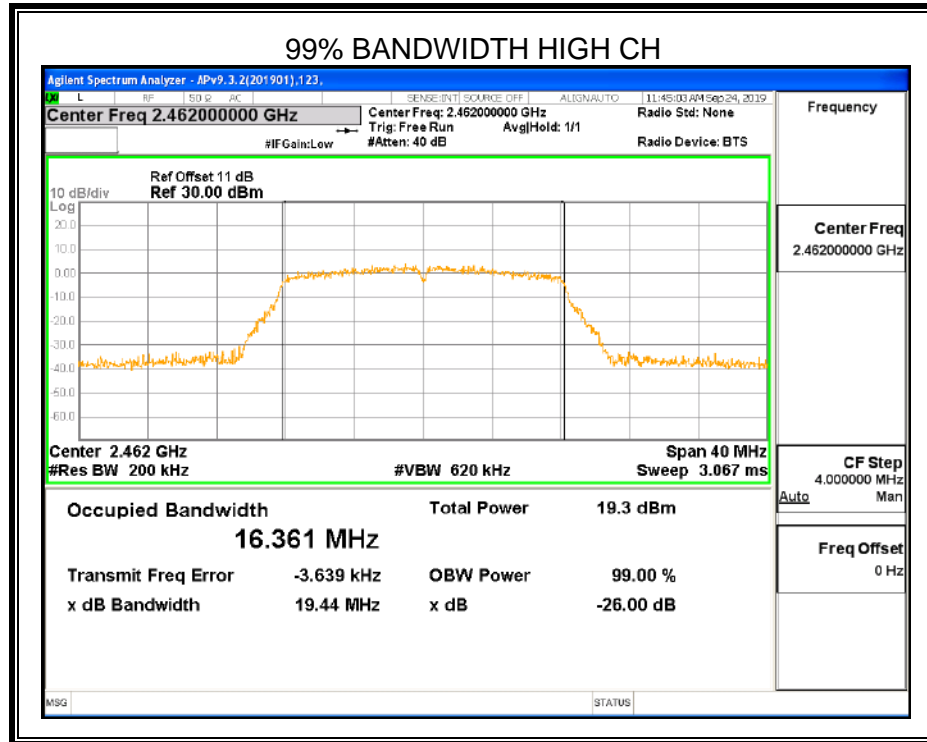


Note: All the modes and antenna ports had been tested, only the worst data recorded in the report.







### 8.2.3. 802.11n HT20 MIMO MODE


#### ANTENNA 0

Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	16.52	17.535	≥500	Pass
Middle	16.68	17.491	≥500	Pass
High	17.28	17.470	≥500	Pass

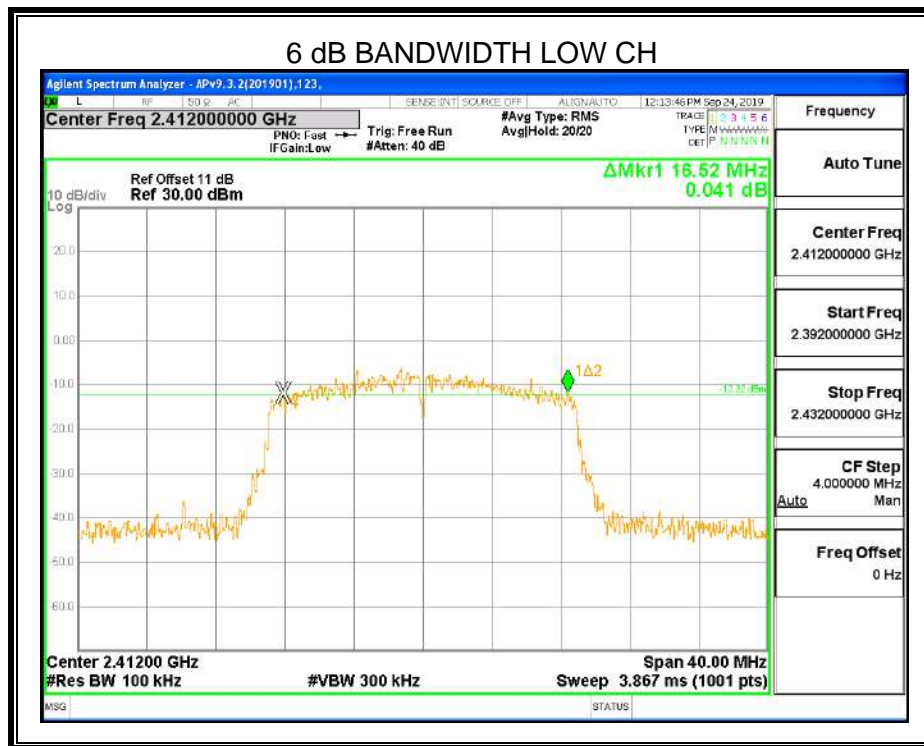

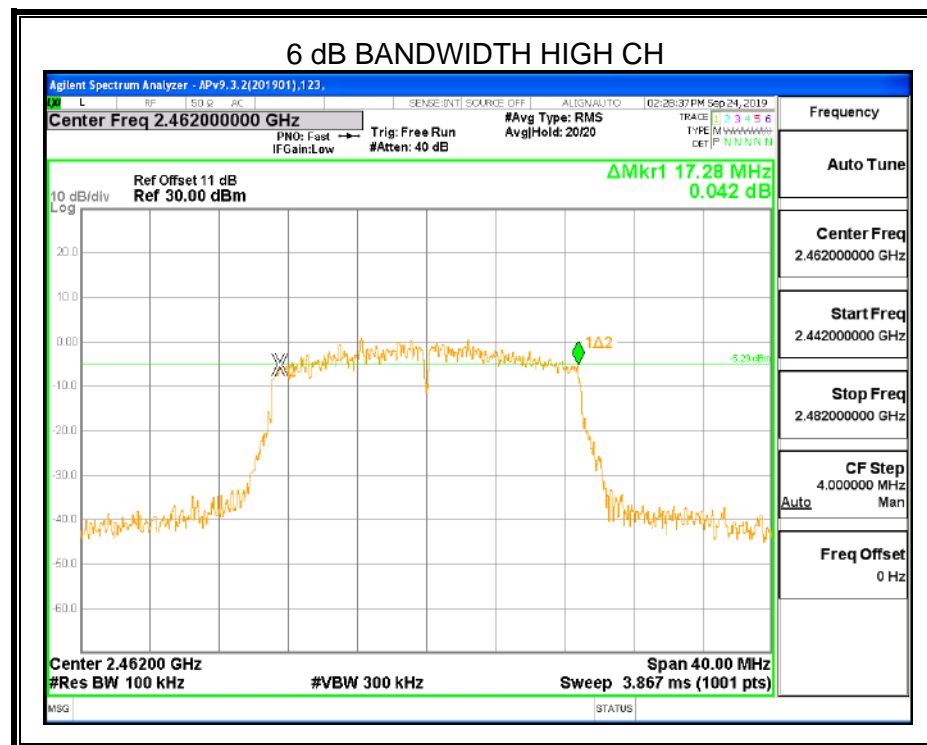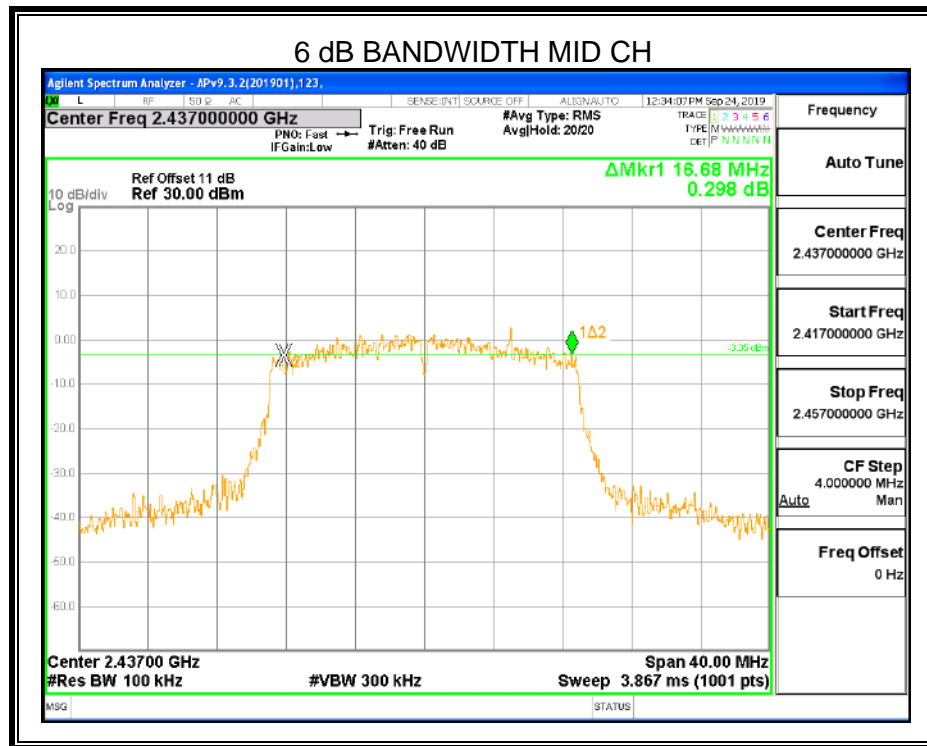

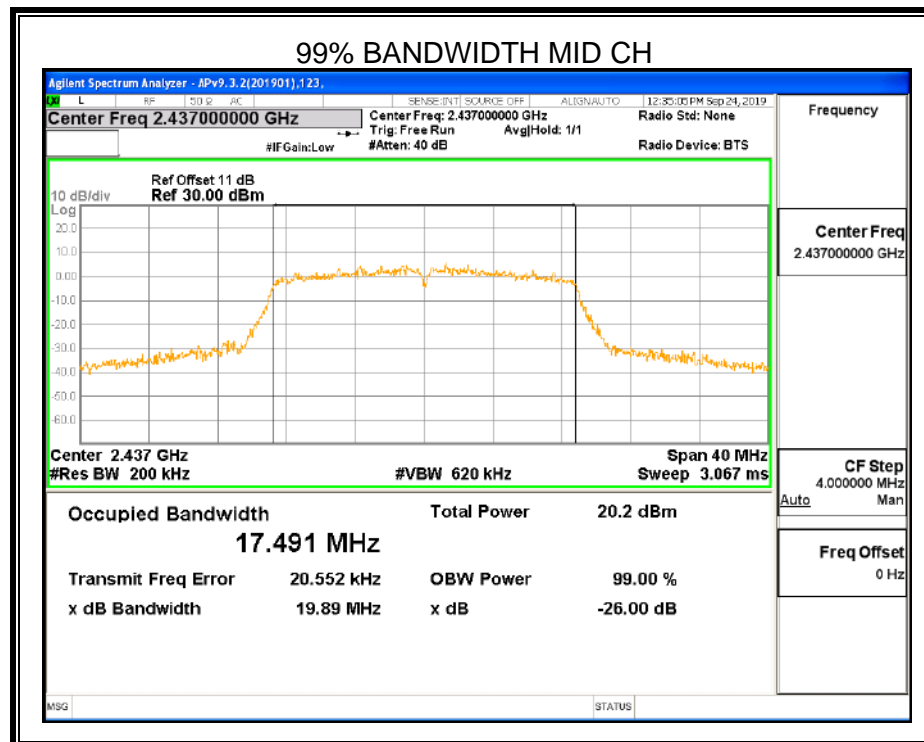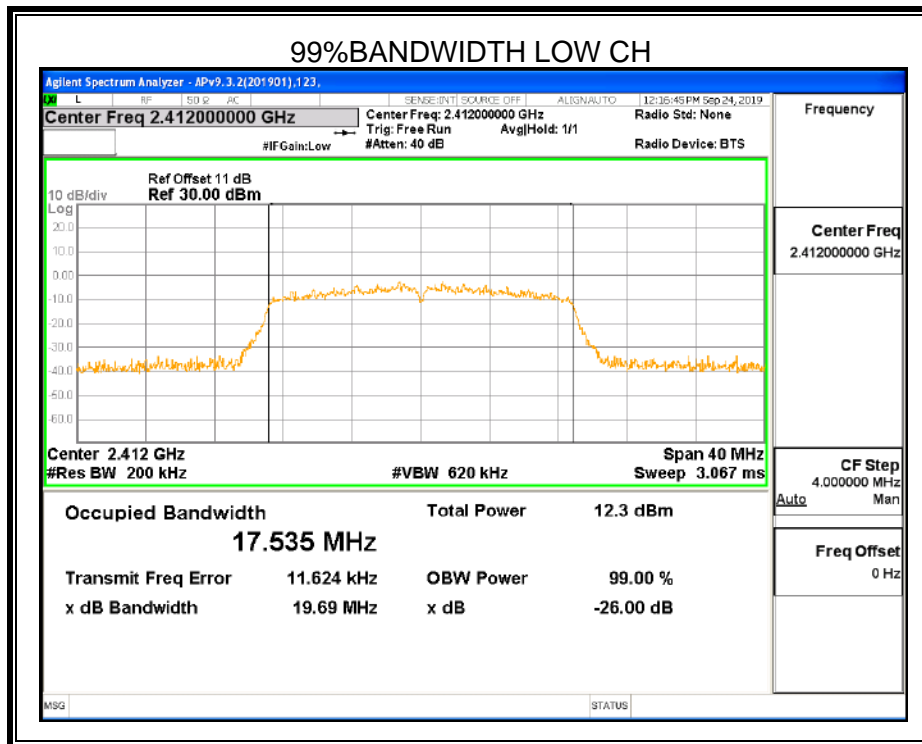

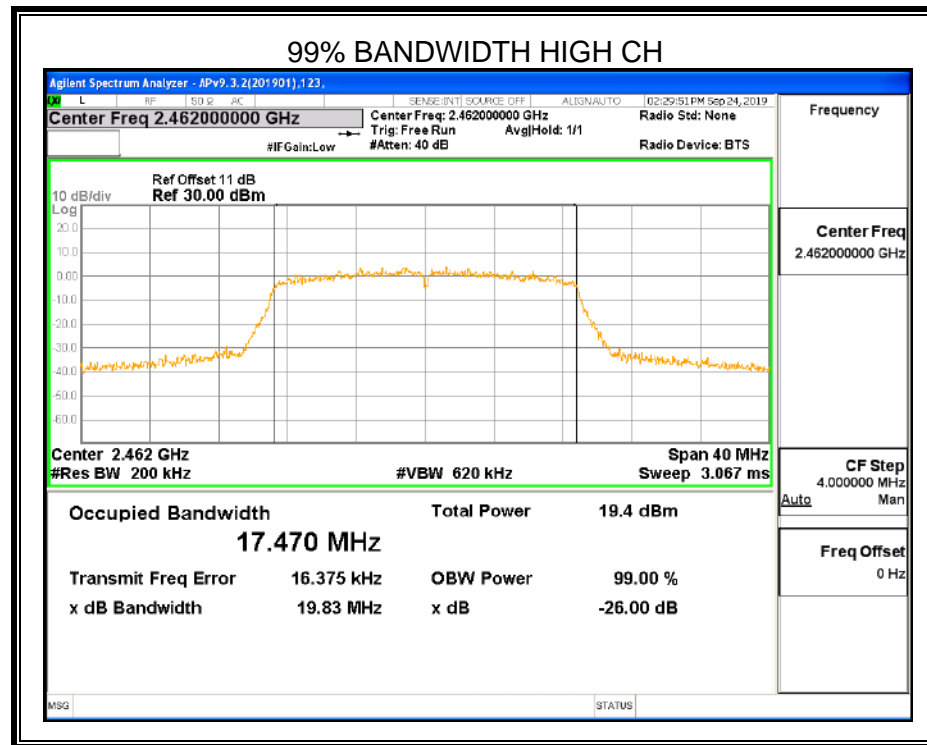






#### 8.2.4. 802.11n HT40 MIMO MODE



##### ANTENNA 0


Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
Low	35.04	35.897	≥500	Pass
Middle	34.96	35.888	≥500	Pass
High	35.04	35.854	≥500	Pass

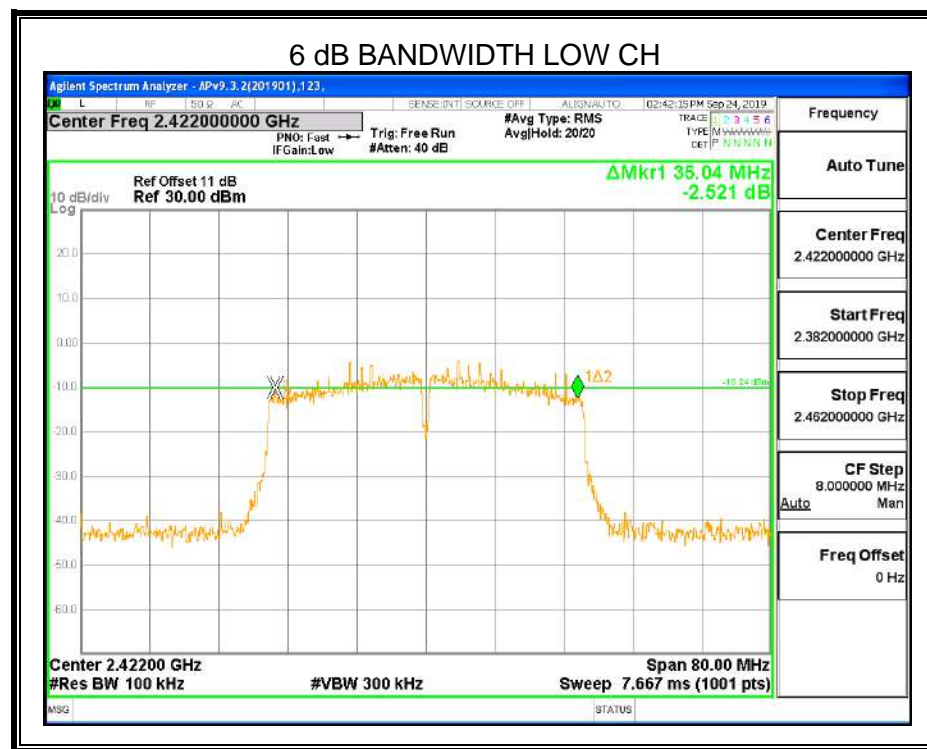



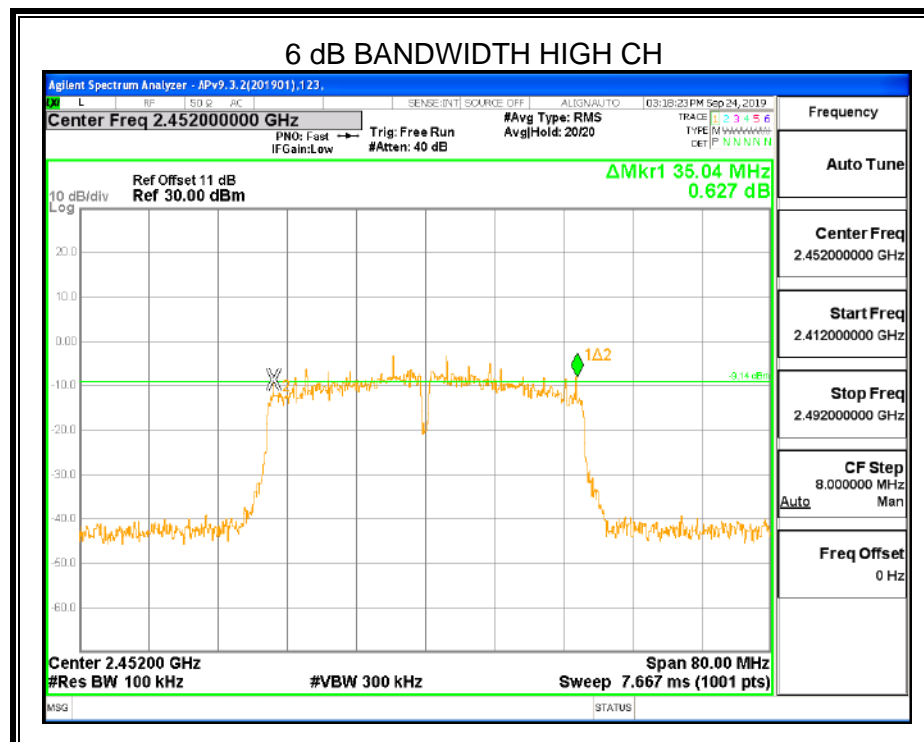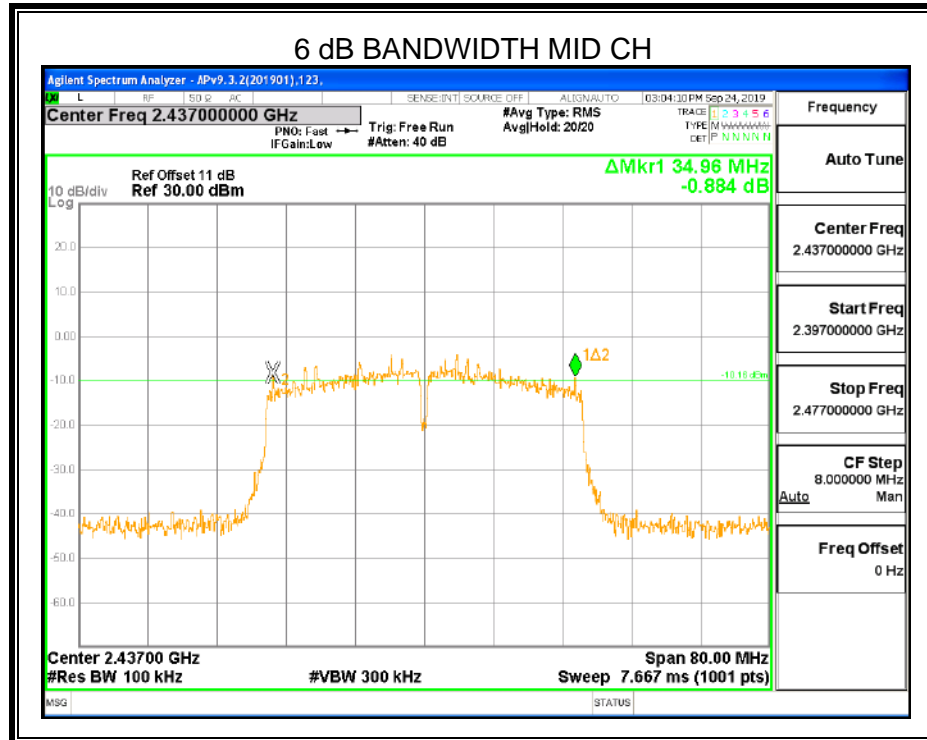

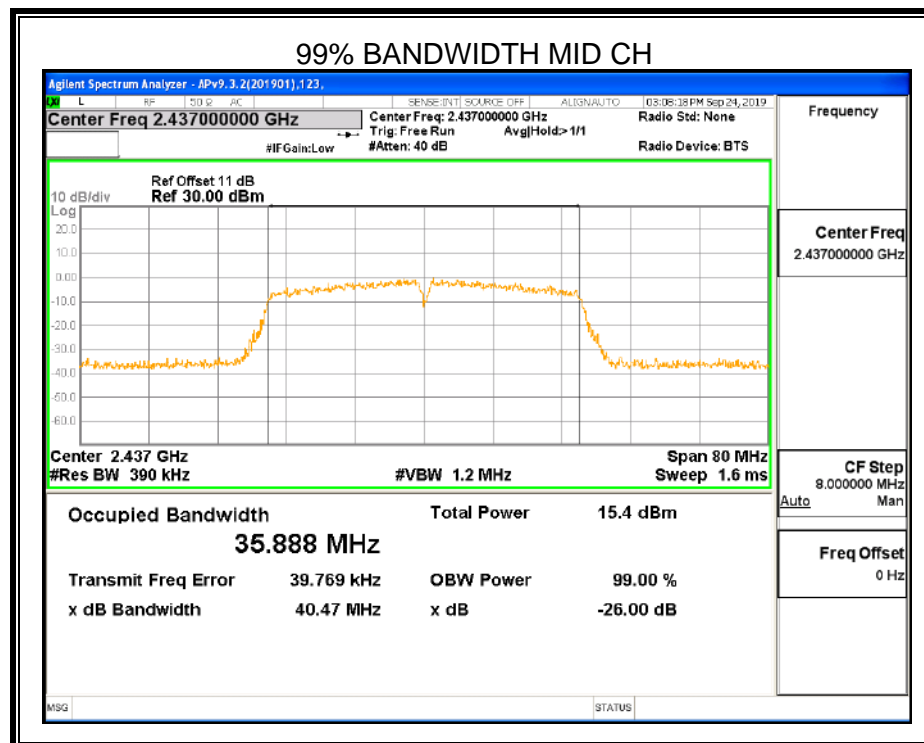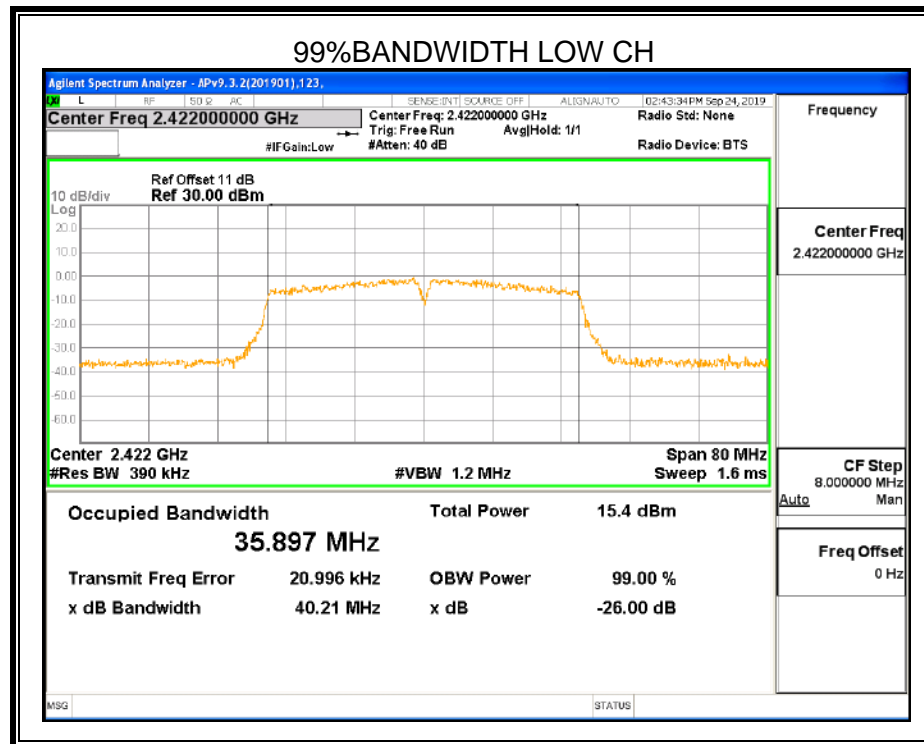

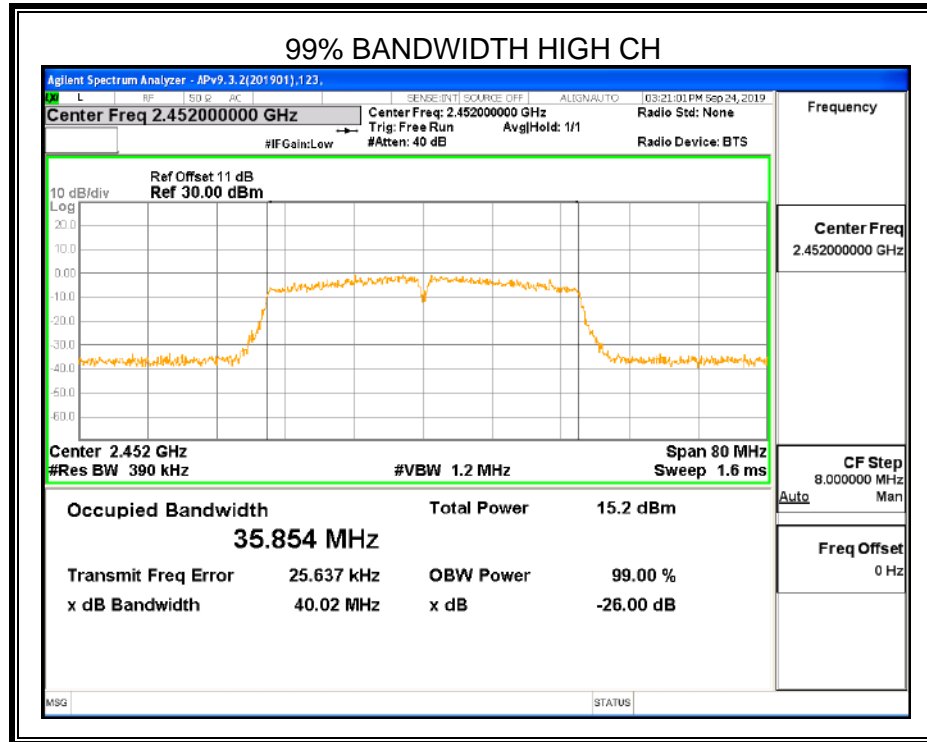

Note: All modes and antennas had been tested, but only the worst data recorded in the report.



### 8.3. PEAK CONDUCTED OUTPUT POWER


#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	Peak Output Power	1 watt or 30dBm (See Note 1/2)	2400-2483.5
1. The total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi 2. Limit=30dBm – 1. Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi, where $N_{ANT}$ is the number of outputs, $G_{ANT}$ is the Antenna gain.			

#### TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.  
Measure peak power each channel.  
Peak Detector use for Peak result.  
AVG Detector use for AVG result.

#### TEST SETUP

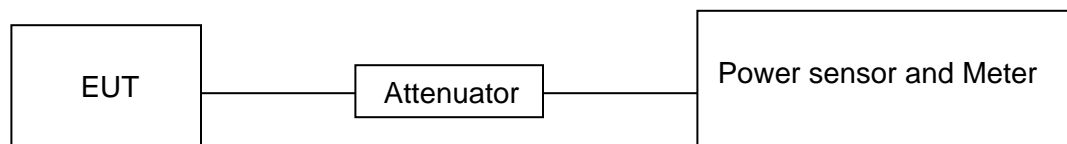

#### TEST ENVIRONMENT

Temperature	24.4°C	Relative Humidity	51%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V



## RESULTS

### 8.3.1. 802.11b SISO MODE

Frequency (MHz)	ANT	Maximum PK Conducted Output Power (dBm)		Limit	Result
		Single	Total		
Low	0	18.34	/	30	PASS
	1	17.40			
Middle	0	18.70			
	1	17.38			
High	0	18.68			
	1	17.56			

Frequency (MHz)	ANT	Maximum AV Conducted Output Power (dBm)		Limit	Result
		Single	Total		
Low	0	15.47	/	30	PASS
	1	14.52			
Middle	0	15.83			
	1	14.51			
High	0	15.80			
	1	14.68			



### 8.3.2. 802.11g SISO MODE

Frequency (MHz)	ANT	Maximum PK Conducted Output Power (dBm)		Limit	Result
		Single	Total		
Low	0	22.94	/	30	PASS
	1	21.74			
Middle	0	23.14			
	1	21.89			
High	0	23.32			
	1	22.26			

Frequency (MHz)	ANT	Maximum AV Conducted Output Power (dBm)		Limit	Result
		Single	Total		
Low	0	15.12	/	30	PASS
	1	13.19			
Middle	0	15.30			
	1	13.39			
High	0	15.41			
	1	13.88			



### 8.3.3. 802.11n HT20 MIMO MODE

Frequency (MHz)	ANT	Maximum PK Conducted Output Power (dBm)		Limit	Result
		Single	Total		
Low	0	20.41	23.80	30	PASS
	1	21.14			
Middle	0	20.43	23.83		
	1	21.17			
High	0	20.34	23.79		
	1	21.18			

Frequency (MHz)	ANT	Maximum AV Conducted Output Power (dBm)		Limit	Result
		Single	Total		
Low	0	12.95	16.20	30	PASS
	1	13.41			
Middle	0	12.99	16.27		
	1	13.51			
High	0	12.98	16.29		
	1	13.56			



#### 8.3.4. 802.11n HT40 MIMO MODE

Frequency (MHz)	ANT	Maximum PK Conducted Output Power (dBm)		Limit	Result
		Single	Total		
Low	0	19.11	22.68	30	PASS
	1	20.16			
Middle	0	19.12	22.77		
	1	20.32			
High	0	18.22	21.90		
	1	19.47			

Frequency (MHz)	ANT	Maximum AV Conducted Output Power (dBm)		Limit	Result
		Single	Total		
Low	0	10.65	13.99	30	PASS
	1	11.28			
Middle	0	10.67	14.04		
	1	11.36			
High	0	9.56	12.93		
	1	10.26			





## 8.4. POWER SPECTRAL DENSITY

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm/3 kHz (See Note 1/2)	2400-2483.5
<p>1. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.</p> <p>2. Limit=8dBm – (Directional gain -6)dBi Directional gain = <math>G_{ANT} + 10 \log(N_{ANT})</math> dBi, where <math>N_{ANT}</math> is the number of outputs, <math>G_{ANT}</math> is the Antenna gain.</p>			

### TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST SETUP

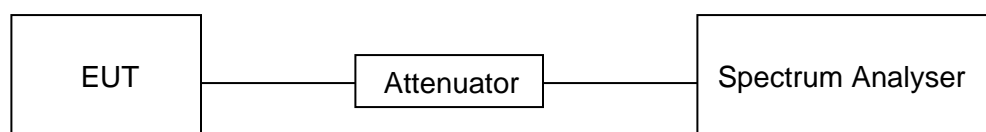



#### **TEST ENVIRONMENT**

Temperature	24.4°C	Relative Humidity	51%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V



#### **RESULTS**


##### **8.4.1. 802.11b SISO MODE**

Frequency (MHz)	ANT	Power Spectral Density (dBm/3kHz)		Limit (dBm/3kHz)
		Single	Total	
Low	1	-8.088	NA	8
Middle	1	-7.093		
High	1	-7.332		



**ANTENNA 0**

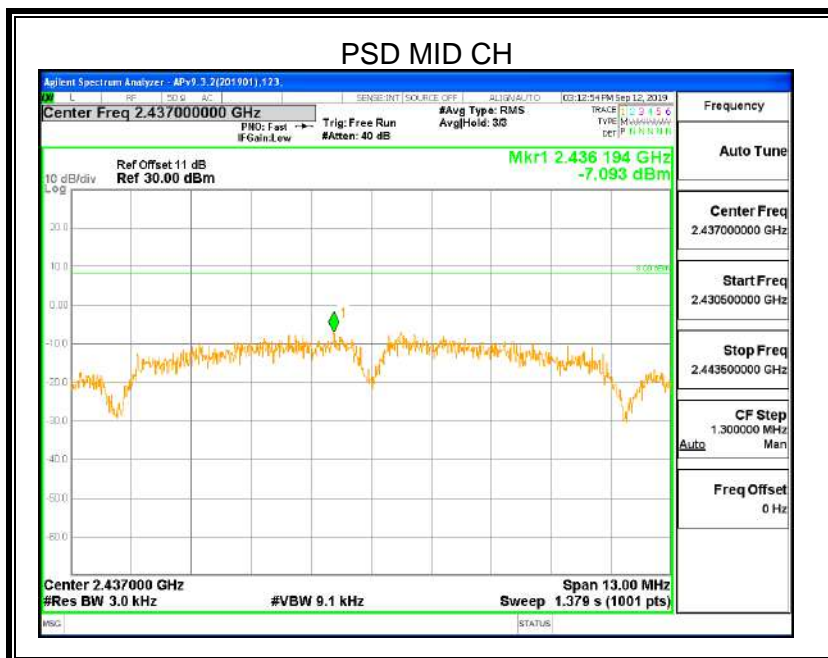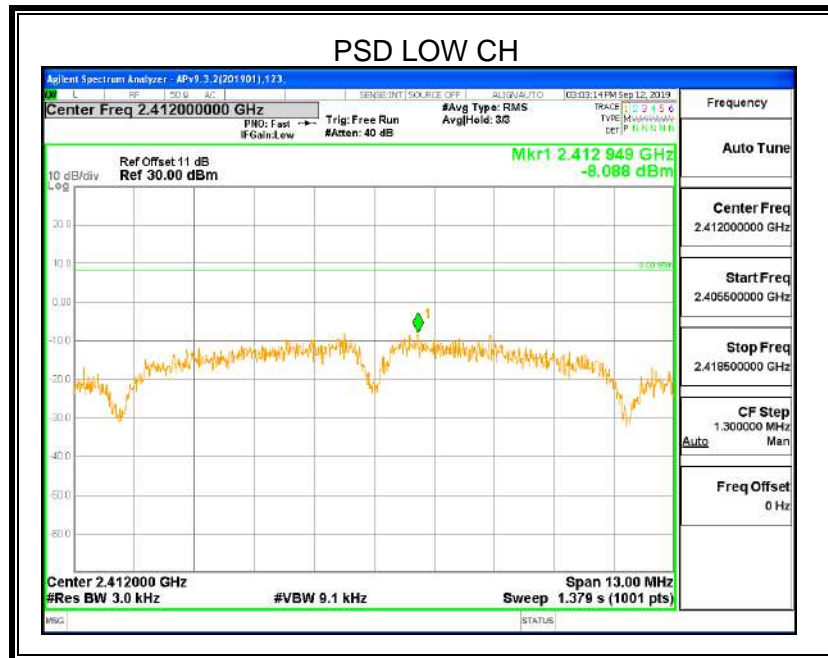

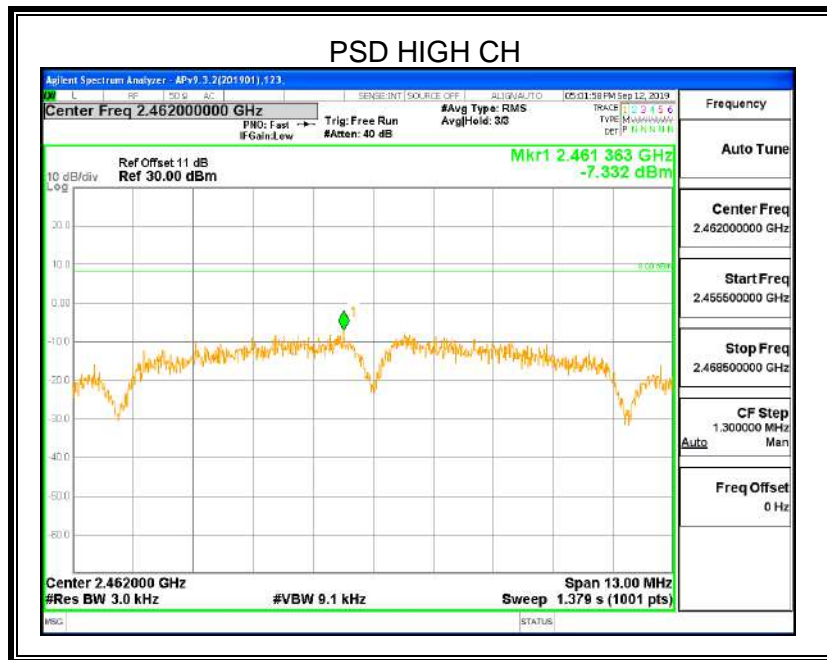

Note: All antennas had been test ,but only the worst data for Antenna 0 was recorded.






#### 8.4.1. 802.11g SISO MODE

Frequency (MHz)	ANT	Power Spectral Density (dBm/3kHz)		Limit (dBm/3kHz)
		Single	Total	
Low	1	-10.302	NA	8
Middle	1	-10.434		
High	1	-9.511		



## ANTENNA 0

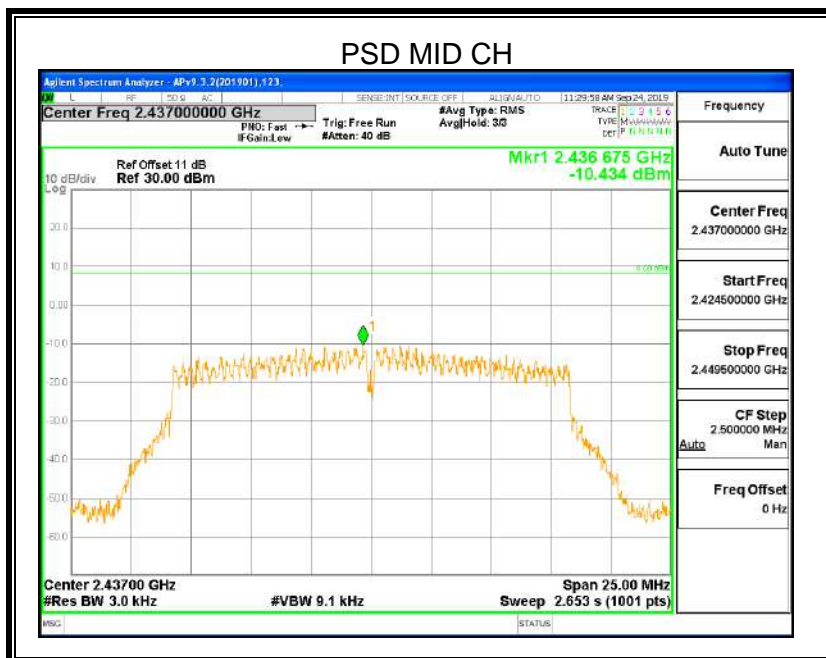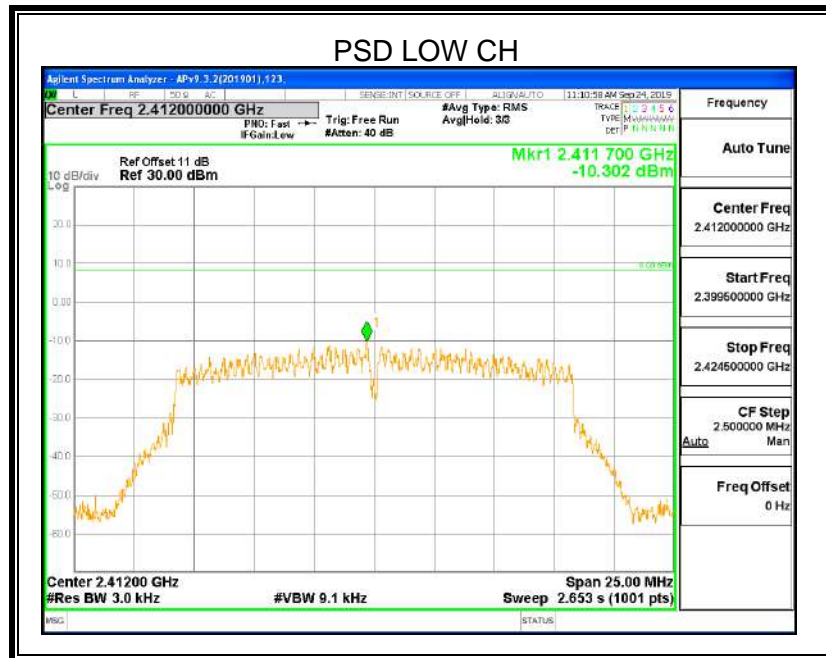

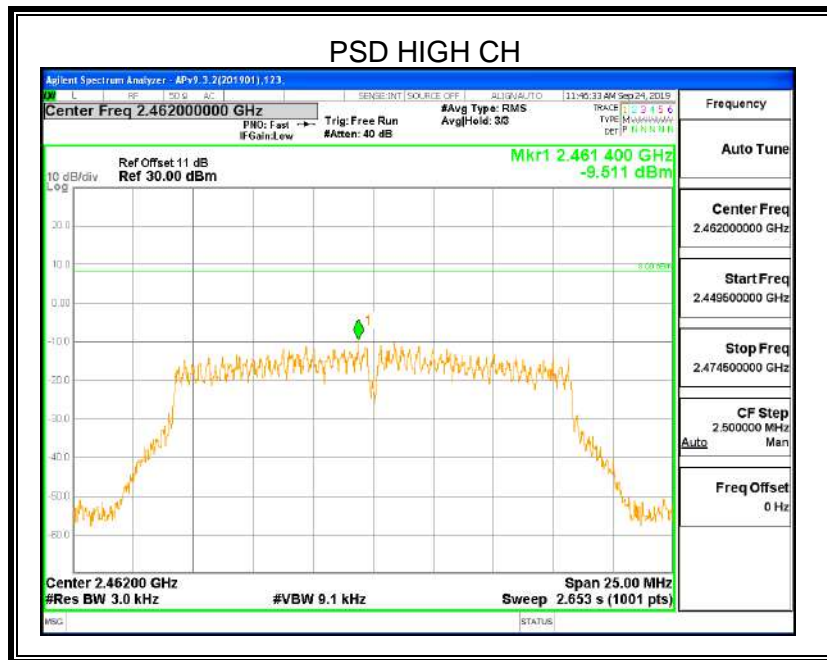

Note: All antennas had been test ,but only the worst data for Antenna 0 was recorded.





#### 8.4.2. 802.11n HT20 MIMO MODE


Frequency (MHz)	ANT	Power Spectral Density (dBm/3kHz)		Limit (dBm/3kHz)
		Single	Total	
Low	0	-13.320	-9.04	8
	1	-11.071		
Middle	0	-13.145	-9.72	
	1	-12.352		
High	0	-12.802	-9.61	
	1	-12.442		








**ANTENNA 0**

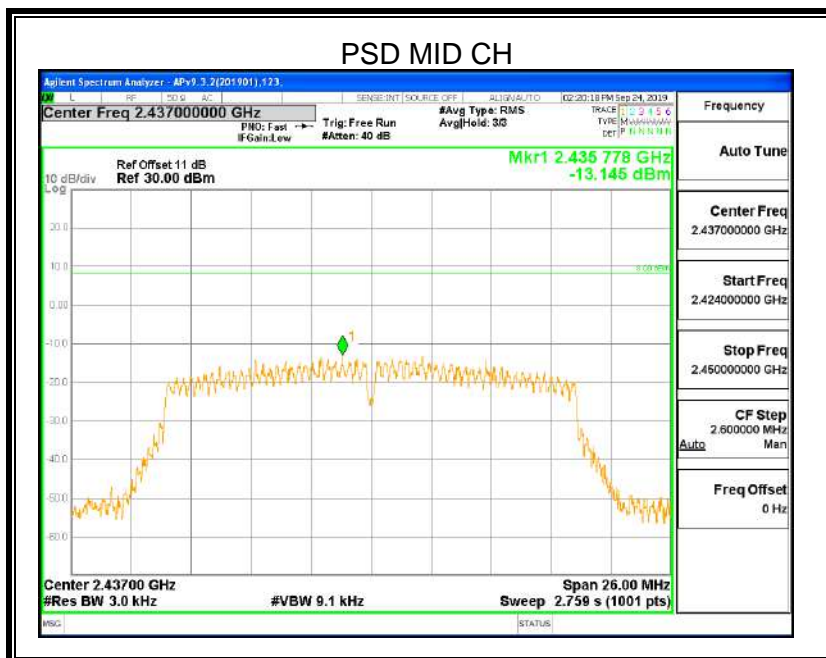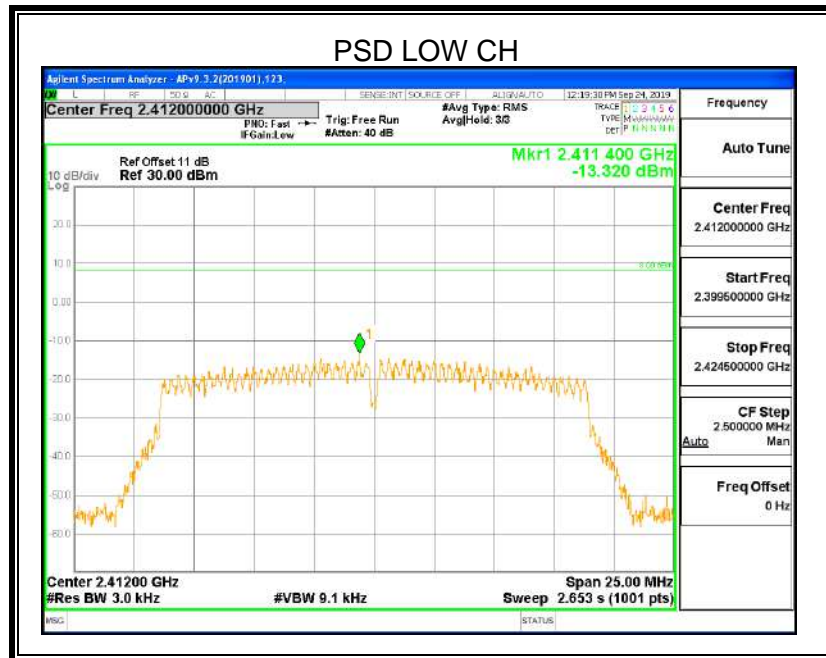

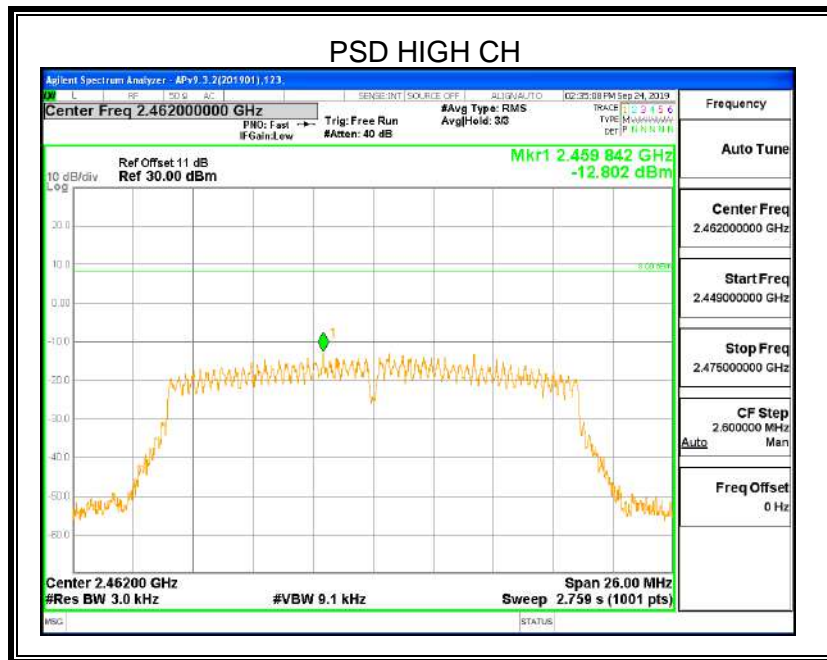

**ANTENNA 1**

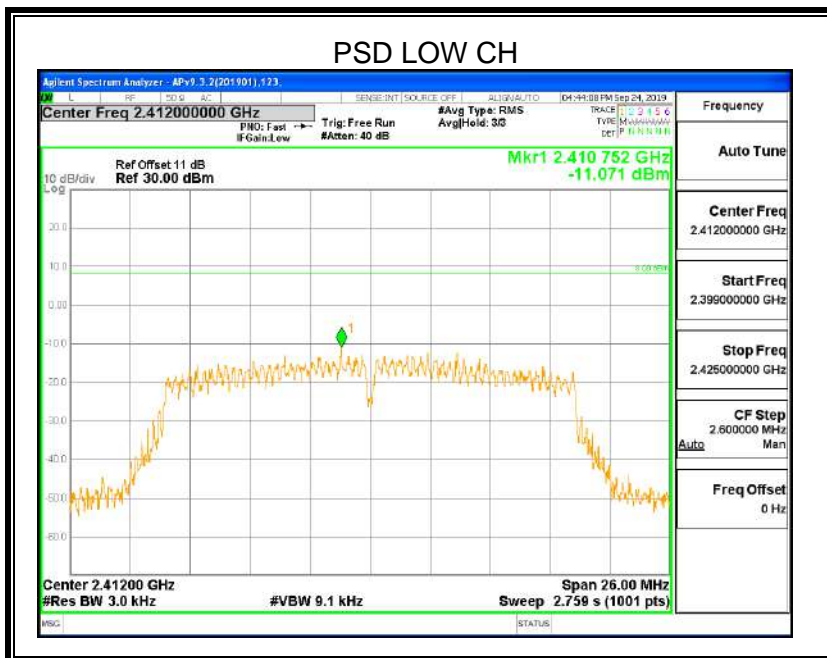

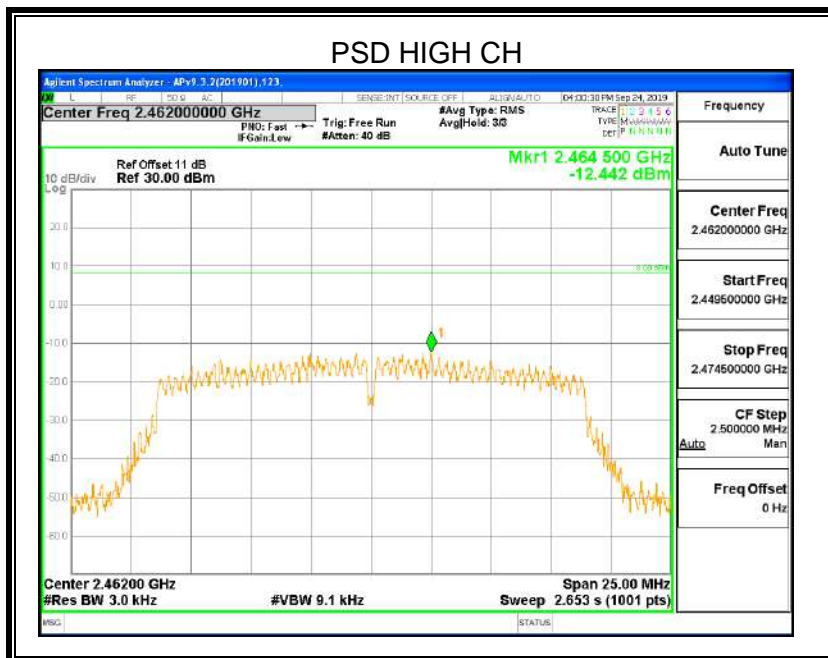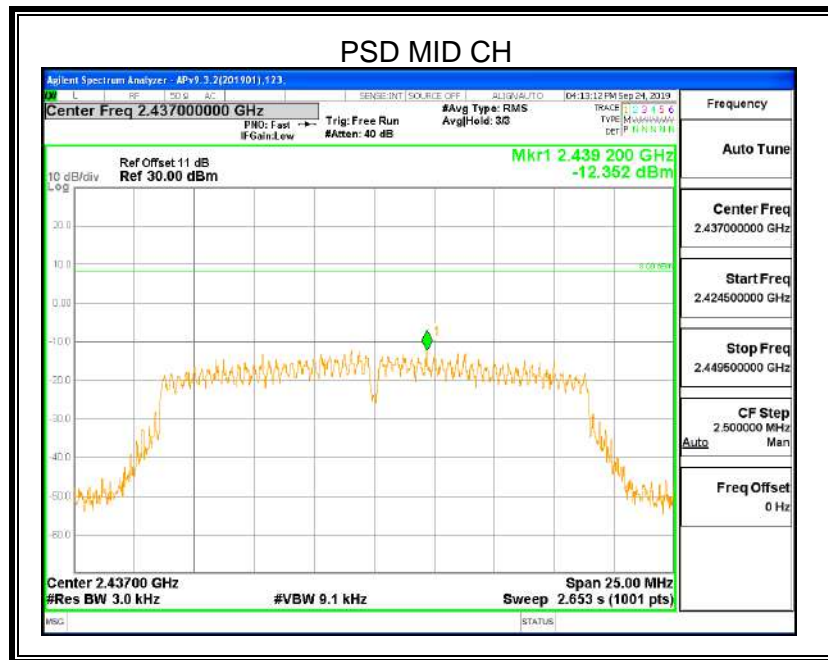






#### 8.4.3. 802.11n HT40 MIMO MODE

Frequency (MHz)	ANT	Power Spectral Density (dBm/3kHz)		Limit (dBm/3kHz)
		Single	Total	
Low	0	-18.263	-14.83	8
	1	-17.464		
Middle	0	-19.570	-15.45	
	1	-17.583		
High	0	-19.584	-15.55	
	1	-17.739		






**ANTENNA 0**

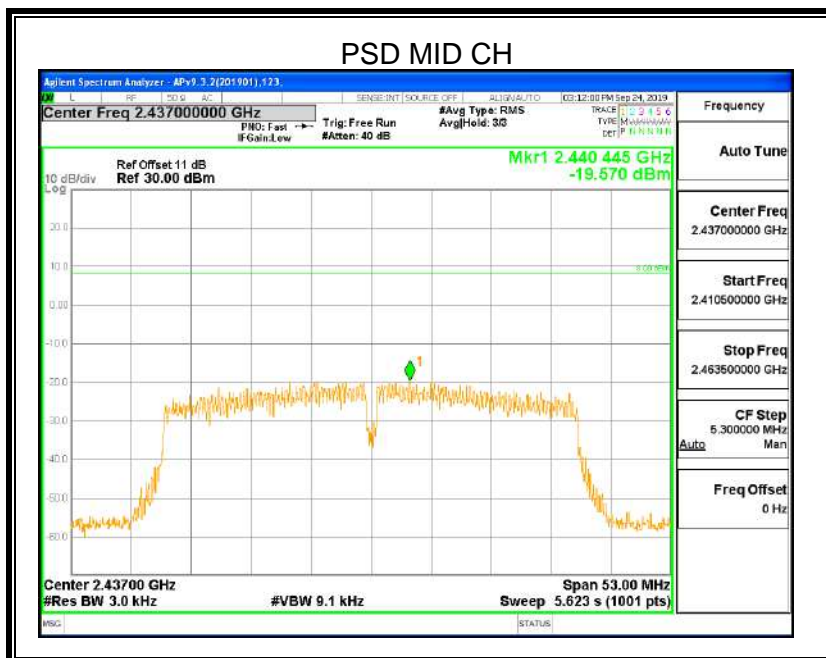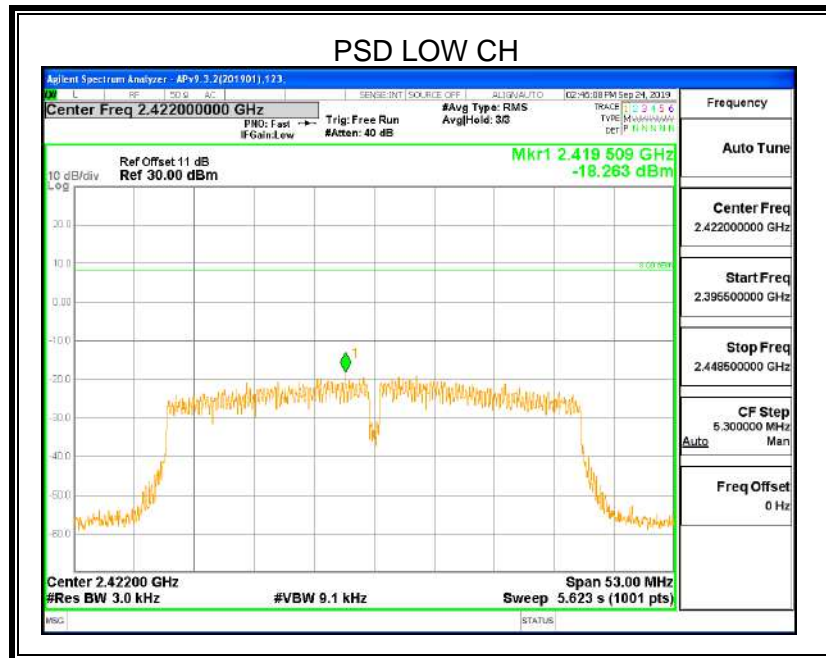

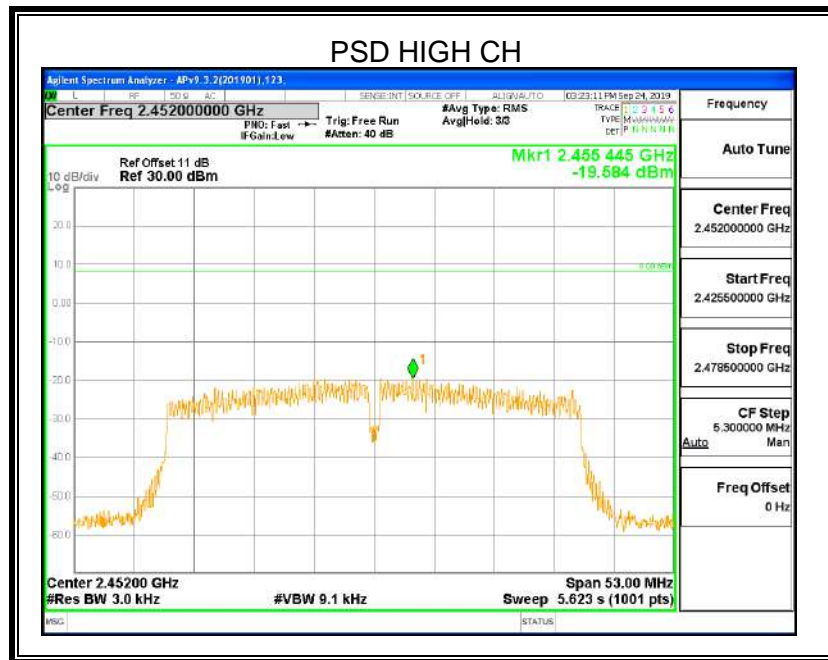

**ANTENNA 1**

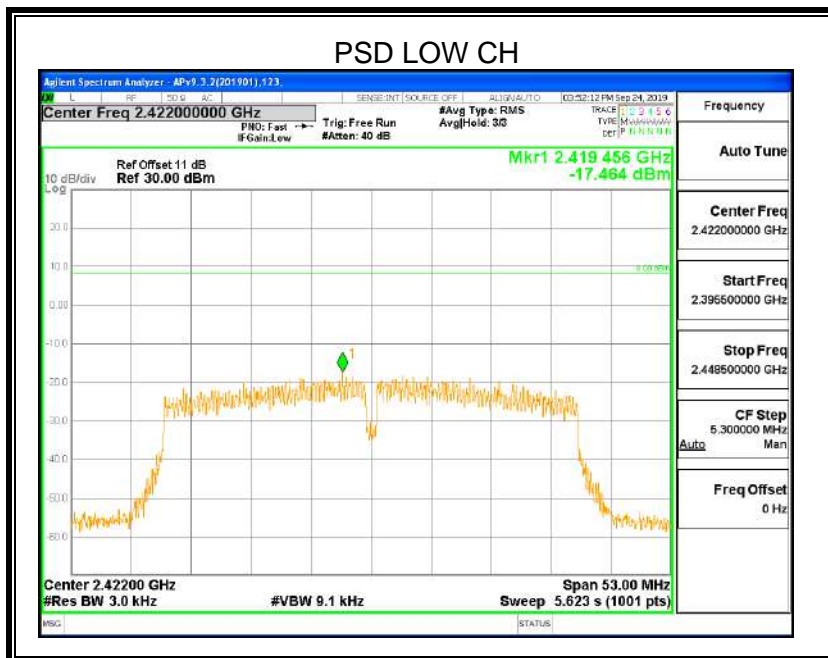

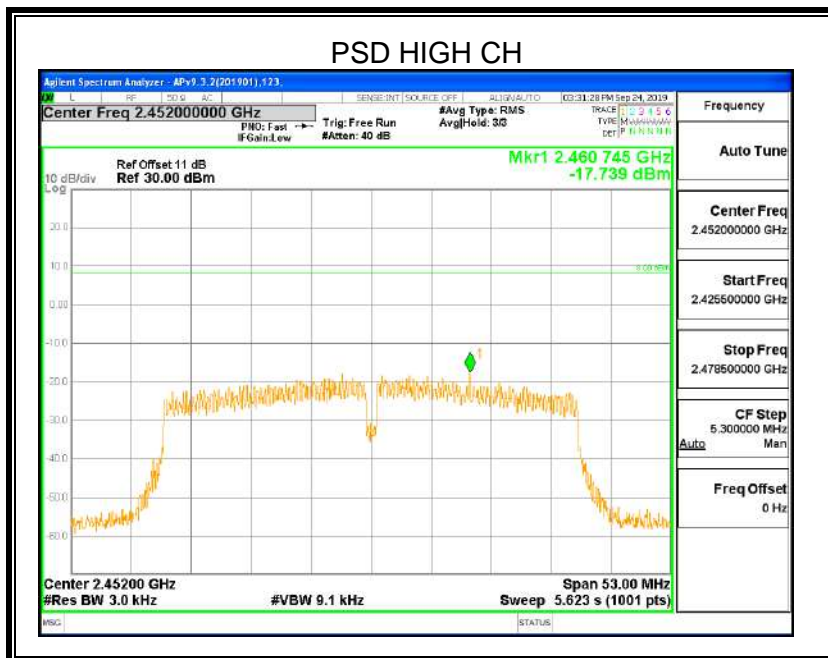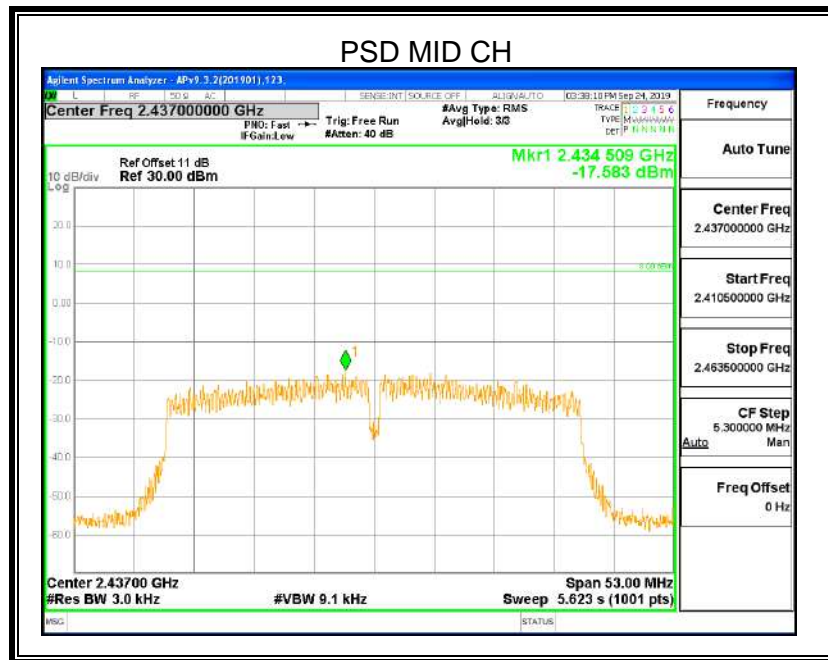





## 8.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum PSD level.


Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.





### TEST SETUP

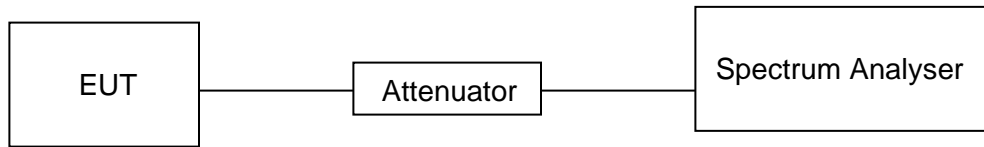

### TEST ENVIRONMENT

Temperature	24.4°C	Relative Humidity	51%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V


### RESULTS




### 8.5.1. 802.11b SISO MODE

#### ANTENNA 0

#### LOW CH BANDEDGE

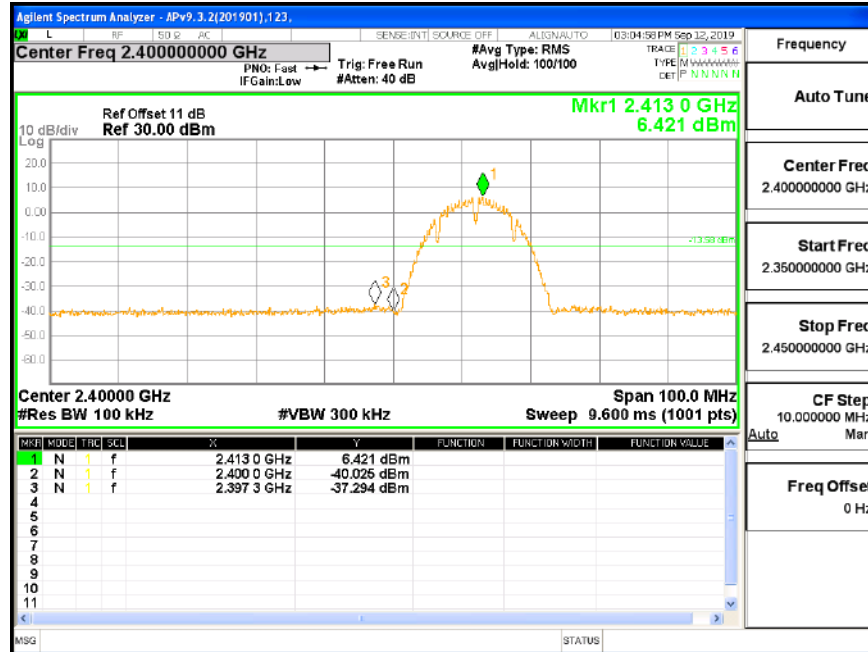


#### LOW CH SPURIOUS EMISSIONS 30M-26G

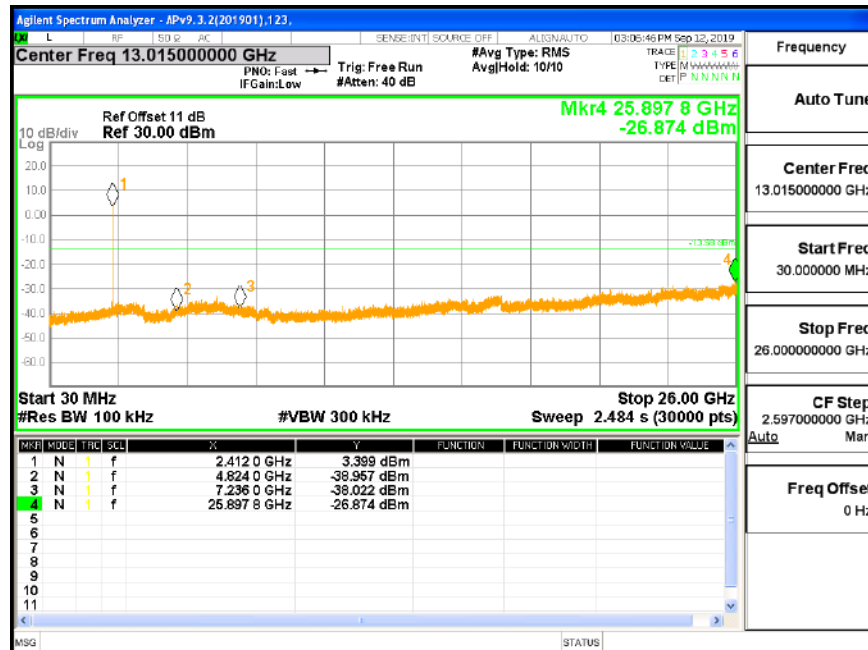




### MID CH REFERENCE

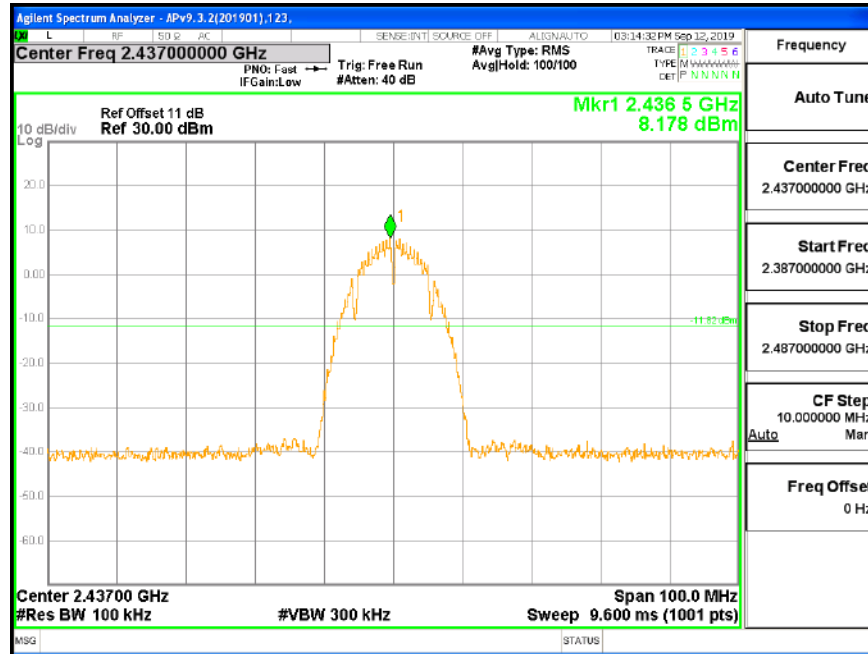


### MID CH SPURIOUS EMISSIONS 30M-26G

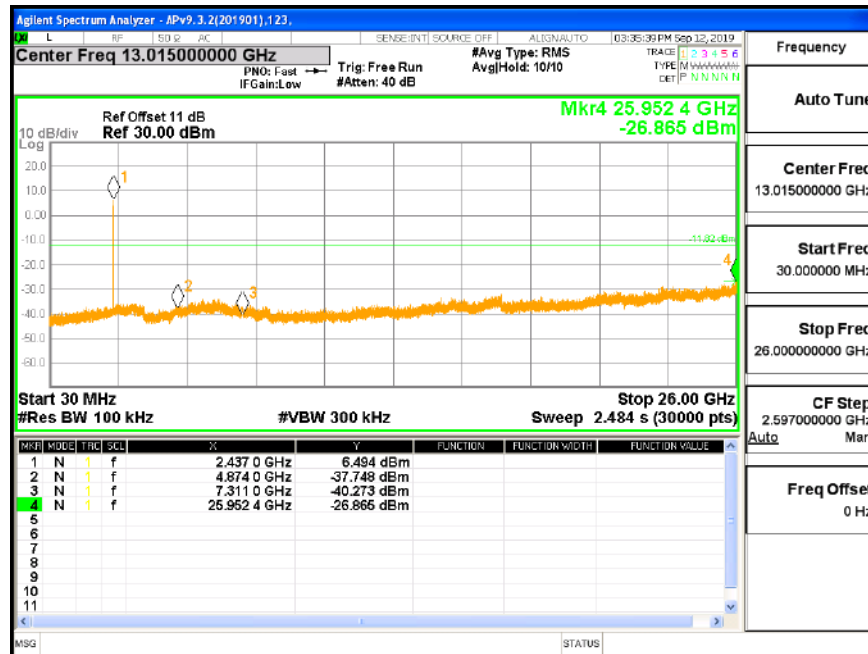




### HIGH CH BANDEDGE

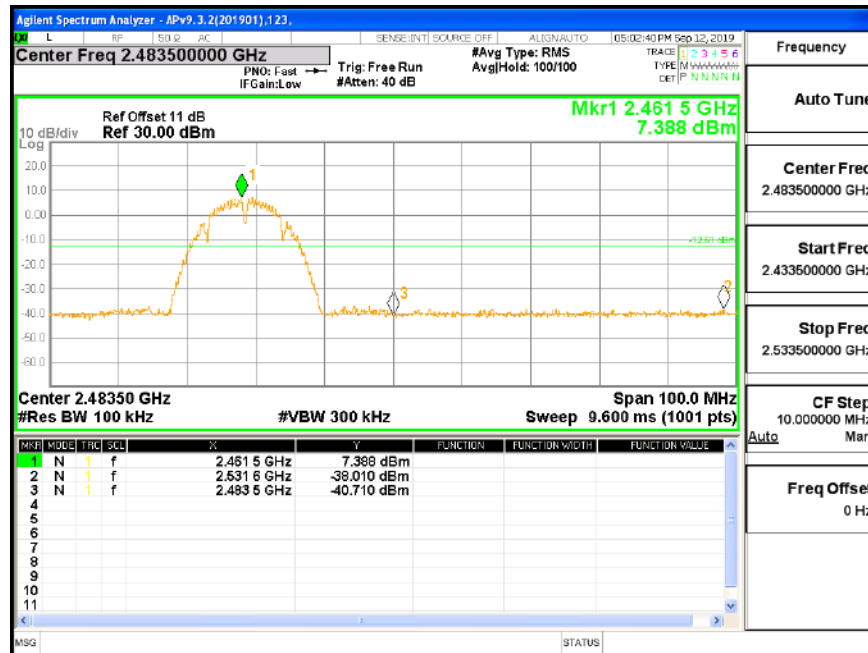

### HIGH CH SPURIOUS EMISSIONS 30M-26G

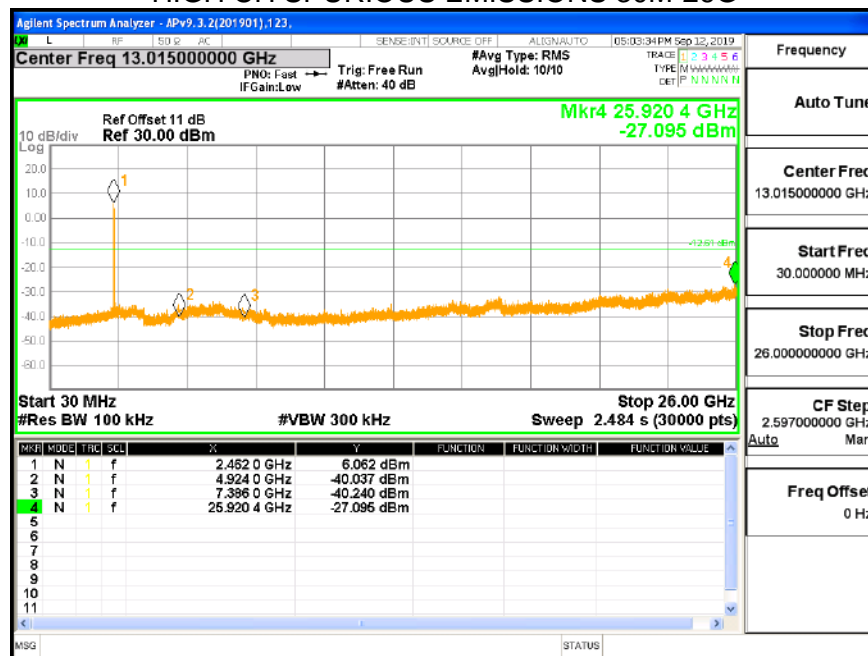


Note: All the modes and antenna ports had been tested, only the worst data recorded in the report.




## 8.5.2. 802.11g SISO MODE

### ANTENNA 0

#### LOW CH BANDEDGE

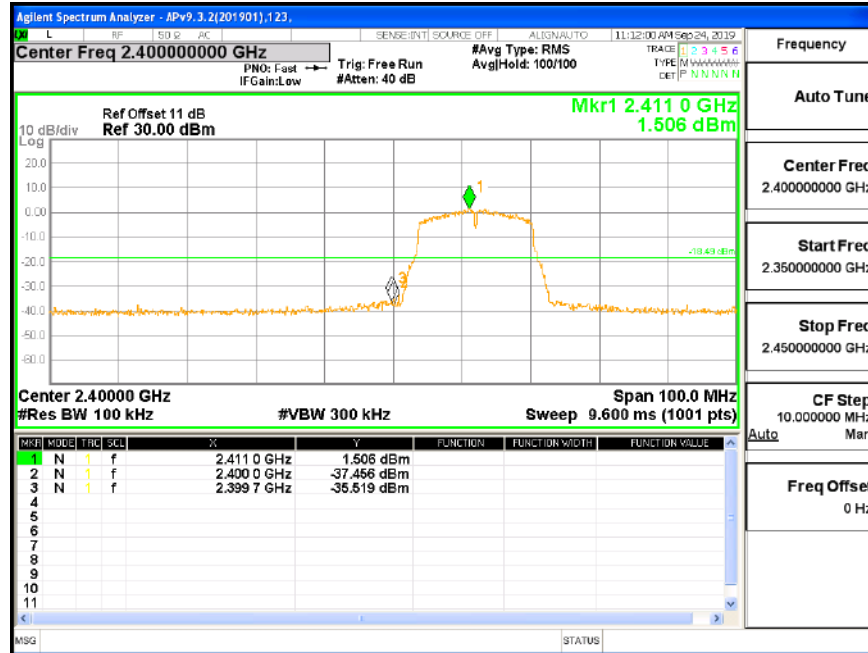


#### LOW CH SPURIOUS EMISSIONS 30M-26G

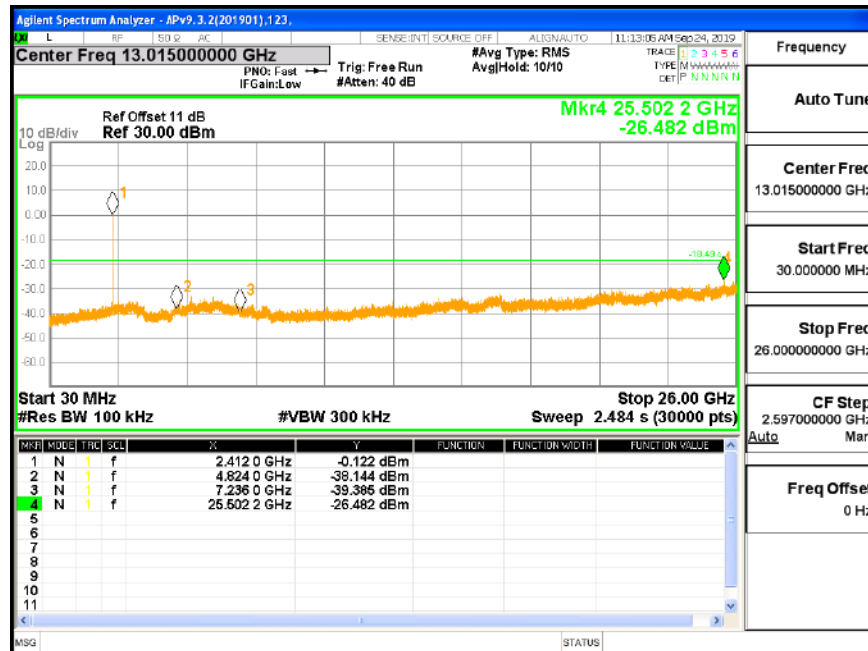




### MID CH REFERENCE

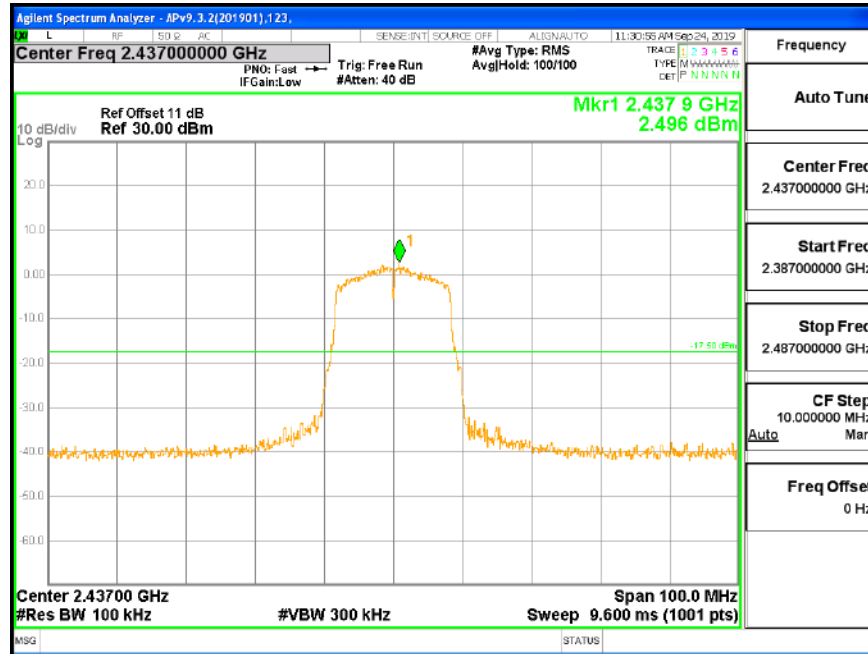


### MID CH SPURIOUS EMISSIONS 30M-26G

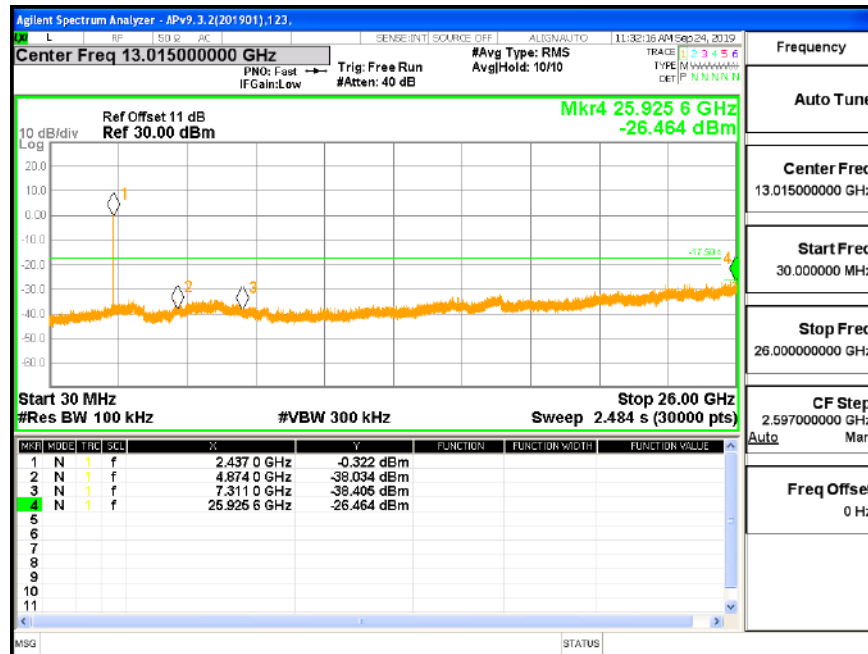




### HIGH CH BANDEDGE

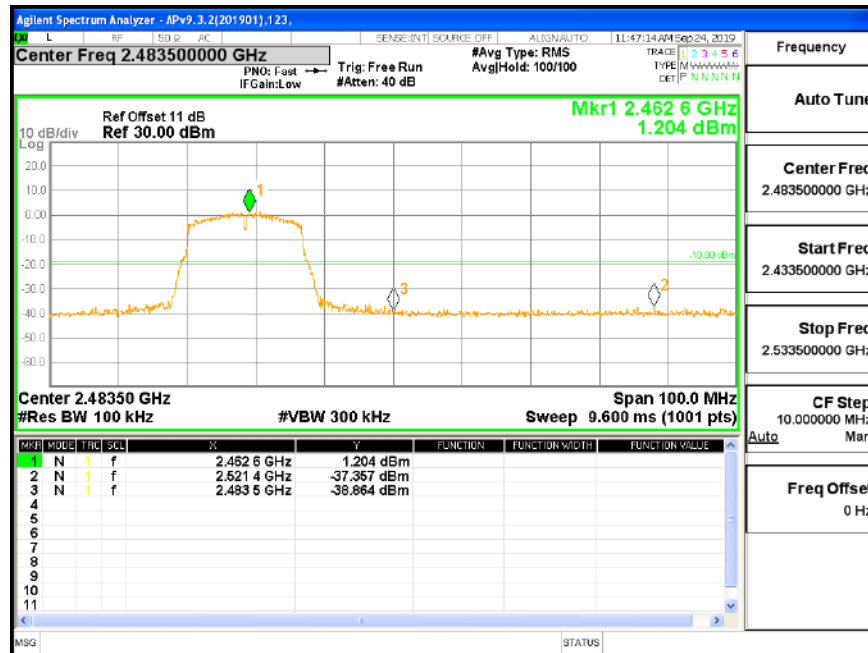

### HIGH CH SPURIOUS EMISSIONS 30M-26G

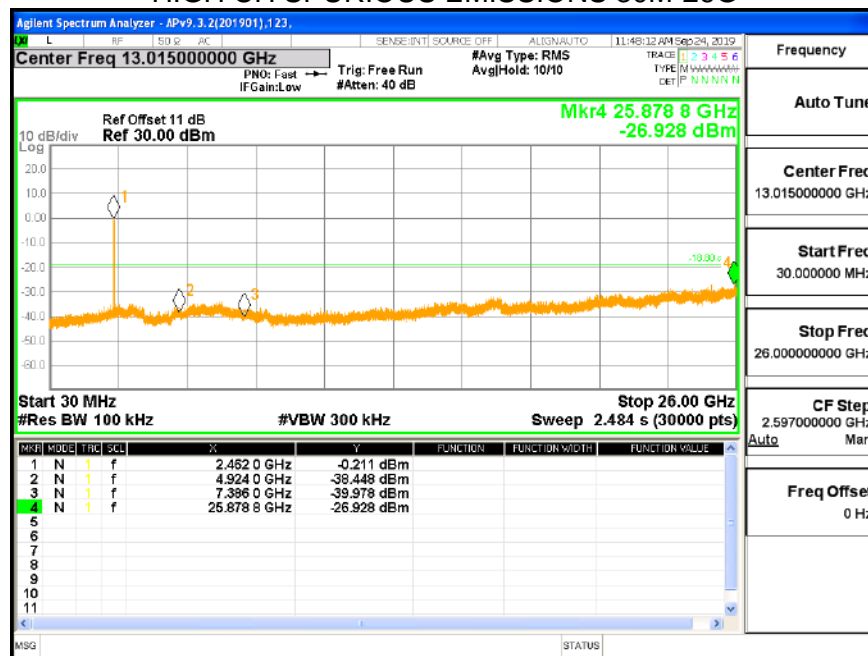

Note: All the modes and antenna ports had been tested, only the worst data recorded in the report.




### 8.5.3. 802.11n HT20 MIMO MODE


#### MIMO MODE-2TX

#### ANTENNA 0

#### LOW CH BANDEDGE

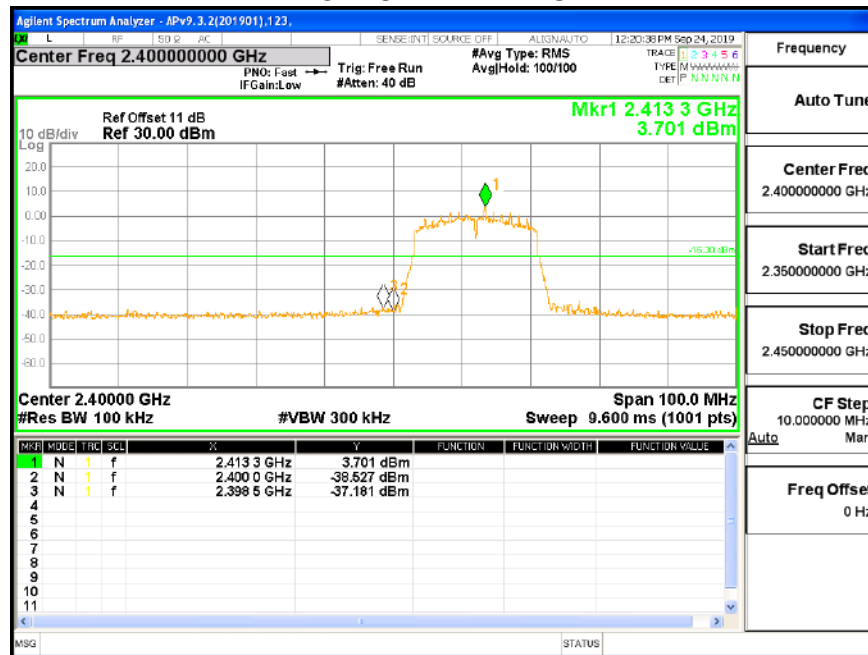


#### LOW CH SPURIOUS EMISSIONS 30M-26G

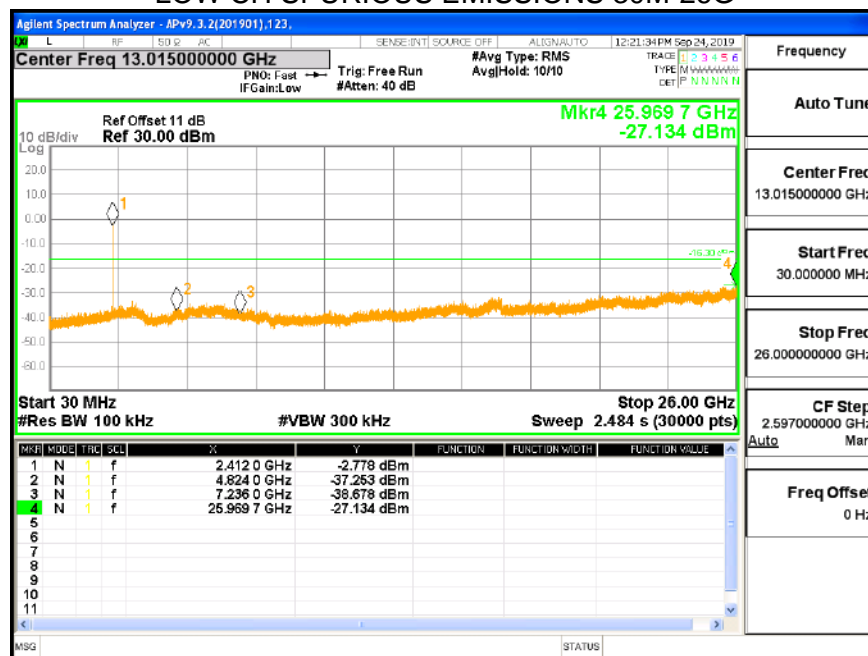






### MID CH REFERENCE

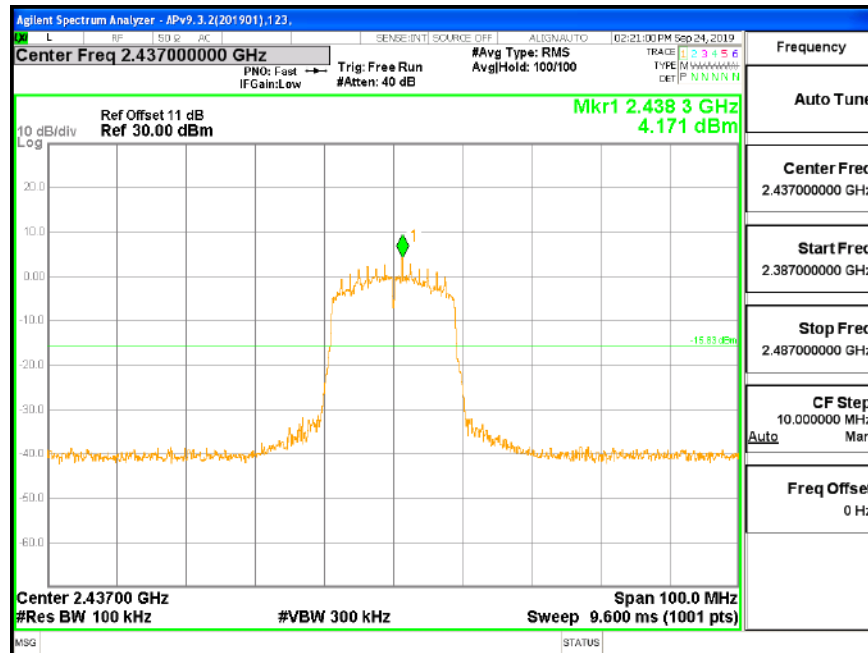


### MID CH SPURIOUS EMISSIONS 30M-26G

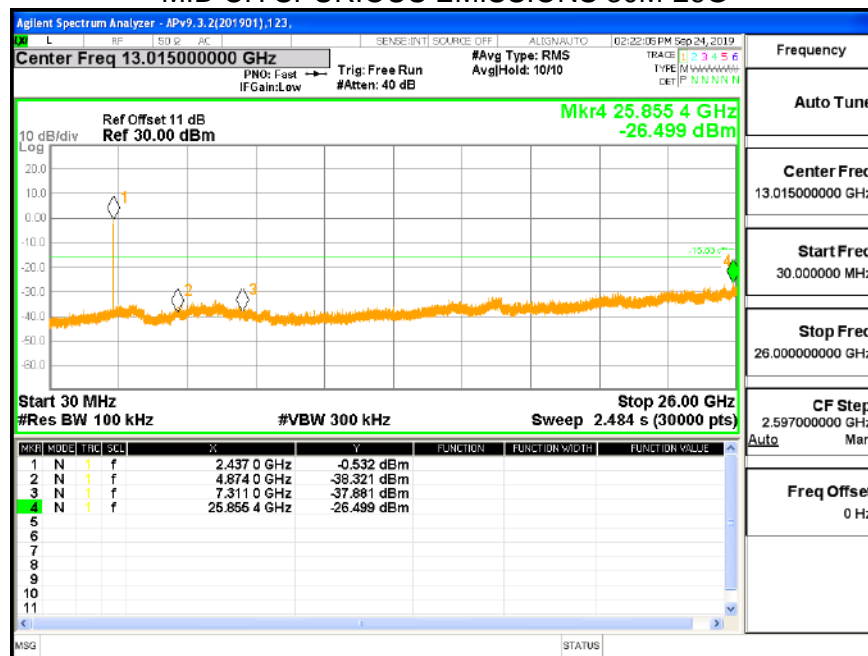




### HIGH CH BANDEDGE

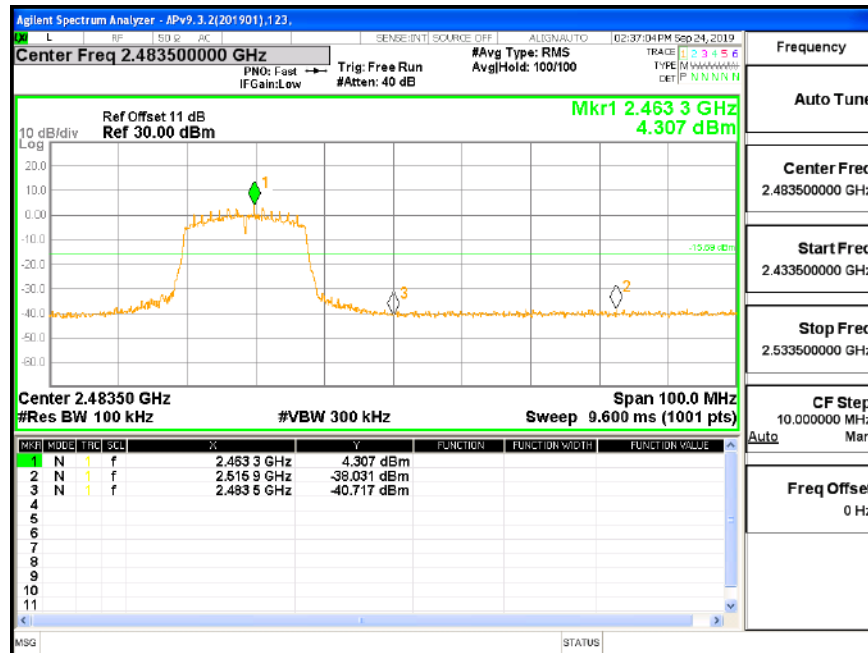


### HIGH CH SPURIOUS EMISSIONS 30M-26G

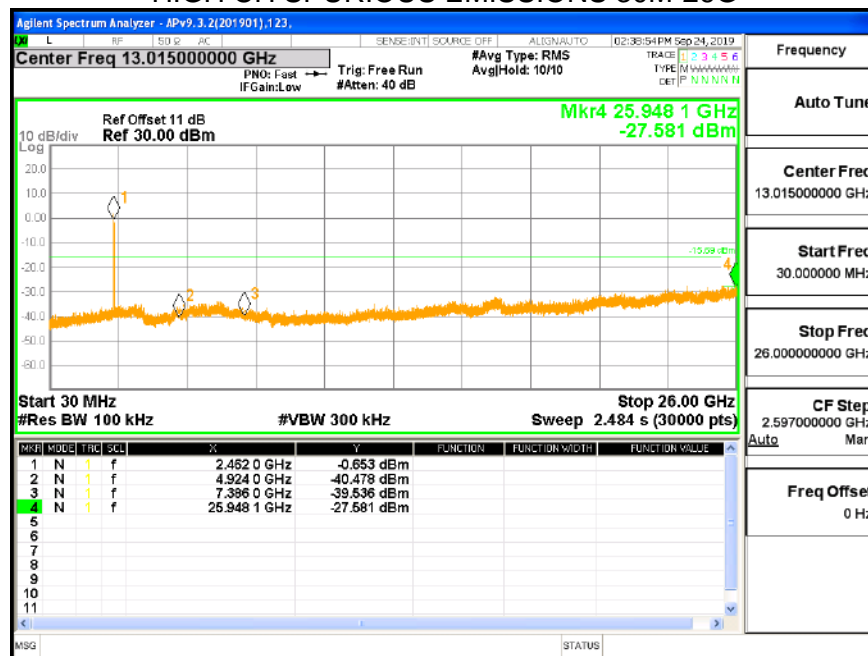




**ANTENNA 1**

**LOW CH BANDEDGE**

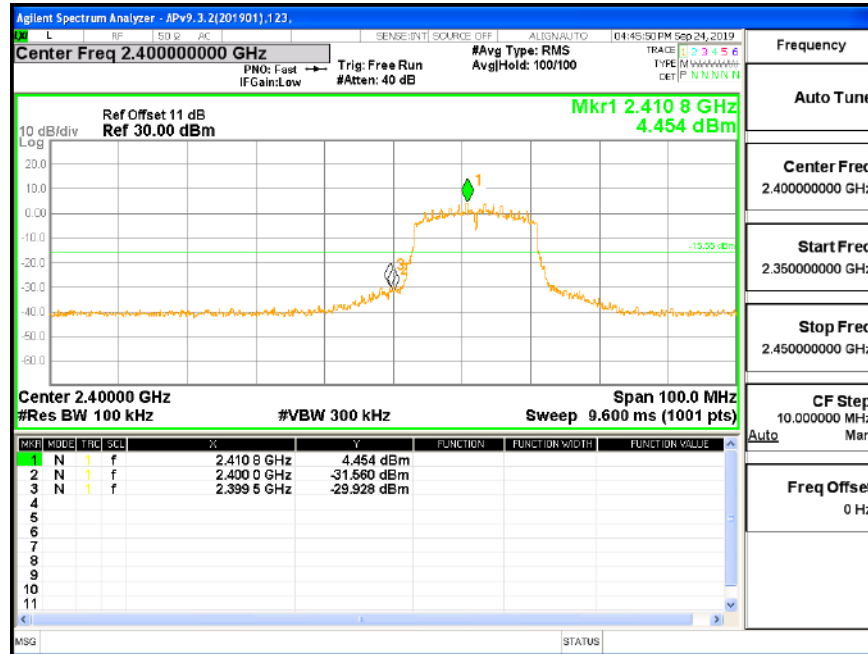


**LOW CH SPURIOUS EMISSIONS 30M-26G**

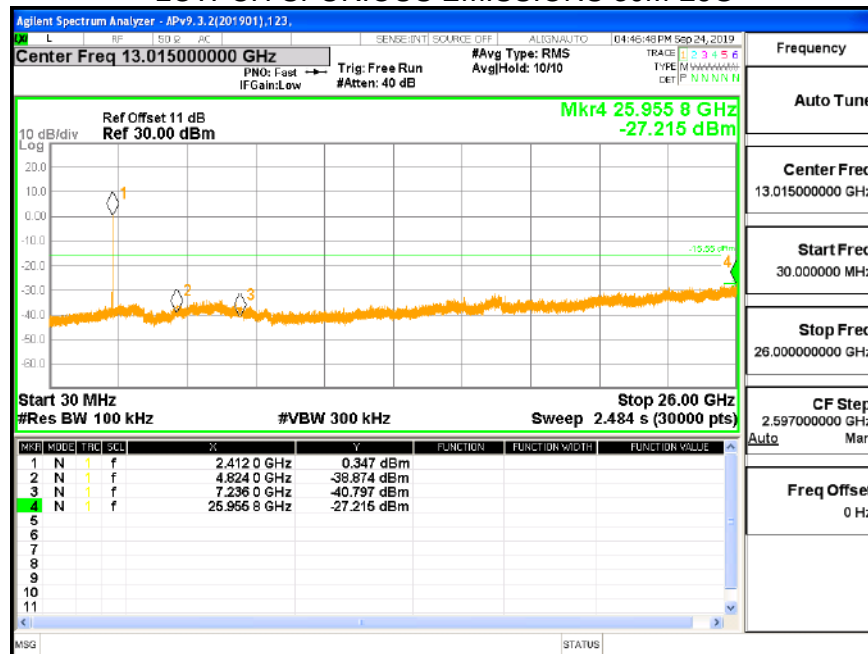




## MID CH REFERENCE

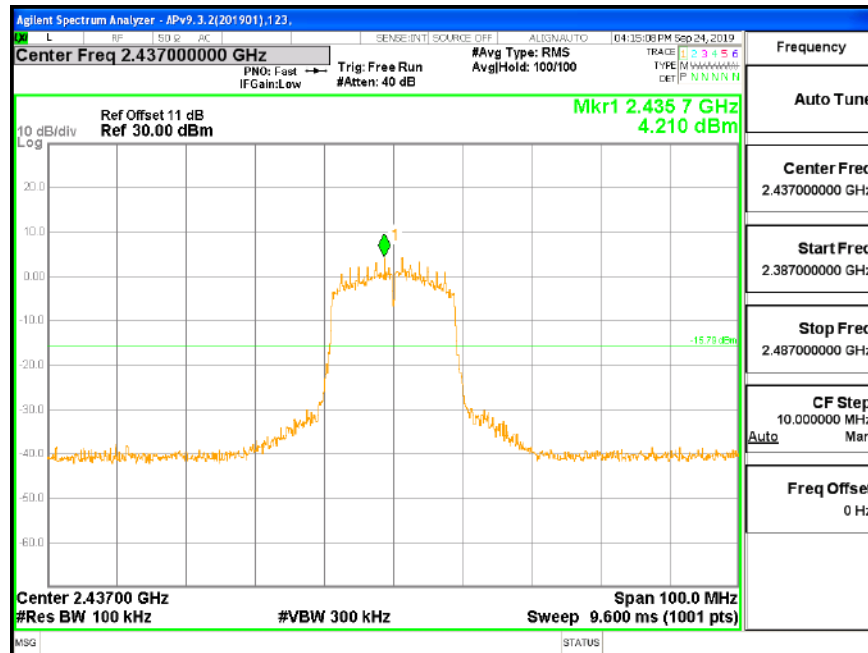


## MID CH SPURIOUS EMISSIONS 30M-26G

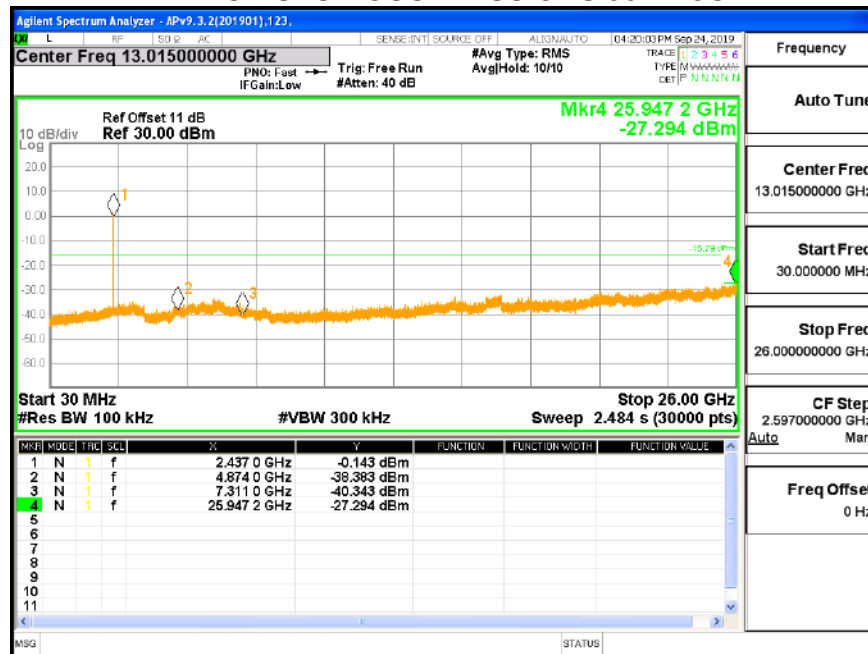




### HIGH CH BANDEDGE

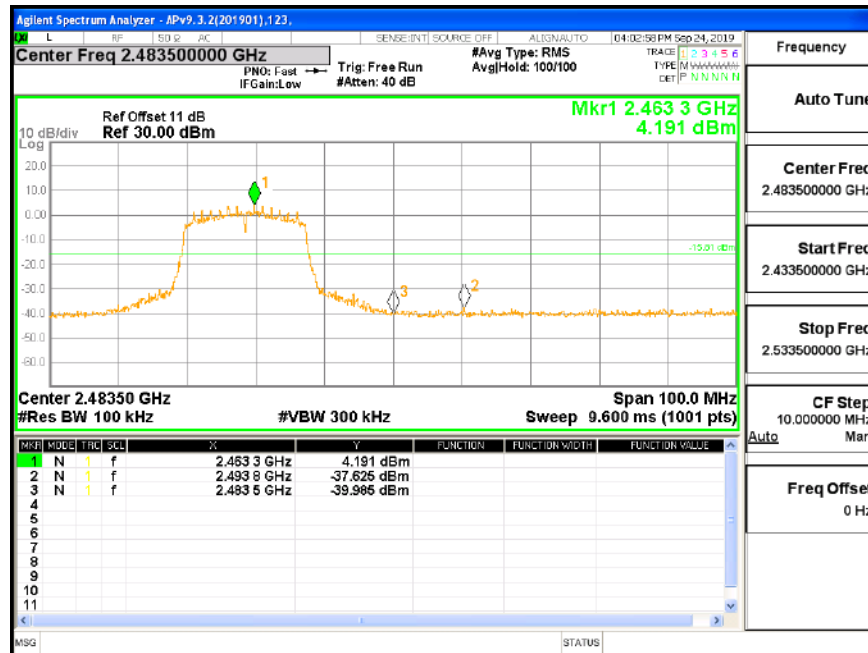

### HIGH CH SPURIOUS EMISSIONS 30M-26G

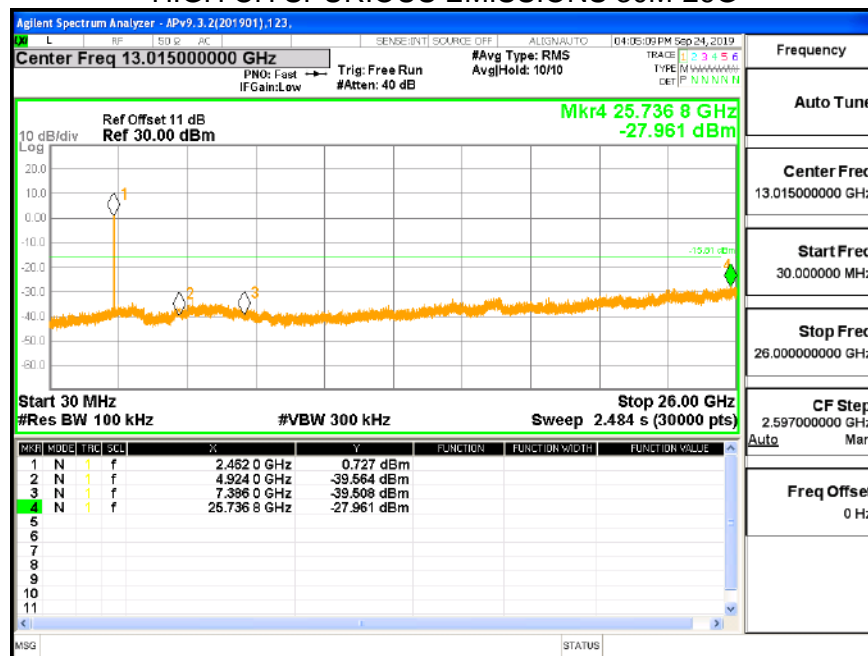




#### 8.5.4. 802.11n HT40 MIMO MODE


##### MIMO MODE-2TX

##### ANTENNA 0

##### LOW CH BANDEDGE

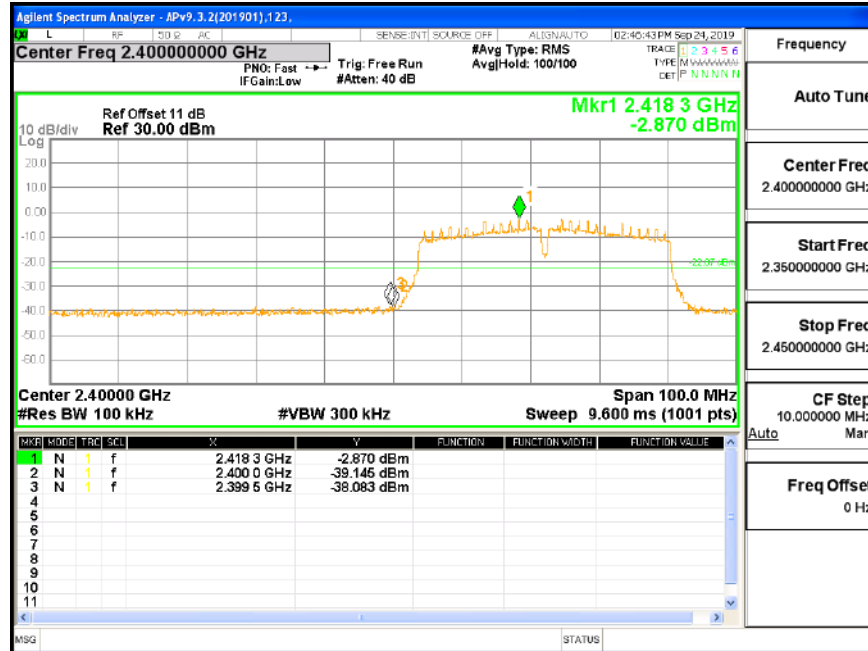


##### LOW CH SPURIOUS EMISSIONS 30M-26G

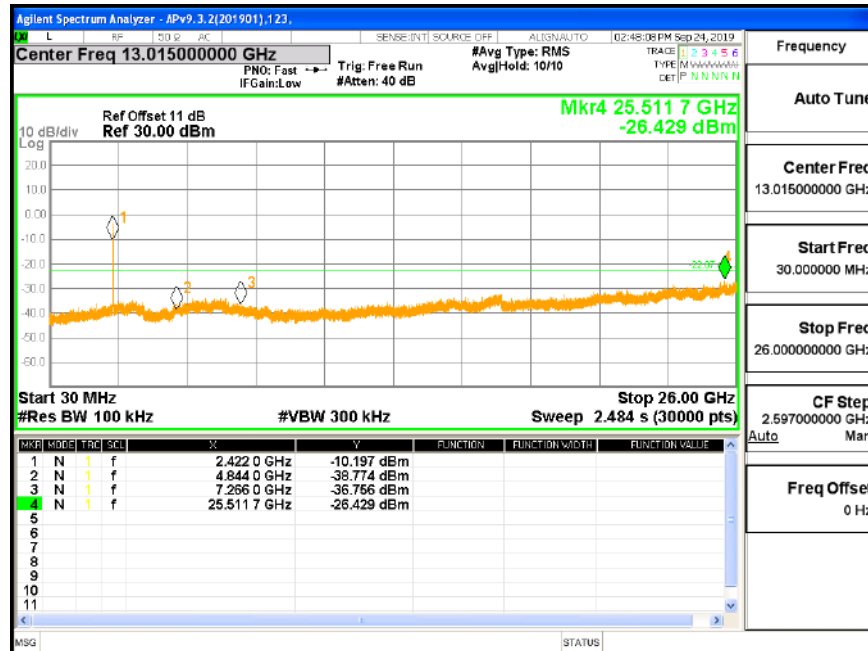




### MID CH REFERENCE

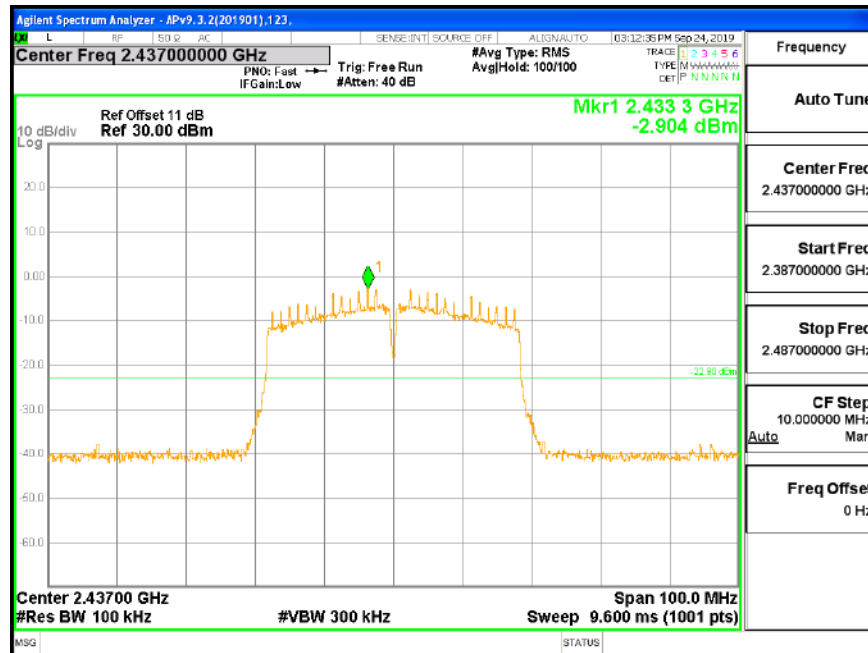


### MID CH SPURIOUS EMISSIONS 30M-26G

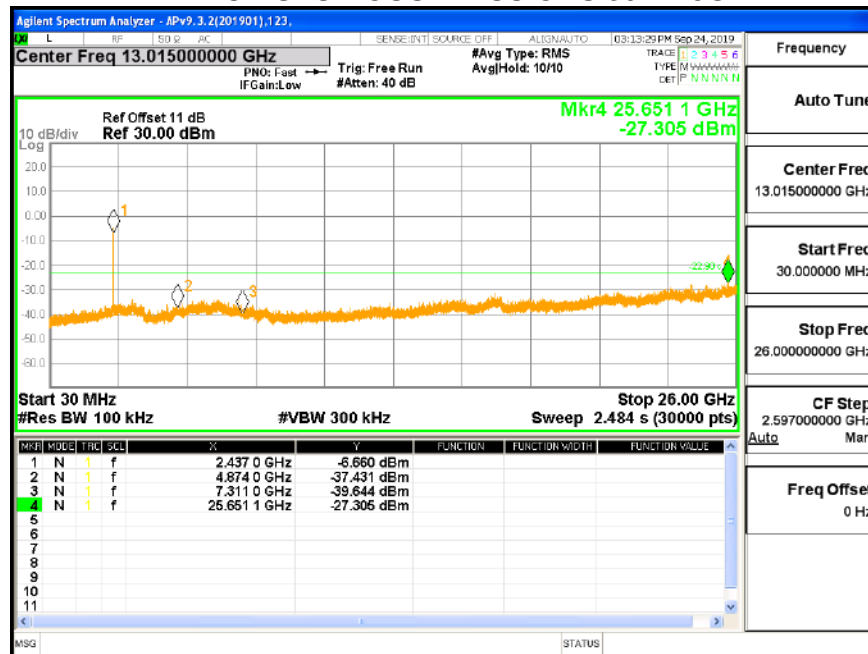




### HIGH CH BANDEDGE

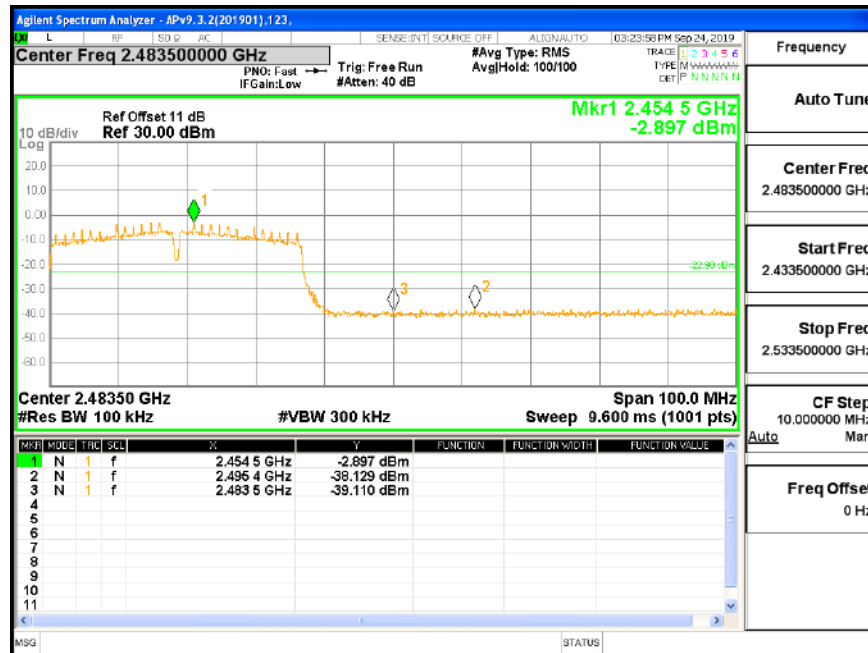

### HIGH CH SPURIOUS EMISSIONS 30M-26G

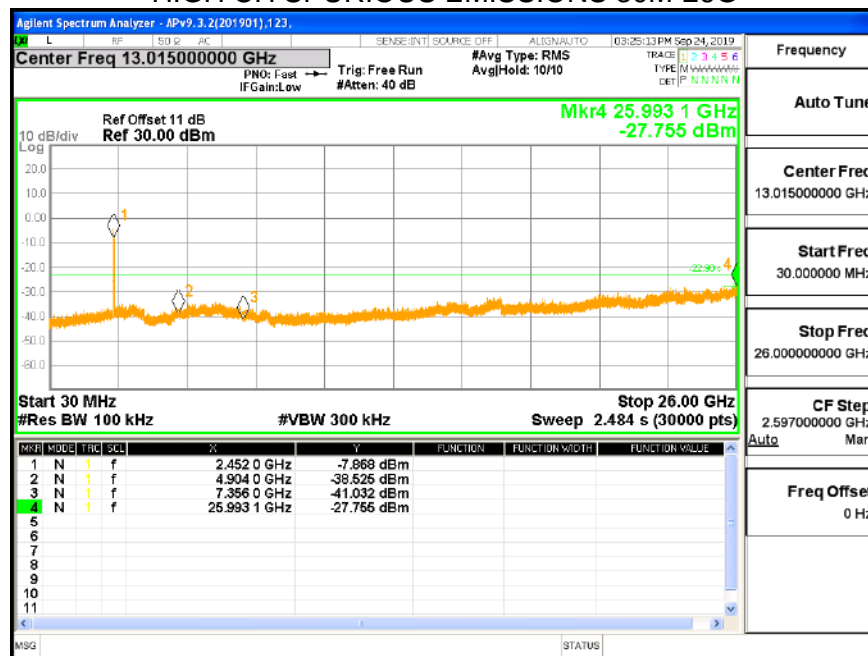







**ANTENNA 1**

**LOW CH BANDEDGE**

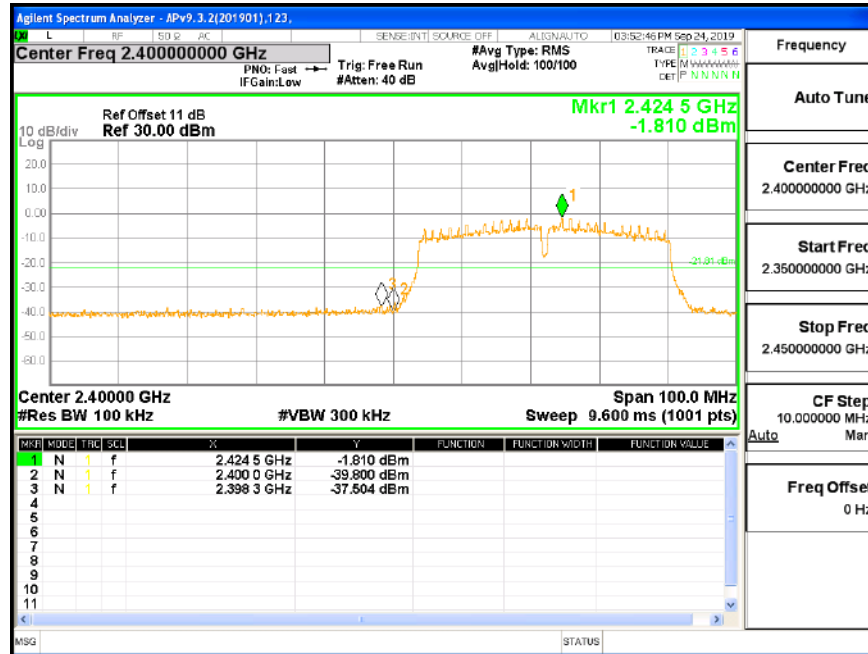


**LOW CH SPURIOUS EMISSIONS 30M-26G**

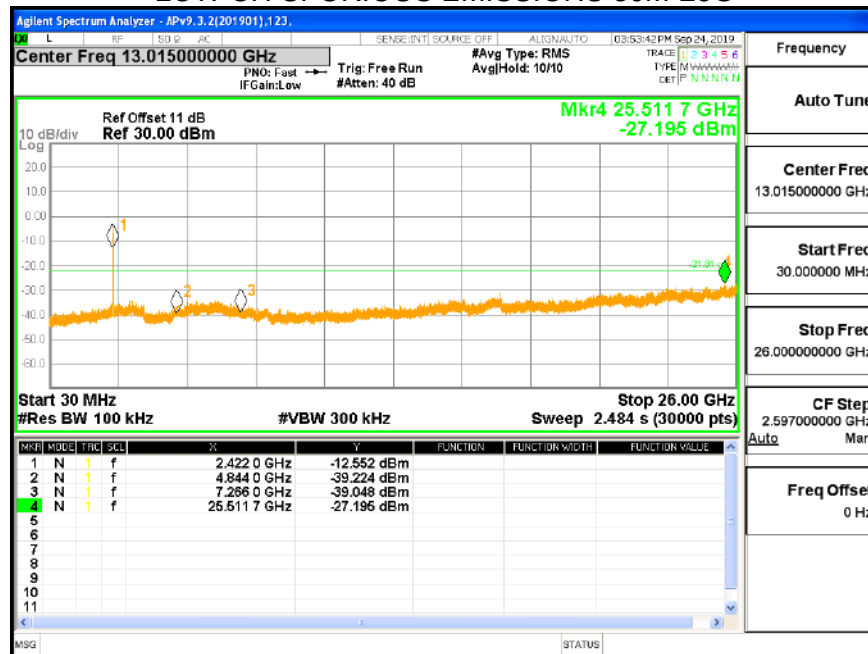




### MID CH REFERENCE

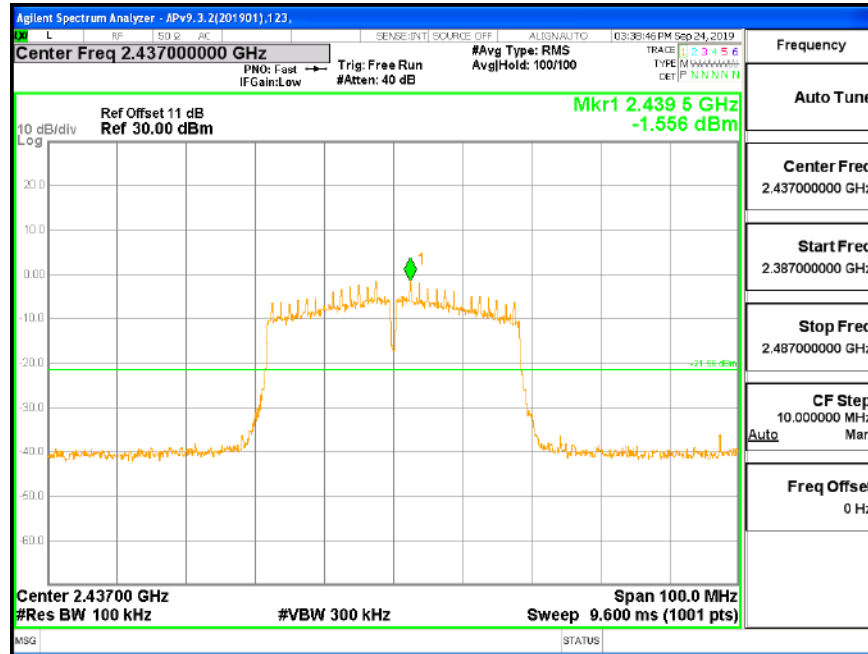


### MID CH SPURIOUS EMISSIONS 30M-26G

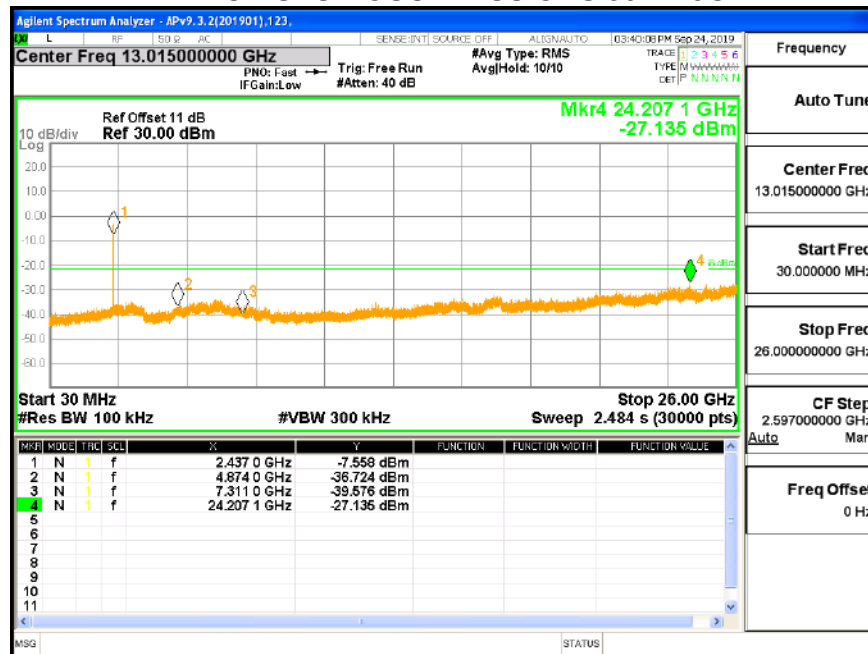




### HIGH CH BANDEDGE

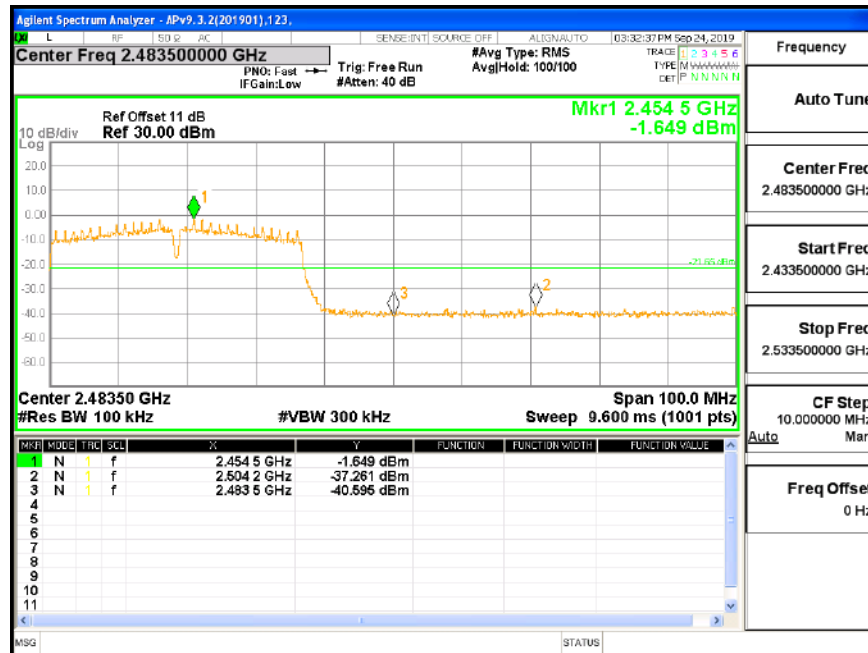

### HIGH CH SPURIOUS EMISSIONS 30M-26G

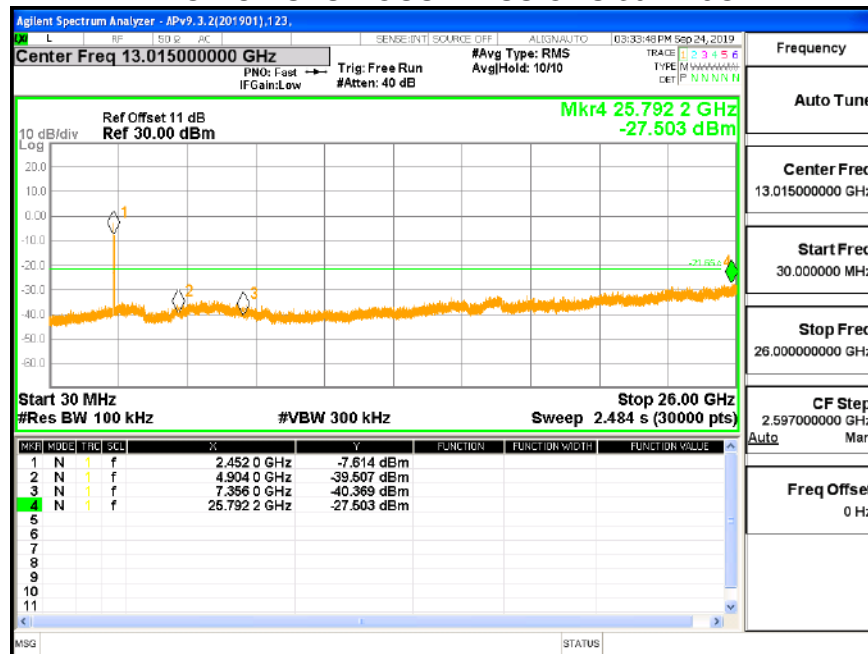



## 9. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209

Please refer to ISSED RSS-GEN Clause 8.9 (Transmitter)

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

IC Restricted bands please refer to ISSED RSS-GEN Clause 8.10

FCC Restricted bands of operation:


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST SETUP AND PROCEDURE

Below 30MHz

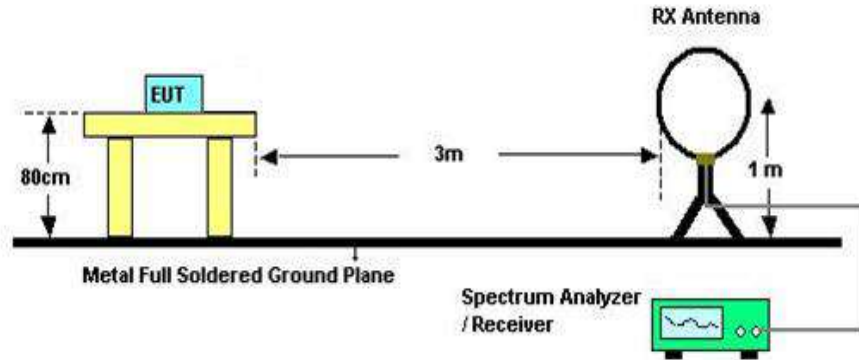


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1G

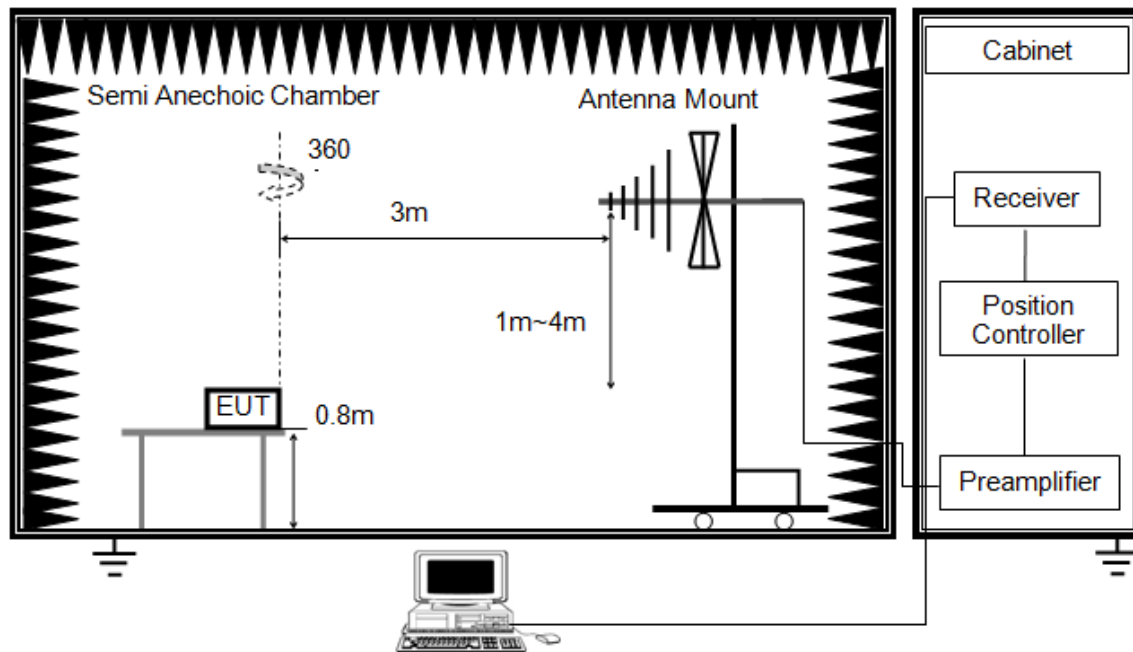


The setting of the spectrum analyser

RBW	120kHz
VBW	300kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

## ABOVE 1G

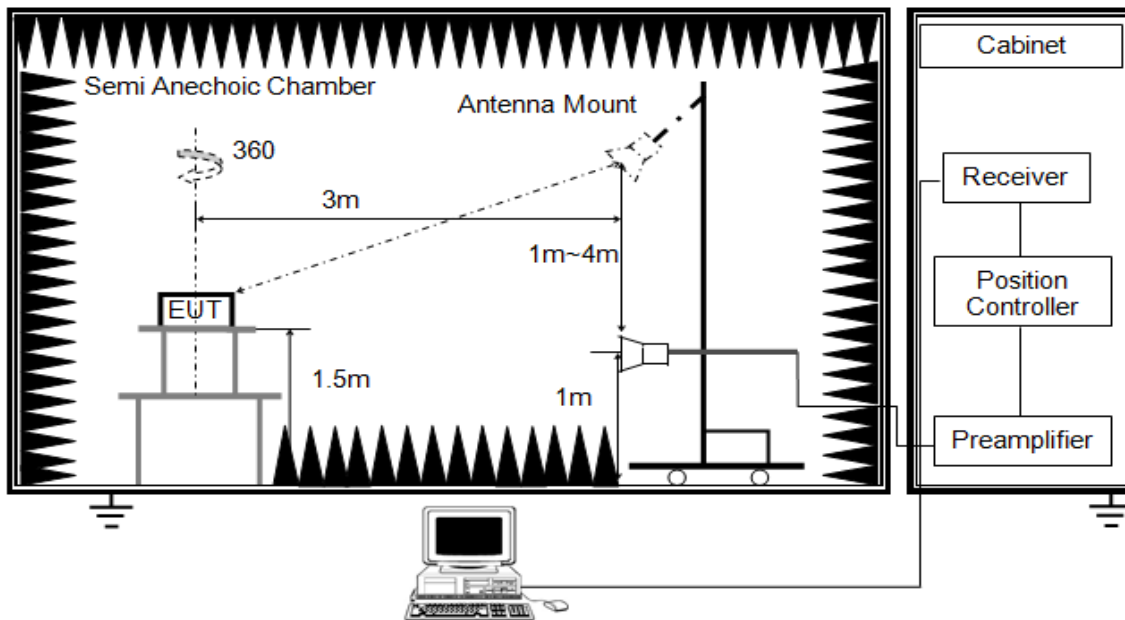


The setting of the spectrum analyser

RBW	1MHz
VBW	PEAK: 3MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.



X axis, Y axis, Z axis positions:

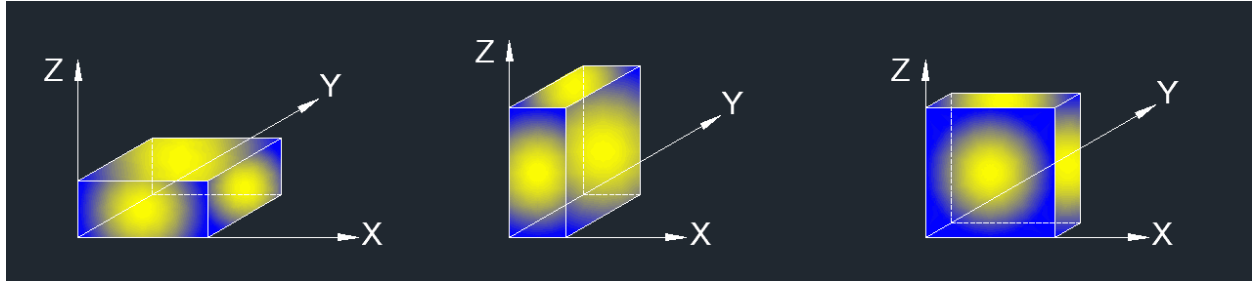

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

#### **TEST ENVIRONMENT**

Temperature	24.2°C	Relative Humidity	61%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V




## 9.1. RESTRICTED BANDEDGE

### 9.1.1. 802.11b SISO MODE

#### 1TX MODE FOR ANT0 (WORST-CASE CONFIGURATION)


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

#### PEAK

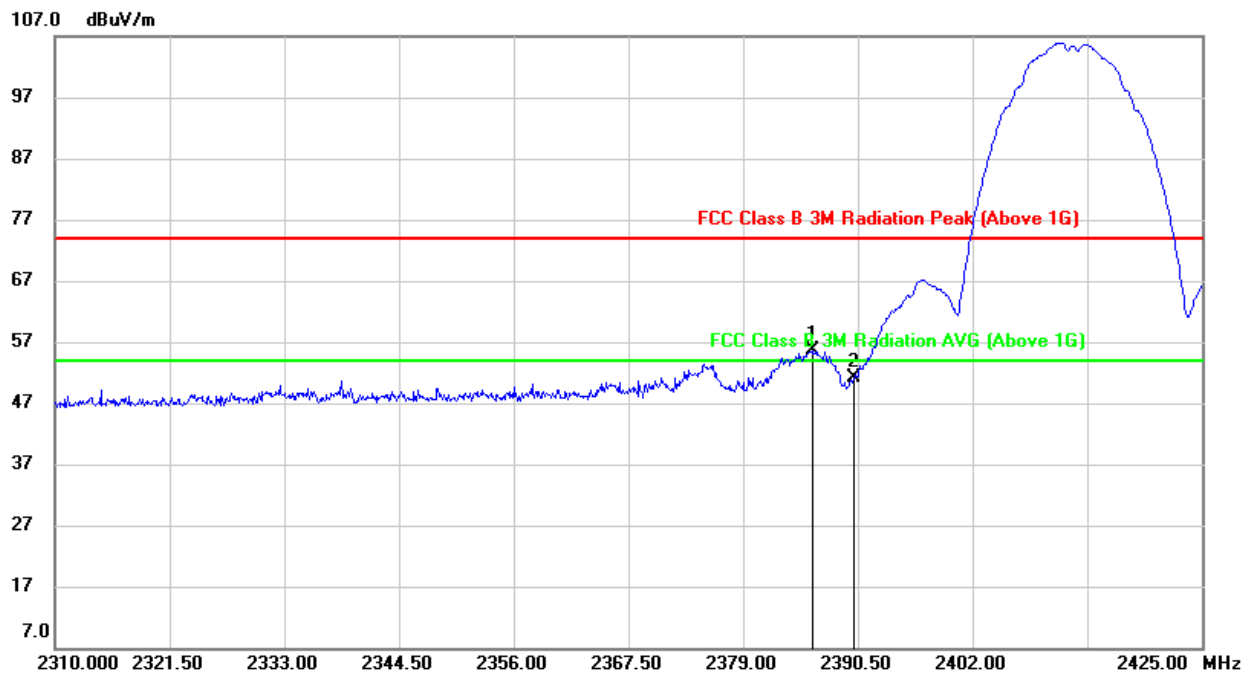


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2386.015	22.74	32.93	55.67	74.00	-18.33	peak
2	2390.000	18.29	32.94	51.23	74.00	-22.77	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

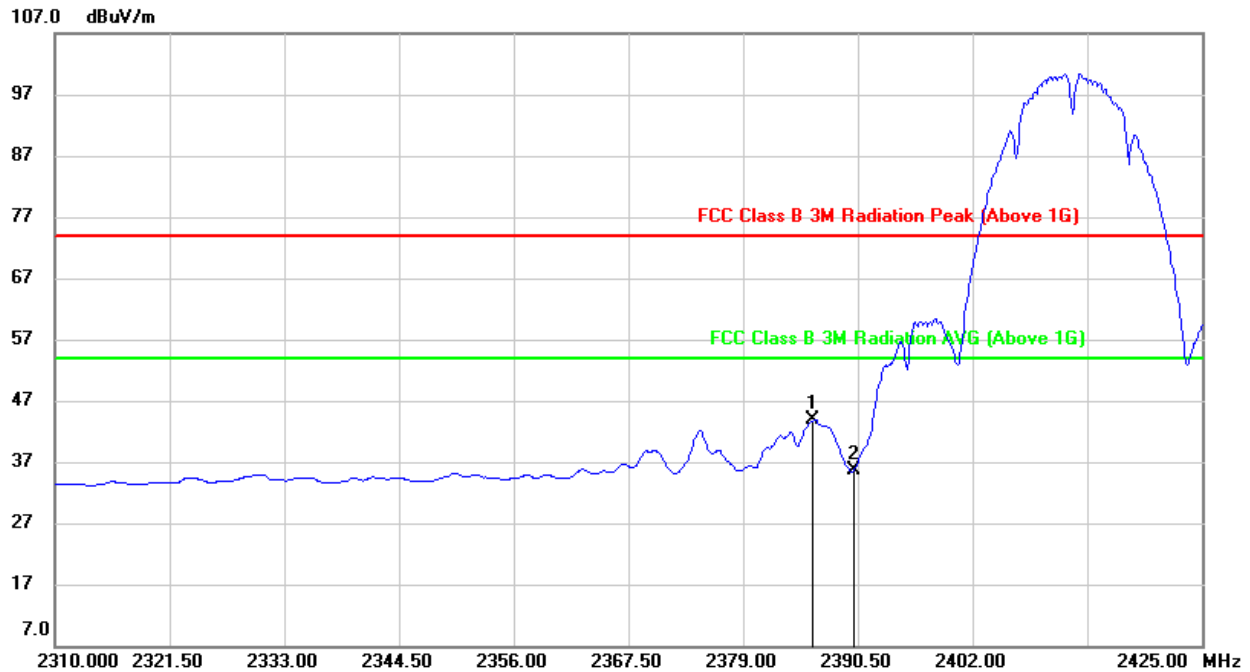**AVG**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2386.015	10.89	32.93	43.82	54.00	-10.18	AVG
2	2390.000	2.59	32.94	35.53	54.00	-18.47	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/Ton$  where: ton is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

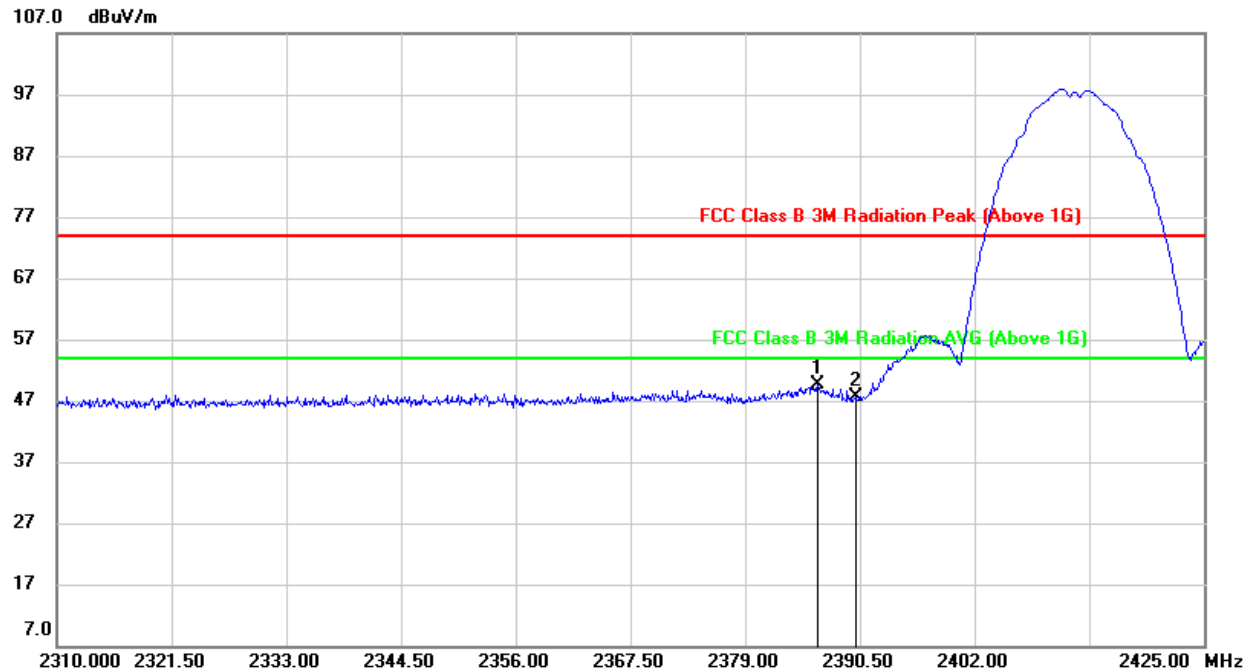**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2386.245	16.73	32.94	49.67	74.00	-24.33	peak
2	2390.000	14.80	32.94	47.74	74.00	-26.26	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

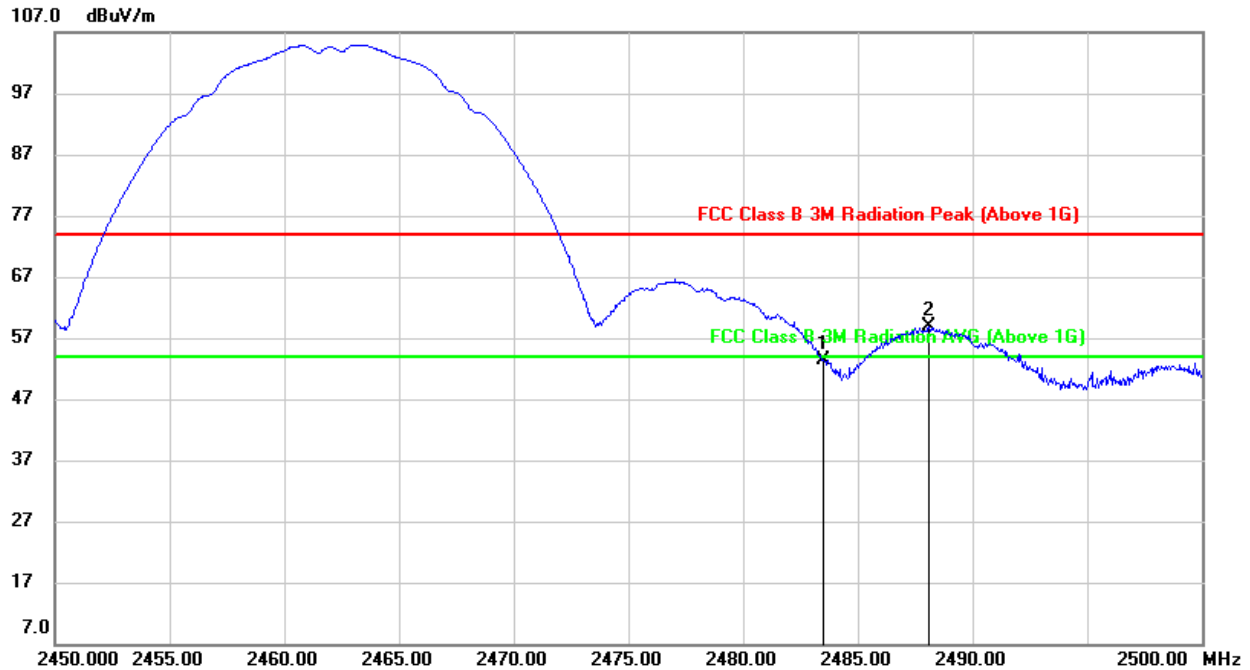**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	19.84	33.58	53.42	74.00	-20.58	peak
2	2488.100	25.33	33.62	58.95	74.00	-15.05	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

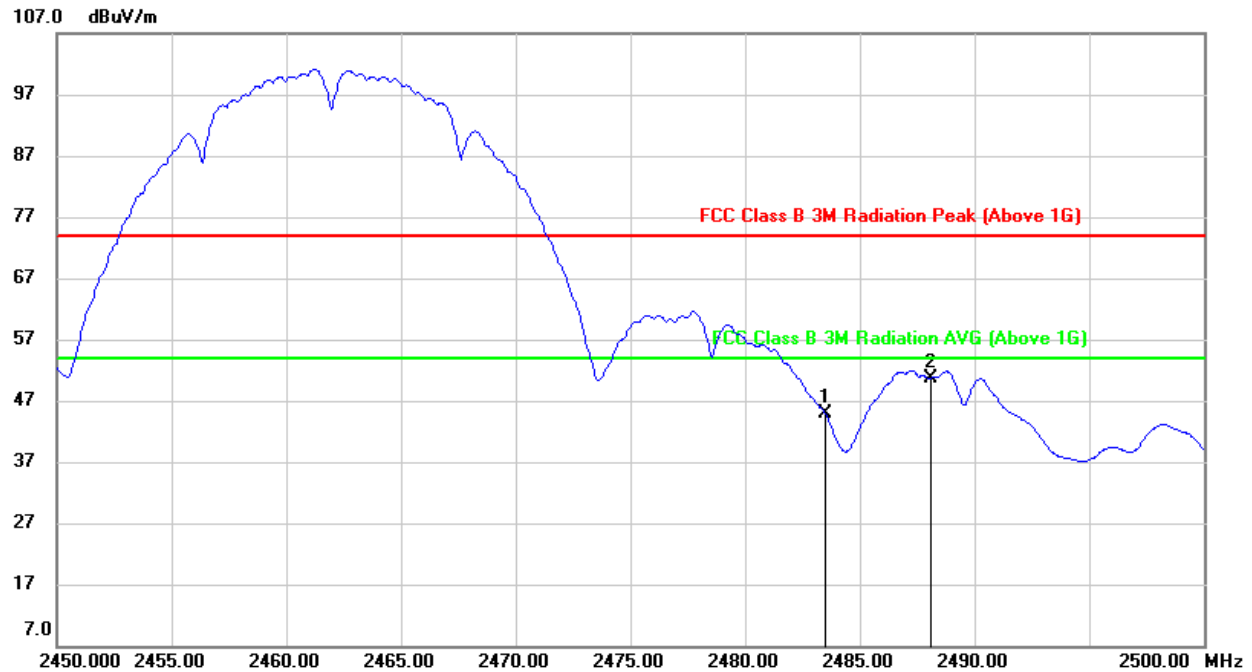**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	11.29	33.58	44.87	54.00	-9.13	AVG
2	2488.100	16.97	33.62	50.59	54.00	-3.41	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/Ton$  where: ton is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

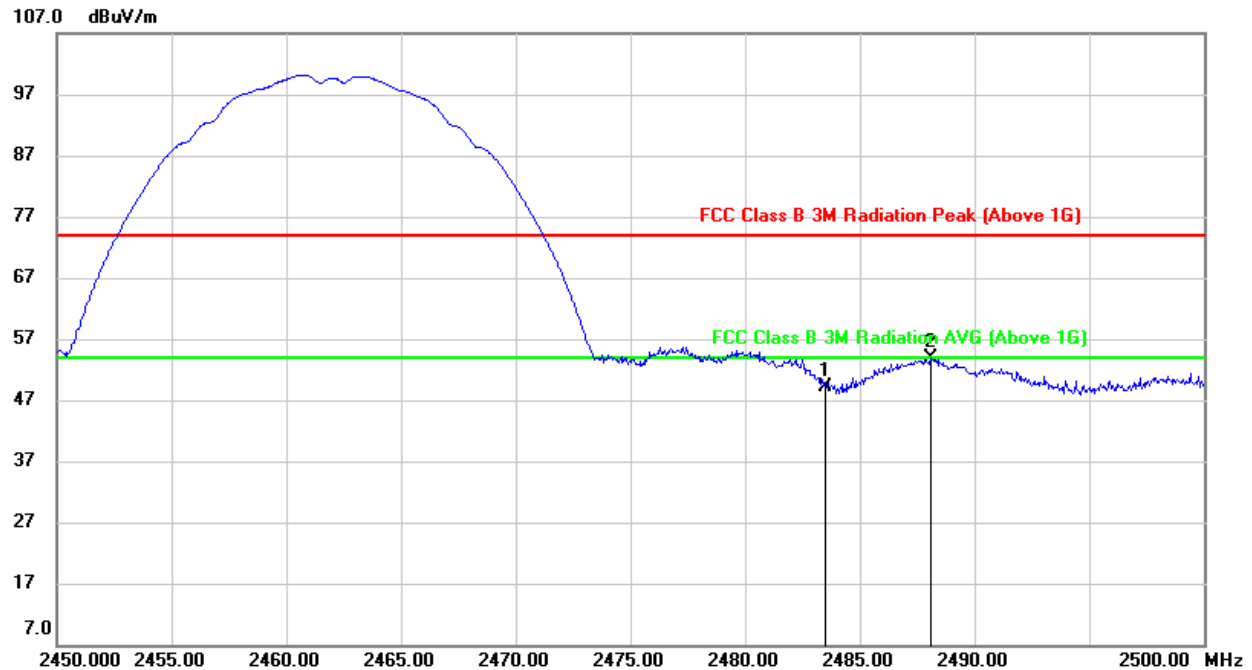**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	15.59	33.58	49.17	74.00	-24.83	peak
2	2488.100	20.20	33.62	53.82	74.00	-20.18	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




### 9.1.2. 802.11g SISO MODE

#### 1TX MODE FOR ANT0 (WORST-CASE CONFIGURATION)

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


##### PEAK

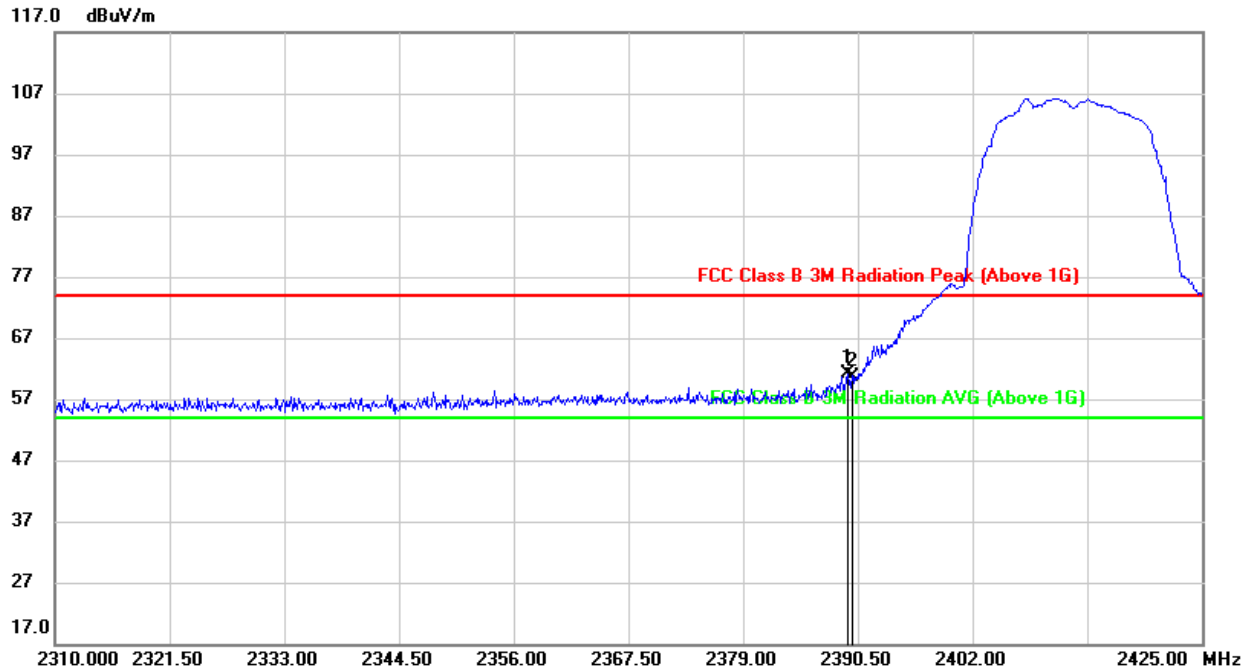

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2389.465	28.14	32.94	61.08	74.00	-12.92	peak
2	2390.000	27.65	32.94	60.59	74.00	-13.41	peak


Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

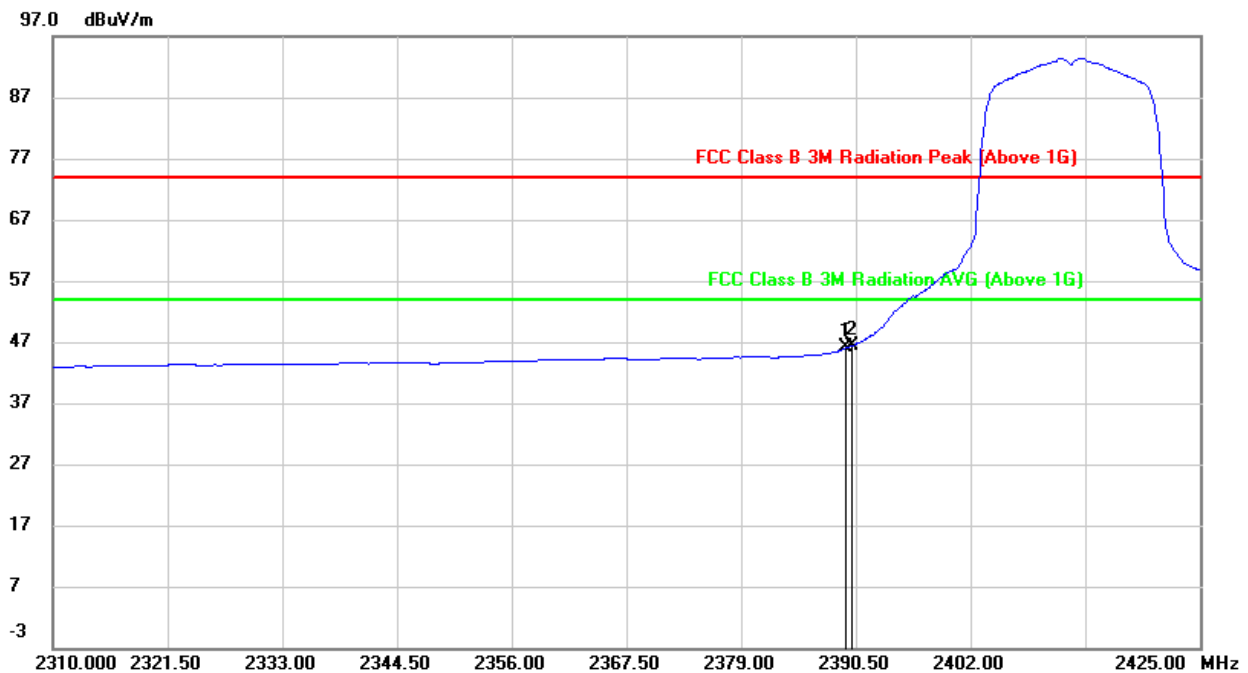

**AVG**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2389.465	13.07	32.94	46.01	54.00	-7.99	AVG
2	2390.000	13.38	32.94	46.32	54.00	-7.68	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/Ton$  where: ton is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

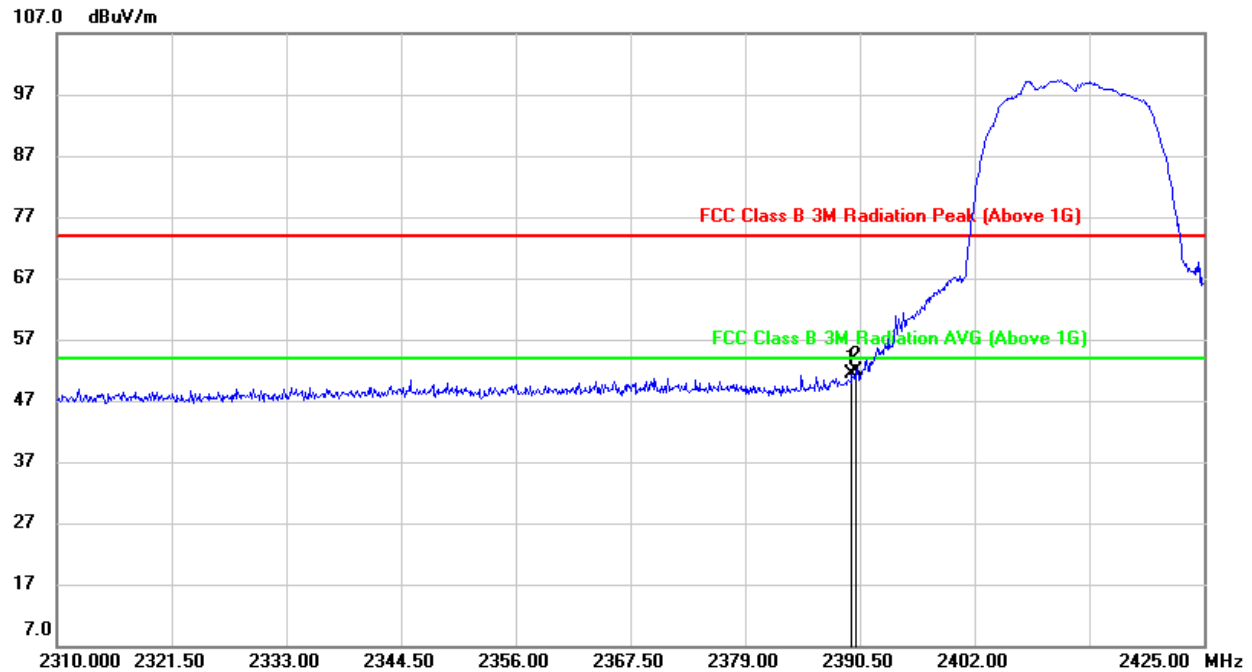**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2389.695	18.55	32.94	51.49	74.00	-22.51	peak
2	2390.000	18.95	32.94	51.89	74.00	-22.11	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

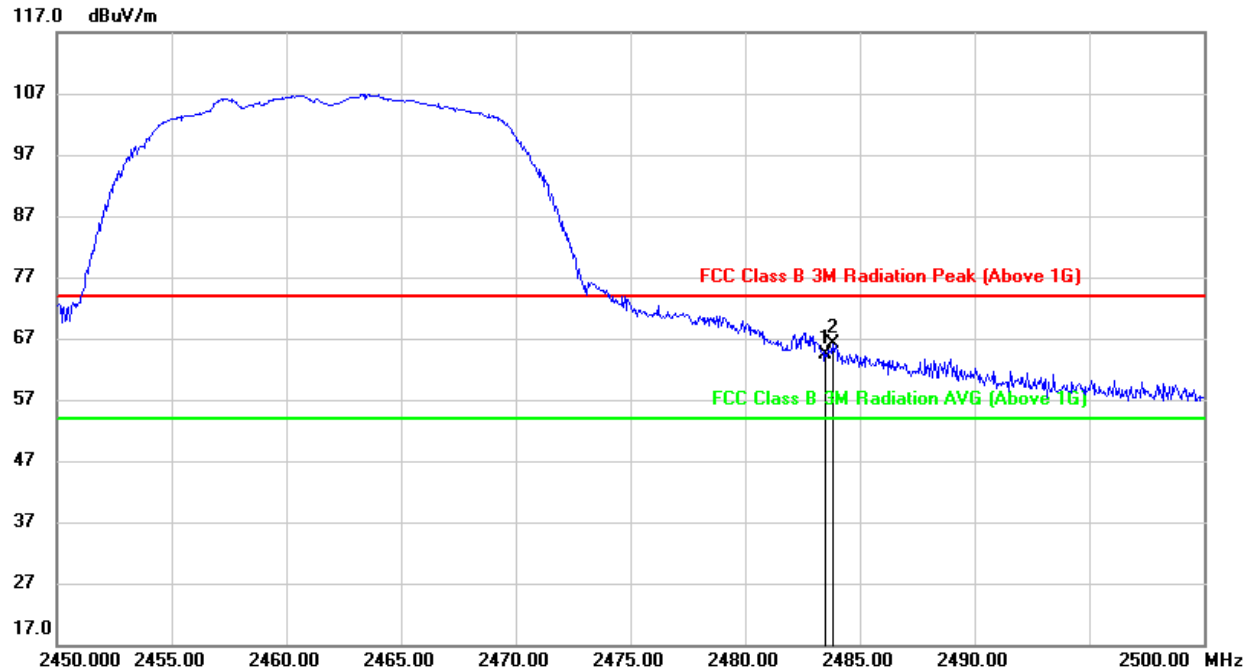**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	30.70	33.58	64.28	74.00	-9.72	peak
2	2483.800	32.56	33.58	66.14	74.00	-7.86	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

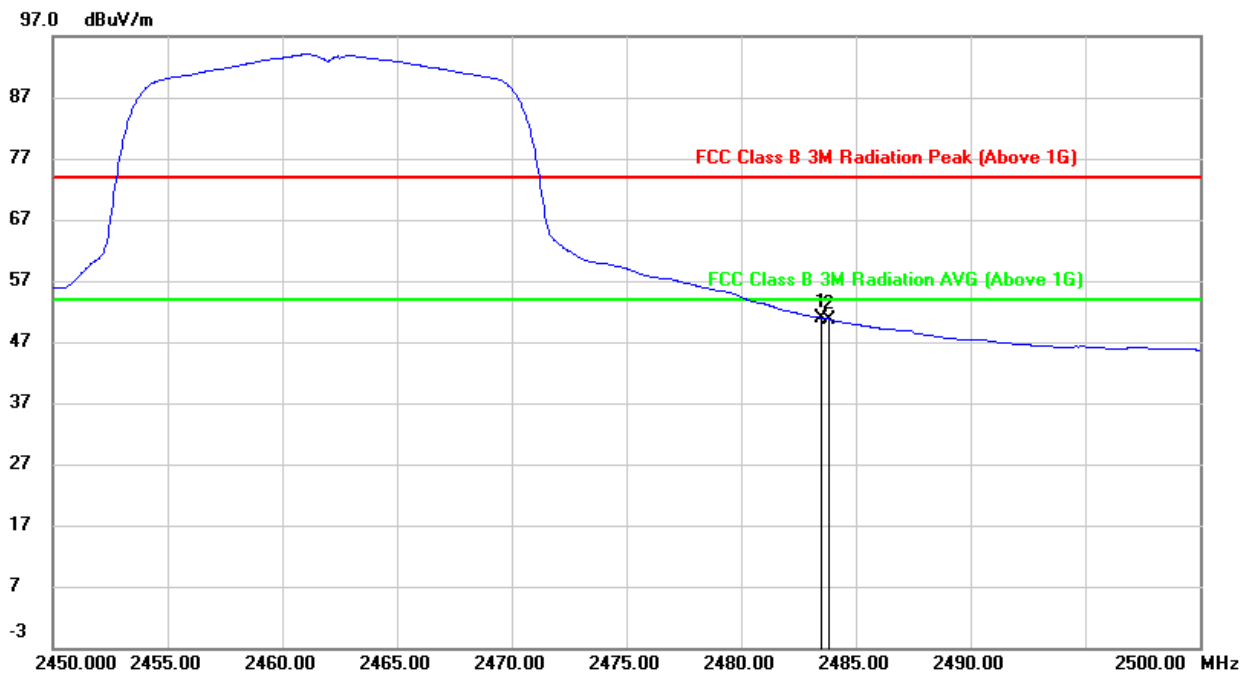**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	17.34	33.58	50.92	54.00	-3.08	AVG
2	2483.800	17.17	33.58	50.75	54.00	-3.25	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/Ton$  where: ton is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

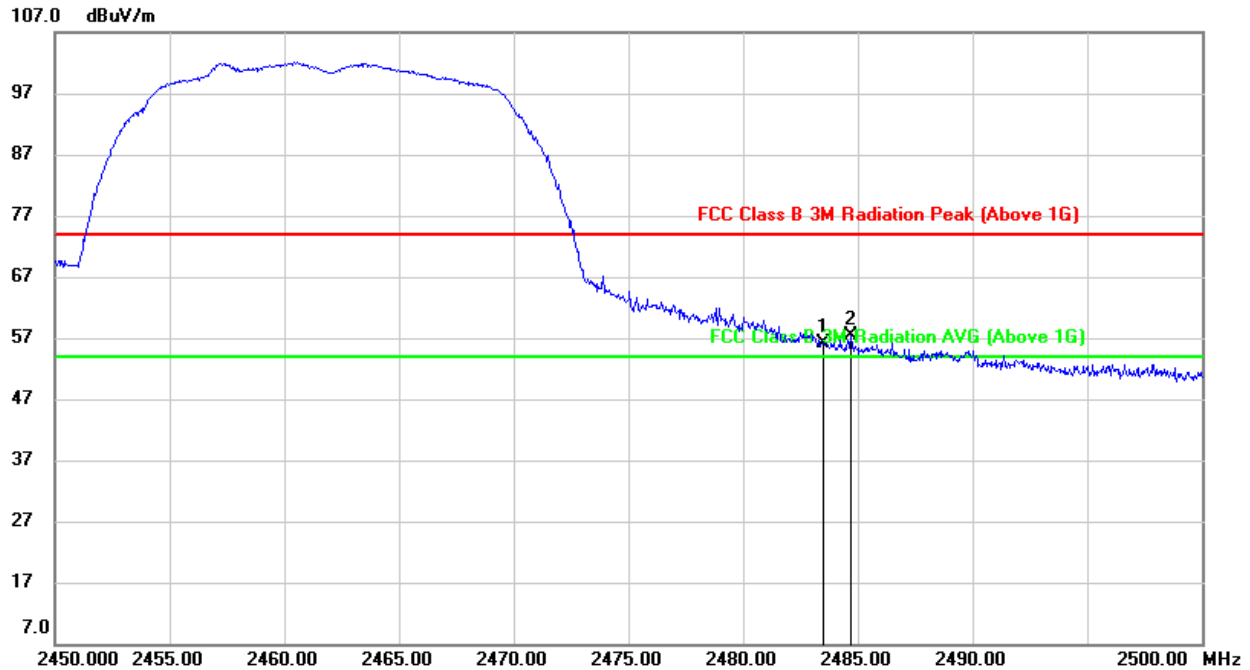**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	22.59	33.58	56.17	74.00	-17.83	peak
2	2484.700	23.83	33.59	57.42	74.00	-16.58	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

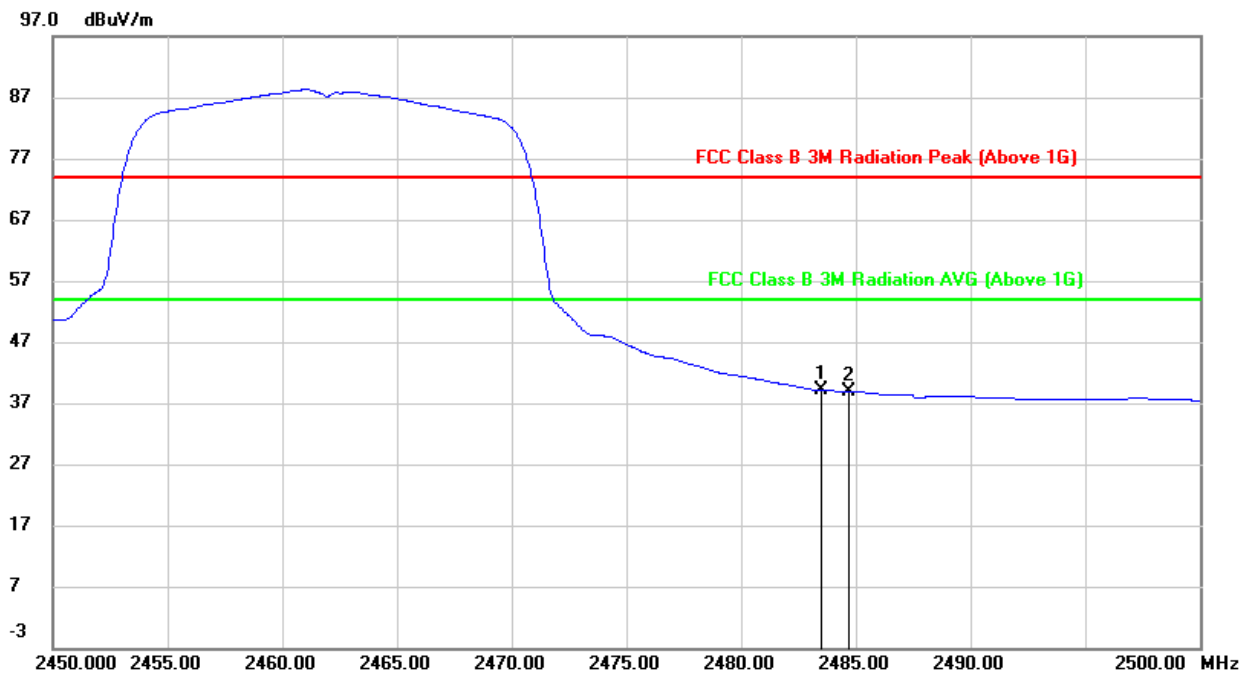**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	5.58	33.58	39.16	54.00	-14.84	AVG
2	2484.700	5.30	33.59	38.89	54.00	-15.11	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/T_{on}$  where:  $t_{on}$  is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




### 9.1.3. 802.11n HT20 MIMO MODE

#### 2TX MODE (WORST-CASE CONFIGURATION)


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

#### PEAK

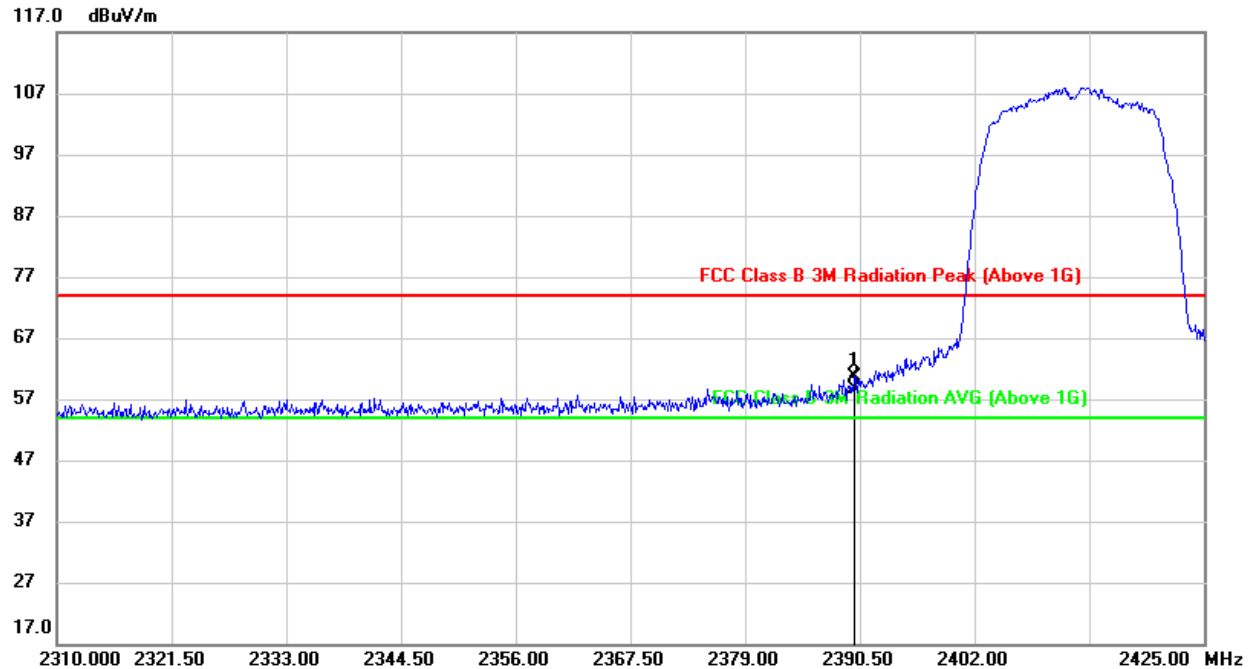

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2389.925	27.75	32.94	60.69	74.00	-13.31	peak
2	2390.000	25.72	32.94	58.66	74.00	-15.34	peak


Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

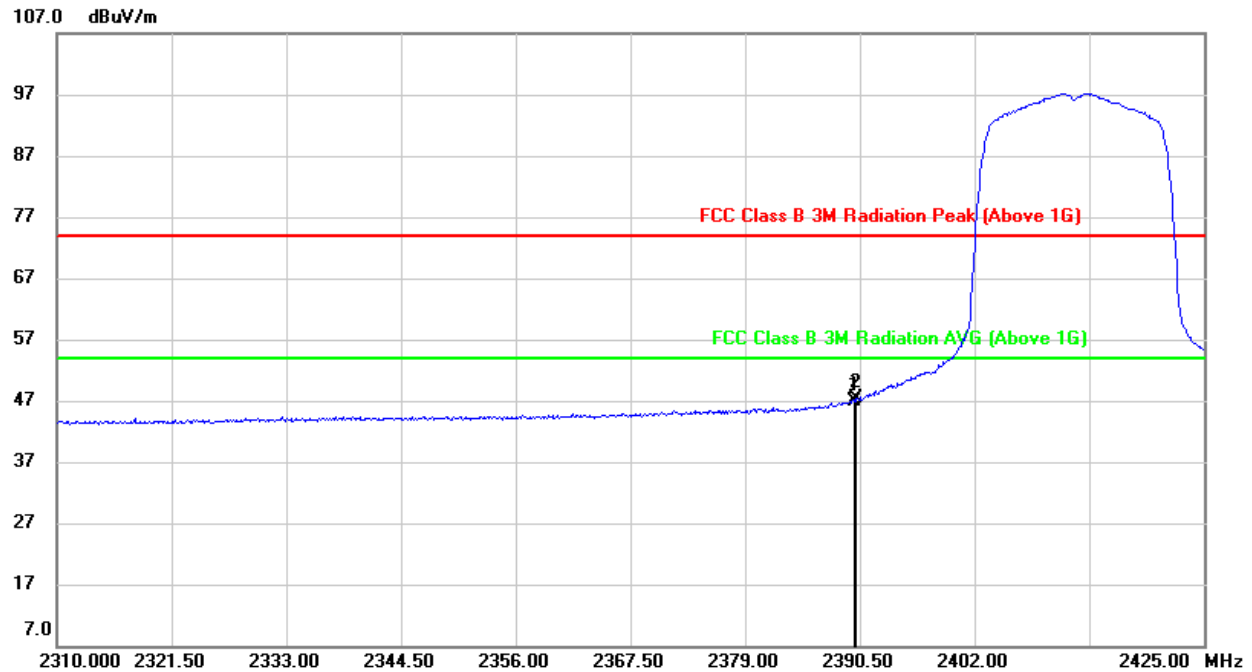**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2389.925	13.90	32.94	46.84	54.00	-7.16	AVG
2	2390.000	14.51	32.94	47.45	54.00	-6.55	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/Ton$  where: ton is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

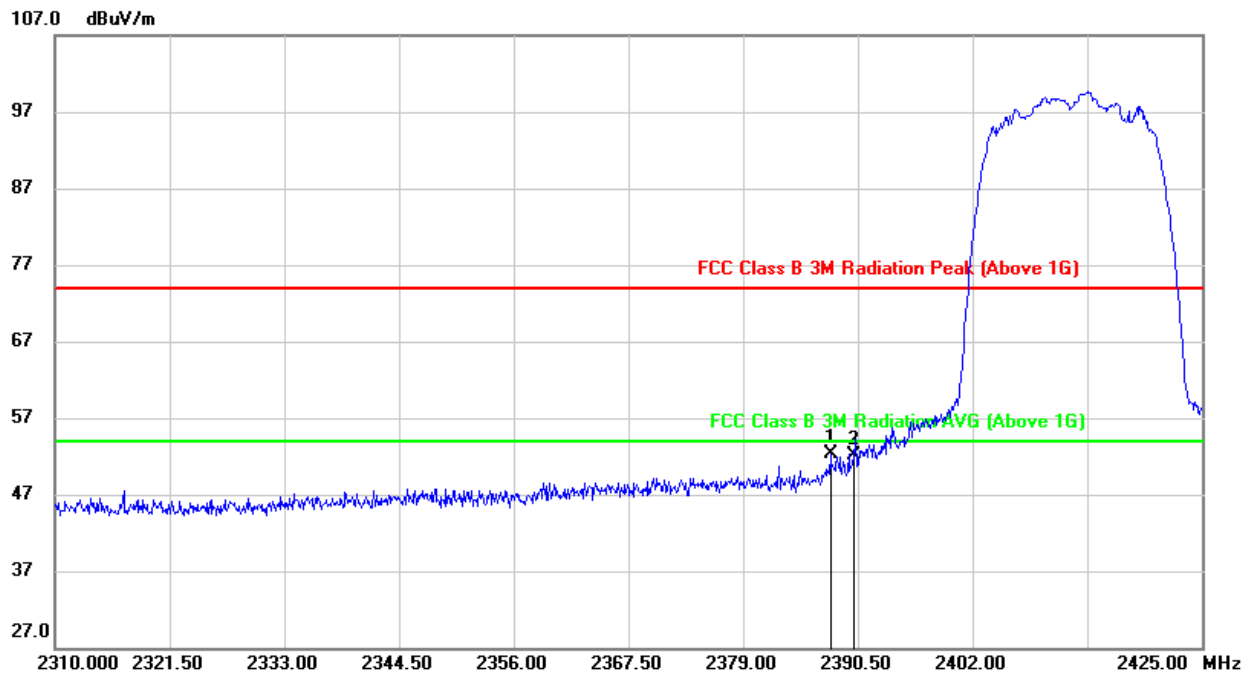

**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2387.740	19.33	32.94	52.27	74.00	-21.73	peak
2	2390.000	19.19	32.94	52.13	74.00	-21.87	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

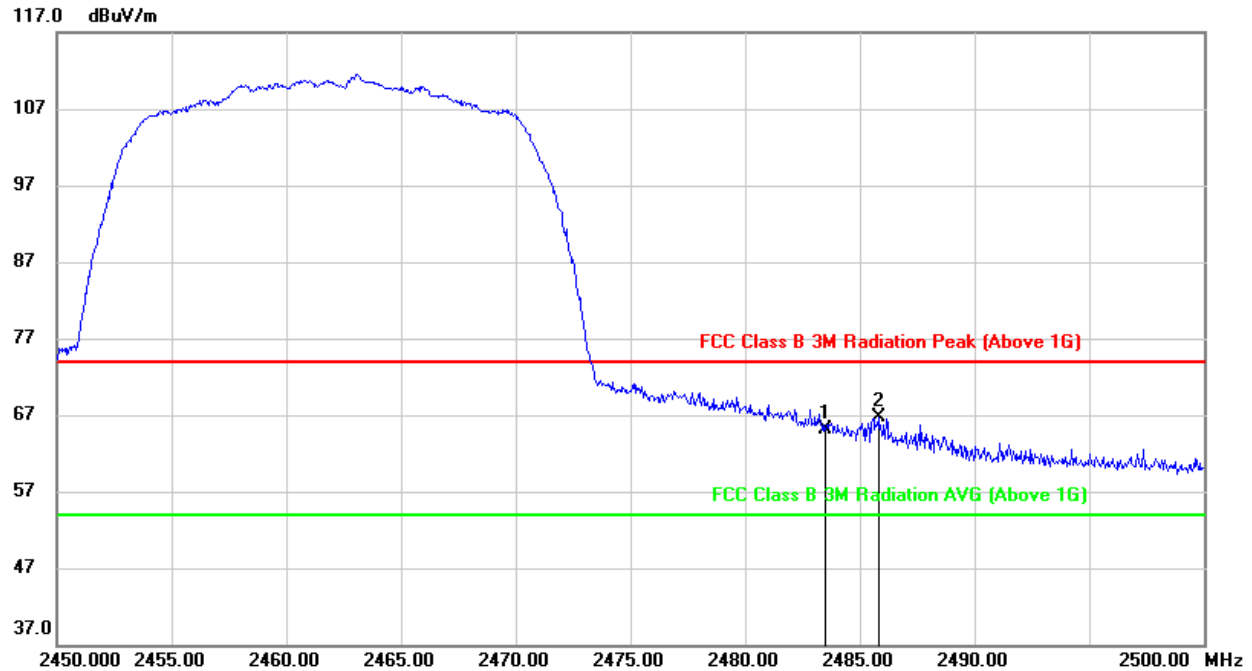

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	31.55	33.58	65.13	74.00	-8.87	peak
2	2485.800	33.02	33.59	66.61	74.00	-7.39	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

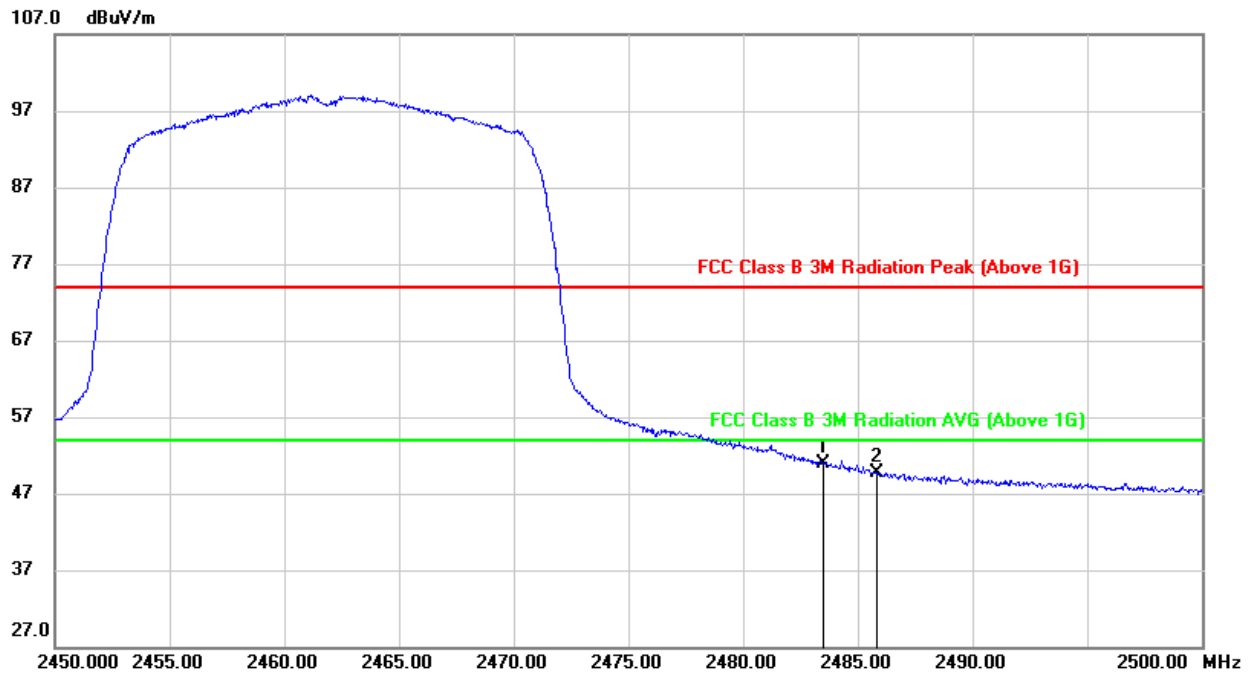**AVG**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	17.27	33.58	50.85	54.00	-3.15	AVG
2	2485.800	16.11	33.59	49.70	54.00	-4.30	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/T_{on}$  where:  $t_{on}$  is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

**PEAK**

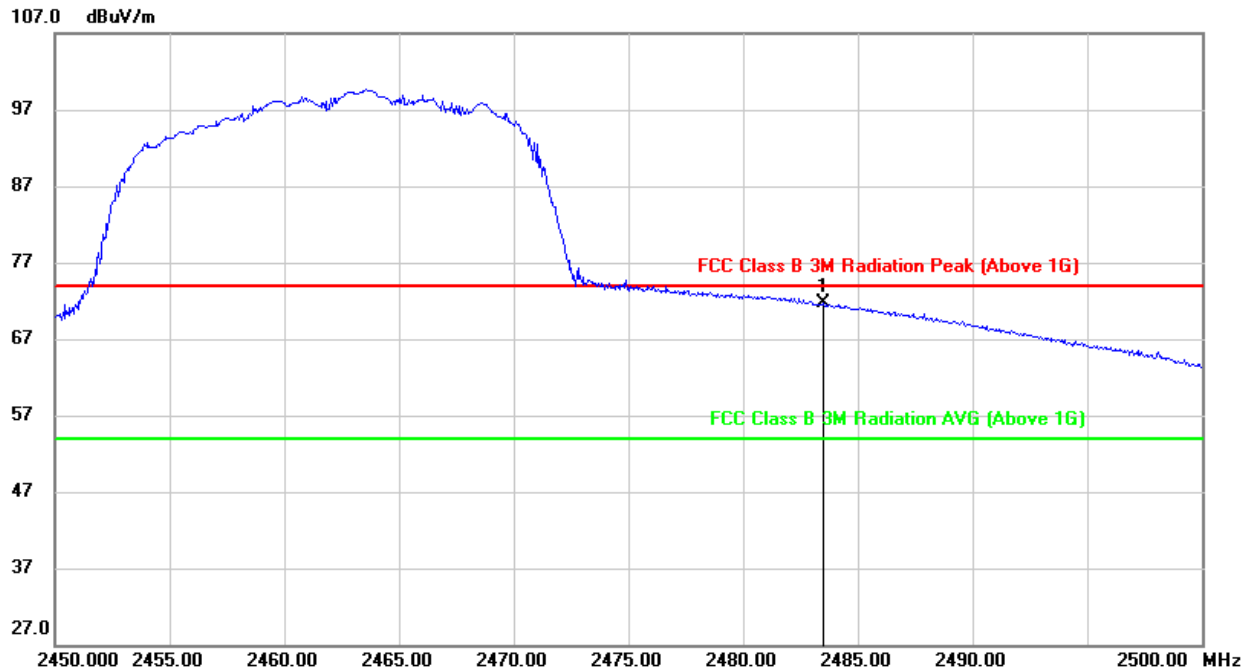

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	38.07	33.58	71.65	74.00	-2.35	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

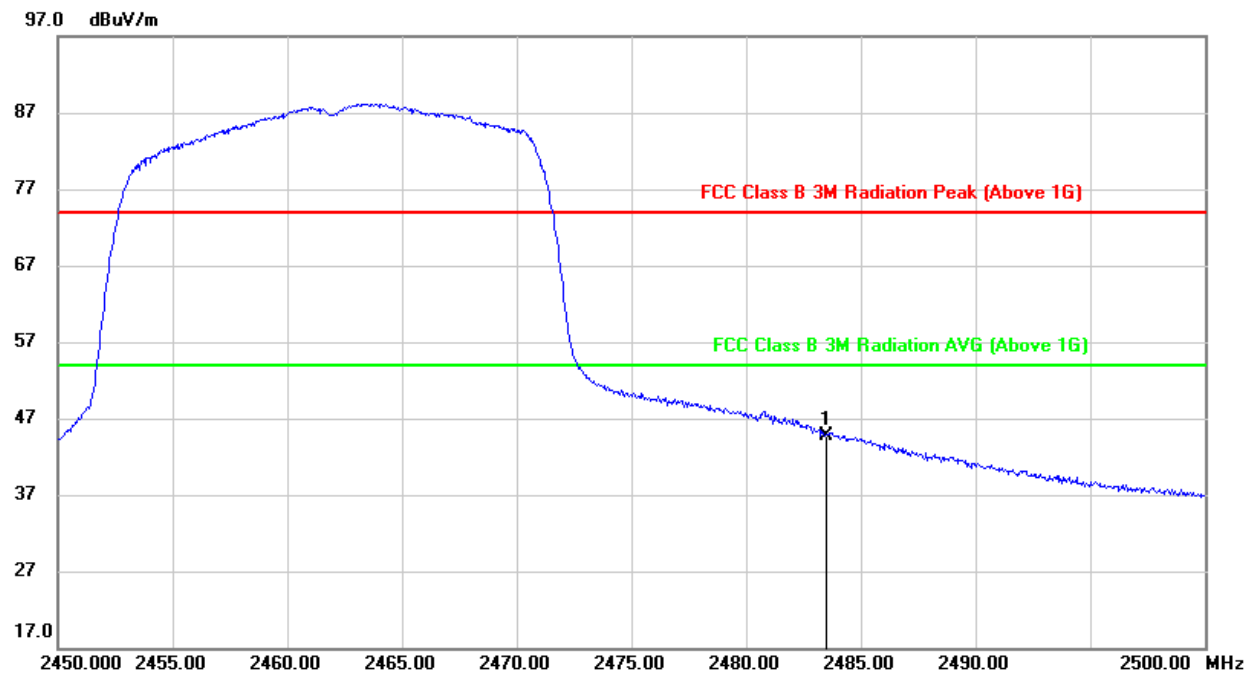**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	11.22	33.58	44.80	54.00	-9.20	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/T_{on}$  where:  $t_{on}$  is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




#### 9.1.4. 802.11n HT40 MIMO MODE

##### 2TX MODE (WORST-CASE CONFIGURATION)


##### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

##### PEAK

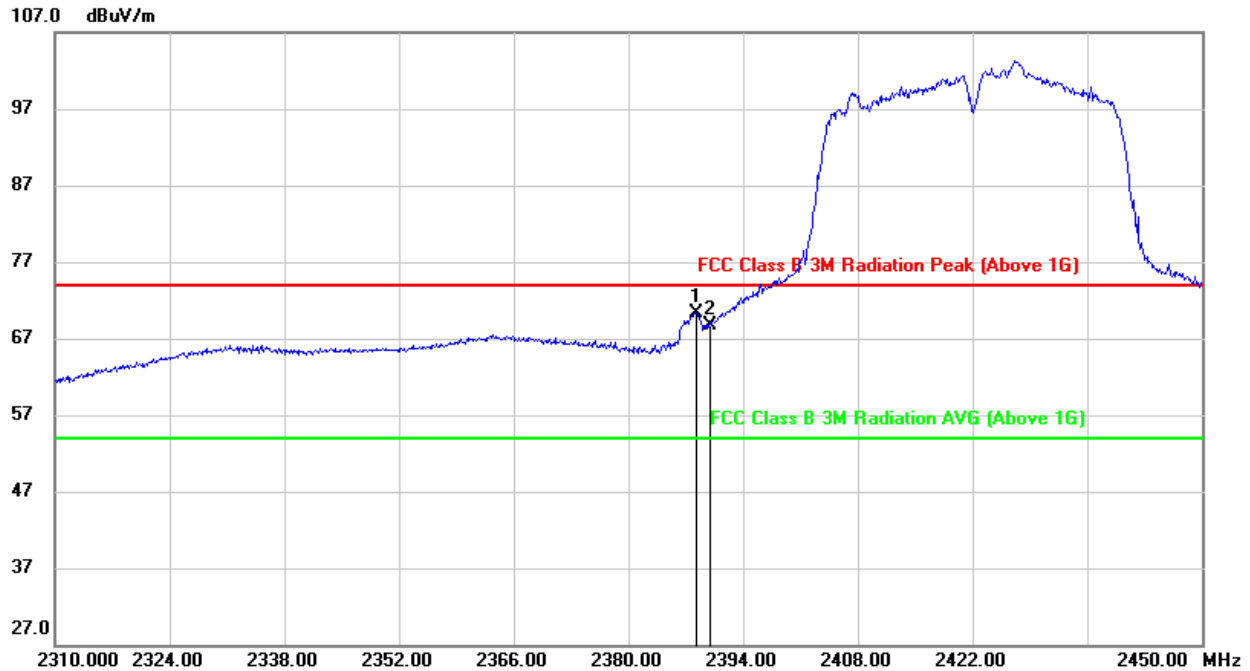


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2388.260	37.39	32.94	70.33	74.00	-3.67	peak
2	2390.000	35.85	32.94	68.79	74.00	-5.21	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

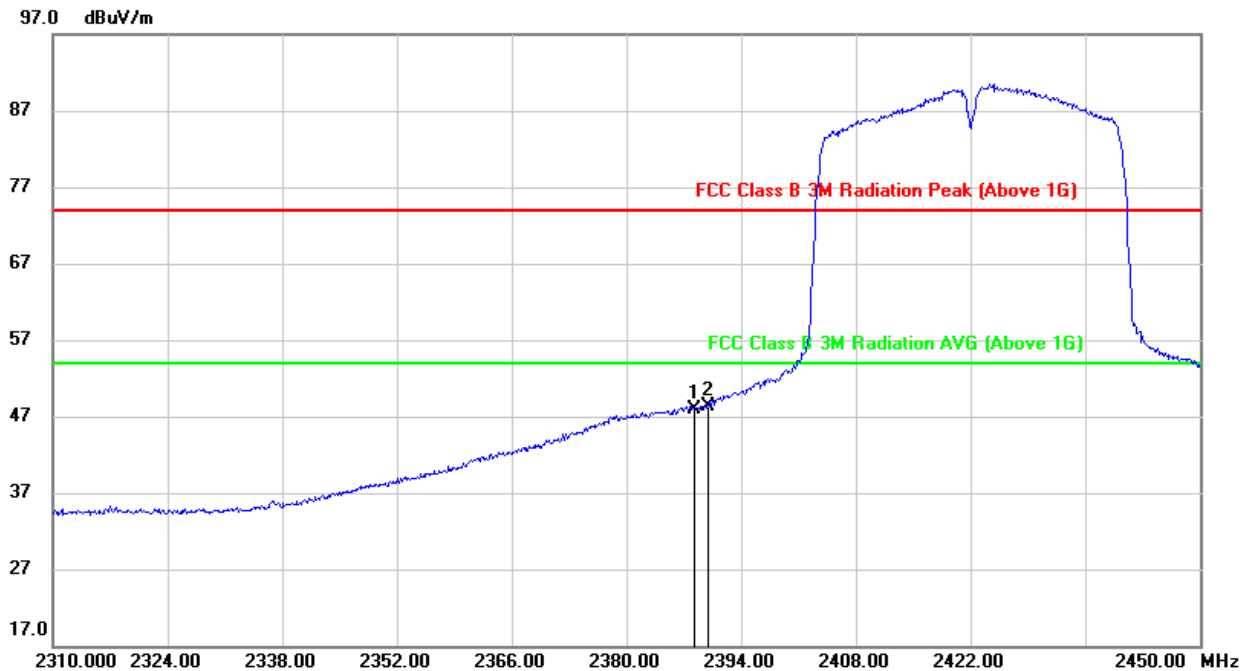**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2388.260	14.87	32.94	47.81	54.00	-6.19	AVG
2	2390.000	15.43	32.94	48.37	54.00	-5.63	AVG


- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/Ton$  where: ton is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

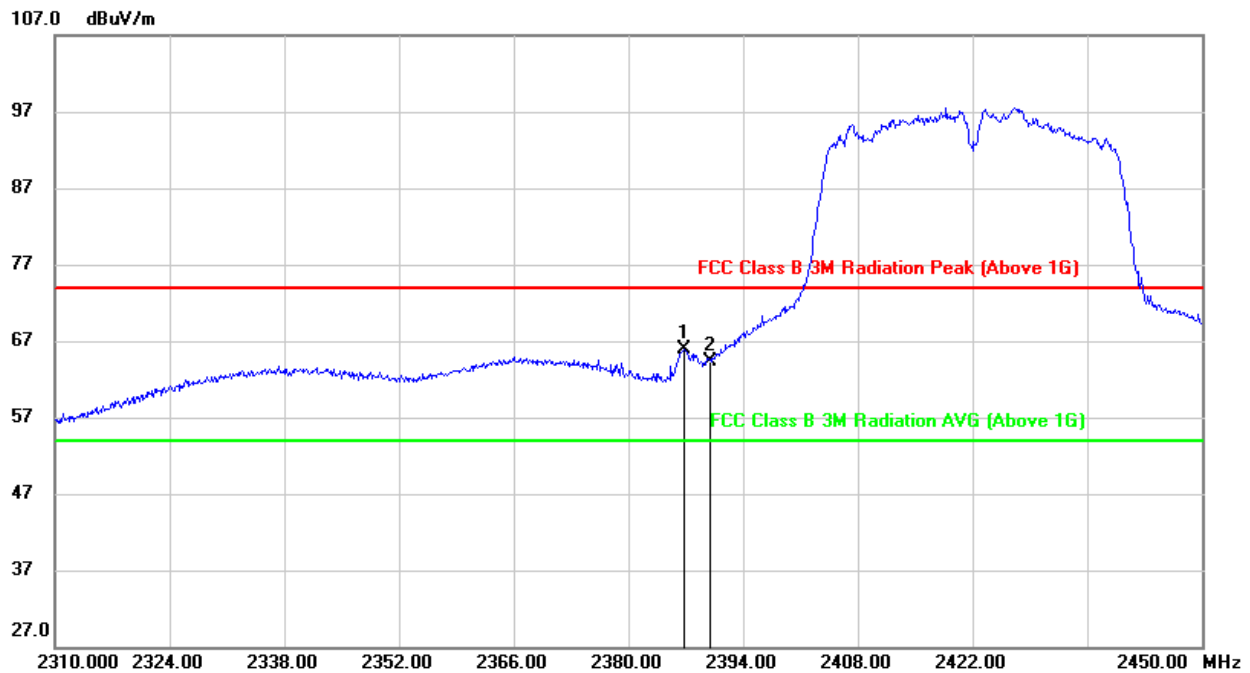**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2386.860	33.03	32.94	65.97	74.00	-8.03	peak
2	2390.000	31.34	32.94	64.28	74.00	-9.72	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

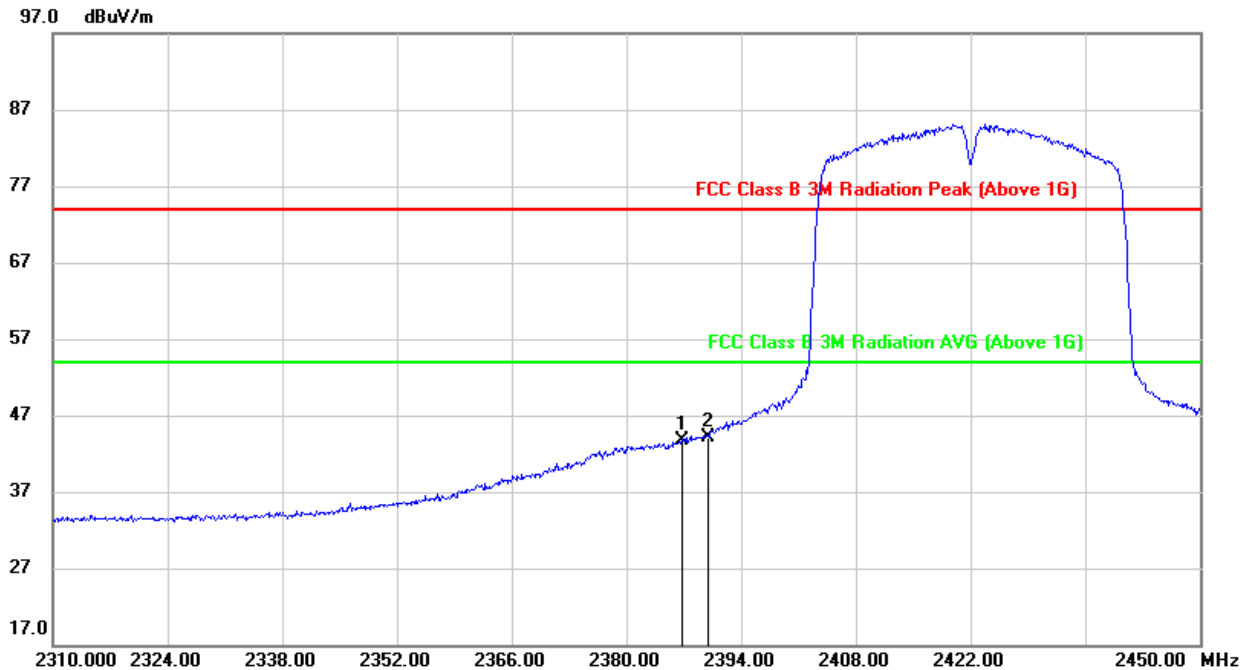

**AVG**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2386.860	10.68	32.94	43.62	54.00	-10.38	AVG
2	2390.000	11.08	32.94	44.02	54.00	-9.98	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG: VBW=1/Ton where: ton is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

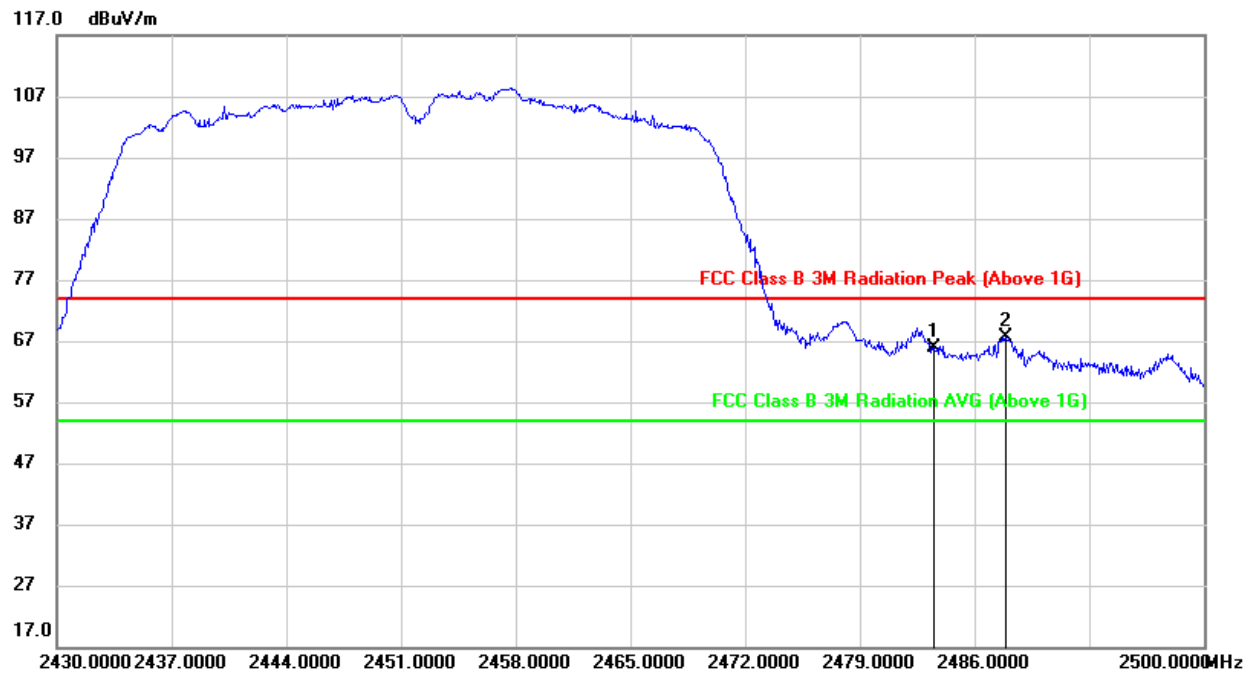


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	32.33	33.58	65.91	74.00	-8.09	peak
2	2487.890	33.99	33.61	67.60	74.00	-6.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

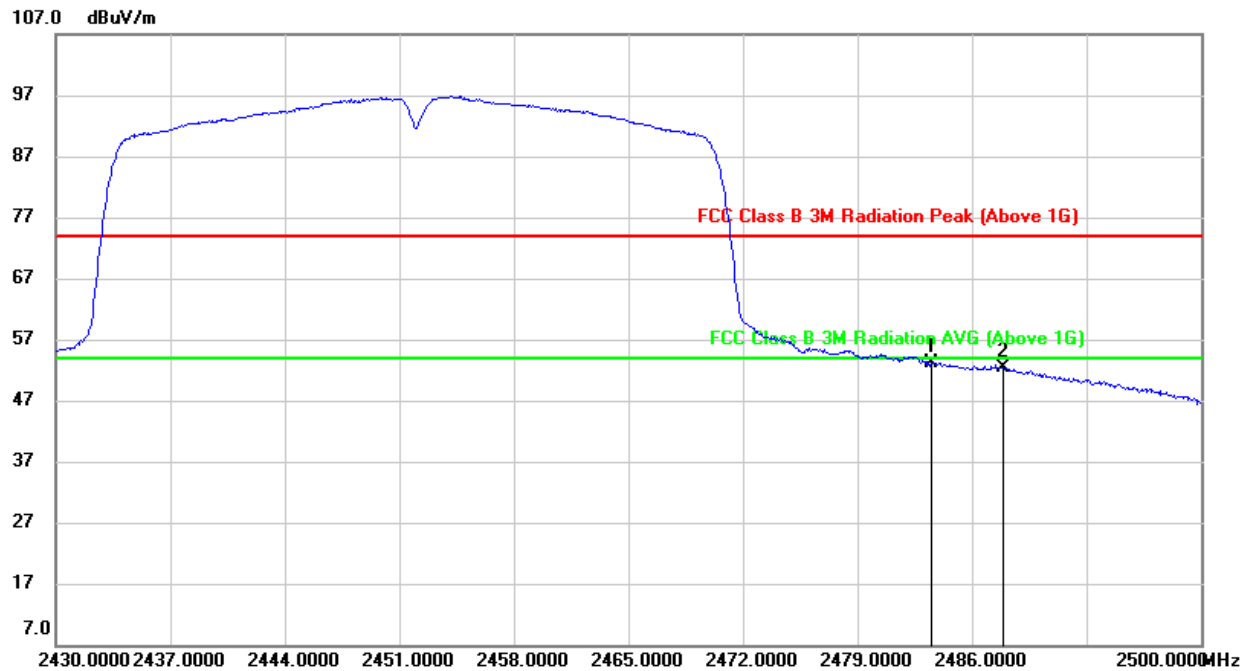**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.55	33.58	53.13	54.00	-0.87	AVG
2	2487.890	18.86	33.61	52.47	54.00	-1.53	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/T_{on}$  where:  $t_{on}$  is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

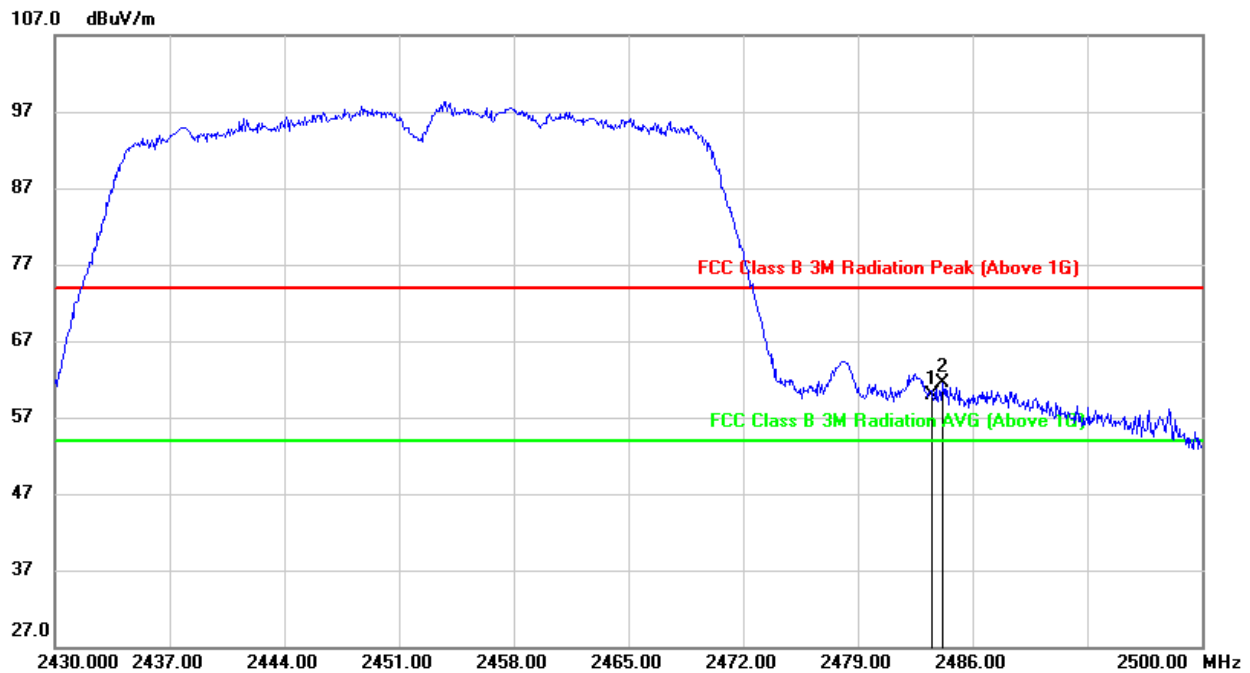**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	26.30	33.58	59.88	74.00	-14.12	peak
2	2484.180	27.94	33.58	61.52	74.00	-12.48	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

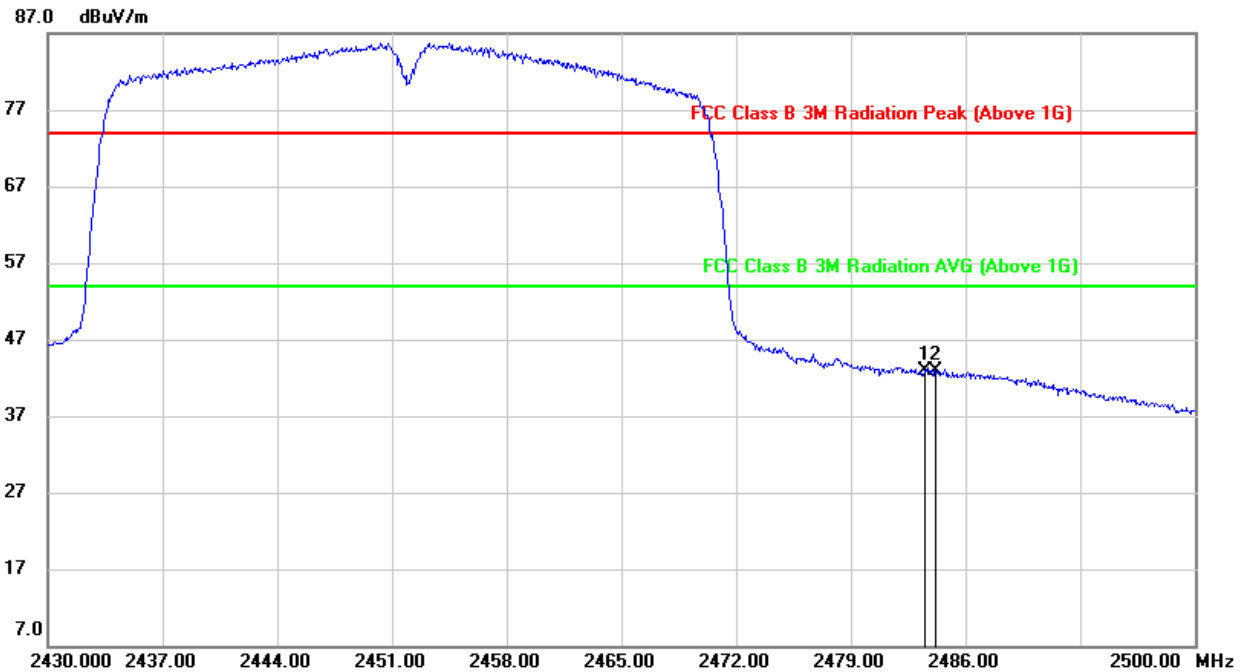**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	2483.500	9.30	33.58	42.88	54.00	-11.12	AVG
2	2484.180	9.29	33.58	42.87	54.00	-11.13	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. AVG:  $VBW=1/Ton$  where: ton is transmit duration.  
4. For transmit duration, please refer to clause 8.1.  
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




## 9.2. SPURIOUS EMISSIONS (3~18GHz)

### 9.2.1. 802.11b SISO MODE


#### 1TX MODE FOR ANT0 (WORST-CASE CONFIGURATION)

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

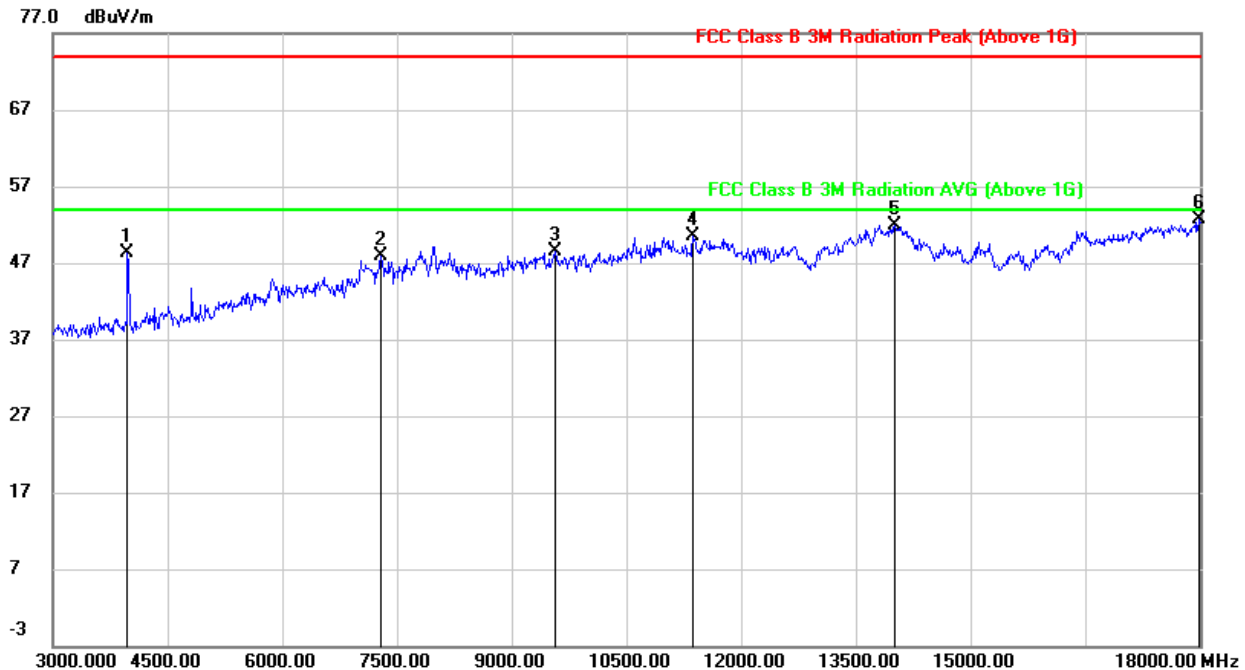

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	50.89	-2.57	48.32	74.00	-25.68	peak
2	7290.000	40.29	7.63	47.92	74.00	-26.08	peak
3	9570.000	38.00	10.53	48.53	74.00	-25.47	peak
4	11370.000	36.99	13.48	50.47	74.00	-23.53	peak
5	14010.000	33.79	18.18	51.97	74.00	-22.03	peak
6	17985.000	28.30	24.35	52.65	74.00	-21.35	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

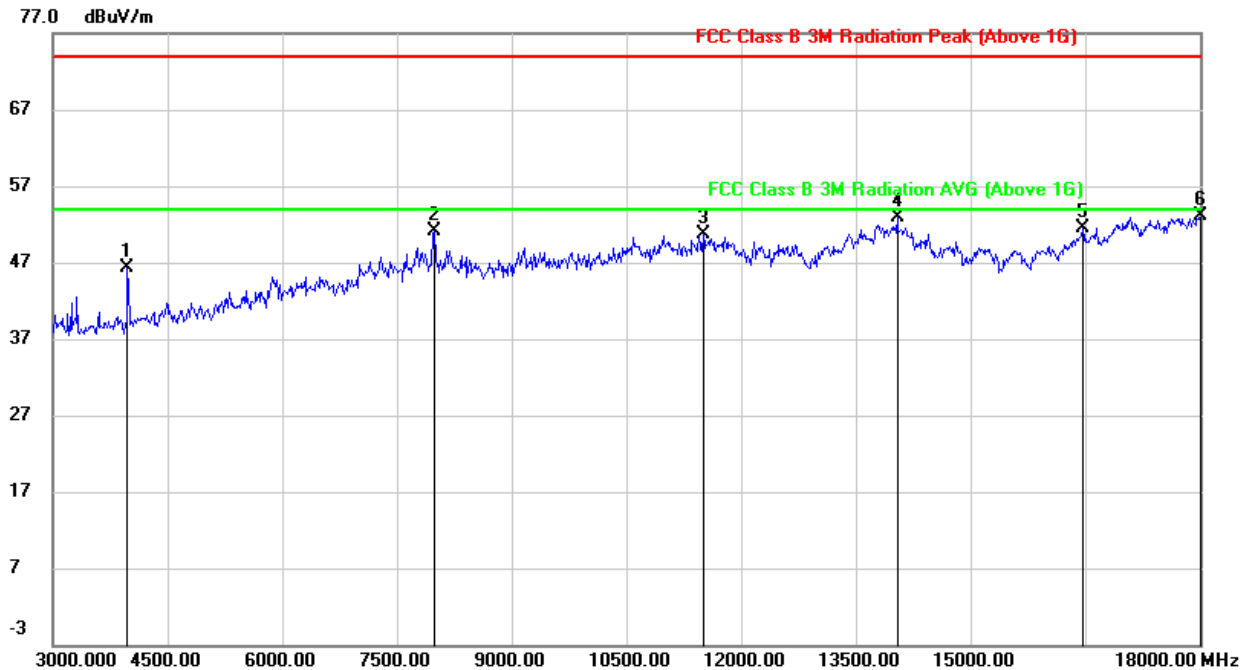**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	48.83	-2.57	46.26	74.00	-27.74	peak
2	7995.000	42.42	8.72	51.14	74.00	-22.86	peak
3	11505.000	36.36	14.36	50.72	74.00	-23.28	peak
4	14040.000	34.64	18.19	52.83	74.00	-21.17	peak
5	16470.000	32.50	19.06	51.56	74.00	-22.44	peak
6	18000.000	28.68	24.44	53.12	74.00	-20.88	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

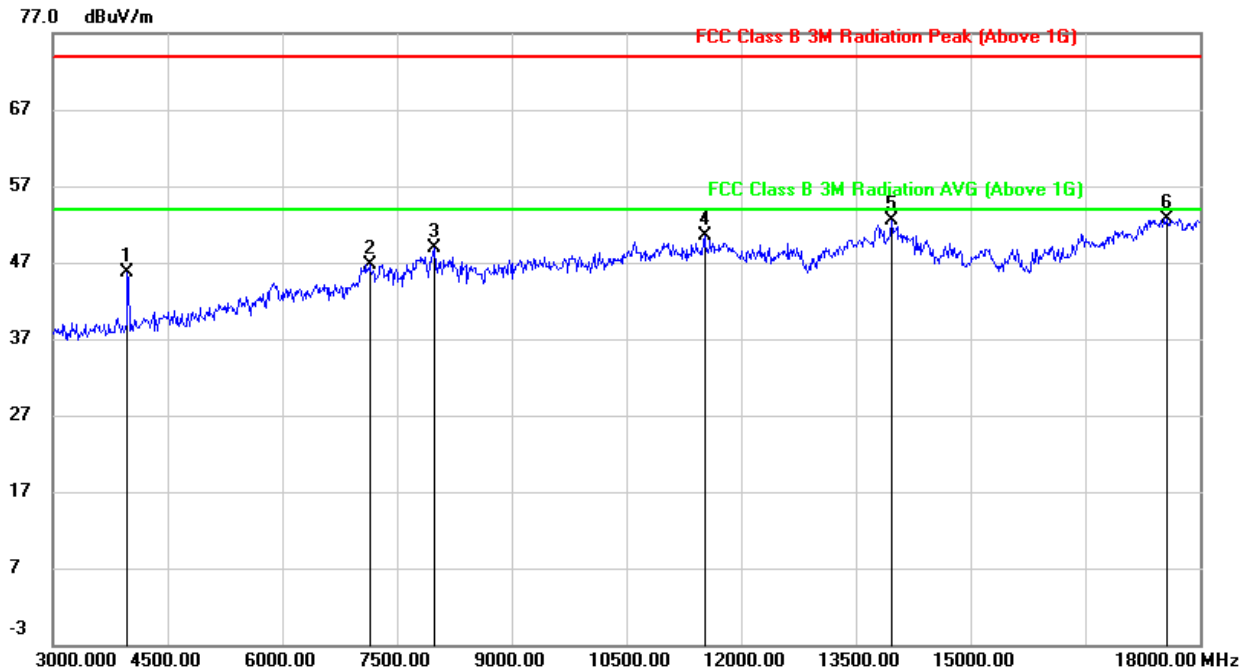**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	48.23	-2.57	45.66	74.00	-28.34	peak
2	7140.000	39.31	7.35	46.66	74.00	-27.34	peak
3	7995.000	40.21	8.72	48.93	74.00	-25.07	peak
4	11520.000	36.10	14.33	50.43	74.00	-23.57	peak
5	13965.000	34.56	17.91	52.47	74.00	-21.53	peak
6	17565.000	29.34	23.43	52.77	74.00	-21.23	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

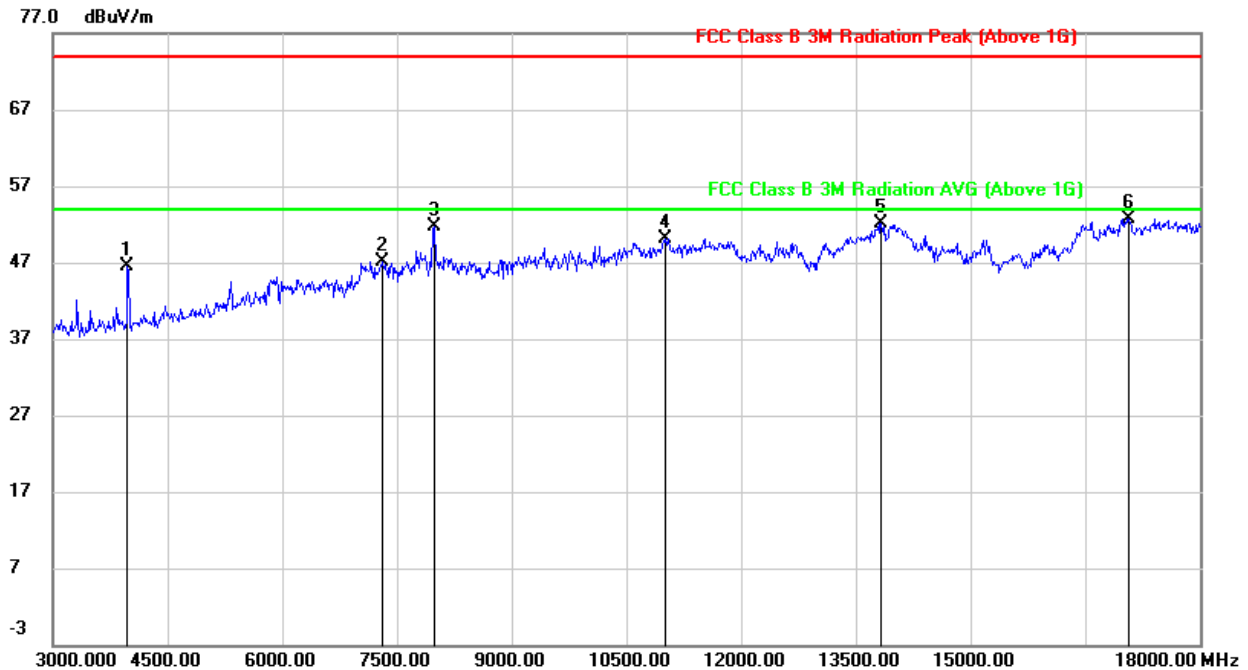

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	48.99	-2.57	46.42	74.00	-27.58	peak
2	7305.000	39.48	7.68	47.16	74.00	-26.84	peak
3	7995.000	42.91	8.72	51.63	74.00	-22.37	peak
4	11010.000	36.64	13.54	50.18	74.00	-23.82	peak
5	13830.000	33.60	18.56	52.16	74.00	-21.84	peak
6	17070.000	28.61	24.09	52.70	74.00	-21.30	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

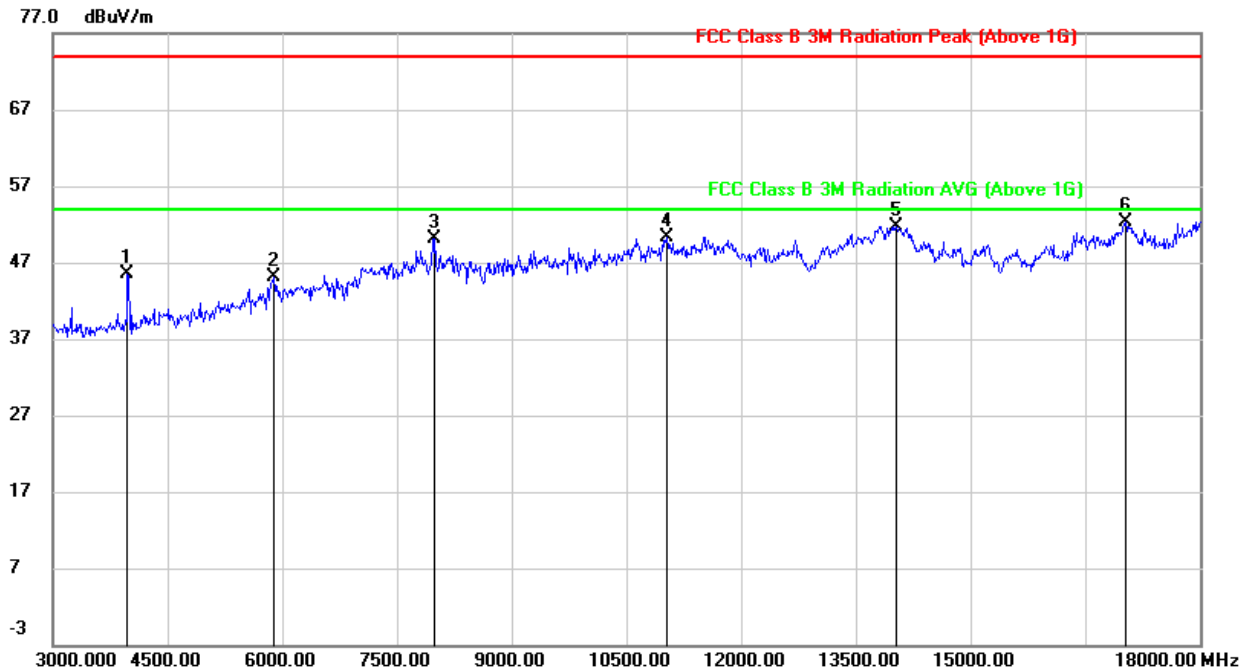**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	48.00	-2.57	45.43	74.00	-28.57	peak
2	5895.000	39.46	5.59	45.05	74.00	-28.95	peak
3	7995.000	41.38	8.72	50.10	74.00	-23.90	peak
4	11025.000	36.81	13.57	50.38	74.00	-23.62	peak
5	14025.000	33.55	18.18	51.73	74.00	-22.27	peak
6	17025.000	28.06	24.16	52.22	74.00	-21.78	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

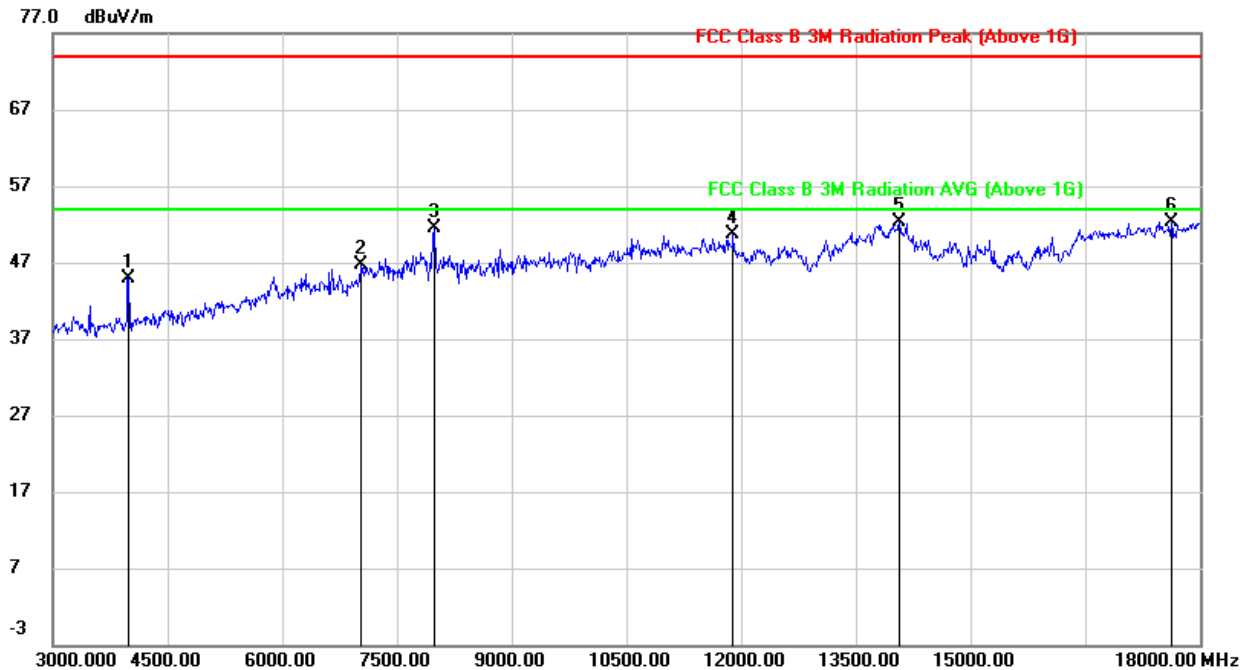**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3990.000	47.55	-2.59	44.96	74.00	-29.04	peak
2	7035.000	39.49	7.21	46.70	74.00	-27.30	peak
3	7980.000	42.72	8.78	51.50	74.00	-22.50	peak
4	11895.000	36.69	14.00	50.69	74.00	-23.31	peak
5	14070.000	34.01	18.20	52.21	74.00	-21.79	peak
6	17625.000	28.87	23.40	52.27	74.00	-21.73	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



## 9.2.2. 802.11g SISO MODE


### 1TX MODE FOR ANT0 (WORST-CASE CONFIGURATION)

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

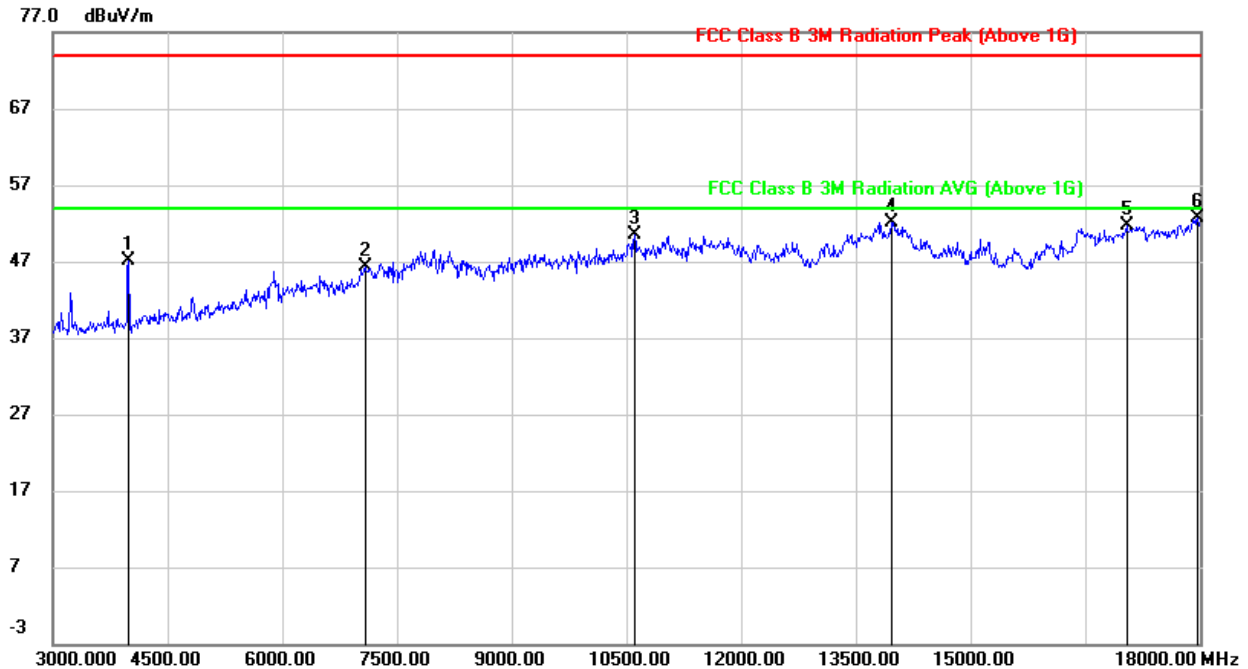

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3990.000	49.71	-2.59	47.12	74.00	-26.88	peak
2	7080.000	39.02	7.33	46.35	74.00	-27.65	peak
3	10605.000	37.30	13.13	50.43	74.00	-23.57	peak
4	13965.000	34.29	17.91	52.20	74.00	-21.80	peak
5	17040.000	27.53	24.13	51.66	74.00	-22.34	peak
6	17970.000	28.35	24.26	52.61	74.00	-21.39	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

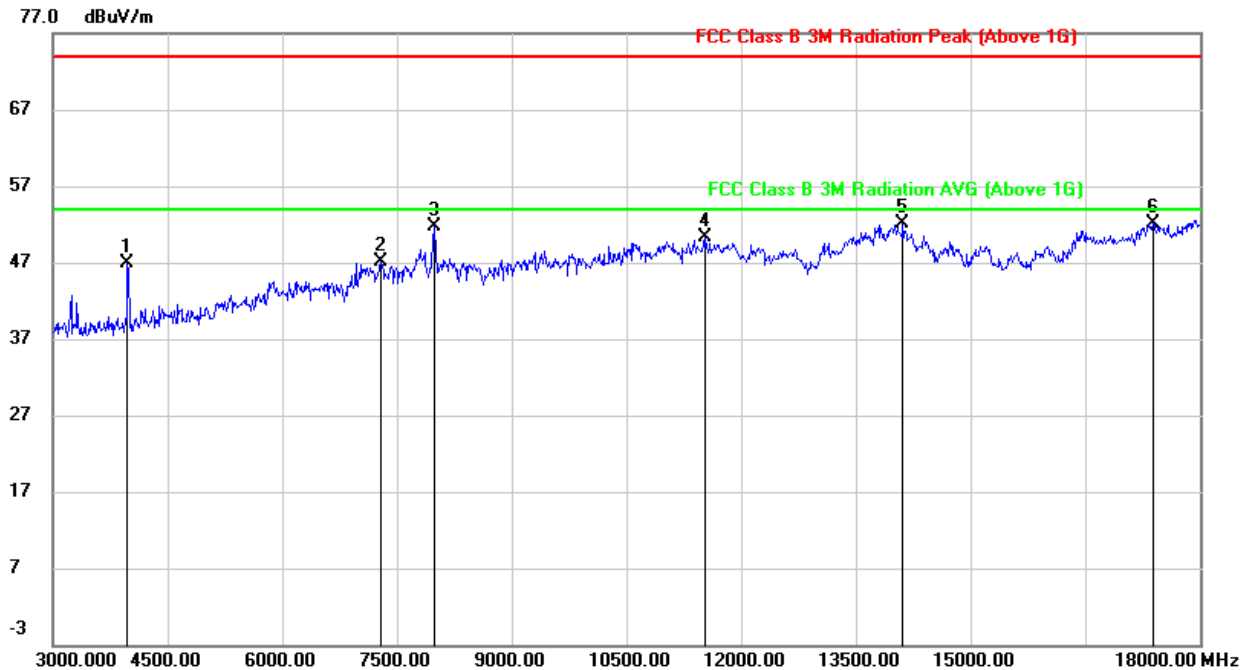**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	49.50	-2.57	46.93	74.00	-27.07	peak
2	7290.000	39.49	7.63	47.12	74.00	-26.88	peak
3	7995.000	42.94	8.72	51.66	74.00	-22.34	peak
4	11520.000	36.01	14.33	50.34	74.00	-23.66	peak
5	14115.000	34.03	18.09	52.12	74.00	-21.88	peak
6	17385.000	28.81	23.34	52.15	74.00	-21.85	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

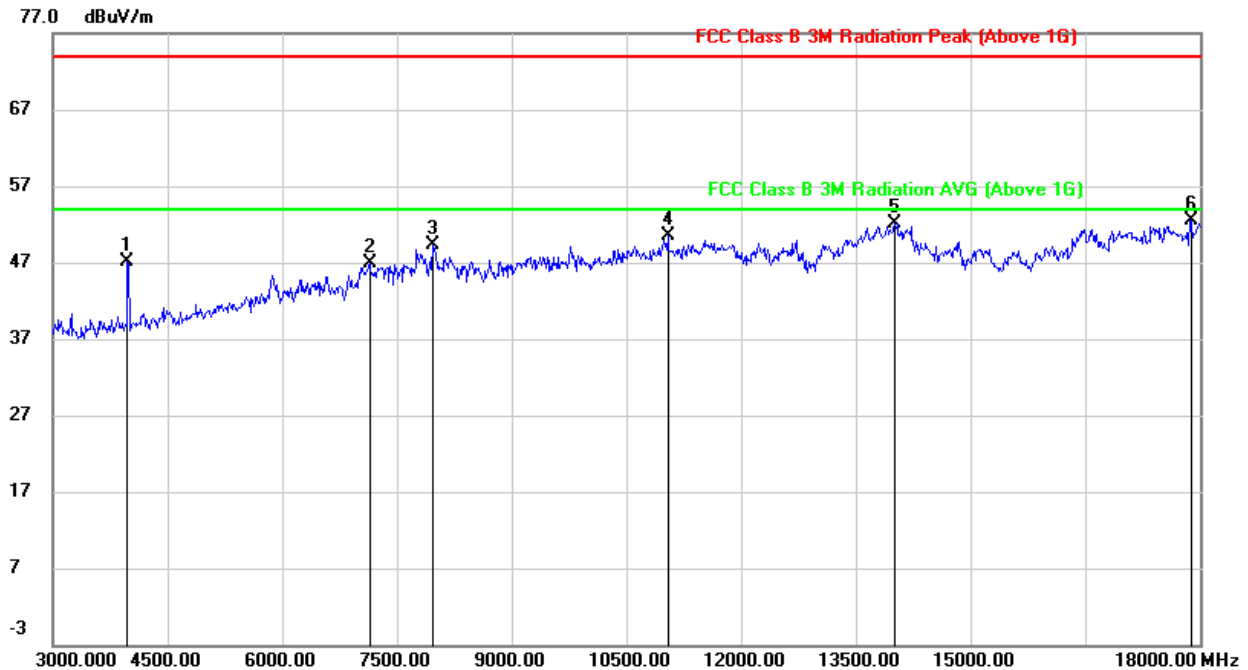**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	49.65	-2.57	47.08	74.00	-26.92	peak
2	7140.000	39.54	7.35	46.89	74.00	-27.11	peak
3	7965.000	40.44	8.84	49.28	74.00	-24.72	peak
4	11040.000	36.87	13.58	50.45	74.00	-23.55	peak
5	14010.000	33.98	18.18	52.16	74.00	-21.84	peak
6	17880.000	28.67	23.78	52.45	74.00	-21.55	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

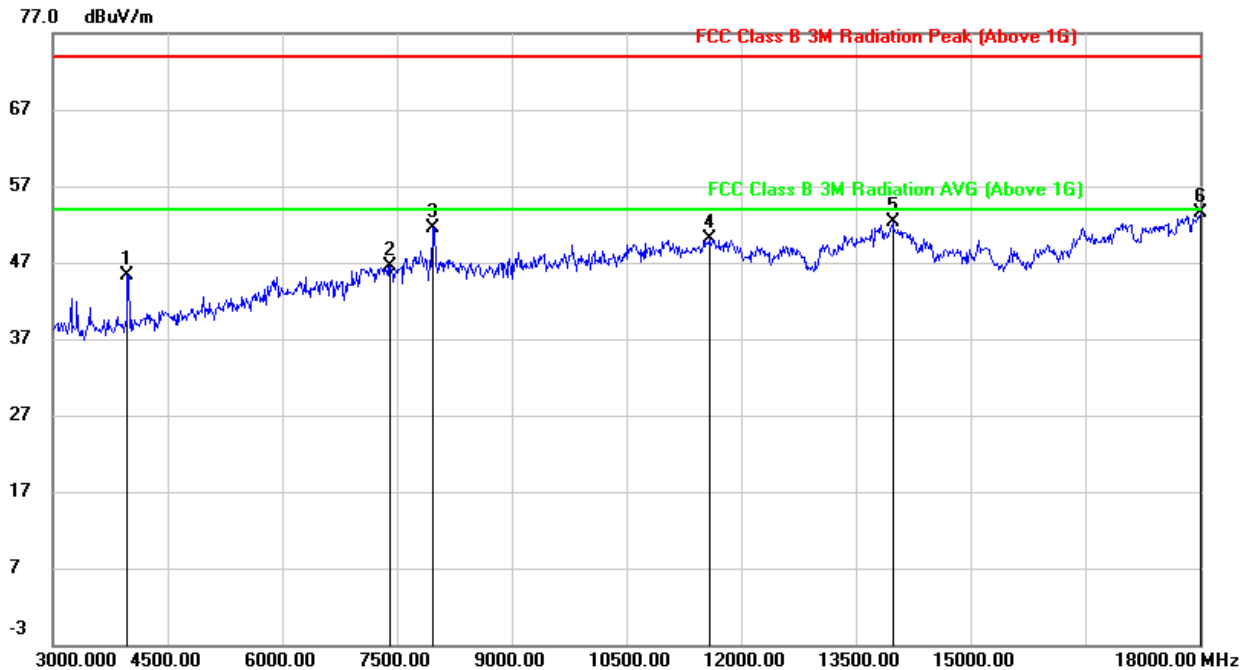**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	47.84	-2.57	45.27	74.00	-28.73	peak
2	7410.000	38.63	7.90	46.53	74.00	-27.47	peak
3	7965.000	42.73	8.84	51.57	74.00	-22.43	peak
4	11580.000	35.80	14.24	50.04	74.00	-23.96	peak
5	13980.000	34.22	18.03	52.25	74.00	-21.75	peak
6	18000.000	29.01	24.44	53.45	74.00	-20.55	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

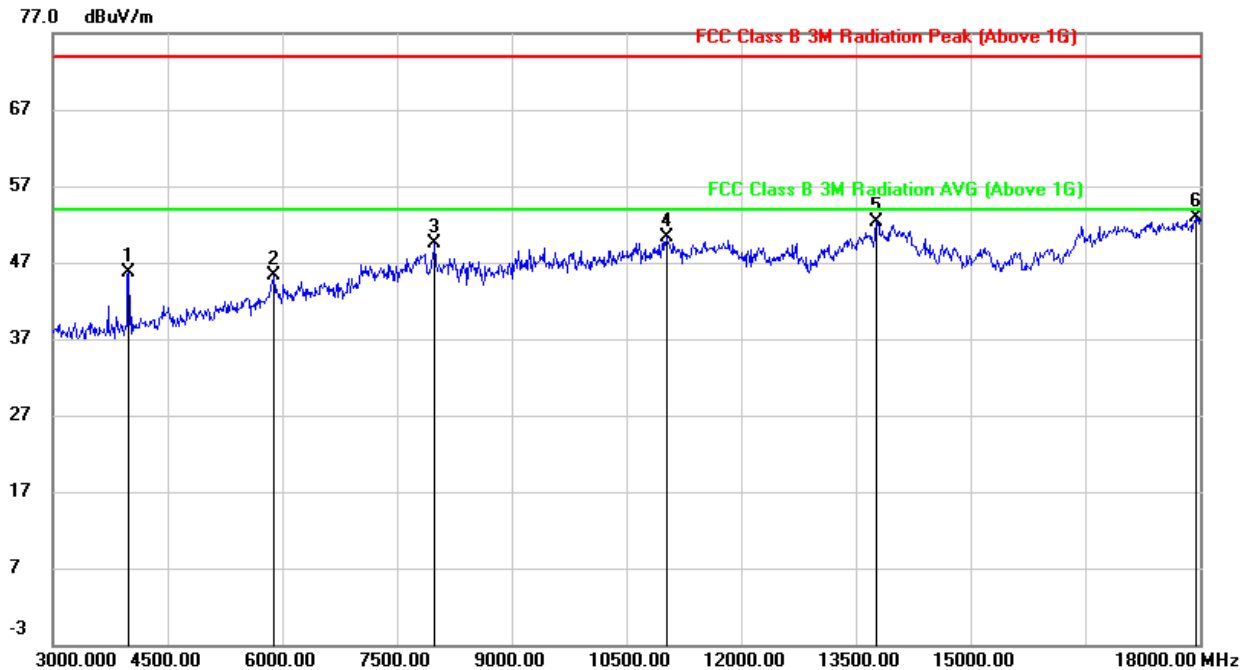

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3990.000	48.24	-2.59	45.65	74.00	-28.35	peak
2	5895.000	39.65	5.59	45.24	74.00	-28.76	peak
3	7995.000	40.79	8.72	49.51	74.00	-24.49	peak
4	11025.000	36.76	13.57	50.33	74.00	-23.67	peak
5	13770.000	33.59	18.64	52.23	74.00	-21.77	peak
6	17955.000	28.80	24.18	52.98	74.00	-21.02	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

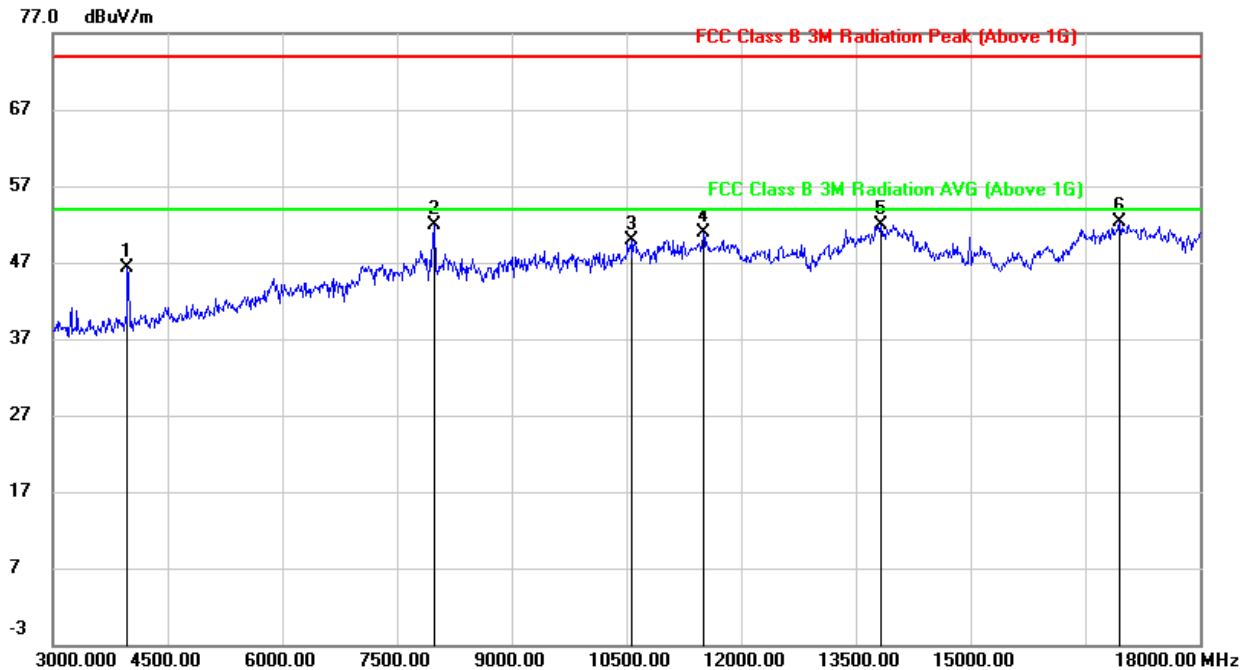

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	48.93	-2.57	46.36	74.00	-27.64	peak
2	7995.000	43.23	8.72	51.95	74.00	-22.05	peak
3	10560.000	37.11	12.80	49.91	74.00	-24.09	peak
4	11505.000	36.48	14.36	50.84	74.00	-23.16	peak
5	13830.000	33.30	18.56	51.86	74.00	-22.14	peak
6	16950.000	29.06	23.16	52.22	74.00	-21.78	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 9.2.3. 802.11n HT20 MIMO MODE

#### 2TX MODE (WORST-CASE CONFIGURATION)

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

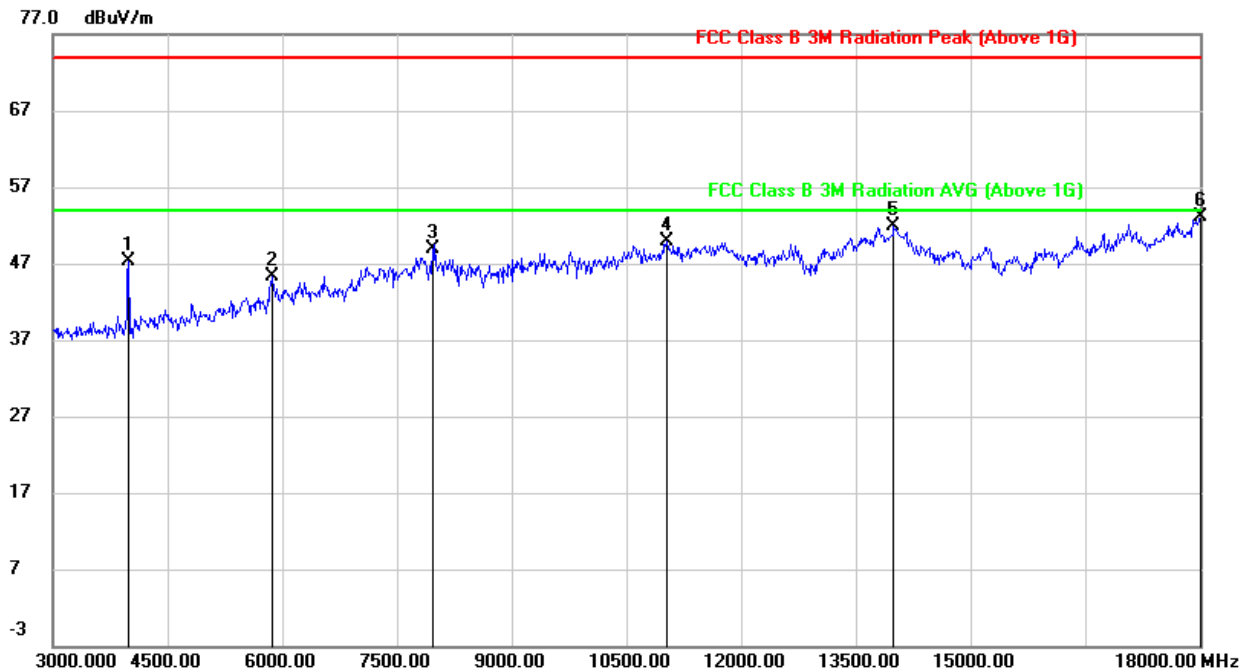


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3990.000	49.92	-2.59	47.33	74.00	-26.67	peak
2	5865.000	40.28	5.03	45.31	74.00	-28.69	peak
3	7965.000	40.13	8.84	48.97	74.00	-25.03	peak
4	11025.000	36.30	13.57	49.87	74.00	-24.13	peak
5	13995.000	33.78	18.14	51.92	74.00	-22.08	peak
6	18000.000	28.67	24.44	53.11	74.00	-20.89	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

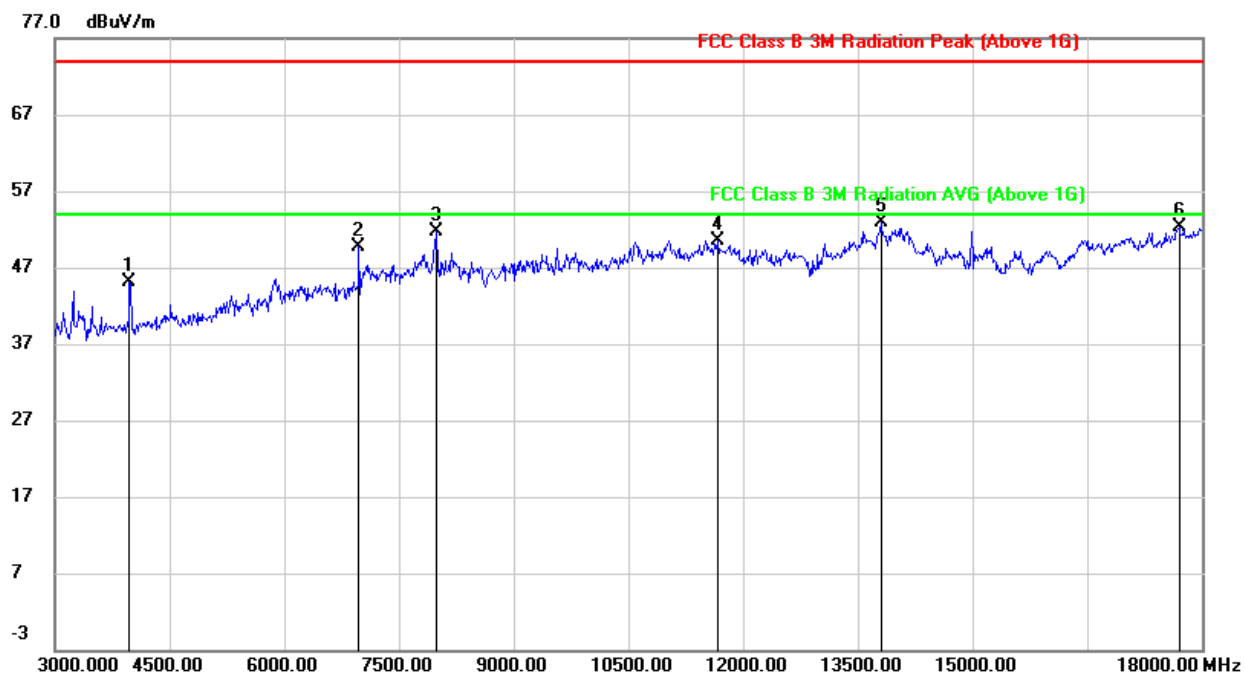

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	47.64	-2.57	45.07	74.00	-28.93	peak
2	6975.000	42.58	7.09	49.67	74.00	-24.33	peak
3	7995.000	42.89	8.72	51.61	74.00	-22.39	peak
4	11670.000	36.71	13.86	50.57	74.00	-23.43	peak
5	13800.000	33.80	19.04	52.84	74.00	-21.16	peak
6	17700.000	28.97	23.24	52.21	74.00	-21.79	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

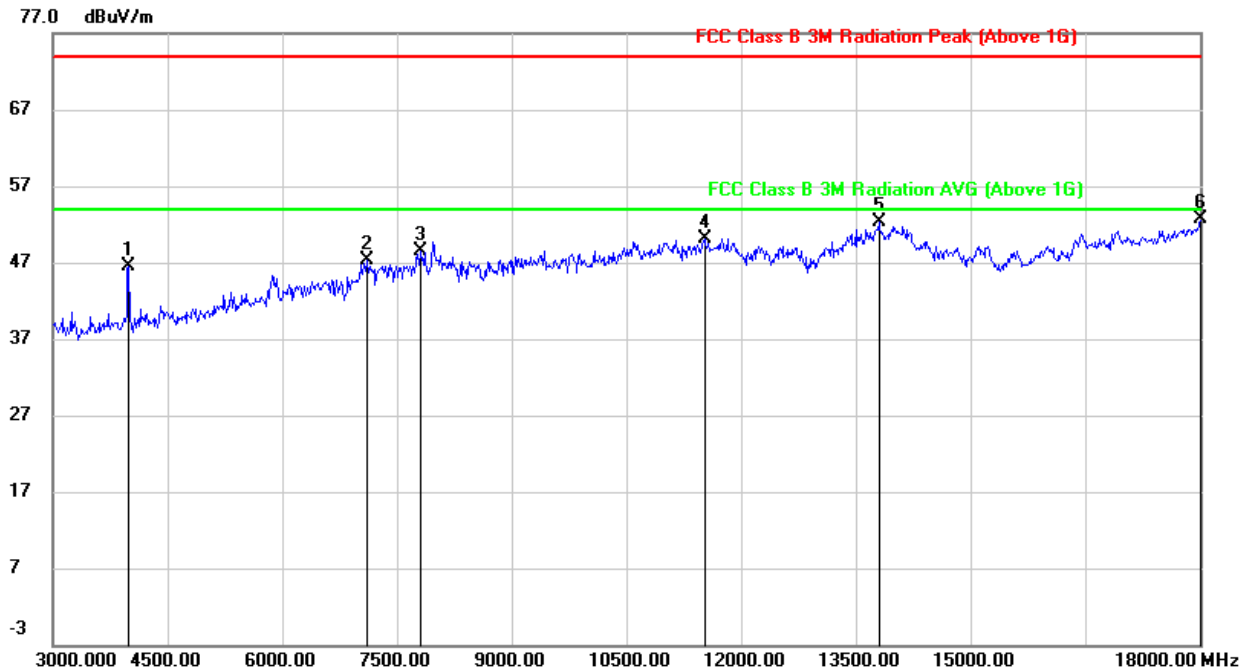**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3990.000	49.05	-2.59	46.46	74.00	-27.54	peak
2	7110.000	39.84	7.38	47.22	74.00	-26.78	peak
3	7800.000	38.79	9.66	48.45	74.00	-25.55	peak
4	11520.000	35.85	14.33	50.18	74.00	-23.82	peak
5	13800.000	33.33	19.04	52.37	74.00	-21.63	peak
6	18000.000	28.23	24.44	52.67	74.00	-21.33	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

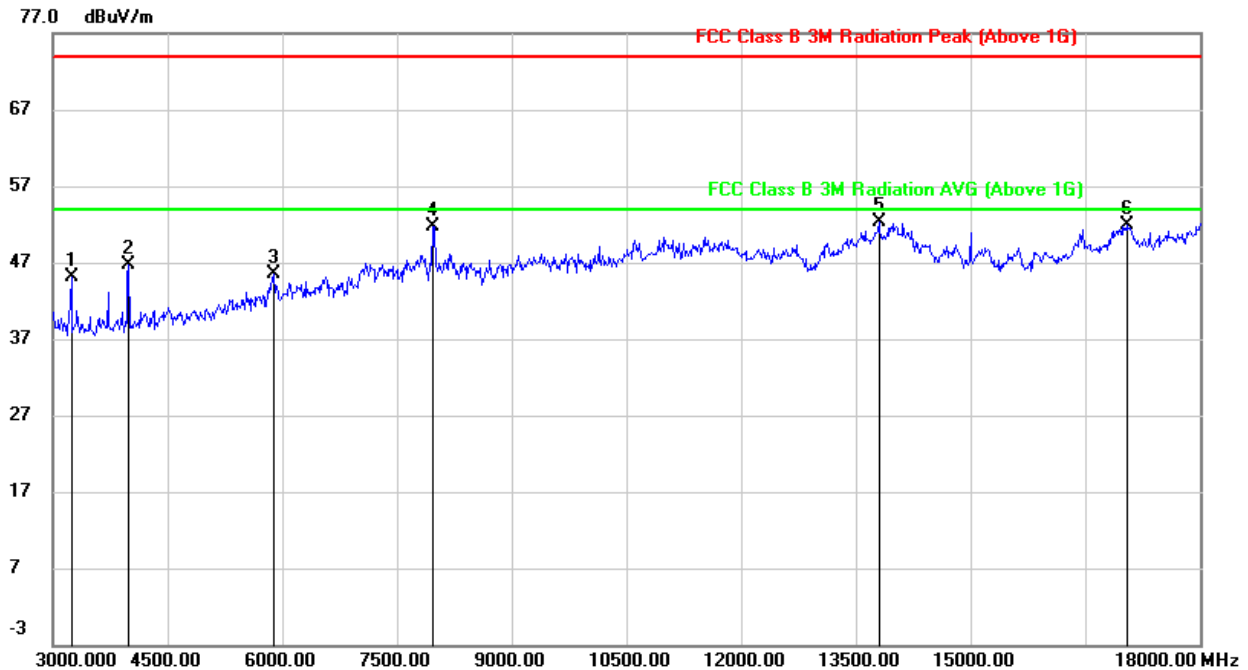**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3240.000	49.17	-4.00	45.17	74.00	-28.83	peak
2	3990.000	49.35	-2.59	46.76	74.00	-27.24	peak
3	5895.000	39.88	5.59	45.47	74.00	-28.53	peak
4	7965.000	42.91	8.84	51.75	74.00	-22.25	peak
5	13800.000	33.18	19.04	52.22	74.00	-21.78	peak
6	17040.000	27.75	24.13	51.88	74.00	-22.12	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

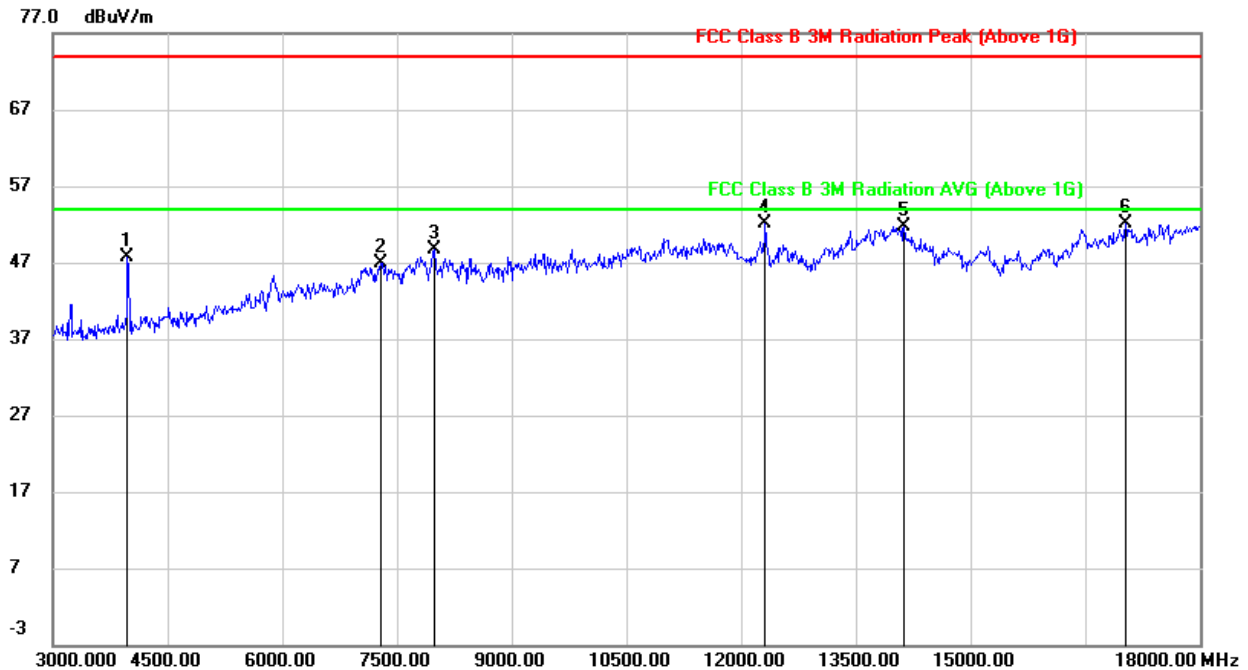**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	50.18	-2.57	47.61	74.00	-26.39	peak
2	7290.000	39.36	7.63	46.99	74.00	-27.01	peak
3	7995.000	40.05	8.72	48.77	74.00	-25.23	peak
4	12315.000	38.30	13.83	52.13	74.00	-21.87	peak
5	14130.000	33.66	17.97	51.63	74.00	-22.37	peak
6	17025.000	27.86	24.16	52.02	74.00	-21.98	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

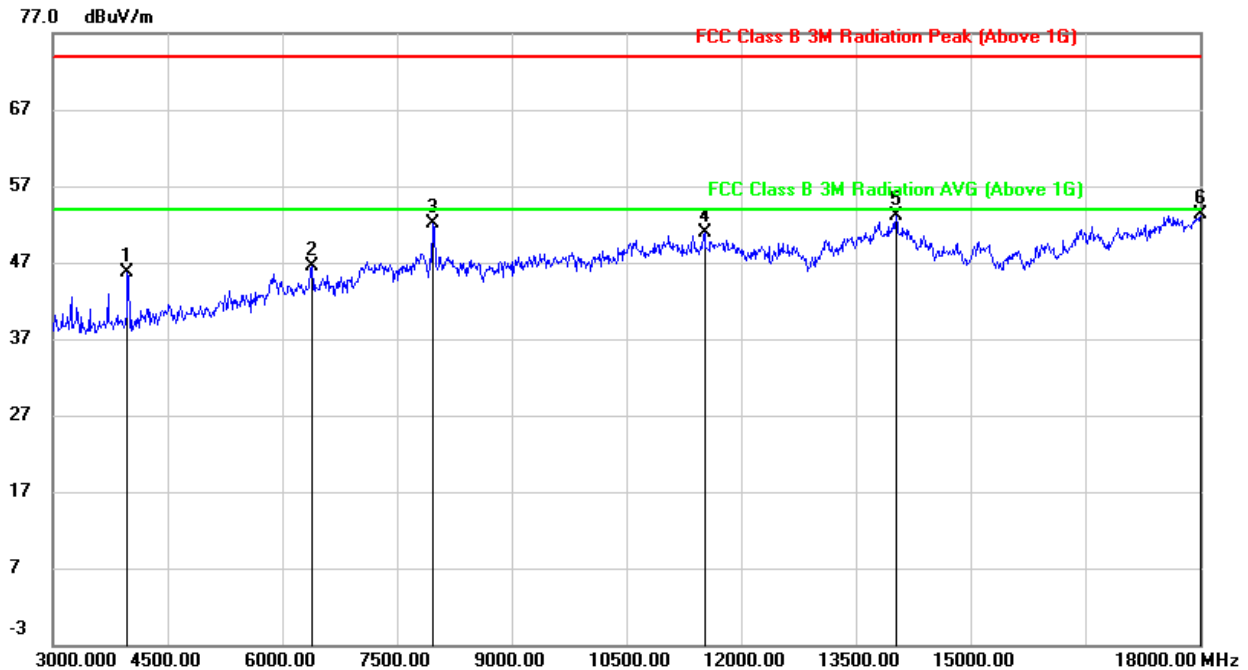**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	48.21	-2.57	45.64	74.00	-28.36	peak
2	6390.000	41.14	5.30	46.44	74.00	-27.56	peak
3	7965.000	43.18	8.84	52.02	74.00	-21.98	peak
4	11520.000	36.54	14.33	50.87	74.00	-23.13	peak
5	14025.000	34.95	18.18	53.13	74.00	-20.87	peak
6	18000.000	28.87	24.44	53.31	74.00	-20.69	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



## 9.2.4. 802.11n HT40 MIMO MODE

### 2TX MODE (WORST-CASE CONFIGURATION)


#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

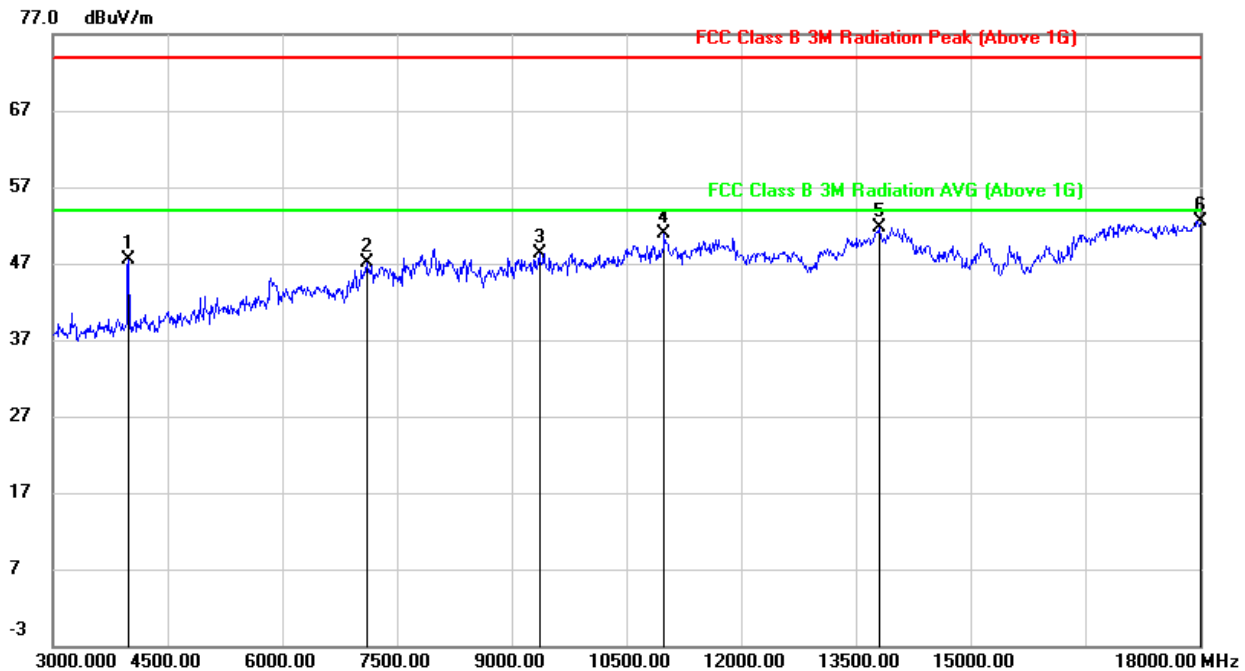

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3990.000	50.10	-2.59	47.51	74.00	-26.49	peak
2	7110.000	39.66	7.38	47.04	74.00	-26.96	peak
3	9360.000	37.84	10.53	48.37	74.00	-25.63	peak
4	10995.000	37.36	13.49	50.85	74.00	-23.15	peak
5	13815.000	32.94	18.79	51.73	74.00	-22.27	peak
6	18000.000	28.10	24.44	52.54	74.00	-21.46	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

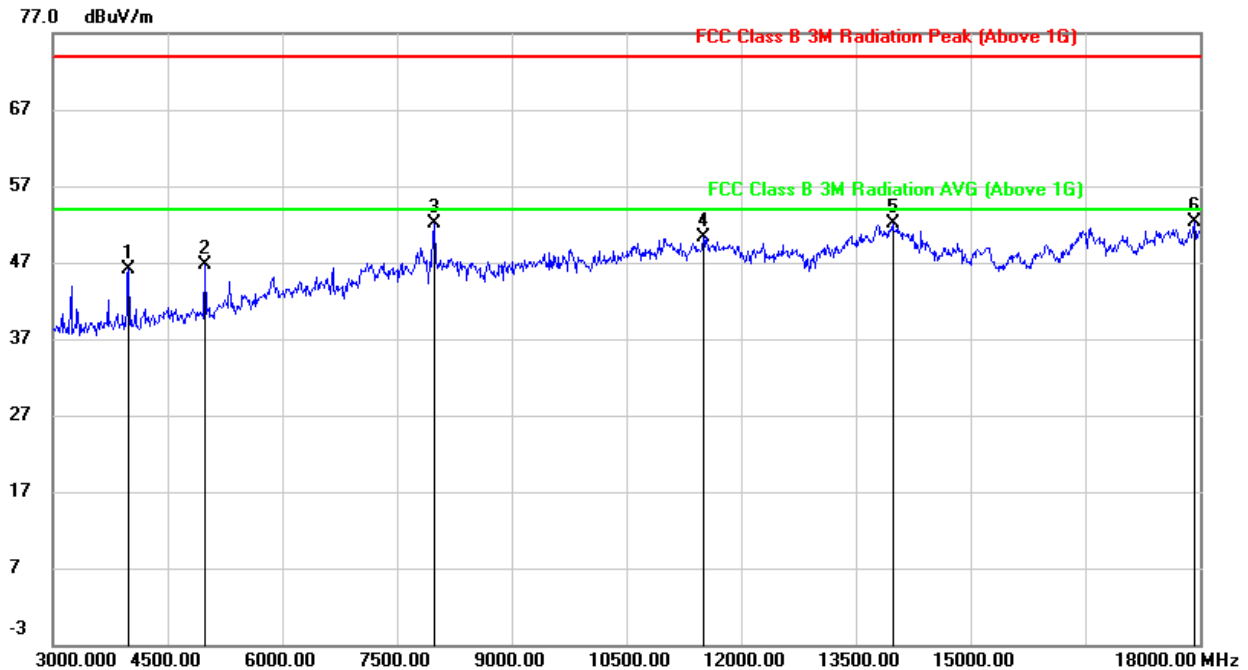

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3990.000	48.66	-2.59	46.07	74.00	-27.93	peak
2	4980.000	45.91	0.74	46.65	74.00	-27.35	peak
3	7995.000	43.44	8.72	52.16	74.00	-21.84	peak
4	11505.000	36.01	14.36	50.37	74.00	-23.63	peak
5	13980.000	34.01	18.03	52.04	74.00	-21.96	peak
6	17925.000	28.21	24.00	52.21	74.00	-21.79	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

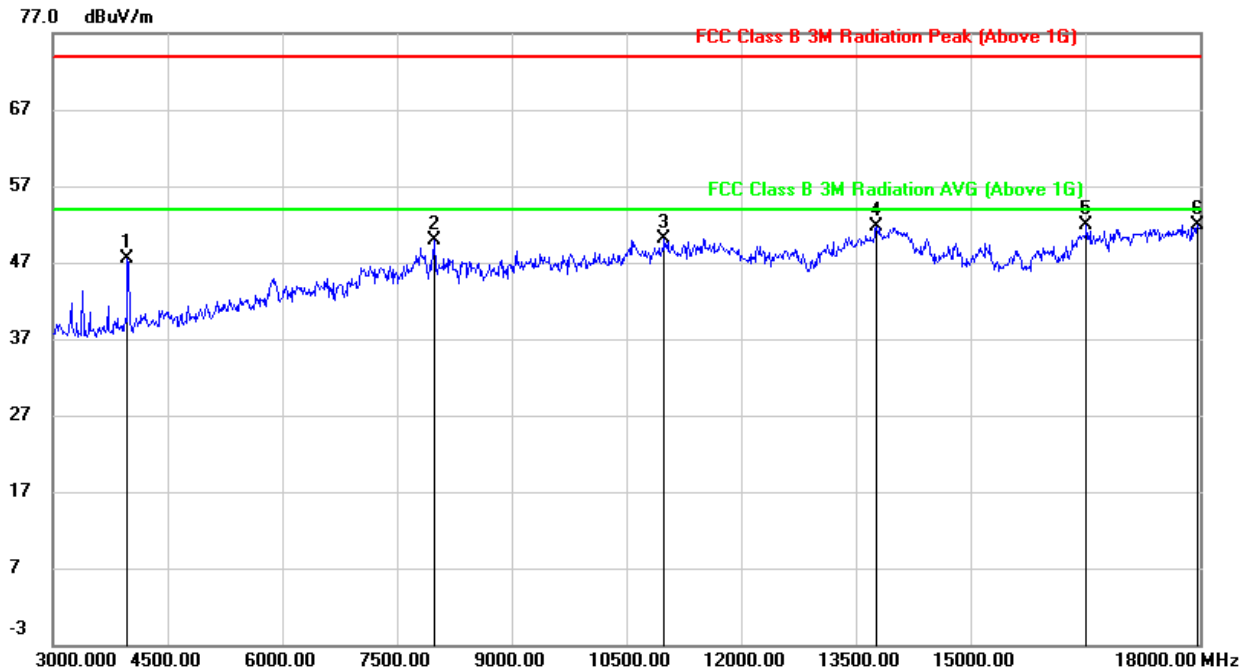**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3975.000	50.10	-2.57	47.53	74.00	-26.47	peak
2	7995.000	41.20	8.72	49.92	74.00	-24.08	peak
3	10995.000	36.67	13.49	50.16	74.00	-23.84	peak
4	13770.000	33.08	18.64	51.72	74.00	-22.28	peak
5	16515.000	32.73	19.19	51.92	74.00	-22.08	peak
6	17970.000	27.69	24.26	51.95	74.00	-22.05	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

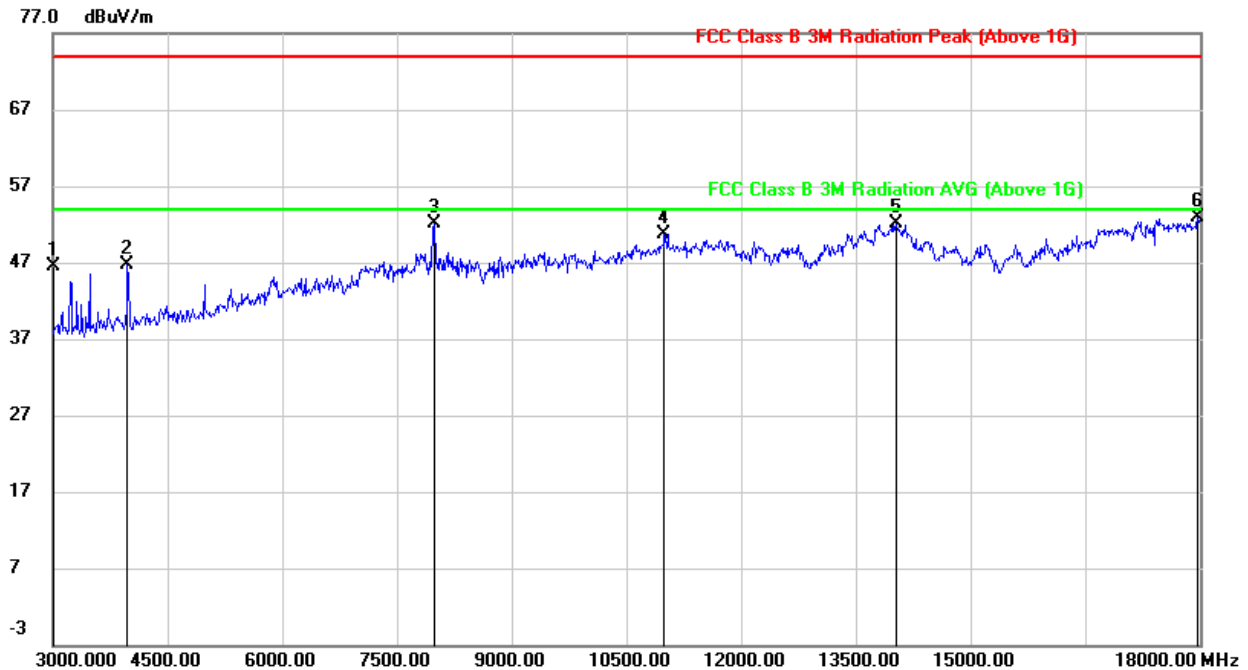**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3000.000	50.65	-4.07	46.58	74.00	-27.42	peak
2	3975.000	49.29	-2.57	46.72	74.00	-27.28	peak
3	7995.000	43.39	8.72	52.11	74.00	-21.89	peak
4	10995.000	37.24	13.49	50.73	74.00	-23.27	peak
5	14025.000	33.87	18.18	52.05	74.00	-21.95	peak
6	17970.000	28.70	24.26	52.96	74.00	-21.04	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

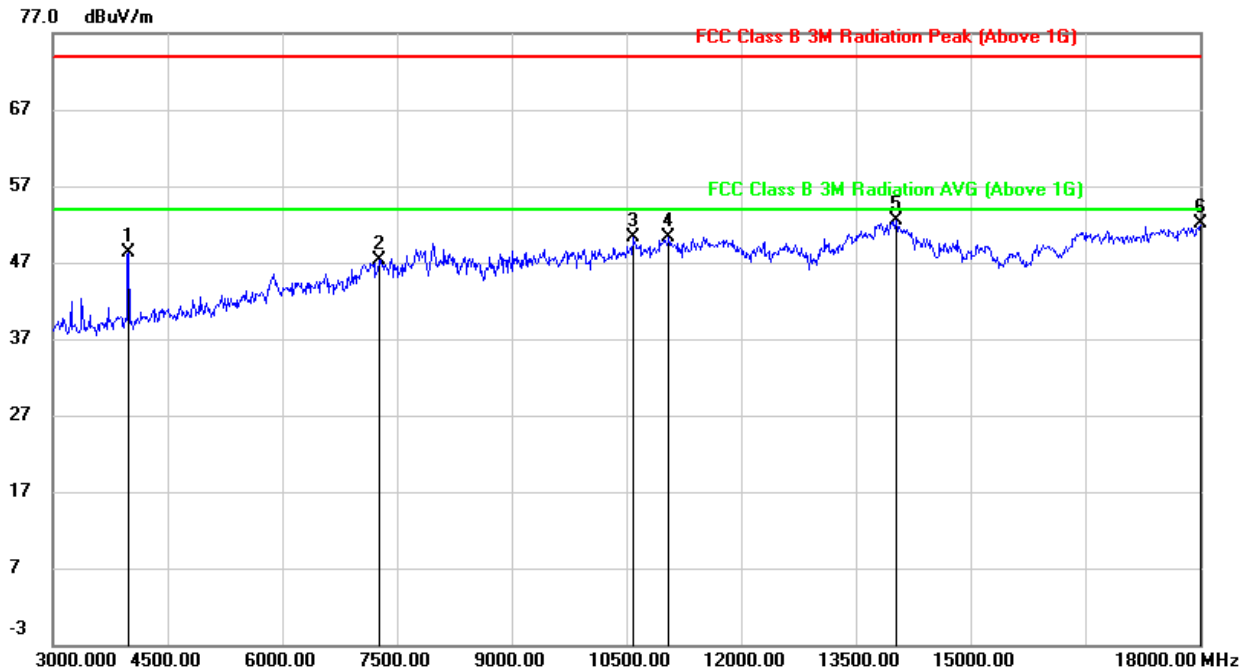**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3990.000	50.97	-2.59	48.38	74.00	-25.62	peak
2	7260.000	39.86	7.53	47.39	74.00	-26.61	peak
3	10590.000	37.18	13.07	50.25	74.00	-23.75	peak
4	11055.000	36.77	13.60	50.37	74.00	-23.63	peak
5	14025.000	34.30	18.18	52.48	74.00	-21.52	peak
6	18000.000	27.65	24.44	52.09	74.00	-21.91	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

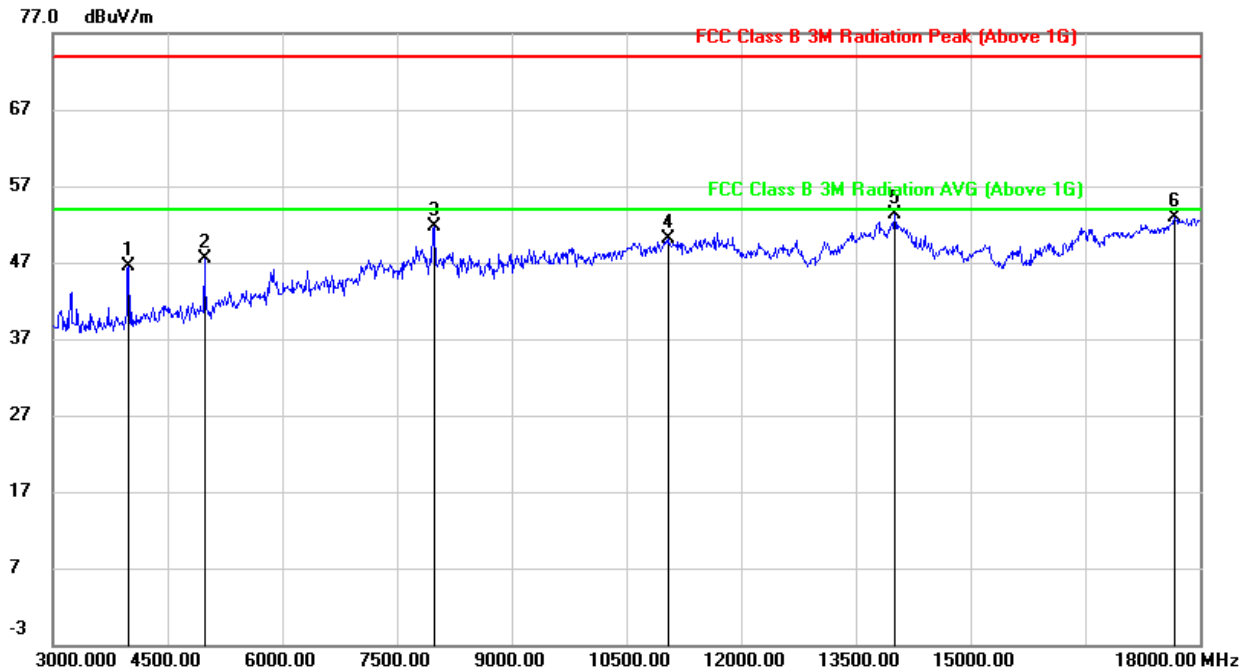**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	3990.000	49.10	-2.59	46.51	74.00	-27.49	peak
2	4980.000	46.71	0.74	47.45	74.00	-26.55	peak
3	7980.000	42.85	8.78	51.63	74.00	-22.37	peak
4	11055.000	36.55	13.60	50.15	74.00	-23.85	peak
5	14010.000	35.04	18.18	53.22	74.00	-20.78	peak
6	17670.000	29.54	23.29	52.83	74.00	-21.17	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




### 9.3. SPURIOUS EMISSIONS (1~3GHz)

#### 9.3.1. 802.11b SISO MODE

##### 1TX MODE FOR ANT0 (WORST-CASE CONFIGURATION)

##### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

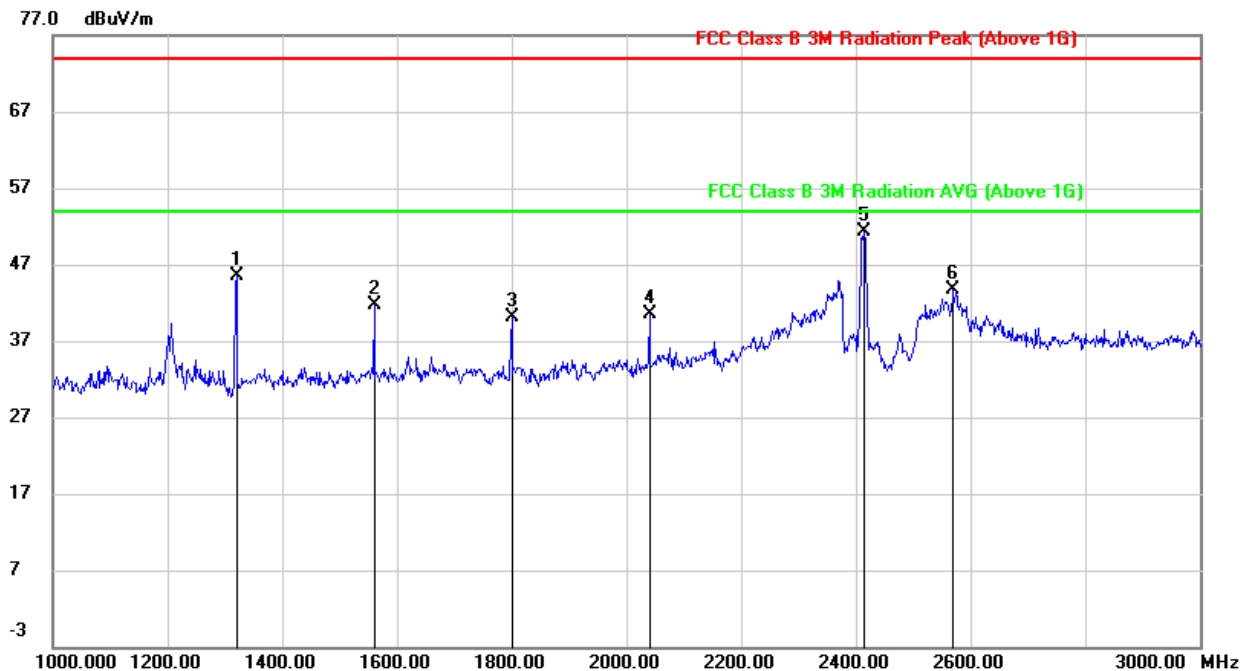

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1320.000	56.81	-11.35	45.46	74.00	-28.54	peak
2	1560.000	52.67	-11.01	41.66	74.00	-32.34	peak
3	1800.000	49.61	-9.42	40.19	74.00	-33.81	peak
4	2040.000	49.70	-9.20	40.50	74.00	-33.50	peak
5	2412.000	58.26	-7.00	51.26	/	/	fundamental
6	2570.000	50.42	-6.66	43.76	74.00	-30.24	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

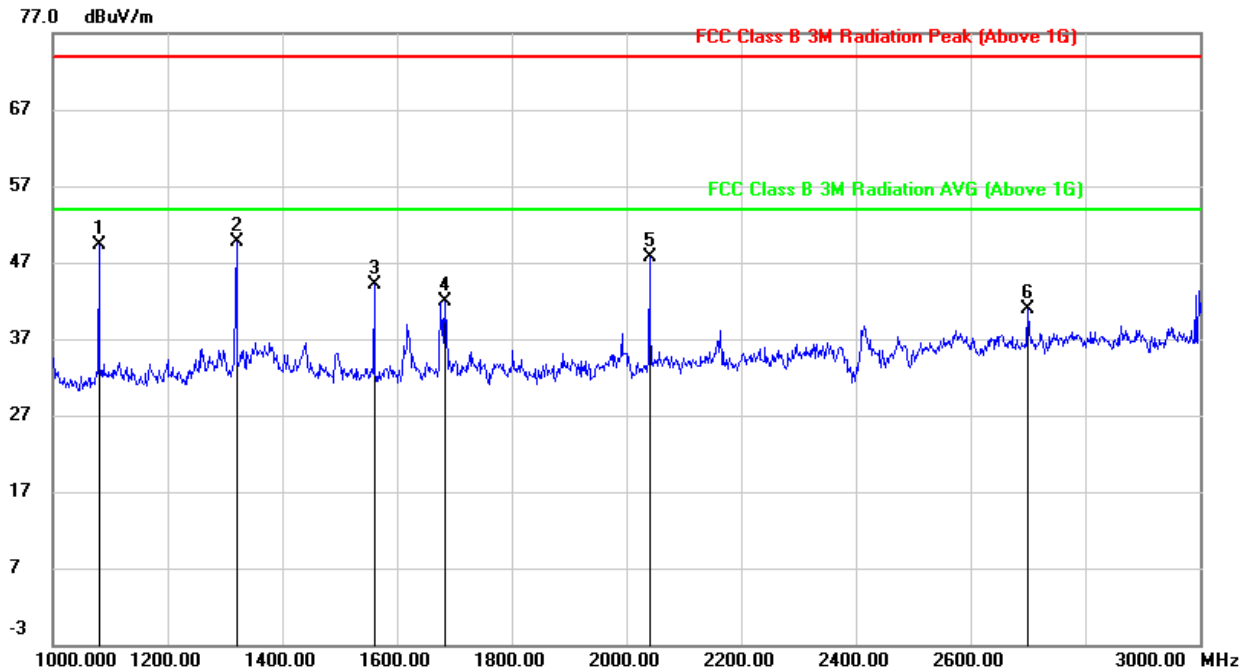**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	62.01	-12.71	49.30	74.00	-24.70	peak
2	1320.000	61.12	-11.35	49.77	74.00	-24.23	peak
3	1560.000	55.21	-11.01	44.20	74.00	-29.80	peak
4	1684.000	52.59	-10.69	41.90	74.00	-32.10	peak
5	2040.000	56.97	-9.20	47.77	74.00	-26.23	peak
6	2700.000	48.23	-7.42	40.81	74.00	-33.19	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

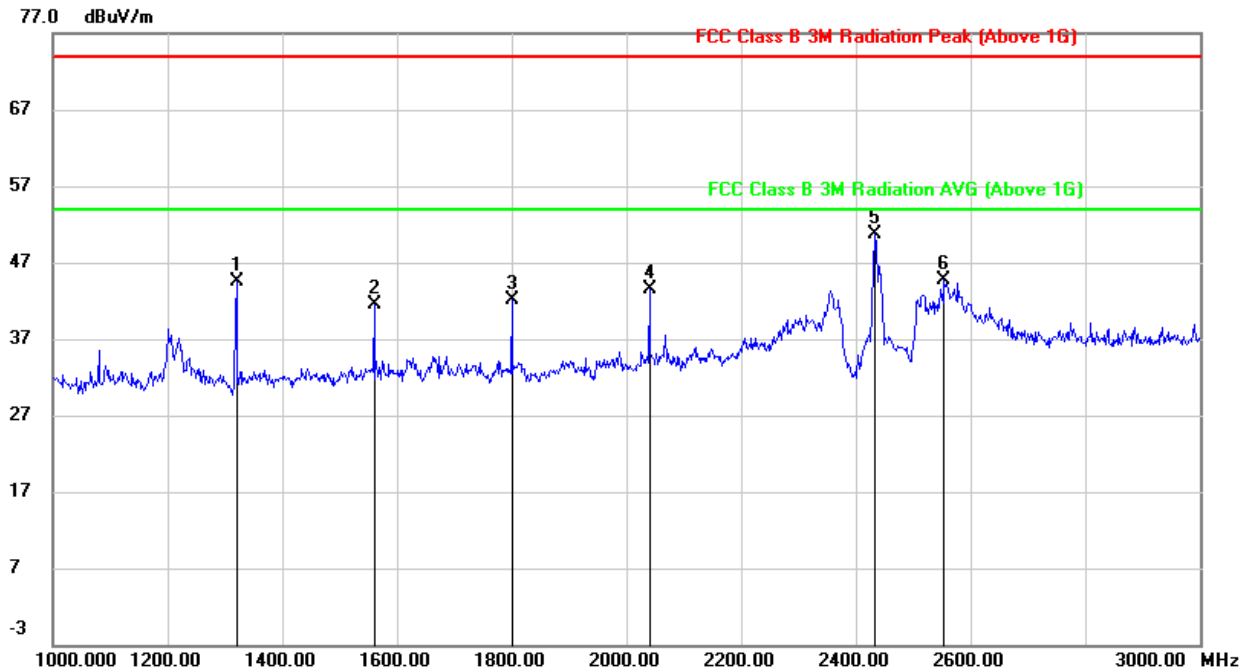**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1320.000	55.94	-11.35	44.59	74.00	-29.41	peak
2	1560.000	52.50	-11.01	41.49	74.00	-32.51	peak
3	1800.000	51.62	-9.42	42.20	74.00	-31.80	peak
4	2040.000	52.75	-9.20	43.55	74.00	-30.45	peak
5	2437.000	57.48	-6.84	50.64	/	/	fundamental
6	2554.000	51.33	-6.60	44.73	74.00	-29.27	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

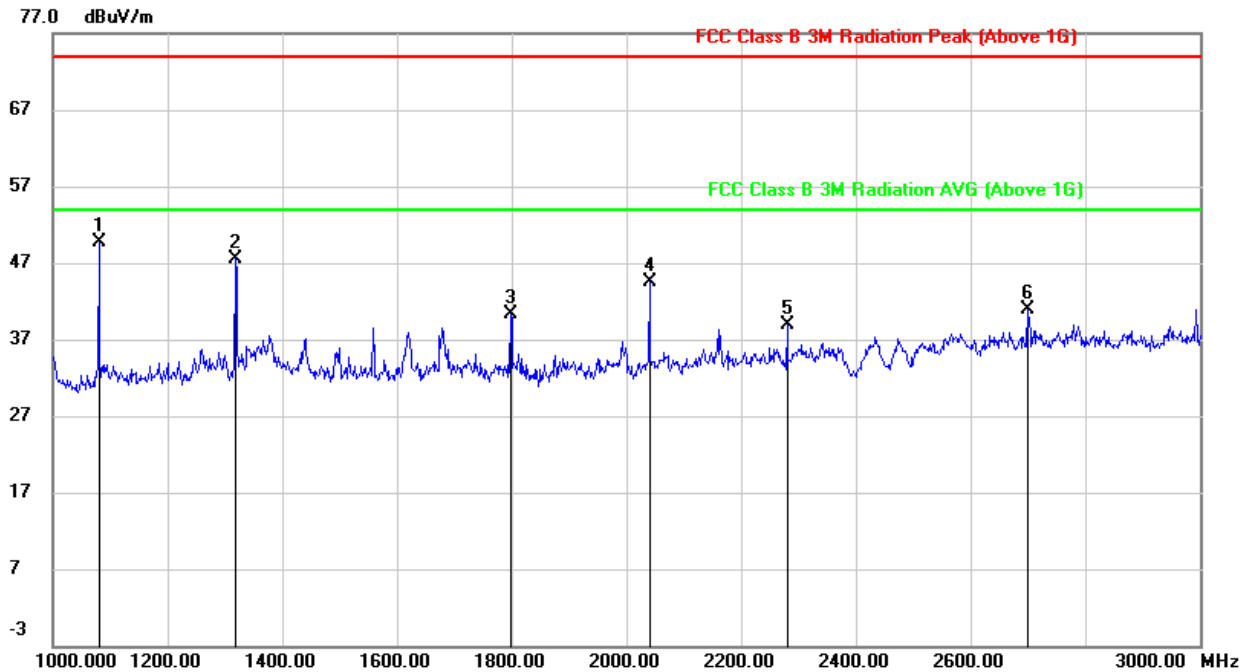

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	62.36	-12.71	49.65	74.00	-24.35	peak
2	1318.000	58.94	-11.34	47.60	74.00	-26.40	peak
3	1798.000	49.83	-9.45	40.38	74.00	-33.62	peak
4	2040.000	53.68	-9.20	44.48	74.00	-29.52	peak
5	2280.000	46.67	-7.69	38.98	74.00	-35.02	peak
6	2700.000	48.29	-7.42	40.87	74.00	-33.13	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

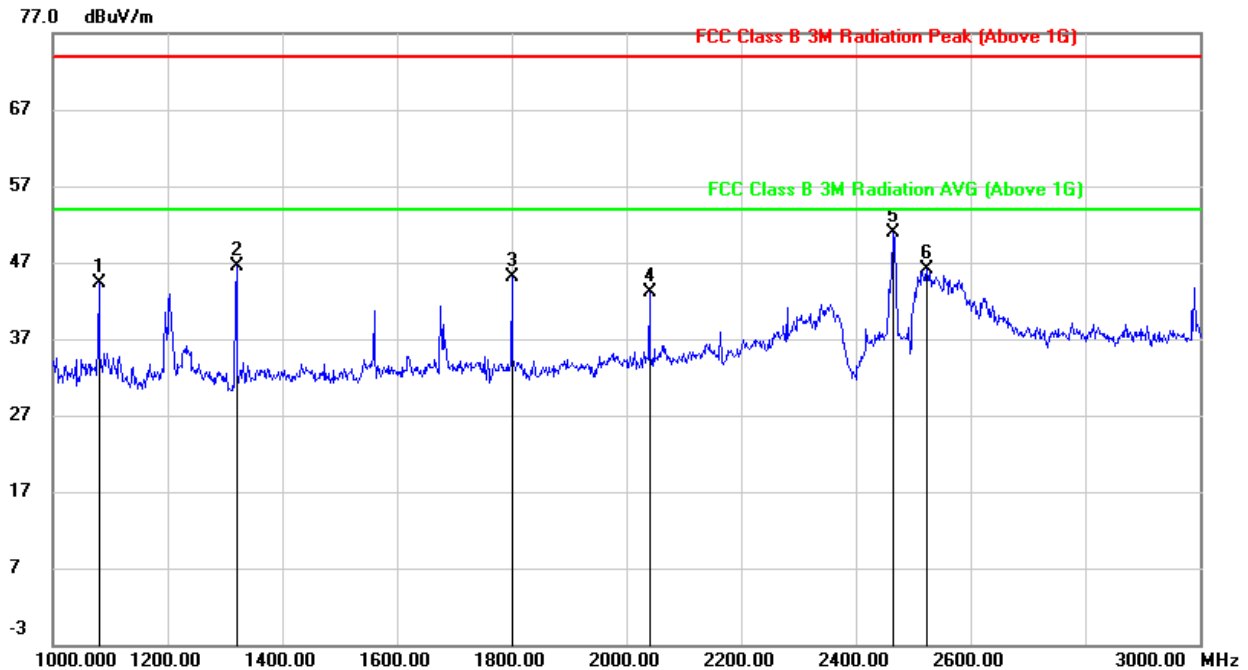**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	56.95	-12.71	44.24	74.00	-29.76	peak
2	1320.000	57.86	-11.35	46.51	74.00	-27.49	peak
3	1800.000	54.50	-9.42	45.08	74.00	-28.92	peak
4	2040.000	52.33	-9.20	43.13	74.00	-30.87	peak
5	2462.000	57.54	-6.60	50.94	/	/	fundamental
6	2524.000	52.46	-6.45	46.01	74.00	-27.99	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

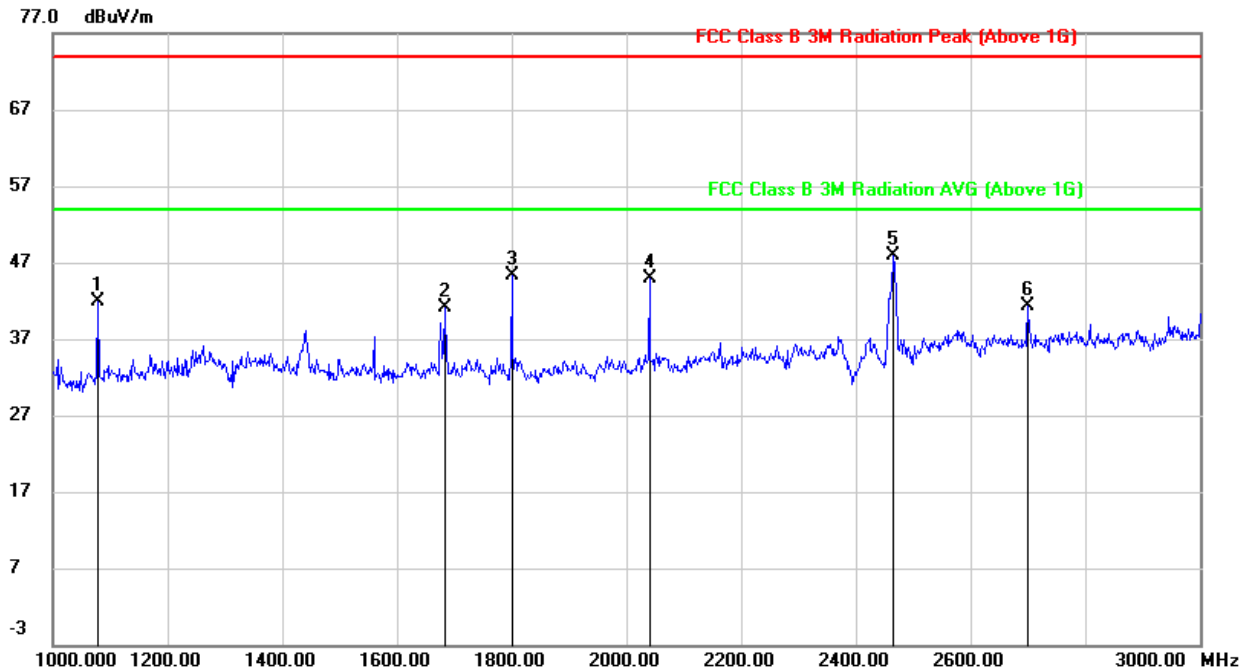**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1078.000	54.58	-12.71	41.87	74.00	-32.13	peak
2	1684.000	51.81	-10.69	41.12	74.00	-32.88	peak
3	1800.000	54.64	-9.42	45.22	74.00	-28.78	peak
4	2040.000	54.14	-9.20	44.94	74.00	-29.06	peak
5	2462.000	54.45	-6.60	47.85	/	/	fundamental
6	2700.000	48.66	-7.42	41.24	74.00	-32.76	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 9.3.2. 802.11g SISO MODE


#### 1TX MODE FOR ANT0 (WORST-CASE CONFIGURATION)

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

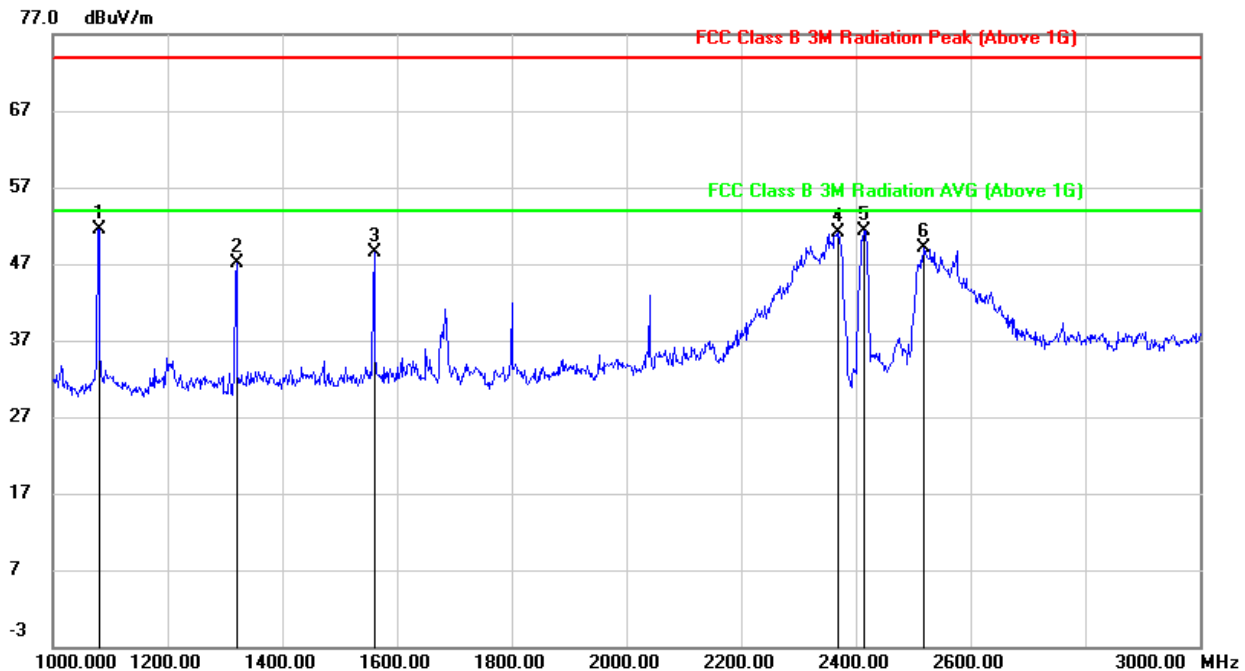

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	64.24	-12.71	51.53	74.00	-22.47	peak
2	1320.000	58.41	-11.35	47.06	74.00	-26.94	peak
3	1560.000	59.43	-11.01	48.42	74.00	-25.58	peak
4	2368.000	58.36	-7.23	51.13	74.00	-22.87	peak
5	2412.000	58.38	-7.00	51.38	/	/	fundamental
6	2518.000	55.52	-6.42	49.10	74.00	-24.90	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

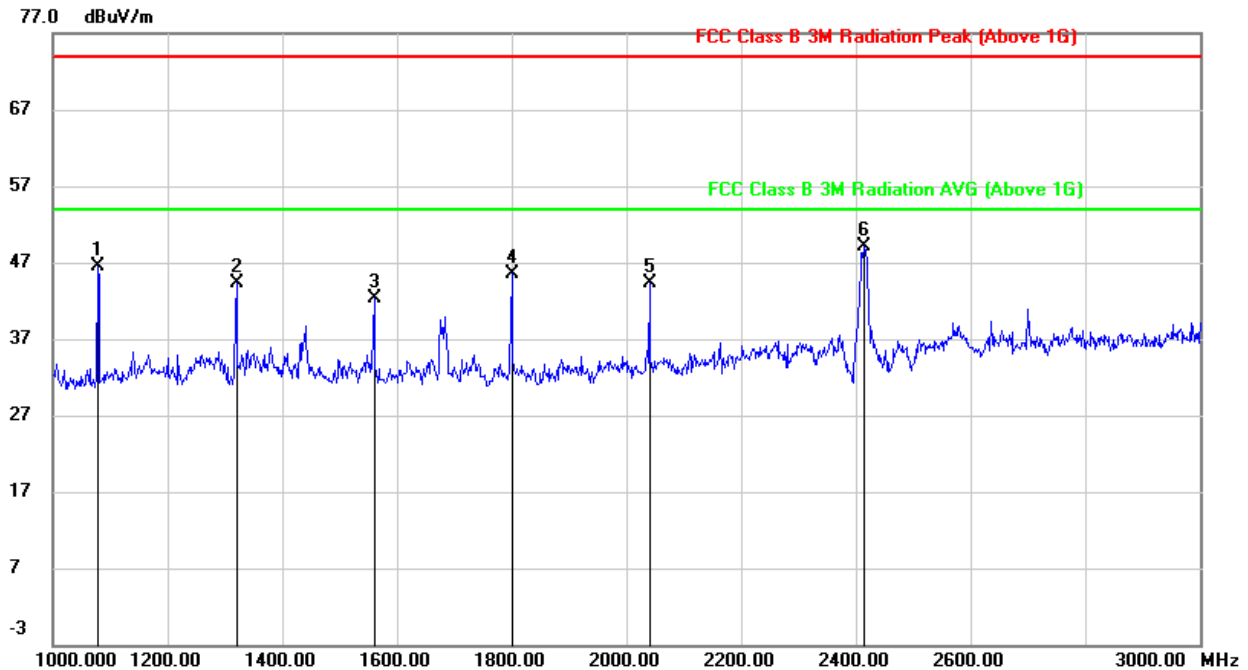**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1078.000	59.18	-12.71	46.47	74.00	-27.53	peak
2	1320.000	55.59	-11.35	44.24	74.00	-29.76	peak
3	1560.000	53.32	-11.01	42.31	74.00	-31.69	peak
4	1800.000	54.88	-9.42	45.46	74.00	-28.54	peak
5	2040.000	53.53	-9.20	44.33	74.00	-29.67	peak
6	2412.000	56.02	-7.00	49.02	/	/	fundamental


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

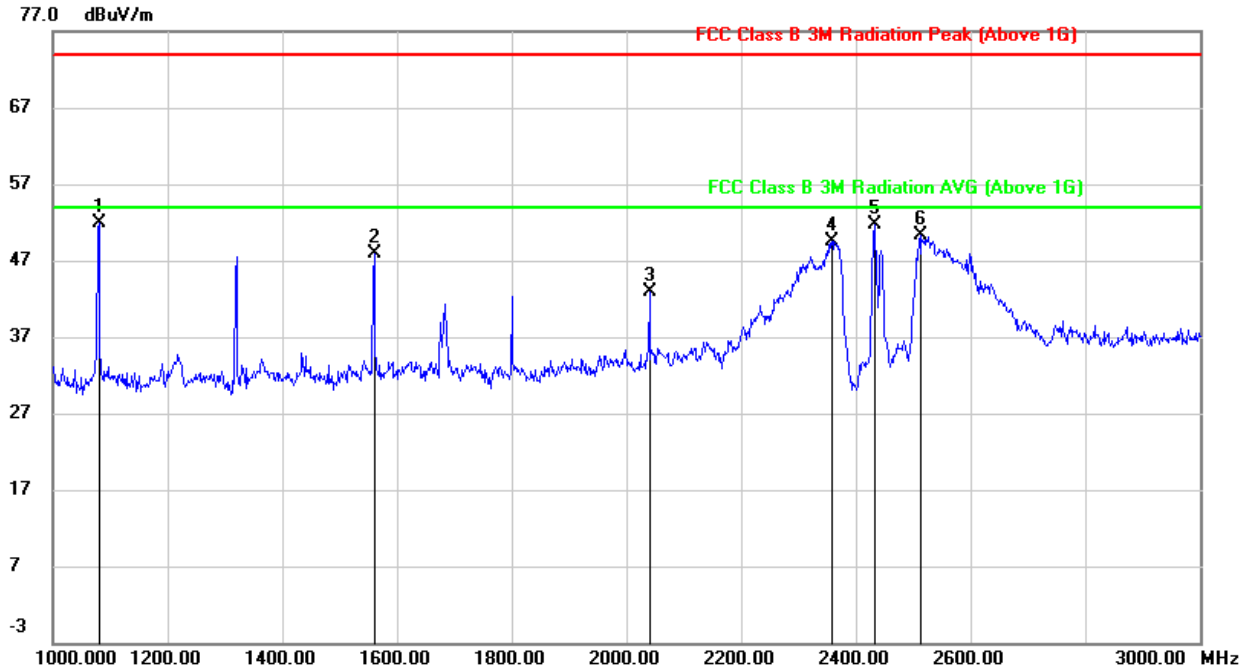**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	64.52	-12.71	51.81	74.00	-22.19	peak
2	1560.000	58.84	-11.01	47.83	74.00	-26.17	peak
3	2040.000	52.12	-9.20	42.92	74.00	-31.08	peak
4	2358.000	56.79	-7.27	49.52	74.00	-24.48	peak
5	2437.000	58.61	-6.85	51.76	/	/	fundamental
6	2514.000	56.63	-6.40	50.23	74.00	-23.77	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

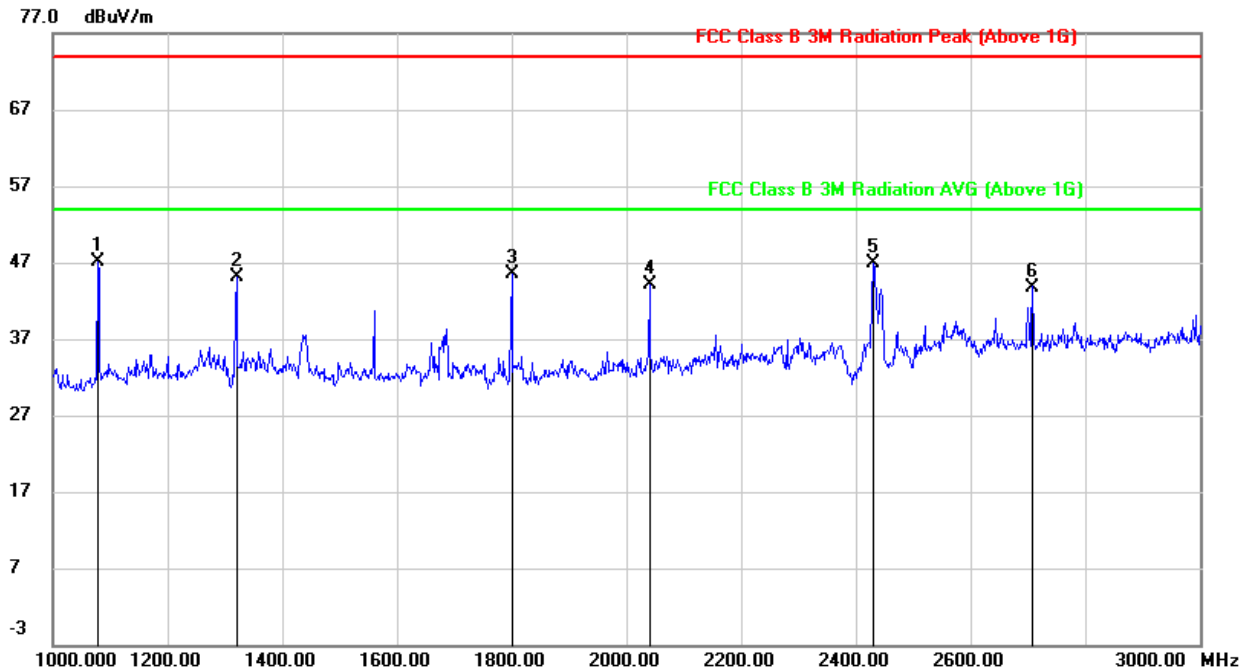**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1078.000	59.81	-12.71	47.10	74.00	-26.90	peak
2	1320.000	56.36	-11.35	45.01	74.00	-28.99	peak
3	1800.000	54.85	-9.42	45.43	74.00	-28.57	peak
4	2040.000	53.35	-9.20	44.15	74.00	-29.85	peak
5	2437.000	53.80	-6.88	46.92	/	/	fundamental
6	2708.000	51.04	-7.24	43.80	74.00	-30.20	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

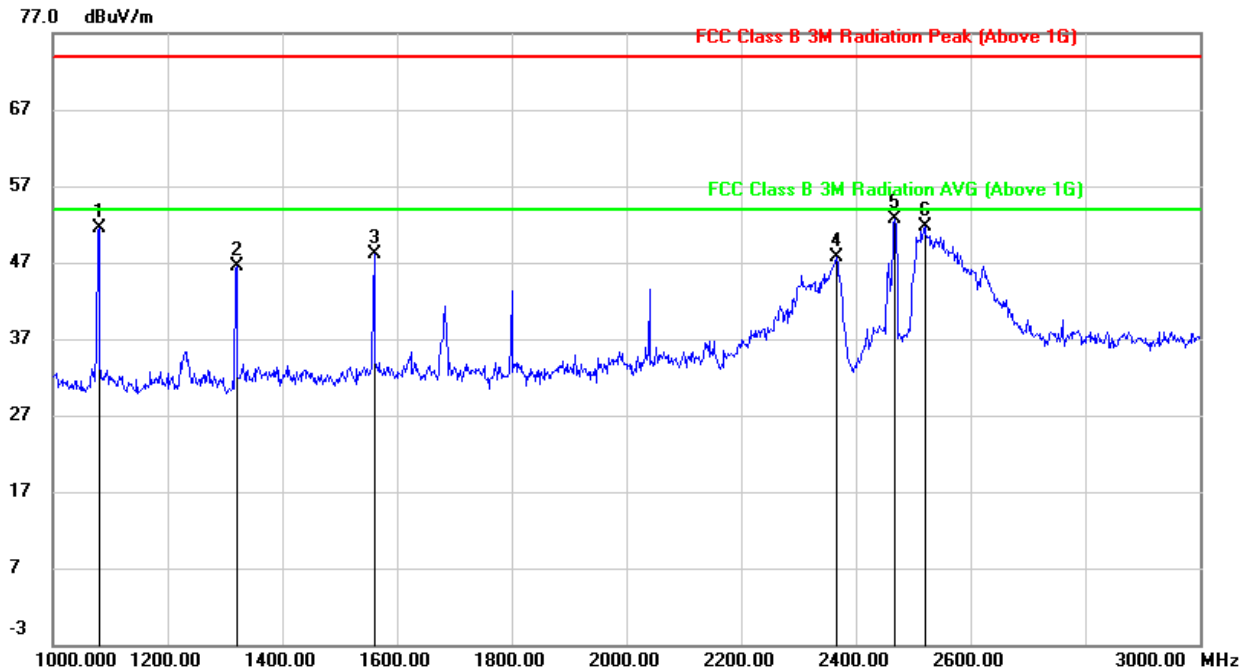**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	64.22	-12.71	51.51	74.00	-22.49	peak
2	1320.000	57.90	-11.35	46.55	74.00	-27.45	peak
3	1560.000	59.06	-11.01	48.05	74.00	-25.95	peak
4	2366.000	54.99	-7.23	47.76	74.00	-26.24	peak
5	2462.000	59.29	-6.59	52.70	/	/	fundamental
6	2520.000	58.20	-6.43	51.77	74.00	-22.23	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

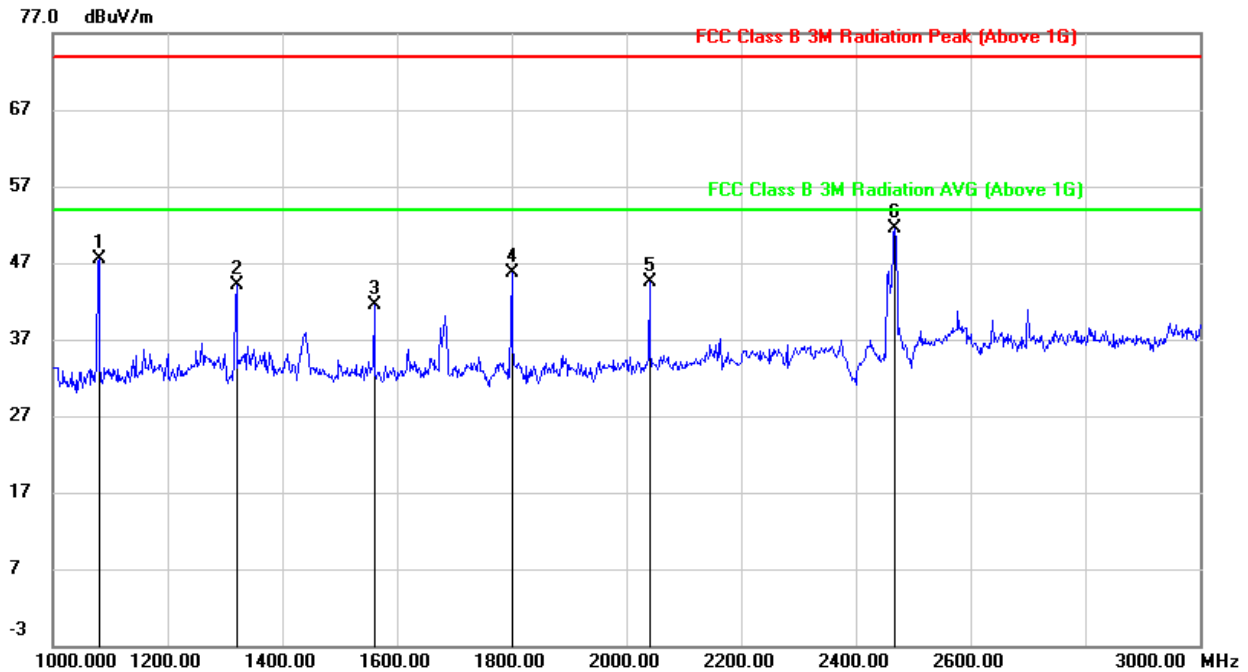

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	60.27	-12.71	47.56	74.00	-26.44	peak
2	1320.000	55.46	-11.35	44.11	74.00	-29.89	peak
3	1560.000	52.60	-11.01	41.59	74.00	-32.41	peak
4	1800.000	55.19	-9.42	45.77	74.00	-28.23	peak
5	2040.000	53.61	-9.20	44.41	74.00	-29.59	peak
6	2462.000	58.00	-6.59	51.41	/	/	fundamental

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 9.3.3. 802.11n HT20 MIMO MODE


#### 2TX MODE (WORST-CASE CONFIGURATION)

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

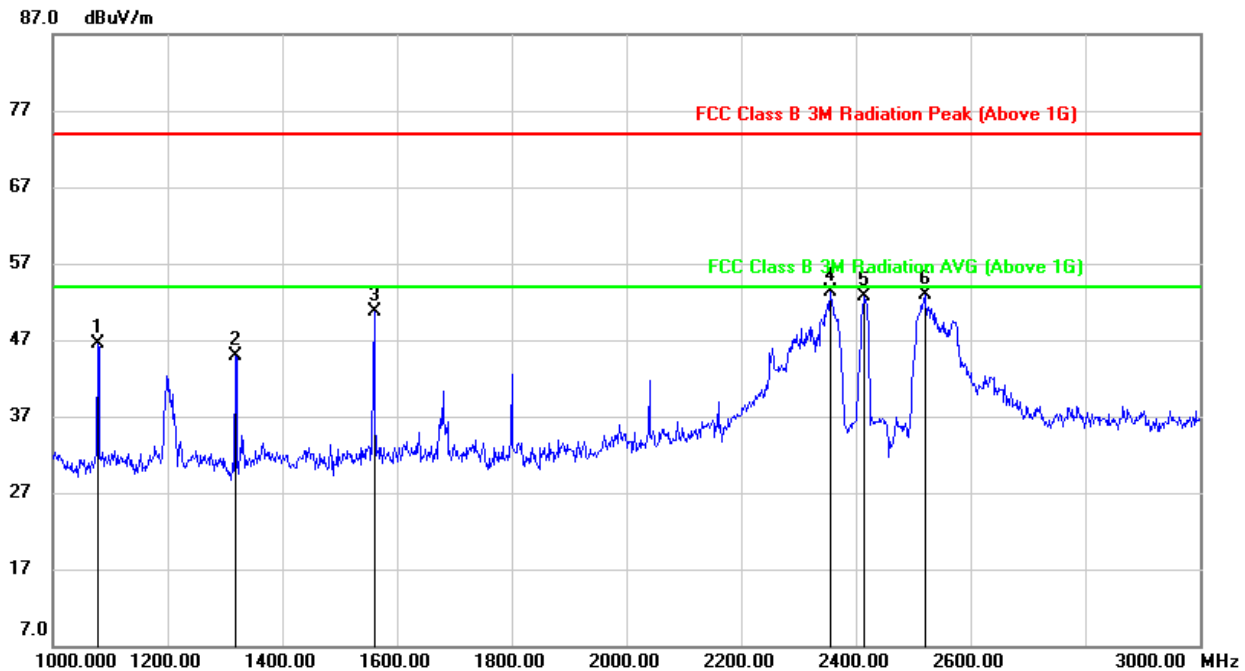

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1078.000	59.27	-12.71	46.56	74.00	-27.44	peak
2	1318.000	56.31	-11.34	44.97	74.00	-29.03	peak
3	1560.000	61.74	-11.01	50.73	74.00	-23.27	peak
4	2356.000	60.59	-7.28	53.31	74.00	-20.69	peak
5	2412.000	59.66	-7.00	52.66	/	/	fundamental
6	2520.000	59.35	-6.43	52.92	74.00	-21.08	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

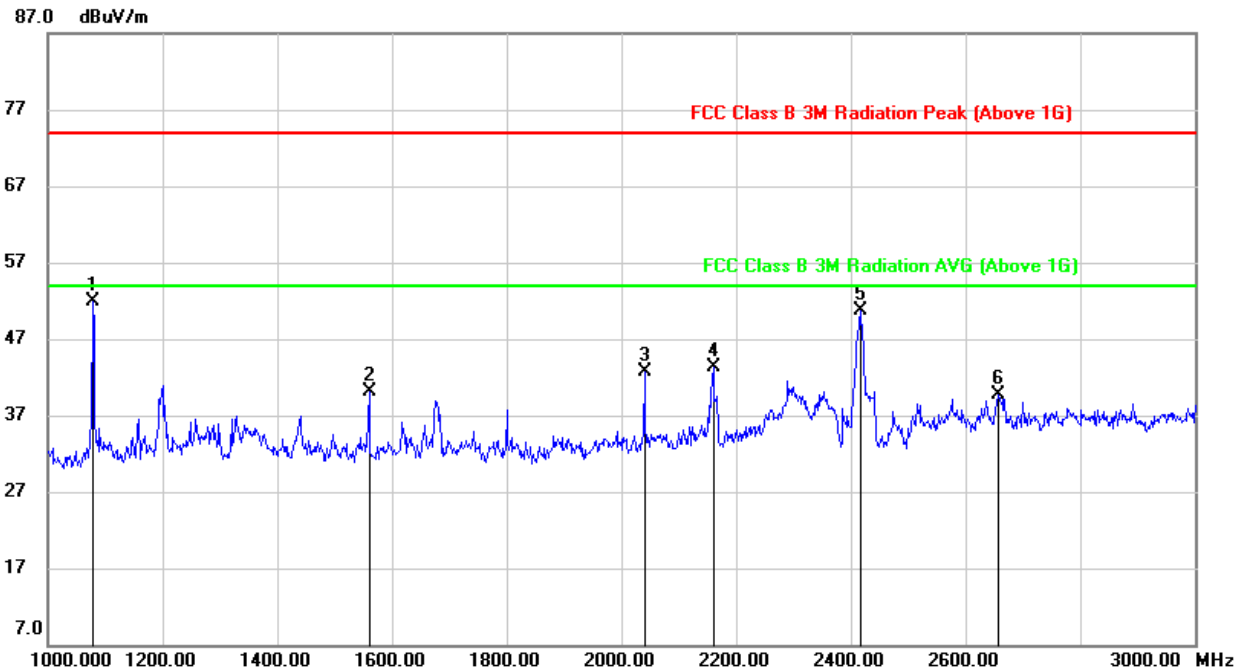**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1078.000	64.58	-12.71	51.87	74.00	-22.13	peak
2	1560.000	51.14	-11.01	40.13	74.00	-33.87	peak
3	2040.000	51.85	-9.20	42.65	74.00	-31.35	peak
4	2160.000	51.67	-8.39	43.28	74.00	-30.72	peak
5	2412.000	57.70	-6.99	50.71	/	/	fundamental
6	2658.000	46.84	-7.16	39.68	74.00	-34.32	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

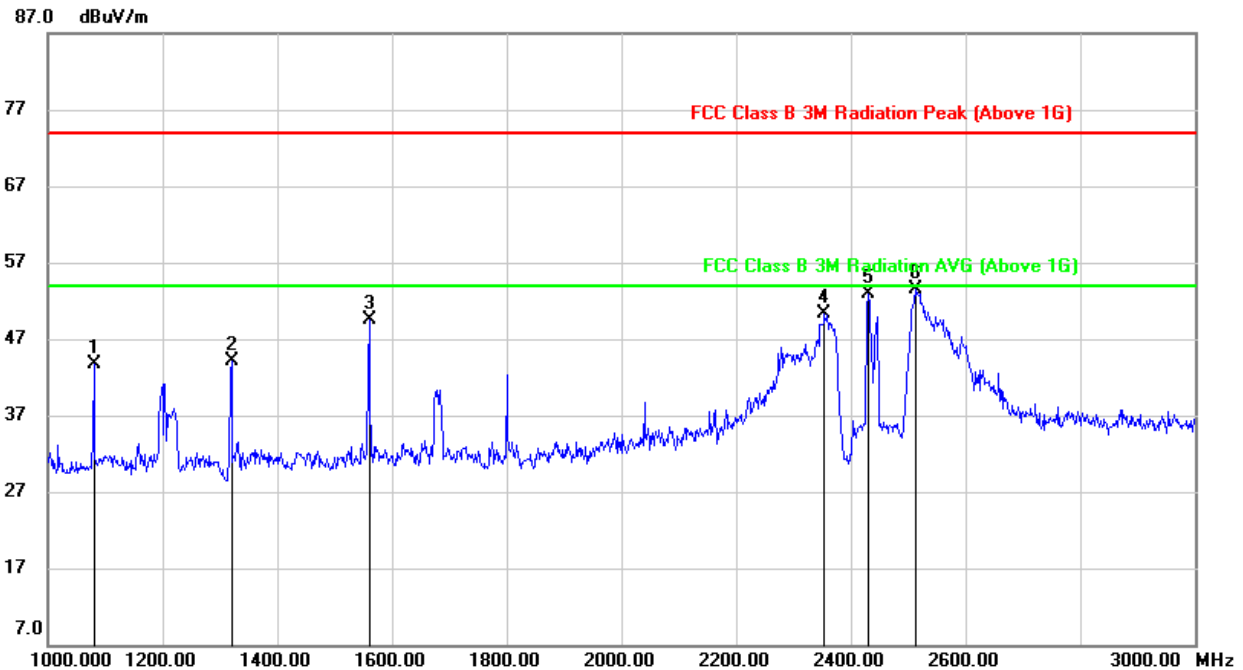**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	56.40	-12.71	43.69	74.00	-30.31	peak
2	1320.000	55.55	-11.35	44.20	74.00	-29.80	peak
3	1560.000	60.53	-11.01	49.52	74.00	-24.48	peak
4	2354.000	57.58	-7.28	50.30	74.00	-23.70	peak
5	2437.000	59.70	-6.88	52.82	/	/	fundamental
6	2512.000	59.85	-6.40	53.45	74.00	-20.55	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

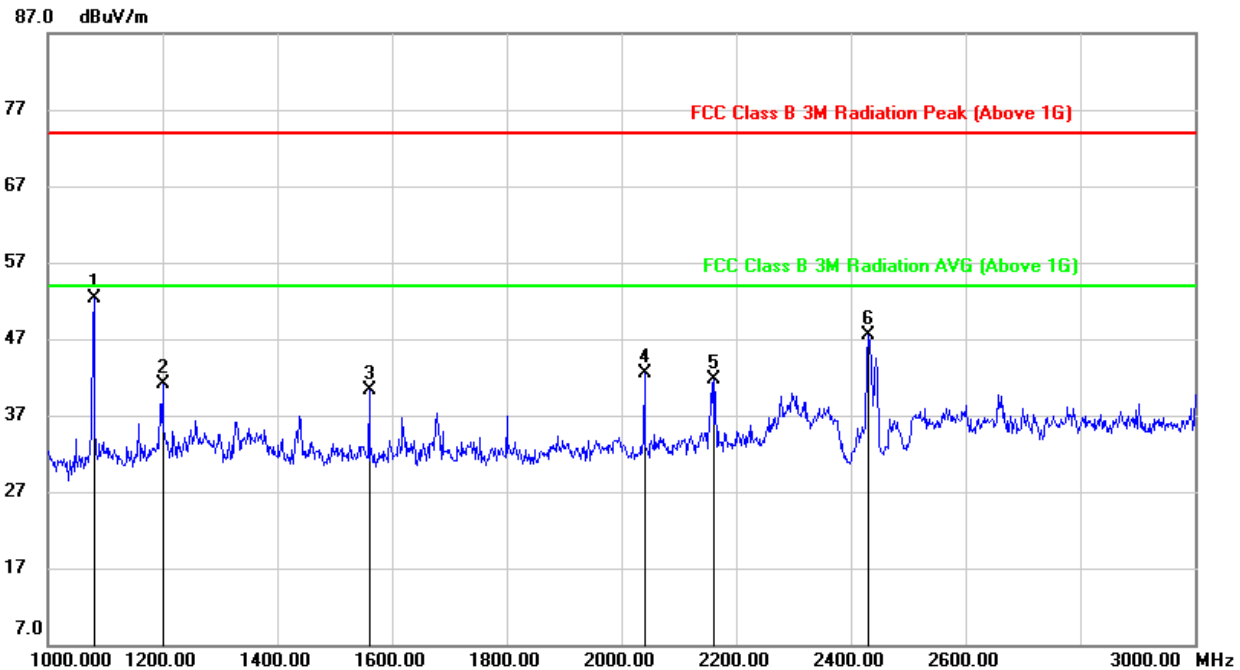**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	65.09	-12.71	52.38	74.00	-21.62	peak
2	1200.000	53.63	-12.44	41.19	74.00	-32.81	peak
3	1560.000	51.27	-11.01	40.26	74.00	-33.74	peak
4	2040.000	51.61	-9.20	42.41	74.00	-31.59	peak
5	2162.000	50.07	-8.40	41.67	74.00	-32.33	peak
6	2437.000	54.47	-6.88	47.59	/	/	fundamental


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

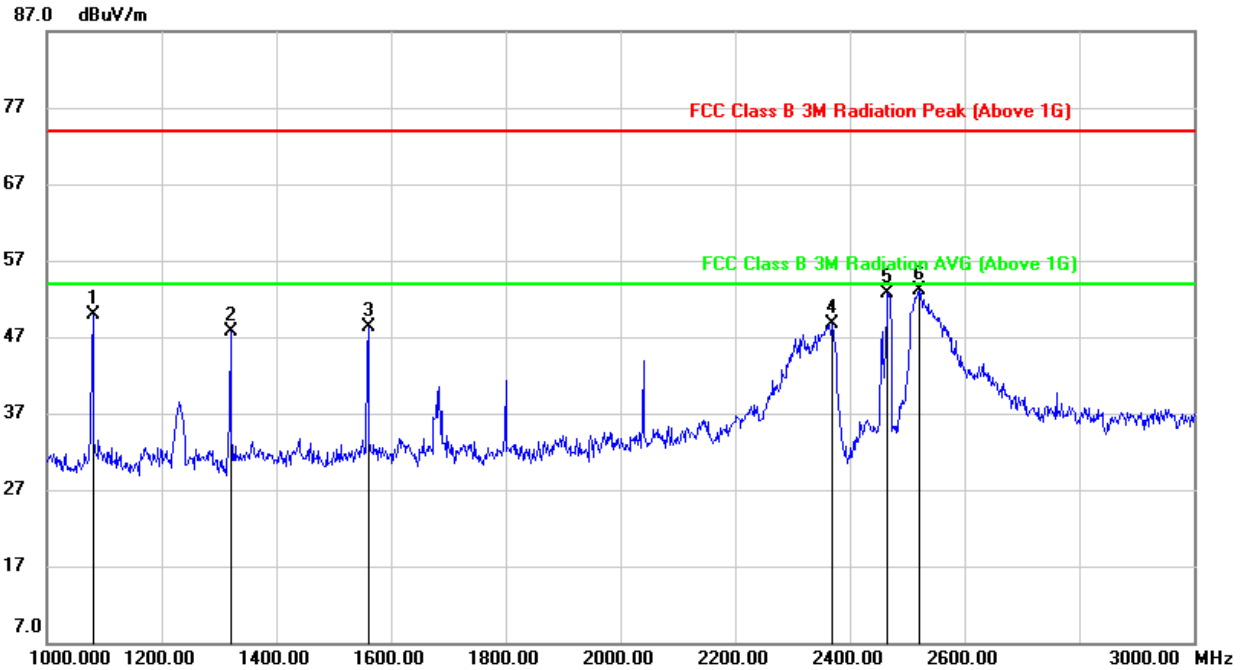**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	62.52	-12.71	49.81	74.00	-24.19	peak
2	1320.000	59.04	-11.35	47.69	74.00	-26.31	peak
3	1560.000	59.31	-11.01	48.30	74.00	-25.70	peak
4	2370.000	55.94	-7.22	48.72	74.00	-25.28	peak
5	2462.000	59.25	-6.60	52.65	/	/	fundamental
6	2520.000	59.60	-6.43	53.17	74.00	-20.83	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

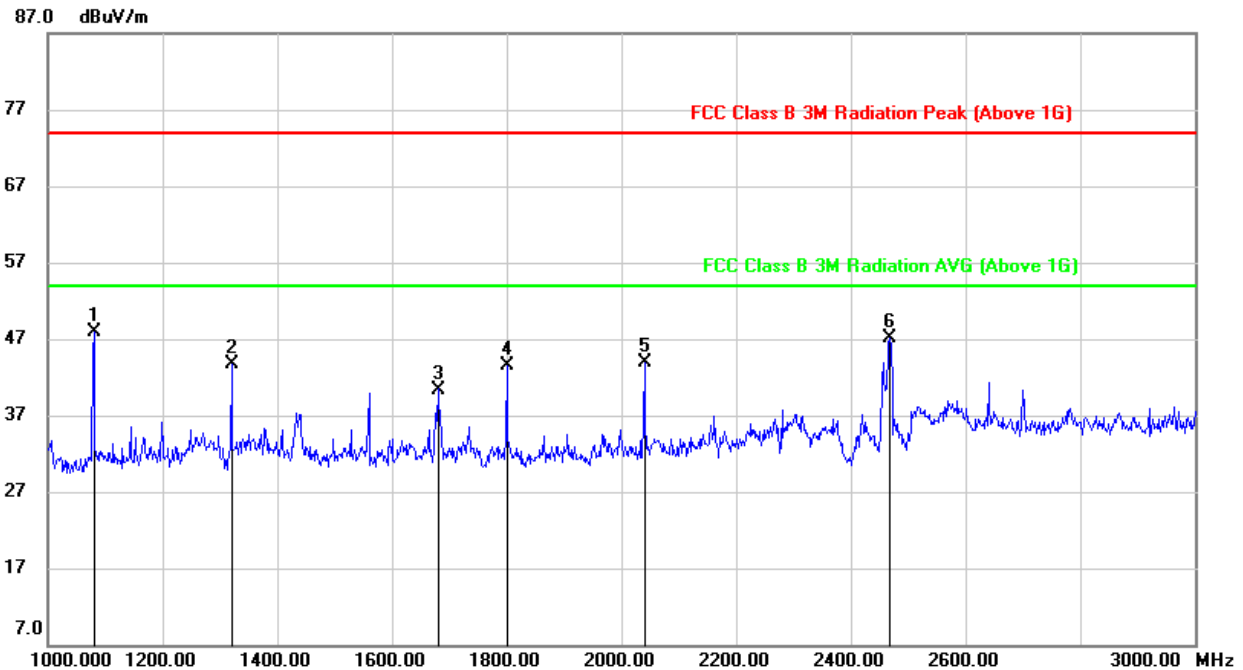**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	60.56	-12.71	47.85	74.00	-26.15	peak
2	1320.000	55.02	-11.35	43.67	74.00	-30.33	peak
3	1680.000	51.10	-10.70	40.40	74.00	-33.60	peak
4	1800.000	52.95	-9.42	43.53	74.00	-30.47	peak
5	2040.000	53.08	-9.20	43.88	74.00	-30.12	peak
6	2462.000	53.76	-6.59	47.17	/	/	fundamental

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.


5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 9.3.4. 802.11n HT40 MIMO MODE

#### 2TX MODE (WORST-CASE CONFIGURATION)

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

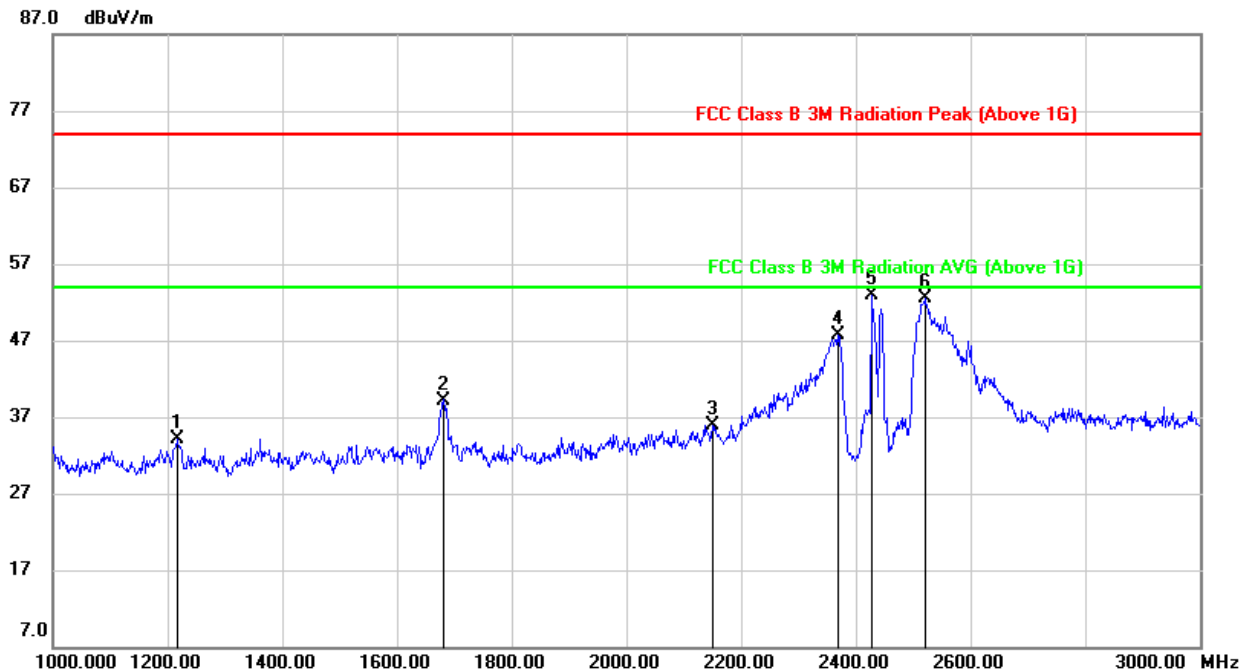

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1216.000	46.33	-12.24	34.09	74.00	-39.91	peak
2	1682.000	49.90	-10.70	39.20	74.00	-34.80	peak
3	2150.000	44.26	-8.38	35.88	74.00	-38.12	peak
4	2368.000	54.94	-7.23	47.71	74.00	-26.29	peak
5	2422.000	59.78	-6.89	52.89	/	/	fundamental
6	2520.000	58.88	-6.43	52.45	74.00	-21.55	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

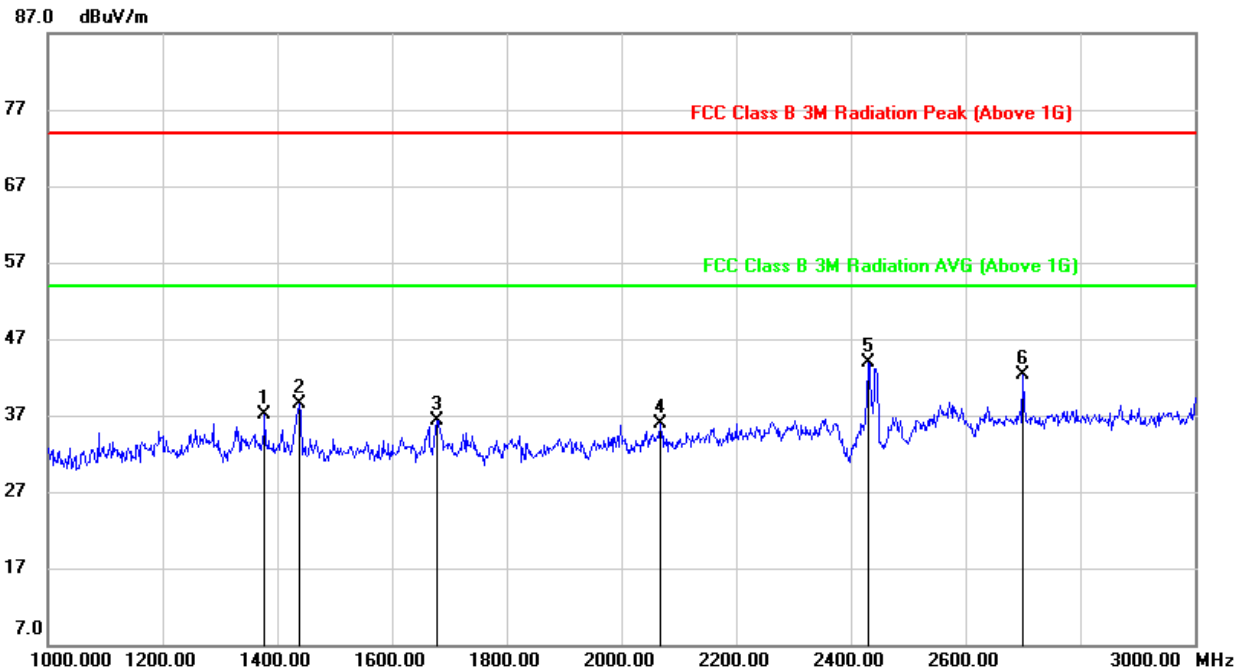

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1378.000	48.83	-11.77	37.06	74.00	-36.94	peak
2	1438.000	50.26	-11.79	38.47	74.00	-35.53	peak
3	1678.000	47.06	-10.69	36.37	74.00	-37.63	peak
4	2068.000	44.77	-8.79	35.98	74.00	-38.02	peak
5	2422.000	50.80	-6.88	43.92	/	/	fundamental
6	2700.000	49.77	-7.42	42.35	74.00	-31.65	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

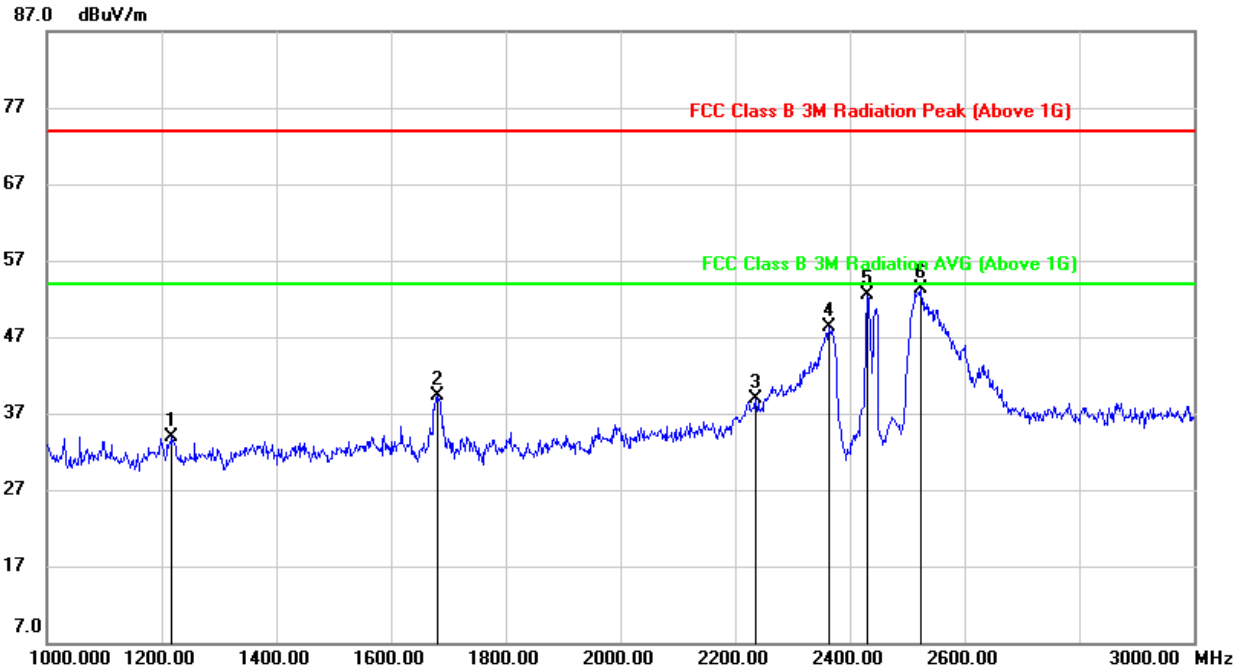**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1218.000	46.05	-12.22	33.83	74.00	-40.17	peak
2	1680.000	50.02	-10.70	39.32	74.00	-34.68	peak
3	2236.000	47.05	-8.11	38.94	74.00	-35.06	peak
4	2364.000	55.49	-7.24	48.25	74.00	-25.75	peak
5	2437.000	59.35	-6.88	52.47	/	/	fundamental
6	2524.000	59.76	-6.45	53.31	74.00	-20.69	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

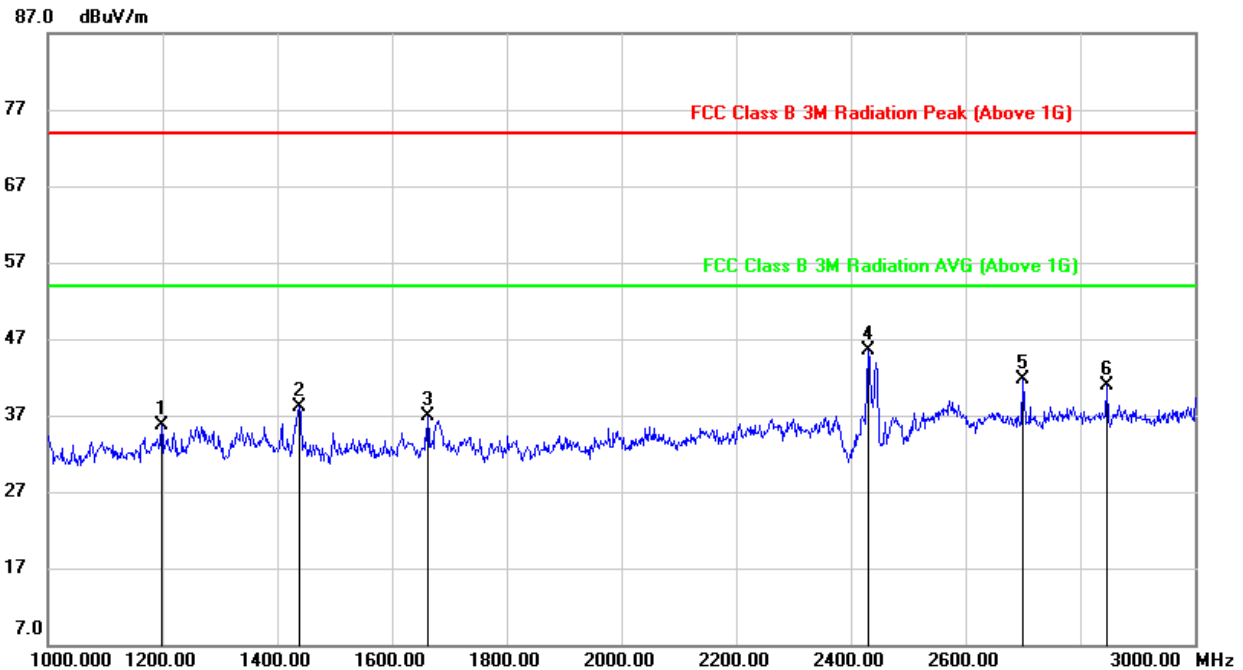**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1198.000	48.22	-12.44	35.78	74.00	-38.22	peak
2	1438.000	49.95	-11.79	38.16	74.00	-35.84	peak
3	1662.000	47.59	-10.67	36.92	74.00	-37.08	peak
4	2437.000	52.46	-6.88	45.58	/	/	fundamental
5	2700.000	49.21	-7.42	41.79	74.00	-32.21	peak
6	2846.000	46.15	-5.16	40.99	74.00	-33.01	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

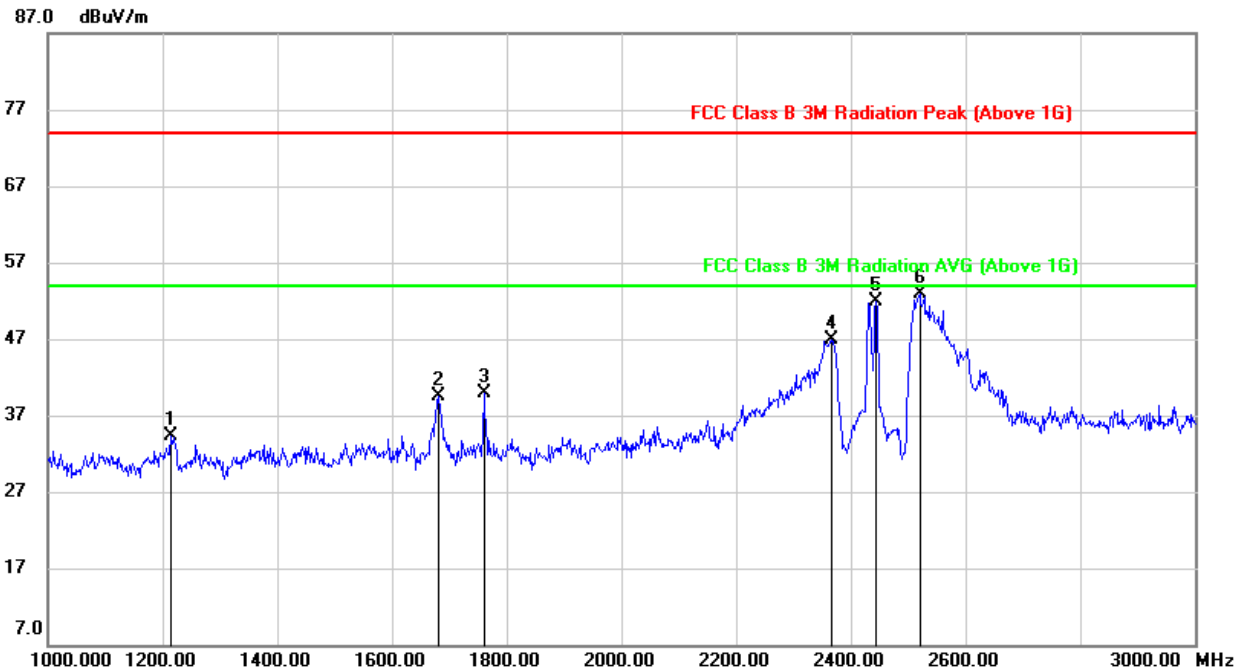**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1214.000	46.49	-12.26	34.23	74.00	-39.77	peak
2	1680.000	50.28	-10.70	39.58	74.00	-34.42	peak
3	1760.000	49.88	-9.94	39.94	74.00	-34.06	peak
4	2366.000	54.10	-7.23	46.87	74.00	-27.13	peak
5	2452.000	58.61	-6.77	51.84	/	/	fundamental
6	2520.000	59.35	-6.43	52.92	74.00	-21.08	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

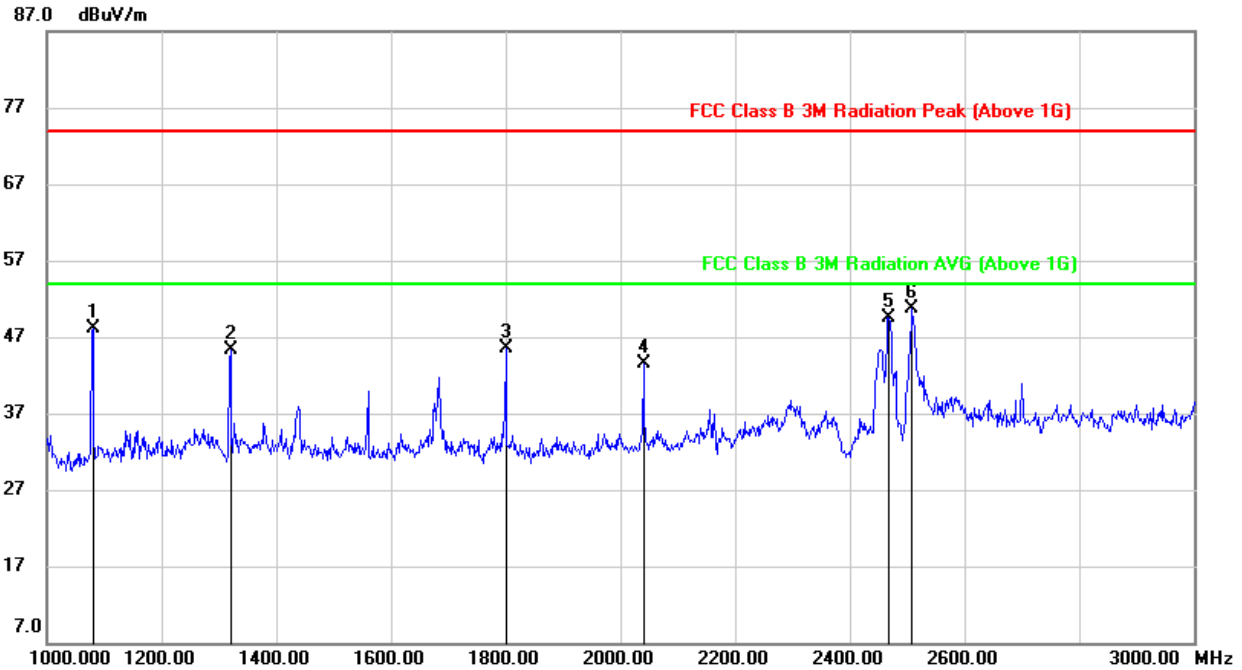**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1080.000	60.84	-12.71	48.13	74.00	-25.87	peak
2	1320.000	56.64	-11.35	45.29	74.00	-28.71	peak
3	1800.000	54.95	-9.42	45.53	74.00	-28.47	peak
4	2040.000	52.70	-9.20	43.50	74.00	-30.50	peak
5	2452.000	56.16	-6.59	49.57	/	/	fundamental
6	2508.000	57.13	-6.37	50.76	74.00	-23.24	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BPF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




## 9.4. SPURIOUS EMISSIONS (18~26GHz)

### 9.4.1. 802.11n HT20 MIMO MODE

#### 2TX MODE (WORST-CASE CONFIGURATION)

#### SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

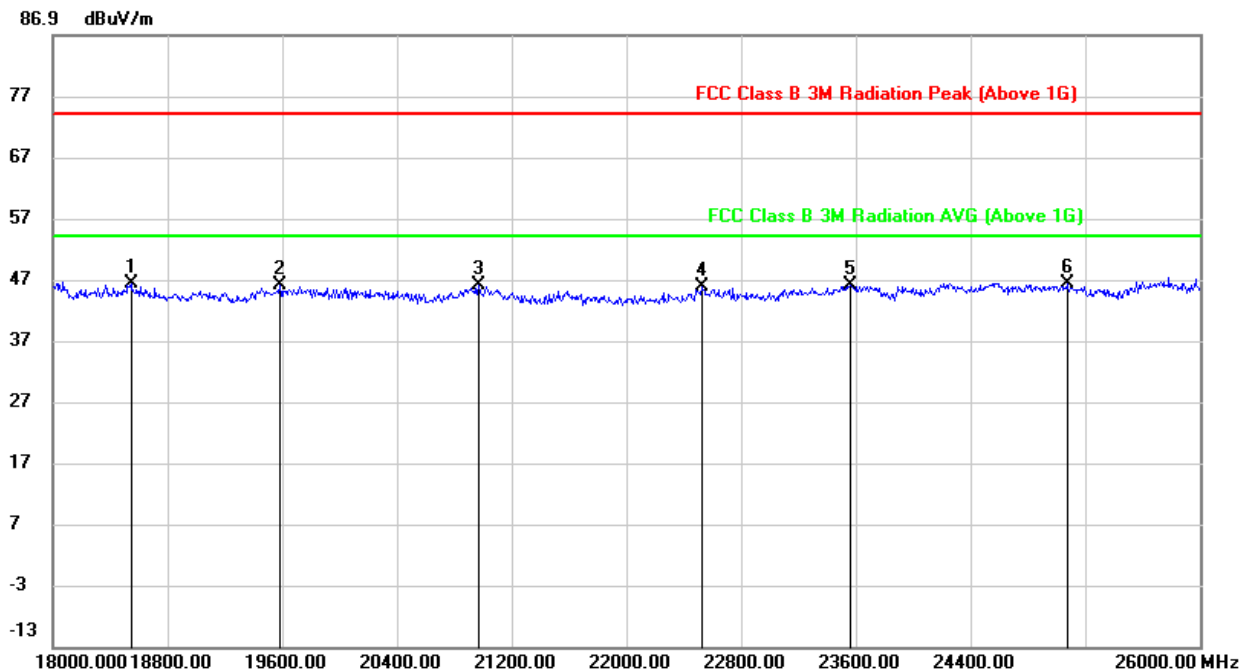


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	18544.000	50.76	-4.46	46.30	74.00	-27.70	peak
2	19584.000	50.67	-4.64	46.03	74.00	-27.97	peak
3	20968.000	51.33	-5.26	46.07	74.00	-27.93	peak
4	22528.000	51.66	-5.79	45.87	74.00	-28.13	peak
5	23560.000	50.71	-4.72	45.99	74.00	-28.01	peak
6	25072.000	47.48	-1.11	46.37	74.00	-27.63	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.



**SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

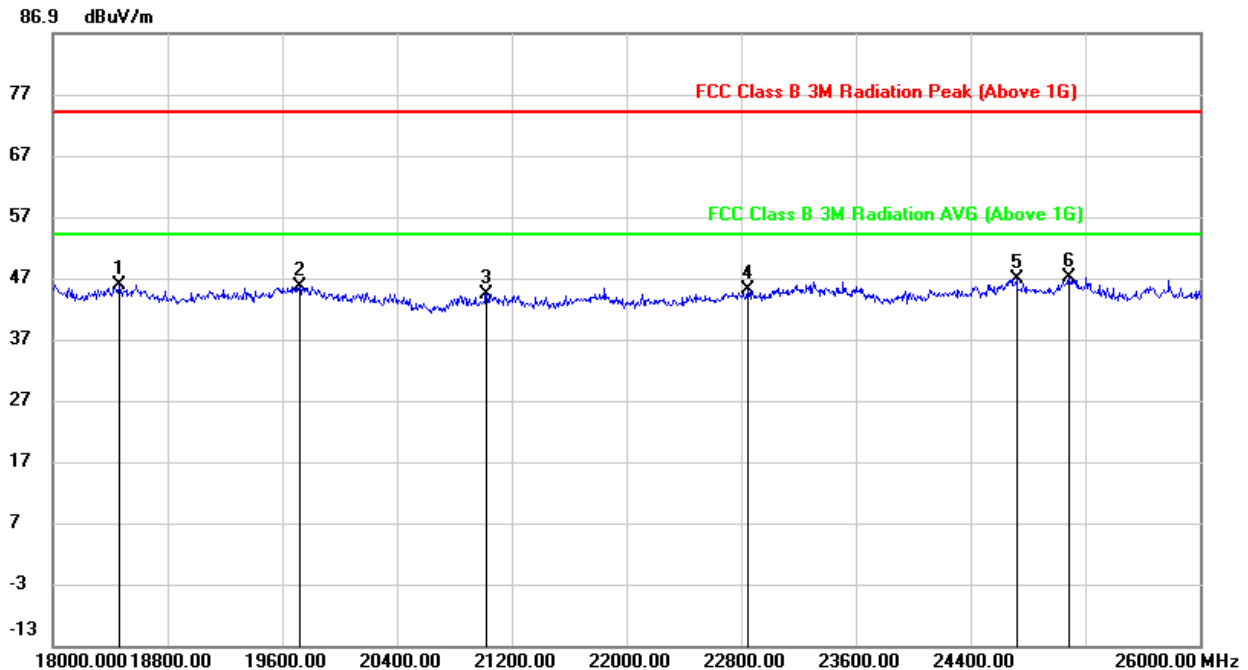

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	18464.000	50.20	-4.39	45.81	74.00	-28.19	peak
2	19720.000	50.00	-4.39	45.61	74.00	-28.39	peak
3	21024.000	49.64	-5.30	44.34	74.00	-29.66	peak
4	22848.000	50.60	-5.69	44.91	74.00	-29.09	peak
5	24720.000	48.87	-2.02	46.85	74.00	-27.15	peak
6	25088.000	48.13	-1.12	47.01	74.00	-26.99	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

Note: All test mode has been tested, only the worst data record in the report




## 9.5. SPURIOUS EMISSIONS (0.03 ~ 1 GHz)

### 9.5.1. 802.11n HT20 MIMO MODE

#### 2TX MODE (WORST-CASE CONFIGURATION)


#### SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

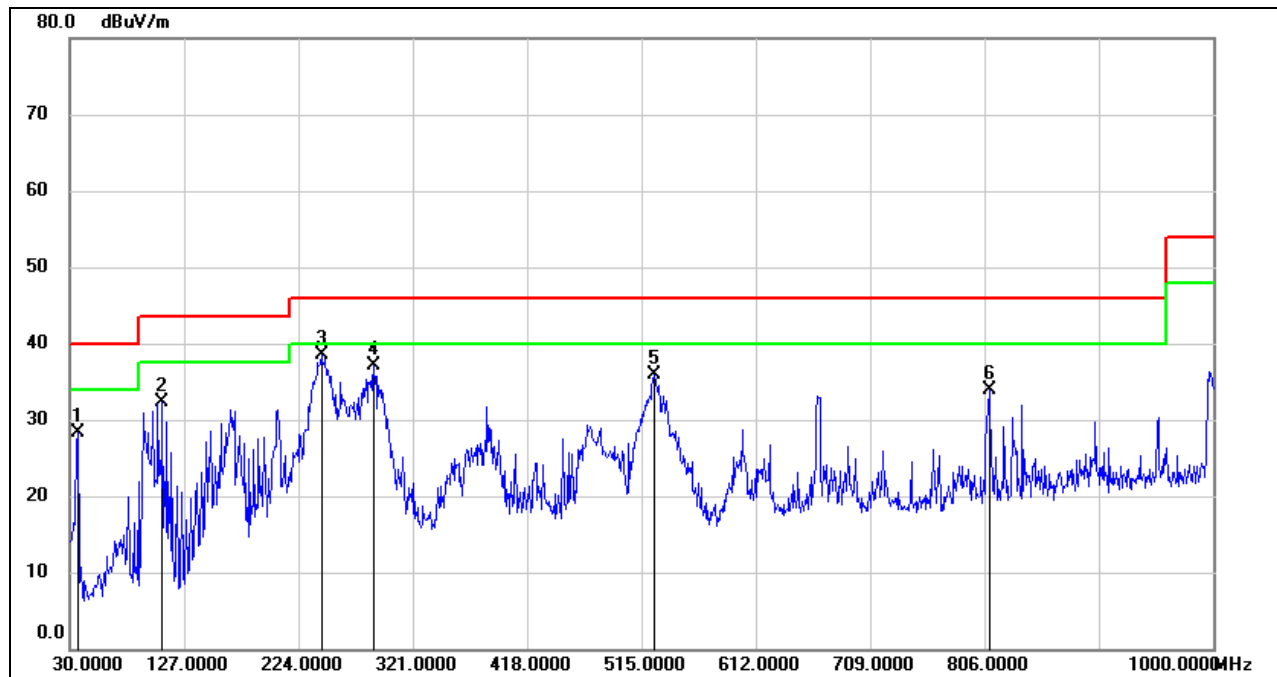

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	36.7900	45.96	-17.71	28.25	40.00	-11.75	QP
2	108.5700	53.87	-21.53	32.34	43.50	-11.16	QP
3	243.4000	55.26	-16.66	38.60	46.00	-7.40	QP
4	288.0200	51.51	-14.50	37.01	46.00	-8.99	QP
5	525.6700	45.77	-9.86	35.91	46.00	-10.09	QP
6	809.8800	39.18	-5.27	33.91	46.00	-12.09	QP

Note: 1. Result Level = Read Level + Correct Factor.  
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

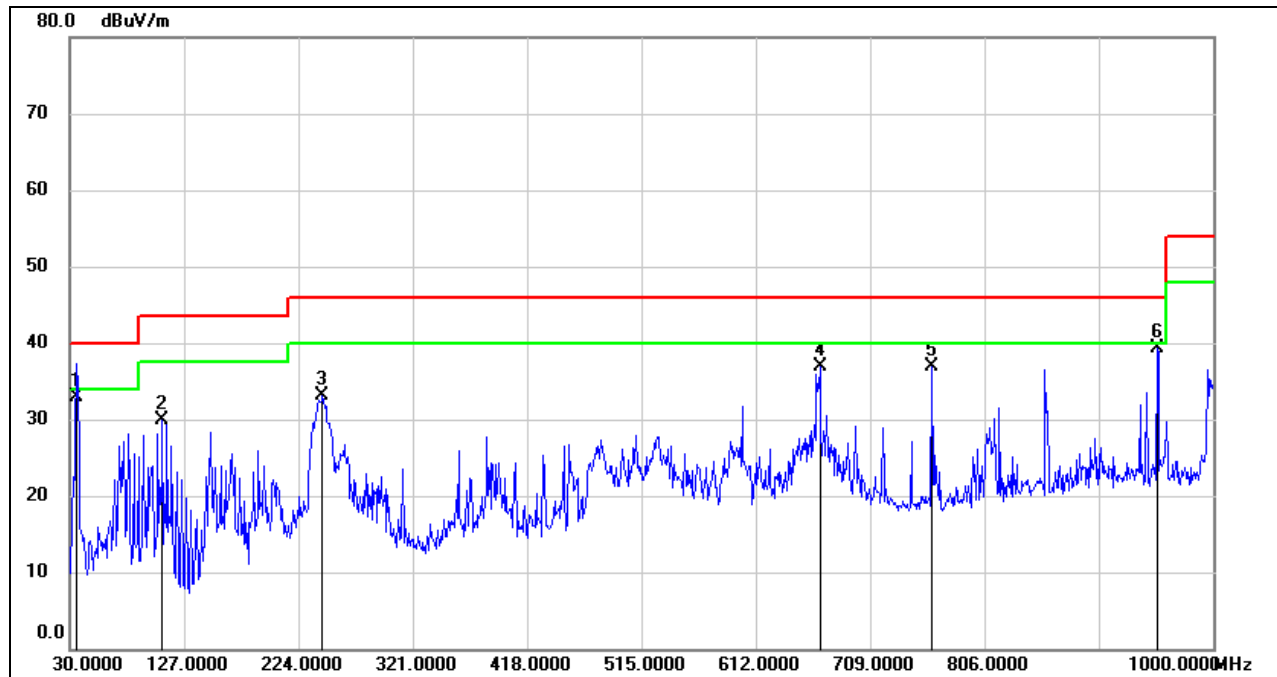

**SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	50.43	-17.62	32.81	40.00	-7.19	QP
2	108.5700	51.36	-21.53	29.83	43.50	-13.67	QP
3	244.3700	49.81	-16.62	33.19	46.00	-12.81	QP
4	666.3200	44.09	-7.23	36.86	46.00	-9.14	QP
5	761.3800	42.64	-5.73	36.91	46.00	-9.09	QP
6	952.4700	42.71	-3.36	39.35	46.00	-6.65	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All test mode has been tested, only the worst data record in the report.


## 9.6. SPURIOUS EMISSIONS BELOW 30M

### 9.6.1. 802. 11n HT20 MIMO MODE

#### 2TX MODE (WORST-CASE CONFIGURATION)

#### SPURIOUS EMISSIONS (MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9kHz~ 150kHz

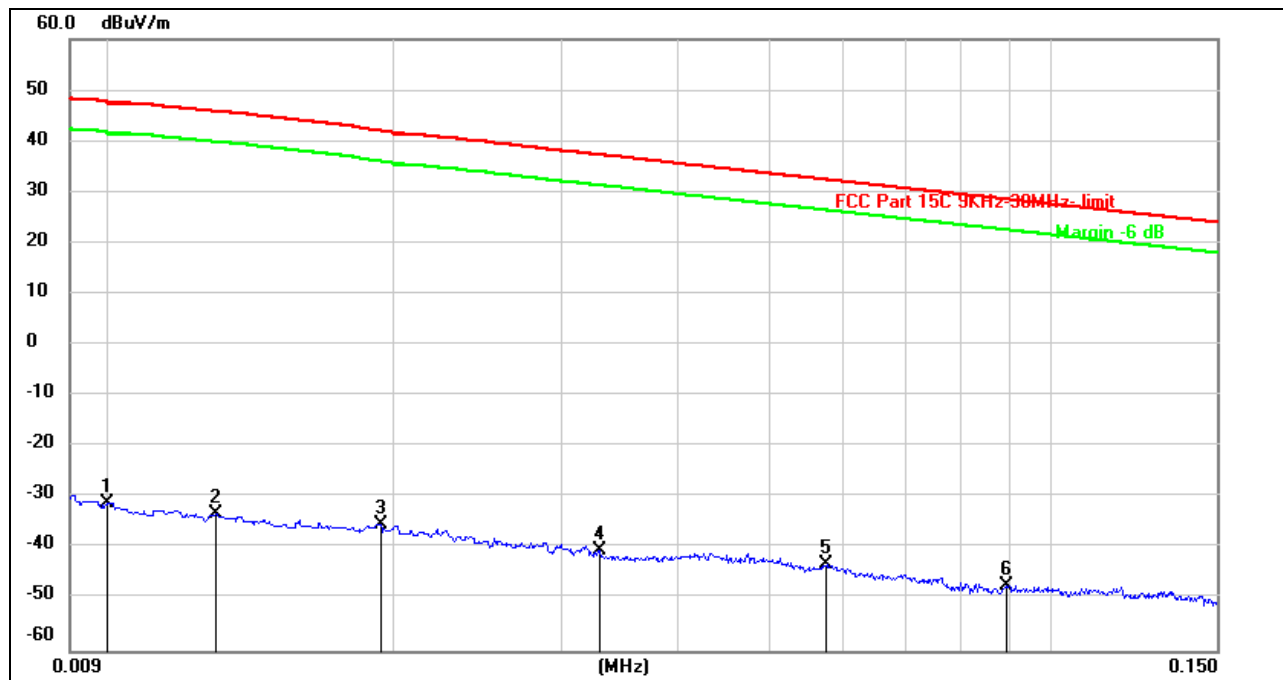

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.0100	70.22	-101.40	-31.18	47.60	-78.78	peak
2	0.0129	68.18	-101.38	-33.20	45.85	-79.05	peak
3	0.0193	66.15	-101.35	-35.20	42.00	-77.20	peak
4	0.0330	60.98	-101.40	-40.42	37.31	-77.73	peak
5	0.0575	58.41	-101.51	-43.10	32.43	-75.53	peak
6	0.0897	54.53	-101.71	-47.18	28.55	-75.73	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.




150kHz ~ 0.49MHz

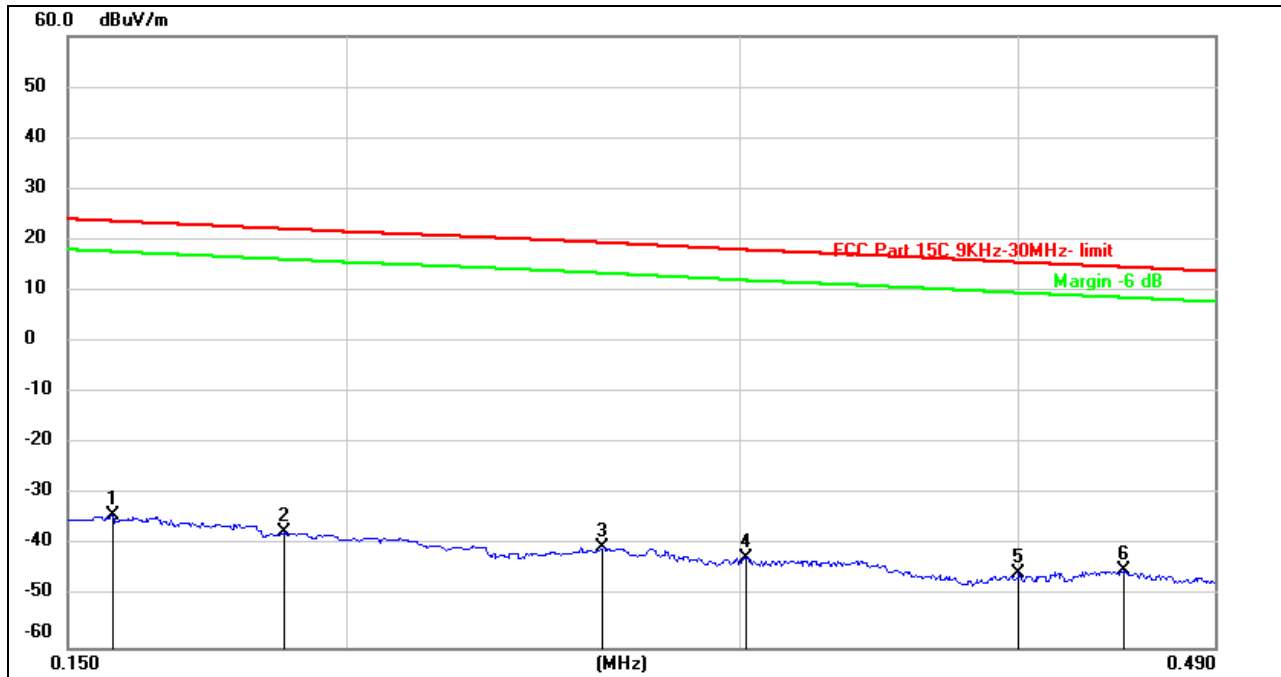

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1570	67.53	-101.65	-34.12	23.69	-57.81	peak
2	0.1877	64.23	-101.70	-37.47	22.14	-59.61	peak
3	0.2605	61.60	-101.81	-40.21	19.45	-59.66	peak
4	0.3019	59.43	-101.85	-42.42	18.01	-60.43	peak
5	0.4001	56.45	-101.96	-45.51	15.56	-61.07	peak
6	0.4460	57.08	-102.01	-44.93	14.66	-59.59	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

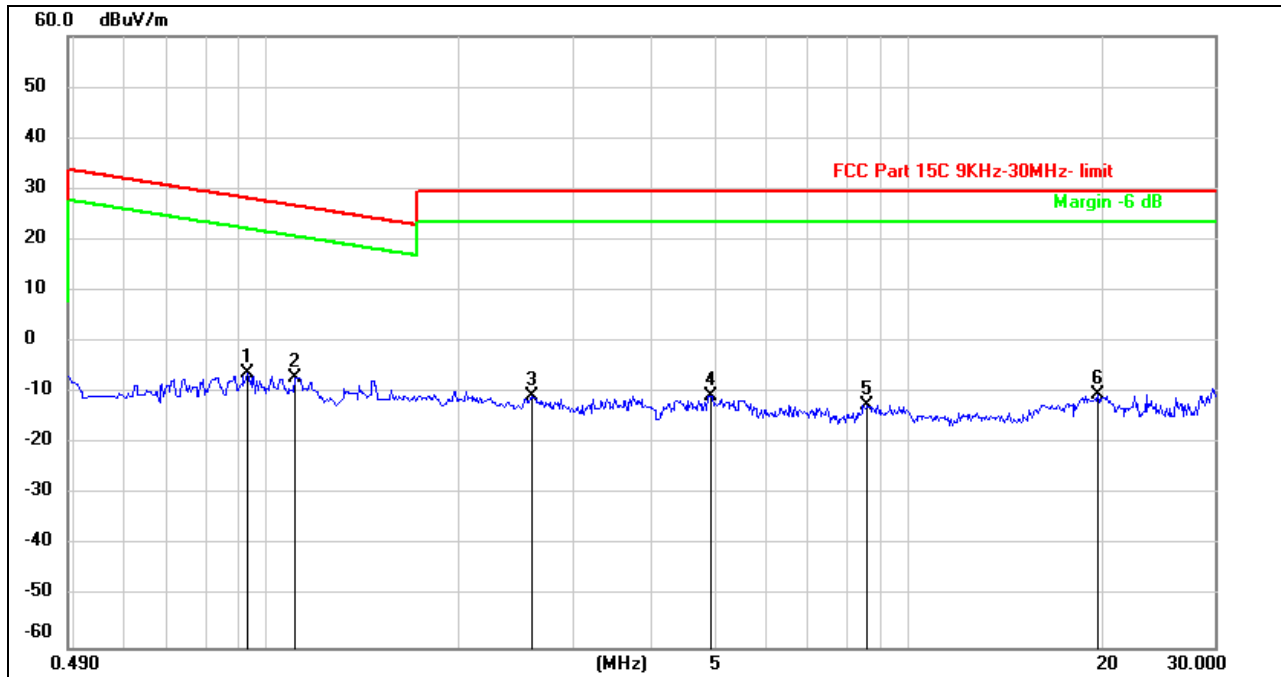0.49MHz ~ 30MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.9344	55.96	-62.23	-6.27	28.20	-34.47	peak
2	1.1091	55.32	-62.22	-6.90	26.71	-33.61	peak
3	2.5935	51.11	-61.68	-10.57	29.54	-40.11	peak
4	4.9165	50.88	-61.48	-10.60	29.54	-40.14	peak
5	8.6348	48.60	-60.99	-12.39	29.54	-41.93	peak
6	19.7895	50.42	-60.84	-10.42	29.54	-39.96	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All test mode has been tested, only the worst data record in the report.


## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

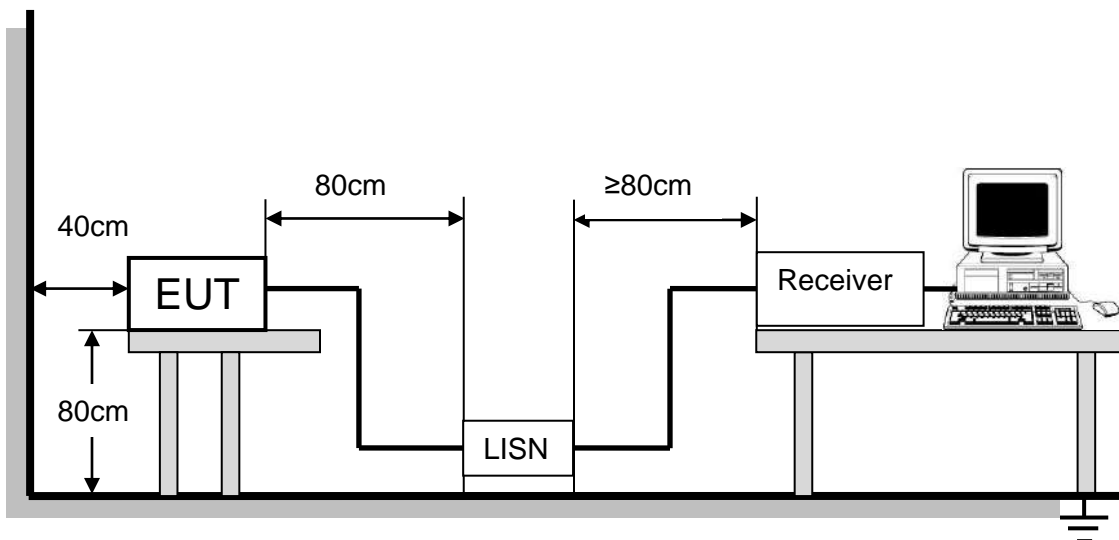


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST ENVIRONMENT

Temperature	24.1°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 5V

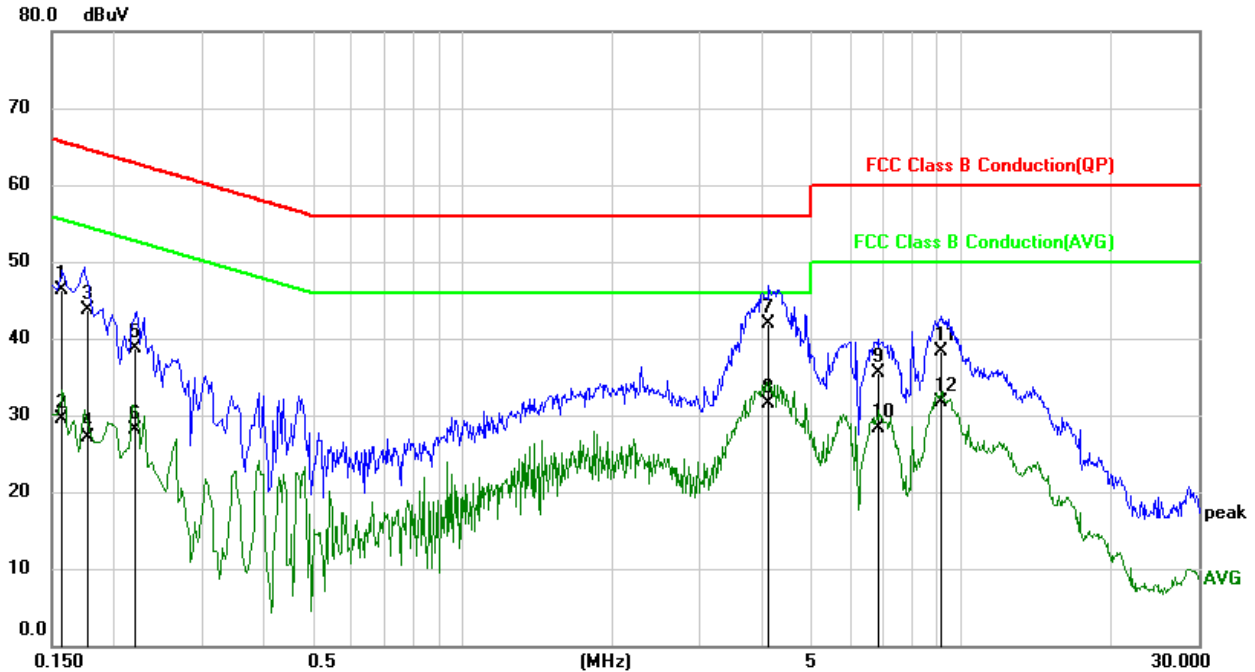**TEST RESULTS****10.1. 802.11n HT20 MIMO MODE****2TX MODE (WORST-CASE CONFIGURATION)****LINE N RESULTS (MID CHANNEL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	36.65	9.60	46.25	65.57	-19.32	QP
2	0.1580	19.97	9.60	29.57	55.57	-26.00	AVG
3	0.1778	34.10	9.60	43.70	64.59	-20.89	QP
4	0.1778	17.51	9.60	27.11	54.59	-27.48	AVG
5	0.2187	29.17	9.60	38.77	62.87	-24.10	QP
6	0.2187	18.54	9.60	28.14	52.87	-24.73	AVG
7	4.1303	32.29	9.66	41.95	56.00	-14.05	QP
8	4.1303	21.93	9.66	31.59	46.00	-14.41	AVG
9	6.8165	25.75	9.71	35.46	60.00	-24.54	QP
10	6.8165	18.59	9.71	28.30	50.00	-21.70	AVG
11	9.1049	28.57	9.75	38.32	60.00	-21.68	QP
12	9.1049	22.03	9.75	31.78	50.00	-18.22	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

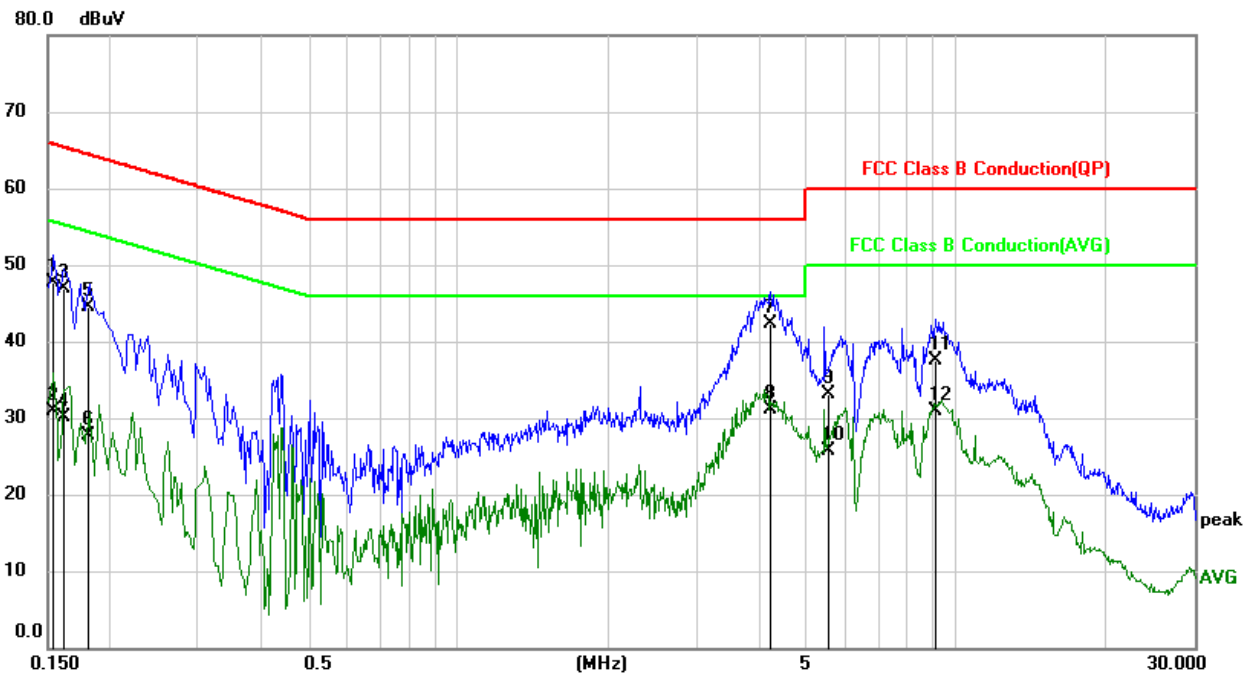**LINE L RESULTS (MID CHANNEL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	38.12	9.61	47.73	65.79	-18.06	QP
2	0.1539	21.22	9.61	30.83	55.79	-24.96	AVG
3	0.1614	37.28	9.61	46.89	65.39	-18.50	QP
4	0.1614	20.56	9.61	30.17	55.39	-25.22	AVG
5	0.1798	34.88	9.61	44.49	64.49	-20.00	QP
6	0.1798	18.02	9.61	27.63	54.49	-26.86	AVG
7	4.2166	32.56	9.66	42.22	56.00	-13.78	QP
8	4.2166	21.42	9.66	31.08	46.00	-14.92	AVG
9	5.5122	23.35	9.69	33.04	60.00	-26.96	QP
10	5.5122	16.02	9.69	25.71	50.00	-24.29	AVG
11	9.1026	27.74	9.73	37.47	60.00	-22.53	QP
12	9.1026	21.20	9.73	30.93	50.00	-19.07	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All test mode has been tested, only the worst data record in the report



## 11. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies

**END OF REPORT**