

FCC Test Report

Report No.: AGC00408220506FE02

FCC ID	:	2A3DR-H5PRO
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	4G Smart Phone
BRAND NAME	:	AGM
MODEL NAME	:	AGM_H5_PRO
APPLICANT	:	AGM Mobile Limited
DATE OF ISSUE	:	Jul. 11, 2022
STANDARD(S)	:	FCC Part 22H & 24E& 27L Rules
REPORT VERSION	:	V1.0







REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 11, 2022	Valid	Initial Release



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	8
2.3 TEST METHODOLOGY	
2.4 DEVICE CAPABILITIES	
2.5 SPECIAL ACCESSORIES	
2.6 EQUIPMENT MODIFICATIONS	
2.7 EMISSION DESIGNATOR	
3. TEST ENVIRONMENT	
3.1 ADDRESS OF THE TEST LABORATORY	
3.2 TEST FACILITY	
3.3 ENVIRONMENTAL CONDITIONS	11
3.4 MEASUREMENT UNCERTAINTY	
3.5 LIST OF TEST EQUIPMENT	12
4. SYSTEM TEST CONFIGURATION	14
4.1 EUT CONFIGURATION	14
4.2 EUT EXERCISE	14
4.3 CONFIGURATION OF EUT SYSTEM	14
4.4 EQUIPMENT USED IN TESTED SYSTEM	
5. SUMMARY OF TEST RESULTS	15
5.1 TEST CONDITION : CONDUCTED TEST	15
5.2 TEST CONDITION : RADIATED TEST	15
6. DESCRIPTION OF TEST MODES	-
7. CONDUCTED OUTPUT POWER	
7.1 PROVISIONS APPLICABLE	
7.2 MEASUREMENT METHOD	
7.3 MEASUREMENT SETUP	
7.4 MEASUREMENT RESULT	19
8. RADIATED OUTPUT POWER	
8.1 PROVISIONS APPLICABLE	22
8.2 MEASUREMENT METHOD	
8.3 MEASUREMENT SETUP	23
8.4 MEASUREMENT RESULT	25
9. PEAK-TO-AVERAGE RATIO	



Report No.: AGC00408220506FE02 Page 4 of 79

9.1 PROVISIONS APPLICABLE	
9.2 MEASUREMENT METHOD	27
9.3 MEASUREMENT SETUP	
9.4 MEASUREMENT RESULT	
10. OCCUPIED BANDWIDTH	
10.1 PROVISIONS APPLICABLE	
10.2 MEASUREMENT METHOD	
10.3 MEASUREMENT SETUP	
10.4 MEASUREMENT RESULT	
11. BAND EDGE EMISSIONS AT ANTENNA TERMINAL	
11.1 MEASUREMENT OVERVIEW	
11.2 MEASUREMENT METHOD	
11.3 MEASUREMENT METHOD	
11.4 MEASUREMENT RESULT	
12. SPURIOUS EMISSIONS AT ANTENNA TERMINAL	
12.1 PROVISIONS APPLICABLE	
12.2 MEASUREMENT METHOD	
12.3 MEASUREMENT SETUP	
12.4 MEASUREMENT RESULT	
13. RADIATED SPURIOUS EMISSION	
13.1. PROVISIONS APPLICABLE	54
13.2. MEASUREMENT PROCEDURE	54
13.3. MEASUREMENT SETUP	
12.4 MEASUREMENT RESULT	
14. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	
14.1 PROVISIONS APPLICABLE	
14.2 MEASUREMENT METHOD	
14.3 MEASUREMENT SETUP	67
13.4 MEASUREMENT RESULT	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	79
APPENDIX B: PHOTOGRAPHS OF EUT	



1. GENERAL INFORMATION

Applicant	licant AGM Mobile Limited		
Address FLAT B5, 1/F MANNING IND. BUILDING,116-118 HOW MING STREE TONG, KOWLOON,HONG KONG,CHINA			
Manufacturer	Shenzhen AIJIEMO Technology Company Limited		
Address	1st Floor 101 and 2nd Floor 201, Building A2, Huafeng Century Technology Park, Nanchang Community, Xixiang, Baoan District, Shenzhen, China.		
Factory	Shenzhen AIJIEMO Technology Company Limited		
Address	1st Floor 101 and 2nd Floor 201, Building A2, Huafeng Century Technology Park, Nanchang Community, Xixiang, Baoan District, Shenzhen, China.		
Product Designation	4G Smart Phone		
Brand Name AGM			
Test Model AGM_H5_PRO			
Date of test	May 12, 2022~Jul. 08, 2022		
Deviation No any deviation from the test method.			
Condition of Test Sample	Normal		

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 22H, 24E and 27L. The test results of this report relate only to the tested sample identified in this report.

Prepared By

Eder Zhan oject Engineer)

(Project Engineer)

Jul. 08, 2022

Reviewed By

Approved By

Calvin Liu (Reviewer)

Jul. 11, 2022

Max Zhang

Max Zhang Authorized Officer

Jul. 11, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

A major technical description of EUT is described as following:

		-		
Product Designation:	4G Smart Phone			
Hardware Version:	PG01_V1.0			
Software Version:	PG0158CZE66.AGM.EEA.HB.S0.HP.20220630.V3.01.test			
Support Networks:	GSM, GPRS, EDGE, V	VCDMA, HSDPA, HSUPA	۱.	
	GPRS 850 PCS1900 (U.S. Bands)			
	GSM 900 DCS 1800 (Non-U.S. Bands)			
Frequency Bands:	UMTS FDD Band II	UMTS FDD Band IV		
	UMTS FDD Band V	(U.S. Bands)		
	UMTS FDD Band I	UMTS FDD Band VIII (N	Ion-U.S. Bands)	
Turpe of Medulation:	GMSK,8PSK Modulatio	on For GSM/GPRS/EDGE	:	
Type of Modulation:	BPSK,QPSK Modulatio	on For WCDMA/HSDPA/H	ISUPA	
	GSM/GPRS/EDGE 850): 824.2MHz-848.8 MHz		
	GSM/GPRS/EDGE 190	00: 1850.2MHz-1909.8 M	Hz	
Frequency Range:	WCDMA Band II: 1852	.4MHz-1907.6 MHz		
	WCDMA Band IV: 1712.4-1752.6 MHz			
	WCDMA Band V: 826.4-846.6 MHz			
	GSM/GPRS 850:	248KGXW		
	EDGE 850:	850: 246KG7W		
	GSM/GPRS 1900:	251KGXW		
Emission Designator:	EDGE 1900:	250KG7W		
	WCDMA Band II:	4M19F9W		
	WCDMA Band IV:	4M18F9W		
	WCDMA Band V:	4M19F9W		
Antenna Type:	PIFA Antenna		1	
Antenna gain:	GSM850:0.5dBi	PCS1900:0.8dBi		
	WCDMA850:0.8dBi	WCDMA1700:0.8dBi	WCDMA1900:0.8dBi	
Power Supply:	DC 3.85V by Built-in Li-ion Battery			
Battery parameter:	DC 3.85V 7000mAh			
Dual Card:	GSM /WCDMA Card Slot			
Extreme Vol. Limits:	DC3.27V to 4.40V (Normal: DC 3.85V)			
Extreme Temp. Tolerance	-30 °C to +55 °C			
Operating Temp	0 °C to +40 °C			



GSM/WCDMA SLOT 1:

	Maximum ERP/EIRP	Max. Average	
	(dBm)	Burst Power (dBm)	
GSM 850	29.85	32.73	
PCS 1900	27.15	29.73	
UMTS BAND V	22.12	23.46	
UMTS BAND II	21.85	23.04	
UMTS BAND IV	21.54	22.61	

GSM/WCDMA SLOT 2:

	Maximum ERP/EIRP	Max. Average	
	(dBm)	Burst Power (dBm)	
GSM 850	29.08	31.42	
PCS 1900	27.88	29.11	
UMTS BAND V	22.45	23.18	
UMTS BAND II	21.66	22.92	
UMTS BAND IV	21.23	22.38	



2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2A3DR-H5PRO**, filing to comply with the FCC Part 22H&24E&27L requirements.

2.3 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title		
1	47 CFR FCC Part 2	Frequency allocations and radio treaty matters, general rules and regulations.		
2	47 CFR FCC Part 22	Public Mobile Services.		
3	47 CFR FCC Part 24	Personal Communications Services.		
4	47 CFR FCC Part 27	Miscellaneous Wireless Communications Services.		
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters		
5	ANSI C03.20-2015	Used in Licensed Radio Services		
6	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and		
0	ANSI/11A-003-E-2010	Performance Standards		
7	KDB 971168	D01 v03r01 Measurement Guidance For Certification Of Licensed Digital		
/		Transmitters.		

2.4 DEVICE CAPABILITIES

850/1900 GSM/GPRS/EGPRS,850/1700/1900 WCDMA/HSPA, Multi-Band LTE,802.11 b/g/n for WLAN,802.11 a/n/ac for UNII,Bluetooth (1X,EDR,LE),GPS, NFC.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation

(landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.5 SPECIAL ACCESSORIES

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 EMISSION DESIGNATOR



Report No.: AGC00408220506FE02 Page 9 of 79

GSM Emission Designator

Emission Designator = 249KGXW GSM BW = 249 kHz G = Phase Modulation X = Cases not otherwise covered W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W WCDMA BW = 4.17 MHz F = Frequency Modulation 9 = Composite Digital Info W = Combination (Audio/Data)

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz W = Amplitude/Angle Modulated 7 = Quantized/Digital Info D = Data transmission; telemetry; telecommand

EDGE Emission Designator

Emission Designator = 249KG7W GSM BW = 249 kHz G = Phase Modulation 7 = Quantized/Digital Info W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz G = Phase Modulation 7 = Quantized/Digital Info D = Data transmission; telemetry; telecommand



3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842



3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS		
Temperature range	15~35 ℃	-30℃~55℃		
Humidty range	20 % to 75 %.	20 % to 75 %.		
Pressure range	86-106kPa	86-106kPa		
Power supply	DC 3.85V	DC 3.27V or 4.40V		
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer				

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)
Radio Frequency	± 6.5 x 10-8	(1)
RF Power, Conducted	± 0.9 dB	(1)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3.5 LIST OF TEST EQUIPMENT

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
LISN	R&S	ESH2-Z5	100086	Jun. 07, 2022	Jun. 06, 2023
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 19, 2021	Sep. 18, 2023
preamplifier	ChengYi	EMC184045S E	980508	Sep. 19, 2021	Sep. 18, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.08, 2021	Jun.07, 2022
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep. 06, 2021	Sep. 05, 2022
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	May 11, 2021	May 10, 2025
Universal Radio Communication Tester	R&S	CMU200	120237	Jun. 09, 2021	Jun. 08, 2022
Universal Radio Communication Tester	R&S	CMU200	120237	Jun. 07, 2022	Jun. 06, 2023
Universal Radio Communication Tester	Agilent	8960	GB46200384	Aug. 18, 2021	Aug. 17, 2022
Power Splitter	Agilent	11636A	34	Jun.08, 2021	Jun.07, 2022
				Jun.06, 2022	Jun.05, 2023
Attenuator	JFW	50FHC-006-5 0	N/A	Jun.08, 2021	Jun.07, 2022
Attenuator	JFW	50FHC-006-5 0	N/A	Jun.06, 2022	Jun.05, 2023
Horn Ant	Schwarzbeck	BBHA 9170		Sep. 19, 2021	Sep. 18, 2022



Report No.: AGC00408220506FE02 Page 13 of 79

(18G-40GHz)					
Horn Ant	ETS	QWH_SL_18		Sep. 19, 2021	Sep. 18, 2022
(18G-40GHz)	EIS	_40_K_SG		Sep. 19, 2021	Sep. 16, 2022
Power Splitter	Agilent	11636A	/	Sep.14, 2021	Sep.13, 2022
CMU200	R&S	120237	/	Jun. 09, 2021	Jun. 08, 2022
CMU200	R&S	120237	/	Jun. 07, 2022	Jun. 06, 2023
Artificial Mains	R&S	101242	/	Jun. 09, 2021	Jun. 08, 2022
Network ENV216		101212	,	00111 00, 2021	00111 00, 2022
Artificial Mains	R&S	101242	/	Jun. 07, 2022	Jun. 06, 2023
Network ENV216				••••••••	••••••, =•=•
Filter Bank Notch	MICRO-TRONICS	010	/	Feb. 21, 2022	Feb. 20, 2023
1(880-915MHz)		010	,	1 00. 21, 2022	1 00. 20, 2020
Filter Bank Notch 2	MICRO-TRONICS	009	1	Eab 21 2022	Eab 20 2022
(1710-1785MHz)		009	/	Feb. 21, 2022	Feb. 20, 2023
Filter Bank Notch 3	MICRO-TRONICS	008	1	Eab 21 2022	Eab 20 2022
(1920-1980MHz)		008	/	Feb. 21, 2022	Feb. 20, 2023



4. SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF EUT SYSTEM

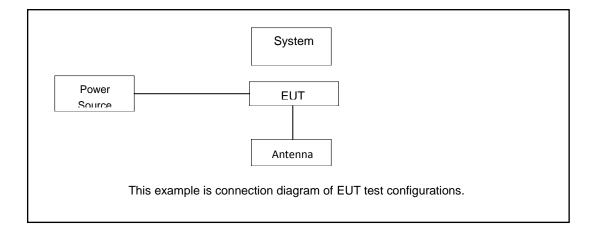


Table 2-1 Equipment Used in EUT System

4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

Test Accessories Come From The Laboratory

☑ Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	ID or Specification	Remark
1	4G Smart Phone	AGM_H5_PRO	2A3DR-H5PRO	EUT
2	Adapter	U312QC1801	Input: AC 100-240V 50/60Hz, 0.5A Output: DC 5.0V 3.0A /DC 9.0V 2.0A /DC 12V 1.5A	AE
3	Battery	GloryG1	DC 3.85V 7000mAh	AE
4	USB Cable	N/A	N/A	AE



5. SUMMARY OF TEST RESULTS

5.1 TEST CONDITION : CONDUCTED TEST

ltem	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a), §24.238(a) §27.53(h)	Pass
5	Conducted Output Power	§2.1046	Pass
6	Frequency stability / variation of ambient temperature	§2.1055, § 22.355, §24.235, §27.54	Pass
7	Peak- to- Average Ratio	§24.232(d), §27.50(d)(5),	Pass

5.2 TEST CONDITION : RADIATED TEST

Item	Test Description	FCC Rules	Result
1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	Pass
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	Pass



6. DESCRIPTION OF TEST MODES

		RF Channel			
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)	
GSM/GPRS/	ТХ	Channel 128	Channel 190	Channel 251	
EDGE850	(824 MHz ~ 849 MHz)	824.2 MHz	836.6 MHz	848.8 MHz	
	ТХ	Channel 4132	Channel 4182	Channel 4233	
WCDMA band V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz	

Bands	Tx/Rx Frequency	RF Channel		
Banas	TARK Trequency	Low(L)	Middle(M)	High(H)
GSM/GPRS/	ТХ	Channel 512	Channel 661	Channel 810
EDGE1900	(1850 MHz-1910 MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
	ТХ	Channel 9262	Channel 9400	Channel 9538
WCDMA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz

		RF Channel		
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)
	ТХ	Channel 1312	Channel 1412	Channel 1513
WCDMA Band IV	(1710 MHz-1755 MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band Radiated		Conducted
	GSM (GMSK, 1Tx-slot) Link	GSM (GMSK,1Tx-slot) Link
GSM/GPRS/	GPRS (GMSK, 1Tx-slot) Link	GPRS (GMSK, 1Tx-slot) Link
EDGE 850/1900	EDGE (8PSK, 1Tx-slot) Link	EDGE (8PSK, 1Tx-slot) Link
WCDMA Band II/IV/V	RMC 12.2kbps Link	RMC 12.2kbps Link



ACCORDING TO 3GPP 25.101 SUB-CLAUSE 6.2.2 , THE MAXIMUM OUTPUT POWER IS ALLOWED TO BE REDUCED BY FOLLOWING THE TABLE.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	
HS-DPDCH, E-DPDCH and E-DPCCH		MAX(CM-1,0)

Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH,

E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



7. CONDUCTED OUTPUT POWER

7.1 PROVISIONS APPLICABLE

The conduction test is carried out in a shielded room.

According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.4)


7.2 MEASUREMENT METHOD

- The transmitter output port was connected to base station.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all mode (GSM/EGPRS 850, GSM/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band IV, WCDMA/HSPA band V)at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

7.3 MEASUREMENT SETUP

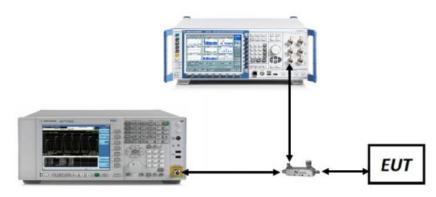



7.4 MEASUREMENT RESULT

GSM 850 Maximum Average Power (dBm)					
Channel	128	190	251		
Frequency(MHz)	824.2 MHz	836.6 MHz	848.8 MHz		
GSM (GMSK, 1Tx-slot)	32.72	32.69	32.65		
GPRS (GMSK, 1Tx-slot)	32.73	32.68	32.69		
GPRS (GMSK, 2Tx-slot)	30.52	30.44	30.61		
GPRS (GMSK, 3Tx-slot)	28.27	28.22	28.12		
GPRS (GMSK, 4Tx-slot)	26.33	26.42	26.26		
EDGE (8PSK, 1Tx-slot)	26.99	26.83	26.72		
EDGE (8PSK, 2Tx-slot)	24.16	24.63	24.43		
EDGE (8PSK, 3Tx-slot)	21.84	22.43	21.96		
EDGE (8PSK, 4Tx-slot)	19.93	20.13	20.03		

PCS 1900 Maximum Average Power (dBm)					
Channel	512	661	810		
Frequency(MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz		
GSM (GMSK, 1Tx-slot)	28.67	29.16	29.43		
GPRS (GMSK, 1Tx-slot)	28.54	29.05	29.73		
GPRS (GMSK, 2Tx-slot)	27.42	27.38	27.41		
GPRS (GMSK, 3Tx-slot)	25.36	25.44	25.51		
GPRS (GMSK, 4Tx-slot)	23.87	23.85	23.79		
EDGE (8PSK, 1Tx-slot)	24.68	26.57	25.76		
EDGE (8PSK, 2Tx-slot)	23.11	23.12	23.05		
EDGE (8PSK, 3Tx-slot)	21.89	21.66	21.74		
EDGE (8PSK, 4Tx-slot)	20.05	20.12	20.02		



WCDMA Band II Maximum Average Power (dBm)					
Channel	9262	9400	9538		
Frequency(MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz		
RMC 12.2kbps	22.33	22.74	23.04		
HSDPA Subtest-1	21.35	21.75	22.06		
HSDPA Subtest-2	20.65	20.97	21.34		
HSDPA Subtest-3	20.64	21.04	21.38		
HSDPA Subtest-4	20.63	20.97	21.32		
HSUPA Subtest-1	19.19	19.54	19.92		
HSUPA Subtest-2	19.28	19.66	20.00		
HSUPA Subtest-3	20.23	20.60	20.88		
HSUPA Subtest-4	18.77	19.14	19.52		
HSUPA Subtest-5	18.35	18.72	19.03		

WCDMA Band IV Maximum Average Power (dBm)							
Channel	1312	1412	1513				
Frequency(MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz				
RMC 12.2kbps	22.61	22.40	22.12				
HSDPA Subtest-1	22.54	21.36	21.47				
HSDPA Subtest-2	21.12	21.17	20.54				
HSDPA Subtest-3	21.23	21.01	21.44				
HSDPA Subtest-4	21.45	21.25	21.84				
HSUPA Subtest-1	19.89	19.38	19.71				
HSUPA Subtest-2	20.04	19.99	19.88				
HSUPA Subtest-3	20.87	20.58	20.61				
HSUPA Subtest-4	19.67	19.22	18.59				
HSUPA Subtest-5	19.72	18.39	20.97				



WCDMA Band V Maximum Average Power (dBm)							
Channel	4132	4182	4233				
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz				
RMC 12.2kbps	23.46	23.36	23.26				
HSDPA Subtest-1	22.32	22.17	22.13				
HSDPA Subtest-2	21.88	21.50	21.43				
HSDPA Subtest-3	21.49	21.44	21.42				
HSDPA Subtest-4	21.39	21.38	21.33				
HSUPA Subtest-1	22.24	22.08	22.02				
HSUPA Subtest-2	20.23	20.07	20.05				
HSUPA Subtest-3	21.24	21.05	21.02				
HSUPA Subtest-4	20.24	20.05	19.93				
HSUPA Subtest-5	19.73	19.57	19.48				



8. RADIATED OUTPUT POWER

8.1 PROVISIONS APPLICABLE

The radiation test is carried out in a semi-anechoic chamber.

According to the test, put the device under test on a non-conductive platform 3 meters away from the receiving antenna (ANSI/TIA-603-E-2016 Article 2.2.17).

The following rules are for the maximum radiated power limit requirements of the product:

Mode	Nominal Peak Power	
GSM 850	< 7 Watts max. ERP (38.45dBm)	
PCS 1900	< 2 Watts max. EIRP (33dBm)	
WCDMA Band II	< 2 Watts max. EIRP (33dBm)	
WCDMA Band IV	< 1 Watts max. EIRP (30dBm)	
WCDMA Band V	< 7 Watts max. ERP (38.45dBm)	

8.2 MEASUREMENT METHOD

- 1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
- 2. RBW = 1 5% of the expected OBW, not to exceed 1MHz
- 3. VBW \ge 3 x RBW
- 4. Span = 1.5 times the OBW
- 5. No. of sweep points > 2 x span / RBW
- 6. Detector = RMS
- 7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
- 8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
- 9. Trace mode = trace averaging (RMS) over 100 sweeps
- 10. The trace was allowed to stabilize.



Radiation Construction Method:

- 1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
- 2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.


The power is calculated by the following formula:

Pd(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dB)

Where: Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.


- 3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
- 4. The EUT was tested in three orthogonal planes (X, Y, Z) and in all possible test configurations and positioning.
- 5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

8.3 MEASUREMENT SETUP

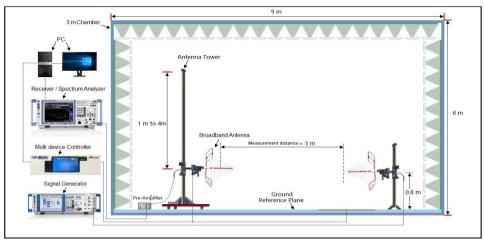


Radiated Power 30MHz to 1GHz Test setup



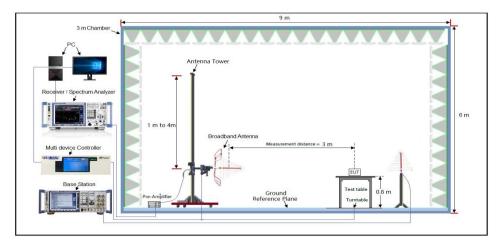

Radiated Power Above 1GHz Test setup

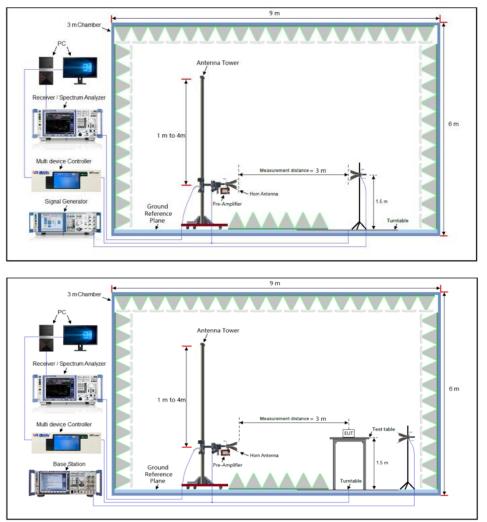



8.4 MEASUREMENT RESULT

	Ch./ Freq.		Substitute	Ant.			Limit	EF	RP
Mode	channel	Freq. (MHz)	LEVEL (dBm)	Gain (dBd)	C.L	Pol.	w	w	dBm
	128	824.2	34.47	5.90	1.21	Н		0.951	29.78
GSM850	190	836.6	34.49	5.90	1.22	Н		0.957	29.81
	251	848.8	34.50	5.90	1.25	н		0.966	29.85
	128	824.2	30.02	5.90	1.21	Н		0.341	25.33
EDGE	190	836.6	29.89	5.90	1.22	н		0.332	25.21
	251	848.8	29.91	5.90	1.25	н	. 7.00	0.336	25.26
	4132	826.4	26.81	5.90	1.21	н	< 7.00	0.163	22.12
WCDMA850	4183	836.6	26.68	5.90	1.25	н		0.160	22.03
	4233	846.6	26.76	5.90	1.24	н		0.162	22.10
	4132	826.4	25.21	5.90	1.21	н		0.113	20.52
HSPA	4183	836.6	25.38	5.90	1.25	н		0.118	20.73
	4233	846.6	25.28	5.90	1.24	Н		0.115	20.62



Report No.: AGC00408220506FE02 Page 26 of 79

	Ch.	/ Freq.	Substitute	Ant.			Limit		EIRP
Mode	channel	Freq. (MHz)	LEVEL (dBm)	Gain (dBi)	C.L	Pol.	w	W	dBm
PCS1900	512	1850.2	33.61	8.6	2.11	н		0.515	27.12
	661	1880.0	33.50	8.6	2.15	н		0.507	27.05
	810	1909.8	33.60	8.6	2.15	Н		0.519	27.15
	512	1850.2	30.61	8.6	2.11	н		0.258	24.12
EDGE	661	1880.0	30.54	8.6	2.15	Н		0.256	24.09
	810	1909.8	30.56	8.6	2.15	н	< 2.00	0.258	24.11
	9262	1852.4	28.34	8.6	2.11	н	< 2.00	0.153	21.85
WCDMA 1900	9400	1880.0	28.22	8.6	2.15	н		0.150	21.77
1900	9538	1907.6	28.23	8.6	2.15	н		0.151	21.78
	9262	1852.4	26.65	8.6	2.11	н		0.104	20.16
HSPA	9400	1880.0	26.67	8.6	2.15	н		0.105	20.22
	9538	1907.6	26.71	8.6	2.15	н		0.106	20.26
	1312	1712.4	27.79	8.3	2.05	н		0.143	21.54
WCDMA 1700	1412	1732.4	27.58	8.3	2.05	н		0.136	21.33
1700	1513	1752.6	27.72	8.3	2.06	н	4.00	0.141	21.48
	1312	1712.4	26.47	8.3	2.05	н	< 1.00	0.105	20.22
HSPA	1412	1732.4	26.39	8.3	2.05	н		0.103	20.14
	1513	1752.6	26.42	8.3	2.06	Н		0.104	20.18

Note:1._EIRP/ERP = Substitute LEVEL (dBm) + Ant. Gain – C.L (Cable Loss)

2. All polarizations and modes have been tested, only the worst mode is recorded in the report



9. PEAK-TO-AVERAGE RATIO

9.1 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

9.2 MEASUREMENT METHOD

① CCDF Procedure for PAPR :

1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;

- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:

-for continuous transmissions, set to 1 ms,

-or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time

that is less than or equal to the burst duration.

4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as PPk. Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record PAvg. Determine the P.A.R. from:

P.A.R(dB) = PPk (dBm) – PAvg (dBm) (PAvg = Average Power + Duty cycle Factor)

Allow trace to fully stabilize.

Use the peak marker function to determine the peak amplitude level.

Test Settings(Peak Power):

The measurement instrument must have a RBW that is greater than or equal to the OBW of the

signal to be measured and a VBW \ge 3 × RBW.

- 1. Set the RBW \geq OBW.
- 2. Set VBW \geq 3 × RBW.
- 3. Set span \geq 2 × OBW.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd




- 4. Sweep time \geq 10 × (number of points in sweep) × (transmission symbol period).
- 5. Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

- 1. Set span to $2 \times to 3 \times the OBW$.
- 2. Set RBW ≥ OBW.
- 3. Set VBW \geq 3 × RBW.
- 4. Set number of measurement points in sweep \geq 2 × span / RBW.
- Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

9.3 MEASUREMENT SETUP

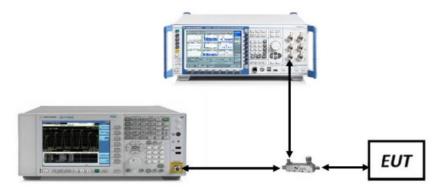



9.4 MEASUREMENT RESULT

Bands	Modulation	Peak-to-average ratio (dB)			Limit	Result
Danas	Modulation	Lowest	Middle	Highest	(dB)	Result
GSM 850	GSM	2.62	2.66	2.62	13	Pass
GSIVI 650	EDGE	5.62	5.69	5.75	13	Pass
DCS 1000	GSM	2.64	2.64	2.52	13	Pass
PCS 1900	EDGE	5.43	5.45	5.50	13	Pass
WCDMA Band II	RMC 12.2kbps	3.02	3.05	4.09	13	Pass
WCDMA Band II	HSUPA	3.16	3.15	3.12	13	Pass
WCDMA Band II	HSDPA	4.57	4.56	4.49	13	Pass
WCDMA Band IV	RMC 12.2kbps	3.67	2.98	3.12	13	Pass
WCDMA Band IV	HSUPA	4.11	4.32	4.25	13	Pass
WCDMA Band IV	HSDPA	4.67	4.38	4.42	13	Pass
WCDMA Band V	RMC 12.2kbps	4.35	2.80	2.83	13	Pass
WCDMA Band V	HSUPA	2.81	2.83	2.87	13	Pass
WCDMA Band V	HSDPA	4.29	4.32	4.19	13	Pass



10. OCCUPIED BANDWIDTH

10.1 PROVISIONS APPLICABLE

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission. The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

10.2 MEASUREMENT METHOD

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1-5% of the 99% occupied bandwidth observed in Step 7

10.3 MEASUREMENT SETUP

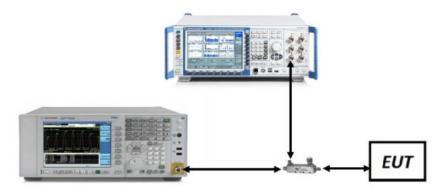



10.4 MEASUREMENT RESULT

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHz)	Emission Bandwidth (KHz)	Verdict
		LCH	247.0	316	PASS
	GSM	MCH	248.1	312	PASS
GSM 850		HCH	247.3	315	PASS
G2IN 020	EDGE	LCH	244.1	311	PASS
		MCH	246.4	308	PASS
		НСН	242.7	307	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHz)	Emission Bandwidth (KHz)	Verdict
		LCH	250.7	313	PASS
	GSM	MCH	246.9	310	PASS
DCS 1000		HCH	247.4	320	PASS
PCS 1900	EDGE	LCH	247.9	313	PASS
		MCH	249.4	310	PASS
		НСН	249.5	308	PASS




Test Band Test Mode	Toot Modo	Test Channel	Occupied Bandwidth	Emission Bandwidth	Verdict
	Test Channel	(KHz)	(KHz)	verdict	
WCDMA 850	UMTS	LCH	4171.5	4731	PASS
		MCH	4180.0	4731	PASS
		HCH	4186.3	4745	PASS


Test Band Test Mode	Teat Made	at Mada Taat Channel	Occupied Bandwidth	Emission Bandwidth	Verdict
	Test Channel	(KHz)	(KHz)	verdict	
WCDMA 1900	UMTS	LCH	4168.3	4720	PASS
		MCH	4168.6	4710	PASS
		HCH	4177.1	4732	PASS

Test Band Test Mode	Test Mede	Test Channel	Occupied Bandwidth	Emission Bandwidth	Verdict
	Test Mode		(KHz)	(KHz)	verdict
WCDMA 1700	UMTS	LCH	4179.9	4755	PASS
		MCH	4176.3	4727	PASS
		НСН	4168.3	4719	PASS



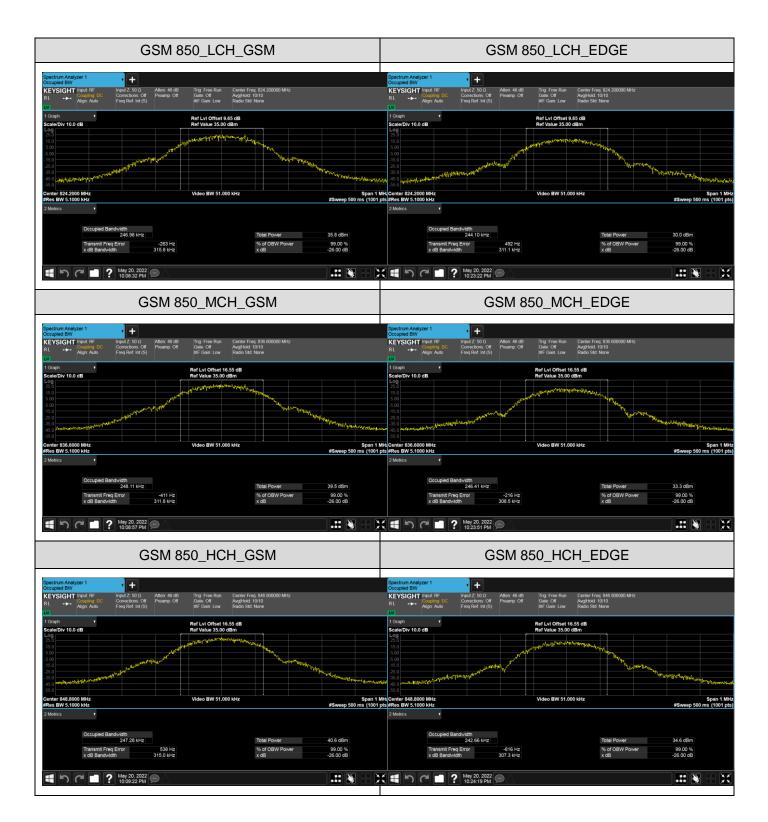



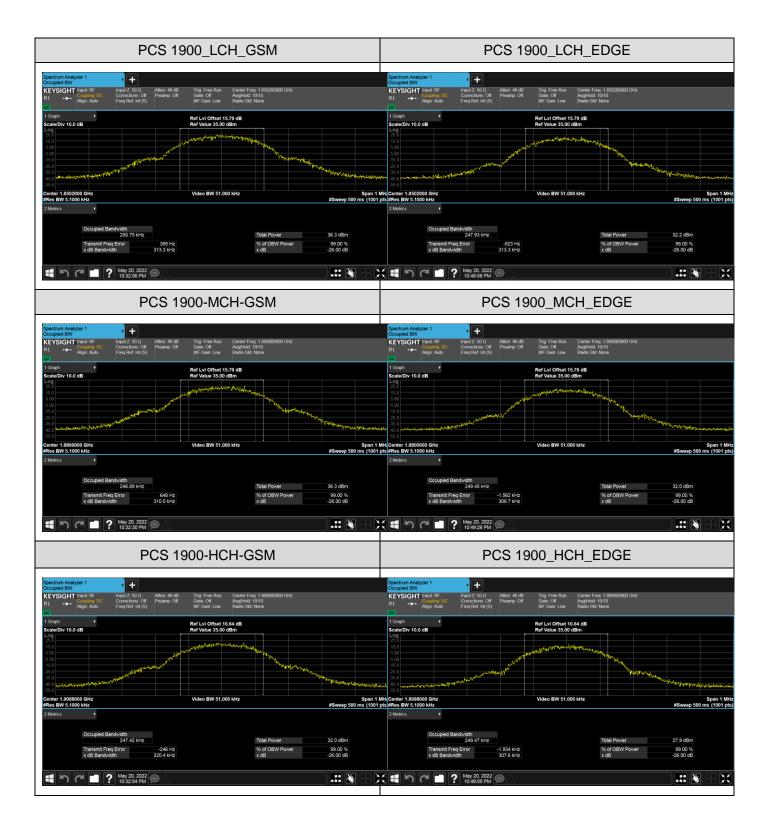











11. BAND EDGE EMISSIONS AT ANTENNA TERMINAL

11.1 MEASUREMENT OVERVIEW

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


11.2 MEASUREMENT METHOD

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. VBW > $3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points \geq 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

TEST NOTE


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


11.3 MEASUREMENT METHOD

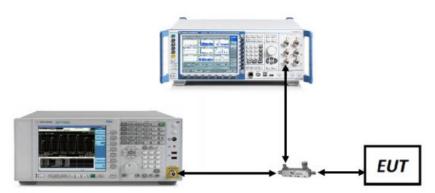




11.4 MEASUREMENT RESULT

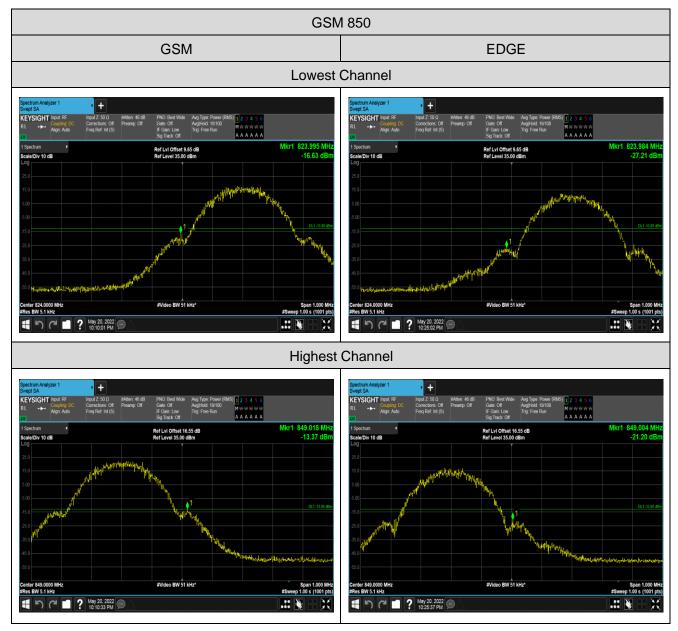







Report No.: AGC00408220506FE02 Page 39 of 79

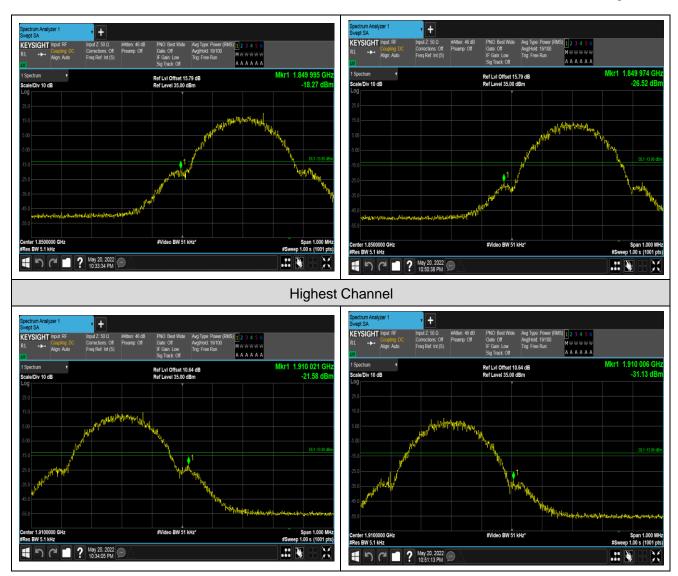



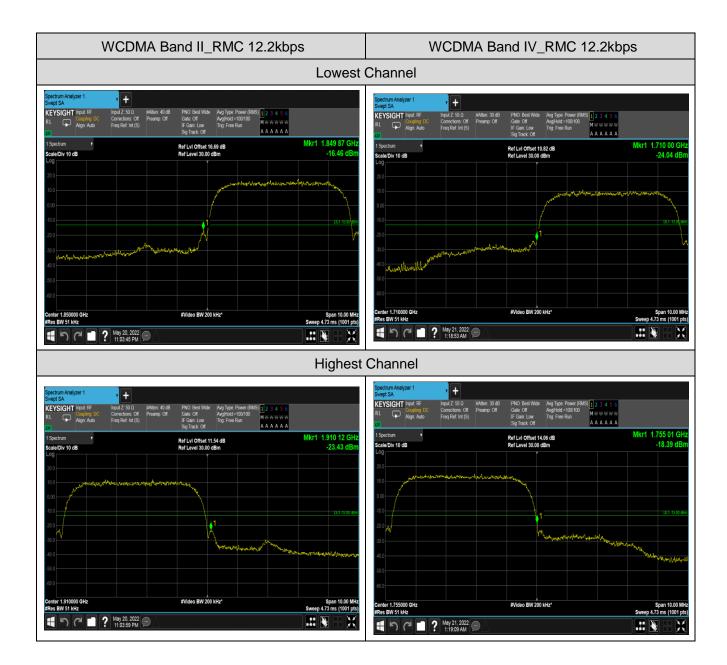



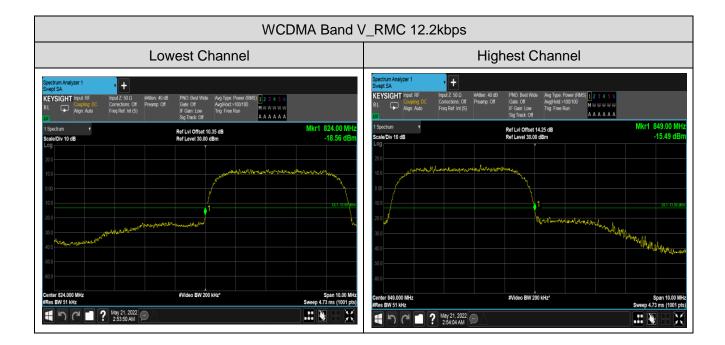



12. SPURIOUS EMISSIONS AT ANTENNA TERMINAL

12.1 PROVISIONS APPLICABLE

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

12.2 MEASUREMENT METHOD

Test Settings (GSM)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = Peak
- 4. Trace Mode = max hold
- 5. Sweep time = auto
- 6. Number of points in sweep $\ge 2 \times \text{Span} / \text{RBW}$

Test Settings (WCDMA)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = RMS
- 4. Trace Mode = trace average
- 5. Sweep time = auto
- 6. Number of points in sweep $\ge 2 \times \text{Span} / \text{RBW}$

12.3 MEASUREMENT SETUP



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com
 Web: http://www.agccert.com/



12.4 MEASUREMENT RESULT

