

10.3.2 Results overview of WCDMA

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 2 (RMC*)	Left Cheek	9400	1880	-3.990	0.086	100	1.00	22.42	22.50	1.019	0.088
	Left Tilt	9400	1880	-1.290	0.081	100	1.00	22.42	22.50	1.019	0.083
	Right Cheek	9400	1880	-2.910	0.084	100	1.00	22.42	22.50	1.019	0.086
	Right Tilt	9400	1880	-4.410	0.078	100	1.00	22.42	22.50	1.019	0.079
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 2 (RMC*)	Front	9400	1880	4.600	0.594	100	1.00	22.42	22.50	1.019	0.605
	Back	9400	1880	0.610	0.672	100	1.00	22.42	22.50	1.019	0.684
	Left	9400	1880	-2.950	0.305	100	1.00	22.42	22.50	1.019	0.311
	right	9400	1880	-0.390	0.356	100	1.00	22.42	22.50	1.019	0.363
	Top	9400	1880	3.140	0.017	100	1.00	22.42	22.50	1.019	0.017
	Bottom	9400	1880	-2.400	0.184	100	1.00	22.42	22.50	1.019	0.187

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 4 (RMC*)	Left Cheek	1312	1712.4	2.340	0.069	100	1.00	23.53	24.00	1.114	0.077
	Left Tilt	1312	1712.4	-3.990	0.075	100	1.00	23.53	24.00	1.114	0.084
	Right Cheek	1312	1712.4	-3.990	0.062	100	1.00	23.53	24.00	1.114	0.069
	Right Tilt	1312	1712.4	0.950	0.063	100	1.00	23.53	24.00	1.114	0.070
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 4 (RMC*)	Front	1312	1712.4	-0.580	0.635	100	1.00	23.53	24.00	1.114	0.708
	Back	1312	1712.4	-0.850	0.639	100	1.00	23.53	24.00	1.114	0.712
	Left	1312	1712.4	-4.110	0.187	100	1.00	23.53	24.00	1.114	0.208
	right	1312	1712.4	-2.440	0.317	100	1.00	23.53	24.00	1.114	0.353
	Top	1312	1712.4	3.940	0.006	100	1.00	23.53	24.00	1.114	0.007
	Bottom	1312	1712.4	2.950	0.176	100	1.00	23.53	24.00	1.114	0.196

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 5 (RMC*)	Left Cheek	4182	836.4	1.750	0.125	100	1.00	22.68	23.00	1.076	0.135
	Left Tilt	4182	836.4	0.280	0.077	100	1.00	22.68	23.00	1.076	0.083
	Right Cheek	4182	836.4	-1.000	0.140	100	1.00	22.68	23.00	1.076	0.151
	Right Tilt	4182	836.4	1.250	0.071	100	1.00	22.68	23.00	1.076	0.076
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
WCDMA Band 5 (RMC*)	Front	4182	836.4	-4.750	0.241	100	1.00	22.68	23.00	1.076	0.259
	Back	4182	836.4	-2.500	0.310	100	1.00	22.68	23.00	1.076	0.334
	Left	4182	836.4	-0.250	0.069	100	1.00	22.68	23.00	1.076	0.074
	right	4182	836.4	-2.250	0.142	100	1.00	22.68	23.00	1.076	0.153
	Top	4182	836.4	1.500	0.005	100	1.00	22.68	23.00	1.076	0.005
	Bottom	4182	836.4	2.500	0.098	100	1.00	22.68	23.00	1.076	0.105

10.3.3 Results overview of LTE

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 2 (BW: 20MHz)	1RB	Left Cheek	19125	1902.5	-4.250	0.025	100	1.00	23.81	24.00	1.045	0.026
		Left Tilt	19125	1902.5	-0.750	0.022	100	1.00	23.81	24.00	1.045	0.023
		Right Cheek	19125	1902.5	-0.500	0.032	100	1.00	23.81	24.00	1.045	0.033
		Right Tilt	19125	1902.5	-1.750	0.029	100	1.00	23.81	24.00	1.045	0.030
	50%RB	Left Cheek	19125	1902.5	-1.250	0.012	100	1.00	23.81	24.00	1.045	0.013
		Left Tilt	19125	1902.5	0.500	0.011	100	1.00	23.81	24.00	1.045	0.011
		Right Cheek	19125	1902.5	-2.500	0.019	100	1.00	23.81	24.00	1.045	0.020
		Right Tilt	19125	1902.5	-2.750	0.014	100	1.00	23.81	24.00	1.045	0.015
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 2 (BW: 20MHz)	1RB	Front	19125	1902.5	4.750	0.146	100	1.00	23.81	24.00	1.045	0.153
		Back	19125	1902.5	-1.500	0.178	100	1.00	23.81	24.00	1.045	0.186
		Left	19125	1902.5	2.500	0.035	100	1.00	23.81	24.00	1.045	0.037
		right	19125	1902.5	-0.750	0.047	100	1.00	23.81	24.00	1.045	0.049
		Top	19125	1902.5	0.250	0.003	100	1.00	23.81	24.00	1.045	0.003
		Bottom	19125	1902.5	-0.250	0.031	100	1.00	23.81	24.00	1.045	0.032
	50%RB	Front	19125	1902.5	-2.000	0.106	100	1.00	23.81	24.00	1.045	0.111
		Back	19125	1902.5	3.250	0.127	100	1.00	23.81	24.00	1.045	0.133
		Left	19125	1902.5	-1.000	0.017	100	1.00	23.81	24.00	1.045	0.018
		right	19125	1902.5	3.000	0.024	100	1.00	23.81	24.00	1.045	0.025
		Top	19125	1902.5	-2.250	0.002	100	1.00	23.81	24.00	1.045	0.002
		Bottom	19125	1902.5	3.500	0.015	100	1.00	23.81	24.00	1.045	0.016

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 4 (BW: 20MHz)	1RB	Left Cheek	20325	1747.5	1.750	0.104	100	1.00	23.90	24.00	1.023	0.106
		Left Tilt	20325	1747.5	0.250	0.061	100	1.00	23.90	24.00	1.023	0.062
		Right Cheek	20325	1747.5	0.500	0.128	100	1.00	23.90	24.00	1.023	0.131
		Right Tilt	20325	1747.5	-1.250	0.075	100	1.00	23.90	24.00	1.023	0.077
	50%RB	Left Cheek	20325	1747.5	2.500	0.087	100	1.00	23.90	24.00	1.023	0.089
		Left Tilt	20325	1747.5	1.250	0.052	100	1.00	23.90	24.00	1.023	0.053
		Right Cheek	20325	1747.5	2.250	0.097	100	1.00	23.90	24.00	1.023	0.099
		Right Tilt	20325	1747.5	-3.250	0.059	100	1.00	23.90	24.00	1.023	0.060
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 4 (BW: 20MHz)	1RB	Front	20325	1747.5	0.500	0.580	100	1.00	23.90	24.00	1.023	0.594
		Back	20325	1747.5	-1.500	0.605	100	1.00	23.90	24.00	1.023	0.619
		Left	20325	1747.5	4.250	0.224	100	1.00	23.90	24.00	1.023	0.229
		right	20325	1747.5	0.250	0.315	100	1.00	23.90	24.00	1.023	0.322
		Top	20325	1747.5	-0.750	0.007	100	1.00	23.90	24.00	1.023	0.007
		Bottom	20325	1747.5	2.750	0.158	100	1.00	23.90	24.00	1.023	0.162
	50%RB	Front	20325	1747.5	-4.500	0.532	100	1.00	23.90	24.00	1.023	0.544
		Back	20325	1747.5	1.500	0.549	100	1.00	23.90	24.00	1.023	0.562
		Left	20325	1747.5	1.750	0.188	100	1.00	23.90	24.00	1.023	0.192
		right	20325	1747.5	-4.750	0.213	100	1.00	23.90	24.00	1.023	0.218
		Top	20325	1747.5	-0.750	0.005	100	1.00	23.90	24.00	1.023	0.005
		Bottom	20325	1747.5	2.000	0.124	100	1.00	23.90	24.00	1.023	0.127

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 5 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	1.250	0.129	100	1.00	25.01	25.50	1.119	0.144
		Left Tilt	20525	836.5	3.500	0.075	100	1.00	25.01	25.50	1.119	0.084
		Right Cheek	20525	836.5	-1.000	0.150	100	1.00	25.01	25.50	1.119	0.168
		Right Tilt	20525	836.5	0.750	0.091	100	1.00	25.01	25.50	1.119	0.102
	50%RB	Left Cheek	20525	836.5	-1.750	0.103	100	1.00	25.01	25.50	1.119	0.115
		Left Tilt	20525	836.5	3.500	0.058	100	1.00	25.01	25.50	1.119	0.065
		Right Cheek	20525	836.5	4.750	0.126	100	1.00	25.01	25.50	1.119	0.141
		Right Tilt	20525	836.5	2.250	0.077	100	1.00	25.01	25.50	1.119	0.086
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 5 (BW: 10MHz)	1RB	Front	20525	836.5	0.500	0.271	100	1.00	25.01	25.50	1.119	0.303
		Back	20525	836.5	-1.750	0.309	100	1.00	25.01	25.50	1.119	0.346
		Left	20525	836.5	-2.500	0.081	100	1.00	25.01	25.50	1.119	0.091
		Right	20525	836.5	1.750	0.128	100	1.00	25.01	25.50	1.119	0.143
		Top	20525	836.5	4.750	0.004	100	1.00	25.01	25.50	1.119	0.004
		Bottom	20525	836.5	-0.250	0.052	100	1.00	25.01	25.50	1.119	0.058
	50%RB	Front	20525	836.5	2.250	0.226	100	1.00	25.01	25.50	1.119	0.253
		Back	20525	836.5	-2.000	0.253	100	1.00	25.01	25.50	1.119	0.283
		Left	20525	836.5	3.250	0.058	100	1.00	25.01	25.50	1.119	0.065
		Right	20525	836.5	3.750	0.094	100	1.00	25.01	25.50	1.119	0.105
		Top	20525	836.5	-4.750	0.002	100	1.00	25.01	25.50	1.119	0.002
		Bottom	20525	836.5	-0.250	0.041	100	1.00	25.01	25.50	1.119	0.046

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 7 (BW: 20MHz)	1RB	Left Cheek	21100	2535	4.000	0.026	100	1.00	23.41	23.50	1.021	0.027
		Left Tilt	21100	2535	-3.000	0.013	100	1.00	23.41	23.50	1.021	0.013
		Right Cheek	21100	2535	-1.000	0.030	100	1.00	23.41	23.50	1.021	0.031
		Right Tilt	21100	2535	-4.250	0.015	100	1.00	23.41	23.50	1.021	0.015
	50%RB	Left Cheek	21100	2535	-2.750	0.020	100	1.00	23.41	23.50	1.021	0.020
		Left Tilt	21100	2535	-0.250	0.006	100	1.00	23.41	23.50	1.021	0.006
		Right Cheek	21100	2535	3.750	0.021	100	1.00	23.41	23.50	1.021	0.021
		Right Tilt	21100	2535	-4.750	0.011	100	1.00	23.41	23.50	1.021	0.011
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 7 (BW: 20MHz)	1RB	Front	21100	2535	1.500	0.187	100	1.00	23.41	23.50	1.021	0.191
		Back	21100	2535	-1.500	0.245	100	1.00	23.41	23.50	1.021	0.250
		Left	21100	2535	-4.750	0.056	100	1.00	23.41	23.50	1.021	0.057
		Right	21100	2535	-0.500	0.075	100	1.00	23.41	23.50	1.021	0.077
		Top	21100	2535	3.500	0.006	100	1.00	23.41	23.50	1.021	0.006
		Bottom	21100	2535	-2.250	0.082	100	1.00	23.41	23.50	1.021	0.084
	50%RB	Front	21100	2535	2.750	0.148	100	1.00	23.41	23.50	1.021	0.151
		Back	21100	2535	-1.250	0.183	100	1.00	23.41	23.50	1.021	0.187
		Left	21100	2535	3.000	0.036	100	1.00	23.41	23.50	1.021	0.037
		Right	21100	2535	0.250	0.049	100	1.00	23.41	23.50	1.021	0.050
		Top	21100	2535	1.750	0.002	100	1.00	23.41	23.50	1.021	0.002
		Bottom	21100	2535	-4.250	0.057	100	1.00	23.41	23.50	1.021	0.058

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 12 (BW: 10MHz)	1RB	Left Cheek	23155	713.5	-4.000	0.063	100	1.00	24.46	24.50	1.009	0.064
		Left Tilt	23155	713.5	1.500	0.037	100	1.00	24.46	24.50	1.009	0.037
		Right Cheek	23155	713.5	-1.250	0.065	100	1.00	24.46	24.50	1.009	0.066
		Right Tilt	23155	713.5	2.250	0.040	100	1.00	24.46	24.50	1.009	0.040
	50%RB	Left Cheek	23155	713.5	1.500	0.053	100	1.00	24.46	24.50	1.009	0.053
		Left Tilt	23155	713.5	-1.750	0.032	100	1.00	24.46	24.50	1.009	0.032
		Right Cheek	23155	713.5	-2.500	0.055	100	1.00	24.46	24.50	1.009	0.056
		Right Tilt	23155	713.5	2.750	0.036	100	1.00	24.46	24.50	1.009	0.036
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 12 (BW: 10MHz)	1RB	Front	23155	713.5	1.000	0.130	100	1.00	24.46	24.50	1.009	0.131
		Back	23155	713.5	-1.750	0.149	100	1.00	24.46	24.50	1.009	0.150
		Left	23155	713.5	-4.250	0.032	100	1.00	24.46	24.50	1.009	0.032
		Right	23155	713.5	2.250	0.056	100	1.00	24.46	24.50	1.009	0.057
		Top	23155	713.5	-2.750	0.002	100	1.00	24.46	24.50	1.009	0.002
		Bottom	23155	713.5	4.500	0.044	100	1.00	24.46	24.50	1.009	0.044
	50%RB	Front	23155	713.5	0.500	0.121	100	1.00	24.46	24.50	1.009	0.122
		Back	23155	713.5	-4.750	0.133	100	1.00	24.46	24.50	1.009	0.134
		Left	23155	713.5	-2.000	0.027	100	1.00	24.46	24.50	1.009	0.027
		Right	23155	713.5	0.500	0.034	100	1.00	24.46	24.50	1.009	0.034
		Top	23155	713.5	1.750	0.002	100	1.00	24.46	24.50	1.009	0.002
		Bottom	23155	713.5	-2.750	0.031	100	1.00	24.46	24.50	1.009	0.031

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 17 (BW: 10MHz)	1RB	Left Cheek	23780	709	1.000	0.073	100	1.00	24.39	24.50	1.026	0.075
		Left Tilt	23780	709	1.250	0.026	100	1.00	24.39	24.50	1.026	0.027
		Right Cheek	23780	709	-4.750	0.067	100	1.00	24.39	24.50	1.026	0.069
		Right Tilt	23780	709	1.500	0.025	100	1.00	24.39	24.50	1.026	0.026
	50%RB	Left Cheek	23780	709	4.500	0.062	100	1.00	24.39	24.50	1.026	0.064
		Left Tilt	23780	709	-2.250	0.021	100	1.00	24.39	24.50	1.026	0.022
		Right Cheek	23780	709	-4.750	0.057	100	1.00	24.39	24.50	1.026	0.058
		Right Tilt	23780	709	-0.750	0.019	100	1.00	24.39	24.50	1.026	0.019
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 17 (BW: 10MHz)	1RB	Front	23780	709	-1.750	0.128	100	1.00	24.39	24.50	1.026	0.131
		Back	23780	709	-1.000	0.153	100	1.00	24.39	24.50	1.026	0.157
		Left	23780	709	-4.500	0.051	100	1.00	24.39	24.50	1.026	0.052
		Right	23780	709	-3.750	0.079	100	1.00	24.39	24.50	1.026	0.081
		Top	23780	709	0.500	0.002	100	1.00	24.39	24.50	1.026	0.002
		Bottom	23780	709	0.250	0.032	100	1.00	24.39	24.50	1.026	0.033
	50%RB	Front	23780	709	-1.500	0.118	100	1.00	24.39	24.50	1.026	0.121
		Back	23780	709	-2.750	0.132	100	1.00	24.39	24.50	1.026	0.135
		Left	23780	709	3.500	0.036	100	1.00	24.39	24.50	1.026	0.037
		Right	23780	709	-1.250	0.071	100	1.00	24.39	24.50	1.026	0.073
		Top	23780	709	2.250	0.002	100	1.00	24.39	24.50	1.026	0.002
		Bottom	23780	709	3.000	0.027	100	1.00	24.39	24.50	1.026	0.028

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 38 (BW: 20MHz)	1RB	Left Cheek	38175	2612.5	4.500	0.028	100	1.00	23.08	23.50	1.102	0.031
		Left Tilt	38175	2612.5	3.750	0.017	100	1.00	23.08	23.50	1.102	0.019
		Right Cheek	38175	2612.5	4.750	0.030	100	1.00	23.08	23.50	1.102	0.033
		Right Tilt	38175	2612.5	-4.000	0.019	100	1.00	23.08	23.50	1.102	0.021
	50%RB	Left Cheek	38175	2612.5	-4.750	0.024	100	1.00	23.08	23.50	1.102	0.026
		Left Tilt	38175	2612.5	3.250	0.012	100	1.00	23.08	23.50	1.102	0.013
		Right Cheek	38175	2612.5	2.250	0.026	100	1.00	23.08	23.50	1.102	0.029
		Right Tilt	38175	2612.5	-1.750	0.015	100	1.00	23.08	23.50	1.102	0.017
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 38 (BW: 20MHz)	1RB	Front	38175	2612.5	0.500	0.184	100	1.00	23.08	23.50	1.102	0.203
		Back	38175	2612.5	-1.250	0.252	100	1.00	23.08	23.50	1.102	0.278
		Left	38175	2612.5	4.750	0.072	100	1.00	23.08	23.50	1.102	0.079
		Right	38175	2612.5	-3.750	0.108	100	1.00	23.08	23.50	1.102	0.119
		Top	38175	2612.5	0.250	0.004	100	1.00	23.08	23.50	1.102	0.004
		Bottom	38175	2612.5	-4.500	0.055	100	1.00	23.08	23.50	1.102	0.061
	50%RB	Front	38175	2612.5	4.500	0.149	100	1.00	23.08	23.50	1.102	0.164
		Back	38175	2612.5	2.500	0.200	100	1.00	23.08	23.50	1.102	0.220
		Left	38175	2612.5	4.000	0.057	100	1.00	23.08	23.50	1.102	0.063
		Right	38175	2612.5	-3.750	0.081	100	1.00	23.08	23.50	1.102	0.089
		Top	38175	2612.5	-4.750	0.002	100	1.00	23.08	23.50	1.102	0.002
		Bottom	38175	2612.5	-0.500	0.046	100	1.00	23.08	23.50	1.102	0.051

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	1RB	Left Cheek	39725	2503.5	1.000	0.074	100	1.00	25.15	25.50	1.084	0.080
		Left Tilt	39725	2503.5	1.750	0.025	100	1.00	25.15	25.50	1.084	0.027
		Right Cheek	39725	2503.5	-4.750	0.040	100	1.00	25.15	25.50	1.084	0.043
		Right Tilt	39725	2503.5	-0.500	0.014	100	1.00	25.15	25.50	1.084	0.015
		Left Cheek	39750	2506.0	-2.250	0.087	100	1.00	25.15	25.50	1.084	0.094
		Left Cheek	40185	2549.5	-0.250	0.076	100	1.00	25.15	25.50	1.084	0.082
		Left Cheek	41055	2636.5	1.750	0.047	100	1.00	25.15	25.50	1.084	0.051
5MHZ		Left Cheek	41490	2680.0	1.250	0.032	100	1.00	25.15	25.50	1.084	0.035
10MHZ												
15MHZ												
20MHZ												
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	1RB	Front	39725	2503.5	-1.750	0.455	100	1.00	25.15	25.50	1.084	0.493
		Back	39725	2503.5	-1.500	0.568	100	1.00	25.15	25.50	1.084	0.616
		Left	39725	2503.5	0.500	0.210	100	1.00	25.15	25.50	1.084	0.228
		Right	39725	2503.5	4.250	0.294	100	1.00	25.15	25.50	1.084	0.319
		Top	39725	2503.5	-2.250	0.005	100	1.00	25.15	25.50	1.084	0.005
		Bottom	39725	2503.5	2.250	0.178	100	1.00	25.15	25.50	1.084	0.193
		Back	39750	2506.0	-1.000	0.618	100	1.00	25.15	25.50	1.084	0.670
5MHZ		Back	40185	2549.5	-1.750	0.572	100	1.00	25.15	25.50	1.084	0.620
10MHZ		Back	41055	2636.5	-1.250	0.452	100	1.00	25.15	25.50	1.084	0.490
15MHZ		Back	41490	2680.0	-4.000	0.365	100	1.00	25.15	25.50	1.084	0.396
20MHZ												

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	50%RB	Left Cheek	39725	2503.5	-3.000	0.058	100	1.00	25.15	25.50	1.084	0.063
		Left Tilt	39725	2503.5	-4.250	0.012	100	1.00	25.15	25.50	1.084	0.013
		Right Cheek	39725	2503.5	1.750	0.029	100	1.00	25.15	25.50	1.084	0.031
		Right Tilt	39725	2503.5	-4.500	0.005	100	1.00	25.15	25.50	1.084	0.005
		Left Cheek	39750	2506.0	-1.250	0.069	100	1.00	25.15	25.50	1.084	0.075
		Left Cheek	40185	2549.5	-3.500	0.037	100	1.00	25.15	25.50	1.084	0.040
		Left Cheek	41055	2636.5	-1.750	0.035	100	1.00	25.15	25.50	1.084	0.038
5MHZ		Left Cheek	41490	2680.0	-2.250	0.020	100	1.00	25.15	25.50	1.084	0.022
10MHZ												
15MHZ												
20MHZ												
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 41 (BW: 20MHz)	50%RB	Front	39725	2503.5	-1.750	0.332	100	1.00	25.15	25.50	1.084	0.360
		Back	39725	2503.5	-0.500	0.419	100	1.00	25.15	25.50	1.084	0.454
		Left	39725	2503.5	-3.000	0.152	100	1.00	25.15	25.50	1.084	0.165
		Right	39725	2503.5	-3.500	0.183	100	1.00	25.15	25.50	1.084	0.198
		Top	39725	2503.5	-2.500	0.002	100	1.00	25.15	25.50	1.084	0.002
		Bottom	39725	2503.5	-2.750	0.114	100	1.00	25.15	25.50	1.084	0.124
		Back	39750	2506.0	-1.250	0.495	100	1.00	25.15	25.50	1.084	0.537
		Back	40185	2549.5	0.750	0.463	100	1.00	25.15	25.50	1.084	0.502
		Back	41055	2636.5	-0.500	0.312	100	1.00	25.15	25.50	1.084	0.338
		Back	41490	2680.0	-4.500	0.217	100	1.00	25.15	25.50	1.084	0.235
5MHZ												
10MHZ												
15MHZ												
20MHZ												

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 42 (BW: 20MHz)	1RB	Left Cheek	43015	3542.5	1.500	0.771	100	1.00	20.19	20.50	1.074	0.828
		Left Tilt	43015	3542.5	3.250	0.294	100	1.00	20.19	20.50	1.074	0.316
		Right Cheek	43015	3542.5	-1.250	0.983	100	1.00	20.19	20.50	1.074	1.056
		Right Tilt	43015	3542.5	-2.250	0.729	100	1.00	20.19	20.50	1.074	0.783
	50%RB	Left Cheek	43015	3542.5	1.750	0.443	100	1.00	20.19	20.50	1.074	0.476
		Left Tilt	43015	3542.5	2.750	0.192	100	1.00	20.19	20.50	1.074	0.206
		Right Cheek	43015	3542.5	-0.750	0.584	100	1.00	20.19	20.50	1.074	0.627
		Right Tilt	43015	3542.5	-0.250	0.467	100	1.00	20.19	20.50	1.074	0.502
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 42 (BW: 20MHz)	1RB	Front	43015	3542.5	0.250	0.237	100	1.00	20.19	20.50	1.074	0.255
		Back	43015	3542.5	-1.500	0.292	100	1.00	20.19	20.50	1.074	0.314
		Left	43015	3542.5	-2.500	0.139	100	1.00	20.19	20.50	1.074	0.149
		Right	43015	3542.5	4.750	0.041	100	1.00	20.19	20.50	1.074	0.044
		Top	43015	3542.5	-2.750	0.086	100	1.00	20.19	20.50	1.074	0.092
		Bottom	43015	3542.5	-3.750	0.007	100	1.00	20.19	20.50	1.074	0.008
	50%RB	Front	43015	3542.5	-0.500	0.157	100	1.00	20.19	20.50	1.074	0.169
		Back	43015	3542.5	-4.750	0.186	100	1.00	20.19	20.50	1.074	0.200
		Left	43015	3542.5	4.500	0.101	100	1.00	20.19	20.50	1.074	0.108
		Right	43015	3542.5	-1.250	0.022	100	1.00	20.19	20.50	1.074	0.024
		Top	43015	3542.5	-3.000	0.048	100	1.00	20.19	20.50	1.074	0.052
		Bottom	43015	3542.5	-4.500	0.003	100	1.00	20.19	20.50	1.074	0.003

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 66 (BW: 20MHz)	1RB	Left Cheek	132322	1745	-4.500	0.102	100	1.00	23.77	24.00	1.054	0.108
		Left Tilt	132322	1745	-3.250	0.049	100	1.00	23.77	24.00	1.054	0.052
		Right Cheek	132322	1745	-0.500	0.110	100	1.00	23.77	24.00	1.054	0.116
		Right Tilt	132322	1745	-4.750	0.055	100	1.00	23.77	24.00	1.054	0.058
	50%RB	Left Cheek	132322	1745	-3.750	0.068	100	1.00	23.77	24.00	1.054	0.072
		Left Tilt	132322	1745	0.500	0.029	100	1.00	23.77	24.00	1.054	0.031
		Right Cheek	132322	1745	-2.250	0.072	100	1.00	23.77	24.00	1.054	0.076
		Right Tilt	132322	1745	0.250	0.035	100	1.00	23.77	24.00	1.054	0.037
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Band 66 (BW: 20MHz)	1RB	Front	132322	1745	-4.250	0.307	100	1.00	23.77	24.00	1.054	0.324
		Back	132322	1745	-1.250	0.568	100	1.00	23.77	24.00	1.054	0.599
		Left	132322	1745	-1.750	0.149	100	1.00	23.77	24.00	1.054	0.157
		Right	132322	1745	1.500	0.057	100	1.00	23.77	24.00	1.054	0.060
		Top	132322	1745	-0.250	0.003	100	1.00	23.77	24.00	1.054	0.003
		Bottom	132322	1745	-2.500	0.072	100	1.00	23.77	24.00	1.054	0.076
	50%RB	Front	132322	1745	-2.750	0.204	100	1.00	23.77	24.00	1.054	0.215
		Back	132322	1745	-1.250	0.287	100	1.00	23.77	24.00	1.054	0.303
		Left	132322	1745	-0.750	0.095	100	1.00	23.77	24.00	1.054	0.100
		Right	132322	1745	2.750	0.034	100	1.00	23.77	24.00	1.054	0.036
		Top	132322	1745	3.000	0.002	100	1.00	23.77	24.00	1.054	0.002
		Bottom	132322	1745	-4.500	0.051	100	1.00	23.77	24.00	1.054	0.054

Mode	Channel Type	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Ch.
NR n5 (BW: 20MHz)	1RB	167300	836.5	0.750	0.135	100	1.00	24.09	24.50	1.099	0.148	167300
		167300	836.5	-2.750	0.071	100	1.00	24.09	24.50	1.099	0.078	167300
		167300	836.5	2.250	0.120	100	1.00	24.09	24.50	1.099	0.132	167300
		167300	836.5	-1.250	0.063	100	1.00	24.09	24.50	1.099	0.069	167300
	50%RB	167300	836.5	-0.250	0.119	100	1.00	24.09	24.50	1.099	0.131	167300
		167300	836.5	-1.500	0.058	100	1.00	24.09	24.50	1.099	0.064	167300
		167300	836.5	-4.750	0.106	100	1.00	24.09	24.50	1.099	0.116	167300
		167300	836.5	-0.750	0.052	100	1.00	24.09	24.50	1.099	0.057	167300
Mode	Channel Type	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Ch.
NR n5 (BW: 20MHz)	1RB	167300	836.5	1.250	0.255	100	1.00	24.09	24.50	1.099	0.280	167300
		167300	836.5	-1.500	0.315	100	1.00	24.09	24.50	1.099	0.346	167300
		167300	836.5	4.250	0.089	100	1.00	24.09	24.50	1.099	0.098	167300
		167300	836.5	-1.750	0.128	100	1.00	24.09	24.50	1.099	0.141	167300
		167300	836.5	3.000	0.005	100	1.00	24.09	24.50	1.099	0.005	167300
		167300	836.5	-0.750	0.071	100	1.00	24.09	24.50	1.099	0.078	167300
	50%RB	167300	836.5	-1.750	0.228	100	1.00	24.09	24.50	1.099	0.251	167300
		167300	836.5	2.000	0.276	100	1.00	24.09	24.50	1.099	0.303	167300
		167300	836.5	-0.750	0.062	100	1.00	24.09	24.50	1.099	0.068	167300
		167300	836.5	-2.750	0.089	100	1.00	24.09	24.50	1.099	0.098	167300
		167300	836.5	-0.500	0.002	100	1.00	24.09	24.50	1.099	0.002	167300
		167300	836.5	4.500	0.055	100	1.00	24.09	24.50	1.099	0.060	167300

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n7 (BW: 20MHz)	1RB	Left Cheek	507000	2535	4.000	0.049	100	1.00	23.36	23.50	1.033	0.051
		Left Tilt	507000	2535	-4.750	0.016	100	1.00	23.36	23.50	1.033	0.017
		Right Cheek	507000	2535	-0.500	0.036	100	1.00	23.36	23.50	1.033	0.037
		Right Tilt	507000	2535	-3.750	0.011	100	1.00	23.36	23.50	1.033	0.011
	50%RB	Left Cheek	507000	2535	-4.000	0.035	100	1.00	23.36	23.50	1.033	0.036
		Left Tilt	507000	2535	1.750	0.007	100	1.00	23.36	23.50	1.033	0.007
		Right Cheek	507000	2535	-3.500	0.018	100	1.00	23.36	23.50	1.033	0.019
		Right Tilt	507000	2535	-1.250	0.004	100	1.00	23.36	23.50	1.033	0.004
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n7 (BW: 20MHz)	1RB	Front	507000	2535	-1.250	0.229	100	1.00	23.36	23.50	1.033	0.237
		Back	507000	2535	-1.750	0.273	100	1.00	23.36	23.50	1.033	0.282
		Left	507000	2535	-3.750	0.043	100	1.00	23.36	23.50	1.033	0.044
		Right	507000	2535	4.000	0.072	100	1.00	23.36	23.50	1.033	0.074
		Top	507000	2535	-4.500	0.005	100	1.00	23.36	23.50	1.033	0.005
		Bottom	507000	2535	1.500	0.076	100	1.00	23.36	23.50	1.033	0.078
	50%RB	Front	507000	2535	-1.500	0.173	100	1.00	23.36	23.50	1.033	0.179
		Back	507000	2535	3.750	0.196	100	1.00	23.36	23.50	1.033	0.202
		Left	507000	2535	-0.500	0.021	100	1.00	23.36	23.50	1.033	0.022
		Right	507000	2535	4.750	0.044	100	1.00	23.36	23.50	1.033	0.045
		Top	507000	2535	0.500	0.002	100	1.00	23.36	23.50	1.033	0.002
		Bottom	507000	2535	-3.750	0.050	100	1.00	23.36	23.50	1.033	0.052

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n12 (BW: 15MHz)	1RB	Left Cheek	141500	707.5	-3.750	0.078	100	1.00	23.97	24.00	1.007	0.079
		Left Tilt	141500	707.5	-4.500	0.035	100	1.00	23.97	24.00	1.007	0.035
		Right Cheek	141500	707.5	1.000	0.079	100	1.00	23.97	24.00	1.007	0.080
		Right Tilt	141500	707.5	0.250	0.039	100	1.00	23.97	24.00	1.007	0.039
	50%RB	Left Cheek	141500	707.5	-2.750	0.062	100	1.00	23.97	24.00	1.007	0.062
		Left Tilt	141500	707.5	-2.000	0.028	100	1.00	23.97	24.00	1.007	0.028
		Right Cheek	141500	707.5	1.000	0.067	100	1.00	23.97	24.00	1.007	0.067
		Right Tilt	141500	707.5	0.250	0.031	100	1.00	23.97	24.00	1.007	0.031
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n12 (BW: 15MHz)	1RB	Front	141500	707.5	1.750	0.142	100	1.00	23.97	24.00	1.007	0.143
		Back	141500	707.5	-2.500	0.208	100	1.00	23.97	24.00	1.007	0.209
		Left	141500	707.5	-4.000	0.031	100	1.00	23.97	24.00	1.007	0.031
		Right	141500	707.5	-2.500	0.074	100	1.00	23.97	24.00	1.007	0.075
		Top	141500	707.5	3.000	0.002	100	1.00	23.97	24.00	1.007	0.002
		Bottom	141500	707.5	1.250	0.036	100	1.00	23.97	24.00	1.007	0.036
	50%RB	Front	141500	707.5	-4.500	0.115	100	1.00	23.97	24.00	1.007	0.116
		Back	141500	707.5	-0.250	0.148	100	1.00	23.97	24.00	1.007	0.149
		Left	141500	707.5	-3.500	0.018	100	1.00	23.97	24.00	1.007	0.018
		Right	141500	707.5	3.750	0.046	100	1.00	23.97	24.00	1.007	0.046
		Top	141500	707.5	-0.500	0.002	100	1.00	23.97	24.00	1.007	0.002
		Bottom	141500	707.5	-1.250	0.022	100	1.00	23.97	24.00	1.007	0.022

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n38 (BW: 20MHz)	1RB	Left Cheek	522500	2580	-4.500	0.018	100	1.00	24.40	24.50	1.023	0.018
		Left Tilt	522500	2580	-4.750	0.008	100	1.00	24.40	24.50	1.023	0.008
		Right Cheek	522500	2580	-4.250	0.019	100	1.00	24.40	24.50	1.023	0.019
		Right Tilt	522500	2580	0.750	0.009	100	1.00	24.40	24.50	1.023	0.009
	50%RB	Left Cheek	522500	2580	-2.500	0.011	100	1.00	24.40	24.50	1.023	0.011
		Left Tilt	522500	2580	4.250	0.005	100	1.00	24.40	24.50	1.023	0.005
		Right Cheek	522500	2580	-4.500	0.012	100	1.00	24.40	24.50	1.023	0.012
		Right Tilt	522500	2580	-3.250	0.006	100	1.00	24.40	24.50	1.023	0.006
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n38 (BW: 20MHz)	1RB	Front	522500	2580	0.750	0.142	100	1.00	24.40	24.50	1.023	0.145
		Back	522500	2580	-1.750	0.202	100	1.00	24.40	24.50	1.023	0.207
		Left	522500	2580	-2.750	0.063	100	1.00	24.40	24.50	1.023	0.064
		Right	522500	2580	-4.500	0.020	100	1.00	24.40	24.50	1.023	0.020
		Top	522500	2580	-2.500	0.002	100	1.00	24.40	24.50	1.023	0.002
		Bottom	522500	2580	1.500	0.018	100	1.00	24.40	24.50	1.023	0.018
	50%RB	Front	522500	2580	-1.250	0.116	100	1.00	24.40	24.50	1.023	0.119
		Back	522500	2580	-4.000	0.159	100	1.00	24.40	24.50	1.023	0.163
		Left	522500	2580	-1.500	0.047	100	1.00	24.40	24.50	1.023	0.048
		Right	522500	2580	-3.250	0.014	100	1.00	24.40	24.50	1.023	0.014
		Top	522500	2580	-2.750	0.002	100	1.00	24.40	24.50	1.023	0.002
		Bottom	522500	2580	2.250	0.009	100	1.00	24.40	24.50	1.023	0.009

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n41 (BW:100MHz)	1RB	Left Cheek	518598	2593	-0.500	0.009	100	1.00	23.31	23.50	1.045	0.009
		Left Tilt	518598	2593	-4.500	0.010	100	1.00	23.31	23.50	1.045	0.010
		Right Cheek	518598	2593	-4.750	0.018	100	1.00	23.31	23.50	1.045	0.019
		Right Tilt	518598	2593	0.250	0.019	100	1.00	23.31	23.50	1.045	0.020
	50%RB	Left Cheek	518598	2593	-0.750	0.004	100	1.00	23.31	23.50	1.045	0.004
		Left Tilt	518598	2593	-4.750	0.007	100	1.00	23.31	23.50	1.045	0.007
		Right Cheek	518598	2593	3.500	0.008	100	1.00	23.31	23.50	1.045	0.008
		Right Tilt	518598	2593	-4.500	0.010	100	1.00	23.31	23.50	1.045	0.010
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n41 (BW:100MHz)	1RB	Front	518598	2593	-3.750	0.107	100	1.00	23.31	23.50	1.045	0.112
		Back	518598	2593	-1.750	0.196	100	1.00	23.31	23.50	1.045	0.205
		Left	518598	2593	-4.250	0.040	100	1.00	23.31	23.50	1.045	0.042
		Right	518598	2593	-2.000	0.068	100	1.00	23.31	23.50	1.045	0.071
		Top	518598	2593	1.500	0.003	100	1.00	23.31	23.50	1.045	0.003
		Bottom	518598	2593	-4.500	0.020	100	1.00	23.31	23.50	1.045	0.021
	50%RB	Front	518598	2593	-0.250	0.085	100	1.00	23.31	23.50	1.045	0.089
		Back	518598	2593	-0.500	0.149	100	1.00	23.31	23.50	1.045	0.156
		Left	518598	2593	3.750	0.020	100	1.00	23.31	23.50	1.045	0.021
		Right	518598	2593	-2.750	0.041	100	1.00	23.31	23.50	1.045	0.043
		Top	518598	2593	-3.500	0.002	100	1.00	23.31	23.50	1.045	0.002
		Bottom	518598	2593	-1.500	0.010	100	1.00	23.31	23.50	1.045	0.010

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n66 (BW:40MHz)	1RB	Left Cheek	352000	1760	-2.250	0.031	100	1.00	23.59	24.00	1.099	0.034
		Left Tilt	352000	1760	1.750	0.011	100	1.00	23.59	24.00	1.099	0.012
		Right Cheek	352000	1760	-1.500	0.036	100	1.00	23.59	24.00	1.099	0.040
		Right Tilt	352000	1760	-4.750	0.017	100	1.00	23.59	24.00	1.099	0.019
	50%RB	Left Cheek	352000	1760	-1.750	0.015	100	1.00	23.59	24.00	1.099	0.016
		Left Tilt	352000	1760	-0.250	0.007	100	1.00	23.59	24.00	1.099	0.008
		Right Cheek	352000	1760	-4.750	0.021	100	1.00	23.59	24.00	1.099	0.023
		Right Tilt	352000	1760	-4.000	0.010	100	1.00	23.59	24.00	1.099	0.011
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n66 (BW:40MHz)	1RB	Front	352000	1760	-4.250	0.182	100	1.00	23.59	24.00	1.099	0.200
		Back	352000	1760	-1.000	0.217	100	1.00	23.59	24.00	1.099	0.238
		Left	352000	1760	-2.250	0.043	100	1.00	23.59	24.00	1.099	0.047
		Right	352000	1760	-3.500	0.065	100	1.00	23.59	24.00	1.099	0.071
		Top	352000	1760	3.250	0.005	100	1.00	23.59	24.00	1.099	0.005
		Bottom	352000	1760	-2.750	0.071	100	1.00	23.59	24.00	1.099	0.078
	50%RB	Front	352000	1760	-2.000	0.132	100	1.00	23.59	24.00	1.099	0.145
		Back	352000	1760	-0.500	0.153	100	1.00	23.59	24.00	1.099	0.168
		Left	352000	1760	-3.750	0.024	100	1.00	23.59	24.00	1.099	0.026
		Right	352000	1760	-4.250	0.038	100	1.00	23.59	24.00	1.099	0.042
		Top	352000	1760	2.750	0.003	100	1.00	23.59	24.00	1.099	0.003
		Bottom	352000	1760	4.750	0.049	100	1.00	23.59	24.00	1.099	0.054

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n71 (BW:15MHz)	1RB	Left Cheek	133100	665.5	-3.000	0.077	100	1.00	22.95	23.00	1.012	0.078
		Left Tilt	133100	665.5	3.250	0.040	100	1.00	22.95	23.00	1.012	0.040
		Right Cheek	133100	665.5	3.750	0.065	100	1.00	22.95	23.00	1.012	0.066
		Right Tilt	133100	665.5	-4.750	0.035	100	1.00	22.95	23.00	1.012	0.035
	50%RB	Left Cheek	133100	665.5	1.750	0.059	100	1.00	22.95	23.00	1.012	0.060
		Left Tilt	133100	665.5	-0.500	0.030	100	1.00	22.95	23.00	1.012	0.030
		Right Cheek	133100	665.5	-0.750	0.052	100	1.00	22.95	23.00	1.012	0.053
		Right Tilt	133100	665.5	-1.250	0.025	100	1.00	22.95	23.00	1.012	0.025
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n71 (BW:15MHz)	1RB	Front	133100	665.5	4.000	0.179	100	1.00	22.95	23.00	1.012	0.181
		Back	133100	665.5	-2.250	0.214	100	1.00	22.95	23.00	1.012	0.216
		Left	133100	665.5	-4.250	0.032	100	1.00	22.95	23.00	1.012	0.032
		Right	133100	665.5	0.750	0.040	100	1.00	22.95	23.00	1.012	0.040
		Top	133100	665.5	-0.500	0.007	100	1.00	22.95	23.00	1.012	0.007
		Bottom	133100	665.5	-3.500	0.065	100	1.00	22.95	23.00	1.012	0.066
	50%RB	Front	133100	665.5	3.500	0.142	100	1.00	22.95	23.00	1.012	0.144
		Back	133100	665.5	-2.250	0.165	100	1.00	22.95	23.00	1.012	0.167
		Left	133100	665.5	-0.750	0.018	100	1.00	22.95	23.00	1.012	0.018
		Right	133100	665.5	-3.500	0.023	100	1.00	22.95	23.00	1.012	0.023
		Top	133100	665.5	-2.750	0.004	100	1.00	22.95	23.00	1.012	0.004
		Bottom	133100	665.5	-4.750	0.039	100	1.00	22.95	23.00	1.012	0.039

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:50MHz)	1RB	Left Cheek	633334	3500	1.000	0.639	100	1.00	25.94	26.00	1.014	0.648
		Left Tilt	633334	3500	-4.750	0.412	100	1.00	25.94	26.00	1.014	0.418
		Right Cheek	633334	3500	-4.250	0.658	100	1.00	25.94	26.00	1.014	0.667
		Right Tilt	633334	3500	-2.500	0.551	100	1.00	25.94	26.00	1.014	0.559
	50%RB	Left Cheek	633334	3500	-2.250	0.294	100	1.00	25.94	26.00	1.014	0.298
		Left Tilt	633334	3500	-1.750	0.251	100	1.00	25.94	26.00	1.014	0.254
		Right Cheek	633334	3500	-4.000	0.316	100	1.00	25.94	26.00	1.014	0.320
		Right Tilt	633334	3500	-4.750	0.275	100	1.00	25.94	26.00	1.014	0.279
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:50MHz)	1RB	Front	633334	3500	-2.000	0.155	100	1.00	25.94	26.00	1.014	0.157
		Back	633334	3500	-2.750	0.202	100	1.00	25.94	26.00	1.014	0.205
		Left	633334	3500	-0.250	0.066	100	1.00	25.94	26.00	1.014	0.067
		Right	633334	3500	-1.750	0.009	100	1.00	25.94	26.00	1.014	0.009
		Top	633334	3500	0.500	0.047	100	1.00	25.94	26.00	1.014	0.048
		Bottom	633334	3500	3.250	0.002	100	1.00	25.94	26.00	1.014	0.002
	50%RB	Front	633334	3500	-0.250	0.116	100	1.00	25.94	26.00	1.014	0.118
		Back	633334	3500	-1.250	0.142	100	1.00	25.94	26.00	1.014	0.144
		Left	633334	3500	-4.250	0.036	100	1.00	25.94	26.00	1.014	0.037
		Right	633334	3500	-4.500	0.004	100	1.00	25.94	26.00	1.014	0.004
		Top	633334	3500	-2.250	0.023	100	1.00	25.94	26.00	1.014	0.023
		Bottom	633334	3500	-3.500	0.002	100	1.00	25.94	26.00	1.014	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:50MHz)	1RB	Left Cheek	638334	3575	0.250	0.791	100	1.00	26.03	26.50	1.114	0.881
		Left Tilt	638334	3575	-1.750	0.217	100	1.00	26.03	26.50	1.114	0.242
		Right Cheek	638334	3575	-2.000	0.626	100	1.00	26.03	26.50	1.114	0.698
		Right Tilt	638334	3575	-4.250	0.174	100	1.00	26.03	26.50	1.114	0.194
	50%RB	Left Cheek	638334	3575	4.500	0.452	100	1.00	26.03	26.50	1.114	0.504
		Left Tilt	638334	3575	2.250	0.148	100	1.00	26.03	26.50	1.114	0.165
		Right Cheek	638334	3575	-1.750	0.417	100	1.00	26.03	26.50	1.114	0.465
		Right Tilt	638334	3575	-3.500	0.124	100	1.00	26.03	26.50	1.114	0.138
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:50MHz)	1RB	Front	638334	3575	0.750	0.121	100	1.00	26.03	26.50	1.114	0.135
		Back	638334	3575	-1.500	0.146	100	1.00	26.03	26.50	1.114	0.163
		Left	638334	3575	4.250	0.040	100	1.00	26.03	26.50	1.114	0.045
		Right	638334	3575	-2.250	0.009	100	1.00	26.03	26.50	1.114	0.010
		Top	638334	3575	-4.500	0.023	100	1.00	26.03	26.50	1.114	0.026
		Bottom	638334	3575	-1.250	0.002	100	1.00	26.03	26.50	1.114	0.002
	50%RB	Front	638334	3575	-3.750	0.081	100	1.00	26.03	26.50	1.114	0.090
		Back	638334	3575	-0.500	0.103	100	1.00	26.03	26.50	1.114	0.115
		Left	638334	3575	-2.250	0.024	100	1.00	26.03	26.50	1.114	0.027
		Right	638334	3575	-1.750	0.005	100	1.00	26.03	26.50	1.114	0.006
		Top	638334	3575	-2.000	0.013	100	1.00	26.03	26.50	1.114	0.014
		Bottom	638334	3575	-2.250	0.002	100	1.00	26.03	26.50	1.114	0.002

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:50MHz)	1RB	Left Cheek	656000	3890	0.500	0.638	100	1.00	26.13	26.50	1.089	0.695
		Left Tilt	656000	3890	2.500	0.386	100	1.00	26.13	26.50	1.089	0.420
		Right Cheek	656000	3890	-0.750	0.496	100	1.00	26.13	26.50	1.089	0.540
		Right Tilt	656000	3890	-4.750	0.300	100	1.00	26.13	26.50	1.089	0.327
	50%RB	Left Cheek	656000	3890	-2.500	0.346	100	1.00	26.13	26.50	1.089	0.377
		Left Tilt	656000	3890	2.250	0.228	100	1.00	26.13	26.50	1.089	0.248
		Right Cheek	656000	3890	-0.250	0.259	100	1.00	26.13	26.50	1.089	0.282
		Right Tilt	656000	3890	-1.750	0.194	100	1.00	26.13	26.50	1.089	0.211
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n77 (BW:50MHz)	1RB	Front	656000	3890	-0.250	0.043	100	1.00	26.13	26.50	1.089	0.047
		Back	656000	3890	-4.750	0.070	100	1.00	26.13	26.50	1.089	0.076
		Left	656000	3890	3.000	0.022	100	1.00	26.13	26.50	1.089	0.024
		Right	656000	3890	-2.250	0.005	100	1.00	26.13	26.50	1.089	0.005
		Top	656000	3890	-4.250	0.016	100	1.00	26.13	26.50	1.089	0.017
		Bottom	656000	3890	-2.750	0.002	100	1.00	26.13	26.50	1.089	0.002
	50%RB	Front	656000	3890	-2.750	0.025	100	1.00	26.13	26.50	1.089	0.027
		Back	656000	3890	-0.750	0.040	100	1.00	26.13	26.50	1.089	0.044
		Left	656000	3890	-0.500	0.013	100	1.00	26.13	26.50	1.089	0.014
		Right	656000	3890	0.250	0.002	100	1.00	26.13	26.50	1.089	0.002
		Top	656000	3890	1.500	0.009	100	1.00	26.13	26.50	1.089	0.010
		Bottom	656000	3890	-3.000	0.002	100	1.00	26.13	26.50	1.089	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n78 (BW:50MHz)	1RB	Left Cheek	635000	3525	-3.500	0.163	100	1.00	25.98	26.00	1.005	0.164
		Left Tilt	635000	3525	2.750	0.015	100	1.00	25.98	26.00	1.005	0.015
		Right Cheek	635000	3525	-4.750	0.172	100	1.00	25.98	26.00	1.005	0.173
		Right Tilt	635000	3525	-1.000	0.167	100	1.00	25.98	26.00	1.005	0.168
	50%RB	Left Cheek	635000	3525	-4.500	0.093	100	1.00	25.98	26.00	1.005	0.093
		Left Tilt	635000	3525	2.750	0.089	100	1.00	25.98	26.00	1.005	0.089
		Right Cheek	635000	3525	-3.500	0.127	100	1.00	25.98	26.00	1.005	0.128
		Right Tilt	635000	3525	-0.250	0.106	100	1.00	25.98	26.00	1.005	0.106
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n78 (BW:50MHz)	1RB	Front	635000	3525	-4.250	0.049	100	1.00	25.98	26.00	1.005	0.049
		Back	635000	3525	-0.750	0.065	100	1.00	25.98	26.00	1.005	0.065
		Left	635000	3525	2.000	0.028	100	1.00	25.98	26.00	1.005	0.028
		Right	635000	3525	-1.750	0.005	100	1.00	25.98	26.00	1.005	0.005
		Top	635000	3525	-0.500	0.020	100	1.00	25.98	26.00	1.005	0.020
		Bottom	635000	3525	-0.750	0.003	100	1.00	25.98	26.00	1.005	0.003
	50%RB	Front	635000	3525	-1.250	0.027	100	1.00	25.98	26.00	1.005	0.027
		Back	635000	3525	2.750	0.036	100	1.00	25.98	26.00	1.005	0.036
		Left	635000	3525	-4.750	0.015	100	1.00	25.98	26.00	1.005	0.015
		Right	635000	3525	-1.750	0.003	100	1.00	25.98	26.00	1.005	0.003
		Top	635000	3525	-3.000	0.009	100	1.00	25.98	26.00	1.005	0.009
		Bottom	635000	3525	0.750	0.002	100	1.00	25.98	26.00	1.005	0.002

Mode	Channel Type	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Ch.
NR n78 (BW:50MHz)	1RB	638334	3575	2.750	0.217	100	1.00	25.98	26.00	1.005	0.218	638334
		638334	3575	-4.750	0.114	100	1.00	25.98	26.00	1.005	0.115	638334
		638334	3575	-1.750	0.195	100	1.00	25.98	26.00	1.005	0.196	638334
		638334	3575	-0.500	0.103	100	1.00	25.98	26.00	1.005	0.103	638334
	50%RB	638334	3575	-1.000	0.104	100	1.00	25.98	26.00	1.005	0.104	638334
		638334	3575	2.250	0.052	100	1.00	25.98	26.00	1.005	0.052	638334
		638334	3575	-4.500	0.091	100	1.00	25.98	26.00	1.005	0.091	638334
		638334	3575	-4.750	0.043	100	1.00	25.98	26.00	1.005	0.043	638334
		638334	3575	-4.750	0.043	100	1.00	25.98	26.00	1.005	0.043	638334
Mode	Channel Type	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Ch.
NR n78 (BW:50MHz)	1RB	638334	3575	3.500	0.038	100	1.00	25.98	26.00	1.005	0.038	638334
		638334	3575	-4.500	0.053	100	1.00	25.98	26.00	1.005	0.053	638334
		638334	3575	3.250	0.021	100	1.00	25.98	26.00	1.005	0.021	638334
		638334	3575	-4.750	0.005	100	1.00	25.98	26.00	1.005	0.005	638334
		638334	3575	-1.500	0.022	100	1.00	25.98	26.00	1.005	0.022	638334
		638334	3575	-1.250	0.007	100	1.00	25.98	26.00	1.005	0.007	638334
	50%RB	638334	3575	-0.750	0.020	100	1.00	25.98	26.00	1.005	0.020	638334
		638334	3575	2.250	0.026	100	1.00	25.98	26.00	1.005	0.026	638334
		638334	3575	-0.250	0.010	100	1.00	25.98	26.00	1.005	0.010	638334
		638334	3575	-1.750	0.002	100	1.00	25.98	26.00	1.005	0.002	638334
		638334	3575	-3.250	0.013	100	1.00	25.98	26.00	1.005	0.013	638334
		638334	3575	-0.750	0.003	100	1.00	25.98	26.00	1.005	0.003	638334
		638334	3575	-0.750	0.003	100	1.00	25.98	26.00	1.005	0.003	638334
		638334	3575	-0.750	0.003	100	1.00	25.98	26.00	1.005	0.003	638334

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n78 (BW:50MHz)	1RB	Left Cheek	650000	3750	3.000	0.197	100	1.00	25.75	26.00	1.059	0.209
		Left Tilt	650000	3750	-4.750	0.089	100	1.00	25.75	26.00	1.059	0.094
		Right Cheek	650000	3750	-3.750	0.174	100	1.00	25.75	26.00	1.059	0.184
		Right Tilt	650000	3750	-2.250	0.076	100	1.00	25.75	26.00	1.059	0.081
	50%RB	Left Cheek	650000	3750	-2.500	0.387	100	1.00	25.75	26.00	1.059	0.410
		Left Tilt	650000	3750	4.250	0.162	100	1.00	25.75	26.00	1.059	0.172
		Right Cheek	650000	3750	-4.000	0.315	100	1.00	25.75	26.00	1.059	0.334
		Right Tilt	650000	3750	-1.750	0.146	100	1.00	25.75	26.00	1.059	0.155
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
NR n78 (BW:50MHz)	1RB	Front	650000	3750	-3.250	0.024	100	1.00	25.75	26.00	1.059	0.025
		Back	650000	3750	-4.750	0.039	100	1.00	25.75	26.00	1.059	0.041
		Left	650000	3750	4.250	0.016	100	1.00	25.75	26.00	1.059	0.017
		Right	650000	3750	-1.500	0.005	100	1.00	25.75	26.00	1.059	0.005
		Top	650000	3750	-2.750	0.019	100	1.00	25.75	26.00	1.059	0.020
		Bottom	650000	3750	3.000	0.002	100	1.00	25.75	26.00	1.059	0.002
	50%RB	Front	650000	3750	-3.250	0.016	100	1.00	25.75	26.00	1.059	0.017
		Back	650000	3750	-0.500	0.024	100	1.00	25.75	26.00	1.059	0.025
		Left	650000	3750	-4.750	0.009	100	1.00	25.75	26.00	1.059	0.010
		Right	650000	3750	-4.500	0.003	100	1.00	25.75	26.00	1.059	0.003
		Top	650000	3750	-2.250	0.011	100	1.00	25.75	26.00	1.059	0.012
		Bottom	650000	3750	-3.750	0.002	100	1.00	25.75	26.00	1.059	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n7 (BW: 20MHz)	1RB	Left Cheek	19125	1902.5	-0.830	0.630	100	1.00	23.18	23.50	1.076	0.678
		Left Tilt	19125	1902.5	4.750	0.964	100	1.00	23.18	23.50	1.076	1.038
		Right Cheek	19125	1902.5	-2.140	0.752	100	1.00	23.18	23.50	1.076	0.810
		Right Tilt	19125	1902.5	0.260	1.032	100	1.00	23.18	23.50	1.076	1.111
	50%RB	Left Cheek	19125	1902.5	4.910	0.452	100	1.00	23.18	23.50	1.076	0.487
		Left Tilt	19125	1902.5	2.340	0.714	100	1.00	23.18	23.50	1.076	0.769
		Right Cheek	19125	1902.5	-1.470	0.526	100	1.00	23.18	23.50	1.076	0.566
		Right Tilt	19125	1902.5	-4.000	0.783	100	1.00	23.18	23.50	1.076	0.843
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n7 (BW: 20MHz)	1RB	Front	19125	1902.5	2.340	0.276	100	1.00	23.18	23.50	1.076	0.297
		Back	19125	1902.5	-1.080	0.281	100	1.00	23.18	23.50	1.076	0.302
		Left	19125	1902.5	3.860	0.134	100	1.00	23.18	23.50	1.076	0.144
		Right	19125	1902.5	-2.990	0.075	100	1.00	23.18	23.50	1.076	0.081
		Top	19125	1902.5	2.750	0.071	100	1.00	23.18	23.50	1.076	0.076
		Bottom	19125	1902.5	-3.200	0.003	100	1.00	23.18	23.50	1.076	0.003
	50%RB	Front	19125	1902.5	-3.020	0.244	100	1.00	23.18	23.50	1.076	0.263
		Back	19125	1902.5	-0.080	0.256	100	1.00	23.18	23.50	1.076	0.276
		Left	19125	1902.5	-2.060	0.117	100	1.00	23.18	23.50	1.076	0.126
		Right	19125	1902.5	0.580	0.059	100	1.00	23.18	23.50	1.076	0.064
		Top	19125	1902.5	-3.820	0.055	100	1.00	23.18	23.50	1.076	0.059
		Bottom	19125	1902.5	-1.300	0.002	100	1.00	23.18	23.50	1.076	0.002

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n66 (BW: 20MHz)	1RB	Left Cheek	19125	1902.5	-4.210	0.365	100	1.00	23.19	23.50	1.074	0.392
		Left Tilt	19125	1902.5	-1.380	0.624	100	1.00	23.19	23.50	1.074	0.670
		Right Cheek	19125	1902.5	-0.460	0.543	100	1.00	23.19	23.50	1.074	0.583
		Right Tilt	19125	1902.5	1.600	1.014	100	1.00	23.19	23.50	1.074	1.089
	50%RB	Left Cheek	19125	1902.5	0.850	0.259	100	1.00	23.19	23.50	1.074	0.278
		Left Tilt	19125	1902.5	-2.690	0.621	100	1.00	23.19	23.50	1.074	0.667
		Right Cheek	19125	1902.5	1.610	0.473	100	1.00	23.19	23.50	1.074	0.508
		Right Tilt	19125	1902.5	4.080	0.684	100	1.00	23.19	23.50	1.074	0.735
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n66 (BW: 20MHz)	1RB	Front	19125	1902.5	0.770	0.207	100	1.00	23.19	23.50	1.074	0.222
		Back	19125	1902.5	-1.020	0.222	100	1.00	23.19	23.50	1.074	0.238
		Left	19125	1902.5	-4.470	0.098	100	1.00	23.19	23.50	1.074	0.105
		Right	19125	1902.5	-2.650	0.062	100	1.00	23.19	23.50	1.074	0.067
		Top	19125	1902.5	2.030	0.040	100	1.00	23.19	23.50	1.074	0.043
		Bottom	19125	1902.5	0.060	0.004	100	1.00	23.19	23.50	1.074	0.004
	50%RB	Front	19125	1902.5	-1.470	0.172	100	1.00	23.19	23.50	1.074	0.185
		Back	19125	1902.5	-1.310	0.204	100	1.00	23.19	23.50	1.074	0.219
		Left	19125	1902.5	-3.390	0.086	100	1.00	23.19	23.50	1.074	0.092
		Right	19125	1902.5	3.240	0.052	100	1.00	23.19	23.50	1.074	0.056
		Top	19125	1902.5	0.950	0.035	100	1.00	23.19	23.50	1.074	0.038
		Bottom	19125	1902.5	-2.950	0.002	100	1.00	23.19	23.50	1.074	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n78 (BW: 20MHz)	1RB	Left Cheek	19125	1902.5	-1.320	0.432	100	1.00	22.62	23.00	1.091	0.472
		Left Tilt	19125	1902.5	4.870	0.584	100	1.00	22.62	23.00	1.091	0.637
		Right Cheek	19125	1902.5	-1.870	0.676	100	1.00	22.62	23.00	1.091	0.738
		Right Tilt	19125	1902.5	1.340	0.985	100	1.00	22.62	23.00	1.091	1.075
	50%RB	Left Cheek	19125	1902.5	-4.420	0.244	100	1.00	22.62	23.00	1.091	0.266
		Left Tilt	19125	1902.5	-4.930	0.391	100	1.00	22.62	23.00	1.091	0.427
		Right Cheek	19125	1902.5	3.150	0.458	100	1.00	22.62	23.00	1.091	0.500
		Right Tilt	19125	1902.5	4.550	0.672	100	1.00	22.62	23.00	1.091	0.733
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2-n78 (BW: 20MHz)	1RB	Front	19125	1902.5	2.950	0.261	100	1.00	22.62	23.00	1.091	0.285
		Back	19125	1902.5	-1.750	0.288	100	1.00	22.62	23.00	1.091	0.314
		Left	19125	1902.5	2.740	0.142	100	1.00	22.62	23.00	1.091	0.155
		Right	19125	1902.5	-0.720	0.062	100	1.00	22.62	23.00	1.091	0.068
		Top	19125	1902.5	0.520	0.163	100	1.00	22.62	23.00	1.091	0.178
		Bottom	19125	1902.5	1.860	0.002	100	1.00	22.62	23.00	1.091	0.002
	50%RB	Front	19125	1902.5	-1.670	0.201	100	1.00	22.62	23.00	1.091	0.219
		Back	19125	1902.5	0.660	0.226	100	1.00	22.62	23.00	1.091	0.247
		Left	19125	1902.5	1.780	0.095	100	1.00	22.62	23.00	1.091	0.104
		Right	19125	1902.5	-3.160	0.044	100	1.00	22.62	23.00	1.091	0.048
		Top	19125	1902.5	-0.770	0.117	100	1.00	22.62	23.00	1.091	0.128
		Bottom	19125	1902.5	-2.760	0.002	100	1.00	22.62	23.00	1.091	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n7 (BW: 20MHz)	1RB	Left Cheek	20325	1747.5	-2.230	0.165	100	1.00	23.12	23.50	1.091	0.180
		Left Tilt	20325	1747.5	1.790	0.207	100	1.00	23.12	23.50	1.091	0.226
		Right Cheek	20325	1747.5	3.800	0.230	100	1.00	23.12	23.50	1.091	0.251
		Right Tilt	20325	1747.5	-0.640	0.475	100	1.00	23.12	23.50	1.091	0.518
	50%RB	Left Cheek	20325	1747.5	3.990	0.128	100	1.00	23.12	23.50	1.091	0.140
		Left Tilt	20325	1747.5	-2.200	0.162	100	1.00	23.12	23.50	1.091	0.177
		Right Cheek	20325	1747.5	0.130	0.195	100	1.00	23.12	23.50	1.091	0.213
		Right Tilt	20325	1747.5	-0.660	0.297	100	1.00	23.12	23.50	1.091	0.324
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n7 (BW: 20MHz)	1RB	Front	20325	1747.5	-4.550	0.051	100	1.00	23.12	23.50	1.091	0.056
		Back	20325	1747.5	4.440	0.059	100	1.00	23.12	23.50	1.091	0.064
		Left	20325	1747.5	-3.380	0.034	100	1.00	23.12	23.50	1.091	0.037
		Right	20325	1747.5	-1.590	0.007	100	1.00	23.12	23.50	1.091	0.008
		Top	20325	1747.5	3.730	0.030	100	1.00	23.12	23.50	1.091	0.033
		Bottom	20325	1747.5	-0.560	0.002	100	1.00	23.12	23.50	1.091	0.002
	50%RB	Front	20325	1747.5	1.350	0.042	100	1.00	23.12	23.50	1.091	0.046
		Back	20325	1747.5	-4.430	0.047	100	1.00	23.12	23.50	1.091	0.051
		Left	20325	1747.5	-4.640	0.021	100	1.00	23.12	23.50	1.091	0.023
		Right	20325	1747.5	3.610	0.003	100	1.00	23.12	23.50	1.091	0.003
		Top	20325	1747.5	-1.530	0.019	100	1.00	23.12	23.50	1.091	0.021
		Bottom	20325	1747.5	1.470	0.002	100	1.00	23.12	23.50	1.091	0.002

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n41 (BW: 20MHz)	1RB	Left Cheek	20325	1747.5	0.110	0.199	100	1.00	22.74	23.00	1.062	0.211
		Left Tilt	20325	1747.5	2.190	0.256	100	1.00	22.74	23.00	1.062	0.272
		Right Cheek	20325	1747.5	-3.680	0.534	100	1.00	22.74	23.00	1.062	0.567
		Right Tilt	20325	1747.5	1.710	0.615	100	1.00	22.74	23.00	1.062	0.653
	50%RB	Left Cheek	20325	1747.5	-2.100	0.165	100	1.00	22.74	23.00	1.062	0.175
		Left Tilt	20325	1747.5	3.320	0.217	100	1.00	22.74	23.00	1.062	0.230
		Right Cheek	20325	1747.5	-1.060	0.376	100	1.00	22.74	23.00	1.062	0.399
		Right Tilt	20325	1747.5	4.560	0.483	100	1.00	22.74	23.00	1.062	0.513
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n41 (BW: 20MHz)	1RB	Front	20325	1747.5	0.730	0.051	100	1.00	22.74	23.00	1.062	0.054
		Back	20325	1747.5	0.100	0.059	100	1.00	22.74	23.00	1.062	0.063
		Left	20325	1747.5	3.460	0.025	100	1.00	22.74	23.00	1.062	0.027
		Right	20325	1747.5	-0.610	0.011	100	1.00	22.74	23.00	1.062	0.012
		Top	20325	1747.5	-2.940	0.022	100	1.00	22.74	23.00	1.062	0.023
		Bottom	20325	1747.5	0.020	0.002	100	1.00	22.74	23.00	1.062	0.002
	50%RB	Front	20325	1747.5	4.280	0.047	100	1.00	22.74	23.00	1.062	0.050
		Back	20325	1747.5	0.540	0.052	100	1.00	22.74	23.00	1.062	0.055
		Left	20325	1747.5	-3.940	0.021	100	1.00	22.74	23.00	1.062	0.022
		Right	20325	1747.5	-0.970	0.009	100	1.00	22.74	23.00	1.062	0.010
		Top	20325	1747.5	-2.950	0.020	100	1.00	22.74	23.00	1.062	0.021
		Bottom	20325	1747.5	3.410	0.002	100	1.00	22.74	23.00	1.062	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n78 (BW: 20MHz)	1RB	Left Cheek	20325	1747.5	2.090	0.152	100	1.00	22.49	22.50	1.002	0.152
		Left Tilt	20325	1747.5	-2.500	0.295	100	1.00	22.49	22.50	1.002	0.296
		Right Cheek	20325	1747.5	-0.490	0.238	100	1.00	22.49	22.50	1.002	0.239
		Right Tilt	20325	1747.5	2.310	0.492	100	1.00	22.49	22.50	1.002	0.493
	50%RB	Left Cheek	20325	1747.5	3.700	0.132	100	1.00	22.49	22.50	1.002	0.132
		Left Tilt	20325	1747.5	-1.840	0.227	100	1.00	22.49	22.50	1.002	0.228
		Right Cheek	20325	1747.5	0.370	0.192	100	1.00	22.49	22.50	1.002	0.192
		Right Tilt	20325	1747.5	-3.470	0.385	100	1.00	22.49	22.50	1.002	0.386
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
4-n78 (BW: 20MHz)	1RB	Front	20325	1747.5	-2.420	0.068	100	1.00	22.49	22.50	1.002	0.068
		Back	20325	1747.5	-4.340	0.091	100	1.00	22.49	22.50	1.002	0.091
		Left	20325	1747.5	0.670	0.046	100	1.00	22.49	22.50	1.002	0.046
		Right	20325	1747.5	2.530	0.014	100	1.00	22.49	22.50	1.002	0.014
		Top	20325	1747.5	-2.540	0.044	100	1.00	22.49	22.50	1.002	0.044
		Bottom	20325	1747.5	0.170	0.002	100	1.00	22.49	22.50	1.002	0.002
	50%RB	Front	20325	1747.5	4.450	0.550	100	1.00	22.49	22.50	1.002	0.551
		Back	20325	1747.5	0.940	0.076	100	1.00	22.49	22.50	1.002	0.076
		Left	20325	1747.5	4.190	0.036	100	1.00	22.49	22.50	1.002	0.036
		Right	20325	1747.5	-3.810	0.011	100	1.00	22.49	22.50	1.002	0.011
		Top	20325	1747.5	2.970	0.038	100	1.00	22.49	22.50	1.002	0.038
		Bottom	20325	1747.5	-1.180	0.002	100	1.00	22.49	22.50	1.002	0.002

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n7 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	-2.790	0.088	100	1.00	22.81	23.00	1.045	0.092
		Left Tilt	20525	836.5	-2.100	0.052	100	1.00	22.81	23.00	1.045	0.054
		Right Cheek	20525	836.5	-4.870	0.079	100	1.00	22.81	23.00	1.045	0.083
		Right Tilt	20525	836.5	3.730	0.044	100	1.00	22.81	23.00	1.045	0.046
	50%RB	Left Cheek	20525	836.5	-2.790	0.067	100	1.00	22.81	23.00	1.045	0.070
		Left Tilt	20525	836.5	4.140	0.039	100	1.00	22.81	23.00	1.045	0.041
		Right Cheek	20525	836.5	0.070	0.061	100	1.00	22.81	23.00	1.045	0.064
		Right Tilt	20525	836.5	-0.330	0.035	100	1.00	22.81	23.00	1.045	0.037
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n7 (BW: 10MHz)	1RB	Front	20525	836.5	-0.940	0.311	100	1.00	22.81	23.00	1.045	0.325
		Back	20525	836.5	0.260	0.355	100	1.00	22.81	23.00	1.045	0.371
		Left	20525	836.5	-1.500	0.051	100	1.00	22.81	23.00	1.045	0.053
		Right	20525	836.5	4.050	0.169	100	1.00	22.81	23.00	1.045	0.177
		Top	20525	836.5	3.250	0.005	100	1.00	22.81	23.00	1.045	0.005
		Bottom	20525	836.5	-2.810	0.128	100	1.00	22.81	23.00	1.045	0.134
	50%RB	Front	20525	836.5	-0.450	0.236	100	1.00	22.81	23.00	1.045	0.247
		Back	20525	836.5	0.330	0.265	100	1.00	22.81	23.00	1.045	0.277
		Left	20525	836.5	-4.300	0.038	100	1.00	22.81	23.00	1.045	0.040
		Right	20525	836.5	3.710	0.127	100	1.00	22.81	23.00	1.045	0.133
		Top	20525	836.5	-2.540	0.002	100	1.00	22.81	23.00	1.045	0.002
		Bottom	20525	836.5	2.490	0.108	100	1.00	22.81	23.00	1.045	0.113

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n38 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	4.240	0.080	100	1.00	22.93	23.00	1.016	0.081
		Left Tilt	20525	836.5	4.370	0.060	100	1.00	22.93	23.00	1.016	0.061
		Right Cheek	20525	836.5	-1.490	0.076	100	1.00	22.93	23.00	1.016	0.077
		Right Tilt	20525	836.5	-0.490	0.054	100	1.00	22.93	23.00	1.016	0.055
	50%RB	Left Cheek	20525	836.5	-2.390	0.063	100	1.00	22.93	23.00	1.016	0.064
		Left Tilt	20525	836.5	1.810	0.049	100	1.00	22.93	23.00	1.016	0.050
		Right Cheek	20525	836.5	1.960	0.059	100	1.00	22.93	23.00	1.016	0.060
		Right Tilt	20525	836.5	0.090	0.046	100	1.00	22.93	23.00	1.016	0.047
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n38 (BW: 10MHz)	1RB	Front	20525	836.5	-2.800	0.104	100	1.00	22.93	23.00	1.016	0.106
		Back	20525	836.5	-2.320	0.183	100	1.00	22.93	23.00	1.016	0.186
		Left	20525	836.5	-0.910	0.022	100	1.00	22.93	23.00	1.016	0.022
		Right	20525	836.5	3.730	0.072	100	1.00	22.93	23.00	1.016	0.073
		Top	20525	836.5	1.680	0.002	100	1.00	22.93	23.00	1.016	0.002
		Bottom	20525	836.5	1.220	0.037	100	1.00	22.93	23.00	1.016	0.038
	50%RB	Front	20525	836.5	2.760	0.076	100	1.00	22.93	23.00	1.016	0.077
		Back	20525	836.5	-0.840	0.147	100	1.00	22.93	23.00	1.016	0.149
		Left	20525	836.5	-3.160	0.014	100	1.00	22.93	23.00	1.016	0.014
		Right	20525	836.5	0.780	0.055	100	1.00	22.93	23.00	1.016	0.056
		Top	20525	836.5	2.280	0.002	100	1.00	22.93	23.00	1.016	0.002
		Bottom	20525	836.5	-2.680	0.027	100	1.00	22.93	23.00	1.016	0.027

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n41 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	-1.670	0.079	100	1.00	22.90	23.00	1.023	0.081
		Left Tilt	20525	836.5	3.880	0.052	100	1.00	22.90	23.00	1.023	0.053
		Right Cheek	20525	836.5	-3.350	0.072	100	1.00	22.90	23.00	1.023	0.074
		Right Tilt	20525	836.5	-1.300	0.049	100	1.00	22.90	23.00	1.023	0.050
	50%RB	Left Cheek	20525	836.5	1.980	0.065	100	1.00	22.90	23.00	1.023	0.067
		Left Tilt	20525	836.5	3.070	0.047	100	1.00	22.90	23.00	1.023	0.048
		Right Cheek	20525	836.5	-0.250	0.061	100	1.00	22.90	23.00	1.023	0.062
		Right Tilt	20525	836.5	-3.540	0.042	100	1.00	22.90	23.00	1.023	0.043
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n41 (BW: 10MHz)	1RB	Front	20525	836.5	2.390	0.128	100	1.00	22.90	23.00	1.023	0.131
		Back	20525	836.5	-0.140	0.169	100	1.00	22.90	23.00	1.023	0.173
		Left	20525	836.5	-1.780	0.022	100	1.00	22.90	23.00	1.023	0.023
		Right	20525	836.5	2.620	0.074	100	1.00	22.90	23.00	1.023	0.076
		Top	20525	836.5	2.350	0.003	100	1.00	22.90	23.00	1.023	0.003
		Bottom	20525	836.5	-0.800	0.028	100	1.00	22.90	23.00	1.023	0.029
	50%RB	Front	20525	836.5	4.130	0.103	100	1.00	22.90	23.00	1.023	0.105
		Back	20525	836.5	-1.460	0.132	100	1.00	22.90	23.00	1.023	0.135
		Left	20525	836.5	-2.320	0.017	100	1.00	22.90	23.00	1.023	0.017
		Right	20525	836.5	1.630	0.061	100	1.00	22.90	23.00	1.023	0.062
		Top	20525	836.5	4.820	0.002	100	1.00	22.90	23.00	1.023	0.002
		Bottom	20525	836.5	2.360	0.020	100	1.00	22.90	23.00	1.023	0.020

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n66 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	0.180	0.087	100	1.00	22.87	23.00	1.030	0.090
		Left Tilt	20525	836.5	-3.330	0.053	100	1.00	22.87	23.00	1.030	0.055
		Right Cheek	20525	836.5	4.650	0.090	100	1.00	22.87	23.00	1.030	0.093
		Right Tilt	20525	836.5	0.140	0.066	100	1.00	22.87	23.00	1.030	0.068
	50%RB	Left Cheek	20525	836.5	0.710	0.069	100	1.00	22.87	23.00	1.030	0.071
		Left Tilt	20525	836.5	-1.160	0.042	100	1.00	22.87	23.00	1.030	0.043
		Right Cheek	20525	836.5	2.660	0.076	100	1.00	22.87	23.00	1.030	0.078
		Right Tilt	20525	836.5	0.080	0.057	100	1.00	22.87	23.00	1.030	0.059
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n66 (BW: 10MHz)	1RB	Front	20525	836.5	4.080	0.214	100	1.00	22.87	23.00	1.030	0.221
		Back	20525	836.5	-0.680	0.285	100	1.00	22.87	23.00	1.030	0.294
		Left	20525	836.5	2.160	0.026	100	1.00	22.87	23.00	1.030	0.027
		Right	20525	836.5	3.190	0.128	100	1.00	22.87	23.00	1.030	0.132
		Top	20525	836.5	-3.310	0.003	100	1.00	22.87	23.00	1.030	0.003
		Bottom	20525	836.5	0.960	0.047	100	1.00	22.87	23.00	1.030	0.048
	50%RB	Front	20525	836.5	-0.350	0.146	100	1.00	22.87	23.00	1.030	0.150
		Back	20525	836.5	0.300	0.227	100	1.00	22.87	23.00	1.030	0.234
		Left	20525	836.5	-3.770	0.019	100	1.00	22.87	23.00	1.030	0.020
		Right	20525	836.5	0.120	0.097	100	1.00	22.87	23.00	1.030	0.100
		Top	20525	836.5	-4.410	0.002	100	1.00	22.87	23.00	1.030	0.002
		Bottom	20525	836.5	0.470	0.037	100	1.00	22.87	23.00	1.030	0.038

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n77 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	1.600	0.079	100	1.00	23.05	23.50	1.109	0.088
		Left Tilt	20525	836.5	-0.320	0.064	100	1.00	23.05	23.50	1.109	0.071
		Right Cheek	20525	836.5	4.900	0.103	100	1.00	23.05	23.50	1.109	0.114
		Right Tilt	20525	836.5	-1.060	0.062	100	1.00	23.05	23.50	1.109	0.069
	50%RB	Left Cheek	20525	836.5	-0.200	0.060	100	1.00	23.05	23.50	1.109	0.067
		Left Tilt	20525	836.5	-0.620	0.038	100	1.00	23.05	23.50	1.109	0.042
		Right Cheek	20525	836.5	1.710	0.079	100	1.00	23.05	23.50	1.109	0.088
		Right Tilt	20525	836.5	3.690	0.037	100	1.00	23.05	23.50	1.109	0.041
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n77 (BW: 10MHz)	1RB	Front	20525	836.5	0.150	0.075	100	1.00	23.05	23.50	1.109	0.083
		Back	20525	836.5	-4.420	0.124	100	1.00	23.05	23.50	1.109	0.138
		Left	20525	836.5	4.590	0.031	100	1.00	23.05	23.50	1.109	0.034
		Right	20525	836.5	4.790	0.058	100	1.00	23.05	23.50	1.109	0.064
		Top	20525	836.5	0.510	0.003	100	1.00	23.05	23.50	1.109	0.003
		Bottom	20525	836.5	2.380	0.027	100	1.00	23.05	23.50	1.109	0.030
	50%RB	Front	20525	836.5	-1.600	0.057	100	1.00	23.05	23.50	1.109	0.063
		Back	20525	836.5	-2.050	0.092	100	1.00	23.05	23.50	1.109	0.102
		Left	20525	836.5	0.900	0.016	100	1.00	23.05	23.50	1.109	0.018
		Right	20525	836.5	4.310	0.035	100	1.00	23.05	23.50	1.109	0.039
		Top	20525	836.5	4.340	0.002	100	1.00	23.05	23.50	1.109	0.002
		Bottom	20525	836.5	1.320	0.014	100	1.00	23.05	23.50	1.109	0.016

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n78 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	-0.620	0.063	100	1.00	23.04	23.50	1.112	0.070
		Left Tilt	20525	836.5	0.410	0.044	100	1.00	23.04	23.50	1.112	0.049
		Right Cheek	20525	836.5	-4.510	0.104	100	1.00	23.04	23.50	1.112	0.116
		Right Tilt	20525	836.5	-0.750	0.055	100	1.00	23.04	23.50	1.112	0.061
	50%RB	Left Cheek	20525	836.5	-2.160	0.045	100	1.00	23.04	23.50	1.112	0.050
		Left Tilt	20525	836.5	1.220	0.033	100	1.00	23.04	23.50	1.112	0.037
		Right Cheek	20525	836.5	-1.680	0.072	100	1.00	23.04	23.50	1.112	0.080
		Right Tilt	20525	836.5	3.980	0.040	100	1.00	23.04	23.50	1.112	0.044
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5-n78 (BW: 10MHz)	1RB	Front	20525	836.5	0.640	0.075	100	1.00	23.04	23.50	1.112	0.083
		Back	20525	836.5	-0.020	0.129	100	1.00	23.04	23.50	1.112	0.143
		Left	20525	836.5	0.840	0.035	100	1.00	23.04	23.50	1.112	0.039
		Right	20525	836.5	4.960	0.008	100	1.00	23.04	23.50	1.112	0.009
		Top	20525	836.5	-4.810	0.002	100	1.00	23.04	23.50	1.112	0.002
		Bottom	20525	836.5	-0.010	0.017	100	1.00	23.04	23.50	1.112	0.019
	50%RB	Front	20525	836.5	-2.270	0.039	100	1.00	23.04	23.50	1.112	0.043
		Back	20525	836.5	-4.430	0.084	100	1.00	23.04	23.50	1.112	0.093
		Left	20525	836.5	0.320	0.017	100	1.00	23.04	23.50	1.112	0.019
		Right	20525	836.5	1.990	0.003	100	1.00	23.04	23.50	1.112	0.003
		Top	20525	836.5	-2.760	0.002	100	1.00	23.04	23.50	1.112	0.002
		Bottom	20525	836.5	4.700	0.007	100	1.00	23.04	23.50	1.112	0.008

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n7 (BW: 20MHz)	1RB	Left Cheek	21100	2535	-2.700	0.144	100	1.00	23.53	24.00	1.114	0.160
		Left Tilt	21100	2535	-0.020	0.051	100	1.00	23.53	24.00	1.114	0.057
		Right Cheek	21100	2535	1.840	0.076	100	1.00	23.53	24.00	1.114	0.085
		Right Tilt	21100	2535	1.450	0.039	100	1.00	23.53	24.00	1.114	0.043
	50%RB	Left Cheek	21100	2535	0.390	0.107	100	1.00	23.53	24.00	1.114	0.119
		Left Tilt	21100	2535	-3.940	0.040	100	1.00	23.53	24.00	1.114	0.045
		Right Cheek	21100	2535	-1.860	0.072	100	1.00	23.53	24.00	1.114	0.080
		Right Tilt	21100	2535	1.710	0.020	100	1.00	23.53	24.00	1.114	0.022
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n7 (BW: 20MHz)	1RB	Front	21100	2535	-2.030	0.434	100	1.00	23.53	24.00	1.114	0.484
		Back	21100	2535	0.700	0.592	100	1.00	23.53	24.00	1.114	0.660
		Left	21100	2535	1.660	0.271	100	1.00	23.53	24.00	1.114	0.302
		Right	21100	2535	0.070	0.030	100	1.00	23.53	24.00	1.114	0.033
		Top	21100	2535	-3.850	0.004	100	1.00	23.53	24.00	1.114	0.004
		Bottom	21100	2535	0.130	0.119	100	1.00	23.53	24.00	1.114	0.133
	50%RB	Front	21100	2535	3.330	0.348	100	1.00	23.53	24.00	1.114	0.388
		Back	21100	2535	4.590	0.419	100	1.00	23.53	24.00	1.114	0.467
		Left	21100	2535	-3.930	0.173	100	1.00	23.53	24.00	1.114	0.193
		Right	21100	2535	3.740	0.016	100	1.00	23.53	24.00	1.114	0.018
		Top	21100	2535	-2.380	0.002	100	1.00	23.53	24.00	1.114	0.002
		Bottom	21100	2535	-4.720	0.057	100	1.00	23.53	24.00	1.114	0.064

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n66 (BW: 20MHz)	1RB	Left Cheek	21100	2535	-3.580	0.296	100	1.00	22.99	23.00	1.002	0.297
		Left Tilt	21100	2535	-4.400	0.637	100	1.00	22.99	23.00	1.002	0.638
		Right Cheek	21100	2535	0.530	0.479	100	1.00	22.99	23.00	1.002	0.480
		Right Tilt	21100	2535	0.830	0.991	100	1.00	22.99	23.00	1.002	0.993
	50%RB	Left Cheek	21100	2535	-3.970	0.195	100	1.00	22.99	23.00	1.002	0.195
		Left Tilt	21100	2535	1.590	0.475	100	1.00	22.99	23.00	1.002	0.476
		Right Cheek	21100	2535	-3.090	0.379	100	1.00	22.99	23.00	1.002	0.380
		Right Tilt	21100	2535	-1.470	0.755	100	1.00	22.99	23.00	1.002	0.757
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n66 (BW: 20MHz)	1RB	Front	21100	2535	-2.690	0.108	100	1.00	22.99	23.00	1.002	0.108
		Back	21100	2535	-0.820	0.151	100	1.00	22.99	23.00	1.002	0.151
		Left	21100	2535	-1.700	0.059	100	1.00	22.99	23.00	1.002	0.059
		Right	21100	2535	2.880	0.024	100	1.00	22.99	23.00	1.002	0.024
		Top	21100	2535	2.500	0.047	100	1.00	22.99	23.00	1.002	0.047
		Bottom	21100	2535	2.870	0.005	100	1.00	22.99	23.00	1.002	0.005
	50%RB	Front	21100	2535	-1.430	0.091	100	1.00	22.99	23.00	1.002	0.091
		Back	21100	2535	-2.370	0.128	100	1.00	22.99	23.00	1.002	0.128
		Left	21100	2535	3.670	0.049	100	1.00	22.99	23.00	1.002	0.049
		Right	21100	2535	4.730	0.016	100	1.00	22.99	23.00	1.002	0.016
		Top	21100	2535	0.340	0.034	100	1.00	22.99	23.00	1.002	0.034
		Bottom	21100	2535	-1.000	0.002	100	1.00	22.99	23.00	1.002	0.002

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n77 (BW: 20MHz)	1RB	Left Cheek	21100	2535	3.750	0.214	100	1.00	22.67	23.00	1.079	0.231
		Left Tilt	21100	2535	1.120	0.363	100	1.00	22.67	23.00	1.079	0.392
		Right Cheek	21100	2535	-0.650	0.297	100	1.00	22.67	23.00	1.079	0.320
		Right Tilt	21100	2535	-0.200	0.880	100	1.00	22.67	23.00	1.079	0.949
	50%RB	Left Cheek	21100	2535	1.290	0.163	100	1.00	22.67	23.00	1.079	0.176
		Left Tilt	21100	2535	-1.890	0.246	100	1.00	22.67	23.00	1.079	0.265
		Right Cheek	21100	2535	-1.430	0.245	100	1.00	22.67	23.00	1.079	0.264
		Right Tilt	21100	2535	0.840	0.752	100	1.00	22.67	23.00	1.079	0.811
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n77 (BW: 20MHz)	1RB	Front	21100	2535	1.920	0.061	100	1.00	22.67	23.00	1.079	0.066
		Back	21100	2535	-2.110	0.109	100	1.00	22.67	23.00	1.079	0.118
		Left	21100	2535	-2.940	0.027	100	1.00	22.67	23.00	1.079	0.029
		Right	21100	2535	4.560	0.015	100	1.00	22.67	23.00	1.079	0.016
		Top	21100	2535	1.470	0.029	100	1.00	22.67	23.00	1.079	0.031
		Bottom	21100	2535	1.230	0.003	100	1.00	22.67	23.00	1.079	0.003
	50%RB	Front	21100	2535	4.280	0.044	100	1.00	22.67	23.00	1.079	0.047
		Back	21100	2535	0.150	0.066	100	1.00	22.67	23.00	1.079	0.071
		Left	21100	2535	-2.260	0.020	100	1.00	22.67	23.00	1.079	0.022
		Right	21100	2535	3.330	0.008	100	1.00	22.67	23.00	1.079	0.009
		Top	21100	2535	-0.910	0.022	100	1.00	22.67	23.00	1.079	0.024
		Bottom	21100	2535	-3.450	0.002	100	1.00	22.67	23.00	1.079	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n78 (BW: 20MHz)	1RB	Left Cheek	21100	2535	3.310	0.374	100	1.00	22.78	23.00	1.052	0.393
		Left Tilt	21100	2535	-2.050	0.519	100	1.00	22.78	23.00	1.052	0.546
		Right Cheek	21100	2535	-0.130	0.792	100	1.00	22.78	23.00	1.052	0.833
		Right Tilt	21100	2535	-0.410	1.059	100	1.00	22.78	23.00	1.052	1.114
	50%RB	Left Cheek	21100	2535	4.020	0.218	100	1.00	22.78	23.00	1.052	0.229
		Left Tilt	21100	2535	-0.740	0.361	100	1.00	22.78	23.00	1.052	0.380
		Right Cheek	21100	2535	1.830	0.637	100	1.00	22.78	23.00	1.052	0.670
		Right Tilt	21100	2535	-1.770	0.827	100	1.00	22.78	23.00	1.052	0.870
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
7-n78 (BW: 20MHz)	1RB	Front	21100	2535	1.950	0.080	100	1.00	22.78	23.00	1.052	0.084
		Back	21100	2535	-0.180	0.180	100	1.00	22.78	23.00	1.052	0.189
		Left	21100	2535	1.870	0.045	100	1.00	22.78	23.00	1.052	0.047
		Right	21100	2535	4.740	0.022	100	1.00	22.78	23.00	1.052	0.023
		Top	21100	2535	-2.200	0.031	100	1.00	22.78	23.00	1.052	0.033
		Bottom	21100	2535	-2.550	0.004	100	1.00	22.78	23.00	1.052	0.004
	50%RB	Front	21100	2535	1.030	0.062	100	1.00	22.78	23.00	1.052	0.065
		Back	21100	2535	-2.280	0.148	100	1.00	22.78	23.00	1.052	0.156
		Left	21100	2535	4.490	0.032	100	1.00	22.78	23.00	1.052	0.034
		Right	21100	2535	2.090	0.016	100	1.00	22.78	23.00	1.052	0.017
		Top	21100	2535	-2.150	0.020	100	1.00	22.78	23.00	1.052	0.021
		Bottom	21100	2535	-0.710	0.002	100	1.00	22.78	23.00	1.052	0.002

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
38-n78 (BW: 20MHz)	1RB	Left Cheek	38175	2612.5	0.800	0.052	100	1.00	22.48	22.50	1.005	0.052
		Left Tilt	38175	2612.5	-2.220	0.075	100	1.00	22.48	22.50	1.005	0.075
		Right Cheek	38175	2612.5	3.310	0.118	100	1.00	22.48	22.50	1.005	0.119
		Right Tilt	38175	2612.5	-4.920	0.179	100	1.00	22.48	22.50	1.005	0.180
	50%RB	Left Cheek	38175	2612.5	3.340	0.035	100	1.00	22.48	22.50	1.005	0.035
		Left Tilt	38175	2612.5	-2.560	0.047	100	1.00	22.48	22.50	1.005	0.047
		Right Cheek	38175	2612.5	2.310	0.109	100	1.00	22.48	22.50	1.005	0.110
		Right Tilt	38175	2612.5	-3.310	0.117	100	1.00	22.48	22.50	1.005	0.118
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
38-n78 (BW: 20MHz)	1RB	Front	38175	2612.5	0.600	0.049	100	1.00	22.48	22.50	1.005	0.049
		Back	38175	2612.5	-0.680	0.092	100	1.00	22.48	22.50	1.005	0.092
		Left	38175	2612.5	-3.830	0.025	100	1.00	22.48	22.50	1.005	0.025
		Right	38175	2612.5	-1.120	0.009	100	1.00	22.48	22.50	1.005	0.009
		Top	38175	2612.5	-4.530	0.004	100	1.00	22.48	22.50	1.005	0.004
		Bottom	38175	2612.5	4.730	0.013	100	1.00	22.48	22.50	1.005	0.013
	50%RB	Front	38175	2612.5	-0.890	0.032	100	1.00	22.48	22.50	1.005	0.032
		Back	38175	2612.5	2.670	0.058	100	1.00	22.48	22.50	1.005	0.058
		Left	38175	2612.5	4.010	0.019	100	1.00	22.48	22.50	1.005	0.019
		Right	38175	2612.5	-0.710	0.006	100	1.00	22.48	22.50	1.005	0.006
		Top	38175	2612.5	-0.090	0.002	100	1.00	22.48	22.50	1.005	0.002
		Bottom	38175	2612.5	-2.230	0.009	100	1.00	22.48	22.50	1.005	0.009

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n41 (BW: 20MHz)	1RB	Left Cheek	39725	2503.5	-2.160	0.093	100	1.00	22.73	23.00	1.064	0.099
		Left Tilt	39725	2503.5	2.260	0.153	100	1.00	22.73	23.00	1.064	0.163
		Right Cheek	39725	2503.5	1.040	0.195	100	1.00	22.73	23.00	1.064	0.208
		Right Tilt	39725	2503.5	-2.950	0.306	100	1.00	22.73	23.00	1.064	0.326
	50%RB	Left Cheek	39725	2503.5	4.120	0.059	100	1.00	22.73	23.00	1.064	0.063
		Left Tilt	39725	2503.5	0.090	0.127	100	1.00	22.73	23.00	1.064	0.135
		Right Cheek	39725	2503.5	1.240	0.144	100	1.00	22.73	23.00	1.064	0.153
		Right Tilt	39725	2503.5	-4.360	0.217	100	1.00	22.73	23.00	1.064	0.231
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n41 (BW: 20MHz)	1RB	Front	39725	2503.5	4.800	0.045	100	1.00	22.73	23.00	1.064	0.048
		Back	39725	2503.5	3.010	0.081	100	1.00	22.73	23.00	1.064	0.086
		Left	39725	2503.5	-3.000	0.022	100	1.00	22.73	23.00	1.064	0.023
		Right	39725	2503.5	-3.150	0.009	100	1.00	22.73	23.00	1.064	0.010
		Top	39725	2503.5	4.170	0.004	100	1.00	22.73	23.00	1.064	0.004
		Bottom	39725	2503.5	-0.380	0.011	100	1.00	22.73	23.00	1.064	0.012
	50%RB	Front	39725	2503.5	4.620	0.022	100	1.00	22.73	23.00	1.064	0.023
		Back	39725	2503.5	-2.200	0.039	100	1.00	22.73	23.00	1.064	0.042
		Left	39725	2503.5	-0.240	0.010	100	1.00	22.73	23.00	1.064	0.011
		Right	39725	2503.5	-4.050	0.004	100	1.00	22.73	23.00	1.064	0.004
		Top	39725	2503.5	-4.840	0.002	100	1.00	22.73	23.00	1.064	0.002
		Bottom	39725	2503.5	2.210	0.005	100	1.00	22.73	23.00	1.064	0.005

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n77 (BW: 20MHz)	1RB	Left Cheek	39725	2503.5	1.220	0.115	100	1.00	22.21	22.50	1.069	0.123
		Left Tilt	39725	2503.5	2.600	0.178	100	1.00	22.21	22.50	1.069	0.190
		Right Cheek	39725	2503.5	-2.270	0.249	100	1.00	22.21	22.50	1.069	0.266
		Right Tilt	39725	2503.5	0.650	0.376	100	1.00	22.21	22.50	1.069	0.402
	50%RB	Left Cheek	39725	2503.5	-3.700	0.098	100	1.00	22.21	22.50	1.069	0.105
		Left Tilt	39725	2503.5	-3.400	0.144	100	1.00	22.21	22.50	1.069	0.154
		Right Cheek	39725	2503.5	0.080	0.210	100	1.00	22.21	22.50	1.069	0.225
		Right Tilt	39725	2503.5	3.340	0.274	100	1.00	22.21	22.50	1.069	0.293
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n77 (BW: 20MHz)	1RB	Front	39725	2503.5	3.030	0.038	100	1.00	22.21	22.50	1.069	0.041
		Back	39725	2503.5	4.240	0.060	100	1.00	22.21	22.50	1.069	0.064
		Left	39725	2503.5	2.470	0.025	100	1.00	22.21	22.50	1.069	0.027
		Right	39725	2503.5	-2.760	0.005	100	1.00	22.21	22.50	1.069	0.005
		Top	39725	2503.5	2.150	0.008	100	1.00	22.21	22.50	1.069	0.009
		Bottom	39725	2503.5	-1.410	0.019	100	1.00	22.21	22.50	1.069	0.020
	50%RB	Front	39725	2503.5	-4.780	0.023	100	1.00	22.21	22.50	1.069	0.025
		Back	39725	2503.5	4.680	0.049	100	1.00	22.21	22.50	1.069	0.052
		Left	39725	2503.5	2.170	0.015	100	1.00	22.21	22.50	1.069	0.016
		Right	39725	2503.5	-1.970	0.002	100	1.00	22.21	22.50	1.069	0.002
		Top	39725	2503.5	3.250	0.005	100	1.00	22.21	22.50	1.069	0.005
		Bottom	39725	2503.5	-2.540	0.008	100	1.00	22.21	22.50	1.069	0.009

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n78 (BW: 20MHz)	1RB	Left Cheek	39725	2503.5	-4.830	0.119	100	1.00	22.58	23.00	1.102	0.131
		Left Tilt	39725	2503.5	-1.580	0.197	100	1.00	22.58	23.00	1.102	0.217
		Right Cheek	39725	2503.5	-2.940	0.124	100	1.00	22.58	23.00	1.102	0.137
		Right Tilt	39725	2503.5	3.130	0.375	100	1.00	22.58	23.00	1.102	0.413
	50%RB	Left Cheek	39725	2503.5	4.820	0.070	100	1.00	22.58	23.00	1.102	0.077
		Left Tilt	39725	2503.5	-2.580	0.107	100	1.00	22.58	23.00	1.102	0.118
		Right Cheek	39725	2503.5	-3.940	0.158	100	1.00	22.58	23.00	1.102	0.174
		Right Tilt	39725	2503.5	-3.450	0.306	100	1.00	22.58	23.00	1.102	0.337
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
41-n78 (BW: 20MHz)	1RB	Front	39725	2503.5	-2.800	0.040	100	1.00	22.58	23.00	1.102	0.044
		Back	39725	2503.5	4.690	0.057	100	1.00	22.58	23.00	1.102	0.063
		Left	39725	2503.5	3.870	0.019	100	1.00	22.58	23.00	1.102	0.021
		Right	39725	2503.5	-2.790	0.002	100	1.00	22.58	23.00	1.102	0.002
		Top	39725	2503.5	3.240	0.017	100	1.00	22.58	23.00	1.102	0.019
		Bottom	39725	2503.5	3.630	0.002	100	1.00	22.58	23.00	1.102	0.002
	50%RB	Front	39725	2503.5	-1.790	0.025	100	1.00	22.58	23.00	1.102	0.028
		Back	39725	2503.5	-2.790	0.037	100	1.00	22.58	23.00	1.102	0.041
		Left	39725	2503.5	2.620	0.013	100	1.00	22.58	23.00	1.102	0.014
		Right	39725	2503.5	4.470	0.002	100	1.00	22.58	23.00	1.102	0.002
		Top	39725	2503.5	-1.020	0.009	100	1.00	22.58	23.00	1.102	0.010
		Bottom	39725	2503.5	-3.140	0.002	100	1.00	22.58	23.00	1.102	0.002

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n7 (BW: 20MHz)	1RB	Left Cheek	132322	1745	-0.520	0.215	100	1.00	22.26	22.50	1.057	0.227
		Left Tilt	132322	1745	1.280	0.381	100	1.00	22.26	22.50	1.057	0.403
		Right Cheek	132322	1745	-2.990	0.272	100	1.00	22.26	22.50	1.057	0.287
		Right Tilt	132322	1745	4.130	0.675	100	1.00	22.26	22.50	1.057	0.713
	50%RB	Left Cheek	132322	1745	3.990	0.192	100	1.00	22.26	22.50	1.057	0.203
		Left Tilt	132322	1745	-0.920	0.267	100	1.00	22.26	22.50	1.057	0.282
		Right Cheek	132322	1745	2.320	0.206	100	1.00	22.26	22.50	1.057	0.218
		Right Tilt	132322	1745	2.280	0.439	100	1.00	22.26	22.50	1.057	0.464
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n7 (BW: 20MHz)	1RB	Front	132322	1745	3.270	0.040	100	1.00	22.26	22.50	1.057	0.042
		Back	132322	1745	4.980	0.054	100	1.00	22.26	22.50	1.057	0.057
		Left	132322	1745	-2.480	0.024	100	1.00	22.26	22.50	1.057	0.025
		Right	132322	1745	0.010	0.007	100	1.00	22.26	22.50	1.057	0.007
		Top	132322	1745	2.700	0.014	100	1.00	22.26	22.50	1.057	0.015
		Bottom	132322	1745	-3.480	0.002	100	1.00	22.26	22.50	1.057	0.002
	50%RB	Front	132322	1745	0.260	0.027	100	1.00	22.26	22.50	1.057	0.029
		Back	132322	1745	1.540	0.030	100	1.00	22.26	22.50	1.057	0.032
		Left	132322	1745	-1.460	0.017	100	1.00	22.26	22.50	1.057	0.018
		Right	132322	1745	-1.530	0.004	100	1.00	22.26	22.50	1.057	0.004
		Top	132322	1745	3.000	0.010	100	1.00	22.26	22.50	1.057	0.011
		Bottom	132322	1745	0.200	0.002	100	1.00	22.26	22.50	1.057	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n38 (BW: 20MHz)	1RB	Left Cheek	132322	1745	-3.380	0.173	100	1.00	22.06	22.50	1.107	0.191
		Left Tilt	132322	1745	1.130	0.283	100	1.00	22.06	22.50	1.107	0.313
		Right Cheek	132322	1745	0.170	0.492	100	1.00	22.06	22.50	1.107	0.544
		Right Tilt	132322	1745	-0.690	0.736	100	1.00	22.06	22.50	1.107	0.814
	50%RB	Left Cheek	132322	1745	4.140	0.137	100	1.00	22.06	22.50	1.107	0.152
		Left Tilt	132322	1745	2.040	0.204	100	1.00	22.06	22.50	1.107	0.226
		Right Cheek	132322	1745	-0.890	0.311	100	1.00	22.06	22.50	1.107	0.344
		Right Tilt	132322	1745	-0.690	0.495	100	1.00	22.06	22.50	1.107	0.548
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n38 (BW: 20MHz)	1RB	Front	132322	1745	1.500	0.037	100	1.00	22.06	22.50	1.107	0.041
		Back	132322	1745	-4.970	0.042	100	1.00	22.06	22.50	1.107	0.046
		Left	132322	1745	3.280	0.019	100	1.00	22.06	22.50	1.107	0.021
		Right	132322	1745	-0.650	0.007	100	1.00	22.06	22.50	1.107	0.008
		Top	132322	1745	1.170	0.015	100	1.00	22.06	22.50	1.107	0.017
		Bottom	132322	1745	0.000	0.002	100	1.00	22.06	22.50	1.107	0.002
	50%RB	Front	132322	1745	1.100	0.025	100	1.00	22.06	22.50	1.107	0.028
		Back	132322	1745	4.490	0.032	100	1.00	22.06	22.50	1.107	0.035
		Left	132322	1745	1.200	0.011	100	1.00	22.06	22.50	1.107	0.012
		Right	132322	1745	-4.300	0.003	100	1.00	22.06	22.50	1.107	0.003
		Top	132322	1745	0.180	0.007	100	1.00	22.06	22.50	1.107	0.008
		Bottom	132322	1745	2.730	0.002	100	1.00	22.06	22.50	1.107	0.002

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n41 (BW: 20MHz)	1RB	Left Cheek	132322	1745	0.900	0.201	100	1.00	22.33	22.50	1.040	0.209
		Left Tilt	132322	1745	-0.330	0.276	100	1.00	22.33	22.50	1.040	0.287
		Right Cheek	132322	1745	1.070	0.253	100	1.00	22.33	22.50	1.040	0.263
		Right Tilt	132322	1745	-0.670	0.675	100	1.00	22.33	22.50	1.040	0.702
	50%RB	Left Cheek	132322	1745	-1.940	0.167	100	1.00	22.33	22.50	1.040	0.174
		Left Tilt	132322	1745	-1.120	0.195	100	1.00	22.33	22.50	1.040	0.203
		Right Cheek	132322	1745	2.000	0.182	100	1.00	22.33	22.50	1.040	0.189
		Right Tilt	132322	1745	3.520	0.437	100	1.00	22.33	22.50	1.040	0.454
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n41 (BW: 20MHz)	1RB	Front	132322	1745	1.400	0.036	100	1.00	22.33	22.50	1.040	0.037
		Back	132322	1745	-0.550	0.058	100	1.00	22.33	22.50	1.040	0.060
		Left	132322	1745	-0.410	0.020	100	1.00	22.33	22.50	1.040	0.021
		Right	132322	1745	4.460	0.009	100	1.00	22.33	22.50	1.040	0.009
		Top	132322	1745	0.730	0.012	100	1.00	22.33	22.50	1.040	0.012
		Bottom	132322	1745	4.070	0.002	100	1.00	22.33	22.50	1.040	0.002
	50%RB	Front	132322	1745	-0.730	0.017	100	1.00	22.33	22.50	1.040	0.018
		Back	132322	1745	-2.260	0.029	100	1.00	22.33	22.50	1.040	0.030
		Left	132322	1745	-0.880	0.007	100	1.00	22.33	22.50	1.040	0.007
		Right	132322	1745	-4.480	0.004	100	1.00	22.33	22.50	1.040	0.004
		Top	132322	1745	3.060	0.005	100	1.00	22.33	22.50	1.040	0.005
		Bottom	132322	1745	4.680	0.002	100	1.00	22.33	22.50	1.040	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n66 (BW: 20MHz)	1RB	Left Cheek	132322	1745	3.250	0.167	100	1.00	23.80	24.00	1.047	0.175
		Left Tilt	132322	1745	0.940	0.312	100	1.00	23.80	24.00	1.047	0.327
		Right Cheek	132322	1745	-4.090	0.239	100	1.00	23.80	24.00	1.047	0.250
		Right Tilt	132322	1745	3.300	0.669	100	1.00	23.80	24.00	1.047	0.701
	50%RB	Left Cheek	132322	1745	-3.360	0.126	100	1.00	23.80	24.00	1.047	0.132
		Left Tilt	132322	1745	-0.600	0.237	100	1.00	23.80	24.00	1.047	0.248
		Right Cheek	132322	1745	2.090	0.204	100	1.00	23.80	24.00	1.047	0.214
		Right Tilt	132322	1745	1.180	0.478	100	1.00	23.80	24.00	1.047	0.501
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n66 (BW: 20MHz)	1RB	Front	132322	1745	2.090	0.041	100	1.00	23.80	24.00	1.047	0.043
		Back	132322	1745	-3.250	0.059	100	1.00	23.80	24.00	1.047	0.062
		Left	132322	1745	-2.300	0.018	100	1.00	23.80	24.00	1.047	0.019
		Right	132322	1745	3.250	0.004	100	1.00	23.80	24.00	1.047	0.004
		Top	132322	1745	2.300	0.013	100	1.00	23.80	24.00	1.047	0.014
		Bottom	132322	1745	1.720	0.002	100	1.00	23.80	24.00	1.047	0.002
	50%RB	Front	132322	1745	-2.310	0.029	100	1.00	23.80	24.00	1.047	0.030
		Back	132322	1745	-1.870	0.031	100	1.00	23.80	24.00	1.047	0.032
		Left	132322	1745	1.560	0.009	100	1.00	23.80	24.00	1.047	0.009
		Right	132322	1745	0.070	0.002	100	1.00	23.80	24.00	1.047	0.002
		Top	132322	1745	1.430	0.006	100	1.00	23.80	24.00	1.047	0.006
		Bottom	132322	1745	-2.640	0.002	100	1.00	23.80	24.00	1.047	0.002

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n77 (BW: 20MHz)	1RB	Left Cheek	132322	1745	0.120	0.164	100	1.00	22.61	23.00	1.094	0.179
		Left Tilt	132322	1745	0.950	0.322	100	1.00	22.61	23.00	1.094	0.352
		Right Cheek	132322	1745	-0.090	0.310	100	1.00	22.61	23.00	1.094	0.339
		Right Tilt	132322	1745	-0.390	0.751	100	1.00	22.61	23.00	1.094	0.822
	50%RB	Left Cheek	132322	1745	0.030	0.132	100	1.00	22.61	23.00	1.094	0.144
		Left Tilt	132322	1745	2.430	0.247	100	1.00	22.61	23.00	1.094	0.270
		Right Cheek	132322	1745	-2.740	0.229	100	1.00	22.61	23.00	1.094	0.251
		Right Tilt	132322	1745	1.070	0.514	100	1.00	22.61	23.00	1.094	0.562
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n77 (BW: 20MHz)	1RB	Front	132322	1745	-3.390	0.049	100	1.00	22.61	23.00	1.094	0.054
		Back	132322	1745	-3.320	0.071	100	1.00	22.61	23.00	1.094	0.078
		Left	132322	1745	4.790	0.022	100	1.00	22.61	23.00	1.094	0.024
		Right	132322	1745	1.890	0.007	100	1.00	22.61	23.00	1.094	0.008
		Top	132322	1745	3.440	0.018	100	1.00	22.61	23.00	1.094	0.020
		Bottom	132322	1745	2.170	0.002	100	1.00	22.61	23.00	1.094	0.002
	50%RB	Front	132322	1745	0.370	0.036	100	1.00	22.61	23.00	1.094	0.039
		Back	132322	1745	0.540	0.045	100	1.00	22.61	23.00	1.094	0.049
		Left	132322	1745	-4.470	0.011	100	1.00	22.61	23.00	1.094	0.012
		Right	132322	1745	0.980	0.004	100	1.00	22.61	23.00	1.094	0.004
		Top	132322	1745	-2.590	0.009	100	1.00	22.61	23.00	1.094	0.010
		Bottom	132322	1745	-0.310	0.002	100	1.00	22.61	23.00	1.094	0.002

Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n78 (BW: 20MHz)	1RB	Left Cheek	132322	1745	-1.010	0.216	100	1.00	22.68	23.00	1.076	0.233
		Left Tilt	132322	1745	0.280	0.379	100	1.00	22.68	23.00	1.076	0.408
		Right Cheek	132322	1745	1.990	0.293	100	1.00	22.68	23.00	1.076	0.315
		Right Tilt	132322	1745	-0.070	0.711	100	1.00	22.68	23.00	1.076	0.765
	50%RB	Left Cheek	132322	1745	-2.420	0.159	100	1.00	22.68	23.00	1.076	0.171
		Left Tilt	132322	1745	1.320	0.237	100	1.00	22.68	23.00	1.076	0.255
		Right Cheek	132322	1745	-0.560	0.215	100	1.00	22.68	23.00	1.076	0.231
		Right Tilt	132322	1745	-2.370	0.448	100	1.00	22.68	23.00	1.076	0.482
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
66-n78 (BW: 20MHz)	1RB	Front	132322	1745	-1.170	0.040	100	1.00	22.68	23.00	1.076	0.043
		Back	132322	1745	-4.520	0.061	100	1.00	22.68	23.00	1.076	0.066
		Left	132322	1745	0.820	0.017	100	1.00	22.68	23.00	1.076	0.018
		Right	132322	1745	1.530	0.002	100	1.00	22.68	23.00	1.076	0.002
		Top	132322	1745	-4.710	0.011	100	1.00	22.68	23.00	1.076	0.012
		Bottom	132322	1745	-0.840	0.002	100	1.00	22.68	23.00	1.076	0.002
	50%RB	Front	132322	1745	3.790	0.028	100	1.00	22.68	23.00	1.076	0.030
		Back	132322	1745	-0.800	0.046	100	1.00	22.68	23.00	1.076	0.050
		Left	132322	1745	-2.050	0.010	100	1.00	22.68	23.00	1.076	0.011
		Right	132322	1745	-4.370	0.002	100	1.00	22.68	23.00	1.076	0.002
		Top	132322	1745	2.130	0.005	100	1.00	22.68	23.00	1.076	0.005
		Bottom	132322	1745	-3.210	0.002	100	1.00	22.68	23.00	1.076	0.002

Results overview of Wifi

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2.4g (2.4~2.4835) 802.11ax20	Left Cheek	11	2462	-1.500	0.102	100	1.00	27.34	27.50	1.038	0.106
	Left Tilt	11	2462	0.500	0.268	100	1.00	27.34	27.50	1.038	0.278
	Right Cheek	11	2462	-4.250	0.042	100	1.00	27.34	27.50	1.038	0.044
	Right Tilt	11	2462	-0.750	0.069	100	1.00	27.34	27.50	1.038	0.072
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
2.4g (2.4~2.4835) 802.11ax20	Front	11	2462	-1.750	0.009	100	1.00	27.34	27.50	1.038	0.009
	Back	11	2462	-2.250	0.014	100	1.00	27.34	27.50	1.038	0.015
	Left	11	2462	1.500	0.005	100	1.00	27.34	27.50	1.038	0.005
	Right	11	2462	4.000	0.002	100	1.00	27.34	27.50	1.038	0.002
	Top	11	2462	-2.750	0.006	100	1.00	27.34	27.50	1.038	0.006
	Bottom	11	2462	-4.750	0.003	100	1.00	27.34	27.50	1.038	0.003

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band1 5180-5240 802.11ax160	Left Cheek	50	5250	-4.000	0.069	100	1.00	18.72	19.00	1.067	0.074
	Left Tilt	50	5250	-4.750	0.116	100	1.00	18.72	19.00	1.067	0.124
	Right Cheek	50	5250	3.750	0.032	100	1.00	18.72	19.00	1.067	0.034
	Right Tilt	50	5250	-2.750	0.045	100	1.00	18.72	19.00	1.067	0.048
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band1 5180-5240 802.11ax160	Front	50	5250	-4.500	0.083	100	1.00	18.72	19.00	1.067	0.089
	Back	50	5250	-4.750	0.068	100	1.00	18.72	19.00	1.067	0.073
	Left	50	5250	2.250	0.028	100	1.00	18.72	19.00	1.067	0.030
	Right	50	5250	3.750	0.010	100	1.00	18.72	19.00	1.067	0.011
	Top	50	5250	1.500	0.015	100	1.00	18.72	19.00	1.067	0.016
	Bottom	50	5250	4.500	0.002	100	1.00	18.72	19.00	1.067	0.002

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band2 5260-5320 802.11a	Left Cheek	52	5260	-4.000	0.062	100	1.00	17.82	18.00	1.042	0.065
	Left Tilt	52	5260	4.500	0.208	100	1.00	17.82	18.00	1.042	0.217
	Right Cheek	52	5260	-2.750	0.040	100	1.00	17.82	18.00	1.042	0.042
	Right Tilt	52	5260	-3.750	0.053	100	1.00	17.82	18.00	1.042	0.055
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band2 5260-5320 802.11a	Front	52	5260	4.500	0.095	100	1.00	17.82	18.00	1.042	0.099
	Back	52	5260	-4.750	0.157	100	1.00	17.82	18.00	1.042	0.164
	Left	52	5260	3.250	0.028	100	1.00	17.82	18.00	1.042	0.029
	Right	52	5260	-1.500	0.040	100	1.00	17.82	18.00	1.042	0.042
	Top	52	5260	-0.250	0.031	100	1.00	17.82	18.00	1.042	0.032
	Bottom	52	5260	-4.250	0.005	100	1.00	17.82	18.00	1.042	0.005

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band3 5500-5700 802.11x160	Left Cheek	114	5570	-4.750	0.153	100	1.00	16.84	17.00	1.038	0.159
	Left Tilt	114	5570	-4.000	0.217	100	1.00	16.84	17.00	1.038	0.225
	Right Cheek	114	5570	-3.250	0.057	100	1.00	16.84	17.00	1.038	0.059
	Right Tilt	114	5570	-4.500	0.092	100	1.00	16.84	17.00	1.038	0.095
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band3 5500-5700 802.11x160	Front	114	5570	2.250	0.144	100	1.00	16.84	17.00	1.038	0.149
	Back	114	5570	-4.750	0.251	100	1.00	16.84	17.00	1.038	0.260
	Left	114	5570	3.000	0.087	100	1.00	16.84	17.00	1.038	0.090
	Right	114	5570	4.250	0.020	100	1.00	16.84	17.00	1.038	0.021
	Top	114	5570	-4.500	0.056	100	1.00	16.84	17.00	1.038	0.058
	Bottom	114	5570	1.250	0.008	100	1.00	16.84	17.00	1.038	0.008

Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band4 5745-5825 802.11n20	Left Cheek	149	5745	-4.000	0.142	100	1.00	16.16	16.50	1.081	0.154
	Left Tilt	149	5745	-4.750	0.220	100	1.00	16.16	16.50	1.081	0.238
	Right Cheek	149	5745	-3.500	0.050	100	1.00	16.16	16.50	1.081	0.054
	Right Tilt	149	5745	-4.250	0.038	100	1.00	16.16	16.50	1.081	0.041
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
5g Band4 5745-5825 802.11n20	Front	149	5745	-4.500	0.147	100	1.00	16.16	16.50	1.081	0.159
	Back	149	5745	4.750	0.276	100	1.00	16.16	16.50	1.081	0.298
	Left	149	5745	1.500	0.061	100	1.00	16.16	16.50	1.081	0.066
	Right	149	5745	-2.750	0.019	100	1.00	16.16	16.50	1.081	0.021
	Top	149	5745	2.500	0.032	100	1.00	16.16	16.50	1.081	0.035
	Bottom	149	5745	-0.250	0.006	100	1.00	16.16	16.50	1.081	0.006


Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Bluetooth	Left Cheek	39	2441	-2.590	0.039	100	1.00	8.53	9.00	1.114	0.043
	Left Tilt	39	2441	-4.810	0.020	100	1.00	8.53	9.00	1.114	0.022
	Right Cheek	39	2441	-1.580	0.027	100	1.00	8.53	9.00	1.114	0.030
	Right Tilt	39	2441	4.130	0.014	100	1.00	8.53	9.00	1.114	0.016
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)
Bluetooth	Front	39	2441	1.030	0.032	100	1.00	8.53	9.00	1.114	0.036
	Back	39	2441	4.020	0.040	100	1.00	8.53	9.00	1.114	0.045
	Left	39	2441	-1.160	0.021	100	1.00	8.53	9.00	1.114	0.023
	Right	39	2441	-4.940	0.002	100	1.00	8.53	9.00	1.114	0.002
	Top	39	2441	1.550	0.017	100	1.00	8.53	9.00	1.114	0.019
	Bottom	39	2441	-2.080	0.004	100	1.00	8.53	9.00	1.114	0.004

Note:

- 1.The maximum SAR Value of each test band is marked bold.
- 2.SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- 3.Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8\text{W/kg}$, other channels SAR testing is not necessary.
- 4.Per KDB 447498 D01 v06, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with head tissue-equivalent medium.
- 5.Per KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.
- 6.Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor= $10^{[(\text{tune-up limit power(dBm)} - \text{Ave.power power (dBm)})/10]}$, where tune-up limit is the maximum rated power among all production units.
- 7.Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.

11 Multiple Transmitter Information

The SAR measurement positions of each side are as below:

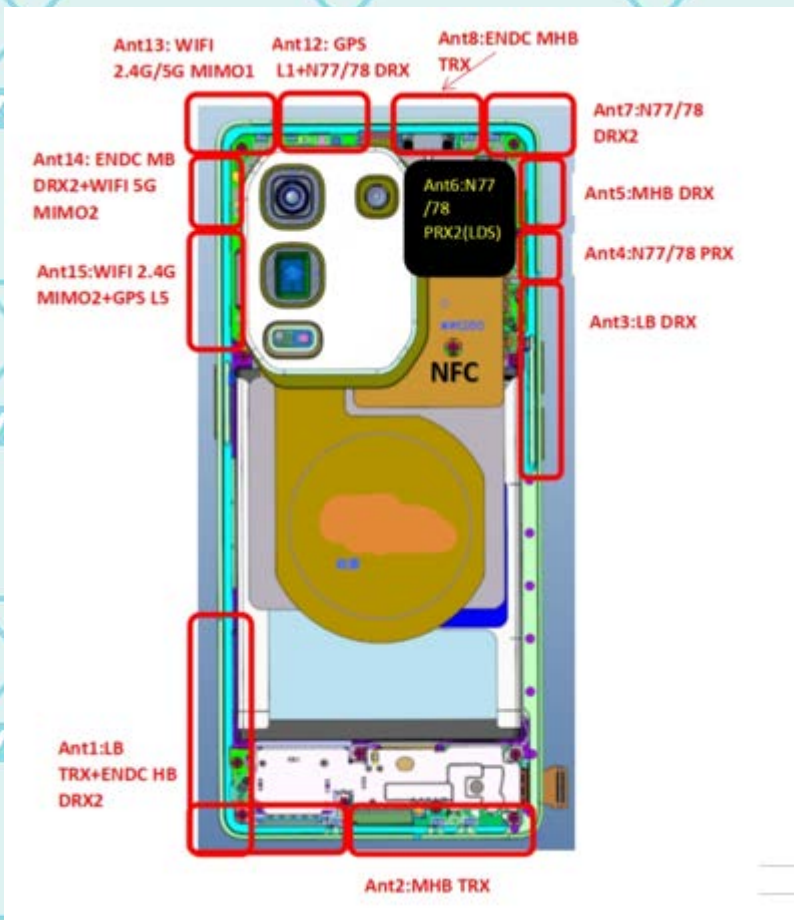

< Rear Side >

Mode	Front side	Rear side	Left side	Right side	Top side	Bottom side
2G/3G/4G /5G Antenna	Yes	Yes	Yes	Yes	Yes	Yes
Wi-Fi/BT Antenna	Yes	Yes	Yes	Yes	Yes	Yes

- 1) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode.
When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

11.1 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Transmission Possibilities				
Simultaneous Tx Combination	Configuration	Head	Body	Hotspot
1	GSM/GPRS/UMTS/LTE/NR +Wi-Fi	YES	YES	YES
2	GSM/GPRS/UMTS/LTE/NR +BT	YES	YES	YES

Note: The device does not support simultaneous BT and Wi-Fi ,because the BT and Wi-Fi share the same antenna and can't transmit simultaneously.

11.1.1 SAR Summation Scenario

Head

Band	Test Position	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) SAR 1g(W/kg)			
GSM850 (voice)	Left Cheek	0.167	0.106	0.154	0.043	0.321	1.6
	Left Tilt	0.092	0.278	0.238	0.022	0.370	
	Right Cheek	0.139	0.044	0.054	0.030	0.193	
	Right Tilt	0.070	0.072	0.041	0.016	0.142	
GSM1900 (voice)	Left Cheek	0.060	0.106	0.154	0.043	0.214	
	Left Tilt	0.053	0.278	0.238	0.022	0.331	
	Right Cheek	0.051	0.044	0.054	0.030	0.105	
	Right Tilt	0.039	0.072	0.041	0.016	0.111	
WCDMA Band 2	Left Cheek	0.088	0.106	0.154	0.043	0.242	
	Left Tilt	0.083	0.278	0.238	0.022	0.361	
	Right Cheek	0.086	0.044	0.054	0.030	0.140	
	Right Tilt	0.079	0.072	0.041	0.016	0.151	
WCDMA Band 4	Left Cheek	0.077	0.106	0.154	0.043	0.231	
	Left Tilt	0.084	0.278	0.238	0.022	0.362	
	Right Cheek	0.069	0.044	0.054	0.030	0.123	
	Right Tilt	0.070	0.072	0.041	0.016	0.142	
WCDMA Band 5	Left Cheek	0.135	0.106	0.154	0.043	0.289	
	Left Tilt	0.083	0.278	0.238	0.022	0.361	
	Right Cheek	0.151	0.044	0.054	0.030	0.205	
	Right Tilt	0.076	0.072	0.041	0.016	0.148	

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
LTE Band 2 QPSK (20MHz)	Left Cheek	1RB	0.026	0.106	0.154	0.043	0.180	1.6
	Left Tilt		0.023	0.278	0.238	0.022	0.301	
	Right Cheek		0.033	0.044	0.054	0.030	0.087	
	Right Tilt		0.030	0.072	0.041	0.016	0.102	
	Left Cheek	50%RB	0.013	0.106	0.154	0.043	0.167	
	Left Tilt		0.011	0.278	0.238	0.022	0.289	
	Right Cheek		0.020	0.044	0.054	0.030	0.074	
	Right Tilt		0.015	0.072	0.041	0.016	0.087	
LTE Band 4 QPSK (20MHz)	Left Cheek	1RB	0.106	0.106	0.154	0.043	0.260	
	Left Tilt		0.062	0.278	0.238	0.022	0.340	
	Right Cheek		0.131	0.044	0.054	0.030	0.185	
	Right Tilt		0.077	0.072	0.041	0.016	0.149	
	Left Cheek	50%RB	0.089	0.106	0.154	0.043	0.243	
	Left Tilt		0.053	0.278	0.238	0.022	0.331	
	Right Cheek		0.099	0.044	0.054	0.030	0.153	
	Right Tilt		0.060	0.072	0.041	0.016	0.132	
LTE Band 5 QPSK (10MHz)	Left Cheek	1RB	0.144	0.106	0.154	0.043	0.298	
	Left Tilt		0.084	0.278	0.238	0.022	0.362	
	Right Cheek		0.168	0.044	0.054	0.030	0.222	
	Right Tilt		0.102	0.072	0.041	0.016	0.174	
	Left Cheek	50%RB	0.115	0.106	0.154	0.043	0.269	
	Left Tilt		0.065	0.278	0.238	0.022	0.343	
	Right Cheek		0.141	0.044	0.054	0.030	0.195	
	Right Tilt		0.086	0.072	0.041	0.016	0.158	
LTE Band 7 QPSK (10MHz)	Left Cheek	1RB	0.027	0.106	0.154	0.043	0.181	
	Left Tilt		0.013	0.278	0.238	0.022	0.291	
	Right Cheek		0.031	0.044	0.054	0.030	0.085	
	Right Tilt		0.015	0.072	0.041	0.016	0.087	
	Left Cheek	50%RB	0.020	0.106	0.154	0.043	0.174	
	Left Tilt		0.006	0.278	0.238	0.022	0.284	
	Right Cheek		0.021	0.044	0.054	0.030	0.075	
	Right Tilt		0.011	0.072	0.041	0.016	0.083	
LTE Band 12 QPSK (10MHz)	Left Cheek	1RB	0.064	0.106	0.154	0.043	0.218	
	Left Tilt		0.037	0.278	0.238	0.022	0.315	
	Right Cheek		0.066	0.044	0.054	0.030	0.120	
	Right Tilt		0.040	0.072	0.041	0.016	0.112	
	Left Cheek	50%RB	0.053	0.106	0.154	0.043	0.207	
	Left Tilt		0.032	0.278	0.238	0.022	0.310	
	Right Cheek		0.056	0.044	0.054	0.030	0.110	
	Right Tilt		0.036	0.072	0.041	0.016	0.108	
LTE Band 17 QPSK (10MHz)	Left Cheek	1RB	0.075	0.106	0.154	0.043	0.229	
	Left Tilt		0.027	0.278	0.238	0.022	0.305	
	Right Cheek		0.069	0.044	0.054	0.030	0.123	
	Right Tilt		0.026	0.072	0.041	0.016	0.098	
	Left Cheek	50%RB	0.064	0.106	0.154	0.043	0.218	
	Left Tilt		0.022	0.278	0.238	0.022	0.300	
	Right Cheek		0.058	0.044	0.054	0.030	0.112	
	Right Tilt		0.019	0.072	0.041	0.016	0.091	
LTE Band 38 QPSK (20MHz)	Left Cheek	1RB	0.031	0.106	0.154	0.043	0.185	
	Left Tilt		0.019	0.278	0.238	0.022	0.297	
	Right Cheek		0.033	0.044	0.054	0.030	0.087	
	Right Tilt		0.021	0.072	0.041	0.016	0.093	
	Left Cheek	50%RB	0.026	0.106	0.154	0.043	0.180	
	Left Tilt		0.013	0.278	0.238	0.022	0.291	
	Right Cheek		0.029	0.044	0.054	0.030	0.083	
	Right Tilt		0.017	0.072	0.041	0.016	0.089	

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
LTE Band 41 QPSK (20MHz)	Left Cheek	1RB	0.094	0.106	0.154	0.043	0.248	1.6
	Left Tilt		0.027	0.278	0.238	0.022	0.305	
	Right Cheek		0.043	0.044	0.054	0.030	0.097	
	Right Tilt		0.015	0.072	0.041	0.016	0.087	
	Left Cheek	50%RB	0.075	0.106	0.154	0.043	0.229	
	Left Tilt		0.013	0.278	0.238	0.022	0.291	
	Right Cheek		0.031	0.044	0.054	0.030	0.085	
	Right Tilt		0.005	0.072	0.041	0.016	0.077	
LTE Band 42 QPSK (20MHz)	Left Cheek	1RB	0.828	0.106	0.154	0.043	0.982	
	Left Tilt		0.316	0.278	0.238	0.022	0.594	
	Right Cheek		1.056	0.044	0.054	0.030	1.110	
	Right Tilt		0.783	0.072	0.041	0.016	0.855	
	Left Cheek	50%RB	0.476	0.106	0.154	0.043	0.630	
	Left Tilt		0.206	0.278	0.238	0.022	0.484	
	Right Cheek		0.627	0.044	0.054	0.030	0.681	
	Right Tilt		0.502	0.072	0.041	0.016	0.574	
LTE Band 66 QPSK (20MHz)	Left Cheek	1RB	0.108	0.106	0.154	0.043	0.262	
	Left Tilt		0.052	0.278	0.238	0.022	0.330	
	Right Cheek		0.116	0.044	0.054	0.030	0.170	
	Right Tilt		0.058	0.072	0.041	0.016	0.130	
	Left Cheek	50%RB	0.072	0.106	0.154	0.043	0.226	
	Left Tilt		0.031	0.278	0.238	0.022	0.309	
	Right Cheek		0.076	0.044	0.054	0.030	0.130	
	Right Tilt		0.037	0.072	0.041	0.016	0.109	
NR Band 5	Left Cheek	1RB	0.148	0.106	0.154	0.043	0.302	
	Left Tilt		0.078	0.278	0.238	0.022	0.356	
	Right Cheek		0.132	0.044	0.054	0.030	0.186	
	Right Tilt		0.069	0.072	0.041	0.016	0.141	
	Left Cheek	50%RB	0.131	0.106	0.154	0.043	0.285	
	Left Tilt		0.064	0.278	0.238	0.022	0.342	
	Right Cheek		0.116	0.044	0.054	0.030	0.170	
	Right Tilt		0.057	0.072	0.041	0.016	0.129	
NR Band 7	Left Cheek	1RB	0.051	0.106	0.154	0.043	0.205	
	Left Tilt		0.017	0.278	0.238	0.022	0.295	
	Right Cheek		0.037	0.044	0.054	0.030	0.091	
	Right Tilt		0.011	0.072	0.041	0.016	0.083	
	Left Cheek	50%RB	0.036	0.106	0.154	0.043	0.190	
	Left Tilt		0.007	0.278	0.238	0.022	0.285	
	Right Cheek		0.019	0.044	0.054	0.030	0.073	
	Right Tilt		0.004	0.072	0.041	0.016	0.076	
NR Band 12	Left Cheek	1RB	0.079	0.106	0.154	0.043	0.233	
	Left Tilt		0.035	0.278	0.238	0.022	0.313	
	Right Cheek		0.080	0.044	0.054	0.030	0.134	
	Right Tilt		0.039	0.072	0.041	0.016	0.111	
	Left Cheek	50%RB	0.062	0.106	0.154	0.043	0.216	
	Left Tilt		0.028	0.278	0.238	0.022	0.306	
	Right Cheek		0.067	0.044	0.054	0.030	0.121	
	Right Tilt		0.031	0.072	0.041	0.016	0.103	

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WiFi2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
NR Band38	Left Cheek	1RB	0.018	0.106	0.154	0.043	0.172	1.6
	Left Tilt		0.008	0.278	0.238	0.022	0.286	
	Right Cheek		0.019	0.044	0.054	0.030	0.073	
	Right Tilt		0.009	0.072	0.041	0.016	0.081	
	Left Cheek	50%RB	0.011	0.106	0.154	0.043	0.165	
	Left Tilt		0.005	0.278	0.238	0.022	0.283	
	Right Cheek		0.012	0.044	0.054	0.030	0.066	
	Right Tilt		0.006	0.072	0.041	0.016	0.078	
NR Band41	Left Cheek	1RB	0.009	0.106	0.154	0.043	0.163	
	Left Tilt		0.010	0.278	0.238	0.022	0.288	
	Right Cheek		0.019	0.044	0.054	0.030	0.073	
	Right Tilt		0.020	0.072	0.041	0.016	0.092	
	Left Cheek	50%RB	0.004	0.106	0.154	0.043	0.158	
	Left Tilt		0.007	0.278	0.238	0.022	0.285	
	Right Cheek		0.008	0.044	0.054	0.030	0.062	
	Right Tilt		0.010	0.072	0.041	0.016	0.082	
NR Band66	Left Cheek	1RB	0.034	0.106	0.154	0.043	0.188	
	Left Tilt		0.012	0.278	0.238	0.022	0.290	
	Right Cheek		0.040	0.044	0.054	0.030	0.094	
	Right Tilt		0.019	0.072	0.041	0.016	0.091	
	Left Cheek	50%RB	0.016	0.106	0.154	0.043	0.170	
	Left Tilt		0.008	0.278	0.238	0.022	0.286	
	Right Cheek		0.023	0.044	0.054	0.030	0.077	
	Right Tilt		0.011	0.072	0.041	0.016	0.083	
NR Band71	Left Cheek	1RB	0.078	0.106	0.154	0.043	0.232	
	Left Tilt		0.040	0.278	0.238	0.022	0.318	
	Right Cheek		0.066	0.044	0.054	0.030	0.120	
	Right Tilt		0.035	0.072	0.041	0.016	0.107	
	Left Cheek	50%RB	0.060	0.106	0.154	0.043	0.214	
	Left Tilt		0.030	0.278	0.238	0.022	0.308	
	Right Cheek		0.053	0.044	0.054	0.030	0.107	
	Right Tilt		0.025	0.072	0.041	0.016	0.097	
NR Band77	Left Cheek	1RB	0.648	0.106	0.154	0.043	0.802	
	Left Tilt		0.418	0.278	0.238	0.022	0.696	
	Right Cheek		0.667	0.044	0.054	0.030	0.721	
	Right Tilt		0.559	0.072	0.041	0.016	0.631	
	Left Cheek	50%RB	0.298	0.106	0.154	0.043	0.452	
	Left Tilt		0.254	0.278	0.238	0.022	0.532	
	Right Cheek		0.320	0.044	0.054	0.030	0.374	
	Right Tilt		0.279	0.072	0.041	0.016	0.351	
NR Band77	Left Cheek	1RB	0.881	0.106	0.154	0.043	1.035	
	Left Tilt		0.242	0.278	0.238	0.022	0.520	
	Right Cheek		0.698	0.044	0.054	0.030	0.752	
	Right Tilt		0.194	0.072	0.041	0.016	0.266	
	Left Cheek	50%RB	0.504	0.106	0.154	0.043	0.658	
	Left Tilt		0.165	0.278	0.238	0.022	0.443	
	Right Cheek		0.465	0.044	0.054	0.030	0.519	
	Right Tilt		0.138	0.072	0.041	0.016	0.210	
NR Band77	Left Cheek	1RB	0.695	0.106	0.154	0.043	0.849	
	Left Tilt		0.420	0.278	0.238	0.022	0.698	
	Right Cheek		0.540	0.044	0.054	0.030	0.594	
	Right Tilt		0.327	0.072	0.041	0.016	0.399	
	Left Cheek	50%RB	0.377	0.106	0.154	0.043	0.531	
	Left Tilt		0.248	0.278	0.238	0.022	0.526	
	Right Cheek		0.282	0.044	0.054	0.030	0.336	
	Right Tilt		0.211	0.072	0.041	0.016	0.283	
NR Band78	Left Cheek	1RB	0.164	0.106	0.154	0.043	0.318	
	Left Tilt		0.015	0.278	0.238	0.022	0.293	
	Right Cheek		0.173	0.044	0.054	0.030	0.227	
	Right Tilt		0.168	0.072	0.041	0.016	0.240	
	Left Cheek	50%RB	0.093	0.106	0.154	0.043	0.247	
	Left Tilt		0.089	0.278	0.238	0.022	0.367	
	Right Cheek		0.128	0.044	0.054	0.030	0.182	
	Right Tilt		0.106	0.072	0.041	0.016	0.178	

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
NR Band78	Left Cheek	1RB	0.218	0.106	0.154	0.043	0.372	1.6
	Left Tilt		0.115	0.278	0.238	0.022	0.393	
	Right Cheek		0.196	0.044	0.054	0.030	0.250	
	Right Tilt		0.103	0.072	0.041	0.016	0.175	
	Left Cheek	50%RB	0.104	0.106	0.154	0.043	0.258	
	Left Tilt		0.052	0.278	0.238	0.022	0.330	
	Right Cheek		0.091	0.044	0.054	0.030	0.145	
	Right Tilt		0.043	0.072	0.041	0.016	0.115	
NR Band78	Left Cheek	1RB	0.209	0.106	0.154	0.043	0.363	
	Left Tilt		0.094	0.278	0.238	0.022	0.372	
	Right Cheek		0.184	0.044	0.054	0.030	0.238	
	Right Tilt		0.081	0.072	0.041	0.016	0.153	
	Left Cheek	50%RB	0.410	0.106	0.154	0.043	0.564	
	Left Tilt		0.172	0.278	0.238	0.022	0.450	
	Right Cheek		0.334	0.044	0.054	0.030	0.388	
	Right Tilt		0.155	0.072	0.041	0.016	0.227	
2-n7	Left Cheek	1RB	0.678	0.106	0.154	0.043	0.832	
	Left Tilt		1.038	0.278	0.238	0.022	1.316	
	Right Cheek		0.810	0.044	0.054	0.030	0.864	
	Right Tilt		1.111	0.072	0.041	0.016	1.183	
	Left Cheek	50%RB	0.487	0.106	0.154	0.043	0.641	
	Left Tilt		0.769	0.278	0.238	0.022	1.047	
	Right Cheek		0.566	0.044	0.054	0.030	0.620	
	Right Tilt		0.843	0.072	0.041	0.016	0.915	
2-n66	Left Cheek	1RB	0.392	0.106	0.154	0.043	0.546	
	Left Tilt		0.670	0.278	0.238	0.022	0.948	
	Right Cheek		0.583	0.044	0.054	0.030	0.637	
	Right Tilt		1.089	0.072	0.041	0.016	1.161	
	Left Cheek	50%RB	0.278	0.106	0.154	0.043	0.432	
	Left Tilt		0.667	0.278	0.238	0.022	0.945	
	Right Cheek		0.508	0.044	0.054	0.030	0.562	
	Right Tilt		0.735	0.072	0.041	0.016	0.807	
2-n78	Left Cheek	1RB	0.472	0.106	0.154	0.043	0.626	
	Left Tilt		0.637	0.278	0.238	0.022	0.915	
	Right Cheek		0.738	0.044	0.054	0.030	0.792	
	Right Tilt		1.075	0.072	0.041	0.016	1.147	
	Left Cheek	50%RB	0.266	0.106	0.154	0.043	0.420	
	Left Tilt		0.427	0.278	0.238	0.022	0.705	
	Right Cheek		0.500	0.044	0.054	0.030	0.554	
	Right Tilt		0.733	0.072	0.041	0.016	0.805	
4-n7	Left Cheek	1RB	0.180	0.106	0.154	0.043	0.334	
	Left Tilt		0.226	0.278	0.238	0.022	0.504	
	Right Cheek		0.251	0.044	0.054	0.030	0.305	
	Right Tilt		0.518	0.072	0.041	0.016	0.590	
	Left Cheek	50%RB	0.140	0.106	0.154	0.043	0.294	
	Left Tilt		0.177	0.278	0.238	0.022	0.455	
	Right Cheek		0.213	0.044	0.054	0.030	0.267	
	Right Tilt		0.324	0.072	0.041	0.016	0.396	
4-n41	Left Cheek	1RB	0.211	0.106	0.154	0.043	0.365	
	Left Tilt		0.272	0.278	0.238	0.022	0.550	
	Right Cheek		0.567	0.044	0.054	0.030	0.621	
	Right Tilt		0.653	0.072	0.041	0.016	0.725	
	Left Cheek	50%RB	0.175	0.106	0.154	0.043	0.329	
	Left Tilt		0.230	0.278	0.238	0.022	0.508	
	Right Cheek		0.399	0.044	0.054	0.030	0.453	
	Right Tilt		0.513	0.072	0.041	0.016	0.585	
4-n78	Left Cheek	1RB	0.152	0.106	0.154	0.043	0.306	
	Left Tilt		0.296	0.278	0.238	0.022	0.574	
	Right Cheek		0.239	0.044	0.054	0.030	0.293	
	Right Tilt		0.493	0.072	0.041	0.016	0.565	
	Left Cheek	50%RB	0.132	0.106	0.154	0.043	0.286	
	Left Tilt		0.228	0.278	0.238	0.022	0.506	
	Right Cheek		0.192	0.044	0.054	0.030	0.246	
	Right Tilt		0.386	0.072	0.041	0.016	0.458	

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
5-n7	Left Cheek	1RB	0.092	0.106	0.154	0.043	0.246	1.6
	Left Tilt		0.054	0.278	0.238	0.022	0.332	
	Right Cheek		0.083	0.044	0.054	0.030	0.137	
	Right Tilt		0.046	0.072	0.041	0.016	0.118	
	Left Cheek	50%RB	0.070	0.106	0.154	0.043	0.224	
	Left Tilt		0.041	0.278	0.238	0.022	0.319	
	Right Cheek		0.064	0.044	0.054	0.030	0.118	
	Right Tilt		0.037	0.072	0.041	0.016	0.109	
5-n38	Left Cheek	1RB	0.081	0.106	0.154	0.043	0.235	
	Left Tilt		0.061	0.278	0.238	0.022	0.339	
	Right Cheek		0.077	0.044	0.054	0.030	0.131	
	Right Tilt		0.055	0.072	0.041	0.016	0.127	
	Left Cheek	50%RB	0.064	0.106	0.154	0.043	0.218	
	Left Tilt		0.050	0.278	0.238	0.022	0.328	
	Right Cheek		0.060	0.044	0.054	0.030	0.114	
	Right Tilt		0.047	0.072	0.041	0.016	0.119	
5-n41	Left Cheek	1RB	0.081	0.106	0.154	0.043	0.235	
	Left Tilt		0.053	0.278	0.238	0.022	0.331	
	Right Cheek		0.074	0.044	0.054	0.030	0.128	
	Right Tilt		0.050	0.072	0.041	0.016	0.122	
	Left Cheek	50%RB	0.067	0.106	0.154	0.043	0.221	
	Left Tilt		0.048	0.278	0.238	0.022	0.326	
	Right Cheek		0.062	0.044	0.054	0.030	0.116	
	Right Tilt		0.043	0.072	0.041	0.016	0.115	
5-n66	Left Cheek	1RB	0.090	0.106	0.154	0.043	0.244	
	Left Tilt		0.055	0.278	0.238	0.022	0.333	
	Right Cheek		0.093	0.044	0.054	0.030	0.147	
	Right Tilt		0.068	0.072	0.041	0.016	0.140	
	Left Cheek	50%RB	0.071	0.106	0.154	0.043	0.225	
	Left Tilt		0.043	0.278	0.238	0.022	0.321	
	Right Cheek		0.078	0.044	0.054	0.030	0.132	
	Right Tilt		0.059	0.072	0.041	0.016	0.131	
5-n77	Left Cheek	1RB	0.088	0.106	0.154	0.043	0.242	
	Left Tilt		0.071	0.278	0.238	0.022	0.349	
	Right Cheek		0.114	0.044	0.054	0.030	0.168	
	Right Tilt		0.069	0.072	0.041	0.016	0.141	
	Left Cheek	50%RB	0.067	0.106	0.154	0.043	0.221	
	Left Tilt		0.042	0.278	0.238	0.022	0.320	
	Right Cheek		0.088	0.044	0.054	0.030	0.142	
	Right Tilt		0.041	0.072	0.041	0.016	0.113	
5-n78	Left Cheek	1RB	0.070	0.106	0.154	0.043	0.224	
	Left Tilt		0.049	0.278	0.238	0.022	0.327	
	Right Cheek		0.116	0.044	0.054	0.030	0.170	
	Right Tilt		0.061	0.072	0.041	0.016	0.133	
	Left Cheek	50%RB	0.050	0.106	0.154	0.043	0.204	
	Left Tilt		0.037	0.278	0.238	0.022	0.315	
	Right Cheek		0.080	0.044	0.054	0.030	0.134	
	Right Tilt		0.044	0.072	0.041	0.016	0.116	
7-n7	Left Cheek	1RB	0.160	0.106	0.154	0.043	0.314	
	Left Tilt		0.057	0.278	0.238	0.022	0.335	
	Right Cheek		0.085	0.044	0.054	0.030	0.139	
	Right Tilt		0.043	0.072	0.041	0.016	0.115	
	Left Cheek	50%RB	0.119	0.106	0.154	0.043	0.273	
	Left Tilt		0.045	0.278	0.238	0.022	0.323	
	Right Cheek		0.080	0.044	0.054	0.030	0.134	
	Right Tilt		0.022	0.072	0.041	0.016	0.094	

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
7-n66	Left Cheek	1RB	0.297	0.106	0.154	0.043	0.451	1.6
	Left Tilt		0.638	0.278	0.238	0.022	0.916	
	Right Cheek		0.480	0.044	0.054	0.030	0.534	
	Right Tilt		0.993	0.072	0.041	0.016	1.065	
	Left Cheek	50%RB	0.195	0.106	0.154	0.043	0.349	
	Left Tilt		0.476	0.278	0.238	0.022	0.754	
	Right Cheek		0.380	0.044	0.054	0.030	0.434	
	Right Tilt		0.757	0.072	0.041	0.016	0.829	
7-n77	Left Cheek	1RB	0.231	0.106	0.154	0.043	0.385	
	Left Tilt		0.392	0.278	0.238	0.022	0.670	
	Right Cheek		0.320	0.044	0.054	0.030	0.374	
	Right Tilt		0.949	0.072	0.041	0.016	1.021	
	Left Cheek	50%RB	0.176	0.106	0.154	0.043	0.330	
	Left Tilt		0.265	0.278	0.238	0.022	0.543	
	Right Cheek		0.264	0.044	0.054	0.030	0.318	
	Right Tilt		0.811	0.072	0.041	0.016	0.883	
7-n78	Left Cheek	1RB	0.393	0.106	0.154	0.043	0.547	
	Left Tilt		0.546	0.278	0.238	0.022	0.824	
	Right Cheek		0.833	0.044	0.054	0.030	0.887	
	Right Tilt		1.114	0.072	0.041	0.016	1.186	
	Left Cheek	50%RB	0.229	0.106	0.154	0.043	0.383	
	Left Tilt		0.380	0.278	0.238	0.022	0.658	
	Right Cheek		0.670	0.044	0.054	0.030	0.724	
	Right Tilt		0.870	0.072	0.041	0.016	0.942	
38-n78	Left Cheek	1RB	0.052	0.106	0.154	0.043	0.206	
	Left Tilt		0.075	0.278	0.238	0.022	0.353	
	Right Cheek		0.119	0.044	0.054	0.030	0.173	
	Right Tilt		0.180	0.072	0.041	0.016	0.252	
	Left Cheek	50%RB	0.035	0.106	0.154	0.043	0.189	
	Left Tilt		0.047	0.278	0.238	0.022	0.325	
	Right Cheek		0.110	0.044	0.054	0.030	0.164	
	Right Tilt		0.118	0.072	0.041	0.016	0.190	
41-n41	Left Cheek	1RB	0.099	0.106	0.154	0.043	0.253	
	Left Tilt		0.163	0.278	0.238	0.022	0.441	
	Right Cheek		0.208	0.044	0.054	0.030	0.262	
	Right Tilt		0.326	0.072	0.041	0.016	0.398	
	Left Cheek	50%RB	0.063	0.106	0.154	0.043	0.217	
	Left Tilt		0.135	0.278	0.238	0.022	0.413	
	Right Cheek		0.153	0.044	0.054	0.030	0.207	
	Right Tilt		0.231	0.072	0.041	0.016	0.303	
41-n77	Left Cheek	1RB	0.123	0.106	0.154	0.043	0.277	
	Left Tilt		0.190	0.278	0.238	0.022	0.468	
	Right Cheek		0.266	0.044	0.054	0.030	0.320	
	Right Tilt		0.402	0.072	0.041	0.016	0.474	
	Left Cheek	50%RB	0.105	0.106	0.154	0.043	0.259	
	Left Tilt		0.154	0.278	0.238	0.022	0.432	
	Right Cheek		0.225	0.044	0.054	0.030	0.279	
	Right Tilt		0.293	0.072	0.041	0.016	0.365	
41-n78	Left Cheek	1RB	0.131	0.106	0.154	0.043	0.285	
	Left Tilt		0.217	0.278	0.238	0.022	0.495	
	Right Cheek		0.137	0.044	0.054	0.030	0.191	
	Right Tilt		0.413	0.072	0.041	0.016	0.485	
	Left Cheek	50%RB	0.077	0.106	0.154	0.043	0.231	
	Left Tilt		0.118	0.278	0.238	0.022	0.396	
	Right Cheek		0.174	0.044	0.054	0.030	0.228	
	Right Tilt		0.337	0.072	0.041	0.016	0.409	

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Band	Test Position	Scaled SAR				BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
		RB allocation	WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
66-n7	Left Cheek	1RB	0.227	0.106	0.154	0.043	0.381	1.6
	Left Tilt		0.403	0.278	0.238	0.022	0.681	
	Right Cheek		0.287	0.044	0.054	0.030	0.341	
	Right Tilt		0.713	0.072	0.041	0.016	0.785	
	Left Cheek	50%RB	0.203	0.106	0.154	0.043	0.357	
	Left Tilt		0.282	0.278	0.238	0.022	0.560	
	Right Cheek		0.218	0.044	0.054	0.030	0.272	
	Right Tilt		0.464	0.072	0.041	0.016	0.536	
66-n38	Left Cheek	1RB	0.191	0.106	0.154	0.043	0.345	
	Left Tilt		0.313	0.278	0.238	0.022	0.591	
	Right Cheek		0.544	0.044	0.054	0.030	0.598	
	Right Tilt		0.814	0.072	0.041	0.016	0.886	
	Left Cheek	50%RB	0.152	0.106	0.154	0.043	0.306	
	Left Tilt		0.226	0.278	0.238	0.022	0.504	
	Right Cheek		0.344	0.044	0.054	0.030	0.398	
	Right Tilt		0.548	0.072	0.041	0.016	0.620	
66-n41	Left Cheek	1RB	0.209	0.106	0.154	0.043	0.363	
	Left Tilt		0.287	0.278	0.238	0.022	0.565	
	Right Cheek		0.263	0.044	0.054	0.030	0.317	
	Right Tilt		0.702	0.072	0.041	0.016	0.774	
	Left Cheek	50%RB	0.174	0.106	0.154	0.043	0.328	
	Left Tilt		0.203	0.278	0.238	0.022	0.481	
	Right Cheek		0.189	0.044	0.054	0.030	0.243	
	Right Tilt		0.454	0.072	0.041	0.016	0.526	
66-n66	Left Cheek	1RB	0.175	0.106	0.154	0.043	0.329	
	Left Tilt		0.327	0.278	0.238	0.022	0.605	
	Right Cheek		0.250	0.044	0.054	0.030	0.304	
	Right Tilt		0.701	0.072	0.041	0.016	0.773	
	Left Cheek	50%RB	0.132	0.106	0.154	0.043	0.286	
	Left Tilt		0.248	0.278	0.238	0.022	0.526	
	Right Cheek		0.214	0.044	0.054	0.030	0.268	
	Right Tilt		0.501	0.072	0.041	0.016	0.573	
66-n77	Left Cheek	1RB	0.179	0.106	0.154	0.043	0.333	
	Left Tilt		0.352	0.278	0.238	0.022	0.630	
	Right Cheek		0.339	0.044	0.054	0.030	0.393	
	Right Tilt		0.822	0.072	0.041	0.016	0.894	
	Left Cheek	50%RB	0.144	0.106	0.154	0.043	0.298	
	Left Tilt		0.270	0.278	0.238	0.022	0.548	
	Right Cheek		0.251	0.044	0.054	0.030	0.305	
	Right Tilt		0.562	0.072	0.041	0.016	0.634	
66-n78	Left Cheek	1RB	0.233	0.106	0.154	0.043	0.387	
	Left Tilt		0.408	0.278	0.238	0.022	0.686	
	Right Cheek		0.315	0.044	0.054	0.030	0.369	
	Right Tilt		0.765	0.072	0.041	0.016	0.837	
	Left Cheek	50%RB	0.171	0.106	0.154	0.043	0.325	
	Left Tilt		0.255	0.278	0.238	0.022	0.533	
	Right Cheek		0.231	0.044	0.054	0.030	0.285	
	Right Tilt		0.482	0.072	0.041	0.016	0.554	

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Hotspot(body-worn10mm)

Band	Test Position	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Limit (W/kg)
		WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
GSM850 (GPRS 4slots)	Front	0.370	0.009	0.159	0.036	0.529	1.6
	Back	0.369	0.015	0.298	0.045	0.667	
	Left	0.201	0.005	0.066	0.023	0.267	
	right	0.251	0.002	0.021	0.002	0.272	
	Top	0.014	0.006	0.035	0.019	0.049	
	Bottom	0.147	0.003	0.006	0.004	0.153	
GSM1900 (GPRS 4slots)	Front	0.496	0.009	0.159	0.036	0.655	
	Back	0.545	0.015	0.298	0.045	0.843	
	Left	0.220	0.005	0.066	0.023	0.286	
	right	0.255	0.002	0.021	0.002	0.276	
	Top	0.016	0.006	0.035	0.019	0.051	
	Bottom	0.196	0.003	0.006	0.004	0.202	
WCDMA Band 2	Front	0.605	0.009	0.159	0.036	0.764	
	Back	0.684	0.015	0.298	0.045	0.982	
	Left	0.311	0.005	0.066	0.023	0.377	
	right	0.363	0.002	0.021	0.002	0.384	
	Top	0.017	0.006	0.035	0.019	0.052	
	Bottom	0.187	0.003	0.006	0.004	0.193	
WCDMA Band 4	Front	0.708	0.009	0.159	0.036	0.867	
	Back	0.712	0.015	0.298	0.045	1.010	
	Left	0.208	0.005	0.066	0.023	0.274	
	right	0.353	0.002	0.021	0.002	0.374	
	Top	0.007	0.006	0.035	0.019	0.042	
	Bottom	0.196	0.003	0.006	0.004	0.202	
WCDMA Band 5	Front	0.259	0.009	0.159	0.036	0.418	
	Back	0.334	0.015	0.298	0.045	0.632	
	Left	0.074	0.005	0.066	0.023	0.140	
	right	0.153	0.002	0.021	0.002	0.174	
	Top	0.005	0.006	0.035	0.019	0.040	
	Bottom	0.105	0.003	0.006	0.004	0.111	

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
LTE Band 2	Front	1RB	0.153	0.009	0.159	0.036	0.312	1.6
	Back		0.186	0.015	0.298	0.045	0.484	
	Left		0.037	0.005	0.066	0.023	0.103	
	right		0.049	0.002	0.021	0.002	0.070	
	Top		0.003	0.006	0.035	0.019	0.038	
	Bottom		0.032	0.003	0.006	0.004	0.038	
	Front	50%RB	0.111	0.009	0.159	0.036	0.270	
	Back		0.133	0.015	0.298	0.045	0.431	
	Left		0.018	0.005	0.066	0.023	0.084	
	right		0.025	0.002	0.021	0.002	0.046	
	Top		0.002	0.006	0.035	0.019	0.037	
LTE Band 4	Bottom		0.016	0.003	0.006	0.004	0.022	
	Front	1RB	0.594	0.009	0.159	0.036	0.753	
	Back		0.619	0.015	0.298	0.045	0.917	
	Left		0.229	0.005	0.066	0.023	0.295	
	right		0.322	0.002	0.021	0.002	0.343	
	Top		0.007	0.006	0.035	0.019	0.042	
	Bottom		0.162	0.003	0.006	0.004	0.168	
	Front	50%RB	0.544	0.009	0.159	0.036	0.703	
	Back		0.562	0.015	0.298	0.045	0.860	
	Left		0.192	0.005	0.066	0.023	0.258	
LTE Band 5	right		0.218	0.002	0.021	0.002	0.239	
	Top		0.005	0.006	0.035	0.019	0.040	
	Bottom		0.127	0.003	0.006	0.004	0.133	
	Front	1RB	0.303	0.009	0.159	0.036	0.462	
	Back		0.346	0.015	0.298	0.045	0.644	
	Left		0.091	0.005	0.066	0.023	0.157	
	right		0.143	0.002	0.021	0.002	0.164	
	Top		0.004	0.006	0.035	0.019	0.039	
	Bottom		0.058	0.003	0.006	0.004	0.064	
	Front	50%RB	0.253	0.009	0.159	0.036	0.412	
LTE Band 7	Back		0.283	0.015	0.298	0.045	0.581	
	Left		0.065	0.005	0.066	0.023	0.131	
	right		0.105	0.002	0.021	0.002	0.126	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.046	0.003	0.006	0.004	0.052	
	Front	1RB	0.191	0.009	0.159	0.036	0.350	
	Back		0.250	0.015	0.298	0.045	0.548	
	Left		0.057	0.005	0.066	0.023	0.123	
	right		0.077	0.002	0.021	0.002	0.098	
	Top		0.006	0.006	0.035	0.019	0.041	
LTE Band 7	Bottom		0.084	0.003	0.006	0.004	0.090	
	Front	50%RB	0.151	0.009	0.159	0.036	0.310	
	Back		0.187	0.015	0.298	0.045	0.485	
	Left		0.037	0.005	0.066	0.023	0.103	
	right		0.050	0.002	0.021	0.002	0.071	
	Top		0.002	0.006	0.035	0.019	0.037	
LTE Band 7	Bottom		0.058	0.003	0.006	0.004	0.064	

LTE Band 12	Front	1RB	0.131	0.009	0.159	0.036	0.290	1.6
	Back		0.150	0.015	0.298	0.045	0.448	
	Left		0.032	0.005	0.066	0.023	0.098	
	right		0.057	0.002	0.021	0.002	0.078	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.044	0.003	0.006	0.004	0.050	
	Front	50%RB	0.122	0.009	0.159	0.036	0.281	
	Back		0.134	0.015	0.298	0.045	0.432	
	Left		0.027	0.005	0.066	0.023	0.093	
	right		0.034	0.002	0.021	0.002	0.055	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.031	0.003	0.006	0.004	0.037	
LTE Band 17	Front	1RB	0.131	0.009	0.159	0.036	0.290	
	Back		0.157	0.015	0.298	0.045	0.455	
	Left		0.052	0.005	0.066	0.023	0.118	
	right		0.081	0.002	0.021	0.002	0.102	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.033	0.003	0.006	0.004	0.039	
	Front	50%RB	0.121	0.009	0.159	0.036	0.280	
	Back		0.135	0.015	0.298	0.045	0.433	
	Left		0.037	0.005	0.066	0.023	0.103	
	right		0.073	0.002	0.021	0.002	0.094	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.028	0.003	0.006	0.004	0.034	
LTE Band 38	Front	1RB	0.203	0.009	0.159	0.036	0.362	
	Back		0.278	0.015	0.298	0.045	0.576	
	Left		0.079	0.005	0.066	0.023	0.145	
	right		0.119	0.002	0.021	0.002	0.140	
	Top		0.004	0.006	0.035	0.019	0.039	
	Bottom		0.061	0.003	0.006	0.004	0.067	
	Front	50%RB	0.164	0.009	0.159	0.036	0.323	
	Back		0.220	0.015	0.298	0.045	0.518	
	Left		0.063	0.005	0.066	0.023	0.129	
	right		0.089	0.002	0.021	0.002	0.110	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.051	0.003	0.006	0.004	0.057	

Report No.: WSCT-ANAB-R&E241200075A-SAR SAR Evaluation Report

Band	Test Position	RB allocation	Scaled SAR			BT SAR 1g(W/kg)	Σ SAR (W/kg)	Llimit (W/kg)
			WWAN SAR 1g(W/kg)	WIFI2.4G SAR 1g(W/kg)	Wi-Fi 5G(Band 4) 1g(W/kg)			
LTE Band 41	Front	1RB	0.493	0.009	0.159	0.036	0.652	1.6
	Back		0.670	0.015	0.298	0.045	0.968	
	Left		0.228	0.005	0.066	0.023	0.294	
	right		0.319	0.002	0.021	0.002	0.340	
	Top		0.005	0.006	0.035	0.019	0.040	
	Bottom		0.193	0.003	0.006	0.004	0.199	
	Front	50%RB	0.360	0.009	0.159	0.036	0.519	
	Back		0.537	0.015	0.298	0.045	0.835	
	Left		0.165	0.005	0.066	0.023	0.231	
	right		0.198	0.002	0.021	0.002	0.219	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.124	0.003	0.006	0.004	0.130	
LTE Band 42	Front	1RB	0.255	0.009	0.159	0.036	0.414	
	Back		0.314	0.015	0.298	0.045	0.612	
	Left		0.149	0.005	0.066	0.023	0.215	
	right		0.044	0.002	0.021	0.002	0.065	
	Top		0.092	0.006	0.035	0.019	0.127	
	Bottom		0.008	0.003	0.006	0.004	0.014	
	Front	50%RB	0.169	0.009	0.159	0.036	0.328	
	Back		0.200	0.015	0.298	0.045	0.498	
	Left		0.108	0.005	0.066	0.023	0.174	
	right		0.024	0.002	0.021	0.002	0.045	
	Top		0.052	0.006	0.035	0.019	0.087	
	Bottom		0.003	0.003	0.006	0.004	0.009	
LTE Band 66	Front	1RB	0.324	0.009	0.159	0.036	0.483	
	Back		0.599	0.015	0.298	0.045	0.897	
	Left		0.157	0.005	0.066	0.023	0.223	
	right		0.060	0.002	0.021	0.002	0.081	
	Top		0.003	0.006	0.035	0.019	0.038	
	Bottom		0.076	0.003	0.006	0.004	0.082	
	Front	50%RB	0.215	0.009	0.159	0.036	0.374	
	Back		0.303	0.015	0.298	0.045	0.601	
	Left		0.100	0.005	0.066	0.023	0.166	
	right		0.036	0.002	0.021	0.002	0.057	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.054	0.003	0.006	0.004	0.060	
N5	Front	1RB	0.280	0.009	0.159	0.036	0.439	
	Back		0.346	0.015	0.298	0.045	0.644	
	Left		0.098	0.005	0.066	0.023	0.164	
	right		0.141	0.002	0.021	0.002	0.162	
	Top		0.005	0.006	0.035	0.019	0.040	
	Bottom		0.078	0.003	0.006	0.004	0.084	
	Front	50%RB	0.251	0.009	0.159	0.036	0.410	
	Back		0.303	0.015	0.298	0.045	0.601	
	Left		0.068	0.005	0.066	0.023	0.134	
	right		0.098	0.002	0.021	0.002	0.119	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.060	0.003	0.006	0.004	0.066	

N7	Front	1RB	0.237	0.009	0.159	0.036	0.396	1.6
	Back		0.282	0.015	0.298	0.045	0.580	
	Left		0.044	0.005	0.066	0.023	0.110	
	right		0.074	0.002	0.021	0.002	0.095	
	Top		0.005	0.006	0.035	0.019	0.040	
	Bottom		0.078	0.003	0.006	0.004	0.084	
	Front	50%RB	0.179	0.009	0.159	0.036	0.338	
	Back		0.202	0.015	0.298	0.045	0.500	
	Left		0.022	0.005	0.066	0.023	0.088	
	right		0.045	0.002	0.021	0.002	0.066	
	Top		0.002	0.006	0.035	0.019	0.037	
N12	Bottom		0.052	0.003	0.006	0.004	0.058	
	Front	1RB	0.143	0.009	0.159	0.036	0.302	
	Back		0.209	0.015	0.298	0.045	0.507	
	Left		0.031	0.005	0.066	0.023	0.097	
	right		0.075	0.002	0.021	0.002	0.096	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.036	0.003	0.006	0.004	0.042	
	Front	50%RB	0.116	0.009	0.159	0.036	0.275	
	Back		0.149	0.015	0.298	0.045	0.447	
	Left		0.018	0.005	0.066	0.023	0.084	
	right		0.046	0.002	0.021	0.002	0.067	
	Top		0.002	0.006	0.035	0.019	0.037	
N38	Bottom		0.022	0.003	0.006	0.004	0.028	
	Front	1RB	0.145	0.009	0.159	0.036	0.304	
	Back		0.207	0.015	0.298	0.045	0.505	
	Left		0.064	0.005	0.066	0.023	0.130	
	right		0.020	0.002	0.021	0.002	0.041	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.018	0.003	0.006	0.004	0.024	
	Front	50%RB	0.119	0.009	0.159	0.036	0.278	
	Back		0.163	0.015	0.298	0.045	0.461	
	Left		0.048	0.005	0.066	0.023	0.114	
	right		0.014	0.002	0.021	0.002	0.035	
	Top		0.002	0.006	0.035	0.019	0.037	
	Bottom		0.009	0.003	0.006	0.004	0.015	