

## PART 96 MEASUREMENT REPORT

### NR Band n48

**Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

04/02/2021 - 03/02/2022, 05/20/2022

**Test Report Issue Date:**

05/24/2022

**Test Site/Location:**

PCTEST lab. Columbia, MD, USA

**Test Report Serial No.:**

1M2112280170-05-R2.A3L

**FCC ID:**

**A3LSMF926U**

**APPLICANT:**

**Samsung Electronics Co., Ltd.**

**Application Type:**

Class II Permissive Change

**Model:**

SM-F926U

**Additional Models:**

SM-F926U1

**EUT Type:**

Portable Handset

**FCC Classification:**

Citizens Band End User Devices (CBE)

**FCC Rule Part(s):**

96

**Test Procedure(s):**

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 940660 D01 v03, WINNF-18-IN-00178 v1.0.0.00, KDB 648474 D03 v01r04

**Class II Permissive Change:**

Please see FCC change document

**Original Grant Date:**

06/23/2021



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

Note: This revised Test Report (S/N: 1M2112280170-05-R2.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



  
Randy Ortañez  
President




<b>FCC ID:</b> A3LSMF926U		<b>PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112280170-05-R2.A3L	<b>Test Dates:</b> 04/02/2021 - 03/02/2022, 05/20/2022	<b>EUT Type:</b> Portable Handset		Page 1 of 49

## T A B L E O F C O N T E N T S


1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
2.5	Software and Firmware .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Measurement Procedure.....	6
3.2	Radiated Power and Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS .....	10
7.1	Summary.....	10
7.2	Conducted Power Output Data .....	11
7.3	Occupied Bandwidth .....	14
7.4	Spurious and Harmonic Emissions at Antenna Terminal .....	20
7.5	Band Edge Emissions at Antenna Terminal .....	27
7.6	Radiated Power (EIRP) .....	33
7.7	Radiated Spurious Emissions Measurements .....	36
7.8	Frequency Stability / Temperature Variation .....	44
7.9	End User Device Additional Requirement (CBSD Protocol) .....	46
8.0	CONCLUSION .....	49

<b>FCC ID:</b> A3LSMF926U		<b>PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112280170-05-R2.A3L	<b>Test Dates:</b> 04/02/2021- 03/02/2022, 05/20/2022	<b>EUT Type:</b> Portable Handset		Page 2 of 49



## MEASUREMENT REPORT



### FCC Part 96



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.089	19.48	35M9G7D
		QPSK	3570.0 - 3680.0	0.083	19.20	38M0G7D
		16QAM	3570.0 - 3680.0	0.070	18.45	38M0W7D
	20 MHz	$\pi/2$ BPSK	3560.0 - 3690.0	0.081	19.07	18M0G7D
		QPSK	3560.0 - 3690.0	0.079	18.97	18M3G7D
		16QAM	3560.0 - 3690.0	0.072	18.57	18M3W7D
	10 MHz	$\pi/2$ BPSK	3555.0 - 3695.0	0.081	19.11	9M00G7D
		QPSK	3555.0 - 3695.0	0.081	19.09	9M00G7D
		16QAM	3555.0 - 3695.0	0.063	17.98	9M03W7D

#### EUT Overview

**Note:** EIRP levels shown in the table above are measured over the full channel bandwidth. These values will appear on the Grant of Authorization.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 3 of 49

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.



### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.**

- PCTEST is a CBRS Alliance (OnGo) Approved Test Lab
- PCTEST is a WinnForum Approved Test Lab
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WinnForum Conformance and Performance Test Technical Standard.
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 4 of 49

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF926U**. The test data contained in this report pertains only to the emissions due to the EUT's NR Band 48 (n48) operation in the CBRS band. Per FCC Part 96, this device is evaluated as a Citizens Band End User Device (CBE).

**Test Device Serial No.:** 1008M, 0105M, 0314M

### 2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests. The EUT was set to transmit in all relevant NR frequencies and bandwidths by using manufacturer provided test software.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.



This device supports two configurations: one is with screen open, and one is with screen closed. Both configurations are tested, and the worst case radiated emissions data is shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.5 Software and Firmware

The test was conducted with firmware version F926USQU0AUCE installed on the EUT.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 5 of 49

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

### 3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.



Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss} [\text{dB}] + \text{antenna gain} [\text{dBd/dBi}]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [\text{dBm}] - \text{cable loss} [\text{dB}]$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -40dBm/MHz for End User Devices.



All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v0r01.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 6 of 49

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF926U	 <b>PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset	Page 7 of 49



## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP1	EMC Cable and Switch System	12/12/2021	Annual	12/12/2022	AP1-002
-	ETS	EMC Cable and Switch System	12/10/2021	Annual	12/10/2022	ETS-002
-	LTx1	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx1
-	LTx2	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx2
-	LTx5	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx5
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201525694
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS Lindgren	3816/2NM	LISN	7/9/2020	Biennial	7/9/2022	00114451
Keysight Technologies	N9030A	PXA Signal Analyzer	1/6/2022	Annual	1/6/2023	MY55410501
Keysight Technologies	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	1/21/2021	Annual	3/21/2022	101716
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/25/2021	Annual	8/25/2022	103200



Table 5-1. Test Equipment Table (04/02/2021 – 03/02/2022)

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Keysight Technologies	N9020A	PXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561

Table 5-2. Test Equipment Table (05/20/2022)

### Notes:

- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.
- In the Equipment Tables above, Table 5-1 represents the equipment used for testing performed on 04/02/2021 – 03/02/2022). The equipment shown in Table 5-2 represents equipment used for testing performed on 05/20/2022. All equipment was within its calibration cycle at the time of testing.
- In Table 5-1 above, the AP1, ETS, and LTx cable sets were used for testing performed between 04/02/2021 and 06/26/2021 and were within their previous yearly calibration cycle.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 8 of 49



## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### QAM Modulation

**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated



7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (7250 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 9 of 49

## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMF926U  
 FCC Classification: Citizens Band End User Devices (CBE)  
 Mode(s): NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
<b>CONDUCTED</b>	Conducted Power	2.1046	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions	2.1051, 96.41(e)(1)(ii), 96.47(e)(2)	-13 dBm/MHz at frequencies within 0-B MHz of channel edge (where B is the bandwidth of the assigned channel) -25 dBm/MHz at frequencies greater than B MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and	PASS	Sections 7.4, 7.5
	Frequency Stability	2.1055	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
	End User Device Additional Requirements (CBSD Protocol)	96.47	End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.  An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.	PASS	Section 7.9
<b>RADIATED</b>	Equivalent Isotropic Radiated Power (EIRP)	96.41(b)	23 dBm/10MHz	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 96.41(e)(1)(ii), 96.47(e)(2)	-40 dBm/MHz	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool Beta 8, Chamber Control v1.3.1.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 10 of 49

## 7.2 Conducted Power Output Data

### \$2.1046

#### Test Overview

The EUT is set up to transmit at maximum power for NR. All power levels are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

#### Test Settings

1. Span = 2 x OBW to 3 x OBW
2. RBW = 1% to 5% of the OBW
3. Number of measurement points in sweep  $\geq 2 \times \text{span} / \text{RBW}$
4. Sweep = auto-couple (less than transmission burst duration)
5. Detector = RMS (power)
6. Trigger was set to enable power measurements only on full power bursts
7. Trace was allowed to stabilize
8. Spectrum analyzer's "Channel Power" function was used to compute the power by integrating the spectrum across the OBW of the signal

#### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**



#### Test Notes

1. Conducted power measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. Conducted power measurements are also evaluated for simultaneous transmission of the n48 carrier plus a supported LTE anchor band (EN-DC). The powers were investigated while both bands are operating at their widest supported channel bandwidth.
3. All other conducted power measurements are contained in the RF exposure report for this filing.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 11 of 49



Bandwidth	Modulation	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	3570.0	1 / 53	23.97
		3625.0	1 / 26	23.67
		3680.0	1 / 53	22.69
	QPSK	3570.0	1 / 53	23.90
		3625.0	1 / 53	23.12
		3680.0	1 / 53	22.36
	16-QAM	3570.0	1 / 53	23.11
		3625.0	1 / 53	22.32
		3680.0	1 / 53	21.80
	64-QAM	3570.0	1 / 53	22.27
		3625.0	1 / 53	21.63
		3680.0	1 / 53	20.95
	256-QAM	3570.0	1 / 53	20.48
		3625.0	1 / 53	19.79
		3680.0	1 / 53	19.17
20 MHz	$\pi/2$ BPSK	3560.0	1 / 53	23.63
		3625.0	1 / 26	23.26
		3690.0	1 / 26	22.34
	QPSK	3560.0	1 / 79	23.38
		3625.0	1 / 53	22.97
		3690.0	1 / 79	22.11
	16-QAM	3560.0	1 / 79	22.65
		3625.0	1 / 53	22.44
		3690.0	1 / 79	21.38
	64-QAM	3560.0	1 / 79	21.80
		3625.0	1 / 79	21.51
		3690.0	1 / 53	20.63
	256-QAM	3560.0	1 / 79	20.09
		3625.0	1 / 53	19.98
		3690.0	1 / 53	18.89
10 MHz	$\pi/2$ BPSK	3555.0	1 / 38	23.87
		3625.0	1 / 13	22.84
		3695.0	1 / 26	22.42
	QPSK	3555.0	1 / 38	23.79
		3625.0	1 / 38	22.75
		3695.0	1 / 26	22.23
	16-QAM	3555.0	1 / 26	22.68
		3625.0	1 / 13	21.86
		3695.0	1 / 38	21.39
	64-QAM	3555.0	1 / 38	21.68
		3625.0	1 / 13	20.80
		3695.0	1 / 13	20.29
	256-QAM	3555.0	1 / 38	20.67
		3625.0	1 / 26	20.00
		3695.0	1 / 26	19.26

**Table 7-2. Conducted Power Output Data (NR n48)**

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset	Page 12 of 49	

NR							LTE							NR	LTE	EN-DC Total
NR Band	NR Bandwidth [MHz]	NR (UL) channel	NR (UL) Frequency	NR (UL) channel	Mod.	NR UL RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE (UL) channel	LTE (UL) Frequency	LTE (UL) channel	Mod.	LTE UL RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Tx. Power (dBm)
n48	40	Mid	3625	641666	$\pi/2$ BPSK	1/26	B66	20	Mid	1745	132322 (66786)	QPSK	1/0	21.13	25.20	26.64
					QPSK	100/0						QPSK	100/0	20.45	23.39	25.17
					QPSK	1/26						QPSK	1/0	21.50	25.20	26.74
					QPSK	1/53						QPSK	1/50	21.30	24.01	25.87
					QPSK	1/79						QPSK	1/99	20.70	23.93	25.62
					16Q	1/26						16Q	1/0	20.71	24.30	25.88

**Table 7-3. Conducted Power Output Data (EN-DC, n48 + B2)**

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset			Page 13 of 49

## 7.3 Occupied Bandwidth

**\$2.1049**

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

### Test Settings



1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-2. Test Instrument & Measurement Setup**

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 14 of 49

## NR Band n48

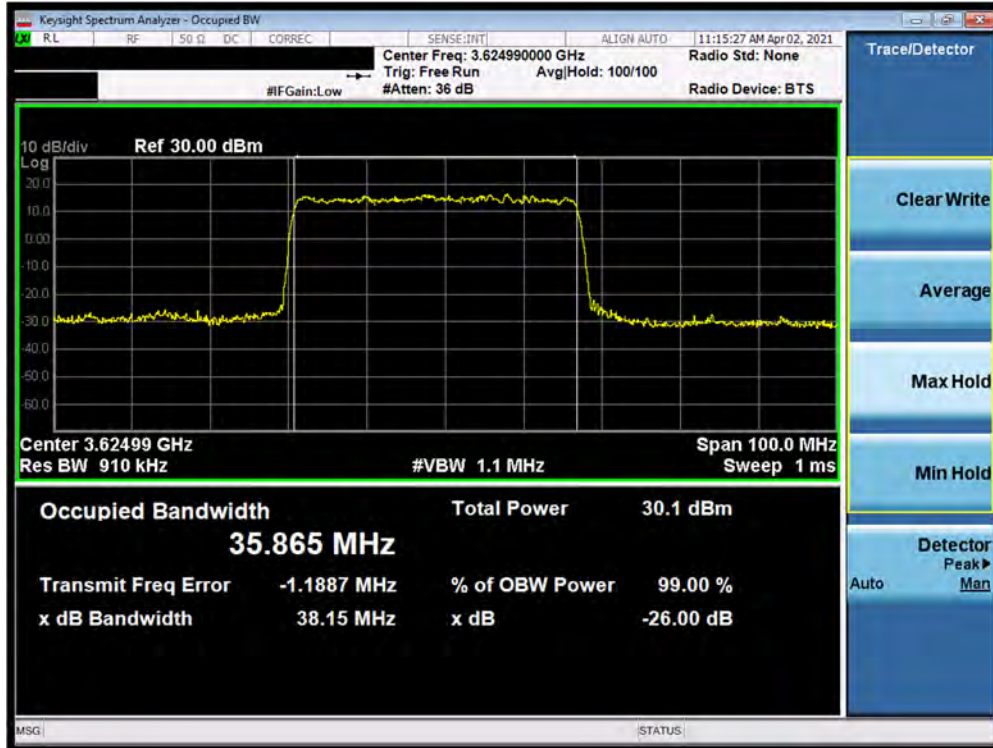


Plot 7-1. Occupied Bandwidth Plot (NR Band n48 - 40MHz  $\pi/2$  BPSK - Full RB Configuration)

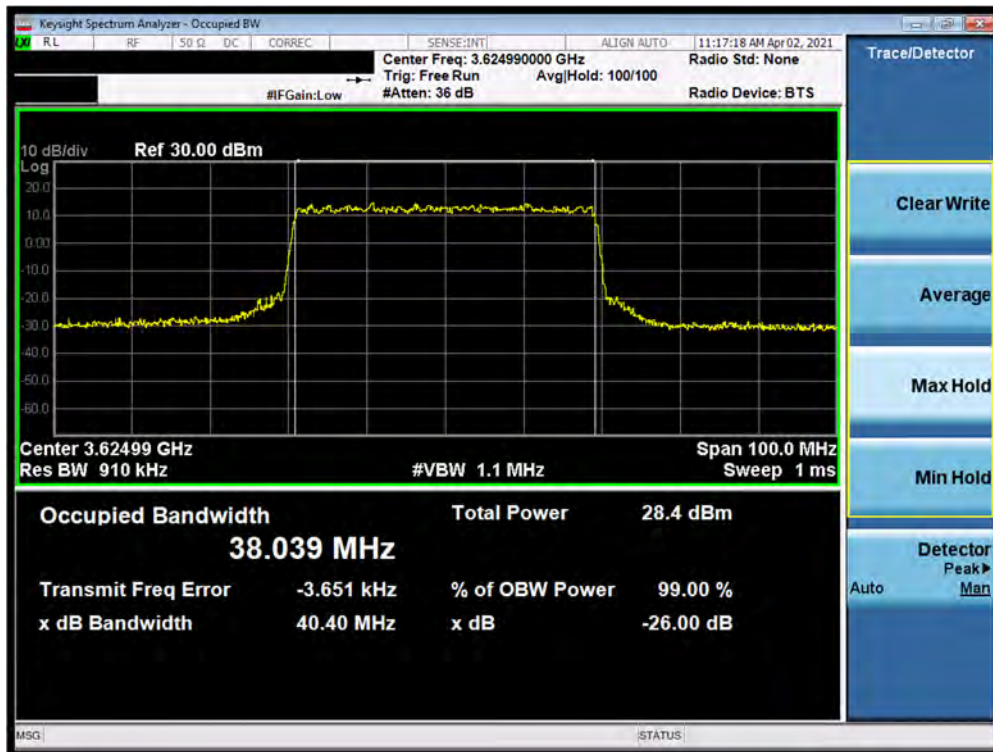


Plot 7-2. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 15 of 49



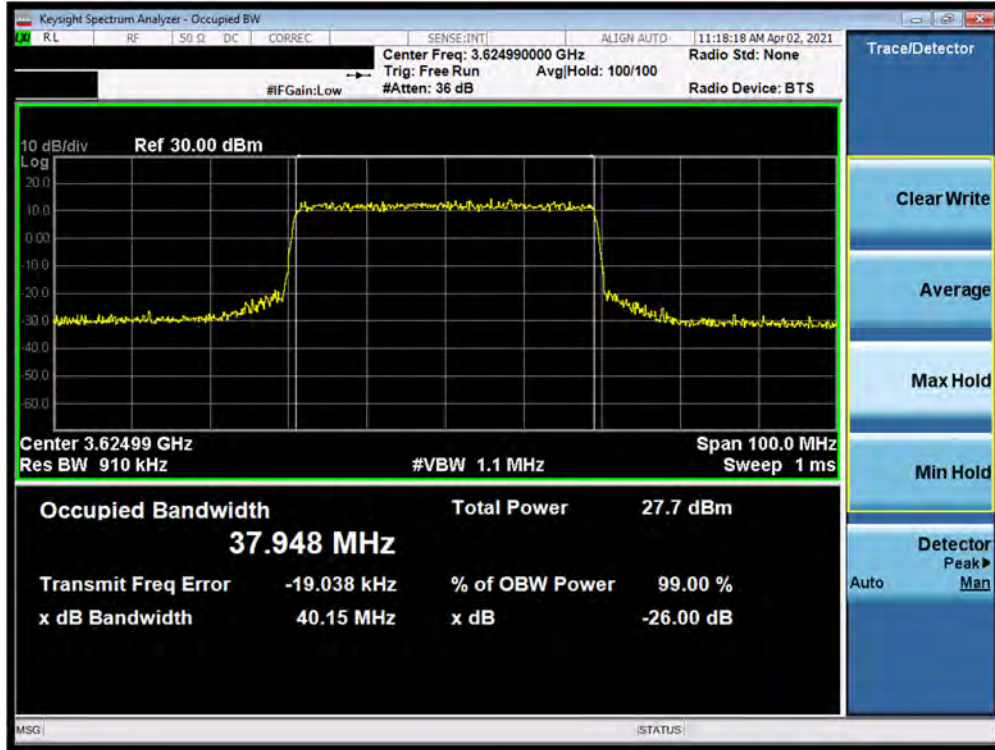

Plot 7-3. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration)

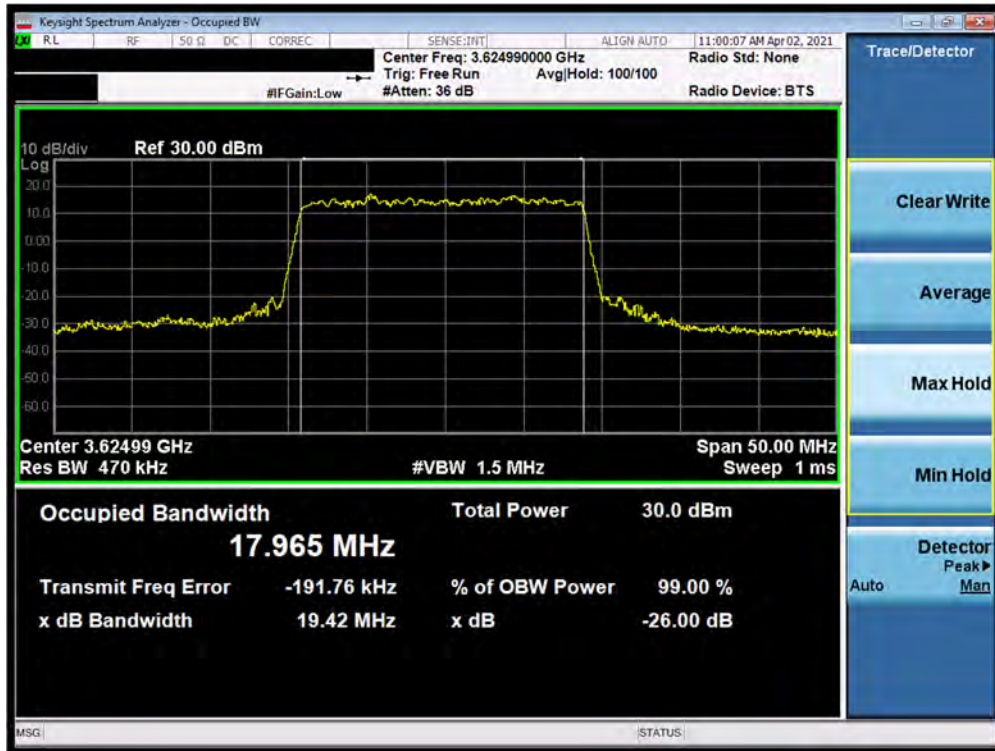


Plot 7-4. Occupied Bandwidth Plot (NR Band n48 - 20MHz  $\pi/2$  BPSK - Full RB Configuration)



FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 16 of 49

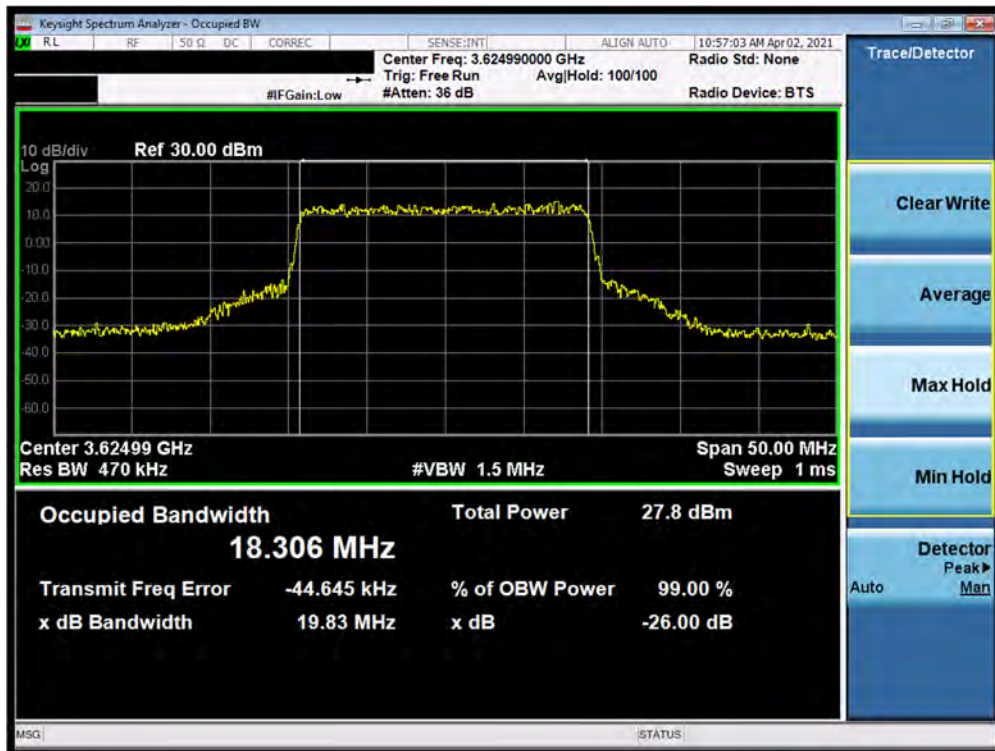

Plot 7-5. Occupied Bandwidth Plot (NR Band n48 - 20MHz QPSK - Full RB Configuration)




Plot 7-6. Occupied Bandwidth Plot (NR Band n48 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2-A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 17 of 49




Plot 7-7. Occupied Bandwidth Plot (NR Band n48 - 10MHz  $\pi/2$  BPSK - Full RB Configuration)

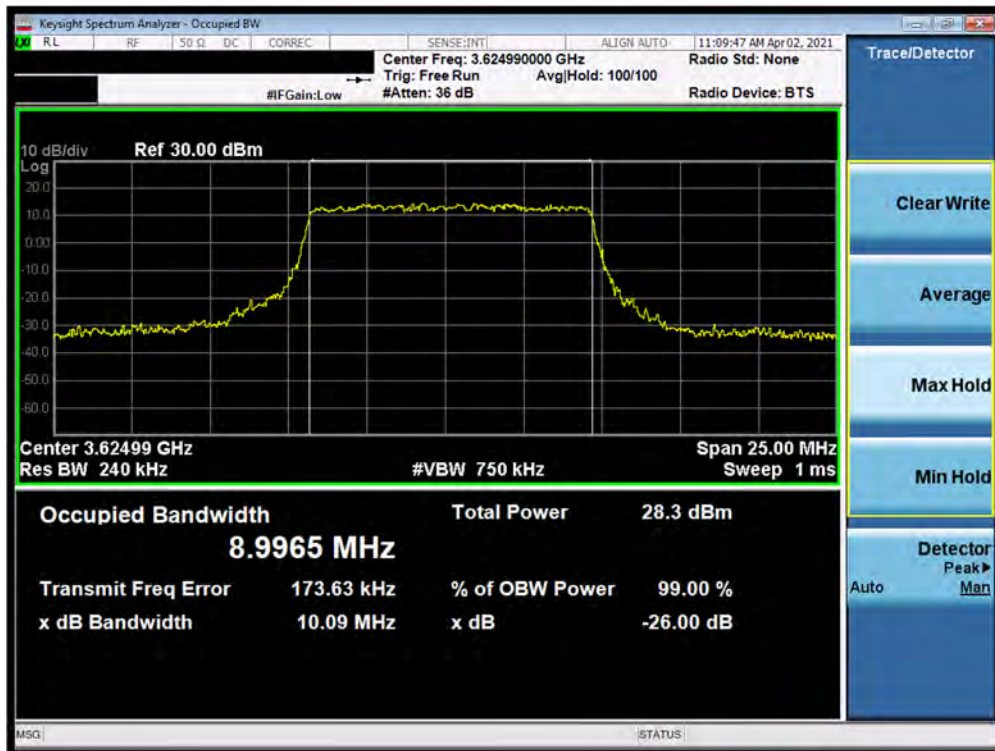



Plot 7-8. Occupied Bandwidth Plot (NR Band n48 - 10MHz QPSK - Full RB Configuration)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2-A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 18 of 49

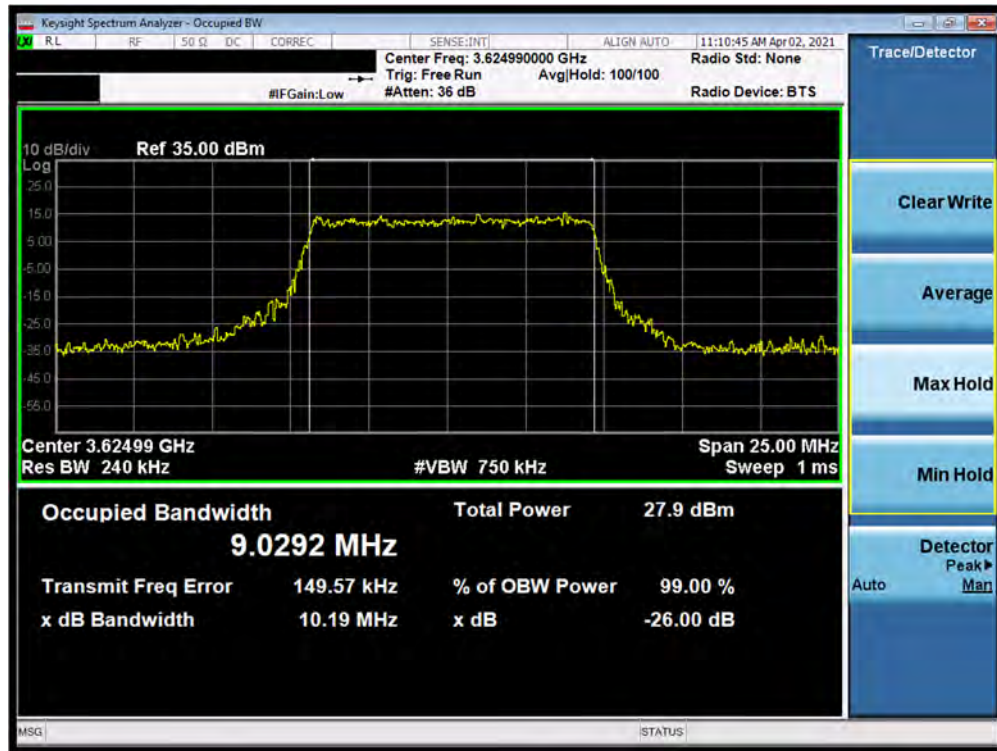



Plot 7-9. Occupied Bandwidth Plot (NR Band n48 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 19 of 49

## 7.4 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §96.41(e)(1)(ii) §96.41(e)(2)

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/Mhz.***

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 \* the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = Max Hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 20 of 49

## NR Band n48

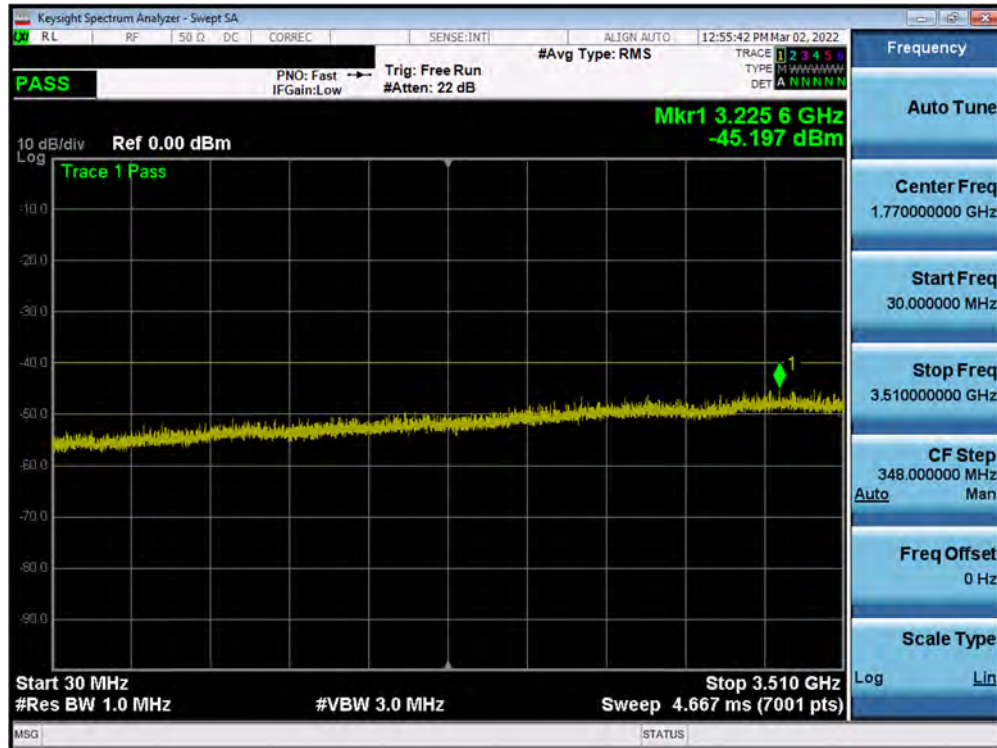


Plot 7-10. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

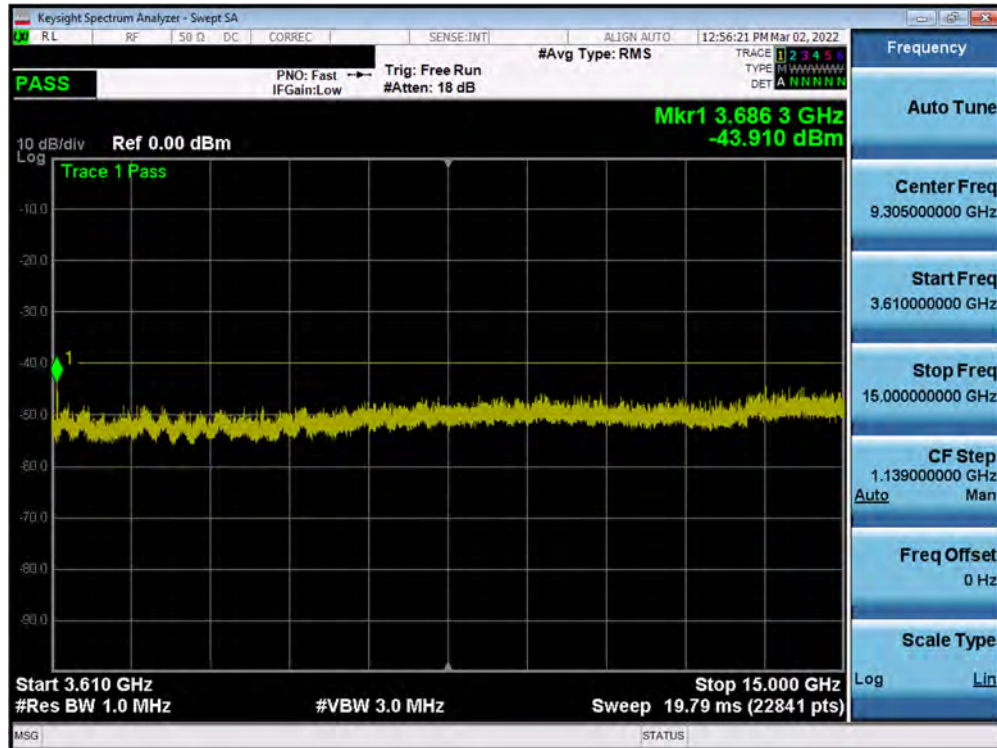


Plot 7-11. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 21 of 49

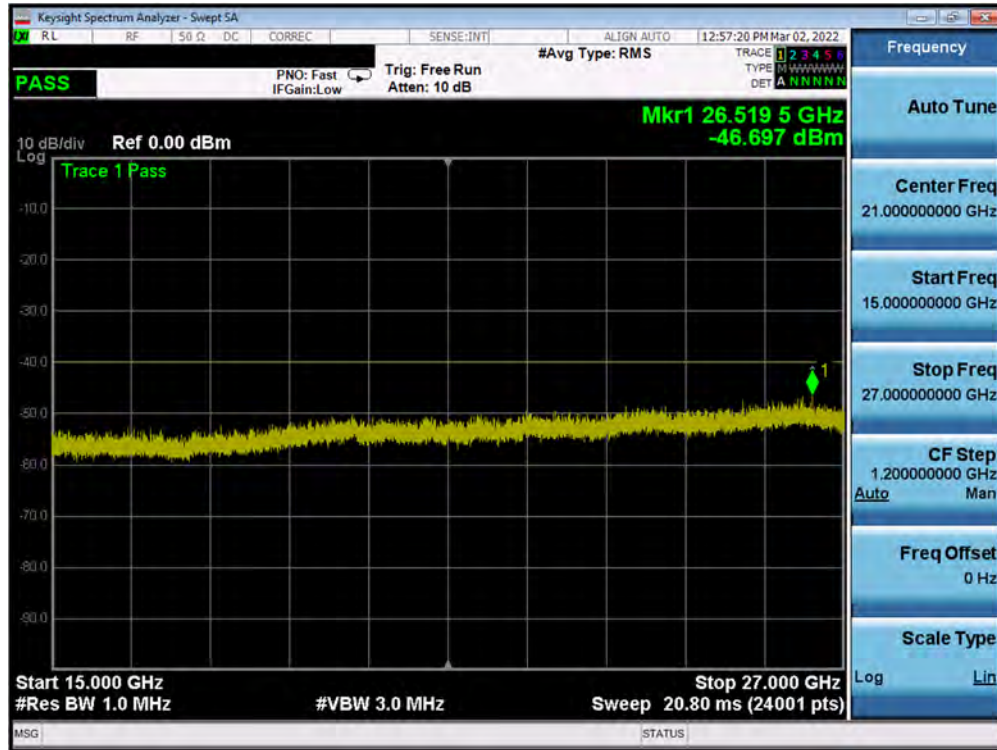


Plot 7-12. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

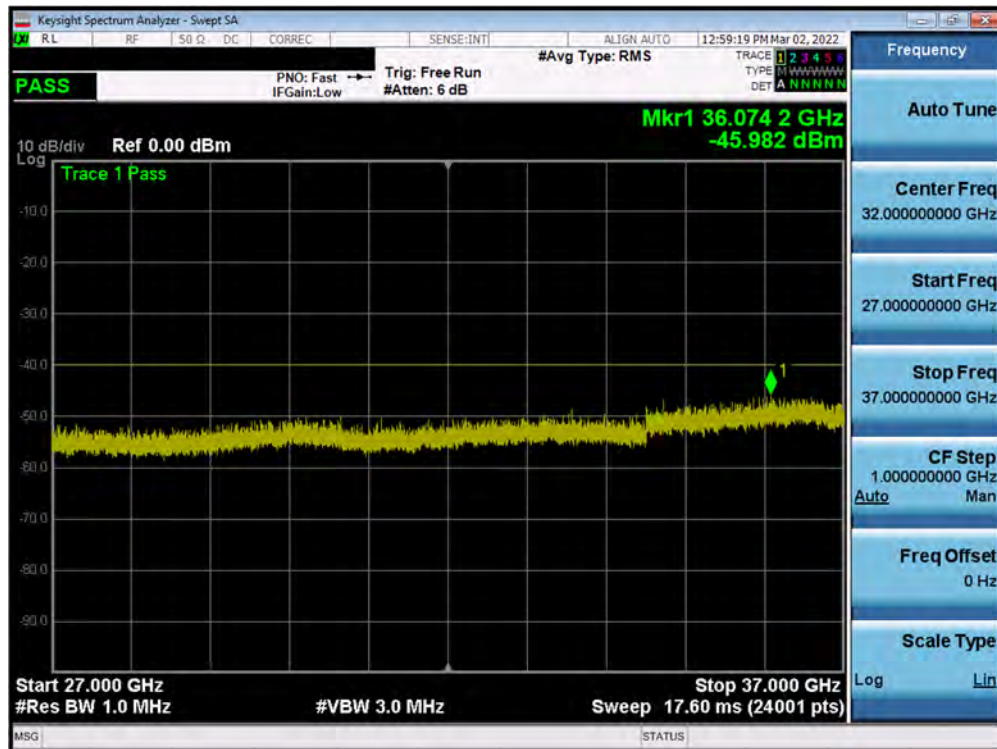


Plot 7-13. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 22 of 49



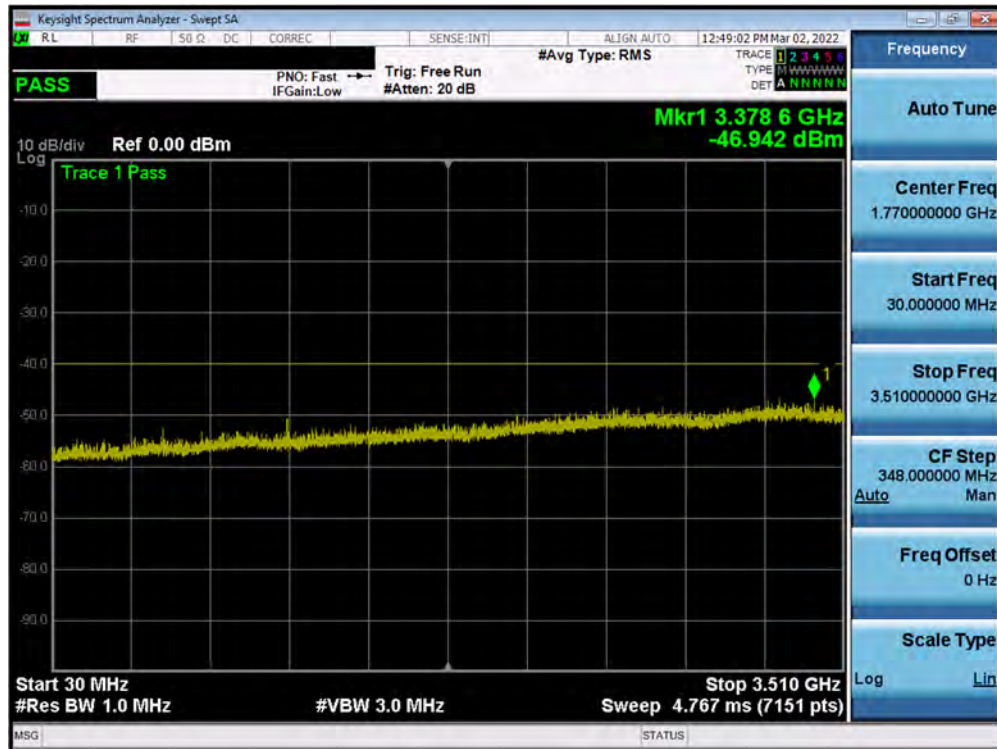


Plot 7-14. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

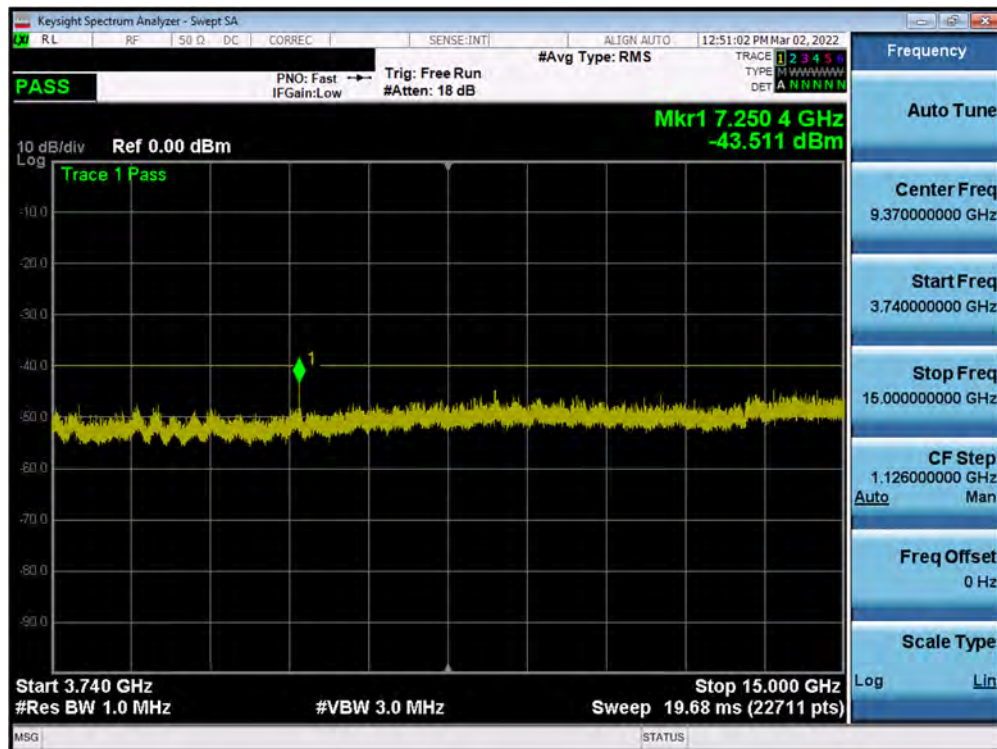


Plot 7-15. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 23 of 49

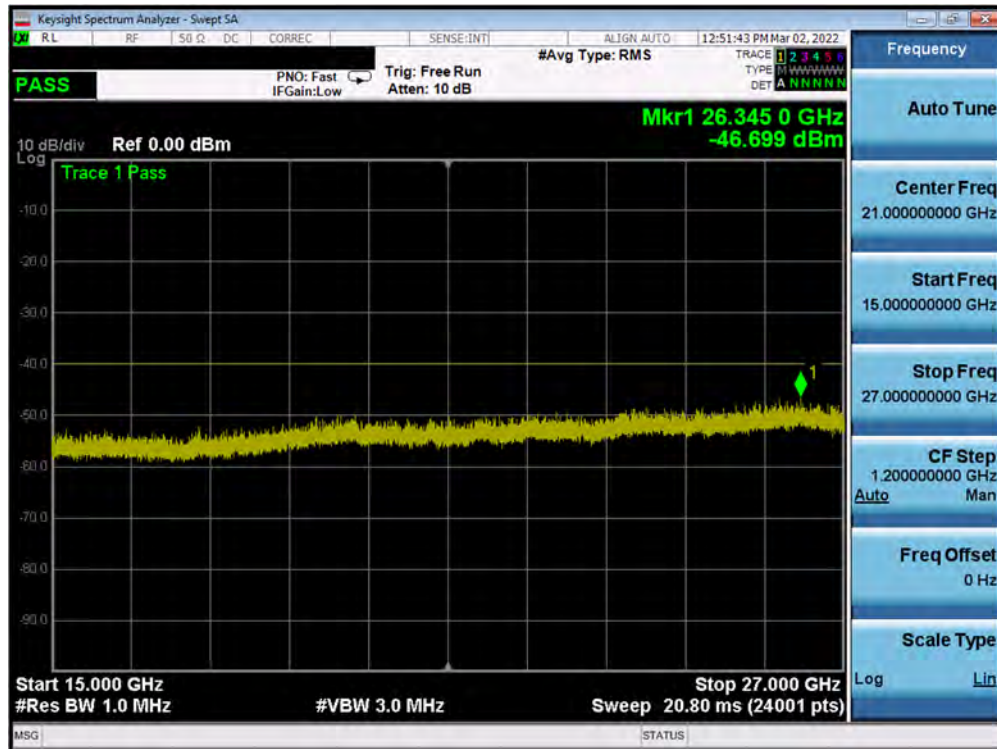


Plot 7-16. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

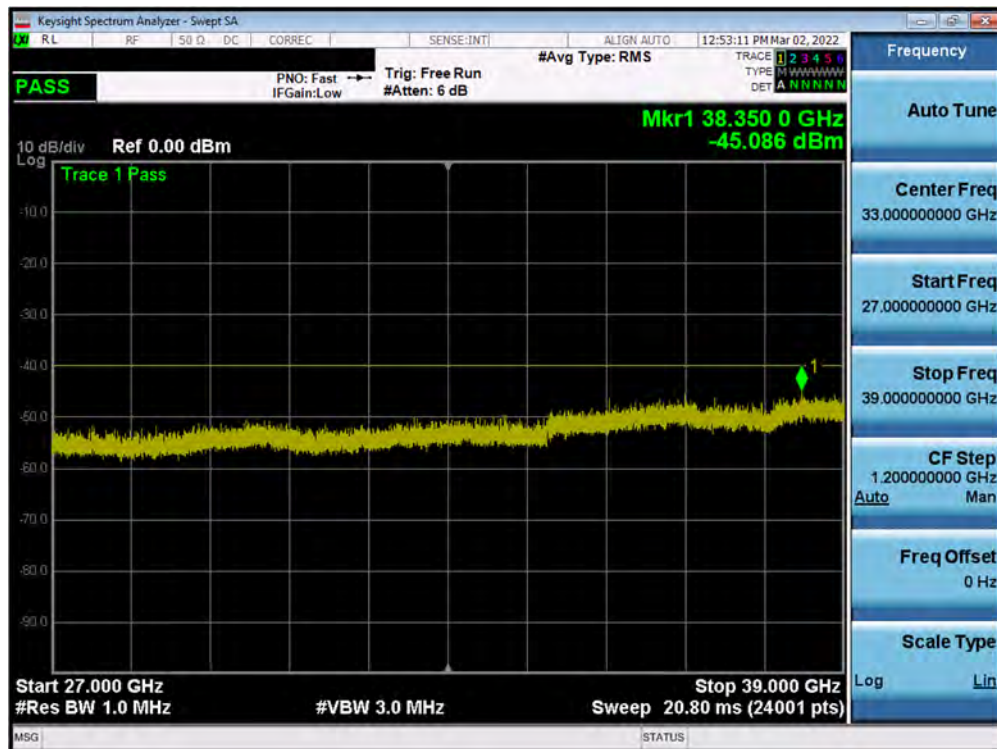


Plot 7-17. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 24 of 49

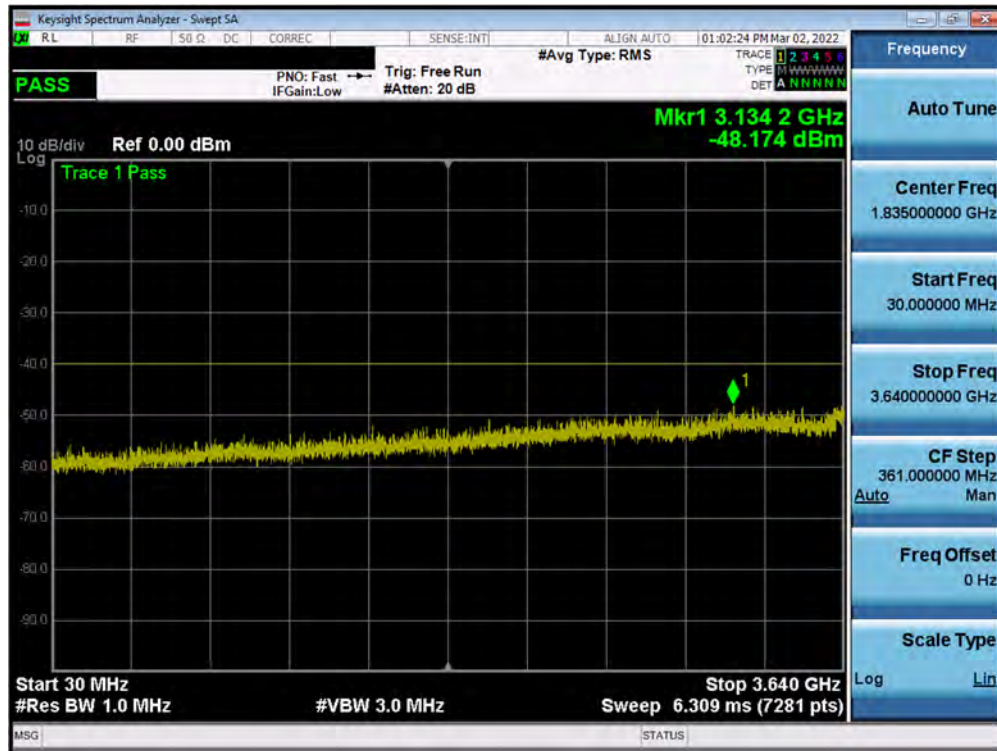


Plot 7-18. Conducted Spurious Plot (NR Band n48 – 40MHz QPSK – High Channel)

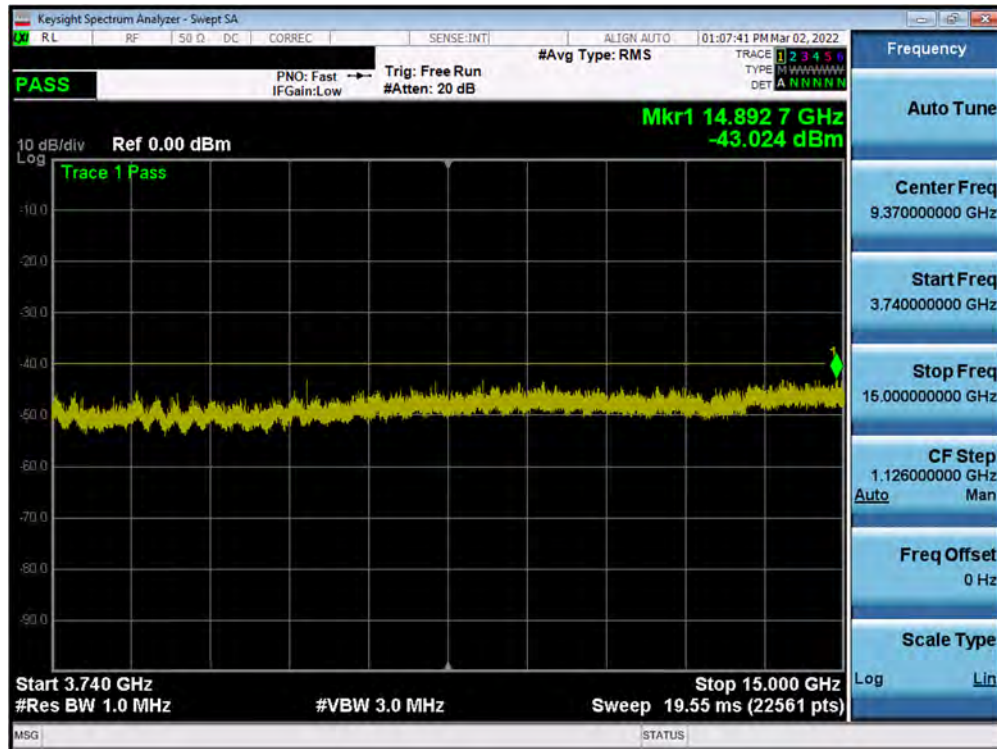


Plot 7-19. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 25 of 49



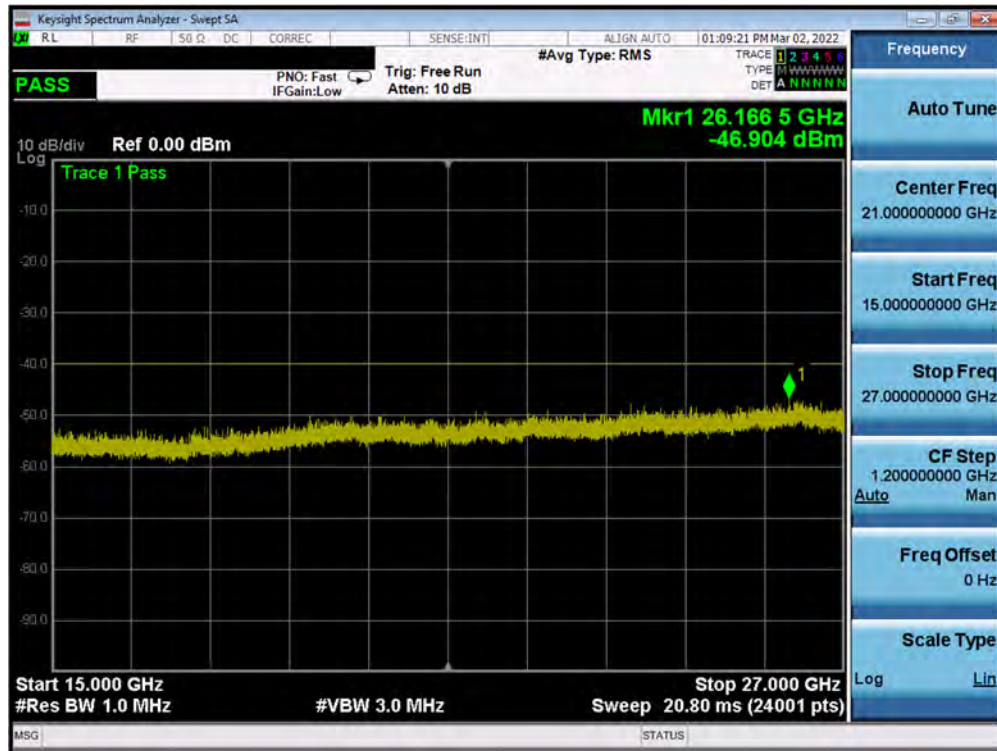

Plot 7-20. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)

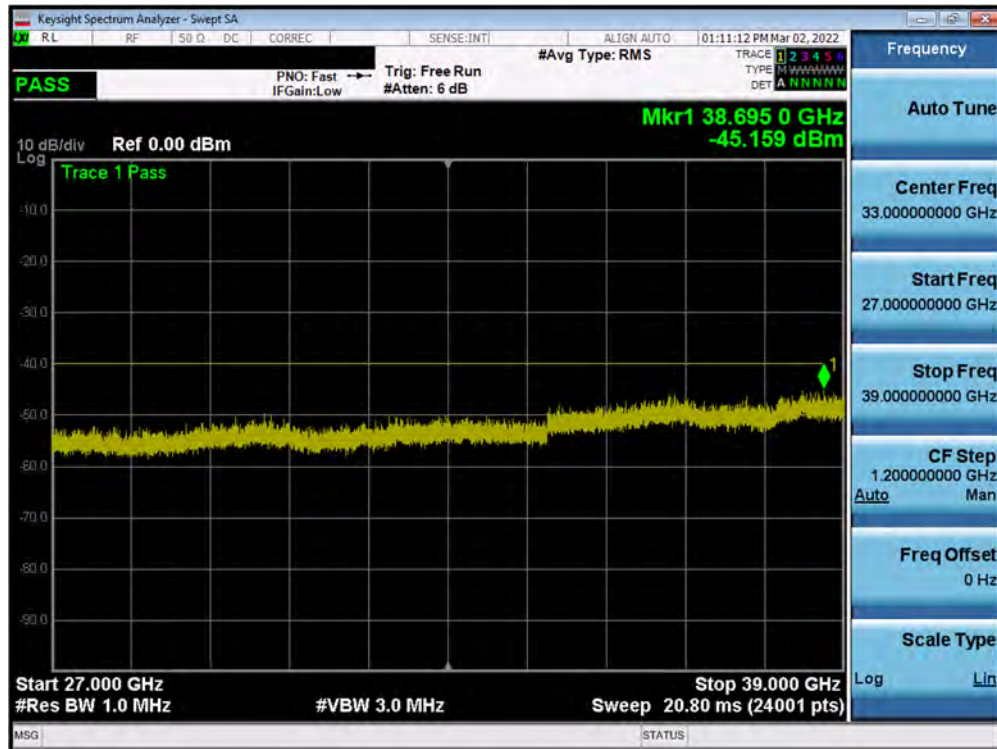

Plot 7-21. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 26 of 49

## 7.5 Band Edge Emissions at Antenna Terminal

\$2.1051 \$96.41(e)(1)(ii) \$96.41(e)(2)

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B MHz (where B is the bandwidth in MHz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B MHz below the lower CBSD-assigned channel edge. At all frequencies greater than B MHz above the upper CBSD assigned channel edge and less than B MHz below the lower CBSD-assigned channel edge, the conducted power of any end user device emission shall not exceed -25 dBm/MHz. The conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.***

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 27 of 49

## NR Band n48

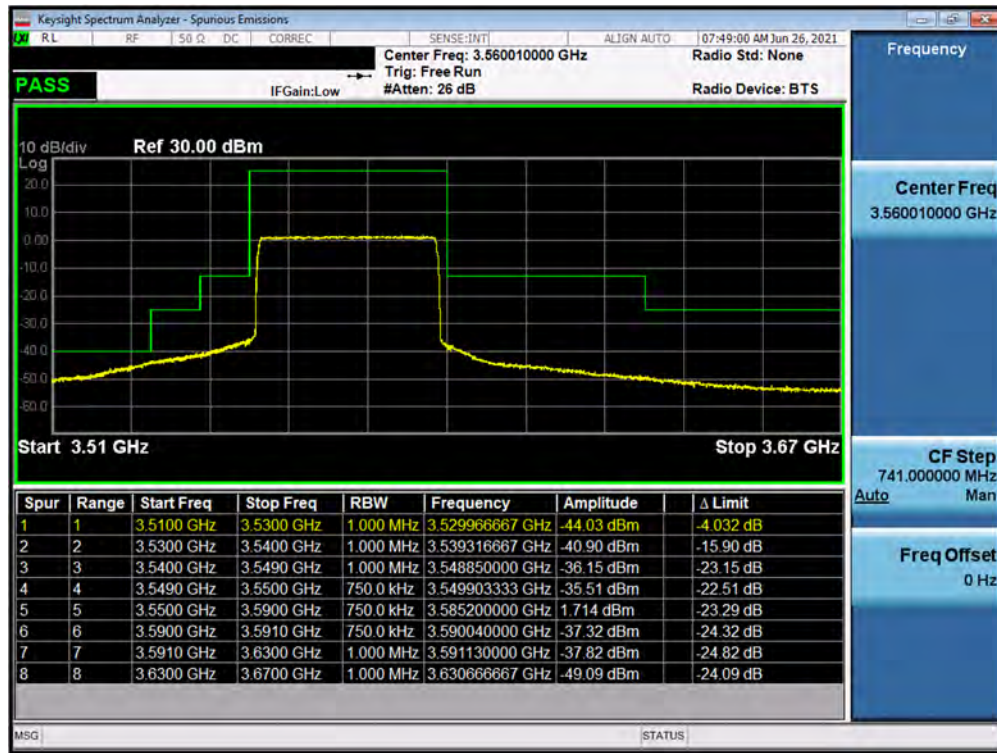


Plot 7-22. Channel Edge Plot (NR Band n48 - 40MHz QPSK - Low Channel)

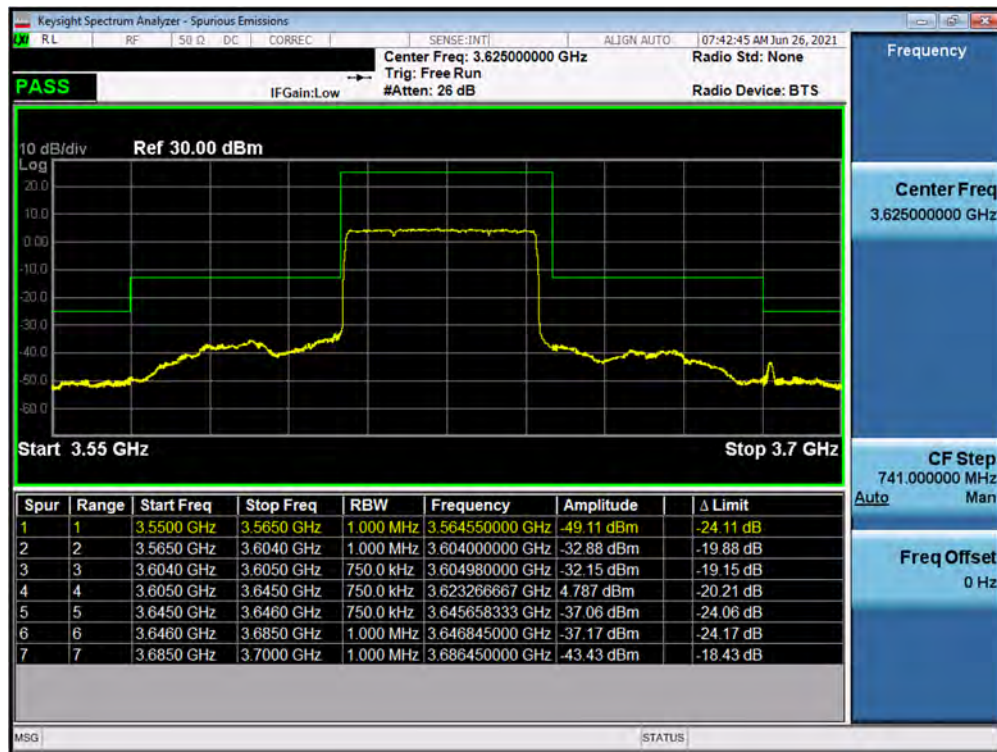


Plot 7-23. Channel Edge Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 28 of 49



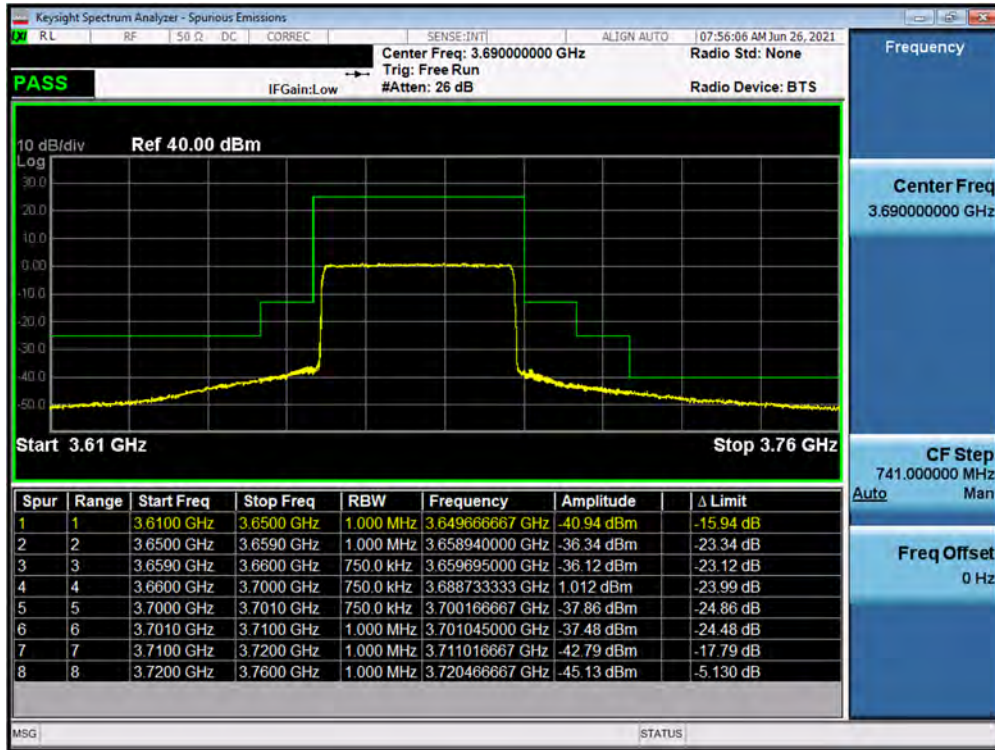


Plot 7-24. Channel Edge Plot (NR Band n48 - 40MHz QPSK - High Channel)

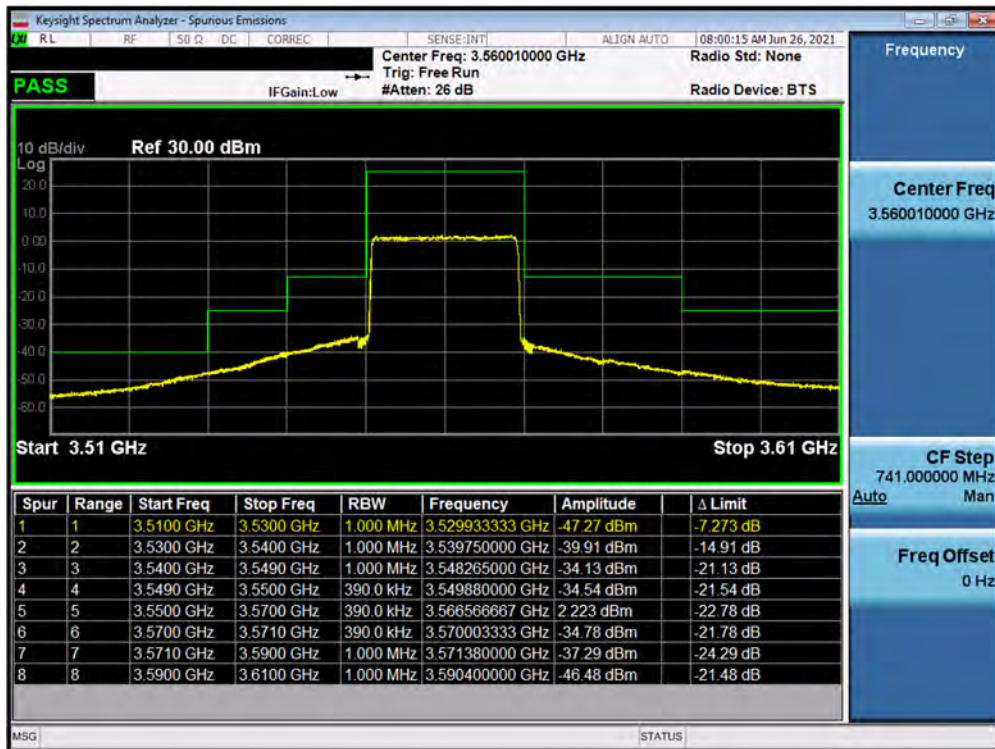


Plot 7-25. Channel Edge Plot (NR Band n48 - 20MHz QPSK - Low Channel)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2-A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 29 of 49



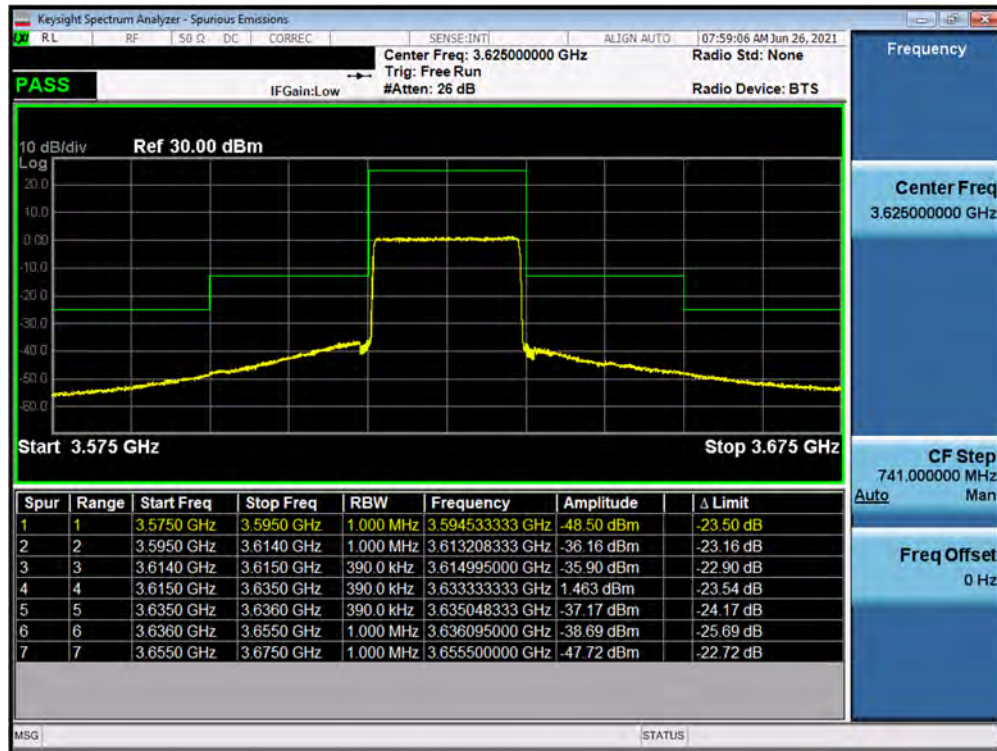


Plot 7-26. Channel Edge Plot (NR Band n48 - 20MHz QPSK - Mid Channel)

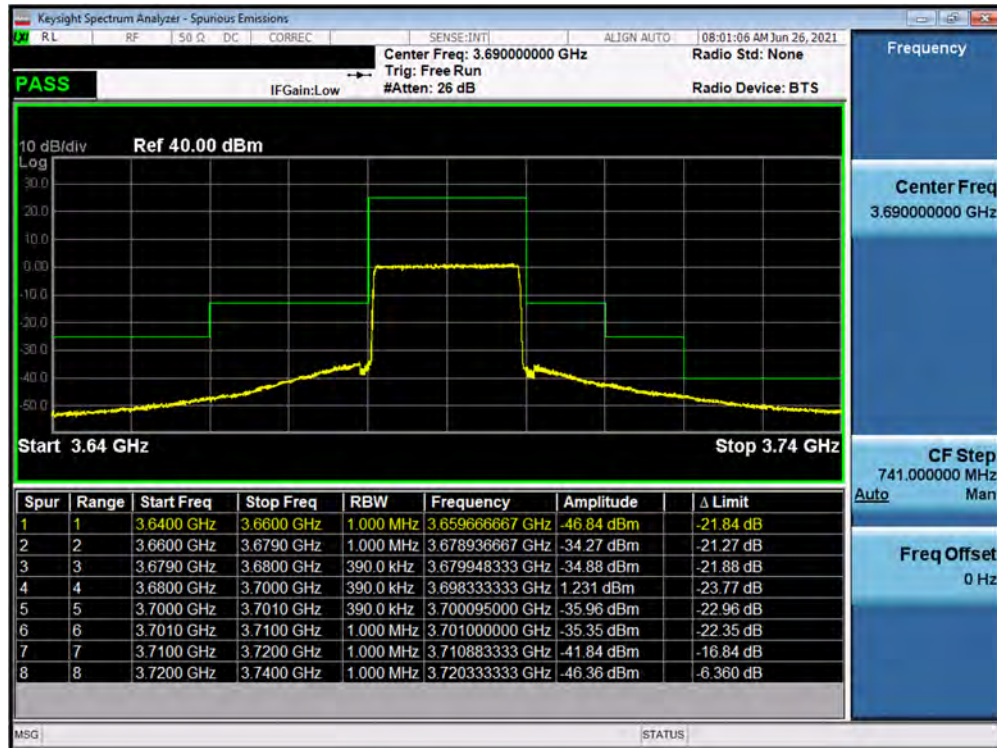


Plot 7-27. Channel Edge Plot (NR Band n48 - 20MHz QPSK - High Channel)

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 30 of 49

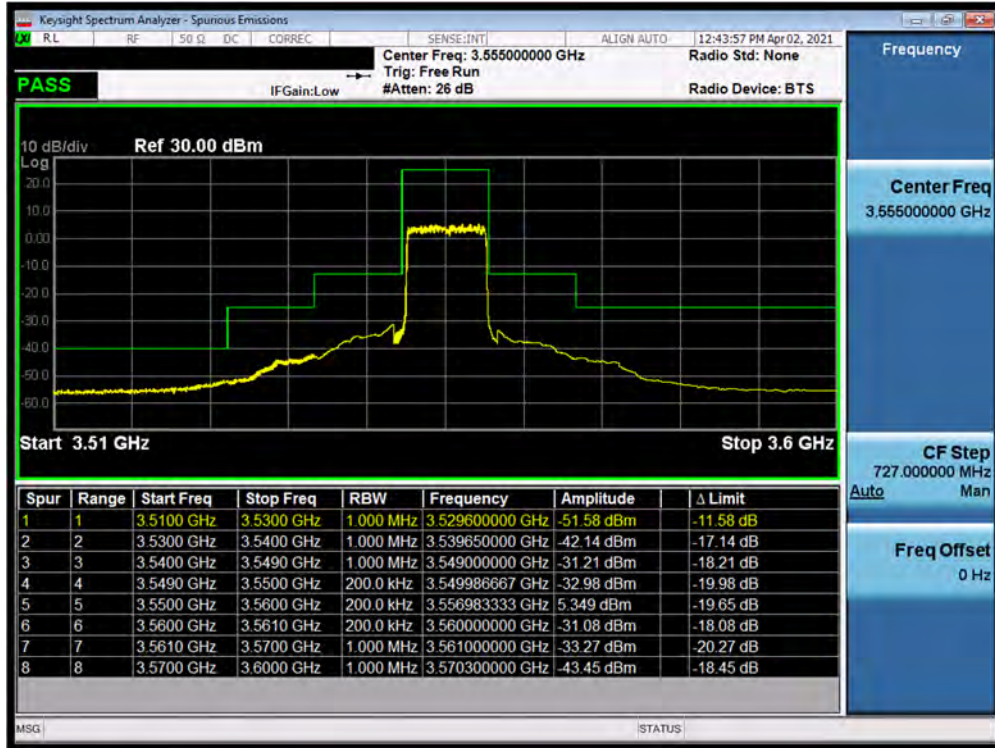


Plot 7-28. Channel Edge Plot (NR Band n48 - 10MHz QPSK - Low Channel)

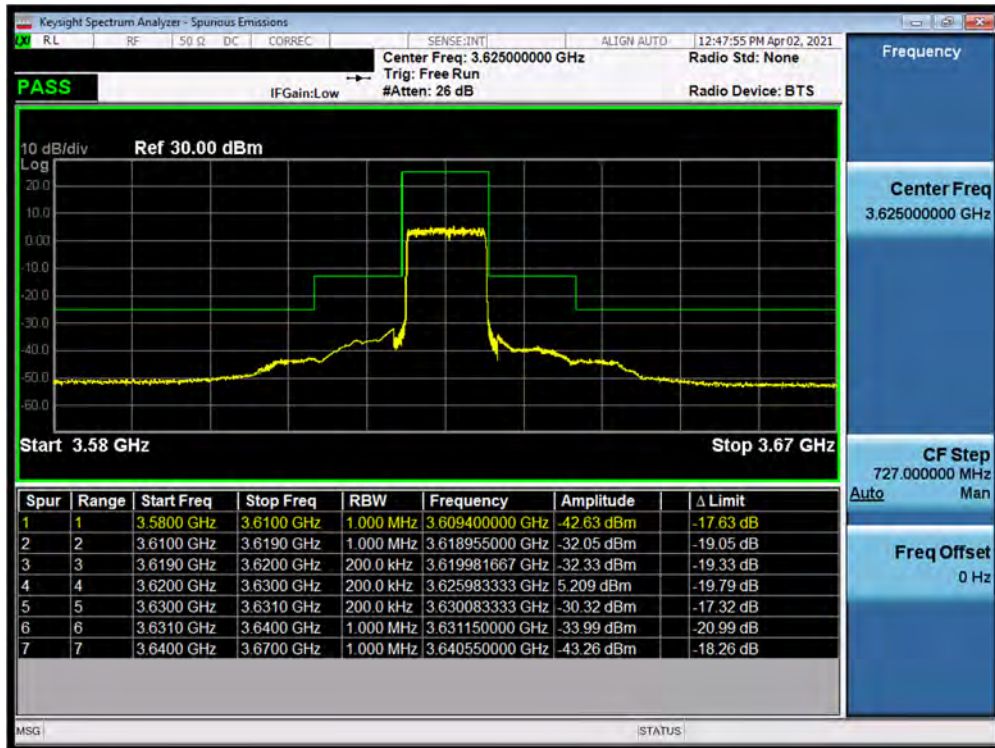



Plot 7-29. Channel Edge Plot (NR Band n48 - 10MHz QPSK - Mid Channel)

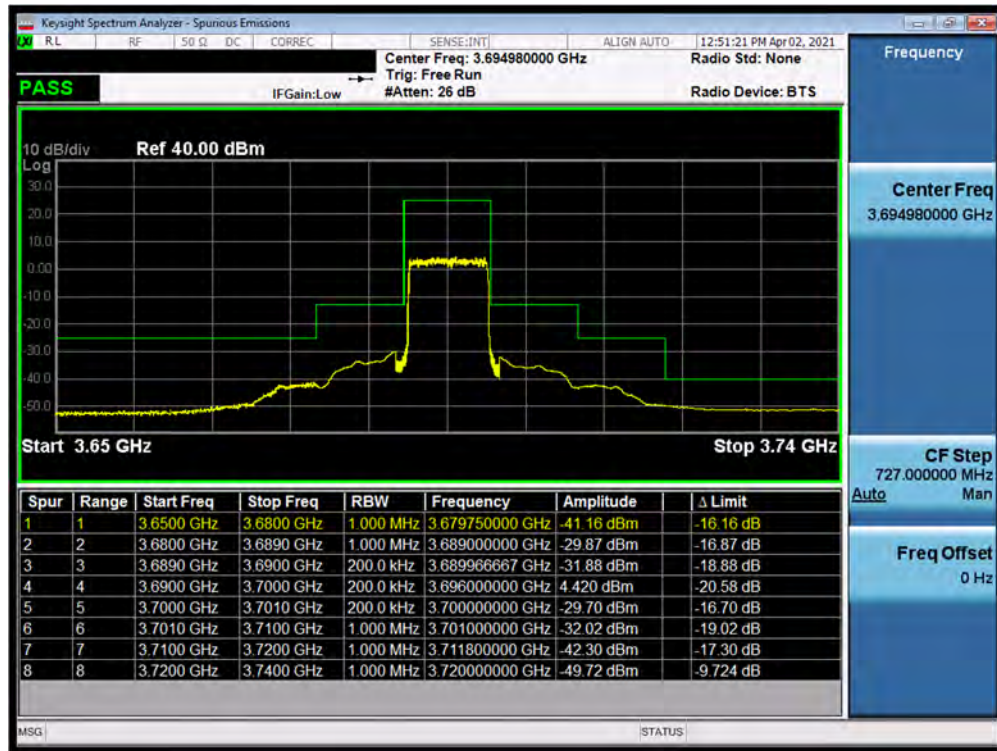FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 31 of 49



Plot 7-30. Channel Edge Plot (NR Band n48 - 10MHz QPSK - High Channel)

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 32 of 49



## 7.6 Radiated Power (EIRP)

### §96.41(b)

#### Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



#### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was set equal to 10MHz.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 33 of 49

## Test Setup

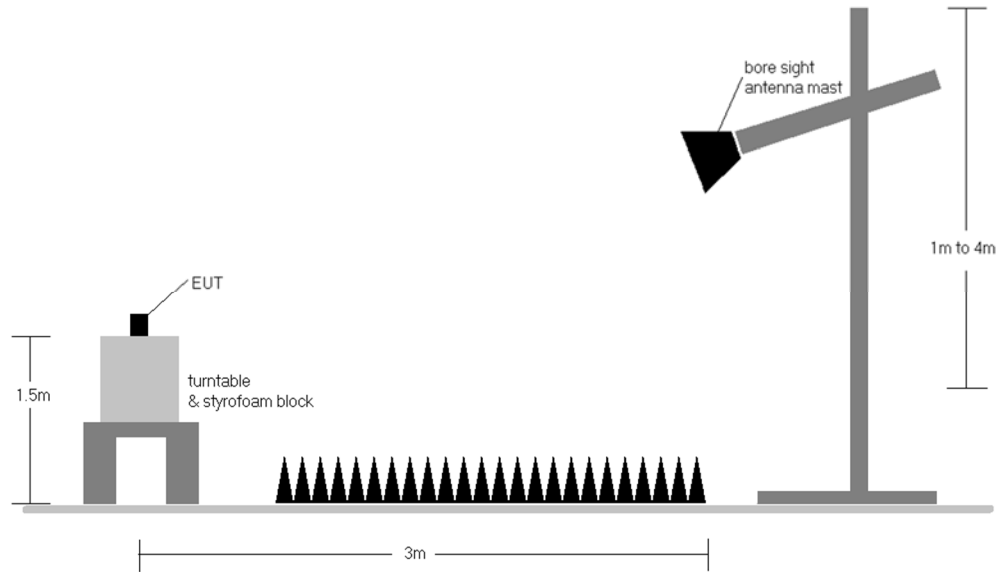

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-5. Radiated Test Setup >1GHz**



## Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The worst case EIRP shown in this section is found with NR operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for NR Band 48 (i.e. 10, 20, 40MHz).
- 4) Unless indicated otherwise, all radiated power measurements are made with the EUT in the “screen open” mechanical configuration.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 34 of 49

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
40 MHz	TT/2 BPSK	3570.0	H	104	330	7.27	1 / 79	12.04	19.31	0.085	23.00	-3.69
		3625.0	H	102	328	6.77	1 / 79	12.71	<b>19.48</b>	<b>0.089</b>	23.00	-3.52
		3680.0	H	102	331	6.25	1 / 53	12.87	19.12	0.082	23.00	-3.88
	QPSK	3570.0	H	104	330	7.27	1 / 79	11.93	19.20	0.083	23.00	-3.80
		3625.0	H	102	328	6.77	1 / 79	12.35	19.12	0.082	23.00	-3.88
		3680.0	H	102	331	6.25	1 / 53	12.85	19.10	0.081	23.00	-3.90
20 MHz	TT/2 BPSK	3625.0	H	102	328	6.77	1 / 79	11.68	18.45	0.070	23.00	-4.55
		3560.0	H	104	330	7.37	1 / 53	11.50	18.87	0.077	23.00	-4.13
		3625.0	H	102	328	6.77	1 / 26	12.30	<b>19.07</b>	<b>0.081</b>	23.00	-3.93
	QPSK	3690.0	H	102	331	6.15	1 / 26	12.62	18.77	0.075	23.00	-4.23
		3560.0	H	104	330	7.37	1 / 79	11.31	18.68	0.074	23.00	-4.32
		3625.0	H	102	328	6.77	1 / 53	12.20	18.97	0.079	23.00	-4.03
10 MHz	TT/2 BPSK	3690.0	H	102	331	6.15	1 / 79	12.71	18.86	0.077	23.00	-4.14
		3625.0	H	102	328	6.77	1 / 53	11.80	18.57	0.072	23.00	-4.43
		3555.0	H	104	330	7.43	1 / 38	11.68	<b>19.11</b>	<b>0.081</b>	23.00	-3.89
	QPSK	3625.0	H	102	328	6.77	1 / 13	11.87	18.64	0.073	23.00	-4.36
		3695.0	H	102	331	6.09	1 / 26	12.76	18.85	0.077	23.00	-4.15
		3555.0	H	104	330	7.43	1 / 38	11.67	19.09	0.081	23.00	-3.91
40 MHz	QPSK	3625.0	H	102	328	6.77	1 / 38	11.98	18.75	0.075	23.00	-4.25
		3695.0	H	102	331	6.09	1 / 26	12.88	18.98	0.079	23.00	-4.02
		3625.0	H	102	328	6.77	1 / 13	11.21	17.98	0.063	23.00	-5.02
40 MHz	QPSK (CP-OFDM)	3625.0	H	102	328	6.77	1 / 38	11.70	<b>18.47</b>	<b>0.070</b>	23.00	-4.53
	QPSK (Opposite Pol.)	3625.0	V	278	113	6.91	1 / 13	10.72	17.63	0.058	23.00	-5.37
	QPSK (WCP)	3625.0	H	155	342	6.77	1 / 38	11.40	18.17	0.066	23.00	-4.83

Table 7-4. EIRP Data (NR Band n48)

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 35 of 49

## 7.7 Radiated Spurious Emissions Measurements

§2.1053 §96.41(e)(1)(ii) §96.41(e)(2)

### Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

### Test Settings


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Max Hold (In cases where the level is within 2dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 36 of 49



## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

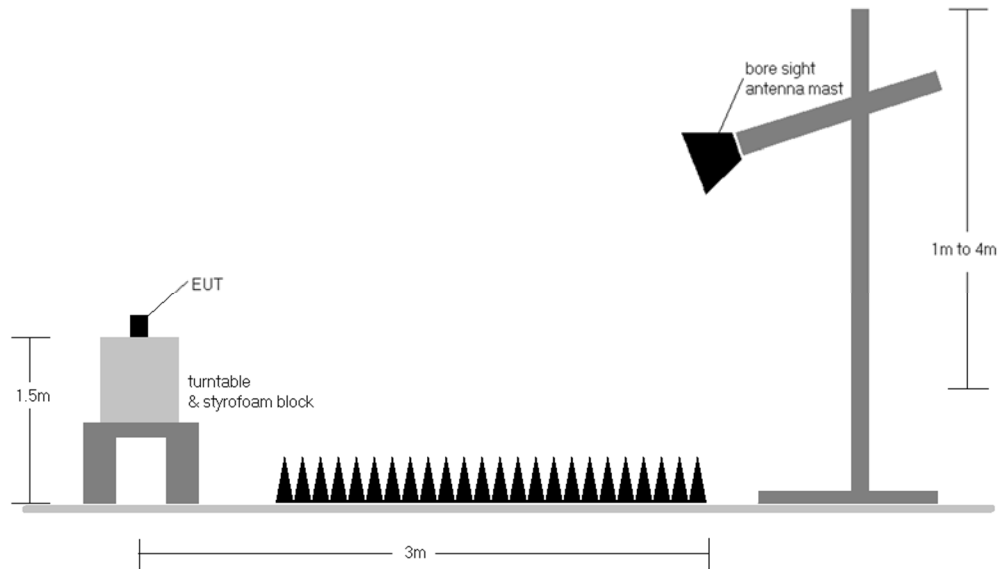



**Figure 7-6. Test Instrument & Measurement Setup**

## Test Notes


- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 6) Per KDB 971168, Field Strength Level (dBμV/m) is converted to EIRP Spurious Emission Level (dBm) using the formula in Section 5.8.4 (d):

a)  $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$


b)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 37 of 49


## NR Band n48

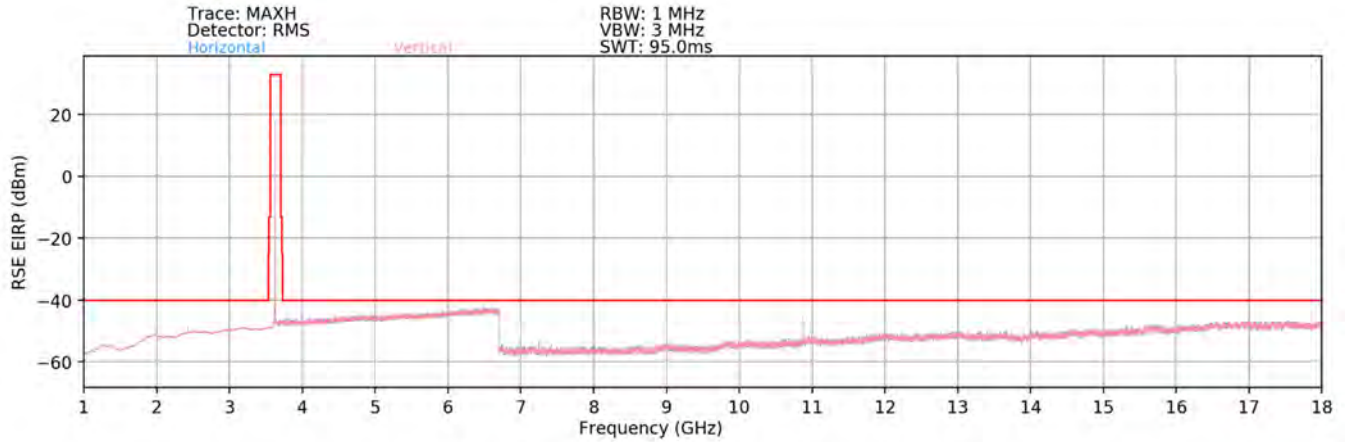

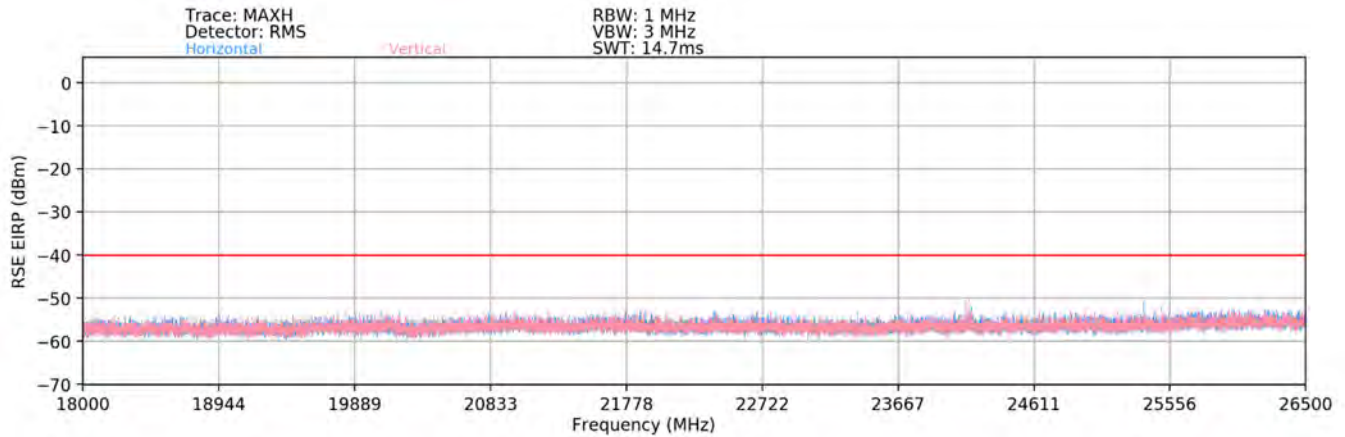

Plot 7-31. Radiated Spurious Plot (NR Band n48) – OPEN

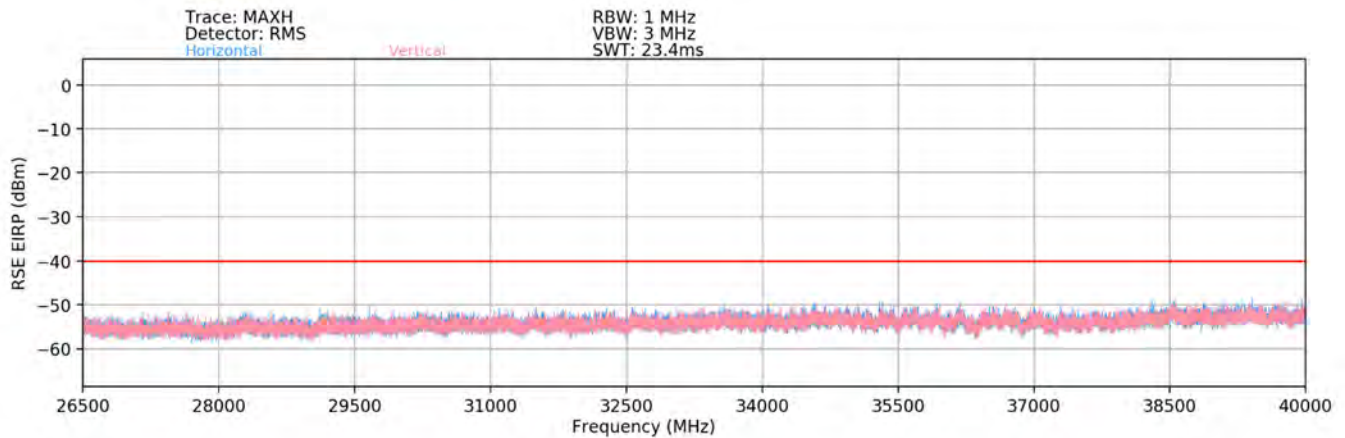


Plot 7-32. Radiated Spurious Plot (NR Band n48) - OPEN




Plot 7-33. Radiated Spurious Plot (NR Band n48) - OPEN


FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 38 of 49

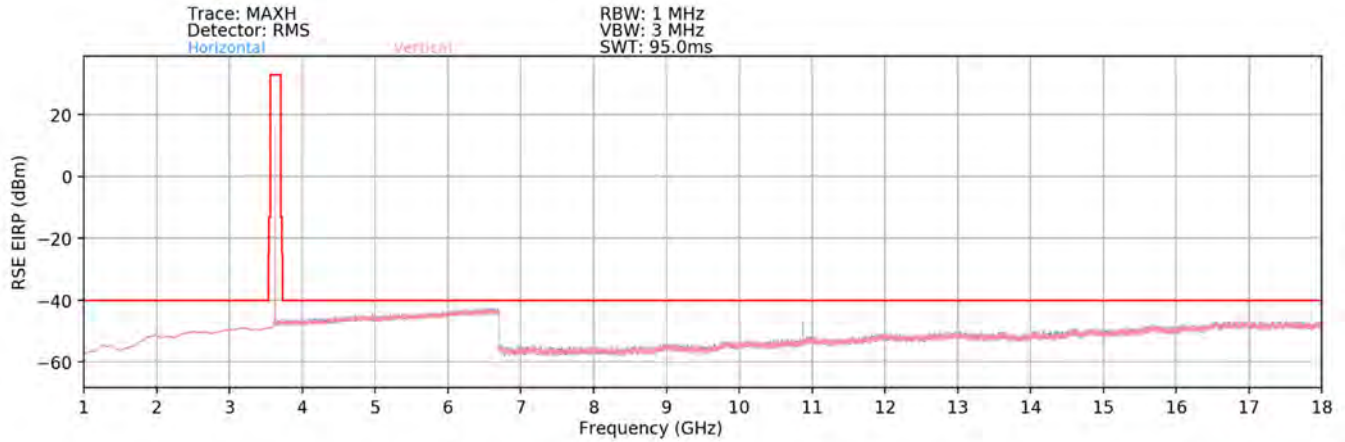

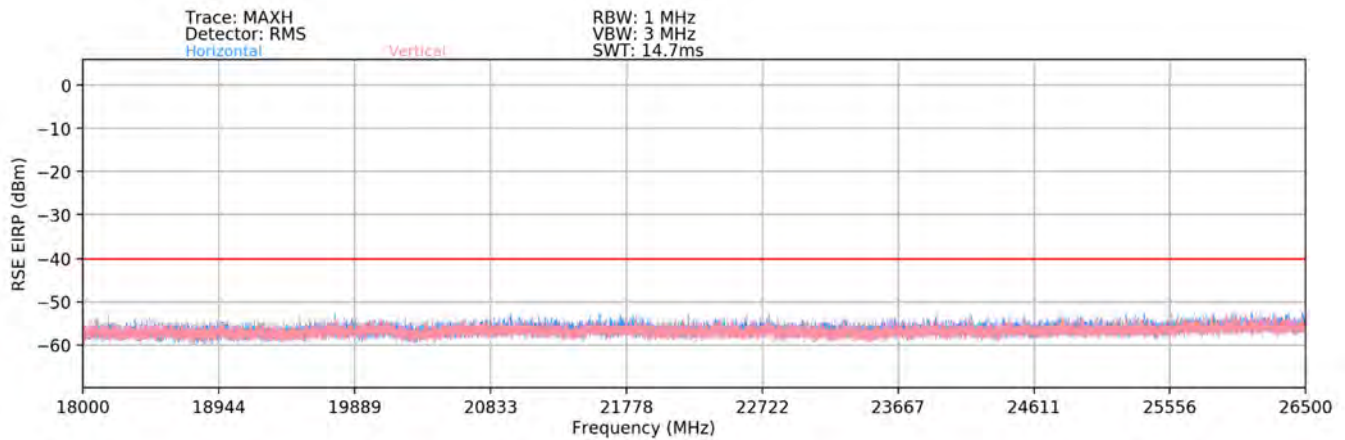

Plot 7-34. Radiated Spurious Plot (NR Band n48) - CLOSED

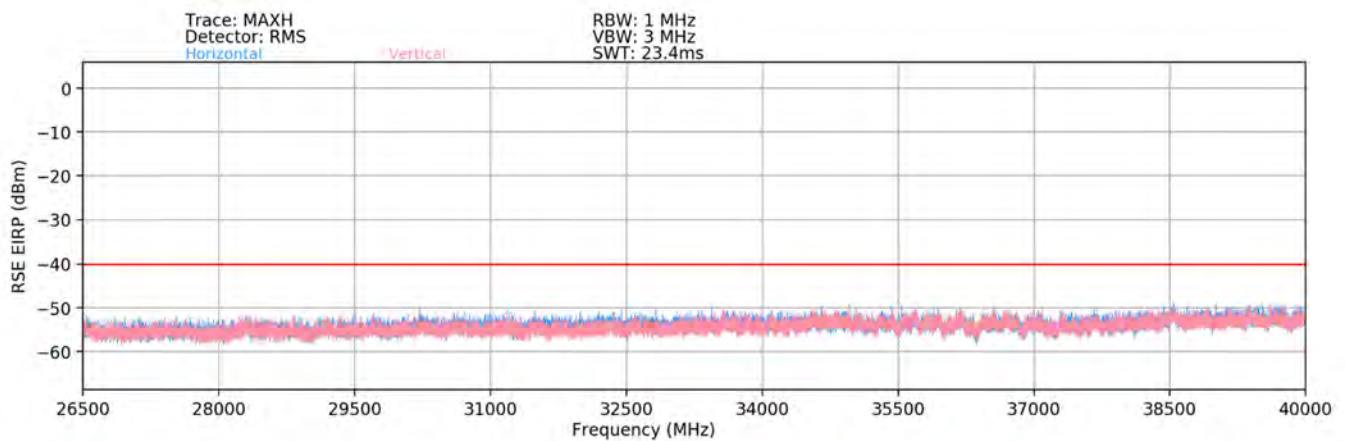

Plot 7-35. Radiated Spurious Plot (NR Band n48) - CLOSED



Plot 7-36. Radiated Spurious Plot (NR Band n48) - CLOSED

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 39 of 49

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1/53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	V	112	72	-76.92	8.07	38.15	-57.11	-40.00	-17.11
10680.0	V	113	28	-71.86	12.38	47.52	-47.74	-40.00	-7.74
14240.0	V	-	-	-81.02	14.78	40.76	-54.50	-40.00	-14.50
17800.0	V	-	-	-82.55	17.91	42.36	-52.90	-40.00	-12.90
21360.0	V	-	-	-57.68	3.01	52.32	-52.48	-40.00	-12.48
24920.0	V	-	-	-57.23	3.47	53.23	-51.57	-40.00	-11.57
28480.0	V	-	-	-57.59	4.67	54.08	-50.72	-40.00	-10.72

Table 7-5. Radiated Spurious Data (NR Band n48 – Low Channel)- OPEN

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1/53



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	V	215	100	-75.75	7.53	38.78	-56.48	-40.00	-16.48
10875.0	V	113	29	-67.50	11.78	51.28	-43.98	-40.00	-3.98
14500.0	V	-	-	-77.19	14.96	44.77	-50.49	-40.00	-10.49
18125.0	V	-	-	-55.93	0.91	51.98	-52.82	-40.00	-12.82
21750.0	V	-	-	-56.24	3.22	53.98	-50.82	-40.00	-10.82
24004.9	V	150	332	-56.12	3.32	54.20	-50.60	-39.00	-11.60
25375.0	H	150	20	-51.94	3.59	58.65	-46.15	-40.00	-6.15
29000.0	V	-	-	-57.18	4.28	54.11	-50.69	-40.00	-10.69
32625.0	V	-	-	-56.77	6.28	56.51	-48.29	-40.00	-8.29

Table 7-6. Radiated Spurious Data (NR Band n48 – Mid Channel)- OPEN

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1/53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	V	-	-	-79.48	8.00	35.52	-59.73	-40.00	-19.73
11070.00	V	-	-	-81.31	12.12	37.81	-57.45	-40.00	-17.45
14760.00	V	-	-	-82.94	15.82	39.88	-55.38	-40.00	-15.38
18450.00	V	-	-	-55.39	1.27	52.88	-51.92	-40.00	-11.92
22140.00	V	-	-	-56.12	2.92	53.81	-50.99	-40.00	-10.99
25830.00	V	-	-	-56.83	3.93	54.10	-50.70	-40.00	-10.70
29520.00	V	-	-	-56.77	5.42	55.65	-49.15	-40.00	-9.15




Table 7-7. Radiated Spurious Data (NR Band n48 – High Channel)- OPEN

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset	Page 40 of 49	

Bandwidth (MHz):	40MHz
Frequency (MHz):	3625MHz
Modulation Signal:	QPSK
RB Config (Size / Offset):	1/53


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	V	217	103	-78.52	7.53	36.01	-68.79	-40.00	-28.79
10875.0	V	319	38	-73.66	11.78	45.12	-59.68	-40.00	-19.68
14500.0	V	-	-	-82.31	14.96	39.65	-65.15	-40.00	-25.15
18125.0	V	-	-	-56.27	0.91	51.64	-53.16	-40.00	-13.16
21750.0	V	-	-	-55.24	3.22	54.98	-49.82	-40.00	-9.82
25375.0	V	-	-	-57.06	3.32	53.26	-51.54	-40.00	-11.54

Table 7-8. Radiated Spurious Data (NR Band n48 – WCP)- OPEN


FCC ID: A3LSMF926U	 <b>PCTEST</b> Proud to be part of 	<b>PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 41 of 49




## EN-DC NR n48 + Band 66

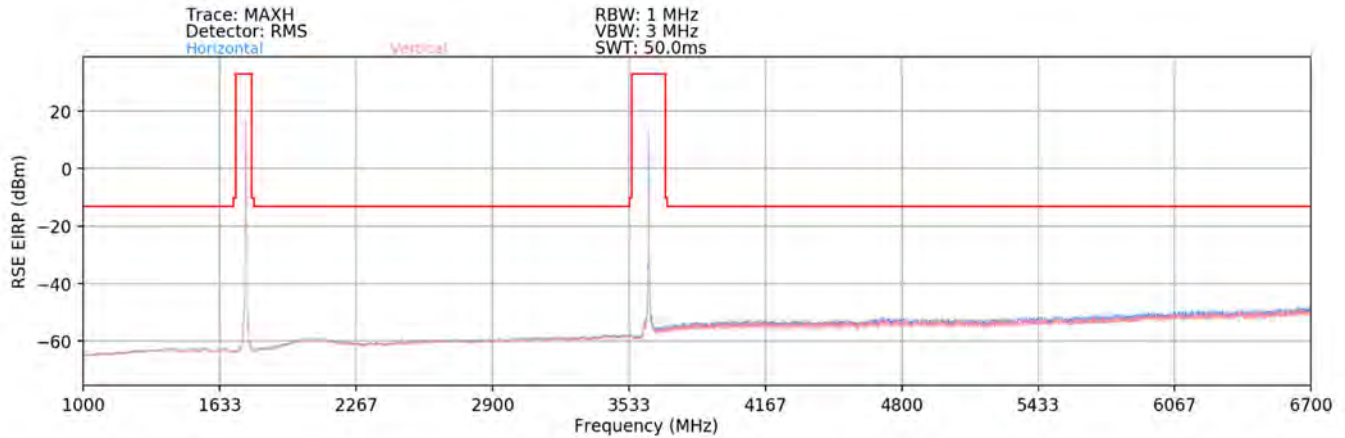

Plot 7-37. Radiated Spurious Plot (EN-DC NR n48 + Band 66) – OPEN

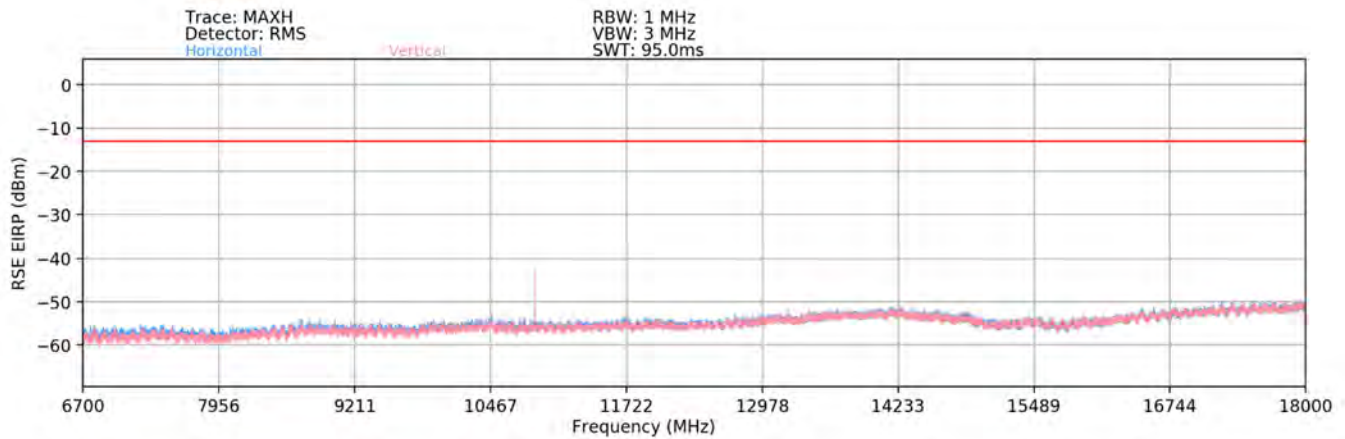


Plot 7-38. Radiated Spurious Plot (EN-DC NR n48 + Band 66) – OPEN

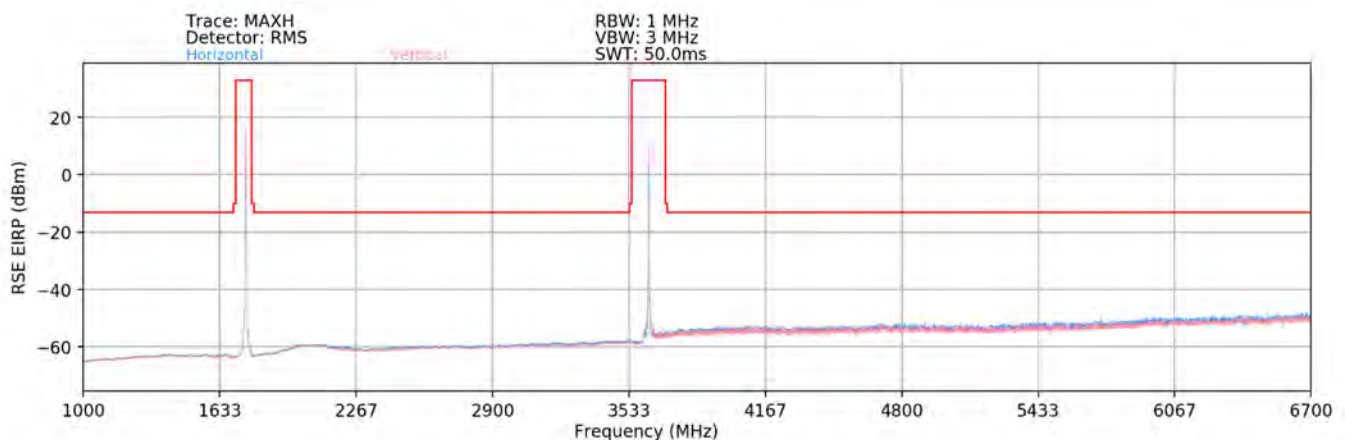

Plot 7-39. Radiated Spurious Plot (EN-DC NR n48 + Band 66) – CLOSED

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 42 of 49

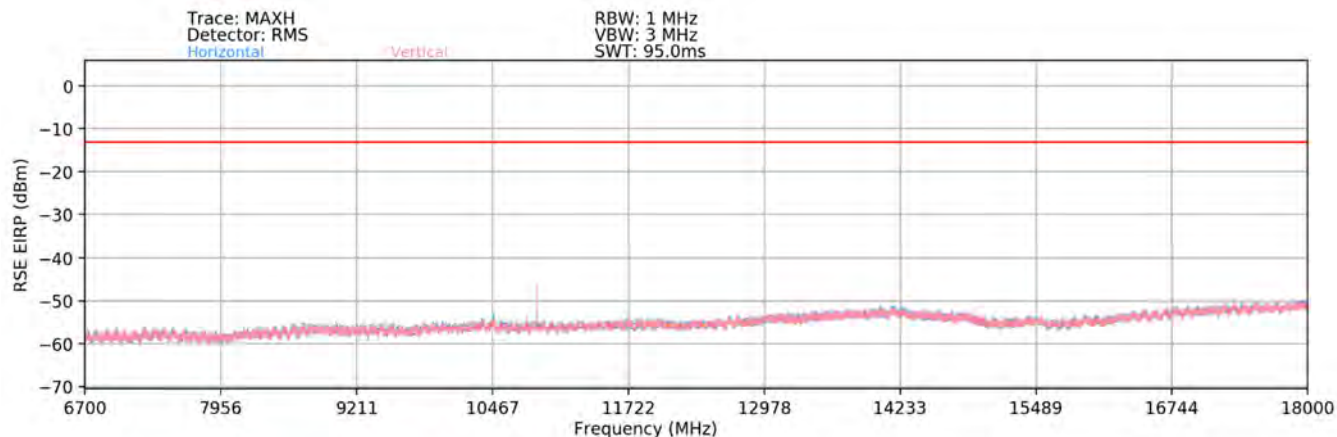



Plot 7-40. Radiated Spurious Plot (EN-DC NR n48 + Band 66) - CLOSED

Bandwidth (MHz):	40 / 20MHz
Frequency (MHz):	3625MHz / 1745MHz
Modulation Signal:	BPSK / QPSK
RB Config (Size / Offset):	1/53 / 1/50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
2015.0	H	-	-	-69.72	5.86	43.14	-52.11	-13.00	-39.11
3895.0	H	-	-	-74.40	10.96	43.56	-51.70	-13.00	-38.70
5505.0	H	-	-	-74.72	13.39	45.67	-49.58	-13.00	-36.58
5775.0	H	-	-	-75.50	13.73	45.23	-50.03	-13.00	-37.03
7385.0	H	-	-	-76.28	8.22	38.94	-56.32	-13.00	-43.32
7655.0	H	-	-	-75.88	8.55	39.67	-55.59	-13.00	-42.59
9265.0	H	-	-	-76.95	10.68	40.73	-54.53	-13.00	-41.53
10875.0	H	142	2	-65.14	13.17	55.03	-40.22	-13.00	-27.22
11145.0	H	-	-	-80.12	13.08	39.96	-55.30	-13.00	-42.30

Table 7-9. Radiated Spurious Data (EN-DC NR n48 + Band 66)- OPEN

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 43 of 49



## 7.8 Frequency Stability / Temperature Variation

### \$2.1055

#### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

#### Test Procedure Used

ANSI/TIA-603-E-2016

#### Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

#### Test Notes

None

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 44 of 49


## Frequency Stability / Temperature Variation

### NR Band n48

Operating Frequency (Hz):	3,625,000,000
Ref. Voltage (VDC):	4.36

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.36	- 30	3,625,139,177	-6,116	-0.0001687
		- 20	3,625,149,850	4,557	0.0001257
		- 10	3,625,152,972	7,678	0.0002118
		0	3,625,151,529	6,235	0.0001720
		+ 10	3,625,149,808	4,515	0.0001245
		+ 20 (Ref)	3,625,145,294	0	0.0000000
		+ 30	3,625,138,717	-6,577	-0.0001814
		+ 40	3,625,137,647	-7,647	-0.0002109
		+ 50	3,625,143,273	-2,021	-0.0000557
Battery Endpoint	2.46	+ 20	3,625,143,806	-1,487	-0.0000410

Table 7-10. NR Band n48 Frequency Stability Data

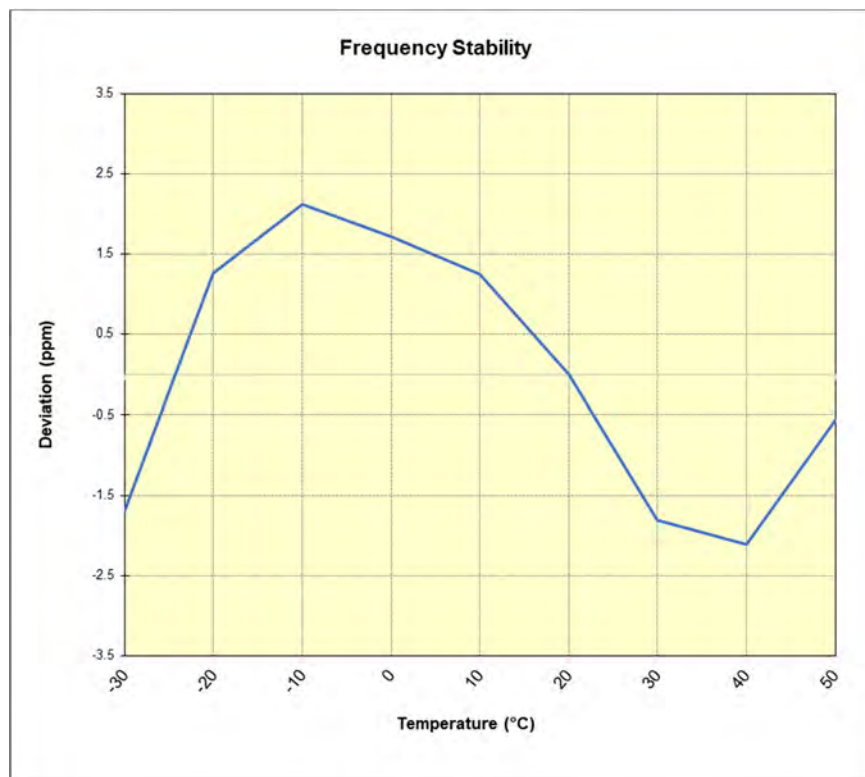

Plot 7-41. NR Band n48 Frequency Stability Chart

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 45 of 49

## 7.9 End User Device Additional Requirement (CBSD Protocol)

### §96.47

#### Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified 5G NR CBSD as a companion device to show compliance with Part 96.47.

***End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.***

***An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.***

#### Test Procedure Used

KDB 940660 D01 v03, WINNF-18-IN-00178 v1.0.0.00



#### Test Setup/Method

The EUT was connected via an RF cable to a certified 5G CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-18-IN-00178 v1.0.0.00 CBRS End User Device as UUT Test Guidelines

1. Run#1:
  - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
  - b. Enable 5G AP service from CBSD.
  - c. Check EUT Tx frequency.
  - d. Disable AP service and check EUT stop transmission within 10s.
2. Run#2:
  - a. Setup WINNF.PT.C.HBT.1 with 3660MHz – 3680MHz.
  - b. Enable 5G AP service from CBSD.
  - c. Check EUT Tx frequency.
  - d. Disable AP service and check EUT stop transmission within 10s.

#### Test Notes


The EUT is an End User Device.

FCC ID: A3LSMF926U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 46 of 49

## Run#1:



Plot 7-42. Run#1 End User Device Frequency of Operations

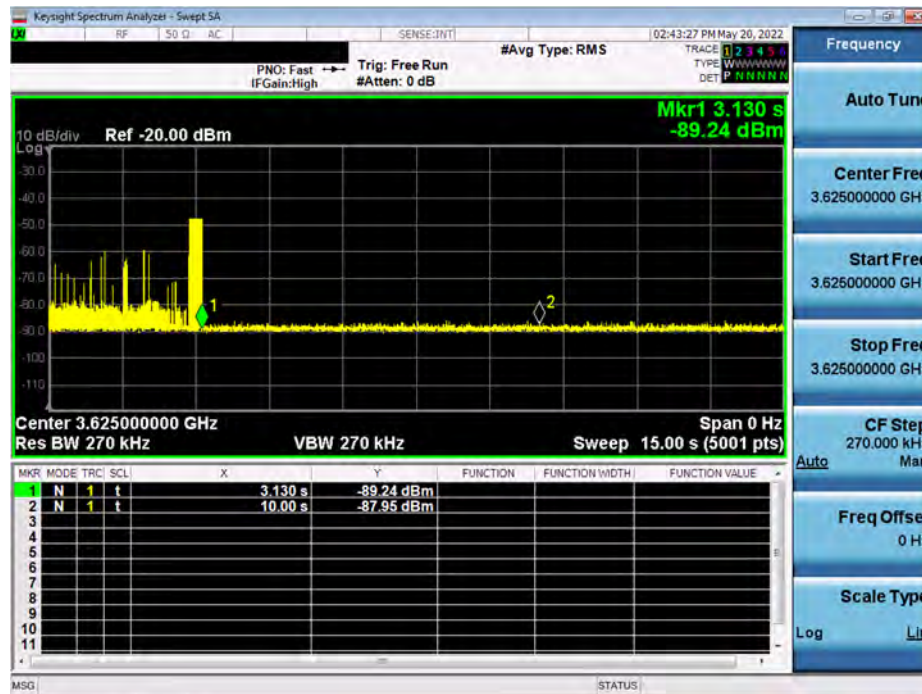

Plot 7-43. Run#1 End User Device Discontinues Operations within 10s

## Note:

CBSD sends instructions to discontinue NR operations (beginning of plot at time = 0 seconds)

Marker 1: EUT discontinues operation.

Marker 2: 10 seconds elapsed time from CBSD sending instructions to EUT.


FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 47 of 49



## Run#2:



Plot 7-44. Run#2 End User Device Frequency of Operations

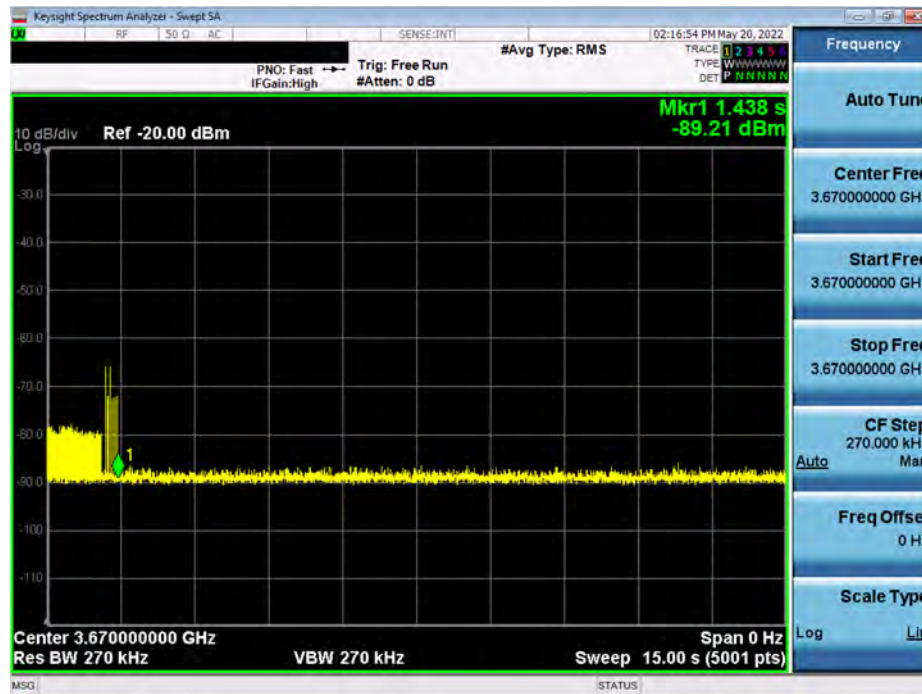

Plot 7-45. Run#2 End User Device Discontinues Operations within 10s



## Note:

CBSD sends instructions to discontinue NR operations (beginning of plot at time = 0 seconds)  
Marker 1: EUT discontinues operation.

FCC ID: A3LSMF926U	<b>PCTEST</b> Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2112280170-05-R2.A3L	Test Dates: 04/02/2021- 03/02/2022, 05/20/2022	EUT Type: Portable Handset		Page 48 of 49

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF926U** complies with all of the End User Device requirements of Part 96 of the FCC Rules for NR operation.

<b>FCC ID:</b> A3LSMF926U		<b>PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2112280170-05-R2.A3L	<b>Test Dates:</b> 04/02/2021- 03/02/2022, 05/20/2022	<b>EUT Type:</b> Portable Handset		Page 49 of 49