


# TEST REPORT

**Applicant:** Seeed Technology Co., Ltd.  
**Address:** 9F, G3 Building, TCL International E City,  
Zhongshanyuan Road, Nanshan District, Shenzhen,  
Guangdong Province, P.R.C  
**Equipment Type:** SenseCAP Card Tracker T1000-E for Meshtastic  
**Model Name:** T1000-E  
**Brand Name:** Seeed Studio  
**FCC ID:** Z4T-T1000-E  
**Test Standard:** FCC 47 CFR Part 2.1093  
(refer to section 3.1)  
**Maximum SAR:** Body (1 g@0mm): 1.19 W/kg  
**Sample Arrival Date:** Aug. 08, 2024  
**Test Date:** Aug. 09, 2024 - Sep. 01, 2024  
**Date of Issue:** Sep. 13, 2024

**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Zhang Jiwei**Checked by:** Xu Rui**Approved by:** Tolan Tu  
(Testing Director)

**Revision History**

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Sep. 13, 2024</u>	<u>Initial Issue</u>

**TABLE OF CONTENTS**

1	GENERAL INFORMATION.....	4
1.1	Test Laboratory .....	4
1.2	Test Location .....	4
1.3	Test Environment Condition.....	4
2	PRODUCT INFORMATION .....	5
2.1	Applicant Information .....	5
2.2	Manufacturer Information.....	5
2.3	General Description for Equipment under Test (EUT).....	5
2.4	Ancillary Equipment.....	5
2.5	Technical Information .....	6
3	SUMMARY OF TEST RESULT .....	7
3.1	Test Standards .....	7
3.2	Device Category and SAR Limit .....	8
3.3	Test Result Summary .....	9
3.4	Test Uncertainty .....	10
4	MEASUREMENT SYSTEM .....	11
4.1	Specific Absorption Rate (SAR) Definition .....	11
4.2	DASY SAR System .....	12
5	SYSTEM VERIFICATION.....	21
5.1	Purpose of System Check .....	21
5.2	System Check Setup .....	21
6	TEST POSITION CONFIGURATIONS .....	22
6.1	Body-worn Position Conditions .....	22
7	MEASUREMENT PROCEDURE .....	23

7.1	Measurement Process Diagram .....	23
7.2	SAR Scan General Requirement .....	24
7.3	Measurement Procedure .....	25
7.4	Area & Zoom Scan Procedure .....	25
8	CONDUCTED RF OUPUT POWER .....	26
8.1	LoRa.....	26
8.2	Bluetooth .....	27
9	TEST EXCLUSION CONSIDERATION .....	28
9.1	Antenna location sketch.....	28
9.2	SAR Test Consideration Table .....	29
10	TEST RESULT .....	32
10.1	LoRa.....	32
10.2	Bluetooth .....	33
11	SAR Measurement Variability .....	34
12	SIMULTANEOUS TRANSMISSION.....	35
13	TEST EQUIPMENTS LIST .....	36
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT .....	37
ANNEX B	SYSTEM CHECK RESULT .....	38
ANNEX C	TEST DATA.....	44
ANNEX D	EUT EXTERNAL PHOTOS.....	55
ANNEX E	SAR TEST SETUP PHOTOS .....	55
ANNEX F	CALIBRATION REPORT .....	55
ANNEX G	TUNE-UP PROCEDURE .....	55

# 1 GENERAL INFORMATION

## 1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input checked="" type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

## 1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Seeed Technology Co., Ltd.
Address	9F, G3 Building, TCL International E City, Zhongshanyuan Road, Nanshan District, Shenzhen, Guangdong Province, P.R.C

### 2.2 Manufacturer Information

Manufacturer	Seeed Technology Co., Ltd.
Address	9F, G3 Building, TCL International E City, Zhongshanyuan Road, Nanshan District, Shenzhen, Guangdong Province, P.R.C

### 2.3 General Description for Equipment under Test (EUT)

EUT Name	SenseCAP Card Tracker T1000-E for Meshtastic
Model Name Under Test	T1000-E
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	v2.2
Software Version	v1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

### 2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	CLY
	Model No.	CLY503048
	Serial No.	N/A
	Capacitance	700mAh
	Rated Voltage	3.7 V
	Limited Voltage	4.2 V

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BLE), LoRa WIFI 802.11b, 802.11g and 802.11n(HT20/40) (Only RX) GPS, Galileo, GLONASS, BDS
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	LoRa, Bluetooth	
Frequency Range	LoRa-DTS	500 kHz&1523 kHz: 903 ~ 914.2 MHz
		500 kHz-US915_2: 902.5 ~ 926.5 MHz
	LoRa-FHSS	100 kHz: 902.2 ~ 927.8 MHz
		125 kHz: 902.3 ~ 914.9 MHz
	Bluetooth	2402 ~ 2480 MHz
Antenna Type	LoRa: PCB Antenna Bluetooth: Ceramic Antenna	
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
EUT Type	Portable Device	
Product Type	<input checked="" type="checkbox"/> Production unit	<input type="checkbox"/> Identical prototype

### 3 SUMMARY OF TEST RESULT

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	ANSI C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	FCC KDB 447498 D04 v01	447498 D04 Interim General RF Exposure Guidance v01
4	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
5	FCC KDB 865664 D02 v01r02	RF Exposure Reporting

### 3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

**NOTE:**

**General Population/Uncontrolled Exposure:** Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Occupational/Controlled Exposure:** Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.



### 3.3 Test Result Summary

#### 3.3.1 Highest SAR (1 g Value)

Equipment Class	Band	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
		Body (0mm)	Body (0mm)
DTS	LoRa	1.19	1.19
FHSS	LoRa	1.12	
DSS	Bluetooth	0.28	
Limit (W/kg)		1.60	
Verdict		Pass	

### 3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 1.19 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

## 4 MEASUREMENT SYSTEM

### 4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,

$\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 4.2 DASY SAR System

### 4.2.1 DASY SAR System Diagram

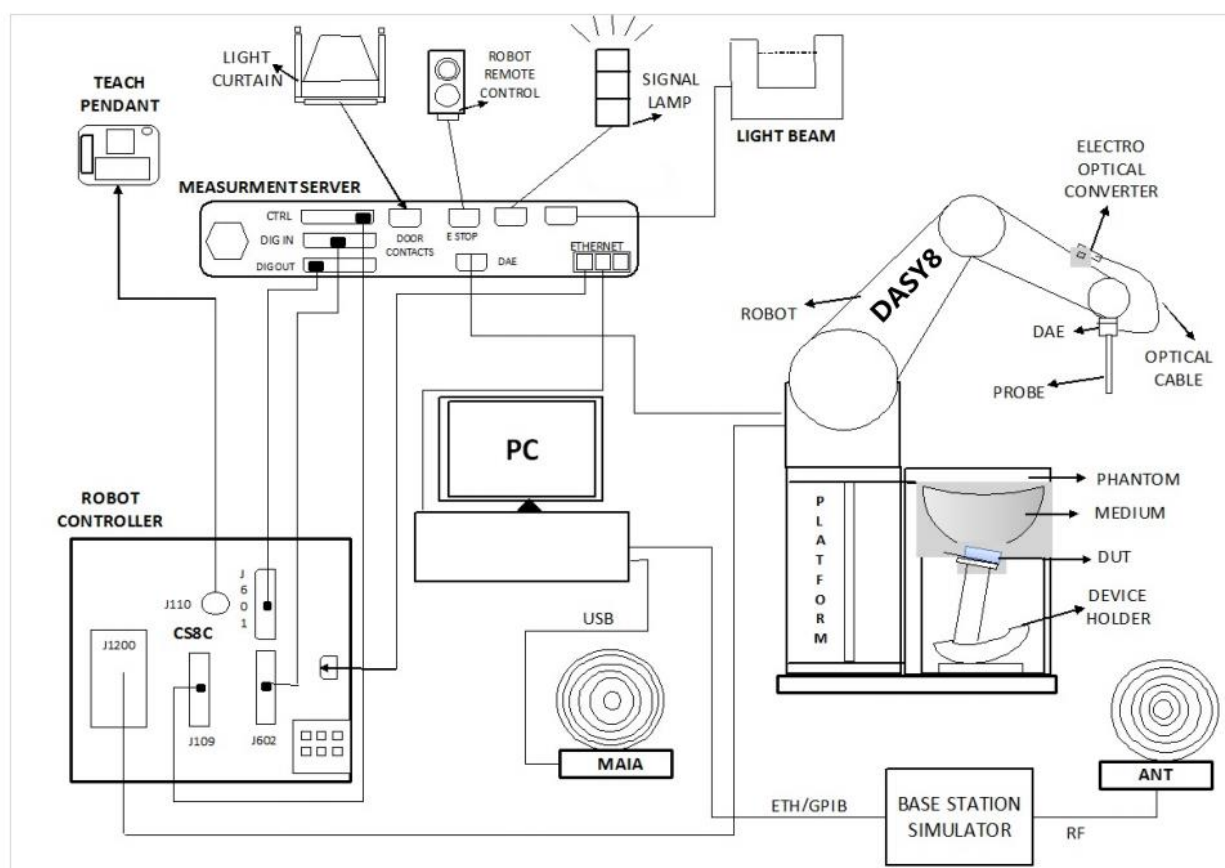

The DASY system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue

simulating liquid. The probe is equipped with an optical surface detector system.


3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
6. The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

#### 4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision  
(repeatability  $\pm 0.02$  mm)
- High reliability  
(industrial design)
- Low maintenance costs  
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements  
(brush less synchron motors; no stepper motors)
- Low ELF interference  
(motor control \_elds shielded via the closed metallic construction shields)

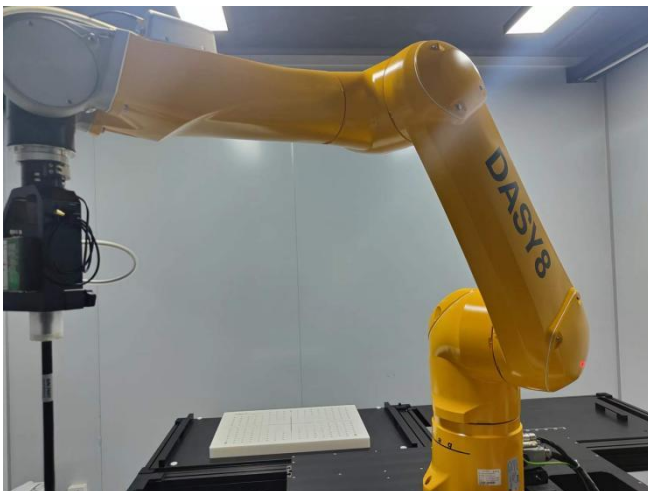

### 4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN: 7510 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) ; $\pm 0.4$ dB in HSL (rotation normal to probe axis)
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



### E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.

#### 4.2.4 Data Acquisition Electronics

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200MΩ
- The Inputs: Symmetrical and Floating
- Common Mode Rejection: Above 80dB



#### 4.2.5 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



- Left hand
- Right hand
- Flat phantom

**Photo of Phantom SN1859**



Serial Number	Material	Length	Height
SN 1859 SAM	Vinylester, glass fiber reinforced	1000	500

Photo of Phantom SN1576



Serial Number	Material	Length	Height
SN 1576SAM	Vinylester, glass fiber reinforced	1000	500

#### 4.2.6 Device Holder

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of  $65^\circ$ . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used. Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than  $1^\circ$ .


#### 4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

**Head Liquid Depth**



**Body Liquid Depth**

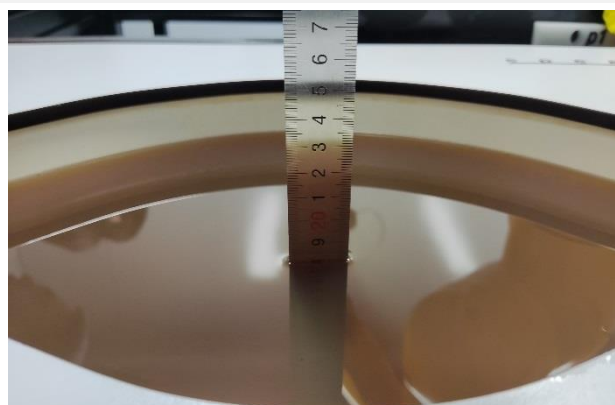

The following table gives the recipes for tissue simulating liquid.

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Head WideBand	SPEAG HBBL600-10000V6	600-10000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxylated alcohol


## 5 SYSTEM VERIFICATION

### 5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 5.2 System Check Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

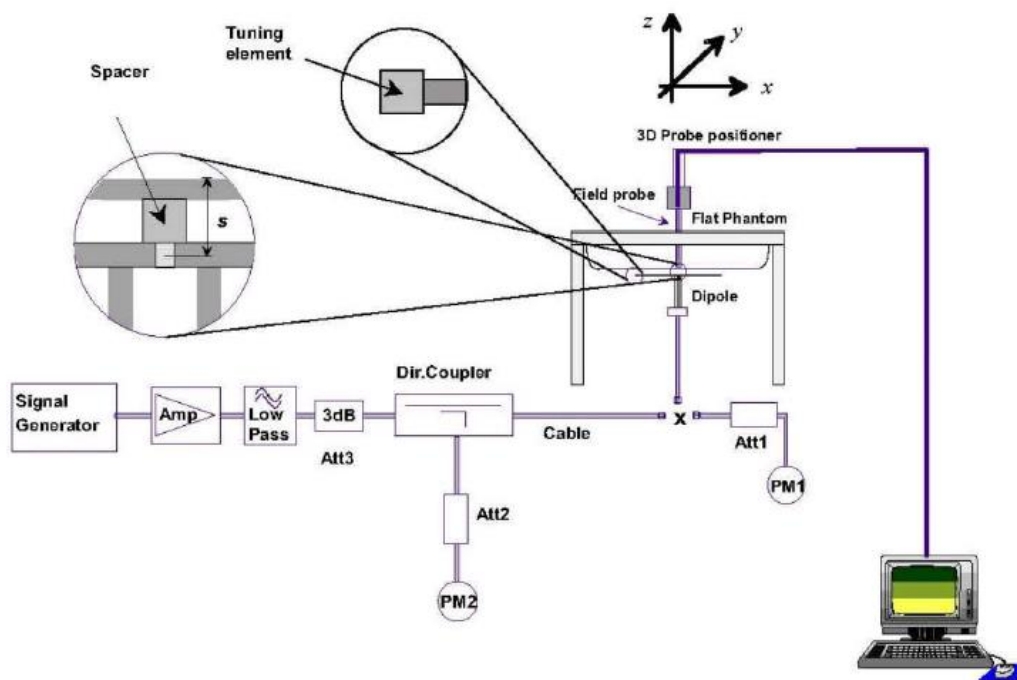


## 6 TEST POSITION CONFIGURATIONS

### 6.1 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in EN 62209-2 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance  $\leq 5$  mm to support compliance.

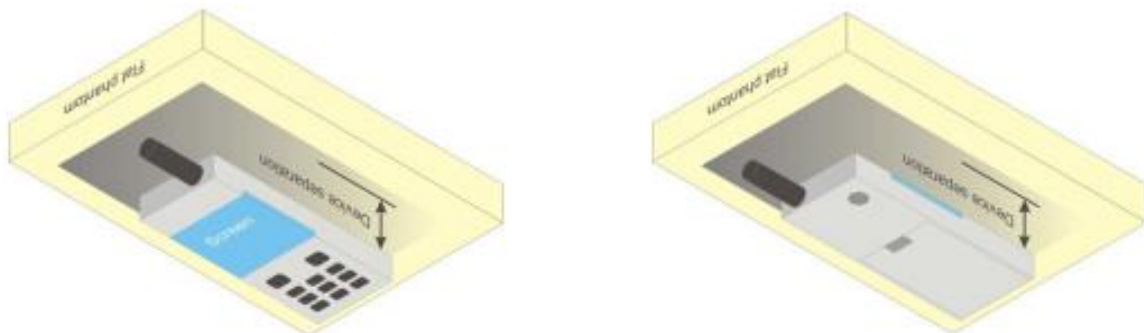

## 7 MEASUREMENT PROCEDURE

### 7.1 Measurement Process Diagram

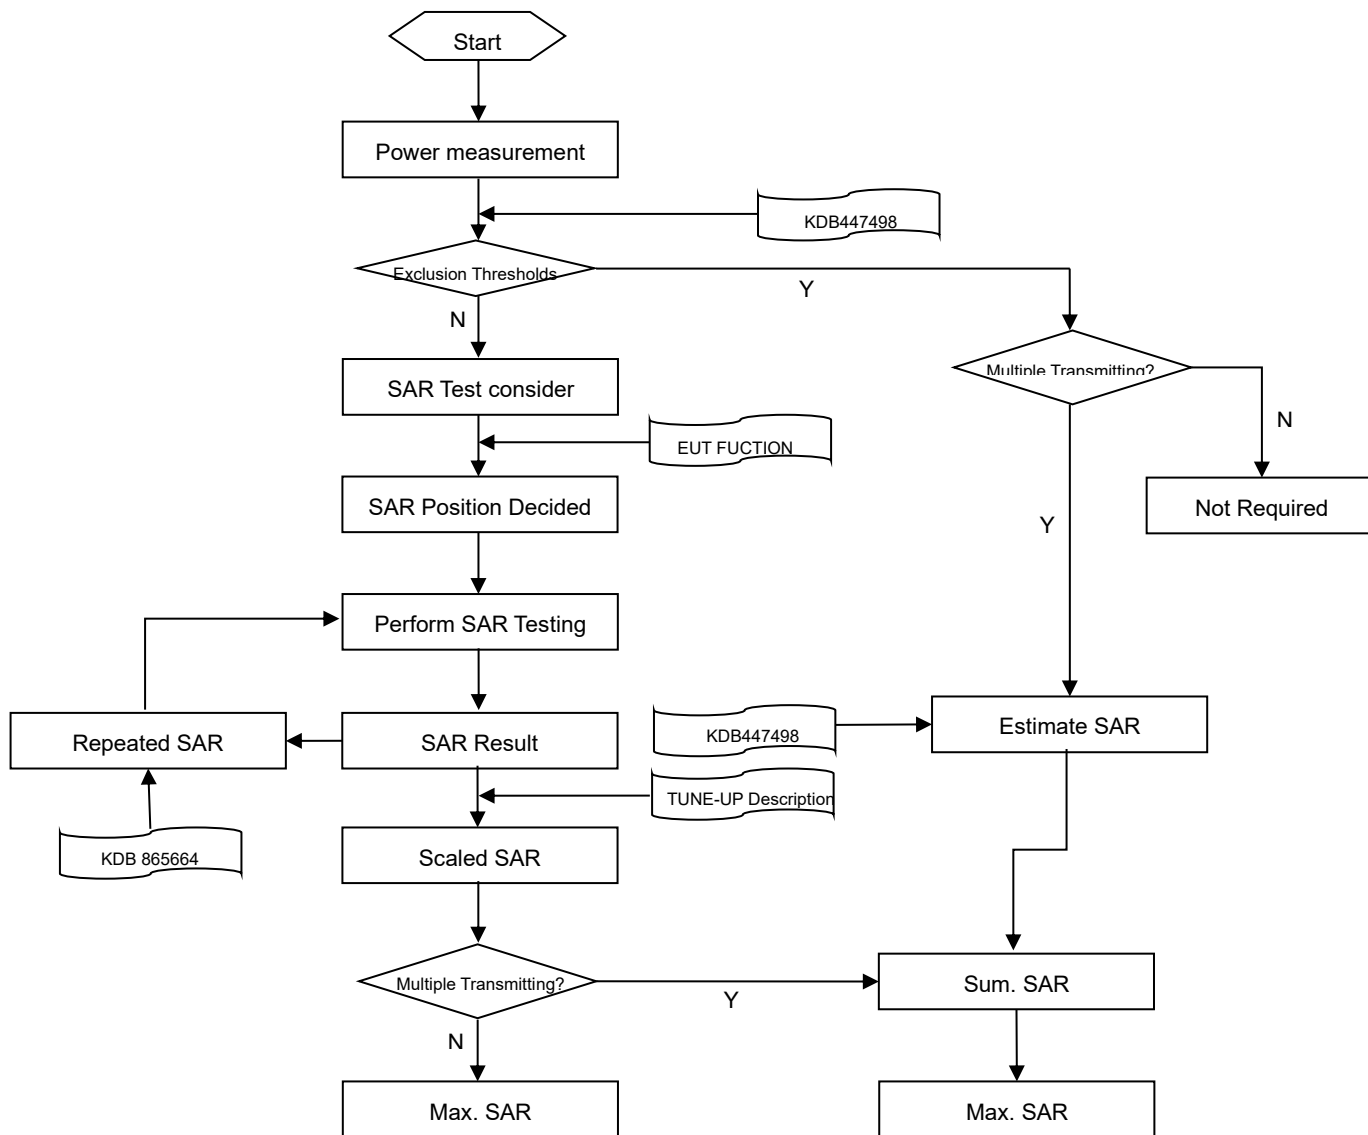

## 7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	½·δ·ln(2)±0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 –3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
		Δz Zoom (n>1): between subsequent points	≤ 1.5·Δz Zoom (n-1)	
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm

### Note:

- $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.
- \* When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is  $\leq 1.4$  W/kg,  $\leq 8$  mm,  $\leq 7$  mm and  $\leq 5$  mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.



## 7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

## 7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

## 8 CONDUCTED RF OUPUT POWER

### 8.1 LoRa


Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
DTS (BW 500kHz)	65	903	<b>20.22</b>	21.00	Yes
	68	907.8	20.15	21.00	Yes
	72	914.2	20.09	21.00	Yes
DTS (BW 500kHz- US915_2)	1	902.5	<b>20.25</b>	21.00	Yes
	16	914.5	20.15	21.00	Yes
	31	926.5	20.01	21.00	Yes
DTS (BW 1523kHz)	65	903	<b>20.95</b>	21.00	Yes
	68	907.8	20.93	21.00	Yes
	72	914.2	20.76	21.00	Yes
FHSS (BW 125kHz)	1	902.3	<b>20.30</b>	20.50	Yes
	32	908.5	20.21	20.50	Yes
	64	914.9	20.11	20.50	Yes
FHSS (BW 100kHz)	1	902.2	<b>20.32</b>	20.50	Yes
	64	914.8	20.09	20.50	Yes
	129	927.8	20.17	20.50	Yes

## 8.2 Bluetooth

Mode	BLE-1Mbps			BLE-2Mbps		
Channel	0	19	39	1	19	38
Frequency (MHz)	2402	2440	2480	2404	2440	2478
Conducted Power (dBm)	<b>6.68</b>	6.42	6.09	6.76	6.58	6.29
Tune-Up Limit (dBm)	8.00	8.00	8.00	8.00	8.00	8.00
SAR Test Require	Yes	No	No	No	No	No

### Duty Cycle


#### BLE-1Mbps

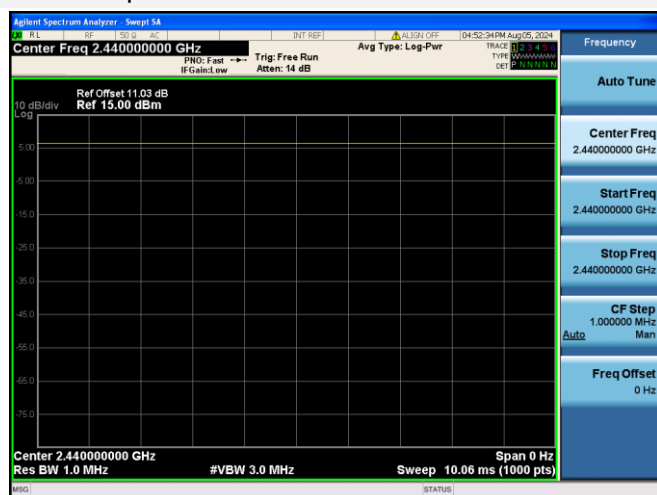

Note: The Bluetooth duty cycle BLE-1Mbps is 100 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.

## 9 TEST EXCLUSION CONSIDERATION

### 9.1 Antenna location sketch

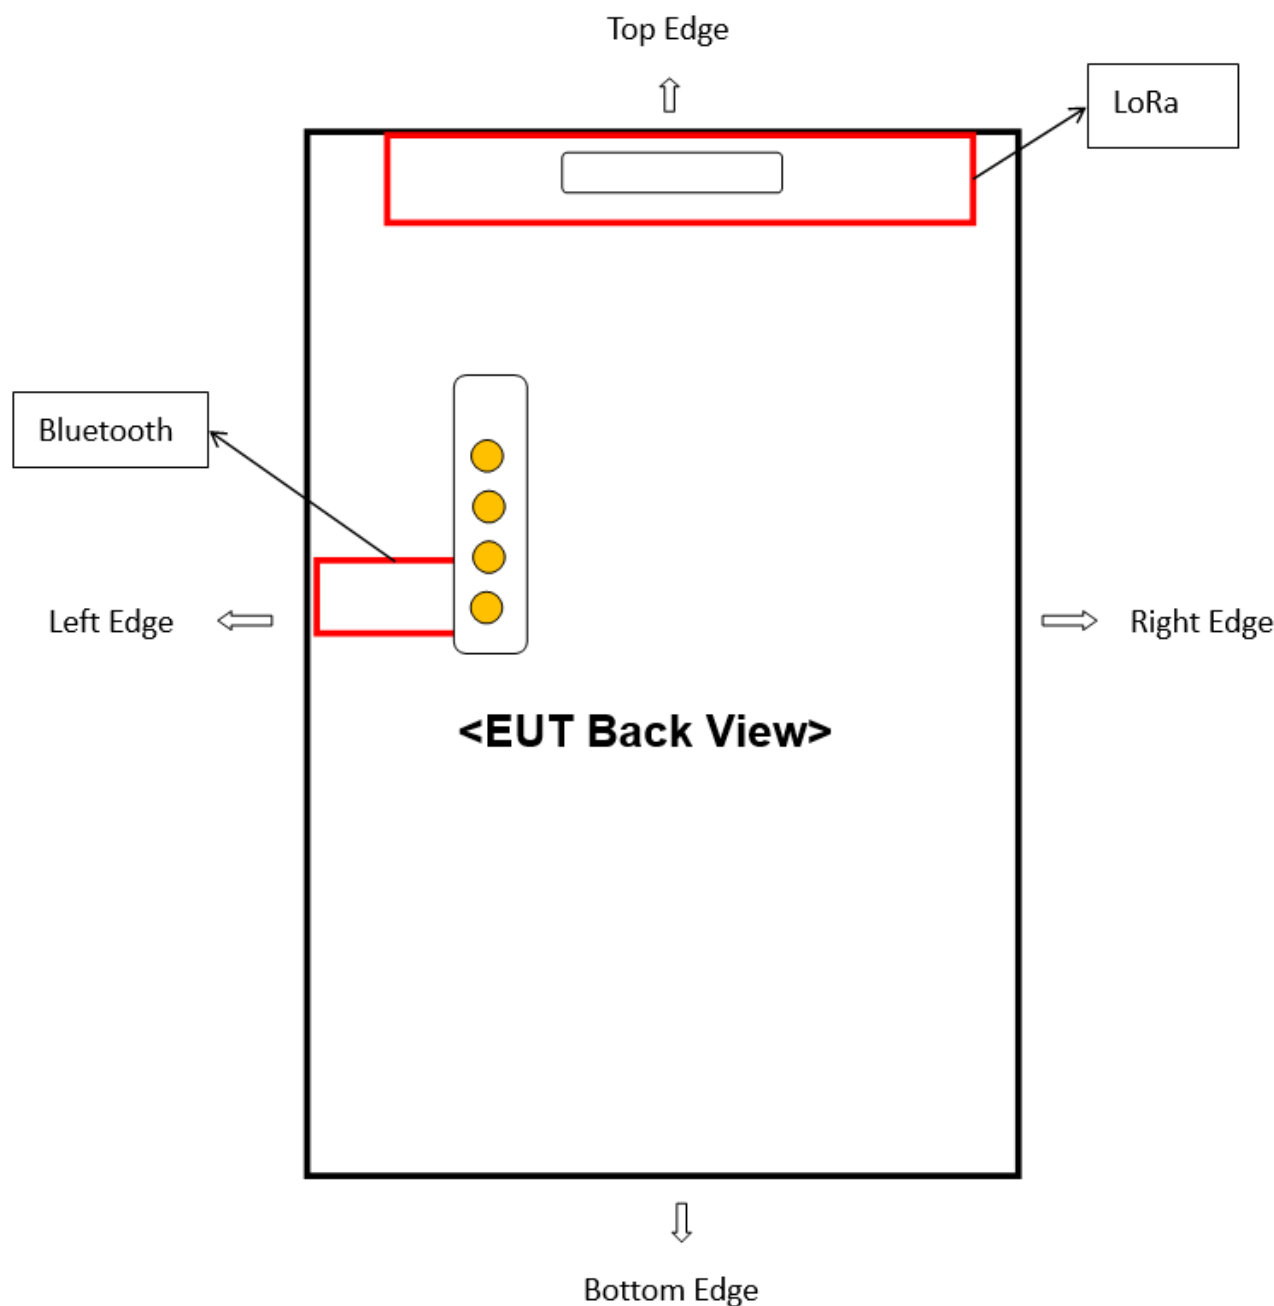

Antenna	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
LoRa	2.55	3.55	2.50	11.20	2.43	72.61
Bluetooth	2.95	2.95	6.39	47.09	37.03	44.27

## 9.2 SAR Test Consideration Table

According with FCC KDB 447498 D04, Appendix B, The SAR-based exemption formula applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P<sub>th</sub> (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). The following table shows the power threshold from 5mm to 50mm.

Power Thresholds (mW)					
Frequency (MHz)	At separation distance of $\leq 5$ mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
300	39 mW	65 mW	88 mW	110 mW	129 mW
450	22 mW	44 mW	67 mW	89 mW	112 mW
835	9 mW	25 mW	44 mW	66 mW	90 mW
1900	3 mW	12 mW	26 mW	44 mW	66 mW
2450	3 mW	10 mW	22 mW	38 mW	59 mW
3600	2 mW	8 mW	18 mW	32 mW	49 mW
5800	1 mW	6 mW	14 mW	25 mW	40 mW
Frequency (MHz)	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of 50 mm
300	148 mW	166 mW	184 mW	201 mW	217 mW
450	135 mW	158 mW	180 mW	203 mW	226 mW
835	116 mW	145 mW	175 mW	207 mW	240 mW
1900	92 mW	122 mW	157 mW	195 mW	236 mW
2450	83 mW	111 mW	143 mW	179 mW	219 mW
3600	71 mW	96 mW	125 mW	158 mW	195 mW
5800	58 mW	80 mW	106 mW	136 mW	169 mW

## 9.2.1 SAR Test Consideration

This host under normal use the RF exposure scenarios are shown in the table below:

RF exposure Position	RF exposure scenarios
Front Side	Body
Back Side	Body
Left Edge	Body
Right Edge	Body
Top Edge	Body
Bottom Edge	Body

### Body RF exposure scenarios

Test Position Configurations	Mode	Bluetooth	LoRa
Calculated Frequency(MHz)		2480	927.8
Front Side	Distance to User (mm)	2.95	2.55
	Max. Peak Power (dBm)	8.00	21.00
	Max. Peak Power (mW)	6.31	125.89
	Exclusion Threshold (mW)	0.99	2.94
	SAR Test Required	Yes	Yes
Back Side	Distance to User (mm)	2.95	3.55
	Max. Peak Power (dBm)	8.00	21.00
	Max. Peak Power (mW)	6.31	125.89
	Exclusion Threshold (mW)	0.99	4.80
	SAR Test Required	Yes	Yes
Left Edge	Distance to User (mm)	6.39	2.50
	Max. Peak Power (dBm)	8.00	21.00
	Max. Peak Power (mW)	6.31	125.89
	Exclusion Threshold (mW)	4.34	2.85
	SAR Test Required	Yes	Yes
Right Edge	Distance to User (mm)	47.09	11.20
	Max. Peak Power (dBm)	8.00	21.00
	Max. Peak Power (mW)	6.31	125.89
	Exclusion Threshold (mW)	194.68	26.37
	SAR Test Required	No	Yes
Top Edge	Distance to User (mm)	37.03	2.43
	Max. Peak Power (dBm)	8.00	21.00
	Max. Peak Power (mW)	6.31	125.89
	Exclusion Threshold (mW)	123.17	2.74
	SAR Test Required	No	Yes
Bottom Edge	Distance to User (mm)	44.27	72.61
	Max. Peak Power (dBm)	8.00	21.00
	Max. Peak Power (mW)	6.31	125.89
	Exclusion Threshold (mW)	173.07	421.37
	SAR Test Required	No	No

## Note:

1. Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
4. Per KDB 447498 D04, for separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive), the threshold Pth (mW) is given by Following:

$$P_{th}(mW) = \begin{cases} ERP_{20cm}(d/20cm)^x & d \leq 20cm \\ ERP_{20cm} & 20cm < d \leq 40cm \end{cases}$$

where

$$x = -\log_{10} \left( \frac{60}{ERP_{20cm}\sqrt{f}} \right)$$

- a. f(GHz) is the RF channel transmit frequency in GHz
- b. d is the separation distance (cm), The result is rounded to one decimal place for comparison
- c.  $ERP_{20cm}$  are determined by:

$$ERP_{20cm}(mW) = f(x) = \begin{cases} 2040f & 0.3GHz \leq f < 1.5GHz \\ 3060 & 1.5GHz \leq f \leq 6GHz \end{cases}$$

5. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate

# 10 TEST RESULT

## 10.1 LoRa

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune- power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Meas SAR (W/kg)	Meas. No.
<b>Body</b>													
DTS (BW 500kHz)	Front Side	0	65	903	0.01	0.176	20.22	21.00	1.197	45.88	2.180	0.459	/
	Back Side	0	65	903	0.07	0.219	20.22	21.00	1.197	45.88	2.180	0.571	/
	Left Edge	0	65	903	0.08	0.375	20.22	21.00	1.197	45.88	2.180	0.979	/
	Right Edge	0	65	903	0.08	0.124	20.22	21.00	1.197	45.88	2.180	0.324	/
	Top Edge	0	65	903	-0.11	0.110	20.22	21.00	1.197	45.88	2.180	0.287	/
	Left Edge	0	68	907.8	0.00	0.235	20.15	21.00	1.216	45.88	2.180	0.623	/
	Left Edge	0	72	914.2	0.16	0.444	20.09	21.00	1.233	45.88	2.180	<b>1.193</b>	1#
DTS (BW 500 kHz- US915_2)	Front Side	0	1	902.5	-0.02	0.143	20.25	21.00	1.189	45.88	2.180	0.371	/
	Back Side	0	1	902.5	-0.11	0.233	20.25	21.00	1.189	45.88	2.180	0.604	/
	Left Edge	0	1	902.5	-0.02	0.412	20.25	21.00	1.189	45.88	2.180	1.068	/
	Right Edge	0	1	902.5	0.07	0.099	20.25	21.00	1.189	45.88	2.180	0.257	/
	Top Edge	0	1	902.5	-0.08	0.120	20.25	21.00	1.189	45.88	2.180	0.311	/
	Left Edge	0	16	914.5	-0.09	0.430	20.15	21.00	1.216	45.88	2.180	<b>1.140</b>	2#
	Left Edge	0	31	926.5	0.12	0.340	20.01	21.00	1.256	45.88	2.180	0.931	/
DTS (BW 1523kHz)	Front Side	0	65	903	0.08	0.202	20.95	21.00	1.012	36.92	2.709	0.554	/
	Back Side	0	65	903	-0.07	0.232	20.95	21.00	1.012	36.92	2.709	0.636	/
	Left Edge	0	65	903	0.02	0.425	20.95	21.00	1.012	36.92	2.709	<b>1.165</b>	3#
	Right Edge	0	65	903	0.00	0.181	20.95	21.00	1.012	36.92	2.709	0.496	/
	Top Edge	0	65	903	-0.04	0.175	20.95	21.00	1.012	36.92	2.709	0.480	/
	Left Edge	0	68	907.8	-0.03	0.338	20.93	21.00	1.016	36.92	2.709	0.930	/
	Left Edge	0	72	914.2	-0.10	0.393	20.76	21.00	1.057	36.92	2.709	1.125	/
FHSS (BW 125kHz)	Front Side	0	1	902.3	-0.07	0.282	20.30	20.50	1.047	77.08	1.297	0.383	/
	Back Side	0	1	902.3	-0.12	0.443	20.30	20.50	1.047	77.08	1.297	0.602	/
	Left Edge	0	1	902.3	-0.01	0.825	20.30	20.50	1.047	77.08	1.297	<b>1.120</b>	4#
	Right Edge	0	1	902.3	-0.06	0.259	20.30	20.50	1.047	77.08	1.297	0.352	/
	Top Edge	0	1	902.3	-0.11	0.228	20.30	20.50	1.047	77.08	1.297	0.310	/
	Left Edge	0	32	908.5	0.00	0.684	20.21	20.50	1.069	77.08	1.297	0.948	/
	Left Edge	0	64	914.9	0.04	0.714	20.11	20.50	1.094	77.08	1.297	1.013	/
FHSS (BW 100kHz)	Front Side	0	1	902.2	0.00	0.049	20.32	20.50	1.042	12.30	8.130	0.415	/
	Back Side	0	1	902.2	-0.06	0.078	20.32	20.50	1.042	12.30	8.130	0.661	/
	Left Edge	0	1	902.2	0.03	0.123	20.32	20.50	1.042	12.30	8.130	<b>1.042</b>	5#
	Right Edge	0	1	902.2	0.05	0.041	20.32	20.50	1.042	12.30	8.130	0.347	/
	Top Edge	0	1	902.2	0.06	0.052	20.32	20.50	1.042	12.30	8.130	0.441	/
	Left Edge	0	64	914.8	0.11	0.110	20.09	20.50	1.099	12.30	8.130	0.983	/



	Left Edge	0	129	927.8	-0.05	0.106	20.17	20.50	1.079	12.30	8.130	0.930	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.													

10.2Bluetooth

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune- power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Meas SAR (W/kg)	Meas. No.
Body													
BLE 1M	Front Side	0	0	2402	0.03	0.209	6.68	8.00	1.355	100.00	1.000	0.283	6#
	Back Side	0	0	2402	-0.03	0.184	6.68	8.00	1.355	100.00	1.000	0.249	/
	Left Edge	0	0	2402	0.04	0.121	6.68	8.00	1.355	100.00	1.000	0.164	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.													

## 11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

Frequency Band (MHz)	Wireless Band	RF Exposure Conditions	Test Position	Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Largest to Smallest SAR Ratio
902.3	Lora-FHSS (BW125 kHz)	Body	Left Edge	0.825	Yes	0.802	1.03

Note: The ratio of largest to smallest SAR for the original and first repeated measurements is  $< 1.20$ , the second repeated measurement is not required.

## 12 SIMULTANEOUS TRANSMISSION

Note: LoRa and Bluetooth antenna can't simultaneous transmission at same time, so simultaneous transmission evaluation is not required in this report.

## 13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY5	52.8.8.1222	N/A	N/A
Test Software	Speag	DASY8	16.2.2.1588	N/A	N/A
835MHz Validation Dipole	Speag	D835V2	SN: 4d187	2024/05/08	2027/05/07
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2024/05/07	2027/05/06
Data Acquisition Electronicsr	Speag	DAE4	SN: 1711	2024/03/18	2025/03/17
E-Field Probe	Speag	EX3DV4	SN: 7510	2024/06/25	2025/06/24
Power Meter	R&S	NRVD-B2	835843/014	2023/09/05	2024/09/04
Signal Generator	R&S	SMB100A	177746	2024/04/24	2025/04/23
Power Sensor	R&S	NRV-Z4	100381	2023/09/05	2024/09/04
Power Sensor	R&S	NRV-Z2	100211	2023/09/05	2024/09/04
Network Analyzer	Agilent	E5071C	MY46103472	2023/11/14	2024/11/13
Thermometer	Elitech	RC-4	EF5238001628	2023/10/09	2024/10/08
Thermometer	Elitech	RC-4HC	EF7239002652	2023/11/17	2024/11/16
Thermometer	Elitech	RC-4	EF5238001629	2023/10/09	2024/10/08
Thermometer	Elitech	RC-4HC	EF7239002655	2023/11/17	2024/11/16
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Dielectric Probe Kit	Speag	DAK3.5	SN: 1312	N/A	N/A
Phantom	Speag	SAM	SN: 1859	N/A	N/A
Phantom	Speag	SAM	SN: 1576	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

## ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAK3.5 Dielectric Probe Kit.

Head Liquid

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity ( $\sigma$ ) (S/m)	Meas. Permittivity ( $\epsilon$ )	Target Conductivity ( $\sigma$ ) (S/m)	Target Permittivity ( $\epsilon$ )	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2024.08.31	Head	835	21.2	0.91	42.34	0.90	41.50	1.11	2.02
2024.09.01	Head	835	21.1	0.92	42.85	0.90	41.50	2.22	3.25
2024.08.09	Head	2450	21.3	1.79	39.76	1.80	39.20	-0.56	1.43
Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$ .									

## ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g).

Head liquid 1g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2024.08.31	Head	835	100	0.956	9.56	9.74	-1.85
2024.09.01	Head	835	100	0.976	9.76	9.74	0.21
2024.08.09	Head	2450	100	5.350	53.50	52.60	1.71
Note: The tolerance limit of System validation $\pm 10\%$ .							

# System Performance Check Data (835MHz)

## Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
CD835V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		CD835	CW, 0--	835.0, 50	9.99	0.912	42.3	22.4	21.2

## Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-31	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

## Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

## Measurement Results

	Area Scan	Zoom Scan
Date	2024-08-31	2024-08-31
psSAR1g [W/kg]	0.944	0.956
psSAR10g [W/kg]	0.615	0.628
Power Drift [dB]	0.01	0.03
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.8
Dist 3dB Peak [mm]		12.2

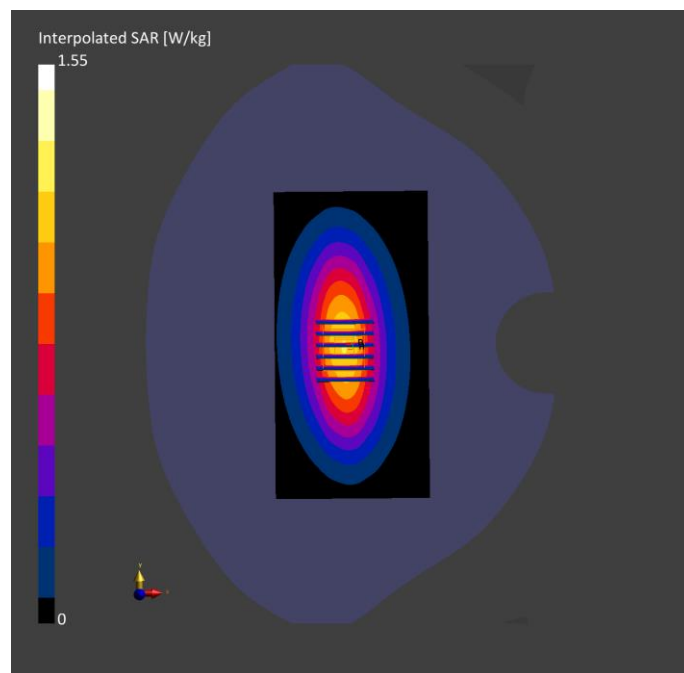



# System Performance Check Data (835MHz)

## Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
CD835V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		CD835	CW, 0--	835.0, 50	9.99	0.923	42.8	22.5	21.1

## Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-01	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

## Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

## Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-01	2024-09-01
psSAR1g [W/kg]	0.951	0.976
psSAR10g [W/kg]	0.618	0.632
Power Drift [dB]	-0.02	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		84.7
Dist 3dB Peak [mm]		13.1

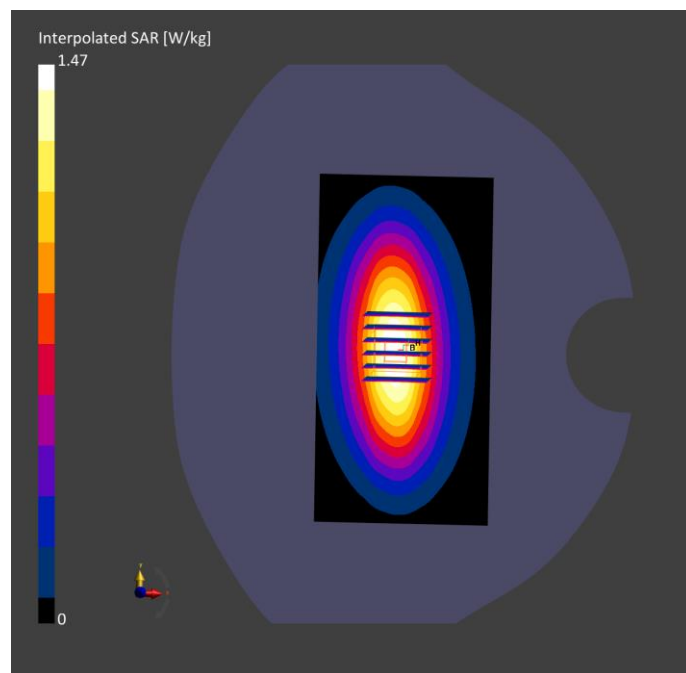

## System Performance Check Data (2450MHz)

Date: 2024.08.09

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.792$  S/m;  $\epsilon_r = 39.76$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024.06.25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2024.03.18
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2450/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.78 W/kg


**CW 2450/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.83 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 11.5 W/kg

**SAR(1 g) = 5.35 W/kg; SAR(10 g) = 2.48 W/kg**

Maximum value of SAR (measured) = 5.75 W/kg

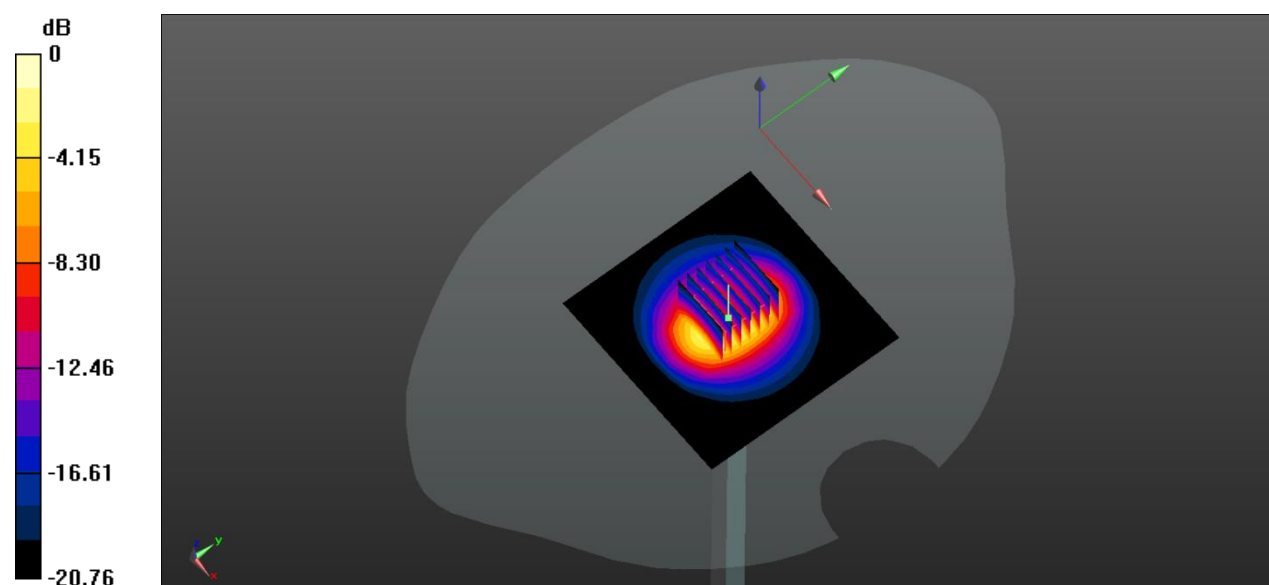

0 dB = 5.75 W/kg

ANNEX C TEST DATA

Meas.1 Body Plane with Left Edge 0mm on 72 Channel in Lora DTS(BW500K) mode

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	85.0 x 55.0 x 5.0	Phone


Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE	Custo	LORA,	914.2,	9.99	0.965	41.4	22.4	21.2
HSL	LEFT,	m	0--	914200					
	0.00	Band							

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-31	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 180.0	32.0 x 32.0 x 30.0	Date	2024-08-31	2024-08-31
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.410	0.444
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.245	0.233
Graded Grid	Yes	Yes	Power Drift [dB]	-0.14	0.16
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor		
Surface Detection	VMS + 6p	VMS + 6p	[dB]		
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		36.7
			Dist 3dB Peak [mm]		6.4

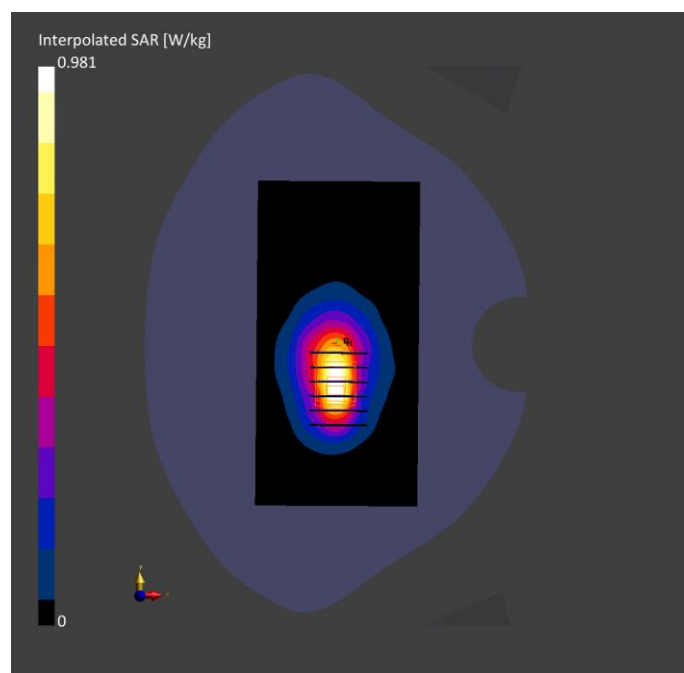

Meas.2 Body Plane with Left Edge 0mm on 16 Channel in Lora DTS(BW500K) mode

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	85.0 x 55.0 x 5.0	Phone


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivit y [S/m]	TSL Permittivity	Ambient Temperatur e [°C]	Liquid Temperatur e [°C]
Flat, HSL	EDGE LEFT, 0.00	Custo m Band	LORA, 0--	914.5, 914500	9.99	0.976	41.3	22.4	21.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-31	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 180.0	32.0 x 32.0 x 30.0	Date	2024-08-31	2024-08-31
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.404	0.430
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.243	0.224
Graded Grid	Yes	Yes	Power Drift [dB]	-0.05	-0.09
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor		
Surface Detection	VMS + 6p	VMS + 6p	[dB]		
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		35.5
			Dist 3dB Peak [mm]		6.4

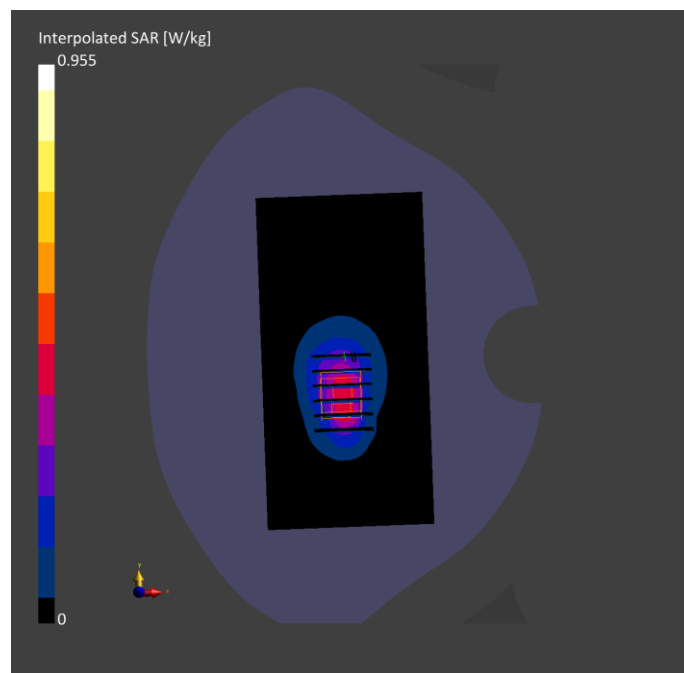

Meas.3 Body Plane with Left Edge 0mm on 65 Channel in Lora DTS(BW1.523M) mode

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	85.0 x 55.0 x 5.0	Phone

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivit y [S/m]	TSL Permittivity	Ambient Temperatu re [°C]	Liquid Temperatu re [°C]
Flat, HSL	EDGE LEFT, 0.00	Custo m Band	LORA, 0--	903.0, 903000	9.99	0.963	41.9	22.4	21.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-31	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup	Measurement Results				
	Area Scan	Zoom Scan	Area Scan	Zoom Scan	
Grid Extents [mm]	90.0 x 180.0	32.0 x 32.0 x 30.0	Date	2024-08-31	2024-08-31
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.418	0.425
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.223	0.231
Graded Grid	Yes	Yes	Power Drift [dB]	-0.08	0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor		
Surface Detection	VMS + 6p	VMS + 6p	[dB]		
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		33.3
			Dist 3dB Peak [mm]		6.4



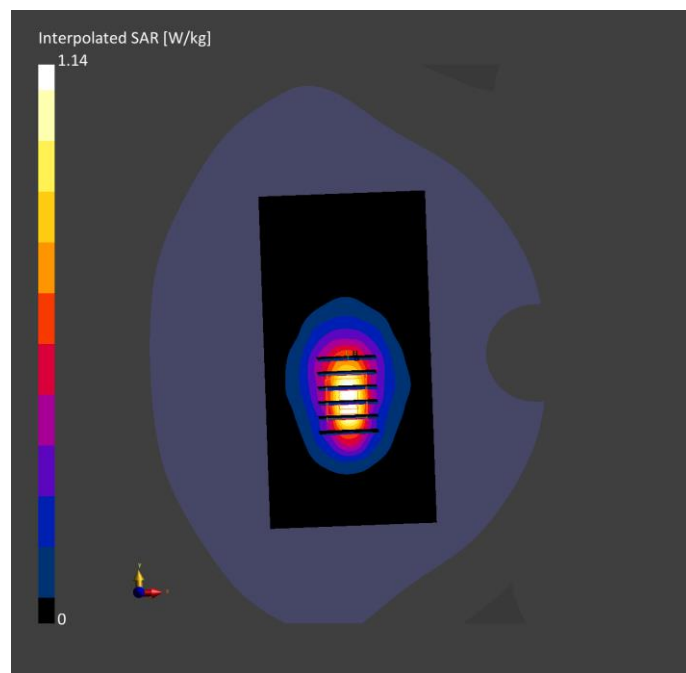

Meas.4 Body Plane with Left Edge 0mm on 1 Channel in Lora FHSS(BW125K) mode

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	85.0 x 55.0 x 5.0	Phone


Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE	Custo	LORA,	902.3,	9.99	0.971	41.3	22.5	21.1
HSL	LEFT,	m	0--	902300					
	0.00	Band							

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-01	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 180.0	32.0 x 32.0 x 30.0	Date	2024-09-01	2024-09-01
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.851	0.825
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.489	0.436
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor		
Surface Detection	VMS + 6p	VMS + 6p	[dB]		
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		48.7
			Dist 3dB Peak [mm]		9.3

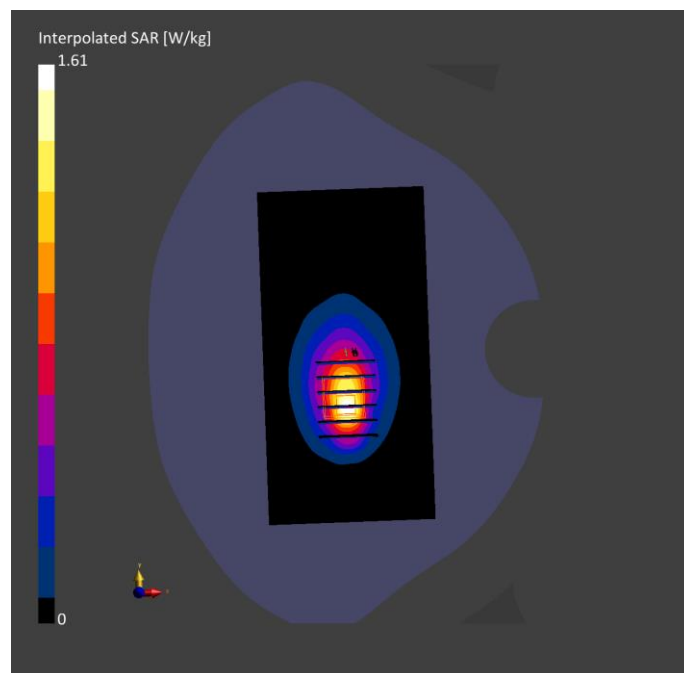

Meas.5 Body Plane with Left Edge 0mm on 1 Channel in Lora FHSS(BW100K) mode

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	85.0 x 55.0 x 5.0	Phone


Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatu	Temperatu
TSL	Distance			Channel		y [S/m]		re	re
	[mm]			Number				[°C]	[°C]
Flat,	FRONT,	Custo	LORA,	902.2,	9.99	0.949	42.1	22.5	21.1
HSL	0.00	m	0--	902200					
		Band							

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-01	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0	Date	2024-09-01	2024-09-01
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.147	0.123
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.051	0.043
Graded Grid	Yes	Yes	Power Drift [dB]	0.06	0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor		
Surface Detection	VMS + 6p	VMS + 6p	[dB]		
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		39.7
			Dist 3dB Peak [mm]		6.0

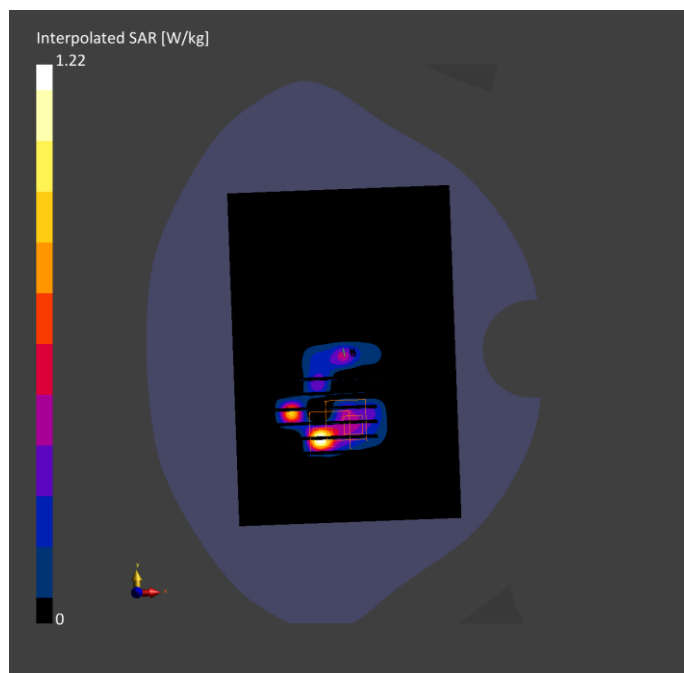

## Meas.6 Body Plane with Front Side 0mm on 0 Channel in BLE mode

Date: 2024.08.09

Communication System Band: BT; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2402$  MHz;  $\sigma = 1.739$  S/m;  $\epsilon_r = 40.359$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.75, 7.75, 7.75); Calibrated: 2024.06.25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2024.03.18
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch0/Area Scan (81x111x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.359 W/kg


**Ch0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 6.123 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.695 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.259 W/kg

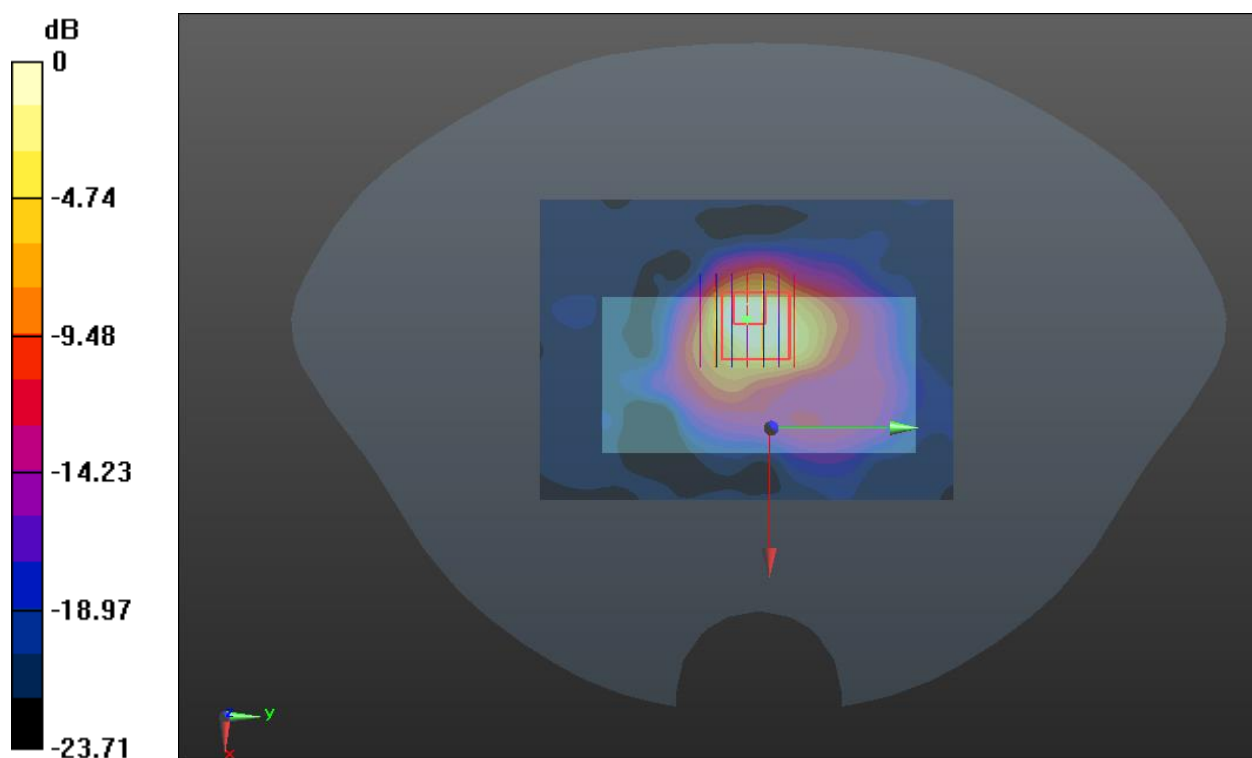

0 dB = 0.259 W/kg

## **ANNEX D EUT EXTERNAL PHOTOS**

Please refer the document “BL-SZ2471156-AW.pdf”.

## **ANNEX E SAR TEST SETUP PHOTOS**

Please refer the document “BL-SZ2471156-AS.pdf”.

## **ANNEX F CALIBRATION REPORT**

Please refer the document “BL-SZ2471156-AC.pdf”.

## **ANNEX G TUNE-UP PROCEDURE**

Please refer the document “BL-SZ2471156-AT.pdf”.

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--