



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.407

TEST REPORT

For

Hangzhou Arenti Technology Co., Ltd.

Zandsteen 50, 2132 MR Hoofddorp, Noord-Holland, Netherlands

FCC ID: 2A2MQ-SPEED10T

Report Type: Original Report	Product Type: IP CAMERA
Project Engineer:	Cary Han
Report Number:	RSHA210726002-00C
Report Date:	2021-08-23
Reviewed By:	Chris Wang
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EUT EXERCISE SOFTWARE.....	5
EQUIPMENT MODIFICATIONS.....	10
SUPPORT EQUIPMENT LIST AND DETAILS.....	10
EXTERNAL I/O CABLE	10
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST.....	14
FCC §1.1310 & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)	15
CALCULATED FORMULARY.....	15
FCC §15.203 – ANTENNA REQUIREMENT	17
APPLICABLE STANDARD.....	17
ANTENNA CONNECTOR CONSTRUCTION.....	17
FCC §15.207 & §15.407(B) (9) – AC POWER LINE CONDUCTED EMISSIONS.....	18
APPLICABLE STANDARD.....	18
EUT SETUP.....	18
EMI TEST RECEIVER SETUP	18
TEST PROCEDURE.....	19
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	19
TEST RESULTS SUMMARY.....	19
TEST DATA.....	19
FCC §15.205 & §15.209 & §15.407(B)(1) (4) (8) (9) (10) (11)– UNDESIRABLE EMISSION & RESTRICTED BANDS.....	24
APPLICABLE STANDARD.....	24
EUT SETUP.....	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	25
TEST PROCEDURE.....	25
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	26
TEST DATA.....	26
FCC §15.407(A) & §15.407(E) –EMISSION BANDWIDTH.....	52
APPLICABLE STANDARD.....	52
TEST PROCEDURE.....	52
TEST DATA.....	53
FCC §15.407(A) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER	67
APPLICABLE STANDARD.....	67
TEST PROCEDURE.....	67
TEST DATA.....	68
FCC §15.407(A) (1) (3) – POWER SPECTRAL DENSITY	70
APPLICABLE STANDARD.....	70
TEST PROCEDURE.....	70
TEST DATA.....	70

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Hangzhou Arenti Technology Co., Ltd.	
Tested Model	Speed 10T	
Series Model	DOME1, Speed 10S, Speed 10Q, DOME1 PRO	
Product Type	IP CAMERA	
Power Supply	DC 5V from adapter	
Maximum Output Power	5G Wi-Fi B1:	5G Wi-Fi B4:
	802.11a:11.28 dBm	15.83 dBm
	802.11n20:11.45 dBm	15.64 dBm
	802.11n40:6.80 dBm	15.66 dBm
Operating Frequency	5G Wi-Fi B1: 5180-5240 MHz, B4: 5745-5825 MHz	
Channel Number	5G Wi-Fi B1: 6, B4: 7	
Channel Separation	5G Wi-Fi: 802.11a/n20: 20MHz; 802.11n40: 40 MHz	
Modulation Type	OFDM	
Antenna Type	FPC Antenna	
*Maximum Antenna Gain	3.51 dBi	

Adapter-1 Information:

Model: TPA-46B050100UU

Input: AC 100-240V~50/60Hz, 0.2A

Output: DC 5.0V, 1000mA

Adapter-2 Information:

Model: GTA92-0501000US

Input: AC 100-240V~50/60Hz, 0.3A

Output: DC 5.0V, 1.0A, 5.0W

*Note: The Maximum Antenna Gain was declared by the applicant.

*All measurement and test data in this report was gathered from production sample serial number:

RSHA210726002-1 (Assigned by the BACL. The EUT supplied by the applicant was received on 2021-07-26)

Objective

This type approval report is prepared on behalf of *Hangzhou Arenti Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions' rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan).

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For **5150~5250 MHz** band, test channel list is as below,

802.11a/n20 mode Channel 36, 40, 48 were tested.

802.11n40 mode Channel 38, 46 were tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240

For **5725~5850 MHz** band,

802.11a/n20 mode Channel 149, 157, 165 were tested.

802.11n40 mode Channel 151, 159 were tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785	/	/



EUT Exercise Software

RF test tool: Demo


The worst case was performed under:



Mode	Data rate	*Power level setting	
		5150-5250 Band	5725-5850 Band
802.11a	6 Mbps	0	0
802.11n-HT20	MCS0	0	0
802.11 n-HT 40	MCS0	-8	0

Note: The power level setting was declared by the applicant.

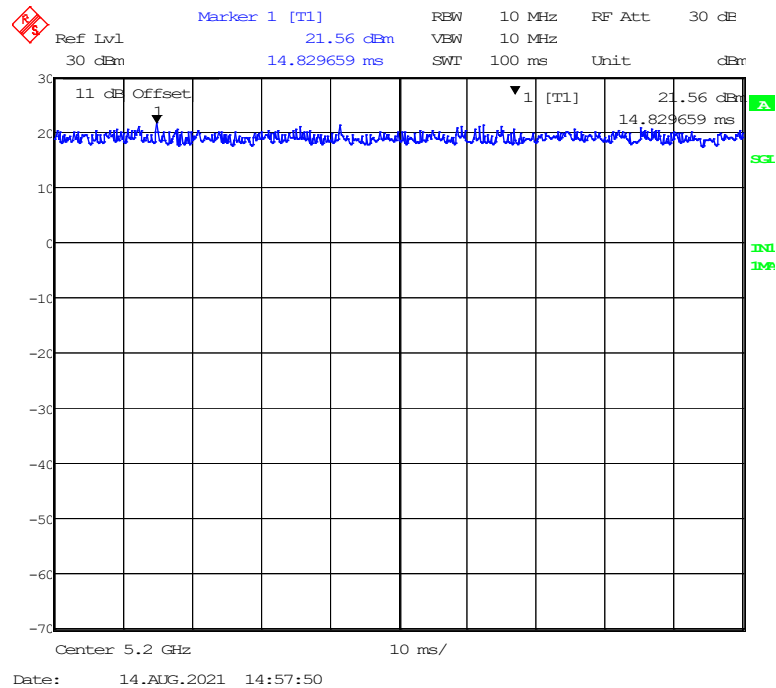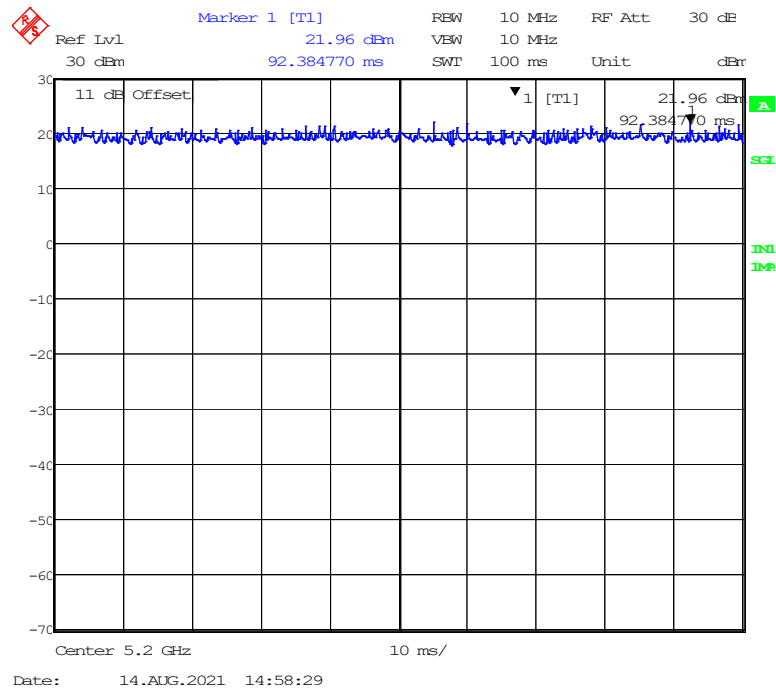
Duty Cycle**5150MHz-5250MHz Band:****802.11a mode****802.11n-HT20 mode**

802.11n-HT40 mode

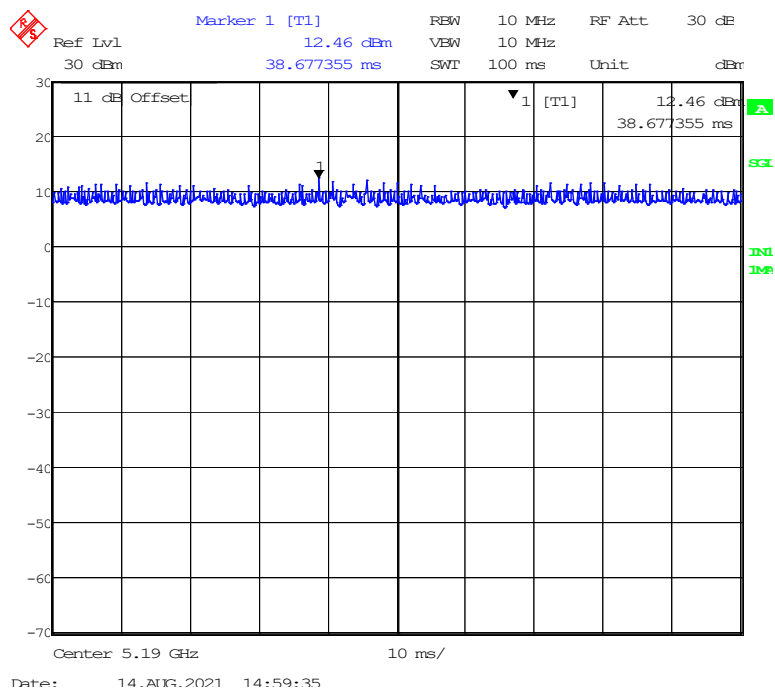

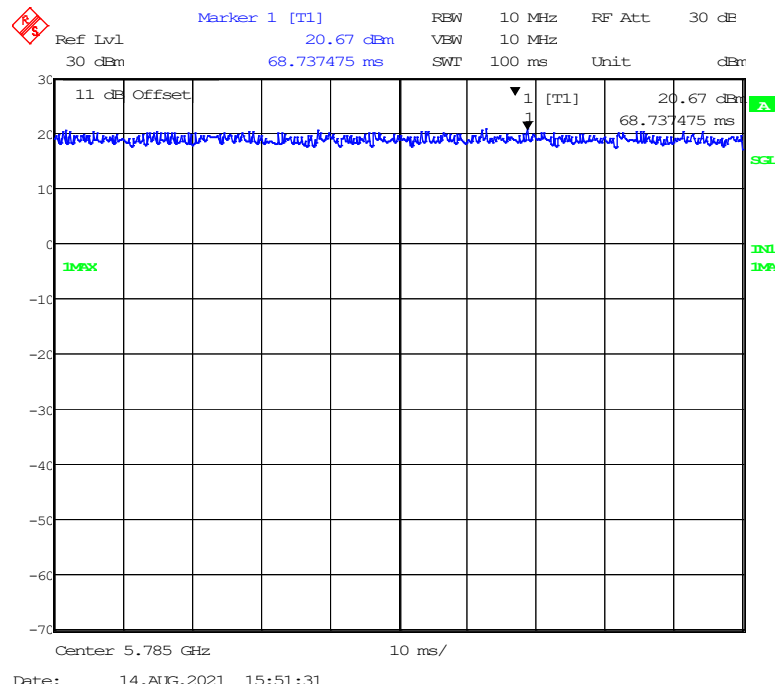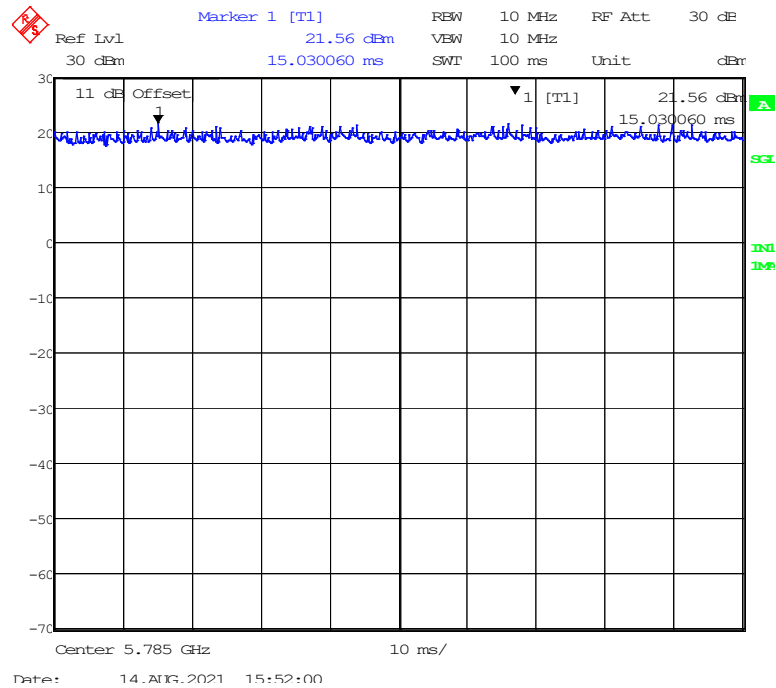5725MHz-5850MHz Band:**802.11a mode****802.11n-HT20 mode**

802.11n-HT40 mode

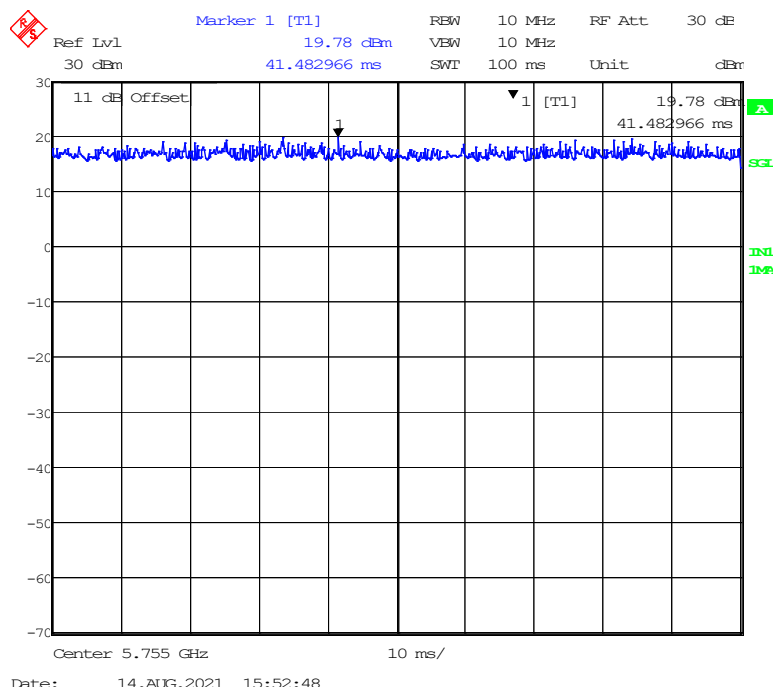

Mode	Frequency Range (MHz)	Duty Cycle (%)	T _{on} (ms)	T _{on+off} (ms)	10log(1/x)
802.11a	5150-5250	100	100	100	0
802.11n-HT20		100	100	100	0
802.11n-HT40		100	100	100	0
802.11a	5725-5850	100	100	100	0
802.11n-HT20		100	100	100	0
802.11n-HT40		100	100	100	0

Note: “x” means duty cycle.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Sandisk	SD card	32G	72810VCP9128

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	2.0	EUT	Adapter
Power Cable	1.0	Adapter	LISN/AC Source

Block Diagram of Test Setup

For Conducted Emissions:

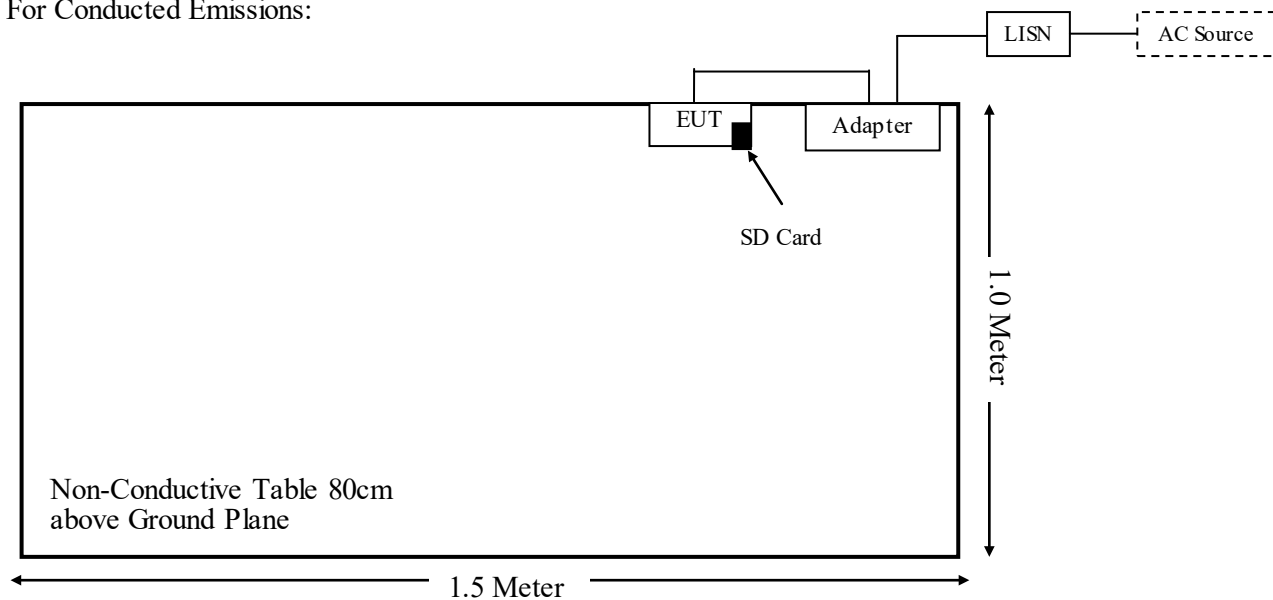


For Radiated Emissions (Below 1GHz):

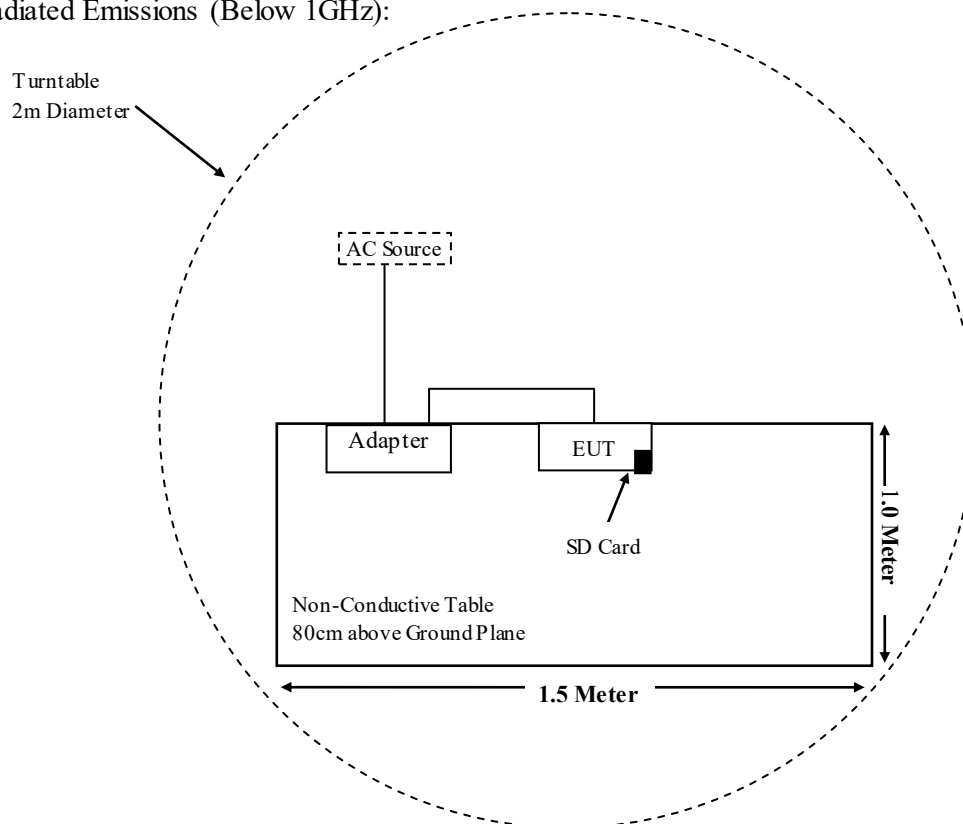

For Radiated Emissions (Above 1GHz):

Turntable
2m Diameter

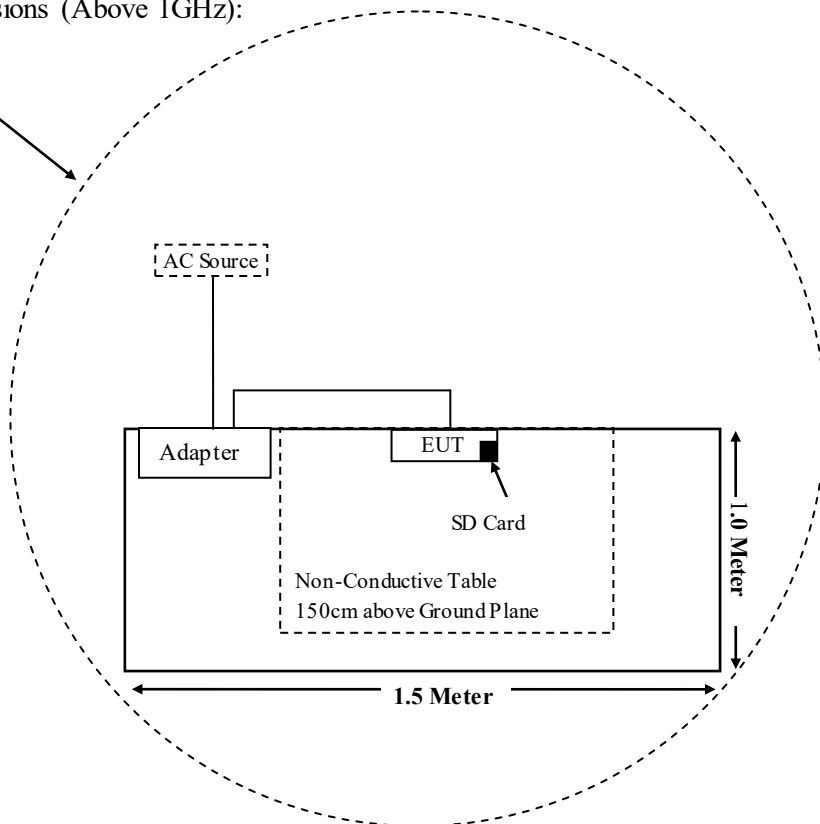

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 & §15.407(b) (9)	AC Power Line Conducted Emissions	Compliant
§15.205 & §15.209 & §15.407(b) (1) (4) (8) (9) (10) (11)	Undesirable Emission & Restricted Bands	Compliant
§15.407(a) & §15.407(e)	Emission Bandwidth	Compliant
§15.407(a) (1) (3)	Conducted Transmitter Output Power	Compliant
§15.407(a) (1) (3)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2020-11-27	2021-11-26
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2020-01-07	2023-01-06
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2021-03-16	2022-03-15
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	2516	2020-01-07	2023-01-06
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-08-14	2021-08-13
EM Electronics Corporation	Amplifier	EM18G40G	060726	2021-03-22	2022-03-21
MICRO-TRONICS	Band Reject Filter	BRC50703	G094	2021-08-05	2022-08-04
MICRO-TRONICS	Band Reject Filter	BRC50705	G085	2021-08-05	2022-08-04
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2020-11-27	2021-11-26
Agilent	Power Meter	N1912A	MY5000492	2020-11-18	2021-11-17
Agilent	Power Sensor	N1921A	MY54210024	2020-11-18	2021-11-17
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Arenti	RF Cable	Arenti C01	C01	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2021-07-28	2022-07-27
Rohde & Schwarz	LISN	ENV216	101115	2020-11-27	2021-11-26
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2021-08-10	2022-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2021-08-15	2022-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412~2462	2.41	1.74	15.00	31.62	20	0.0109	1.0
802.11g		2.41	1.74	19.00	79.43	20	0.0275	1.0
802.11n-HT20		2.41	1.74	19.50	89.13	20	0.0308	1.0
802.11n-HT40	2422~2452	2.41	1.74	17.50	56.23	20	0.0195	1.0
802.11a	5150~5250	3.51	2.24	11.50	14.13	20	0.0063	1.0
	5725~5850	3.51	2.24	16.00	39.81	20	0.0178	1.0
802.11n20	5150~5250	3.51	2.24	11.50	14.13	20	0.0063	1.0
	5725~5850	3.51	2.24	16.00	39.81	20	0.0178	1.0
802.11n40	5150~5250	3.51	2.24	7.00	5.01	20	0.0022	1.0
	5725~5850	3.51	2.24	16.00	39.81	20	0.0178	1.0

Note: 1. For the above tune up power were declared by the manufacturer.
 2. 2.4G Wi-Fi and 5G Wi-Fi can't transmit simultaneously.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407, if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an FPC antenna for 5G Wi-Fi which the antenna gain is 3.51dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 & §15.407(B) (9) – AC POWER LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (9)

EUT Setup

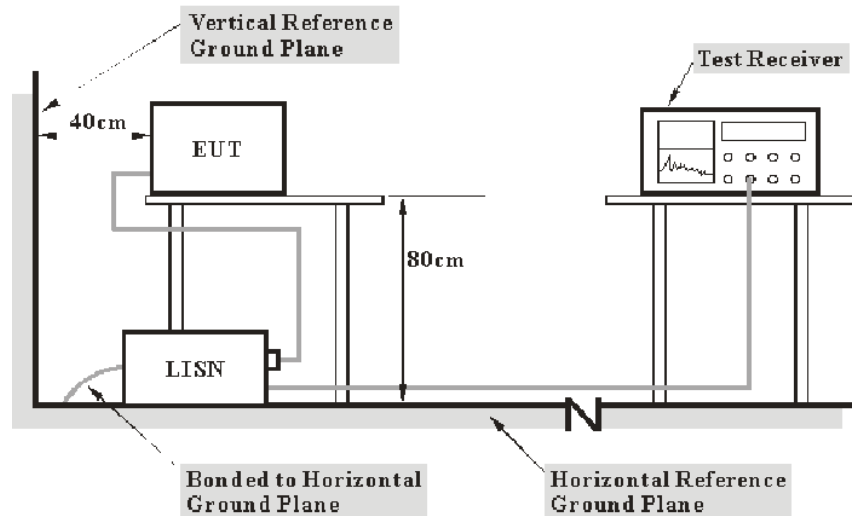

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	24.9 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Cary Han on 2021-08-18.

EUT operation mode: Transmitting in 802.11a mode high channel of 5150-5250MHz (worst case)

AC 120V/60 Hz Line


Adapter-1: TPA-46B050100UU

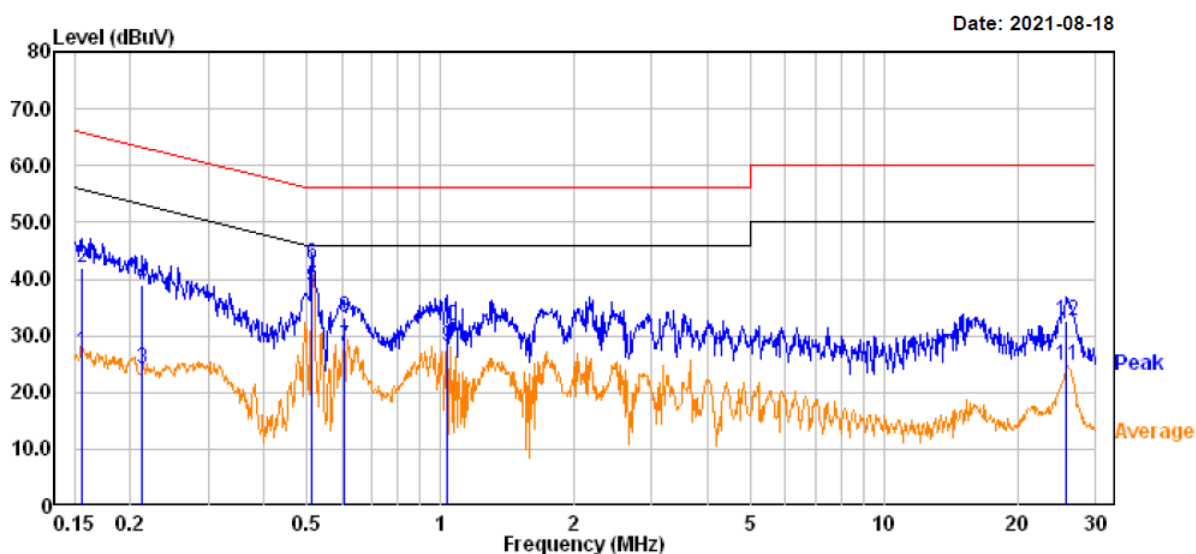

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.155	7.35	19.82	27.17	55.71	-28.54	Average
2	0.155	22.20	19.82	42.02	65.71	-23.69	QP
3	0.213	4.36	19.82	24.18	53.10	-28.92	Average
4	0.213	19.20	19.82	39.02	63.10	-24.08	QP
5	0.514	18.78	19.76	38.54	46.00	-7.46	Average
6	0.514	22.70	19.76	42.46	56.00	-13.54	QP
7	0.606	8.44	19.75	28.19	46.00	-17.81	Average
8	0.606	13.40	19.75	33.15	56.00	-22.85	QP
9	1.032	8.18	19.82	28.00	46.00	-18.00	Average
10	1.032	12.00	19.82	31.82	56.00	-24.18	QP
11	25.833	5.06	19.71	24.77	50.00	-25.23	Average
12	25.833	13.00	19.71	32.71	60.00	-27.29	QP

AC 120V/60 Hz, Neutral**Adapter-1: TPA-46B050100UU**

Date: 2021-08-18

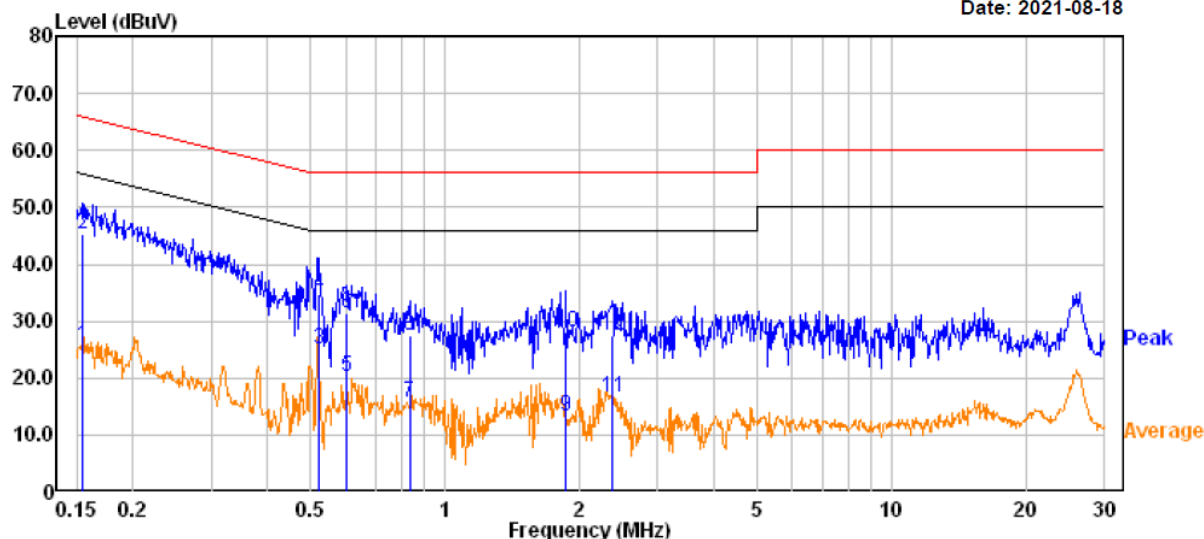


		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.155	5.84	19.82	25.66	55.75	-30.09	Average
2	0.155	25.50	19.82	45.32	65.75	-20.43	QP
3	0.522	5.18	19.76	24.94	46.00	-21.06	Average
4	0.522	15.00	19.76	34.76	56.00	-21.24	QP
5	0.600	0.62	19.75	20.37	46.00	-25.63	Average
6	0.600	11.50	19.75	31.25	56.00	-24.75	QP
7	0.833	-4.13	19.71	15.58	46.00	-30.42	Average
8	0.833	7.70	19.71	27.41	56.00	-28.59	QP
9	1.868	-6.51	19.83	13.32	46.00	-32.68	Average
10	1.868	8.30	19.83	28.13	56.00	-27.87	QP
11	2.373	-3.00	19.55	16.55	46.00	-29.45	Average
12	2.373	7.81	19.55	27.36	56.00	-28.64	QP


AC 120V/60 Hz, Line

Adapter-2: GTA92-0501000US

Date: 2021-08-18

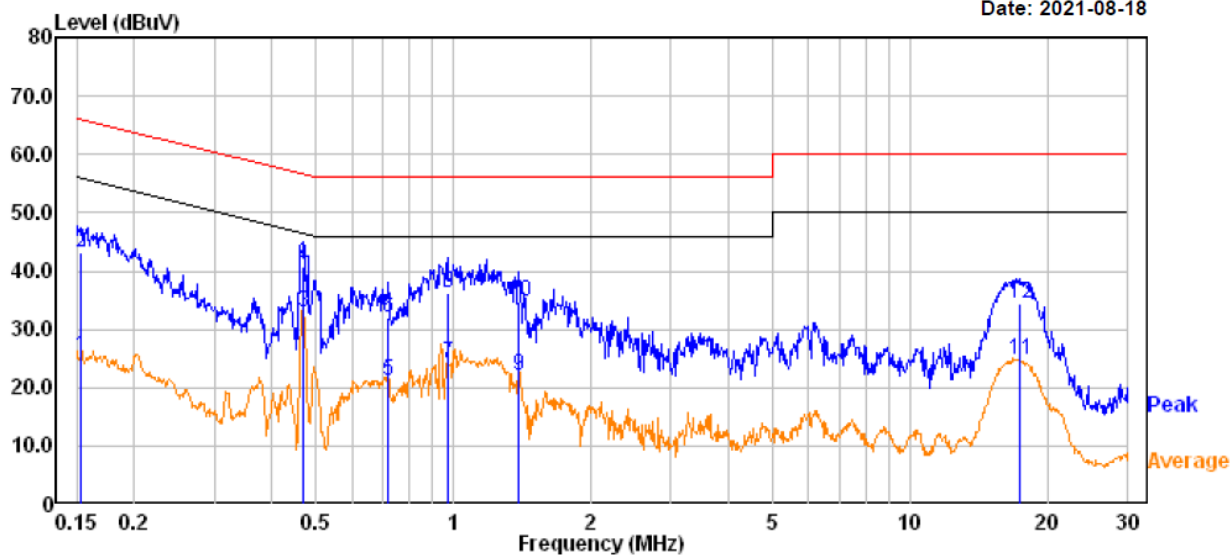

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.153	5.56	19.82	25.38	55.83	-30.45 Average
2	0.153	23.40	19.82	43.22	65.83	-22.61 QP
3	0.467	13.24	19.75	32.99	46.56	-13.57 Average
4	0.467	21.01	19.75	40.76	56.56	-15.80 QP
5	0.721	1.31	19.74	21.05	46.00	-24.95 Average
6	0.721	12.20	19.74	31.94	56.00	-24.06 QP
7	0.972	4.47	19.80	24.27	46.00	-21.73 Average
8	0.972	16.30	19.80	36.10	56.00	-19.90 QP
9	1.385	2.11	19.83	21.94	46.00	-24.06 Average
10	1.385	15.00	19.83	34.83	56.00	-21.17 QP
11	17.425	4.95	19.80	24.75	50.00	-25.25 Average
12	17.425	14.60	19.80	34.40	60.00	-25.60 QP

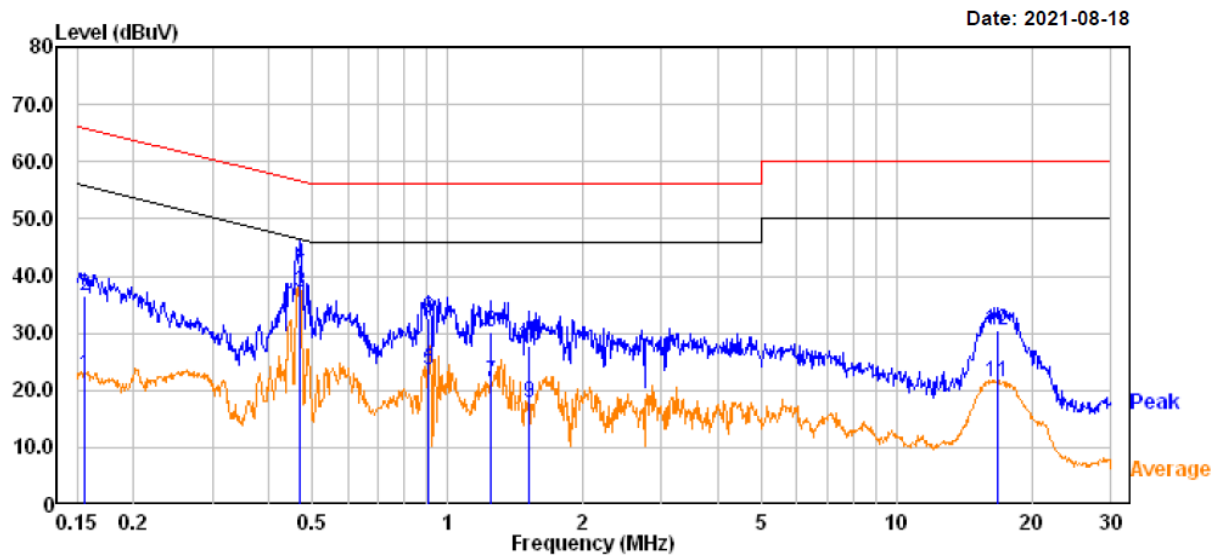AC 120V/60 Hz, Neutral**Adapter-2: GTA92-0501000US**

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.156	2.77	19.82	22.59	55.67	-33.08	Average
2	0.156	16.60	19.82	36.42	65.67	-29.25	QP
3	0.470	17.34	19.75	37.09	46.52	-9.43	Average
4	0.470	22.21	19.75	41.96	56.52	-14.56	QP
5	0.907	3.91	19.74	23.65	46.00	-22.35	Average
6	0.907	12.79	19.74	32.53	56.00	-23.47	QP
7	1.248	1.67	19.82	21.49	46.00	-24.51	Average
8	1.248	10.50	19.82	30.32	56.00	-25.68	QP
9	1.515	-1.92	19.85	17.93	46.00	-28.07	Average
10	1.515	7.99	19.85	27.84	56.00	-28.16	QP
11	16.744	1.73	19.76	21.49	50.00	-28.51	Average
12	16.744	10.59	19.76	30.35	60.00	-29.65	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

FCC § 15.205 & §15.209 & §15.407(B) (1) (4) (8) (9) (10) (11)– UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1), (4), (8), (9), (10), (11); §15.209; §15.205;

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz.


According to 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for $d = 3$ meters.

EUT Setup

Below 1 GHz:

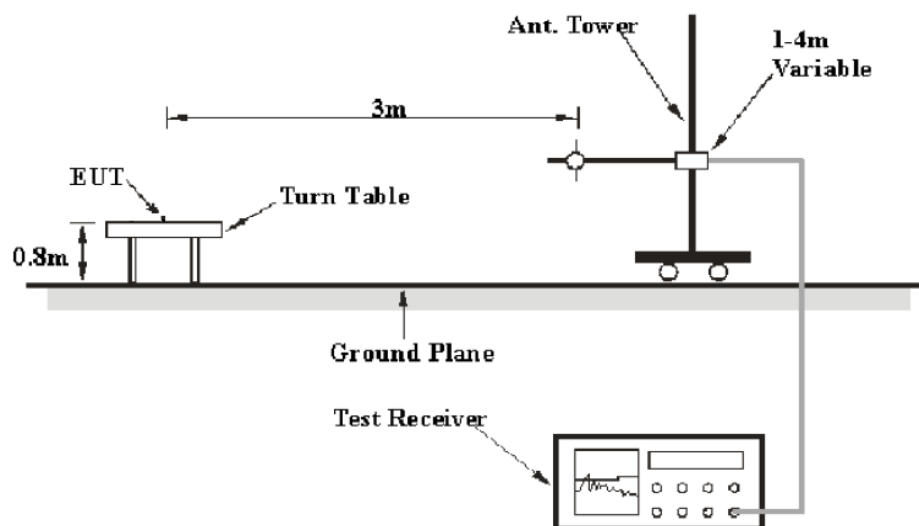

1 GHz-40GHz:

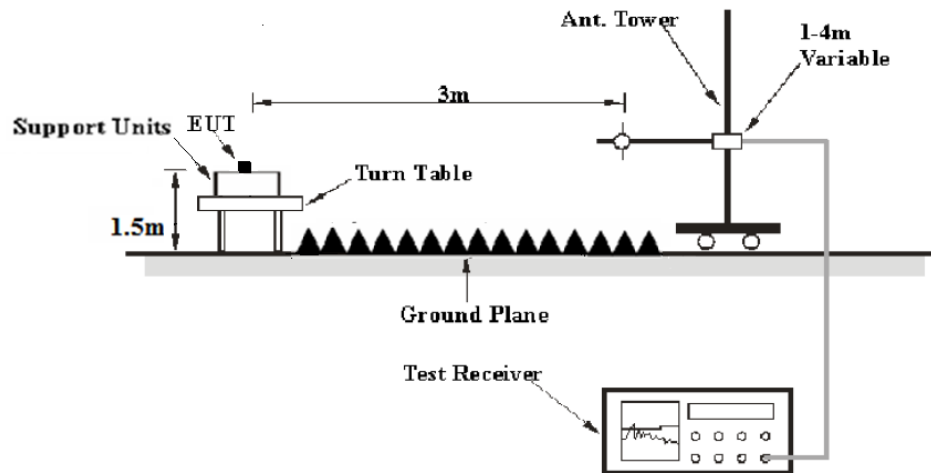

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	QP
Above 1GHz	1MHz	3 MHz	PK
	1MHz	3 MHz	AV

Test Procedure

During the radiated emission test, the adapter was connected to AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

Temperature:	24.1~24.9 °C
Relative Humidity:	50~54 %
ATM Pressure:	100.9~101.7 kPa

The testing was performed by Cary Han from 2021-08-10 to 2021-08-13.


Test Mode: Transmitting

Spurious Emission Test

30MHz-1GHz (5150-5250MHz Band):

Adapter-1: TPA-46B050100UU


Pre-scan with 802.11a, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case 802.11a mode high channel in Y-axis of orientation was recorded

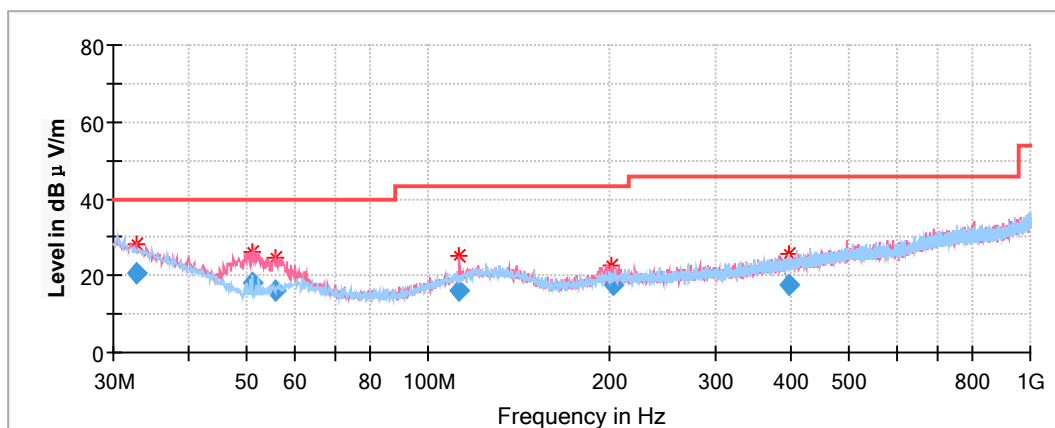

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	QuasiPeak (dB μ V/m)	Height (cm)	Polar (H/V)				
32.667600	20.70	200.0	H	263.0	-5.8	40.00	19.30
51.000100	18.11	100.0	V	208.0	-16.8	40.00	21.89
55.945500	15.96	100.0	V	241.0	-15.2	40.00	24.04
112.818350	15.95	100.0	V	166.0	-12.2	43.50	26.55
202.511250	17.38	100.0	V	285.0	-12.0	43.50	26.12
398.363350	17.38	100.0	V	40.0	-8.1	46.00	28.62

Adapter-2: GTA92-0501000US


Pre-scan with 802.11a, 802.11n-HT20 and 802.11n-HT40 ac80 modes of operation in the X,Y and Z axes of orientation, **the worst case 802.11n-HT20 mode high channel** in Y-axis of orientation was recorded

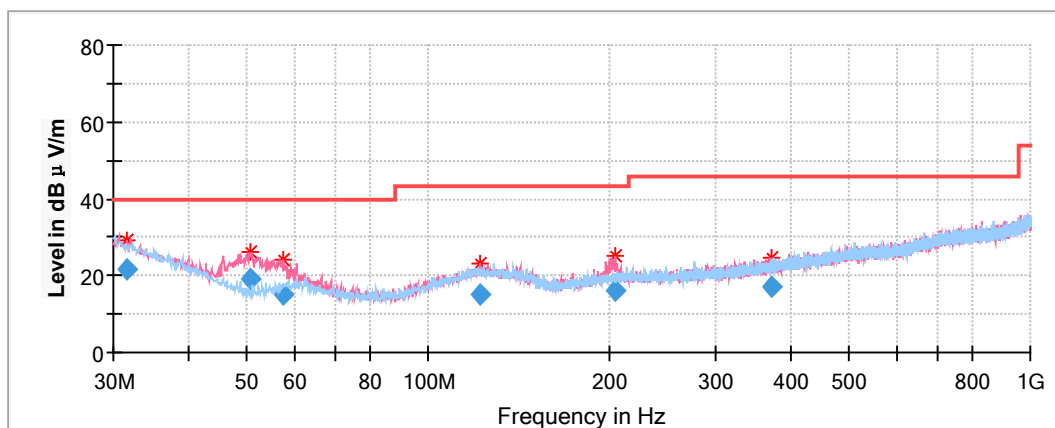

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
31.690450	21.48	200.0	V	63.0	-4.5	40.00	18.52
50.612600	19.22	100.0	V	236.0	-17.0	40.00	20.78
57.520950	15.26	100.0	V	2.0	-15.0	40.00	24.74
122.169300	15.22	200.0	V	270.0	-10.9	43.50	28.28
203.870300	16.21	100.0	V	19.0	-12.0	43.50	27.29
371.445850	16.86	200.0	V	80.0	-8.9	46.00	29.14

30MHz-1GHz (5725-5850MHz Band):**Adapter-1: TPA-46B050100UU**


Pre-scan with 802.11a, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case 802.11n-HT40 mode low channel in Y-axis of orientation was recorded

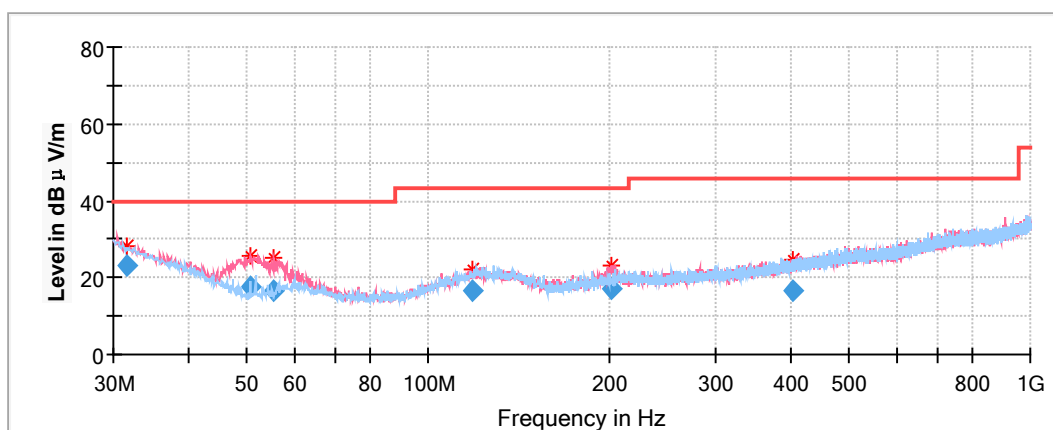

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
31.704450	23.29	200.0	V	46.0	-4.8	40.00	16.71
50.853000	17.79	100.0	V	122.0	-17.2	40.00	22.21
55.464200	16.69	100.0	V	270.0	-15.5	40.00	23.31
118.440950	16.36	200.0	H	127.0	-11.1	43.50	27.14
201.566150	16.93	100.0	V	127.0	-12.0	43.50	26.57
402.721450	16.63	200.0	V	0.0	-7.9	46.00	29.37

Adapter-2: GTA92-0501000US

Pre-scan with 802.11a, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case 802.11a mode low channel in Y-axis of orientation was recorded

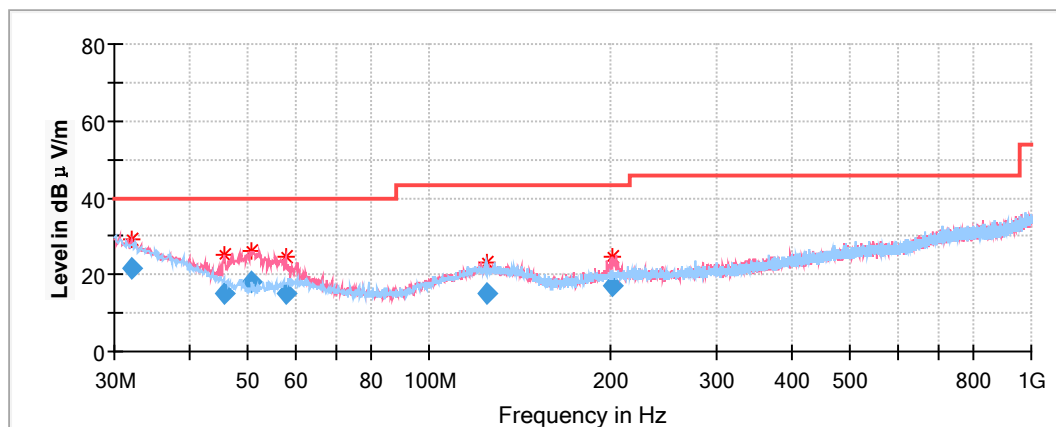


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
32.064000	21.40	100.0	V	170.0	-4.6	40.00	18.60
45.643750	14.90	100.0	V	236.0	-14.9	40.00	25.10
50.641500	18.17	100.0	V	236.0	-17.1	40.00	21.83
57.766650	14.98	200.0	V	287.0	-15.4	40.00	25.02
125.068400	14.96	200.0	H	28.0	-11.0	43.50	28.54
201.694600	17.24	100.0	V	19.0	-12.0	43.50	26.26

1GHz-18GHz (5150-5250MHz Band): (Power by adapter 1 worst case)**802.11a Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:


1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

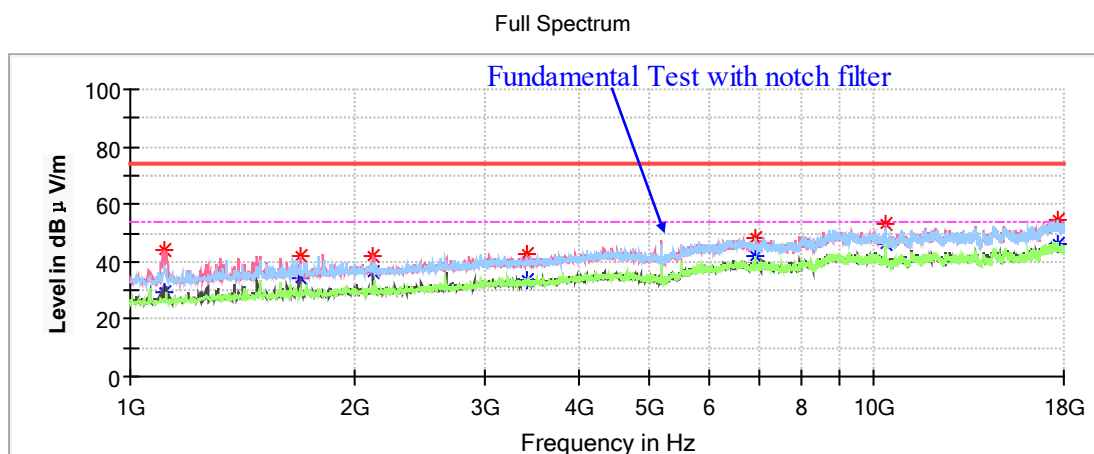Low Channel: 5180MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1113.90	---	29.54	200	V	199.0	-8.5	54.00	24.46
1113.90	44.24	---	200	V	199.0	-8.5	74.00	29.76
1693.60	---	34.36	150	V	267.0	-5.9	54.00	19.64
1693.60	41.82	---	150	V	267.0	-5.9	74.00	32.18
2123.70	42.11	---	150	V	177.0	-4.7	68.20	26.09
3407.20	42.54	---	200	V	122.0	-1.8	68.20	25.66
6905.80	48.55	---	150	V	267.0	5.7	68.20	19.65
10360.20	53.07	---	150	V	216.0	8.5	68.20	15.13
17648.10	54.72	---	200	H	270.0	14.1	68.20	13.48

Middle Channel: 5200MHz


Full Spectrum

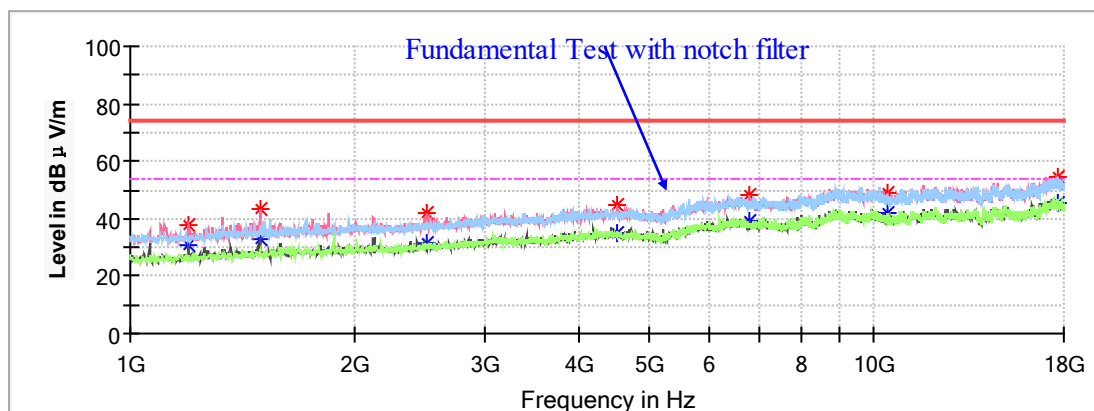

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1198.90	---	30.58	150	V	264.0	-8.0	54.00	23.42
1198.90	38.07	---	150	V	264.0	-8.0	74.00	35.93
1494.70	---	32.86	150	V	42.0	-6.5	54.00	21.14
1494.70	43.12	---	150	V	42.0	-6.5	74.00	30.88
2499.40	---	31.21	150	V	264.0	-4.0	54.00	22.79
2499.40	42.00	---	150	V	264.0	-4.0	74.00	32.00
4513.90	---	34.77	150	V	68.0	1.3	54.00	19.23
4513.90	45.05	---	150	V	68.0	1.3	74.00	28.95
6805.50	47.96	---	150	V	0.0	5.6	68.20	20.24
10401.00	48.76	---	150	V	106.0	8.5	68.20	19.44
17620.90	54.66	---	150	V	8.0	14.2	68.20	13.54

High Channel: 5240MHz

Full Spectrum

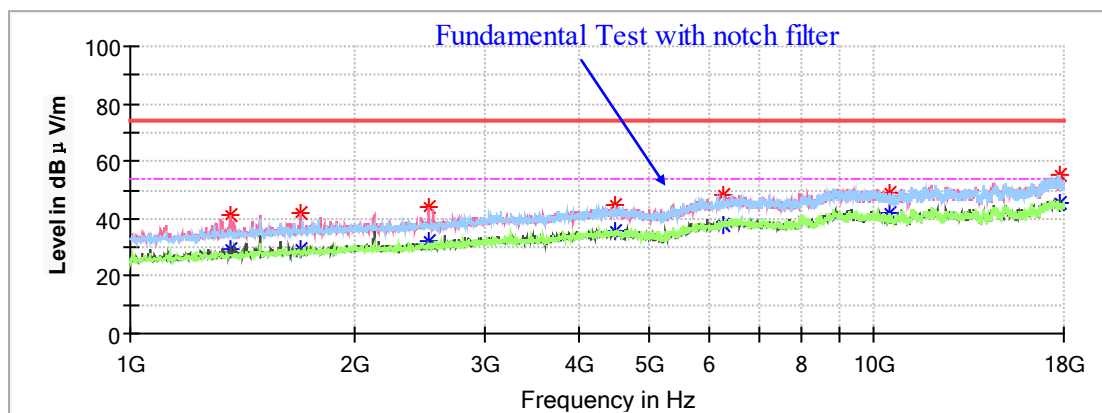

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1360.40	---	29.53	150	V	253.0	-7.2	54.00	24.47
1360.40	41.08	---	150	V	253.0	-7.2	74.00	32.92
1697.00	---	29.20	150	V	267.0	-5.9	54.00	24.80
1697.00	41.76	---	150	V	267.0	-5.9	74.00	32.24
2523.20	43.88	---	150	V	295.0	-3.9	68.20	24.32
4485.00	44.75	---	200	H	76.0	1.3	68.20	23.45
6263.20	48.48	---	200	H	1.0	4.8	68.20	19.72
10480.70	49.22	---	150	H	170.0	8.4	68.20	18.98
17762.00	---	45.65	200	H	335.0	13.8	54.00	8.35
17762.00	55.28	---	200	H	335.0	13.8	74.00	18.72

802.11n-HT20 Mode:


(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:


1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5180MHz

Full Spectrum

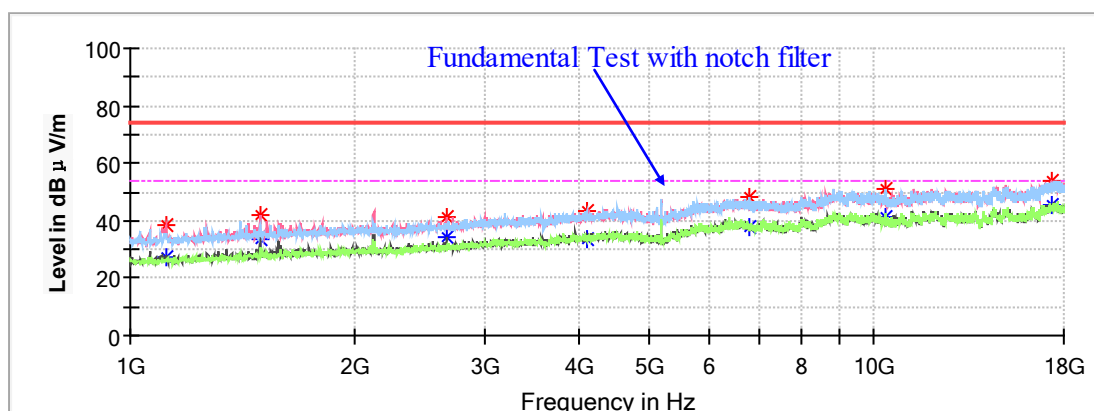


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1115.60	---	27.02	200	V	308.0	-8.5	54.00	26.98
1115.60	38.70	---	200	V	308.0	-8.5	74.00	35.30
1494.70	---	33.29	200	V	49.0	-6.5	54.00	20.71
1494.70	42.29	---	200	V	49.0	-6.5	74.00	31.71
2659.20	41.03	---	150	V	278.0	-3.4	68.20	27.17
4100.80	---	33.83	150	V	148.0	0.6	54.00	20.17
4100.80	43.60	---	150	V	148.0	0.6	74.00	30.40
6810.60	47.94	---	200	H	84.0	5.6	68.20	20.26
10356.80	51.19	---	150	H	246.0	8.5	68.20	17.01
17372.70	53.97	---	200	V	0.0	14.1	68.20	14.23

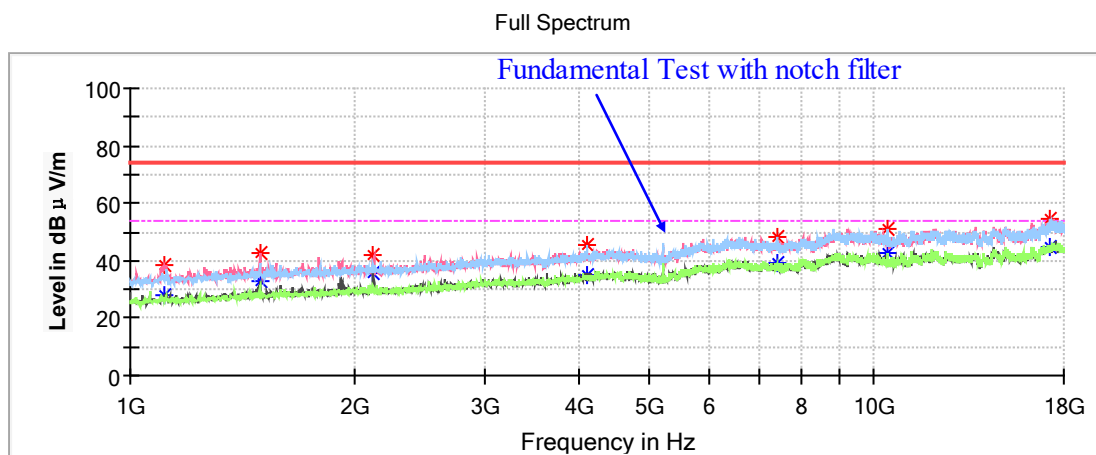Middle Channel: 5200MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1113.90	---	27.81	200	V	187.0	-8.5	54.00	26.19
1113.90	38.32	---	200	V	187.0	-8.5	74.00	35.68
1493.00	---	32.90	200	V	37.0	-6.5	54.00	21.10
1493.00	42.83	---	200	V	37.0	-6.5	74.00	31.17
2123.70	42.10	---	150	V	100.0	-4.7	68.20	26.10
4109.30	45.11	---	200	H	159.0	0.6	74.00	28.89
4109.30	---	34.74	200	H	159.0	0.6	54.00	19.26
7392.00	---	38.98	200	H	9.0	5.0	54.00	15.02
7392.00	48.32	---	200	H	9.0	5.0	74.00	25.68
10399.30	51.31	---	200	H	238.0	8.5	68.20	16.89
17194.20	54.68	---	200	H	358.0	13.5	68.20	13.52

High Channel: 5240MHz

Full Spectrum

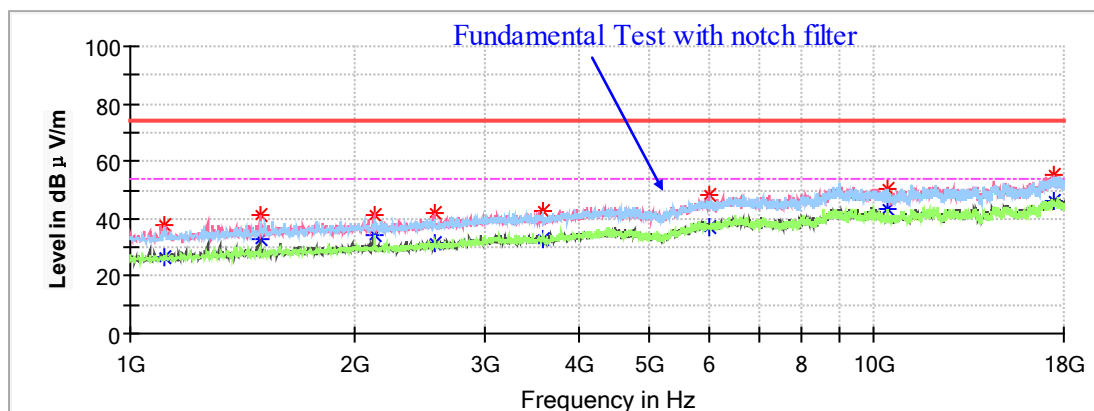

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1110.50	---	26.64	150	V	71.0	-8.5	54.00	27.36
1110.50	37.51	---	150	V	71.0	-8.5	74.00	36.49
1493.00	---	32.54	150	V	173.0	-6.5	54.00	21.46
1493.00	41.23	---	150	V	173.0	-6.5	74.00	32.77
2125.40	41.23	---	150	V	323.0	-4.7	68.20	26.97
2565.70	42.28	---	150	V	283.0	-3.8	68.20	25.92
3584.00	42.90	---	200	H	270.0	-1.3	68.20	25.3
6018.40	48.08	---	150	V	96.0	4.2	68.20	20.12
10458.80	50.35	---	200	H	191.0	8.5	68.20	17.85
17442.40	55.38	---	200	V	207.0	14.3	68.20	12.82

802.11n-HT40 Mode:


(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5190MHz


Full Spectrum

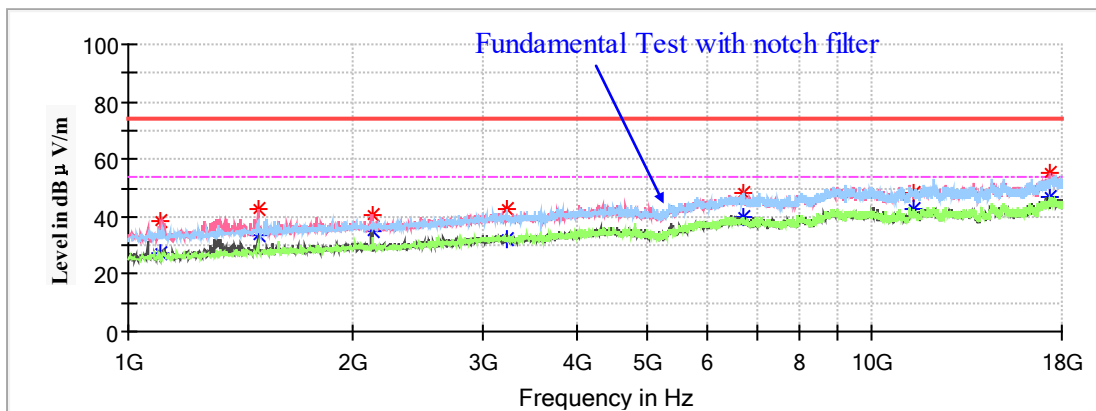

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1107.10	---	27.45	150	V	335.0	-8.5	54.00	26.55
1107.10	38.80	---	150	V	335.0	-8.5	74.00	35.20
1493.00	---	33.61	200	V	37.0	-6.5	54.00	20.39
1493.00	42.85	---	200	V	37.0	-6.5	74.00	31.15
2125.40	40.89	---	200	V	15.0	-4.7	68.20	27.31
3225.30	42.48	---	200	H	70.0	-1.9	68.20	25.72
6730.70	48.28	---	200	H	296.0	5.5	68.20	19.92
11380.20	48.38	---	150	H	51.0	10.4	74.00	25.62
11380.20	---	42.45	150	H	51.0	10.4	54.00	11.55
17388.00	55.01	---	200	V	0.0	14.1	68.20	13.19

High Channel: 5230MHz

Full Spectrum

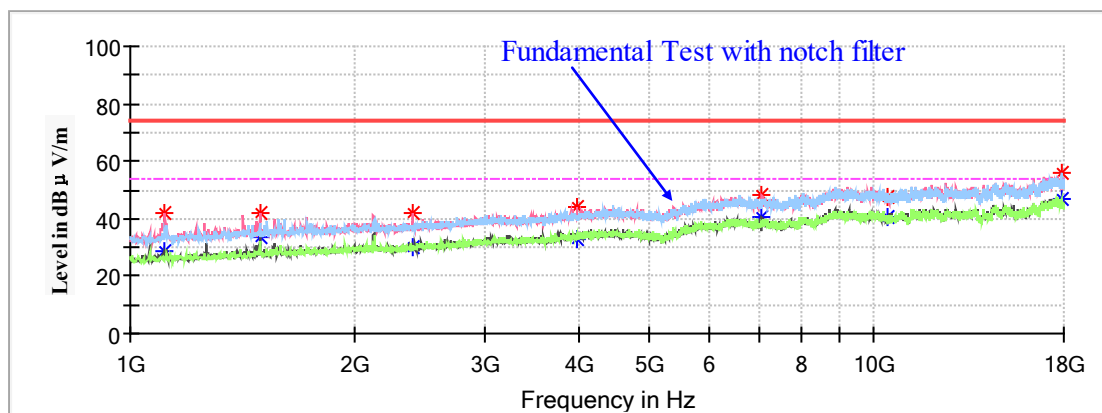


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1113.90	---	28.94	200	V	156.0	-8.5	54.00	25.06
1113.90	42.29	---	200	V	156.0	-8.5	74.00	31.71
1493.00	---	33.81	150	V	61.0	-6.5	54.00	20.19
1493.00	42.21	---	150	V	61.0	-6.5	74.00	31.79
2395.70	41.84	---	150	V	283.0	-4.2	68.20	26.36
3995.40	---	33.14	200	V	144.0	0.4	54.00	20.86
3995.40	44.26	---	200	V	144.0	0.4	74.00	29.74
7075.80	48.04	---	150	V	217.0	5.6	68.20	20.16
10458.80	47.82	---	150	V	165.0	8.5	68.20	20.38
17833.40	---	47.06	200	H	344.0	13.7	54.00	6.94
17833.40	55.88	---	200	H	344.0	13.7	74.00	18.12

1GHz-18GHz (5725-5850MHz Band): (Power by adapter 1 worst case)**802.11a Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:


1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

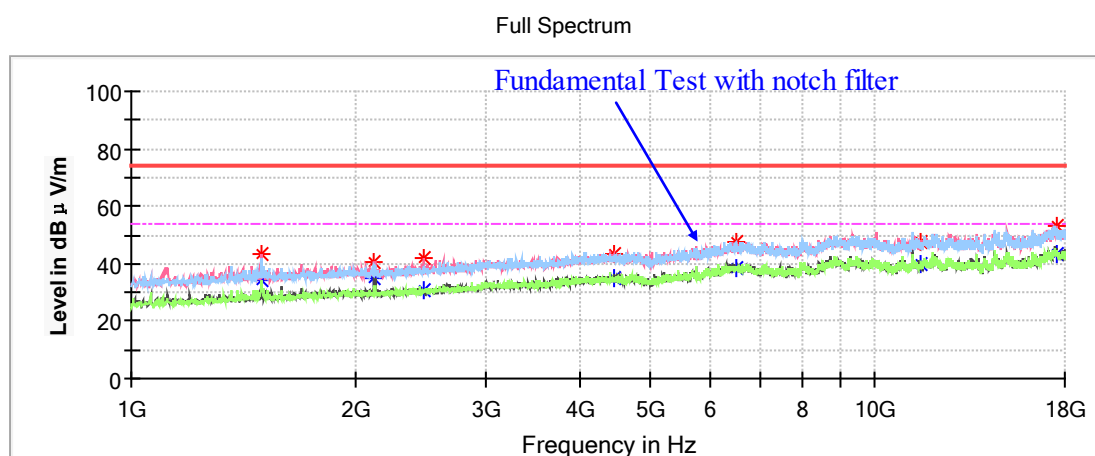Low Channel: 5745MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1494.70	---	34.45	200	H	207.0	-6.5	54.00	19.55
1494.70	43.32	---	200	H	207.0	-6.5	74.00	30.68
2123.70	40.48	---	150	V	357.0	-4.7	68.20	27.72
2479.00	42.13	---	200	V	186.0	-4.0	68.20	26.07
4449.30	43.53	---	200	V	161.0	1.2	68.20	24.67
6509.70	47.42	---	200	V	148.0	5.4	68.20	20.78
11490.70	---	39.56	150	V	297.0	10.6	54.00	14.44
11490.70	47.23	---	150	V	297.0	10.6	74.00	26.77
17556.30	53.11	---	150	V	71.0	14.3	68.20	15.09

Middle Channel: 5785MHz


Full Spectrum

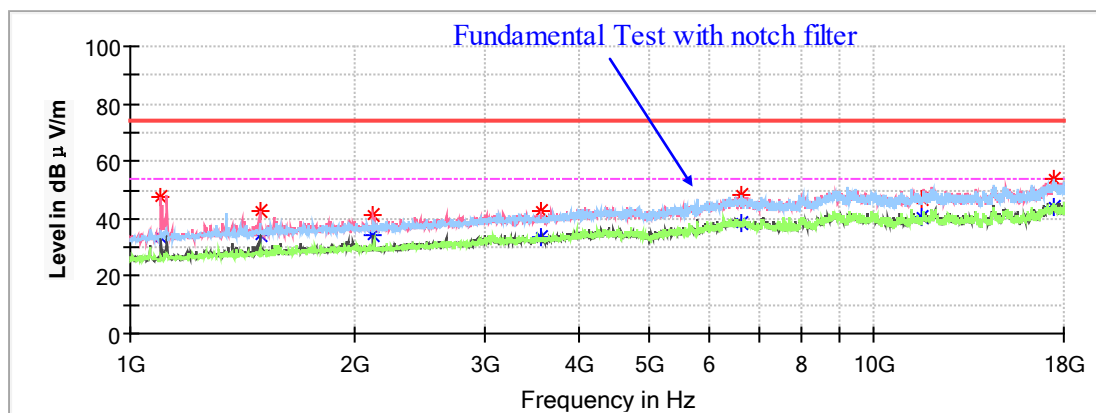

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1100.30	47.85	---	150	V	303.0	-8.5	74.00	26.15
1100.30	---	33.71	150	V	303.0	-8.5	54.00	20.29
1493.00	42.51	---	150	V	239.0	-6.5	74.00	31.49
1493.00	---	34.10	150	V	239.0	-6.5	54.00	19.90
2123.70	41.32	---	200	V	199.0	-4.7	68.20	26.88
3575.50	42.63	---	150	V	239.0	-1.4	68.20	25.57
6642.30	48.02	---	200	H	359.0	5.5	68.20	20.18
11568.90	---	40.43	200	H	334.0	10.5	54.00	13.57
11568.90	46.99	---	200	H	334.0	10.5	74.00	27.01
17450.90	53.81	---	200	H	321.0	14.3	68.20	14.39

High Channel: 5825MHz

Full Spectrum

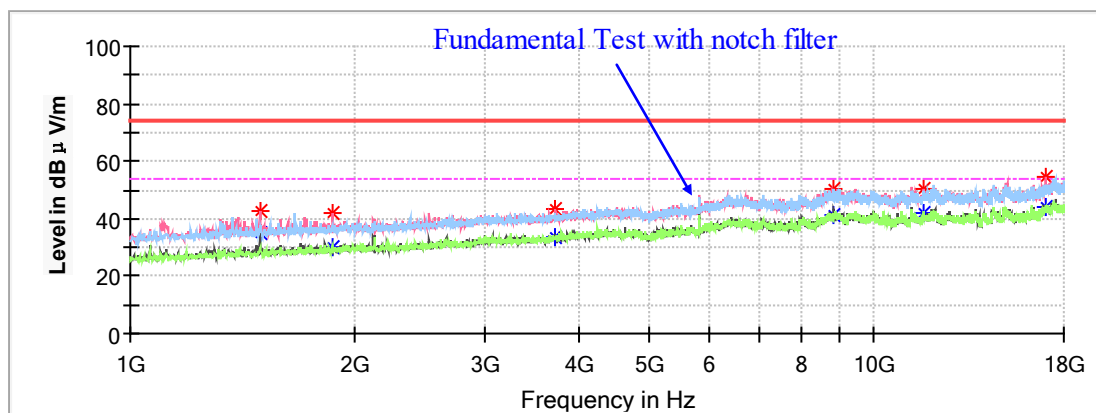

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1493.00	---	34.69	150	V	235.0	-6.5	54.00	19.31
1493.00	42.64	---	150	V	235.0	-6.5	74.00	31.36
1868.70	42.25	---	200	V	176.0	-5.3	68.20	25.95
3728.50	---	33.87	200	V	9.0	-0.7	54.00	20.13
3728.50	43.14	---	200	V	9.0	-0.7	74.00	30.86
8806.40	50.24	---	150	V	131.0	8.7	68.20	17.96
11652.20	50.10	---	150	V	104.0	10.4	74.00	23.90
11652.20	---	42.13	150	V	104.0	10.4	54.00	11.87
17070.10	54.69	---	150	V	78.0	13.2	68.20	13.51

802.11n-HT20 Mode:


(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 5745MHz


Full Spectrum

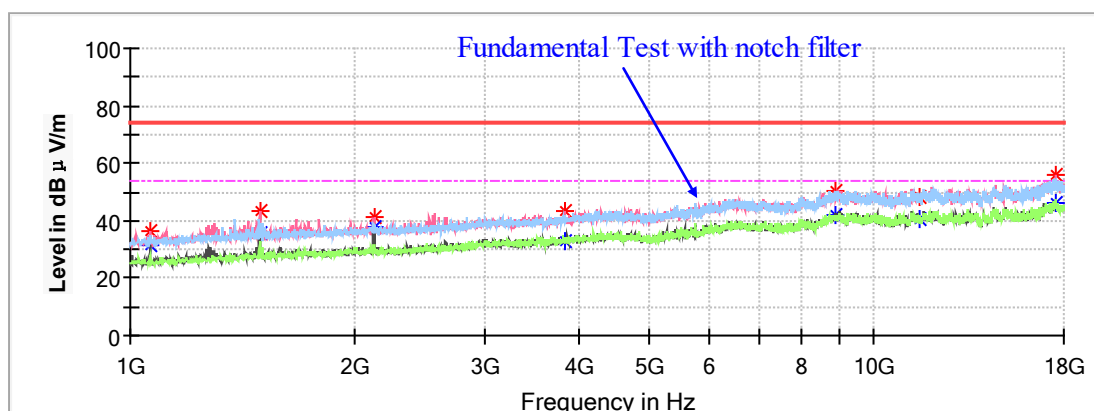

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1062.90	36.65	---	200	V	244.0	-8.7	74.00	37.35
1062.90	---	31.15	200	V	244.0	-8.7	54.00	22.85
1493.00	---	35.83	200	V	0.0	-6.5	54.00	18.17
1493.00	43.22	---	200	V	0.0	-6.5	74.00	30.78
2127.10	41.34	---	150	V	97.0	-4.7	68.20	26.86
3839.00	---	33.02	150	H	355.0	-0.2	54.00	20.98
3839.00	43.55	---	150	H	355.0	-0.2	74.00	30.45
8850.60	50.30	---	200	H	85.0	8.9	68.20	17.90
11490.70	---	40.68	150	V	251.0	10.6	54.00	13.32
11490.70	48.45	---	150	V	251.0	10.6	74.00	25.55
17546.10	55.65	---	150	V	71.0	14.3	68.20	12.55

Middle Channel: 5785MHz


Full Spectrum

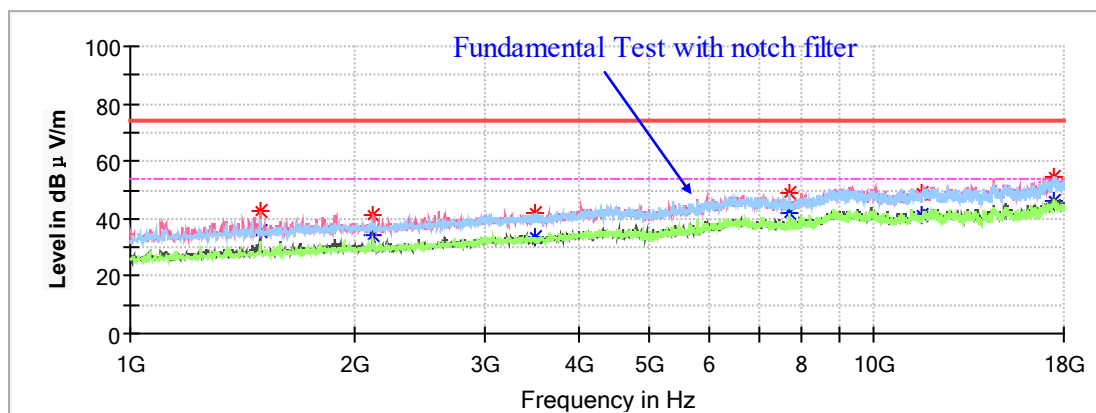

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1493.00	---	35.83	150	V	239.0	-6.5	54.00	18.17
1493.00	42.68	---	150	V	239.0	-6.5	74.00	31.32
2123.70	41.44	---	150	V	0.0	-4.7	68.20	26.76
3507.50	42.11	---	200	H	245.0	-1.7	68.20	26.09
7713.30	---	42.30	200	H	182.0	5.3	54.00	11.70
7713.30	48.76	---	200	H	182.0	5.3	74.00	25.24
11568.90	---	41.16	200	H	195.0	10.5	54.00	12.84
11568.90	49.00	---	200	H	195.0	10.5	74.00	25.00
17461.10	54.48	---	150	V	264.0	14.3	68.20	13.72

High Channel: 5825MHz

Full Spectrum

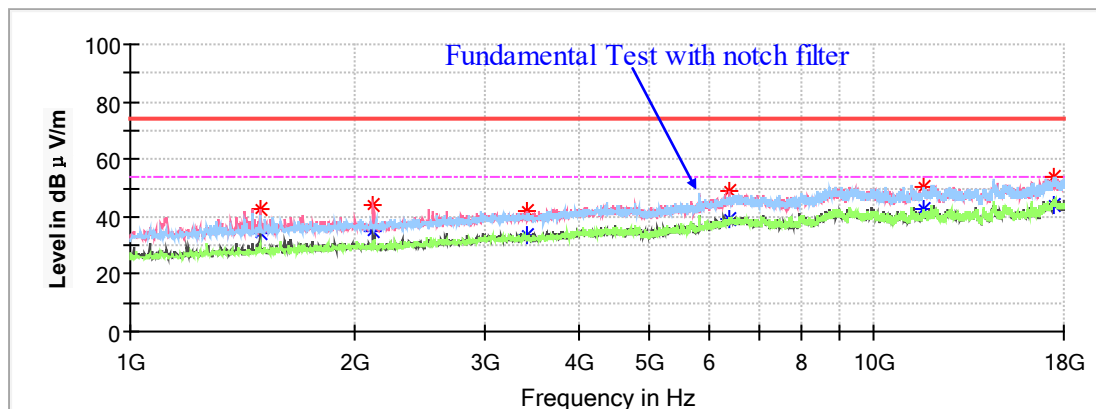


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1493.00	---	34.05	200	V	0.0	-6.5	54.00	19.95
1493.00	42.89	---	200	V	0.0	-6.5	74.00	31.11
2123.70	---	34.96	150	V	0.0	-4.7	54.00	19.04
2123.70	44.00	---	200	V	217.0	-4.7	74.00	30.00
3422.50	42.21	---	150	V	252.0	-1.8	68.20	25.99
6399.20	48.78	---	150	V	16.0	5.2	68.20	19.42
11653.90	---	42.66	200	H	0.0	10.4	54.00	11.34
11653.90	50.67	---	200	H	0.0	10.4	74.00	23.33
17422.00	54.14	---	150	V	316.0	14.2	68.20	14.06

802.11n-HT40 Mode:

(Pre-scan in the X, Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:


1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

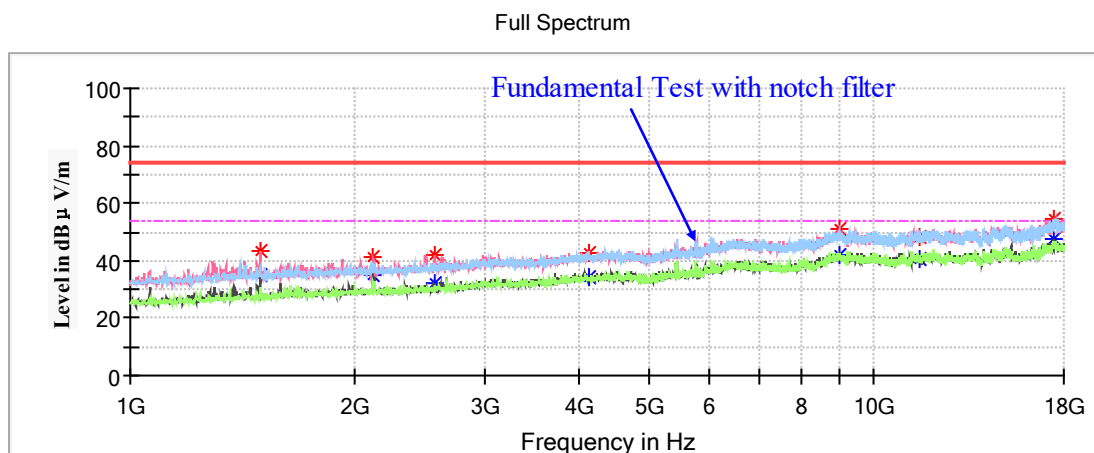Low Channel: 5755MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1494.70	---	34.81	200	V	15.0	-6.5	54.00	19.19
1494.70	43.47	---	200	V	15.0	-6.5	74.00	30.53
2123.70	41.60	---	150	V	96.0	-4.7	68.20	26.60
2567.40	41.70	---	150	V	277.0	-3.7	68.20	26.50
4133.10	---	33.99	200	H	48.0	0.7	54.00	20.01
4133.10	42.95	---	200	H	48.0	0.7	74.00	31.05
8959.40	50.90	---	200	V	207.0	9.3	68.20	17.30
11507.70	---	40.63	150	H	300.0	10.6	54.00	13.37
11507.70	48.28	---	150	H	300.0	10.6	74.00	25.72
17478.10	54.85	---	150	V	211.0	14.4	68.20	13.35

High Channel: 5795MHz


Full Spectrum

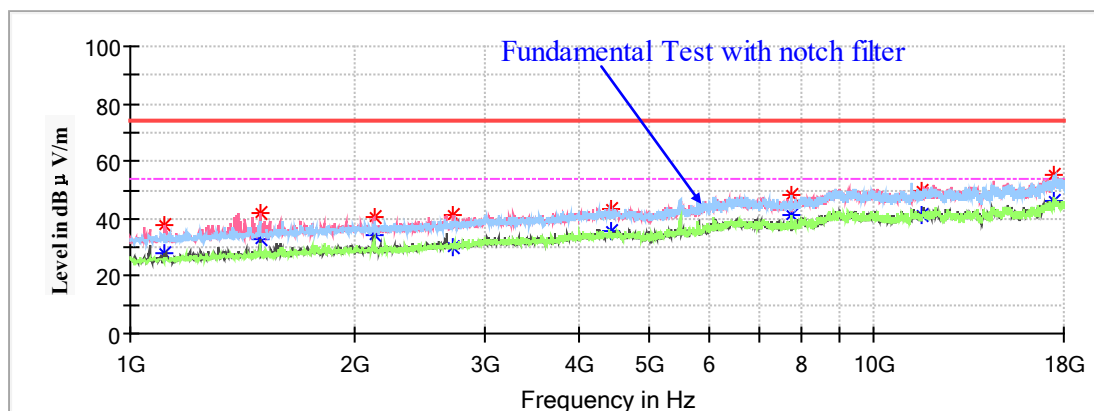


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1112.20	---	28.04	200	V	219.0	-8.5	54.00	25.96
1112.20	37.95	---	200	V	219.0	-8.5	74.00	36.05
1493.00	---	32.89	200	V	25.0	-6.5	54.00	21.11
1493.00	42.25	---	200	V	25.0	-6.5	74.00	31.75
2125.40	40.41	---	150	V	115.0	-4.7	68.20	27.79
2708.50	---	30.35	200	V	257.0	-3.2	54.00	23.65
2708.50	41.43	---	200	V	257.0	-3.2	74.00	32.57
4427.20	43.26	---	150	V	52.0	1.2	68.20	24.94
7726.90	---	41.10	150	H	181.0	5.4	54.00	12.90
7726.90	47.97	---	150	H	181.0	5.4	74.00	26.03
11590.80	49.78	---	200	H	98.0	10.5	74.00	24.22
11590.80	---	41.36	200	H	98.0	10.5	54.00	12.64
17493.40	55.12	---	200	H	0.0	14.4	68.20	13.08

18GHz-40GHz (5150-5250MHz Band): (Power by adapter 1 worst case)

Pre-scan with 802.11a, 802.11n-HT20, 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **802.11a mode high channel** in Y-axis of orientation was recorded

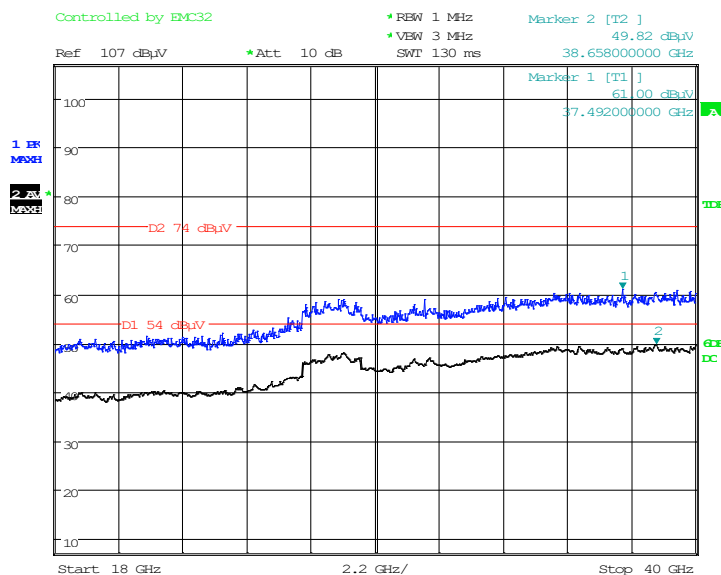Horizontal


Date: 13.AUG.2021 18:21:12

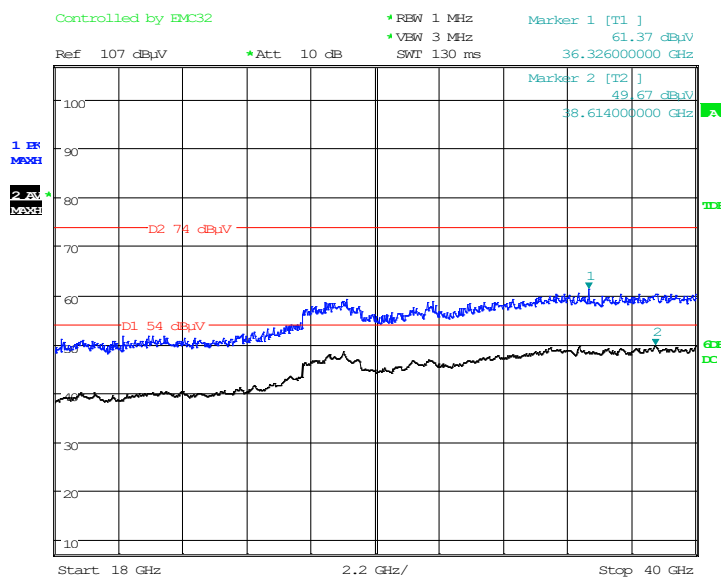Vertical


Date: 13.AUG.2021 18:15:22

18GHz-40GHz (5725-5850MHz Band): (Power by adapter 1 worst case)

Pre-scan with 802.11a, 802.11n-HT20, 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **802.11a mode low channel** in Y-axis of orientation was recorded

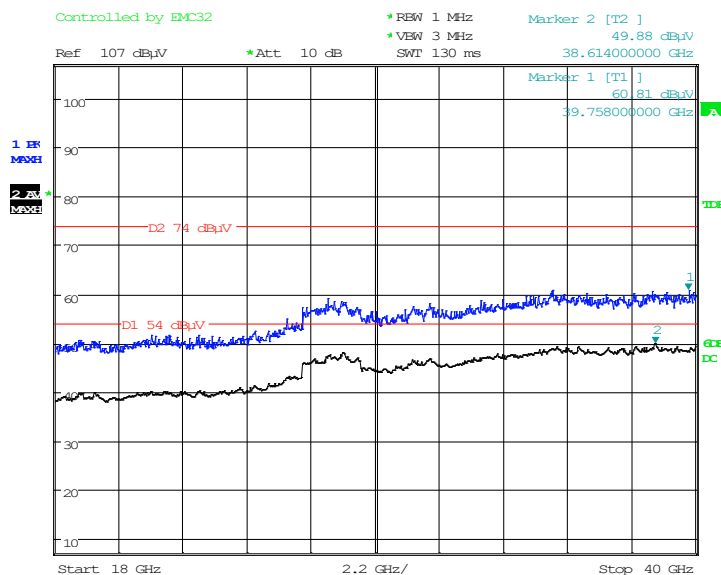Horizontal

Date: 13.AUG.2021 18:35:50

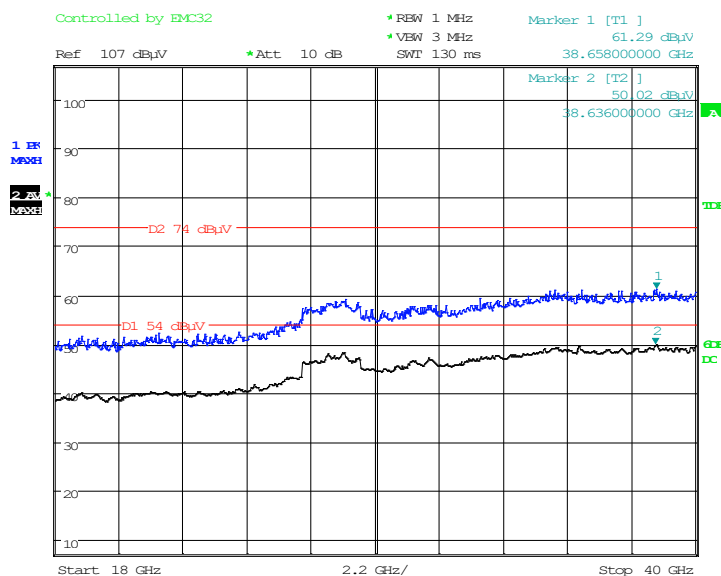Vertical

Date: 13.AUG.2021 18:27:43

Restricted Bands Emissions Test (5150-5250MHz Band):

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

802.11a Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation in vertical polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	53.43	---	150.0	V	353.0	11.4	74.00	20.57
5150.00	---	49.47	150.0	V	353.0	11.4	54.00	4.53
High Channel: 5240MHz								
5350.00	52.37	---	200.0	H	165.0	11.8	74.00	21.63
5350.00	---	48.38	200.0	H	165.0	11.8	54.00	5.62

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation in vertical polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	52.94	---	150.0	V	341.0	11.4	74.00	21.06
5150.00	---	48.63	150.0	V	341.0	11.4	54.00	5.37
High Channel: 5240MHz								
5350.00	52.45	---	200.0	V	130.0	11.8	74.00	21.55
5350.00	---	48.74	200.0	V	130.0	11.8	54.00	5.26

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation in vertical polarization was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5190MHz								
5150.00	51.79	---	200.0	H	133.0	11.4	74.00	22.21
5150.00	---	47.51	200.0	H	133.0	11.4	54.00	6.49
High Channel: 5230MHz								
5350.00	53.42	---	150.0	V	336.0	11.8	74.00	20.58
5350.00	---	47.47	150.0	V	336.0	11.8	54.00	6.53

Restricted Bands Emissions Test (5725-5850MHz Band):

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

802.11a Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	59.02	---	200.0	H	193.0	13.0	68.20	9.18
5700.00	59.02	---	200.0	V	0.0	13.3	105.20	46.18
5720.00	63.48	---	200.0	H	58.0	13.4	110.80	47.32
5725.00	66.51	---	200.0	H	230.0	13.4	122.20	55.69
High Channel: 5825MHz								
5850.00	60.87	---	150.0	V	249.0	14.0	122.20	61.33
5855.00	59.93	---	150.0	H	357.0	14.2	110.80	50.87
5875.00	60.02	---	150.0	V	198.0	14.2	105.20	45.18
5925.00	60.84	---	150.0	H	334.0	14.3	68.20	7.36

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	58.17	---	200.0	V	79.0	13.0	68.20	10.03
5700.00	59.54	---	200.0	V	215.0	13.3	105.20	45.66
5720.00	63.19	---	150.0	H	211.0	13.4	110.80	47.61
5725.00	71.45	---	200.0	H	218.0	13.4	122.20	50.75
High Channel: 5825MHz								
5850.00	64.47	---	200.0	V	227.0	14.2	122.20	57.73
5855.00	60.61	---	150.0	V	245.0	14.2	110.80	50.19
5875.00	62.59	---	200.0	V	354.0	14.3	105.20	42.61
5925.00	60.64	---	150.0	V	349.0	14.7	68.20	7.56

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5755MHz								
5650.00	58.89	---	200.0	H	302.0	13.0	68.20	9.31
5700.00	61.11	---	150.0	V	158.0	13.3	105.20	44.09
5720.00	74.03	---	200.0	V	254.0	13.4	110.80	36.77
5725.00	70.87	---	200.0	V	235.0	13.4	122.20	51.33
High Channel: 5795MHz								
5850.00	61.11	---	200.0	V	245.0	14.2	122.20	61.09
5855.00	59.99	---	200.0	H	35.0	14.2	110.80	50.81
5875.00	61.34	---	150.0	H	0.0	14.3	105.20	43.86
5925.00	61.83	---	150.0	V	60.0	14.7	68.20	6.37

FCC §15.407(A) & §15.407(E) –EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz band is made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
 - Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - Detector = Peak.
 - Trace mode = max hold.
 - Sweep = auto couple.
 - Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	24.1 °C
Relative Humidity:	50%
ATM Pressure:	101.0 kPa

The testing was performed by Cary Han on 2021-08-14.

Test Result: Compliant

5150-5250 MHz:

Test mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	Low	5180	33.908	17.475
	Middle	5200	34.028	17.475
	High	5240	34.950	17.555
802.11n-HT20	Low	5180	21.002	18.116
	Middle	5200	22.565	18.116
	High	5240	30.461	18.277
802.11n-HT40	Low	5190	60.060	36.874
	High	5230	58.998	36.874

5725-5850MHz:

Test mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	Low	5745	16.593	17.715	≥ 0.5
	Middle	5785	16.513	17.475	≥ 0.5
	High	5825	16.513	17.475	≥ 0.5
802.11n-HT20	Low	5745	17.715	18.357	≥ 0.5
	Middle	5785	17.715	18.196	≥ 0.5
	High	5825	17.796	18.116	≥ 0.5
802.11n-HT40	Low	5755	36.433	36.553	≥ 0.5
	High	5795	36.192	36.433	≥ 0.5

Note: No transmitted signal in the 99% bandwidth extends into the U-NII-2A and U-NII-2C band.

802.11a mode, 5180MHz



Delta 1 [T1] REW 300 kHz RF Att 30 dB
 Ref Lvl 0.03 dB VEW 1 MHz
 30 dBm 34.94989980 MHz SWT 5 ms Unit dBm

11 dB Offset
 -23.67 dBm
 5.22256513 GHz
 0.03 dB
 34.94989980 MHz
 17.55511022 MHz
 -7.27 dBm
 5.23122244 GHz
 -7.08 dBm
 5.24877756 GHz

DL 3.04 dBm
 IMAX
 T1
 T2
 1

Center 5.24 GHz 4 MHz/
 Span 40 MHz

Date: 14.AUG.2021 13:59:28

Delta 1 [T1]

Ref Lvl 0.81 dB

30 dBm 21.00200401 MHz

RBW 300 kHz

SWT 1 ms

RF Att 30 dB

Unit dBm

11 dB Offset

1 [T1] -24.53 dBm

5.16953908 GHz

1 [T1] 0.81 dB

21.00200401 MHz

18.11623246 MHz

OPB

1 [T1] -5.59 dBm

5.17098196 GHz

1 [T1] -5.59 dBm

5.18909820 GHz

D1 1.93 dBm

IMAX

D2 -24.07 dBm

IMIN


Center 5.18 GHz

4 MHz/


Span 40 MHz

Date: 14.AUG.2021 14:01:23

802.11n-HT20 mode, 5200MHz

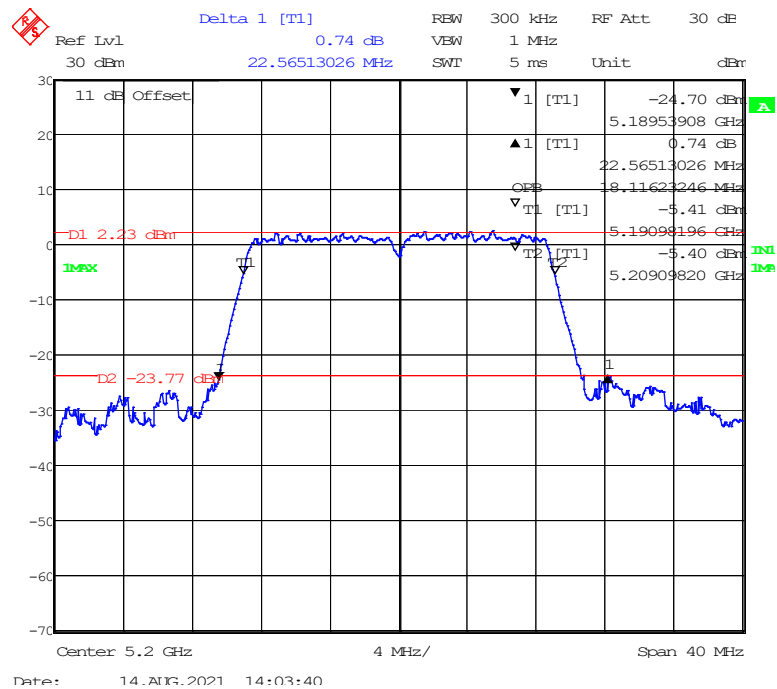

802.11n-HT20 mode, 5240MHz

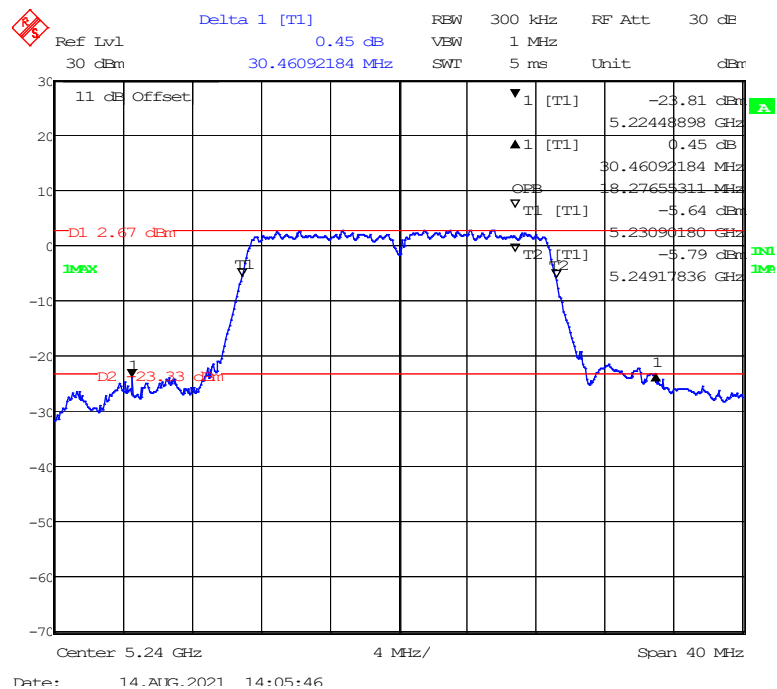

Delta 1 [T1] 0.76 dB

Ref Lvl 30 dBm

60.06012024 MHz

REW 500 kHz RF Att 30 dB

SWT 5 ms Unit dBm

11 dB Offset

▼ 1 [T1] -33.74 dBm

▲ 1 [T1] 0.76 dB

60.06012024 MHz

▼ T1 [T1] -12.73 dBm

▼ T2 [T1] -12.74 dBm

5.15849699 GHz

5.17164329 GHz

5.20851703 GHz

IMR

D1 -6.47 dBm

D2 -32.40 dBm

Center 5.19 GHz

8 MHz/

Span 80 MHz

Date: 14.AUG.2021 14:20:45

Delta 1 [T1] 1.37 dB

Ref Lvl 30 dBm 58.99799599 MHz

REW 500 kHz RF Att 30 dB

VBW 2 MHz

SWT 5 ms Unit dBm

11 dB Offset

▼ 1 [T1] -33.61 dBm

▲ 1 [T1] 1.37 dB

58.99799599 MHz

OFF 36.87374749 MHz

▼ T1 [T1] -11.66 dBm

5.21164329 GHz

▼ T2 [T1] -11.88 dBm

5.24851703 GHz

green

DI -5.73 dBm

p2 -11.78 dBm

Center 5.23 GHz

8 MHz/


Span 80 MHz

Date: 14.AUG.2021 14:18:30


5725-5850 MHz Band



6dB Bandwidth

802.11a mode, 5745MHz

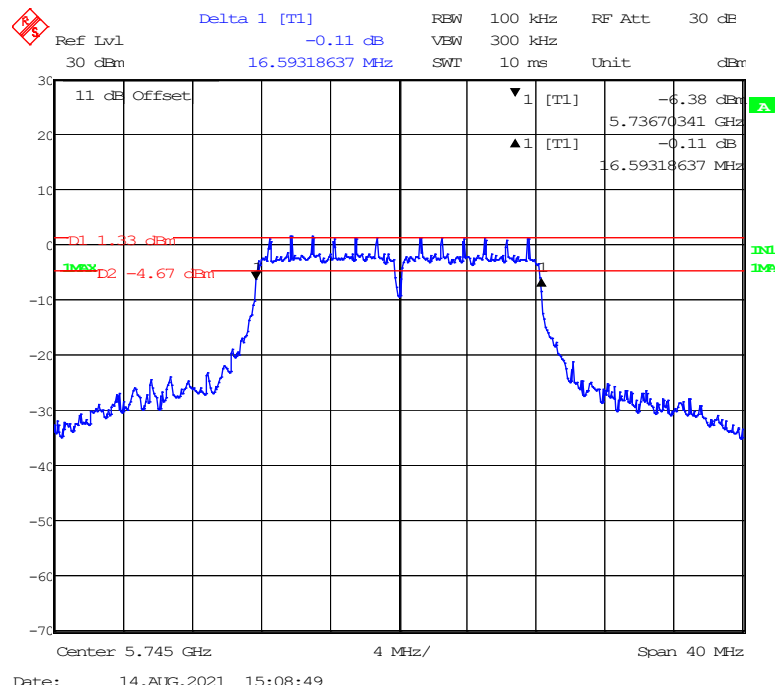


802.11a mode, 5785MHz

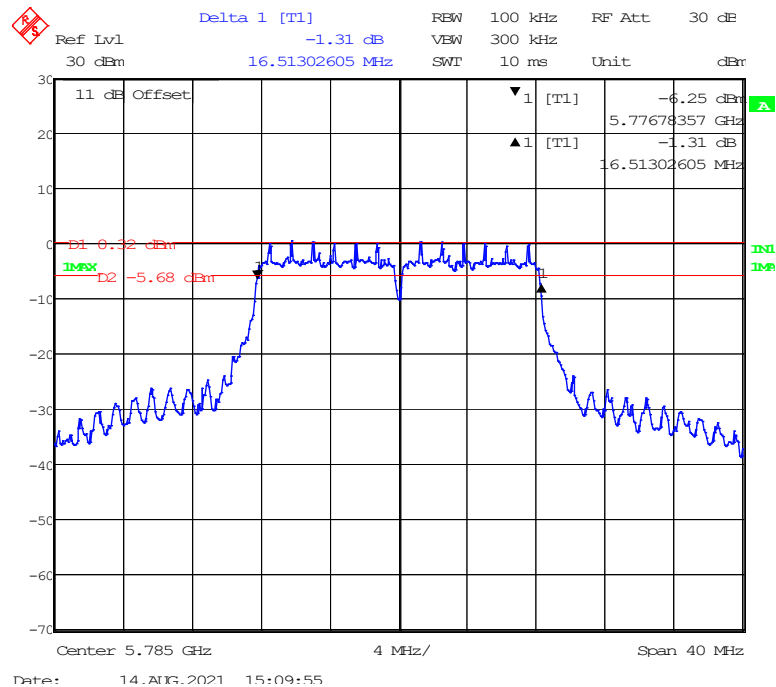


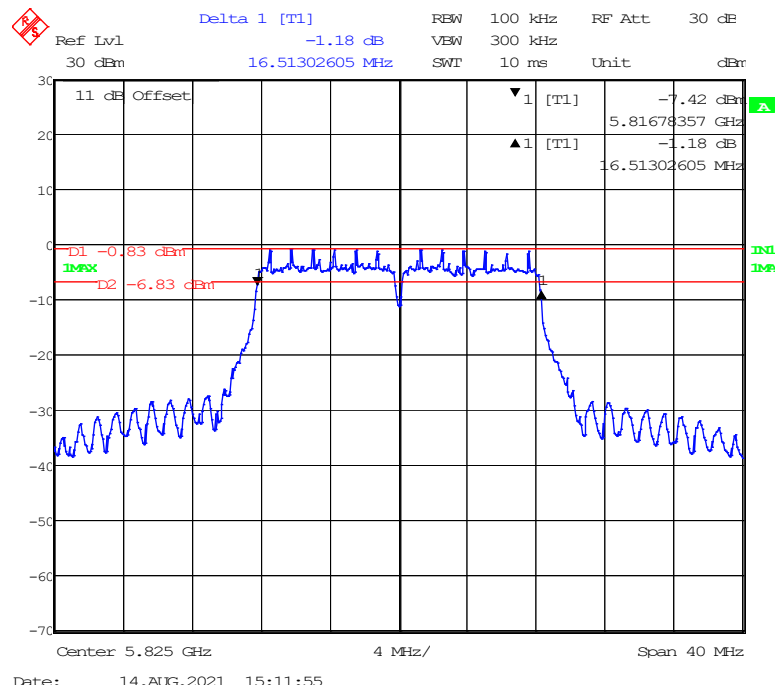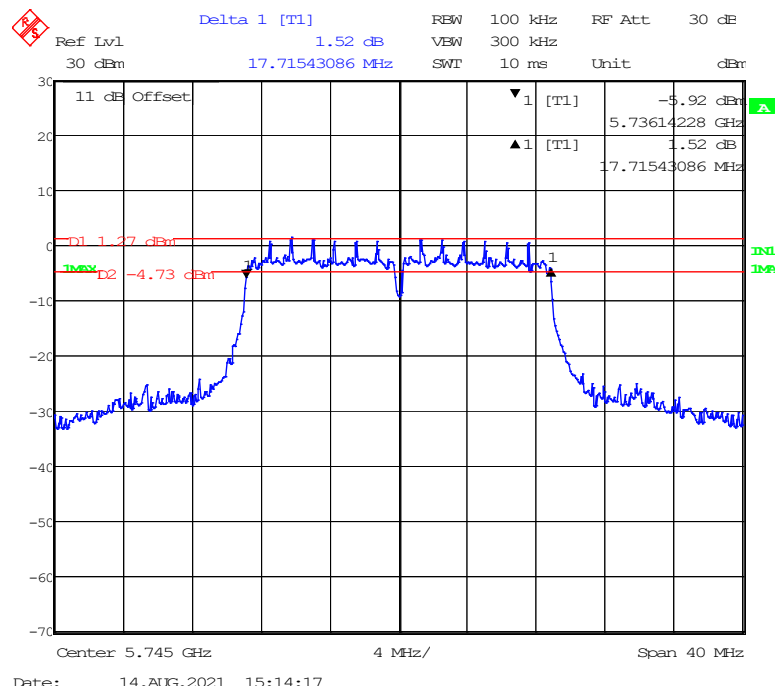802.11a mode, 5825MHz**802.11n-HT20 mode, 5745MHz**


802.11n-HT20 mode, 5785MHz

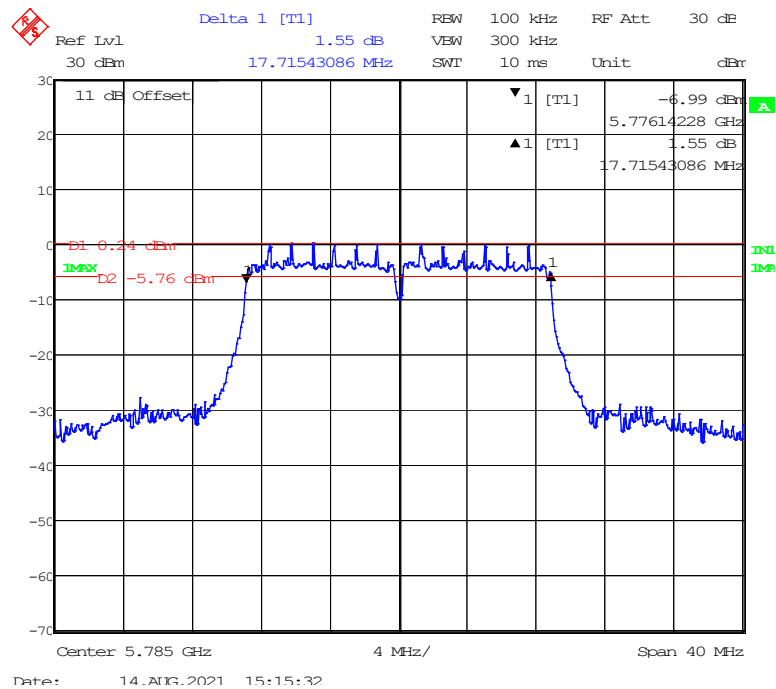


802.11n-HT20 mode, 5825MHz

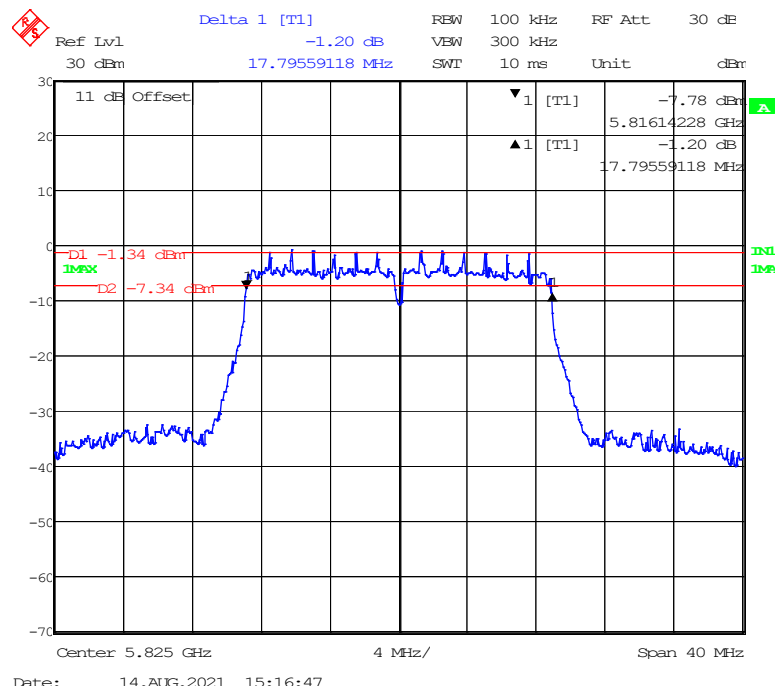

802.11n-HT40 mode, 5755MHz

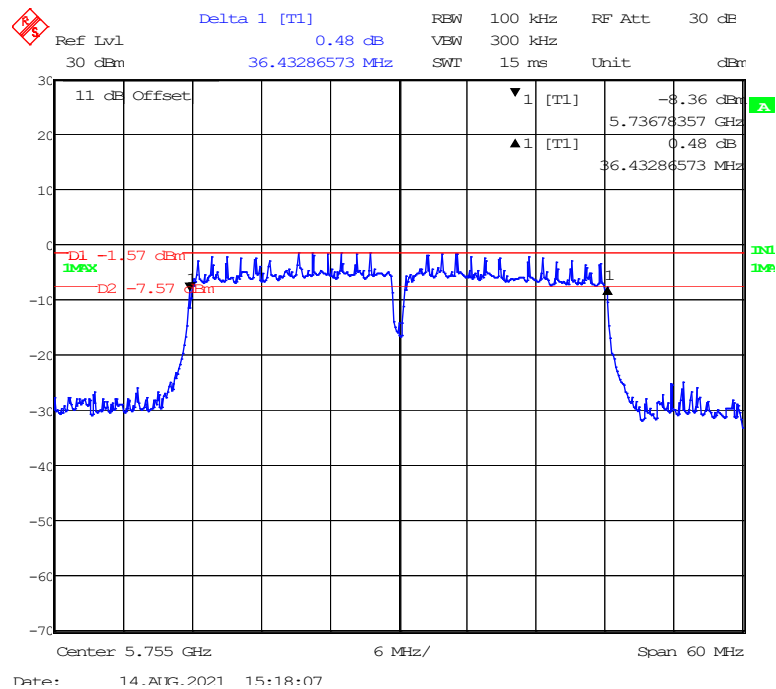


802.11n-HT40 mode, 5795MHz

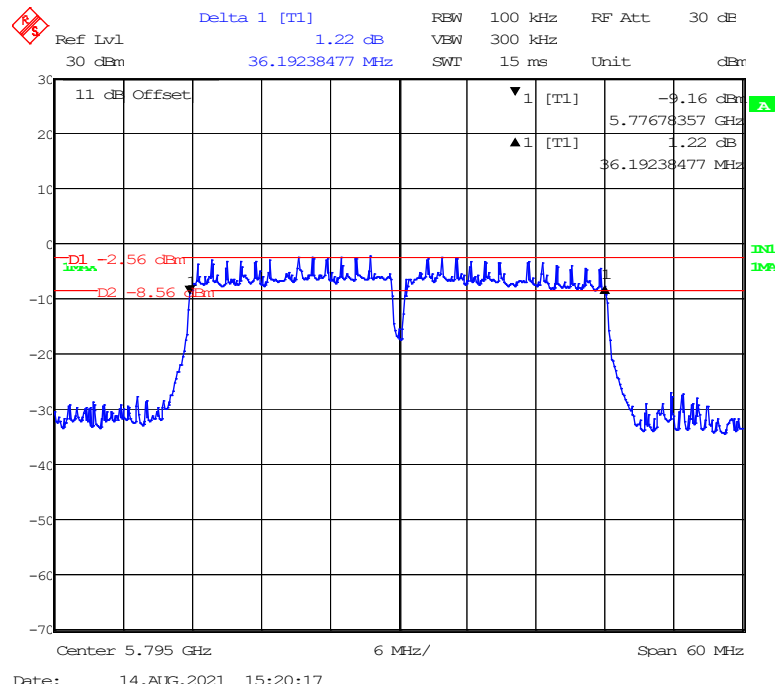


99% Occupied Bandwidth:


802.11a mode, 5745MHz

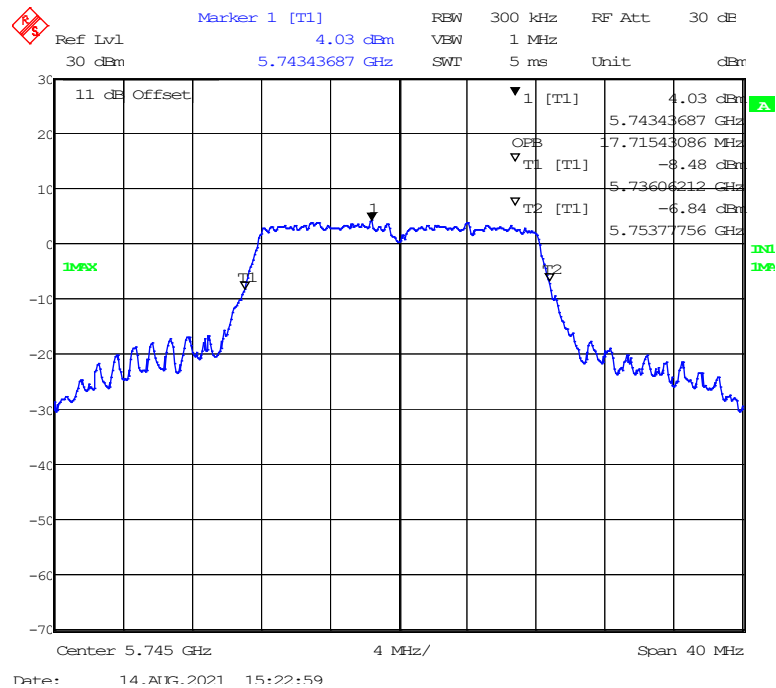


802.11a mode, 5785MHz

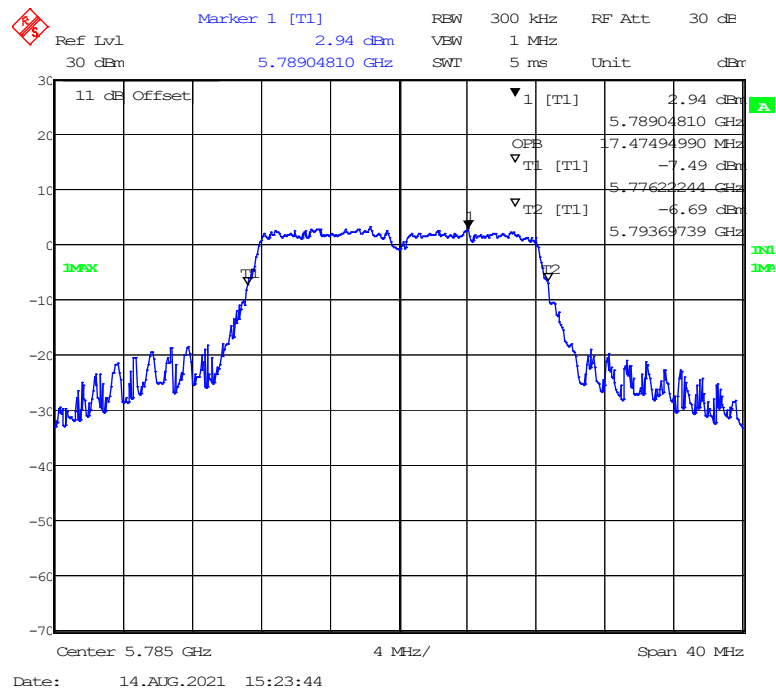


802.11a mode, 5825MHz

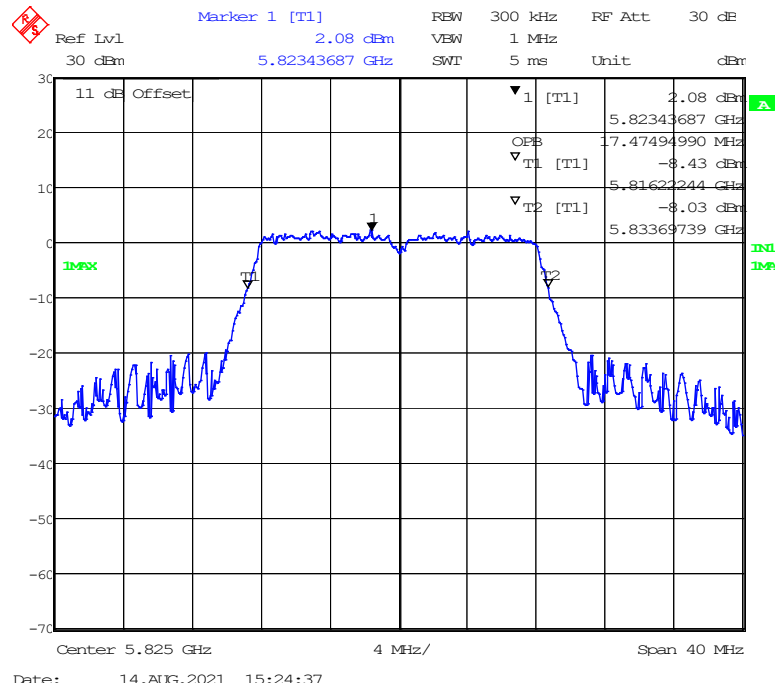


802.11n-HT20 mode, 5745MHz

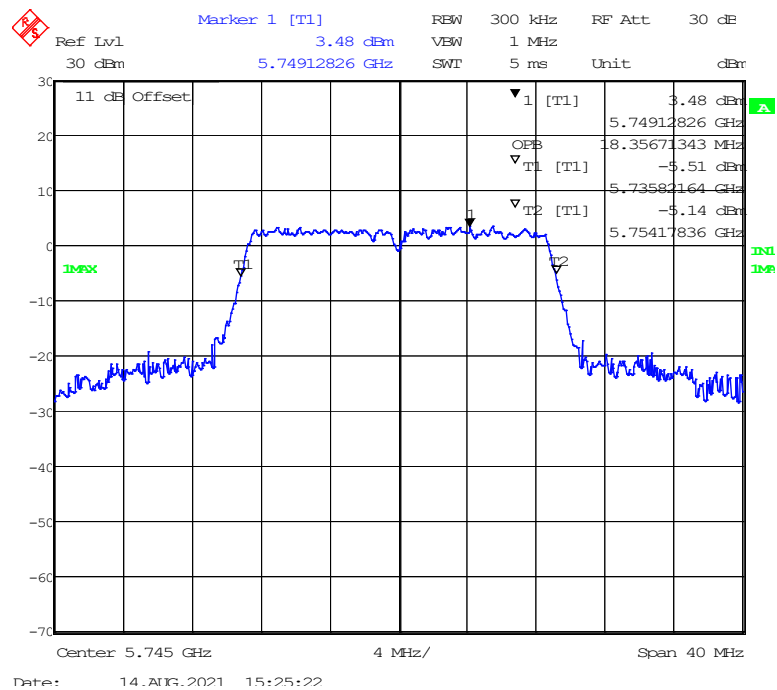


802.11n-HT20 mode, 5785MHz

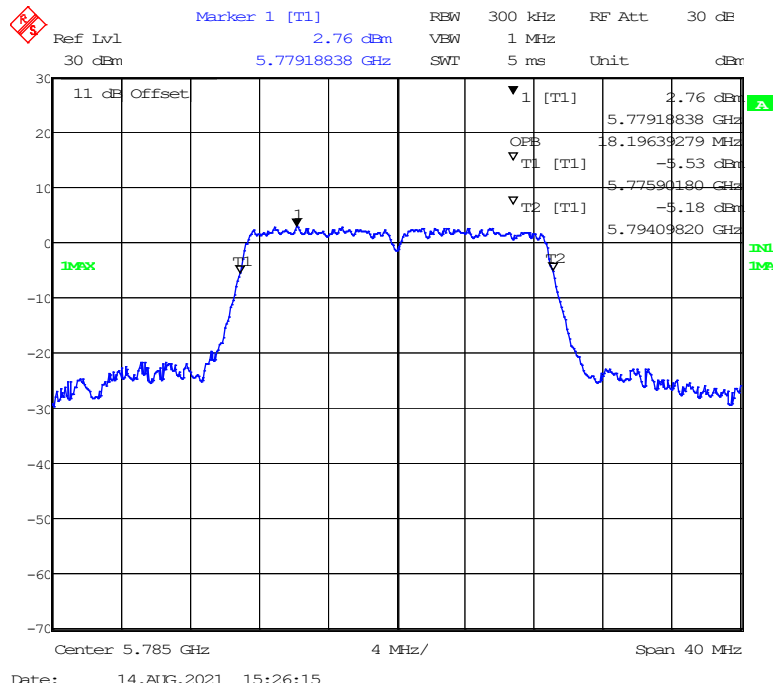


802.11n-HT20 mode, 5825MHz

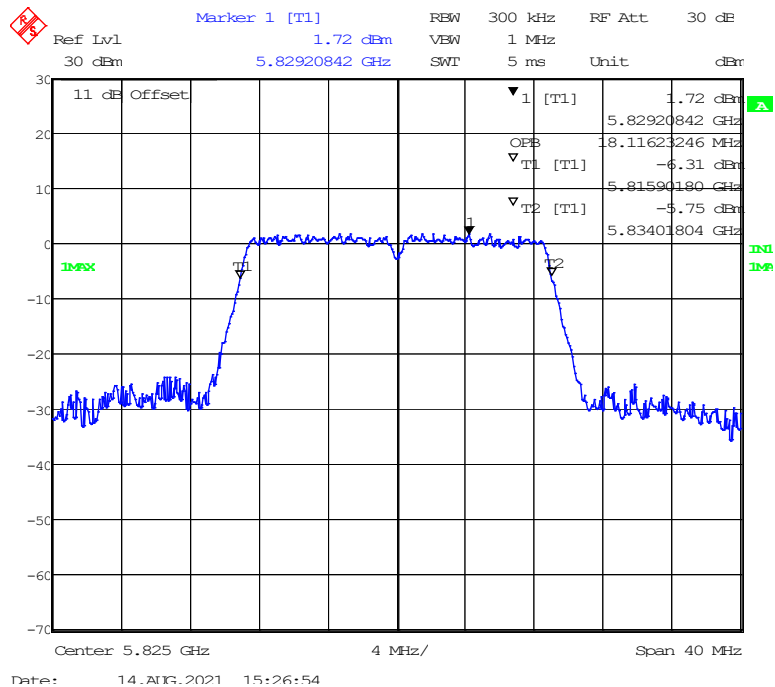

802.11n-HT40 mode, 5755MHz

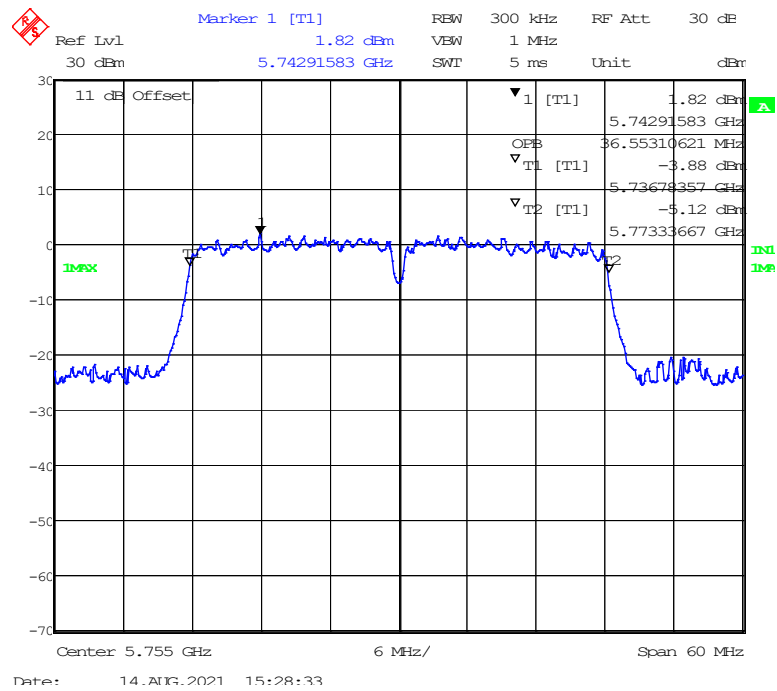

802.11n-HT40 mode, 5795MHz

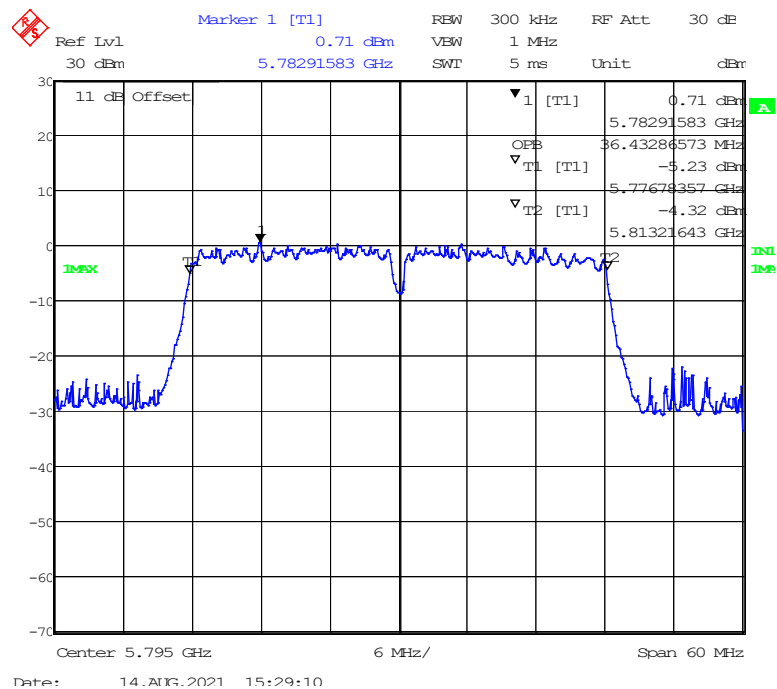

FCC §15.407(A) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

According to §15.407(a)(1)


(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data**Environmental Conditions**

Temperature:	24.1 °C
Relative Humidity:	50%
ATM Pressure:	101.0 kPa

The testing was performed by Cary Han on 2021-08-14.

Test Mode: Transmitting

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a	5150-5250 MHz	5180	10.36	24	PASS
		5200	10.72	24	PASS
		5240	11.28	24	PASS
802.11n-HT20	5150-5250 MHz	5180	10.63	24	PASS
		5200	10.87	24	PASS
		5240	11.45	24	PASS
802.11n-HT40	5150-5250 MHz	5190	6.06	24	PASS
		5230	6.80	24	PASS

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a	5725-5850 MHz	5745	15.83	30	PASS
		5785	14.88	30	PASS
		5825	14.43	30	PASS
802.11n-HT20	5725-5850 MHz	5745	15.64	30	PASS
		5785	14.80	30	PASS
		5825	14.52	30	PASS
802.11n-HT40	5725-5850 MHz	5755	15.66	30	PASS
		5795	15.10	30	PASS

Note: The maximum antenna gain is 3.51 dBi.

FCC §15.407(A)(1)(3) – POWER SPECTRAL DENSITY

Applicable Standard

According to §15.407(a)(1)

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

The measurements are base on FCC KDB 789033 D02 General UNII Test Proceidyres New Rules v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices section F: Maximum power spectral density (PPSD)

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	50%
ATM Pressure:	101.0 kPa

The testing was performed by Cary Han on 2021-08-14.

Test Mode: Transmitting



5150MHz-5250MHz:



Mode	Channel	Frequency (MHz)	PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	Low	5180	1.06	11	PASS
	Middle	5200	1.09	11	PASS
	High	5240	1.71	11	PASS
802.11n-HT20	Low	5180	0.81	11	PASS
	Middle	5200	1.09	11	PASS
	High	5240	1.43	11	PASS
802.11n-HT40	Low	5190	-5.68	11	PASS
	High	5230	-4.99	11	PASS



5725MHz-5850MHz:



Mode	Channel	Frequency (MHz)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11a	Low	5745	1.35	30	PASS
	Middle	5785	0.45	30	PASS
	High	5825	-0.73	30	PASS
802.11n-HT20	Low	5745	1.21	30	PASS
	Middle	5785	0.64	30	PASS
	High	5825	-0.88	30	PASS
802.11n-HT40	Low	5755	-1.17	30	PASS
	High	5795	-2.30	30	PASS



Note: The maximum antenna gain is 3.51 dBi.

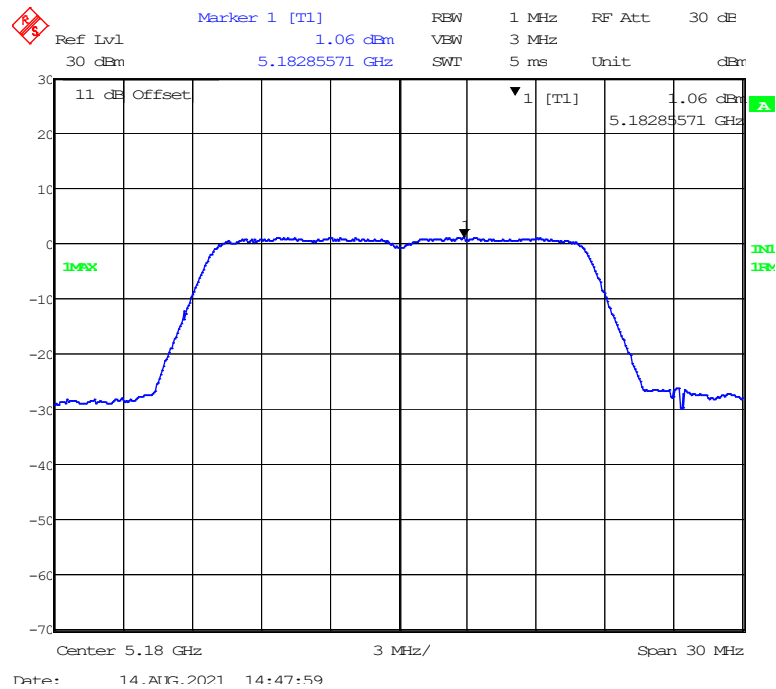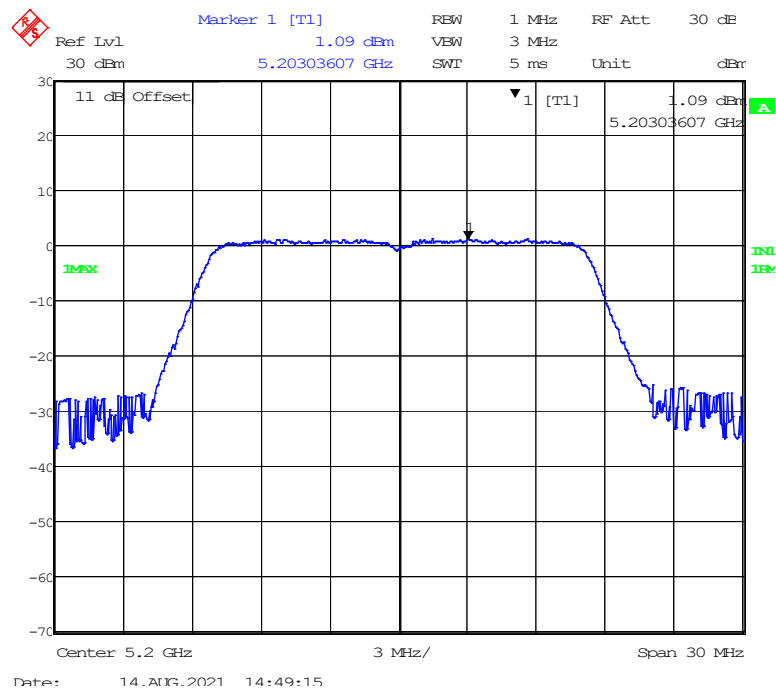5150MHz-5250MHz Band:**802.11a mode, Power spectral density-5180MHz****802.11a mode, Power spectral density-5200MHz**

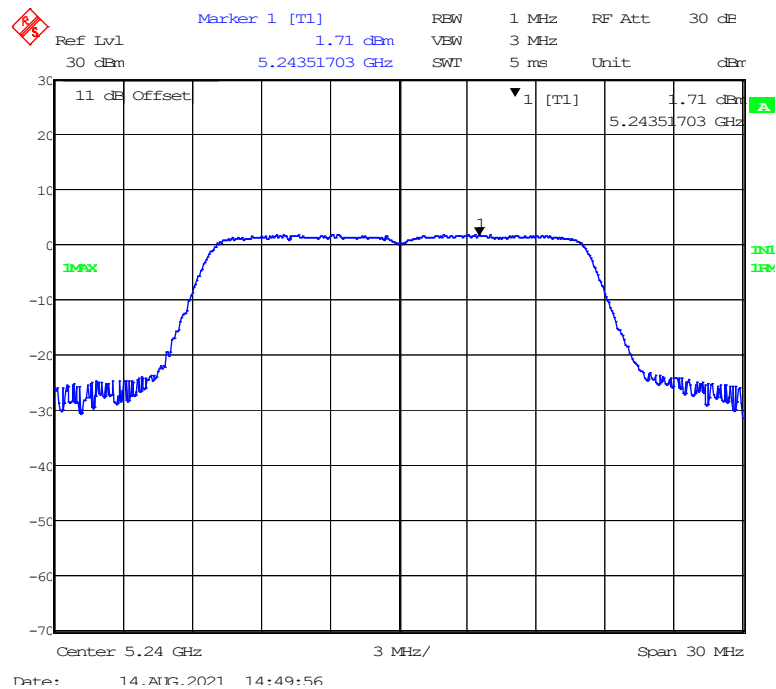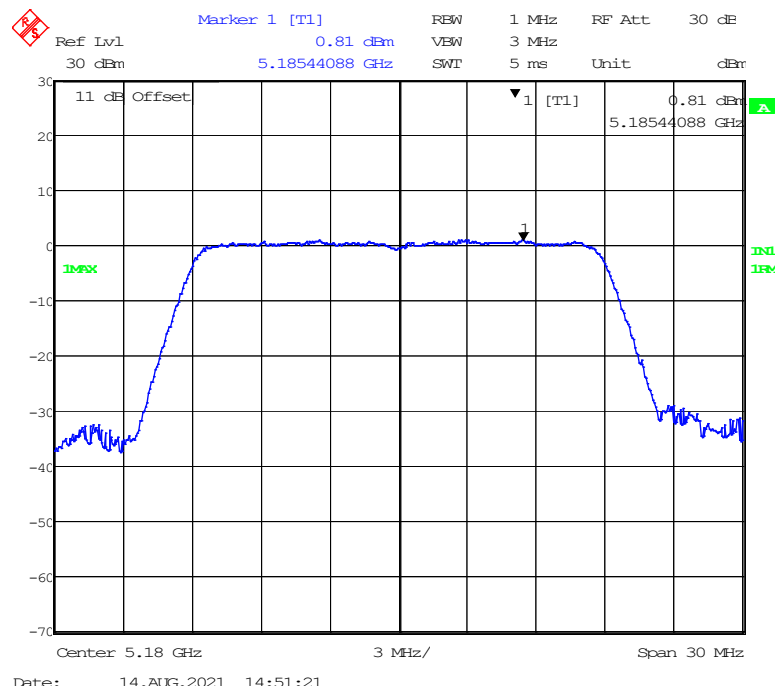802.11a mode, Power spectral density-5240MHz**802.11n-HT20 mode, Power spectral density-5180MHz**

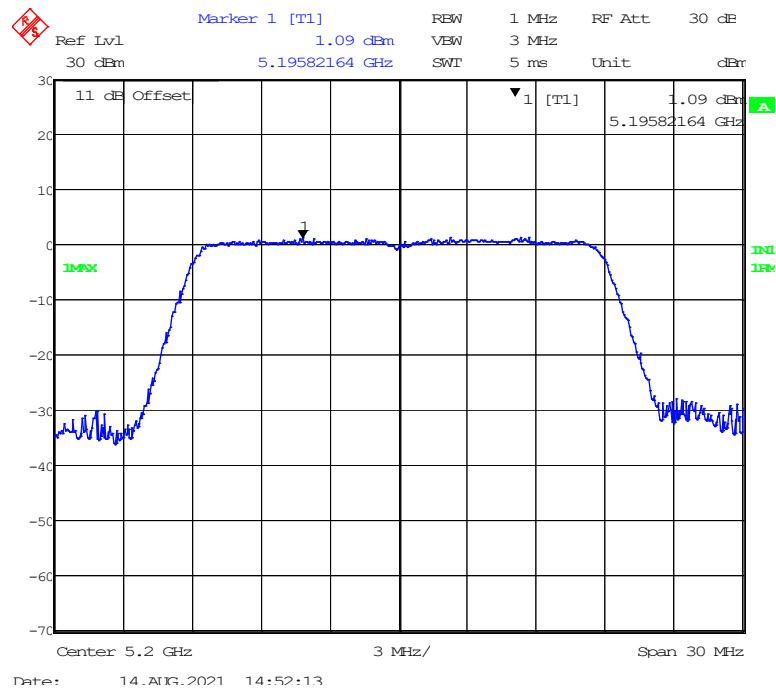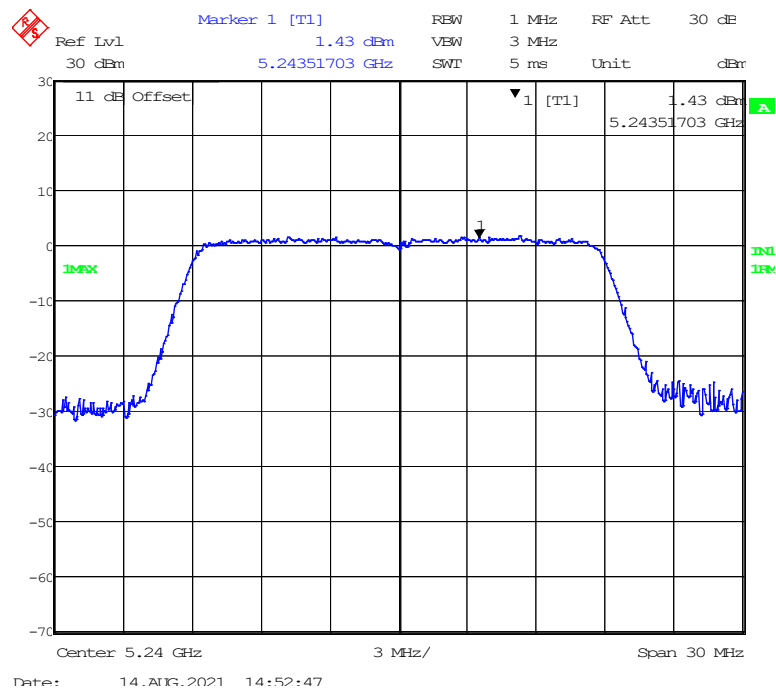802.11n-HT20 mode, Power spectral density-5200MHz**802.11n-HT20 mode, Power spectral density-5240MHz**

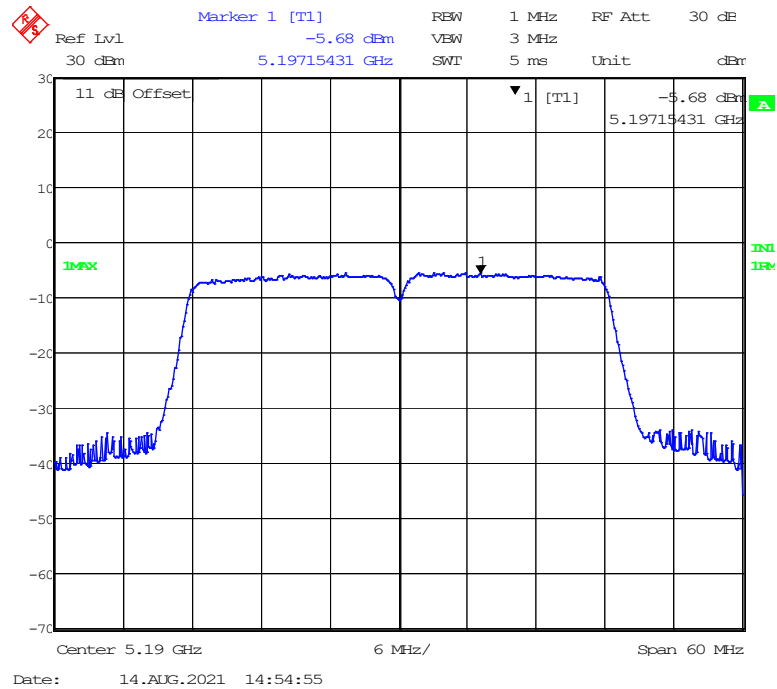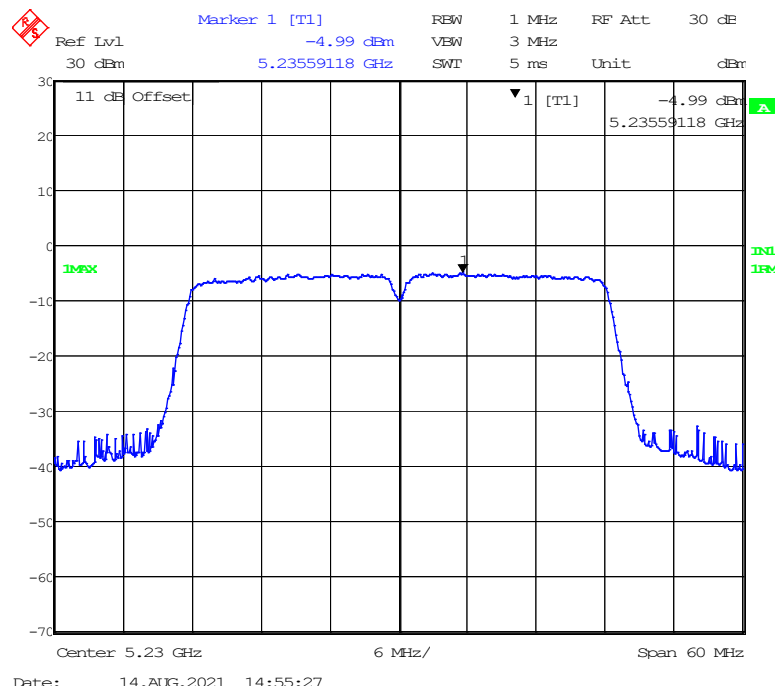802.11n-HT40 mode, Power spectral density-5190MHz**802.11n-HT40 mode, Power spectral density-5230MHz**

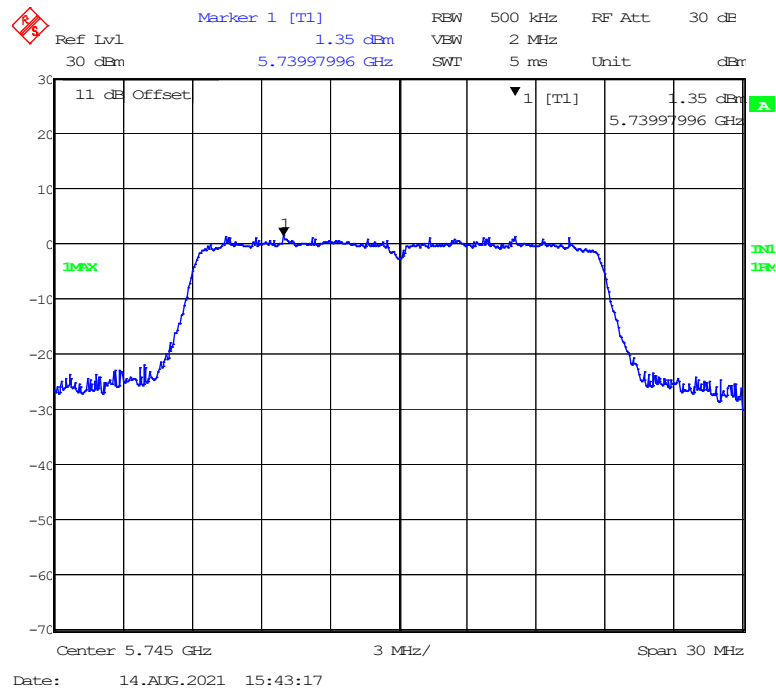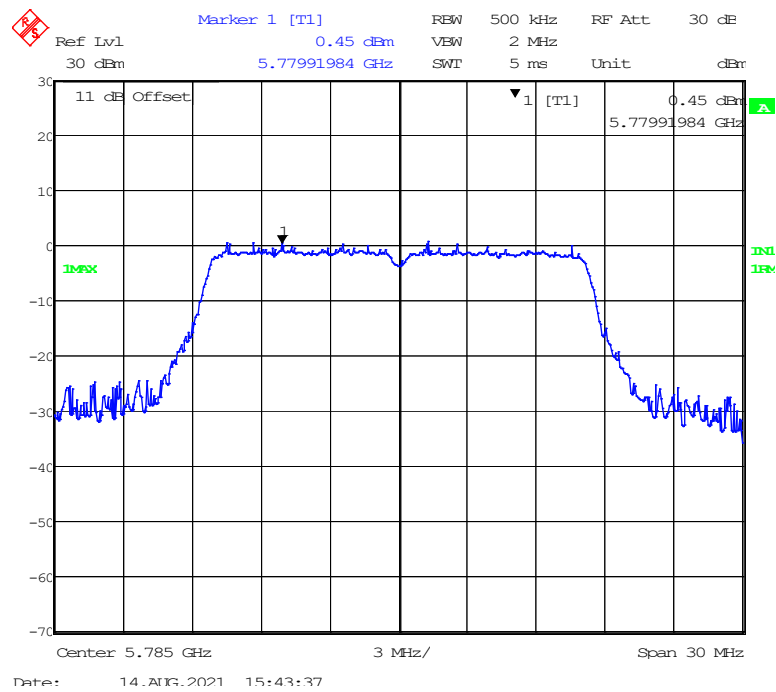5725MHz-5850 MHz Band:**802.11a mode, Power spectral density-5745MHz****802.11a mode, Power spectral density-5785MHz**

Ref Lvl 30 dBm

Marker 1 [T1] -0.73 dBm 5.82635271 GHz

REW 500 kHz RF Att 30 dB

VBW 2 MHz

SWT 5 ms Unit dBm

11 dB Offset

1 [T1] -0.73 dBm 5.82635271 GHz



IMRFX



INI IEM

Center 5.825 GHz 3 MHz/ Span 30 MHz

Date: 14.AUG.2021 15:44:18

REF 1
 Ref Lvl 30 dBm
 Marker 1 [T1] 1.21 dBm
 5.73751503 GHz
 RES 500 kHz
 VSW 2 MHz
 SWI 5 ms
 RF Att 30 dB
 Unit dBm
 11 dB Offset
 1 [T1]
 1.21 dBm
 5.73751503 GHz
 IMAX
 IMIN
 Center 5.745 GHz
 3 MHz/
 Span 30 MHz
 Date: 14.AUG.2021 15:44:53

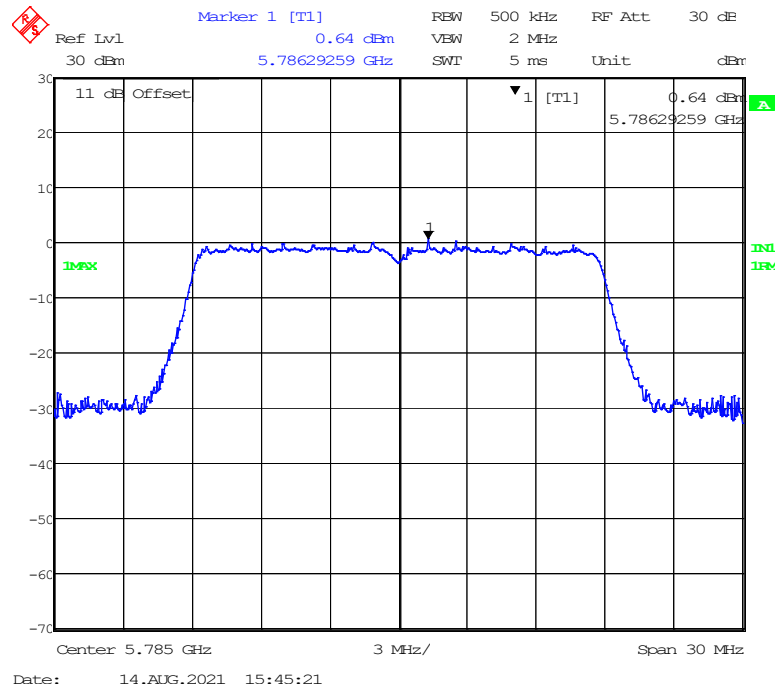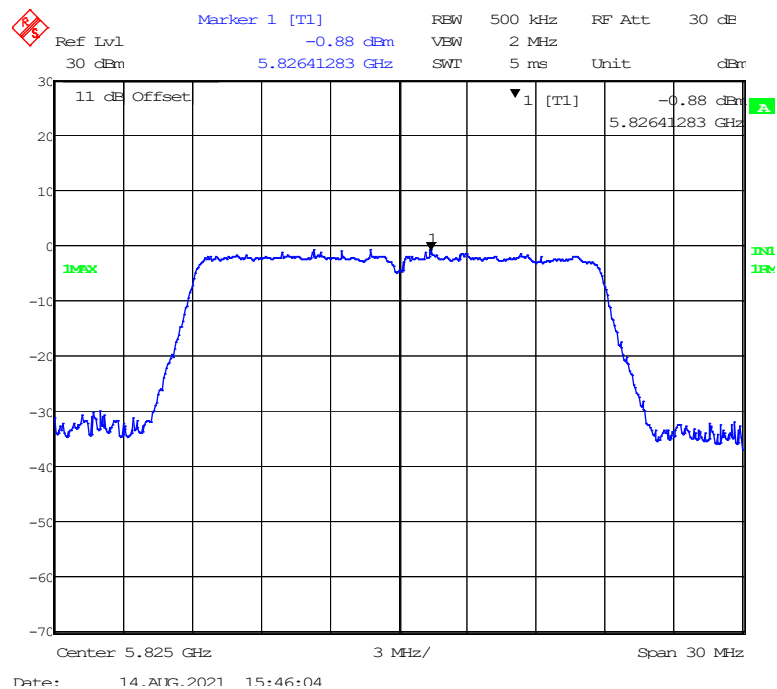802.11n-HT20 mode, Power spectral density-5785MHz**802.11n-HT20 mode, Power spectral density-5825MHz**

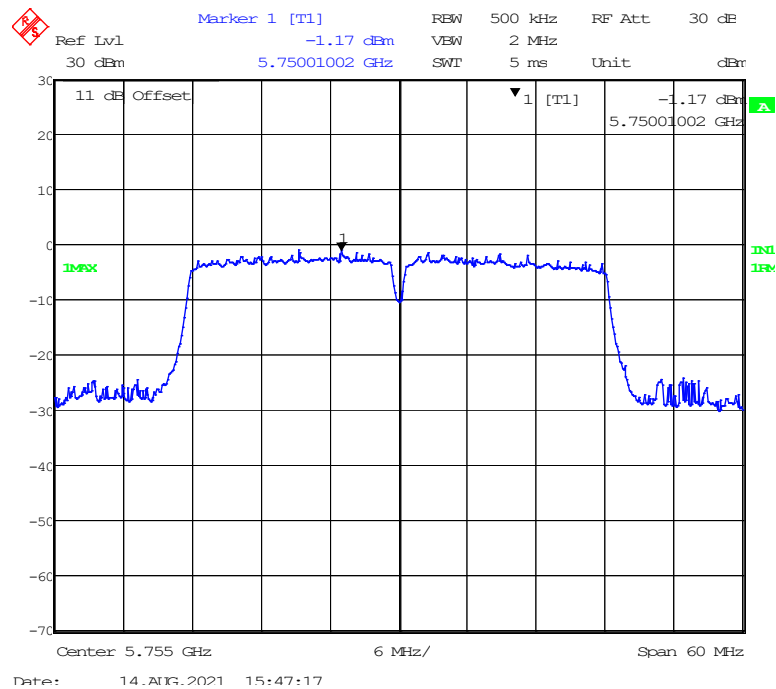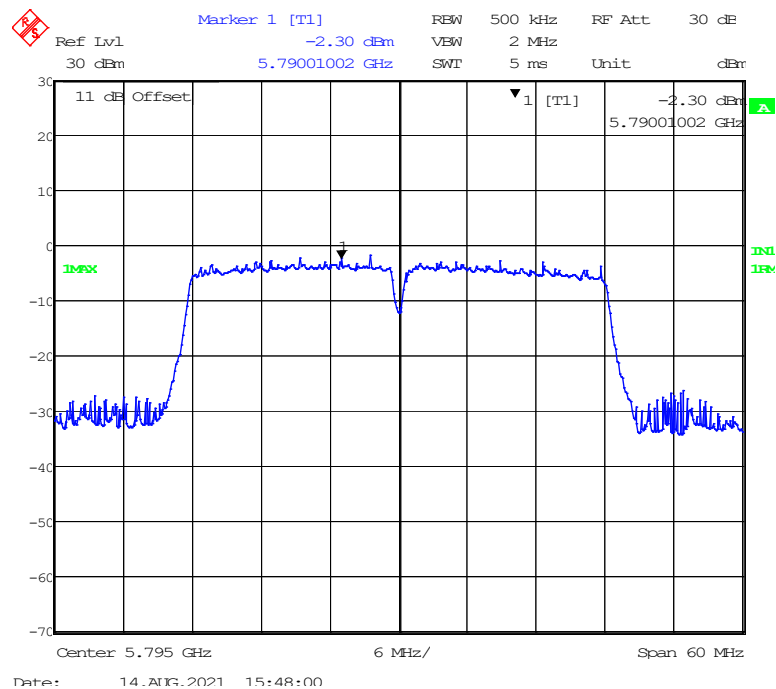802.11n-HT40 mode, Power spectral density-5755MHz**802.11n-HT40 mode, Power spectral density-5795MHz**

Declarations

- 1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.
- 2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
- 3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
- 5: This report cannot be reproduced except in full, without prior written approval of the Company.
- 6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******