

Test Report

Report Number:

F145298E5

Applicant:

u-blox Malmö AB

Manufacturer:

u-blox Malmö AB

Equipment under Test (EUT):

ODIN-W161



Laboratory accredited by
Deutsche Akkreditierungsstelle GmbH (DAkkS)
in compliance with DIN EN ISO/IEC 17025
under the Reg. No. D-PL-17186-01-02,
FCC Test site registration number 90877 and
Industry Canada Test site registration IC3469A-1



REFERENCES

- [1] **ANSI C63.10-2013** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15 (December 2014)** Radio Frequency Devices
- [3] **Publication Number 789033 (June 2014)** UNII Meas Guidelines v01
- [4] **RSS-210 Issue 8 (December 2010)** Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
- [5] **RSS-Gen Issue 4 (November 2014)** General Requirements for Compliance of Radio Apparatus

TEST RESULT

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test.

The complete test results are presented in the following.

| | | | |
|----------------------|---------------------|--|-------------|
| Test engineer: | Wolfgang KASALOWSKY |  | 8 July 2015 |
| | Name | Signature | Date |
| Authorized reviewer: | Bernd STEINER |  | 8 July 2015 |
| | Name | Signature | Date |

RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

| Contents: | Page |
|---|-------------|
| 1 IDENTIFICATION | 5 |
| 1.1 Applicant..... | 5 |
| 1.2 Manufacturer..... | 5 |
| 1.3 Test laboratory..... | 5 |
| 1.4 EUT (Equipment under Test)..... | 6 |
| 1.5 Dates..... | 7 |
| 2 OPERATIONAL STATES..... | 8 |
| 3 ADDITIONAL INFORMATION..... | 11 |
| 4 OVERVIEW | 12 |
| 5 TEST RESULTS | 13 |
| 5.1 Maximum conducted output power | 13 |
| 5.1.1 Method of measurement..... | 13 |
| 5.1.2 Test results | 14 |
| 5.2 Emission Bandwidth..... | 15 |
| 5.2.1 Method of measurement..... | 15 |
| 5.2.2 Test result | 15 |
| 5.3 Minimum Emission Bandwidth for the band 5.725 – 5.850 GHz | 17 |
| 5.3.1 Method of measurement..... | 17 |
| 5.3.2 Test result | 18 |
| 5.4 Maximum Power Spectral Density | 19 |
| 5.4.1 Method of measurement..... | 19 |
| 5.4.2 Test result | 20 |
| 5.4.3 Method of measurement for the band 5.725 – 5.85 GHz | 22 |
| 5.4.4 Test result | 22 |
| 5.5 Frequency Stability..... | 24 |
| 5.5.1 Method of measurement..... | 24 |
| 5.5.2 Test result | 25 |
| 5.6 Band-edge compliance..... | 26 |
| 5.6.1 Method of measurement (band edges next to unrestricted bands) | 26 |
| 5.6.2 Test result (band edges next to unrestricted bands (radiated)) | 27 |
| 5.6.2.1 Results at the lower and upper end of the 5.47 – 5.725 GHz band..... | 27 |
| 5.6.2.2 Results at the lower and upper end of the 5.725 – 5.85 GHz band..... | 30 |
| 5.6.3 Method of measurement (band edges next to restricted bands (radiated)) | 33 |
| 5.6.4 Test result (band edges next to restricted bands (radiated))..... | 33 |
| 5.7 Maximum unwanted emissions..... | 37 |
| 5.7.1 Method of measurement (radiated emissions) | 37 |
| 5.7.2 Test results (radiated emissions) | 44 |
| 5.7.2.1 Preliminary radiated emission measurement..... | 44 |
| 5.7.2.1.1 Results for the 5.15 - 5.25 GHz, 5.25 – 5.35 GHz and 5.47 - 5.725 GHz bands | 47 |

| | | |
|-----------|--|----|
| 5.7.2.1.2 | Results for the 5.725 – 5.85 GHz band..... | 50 |
| 5.7.2.2 | Final radiated emission measurement (9 kHz to 1 GHz)..... | 53 |
| 5.7.2.3 | Final radiated emission measurement (1 GHz to 40 GHz)..... | 53 |
| 5.8 | Conducted emissions on power supply lines (150 kHz to 30 MHz)..... | 60 |
| 6 | TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS..... | 63 |
| 7 | REPORT HISTORY | 65 |
| 8 | LIST OF ANNEXES | 65 |

1 IDENTIFICATION

1.1 Applicant

| | |
|--|---|
| Name: | u-blox Malmö AB |
| Address: | Östra Varvsgatan 4, 5 tr, SE-211 75 Malmö |
| Country: | Sweden |
| Name for contact purposes: | Mr. Mats ANDERSSON |
| Phone: | + 46 40 63 07 100 |
| Fax: | + 46 40 23 71 37 |
| eMail Address: | mats.andersson@u-blox.com |
| Applicant represented during the test by the following person: | None |

1.2 Manufacturer

| | |
|--|---|
| Name: | u-blox Malmö AB |
| Address: | Östra Varvsgatan 4, 5 tr, SE-211 75 Malmö |
| Country: | Sweden |
| Name for contact purposes: | Mr. Mats ANDERSSON |
| Phone: | + 46 40 63 07 100 |
| Fax: | + 46 40 23 71 37 |
| eMail Address: | mats.andersson@u-blox.com |
| Applicant represented during the test by the following person: | None |

1.3 Test laboratory

The tests were carried out at: **PHOENIX TESTLAB GmbH**
Königswinkel 10
32825 Blomberg
Germany

accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS) in compliance with DIN EN ISO/IEC 17025 under the Reg. No. D-PL-17186-01-02, FCC Test site registration number 90877 and Industry Canada Test site registration IC3469A-1.

1.4 EUT (Equipment under Test)

| | |
|---------------------|--|
| Test object: * | WLAN module |
| Type: * | ODIN-W161 |
| FCC ID: * | PVH1953 |
| IC: * | 5325A-1953 |
| Serial number: * | WLAN: 29200626020, 292006260218, 292006259621, 292006259601, 292006260221 |
| PCB identifier: * | 0953-03 |
| Hardware version: * | 3.1 |
| Software version: * | cB-2282(wlan_pcti_release_1.0.13605) |

| | | | | | | |
|--|---|--------|--------------------|----------|--------------------|--------|
| Fulfills WLAN specification: * | IEEE, 802.11b, 802.11g, 802.11n, 802.11a | | | | | |
| Antenna type: * | Integral antenna | | | | | |
| | Fractus FR05-S1-NO-1-003 | | | | | |
| Antenna gain: * | 3 dBi | | | | | |
| Antenna connector: * | None (temporary UFL for test purposes only) | | | | | |
| Power supply - EUT | 3.3 V DC | | | | | |
| Power supply Host | U _{nom} = | 5 V DC | U _{min} = | 3.6 V DC | U _{max} = | 6 V DC |
| Type of modulation: * | 802.11a: OFDM 802.11b: CCK, DQPSK, DBPSK 802.11g: OFDM 802.11n: OFDM | | | | | |
| Operating frequency range:* | 2412 MHz to 2462 MHz, 5180 MHz to 5240 MHz, 5260 MHz to 5320 MHz, 5500 MHz to 5700 MHz, 5745 to 5825 MHz | | | | | |
| Number of channels: * | 32 | | | | | |
| Temperature range: * | -40 °C to +85 °C | | | | | |
| Lowest / highest internal clock frequency: * | 32768 Hz / 26.000 MHz | | | | | |

* declared by the applicant.

| | | | | |
|------------|-----|----------|-----|----------|
| Channel 01 | RX: | 2412 MHz | TX: | 2412 MHz |
| Channel 02 | RX: | 2417 MHz | TX: | 2417 MHz |
| Channel 03 | RX: | 2422 MHz | TX: | 2422 MHz |
| Channel 04 | RX: | 2427 MHz | TX: | 2427 MHz |
| Channel 05 | RX: | 2432 MHz | TX: | 2432 MHz |
| Channel 06 | RX: | 2437 MHz | TX: | 2437 MHz |
| Channel 07 | RX: | 2442 MHz | TX: | 2442 MHz |
| Channel 08 | RX: | 2447 MHz | TX: | 2447 MHz |
| Channel 09 | RX: | 2452 MHz | TX: | 2452 MHz |
| Channel 10 | RX: | 2457 MHz | TX: | 2457 MHz |
| Channel 11 | RX: | 2462 MHz | TX: | 2462 MHz |

| | | | | |
|------------|-----|----------|-----|----------|
| Channel 36 | RX: | 5180 MHz | TX: | 5180 MHz |
| Channel 40 | RX: | 5200 MHz | TX: | 5200 MHz |
| Channel 44 | RX: | 5220 MHz | TX: | 5220 MHz |
| Channel 48 | RX: | 5240 MHz | TX: | 5240 MHz |

| | | | | |
|------------|-----|----------|-----|----------|
| Channel 52 | RX: | 5260 MHz | TX: | 5260 MHz |
| Channel 56 | RX: | 5280 MHz | TX: | 5280 MHz |
| Channel 60 | RX: | 5300 MHz | TX: | 5300 MHz |
| Channel 64 | RX: | 5320 MHz | TX: | 5320 MHz |

| | | | | |
|-------------|-----|----------|-----|----------|
| Channel 100 | RX: | 5500 MHz | TX: | 5500 MHz |
| Channel 104 | RX: | 5520 MHz | TX: | 5520 MHz |
| Channel 108 | RX: | 5540 MHz | TX: | 5540 MHz |
| Channel 112 | RX: | 5560 MHz | TX: | 5560 MHz |
| Channel 116 | RX: | 5580 MHz | TX: | 5580 MHz |

| | | | | |
|-------------|-----|----------|-----|----------|
| Channel 132 | RX: | 5660 MHz | TX: | 5660 MHz |
| Channel 136 | RX: | 5680 MHz | TX: | 5680 MHz |
| Channel 140 | RX: | 5700 MHz | TX: | 5700 MHz |

| | | | | |
|-------------|-----|----------|-----|----------|
| Channel 149 | RX: | 5745 MHz | TX: | 5745 MHz |
| Channel 153 | RX: | 5765 MHz | TX: | 5765 MHz |
| Channel 157 | RX: | 5785 MHz | TX: | 5785 MHz |
| Channel 161 | RX: | 5805 MHz | TX: | 5805 MHz |
| Channel 165 | RX: | 5825 MHz | TX: | 5825 MHz |

The following external I/O cables were used:

| Identification | Length |
|----------------|--------|
| DC power cable | 2 m * |
| RS232 cable | 2 m * |

*: Length during the test if not other specified.

1.5 Dates

| | |
|---------------------------------|-------------------|
| Date of receipt of test sample: | 03 September 2014 |
| Start of test: | 10 September 2014 |
| End of test: | 19 September 2014 |

2 OPERATIONAL STATES

The equipment under test (EUT) is a WLAN dual band and Bluetooth dual mode module soldered on to a carrier board. The WLAN / Bluetooth module is equipped with a chip antenna on the reference design. A RS232 connector and the power supply connector are located at the carrier board.

The tests were carried out with an unmodified sample of the EUT. Some tests were carried out conducted at the temporary UFL connector. Other tests were carried out radiated with the chip antenna on the reference design.

The carrier board was connected via a RS232 connection to a laptop computer. With a test software running on the laptop the operation mode as shown in the table below could be chosen.

During the tests, the test samples were powered with 5 V via the power supply connection of the carrier board from a laboratory power supply.

The following operation modes were identified as worst case condition and used during the tests:

| Operation mode | Description of the operation mode | WLAN mode | WLAN channel | Modulation | Data rate / Mbps |
|----------------|---|-----------|--------------|------------|------------------|
| 1 | Continuous transmitting on 5180 MHz | a | 36 | OFDM | 6 MBit/s |
| 2 | Continuous transmitting on 5200 MHz | a | 40 | OFDM | 6 MBit/s |
| 3 | Continuous transmitting on 5240 MHz | a | 48 | OFDM | 6 MBit/s |
| 4 | Continuous transmitting on 5260 MHz | a | 52 | OFDM | 6 MBit/s |
| 5 | Continuous transmitting on 5300 MHz | a | 60 | OFDM | 6 MBit/s |
| 6 | Continuous transmitting on 5320 MHz | a | 64 | OFDM | 6 MBit/s |
| 7 | Continuous transmitting on 5500 MHz | a | 100 | OFDM | 6 MBit/s |
| 8 | Continuous transmitting on 5580 MHz | a | 116 | OFDM | 6 MBit/s |
| 9 | Continuous transmitting on 5700 MHz | a | 140 | OFDM | 6 MBit/s |
| 10 | Continuous transmitting on 5745 MHz | a | 149 | OFDM | 6 MBit/s |
| 11 | Continuous transmitting on 5785 MHz | a | 157 | OFDM | 6 MBit/s |
| 12 | Continuous transmitting on 5825 MHz | a | 165 | OFDM | 6 MBit/s |
| 13 | Continuous transmitting on 5180 MHz | n20 | 36 | OFDM | 6.5 MBit/s |
| 14 | Continuous transmitting on 5200 MHz | n20 | 40 | OFDM | 6.5 MBit/s |
| 15 | Continuous transmitting on 5240 MHz | n20 | 48 | OFDM | 6.5 MBit/s |
| 16 | Continuous transmitting on 5260 MHz | n20 | 52 | OFDM | 6.5 MBit/s |
| 17 | Continuous transmitting on 5300 MHz | n20 | 60 | OFDM | 6.5 MBit/s |
| 18 | Continuous transmitting on 5320 MHz | n20 | 64 | OFDM | 6.5 MBit/s |
| 19 | Continuous transmitting on 5500 MHz | n20 | 100 | OFDM | 6.5 MBit/s |
| 20 | Continuous transmitting on 5580 MHz | n20 | 116 | OFDM | 6.5 MBit/s |
| 21 | Continuous transmitting on 5700 MHz | n20 | 140 | OFDM | 6.5 MBit/s |
| 22 | Continuous transmitting on 5745 MHz | n20 | 149 | OFDM | 6.5 MBit/s |
| 23 | Continuous transmitting on 5785 MHz | n20 | 157 | OFDM | 6.5 MBit/s |
| 24 | Continuous transmitting on 5825 MHz | n20 | 165 | OFDM | 6.5 MBit/s |
| 25 | Normal operation Mode with automatic channel selection from Access Points | - | - | OFDM | - |

Physical boundaries of the ODIN-W161

and

chip antenna on the reference design:

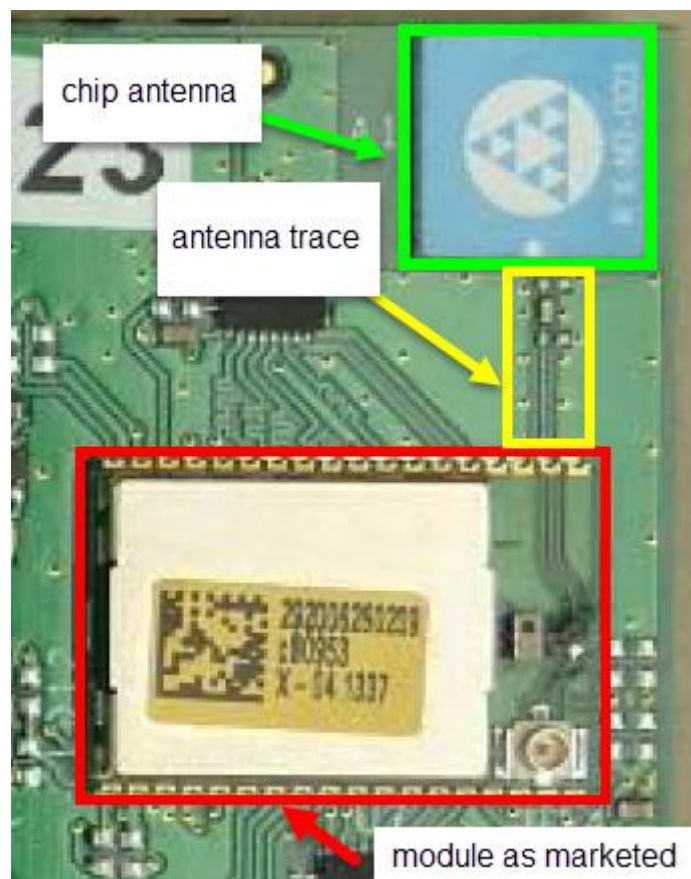
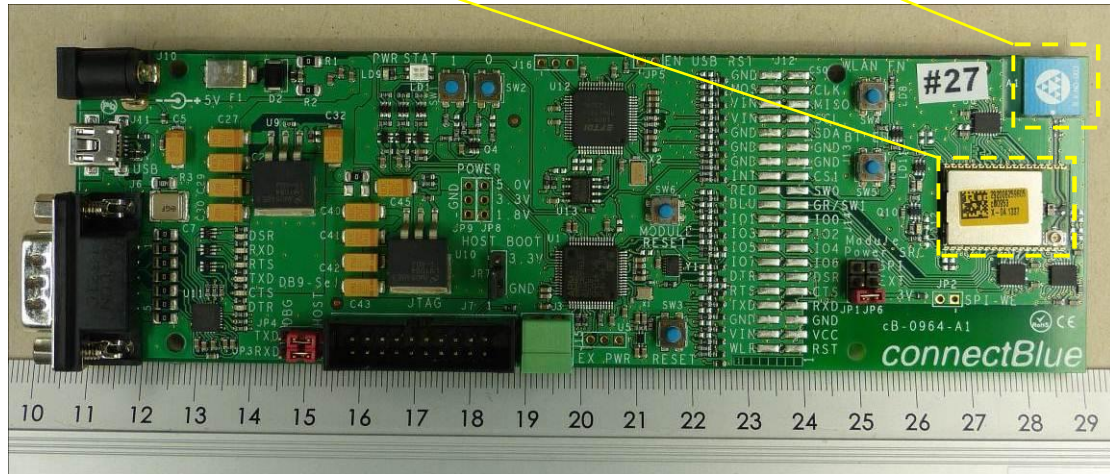

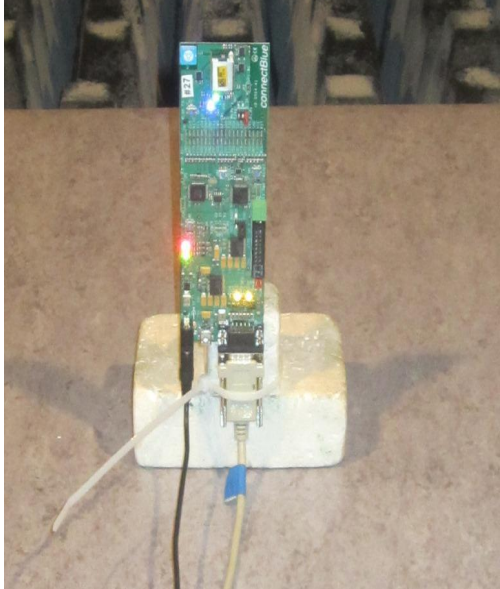



Table 1 Worst case test setup

| Position 1 (Radiated Emissions) | Position 3 (Radiated Emissions) |
|--|---|
|  |  |
| Position 2 (Radiated Emissions) | |
|  | |

Preliminary tests were performed to find worst-case configuration and position. The radiated emission measurements were carried out in the orthogonal direction that emits the highest spurious emission levels.

The following test modes were adjusted during the tests:

| Test items | Operation mode |
|--|--|
| Maximum Conducted Output Power | 1 - 24 |
| Emission Bandwidth | 1 - 18 |
| Minimum Emission Bandwidth for the band 5.725 – 5.85 GHz | 22 - 24 |
| Maximum Power Spectral Density | 1 - 24 |
| Band Edge Compliance | 1, 3, 4, 6, 7, 9, 10, 12, 13, 15, 16, 18, 19, 21, 22, 24 |
| Maximum Unwanted Emissions | 1 - 24 |
| Conducted emission on power supply line | 25 |

3 ADDITIONAL INFORMATION

The power was set to the values shown in the table below.

| Channel | 36 - 48 | 52 - 64 | 100 | 104 - 136 | 140 | 149 - 165 |
|----------------------------------|---------|---------|------|-----------|------|-----------|
| Power a/n20 modes (for 5 GHz) | 13.5 | 16.0 | 15.0 | 14.5 | 13.0 | 18.0 |

This report contains the results of the EUT operating in the 5 GHz UNII bands only.

4 OVERVIEW

| Application | Frequency range [MHz] | FCC 47 CFR Part 15 section [2] | RSS 210, Issue 8 [4] or RSS-Gen, Issue 4 [5] | Status | Refer page |
|------------------------------------|---|--|--|--------|------------|
| Maximum Conducted Output Power | 5150 – 5250 5250 – 5350 5470 – 5725 | 15.407 (a) | A9.2 [4] | Passed | 13 et seq |
| | 5725 - 5850 | 15.407 (a) | - | Passed | |
| Emission Bandwidth | 5150 – 5250 5250 – 5350 5470 – 5725 | 15.403 (i) | A9.2 [4] | Passed | 15 et seq |
| | 5725 - 5850 | 15.403 (i) | - | Passed | 17 et seq |
| Maximum Power Spectral Density | 5150 – 5250 5250 – 5350 5470 - 5725 | 15.407 (a)(5) | A9.2 [4] | Passed | 19 et seq |
| | 5725 - 5850 | 15.407 (a)(5) | - | Passed | 22 et seq |
| Frequency Stability | 5150 – 5250 | 15.407 (g) | A9.5 [4] | Passed | 24 et seq |
| Band edge compliance | 5150 – 5250 5250 – 5350 5470 - 5725 | 15.407 (b) | A8.5 [4] | Passed | 26 et seq. |
| | 5725 - 5850 | 15.407 (b) | - | Passed | 30 et seq |
| Radiated emissions (transmitter) | 0.009 - 40,000 | 15.407 (b) 15.205 (a) 15.209 (a) | 8.9 [5], 2.5 [4] | Passed | 37 et seq. |
| Conducted emissions on supply line | 0.15 - 30 | 15.207 (a) | 8.8 [5] | Passed | 60 et seq. |

5 TEST RESULTS

5.1 Maximum conducted output power

5.1.1 Method of measurement

The EUT has to be connected to the power meter via a low loss cable.

Acceptable measurement configurations

The measurement procedures described herein are based on the use of an antenna-port conducted test configuration.

“Measurement using a power meter (PM)” was used for this test. The procedure is described in chapter E)3)a) of document [3].

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

Test set-up:



5.1.2 Test results

| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 62 % |
|---------------------|-------|-------------------|------|

The highest antenna gain is 3 dBi. Therefore no reduction of the power limit is necessary.

| Operation Mode | Nominal Channel frequency | Antenna gain combined [dBi] | Maximum output power [dBm] | Margin [dB] | power limit [dBm] | Power limit calculated from 26 dB Bandwidth |
|-------------------------|---------------------------|-----------------------------|----------------------------|-------------|-------------------|---|
| 1 | 5180 MHz | 3 | 12.3 | 11.7 | 24 | - |
| 2 | 5200 MHz | 3 | 13.1 | 10.9 | 24 | - |
| 3 | 5240 MHz | 3 | 12.9 | 11.1 | 24 | - |
| 4 | 5260 MHz | 3 | 15.2 | 8.8 | 24 | 26.48 |
| 5 | 5300 MHz | 3 | 15.1 | 8.9 | 24 | 26.45 |
| 6 | 5320 MHz | 3 | 13.8 | 10.2 | 24 | 25.67 |
| 7 | 5500 MHz | 3 | 15.1 | 8.9 | 24 | 25.70 |
| 8 | 5580 MHz | 3 | 14.6 | 9.4 | 24 | 26.63 |
| 9 | 5700 MHz | 3 | 13.0 | 11.0 | 24 | 24.82 |
| 10 | 5745 MHz | 3 | 18.7 | 11.3 | 30 | - |
| 11 | 5785 MHz | 3 | 18.8 | 11.2 | 30 | - |
| 12 | 5850 MHz | 3 | 18.6 | 11.4 | 30 | - |
| 13 | 5180 MHz | 3 | 12.2 | 11.8 | 24 | - |
| 14 | 5200 MHz | 3 | 12.9 | 11.1 | 24 | - |
| 15 | 5240 MHz | 3 | 12.9 | 11.1 | 24 | - |
| 16 | 5260 MHz | 3 | 15.1 | 8.9 | 24 | 26.74 |
| 17 | 5300 MHz | 3 | 15.1 | 8.9 | 24 | 26.65 |
| 18 | 5320 MHz | 3 | 13.7 | 10.3 | 24 | 25.93 |
| 19 | 5500 MHz | 3 | 14.5 | 9.5 | 24 | 25.67 |
| 20 | 5580 MHz | 3 | 14.5 | 9.5 | 24 | 26.90 |
| 21 | 5700 MHz | 3 | 12.8 | 11.2 | 24 | 25.05 |
| 22 | 5745 MHz | 3 | 18.7 | 11.3 | 30 | - |
| 23 | 5785 MHz | 3 | 18.7 | 11.3 | 30 | - |
| 24 | 5850 MHz | 3 | 18.6 | 11.4 | 30 | - |
| Measurement uncertainty | | | +0.66 dB / -0.72 dB | | | |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

| |
|--------|
| 26, 27 |
|--------|

5.2 Emission Bandwidth

5.2.1 Method of measurement

The relating measurements were carried out in a conducting manner. Therefore, the antenna connector was directly connected to a spectrum analyser. The measurement procedure refers to part C.1. of document [3].


- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyser. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.2.2 Test result

| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 59 % |
|---------------------|-------|-------------------|------|

The following results were measured at the antenna port of the EUT. The plot shows an exemplary measurement result for the worst documented case. The other results are listed in the following table.

137117 26dB-BW a 140: Emission Bandwidth (operation mode 9):

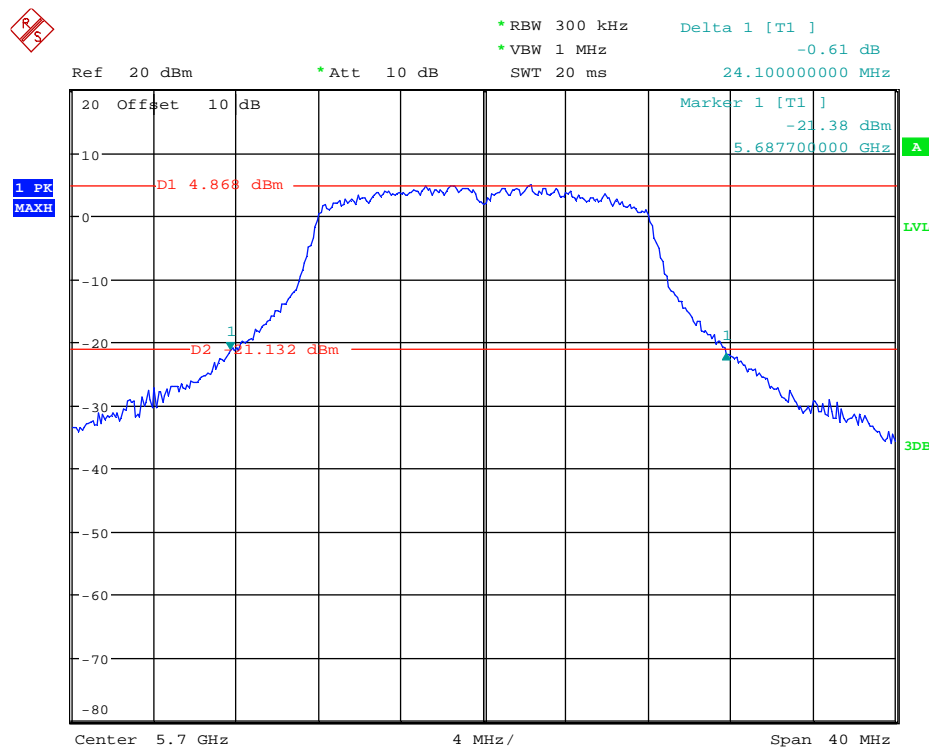

| Operation Mode | Nominal Channel frequency [MHz] | 26 dB Bandwidth [MHz] | Result |
|-------------------------|---------------------------------|-----------------------|--------|
| 1 | 5180 | 25.100 | Passed |
| 2 | 5200 | 26.600 | Passed |
| 3 | 5240 | 26.000 | Passed |
| 4 | 5260 | 35.300 | Passed |
| 5 | 5300 | 35.100 | Passed |
| 6 | 5320 | 29.300 | Passed |
| 7 | 5500 | 28.300 | Passed |
| 8 | 5580 | 26.000 | Passed |
| 9 | 5700 | 24.100 | Passed |
| 13 | 5180 | 26.300 | Passed |
| 14 | 5200 | 28.800 | Passed |
| 15 | 5240 | 28.400 | Passed |
| 16 | 5260 | 37.500 | Passed |
| 17 | 5300 | 36.700 | Passed |
| 18 | 5320 | 31.100 | Passed |
| 19 | 5500 | 29.200 | Passed |
| 20 | 5580 | 27.600 | Passed |
| 21 | 5700 | 25.400 | Passed |
| Measurement uncertainty | | +0.66 dB / -0.72 dB | |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

7

5.3 Minimum Emission Bandwidth for the band 5.725 – 5.850 GHz

5.3.1 Method of measurement

The relating measurements were carried out in a conducting manner. Therefore, the antenna connector was directly connected to a spectrum analyser. The measurement procedure refers to part C.2. of document [3].


- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 Test result

| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 59 % |
|---------------------|-------|-------------------|------|

The following results were measured at the antenna port of the EUT. The plot shows an exemplary measurement result for the worst documented case. The other results are listed in the following table.

136117 6dB-BW a 165.wmf: Emission Bandwidth (operation mode 3):

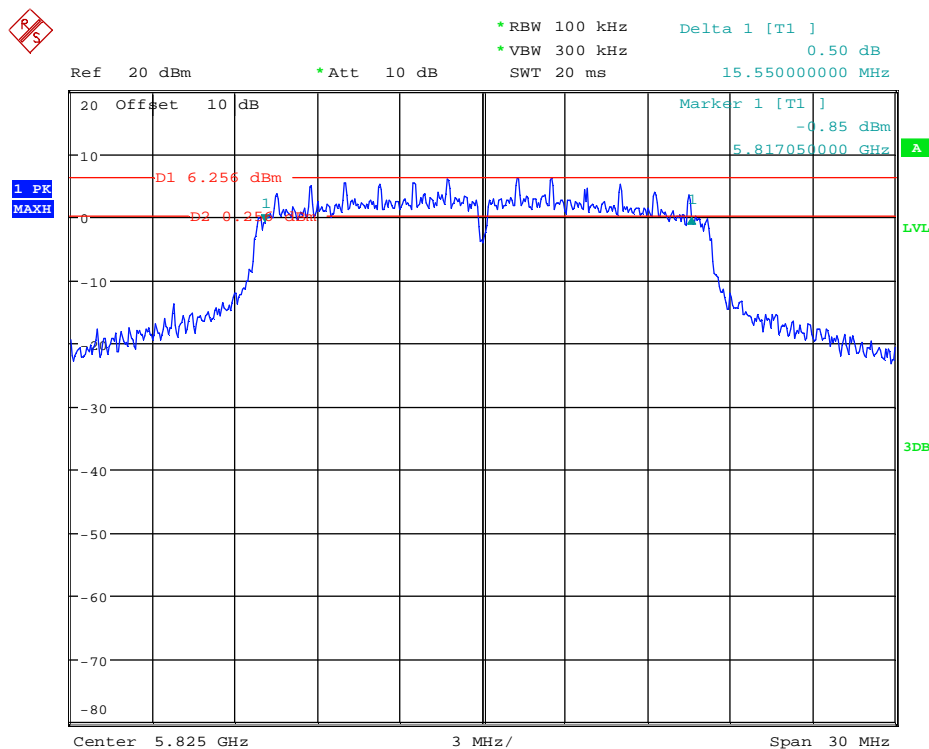

| Operation Mode | Center Frequency [MHz] | Minimum 6-dB Bandwidth Limit [MHz] | 6 dB Bandwidth [MHz] | Result |
|-------------------------|------------------------|------------------------------------|----------------------|--------|
| 1 | 5745 | 0.5 | 15.500 | Passed |
| 2 | 5785 | 0.5 | 15.400 | Passed |
| 3 | 5825 | 0.5 | 15.550 | Passed |
| 4 | 5745 | 0.5 | 15.250 | Passed |
| 5 | 5785 | 0.5 | 15.250 | Passed |
| 6 | 5825 | 0.5 | 15.550 | Passed |
| Measurement uncertainty | | +0.66 dB / -0.72 dB | | |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

7

5.4 Maximum Power Spectral Density

5.4.1 Method of measurement

The relating measurements were carried out in a conducting manner. Therefore, the antenna connector was directly connected to a spectrum analyser. The measurement procedure refers to part F) of document [3].

Method SA-1 was used for this measurement.


- Set span to encompass the entire 26-dB emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging).
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- The result is the Maximum PSD over 1 MHz reference bandwidth.
- Set Marker to the peak of the spectrum.
- If duty cycle < 100 % add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum.

5.4.2 Test result

| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 59 % |
|---------------------|-------|-------------------|------|

The following results were measured at the antenna port of the EUT. The plot shows an exemplary measurement result for the worst documented case. The other results are listed in the following table.

136117_PeakPwrSpecDens_a_40.wmf: Power Spectral Density (operation mode 2):

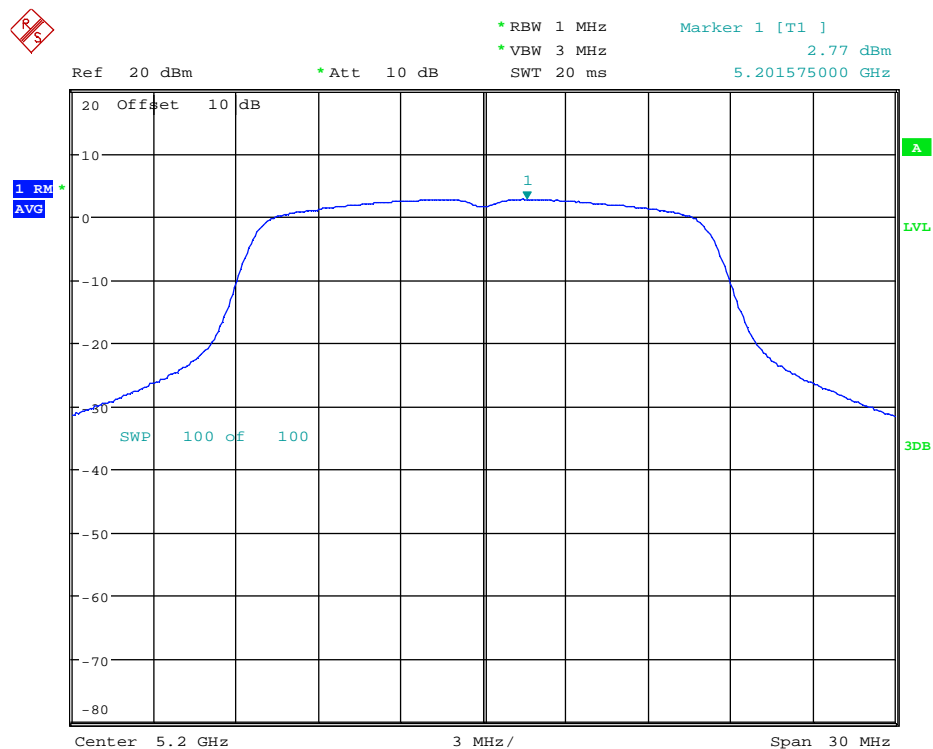

| Operation Mode | Nominal Channel frequency [MHz] | Peak Frequency [MHz] | Power Spectral Density Reading [dBm / MHz] | Power Spectral Density Limit [dBm / MHz] | Margin [dB] | Result |
|-------------------------|---------------------------------|----------------------|--|--|-------------|--------|
| 1 | 5180 | 5181.650 | 1.91 | 11 | 9.09 | Passed |
| 2 | 5200 | 5201.575 | 2.78 | 11 | 8.22 | Passed |
| 3 | 5240 | 5238.350 | 2.56 | 11 | 8.44 | Passed |
| 4 | 5260 | 5261.500 | 4.63 | 11 | 6.37 | Passed |
| 5 | 5300 | 5298.575 | 4.31 | 11 | 6.69 | Passed |
| 6 | 5320 | 5318.575 | 3.04 | 11 | 7.96 | Passed |
| 7 | 5500 | 5498.575 | 3.84 | 11 | 7.16 | Passed |
| 8 | 5580 | 5578.575 | 4.39 | 11 | 6.61 | Passed |
| 9 | 5700 | 5698.500 | 1.70 | 11 | 9.30 | Passed |
| 13 | 5180 | 5181.400 | 1.55 | 11 | 9.45 | Passed |
| 14 | 5200 | 5198.700 | 2.49 | 11 | 8.51 | Passed |
| 15 | 5240 | 5238.600 | 2.35 | 11 | 8.65 | Passed |
| 16 | 5260 | 5258.600 | 4.51 | 11 | 6.49 | Passed |
| 17 | 5300 | 5298.400 | 4.16 | 11 | 6.84 | Passed |
| 18 | 5320 | 5321.600 | 2.87 | 11 | 8.13 | Passed |
| 19 | 5500 | 5498.500 | 4.11 | 11 | 6.98 | Passed |
| 20 | 5580 | 5578.300 | 4.16 | 11 | 6.84 | Passed |
| 21 | 5700 | 5698.500 | 1.34 | 11 | 9.66 | Passed |
| Measurement uncertainty | | | +0.66 dB / -0.72 dB | | | |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

7

5.4.3 Method of measurement for the band 5.725 – 5.85 GHz

The relating measurements were carried out in a conducting manner. Therefore, the antenna connector was directly connected to a spectrum analyser. The measurement procedure refers to part F) of document [3].

Method SA-1 was used for this measurement.


- Set span to encompass the entire 26-dB emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- Set RBW = 500 kHz.
- Set VBW ≥ 1.5 MHz.
- Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging).
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- The result is the Maximum PSD over 500 kHz reference bandwidth.
- Set Marker to the peak of the spectrum.
- If duty cycle < 100 % add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

5.4.4 Test result

| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 44 % |
|---------------------|-------|-------------------|------|

The following results were measured at the antenna port of the EUT. The plot shows an exemplary measurement result for the worst documented case. The other results are listed in the following table.

145298 PSD CH157 A 500K.wmf: Power Spectral Density (operation mode 11):

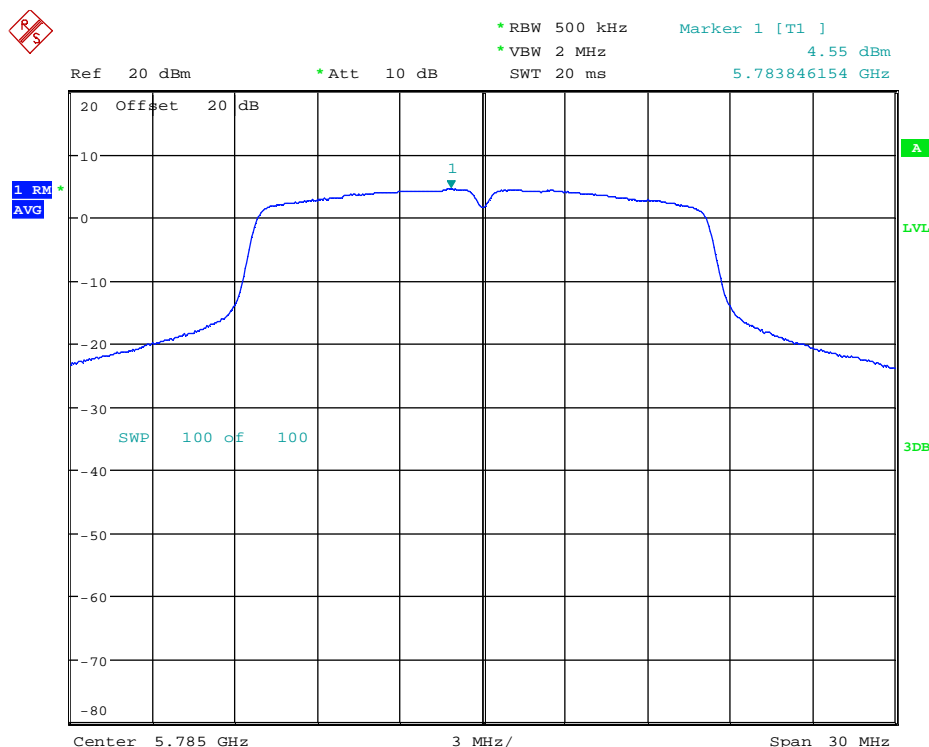

| Operation Mode | Nominal Channel frequency [MHz] | Peak Frequency [MHz] | Power Spectral Density Reading [dBm / 500 kHz] | Power Spectral Density Limit [dBm / 500 kHz] | Margin [dB] | Result |
|-------------------------|---------------------------------|----------------------|--|--|-------------|--------|
| 10 | 5745 | 5743.365 | 4.33 | 30 | 25.67 | Passed |
| 11 | 5785 | 5783.846 | 4.55 | 30 | 25.45 | Passed |
| 12 | 5825 | 5823.654 | 4.31 | 30 | 25.69 | Passed |
| 22 | 5745 | 5743.510 | 4.23 | 30 | 25.77 | Passed |
| 23 | 5785 | 5783.846 | 4.21 | 30 | 25.79 | Passed |
| 24 | 5825 | 5823.798 | 3.97 | 30 | 26.03 | Passed |
| Measurement uncertainty | | | +0.66 dB / -0.72 dB | | | |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

7

5.5 Frequency Stability

5.5.1 Method of measurement

The EUT is placed in a climatic chamber, which is able to adjust the temperature over the desired temperature range.

After reaching the desired temperature and an after an appropriate acclimatisation time, the EUT is turned on.

The nominal channel frequency is the measurement result with nominal supply power at 20 °C.

Spectrum analyzer settings:


- Attenuation: Auto
- Center Frequency: channel frequency
- Span: 2 MHz
- RWB=VBW: 10 kHz
- Sweep Time: Auto

The frequency stability is testet at the minimum and maximum voltage, which is permitted by the manufacturer.

The frequency stability is testet at the minimum and maximum temperature, which is permitted by the manufacturer. But at least a temperature span from -30 °C – + 50 °C shall be covered.

The temperature is measured in 10 °C steps.

Test set-up:

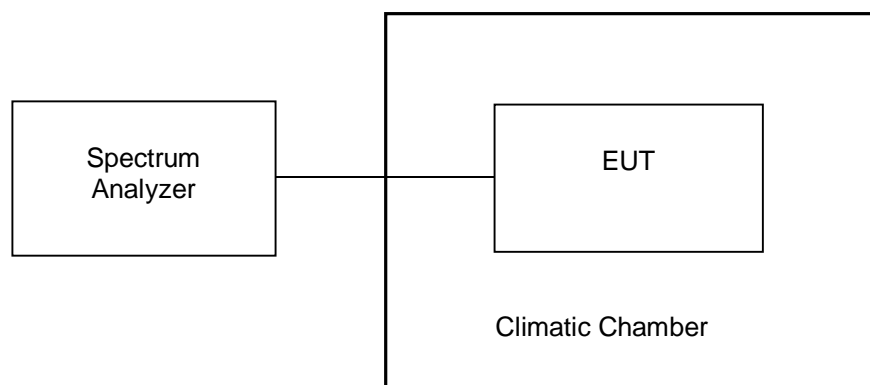

5.5.2 Test result

The EUT was set to transmit continuously in operation mode 4. The frequency was derived by observing a characteristic dip in the centre of the OFDM signal.

| Voltage [V] | Measurement Frequency [MHz] | Frequency Deviation d [ppm] | Limit [ppm] | Result |
|-------------------------|-----------------------------|-------------------------------|-------------|--------|
| 3 V | 5199.997596 | 0.31 | 20 | Passed |
| 3.3 V | 5199.995994 | Reference | 20 | - |
| 3.6 V | 5199.998397 | 0.46 | 20 | Passed |
| Measurement uncertainty | | +0.66 dB / -0.72 dB | | |

| Temperature [°C] | Measurement Frequency [MHz] | Frequency Deviation [ppm] | Limit [ppm] | Result |
|-------------------------|-----------------------------|---------------------------|-------------|--------|
| -40 °C | 5200.002430 | 0.44 | 20 | Passed |
| -30 °C | 5200.003220 | 0.59 | 20 | Passed |
| -20 °C | 5200.003190 | 0.59 | 20 | Passed |
| -10 °C | 5200.002520 | 0.46 | 20 | Passed |
| 0 °C | 5200.000080 | -0.01 | 20 | Passed |
| 10 °C | 5200.000530 | 0.08 | 20 | Passed |
| 20 °C | 5200.000130 | Reference | - | - |
| 30 °C | 5200.000080 | -0.01 | 20 | Passed |
| 40 °C | 5200.000930 | 0.15 | 20 | Passed |
| 50 °C | 5200.000040 | -0.02 | 20 | Passed |
| 60 °C | 5199.999470 | -0.13 | 20 | Passed |
| 70 °C | 5199.999200 | -0.18 | 20 | Passed |
| 80 °C | 5200.001870 | 0.33 | 20 | Passed |
| 85 °C | 5199.994110 | -1.16 | 20 | Passed |
| Measurement uncertainty | | +0.66 dB / -0.72 dB | | |

TEST EQUIPMENT USED FOR THE TEST:

7, 31

5.6 Band-edge compliance

5.6.1 Method of measurement (band edges next to unrestricted bands)

The measurements were carried out in a radiated manner. The measurement procedure refers to part G2 and G3d of document [3].

Measurement Procedure – Unwanted Emissions

- Set the center frequency and span to encompass the frequency range to be measured.
- RBW = 1 MHz. (100 kHz for frequencies below 1 GHz)
- VBW \geq 3 MHz. (300 kHz for frequencies below 1 GHz)
- Detector = Peak.
- Ensure that the number of measurement points \geq span/RBW.
- Sweep time = auto couple.
- Trace Mode = max hold.
- Allow the trace to stabilise.
- Use the peak marker function to determine the maximum amplitude level.

Section G3d states, that unwanted Emissions within 2 MHz of the band edge may be measured using special band-edge techniques (the marker delta method or integration methods), provided that the 99% occupied bandwidth falls within the 2 MHz of the band edge. Otherwise all unwanted emissions measurements shall be performed using the standard methods.


The measurements were performed at the lower and upper end of the 5.47 – 5.725 GHz band and 5.725 – 5.85 GHz band.

5.6.2 Test result (band edges next to unrestricted bands (radiated))


| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 55 % |
|---------------------|-------|-------------------|------|

5.6.2.1 Results at the lower and upper end of the 5.47 – 5.725 GHz band


145298 #23 bandedge_ch100_6Mbps.wmf: band-edge compliance (operation mode 7):

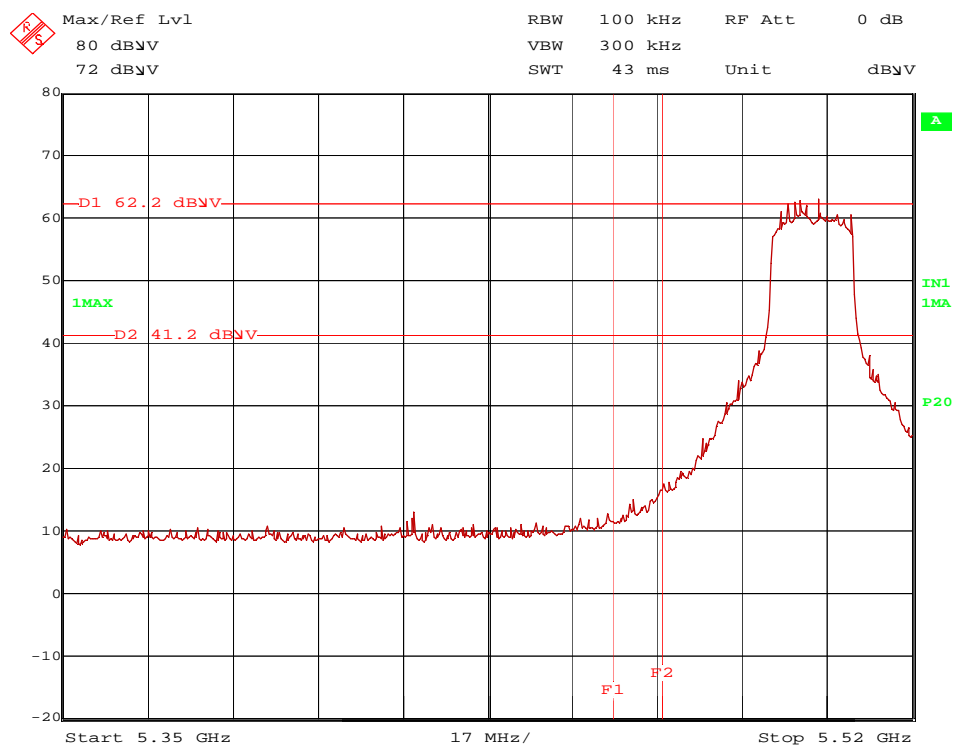


145298_#23_bandedge_ch100_6,5Mbps.wmf: band-edge compliance (operation mode 19):

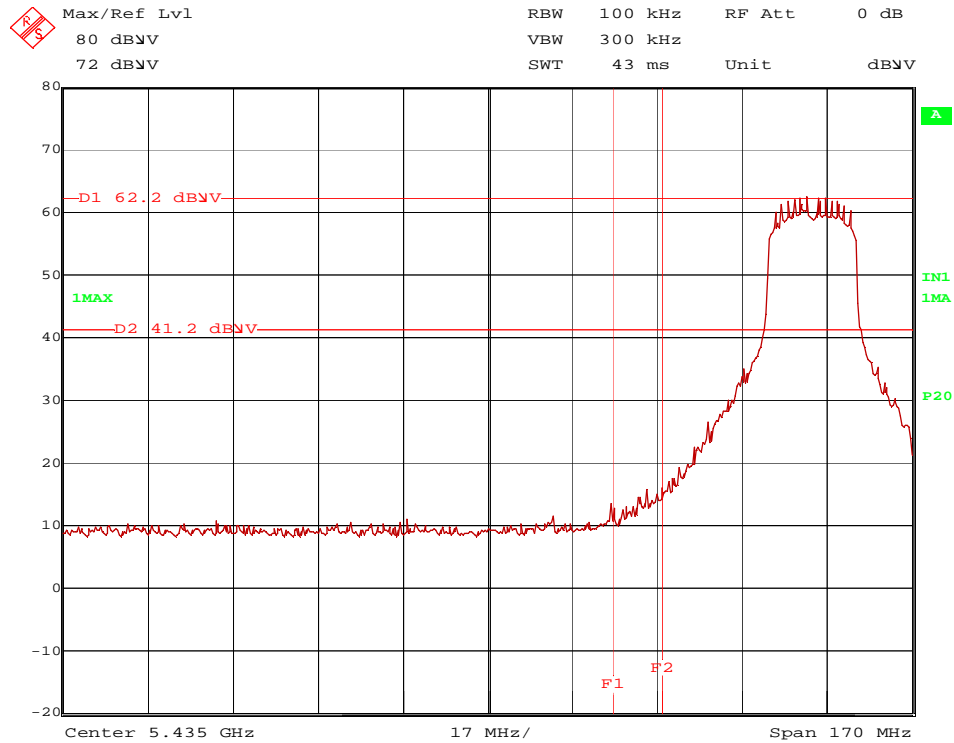

145298_#23_bandedge_ch140_6Mbps.wmf: band-edge compliance (operation mode 9):

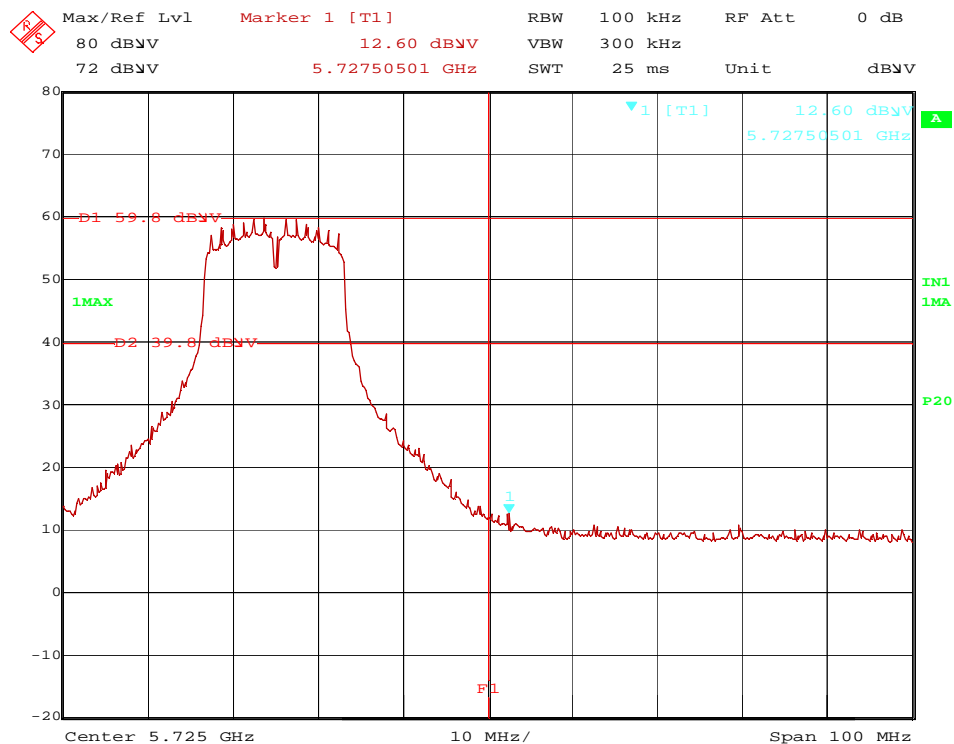

145298_#23_bandedge_ch140_6,5Mbps.wmf: band-edge compliance (operation mode 21):

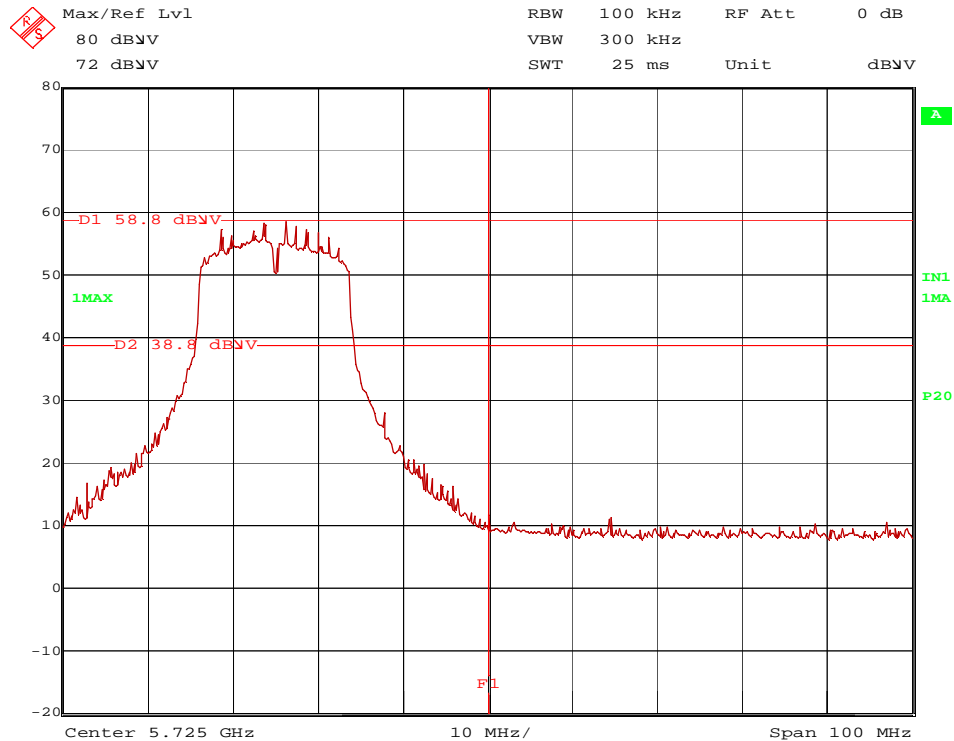

According to document [3] part G2d the measured field strength was converted to EIRP and compared to the limit of -27 dBm/MHz:

| Operation Mode | WLAN channel | WLAN mode | Band-Edge | Unwanted Emission Frequency MHz | Unwanted Emission Value dBm / MHz | Limit dBm / MHz | Margin dB | Result |
|-------------------------|--------------|-----------|-----------|---------------------------------|-----------------------------------|-----------------|-----------|--------|
| 7 | 100 | a | low | 5467.9 | -29.0 | -27.0 | 2.0 | Passed |
| 9 | 140 | a | low | 5468.1 | -30.3 | -27.0 | 3.3 | Passed |
| 19 | 100 | n20 | high | 5727.5 | -34.0 | -27.0 | 7.0 | Passed |
| 21 | 140 | n20 | high | 5725.6 | -34.2 | -27.0 | 7.2 | Passed |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | |


Test: Passed

TEST EQUIPMENT USED FOR THE TEST:


6, 8 - 11, 13, 17, 18

5.6.2.2 Results at the lower and upper end of the 5.725 – 5.85 GHz band


145298 #23 bandedge_unrestr_ch149_6Mbps.wmf: band-edge compliance (operation mode 10):

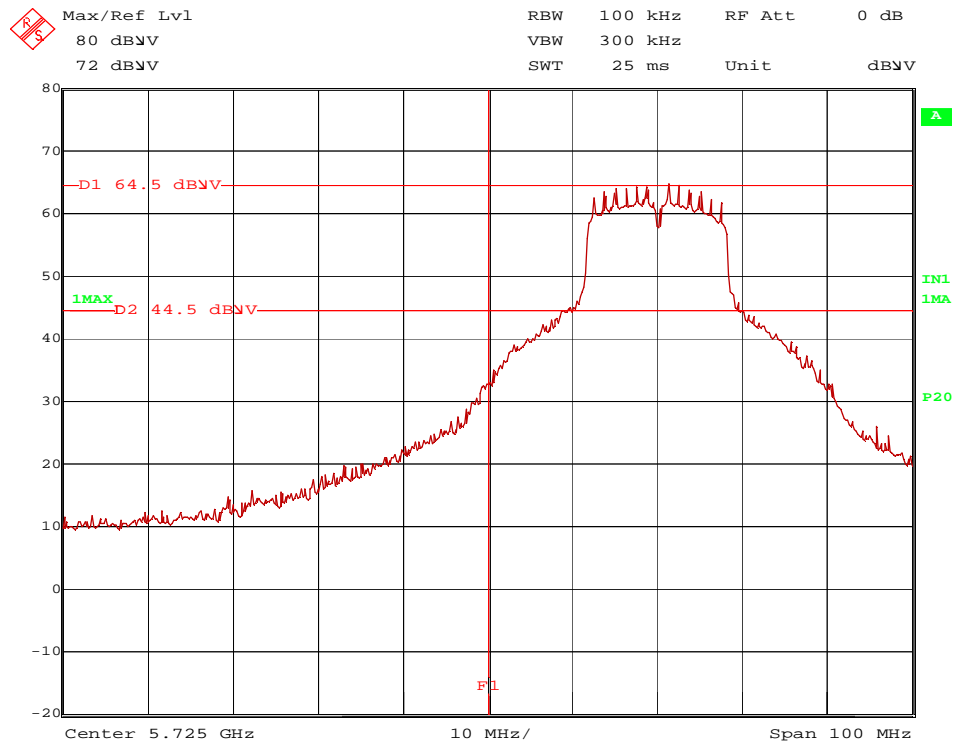


145298 #23 bandedge_unrestr_ch149_6.5Mbps.wmf: band-edge compliance (operation mode 22):

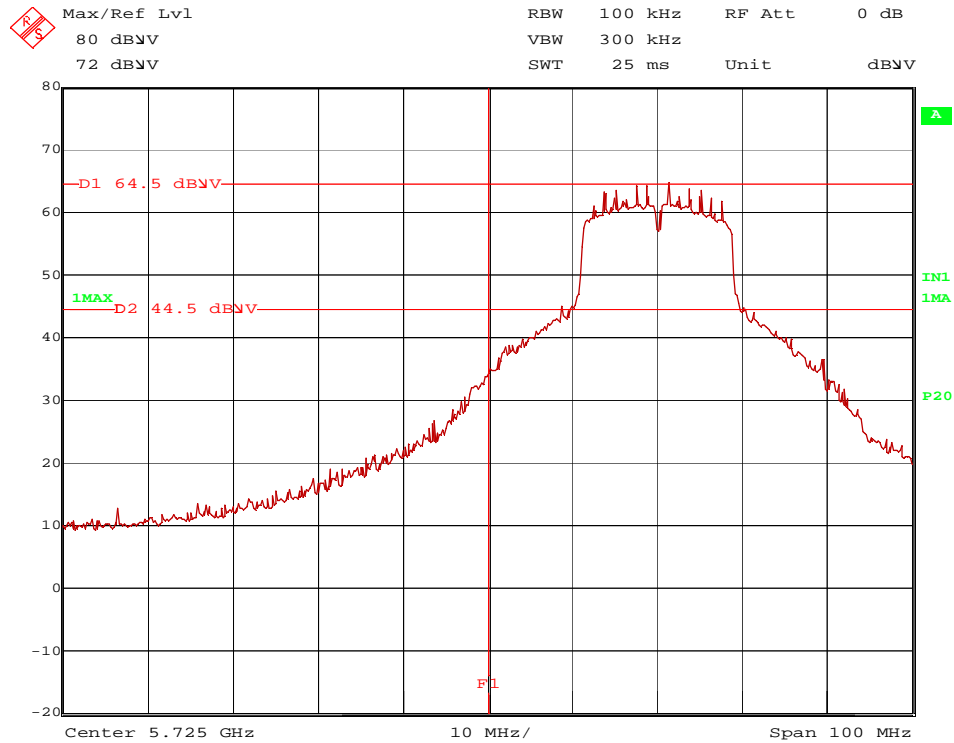

145298 #23 bandedge_unrestr_ch165_6Mbps.wmf: band-edge compliance(operation mode 12):

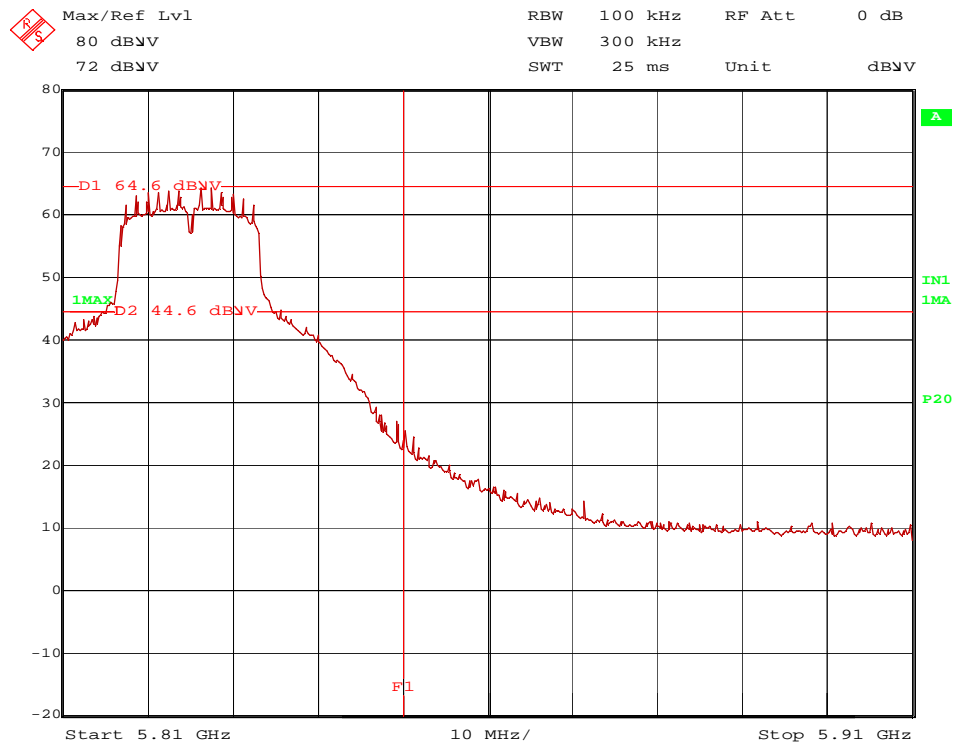

145298_#23_bandedge_unrestr_ch165_6,5Mbps.wmf: band-edge compliance (operation mode 24):

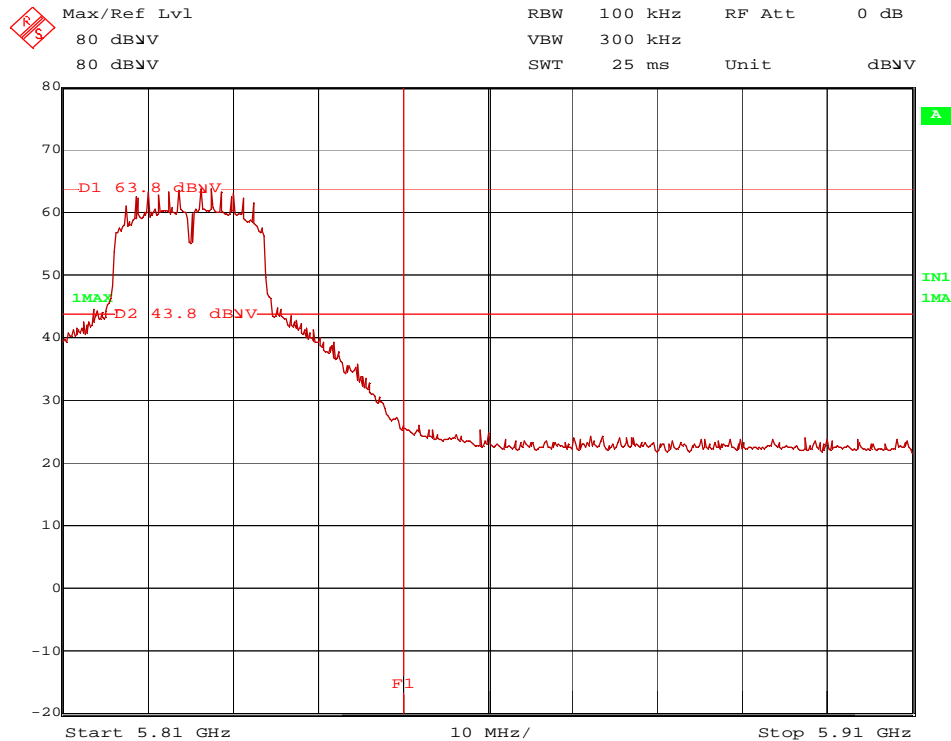

According to document [3] part G2d the measured field strength was converted to EIRP and compared to the limit of -17 dBm/MHz (within the frequency range from the band edge to 10 MHz above or below the band edge):

| Operation Mode | WLAN channel | WLAN mode | Band-Edge | Unwanted Emission Frequency MHz | Unwanted Emission Value dBm / MHz | Limit dBm / MHz | Margin dB | Result |
|-------------------------|--------------|-----------|-----------|---------------------------------|-----------------------------------|-----------------|-----------|--------|
| 7 | 149 | a | low | 5724.5 | -19.6 | -17.0 | 2.6 | Passed |
| 9 | 149 | a | low | 5724.5 | -18.7 | -17.0 | 1.7 | Passed |
| 16 | 157 | n20 | high | 5850.5 | -24.5 | -17.0 | 7.5 | Passed |
| 18 | 157 | n20 | high | 5859.0 | -25.5 | -17.0 | 8.5 | Passed |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | |

Test: Passed

| |
|-----------------------------------|
| TEST EQUIPMENT USED FOR THE TEST: |
| 6, 8 - 11, 13, 17, 18 |

5.6.3 Method of measurement (band edges next to restricted bands (radiated))

The same test set-up as used for the radiated emission measurement shall be used (refer also subclause 5.7.1 of this test report).


After trace stabilisation the marker shall be set on the signal peak. The frequency line shall be set on the edge of the assigned frequency band. Now set the second marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is higher than that at the band-edge. The level of the measured field strength shall be compared to the general limits specified in § 15.205.

The measurement was performed at the lower and upper end of the 5.15 – 5.35 GHz band.


5.6.4 Test result (band edges next to restricted bands (radiated))

| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 55 % |
|---------------------|-------|-------------------|------|


145298_#23_bandedge_restr_ch36_6Mbps.wmf: band-edge compliance (operation mode 1):

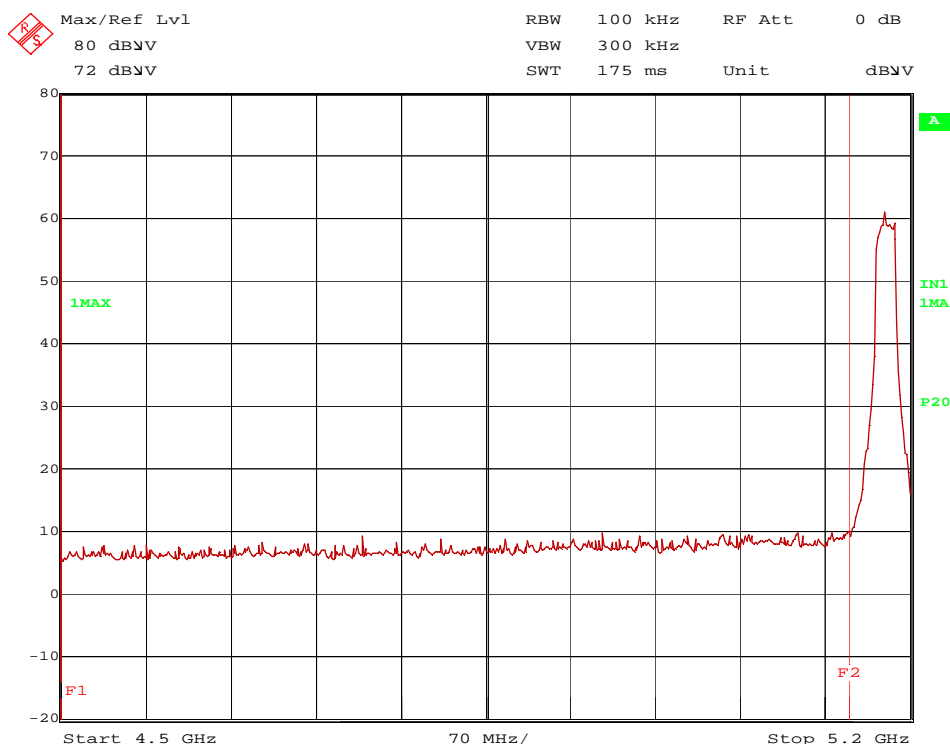


145298_#23_bandedge_restr_ch36_6,5Mbps.wmf: band-edge compliance (operation mode 13):

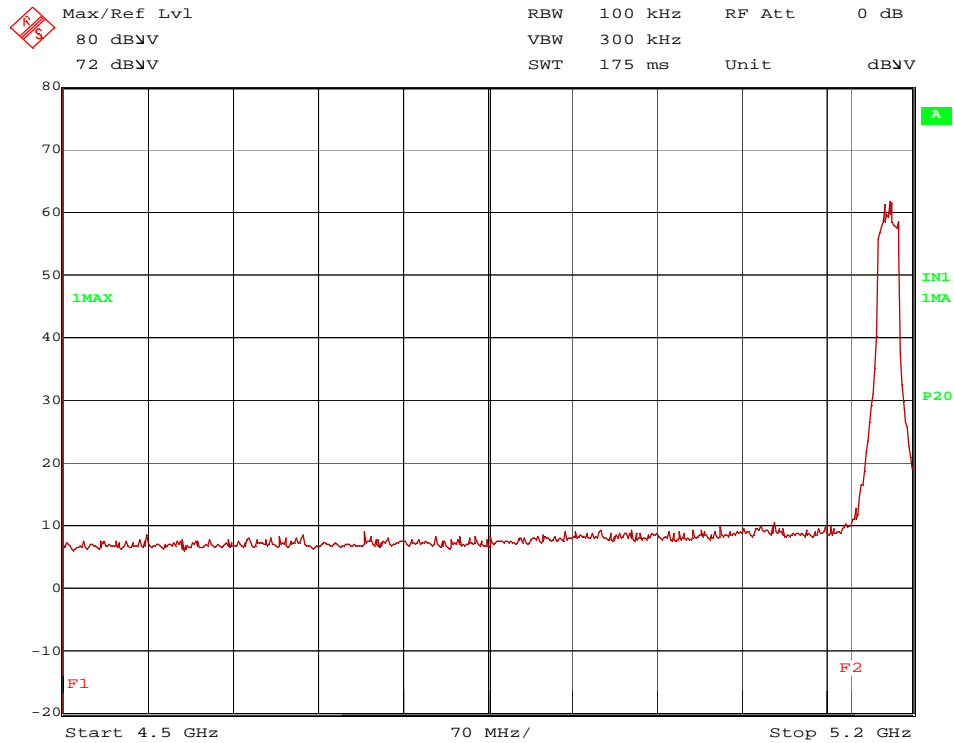

145298_#23_bandedge_restr_ch64_6Mbps.wmf: band-edge compliance (operation mode 6):

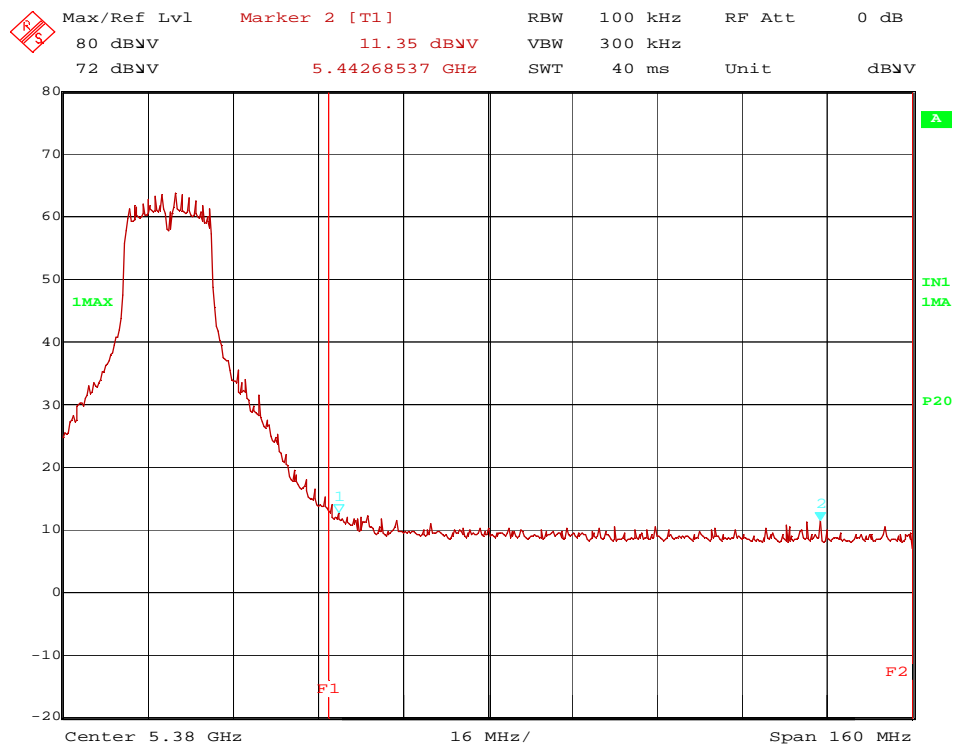

145298_#23_bandedge_restr_ch64_6,5Mbps.wmf: band-edge compliance (operation mode 18):

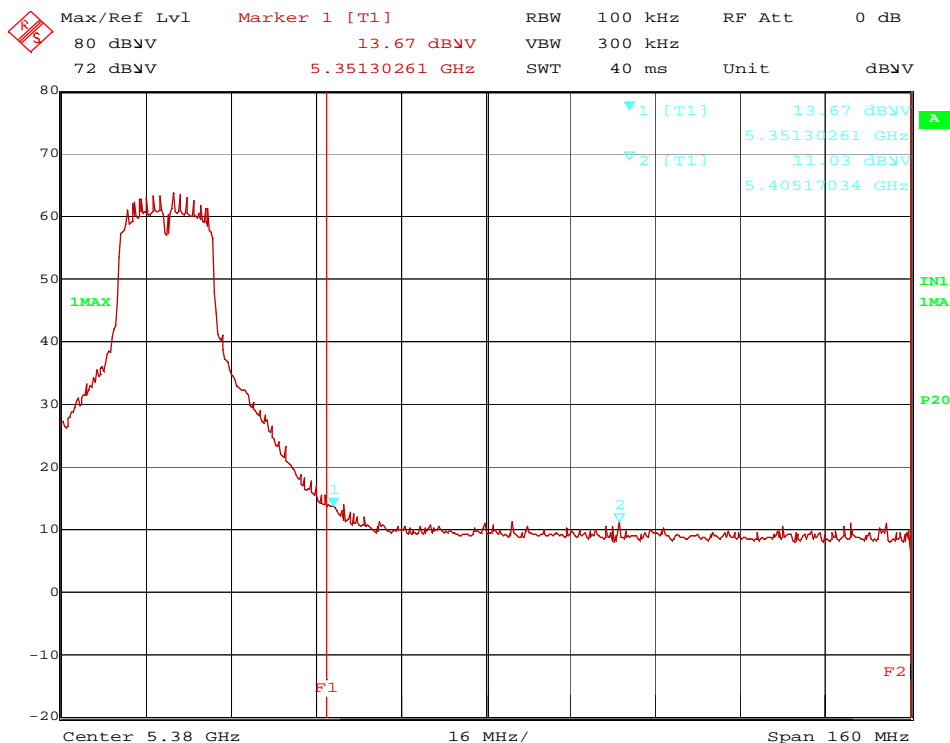

| Band Edge Compliance, a-mode, channel 36 (Operation mode 1) | | | | | | | | | | | |
|---|---------|-----------------|-------------------------|------------------------|-------------|-------------------|----------------------|-------------|-----------------|------------------|--------|
| WLAN Mode | Channel | Frequency [MHz] | Field Strength [dBμV/m] | Peak Limit [dBμV/m] | Margin [dB] | Reading [dBμV] | Antenna Factor / 1/m | Preamp / dB | Cable Loss / dB | Restricted Band? | Result |
| a | 36 | 5147.0 | 60.59 | 74.00 | 13.41 | 21.50 | 33.49 | 0.00 | 5.60 | Y | Passed |
| | | 4748.0 | 55.43 | 74.00 | 18.57 | 17.54 | 32.59 | 0.00 | 5.30 | Y | Passed |
| | | | | | | | | | | | |
| WLAN Mode | Channel | Frequency [MHz] | Field Strength [dBμV/m] | Average Limit [dBμV/m] | Margin [dB] | Reading [dBm] | Antenna Factor / 1/m | Preamp / dB | Cable Loss / dB | Restricted Band? | Result |
| a | 36 | 5147.0 | 45.55 | 54.00 | 8.45 | 6.46 | 33.49 | 5.60 | 3.80 | Y | Passed |
| | | 4748.0 | 42.31 | 54.00 | 11.69 | 4.42 | 32.59 | 5.30 | | Y | Passed |
| Measurement uncertainty | | | | | | +2.2 dB / -3.6 dB | | | | | |

| Band Edge Compliance, a-mode, channel 64 (Operation mode 6) | | | | | | | | | | | |
|---|---------|-----------------|-------------------------|------------------------|-------------|-------------------|----------------------|-------------|-----------------|------------------|--------|
| WLAN Mode | Channel | Frequency [MHz] | Field Strength [dBμV/m] | Peak Limit [dBμV/m] | Margin [dB] | Reading [dBμV] | Antenna Factor / 1/m | Preamp / dB | Cable Loss / dB | Restricted Band? | Result |
| a | 64 | 5442.7 | 57.96 | 74.00 | 16.04 | 18.26 | 33.80 | 0.00 | 5.90 | Y | Passed |
| | | 5351.9 | 64.17 | 74.00 | 9.83 | 24.67 | 33.80 | 0.00 | 5.70 | Y | Passed |
| | | | | | | | | | | | |
| WLAN Mode | Channel | Frequency [MHz] | Field Strength [dBμV/m] | Average Limit [dBμV/m] | Margin [dB] | Reading [dBm] | Antenna Factor / 1/m | Preamp / dB | Cable Loss / dB | Restricted Band? | Result |
| a | 64 | 5442.7 | 44.72 | 54.00 | 9.28 | 05.02 | 33.80 | 0.00 | 5.90 | Y | Passed |
| | | 5351.9 | 47.36 | 54.00 | 6.64 | 7.86 | 33.80 | 0.00 | 5.70 | Y | Passed |
| Measurement uncertainty | | | | | | +2.2 dB / -3.6 dB | | | | | |

| Band Edge Compliance, n20-mode, channel 64 (Operation mode 18) | | | | | | | | | | | |
|--|---------|-----------------|-------------------------|------------------------|-------------|-------------------|----------------------|-------------|-----------------|------------------|--------|
| WLAN Mode | Channel | Frequency [MHz] | Field Strength [dBμV/m] | Peak Limit [dBμV/m] | Margin [dB] | Reading [dBμV] | Antenna Factor / 1/m | Preamp / dB | Cable Loss / dB | Restricted Band? | Result |
| n20 | 64 | 5405.2 | 58.47 | 74.00 | 15.53 | 18.97 | 33.80 | 0.00 | 5.70 | Y | Passed |
| | | 5351.3 | 67.32 | 74.00 | 6.68 | 27.82 | 33.80 | 0.00 | 5.70 | Y | Passed |
| | | | | | | | | | | | |
| WLAN Mode | Channel | Frequency [MHz] | Field Strength [dBμV/m] | Average Limit [dBμV/m] | Margin [dB] | Reading [dBm] | Antenna Factor / 1/m | Preamp / dB | Cable Loss / dB | Restricted Band? | Result |
| n20 | 64 | 5405.2 | 44.75 | 54.00 | 9.25 | 5.25 | 33.80 | 0.00 | 5.70 | Y | Passed |
| | | 5351.3 | 47.74 | 54.00 | 6.26 | 8.24 | 33.80 | 0.00 | 5.70 | Y | Passed |
| Measurement uncertainty | | | | | | +2.2 dB / -3.6 dB | | | | | |

| Band Edge Compliance, channel 100 (Operation mode 7 / 19) | | | | | | | | | | | |
|---|---------|-----------------|-------------------------|------------------------|-------------|-------------------|----------------------|-------------|-----------------|------------------|--------|
| WLAN Mode | Channel | Frequency [MHz] | Field Strength [dBμV/m] | Peak Limit [dBμV/m] | Margin [dB] | Reading [dBμV] | Antenna Factor / 1/m | Preamp / dB | Cable Loss / dB | Restricted Band? | Result |
| a | 100 | 5430.1 | 59.13 | 74.00 | 14.87 | 19.43 | 33.80 | 0.00 | 5.90 | Y | Passed |
| n20 | | 5459.7 | 64.44 | 74.00 | 9.56 | 24.54 | 34.00 | 0.00 | 5.90 | Y | Passed |
| | | | | | | | | | | | |
| WLAN Mode | Channel | Frequency [MHz] | Field Strength [dBμV/m] | Average Limit [dBμV/m] | Margin [dB] | Reading [dBm] | Antenna Factor / 1/m | Preamp / dB | Cable Loss / dB | Restricted Band? | Result |
| a | 100 | 5430.1 | 45.97 | 54.00 | 8.03 | 6.27 | 33.80 | 0.00 | 5.90 | Y | Passed |
| n20 | | 5459.7 | 46.37 | 54.00 | 7.63 | 6.47 | 34.00 | 0.00 | 5.90 | Y | Passed |
| Measurement uncertainty | | | | | | +2.2 dB / -3.6 dB | | | | | |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

6, 8 - 11, 13, 17, 18

5.7 Maximum unwanted emissions

5.7.1 Method of measurement (radiated emissions)

The radiated emission measurement is subdivided into four stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 30 MHz to 1 GHz.
- A final measurement carried out on an open area test site with reflecting ground plane and various antenna heights in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 110 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 110 GHz.

All measurements will be carried out with the EUT working on the middle of the assigned frequency band.

Preliminary measurement (9 kHz to 30 MHz):


In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of

3 meters. Tabletop devices will be set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The setup of the Equipment under test will be in accordance to [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to find the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

| Frequency range | Resolution bandwidth |
|-------------------|----------------------|
| 9 kHz to 150 kHz | 200 Hz |
| 150 kHz to 30 MHz | 10 kHz |

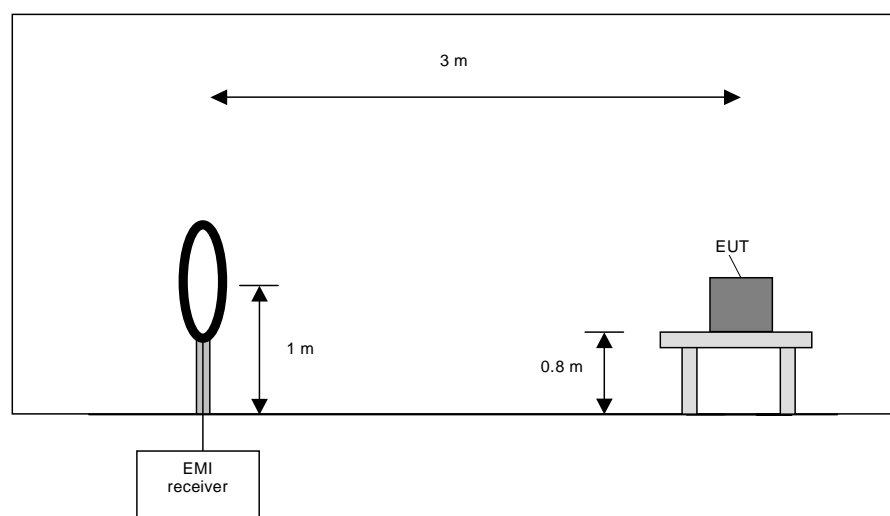

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (only if the EUT is a module or is used in a handheld application).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


Final measurement (9 kHz to 30 MHz):

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m whichever is appropriate. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according to [2].

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range | Resolution bandwidth |
|-------------------|----------------------|
| 9 kHz to 150 kHz | 200 Hz |
| 150 kHz to 30 MHz | 9 kHz |

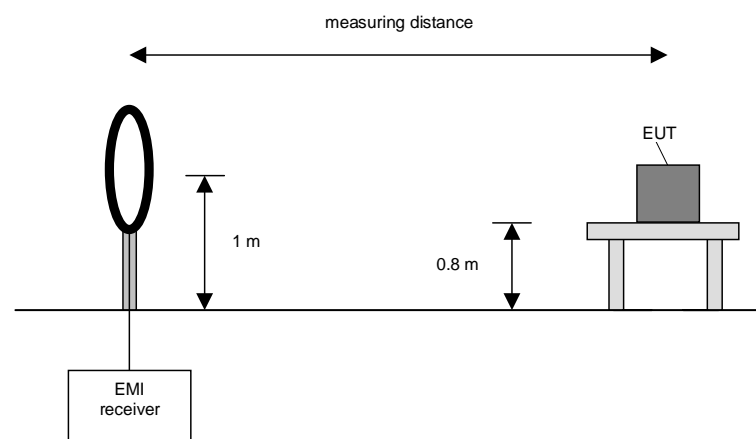

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (only if the EUT is a module or is used in a handheld application).


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The setup of the Equipment under test will be in accordance to [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range | Resolution bandwidth |
|-------------------|----------------------|
| 30 MHz to 230 MHz | 100 kHz |
| 230 MHz to 1 GHz | 100 kHz |

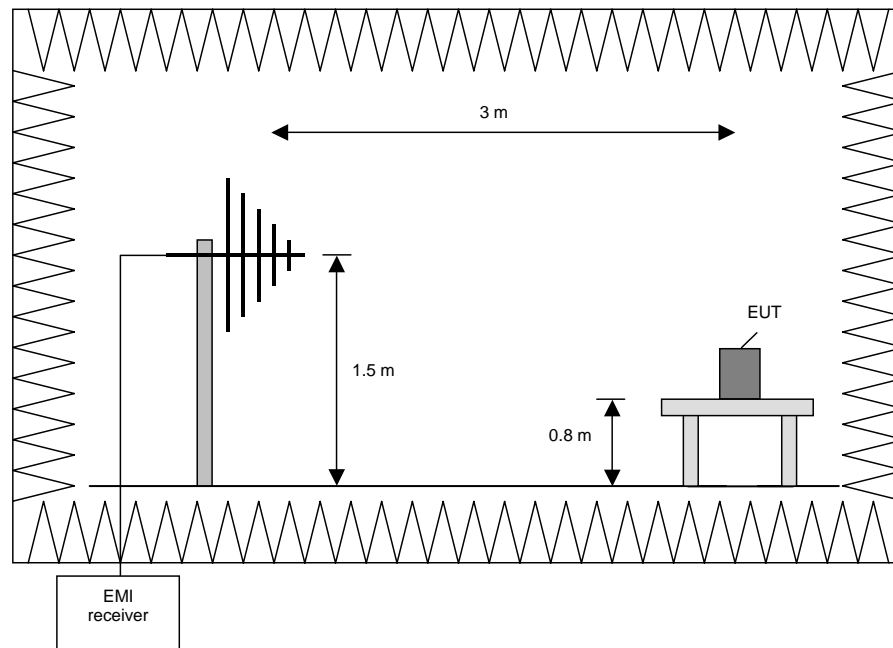

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) for each orthogonal axes of the EUT (only if the EUT is a module or is used in a handheld application).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range | Resolution bandwidth |
|-----------------|----------------------|
| 30 MHz to 1 GHz | 120 kHz |

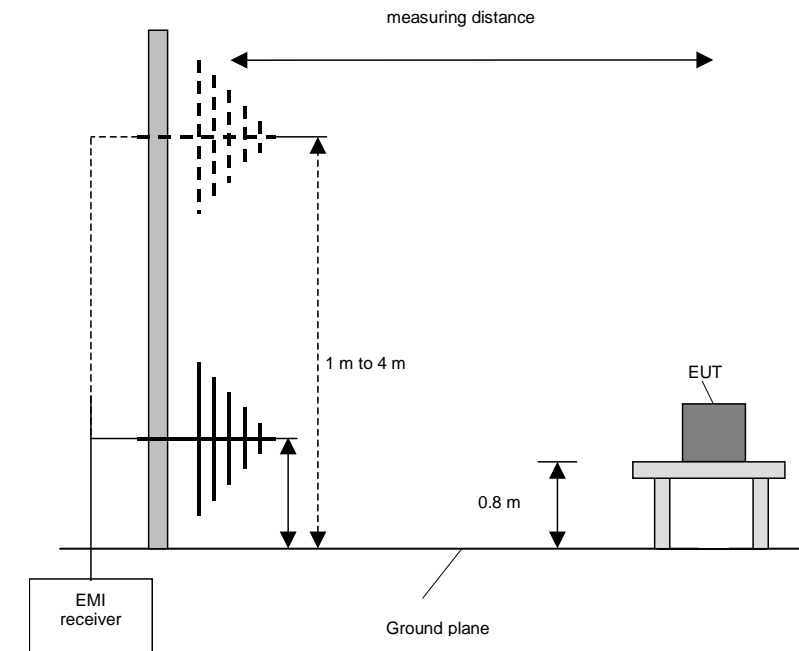

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (only if the EUT is a module or is used in a handheld application).

Preliminary and final measurement (1 GHz to 110 GHz)


This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support a height of 150 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.10-2013 [1].

Preliminary measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending on the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and then the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range | Resolution bandwidth |
|--------------------|----------------------|
| 1 GHz to 4 GHz | 100 kHz |
| 4 GHz to 12 GHz | 100 kHz |
| 12 GHz to 18 GHz | 100 kHz |
| 18 GHz to 26.5 GHz | 100 kHz |
| 26.5 GHz to 40 GHz | 100 kHz |
| 40 GHz to 60 GHz | 100 kHz |
| 50 GHz to 75 GHz | 100 kHz |
| 75 GHz to 110 GHz | 100 kHz |

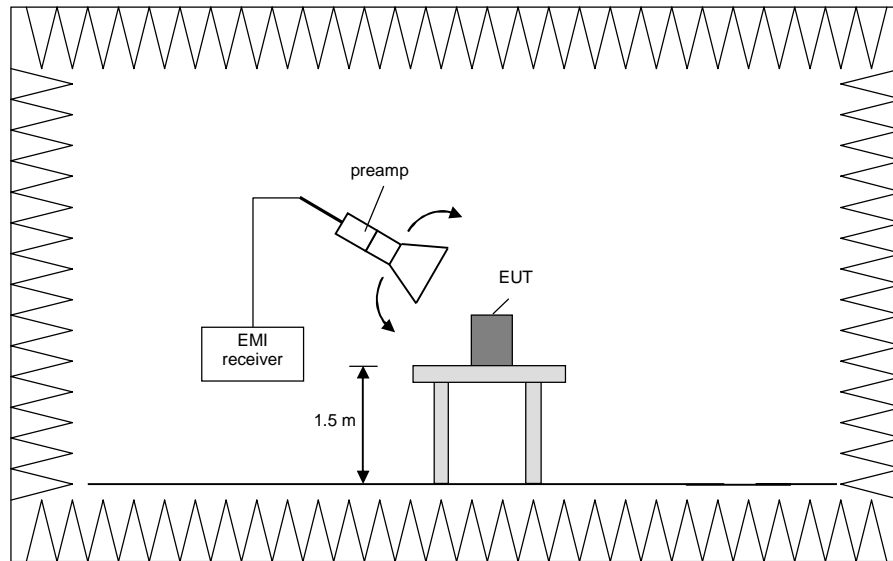


Final measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

| Frequency range | Resolution bandwidth |
|--------------------|----------------------|
| 1 GHz to 4 GHz | 1 MHz |
| 4 GHz to 12 GHz | 1 MHz |
| 12 GHz to 18 GHz | 1 MHz |
| 18 GHz to 26.5 GHz | 1 MHz |
| 26.5 GHz to 40 GHz | 1 MHz |
| 40 GHz to 60 GHz | 1 MHz |
| 50 GHz to 75 GHz | 1 MHz |
| 75 GHz to 110 GHz | 1 MHz |

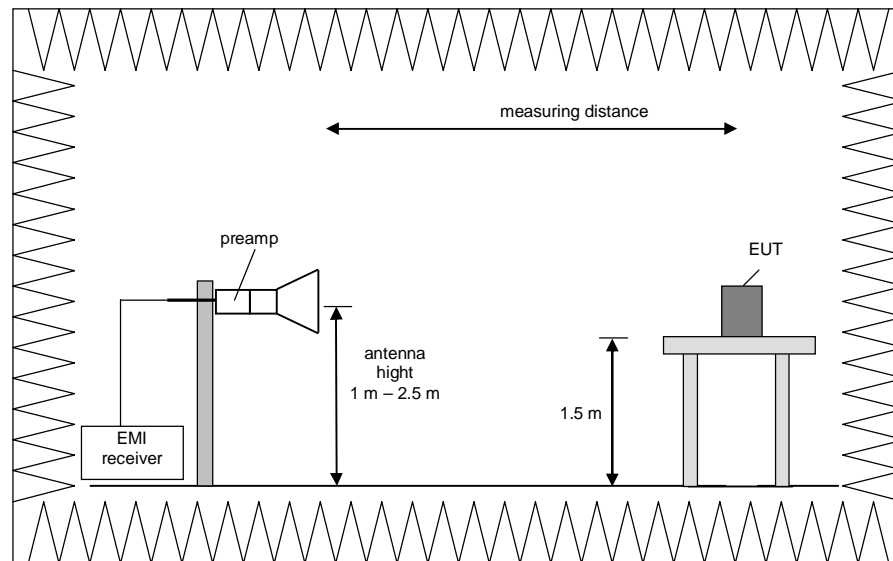

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 26.5 GHz, 26.5 GHz to 40 GHz, 40 GHz to 60 GHz, 60 GHz to 75 GHz and 75 GHz to 110 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Steps 1) to 6) are defined as preliminary measurement.


5.7.2 Test results (radiated emissions)

5.7.2.1 Preliminary radiated emission measurement


| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 21 °C | Relative humidity | 51 % |
|---------------------|-------|-------------------|------|

- Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m below 1 GHz and 1,5 m above 1 GHz. The distance between EUT and antenna was 3 m.
- Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A.
- Test record: All results are shown in the following.
- Supply voltage: During all measurements the host of the EUT was powered with 5 V DC via a laboratory power supply.
- Remark: Only the plots of the worst case emissions are submitted for every frequency range above 1 GHz in the preliminary results.
- The Emissions below 1 GHz were similar for all transmit frequencies, modulation schemes and data rates. Therefore only the results of an exemplary test case are submitted below.


145298 9-150k.wmf: Spurious emissions from 9 kHz to 150 kHz:

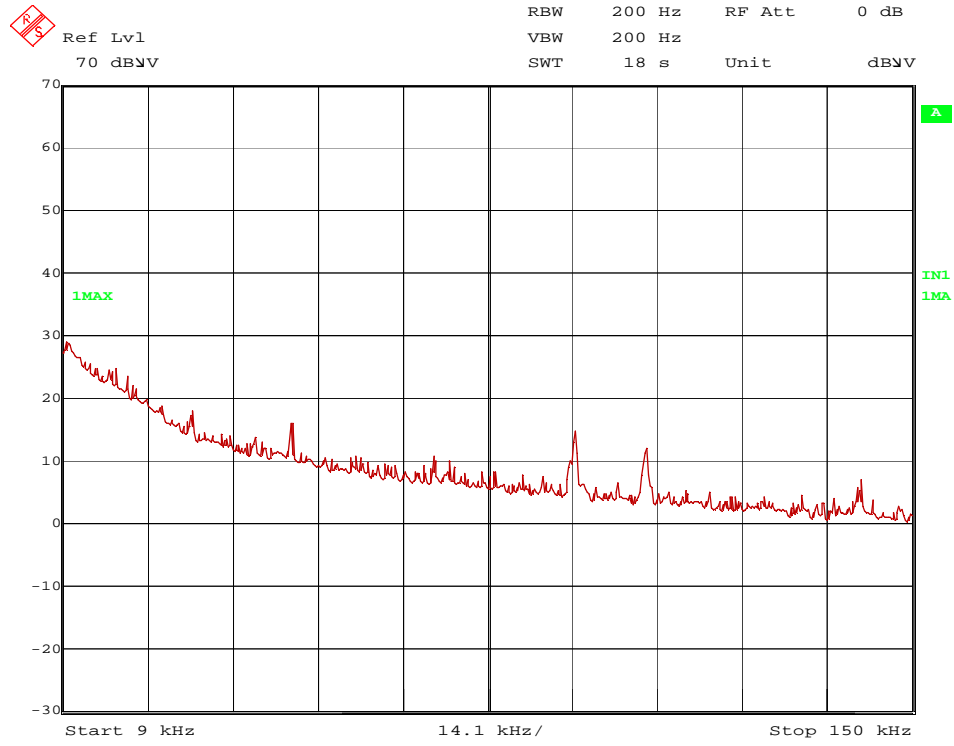


145298 150k-1M.wmf: Spurious emissions from 150 kHz to 1 MHz:

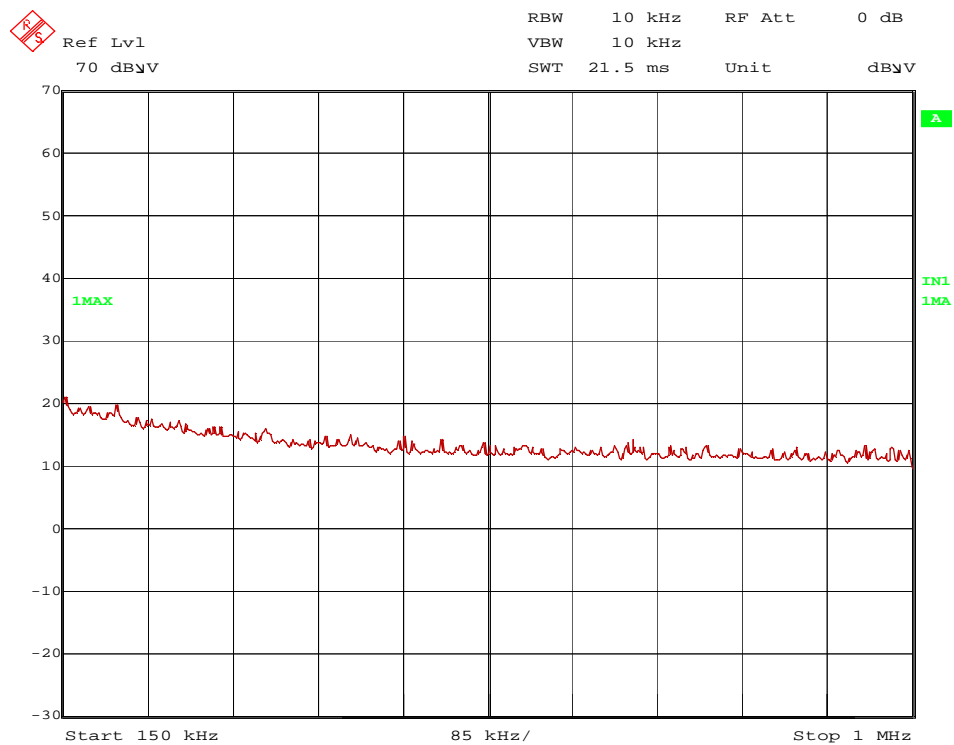

145298 1-30M: Spurious emissions from 1 MHz to 30 MHz:

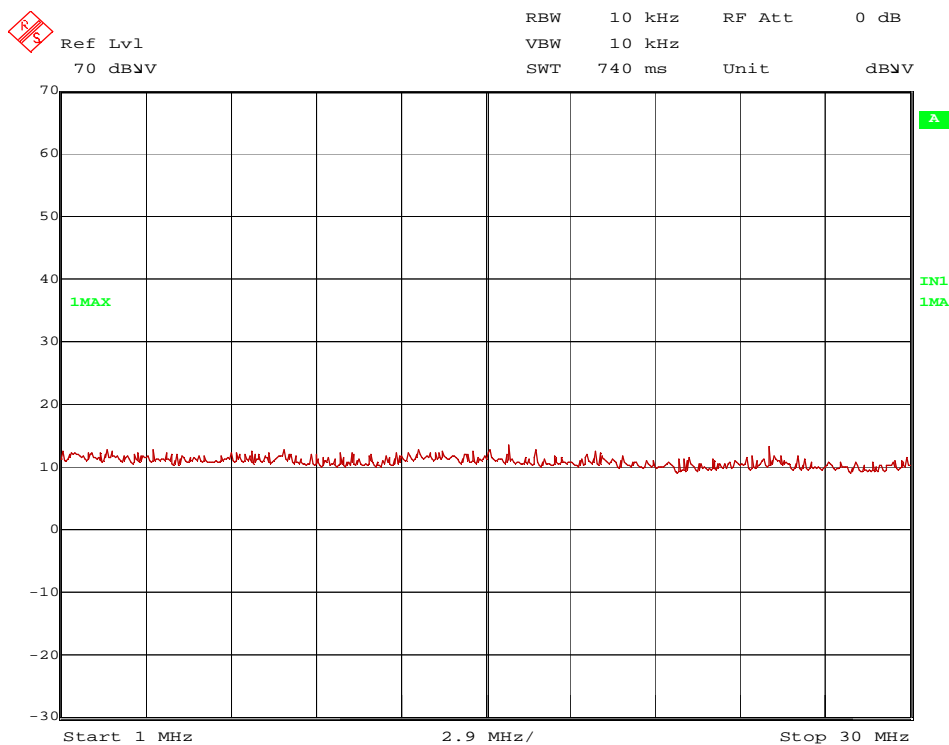


145298 #23 30M-1G WLAN_ch40.wmf: Spurious emissions from 30 MHz to 1 GHz:

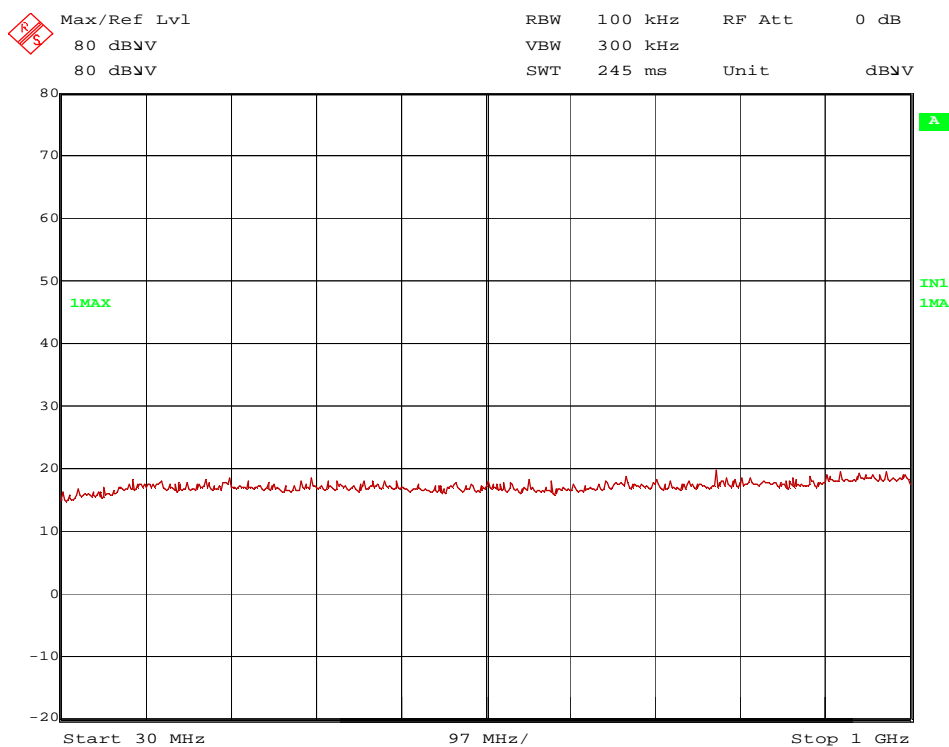


5.7.2.1.1 Results for the 5.15 - 5.25 GHz, 5.25 – 5.35 GHz and 5.47 - 5.725 GHz bands


145298 #23 1-8G WLAN_ch64.wmf: Spurious emissions from 1 GHz to 8 GHz (operation mode 17):

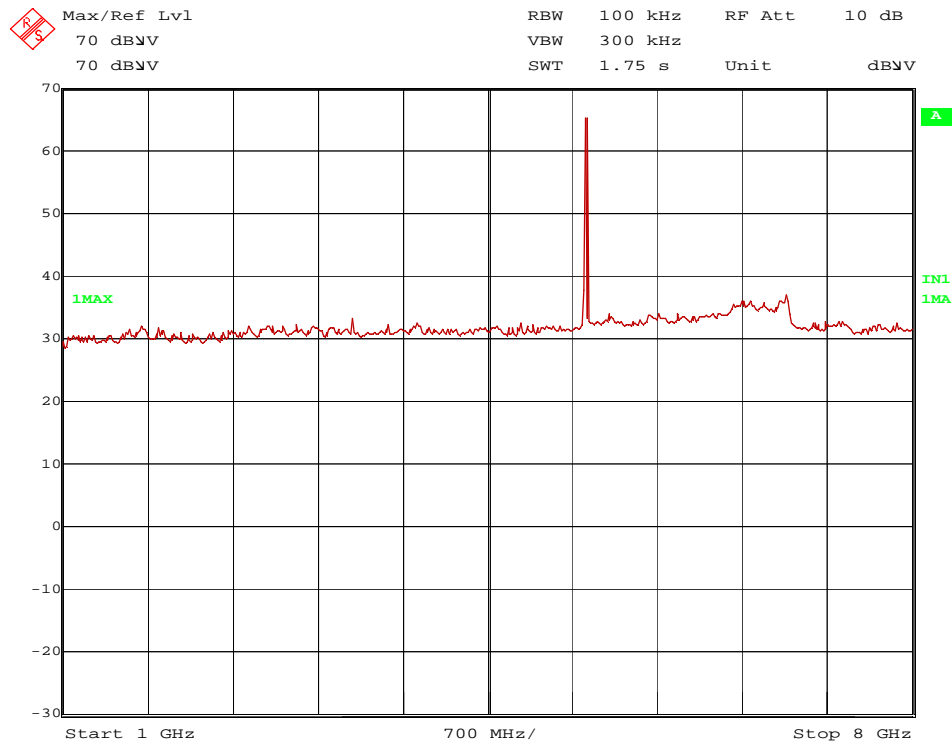

145298 #23 8-12G WLAN_ch64.wmf: Spurious emissions from 8 GHz to 12 GHz (operation mode 17):

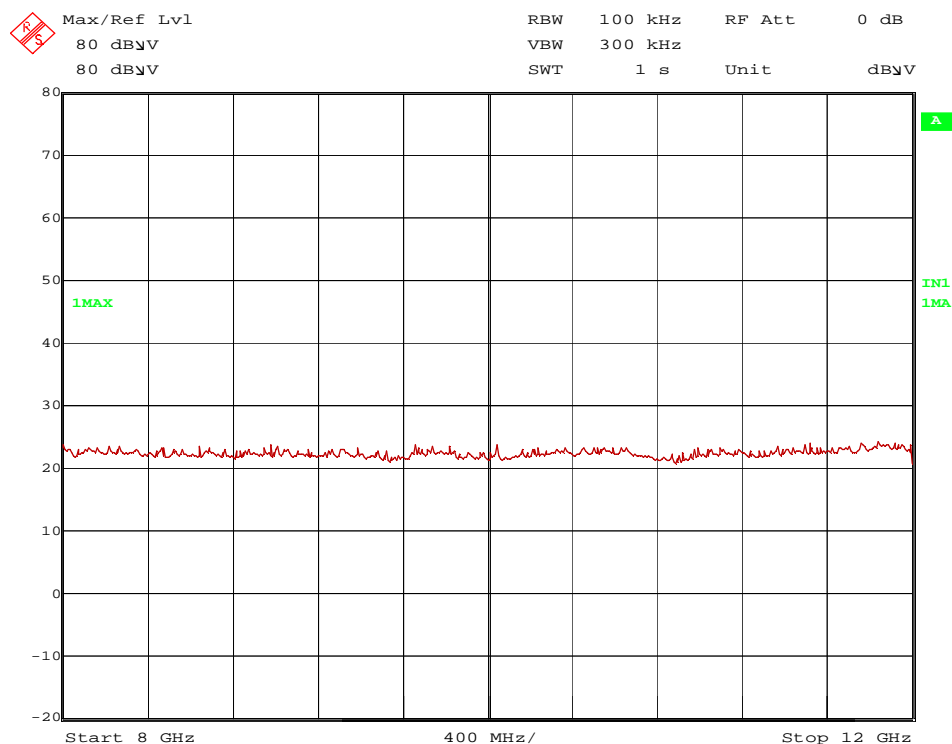

145298 #23 26,5-40G WLAN ch140.wmf: Spurious emissions from 26.5 – 40 GHz (operation mode 21):

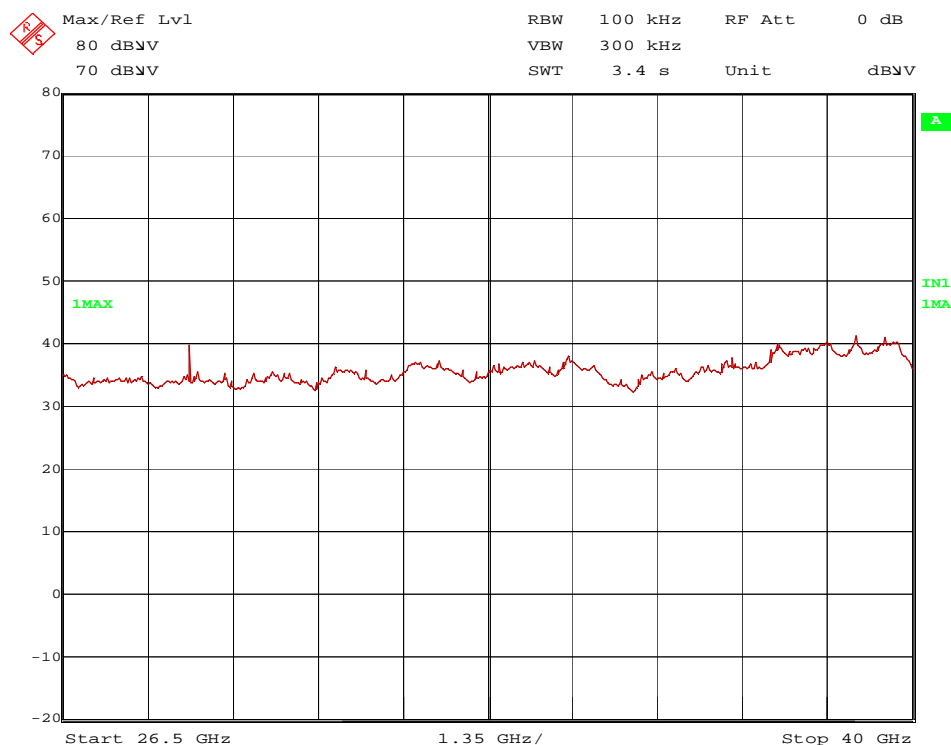

The following frequencies were found inside the restricted bands during the preliminary radiated emission test:

- 13250, 13300, 15540, 15600, 15720, 15780, 15900, 15960, 20720, 20800, 20960, 21040, 21200, 21280, 22320, 22800, 31200, 31440, 31560 MHz and 31800 MHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 12950, 13000, 13100, 13150, 16500, 16740, 17100, 22000, 25900, 26000, 26200, 26300, 26500, 26600, 27500, 27900, 28500, 31080, 31920, 33000, 33480, and
- 34200 MHz


These frequencies have to be measured in a final measurement. The results are presented in the following.

TEST EQUIPMENT USED FOR THE TEST:


6, 8 - 25, 29, 32, 33

5.7.2.1.2 Results for the 5.725 – 5.85 GHz band


145298 #23 1-8G WLAN ch165.wmf: Spurious emissions from 1 GHz to 8 GHz (operation mode 24):

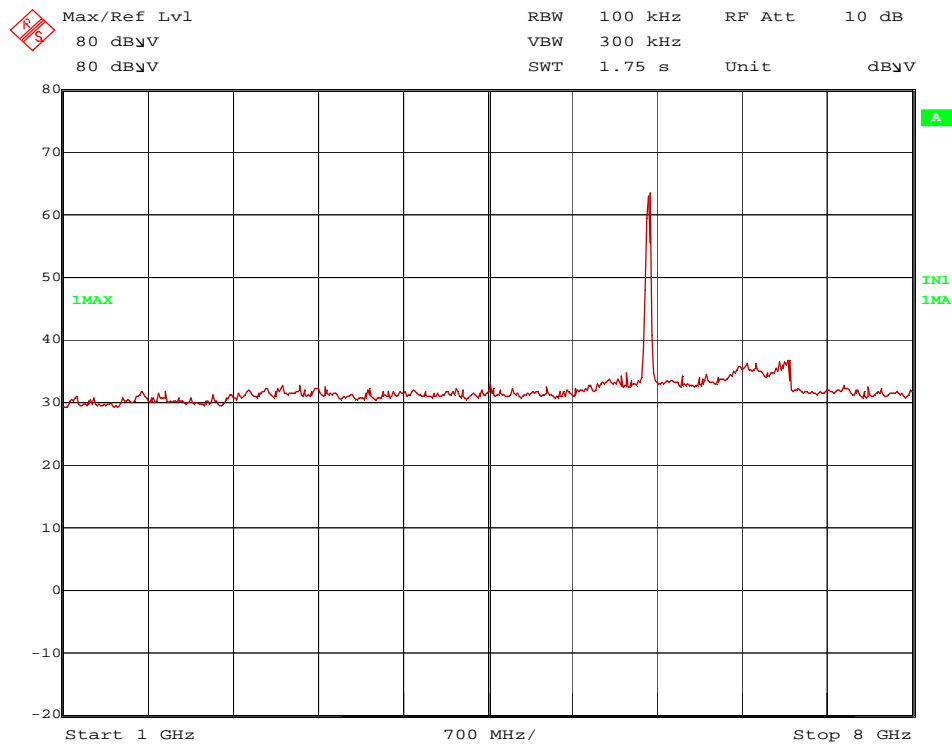


145298 #23 8-12G WLAN ch157.wmf: Spurious emissions from 8 GHz to 12 GHz (operation mode 23):

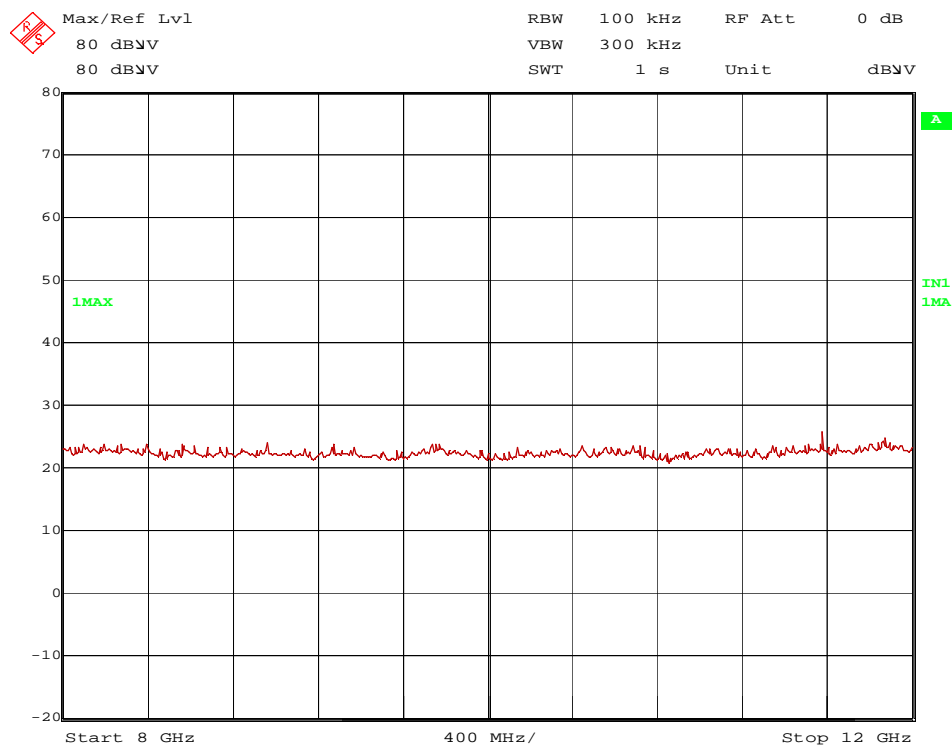


145298 23 12-18G WLAN ch157.wmf: Spurious emissions from 12 to 18 GHz (operation mode 23):

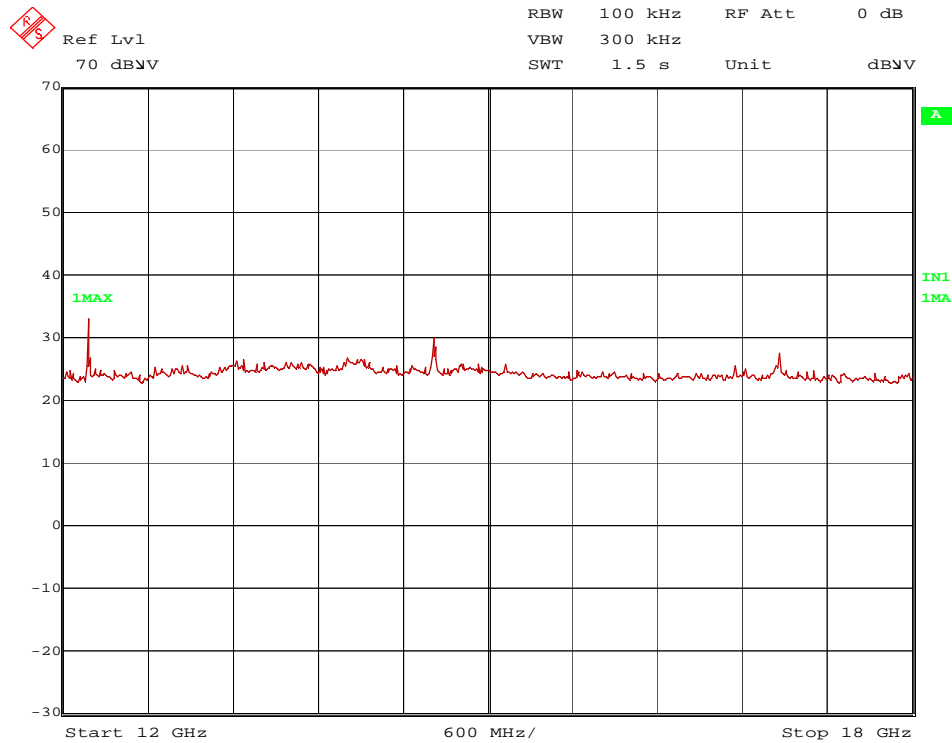

145298 #23 18-26,5G WLAN ch165.wmf: Spurious emissions from 18 – 26.5 GHz (operation mode 24):

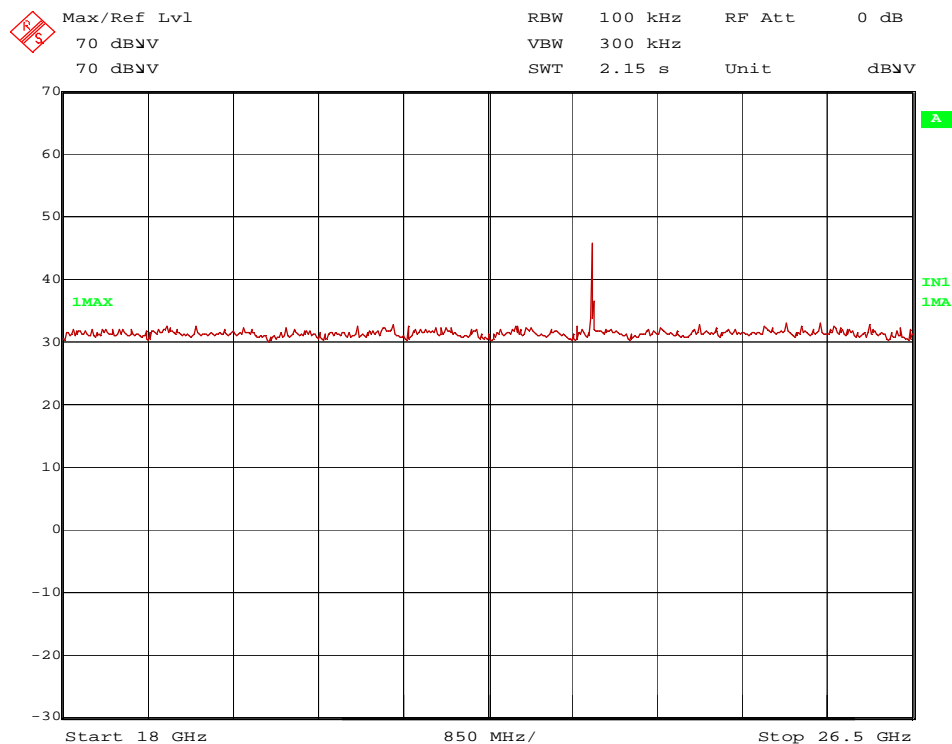

145298 #23 26,5-40G WLAN ch165.wmf: Spurious emissions from 26.5 - 40GHz (operation mode 24):

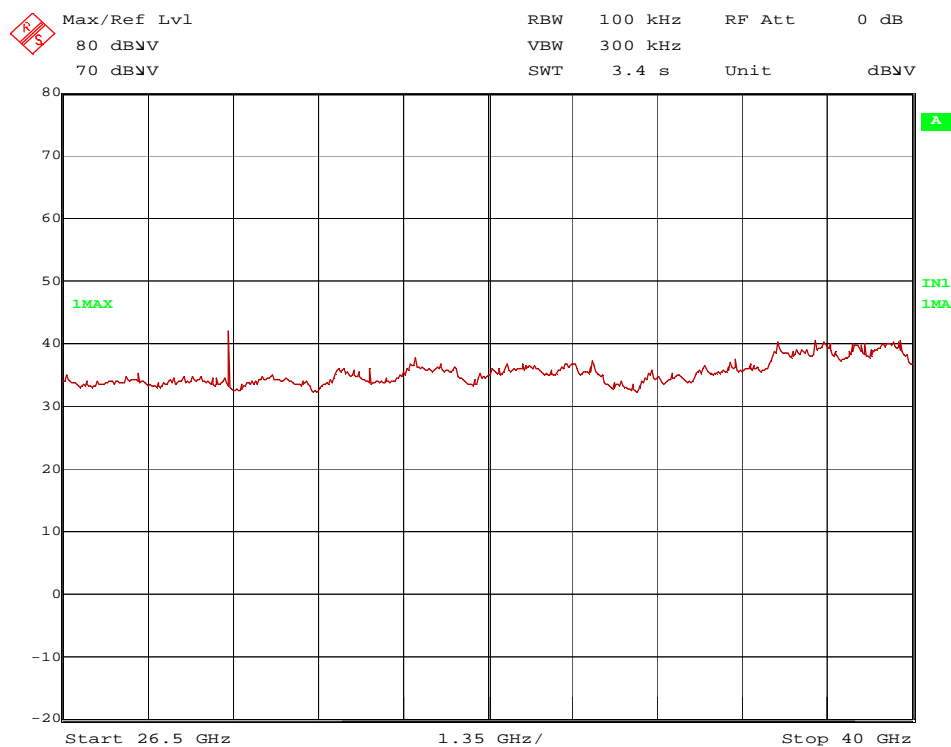

The following frequencies were found inside the restricted bands during the preliminary radiated emission test:

- 11570 MHz, 22980 MHz

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 17235.MHz, 17355 MHz, 17475 MHz, 23140 MHz, 23300 MHz, 28725 MHz, 28925 MHz, 29125 MHz

These frequencies have to be measured in a final measurement. The results are presented in the following.

TEST EQUIPMENT USED FOR THE TEST:

6, 8 - 25, 29, 32, 33

5.7.2.2 Final radiated emission measurement (9 kHz to 1 GHz)

No emissions could be measured at the open area test site. Therefore no results for the final measurements are submitted.

5.7.2.3 Final radiated emission measurement (1 GHz to 40 GHz)

| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 22 °C | Relative humidity | 55 % |
|---------------------|-------|-------------------|------|

Position of EUT: The EUT was set-up on a non-conducting table of a height of 1.5 m. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the host of the EUT was powered with 5 V via an laboratory power supply..

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

Additional information: For simplification all values were compared to the restricted band limits. Position 2 was found to have the worst case spurious emissions.

Transmitter operates at the lower end of the assigned frequency band (operation mode 13)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 12950 | 46.8 | 74.0 | 27.2 | 36.4 | 33.6 | 26.4 | 3.2 | 150 | Vert. | No |
| 15540 | 48.8 | 74.0 | 25.2 | 39.2 | 33.7 | 27.8 | 3.7 | 150 | Hor. | Yes |
| 20720 | 55.3 | 74.0 | 18.7 | 51.4 | 37.1 | 37.7 | 4.4 | 150 | Hor. | Yes |
| 25900 | 47.0 | 74.0 | 27.0 | 43.9 | 37.2 | 38.9 | 4.9 | 150 | Hor. | No |
| 31080 | 51.1 | 74.0 | 22.9 | 36.3 | 40.7 | 28.8 | 2.9 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 12950 | 39.8 | 54.0 | 14.2 | 29.4 | 33.6 | 26.4 | 3.2 | 150 | Vert. | No |
| 15540 | 36.0 | 54.0 | 18.0 | 26.4 | 33.7 | 27.8 | 3.7 | 150 | Hor. | Yes |
| 20720 | 52.2 | 54.0 | 1.8 | 48.3 | 37.1 | 37.7 | 4.4 | 150 | Hor. | Yes |
| 25900 | 40.2 | 54.0 | 13.8 | 37.1 | 37.2 | 38.9 | 4.9 | 150 | Hor. | No |
| 31080 | 42.3 | 54.0 | 11.7 | 27.5 | 40.7 | 28.8 | 2.9 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the lower end of the assigned frequency band (operation mode 16)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13150 | 46.6 | 74.0 | 27.4 | 36.3 | 33.6 | 26.6 | 3.2 | 150 | Vert. | No |
| 15780 | 57.8 | 74.0 | 16.2 | 48.0 | 33.8 | 27.7 | 3.7 | 150 | Hor. | Yes |
| 21040 | 55.9 | 74.0 | 18.1 | 52.5 | 37.1 | 37.9 | 4.3 | 150 | Hor. | Yes |
| 26300 | 56.1 | 74.0 | 17.9 | 44.6 | 37.3 | 30.9 | 5.0 | 150 | Hor. | No |
| 31560 | 51.4 | 74.0 | 22.6 | 35.4 | 40.6 | 27.6 | 3.0 | 150 | Hor. | Yes |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13150 | 38,2 | 54,0 | 15,8 | 27,9 | 33,6 | 26,6 | 3,2 | 150 | Vert. | No |
| 15780 | 42,6 | 54,0 | 11,4 | 32,8 | 33,8 | 27,7 | 3,7 | 150 | Hor. | Yes |
| 21040 | 52,4 | 54,0 | 1,6 | 49,0 | 37,1 | 37,9 | 4,3 | 150 | Hor. | Yes |
| 26300 | 49,0 | 54,0 | 5,0 | 37,5 | 37,3 | 30,9 | 5,0 | 150 | Hor. | No |
| 31560 | 43,1 | 54,0 | 10,9 | 27,1 | 40,6 | 27,6 | 3,0 | 150 | Hor. | Yes |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the lower end of the assigned frequency band (operation mode 19)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|------|---------------------|
| 16500 | 56.4 | 74.0 | 17.6 | 46.9 | 33.8 | 28.1 | 3.8 | 150 | Hor. | No |
| 22000 | 53.2 | 74.0 | 20.8 | 49.3 | 37.2 | 37.8 | 4.5 | 150 | Hor. | No |
| 27500 | 50.9 | 74.0 | 23.1 | 35.4 | 40.7 | 30.3 | 5.1 | 150 | Hor. | No |
| 33000 | 53.4 | 74.0 | 20.6 | 35.8 | 40.7 | 26.4 | 3.3 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|------|---------------------|
| 16500 | 43,5 | 54,0 | 10,5 | 34,0 | 33,8 | 28,1 | 3,8 | 150 | Hor. | No |
| 22000 | 49,1 | 54,0 | 4,9 | 45,2 | 37,2 | 37,8 | 4,5 | 150 | Hor. | No |
| 27500 | 42,2 | 54,0 | 11,8 | 26,7 | 40,7 | 30,3 | 5,1 | 150 | Hor. | No |
| 33000 | 44,8 | 54,0 | 9,2 | 27,2 | 40,7 | 26,4 | 3,3 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the lower end of the assigned frequency band (operation mode 22)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restr. Band |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|------|----------------|
| 17235 | 64.0 | 74.0 | 10.0 | 54.9 | 33.8 | 28.6 | 4.0 | 150 | Hor. | No |
| 22980 | 56.8 | 74.0 | 17.2 | 53.1 | 37.2 | 38.1 | 4.6 | 150 | Hor. | Yes |
| 28725 | 50.1 | 74.0 | 23.9 | 37.1 | 40.6 | 30.2 | 2.6 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restr. Band |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|----------------|
| 17235 | 50.1 | 54.0 | 3.9 | 41.0 | 33.8 | 28.6 | 4.0 | 150 | Hor. | No |
| 22980 | 50.4 | 54.0 | 3.6 | 46.7 | 37.2 | 38.1 | 4.6 | 150 | Vert. | Yes |
| 28725 | 43.2 | 54.0 | 10.8 | 30.2 | 40.6 | 30.2 | 2.6 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the middle of the assigned frequency band (operation mode 14)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13000 | 46.9 | 74.0 | 27.1 | 36.5 | 33.6 | 26.5 | 3.3 | 150 | Hor. | No |
| 15600 | 51.7 | 74.0 | 22.3 | 42.1 | 33.7 | 27.9 | 3.8 | 150 | Hor. | Yes |
| 20800 | 55.5 | 74.0 | 18.5 | 51.8 | 37.1 | 37.7 | 4.3 | 150 | Hor. | Yes |
| 26000 | 55.6 | 74.0 | 18.4 | 44.1 | 37.2 | 30.7 | 5.0 | 150 | Hor. | No |
| 31200 | 50.9 | 74.0 | 23.1 | 36.0 | 40.7 | 28.4 | 2.7 | 150 | Vert. | Yes |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13000 | 39.6 | 54.0 | 14.4 | 29.2 | 33.6 | 26.5 | 3.3 | 150 | Hor. | No |
| 15600 | 37.5 | 54.0 | 16.5 | 27.9 | 33.7 | 27.9 | 3.8 | 150 | Hor. | Yes |
| 20800 | 52.3 | 54.0 | 1.7 | 48.6 | 37.1 | 37.7 | 4.3 | 150 | Hor. | Yes |
| 26000 | 48.7 | 54.0 | 5.3 | 37.2 | 37.2 | 30.7 | 5.0 | 150 | Hor. | No |
| 31200 | 42.4 | 54.0 | 11.6 | 27.5 | 40.7 | 28.4 | 2.7 | 150 | Vert. | Yes |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the middle of the assigned frequency band (operation mode 17)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13250 | 46.6 | 74.0 | 27.4 | 36.3 | 33.6 | 26.5 | 3.2 | 150 | Vert. | Yes |
| 15900 | 58.9 | 74.0 | 15.1 | 49.1 | 33.8 | 27.6 | 3.6 | 150 | Hor. | Yes |
| 21200 | 56.9 | 74.0 | 17.1 | 53.2 | 37.1 | 37.8 | 4.4 | 150 | Hor. | Yes |
| 26500 | 58.6 | 74.0 | 15.4 | 43.9 | 40.6 | 30.8 | 4.9 | 150 | Hor. | No |
| 31800 | 51.8 | 74.0 | 22.2 | 35.8 | 40.6 | 27.5 | 2.9 | 150 | Hor. | Yes |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13250 | 37.7 | 54.0 | 16.3 | 27.4 | 33.6 | 26.5 | 3.2 | 150 | Vert. | Yes |
| 15900 | 44.2 | 54.0 | 9.8 | 34.4 | 33.8 | 27.6 | 3.6 | 150 | Hor. | Yes |
| 21200 | 53.7 | 54.0 | 0.3 | 50.0 | 37.1 | 37.8 | 4.4 | 150 | Hor. | Yes |
| 26500 | 51.6 | 54.0 | 2.4 | 36.9 | 40.6 | 30.8 | 4.9 | 150 | Hor. | No |
| 31800 | 43.1 | 54.0 | 10.9 | 27.1 | 40.6 | 27.5 | 2.9 | 150 | Hor. | Yes |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the middle of the assigned frequency band (operation mode 20)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 16740 | 59.9 | 74.0 | 14.1 | 50.9 | 33.8 | 28.6 | 3.9 | 150 | Hor. | No |
| 22320 | 52.3 | 74.0 | 21.7 | 48.3 | 37.2 | 37.7 | 4.5 | 150 | Vert. | Yes |
| 27900 | 49.1 | 74.0 | 24.9 | 35.8 | 40.6 | 30.1 | 2.8 | 150 | Hor. | No |
| 33480 | 54.6 | 74.0 | 19.4 | 36.6 | 40.7 | 26.0 | 3.3 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 16740 | 45.2 | 54.0 | 8.8 | 36.2 | 33.8 | 28.6 | 3.9 | 150 | Hor. | No |
| 22320 | 48.8 | 54.0 | 5.2 | 44.8 | 37.2 | 37.7 | 4.5 | 150 | Vert. | Yes |
| 27900 | 40.9 | 54.0 | 13.1 | 27.6 | 40.6 | 30.1 | 2.8 | 150 | Hor. | No |
| 33480 | 45.3 | 54.0 | 8.7 | 27.3 | 40.7 | 26.0 | 3.3 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the middle of the assigned frequency band (operation mode 23)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dB μ V/m | Limit dB μ V/m | Margin dB | Readings dB μ V | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restr. Band |
|-------------------------|---------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|------|----------------|
| 11570 | 52.0 | 74.0 | 22.0 | 33.7 | 38.9 | 23.7 | 3.1 | 150 | Hor. | Yes |
| 17355 | 65.0 | 74.0 | 9.0 | 55.6 | 33.9 | 28.4 | 3.9 | 150 | Hor. | No |
| 23140 | 56.3 | 74.0 | 17.7 | 52.4 | 37.2 | 37.8 | 4.6 | 150 | Hor. | No |
| 28925 | 49.6 | 74.0 | 24.4 | 36.3 | 40.6 | 30.3 | 3.0 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dB μ V/m | Limit dB μ V/m | Margin dB | Readings dB μ V | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restr. Band |
|-------------------------|---------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|------|----------------|
| 11570 | 41.7 | 54.0 | 12.3 | 23.4 | 38.9 | 23.7 | 3.1 | 150 | Hor. | Yes |
| 17355 | 51.2 | 54.0 | 2.8 | 41.8 | 33.9 | 28.4 | 3.9 | 150 | Hor. | No |
| 23140 | 49.1 | 54.0 | 4.9 | 45.2 | 37.2 | 37.8 | 4.6 | 150 | Hor. | No |
| 28925 | 42.6 | 54.0 | 11.4 | 29.3 | 40.6 | 30.3 | 3.0 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the upper end of the assigned frequency band (operation mode 15)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dB μ V/m | Limit dB μ V/m | Margin dB | Readings dB μ V | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13100 | 46.7 | 74.0 | 27.3 | 36.1 | 33.6 | 26.3 | 3.3 | 150 | Vert. | No |
| 15720 | 52.5 | 74.0 | 21.5 | 42.9 | 33.7 | 27.8 | 3.6 | 150 | Hor. | Yes |
| 20960 | 56.2 | 74.0 | 17.8 | 52.5 | 37.1 | 37.8 | 4.4 | 150 | Hor. | Yes |
| 26200 | 55.3 | 74.0 | 18.7 | 44.2 | 37.2 | 30.9 | 4.8 | 150 | Hor. | No |
| 31440 | 51.2 | 74.0 | 22.8 | 35.3 | 40.7 | 27.7 | 2.9 | 150 | Hor. | Yes |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dB μ V/m | Limit dB μ V/m | Margin dB | Readings dB μ V | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13100 | 38.2 | 54.0 | 15.8 | 27.6 | 33.6 | 26.3 | 3.3 | 150 | Vert. | No |
| 15720 | 38.7 | 54.0 | 15.3 | 29.1 | 33.7 | 27.8 | 3.6 | 150 | Hor. | Yes |
| 20960 | 52.5 | 54.0 | 1.5 | 48.8 | 37.1 | 37.8 | 4.4 | 150 | Hor. | Yes |
| 26200 | 48.6 | 54.0 | 5.4 | 37.5 | 37.2 | 30.9 | 4.8 | 150 | Hor. | No |
| 31440 | 43.0 | 54.0 | 11.0 | 27.1 | 40.7 | 27.7 | 2.9 | 150 | Hor. | Yes |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the upper end of the assigned frequency band (operation mode 18)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13300 | 47.0 | 74.0 | 27.0 | 36.6 | 33.6 | 26.3 | 3.2 | 150 | Vert. | Yes |
| 15960 | 56.6 | 74.0 | 17.4 | 46.8 | 33.8 | 27.7 | 3.7 | 150 | Hor. | Yes |
| 21280 | 57.1 | 74.0 | 16.9 | 53.3 | 37.2 | 37.8 | 4.4 | 150 | Hor. | Yes |
| 26600 | 50.9 | 74.0 | 23.1 | 36.2 | 40.6 | 30.7 | 4.8 | 150 | Hor. | No |
| 31920 | 53.0 | 74.0 | 21.0 | 36.2 | 40.6 | 26.9 | 3.1 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 13300 | 37.7 | 54.0 | 16.3 | 27.3 | 33.6 | 26.3 | 3.2 | 150 | Vert. | Yes |
| 15960 | 41.6 | 54.0 | 12.4 | 31.8 | 33.8 | 27.7 | 3.7 | 150 | Hor. | Yes |
| 21280 | 53.2 | 54.0 | 0.8 | 49.4 | 37.2 | 37.8 | 4.4 | 150 | Hor. | Yes |
| 26600 | 43.4 | 54.0 | 10.6 | 28.7 | 40.6 | 30.7 | 4.8 | 150 | Hor. | No |
| 31920 | 43.7 | 54.0 | 10.3 | 26.9 | 40.6 | 26.9 | 3.1 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the upper end of the assigned frequency band (operation mode 21)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 17100 | 58.6 | 74.0 | 15.4 | 49.2 | 33.8 | 28.3 | 3.9 | 150 | Hor. | No |
| 22800 | 53.0 | 74.0 | 21.0 | 48.9 | 37.2 | 37.8 | 4.7 | 150 | Vert. | Yes |
| 28500 | 49.7 | 74.0 | 24.3 | 36.6 | 40.6 | 30.3 | 2.8 | 150 | Hor. | No |
| 34200 | 53.2 | 74.0 | 20.8 | 35.3 | 40.7 | 26.0 | 3.2 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dBμV/m | Limit dBμV/m | Margin dB | Readings dBμV | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restricted Band? |
|-------------------------|---------------------------|-----------------|--------------|-------------------|--------------------------|--------------|---------------------|--------------|-------|---------------------|
| 17100 | 43.5 | 54.0 | 10.5 | 34.1 | 33.8 | 28.3 | 3.9 | 150 | Hor. | No |
| 22800 | 49.8 | 54.0 | 4.2 | 45.7 | 37.2 | 37.8 | 4.7 | 150 | Vert. | Yes |
| 28500 | 42.3 | 54.0 | 11.7 | 29.2 | 40.6 | 30.3 | 2.8 | 150 | Hor. | No |
| 34200 | 42.4 | 54.0 | 11.6 | 24.5 | 40.7 | 26.0 | 3.2 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Transmitter operates at the upper end of the assigned frequency band (operation mode 24)

Result measured with the peak detector:

| Frequency MHz | Meas. Result dB μ V/m | Limit dB μ V/m | Margin dB | Readings dB μ V | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restr. Band |
|-------------------------|---------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|------|----------------|
| 17475 | 66.1 | 74.0 | 7.9 | 56.4 | 33.9 | 28.0 | 3.9 | 150 | Hor. | No |
| 23300 | 58.5 | 74.0 | 15.5 | 54.5 | 37.2 | 37.9 | 4.7 | 150 | Hor. | No |
| 29125 | 50.1 | 74.0 | 23.9 | 37.1 | 40.6 | 30.3 | 2.7 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Result measured with the average detector:

| Frequency MHz | Meas. Result dB μ V/m | Limit dB μ V/m | Margin dB | Readings dB μ V | Antenna factor 1/m | Preamp dB | Cable loss dB | Height cm | Pol. | Restr. Band |
|-------------------------|---------------------------------|-----------------------|--------------|------------------------|--------------------------|--------------|---------------------|--------------|------|----------------|
| 17475 | 52.5 | 54.0 | 1.5 | 42.8 | 33.9 | 28.0 | 3.9 | 150 | Hor. | No |
| 23300 | 49.6 | 54.0 | 4.4 | 45.6 | 37.2 | 37.9 | 4.7 | 150 | Hor. | No |
| 29125 | 43.7 | 54.0 | 10.3 | 30.7 | 40.6 | 30.3 | 2.7 | 150 | Hor. | No |
| Measurement uncertainty | | | | +2.2 dB / -3.6 dB | | | | | | |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

6, 8 - 25, 29, 32, 33


5.8 Conducted emissions on power supply lines (150 kHz to 30 MHz)

5.8.1 Method of measurement

This test will be carried out in a shielded chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The setup of the Equipment under test will be in accordance to ANSI C63.10-2013 [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the appropriate limit, this emission will be measured with the average and quasi-peak detector on all lines.

| Frequency range | Resolution bandwidth |
|-------------------|----------------------|
| 150 kHz to 30 MHz | 9 kHz |

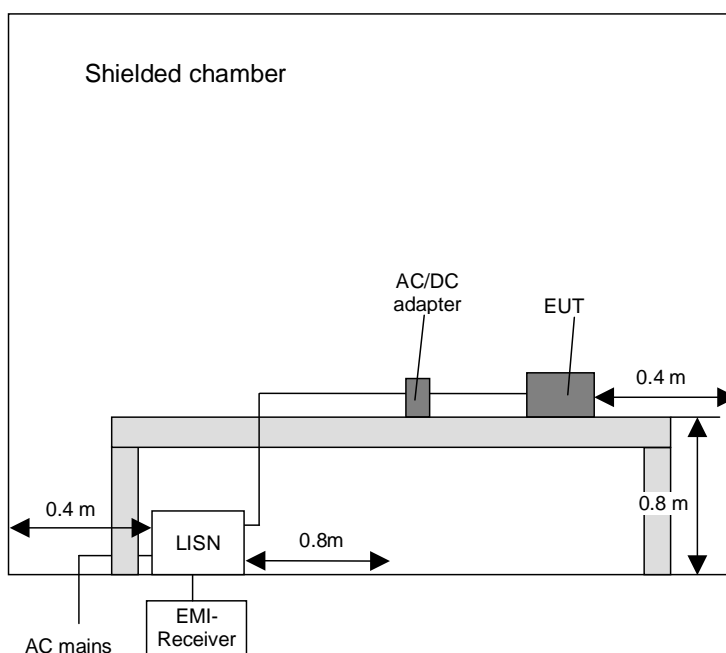

5.8.2 Test results (conducted emissions on power supply lines)

| | | | |
|---------------------|-------|-------------------|------|
| Ambient temperature | 20 °C | Relative humidity | 52 % |
|---------------------|-------|-------------------|------|


Position of EUT: For the test the EUT were plugged into a laptop PC via a RS232 cable. The EUT was set to continuous transmission on channel 60 (n20 mode, 6.5 Mbps, PWR: 16 dBm, operation mode 14) by the laptop PC. The laptop PC with the inserted EUT was set-up on a non-conducting table of a height of 0.8 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: Measurement performed with US 120V/60Hz. For the test a power supply type 2121 from Mascot was used.

The curves in the diagram only represent for each frequency point the maximum measured value of all preliminary measurements, which were made for each power supply line. The top-measured curve represents the peak measurement and the bottom-measured curve the average measurement. The quasi-peak measured points are marked by an x and the average measured points by an +.

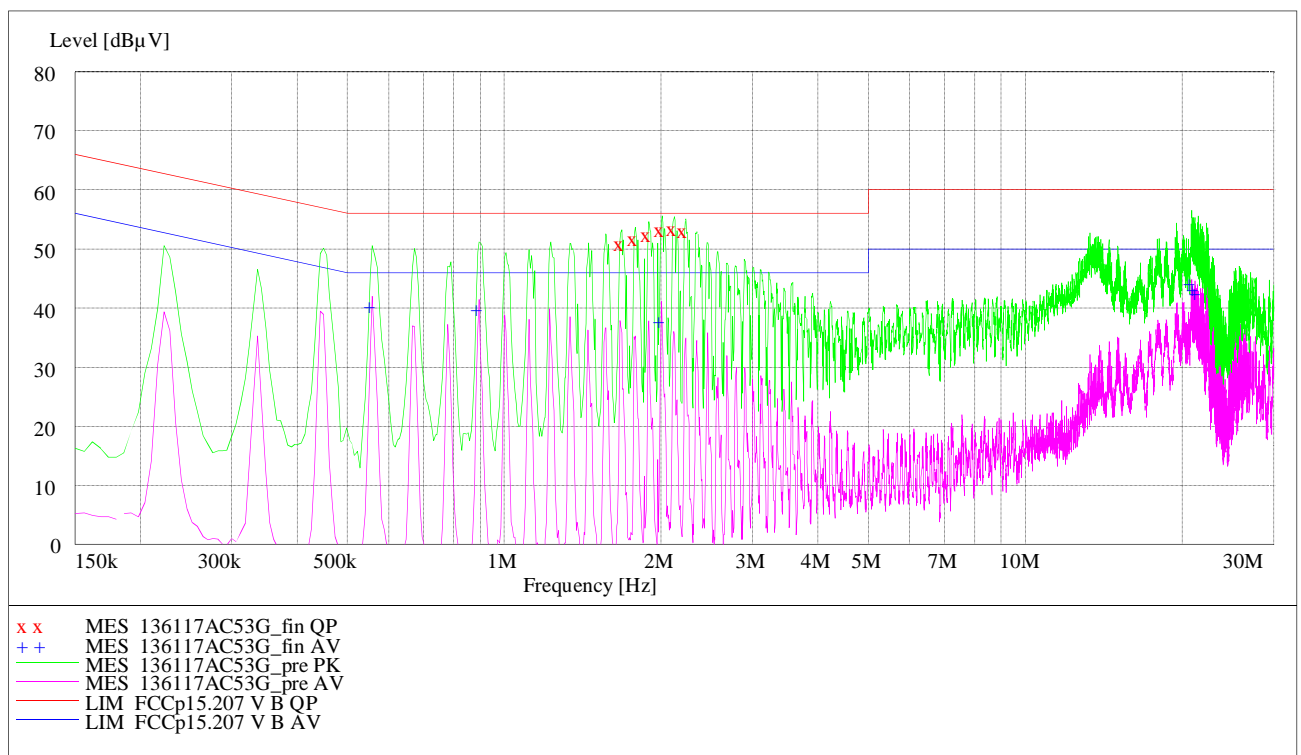

Result measured with the quasipeak detector (marked by an x):

| Frequency MHz | Level dBµV | Transducer dB | Limit dBµV | Margin dB | Line | PE |
|------------------|---------------|------------------|---------------|--------------|------|-----|
| 1.680000 | 51.00 | 0.7 | 56.0 | 5.0 | L1 | GND |
| 1.788000 | 51.90 | 0.7 | 56.0 | 4.1 | L1 | FLO |
| 1.896000 | 52.70 | 0.7 | 56.0 | 3.3 | L1 | FLO |
| 2.010000 | 53.70 | 0.8 | 56.0 | 2.3 | L1 | GND |
| 2.124000 | 53.80 | 0.8 | 56.0 | 2.2 | L1 | FLO |
| 2.232000 | 53.30 | 0.8 | 56.0 | 2.7 | L1 | FLO |

Result measured with the average detector (marked by a +):

| Frequency MHz | Level dBµV | Transducer dB | Limit dBµV | Margin dB | Line | PE |
|------------------|---------------|------------------|---------------|--------------|------|-----|
| 0.558000 | 40.70 | 0.9 | 46.0 | 5.3 | L1 | GND |
| 0.894000 | 40.10 | 0.7 | 46.0 | 5.9 | L1 | GND |
| 2.004000 | 38.00 | 0.8 | 46.0 | 8.0 | L1 | GND |
| 20.916000 | 44.50 | 2.5 | 50.0 | 5.5 | N | FLO |
| 21.174000 | 43.70 | 2.5 | 50.0 | 6.3 | L1 | GND |
| 21.420000 | 42.80 | 2.5 | 50.0 | 7.2 | L1 | GND |

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

1 – 5

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

| No. | Test equipment | Type | Manufacturer | Serial No. | PM. No. | Cal. Date | Cal. Due |
|-----|--|----------------------------|-----------------------|--------------------------|---------|---|----------|
| 1 | Shielded chamber M47 | - | Albatross Projects | B83117-C6439-T262 - | 480662 | Weekly verification (system cal.) | |
| 2 | EMI Receiver | ESIB 26 | Rohde & Schwarz | 1088.7490 | 481182 | 03/21/2014 | 03/2016 |
| 3 | LISN | NSLK8128 | Schwarzbeck | 8128155 | 480058 | 12/20/2013 | 12/2014 |
| 4 | High pass filter | HR 0.13- 5ENN | FSY Microwave Inc. | DC 0109 SN 002 | 480340 | Weekly verification (system cal.) | |
| 5 | EMI Software | ES-K1 | Rohde & Schwarz | - | 480111 | - | - |
| 6 | Fully anechoic chamber M20 | - | Albatross Projects | B83107-E2439-T232 | 480303 | Weekly verification (system cal.) | |
| 7 | Spectrum analyser | FSU | Rohde & Schwarz | 200125 | 480956 | 07/15/2013 | 07/2015 |
| 8 | Measuring receiver | ESI 40 | Rohde & Schwarz | 100064 | 480355 | 02/26/2014 | 02/2016 |
| 9 | Controller | MCU | Maturo | MCU/043/971107 | 480832 | - | - |
| 10 | Turntable | DS420HE | Deisel | 420/620/80 | 480315 | - | - |
| 11 | Antenna support | AS615P | Deisel | 615/310 | 480187 | - | - |
| 12 | Antenna | CBL6112 B | Chase | 2688 | 480328 | 04/14/2014 | 04/2017 |
| 13 | Antenna | 3115 A | EMCO | 9609-4918 | 480183 | 11/09/2011 | 11/2014 |
| 14 | Standard Gain Horn 11.9 GHz – 18 GHz | 18240-20 | Flann Microwave | 483 | 480294 | Six month verification (system cal.) | |
| 15 | Standard Gain Horn 17.9 GHz – 26.7 GHz | 20240-20 | Flann Microwave | 411 | 480297 | Six month verification (system cal.) | |
| 16 | Standard Gain Horn Antenne 26.4 – 40.1 GHz | 22240-20 | Flann Microwave | 469 | 480229 | Six month verification (system cal.) | |
| 17 | RF-cable No. 3 | Sucoflex 106B | Huber&Suhner | 0563/6B / Kabel 3 | 480670 | Weekly verification (system cal.) | |
| 18 | RF-cable No. 40 | Sucoflex 106B | Huber&Suhner | 0708/6B / Kabel 40 | 481330 | Weekly verification (system cal.) | |
| 19 | RF-cable No. 36 | Sucoflex 106B | Huber&Suhner | 500003/6B / Kabel 36- | 481680 | Weekly verification (system cal.) | |
| 20 | RF-cable 1 m | KPS-1533- 400-KPS | Insulated Wire | - | 480300 | Six month verification (system cal.) | |
| 21 | RF-cable 2 m | KPS-1533- 800-KPS | Insulated Wire | | 480302 | Six month verification (system cal.) | |
| 22 | Preamplifier | JS3- 00101200- 23-5A | Miteq | 681851 | 480337 | Six month verification (system cal.) | |
| 23 | Preamplifier | JS3- 12001800- 16-5A | Miteq | 571667 | 480343 | Six month verification (system cal.) | |
| 24 | Preamplifier | JS3- 18002600- 20-5A | Miteq | 658697 | 480342 | Six month verification (system cal.) | |
| 25 | Loop antenna | HFH2-Z2 | Rohde & Schwarz | 832609/014 | 480059 | 02/18/2014 | 02/2016 |
| 26 | Power Meter | NRVD | Rohde & Schwarz | 833697/030 | 480589 | 07/2013 | 07/2015 |
| 27 | Power Sensor | NRV-Z2 | Rohde & Schwarz | 844854/003 | 480194 | 02/25/2014 | 02/2016 |

| | | | | | | | |
|----|-----------------------------|--|-----------------------------|----------------|--------|---|---------|
| 28 | 4 GHz High Pass Filter | WHKX4.0/18 G-8SS | Wainwright Instruments | 1 | 480587 | Weekly verification (system cal.) | |
| 29 | Single Control Unit | SCU | Maturo GmbH | SCU/006/971107 | 480831 | Calibration not necessary | |
| 30 | High pass Filter | H26G40G1 | Microwave Circuits. Inc. | 33471 | 480593 | Six month verification (system cal.) | |
| 31 | Temperature Test Chamber | MK 240 | Binder | 05-79022 | 480462 | 02/18/2014 | 08/2015 |
| 32 | High pass Filter | WHKX8.0/18 G-8SS | Wainwright Instruments | | 480586 | 12 month verification | |
| 33 | Tuneable band reject | WRCJ5100/5 850-20/50- 8SSK | Wainwright Instruments | | 480681 | Calibration not necessary | |
| 34 | Band reject filter | WRCTF2402/ 2480- 2399/2483- 35/12+9EE | Wainwright Instruments | | 480748 | Calibration not necessary | |

7 REPORT HISTORY

| Report Number | Date | Comment |
|---------------|--------------|------------------|
| F145298E5 | 08 July 2015 | Document created |
| | | |
| | | |
| | | |

8 LIST OF ANNEXES

ANNEX A TEST SET-UP PHOTOS 7 pages

145298_13.jpg: Test setup - Radiated emission (fully anechoic chamber)
 145298_02.jpg: Test setup - Radiated emission (fully anechoic chamber)
 145298_14.jpg: Test setup - Radiated emission (fully anechoic chamber)
 145298_15.jpg: Test setup - Radiated emission (fully anechoic chamber)
 145298_16.jpg: Test setup - Radiated emission (fully anechoic chamber)
 145298_17.jpg: Test setup - Radiated emission (fully anechoic chamber)
 145298_18.jpg: Test setup – conducted emissions on power supply lines

ANNEX B EXTERNAL PHOTOGRAPHS 2 pages

145298_11.jpg: Carrier Board with EUT– Top View
 145298_35.jpg: Carrier Board with EUT –Top View (Detail)
 145298_12.jpg: Carrier Board – Bottom View
 145298_07.jpg: Carrier Board – Connectors

ANNEX C INTERNAL PHOTOGRAPHS 2 pages

145298_08.jpg: EUT - top view. with shielding
 145298_09.jpg: EUT - top view. shielding removed
 145298_10.jpg: EUT – bottom view