



品名：WAG-B1.01.L.0806 工規

History List

[illegible]

WAG-B.01.L.0806 Specification

1. Explanation of part number :

WAG B 01 L 0806
(1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) Material : FPC

(3) Frequency : 1575.42Mhz , 2400-2500Mhz

(4) Coaxial Cable Type : 00

(5) Suffix : 047

2. Electrical Specification :

2-1. Frequency Band:

Frequency Band	MHz
GPS,WIFI	1575.42Mhz , 2400-2500Mhz,5150-5850Mhz

2-2. Impedance

50 ohm nominal

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

浙江海通通讯电子股份有限公司

SCALE :

UNIT : mm

DRAWN BY : 程国富

CHECKED BY : 于超群

DESIGNED BY : 于超群

APPROVED BY : 夏彪

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : WAG-F-LAG0-00-047 Specification

DOCUMENT
NO.

PAGE REV.
A0

2-3. VSWR ,Efficiency , and Active Data :

2-3.1 VSWR:

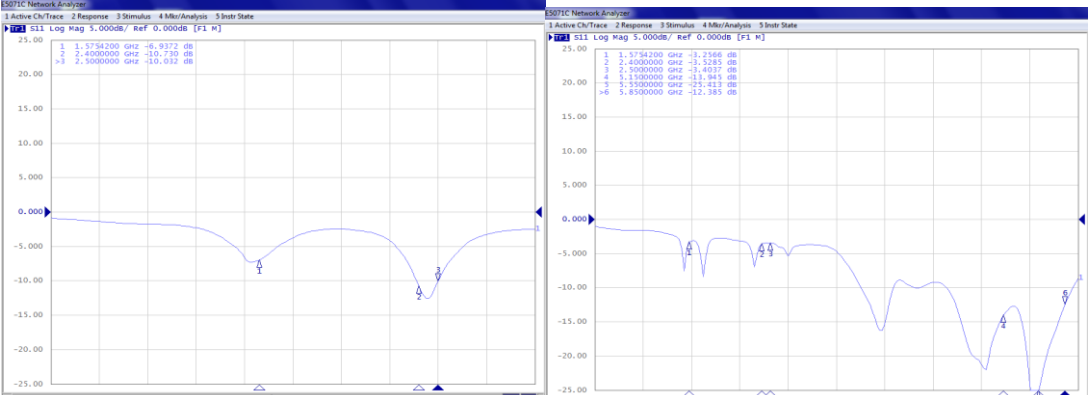Frequency Band	1575.42	2400	2500	5550
2-3-1. Typical Value:	-6.3	-11.2	-10.1	-25.8
2-3-2Measuring Method	1. A 50 Ω coaxial cable is connected to the fpcb antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.			
2-3-3Picture				

2-4. Measure and Chamber

2-4-1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 程国富

CHECKED BY : 于超群

DESIGNED BY : 于超群

APPROVED BY : 夏彪

TITLE : WAG-F-LAG0-00-047 Specification


DOCUMENT
NO.

PAGE REV.
A0

浙江海通通讯电子股份有限公司

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

2-4-2 Chamber definition

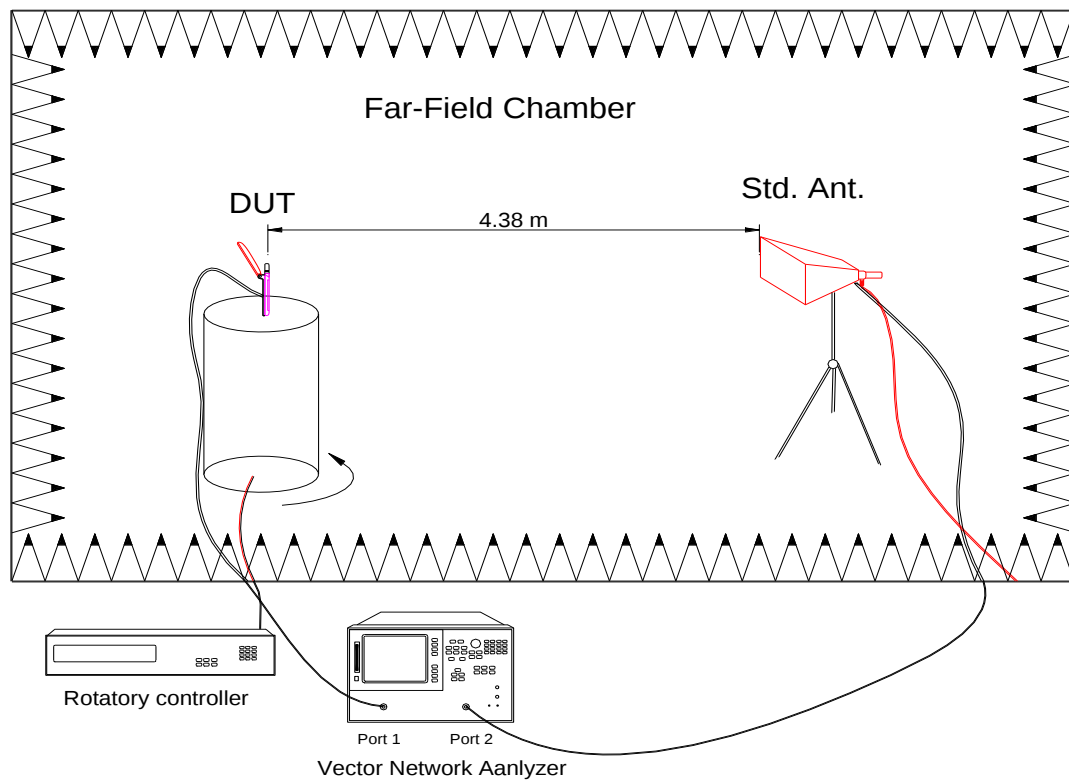

1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 程国富

CHECKED BY : 于超群

DESIGNED BY : 于超群

APPROVED BY : 夏彪

TITLE : WAG-F-LAG0-00-047 Specification

DOCUMENT
NO.

PAGE REV.
A0

浙江海通通讯电子股份有限公司

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

2-4-3 TRP/TIS

WIFI-B	12.62	
	12.48	
	11.13	-80.02

WIFI-A	9.86	
	10.21	
	9.88	-69.79

GPS	42.1	-152.28
-----	------	---------

2-4-4 Antenna Efficiency

Frequency	Efficiency	Efficiency . dB	Gain . dBi
1550000000	20%	-7.08	-3.77
1555000000	21%	-6.73	-3.43
1560000000	23%	-6.42	-3.17
1565000000	25%	-6.08	-2.67
1570000000	26%	-5.78	-2.40
1575000000	28%	-5.54	-2.41
1580000000	30%	-5.27	-2.46
1585000000	31%	-5.12	-2.52
1590000000	31%	-5.15	-2.68
1595000000	30%	-5.22	-2.69
1600000000	29%	-5.38	-2.68
2400000000	23%	-6.43	-1.37
2410000000	23%	-6.33	-1.32
2420000000	23%	-6.32	-1.32
2430000000	24%	-6.20	-1.37
2440000000	25%	-6.10	-1.28
2450000000	25%	-6.06	-1.21
2460000000	24%	-6.14	-1.38
2470000000	24%	-6.19	-1.32
2480000000	23%	-6.32	-1.27
2490000000	22%	-6.51	-1.27
2500000000	22%	-6.56	-1.30

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

浙江海通通讯电子股份有限公司

SCALE :

UNIT : mm

DRAWN BY : 程国富

CHECKED BY : 于超群

DESIGNED BY : 于超群

APPROVED BY : 夏彪

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION



TITLE : WAG-F-LAG0-00-047 Specification

DOCUMENT
NO.

PAGE REV.
A0

Frequency	Efficiency	Efficiency . dB	Gain . dBi
5150000000	20%	-7.03	-5.42
5200000000	21%	-6.85	-5.63
5250000000	22%	-6.56	-4.42
5300000000	23%	-6.31	-4.44
5350000000	24%	-6.24	-4.41
5400000000	24%	-6.25	-2.2
5450000000	26%	-5.91	-2.94
5500000000	26%	-5.82	-2.26
5550000000	27%	-5.73	-2.1
5600000000	26%	-5.93	-4.6
5650000000	25%	-5.97	-5.37
5700000000	24%	-6.17	-5.69
5750000000	22%	-6.50	-5.43
5800000000	23%	-6.37	-5.41
5850000000	24%	-6.22	-5.65

3. Antenna Dimensions:

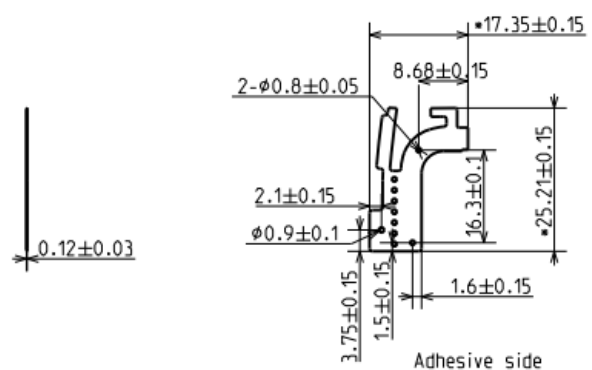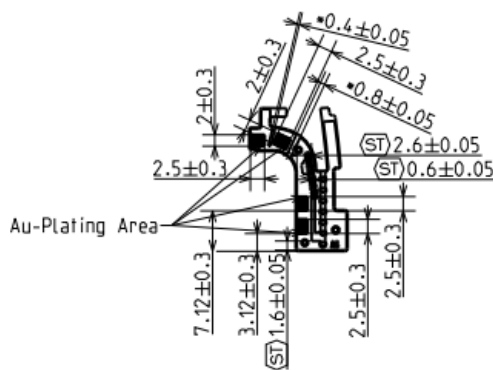

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 程国富

CHECKED BY : 于超群

DESIGNED BY : 于超群

APPROVED BY : 夏彪

TITLE : WAG-F-LAG0-00-047 Specification

DOCUMENT
NO.

PAGE REV.

A0

浙江海通通讯电子股份有限公司

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION