

**KLS-Z502 Exhibit 03 – S10 External Appearance**

**McMurdo Smartfind S10 AIS Beacon**





Operating instructions




deployment instructions



## deployment instructions



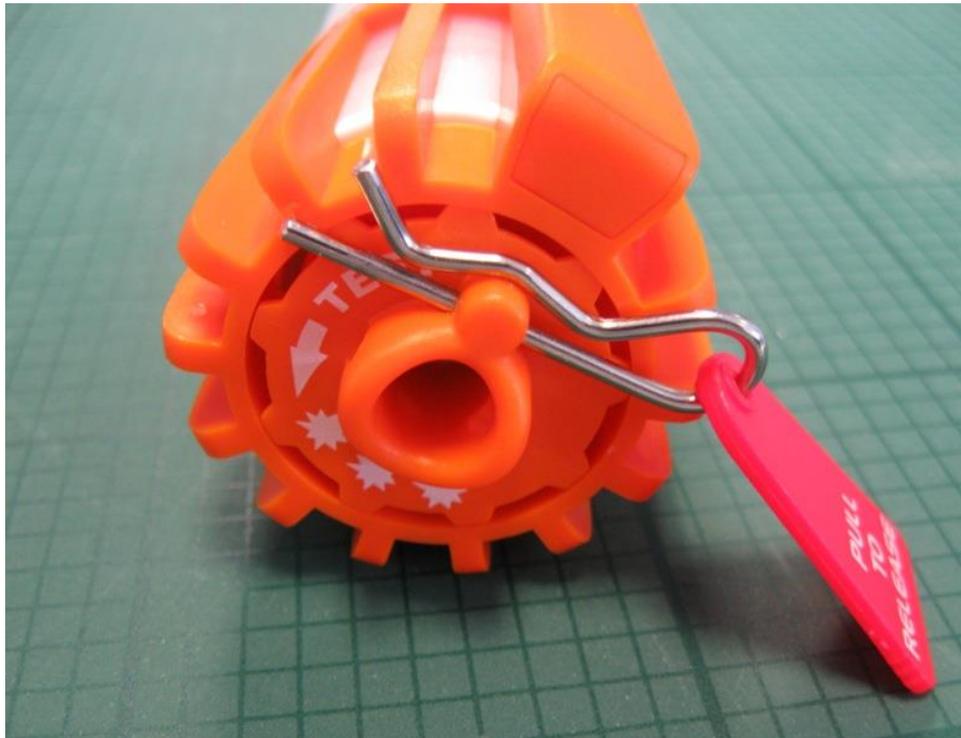


The Arming Clip must be removed before the Beacon can be activated - the arrangement shown is likely to be refined further for production




Programming Label

Product Label

ON / OFF control is effected by means of internal reed switches and a magnet mounted in the orange end-cap

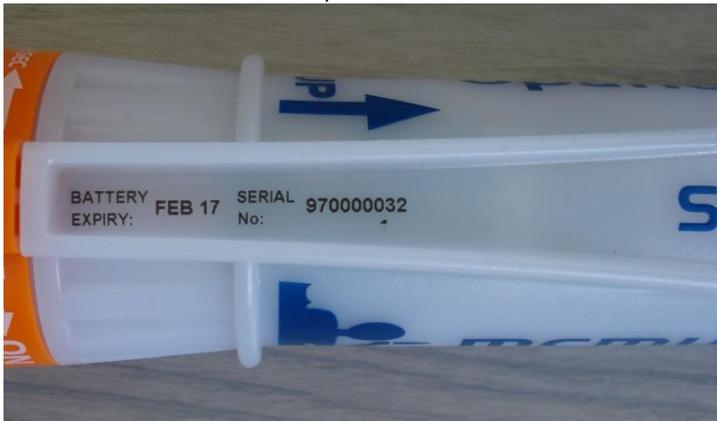

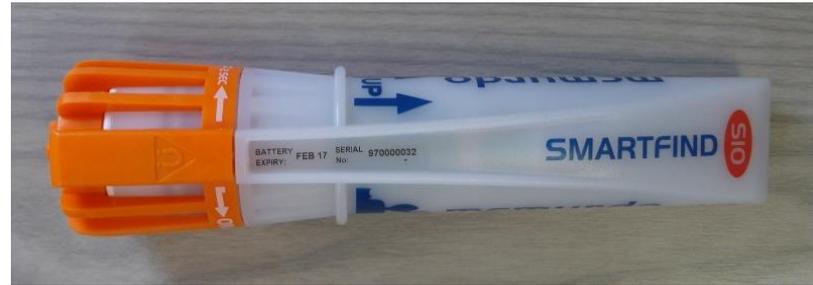

Erwan THOMAS  
 Certification and Hardware Engineer  
 Tel : +33 (0)2 97 02 96 83  
 Email : erwan.thomas@orolia.com