

TEST REPORT

Applicant: Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address: NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China
Equipment Type: Mobile Phone
Model Name: CPH2519
Brand Name: OPPO
FCC ID: R9C-CPH2519
Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014
Sample Arrival Date: Aug. 09, 2023
Test Date: Aug. 11, 2023 - Aug. 16, 2023
Date of Issue: Sep. 25, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Zhang Guoxi

Checked by: Xia Long

Approved by: Liao Jianming
(Technical Director)

Zhang Guoxi

Xia Long

Jm Liao

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Sep. 25, 2023</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Ancillary Equipment	6
2.5	Technical Information	7
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Verdict	8
3.3	Test Uncertainty	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Enclosure List	9
4.2	Test Configurations	9
4.3	Test Setups	10
5	TEST ITEMS	12
5.1	Emission Tests	12
ANNEX A	TEST RESULTS	16
A.1	Radiated Emission	16
A.2	Conducted Emission, AC Ports	26
ANNEX B	TEST SETUP PHOTOS	31
ANNEX C	EUT EXTERNAL PHOTOS	31

ANNEX D	EUT INTERNAL PHOTOS	31
---------	---------------------------	----

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address	NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China

2.2 Manufacturer Information

Manufacturer	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address	NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	CPH2519
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	11
Software Version	ColorOS 13.2
Dimensions (Approx.)	unfold: 166.32*75.68*7.73 mm fold: 85.54*75.68*16.55 mm
Weight (Approx.)	198g(with battery)
EUT ID	S31, S36
IMEI Number	S31: IMEI1: 861243060079039, IMEI2: 861243060079021
	S36: IMEI1: 861243060078437, IMEI2: 861243060078429

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery 1	
	Brand Name	SUPERVOOC
	Model No.	BLPA11
	Serial No.	N/A
	Capacitance	Rated: 980mAh/3.84Wh Typical: 1018mAh/3.99Wh
	Rated Voltage	3.91V
	Limit Charge Voltage	4.5 V
	Manufacturer	Dongguan NVT Technology Co., Ltd
Ancillary Equipment 2	Battery 2	
	Brand Name	SUPERVOOC
	Model No.	BLPA13
	Serial No.	N/A
	Capacitance	Rated: 3190mAh/12.48Wh Typical: 3285mAh/12.85Wh
	Rated Voltage	3.91V
	Limit Charge Voltage	4.5 V
	Manufacturer	Dongguan NVT Technology Co., Ltd
Ancillary Equipment 3	Adapter 1	
	Brand Name	SUPERVOOC
	Model No.	VCB7CAUH (USA Plug)
	Serial No.	N/A
	Rated Input	Input1: 100-130VAC 50/60Hz 1.8A Input2: 200-240VAC 50/60Hz 1.8A
	Rated Output	Output1: 5VDC 2A or 5-11VDC 5.0A Max Output2: 5VDC 2A or 5-11VDC 6.1A Max
	Manufacturer	Dongguan YOHOO Electronic Technology Co., Ltd.
Ancillary Equipment 4	Adapter 2	
	Brand Name	SUPERVOOC
	Model No.	VCB7CAUH (USA Plug)
	Serial No.	N/A
	Rated Input	Input1: 100-130VAC 50/60Hz 1.8A Input2: 200-240VAC 50/60Hz 1.8A
	Rated Output	Output1: 5VDC 2A or 5-11VDC 5.0A Max Output2: 5VDC 2A or 5-11VDC 6.1A Max
	Manufacturer	Jiangsu Chenyang Electron Co., Ltd.
Ancillary Equipment 5	USB Cable	
	Model No.	DL143
	Length (Approx.)	1.0 m
Note 1: Letter in () means plug type.		
Note 2: All adapters are tested, only the worst data of VCB7CAUH (Jiangsu Chenyang Electron		

Co., Ltd.) shown in this report.

Note 3: Both batteries are inside the folding screen phone and tested together.

2.5 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7/12/17/26/66 LTE TDD Band 38/41 LTE CA Uplink (UL): CA_7C, CA_38C, CA_41C 5G Network SA: NR n2/n5/n7/n12/n38/n41/n66 NSA(EN-DC): DC_2A_n7A, DC_4A_n7A, DC_4A_n38A, DC_4A_n41A, DC_5A_7A, DC_5A_n38A, DC_7A_n5A, DC_66A_n7A, DC_66A_n38A, DC_66A_n41A Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40), VHT20/40 and 802.11ax(HE20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80/160) and 802.11ax(HE20/40/80/160) U-NII-1/2A/2C/3, GPS, NFC, BeiDou, Galileo, GLONASS, SBAS
Classification of equipment	Class B
The highest internal frequency of EUT	5850 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.2 dB
Radiated emissions (30 MHz-1 GHz)-3m	4.8 dB
Radiated emissions (1 GHz-18 GHz)-3m	4.9 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Laptop	Lenovo	N/A	N/A	N/A	N/A	☒
Data connector	N/A	N/A	N/A	N/A	N/A	☒
USB disk	Sandisk	N/A	N/A	N/A	N/A	☒
Type-C Headset	OPPO	N/A	N/A	1.12m	N/A	☒

4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Video Play Test Mode</u> EUT + Adapter + USB Cable + Battery
Mode 2	<u>The Camera Test Mode</u> EUT + Adapter + USB Cable + Battery
Mode 3	<u>The Standby Test Mode</u> EUT + Adapter + USB Cable + Battery
Mode 4	<u>The Collapse Screen Test Mode</u> EUT + Adapter + USB Cable + Battery
Mode 5	<u>The USB Test Mode</u> EUT + USB Cable + Battery + Laptop
Mode 6	<u>The OTG Test Mode</u> EUT + Battery + Data connector + USB Disk
Mode 7	<u>The Type-C Headset Test Mode</u> EUT + Type-C Headset + Battery

Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 7	1 , 5
Conducted Emission, AC Ports	Mode 1~Mode 5	1 , 5


Note: Based on client request, all normal using modes of the normal function were tested, but only data of the worst mode was reported in this report.

4.3 Test Setups


Test Setup 1

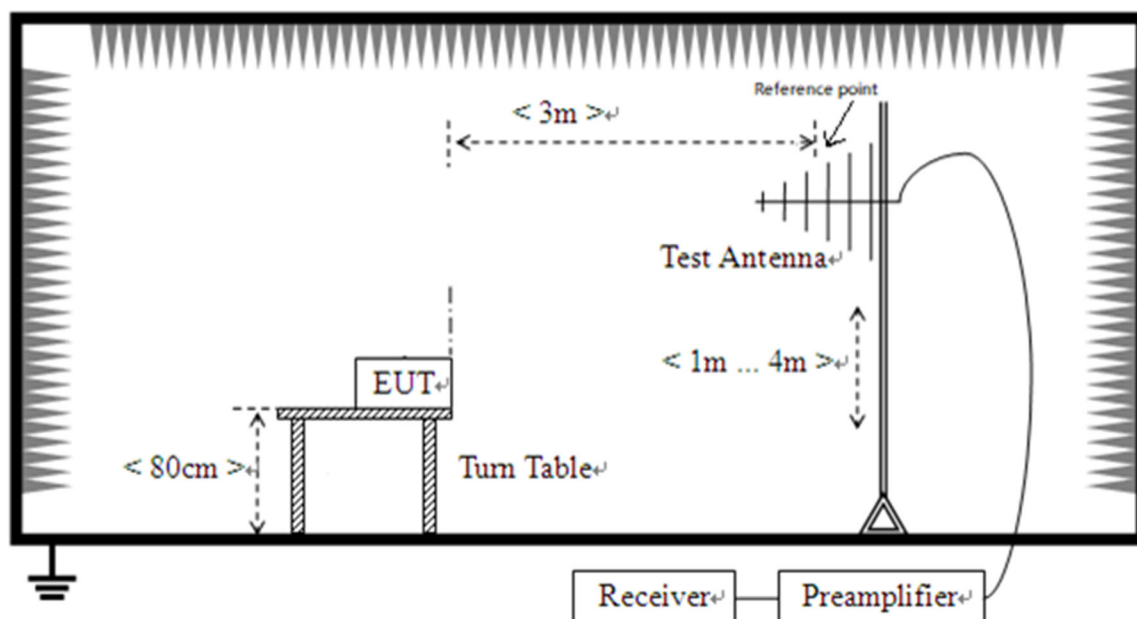

Radiated Emission (30 MHz-1 GHz)

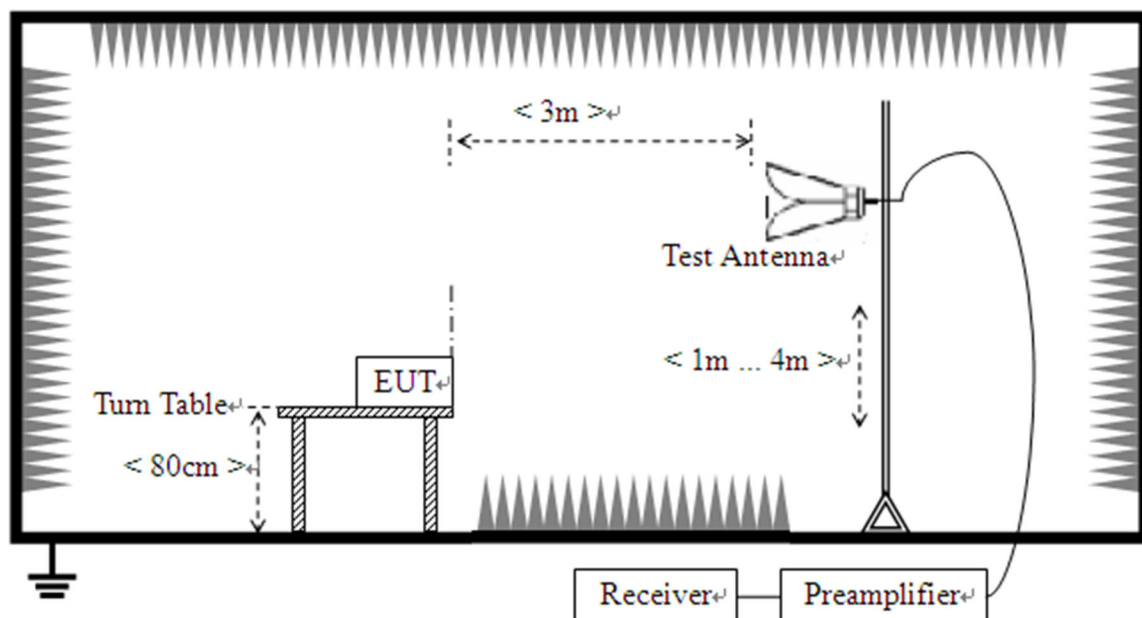

Radiated Emission (above 1 GHz)

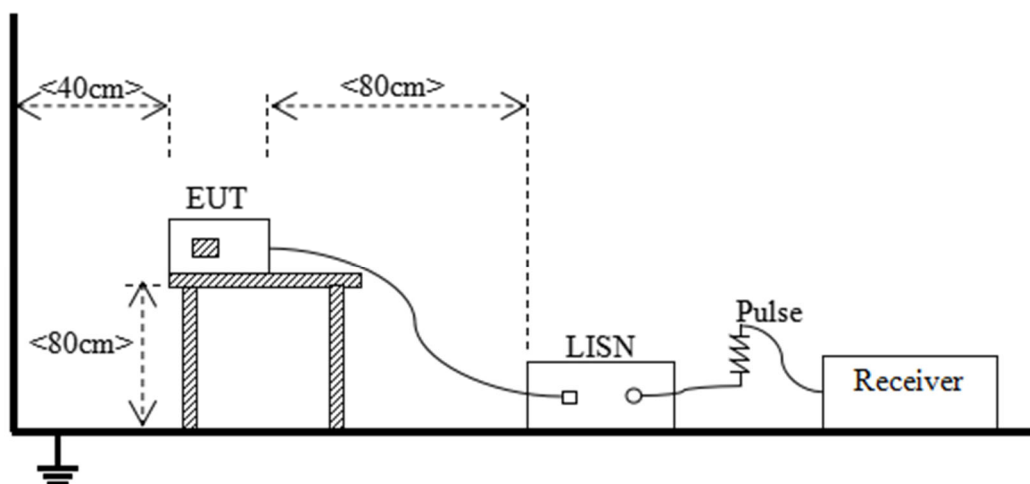Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \times \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) The limits using ANSI C63.4.
- 4) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \times \log(d_{10m}/d_{3m})$$

Where:

L_{3m} is Average Class A limit at 3m;

L_{10m} is Average Class A limit at 10m;

d_{10m} is Measurement distance in 10m;

d_{3m} is Measurement distance in 3m.

For this case: $L_{3m} = 49.5 + 20 \times \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz

Highest internal frequency (F_x)	Highest measurement frequency (F_M)
$F_x \geq 1 \text{ GHz}$	$5 * F_x$ or 40 GHz, whichever is lower.
Note: F_x is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit – Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dBμV) = Reading (dBμV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 2: The Radiated Emission is required to be investigated to the upper frequency of 5th harmonic of the highest internal frequency of EUT or 40 GHz, whichever is lower. The test results above 18GHz are only noise and are not recorded in the report.

Sample No.	S31	Temperature	22.1℃
Humidity	53%RH	Pressure	101kPa
Test Engineer	He Shichang	Test date	Aug. 16, 2023


Test Mode 1

1) Test Antenna Vertical, 30 MHz – 1 GHz

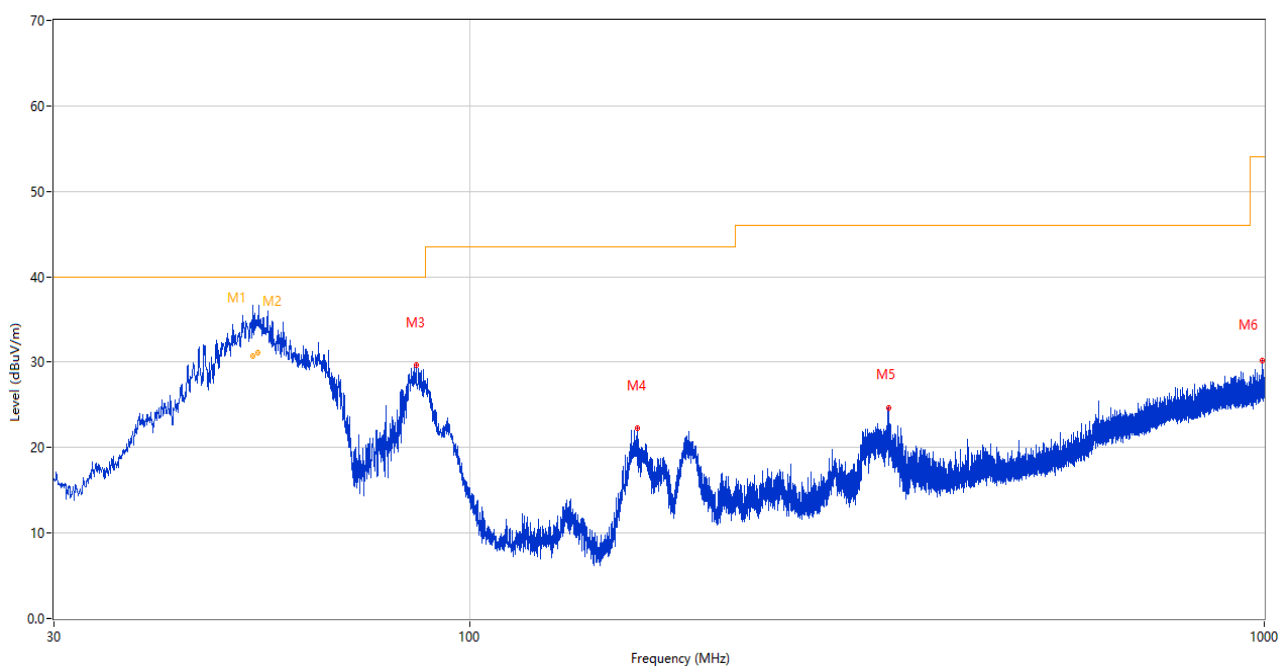

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	53.382	35.15	-25.55	40.0	4.85	Peak	66.00	106	Vertical	N/A
1*	53.382*	30.65	-25.55	40.0	9.35	QP	66.00	106	Vertical	Pass
2	54.148	35.49	-25.58	40.0	4.51	Peak	81.00	100	Vertical	N/A
2*	54.148*	31.16	-25.58	40.0	8.84	QP	81.00	100	Vertical	Pass
3	85.630	29.66	-29.82	40.0	10.34	Peak	77.00	100	Vertical	Pass
4	162.551	22.31	-29.49	43.5	21.19	Peak	49.00	100	Vertical	Pass
5	336.666	24.64	-22.47	46.0	21.36	Peak	0.00	100	Vertical	Pass
6	993.501	30.16	-8.40	54.0	23.84	Peak	305.00	200	Vertical	Pass


2) Test Antenna Horizontal, 30 MHz – 1 GHz

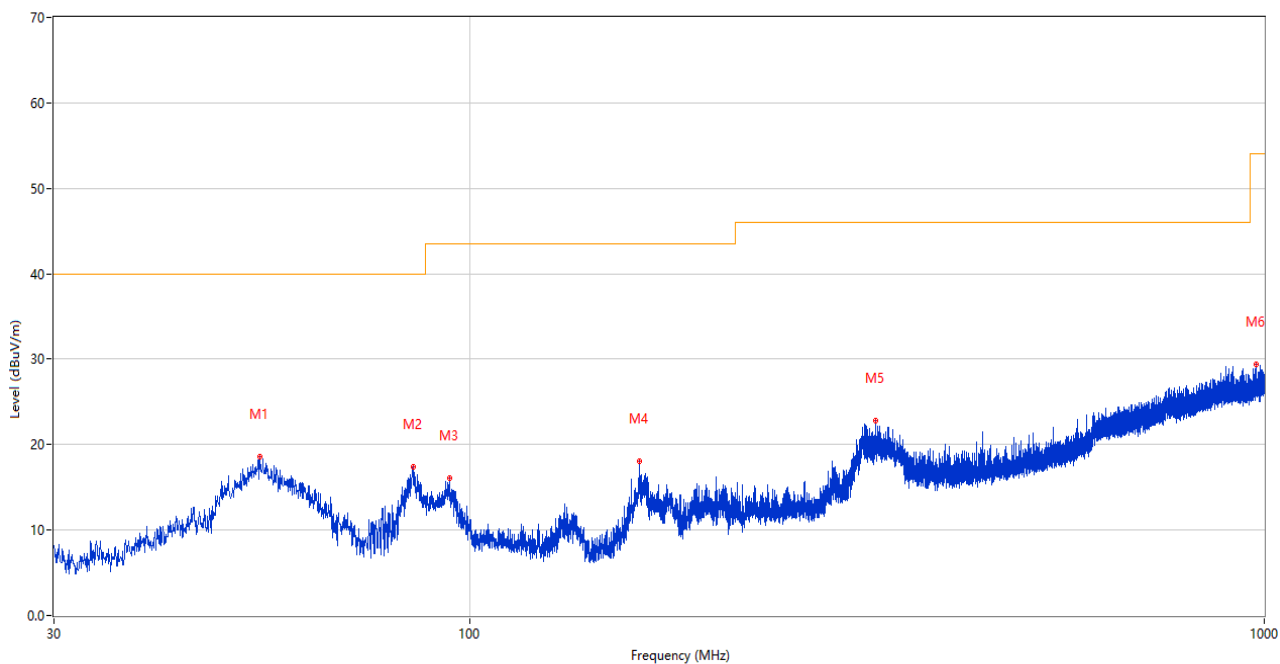

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	54.541	18.59	-25.61	40.0	21.41	Peak	54.00	100	Horizontal	Pass
2	85.048	17.39	-29.94	40.0	22.61	Peak	148.00	200	Horizontal	Pass
3	94.359	16.11	-27.65	43.5	27.39	Peak	148.00	200	Horizontal	Pass
4	163.666	18.06	-29.43	43.5	25.44	Peak	121.00	200	Horizontal	Pass
5	323.910	22.76	-22.98	46.0	23.24	Peak	195.00	100	Horizontal	Pass
6	978.223	29.41	-8.74	54.0	24.59	Peak	262.00	200	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2022.09.09	2023.09.08	☒
Amplifier (30-1GHz)	COM-MV	ZT30-1000M	B2017119081	2022.12.07	2023.12.06	☒
Test Antenna-Bi-Log	SCHWARZB ECK	VULB 9168	9168-00867	2022.04.12	2025.04.11	☒
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2021.08.19	2024.08.18	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

3) Test Antenna Vertical, 1 GHz – 6 GHz

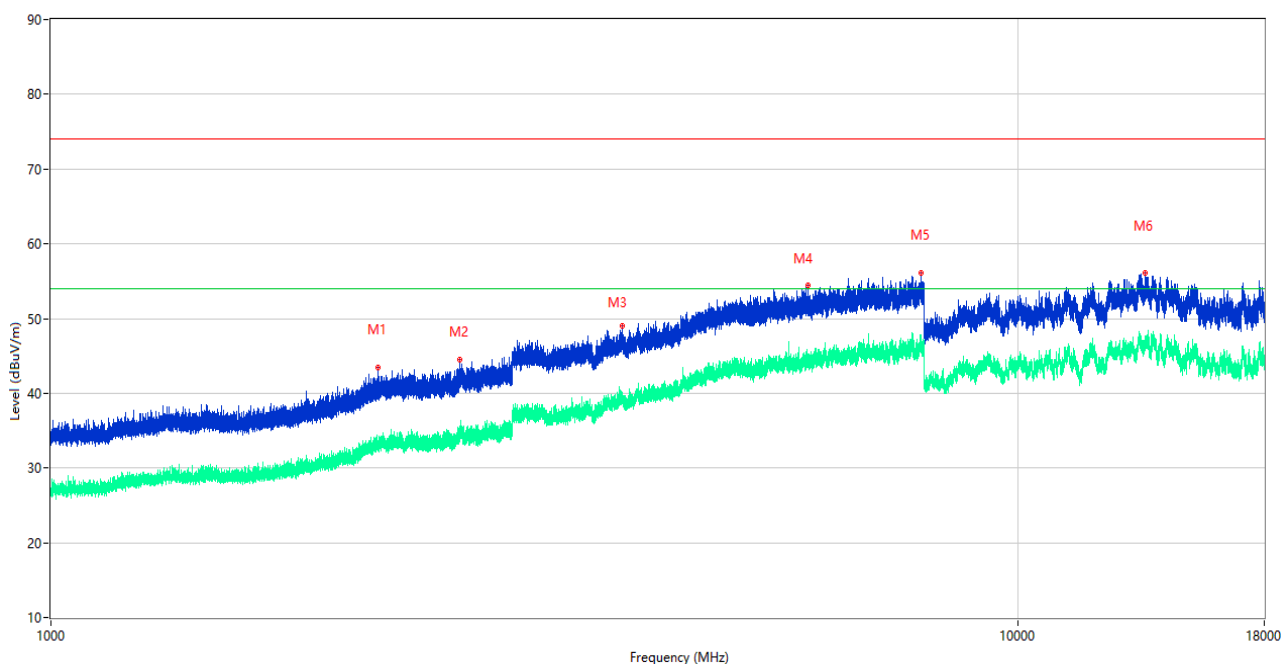

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2180.200	43.50	-12.37	74.0	30.50	Peak	300.00	100	Vertical	Pass
1**	2180.200	32.76	-12.37	54.0	21.24	AV	300.00	100	Vertical	Pass
2	2648.300	44.54	-10.23	74.0	29.46	Peak	326.00	100	Vertical	Pass
2**	2648.300	34.59	-10.23	54.0	19.41	AV	326.00	100	Vertical	Pass
3	3901.750	48.95	-2.31	74.0	25.05	Peak	170.00	100	Vertical	Pass
3**	3901.750	39.54	-2.31	54.0	14.46	AV	170.00	100	Vertical	Pass
4	6064.250	54.48	0.85	74.0	19.52	Peak	253.00	100	Vertical	Pass
4**	6064.250	45.08	0.85	54.0	8.92	AV	253.00	100	Vertical	Pass
5	7943.500	56.16	3.26	74.0	17.84	Peak	23.00	100	Vertical	Pass
5**	7943.500	45.66	3.26	54.0	8.34	AV	23.00	100	Vertical	Pass
6	13567.500	56.06	4.73	74.0	17.94	Peak	177.00	100	Vertical	Pass
6**	13567.500	47.71	4.73	54.0	6.29	AV	177.00	100	Vertical	Pass

4) Test Antenna Horizontal, 1 GHz – 6 GHz

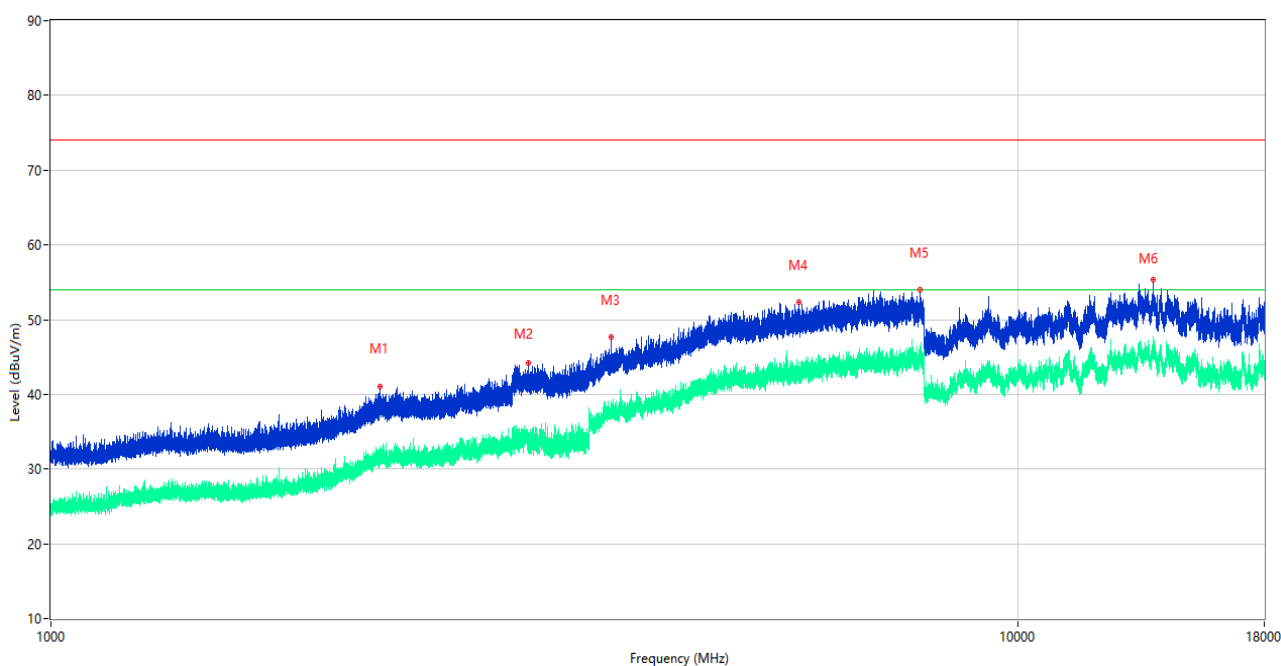


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2190.600	41.10	-12.29	74.0	32.90	Peak	146.00	100	Horizontal	Pass
1**	2190.600	31.36	-12.29	54.0	22.64	AV	146.00	100	Horizontal	Pass
2	3122.250	44.26	-5.83	74.0	29.74	Peak	293.00	100	Horizontal	Pass
2**	3122.250	32.71	-5.83	54.0	21.29	AV	293.00	100	Horizontal	Pass
3	3802.500	47.62	-3.11	74.0	26.38	Peak	136.00	100	Horizontal	Pass
3**	3802.500	36.86	-3.11	54.0	17.14	AV	136.00	100	Horizontal	Pass
4	5940.750	52.29	1.37	74.0	21.71	Peak	256.00	100	Horizontal	Pass
4**	5940.750	44.41	1.37	54.0	9.59	AV	256.00	100	Horizontal	Pass
5	7919.000	54.00	2.93	74.0	20.00	Peak	284.00	100	Horizontal	Pass
5**	7919.000	45.50	2.93	54.0	8.50	AV	284.00	100	Horizontal	Pass
6	13806.500	55.40	5.73	74.0	18.60	Peak	149.00	100	Horizontal	Pass
6**	13806.500	45.79	5.73	54.0	8.21	AV	149.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2022.09.09	2023.09.08	☒
Amplifier (1-12GHz)	Advanced Microwave	WLA652A	1740103	2022.12.07	2023.12.06	☒
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2022.12.07	2023.12.06	☐
Test Antenna-Horn	SCHWARZB ECK	BBHA 9120D	01917	2022.06.09	2025.06.08	☒
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2021.08.19	2024.08.18	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

Test Mode 5


Sample No.	S19	Temperature	24.4℃
Humidity	48%RH	Pressure	101kPa
Test Engineer	He Shichang	Test date	Aug. 11, 2023

5) Test Antenna Vertical, 30 MHz – 1 GHz

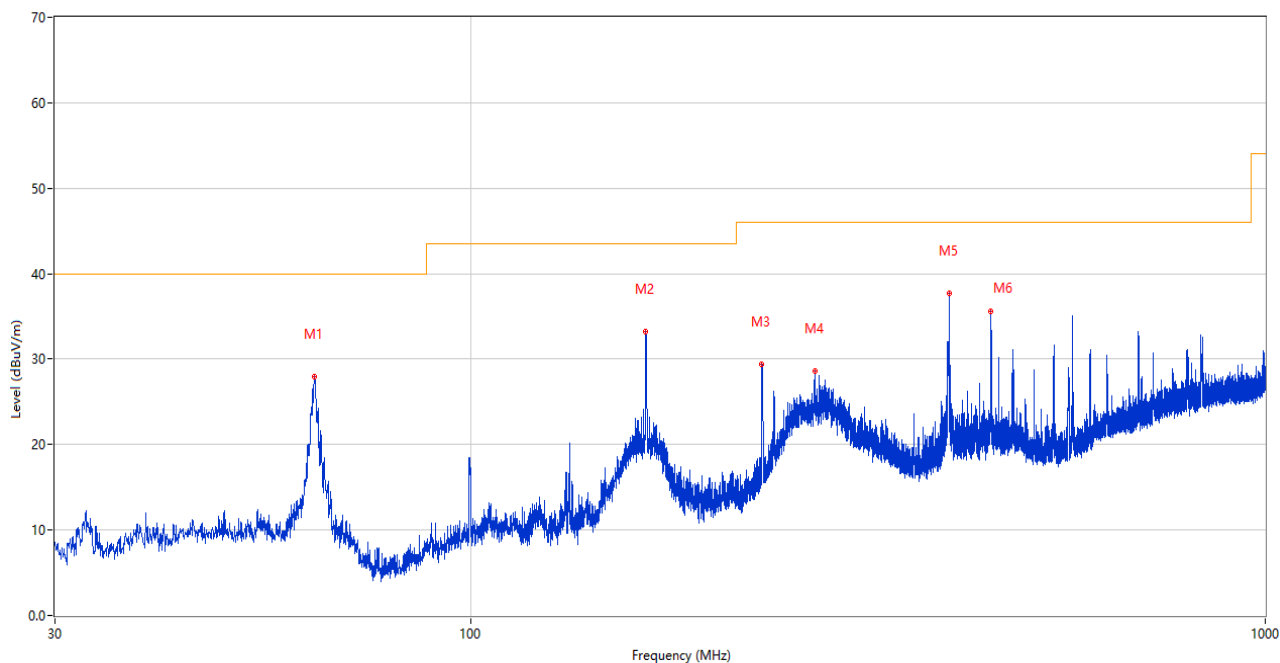


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	63.611	27.99	-27.22	40.0	12.01	Peak	172.00	100	Vertical	Pass
2	166.139	33.25	-29.30	43.5	10.25	Peak	284.00	100	Vertical	Pass
3	232.584	29.42	-25.44	46.0	16.58	Peak	147.00	200	Vertical	Pass
4	271.094	28.60	-24.40	46.0	17.40	Peak	332.00	200	Vertical	Pass
5	399.861	37.66	-20.95	46.0	8.34	Peak	147.00	100	Vertical	Pass
6	451.707	35.64	-19.84	46.0	10.36	Peak	139.00	100	Vertical	Pass

6) Test Antenna Horizontal, 30 MHz – 1 GHz

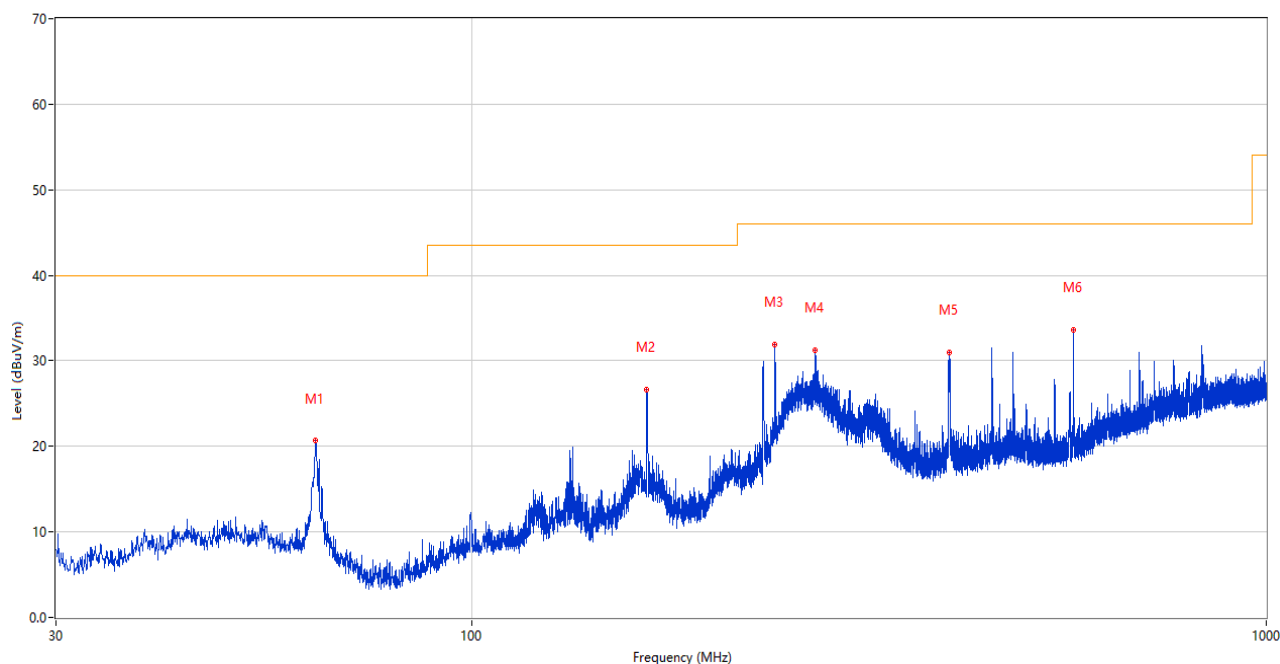


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	63.611	20.63	-27.22	40.0	19.37	Peak	315.00	200	Horizontal	Pass
2	166.139	26.67	-29.30	43.5	16.83	Peak	136.00	200	Horizontal	Pass
3	240.975	31.92	-25.08	46.0	14.08	Peak	125.00	100	Horizontal	Pass
4	270.948	31.22	-24.40	46.0	14.78	Peak	219.00	100	Horizontal	Pass
5	398.649	31.01	-21.00	46.0	14.99	Peak	97.00	100	Horizontal	Pass
6	572.133	33.57	-16.98	46.0	12.43	Peak	221.00	200	Horizontal	Pass

7) Test Antenna Vertical, 1 GHz – 6 GHz

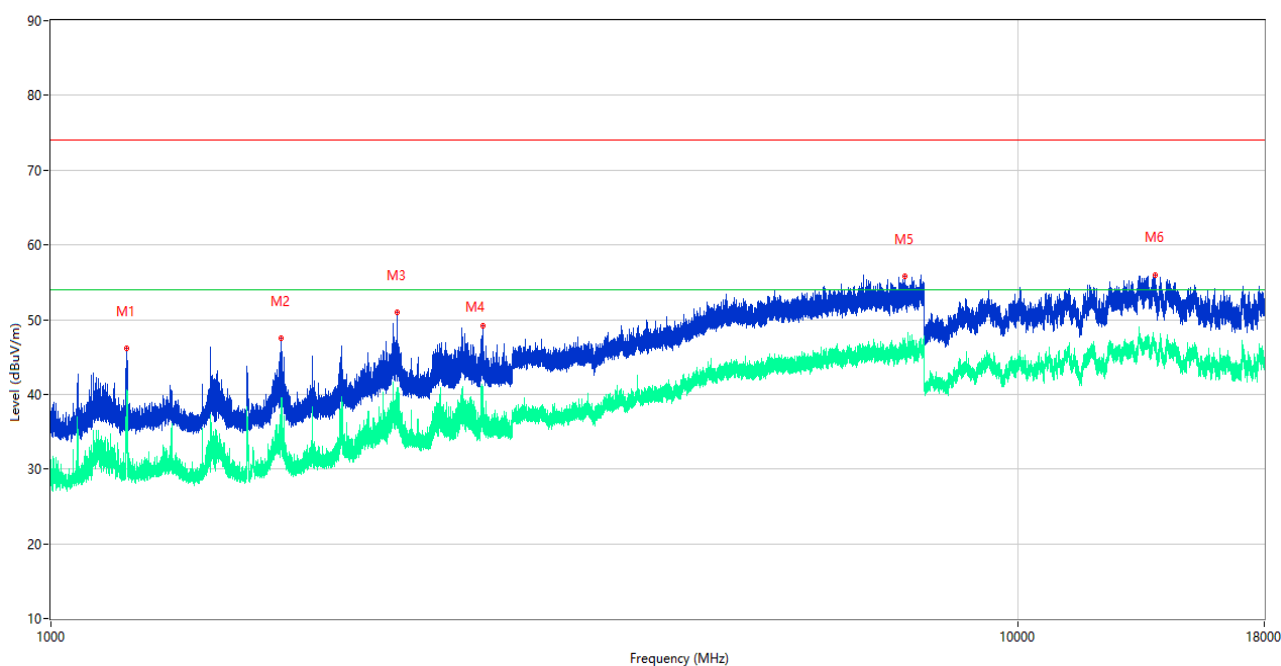

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.400	46.18	-17.33	74.0	27.82	Peak	227.00	100	Vertical	Pass
1**	1197.400	38.38	-17.33	54.0	15.62	AV	227.00	100	Vertical	Pass
2	1732.000	47.44	-16.55	74.0	26.56	Peak	153.00	100	Vertical	Pass
2**	1732.000	35.21	-16.55	54.0	18.79	AV	153.00	100	Vertical	Pass
3	2281.500	50.95	-11.59	74.0	23.05	Peak	197.00	100	Vertical	Pass
3**	2281.500	40.03	-11.59	54.0	13.97	AV	197.00	100	Vertical	Pass
4	2795.600	49.24	-8.92	74.0	24.76	Peak	162.00	100	Vertical	Pass
4**	2795.600	39.65	-8.92	54.0	14.35	AV	162.00	100	Vertical	Pass
5	7649.000	55.86	2.34	74.0	18.14	Peak	80.00	100	Vertical	Pass
5**	7649.000	45.44	2.34	54.0	8.56	AV	80.00	100	Vertical	Pass
6	13890.500	55.98	4.81	74.0	18.02	Peak	28.00	100	Vertical	Pass
6**	13890.500	46.21	4.81	54.0	7.79	AV	28.00	100	Vertical	Pass

8) Test Antenna Horizontal, 1 GHz – 6 GHz

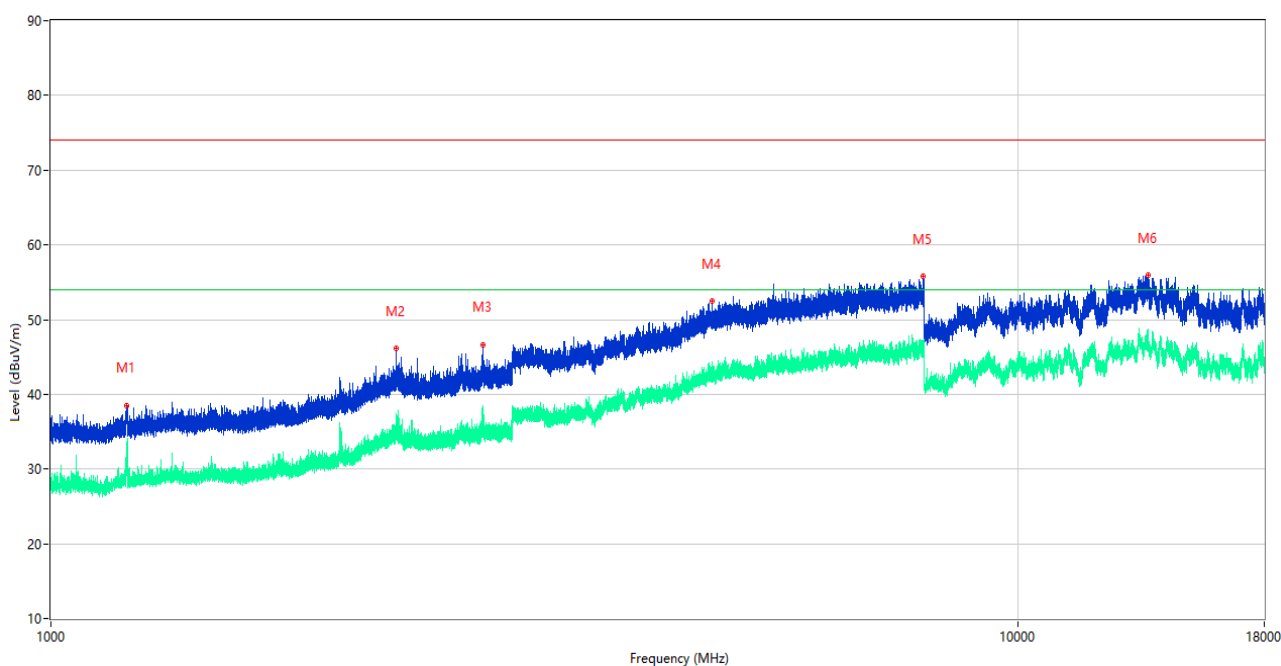

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.900	38.54	-17.41	74.0	35.46	Peak	145.00	100	Horizontal	Pass
1**	1196.900	30.38	-17.41	54.0	23.62	AV	145.00	100	Horizontal	Pass
2	2276.900	46.10	-11.73	74.0	27.90	Peak	149.00	100	Horizontal	Pass
2**	2276.900	34.60	-11.73	54.0	19.40	AV	149.00	100	Horizontal	Pass
3	2799.700	46.68	-8.73	74.0	27.32	Peak	255.00	100	Horizontal	Pass
3**	2799.700	35.01	-8.73	54.0	18.99	AV	255.00	100	Horizontal	Pass
4	4834.250	52.47	0.07	74.0	21.53	Peak	280.00	100	Horizontal	Pass
4**	4834.250	42.33	0.07	54.0	11.67	AV	280.00	100	Horizontal	Pass
5	7994.500	55.83	2.65	74.0	18.17	Peak	261.00	100	Horizontal	Pass
5**	7994.500	45.93	2.65	54.0	8.07	AV	261.00	100	Horizontal	Pass
6	13641.500	55.93	5.06	74.0	18.07	Peak	294.00	100	Horizontal	Pass
6**	13641.500	46.93	5.06	54.0	7.07	AV	294.00	100	Horizontal	Pass


A.2 Conducted Emission, AC Ports

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	S36	Temperature	24.4℃
Humidity	48%RH	Pressure	101kPa
Test Engineer	Yang yang	Test date	Aug. 16, 2023


Test Mode 1

1) L Phase

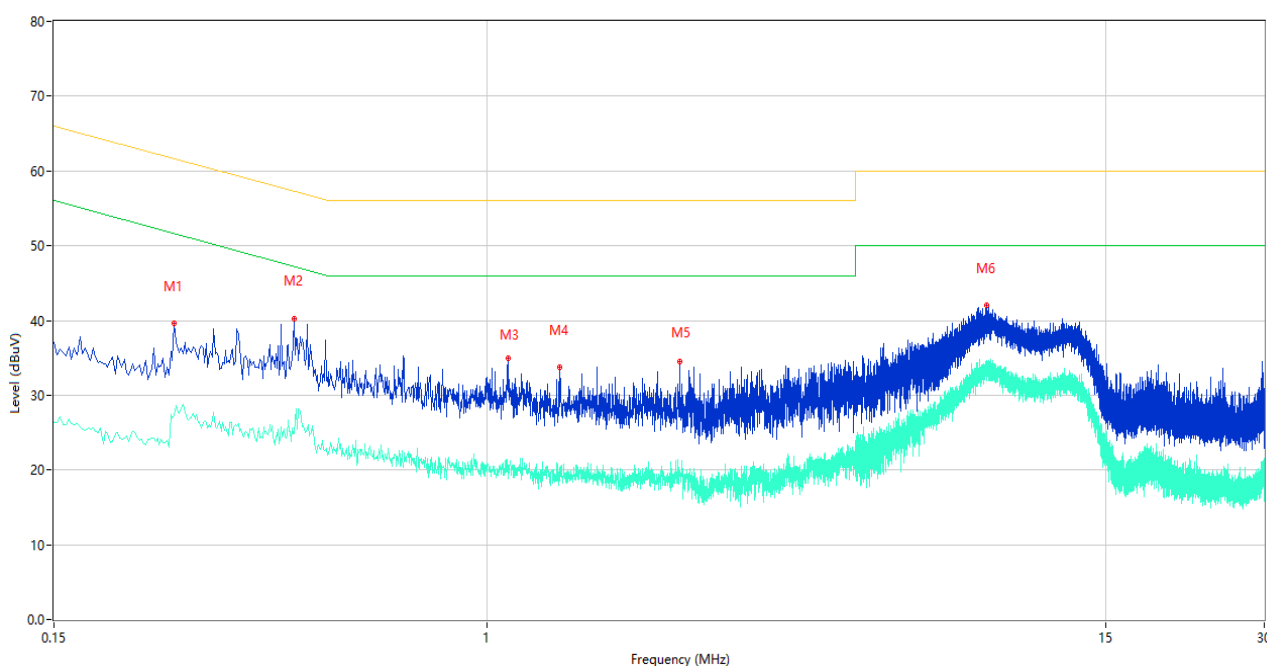

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.254	39.56	9.79	61.63	22.07	Peak	L	Pass
1**	0.254	27.23	9.79	51.63	24.40	AV	L	Pass
2	0.430	40.28	10.34	57.25	16.97	Peak	L	Pass
2**	0.430	24.87	10.34	47.25	22.38	AV	L	Pass
3	1.098	34.90	10.21	56.00	21.10	Peak	L	Pass
3**	1.098	20.39	10.21	46.00	25.61	AV	L	Pass
4	1.374	33.70	10.39	56.00	22.30	Peak	L	Pass
4**	1.374	18.50	10.39	46.00	27.50	AV	L	Pass
5	2.322	34.53	10.25	56.00	21.47	Peak	L	Pass
5**	2.322	19.76	10.25	46.00	26.24	AV	L	Pass
6	8.902	41.99	10.51	60.00	18.01	Peak	L	Pass
6**	8.902	33.37	10.51	50.00	16.63	AV	L	Pass

2) N Phase

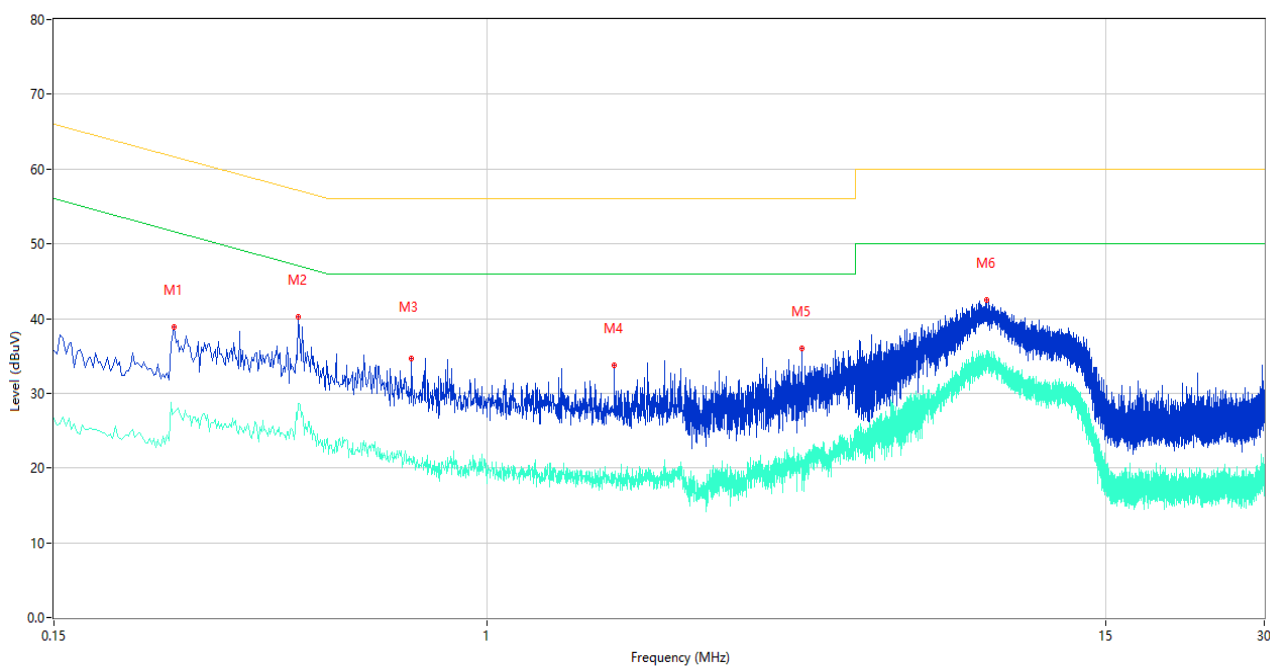


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.254	38.86	9.79	61.63	22.77	Peak	N	Pass
1**	0.254	27.46	9.79	51.63	24.17	AV	N	Pass
2	0.438	40.21	10.33	57.10	16.89	Peak	N	Pass
2**	0.438	28.57	10.33	47.10	18.53	AV	N	Pass
3	0.718	34.65	10.21	56.00	21.35	Peak	N	Pass
3**	0.718	21.01	10.21	46.00	24.99	AV	N	Pass
4	1.742	33.71	10.22	56.00	22.29	Peak	N	Pass
4**	1.742	18.06	10.22	46.00	27.94	AV	N	Pass
5	3.970	36.02	10.16	56.00	19.98	Peak	N	Pass
5**	3.970	20.38	10.16	46.00	25.62	AV	N	Pass
6	8.894	42.44	10.59	60.00	17.56	Peak	N	Pass
6**	8.894	33.44	10.59	50.00	16.56	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2022.09.09	2023.09.08	☒
LISN	SCHWARZBECK	NSLK 8127	8127-687	2023.05.16	2024.05.15	☒
ISN	TESEQ	ISN T800	34449	2022.11.11	2023.11.10	☐
ISN	TESEQ	ISN T8-Cat6	53561	2023.04.23	2024.04.22	☐
Shielded Room	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☐


Test Mode 5

3) L Phase

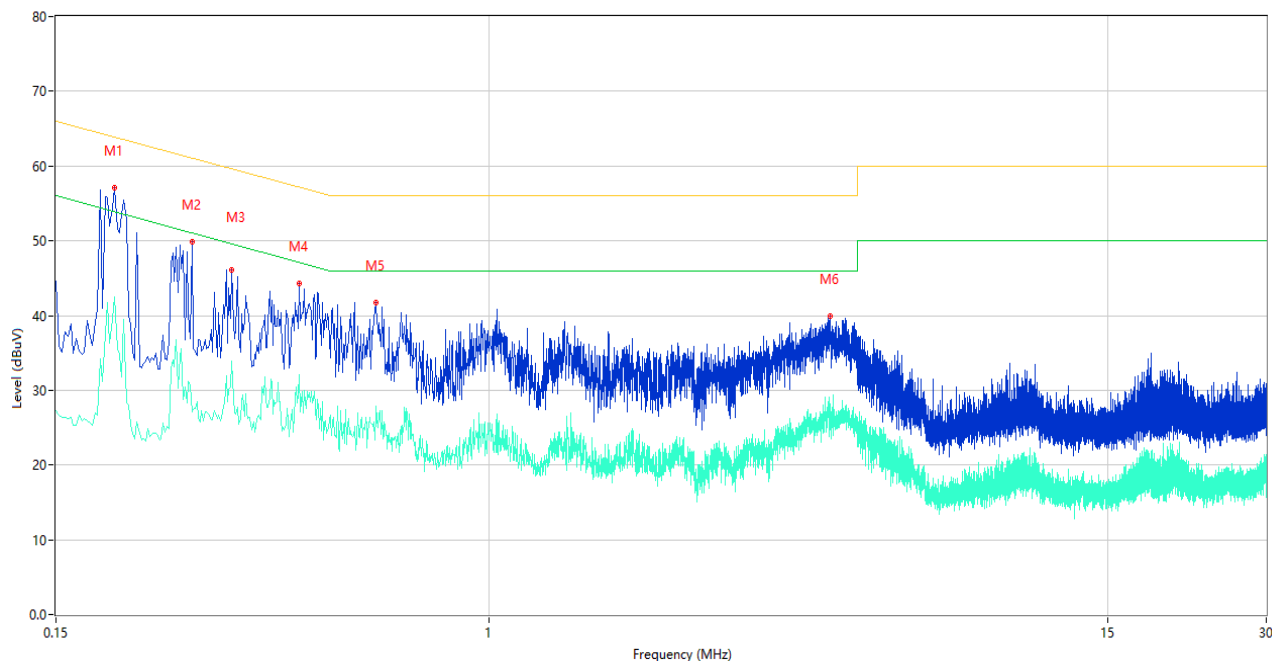

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.194	57.03	9.79	63.86	6.83	Peak	L	Pass
1**	0.194	42.48	9.79	53.86	11.38	AV	L	Pass
2	0.272	49.82	9.79	61.06	11.24	Peak	L	Pass
2**	0.272	27.14	9.79	51.06	23.92	AV	L	Pass
3	0.324	46.10	9.75	59.60	13.50	Peak	L	Pass
3**	0.324	33.95	9.75	49.60	15.65	AV	L	Pass
4	0.436	44.30	10.33	57.14	12.84	Peak	L	Pass
4**	0.436	32.12	10.33	47.14	15.02	AV	L	Pass
5	0.608	41.77	10.34	56.00	14.23	Peak	L	Pass
5**	0.608	26.70	10.34	46.00	19.30	AV	L	Pass
6	4.446	39.92	9.92	56.00	16.08	Peak	L	Pass
6**	4.446	28.24	9.92	46.00	17.76	AV	L	Pass

4) N Phase

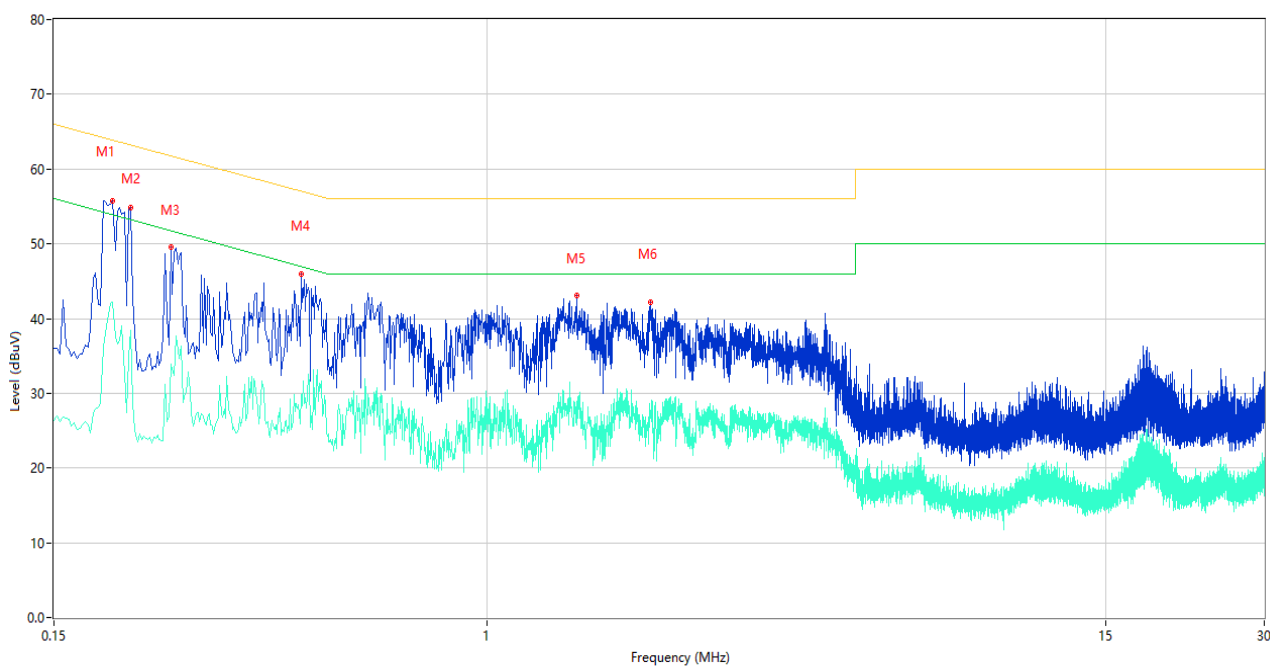

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.194	55.79	9.79	63.86	8.07	Peak	N	Pass
1**	0.194	42.23	9.79	53.86	11.63	AV	N	Pass
2	0.210	54.87	9.78	63.21	8.34	Peak	N	Pass
2**	0.210	38.35	9.78	53.21	14.86	AV	N	Pass
3	0.250	49.52	9.79	61.76	12.24	Peak	N	Pass
3**	0.250	33.85	9.79	51.76	17.91	AV	N	Pass
4	0.442	46.01	10.32	57.02	11.01	Peak	N	Pass
4**	0.442	29.84	10.32	47.02	17.18	AV	N	Pass
5	1.478	43.13	10.14	56.00	12.87	Peak	N	Pass
5**	1.478	25.93	10.14	46.00	20.07	AV	N	Pass
6	2.046	42.13	10.33	56.00	13.87	Peak	N	Pass
6**	2.046	27.76	10.33	46.00	18.24	AV	N	Pass

ANNEX B

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2380398-A-1E.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2380398-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2380398-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--