

FCC AND ISED CERTIFICATION TEST REPORT

FOR

Applicant	:	Sahara Presentation Systems PLC
Address	:	Europa House, Littlebrook DC1, Shield Road, Dartford, Kent, United Kingdom
Equipment under Test	:	Clevershare Hub
Model No.	:	Clevershare Hub
Trade Mark	:	N/A
FCC ID	:	2APKO-WB05
IC	:	25437-WB05
Manufacturer	:	Sahara Presentation Systems PLC
Address	:	Europa House, Littlebrook DC1, Shield Road, Dartford, Kent, United Kingdom

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

TABLE OF CONTENTS

	Test report declares.....	4
1.	Summary of test results	6
2.	General test information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT	7
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty.....	9
3.	Equipment used during test	10
4.	6dB Bandwidth and 99% Bandwidth.....	11
4.1.	Block diagram of test setup.....	11
4.2.	Limits	11
4.3.	Test Procedure	11
4.4.	Test Result	12
4.5.	original test data	13
5.	Conducted Peak Output Power	26
5.1.	Block diagram of test setup.....	26
5.2.	Limits	26
5.3.	Test Procedure	26
5.4.	Test Result	26
6.	Power Spectral Density.....	28
6.1.	Block diagram of test setup.....	28
6.2.	Limits	28
6.3.	Test Procedure	28
6.4.	Test Result	28
6.5.	original test data	29
7.	Band Edge Compliance (Conducted Method)	36
7.1.	Block diagram of test setup.....	36
7.2.	Limits	36
7.3.	Test procedure	36
7.4.	Test Result	37
7.5.	original test data	37
8.	Radiated Spurious Emissions	42
8.1.	Block diagram of test setup.....	42

8.2.	Limit	43
8.3.	Test Procedure	45
8.4.	Test result	46
9.	RF Conducted Spurious Emissions	61
9.1.	Block diagram of test setup	61
9.2.	Limits	61
9.3.	Test procedure	61
9.4.	Test Result	62
9.5.	original test data	62
10.	Radiated Band Edge Compliance	81
10.1.	Block diagram of test setup	81
10.2.	Limit	81
10.3.	Test Procedure	81
10.4.	Test result	81
11.	Power Line Conducted Emission	106
11.1.	Block diagram of test setup	106
11.2.	Power Line Conducted Emission Limits (Class B)	106
11.3.	Test Procedure	106
11.4.	Test Result	107
12.	Antenna Requirements	110
12.1.	Limit	110
12.2.	Result	110
13.	Test setup photograph	111
14.	Photos of the EUT	113

TEST REPORT DECLARE

Applicant	:	Sahara Presentation Systems PLC
Address	:	Europa House, Littlebrook DC1, Shield Road, Dartford, Kent, United Kingdom
Equipment under Test	:	Clevershare Hub
Model No	:	Clevershare Hub
Trade Mark	:	N/A
Manufacturer	:	Sahara Presentation Systems PLC
Address	:	Europa House, Littlebrook DC1, Shield Road, Dartford, Kent, United Kingdom

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test procedure used: ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, 558074 D01 15.247 Meas Guidance v05r02

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No:	DDT-R21121709-2E03		
Date of Receipt:	Dec. 22, 2021	Date of Test:	Dec. 22, 2021 ~ Apr. 24, 2022

Prepared By:

Johnny Wang

Johnny Wang/Engineer**Approved By:****Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision history

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Apr. 24, 2022	

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Conducted Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Power Spectral Density	FCC Part 15:15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Band-edge and Spurious Emissions (Conducted)	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Radiated Spurious Emissions	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Radiated Band Edge Compliance	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2013 RSS-Gen Issue 5	Pass
Antenna requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass

2. General test information

2.1. Description of EUT

EUT* Name	: Clevershare Hub
Model Number	: Clevershare Hub
EUT function description	: Please reference user manual of this device
Power supply	: Input: 100-240V ~ 50/60Hz 1.0A Max
Radio Technology	: IEEE 802.11b/g/n/ax
FCC Operation frequency	: IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz IEEE 802.11ax HE20: 2412MHz—2462MHz IEEE 802.11ax HE40: 2422MHz—2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE20, HE40: OFDMA(BPSK,QPSK,16QAM,64QAM,256QAM, 1024QAM)
Transmitter rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: up to 72.2 Mbps IEEE 802.11n HT40: up to 150 Mbps IEEE 802.11ax HE20: up to 143.4 Mbps IEEE 802.11ax HE40: up to 286.8 Mbps
Antenna Type	: PCB antenna, maximum PK gain: 2.44 dBi
Sample Type	: Series production

Note: EUT is the ab. of equipment under test.

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/


2.2. Accessories of EUT

Assistant equipment	Manufacturer	Model number	Other
Switching adapter	GangQi	GQ36-120300-Ax	Input: 100-240V 50/60Hz 1.0A Max Output: DC 12V3A 36.0W

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test



The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

Test software: SecureCRTPortable.exe

Tested mode, channel, setting Tx power and rand data rate information

Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
	ANT1			
Tx mode 802.11b	/	11	LCH: CH1	2412
	/	11	MCH: CH6	2437
	/	11	HCH: CH11	2462
Tx mode 802.11g	/	54	LCH: CH1	2412
	/	54	MCH: CH6	2437
	/	54	HCH: CH11	2462
Tx mode 802.11n HT20	/	MCS 7	LCH: CH1	2412
	/	MCS 7	MCH: CH6	2437
	/	MCS 7	HCH: CH11	2462
Tx mode 802.11n HT40	/	MCS 7	LCH: CH3	2422
	/	MCS 7	MCH: CH6	2437
	/	MCS 7	HCH: CH9	2452
Tx mode 802.11ax HE20	/	MCS 11	LCH: CH1	2412
	/	MCS 11	MCH: CH6	2437
	/	MCS 11	HCH: CH11	2462
Tx mode 802.11ax HE40	/	MCS 11	LCH: CH3	2422
	/	MCS 11	MCH: CH6	2437
	/	MCS 11	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 ⁻⁸ (Antenna couple method) 5.5 × 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.40 dB (3.6 GHz ≤ f < 8 GHz) 1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for radio frequency (RBW<20 kHz)	3×10 ⁻⁸
Temperature	0.4°C
Humidity	2%
Uncertainty for Radiation Emission test (30 MHz-1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz-40 GHz)	4.10 dB (1-6 GHz) 4.40 dB (6 GHz-18 GHz) 3.54 dB (18 GHz-26 GHz) 4.30 dB (26 GHz-40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz-30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 3#)					
Signal analyzer	R&S	FSQ26	101272	Jun. 01, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150 L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU	100472	Jun. 01, 2021	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Aug. 07, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 08, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Sep. 02, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Mar. 15, 2022	1 Year
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101109	Sep. 02, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 02, 2021	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 02, 2021	1 Year
LISN 3	SCHWARZBECK	NSLK 8163	00017	Sep. 02, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

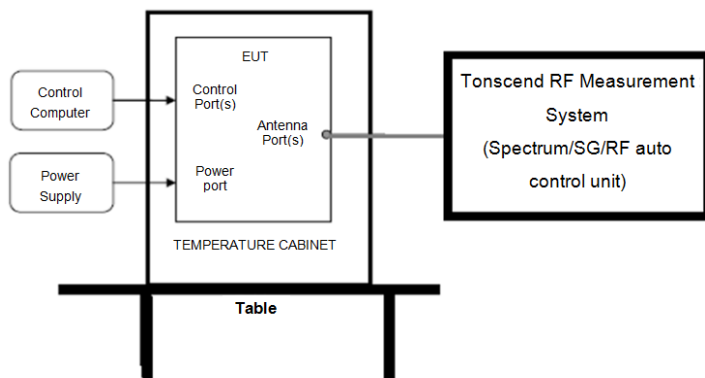

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW:	300 kHz
VBW:	1 MHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) 6dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4. Test Result


Test Mode	Test	Ant	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
11B	2412	Ant1	7.84	0.5	Pass
11B	2437	Ant1	7.76	0.5	Pass
11B	2462	Ant1	7.36	0.5	Pass
11G	2412	Ant1	16.36	0.5	Pass
11G	2437	Ant1	16.36	0.5	Pass
11G	2462	Ant1	16.40	0.5	Pass
11N20SISO	2412	Ant1	17.64	0.5	Pass
11N20SISO	2437	Ant1	17.72	0.5	Pass
11N20SISO	2462	Ant1	17.60	0.5	Pass
11N40SISO	2422	Ant1	36.08	0.5	Pass
11N40SISO	2437	Ant1	36.08	0.5	Pass
11N40SISO	2452	Ant1	36.08	0.5	Pass
11AX20SISO	2412	Ant1	18.80	0.5	Pass
11AX20SISO	2437	Ant1	18.84	0.5	Pass
11AX20SISO	2462	Ant1	19.00	0.5	Pass
11AX40SISO	2422	Ant1	37.92	0.5	Pass
11AX40SISO	2437	Ant1	37.92	0.5	Pass
11AX40SISO	2452	Ant1	36.32	0.5	Pass


Test Mode	Test	Ant	99% OBW [MHz]	Limit [MHz]	Verdict
11B	2412	Ant1	12.28	---	Pass
11B	2437	Ant1	12.24	---	Pass
11B	2462	Ant1	12.28	---	Pass
11G	2412	Ant1	17.16	---	Pass
11G	2437	Ant1	17.12	---	Pass
11G	2462	Ant1	17.12	---	Pass
11N20SISO	2412	Ant1	18.56	---	Pass
11N20SISO	2437	Ant1	18.52	---	Pass
11N20SISO	2462	Ant1	18.52	---	Pass
11N40SISO	2422	Ant1	37.76	---	Pass
11N40SISO	2437	Ant1	37.84	---	Pass
11N40SISO	2452	Ant1	37.84	---	Pass
11AX20SISO	2412	Ant1	19.56	---	Pass
11AX20SISO	2437	Ant1	19.56	---	Pass
11AX20SISO	2462	Ant1	19.56	---	Pass
11AX40SISO	2422	Ant1	39.12	---	Pass

11AX40SISO	2437	Ant1	39.04	---	Pass
11AX40SISO	2452	Ant1	39.04	---	Pass

4.5. original test data


6 dB bandwidth:

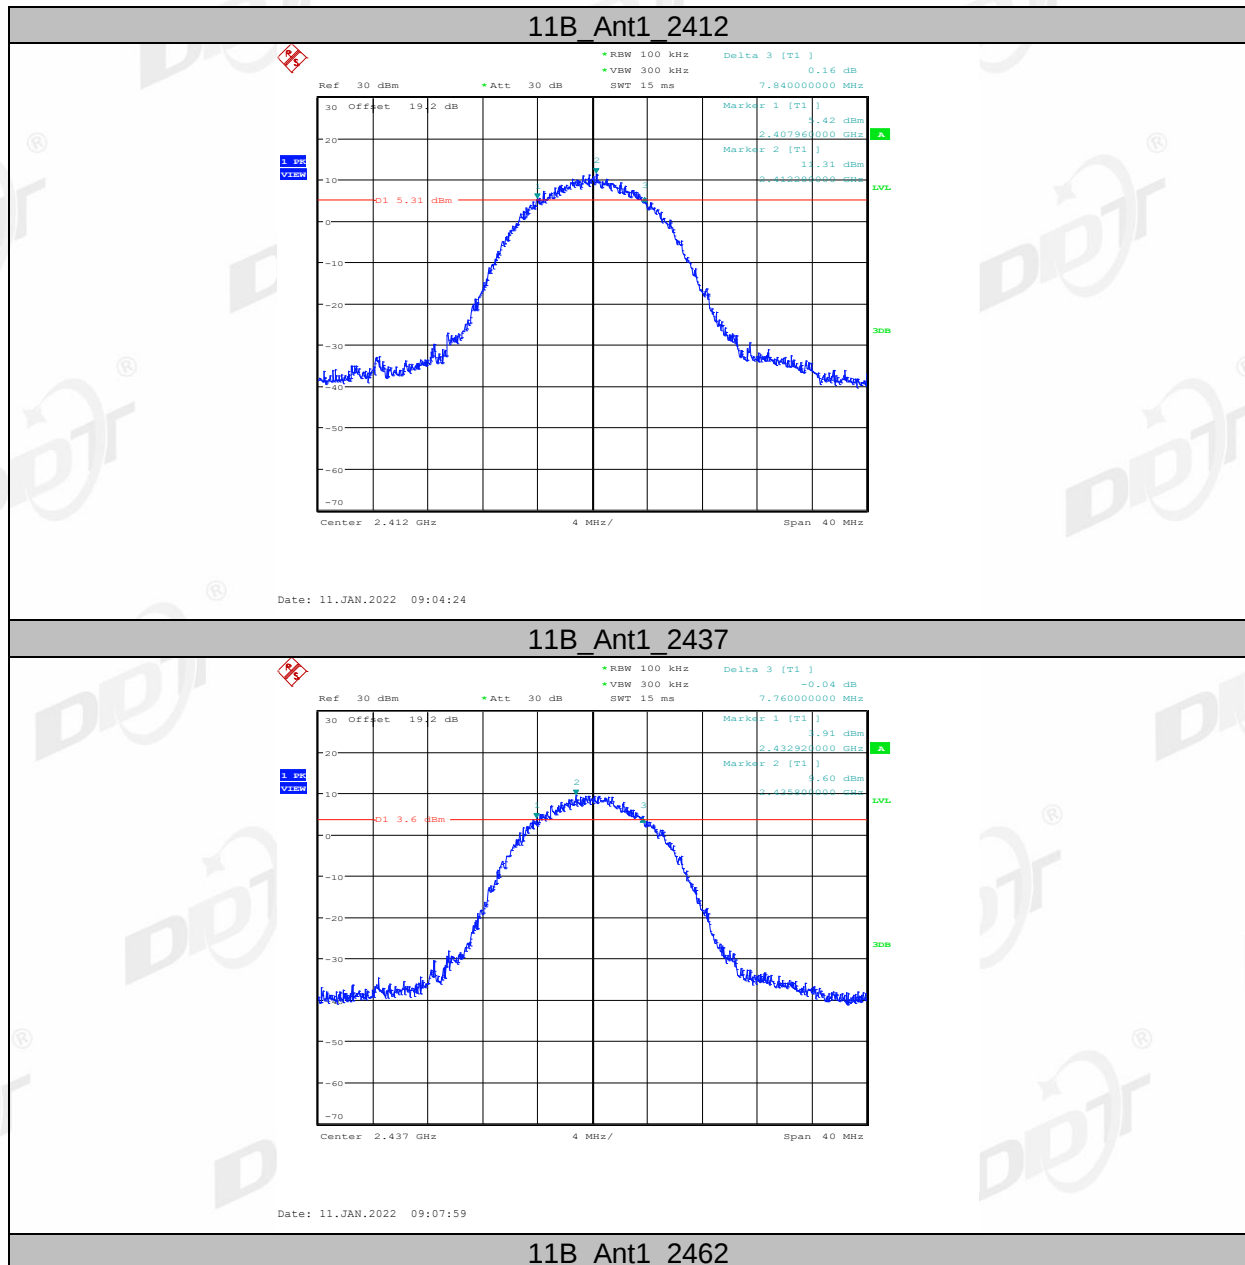

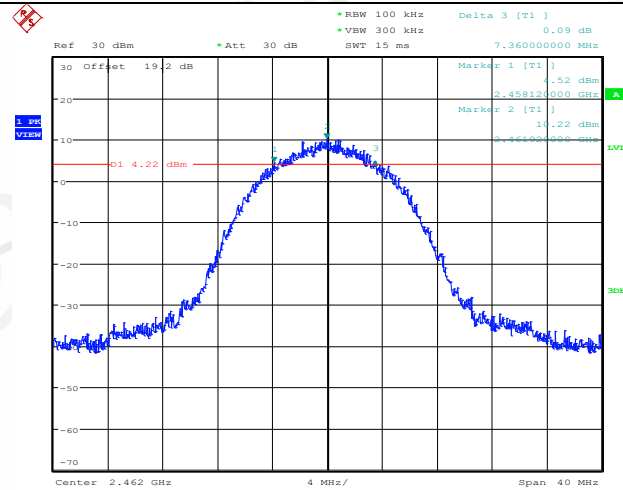


Date: 11.JAN.2022 09:20:36

11G Ant1 2412

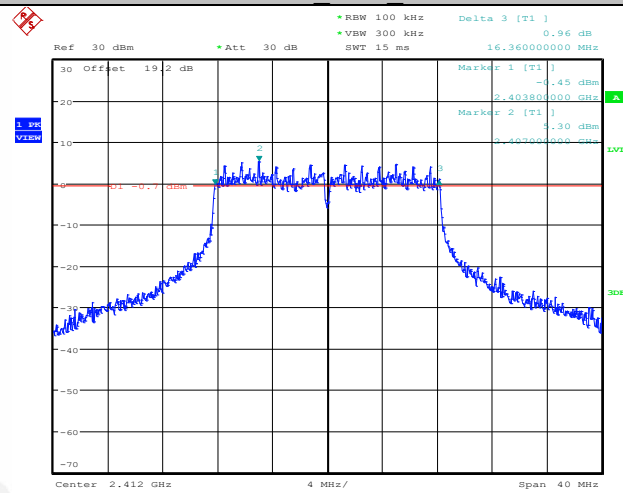


Date: 11.JAN.2022 09:36:31

11G Ant1 2437

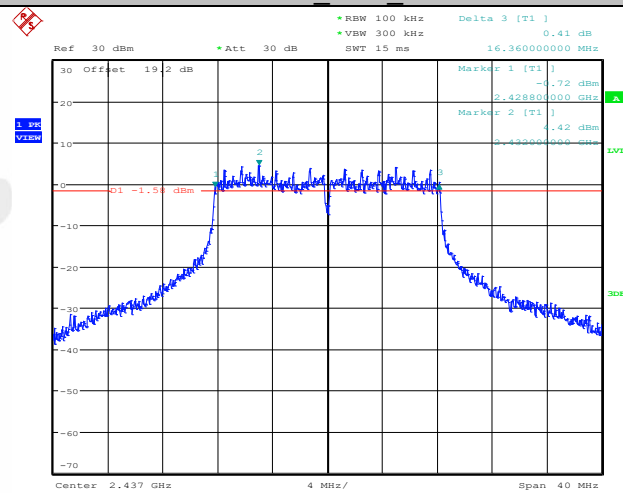


Date: 11.JAN.2022 09:41:51

11G Ant1 2462

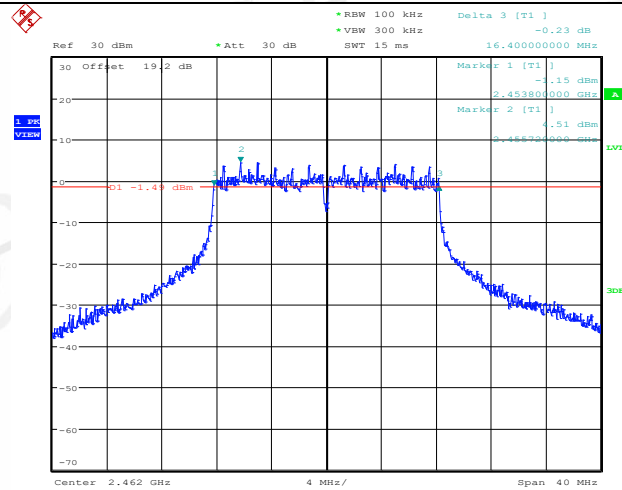


Date: 11.JAN.2022 09:44:19

11N20SISO Ant1 2412

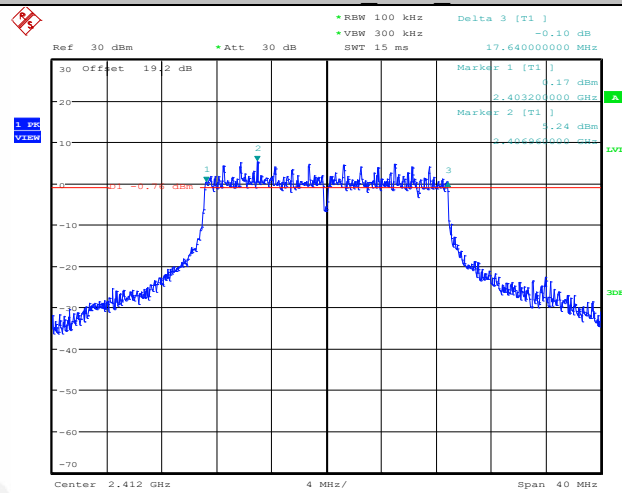


Date: 11.JAN.2022 09:48:06

11N20SISO Ant1 2437

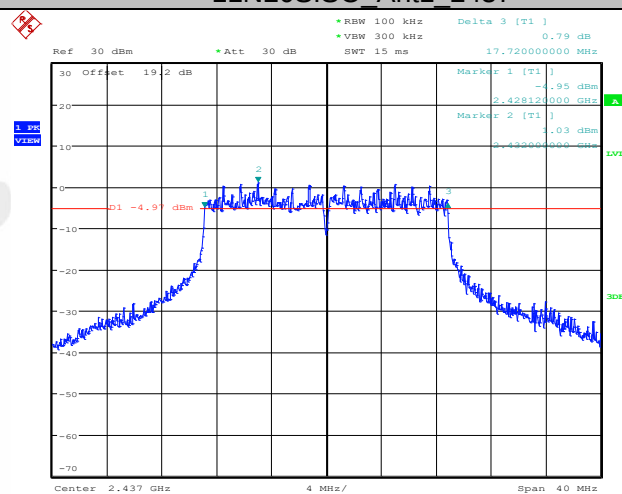

Date: 11.JAN.2022 09:59:01


11N20SISO Ant1 2462



Date: 11.JAN.2022 10:12:36


Date: 11.JAN.2022 10:18:33

Page 16 of 126

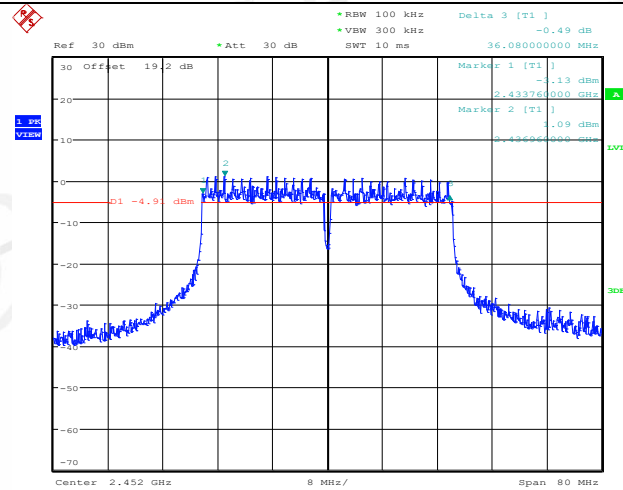


Date: 11.JAN.2022 10:21:05

11AX20SISO_Ant1_2412

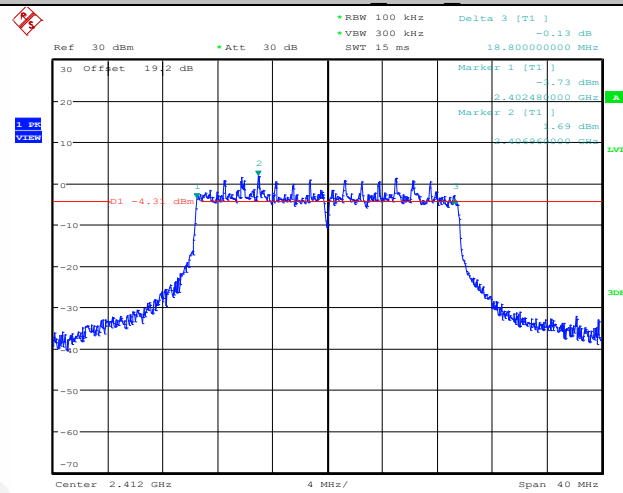


Date: 11.JAN.2022 10:53:06

11AX20SISO_Ant1_2437

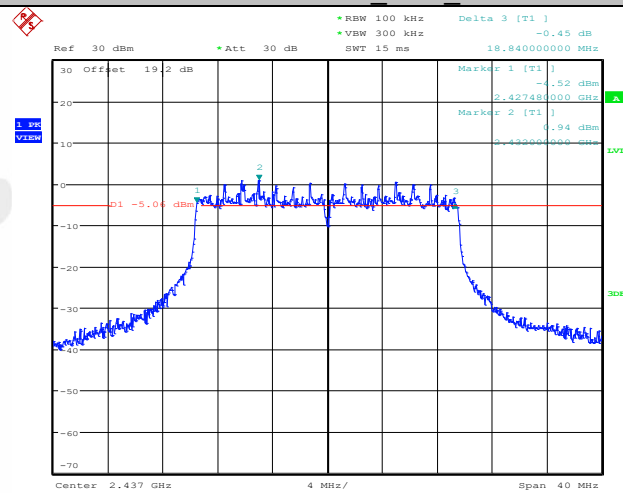


Date: 11.JAN.2022 10:50:26

11AX20SISO_Ant1_2462

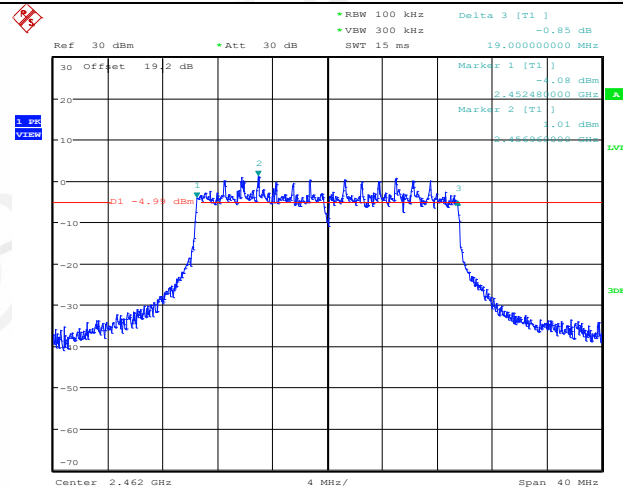


Date: 11.JAN.2022 10:47:36

11AX40SISO_Ant1_2422

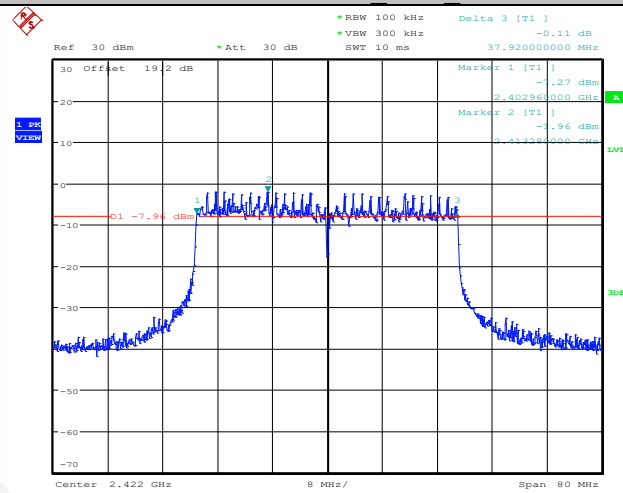


Date: 11.JAN.2022 10:39:44

11AX40SISO_Ant1_2437


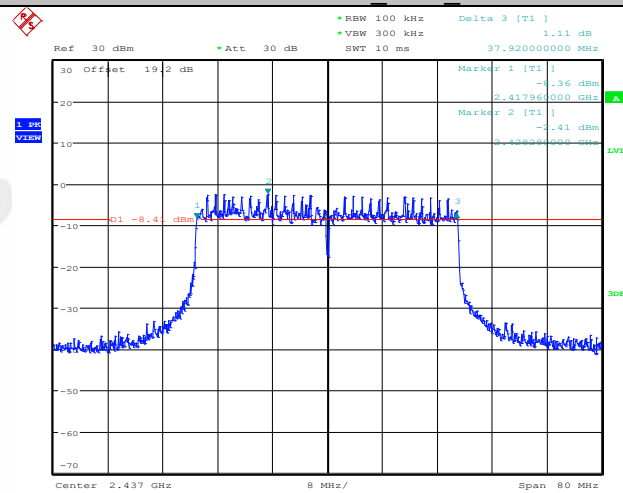


Date: 11.JAN.2022 10:37:03


11AX40SISO_Ant1_2452

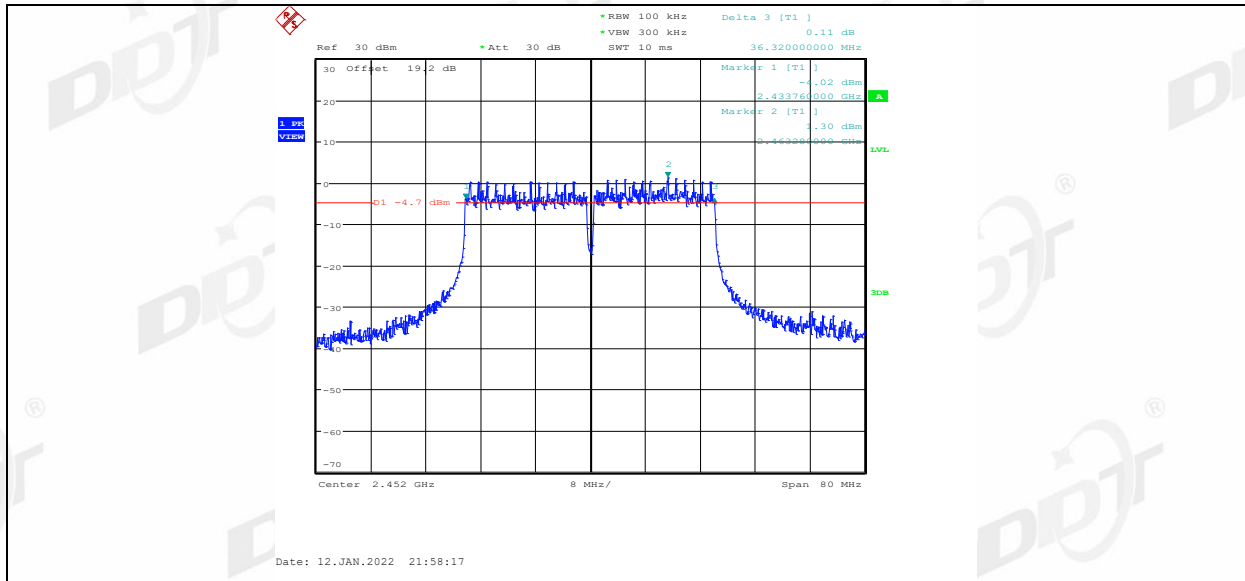

99% bandwidth:

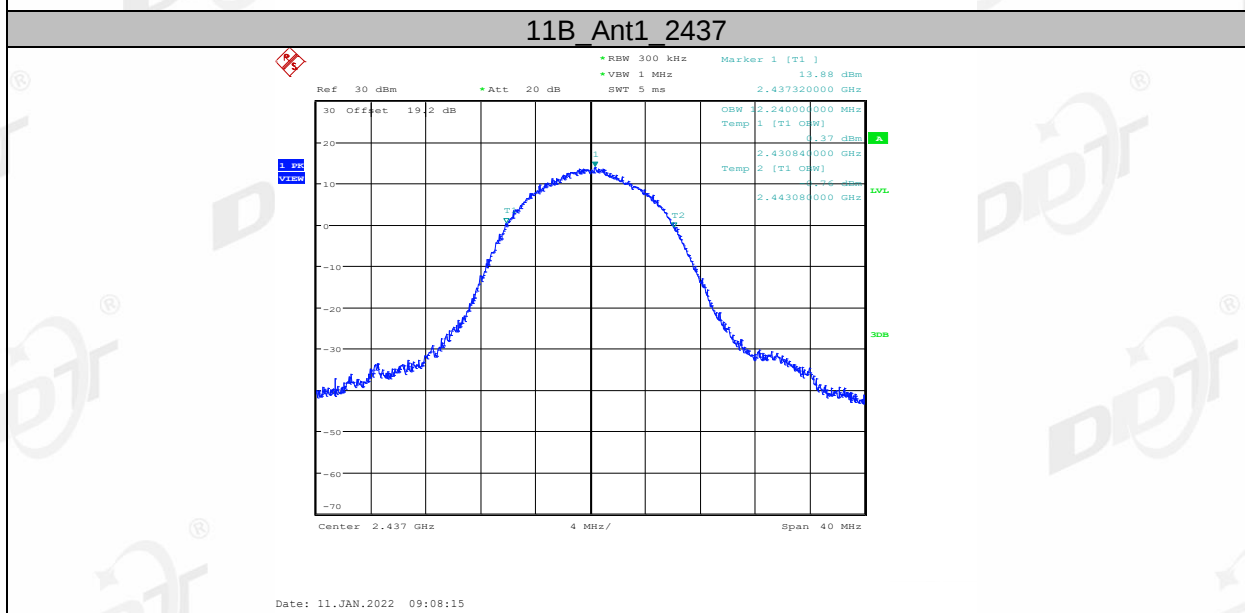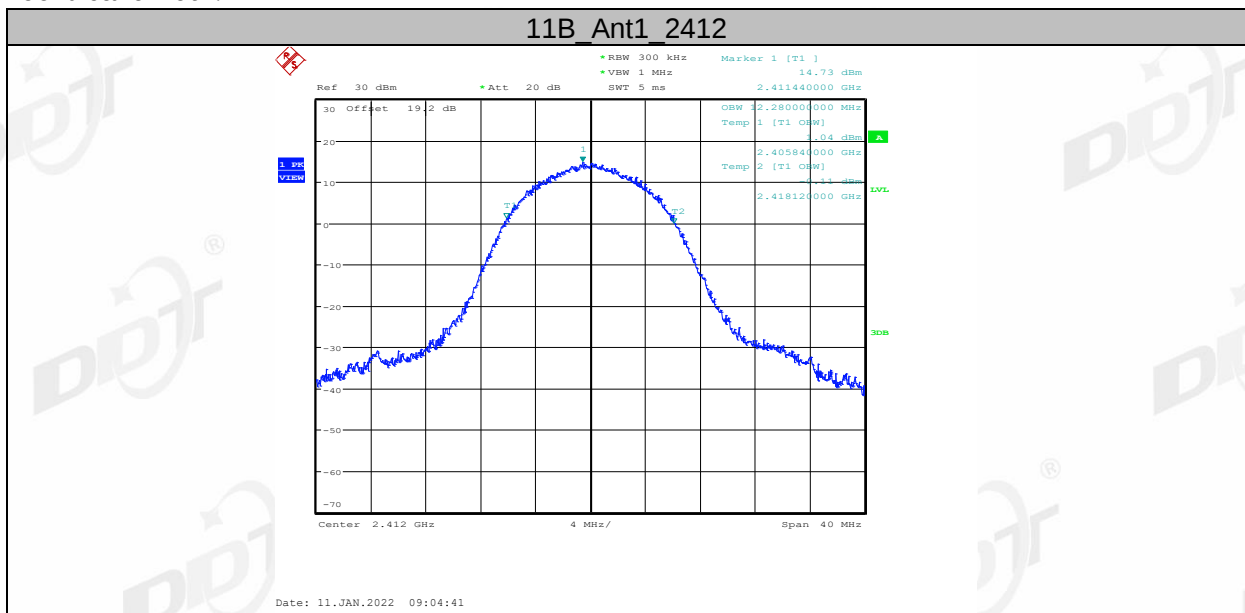


11B_Ant1_2462

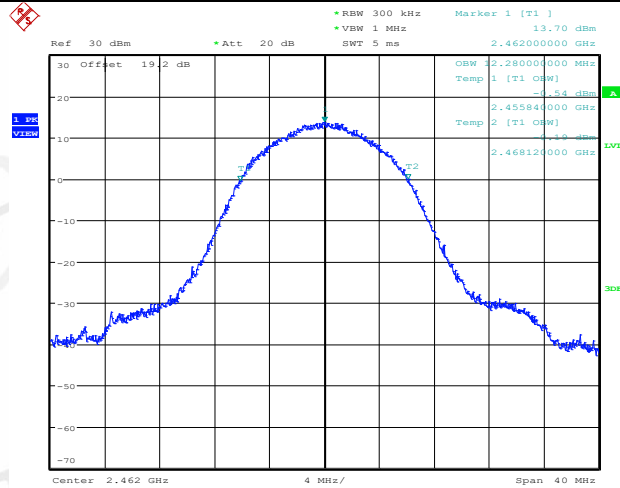


Date: 11.JAN.2022 09:20:52

11G_Ant1_2412

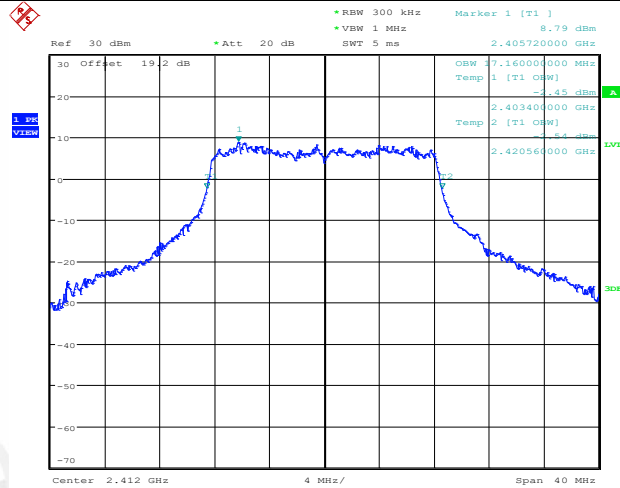


Date: 11.JAN.2022 09:36:47

11G_Ant1_2437

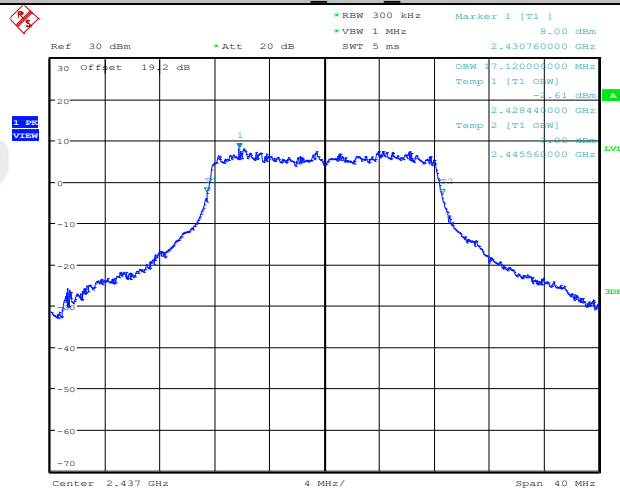


Date: 11.JAN.2022 09:42:08

11G_Ant1_2462

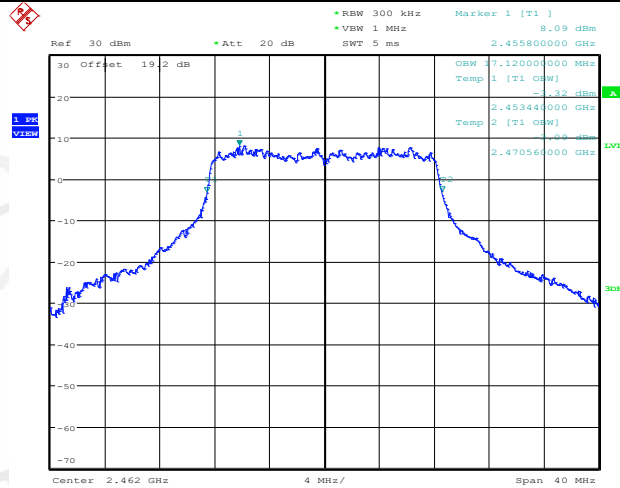


Date: 11.JAN.2022 09:44:36

11N20SISO_Ant1_2412

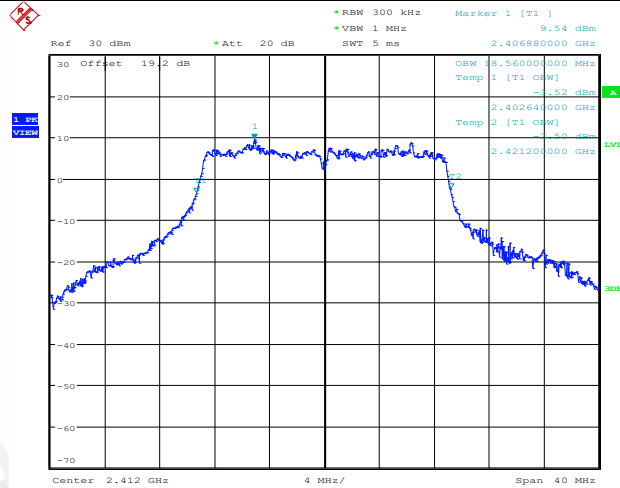


Date: 11.JAN.2022 09:48:22

11N20SISO_Ant1_2437

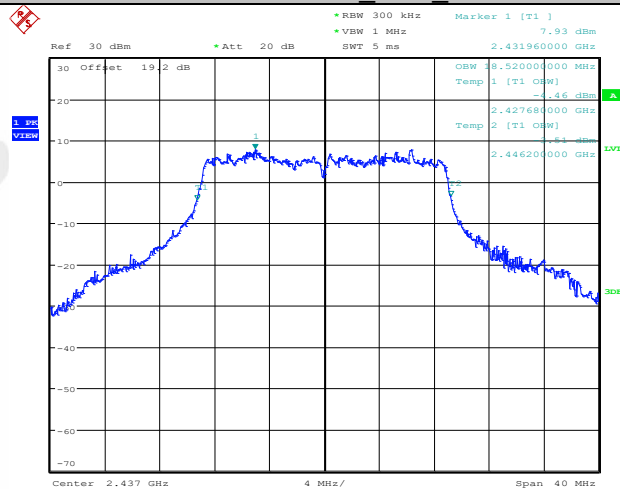


Date: 11.JAN.2022 09:59:17

11N20SISO Ant1 2462

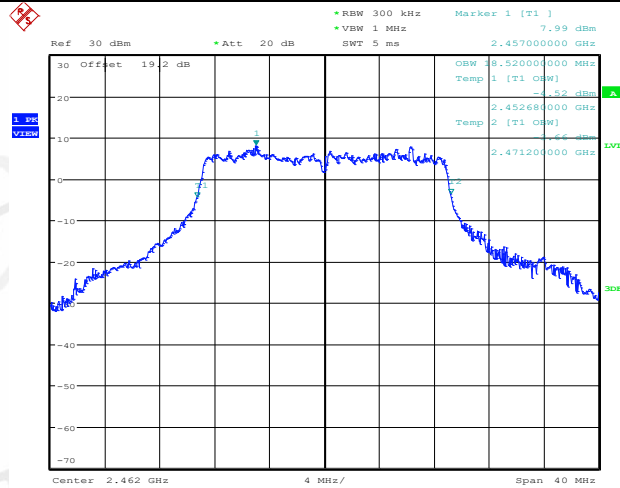


Date: 11.JAN.2022 10:10:11

11N40SISO Ant1 2422

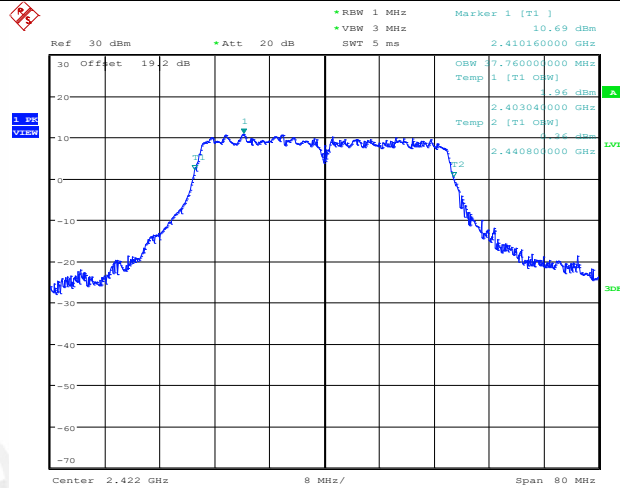


Date: 11.JAN.2022 10:12:52

11N40SISO Ant1 2437

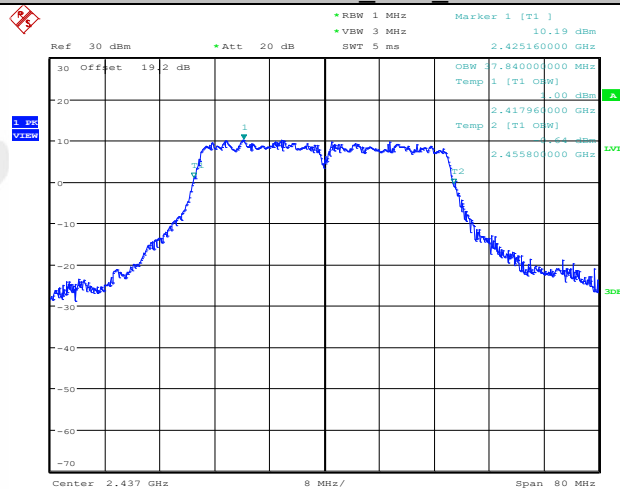


Date: 11.JAN.2022 10:18:50

11N40SISO Ant1 2452

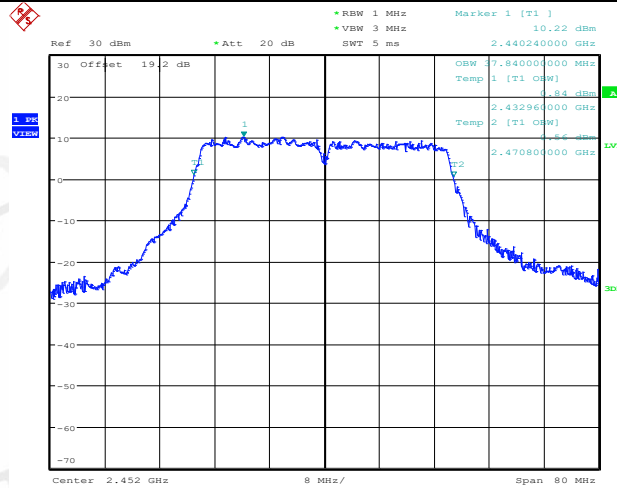


Date: 11.JAN.2022 10:21:22

11AX20SISO Ant1 2412

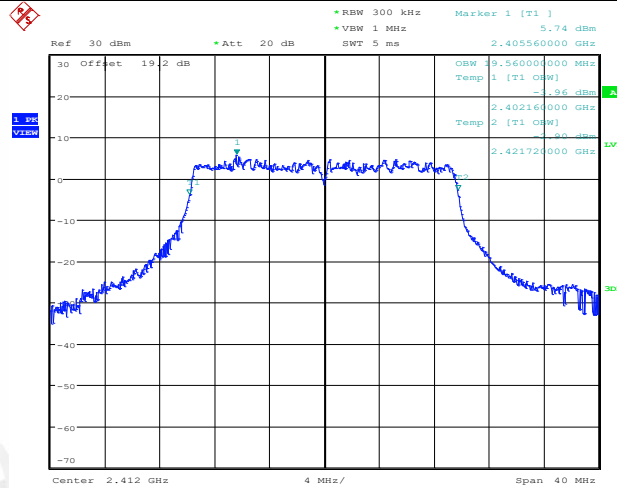


Date: 11.JAN.2022 10:52:48

11AX20SISO Ant1 2437

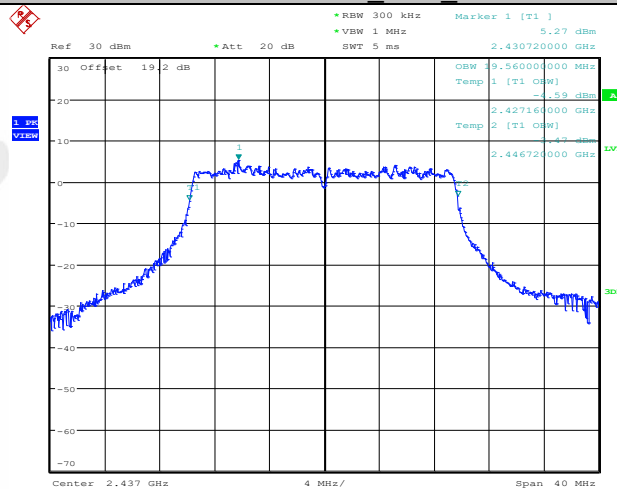


Date: 11.JAN.2022 10:50:09

11AX20SISO Ant1 2462

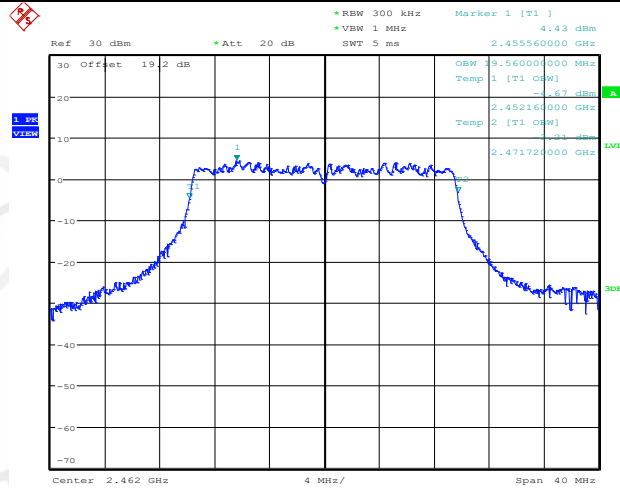


Date: 11.JAN.2022 10:47:53

11AX40SISO Ant1 2422

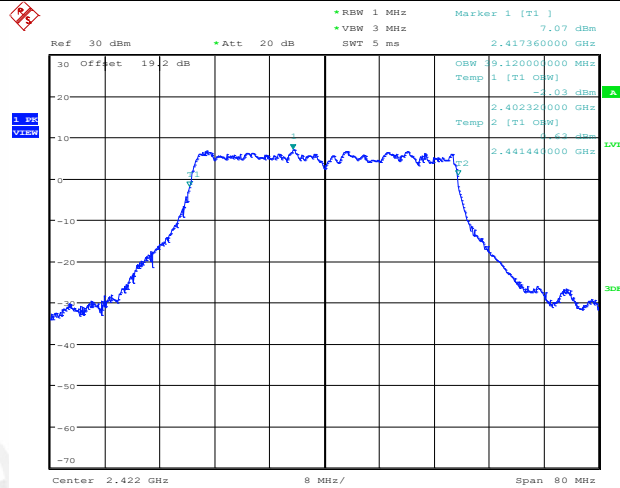


Date: 11.JAN.2022 10:39:26

11AX40SISO Ant1 2437

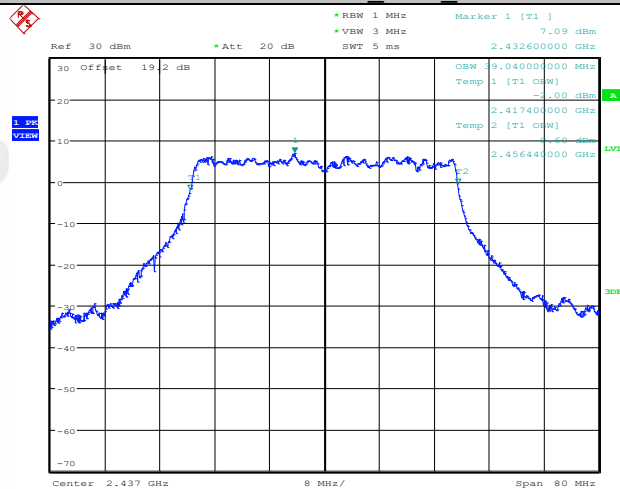

Date: 11.JAN.2022 10:36:46

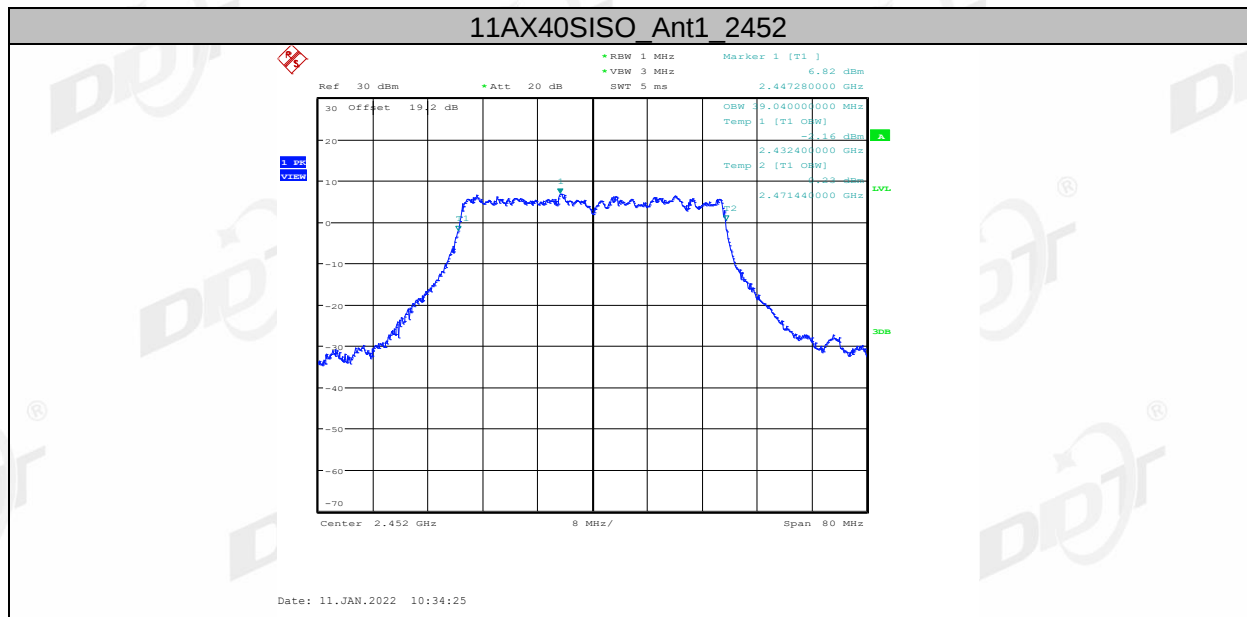

5. Conducted Peak Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power meter.

5.4. Test Result

Test Mode	Test Channel	Ant	Conducted Output Power (dBm)	Limit [dBm]	Verdict
11B	2412	Ant1	18.69	30	Pass
11B	2437	Ant1	17.78	30	Pass
11B	2462	Ant1	17.78	30	Pass
11G	2412	Ant1	15.40	30	Pass
11G	2437	Ant1	14.64	30	Pass
11G	2462	Ant1	14.70	30	Pass
11N20SISO	2412	Ant1	15.59	30	Pass
11N20SISO	2437	Ant1	14.84	30	Pass
11N20SISO	2462	Ant1	14.93	30	Pass
11N40SISO	2422	Ant1	15.12	30	Pass
11N40SISO	2437	Ant1	14.20	30	Pass
11N40SISO	2452	Ant1	14.67	30	Pass
11AX20SISO	2412	Ant1	12.12	30	Pass
11AX20SISO	2437	Ant1	10.87	30	Pass
11AX20SISO	2462	Ant1	11.38	30	Pass
11AX40SISO	2422	Ant1	11.81	30	Pass
11AX40SISO	2437	Ant1	10.72	30	Pass
11AX40SISO	2452	Ant1	11.36	30	Pass

Test Mode	Test Channel	Ant	EIRP (dBm)	Limit [dBm]	Verdict
11B	2412	Ant1	21.13	36	Pass
11B	2437	Ant1	20.22	36	Pass
11B	2462	Ant1	20.22	36	Pass
11G	2412	Ant1	17.84	36	Pass
11G	2437	Ant1	17.08	36	Pass
11G	2462	Ant1	17.14	36	Pass
11N20SISO	2412	Ant1	18.03	36	Pass
11N20SISO	2437	Ant1	17.28	36	Pass
11N20SISO	2462	Ant1	17.37	36	Pass
11N40SISO	2422	Ant1	17.56	36	Pass
11N40SISO	2437	Ant1	16.64	36	Pass
11N40SISO	2452	Ant1	17.11	36	Pass
11AX20SISO	2412	Ant1	14.56	36	Pass
11AX20SISO	2437	Ant1	13.31	36	Pass
11AX20SISO	2462	Ant1	13.82	36	Pass
11AX40SISO	2422	Ant1	14.25	36	Pass
11AX40SISO	2437	Ant1	13.16	36	Pass
11AX40SISO	2452	Ant1	13.80	36	Pass
Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)					

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


6.4. Test Result

Test Mode	Test Channel	Ant	PSD [dBm]	Limit [dBm/3kHz]	Verdict
11B	2412	Ant1	-8.27	8.00	Pass
11B	2437	Ant1	-6.29	8.00	Pass
11B	2462	Ant1	-7.32	8.00	Pass
11G	2412	Ant1	-10.83	8.00	Pass
11G	2437	Ant1	-11.25	8.00	Pass
11G	2462	Ant1	-12.04	8.00	Pass
11N20SISO	2412	Ant1	-9.97	8.00	Pass
11N20SISO	2437	Ant1	-12.59	8.00	Pass
11N20SISO	2462	Ant1	-10.92	8.00	Pass
11N40SISO	2422	Ant1	-13.29	8.00	Pass
11N40SISO	2437	Ant1	-13.12	8.00	Pass
11N40SISO	2452	Ant1	-14.42	8.00	Pass


11AX20SISO	2412	Ant1	-13.35	8.00	Pass
11AX20SISO	2437	Ant1	-14.36	8.00	Pass
11AX20SISO	2462	Ant1	-13.39	8.00	Pass
11AX40SISO	2422	Ant1	-15.87	8.00	Pass
11AX40SISO	2437	Ant1	-16.41	8.00	Pass
11AX40SISO	2452	Ant1	-14.47	8.00	Pass

6.5. original test data




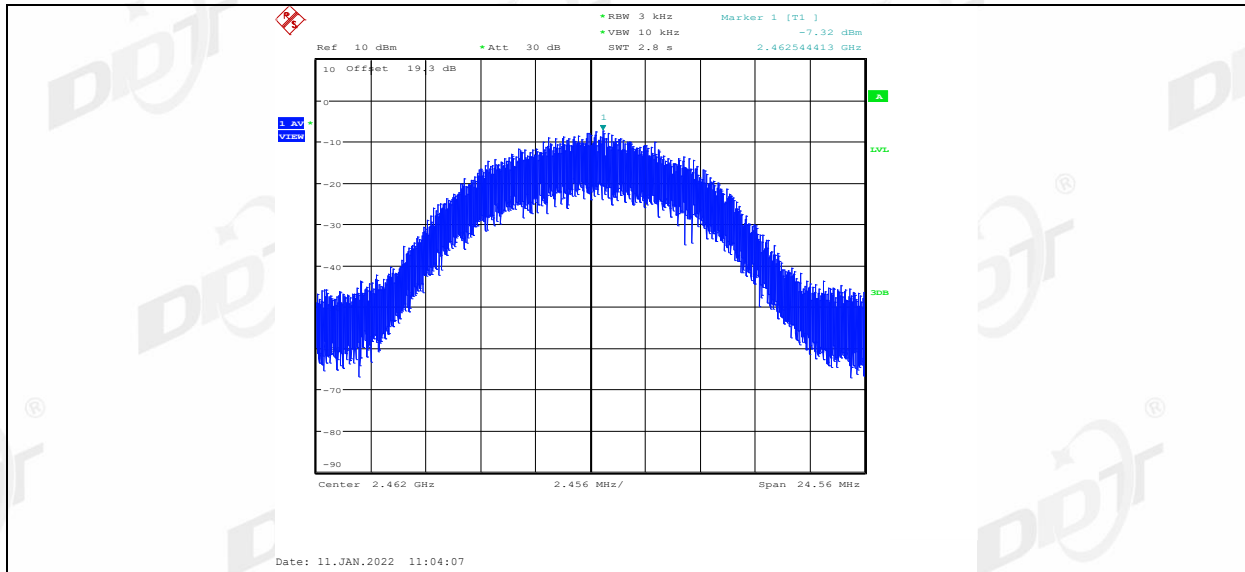


11G_Ant1_2412

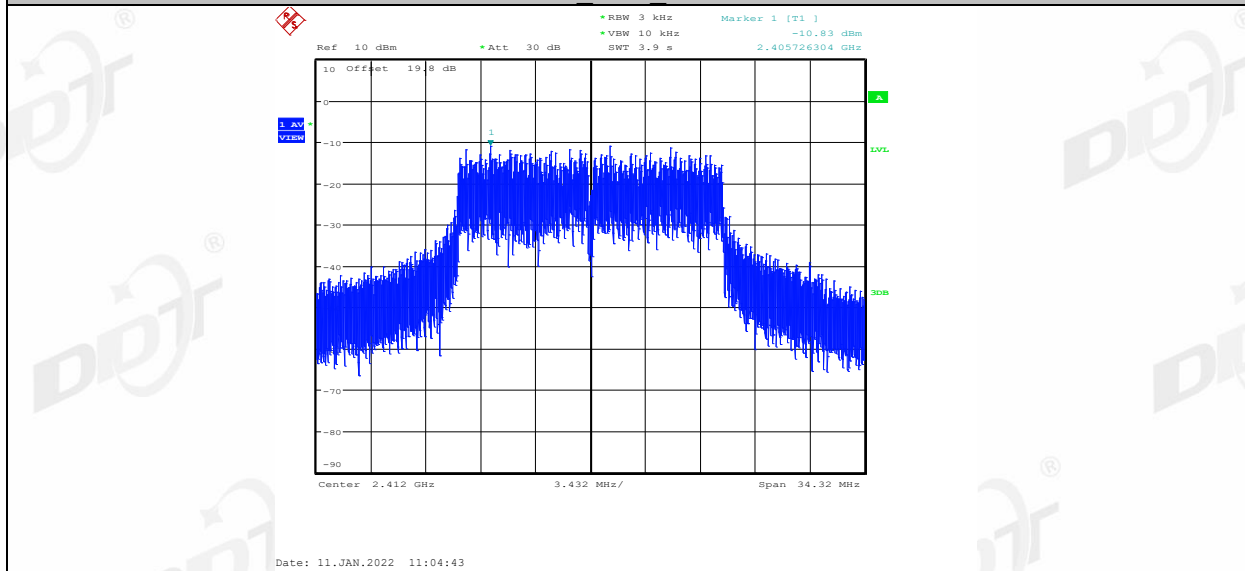


11G_Ant1_2437

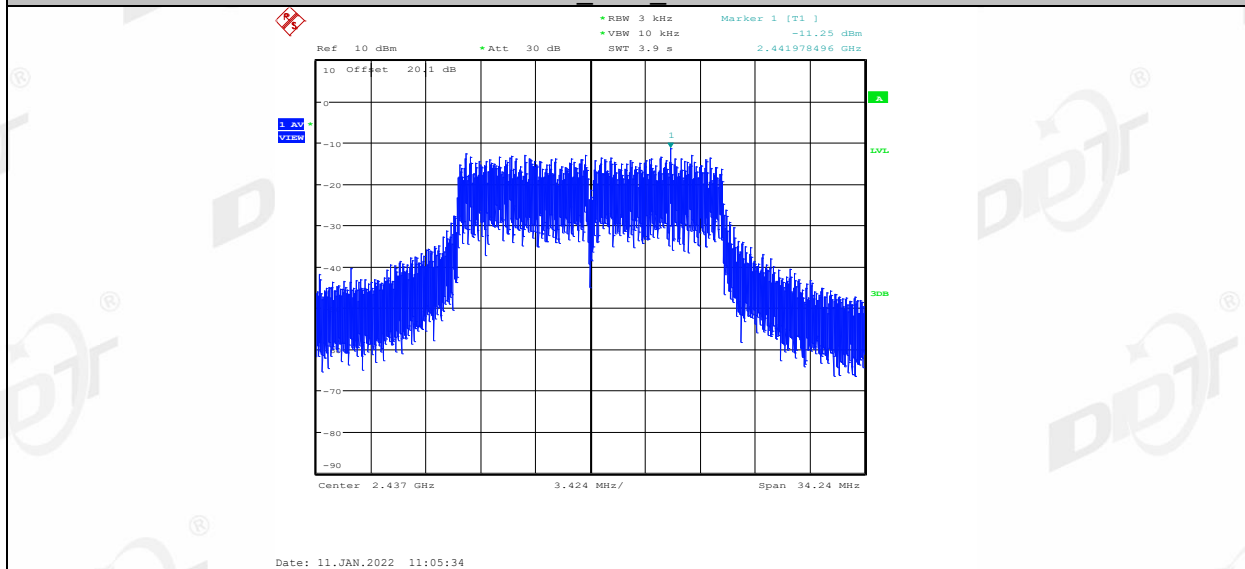


11G_Ant1_2462

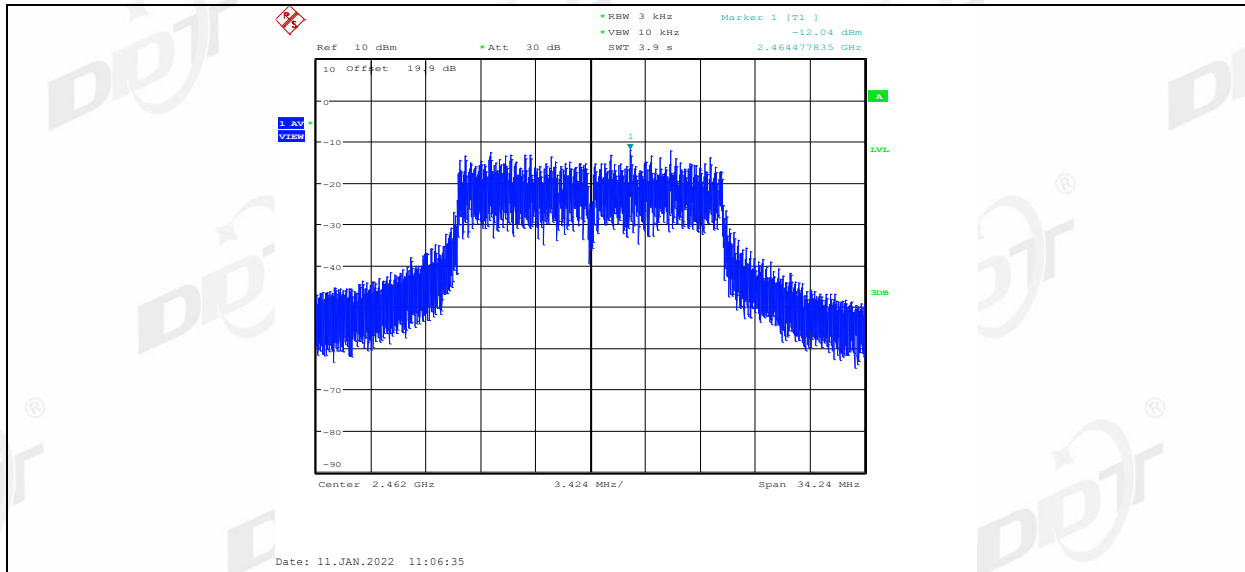


11N20SISO_Ant1_2412

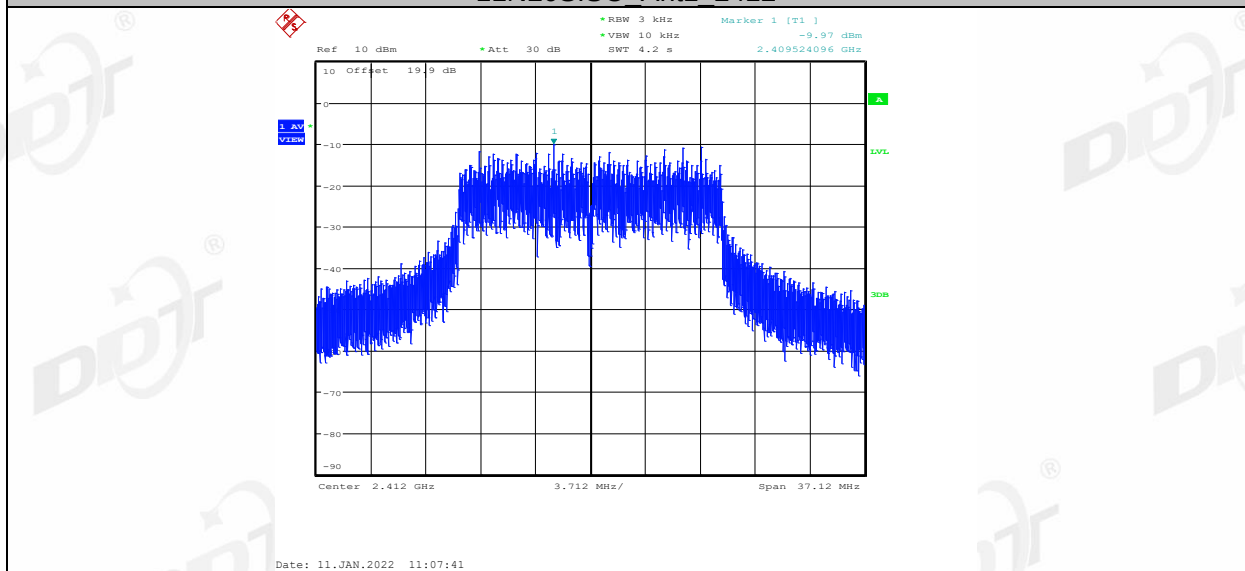


11N20SISO_Ant1_2437

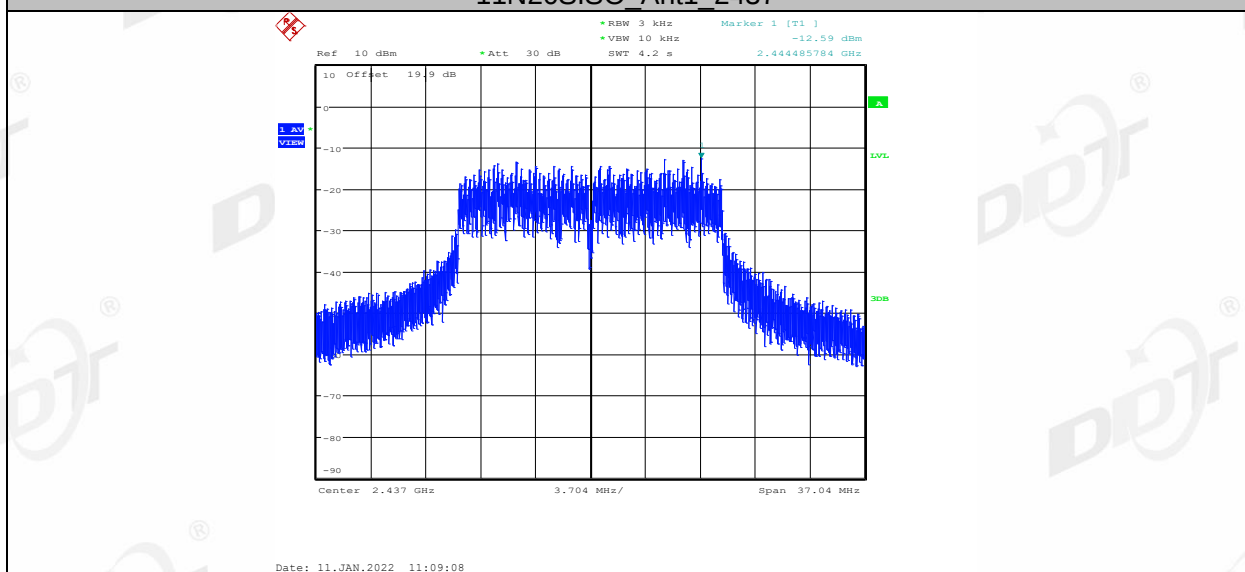


11N20SISO_Ant1_2462

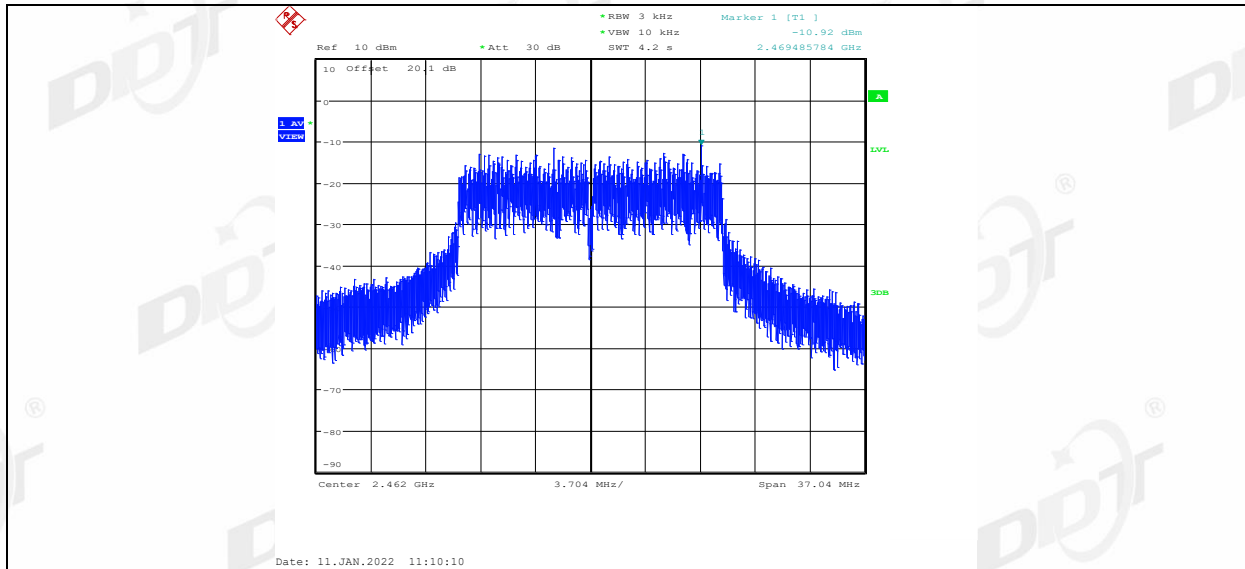


11N40SISO_Ant1_2422

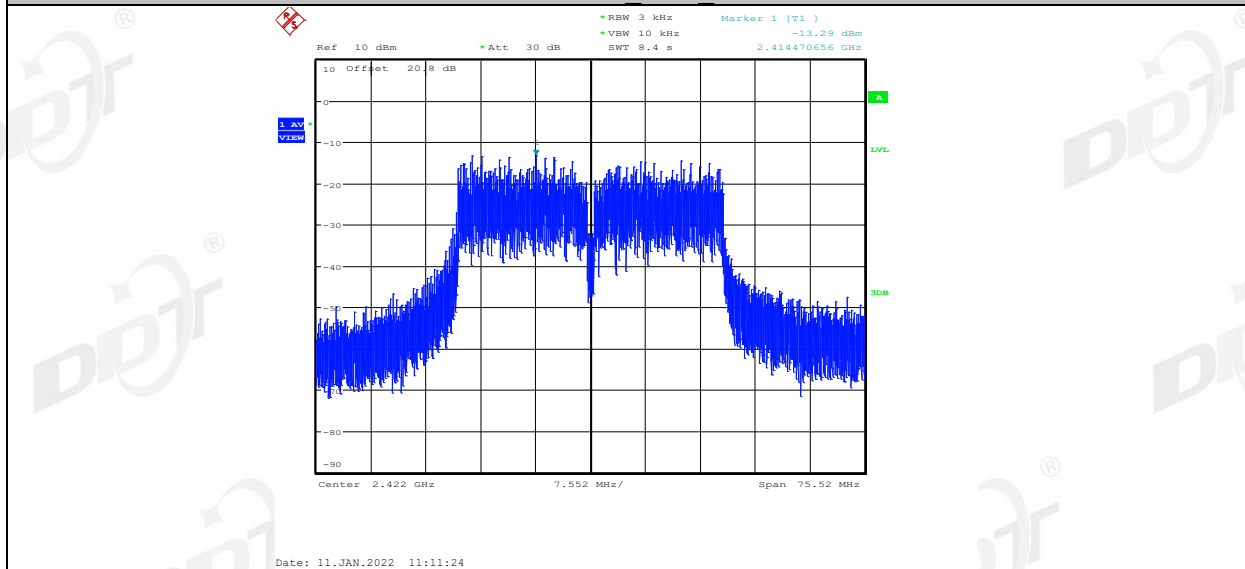


11N40SISO_Ant1_2437

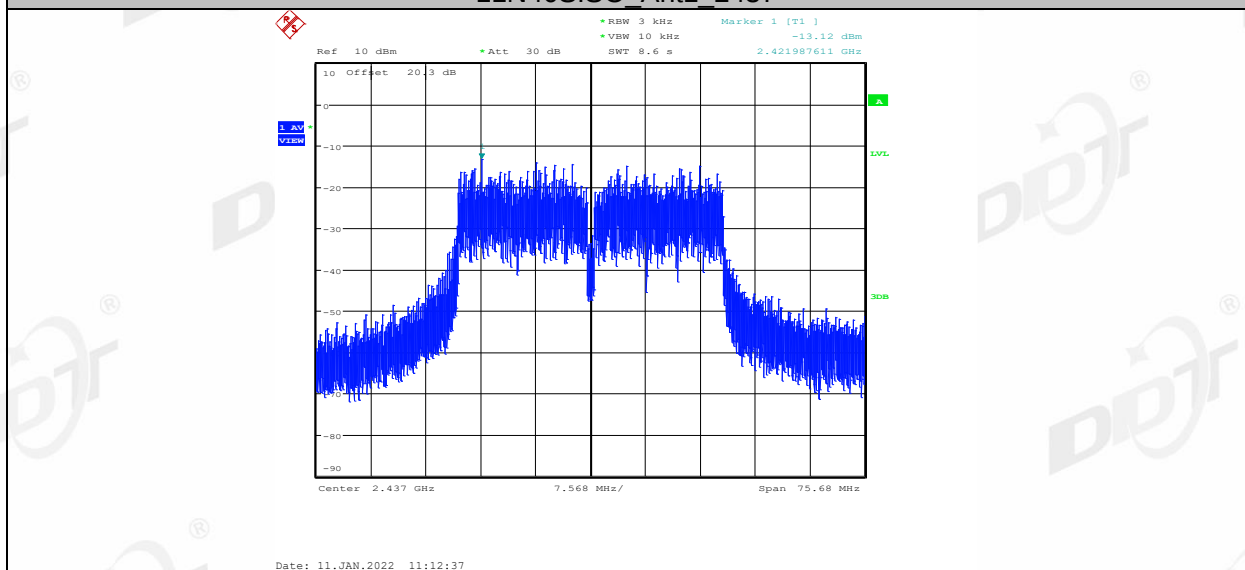


11N40SISO_Ant1_2452

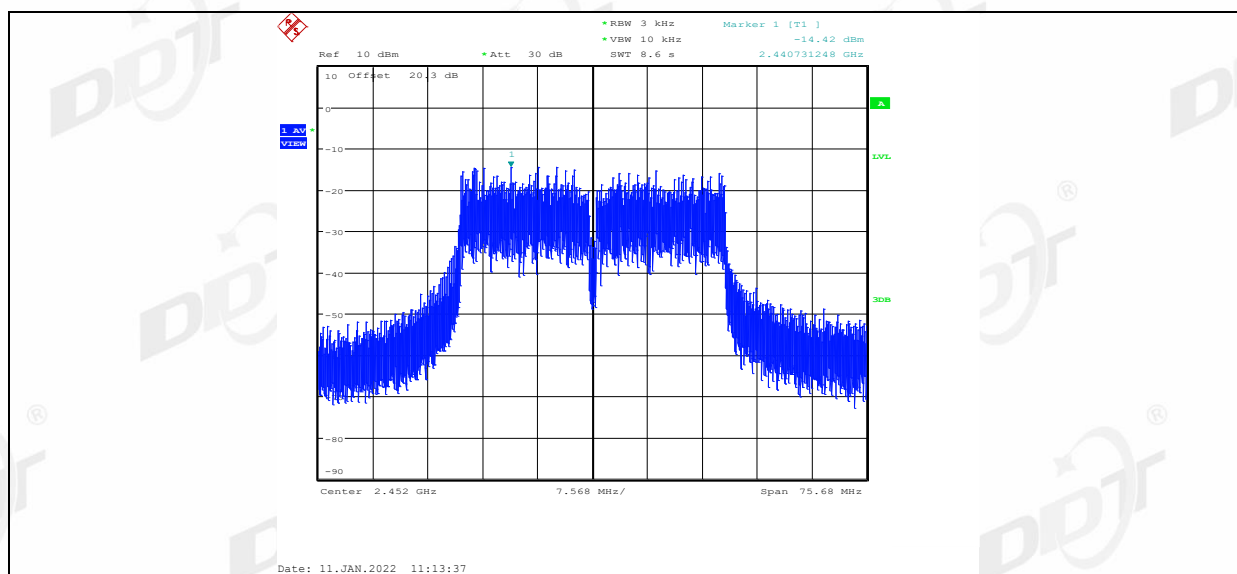


11AX20SISO_Ant1_2412

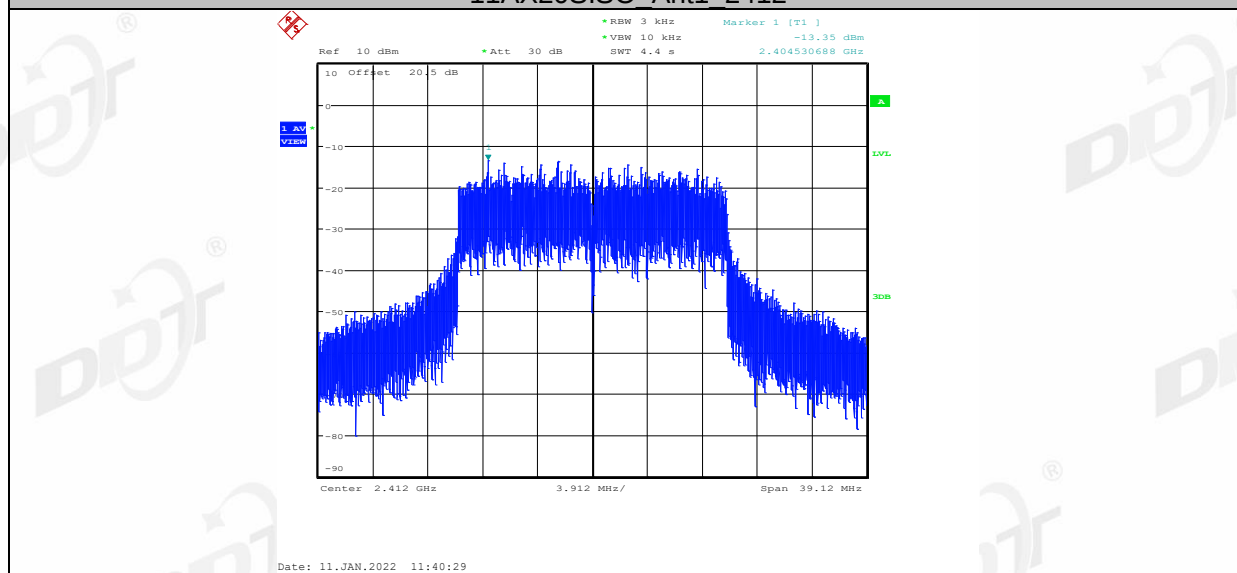


11AX20SISO_Ant1_2437

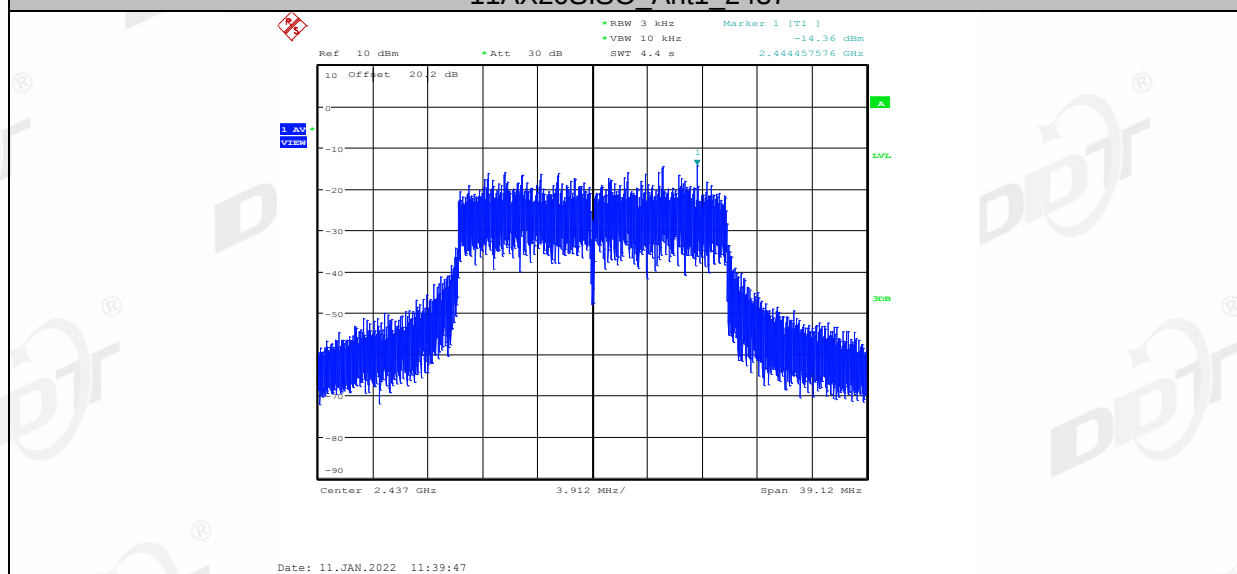


11AX20SISO_Ant1_2462

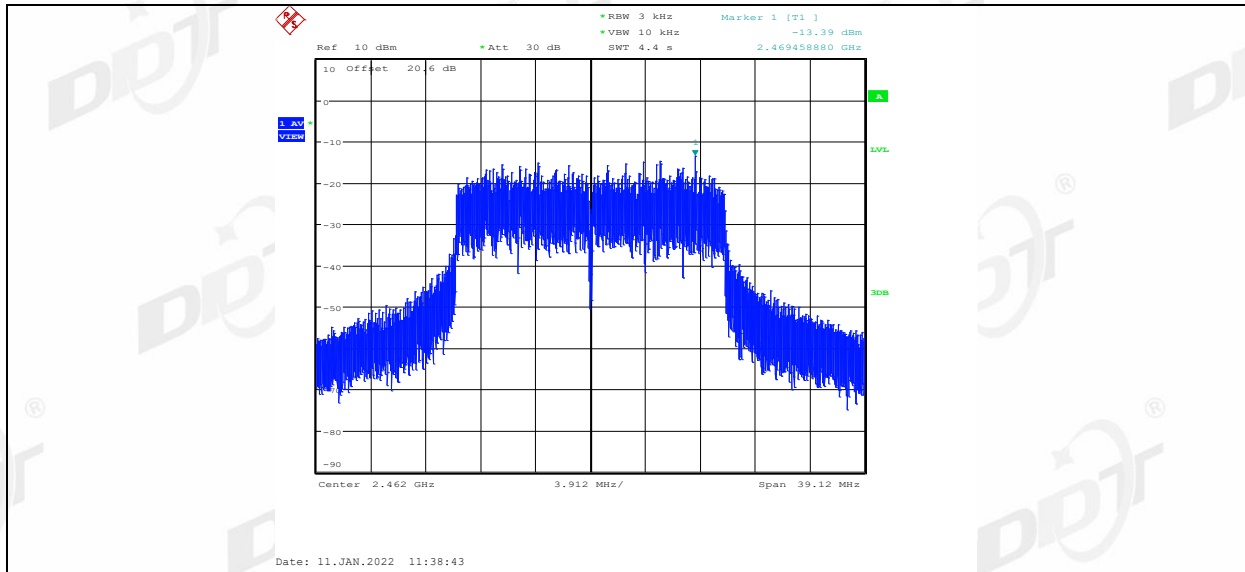


11AX40SISO_Ant1_2422

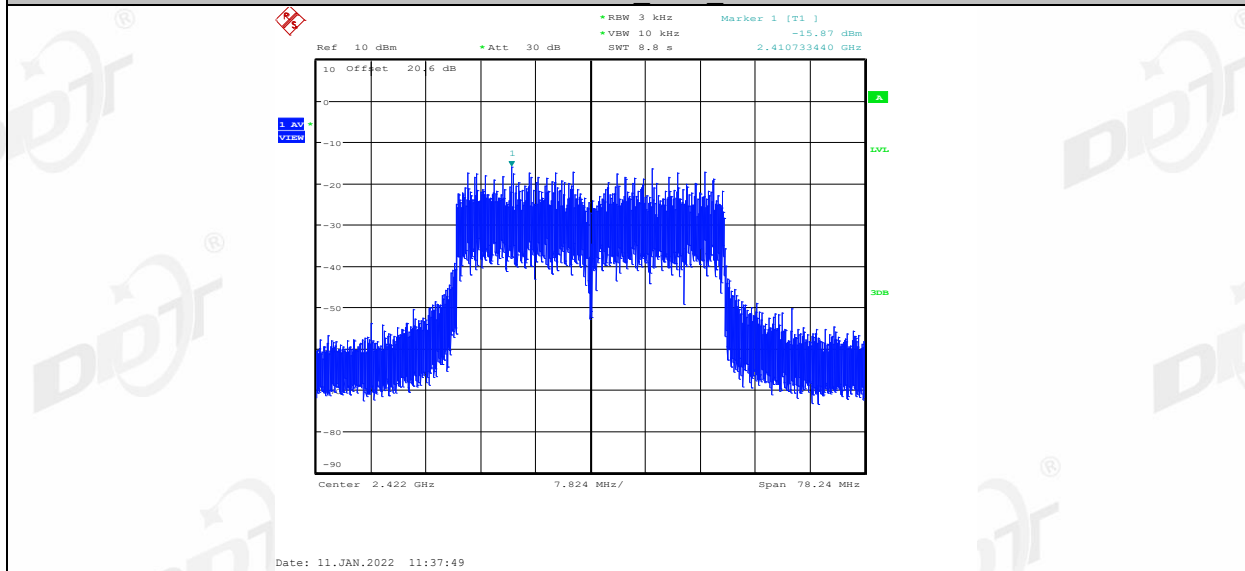

11AX40SISO_Ant1_2437

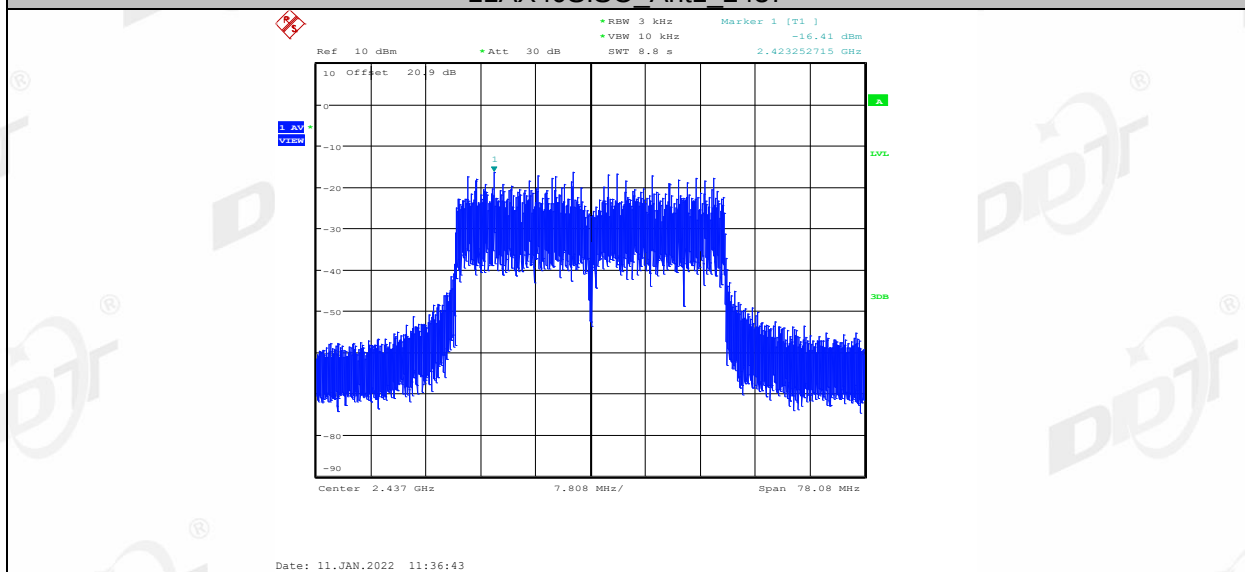

11AX40SISO_Ant1_2452

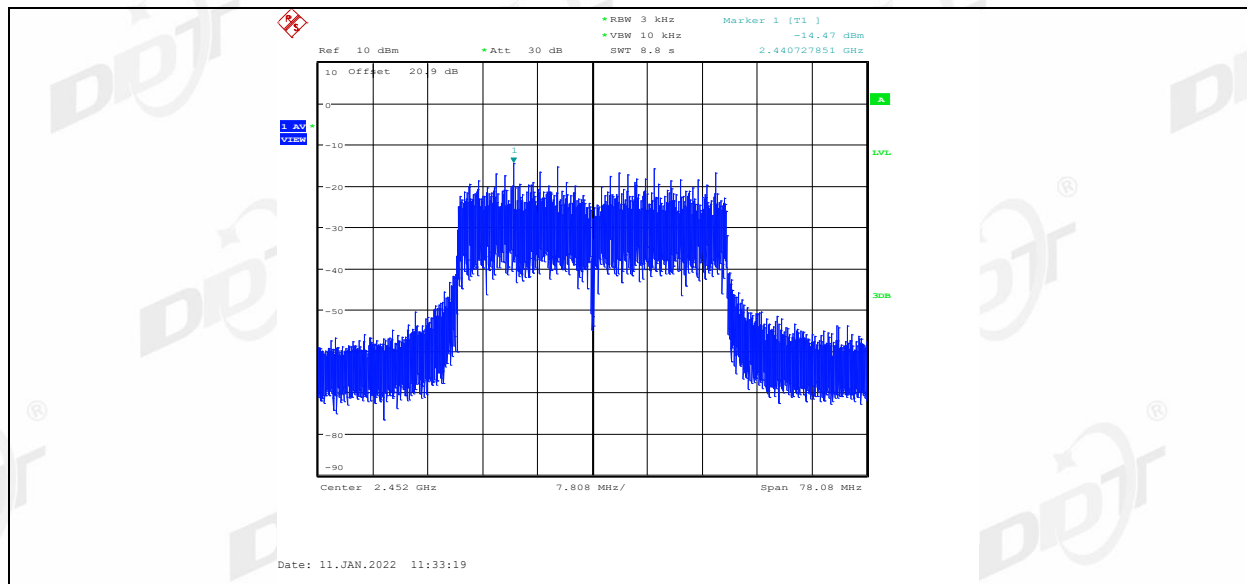

7. Band Edge Compliance (Conducted Method)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

7.4. Test Result

EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result Result (dBm)
11b	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass
11g	CH1	Pass	11ax HE 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass


7.5. original test data

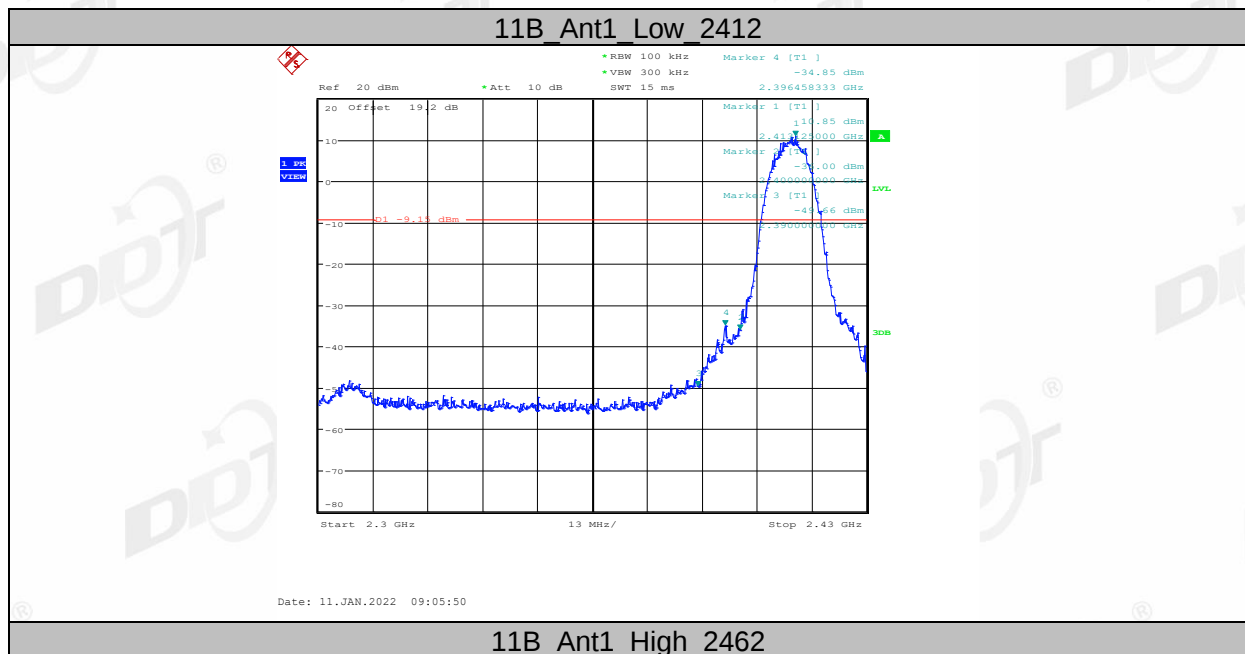

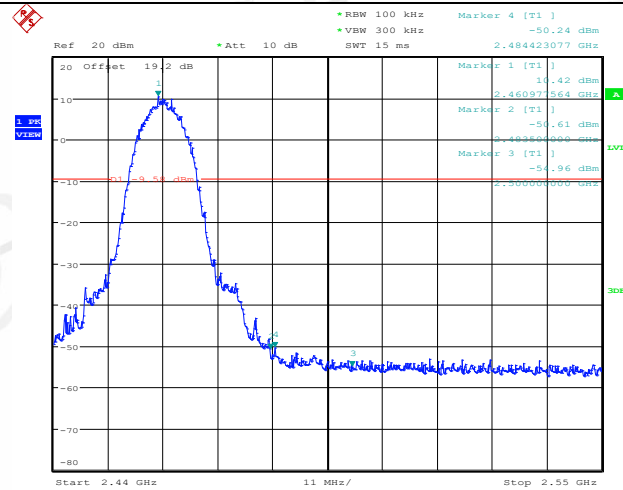


Date: 11.JAN.2022 09:23:38

11G Ant1 Low 2412

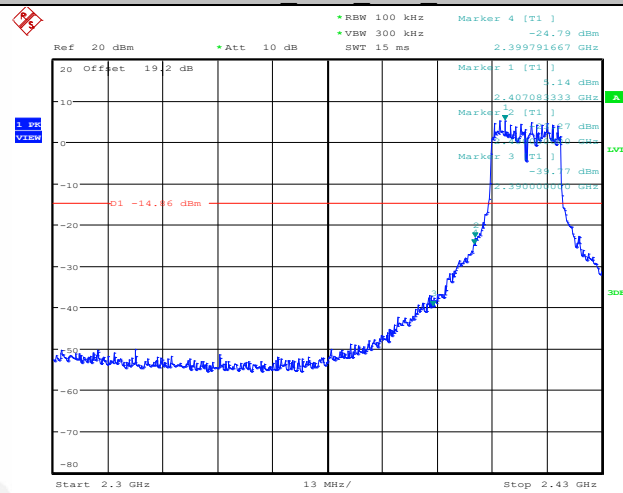



Date: 11.JAN.2022 09:37:58


11G Ant1 High 2462

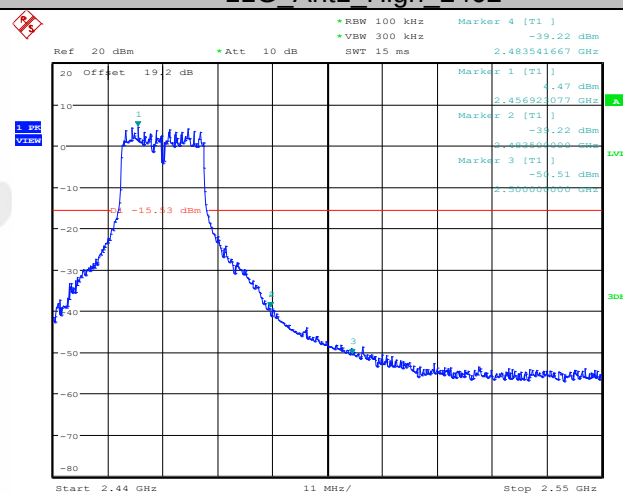


Date: 11.JAN.2022 09:46:09

11N20SISO Ant1 Low 2412




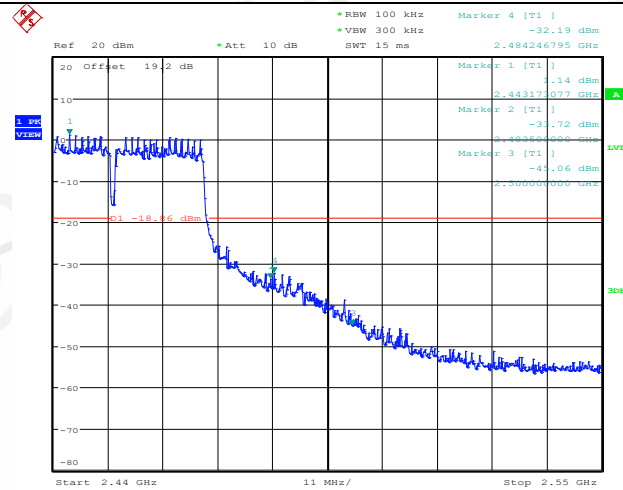

11AX20SISO Ant1 Low 2412

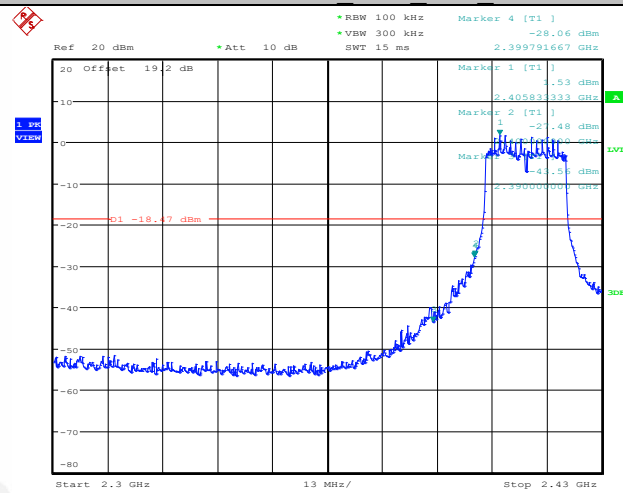

11AX20SISO Ant1 High 2462

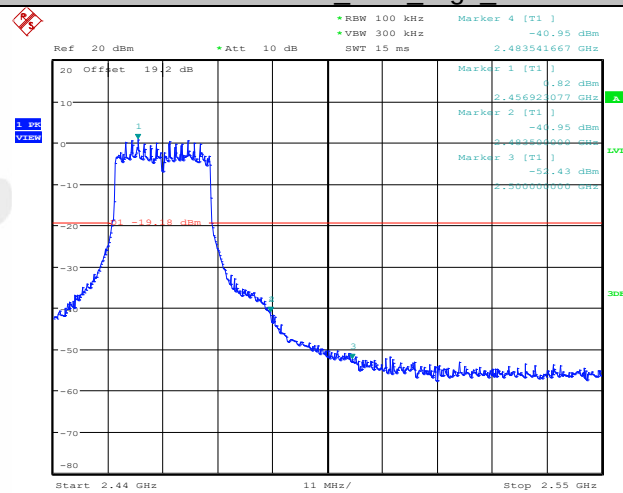


11AX40SISO Ant1 Low 2422




8. Radiated Spurious Emissions

8.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

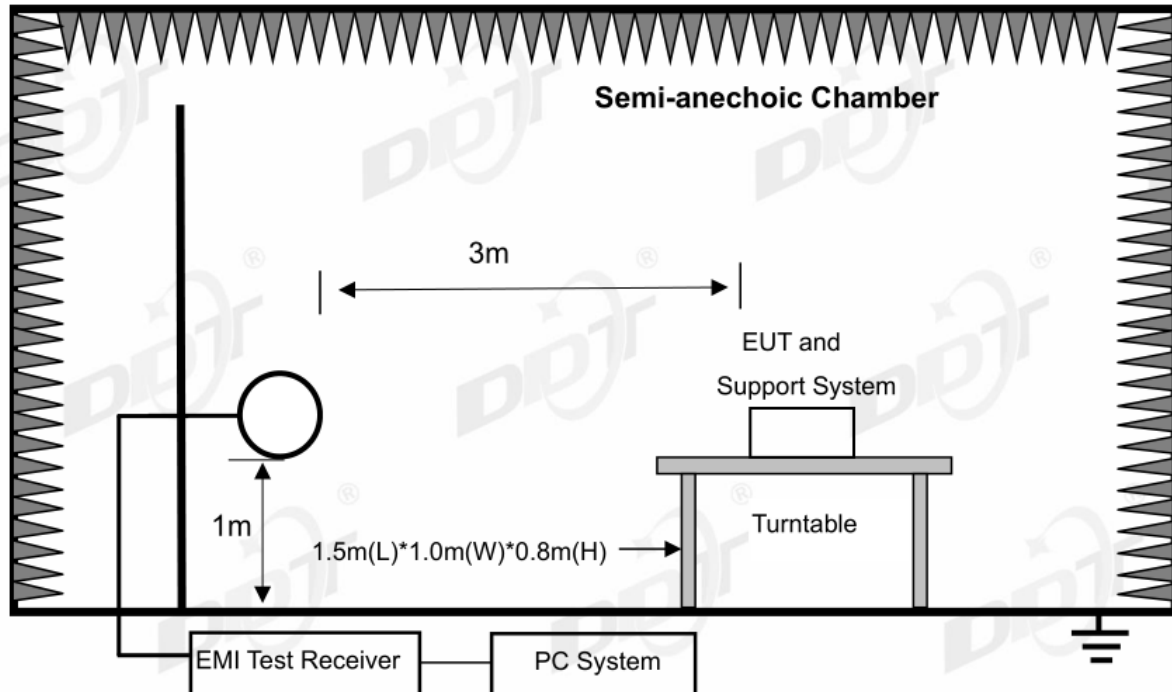

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

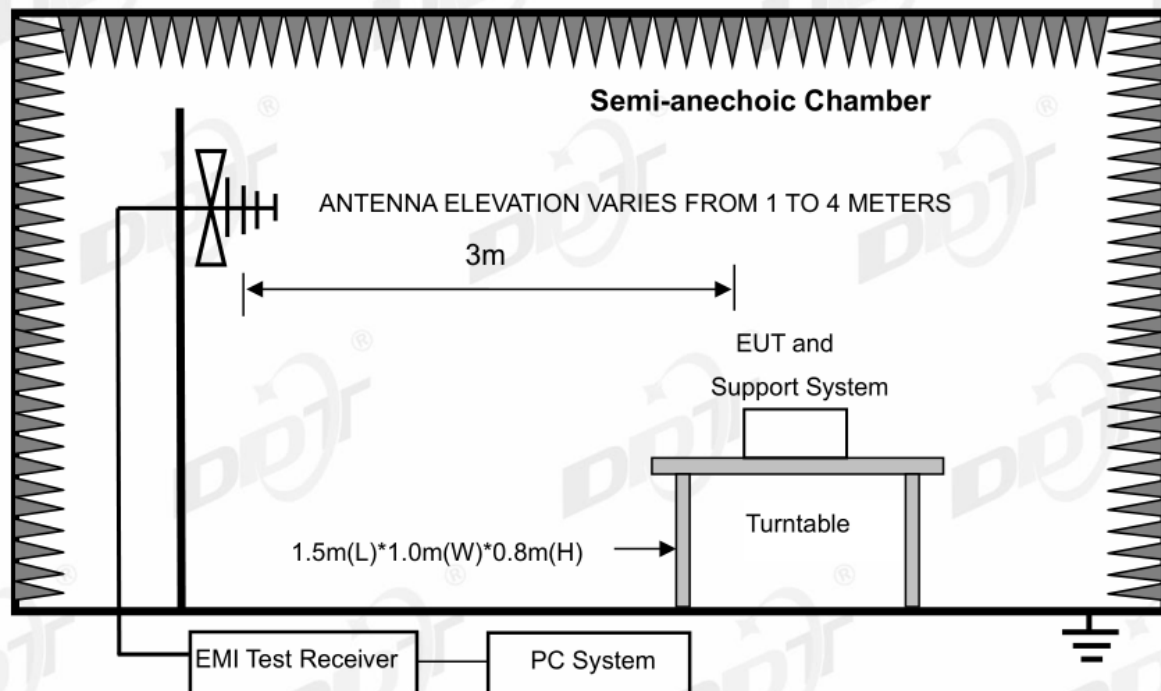

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

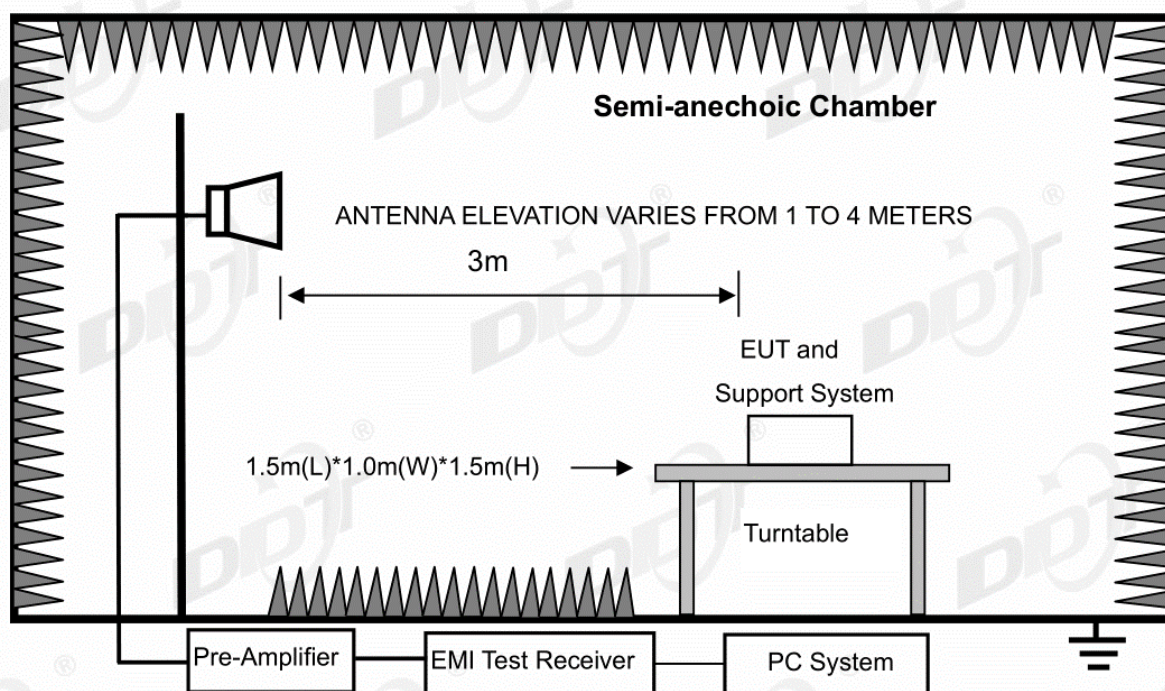

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits

shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits..

8.3. Test Procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi-anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi-anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the

antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

8.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits and RSS-Gen section 8.9 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is 802.11b mode)

Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in Ant1 of 802.11b, Tx 2412 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC BELOW 1G.EM6

Test Date : 2022-04-01

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub


Power Supply : AC 120V/60Hz

Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 VLUB 9163 3#/3m/VERTICAL

Memo : 2.4GWIFI

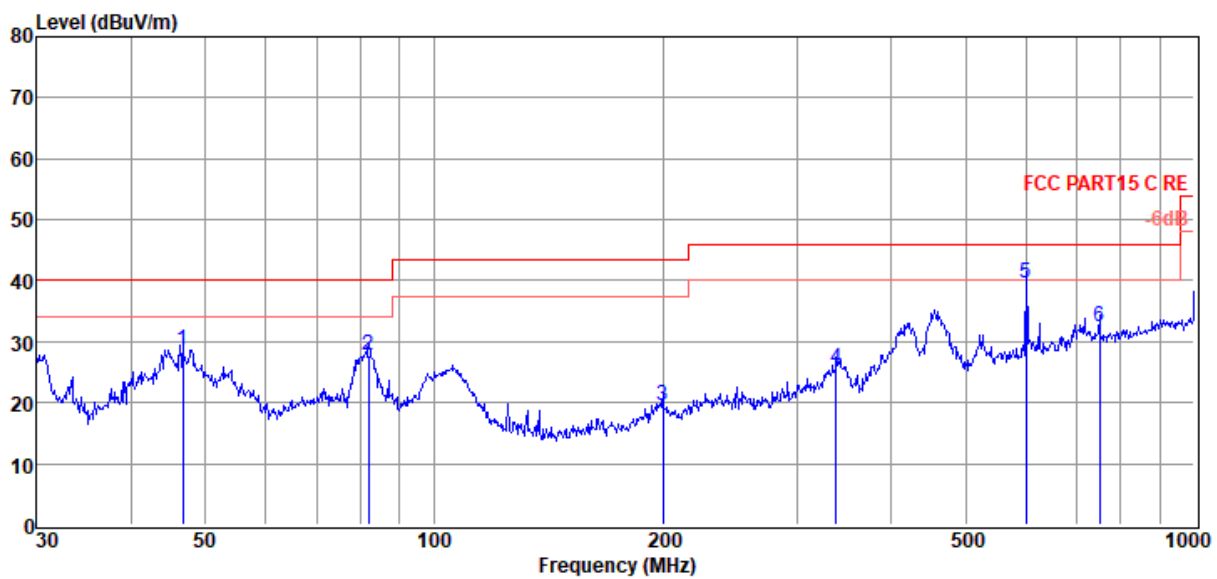

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	46.67	10.70	14.20	3.65	28.55	40.00	-11.45	QP	VERTICAL
2	82.07	15.00	8.82	3.89	27.71	40.00	-12.29	QP	VERTICAL
3	199.99	3.16	11.90	4.45	19.51	43.50	-23.99	QP	VERTICAL
4	338.40	6.20	14.40	4.96	25.56	46.00	-20.44	QP	VERTICAL
5	601.43	14.59	19.13	5.74	39.46	46.00	-6.54	QP	VERTICAL
6	750.11	5.72	20.60	6.10	32.42	46.00	-13.58	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC BELOW 1G.EM6

Test Date : 2022-04-01

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub


Power Supply : AC 120V/60Hz

Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 VLUB 9163 3#/3m/HORIZONTAL

Memo : 2.4GWIFI

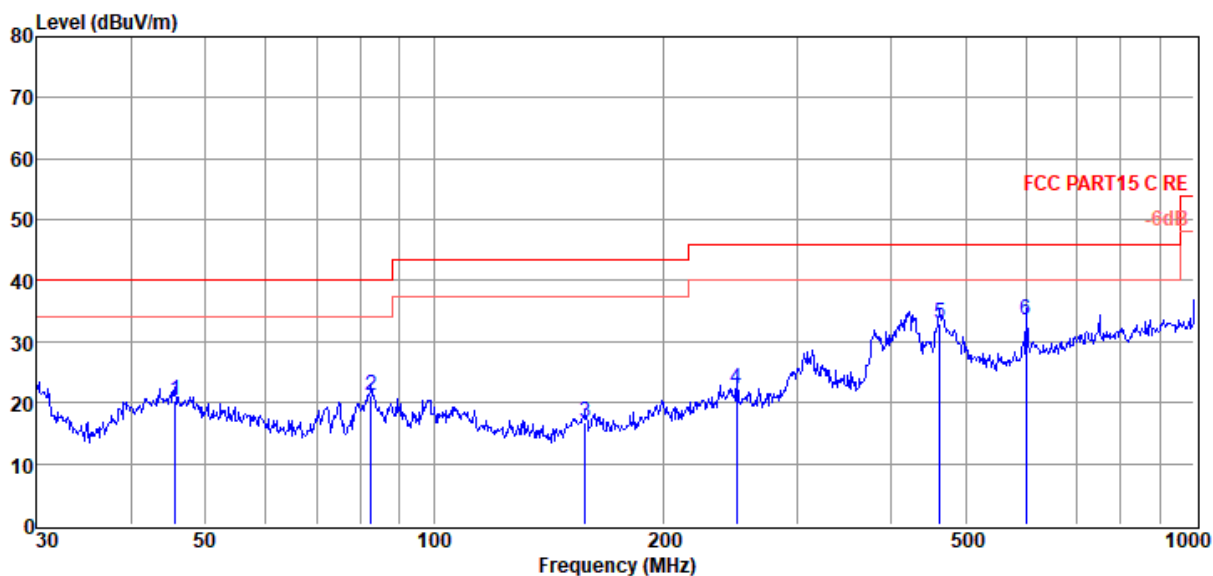

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	45.70	2.04	14.75	3.65	20.44	40.00	-19.56	QP	HORIZONTAL
2	82.65	8.26	8.99	3.89	21.14	40.00	-18.86	QP	HORIZONTAL
3	158.11	4.05	8.41	4.29	16.75	43.50	-26.75	QP	HORIZONTAL
4	250.30	5.07	12.51	4.65	22.23	46.00	-23.77	QP	HORIZONTAL
5	462.35	11.78	15.95	5.36	33.09	46.00	-12.91	QP	HORIZONTAL
6	601.43	8.67	19.13	5.74	33.54	46.00	-12.46	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G -EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11B 2412

Data: 80

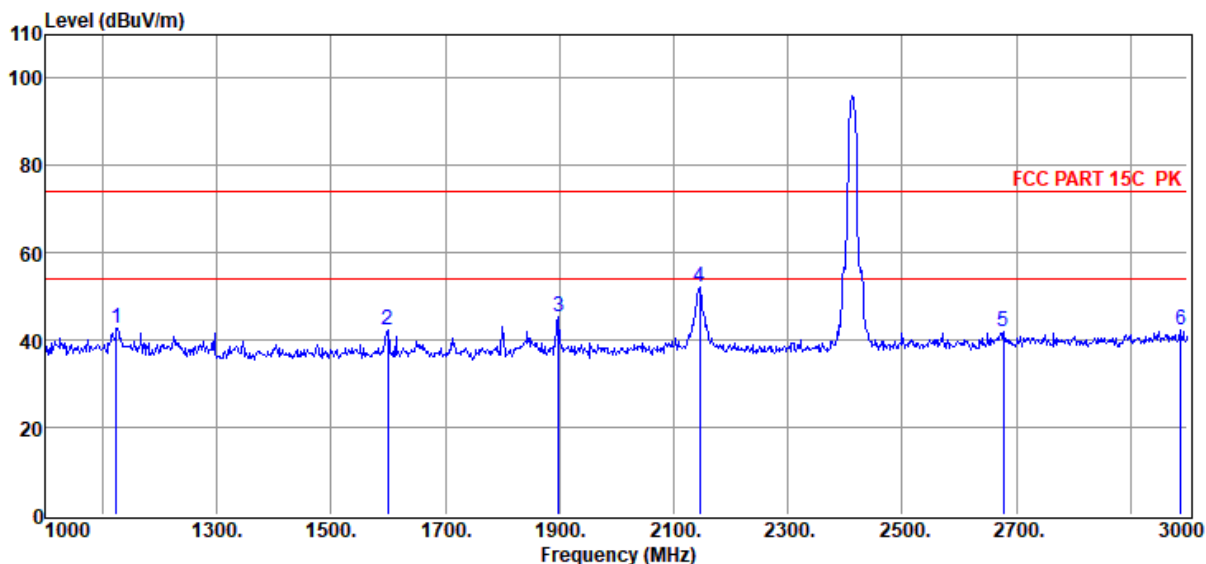

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1124.00	53.63	25.48	38.09	1.17	0.52	42.71	74.00	-31.29	Peak	VERTICAL
2	1600.00	53.42	25.66	38.80	1.42	0.61	42.31	74.00	-31.69	Peak	VERTICAL
3	1898.00	56.13	26.43	39.25	1.56	0.66	45.53	74.00	-28.47	Peak	VERTICAL
4	2146.00	62.18	26.96	39.47	1.64	0.70	52.01	74.00	-21.99	Peak	VERTICAL
5	2678.00	50.99	28.28	39.74	1.79	0.75	42.07	74.00	-31.93	Peak	VERTICAL
6	2988.00	50.00	29.45	39.89	1.87	0.79	42.22	74.00	-31.78	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11B 2412

Data: 81

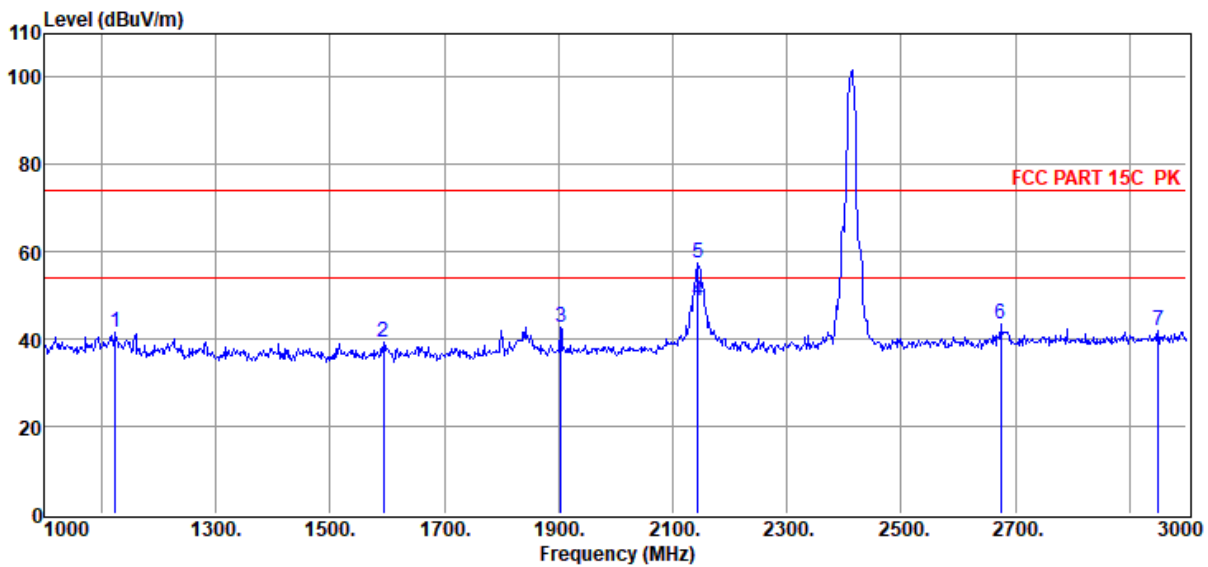

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1124.00	52.64	25.48	38.09	1.17	0.52	41.72	74.00	-32.28	Peak	HORIZONTAL
2	1594.00	50.26	25.64	38.79	1.42	0.61	39.14	74.00	-34.86	Peak	HORIZONTAL
3	1904.00	53.13	26.45	39.26	1.56	0.66	42.54	74.00	-31.46	Peak	HORIZONTAL
4	2144.00	58.83	26.96	39.47	1.64	0.70	48.66	54.00	-5.34	Average	HORIZONTAL
5	2144.00	67.45	26.96	39.47	1.64	0.70	57.28	74.00	-16.72	Peak	HORIZONTAL
6	2674.00	52.43	28.26	39.74	1.79	0.75	43.49	74.00	-30.51	Peak	HORIZONTAL
7	2950.00	49.81	29.31	39.88	1.86	0.78	41.88	74.00	-32.12	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11B 2437

Data: 82

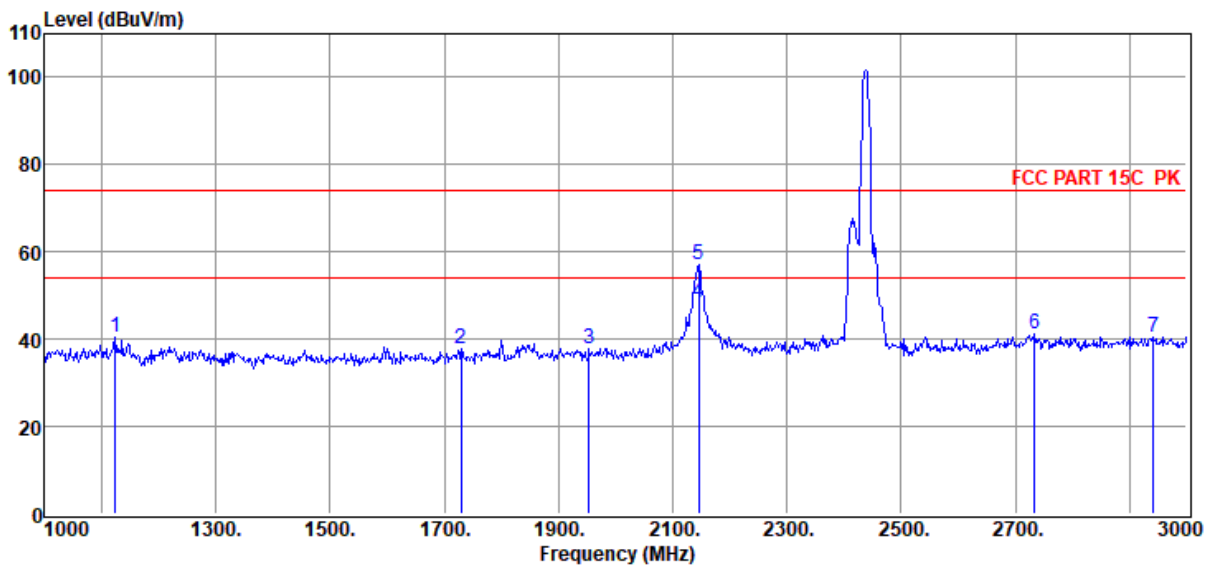

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1124.00	51.30	25.48	38.09	1.17	0.52	40.38	74.00	-33.62	Peak	HORIZONTAL
2	1730.00	48.82	26.00	39.00	1.48	0.63	37.93	74.00	-36.07	Peak	HORIZONTAL
3	1954.00	48.48	26.58	39.33	1.58	0.67	37.98	74.00	-36.02	Peak	HORIZONTAL
4	2146.00	58.48	26.96	39.47	1.64	0.70	48.31	54.00	-5.69	Average	HORIZONTAL
5	2146.00	67.13	26.96	39.47	1.64	0.70	56.96	74.00	-17.04	Peak	HORIZONTAL
6	2734.00	49.78	28.49	39.77	1.80	0.76	41.06	74.00	-32.94	Peak	HORIZONTAL
7	2942.00	48.28	29.28	39.87	1.85	0.78	40.32	74.00	-33.68	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11B 2437

Data: 83

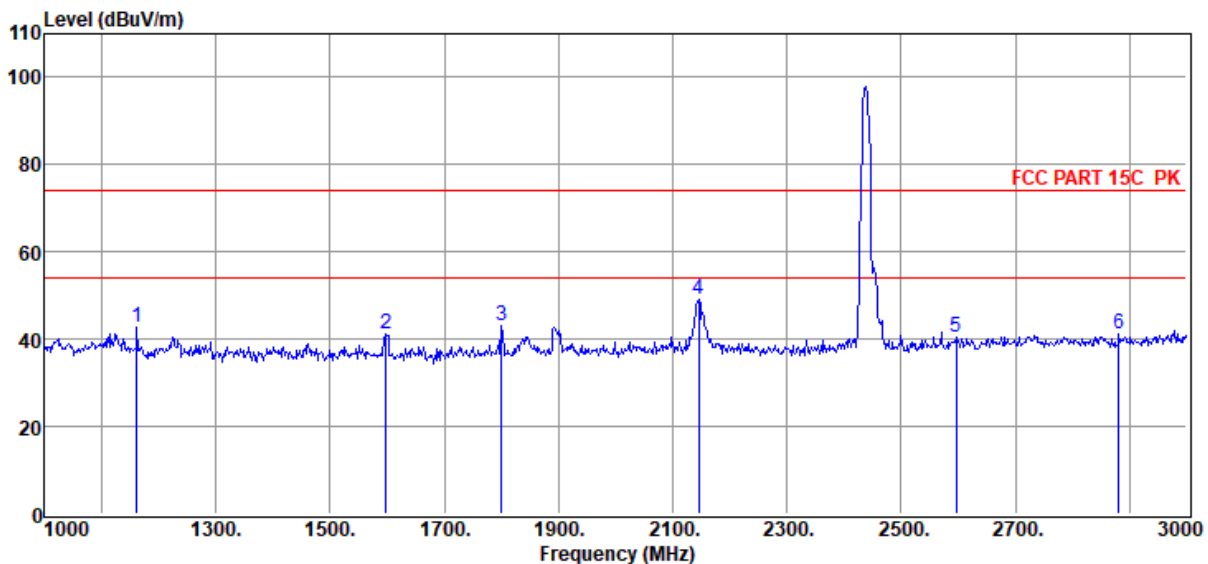

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1162.00	53.54	25.47	38.14	1.19	0.53	42.59	74.00	-31.41	Peak	VERTICAL
2	1598.00	52.39	25.65	38.80	1.42	0.61	41.27	74.00	-32.73	Peak	VERTICAL
3	1800.00	53.76	26.18	39.10	1.51	0.64	42.99	74.00	-31.01	Peak	VERTICAL
4	2146.00	59.39	26.96	39.47	1.64	0.70	49.22	74.00	-24.78	Peak	VERTICAL
5	2596.00	49.82	27.96	39.70	1.76	0.75	40.59	74.00	-33.41	Peak	VERTICAL
6	2882.00	49.20	29.05	39.84	1.84	0.78	41.03	74.00	-32.97	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11B 2462

Data: 84

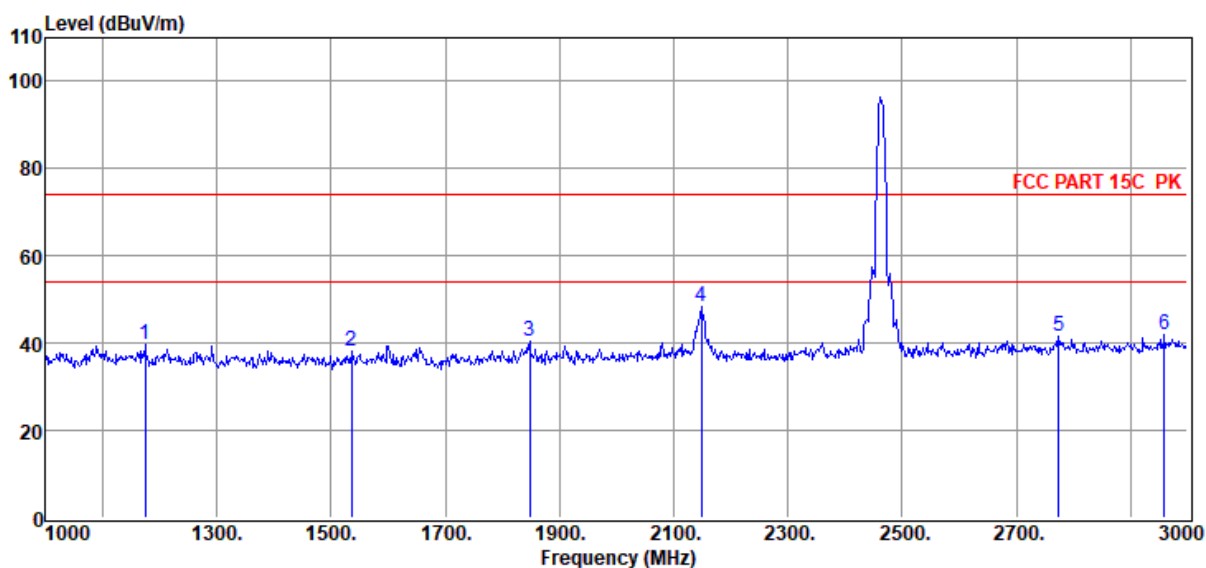

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1174.00	50.52	25.47	38.16	1.20	0.53	39.56	74.00	-34.44	Peak	VERTICAL
2	1536.00	49.41	25.49	38.70	1.40	0.60	38.20	74.00	-35.80	Peak	VERTICAL
3	1848.00	51.07	26.30	39.17	1.53	0.65	40.38	74.00	-33.62	Peak	VERTICAL
4	2148.00	58.38	26.97	39.47	1.64	0.70	48.22	74.00	-25.78	Peak	VERTICAL
5	2774.00	50.16	28.64	39.79	1.81	0.77	41.59	74.00	-32.41	Peak	VERTICAL
6	2960.00	49.67	29.35	39.88	1.86	0.79	41.79	74.00	-32.21	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11B 2462

Data: 85

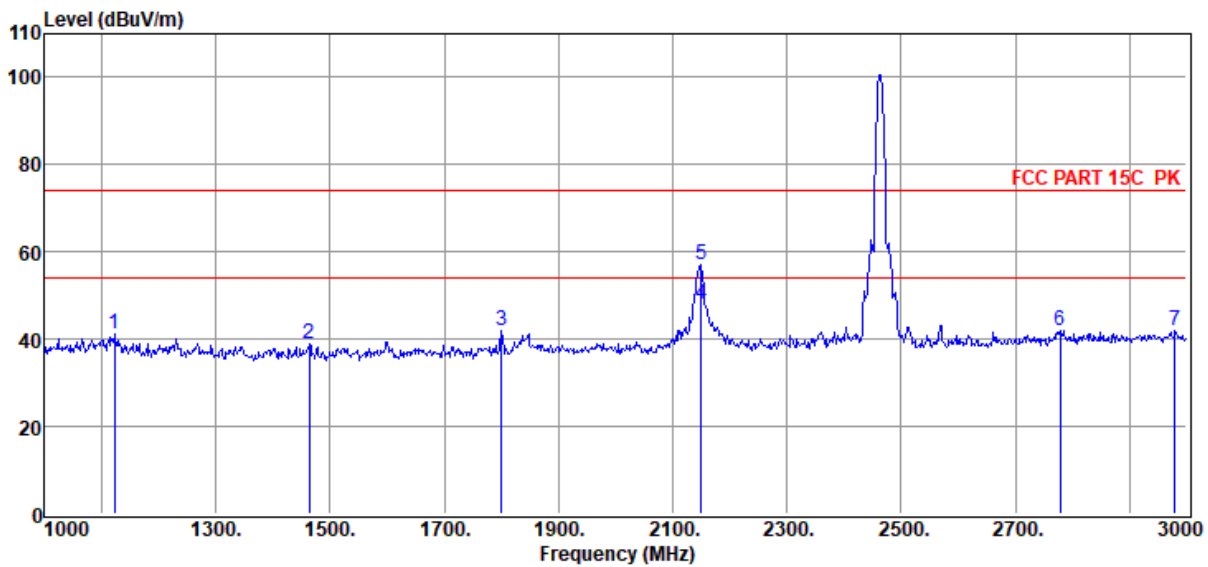

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1122.00	52.11	25.48	38.08	1.17	0.52	41.20	74.00	-32.80	Peak	HORIZONTAL
2	1464.00	50.06	25.41	38.60	1.36	0.58	38.81	74.00	-35.19	Peak	HORIZONTAL
3	1800.00	52.64	26.18	39.10	1.51	0.64	41.87	74.00	-32.13	Peak	HORIZONTAL
4	2150.00	58.24	26.97	39.48	1.64	0.70	48.07	54.00	-5.93	Average	HORIZONTAL
5	2150.00	67.35	26.97	39.48	1.64	0.70	57.18	74.00	-16.82	Peak	HORIZONTAL
6	2778.00	50.58	28.66	39.79	1.81	0.77	42.03	74.00	-31.97	Peak	HORIZONTAL
7	2980.00	49.86	29.42	39.89	1.86	0.79	42.04	74.00	-31.96	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11B 2462 power 7

Data: 86

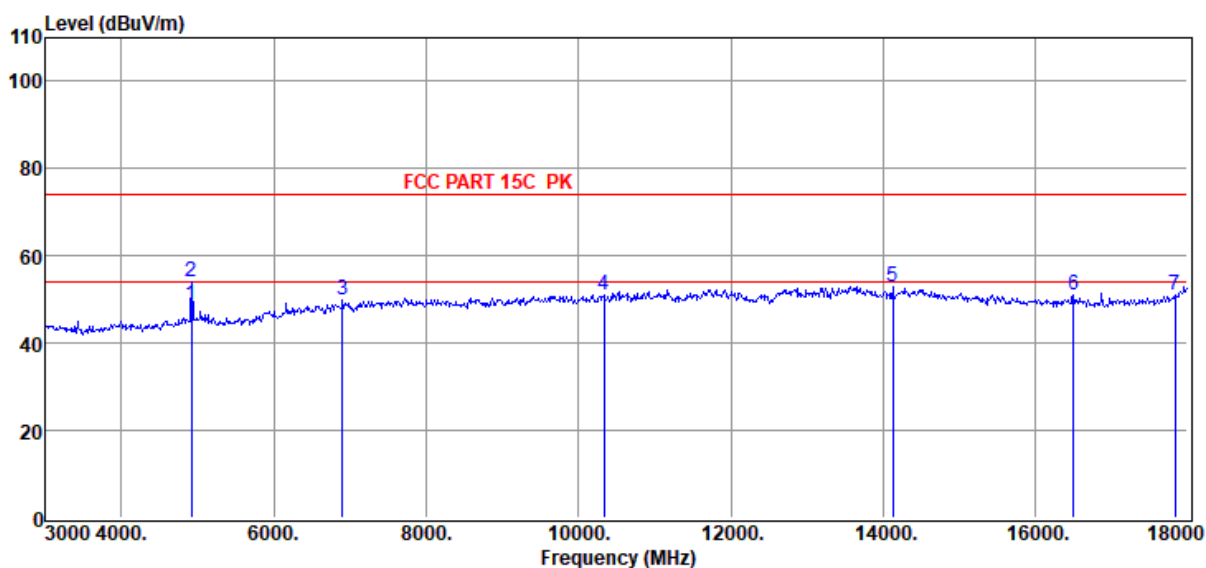

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4920.00	51.64	32.84	40.38	2.51	2.18	48.79	54.00	-5.21	Average	HORIZONTAL
2	4920.00	56.72	32.84	40.38	2.51	2.18	53.87	74.00	-20.13	Peak	HORIZONTAL
3	6900.00	48.31	35.84	39.78	3.07	2.31	49.75	74.00	-24.25	Peak	HORIZONTAL
4	10335.00	46.68	38.80	40.47	3.67	2.45	51.13	74.00	-22.87	Peak	HORIZONTAL
5	14130.00	45.19	39.90	39.69	4.48	2.86	52.74	74.00	-21.26	Peak	HORIZONTAL
6	16500.00	45.06	37.90	40.00	4.73	3.32	51.01	74.00	-22.99	Peak	HORIZONTAL
7	17835.00	41.69	41.48	40.60	4.91	3.74	51.22	74.00	-22.78	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11B 2462 power 7

Data: 87

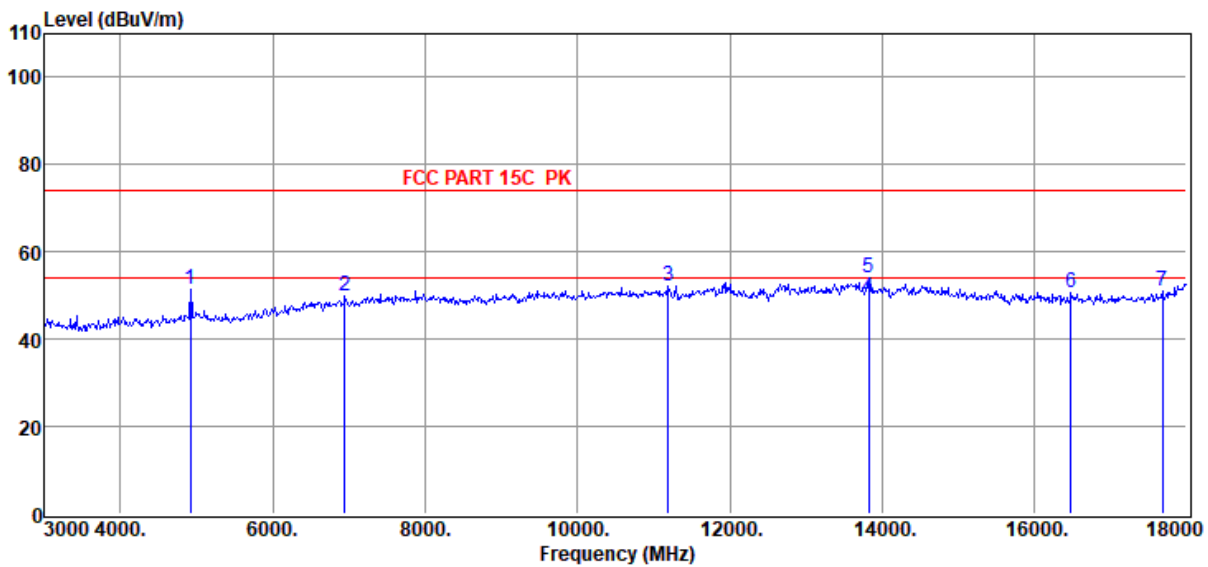

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4920.00	54.29	32.84	40.38	2.51	2.18	51.44	74.00	-22.56	Peak	VERTICAL
2	6945.00	48.44	35.91	39.74	3.05	2.29	49.95	74.00	-24.05	Peak	VERTICAL
3	11190.00	47.00	39.19	40.18	3.86	2.38	52.25	74.00	-21.75	Peak	VERTICAL
4	13830.00	42.22	39.93	39.82	4.35	2.91	49.59	54.00	-4.41	Average	VERTICAL
5	13830.00	46.68	39.93	39.82	4.35	2.91	54.05	74.00	-19.95	Peak	VERTICAL
6	16485.00	44.78	37.90	40.00	4.73	3.31	50.72	74.00	-23.28	Peak	VERTICAL
7	17685.00	42.25	40.55	40.51	4.87	3.70	50.86	74.00	-23.14	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11B 2437 power 7

Data: 88

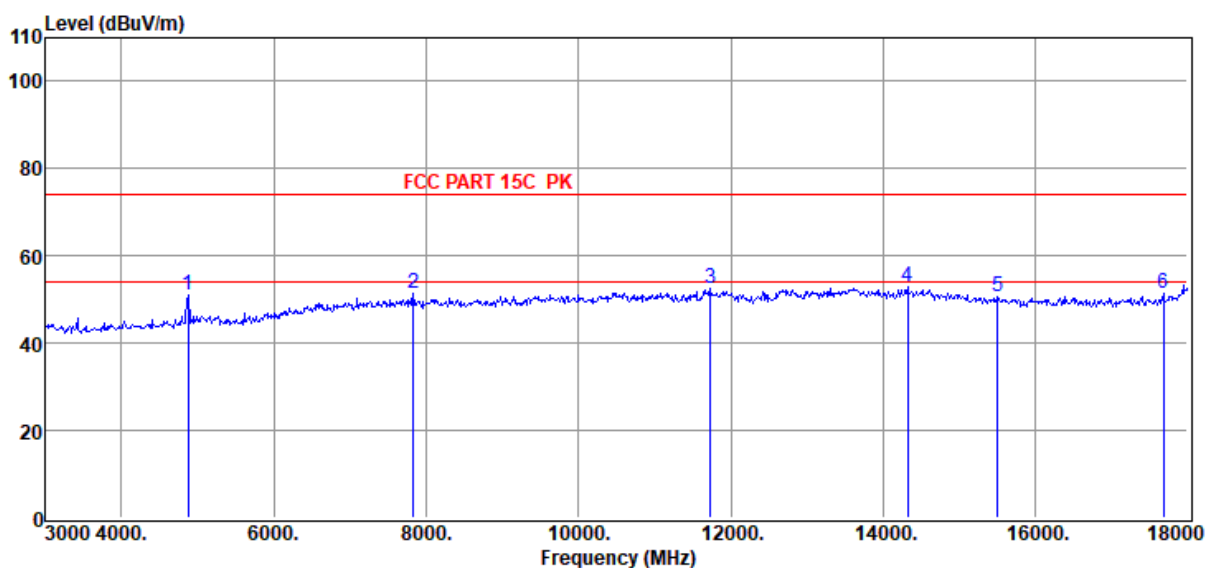

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4875.00	54.02	32.70	40.38	2.49	2.17	51.00	74.00	-23.00	Peak	VERTICAL
2	7830.00	48.76	36.80	39.78	3.17	2.28	51.23	74.00	-22.77	Peak	VERTICAL
3	11730.00	47.36	39.09	40.13	4.01	2.39	52.72	74.00	-21.28	Peak	VERTICAL
4	14325.00	45.29	39.90	39.67	4.41	2.81	52.74	74.00	-21.26	Peak	VERTICAL
5	15510.00	44.03	38.78	39.75	4.56	2.88	50.50	74.00	-23.50	Peak	VERTICAL
6	17685.00	42.94	40.55	40.51	4.87	3.70	51.55	74.00	-22.45	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-07
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11B 2437 power 7

Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
 1G .EM6

Data: 89

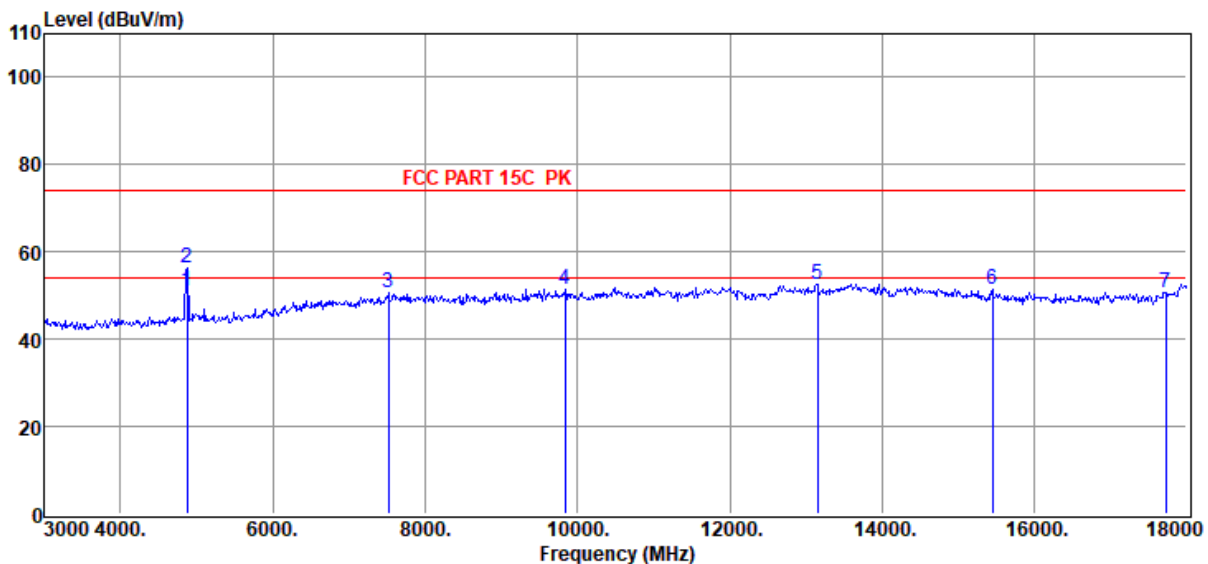

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4875.00	53.91	32.70	40.38	2.49	2.17	50.89	54.00	-3.11	Average	HORIZONTAL
2	4875.00	59.27	32.70	40.38	2.49	2.17	56.25	74.00	-17.75	Peak	HORIZONTAL
3	7515.00	48.44	36.42	39.75	3.14	2.27	50.52	74.00	-23.48	Peak	HORIZONTAL
4	9840.00	47.32	38.50	40.49	3.65	2.43	51.41	74.00	-22.59	Peak	HORIZONTAL
5	13155.00	45.83	39.72	40.29	4.27	2.95	52.48	74.00	-21.52	Peak	HORIZONTAL
6	15450.00	44.90	38.87	39.74	4.55	2.84	51.42	74.00	-22.58	Peak	HORIZONTAL
7	17730.00	41.85	40.83	40.54	4.88	3.71	50.73	74.00	-23.27	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11B 2437 power 7

Data: 90

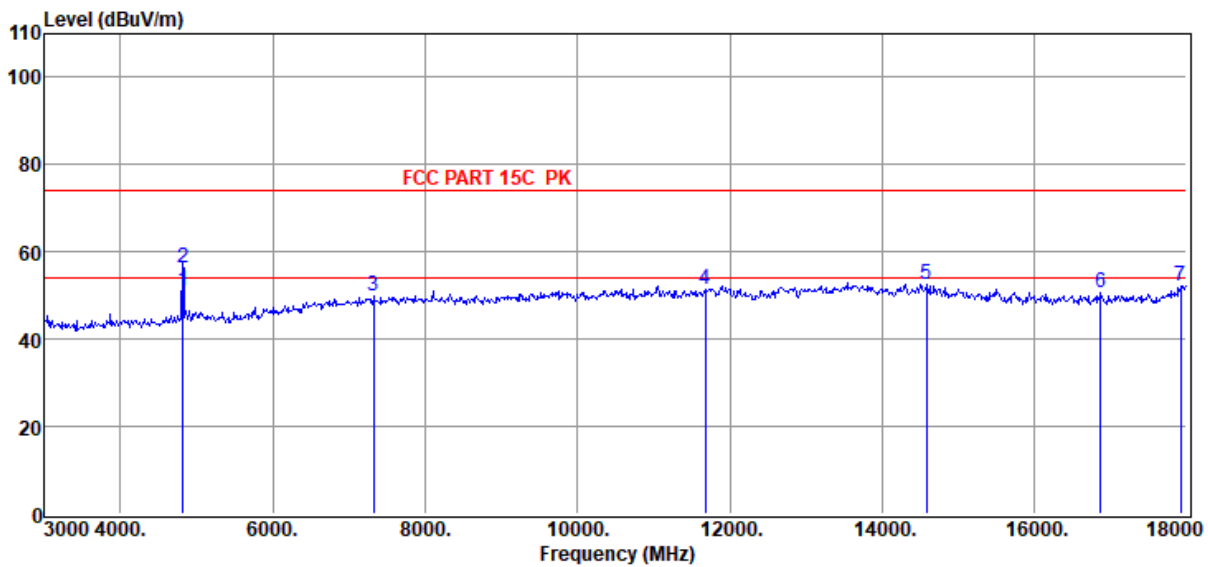

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4815.00	54.16	32.51	40.36	2.47	2.16	50.94	54.00	-3.06	Average	HORIZONTAL
2	4815.00	59.66	32.51	40.36	2.47	2.16	56.44	74.00	-17.56	Peak	HORIZONTAL
3	7320.00	47.89	36.26	39.73	3.10	2.27	49.79	74.00	-24.21	Peak	HORIZONTAL
4	11685.00	46.03	39.07	40.13	4.00	2.39	51.36	74.00	-22.64	Peak	HORIZONTAL
5	14580.00	45.09	39.84	39.64	4.37	2.74	52.40	74.00	-21.60	Peak	HORIZONTAL
6	16875.00	44.28	38.35	40.07	4.72	3.46	50.74	74.00	-23.26	Peak	HORIZONTAL
7	17925.00	42.17	42.03	40.65	4.94	3.77	52.26	74.00	-21.74	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11B 2412 power 7

Data: 91

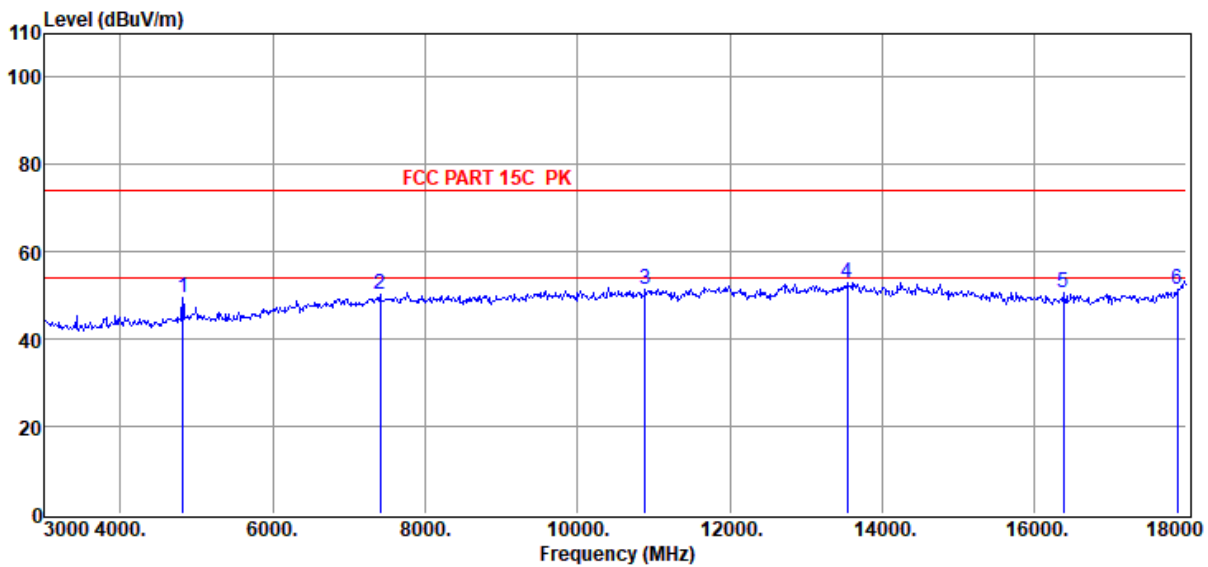

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4815.00	52.79	32.51	40.36	2.47	2.16	49.57	74.00	-24.43	Peak	VERTICAL
2	7410.00	48.43	36.33	39.74	3.12	2.27	50.41	74.00	-23.59	Peak	VERTICAL
3	10890.00	46.32	39.23	40.24	3.77	2.39	51.47	74.00	-22.53	Peak	VERTICAL
4	13545.00	46.14	39.99	40.02	4.04	2.93	53.08	74.00	-20.92	Peak	VERTICAL
5	16380.00	44.73	37.90	39.98	4.70	3.27	50.62	74.00	-23.38	Peak	VERTICAL
6	17880.00	41.44	41.76	40.63	4.93	3.76	51.26	74.00	-22.74	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test Result


EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result Result (dBm)
11b	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass
11g	CH1	Pass	11ax HE 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass

9.5. original test data

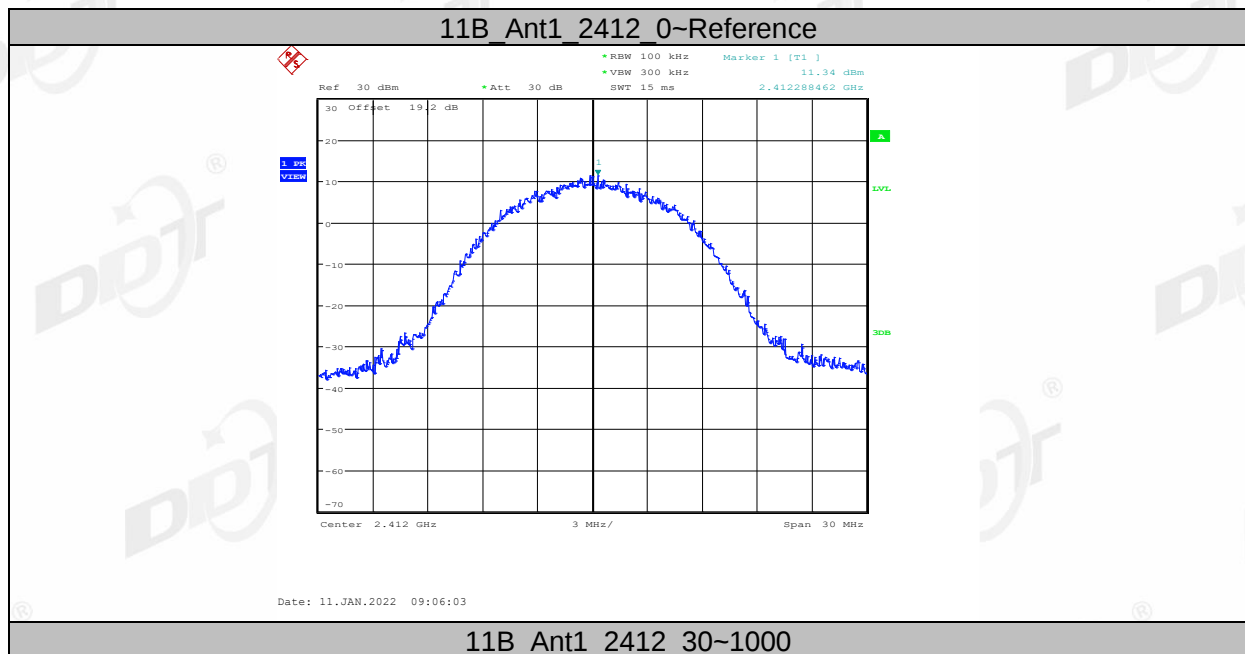


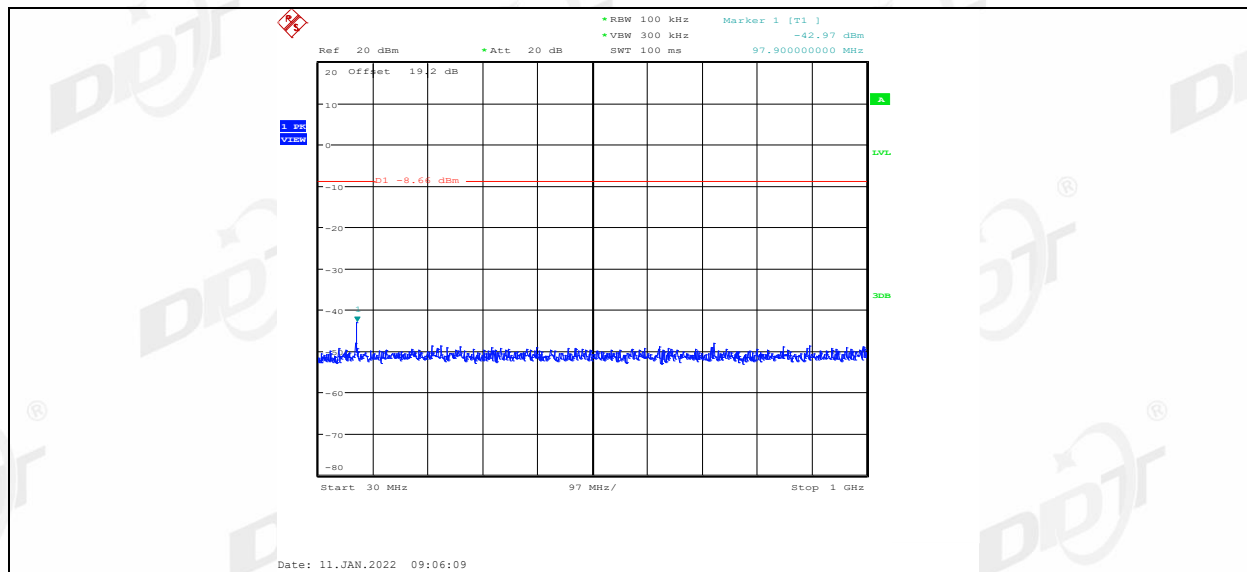


11B_Ant1_2412_1000-26500

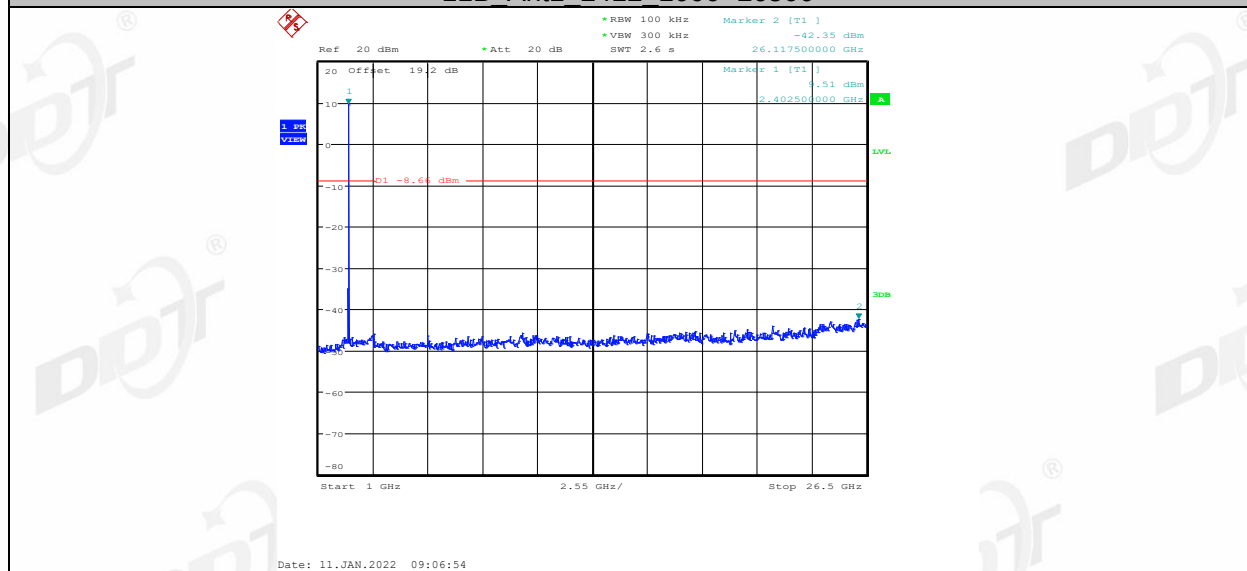


11B_Ant1_2437_0-Reference

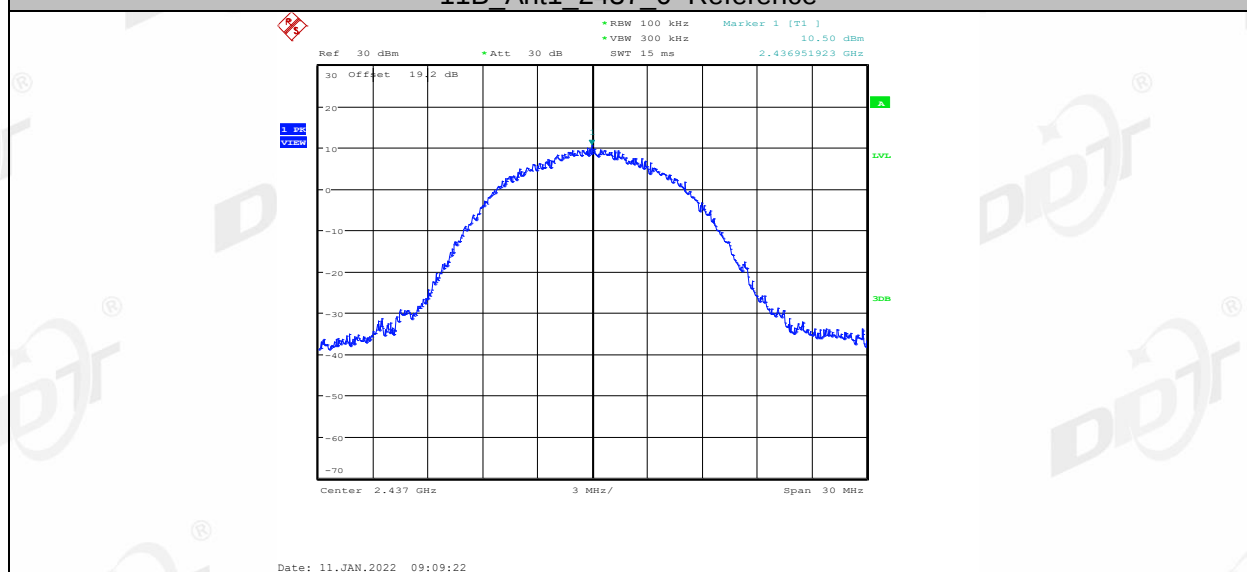


11B_Ant1_2437_30-1000

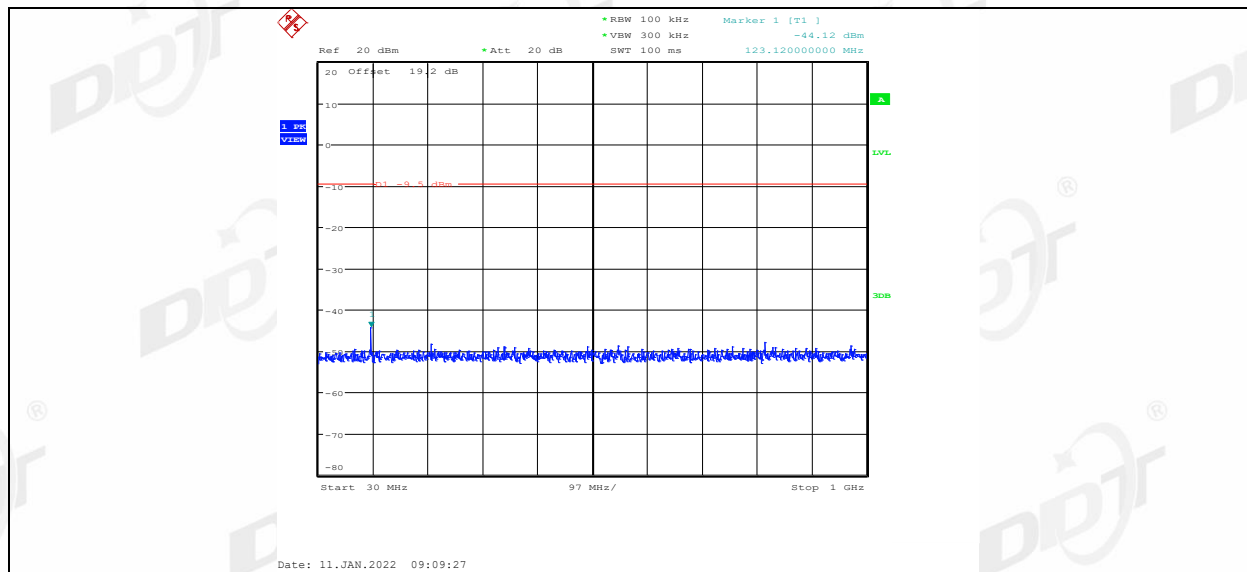


11B_Ant1_2437_1000~26500

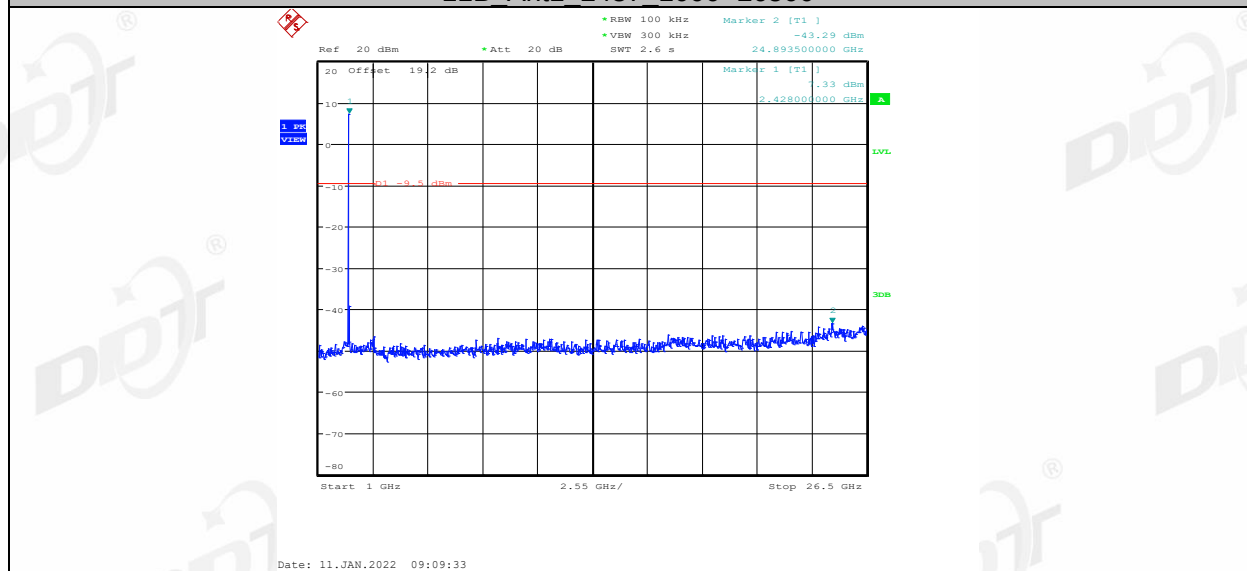


11B_Ant1_2462_0~Reference

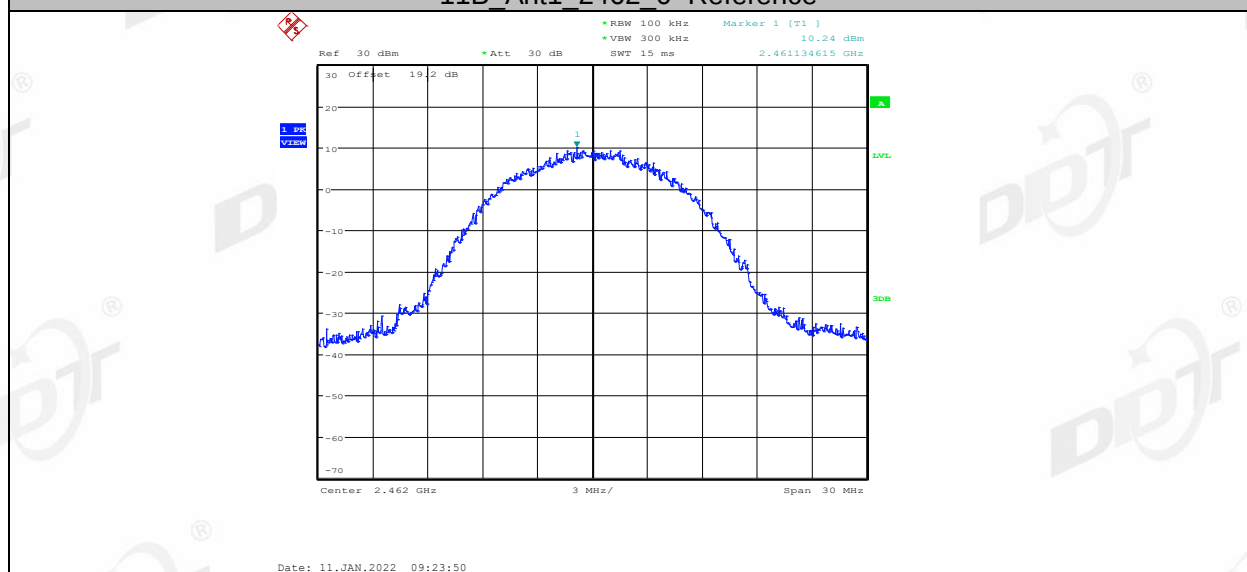


11B_Ant1_2462_30~1000

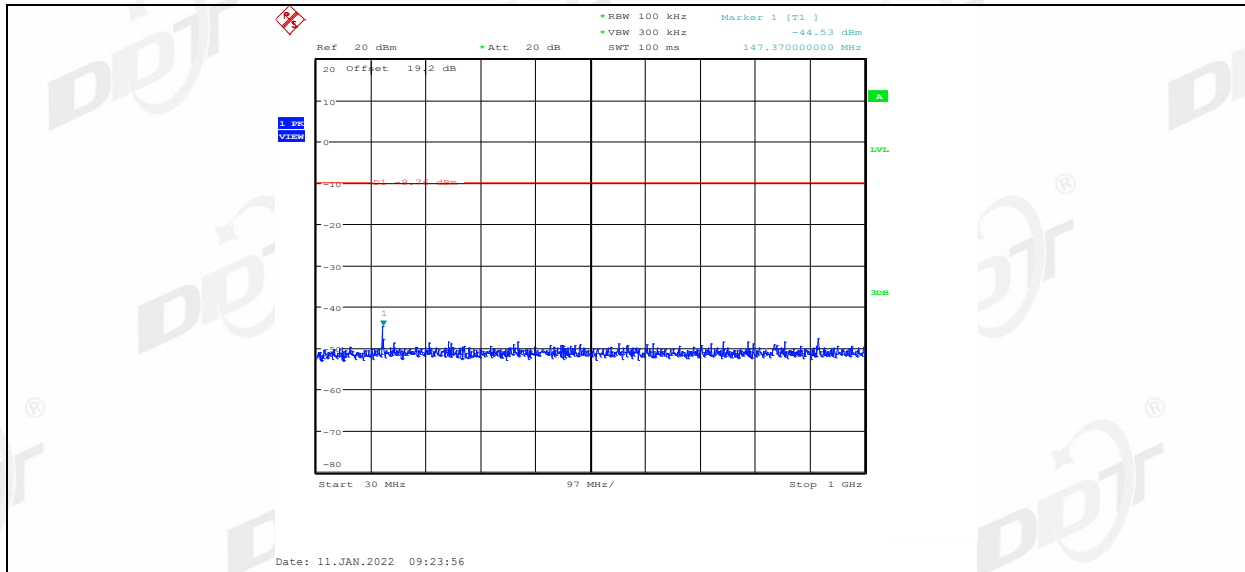


11B Ant1 2462 1000-26500

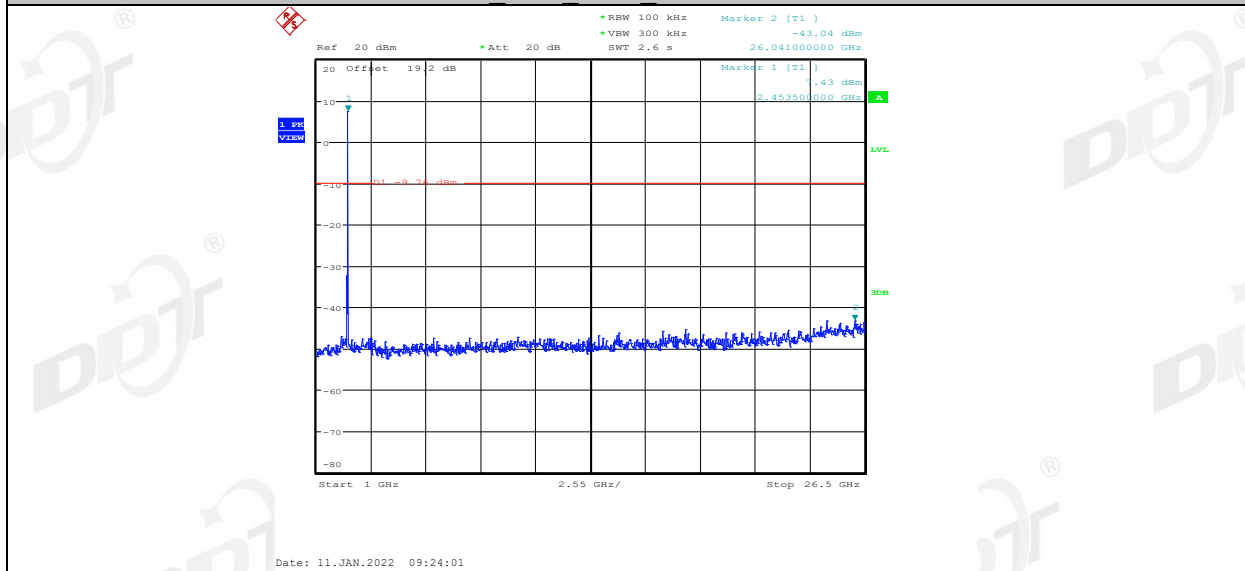


11G Ant1 2412 0~Reference

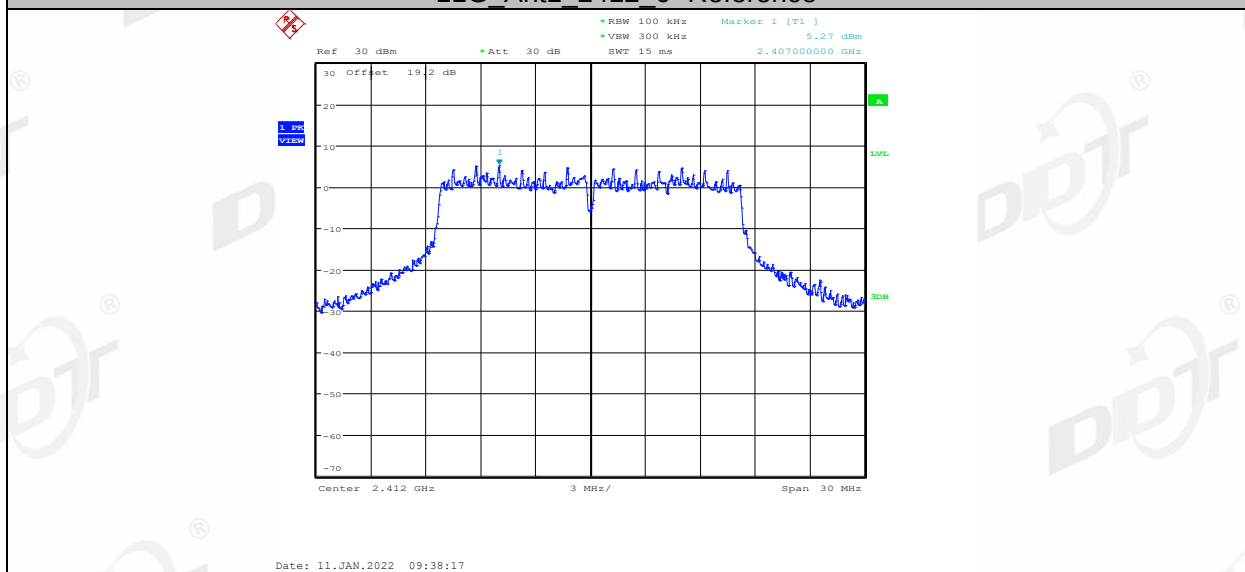


11G Ant1 2412 30~1000

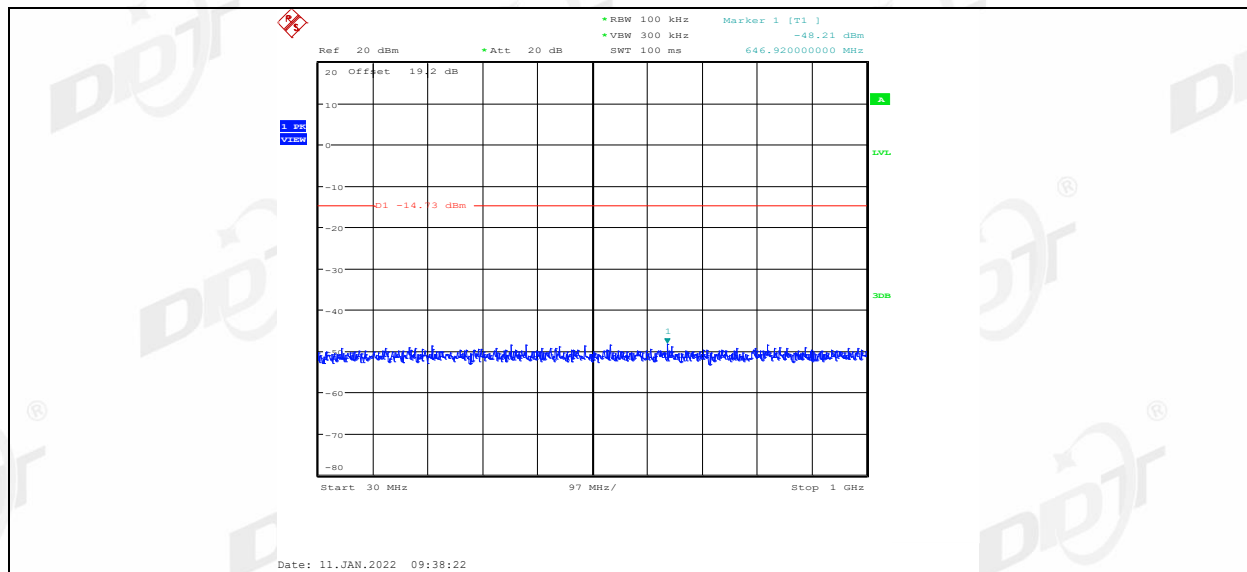


11G Ant1 2412 1000~26500

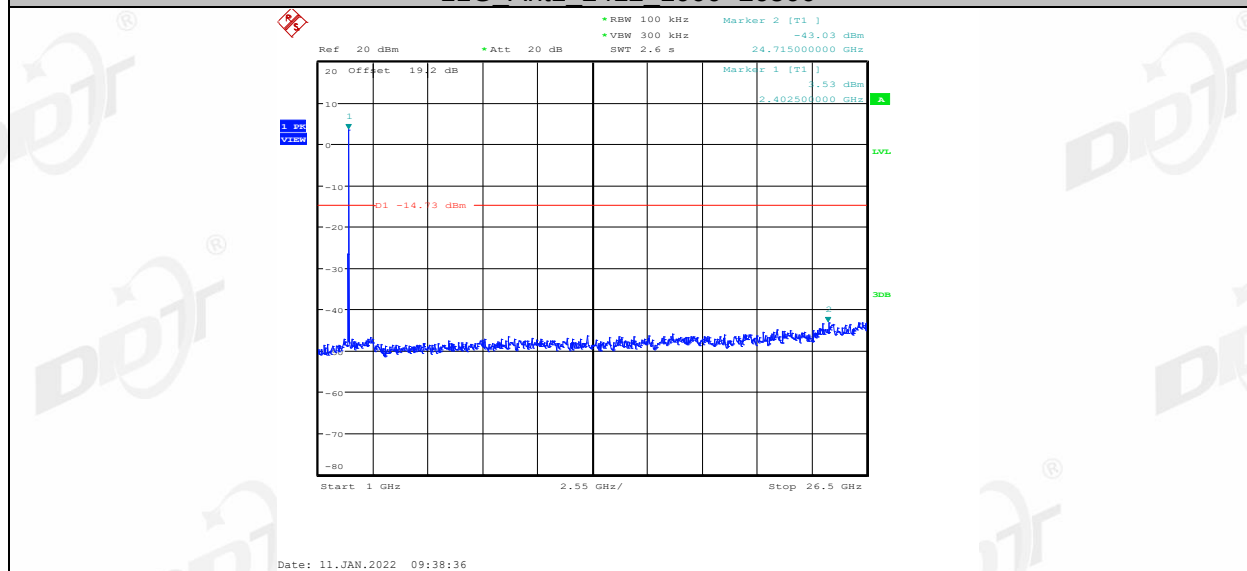


11G Ant1 2437 0~Reference

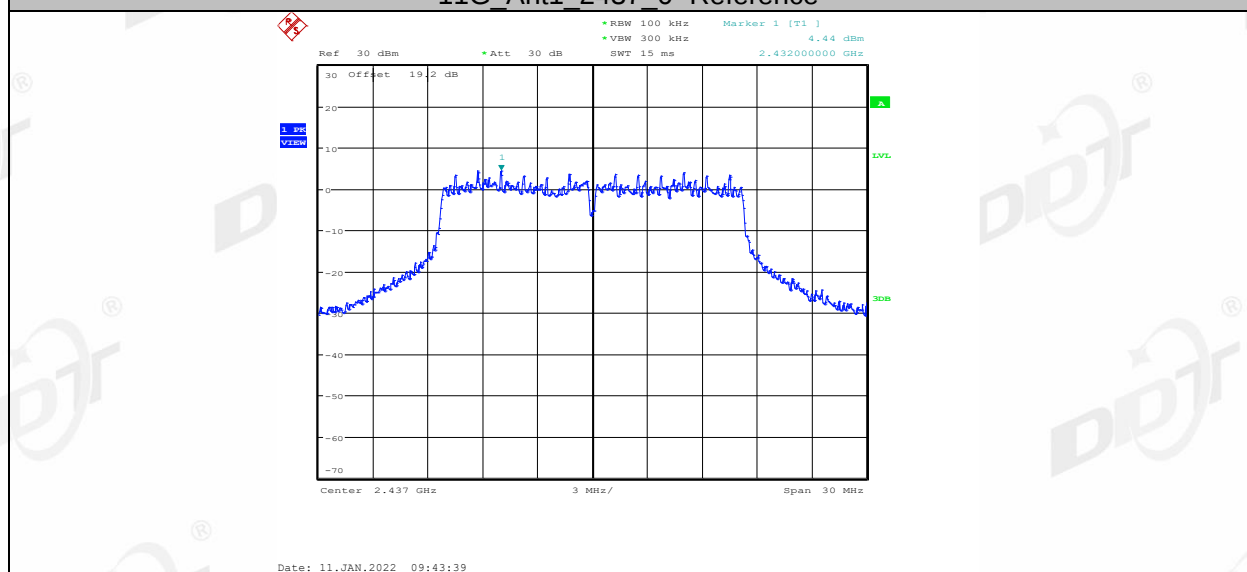


11G Ant1 2437 30~1000

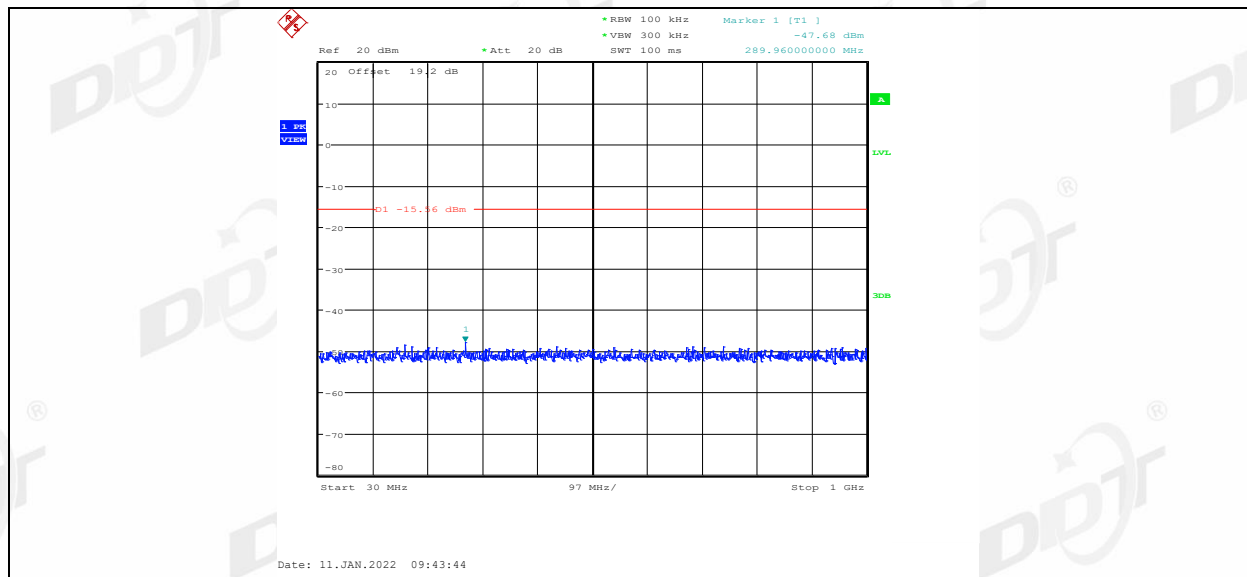


11G Ant1 2437 1000~26500

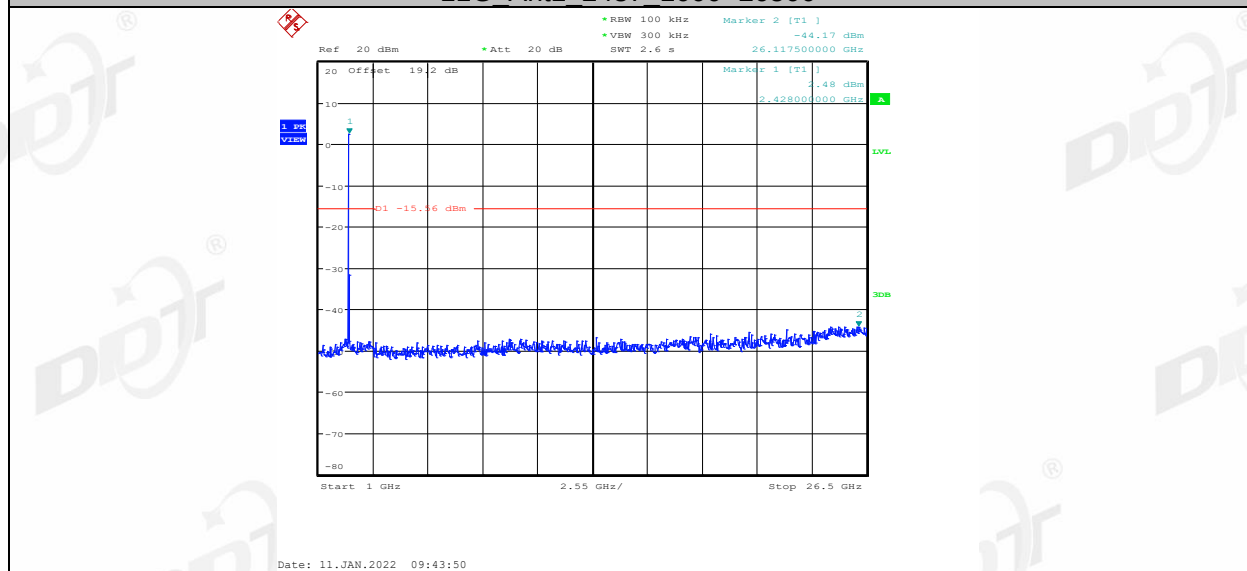


11G Ant1 2462 0~Reference

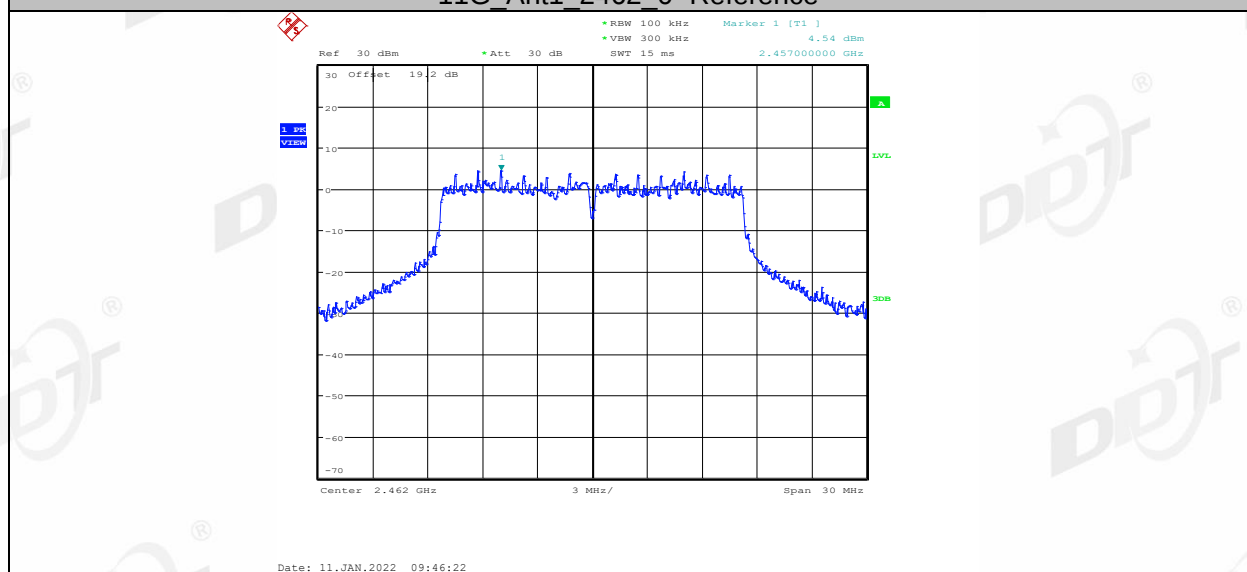


11G Ant1 2462 30~1000

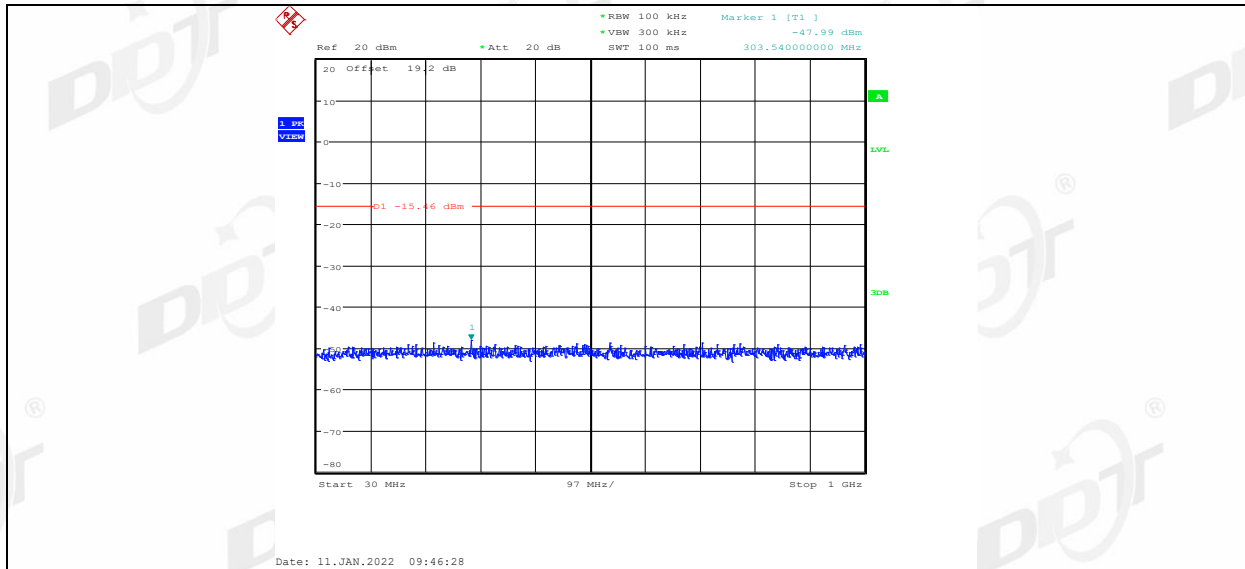


11G Ant1 2462 1000~26500

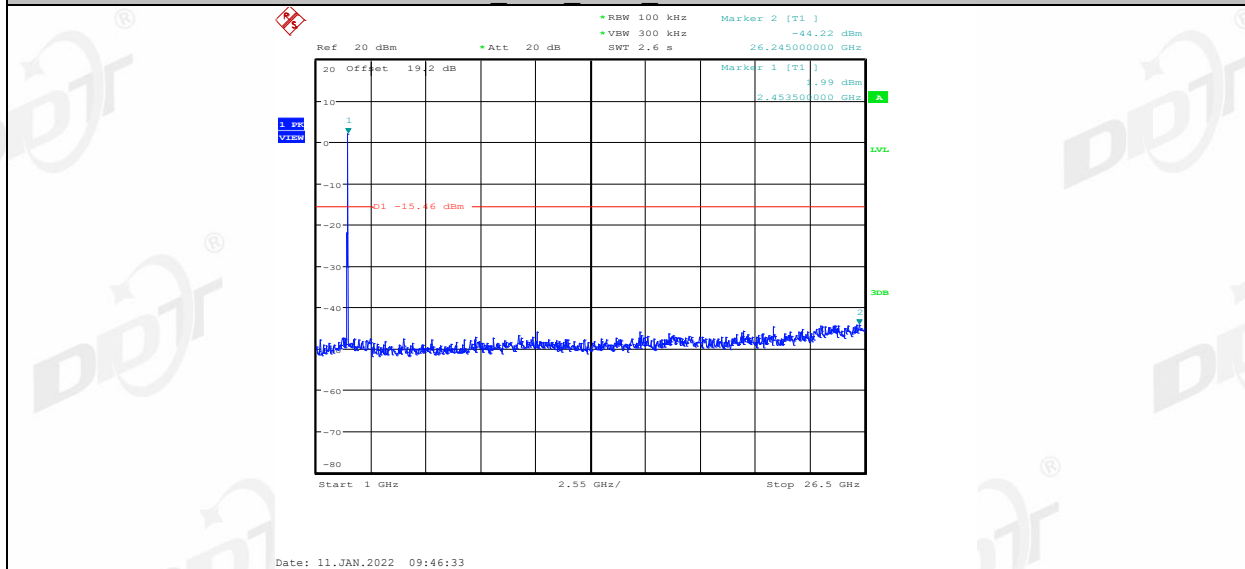


11N20SISO Ant1 2412 0~Reference

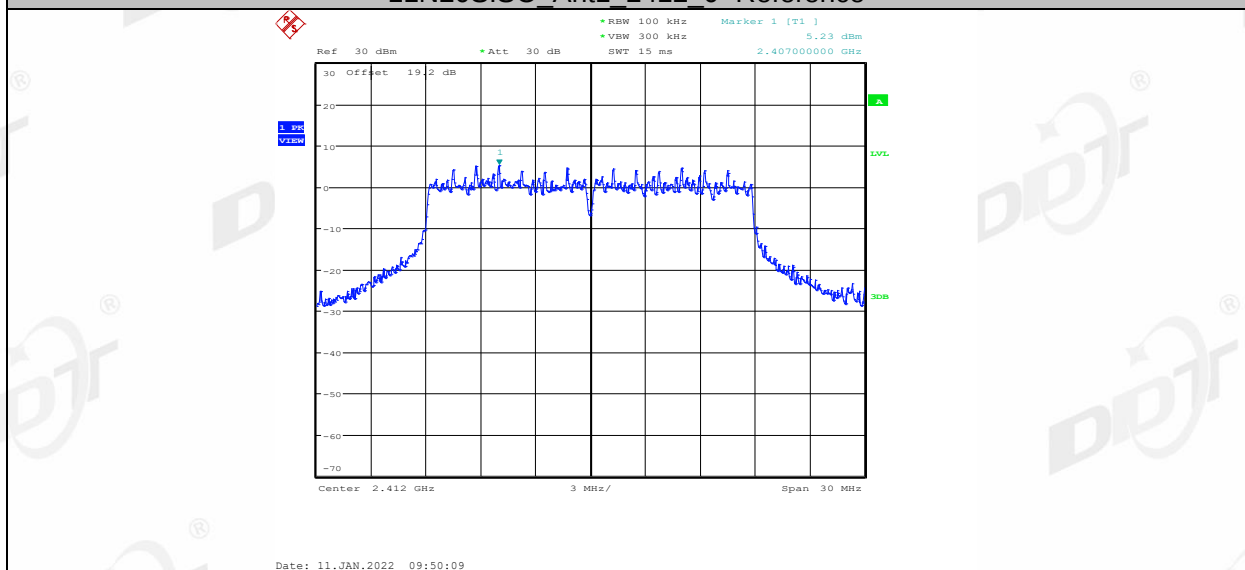


11N20SISO Ant1 2412 30~1000

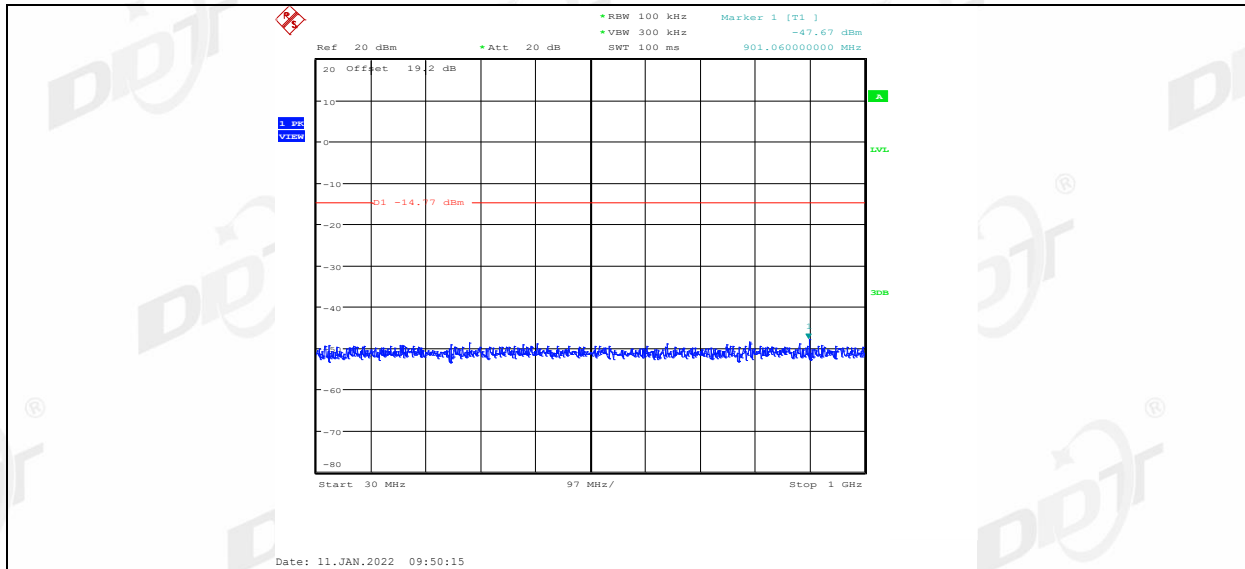


11N20SISO Ant1 2412 1000~26500

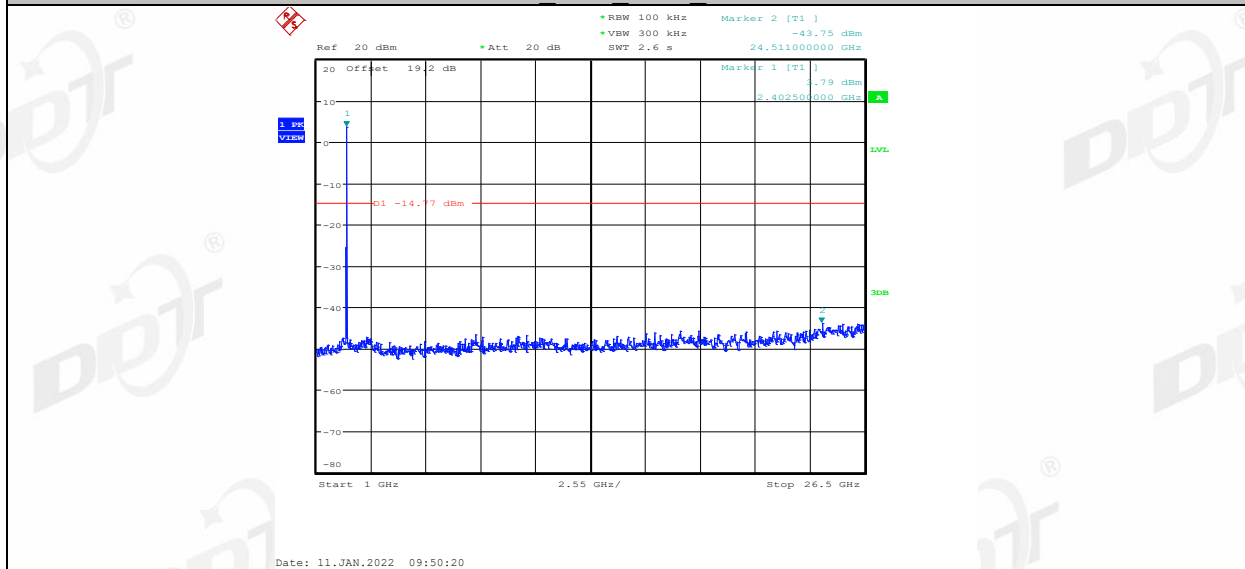

11N20SISO Ant1 2437 0~Reference

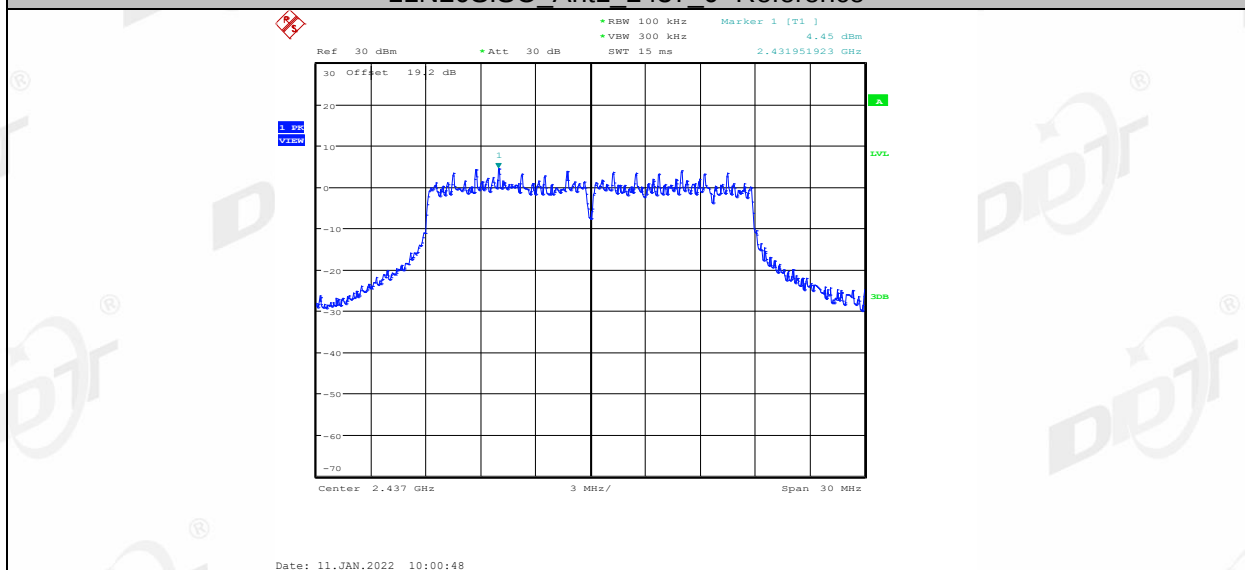


11N20SISO Ant1 2437 30~1000

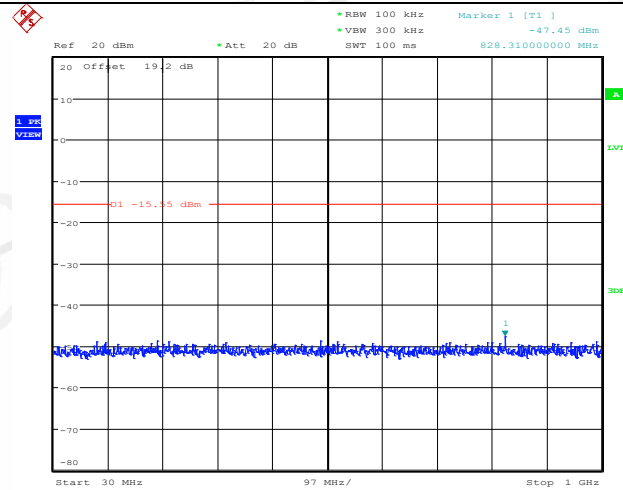


Date: 11.JAN.2022 10:00:54

11N20SISO Ant1 2437 1000~26500

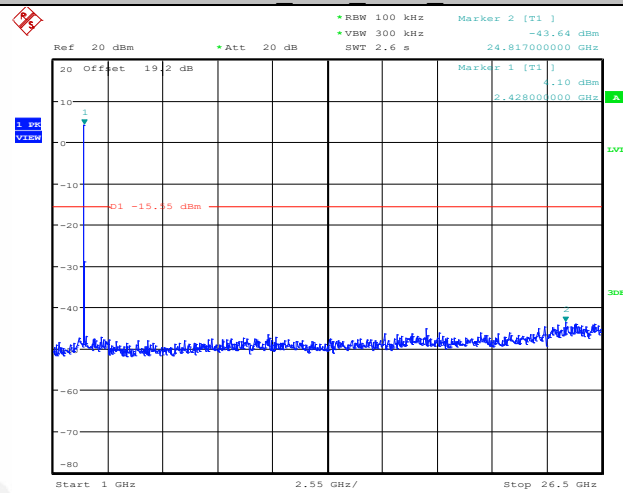


Date: 11.JAN.2022 10:00:59

11N20SISO Ant1 2462 0~Reference

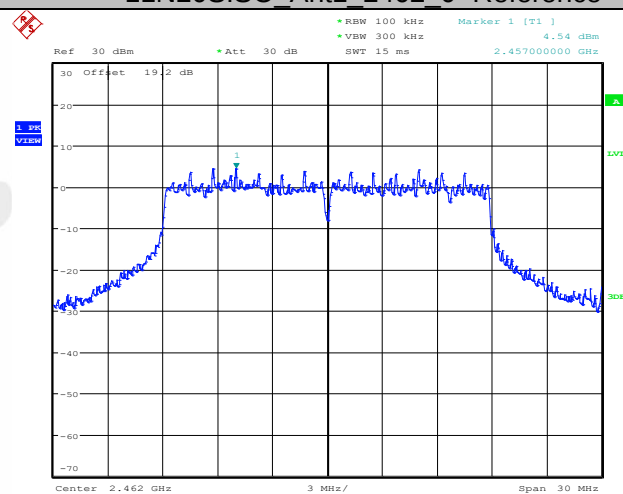


Date: 11.JAN.2022 10:11:56


11N20SISO Ant1 2462 30~1000

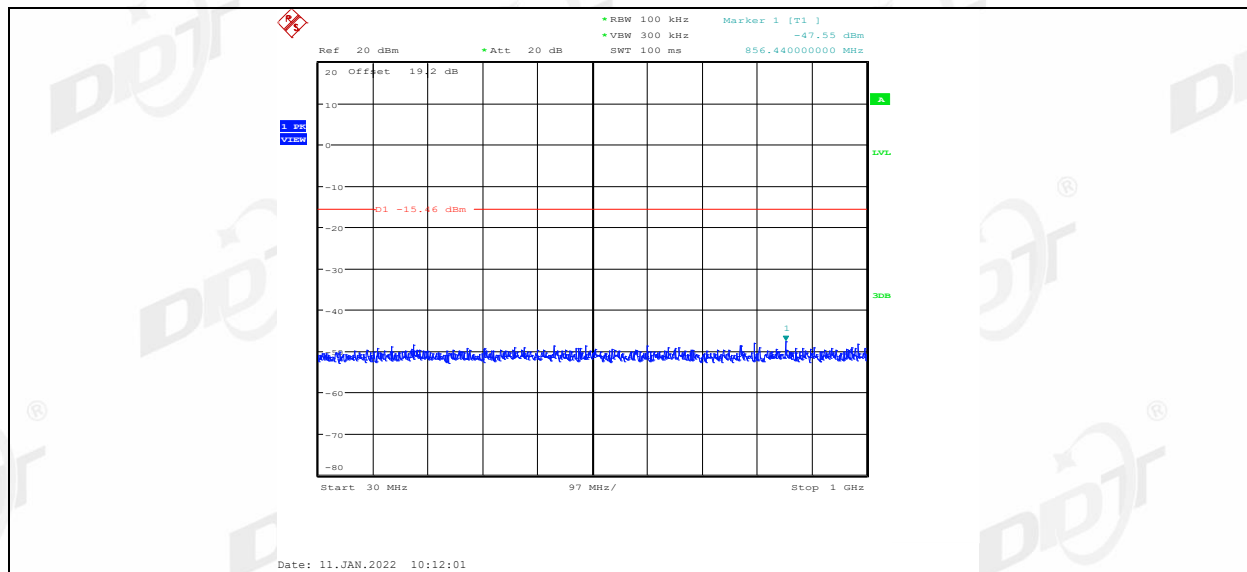


11N20SISO Ant1 2462 1000~26500

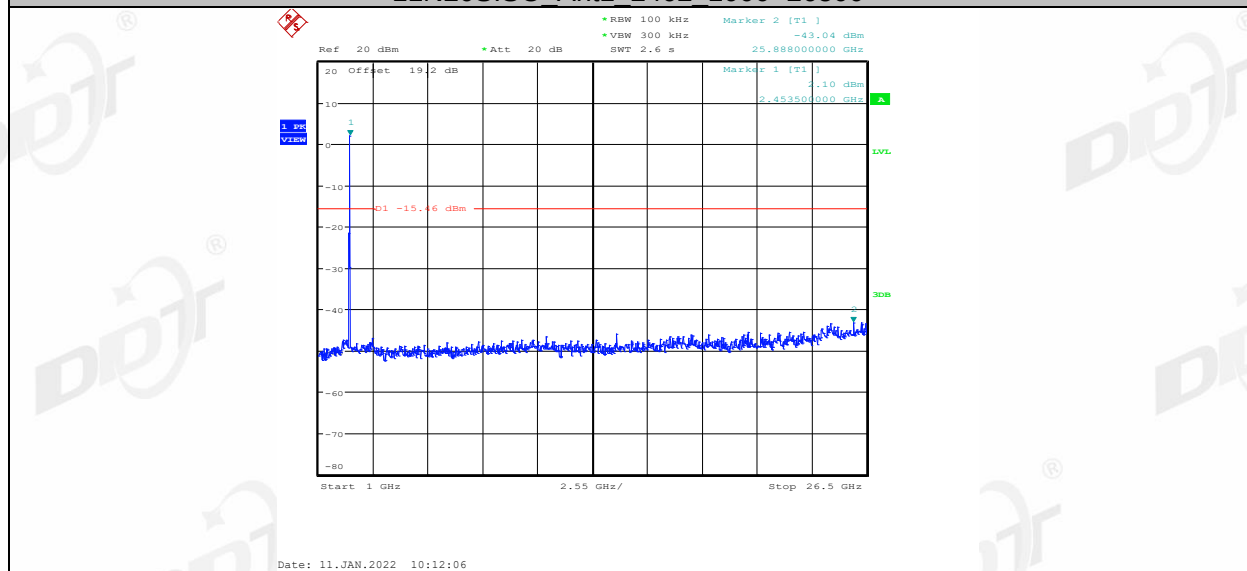

11N40SISO Ant1 2422 0~Reference

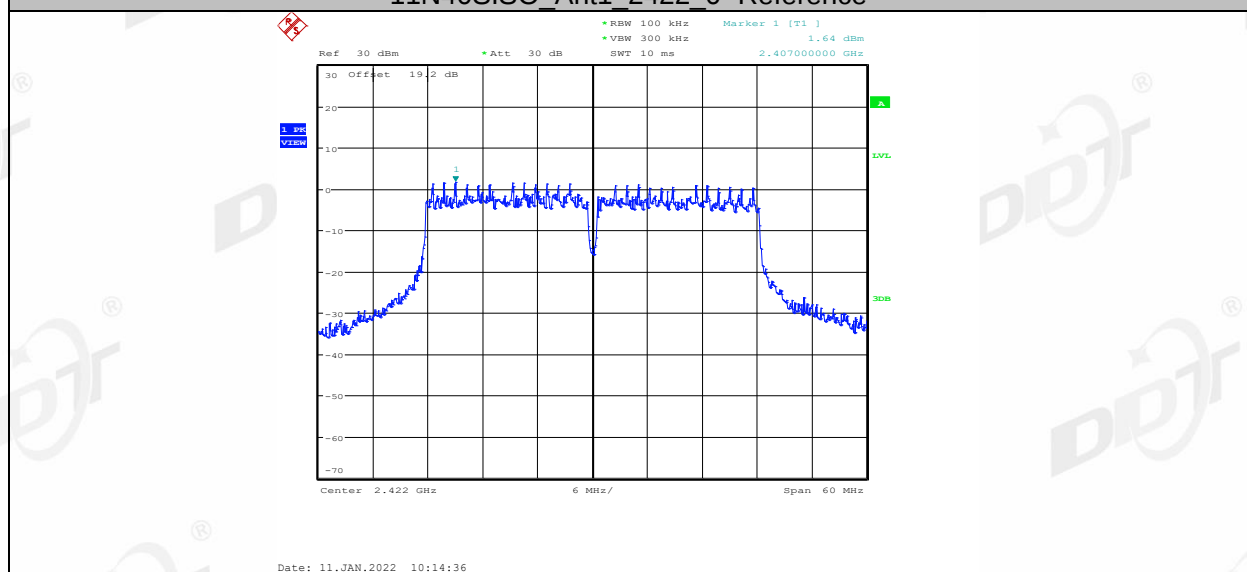


11N40SISO Ant1 2422 30~1000

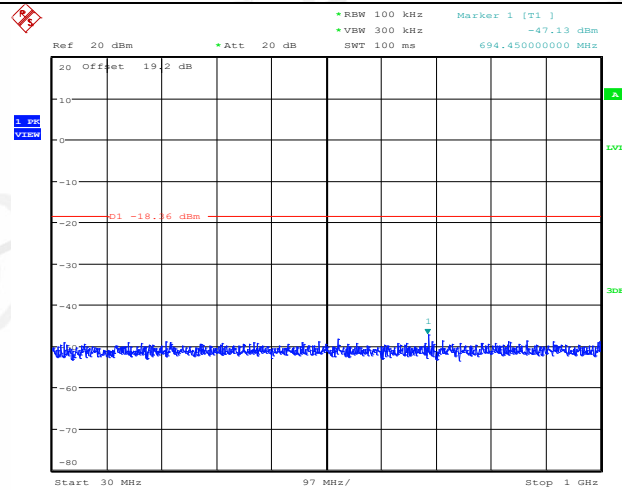


Date: 11.JAN.2022 10:14:41

11N40SISO_Ant1_2422_1000~26500

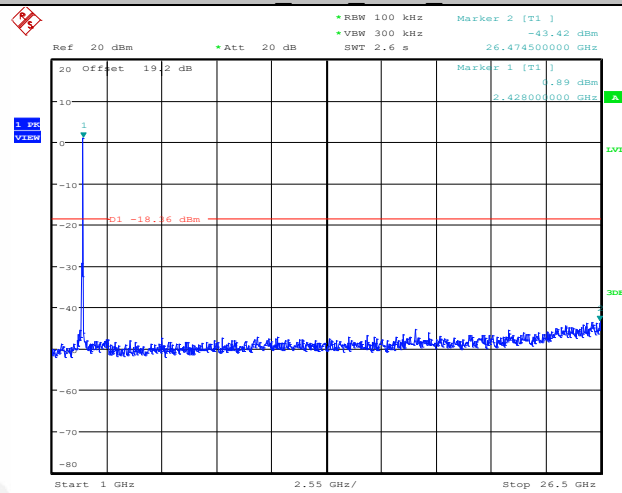


Date: 11.JAN.2022 10:14:47

11N40SISO_Ant1_2437_0~Reference

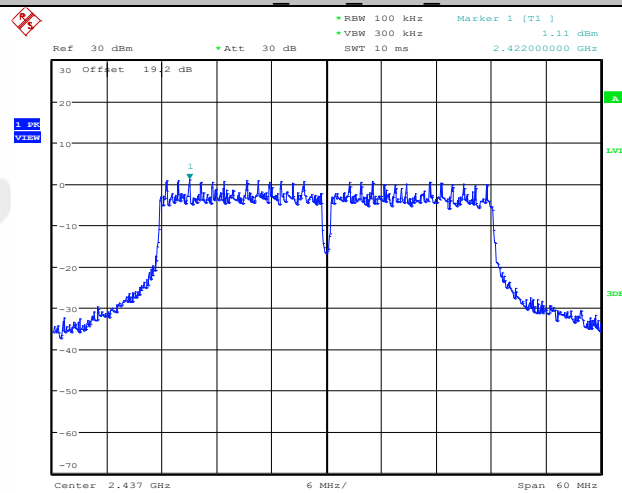


Date: 11.JAN.2022 10:20:18


11N40SISO_Ant1_2437_30~1000

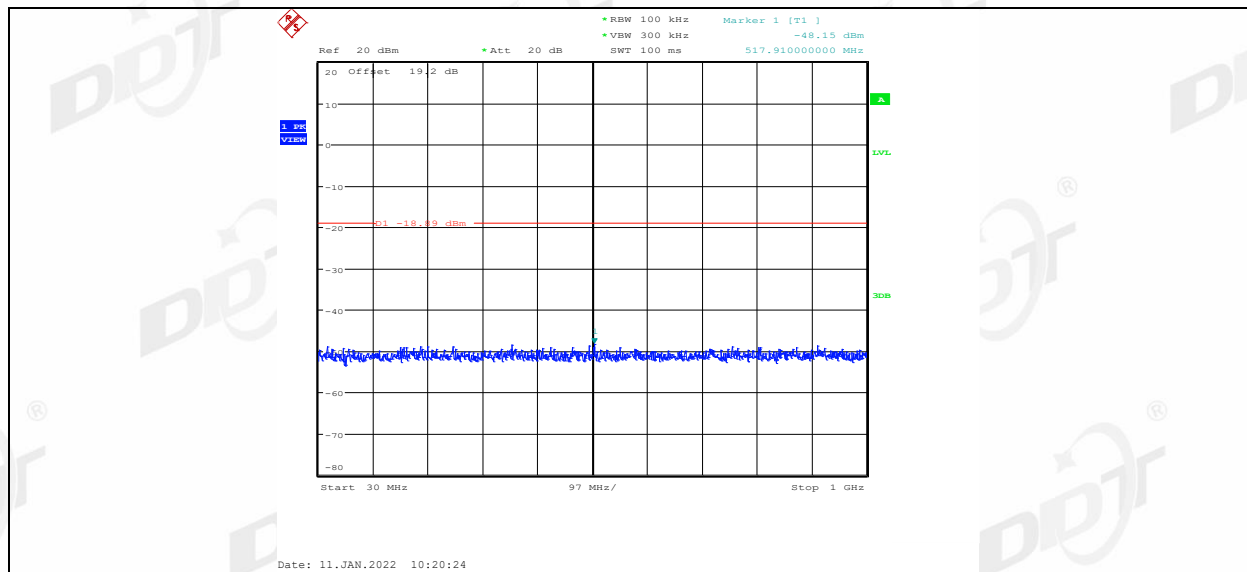


11N40SISO Ant1 2437 1000~26500

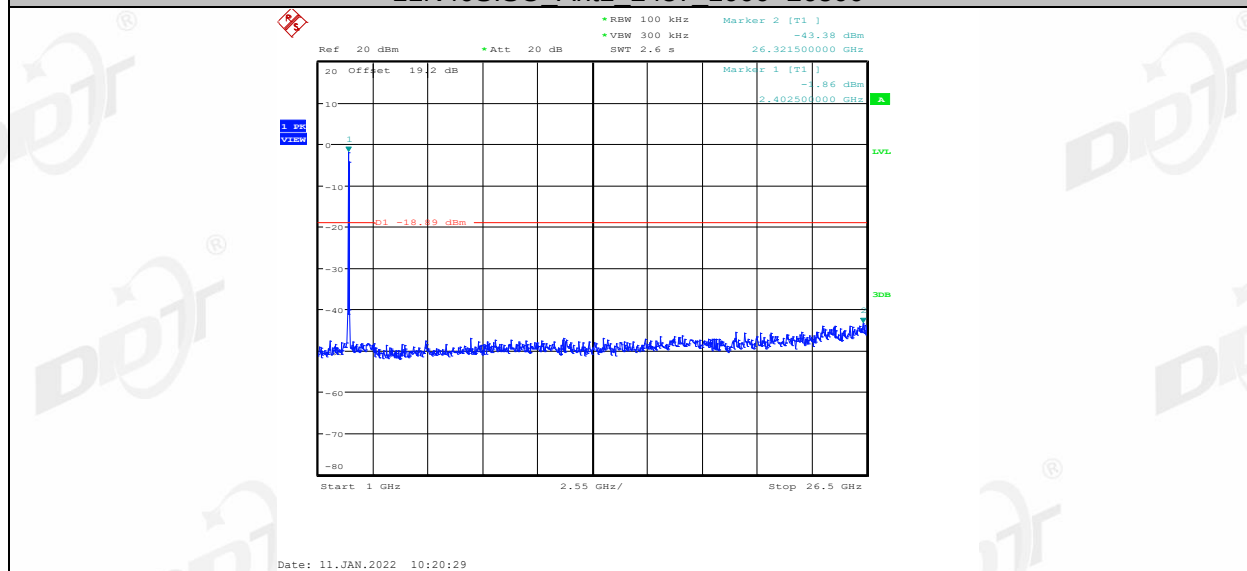

11N40SISO Ant1 2452 0~Reference

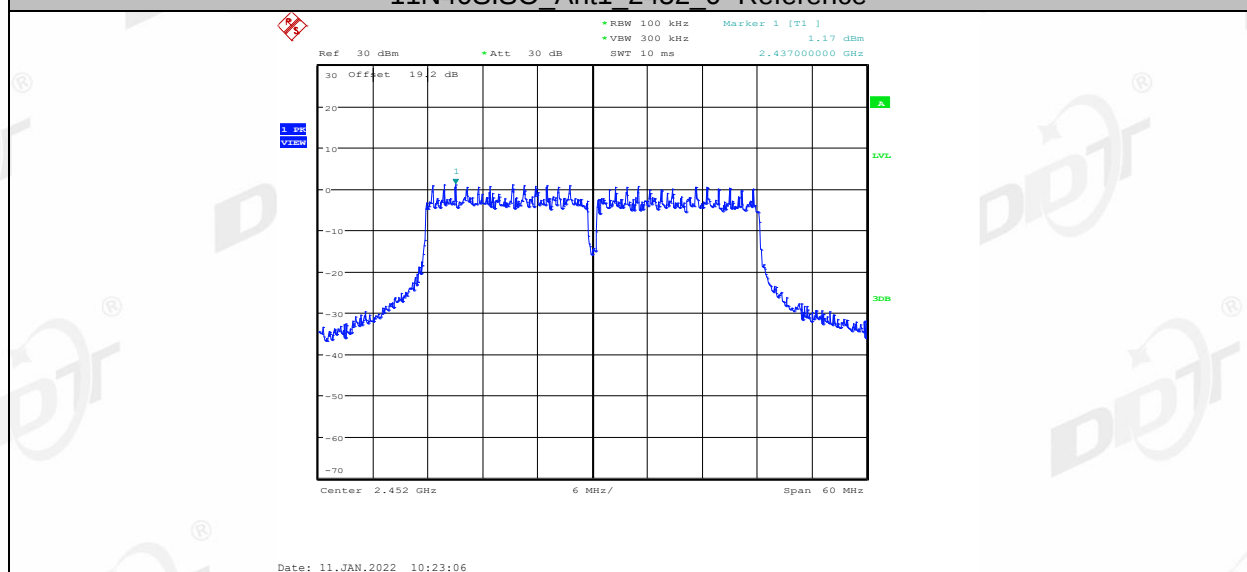


11N40SISO Ant1 2452 30~1000

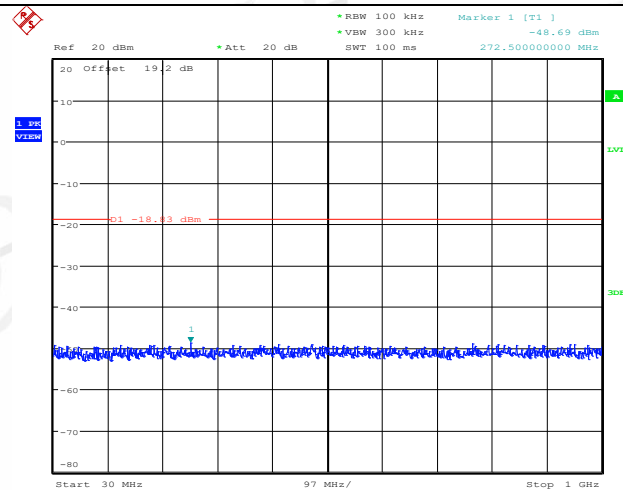


Date: 11.JAN.2022 10:23:11

11N40SISO	Ant1	2452	1000~26500
-----------	------	------	------------

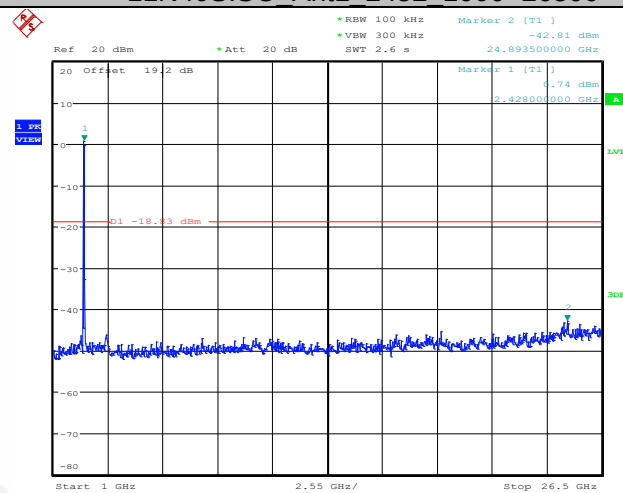


Date: 11.JAN.2022 10:23:16

11AX20SISO Ant1 2412 0~Reference

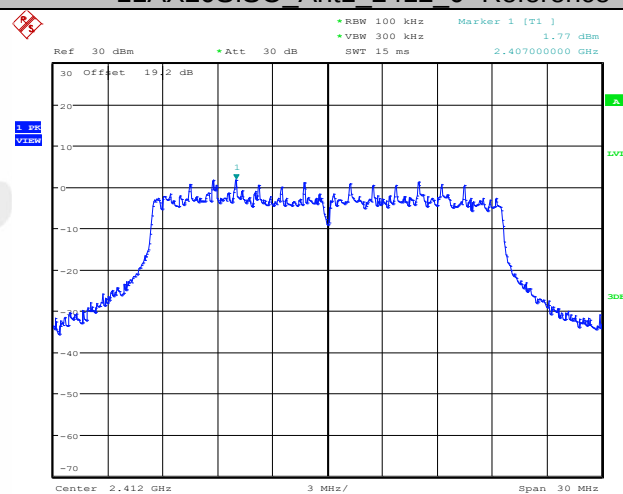


Date: 11.JAN.2022 10:50:50


11AX20SISO Ant1 2412 30~1000

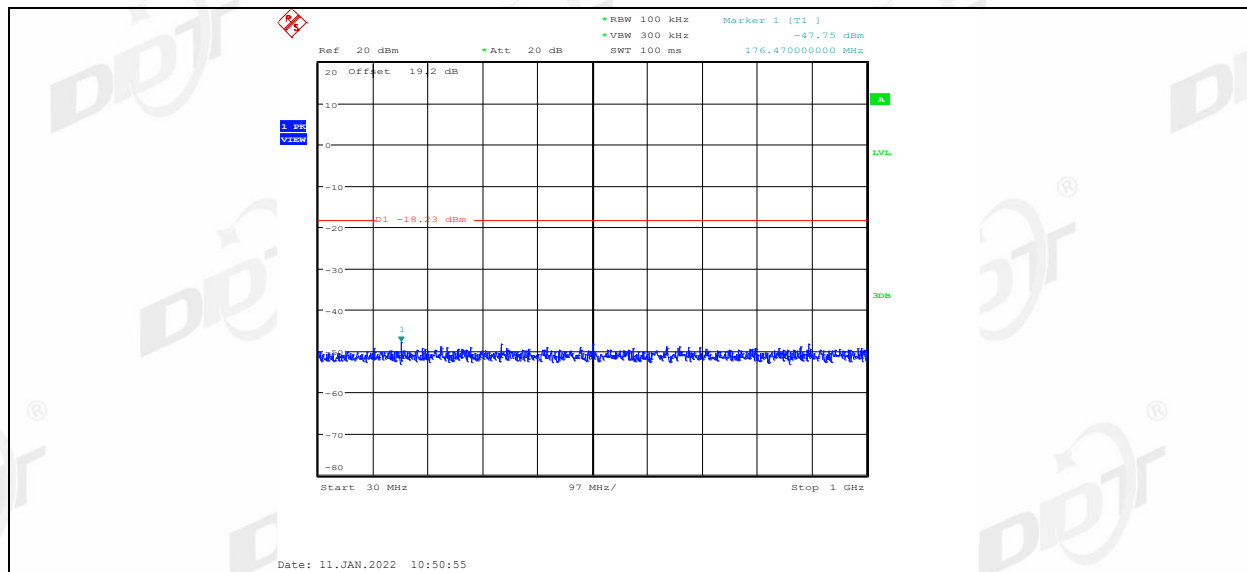


11AX20SISO Ant1 2412 1000-26500

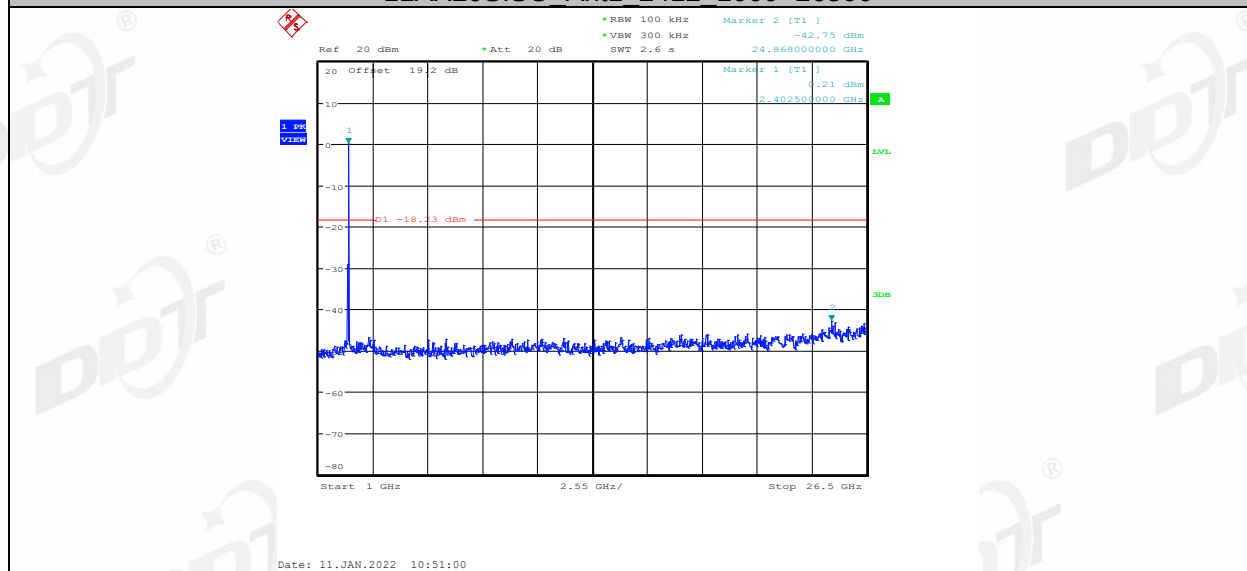


11AX20SISO Ant1 2437 0-Reference

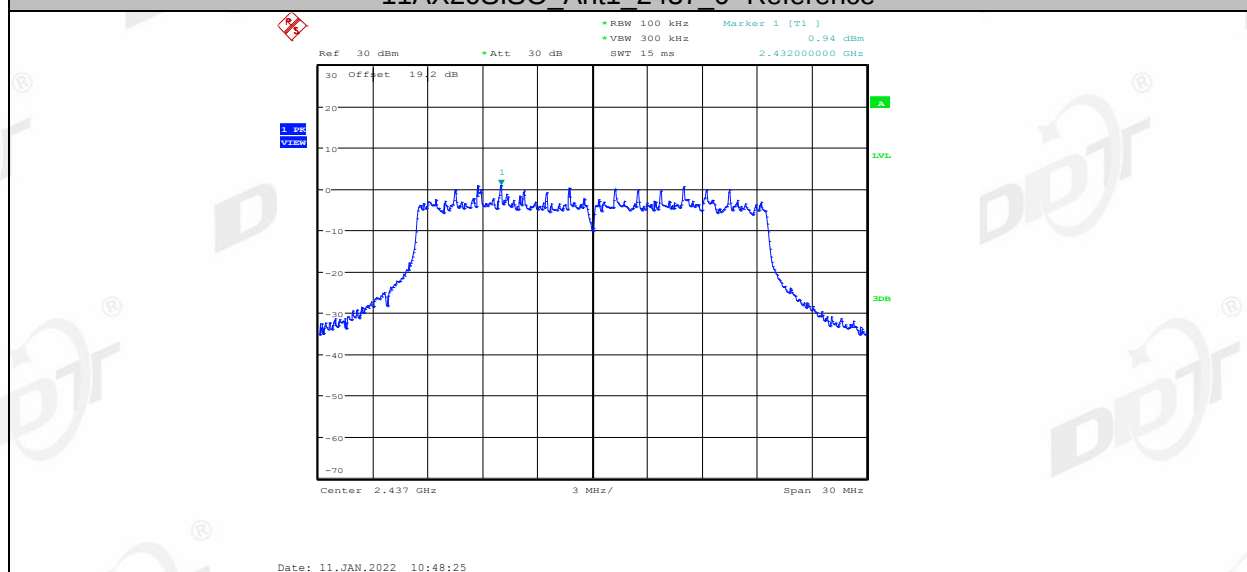


11AX20SISO Ant1 2437 30-1000

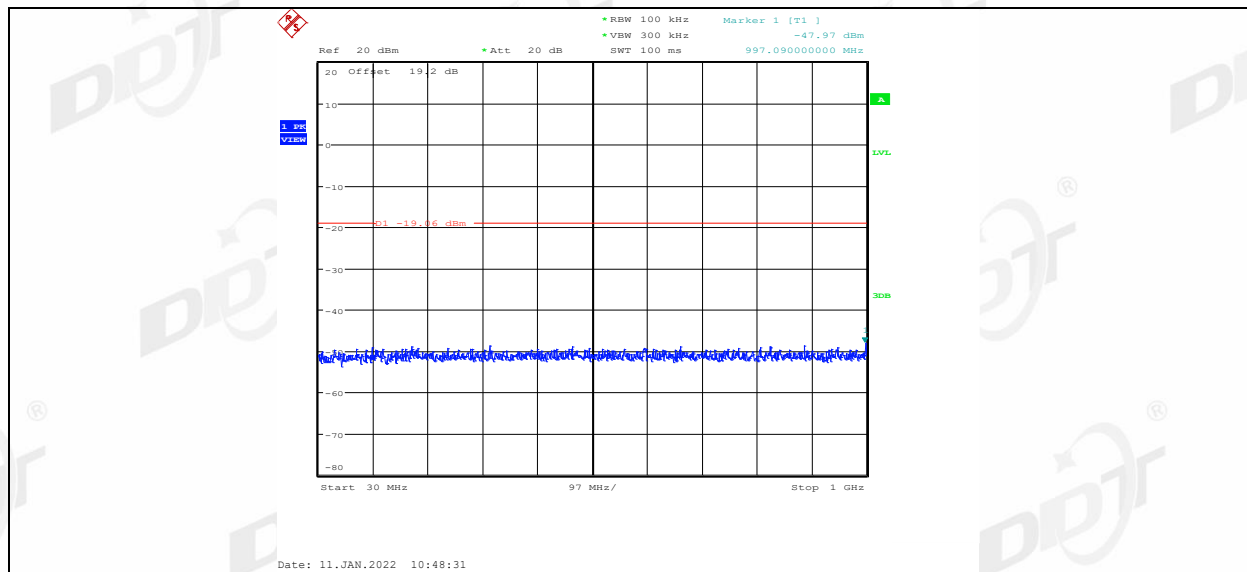


11AX20SISO Ant1 2437 1000-26500

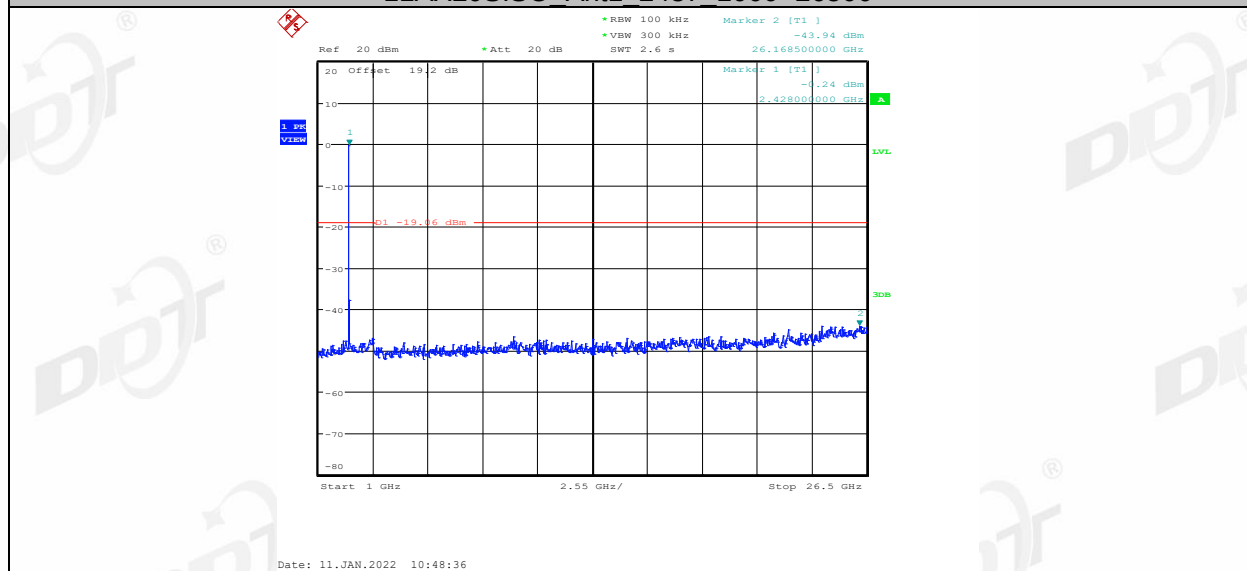


11AX20SISO Ant1 2462 0-Reference

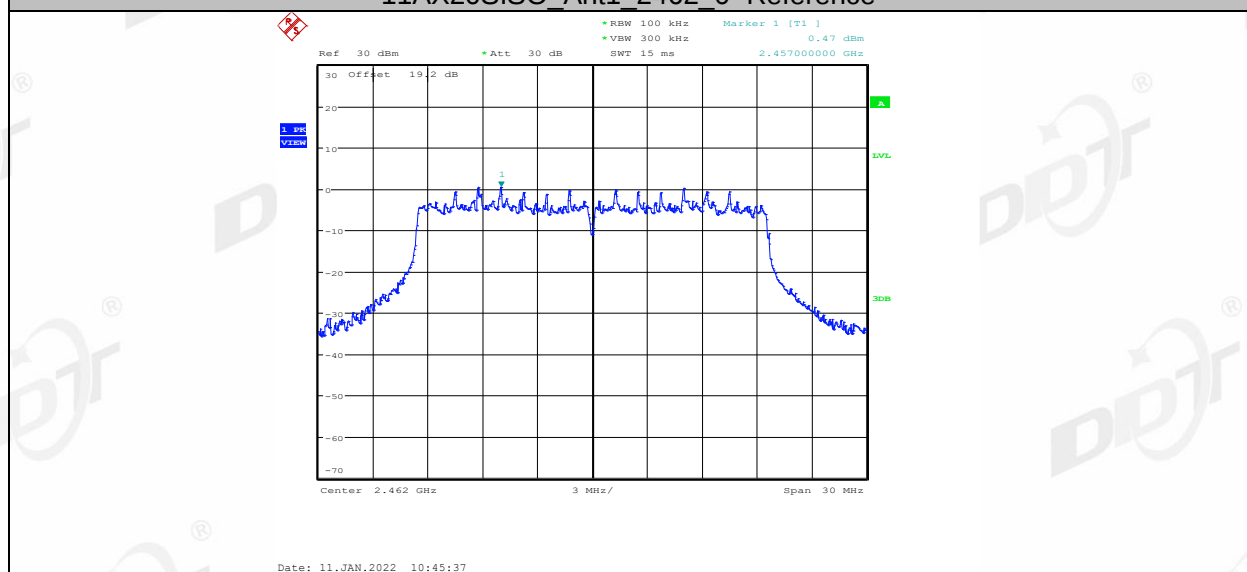


11AX20SISO Ant1 2462 30-1000

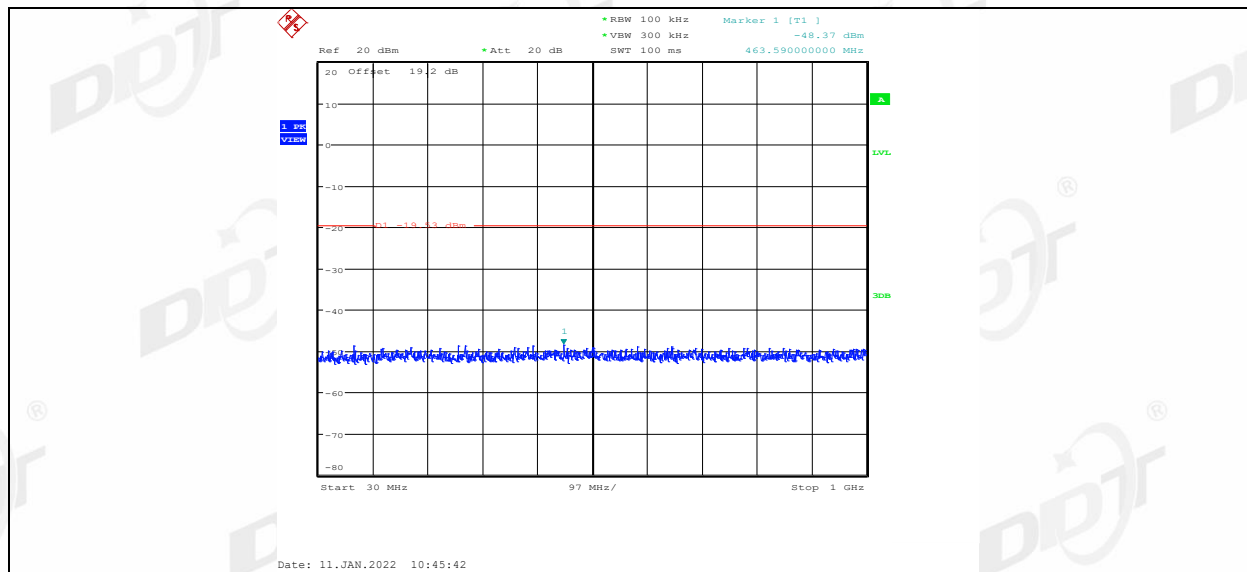


11AX20SISO Ant1 2462 1000-26500

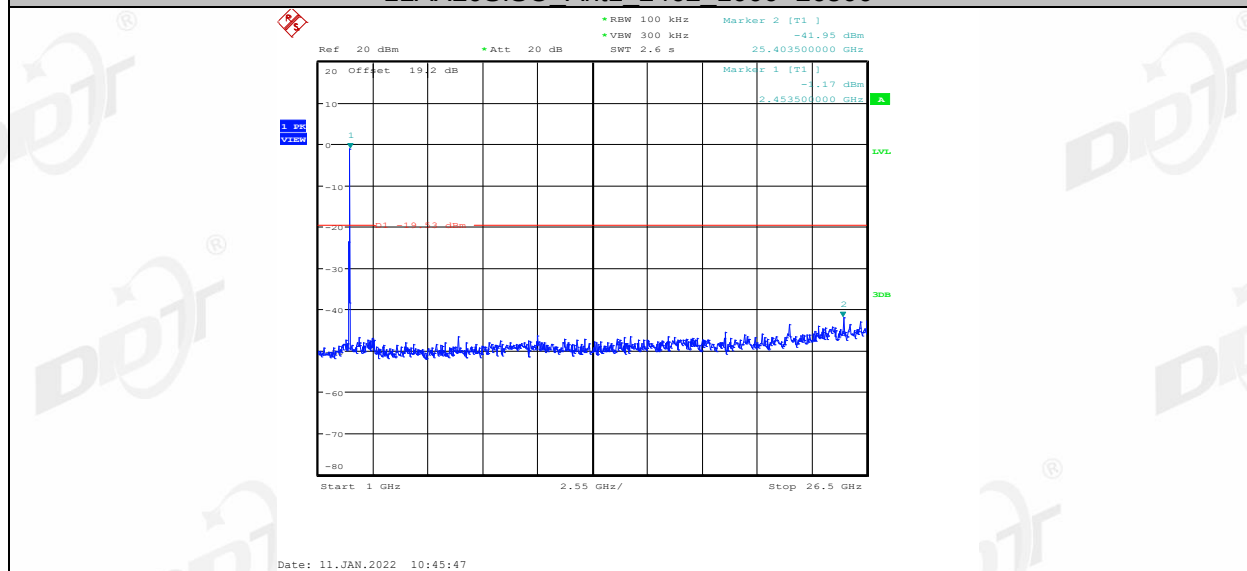

11AX40SISO Ant1 2422 0-Reference

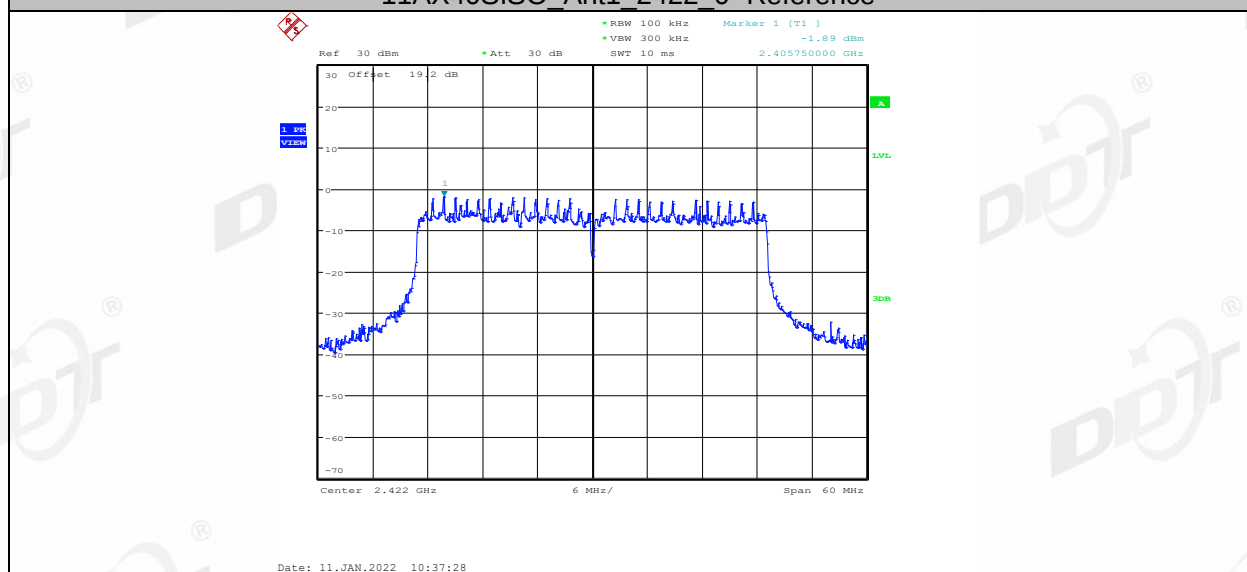


11AX40SISO Ant1 2422 30-1000

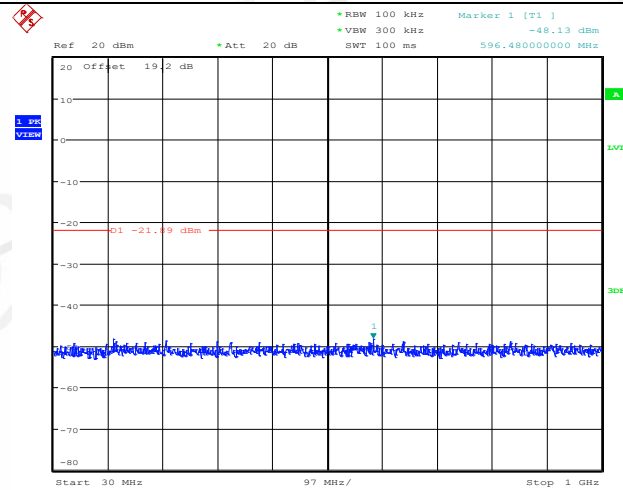


Date: 11.JAN.2022 10:37:33

11AX40SISO Ant1 2422 1000-26500

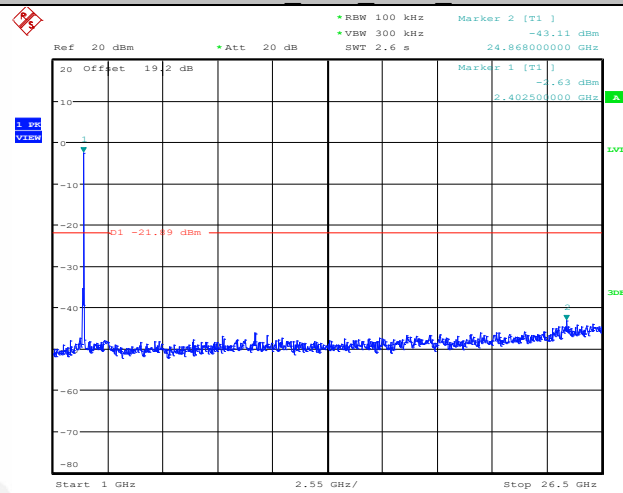


Date: 11.JAN.2022 10:37:39

11AX40SISO Ant1 2437 0-Reference

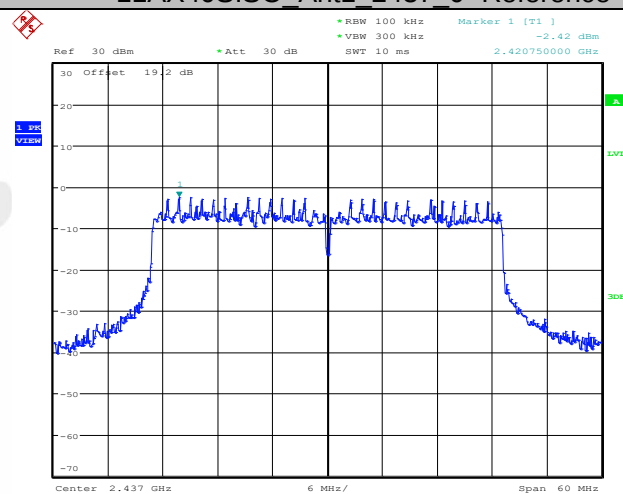


Date: 11.JAN.2022 10:35:02


11AX40SISO Ant1 2437 30-1000

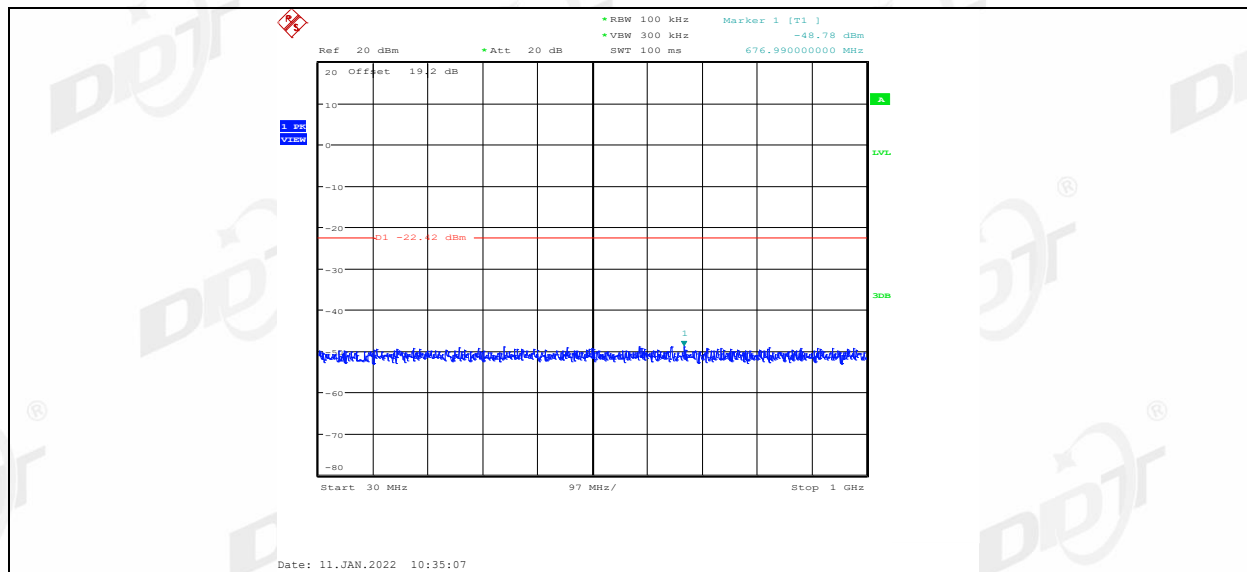

11AX40SISO Ant1 2437 1000-26500

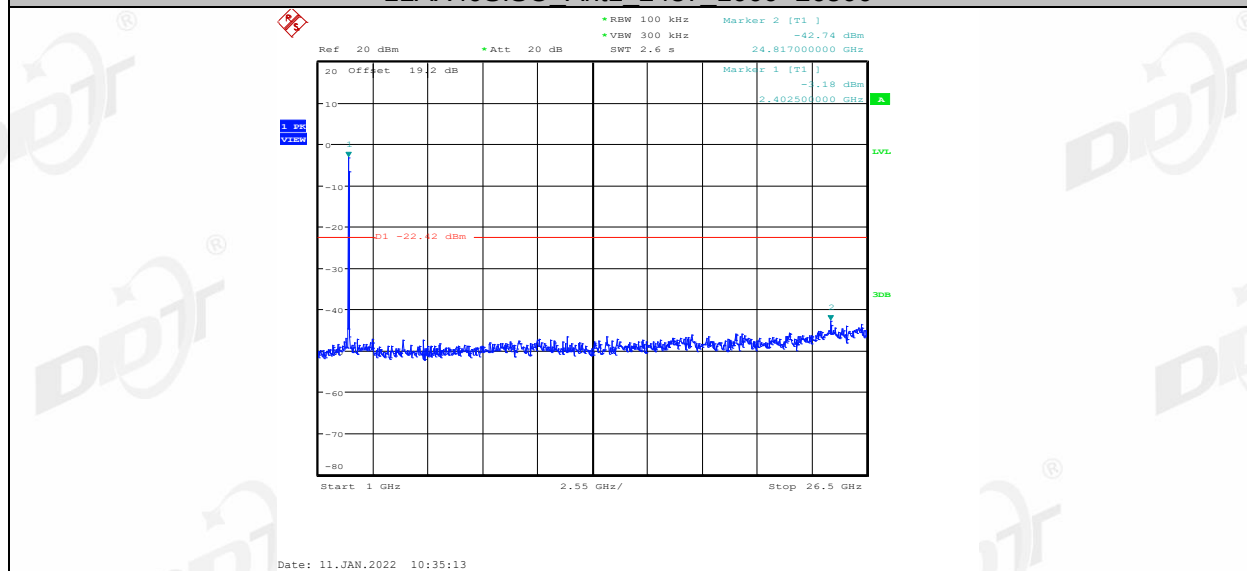

11AX40SISO Ant1 2452 0-Reference

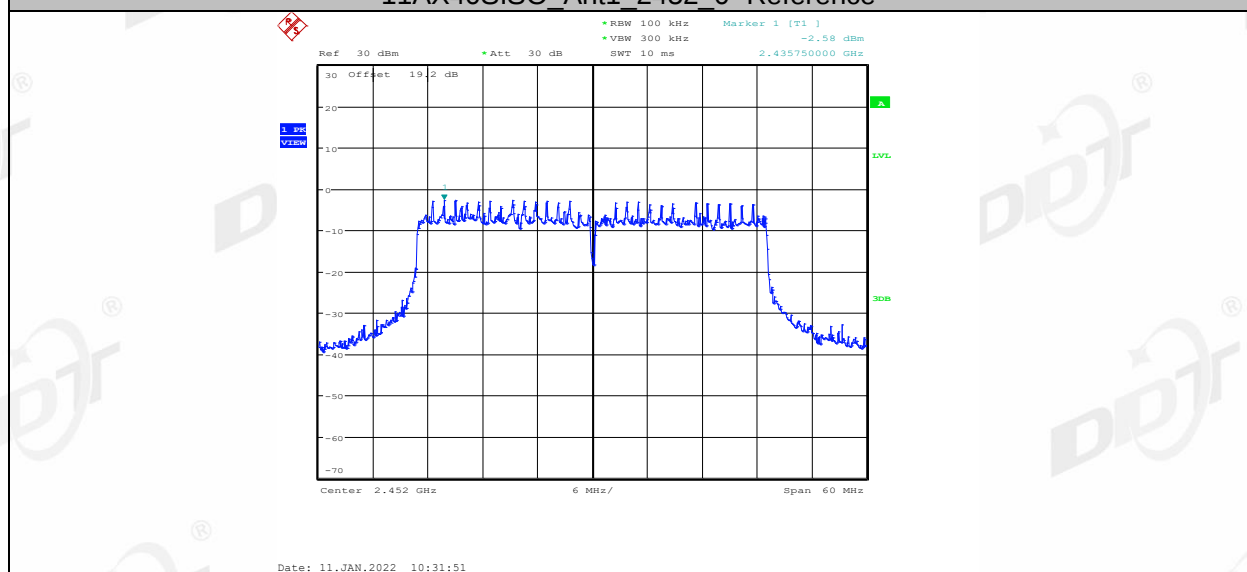


11AX40SISO Ant1 2452 30-1000



10. Radiated Band Edge Compliance

10.1. Block diagram of test setup

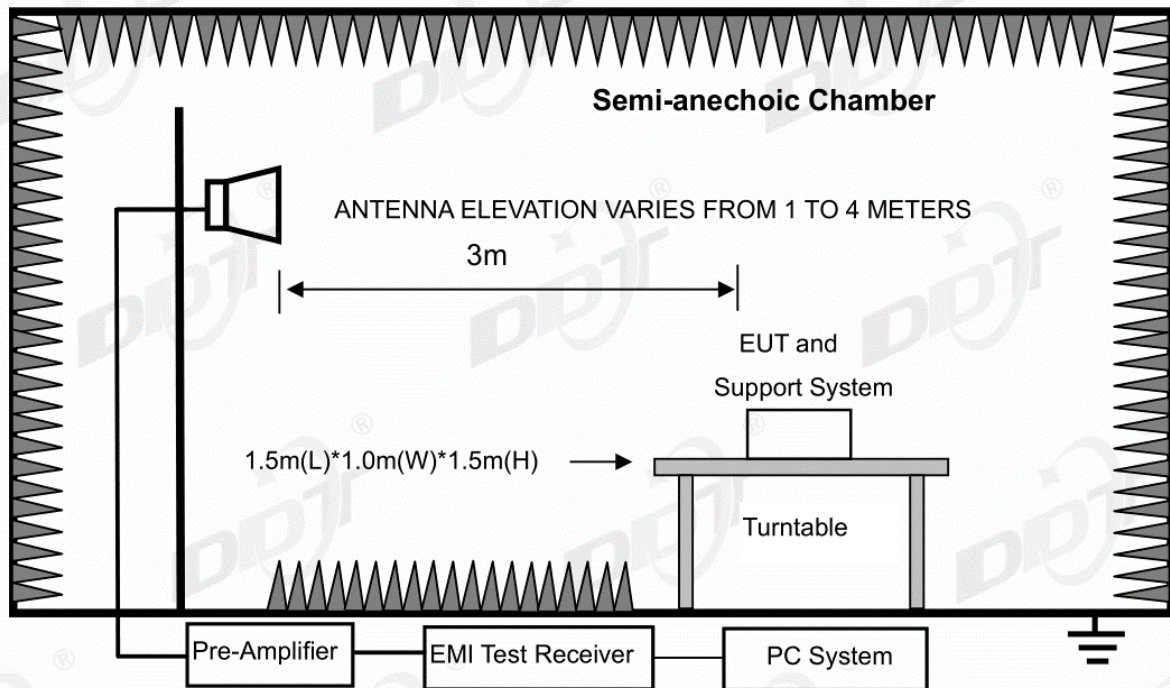

10.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

10.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2430 MHz and 2450 MHz to 2500 MHz, 2310 MHz to 2450 MHz and 2430 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

10.4. Test result

Pass. (See below detailed test result)

Note: All mode were tested and only the worst case was recorded this report.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11B 2412

Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Data: 53

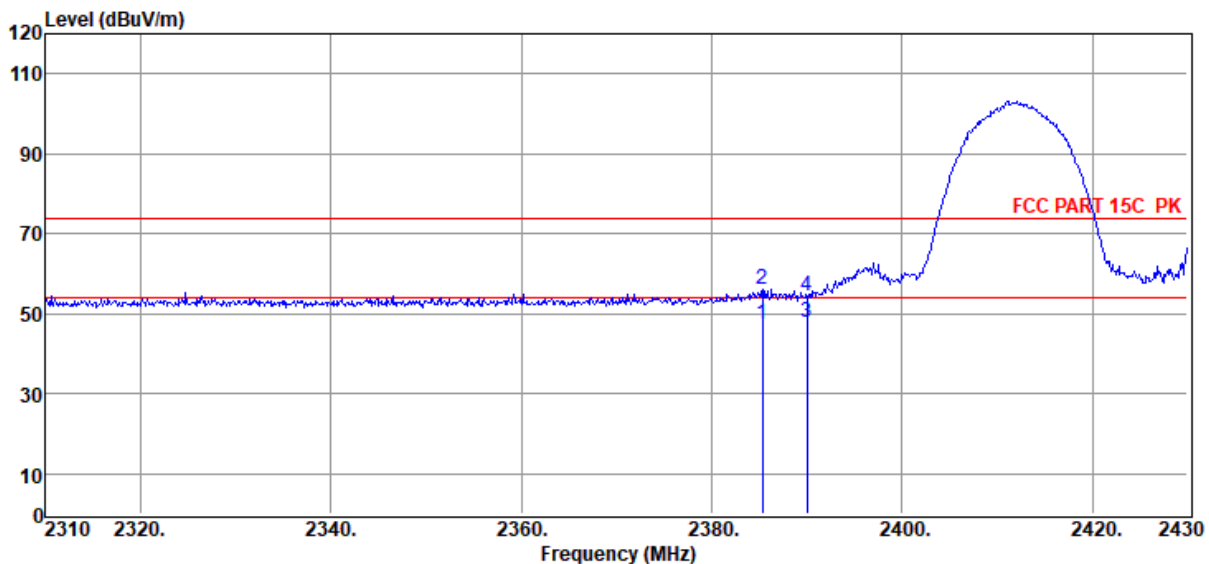

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2385.36	17.24	27.39	0.00	1.71	1.22	47.56	54.00	-6.44	Average	VERTICAL
2	2385.36	25.97	27.39	0.00	1.71	1.22	56.29	74.00	-17.71	Peak	VERTICAL
3	2390.04	17.61	27.40	0.00	1.71	1.24	47.96	54.00	-6.04	Average	VERTICAL
4	2390.04	24.19	27.40	0.00	1.71	1.24	54.54	74.00	-19.46	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11B 2412 power:7

Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Data: 55

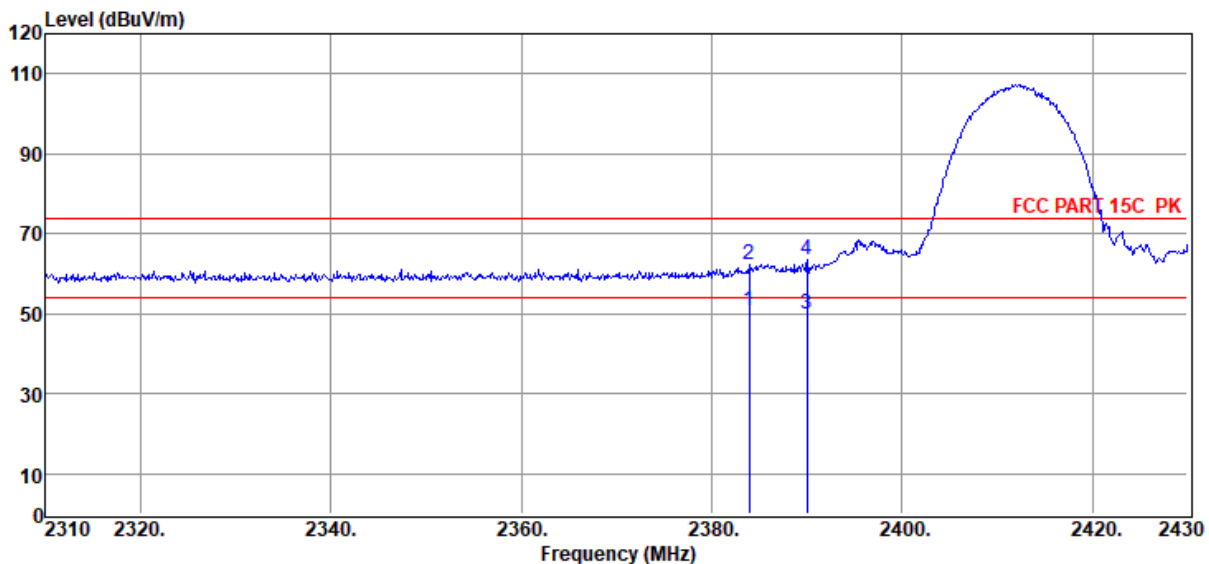

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2383.92	20.61	27.39	0.00	1.71	1.22	50.93	54.00	-3.07	Average	HORIZONTAL
2	2383.92	32.13	27.39	0.00	1.71	1.22	62.45	74.00	-11.55	Peak	HORIZONTAL
3	2390.04	19.62	27.40	0.00	1.71	1.24	49.97	54.00	-4.03	Average	HORIZONTAL
4	2390.04	33.21	27.40	0.00	1.71	1.24	63.56	74.00	-10.44	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11B 2462 power:7

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6
Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

Data: 56

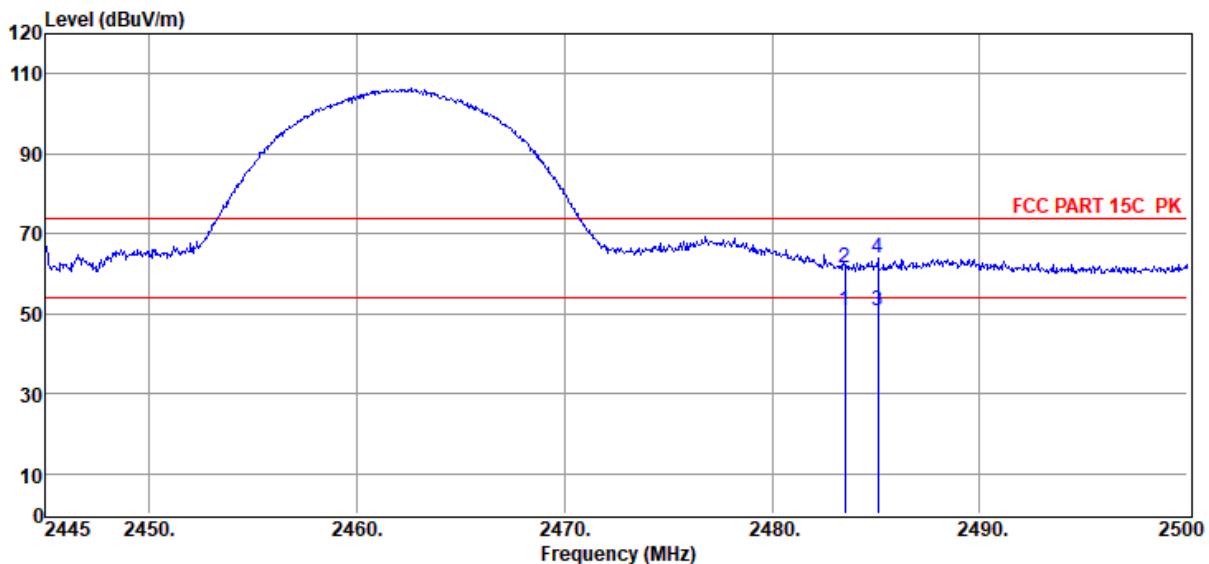

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	20.02	27.57	0.00	1.74	1.53	50.86	54.00	-3.14	Average	HORIZONTAL
2	2483.50	30.74	27.57	0.00	1.74	1.53	61.58	74.00	-12.42	Peak	HORIZONTAL
3	2485.10	20.08	27.57	0.00	1.74	1.54	50.93	54.00	-3.07	Average	HORIZONTAL
4	2485.10	32.91	27.57	0.00	1.74	1.54	63.76	74.00	-10.24	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11B 2462 power:7

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6
Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Data: 57

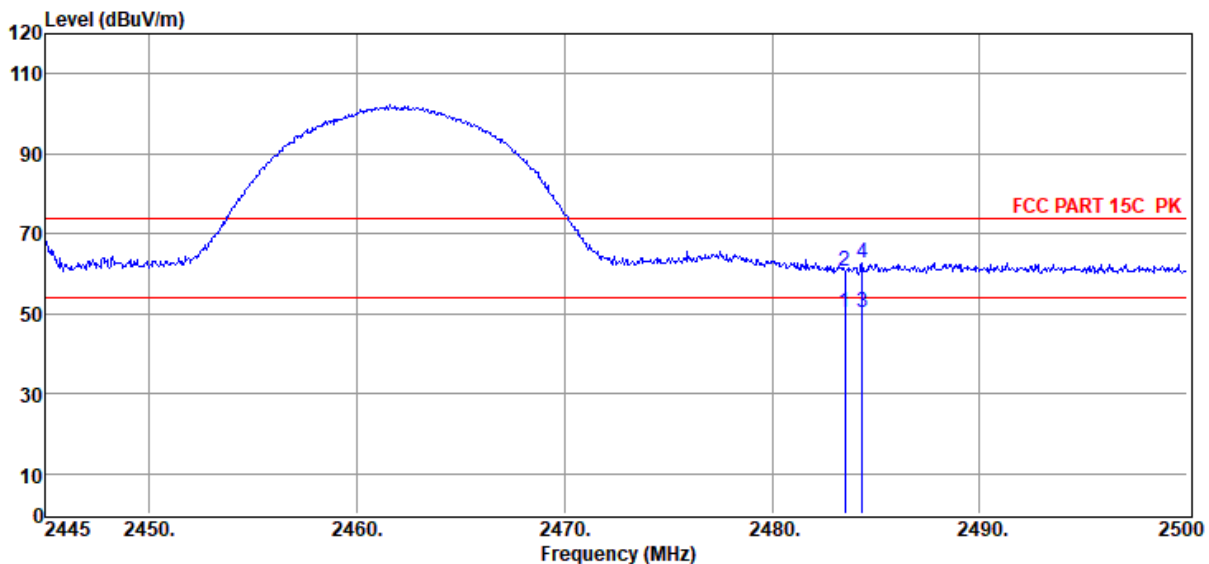

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.28	27.57	0.00	1.74	1.53	50.12	54.00	-3.88	Average	VERTICAL
2	2483.50	29.72	27.57	0.00	1.74	1.53	60.56	74.00	-13.44	Peak	VERTICAL
3	2484.33	19.61	27.57	0.00	1.74	1.54	50.46	54.00	-3.54	Average	VERTICAL
4	2484.33	31.76	27.57	0.00	1.74	1.54	62.61	74.00	-11.39	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# **D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6**

Test Date : 2022-04-02 **Tested By** : Kennys Zhang


EUT : Clevershare Hub **Model Number** : Clevershare Hub

Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11G 2412 power:7 ofst:-7

Data: 58

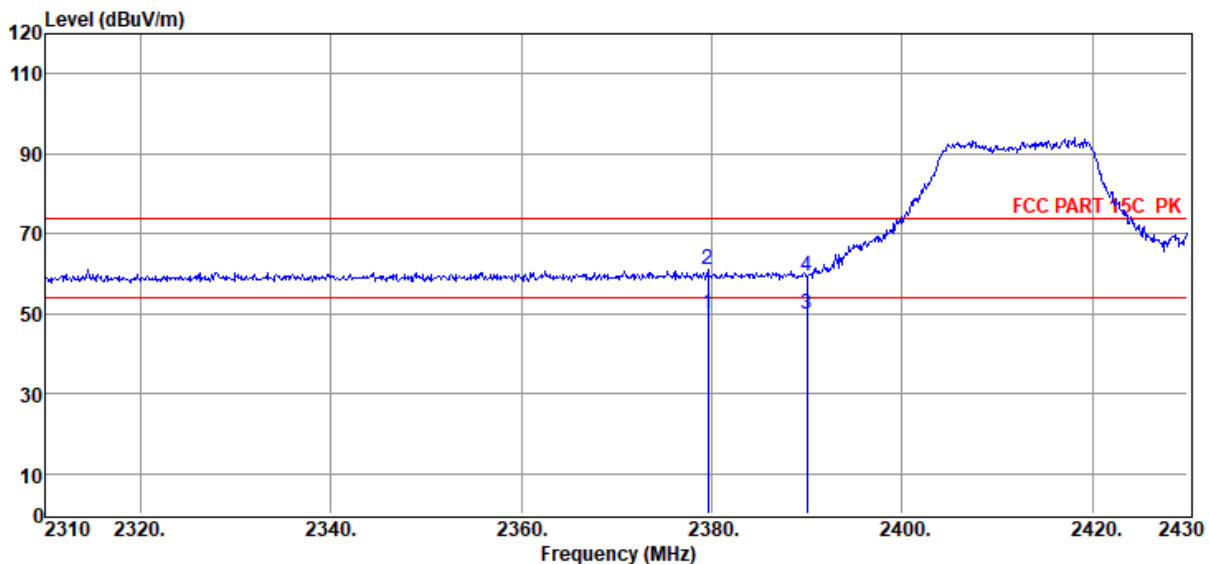

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2379.60	19.63	27.38	0.00	1.71	1.20	49.92	54.00	-4.08	Average	VERTICAL
2	2379.60	30.64	27.38	0.00	1.71	1.20	60.93	74.00	-13.07	Peak	VERTICAL
3	2390.04	19.54	27.40	0.00	1.71	1.24	49.89	54.00	-4.11	Average	VERTICAL
4	2390.04	29.01	27.40	0.00	1.71	1.24	59.36	74.00	-14.64	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11G 2412 power:7 ofst:-7

Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
 1G .EM6

Data: 59

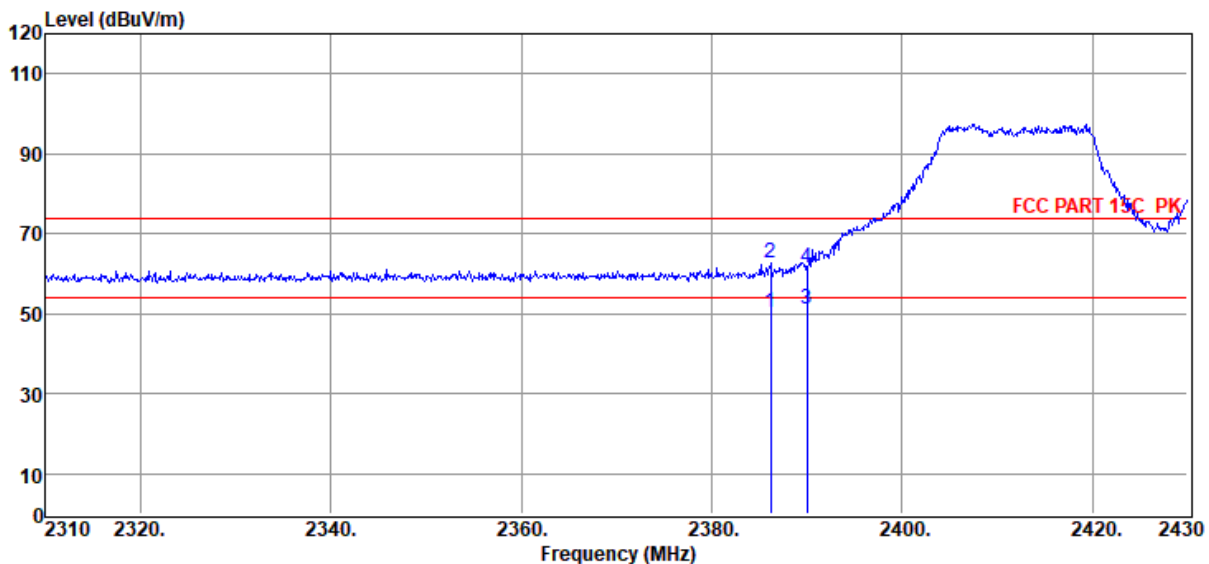

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2386.20	20.06	27.40	0.00	1.71	1.22	50.39	54.00	-3.61	Average	HORIZONTAL
2	2386.20	32.50	27.40	0.00	1.71	1.22	62.83	74.00	-11.17	Peak	HORIZONTAL
3	2390.04	20.61	27.40	0.00	1.71	1.24	50.96	54.00	-3.04	Average	HORIZONTAL
4	2390.04	31.00	27.40	0.00	1.71	1.24	61.35	74.00	-12.65	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11G 2462 power:7 ofst:-8

Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Data: 61

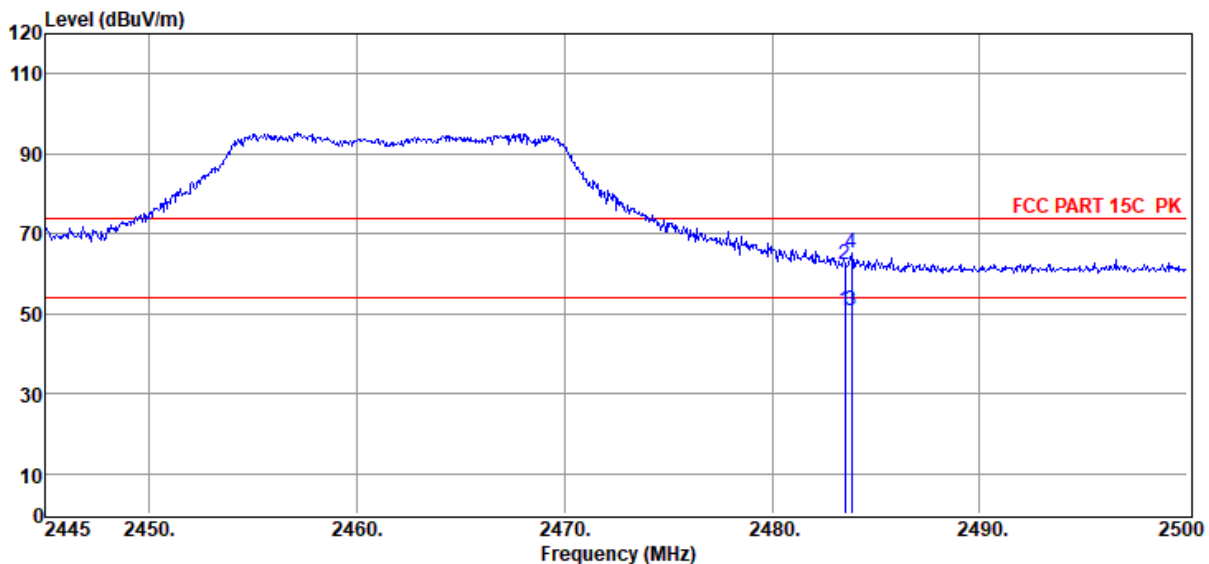

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.71	27.57	0.00	1.74	1.53	50.55	54.00	-3.45	Average	HORIZONTAL
2	2483.50	31.42	27.57	0.00	1.74	1.53	62.26	74.00	-11.74	Peak	HORIZONTAL
3	2483.83	19.92	27.57	0.00	1.74	1.53	50.76	54.00	-3.24	Average	HORIZONTAL
4	2483.83	34.18	27.57	0.00	1.74	1.53	65.02	74.00	-8.98	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11G 2462 power:7 ofst:-8

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6
Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Data: 62

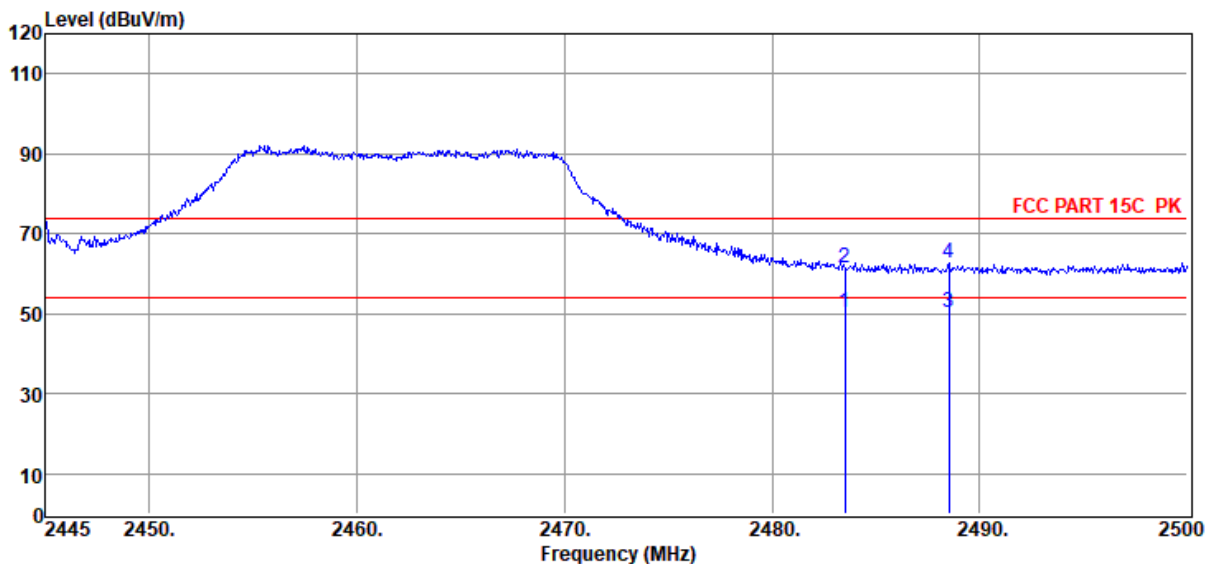

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.38	27.57	0.00	1.74	1.53	50.22	54.00	-3.78	Average	VERTICAL
2	2483.50	30.53	27.57	0.00	1.74	1.53	61.37	74.00	-12.63	Peak	VERTICAL
3	2488.51	19.51	27.58	0.00	1.74	1.55	50.38	54.00	-3.62	Average	VERTICAL
4	2488.51	31.98	27.58	0.00	1.74	1.55	62.85	74.00	-11.15	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# **D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6**

Test Date : 2022-04-02 **Tested By** : Kennys Zhang


EUT : Clevershare Hub **Model Number** : Clevershare Hub

Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11N 2412 power:7 ofst:-8

Data: 63

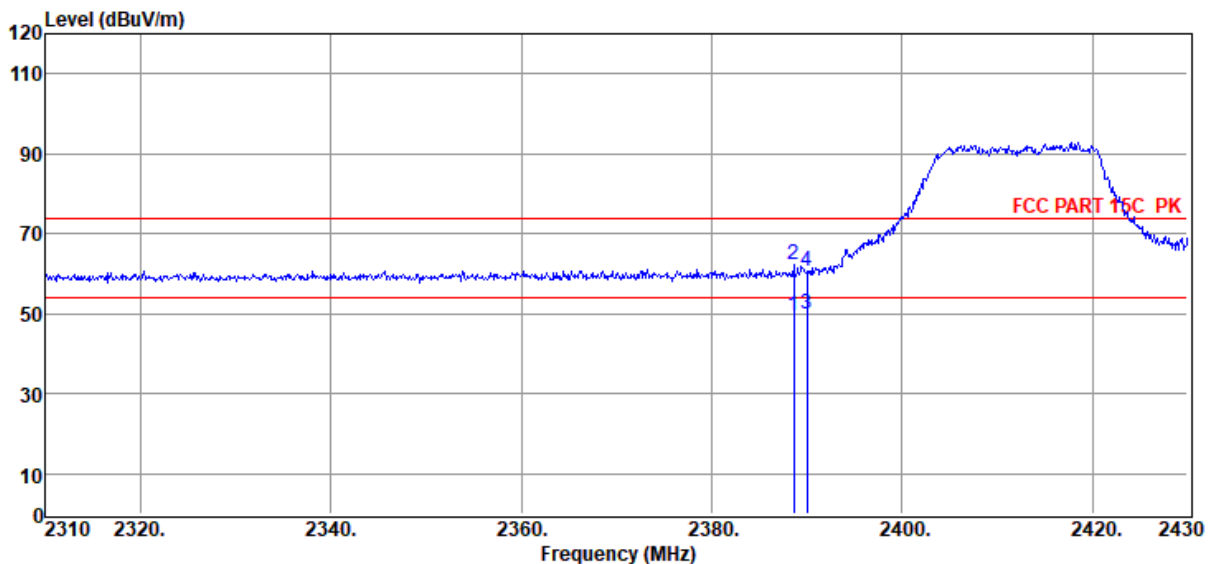

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.60	19.31	27.40	0.00	1.71	1.23	49.65	54.00	-4.35	Average	VERTICAL
2	2388.60	31.81	27.40	0.00	1.71	1.23	62.15	74.00	-11.85	Peak	VERTICAL
3	2390.04	19.62	27.40	0.00	1.71	1.24	49.97	54.00	-4.03	Average	VERTICAL
4	2390.04	30.27	27.40	0.00	1.71	1.24	60.62	74.00	-13.38	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-02

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11N 2412 power:7 ofst:-8

Data: 64

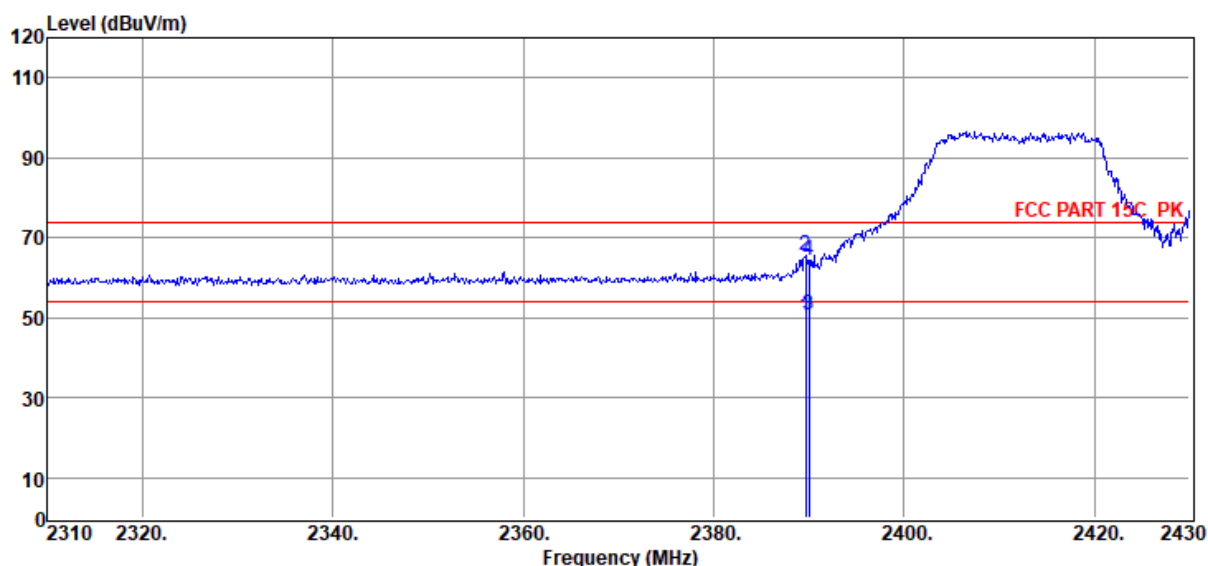

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2389.68	20.13	27.40	0.00	1.71	1.24	50.48	54.00	-3.52	Average	HORIZONTAL
2	2389.68	35.04	27.40	0.00	1.71	1.24	65.39	74.00	-8.61	Peak	HORIZONTAL
3	2390.04	20.28	27.40	0.00	1.71	1.24	50.63	54.00	-3.37	Average	HORIZONTAL
4	2390.04	33.96	27.40	0.00	1.71	1.24	64.31	74.00	-9.69	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-02

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11N 2462 power:6 ofst:-7

Data: 65

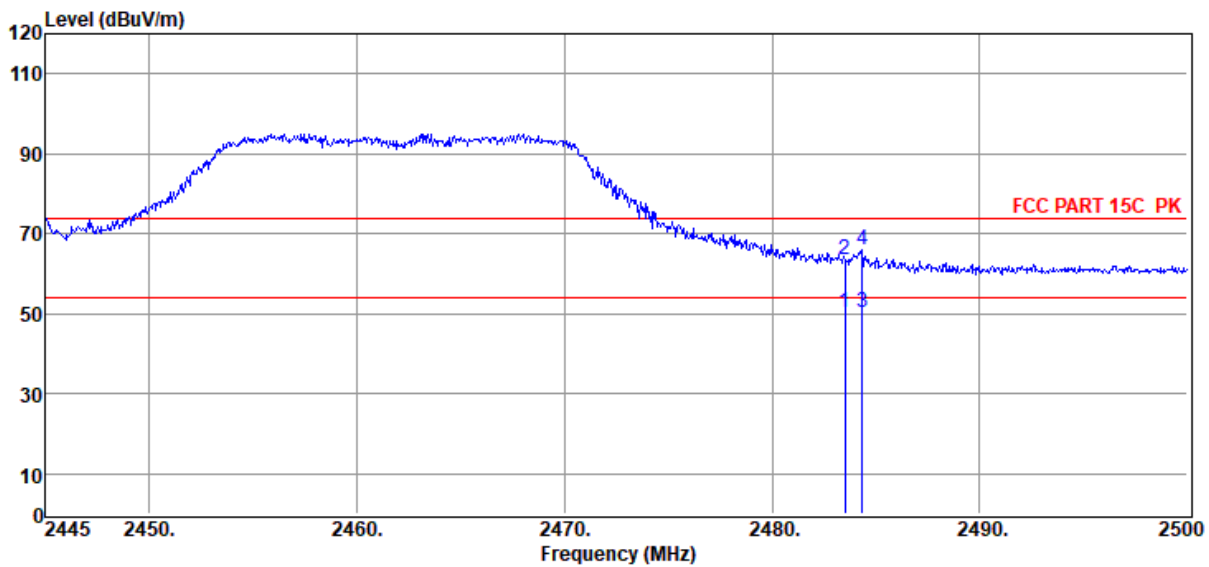

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.59	27.57	0.00	1.74	1.53	50.43	54.00	-3.57	Average	HORIZONTAL
2	2483.50	32.81	27.57	0.00	1.74	1.53	63.65	74.00	-10.35	Peak	HORIZONTAL
3	2484.33	19.34	27.57	0.00	1.74	1.54	50.19	54.00	-3.81	Average	HORIZONTAL
4	2484.33	35.33	27.57	0.00	1.74	1.54	66.18	74.00	-7.82	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11N 2462 power:6 ofst:-7

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6
Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Data: 66

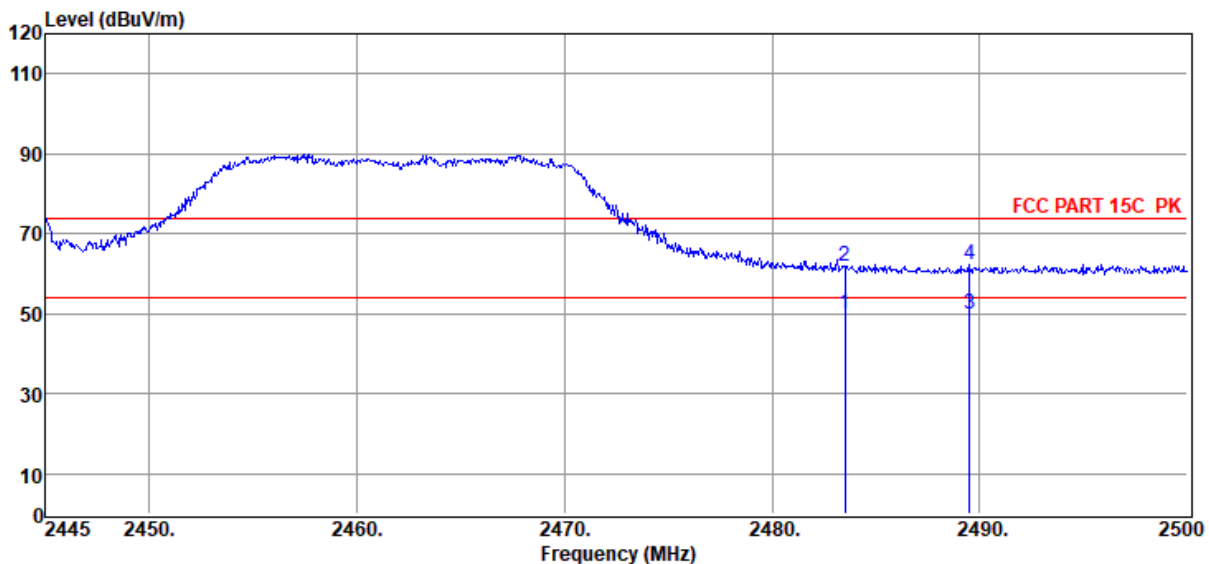

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.22	27.57	0.00	1.74	1.53	50.06	54.00	-3.94	Average	VERTICAL
2	2483.50	31.12	27.57	0.00	1.74	1.53	61.96	74.00	-12.04	Peak	VERTICAL
3	2489.50	19.06	27.58	0.00	1.74	1.55	49.93	54.00	-4.07	Average	VERTICAL
4	2489.50	31.49	27.58	0.00	1.74	1.55	62.36	74.00	-11.64	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-02

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11N40 2422 power:6 ofst:-9

Data: 67

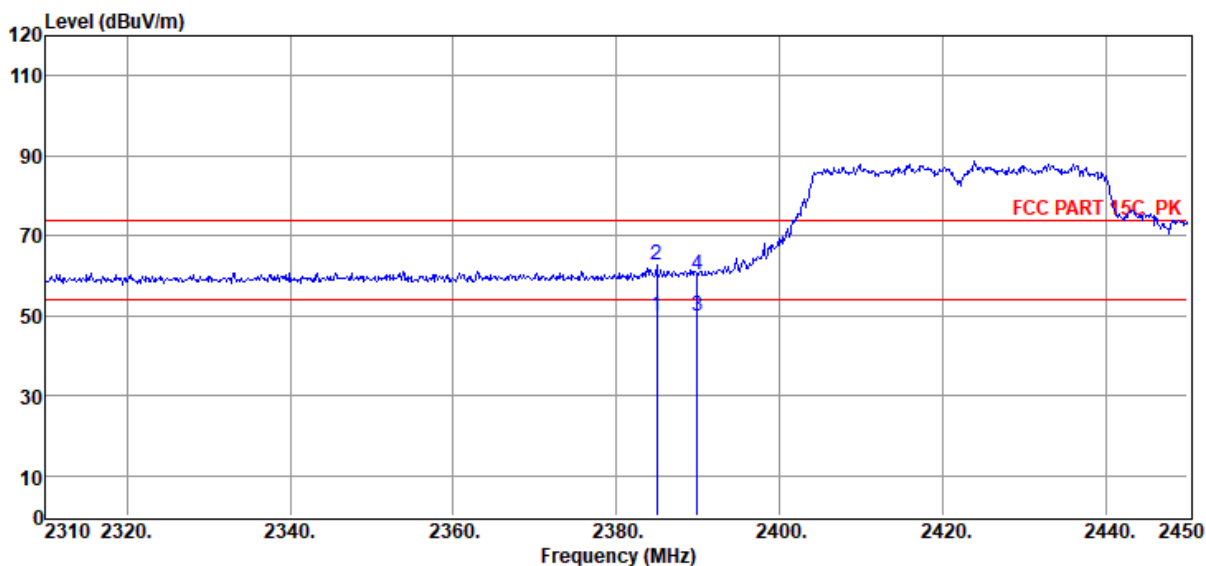

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2384.90	19.51	27.39	0.00	1.71	1.22	49.83	54.00	-4.17	Average	VERTICAL
2	2384.90	32.18	27.39	0.00	1.71	1.22	62.50	74.00	-11.50	Peak	VERTICAL
3	2389.94	19.67	27.40	0.00	1.71	1.24	50.02	54.00	-3.98	Average	VERTICAL
4	2389.94	29.67	27.40	0.00	1.71	1.24	60.02	74.00	-13.98	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11N40 2422 power:6 ofst:-9

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6
Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

Data: 68

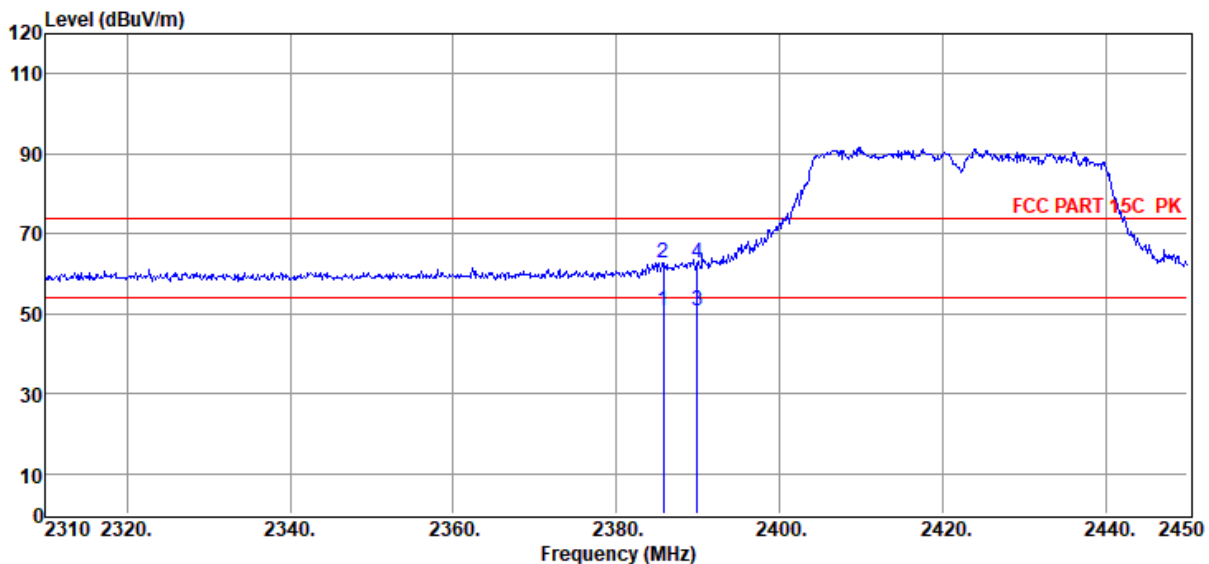

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2385.74	20.34	27.39	0.00	1.71	1.22	50.66	54.00	-3.34	Average	HORIZONTAL
2	2385.74	32.52	27.39	0.00	1.71	1.22	62.84	74.00	-11.16	Peak	HORIZONTAL
3	2389.94	20.51	27.40	0.00	1.71	1.24	50.86	54.00	-3.14	Average	HORIZONTAL
4	2389.94	32.13	27.40	0.00	1.71	1.24	62.48	74.00	-11.52	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-02

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11N40 2452 power:5 ofst:-7

Data: 70

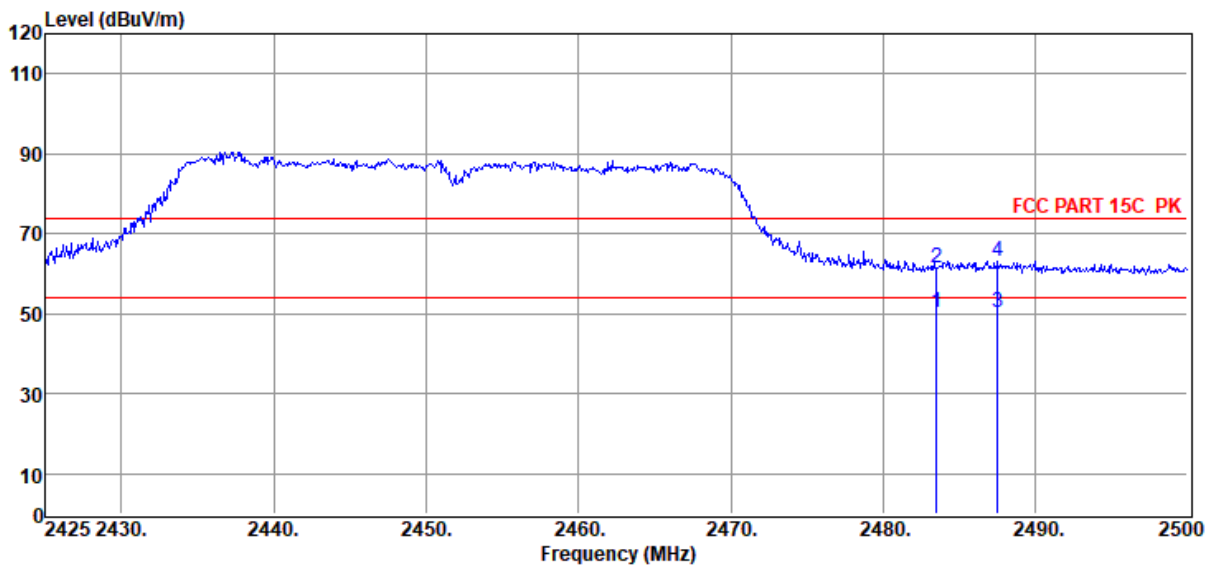

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.62	27.57	0.00	1.74	1.53	50.46	54.00	-3.54	Average	HORIZONTAL
2	2483.50	30.51	27.57	0.00	1.74	1.53	61.35	74.00	-12.65	Peak	HORIZONTAL
3	2487.55	19.42	27.58	0.00	1.74	1.55	50.29	54.00	-3.71	Average	HORIZONTAL
4	2487.55	32.23	27.58	0.00	1.74	1.55	63.10	74.00	-10.90	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11N40 2452 power:5 ofst:-7

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6
Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Data: 71

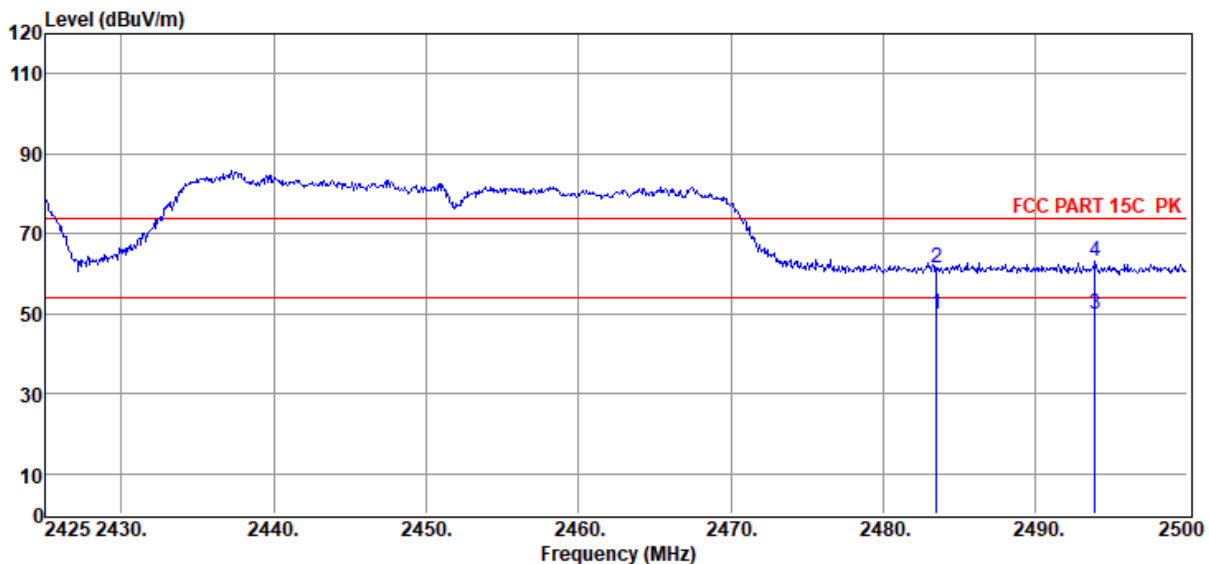

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.21	27.57	0.00	1.74	1.53	50.05	54.00	-3.95	Average	VERTICAL
2	2483.50	30.80	27.57	0.00	1.74	1.53	61.64	74.00	-12.36	Peak	VERTICAL
3	2493.93	19.12	27.59	0.00	1.74	1.57	50.02	54.00	-3.98	Average	VERTICAL
4	2493.93	32.16	27.59	0.00	1.74	1.57	63.06	74.00	-10.94	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# **D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6**

Test Date : 2022-04-02 **Tested By** : Kennys Zhang


EUT : Clevershare Hub **Model Number** : Clevershare Hub

Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2412 power:7 ofst:-9

Data: 72

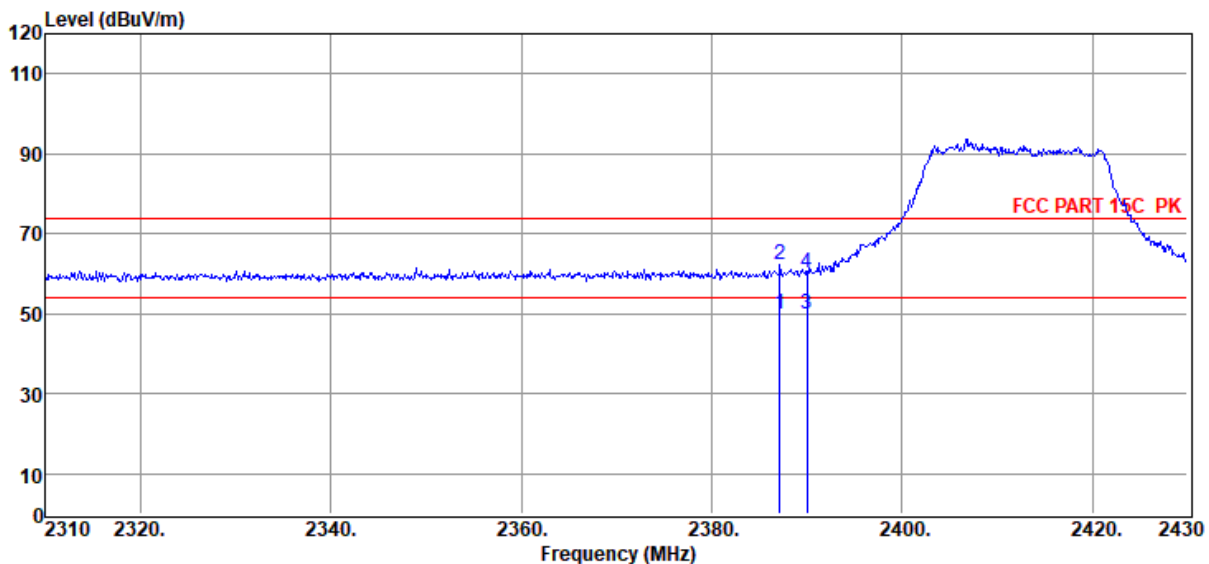

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2387.16	19.40	27.40	0.00	1.71	1.23	49.74	54.00	-4.26	Average	VERTICAL
2	2387.16	31.90	27.40	0.00	1.71	1.23	62.24	74.00	-11.76	Peak	VERTICAL
3	2390.04	19.58	27.40	0.00	1.71	1.24	49.93	54.00	-4.07	Average	VERTICAL
4	2390.04	29.85	27.40	0.00	1.71	1.24	60.20	74.00	-13.80	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE
1G .EM6

Test Date : 2022-04-02

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 2412 power:7 ofst:-9

Data: 73

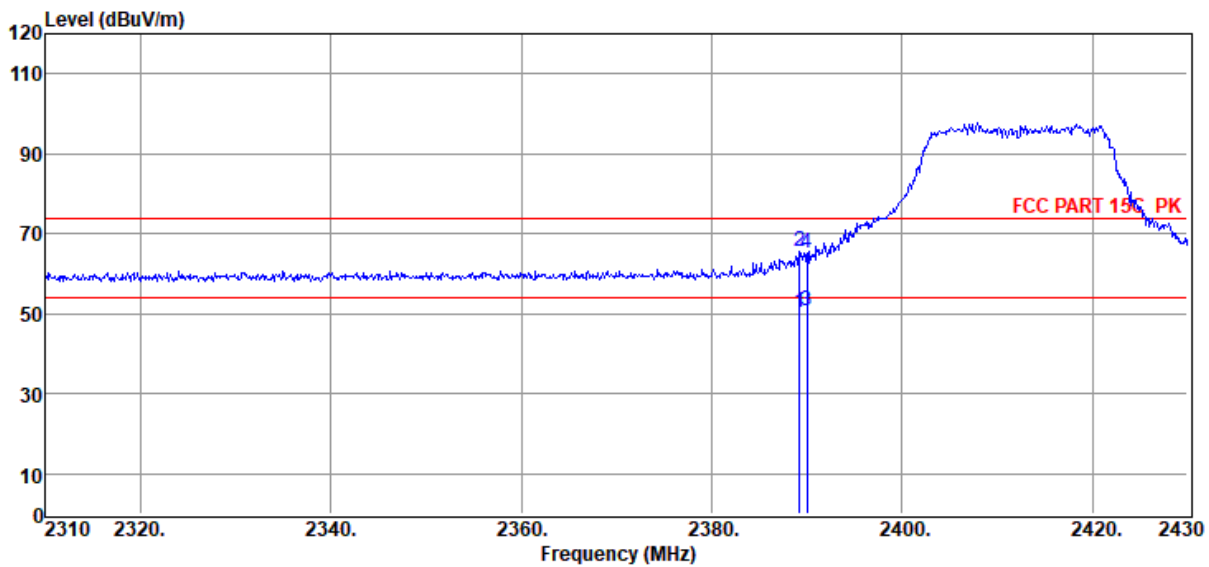

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2389.20	20.13	27.40	0.00	1.71	1.23	50.47	54.00	-3.53	Average	HORIZONTAL
2	2389.20	35.17	27.40	0.00	1.71	1.23	65.51	74.00	-8.49	Peak	HORIZONTAL
3	2390.04	20.49	27.40	0.00	1.71	1.24	50.84	54.00	-3.16	Average	HORIZONTAL
4	2390.04	34.92	27.40	0.00	1.71	1.24	65.27	74.00	-8.73	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-02
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11AX20 2462 power:6 ofst:-7

Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Data: 74

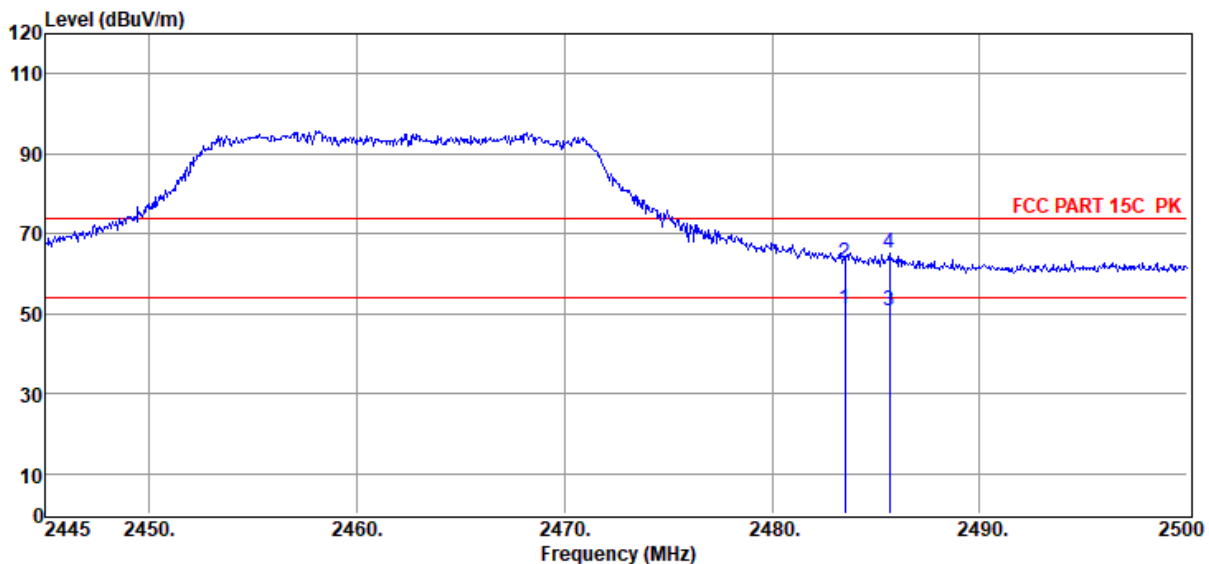

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	20.14	27.57	0.00	1.74	1.53	50.98	54.00	-3.02	Average	HORIZONTAL
2	2483.50	31.95	27.57	0.00	1.74	1.53	62.79	74.00	-11.21	Peak	HORIZONTAL
3	2485.65	19.86	27.57	0.00	1.74	1.54	50.71	54.00	-3.29	Average	HORIZONTAL
4	2485.65	34.39	27.57	0.00	1.74	1.54	65.24	74.00	-8.76	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Test Date : 2022-04-02

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2462 power:6 ofst:-7

Data: 75

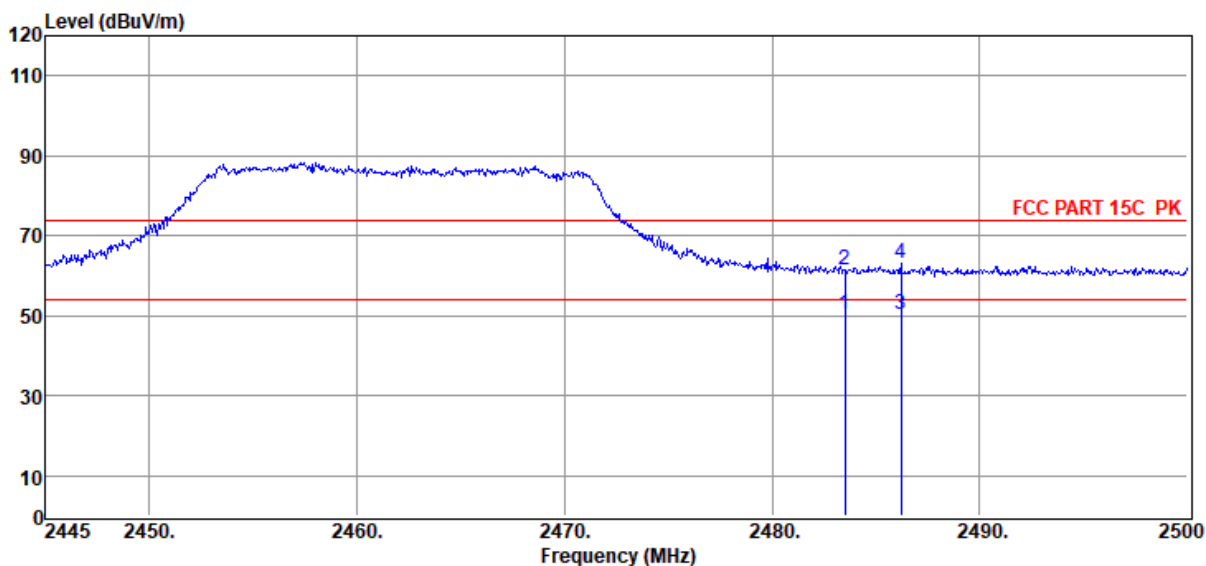

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.62	27.57	0.00	1.74	1.53	50.46	54.00	-3.54	Average	VERTICAL
2	2483.50	30.51	27.57	0.00	1.74	1.53	61.35	74.00	-12.65	Peak	VERTICAL
3	2486.20	19.50	27.58	0.00	1.74	1.54	50.36	54.00	-3.64	Average	VERTICAL
4	2486.20	32.25	27.58	0.00	1.74	1.54	63.11	74.00	-10.89	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX40 2422 power:6 ofst:-9

Data: 76

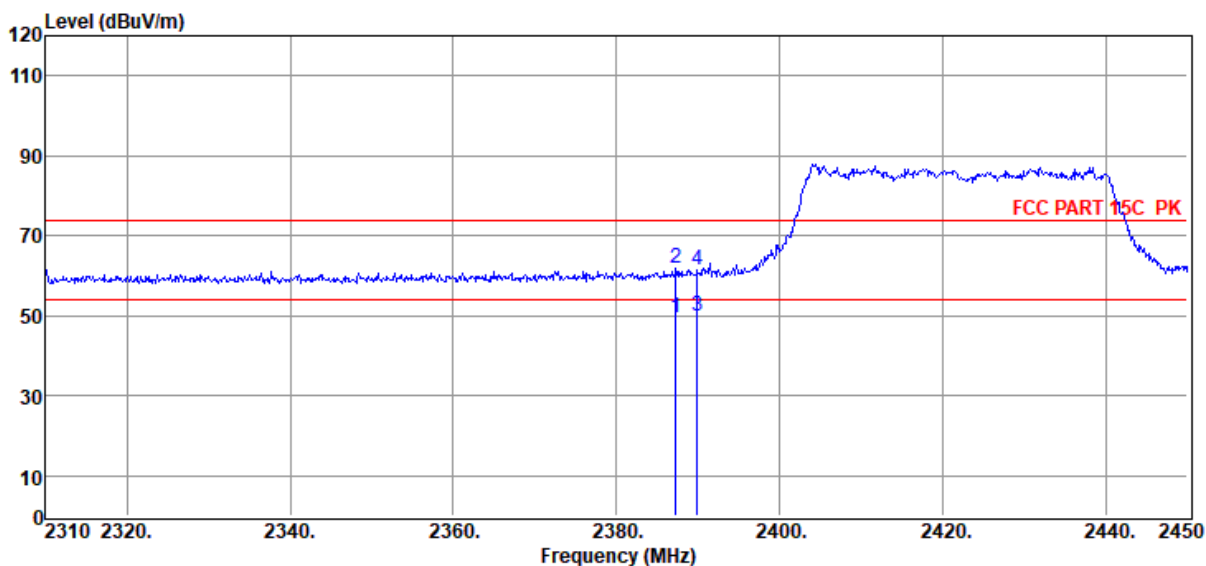

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.28	19.26	27.40	0.00	1.71	1.23	49.60	54.00	-4.40	Average	VERTICAL
2	2387.28	31.52	27.40	0.00	1.71	1.23	61.86	74.00	-12.14	Peak	VERTICAL
3	2389.94	19.66	27.40	0.00	1.71	1.24	50.01	54.00	-3.99	Average	VERTICAL
4	2389.94	30.99	27.40	0.00	1.71	1.24	61.34	74.00	-12.66	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-04-07
EUT : Clevershare Hub
Power Supply : AC 120V/60Hz
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa
Memo : 11AX40 2422 power:6 ofst:-9

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6
Tested By : Kennys Zhang
Model Number : Clevershare Hub
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

Data: 77

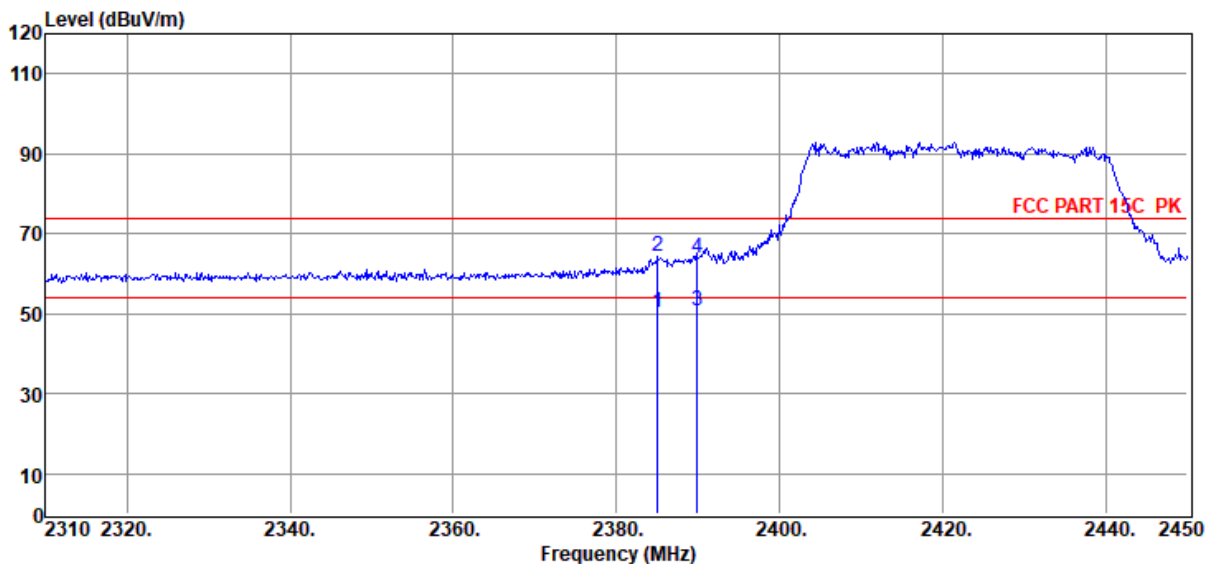

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2385.04	20.16	27.39	0.00	1.71	1.22	50.48	54.00	-3.52	Average	HORIZONTAL
2	2385.04	33.88	27.39	0.00	1.71	1.22	64.20	74.00	-9.80	Peak	HORIZONTAL
3	2389.94	20.52	27.40	0.00	1.71	1.24	50.87	54.00	-3.13	Average	HORIZONTAL
4	2389.94	33.48	27.40	0.00	1.71	1.24	63.83	74.00	-10.17	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6

Test Date : 2022-04-07

Tested By : Kennys Zhang

EUT : Clevershare Hub

Model Number : Clevershare Hub

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX40 2452 power:5 ofst:-7

Data: 78

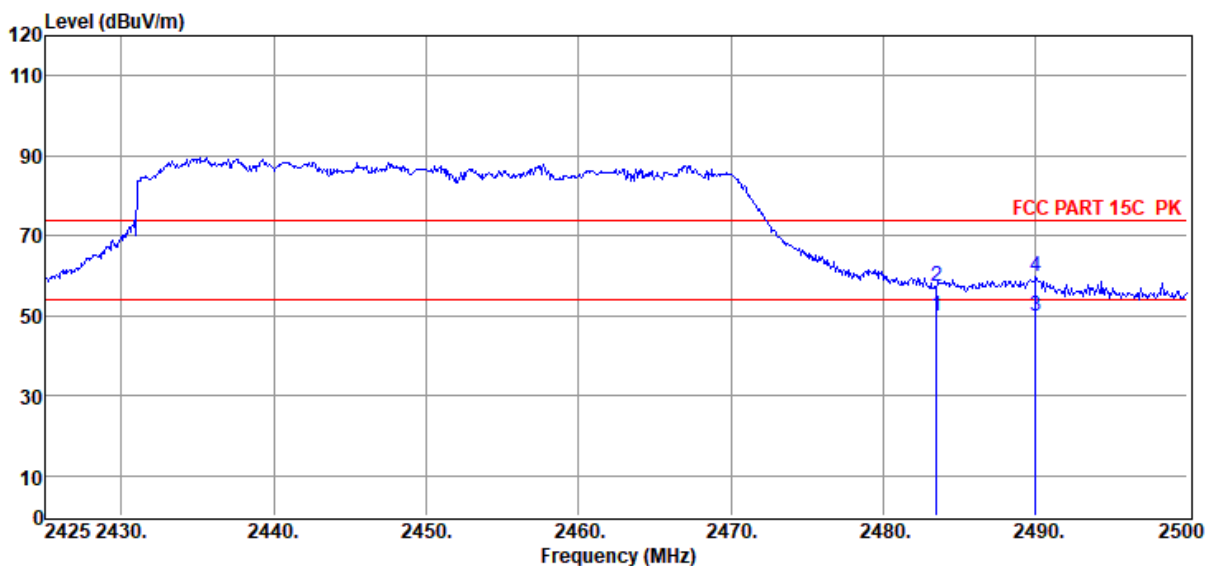

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.22	27.57	0.00	1.74	1.53	50.06	54.00	-3.94	Average	HORIZONTAL
2	2483.50	26.56	27.57	0.00	1.74	1.53	57.40	74.00	-16.60	Peak	HORIZONTAL
3	2490.03	19.13	27.58	0.00	1.74	1.55	50.00	54.00	-4.00	Average	HORIZONTAL
4	2490.03	28.79	27.58	0.00	1.74	1.55	59.66	74.00	-14.34	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# **D:\E3 6.111\2022 Report Data\Q21121709-2E\FCC ABOVE 1G .EM6**

Test Date : 2022-04-07 **Tested By** : Kennys Zhang


EUT : Clevershare Hub **Model Number** : Clevershare Hub

Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX40 2452 power:5 ofst:-7

Data: 79

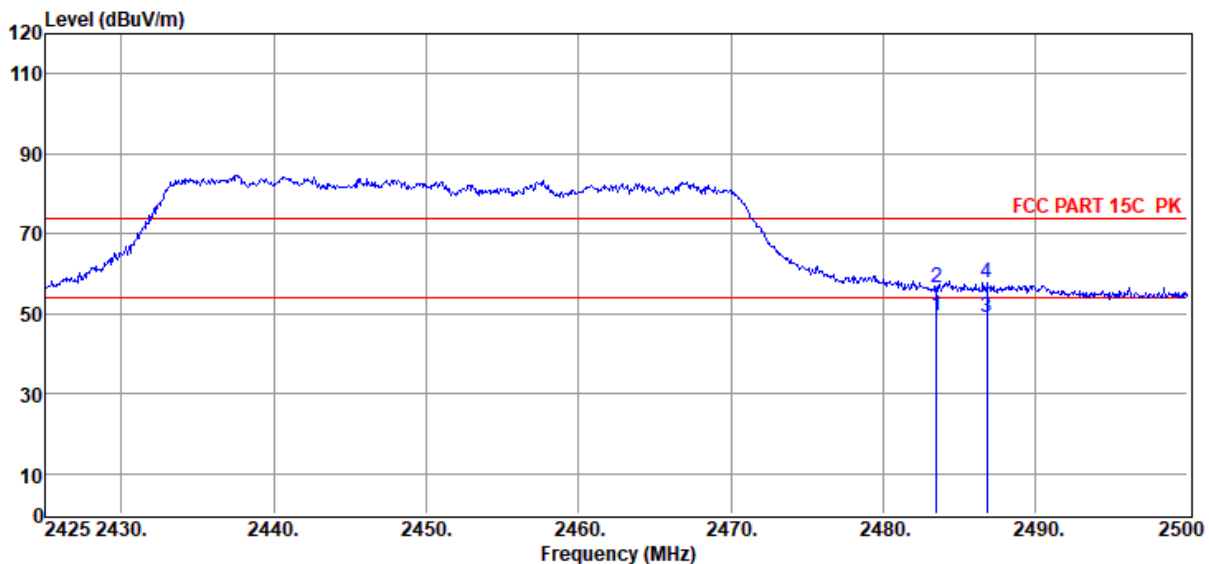

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	18.51	27.57	0.00	1.74	1.53	49.35	54.00	-4.65	Average	VERTICAL
2	2483.50	25.75	27.57	0.00	1.74	1.53	56.59	74.00	-17.41	Peak	VERTICAL
3	2486.80	18.42	27.58	0.00	1.74	1.54	49.28	54.00	-4.72	Average	VERTICAL
4	2486.80	26.86	27.58	0.00	1.74	1.54	57.72	74.00	-16.28	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Power Line Conducted Emission

11.1. Block diagram of test setup

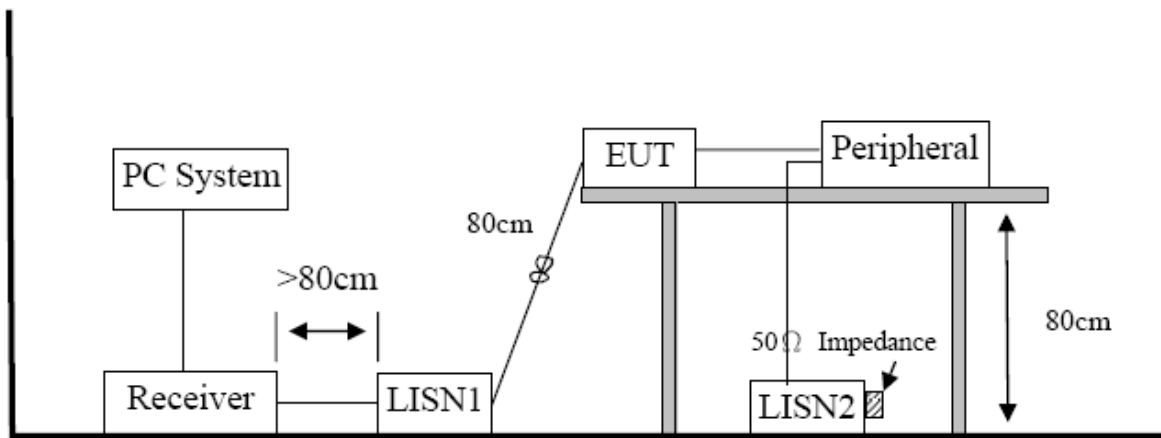

11.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

11.4. Test Result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means peak detection; "----" means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2022 CE report date\Q21121709-2E Clevershare Hub\FCC.EM6

Test Date : 2022-04-21

Tested By : James Gan

EUT : Clevershare Hub

Model Number : Clevershare Hub


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:24.3°C, RH:53.0%, BP:101.0kPa LISN

: 2021 1# ENV216/NEUTRAL

Memo : 2.4G WIFI

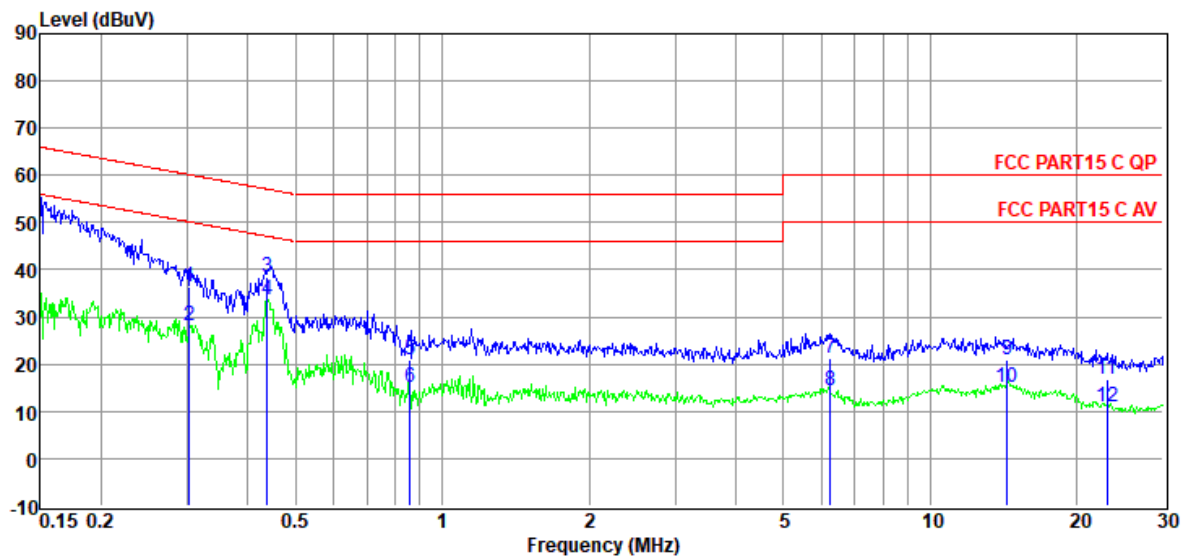

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.30	16.96	9.66	0.02	9.92	36.56	60.15	-23.59	QP	NEUTRAL
2	0.30	8.41	9.66	0.02	9.92	28.01	50.15	-22.14	Average	NEUTRAL
3	0.44	19.09	9.54	0.02	9.91	38.56	57.11	-18.55	QP	NEUTRAL
4	0.44	14.07	9.54	0.02	9.91	33.54	47.11	-13.57	Average	NEUTRAL
5	0.86	1.30	9.74	0.03	9.90	20.97	56.00	-35.03	QP	NEUTRAL
6	0.86	-4.61	9.74	0.03	9.90	15.06	46.00	-30.94	Average	NEUTRAL
7	6.25	1.71	9.64	0.08	9.94	21.37	60.00	-38.63	QP	NEUTRAL
8	6.25	-5.43	9.64	0.08	9.94	14.23	50.00	-35.77	Average	NEUTRAL
9	14.36	1.37	9.62	0.14	9.93	21.06	60.00	-38.94	QP	NEUTRAL
10	14.36	-4.52	9.62	0.14	9.93	15.17	50.00	-34.83	Average	NEUTRAL
11	23.02	-3.16	9.83	0.18	9.97	16.82	60.00	-43.18	QP	NEUTRAL
12	23.02	-8.93	9.83	0.18	9.97	11.05	50.00	-38.95	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2022 CE report date\Q21121709-2E Clevershare Hub\FCC.EM6

Test Date : 2022-04-21

Tested By : James Gan

EUT : Clevershare Hub

Model Number : Clevershare Hub


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:24.3°C, RH:53.0%, BP:101.0kPa LISN

: 2021 1# ENV216/LINE

Memo : 2.4G WIFI

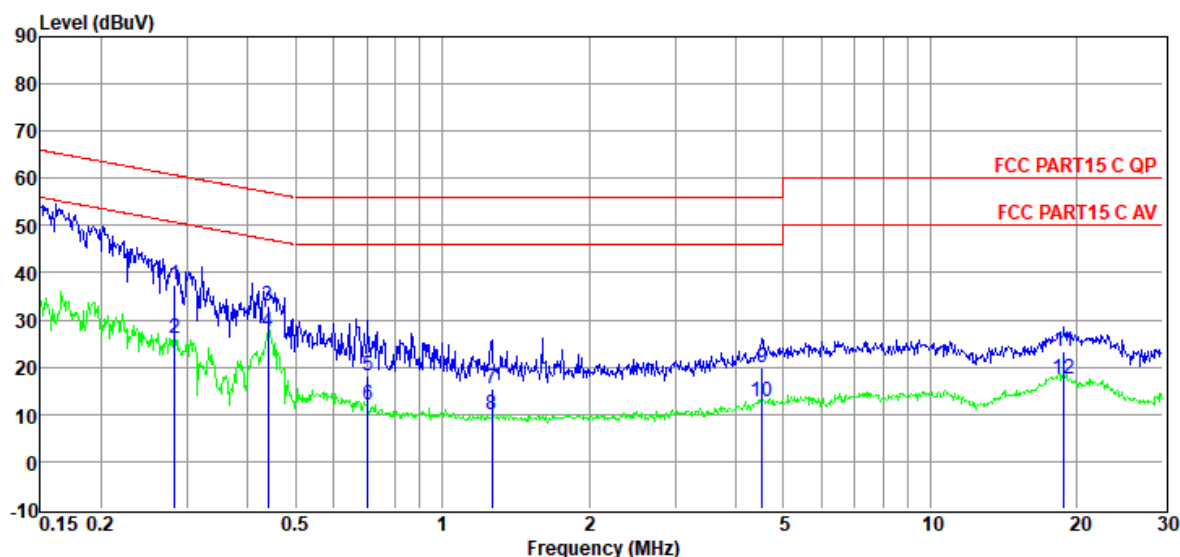

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.28	17.88	9.72	0.02	9.92	37.54	60.72	-23.18	QP	LINE
2	0.28	6.50	9.72	0.02	9.92	26.16	50.72	-24.56	Average	LINE
3	0.44	13.38	9.63	0.02	9.91	32.94	57.07	-24.13	QP	LINE
4	0.44	7.93	9.63	0.02	9.91	27.49	47.07	-19.58	Average	LINE
5	0.70	-1.18	9.50	0.02	9.91	18.25	56.00	-37.75	QP	LINE
6	0.70	-7.55	9.50	0.02	9.91	11.88	46.00	-34.12	Average	LINE
7	1.26	-4.21	9.57	0.03	9.89	15.28	56.00	-40.72	QP	LINE
8	1.26	-9.49	9.57	0.03	9.89	10.00	46.00	-36.00	Average	LINE
9	4.53	0.41	9.58	0.06	9.92	19.97	56.00	-36.03	QP	LINE
10	4.53	-6.92	9.58	0.06	9.92	12.64	46.00	-33.36	Average	LINE
11	18.82	3.63	9.64	0.17	9.95	23.39	60.00	-36.61	QP	LINE
12	18.82	-2.15	9.64	0.17	9.95	17.61	50.00	-32.39	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

12.2. Result

The product is that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.44 dBi.