


Test Report TR3768-180-BLE

Equipment Under Test:	SONA NX611
Requirement(s):	eCFR 47 Part 15.247 RSS-247
Test Date(s):	01/22/2024-04/30/2024, 12/04/2024-01/17/2025
Prepared for:	Ezurio Attn: Brian Petted W66 N220 Commerce Ct. Cedarburg, WI 53012

Report Issued by: Dylan Rosenfeldt, EMC Engineer	
Signature: 	Date: 2/14/2025
Report Reviewed by: Adam Alger, Manager EMC Laboratory	
Signature: 	Date: 2/12/2025
Report Constructed by: Dylan Rosenfeldt, EMC Engineer	
Signature: 	Date: 2/12/2025

This test report may not be reproduced, except in full, without approval of Ezurio

Company: Ezurio	Page 1 of 29	Name: SONA NX611
Report: TR3768-180-BLE		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

CONTENTS

Contents.....	2
Ezurio Test Services in Review	3
1 Test Report Summary	4
2 Client Information.....	5
2.1 Equipment Under Test (EUT) Information.....	5
2.2 Product Description	5
2.3 Modifications Incorporated for Compliance	5
2.4 Deviations and Exclusions from Test Specifications.....	5
2.5 EUT Information	5
2.6 Ancillary Equipment	6
2.7 Antenna Information	6
2.8 Test Channels.....	6
2.9 Power Table and Reduced Video Bandwidth for Average Measurements	6
3 Worst Case Test Results Summary.....	7
4 References	8
5 Uncertainty Summary	9
6 Test Data	10
6.1 Antenna Port Conducted Emissions	10
6.2 Radiated Emissions	20
6.3 AC Mains Conducted Emissions.....	26
7 Revision History	29

Ezurio Test Services in Review

The Ezurio laboratory located at W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA is recognized through the following organizations:



A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025:2017 with Electrical (EMC) Scope

A2LA Certificate Number: 1255.01

Scope of accreditation includes all test methods listed herein unless otherwise noted



Federal Communications Commission (FCC) – USA

Accredited Test Firm Registration Number: 953492

Recognition of two 3 meter Semi-Anechoic Chambers



Innovation, Science and Economic Development Canada

Accredited U.S. Identification Number: US0218

Recognition of two 3 meter Semi-Anechoic Chambers

Company: Ezurio	Page 3 of 29	Name: SONA NX611
Report: TR3768-180-BLE		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

1 TEST REPORT SUMMARY

During **01/22/2024-04/30/2024, 12/04/2024-01/17/2025** the Equipment Under Test (EUT), **SONA NX611**, as provided by Ezurio was tested to the following requirements:

FCC 15.247 | RSS-247 – DTS Bluetooth Low Energy

Requirements	Description	Method	Compliant
15.247(d) 15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.10	Spurious Radiated Emissions in Restricted Bands 30-40000 MHz	ANSI C63.10	Yes
15.247(a)(2) RSS-247 Clause 5.2 (a)	6dB and 99% Occupied Bandwidth	ANSI C63.10	Yes
15.247(b)(3) RSS-247 Clause 5.4 (d)	RF Output Power	ANSI C63.10	Yes
15.247(d) RSS-247 Clause 5.5 RSS-GEN A1 Clause 8.9	Out-of-band Emissions	ANSI C63.10	Yes
15.247(e) RSS-247 Clause 5.2 (b)	Power Spectral Density	ANSI C63.10	Yes
2.1055(d) RSS-GEN 6.11	Frequency Stability	ANSI C63.10	Reported
15.207 RSS-GEN 8.8	AC Conducted Emissions	ANSI C63.10	Yes

Notice:

The results relate only to the item tested as configured and described in this report. Any additional configurations, modes of operation, or modifications made to the equipment under test after the specified test date(s) are at the decision of the client and may not apply to the data seen in this test report.

The decision rule for Pass / Fail assessment to the specification or standard listed in this test report has been agreed upon by the client and laboratory to be as follows:

Measurement Type	Rule
Emissions – Amplitude	1 dB below specified limit
Emissions – Frequency	1% less than the specification
Immunity	Tested at specified level

Company: Ezurio	Page 4 of 29	Name: SONA NX611
Report: TR3768-180-BLE		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

2 CLIENT INFORMATION

Company Name	Ezurio
Contact Person	Brian Petted
Address	W66 N220 Commerce Ct. Cedarburg, WI 53012

2.1 Equipment Under Test (EUT) Information

The following information has been supplied by the client

Product Name	SONA NX611
Part Number	453-00180
Serial Number	00026 00028 00042
FCC ID	SQG-SONANX611C
IC ID	3147A-SONANX611C

2.2 Product Description

The NX611 is based upon NXP IW611 Wi-Fi 6 chipset. Feature-set includes 802.11 a/b/g/n/ac/ax Wi-Fi 6 and Dual-Mode Bluetooth v5.3 (BDR + EDR + BLE).

2.3 Modifications Incorporated for Compliance

None noted at time of test

2.4 Deviations and Exclusions from Test Specifications

None noted at time of test

2.5 EUT Information

Power Supply – INPUT:100-240VAC 50/60 Hz 0.3A

OUTPUT: 5VDC 2A

Firmware - sduart_nw61x_v1.bin.se

Sduart_nw61x_v1_mfg.bin.se

Company: Ezurio	Page 5 of 29	Name: SONA NX611
Report: TR3768-180-BLE		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

2.6 Ancillary Equipment

Equipment used for EUT programming (not part of the EUT)

Development Kit, SU60-SOMC 6.0

P/N: 463-00138-K1 Rev 1

Power Supply: INPUT: 100-240 VAC 50/60Hz 0.7A

OUTPUT: 12VDC 2A

HP Elitebook 840G1

Labtool Version: 1.0.0.45.6

2.7 Antenna Information

Manufacturer	Model	Part Number	Dimension	Type	Peak Gain (dBi)	
					2400-2480 MHz	5150-5850 MHz
TDK	Multilayer Antenna	ANT162442DT-2001A2	1.6mm x 0.8mm x 0.4mm	Chip	3.3	4.2

2.8 Test Channels

Channel	Frequency (MHz)	Data Rates
0	2402	125k, 500k, 1M and 2M
19	2440	
39	2480	

2.9 Power Table and Reduced Video Bandwidth for Average Measurements

Data Rate	Minimum Average VBW (Hz)	Power Setting
125 kbps	1000	6
500 kbps	330	6
1 Mbps	2700	6
2 Mbps	5100	6

3 WORST CASE TEST RESULTS SUMMARY

Requirement	Channel and Data Rate	Frequency (MHz)	Measurement	Limit	Margin
15.247 (a)(2) RSS-247 Clause 5.2(a)	39 500 kbps	-	647 kHz	at least 500 kHz	-
15.247 (b)(3) RSS-247 Clause 5.4 (d)	19 1 Mbps	-	7.8 dBm	30 dBm	22.2 dB
15.247 (e) RSS-247 Clause 5.2 (b)	19 125 kbps	-	7.7 dBm/100 kHz	8.0 dBm/3 kHz	0.3 dB
15.247 (d) RSS-247 Clause 5.5 Conducted	0 2 Mbps	2400.0	-26.0 dBm	-12.3 dBm	13.7 dB
15.247(d) RSS-247 Clause 5.5 RSS-GEN Clause 8.9 Radiated	38 2Mbps	2488.2	48.1 dBμV/m	54.0 dBμV/m	5.9 dB
15.207	17 1 Mbps	0.517	24.9 dBμV	46.0 dBμV	21.1 dB

4 REFERENCES

Publication	Edition	Date	AMD 1	AMD 2
FCC eCFR 47 Part 15	-	2025	-	-
ANSI C63.10	-	2020	2024	-
RSS-247	3	2023	-	-
RSS-GEN	5	2018	2019	2021
KDB 558074 D01	-	2019	-	-

5 UNCERTAINTY SUMMARY

Using the guidance of the following publications the calculated measurement uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of $k = 2$.

References

CISPR 16-4-1

CISPR 16-4-2

CISPR 32

ANSI C63.23

A2LA P103

A2LA P103c

ETSI TR 100-028

Measurement Type	Configuration	Uncertainty $\pm$
Radiated Emissions	Biconical Antenna	5.0 dB
Radiated Emissions	Log Periodic Antenna	5.3 dB
Radiated Emissions	Horn Antenna	4.7 dB
AC Line Conducted Emissions	Artificial Mains Network	3.4 dB
Telecom Conducted Emissions	Asymmetric Artificial Network	4.9 dB
Disturbance Power Emissions	Absorbing Clamp	4.1 dB
Radiated Immunity	3 Volts/meter	2.2 dB
Conducted Immunity	CDN/EM/BCI	2.4/3.5/3.4 dB
EFT Burst/Surge	Peak pulse voltage	164 volts
ESD Immunity	15 kV level	1377 Volts


Parameter	ETSI U.C. $\pm$	U.C. $\pm$
Radio Frequency, from F0	1×10^{-7}	0.55×10^{-7}
Occupied Channel Bandwidth	5 %	2 %
RF conducted Power (Power Meter)	1.5 dB	1.2 dB
RF conducted emissions (Spectrum Analyzer)	3.0 dB	1.7 dB
All emissions, radiated	6.0 dB	5.3 dB
Temperature	1° C	0.65° C
Humidity	5 %	2.9 %
Supply voltages	3 %	1 %

6 TEST DATA

6.1 Antenna Port Conducted Emissions

Description of Measurement	The direct measurement of emissions at the antenna port of the EUT is achieved by use of a RF connection to a spectrum analyzer or power meter. The cable and attenuator factors are loaded into the analyzer or power meter allowing for direct measurement readings without the need for further corrections.
Example Calculations	Measurement (dBm) + Cable factor (dB) + External Attenuator (dB) = Corrected Reading (dBm) Margin (dB) = Limit (dBm) – Corrected Reading (dBm)

Block Diagram

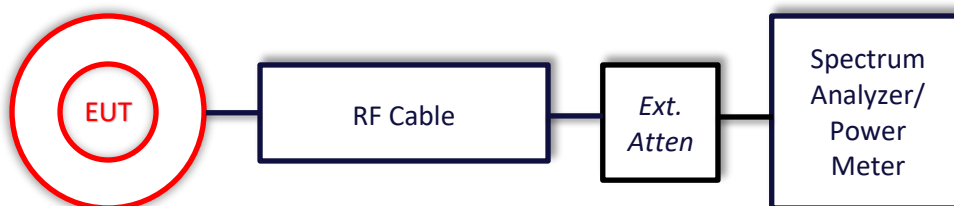

6.1.1 6dB and 99% Occupied Bandwidth

Operator	Dylan Rosenfeldt	QA	Adam Hauke
Temperature	22.3°C	R.H. %	30.30%
Test Date	03/15/2024	Location	Conducted RF Bench
Requirement	15.247 (a)(2) RSS-247 Clause 5.2 (a)	Method	ANSI C63.10 6.9

Limits: The minimum 6 dB bandwidth shall be at least 500 kHz

Test Parameters

Frequency	2400-2483.5 MHz	Setup	Antenna Port
RBW	99% OBW - 30 kHz 6dB DTS - 100 kHz	VBW	300 kHz
Detector(s)	Peak	Settings	Max Hold

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	388	6/13/2023	6/12/2024	Active Verification
EE 960085	Analyzer - EMI Receiver	Agilent	N9038A	MY51210148	4/27/2023	4/27/2024	Active Calibration


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BLE Tx
Frequency	2400-2483.5 MHz	Channel	See 2.8

Table

Rate	Channel	6 dB BW (kHz)	99% BW (kHz)
1 Mbps	0	711	1034
	19	697	1037
	39	697	1037
2 Mbps	0	1167	2055
	19	1163	2058
	39	1166	2059
500 kbps	0	648	1055
	19	649	1057
	39	647	1057
125 kbps	0	667	1020
	19	663	1020
	39	668	1021

Plots

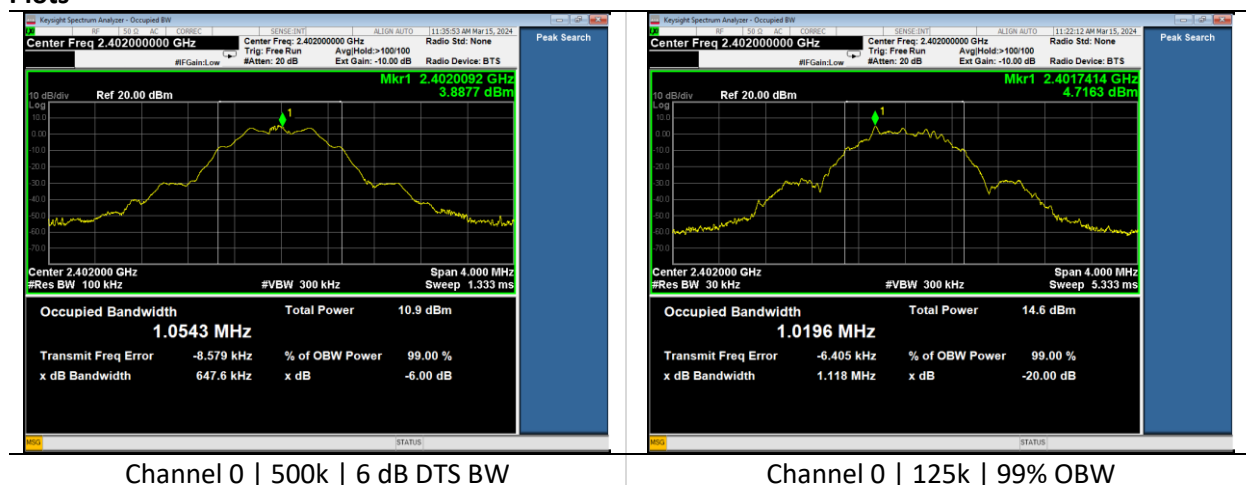

6.1.2 RF Output Power

Operator	Dylan Rosenfeldt	QA	Adam Hauke
Temperature	21.8°C-21.9°C	R.H. %	32.20%-33.30%
Test Date	03/12/2024-03/14/2024	Location	Conducted RF Bench
Requirement	15.247 (b)(3) RSS-247 Clause 5.4 (d)	Method	ANSI C63.10 11.9.1

Limit: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

Test Parameters

Frequency	2400-2483.5 MHz	Setup	Antenna Port
RBW	3 MHz	VBW	50 MHz
Detector(s)	Peak	Settings	Max Hold Span: 10 MHz

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	388	6/13/2023	6/12/2024	Active Verification
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210138	4/10/2023	4/10/2024	Active Calibration


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BLE Tx
Frequency	2400-2483.5 MHz	Channel	See 2.8

Tables

Rate	Channel	Peak Output Power (dBm)	Limit (dBm)	Margin (dB)
1 Mbps	0	7.5	30.0	22.5
	19	7.8	30.0	22.2
	39	7.7	30.0	22.3
2 Mbps	0	7.6	30.0	22.4
	19	7.8	30.0	22.2
	39	7.8	30.0	22.2
500 kbps	0	7.5	30.0	22.5
	19	7.8	30.0	22.2
	39	7.7	30.0	22.3
125 kbps	0	7.5	30.0	22.5
	19	7.8	30.0	22.2
	39	7.7	30.0	22.3

Plots

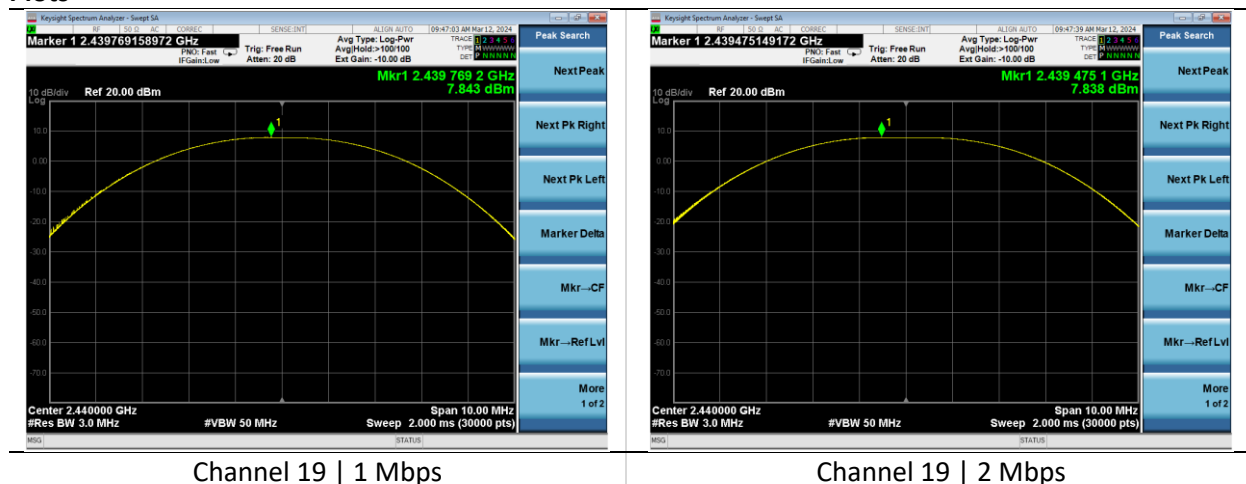

6.1.3 Power Spectral Density

Operator	Dylan Rosenfeldt	QA	Adam Hauke
Temperature	21.8°C-21.9°C	R.H. %	32.20%-33.30%
Test Date	03/12/2024-03/14/2024	Location	Conducted RF Bench
Requirement	15.247 (e) RSS-247 Clause 5.2 (b)	Method	ANSI C63.10 11.10.2

Limits: Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Test Parameters

Frequency	2400-2483.5 MHz	Detector(s)	Peak
RBW	100 kHz	VBW	300 kHz
Notes	The same method of determining the conducted output power shall be used to determine the power spectral density		

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	388	6/13/2023	6/12/2024	Active Verification
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210138	4/10/2023	4/10/2024	Active Calibration


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BLE Tx
Frequency	2400-2483.5 MHz	Channel	See 2.8

Table

Rate	Channel	Peak PSD (dBm/100 kHz)	Limit (dBm/3 kHz)	Margin (dB)
1 Mbps	0	6.8	8.0	1.2
	19	7.2	8.0	0.8
	39	7.0	8.0	1.0
2 Mbps	0	7.0	8.0	1.0
	19	7.3	8.0	0.7
	39	7.2	8.0	0.8
500 kbps	0	5.3	8.0	2.7
	19	5.7	8.0	2.3
	39	5.5	8.0	2.5
125 kbps	0	7.4	8.0	0.6
	19	7.7	8.0	0.3
	39	7.6	8.0	0.4

Plots

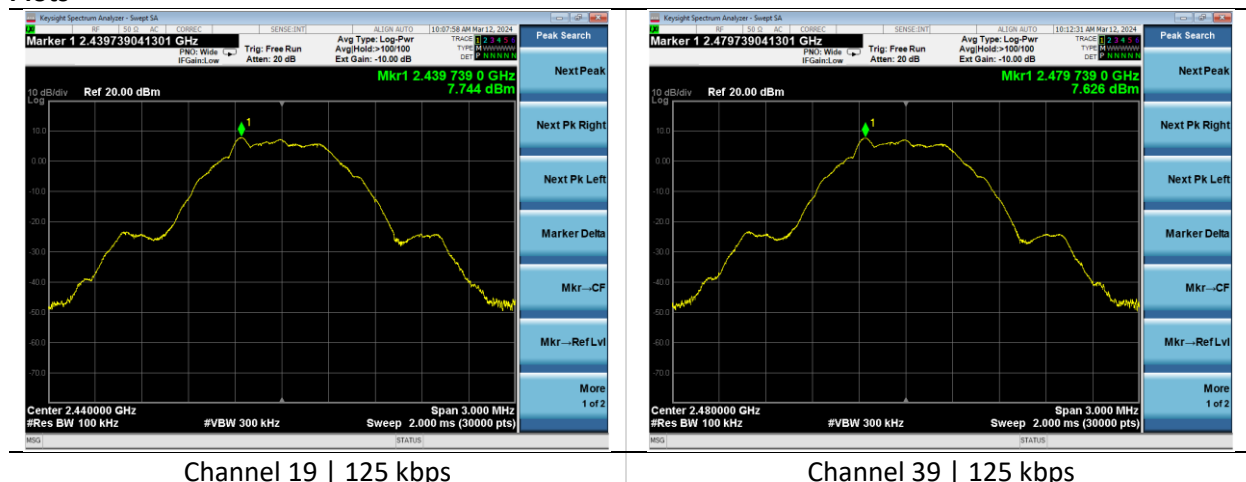

6.1.4 Out-of-band Emissions

Operator	Dylan Rosenfeldt	QA	Adam Alger
Temperature	22.2°C 22.3°C	R.H. %	27.10% 24.10%
Test Date	03/11/2024 03/29/2024	Location	Conducted RF Bench
Requirement	15.247(d) RSS-247 Clause 5.5	Method	ANSI C63.10 11.12.2.5.2

Limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement provided the transmitter demonstrates compliance with the peak conducted power limits.

Reference Level (Worst Case PSD)

Channel 19 – 125 kbps – 7.7 dBm/100 kHz

7.7 dBm-20 dB = -12.3 dBm Limit

Test Parameters

Frequency	30-40000 MHz	Setup	Antenna Port
RBW	100 kHz	VBW	300 kHz
Detector(s)	Peak		

Instrumentation



Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	06/13/2023	06/12/2024	Active Verification
EE 960085	Analyzer – Spectrum	Agilent	N9010A	MY53400296	04/11/2023	04/11/2024	Active Calibration
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/11/2023	4/11/2024	Active Calibration
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	388	6/13/2023	6/12/2024	Active Verification

Input Power	120 VAC @ 60 Hz	Mode	2.4 GHz BLE Tx
Frequency	2400-2483.5 MHz	Channel	See 2.8

Measurements

Rate	Channel	Frequency (MHz)	Measurement (dBm)	Limit (dBm)	Margin (dB)
1 Mbps	0	2399.9	-51.7	-12.3	39.4
	39	2506.5	-56.2	-12.3	43.9
2 Mbps	0	2400.0	-26.0	-12.3	13.7
	39	2506.3	-55.8	-12.3	43.5
500 kbps	0	2399.9	-53.6	-12.3	41.3
125 kbps	0	2399.9	-53.1	-12.3	40.8
	39	2506.5	-56.3	-12.3	44.0

Worst Case Plots

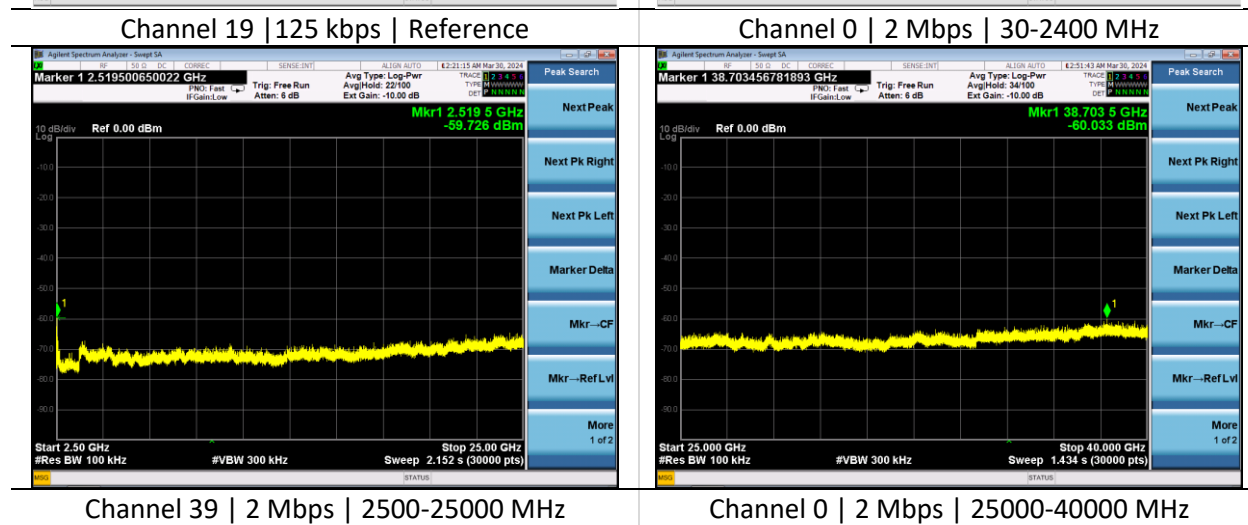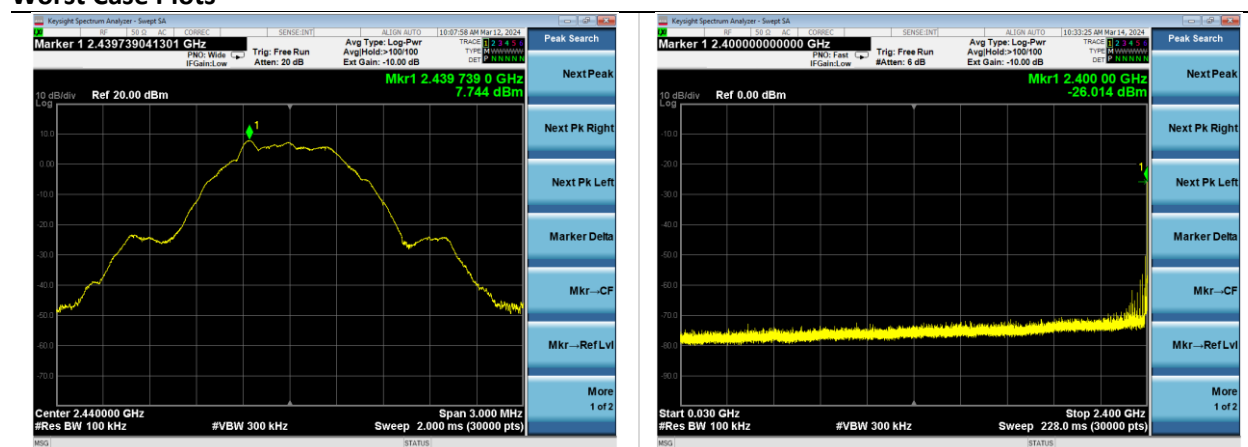

Company: Ezurio	Page 18 of 29	Name: SONA NX611
Report: TR3768-180-BLE		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

6.1.5 Frequency Stability

Operator	Dylan Rosenfeldt	QA	Anthony Smith
Temperature	22.0°C	R.H. %	29.10%
Test Date	04/25/2024	Location	Conducted RF Bench
Requirement	15.407(g) RSS-GEN Clause 6.11	Method	ANSI C63.10 6.8

Test Parameters

Frequency	2402-2480 MHz	Voltage	4.3 VDC, 5 VDC, and 5.8 VDC
Detector(s)	Peak	Settings	Max Hold

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	387	06/13/2023	06/12/2024	Active Verification
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210138	4/10/2023	4/10/2024	Active Calibration

Table

Channel	Voltage (VDC)	Center Frequency (Hz)
0	5	2401999977
	4.3	2401999975
	5.8	2402000025
19	5	2440000022
	4.3	2440000016
	5.8	2440000024
39	5	2479999991
	4.3	2480000011
	5.8	2479999983

6.2 Radiated Emissions

Description of Measurement	The frequency spectrum is investigated for intentional and / or unintentional signals emanating from the EUT by use of a standardized test site and measurement antenna. The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are performed allowing the data to be gathered and reported as corrected values. The maximum emissions from the EUT are determined by turn-table azimuth rotation (360°) and scanning of the measurement antenna. Maximized levels are noted at degree values of azimuth, measurement antenna height, and measurement antenna polarity.
Example Calculations	Measurement (dBμV) + Cable factor (dB) + Other (dB) + Antenna Factor (dB/m) = Corrected Reading (dBμV/m) Margin (dB) = Limit (dBμV/m) - Corrected Reading (dBμV/m) Example at 4000 MHz: Reading = 40 dBμV + 3.4 dB + 0.9 dB + 6.5 dB/m = 50.8 dBμV/m Average Limit = 20 log (500) = 54 dBμV/m Margin = 54 dBμV/m - 50.8 dBμV/m = 3.2 dB

Block Diagram



6.2.1 Spurious Radiated Emissions in the Restricted Bands

Operator	Dylan Rosenfeldt Jon Dilley	QA	Adam Alger Jon Dilley Dylan Rosenfeldt
Temperature	22.8°C-23.9°C	R.H. %	20.60%-28.10%
Test Date	12/06/2024-01/06/2024	Location	Chamber 3 Chamber 5
Requirement	15.247 (d) 15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Method	ANSI C63.10 11.12

15.209 Limits:

Frequency (MHz)	Quasi-Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)
30-88	40.0	-	-
88-216	43.5	-	-
216-960	46.0	-	-
960-1000	54.0	-	-
1000-40000	-	54.0	74.0

Test Parameters

Frequency	30-40000 MHz	Distance	3 m
Detector(s)	Peak Trace Peak, Quasi-Peak, and Average Final measurement	Table height	150 cm
RBW	<1000 MHz – 120 kHz >1000 – 1 MHz	VBW	<1000 – 1.2 MHz >1000 – See 2.9

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960158	Antenna - Double Ridge Horn	ETS Lindgren	3117	109300	2/7/2024	2/7/2025	Active Calibration
EE 960203	Analyzer - EMI Receiver	Keysight	N9038A	MY56400072	4/10/2024	4/10/2025	Active Calibration
LSC-300	Cable	Chamber 3 Emissions	-	-	1/5/2024	1/5/2025	Active Verification
AA 960007	Antenna - Double Ridge Horn	EMCO	3115	9311-4138	11/19/2024	11/19/2025	Active Calibration
AA 960209	Antenna - Low Noise Amplifier	Mini-Circuits	ZVA-213X-S+	037101808	11/19/2024	11/19/2025	Active Calibration
AA 960154	Filter - High Pass 2.4 GHz	KWM	HPF-L-14186	7272-02	4/10/2024	4/10/2025	Active Calibration

Company: Ezurio	Page 21 of 29	Name: SONA NX611
Report: TR3768-180-BLE		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

AA 960174	Antenna - Small Horn	ETS Lindgren	3116C-PA	00206880	12/2/2024	12/2/2025	Active Calibration
AA 960220	Cable	A.H. Systems, Inc.	SAC-26G-6	552	2/16/2024	2/16/2025	Active Verification
AA 960194	Antenna - Biconical	A.H. Systems, Inc.	SAS-540	780	12/9/2024	12/9/2025	Active Calibration
AA 960195	Antenna - Log Periodic	A.H. Systems, Inc.	SAS-512-2	557	11/22/2024	11/23/2025	Active Calibration

EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BLE Tx
EUT	X, Y, Z Plane Orientations	AE	HP Elitebook 840G1 Ezurio – SOM60 Development Kit
Notes	6000 MHz Emission from auxiliary equipment. Not a function of the EUT.		

Radiated Spurious – 30-1000 MHz – Channel 19 – 1 Mbps

Frequency (MHz)	Antenna Polarity	Height (cm)	Azimuth (degree)	Quasi-Peak Reading (dBμV/m)	Quasi-Peak Limit (dBμV/m)	Margin (dB)
188.9	Horizontal	100	0	22.9	43.5	20.6
192.6	Vertical	100	0	23.0	43.5	20.6

*The spurious signals detected do not depend on either the operating channel or the modulation mode

1000-40000 MHz


Band Edge

EUT Orientation	Channel	Data Rate	Measurement Type	Frequency (MHz)	Antenna Polarity	Measurement (dBμV/m)	Limit (dBμV/m)	Margin (dB)
X Plane	0	125 kbps	Peak	2317.5	H	60.0	74.0	14.0
			Average	2385.3	H	46.9	54.0	7.1
		500 kbps	Peak	2327.4	H	60.6	74.0	13.4
			Average	2387.3	H	46.5	54.0	7.5
	1	1 Mbps	Peak	2326.0	H	60.3	74.0	13.7
			Average	2388.5	H	47.6	54.0	6.4
		2 Mbps	Peak	2387.8	H	60.6	74.0	13.4
			Average	2325.2	H	48.0	54.0	6.0
X Plane	39	125 kbps	Peak	2490.0	H	60.7	74.0	13.3
			Average	2484.8	H	47.0	54.0	7.0
		500 kbps	Peak	2490.6	H	60.5	74.0	13.5
			Average	2484.3	H	46.5	54.0	7.5
	38	1 Mbps	Peak	2492.7	H	60.1	74.0	13.9
			Average	2484.6	H	47.5	54.0	6.5
		2 Mbps	Peak	2485.3	H	60.1	74.0	13.9
			Average	2488.2	H	48.1	54.0	5.9

Spurious


Mode	Channel	Measurement Type	Frequency (MHz)	Measurement (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Power Setting
1M	19	Peak	23858.4	57.5	74.0	16.5	6
	19	Average	23858.4	45.3	54.0	8.7	6
	19	Peak	39929.2	58.4	74.0	15.6	6
	19	Average	39929.2	45.6	54.0	8.4	6

Worst Case Plots

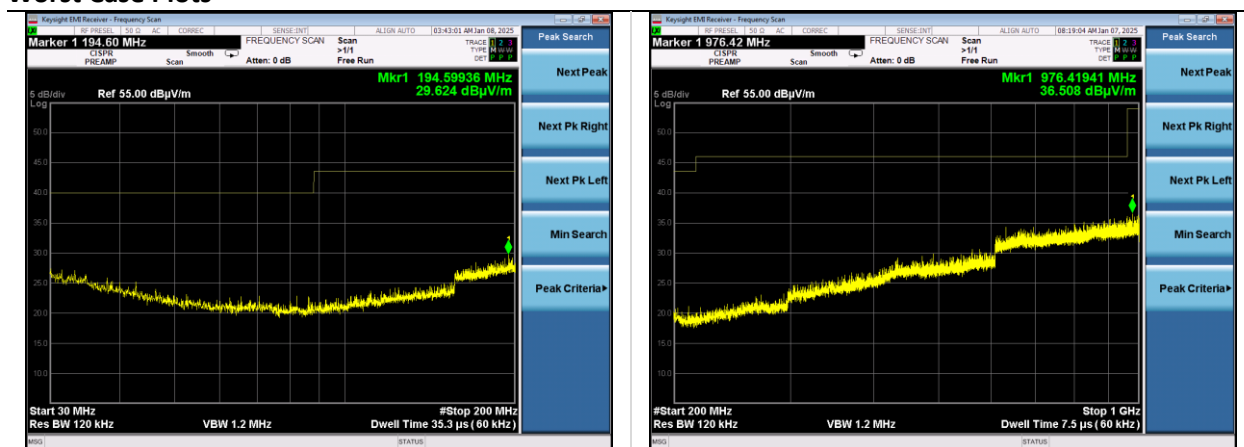


Channel 19 | 1M
30-200 MHz | Horizontal

Channel 19 | 1M
200-1000 MHz | Vertical

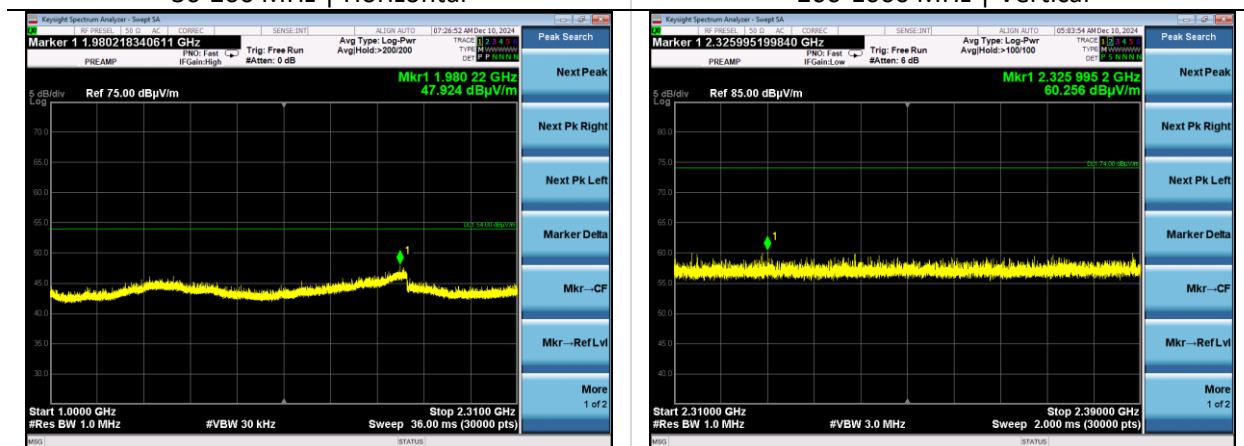


Channel 0 | 125 kbps
1000-2310 MHz | Horizontal


Channel 0 | 1M
2310-2390 MHz | Horizontal

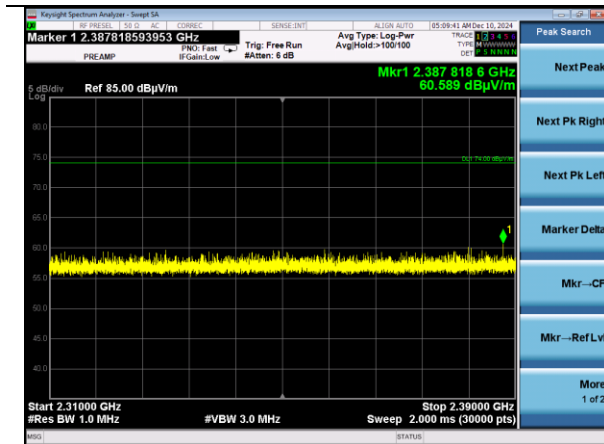


Channel 1 | 2M
2310-2390 MHz | Horizontal

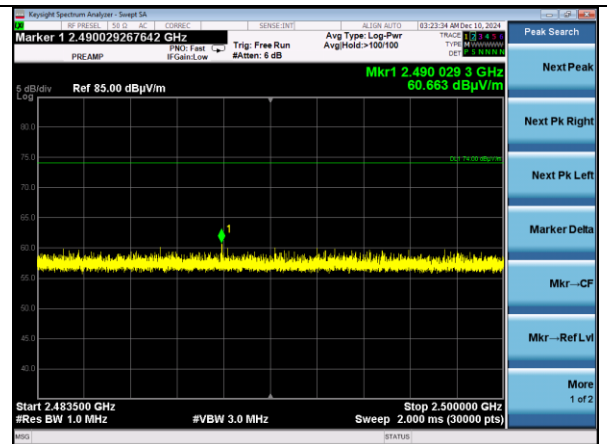


Channel 39 | 125k
2483.5-2500 MHz | Horizontal

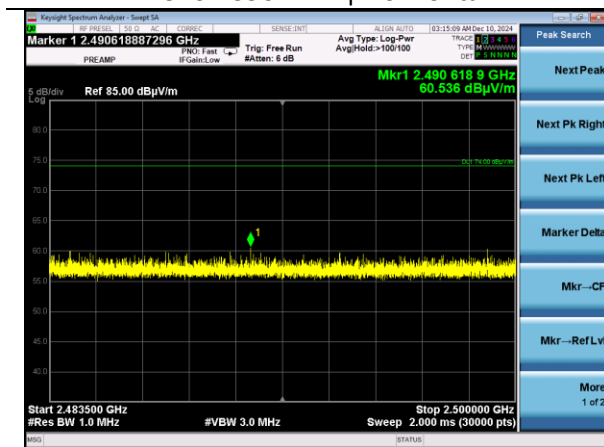


Channel 39 | 500k
2483.5-2500 MHz | Horizontal

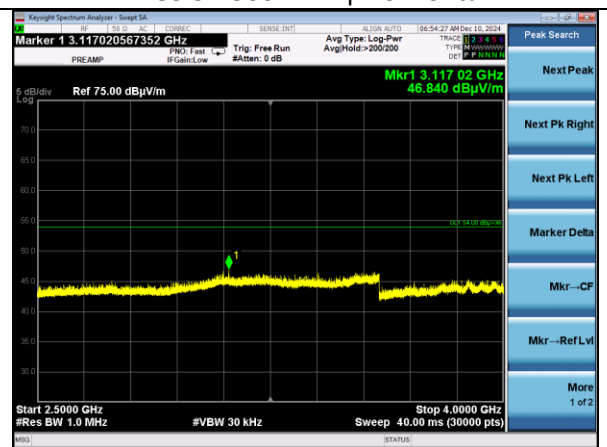


Channel 19 | 1M
2500-4000 MHz | Horizontal

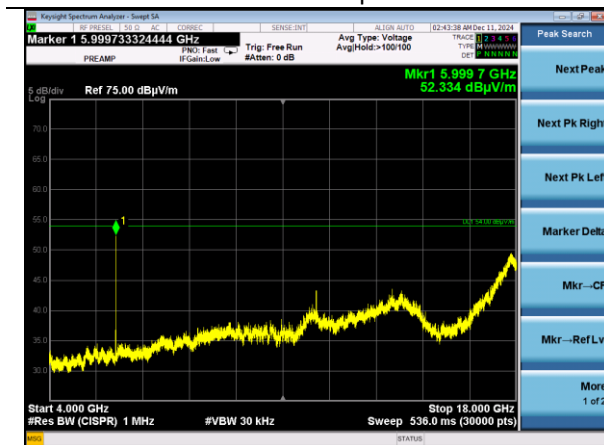

Channel 19 | 1M
4000-18000 MHz | Vertical

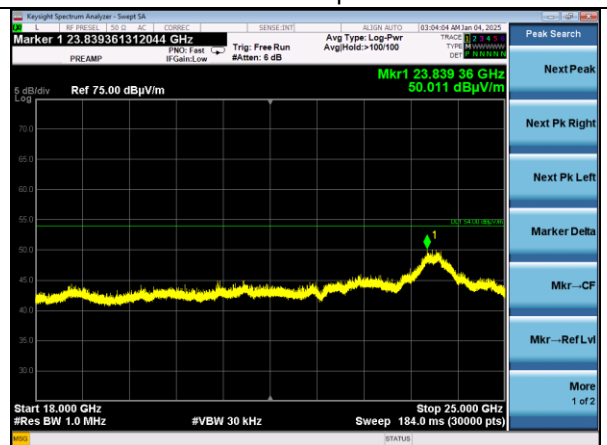

Channel 19 | 1M
18000-25000 MHz | Vertical

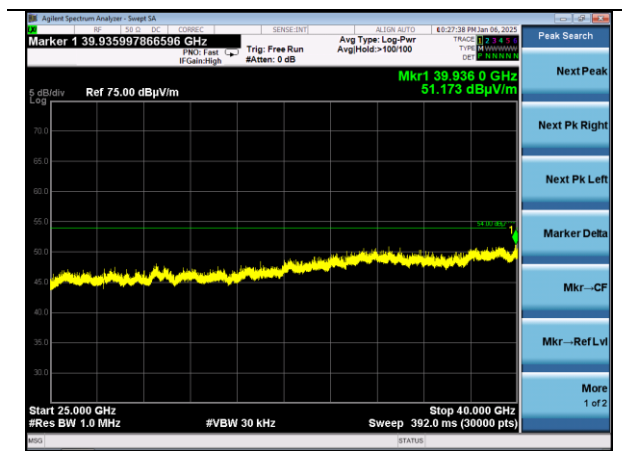

Channel 19 | 1M
25000-40000 MHz | Vertical

Company: Ezurio	Page 25 of 29	Name: SONA NX611
Report: TR3768-180-BLE		Model: SONA NX611C
Job: C-3768		Serial: 00026 00028 00042

6.3 AC Mains Conducted Emissions

A line impedance stabilization network (LISN) or artificial mains network (AMN) allows the emissions of the power supply conductors to be measured while isolating the EUT from the supply mains.

Description of Measurement

The AMN, cable, and other necessary measurement system correction factors are loaded onto the EMI receiver when the measurements are performed. The data is gathered and reported as the corrected values.


Maximum emissions are determined with a peak max hold trace then measurements at a selection of the highest points are made with quasi-peak and average detectors. Results are recorded and compared to limit for each line. (e.g. line and neutral)

Example Calculations

Measurement (dBμV) + Cable factor (dB) + Other (dB) = Corrected Reading (dBμV)

Margin (dB) = Limit (dBμV) - Corrected Reading (dBμV)

Block Diagram

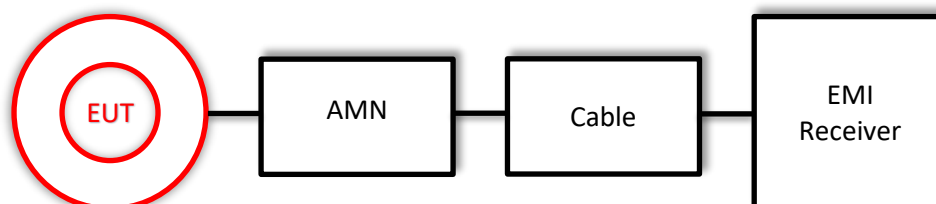

6.3.1 AC Mains Conducted Emissions

Operator	Jon Dille	QA	Adam Hauke
Temperature	20.8°C	R.H. %	19.60%
Test Date	1/22/2024	Location	AC Conducted Bench
Requirement	15.207	Method	ANSI C63.10

Limits:

Frequency (MHz)	Quasi-Peak Limit (dBμV)	Average Limit (dBμV)
0.15-0.5	66.0-56.0*	56.0-46.0*
0.5-5	56.0	46.0
5-30	60.0	50.0

*Decreases with the logarithm of the frequency.

Test Parameters

Frequency	0.15-30 MHz	Distance	40 cm from wall 80 cm from LISN
Detector(s)	Peak Trace Quasi-Peak, Average Final	Table height	80 cm
RBW	9 kHz	VBW	62 kHz
Notes	Channel has no effect on emission		

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210148	4/27/2023	4/27/2024	Active Calibration
EE 960089	LISN	COM-POWER	LI-215A	191943	4/10/2023	4/10/2024	Active Calibration
EE 960162	LISN	COM-POWER	LI-215A	191969	4/10/2023	4/10/2024	Active Calibration
LSC-212	Cable	Micro-Coax	UFB311A-0-1440-70U70U	64639 224071-001	1/8/2024	1/8/2025	Active Verification


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BLE Tx Channel 17 1 Mbps
--------------------	-----------------	-------------	--------------------------

Measurements

Line	Frequency (MHz)	Quasi Peak Reading (dBμV)	Quasi-Peak Limit (dBμV)	Quasi Peak Margin (dB)	Average Reading (dBμV)	Average Limit (dBμV)	Average Margin (dB)
1	0.159	38.3	65.5	27.2	29.2	55.5	26.3
1	0.517	30.7	56.0	25.3	24.9	46.0	21.1
1	11.870	35.6	60.0	24.4	24.9	50.0	25.1
2	0.155	39.0	65.8	26.8	29.7	55.8	26.1
2	0.530	29.2	56.0	26.8	22.2	46.0	23.9
2	11.780	28.4	60.0	31.6	14.3	50.0	35.7

Plots

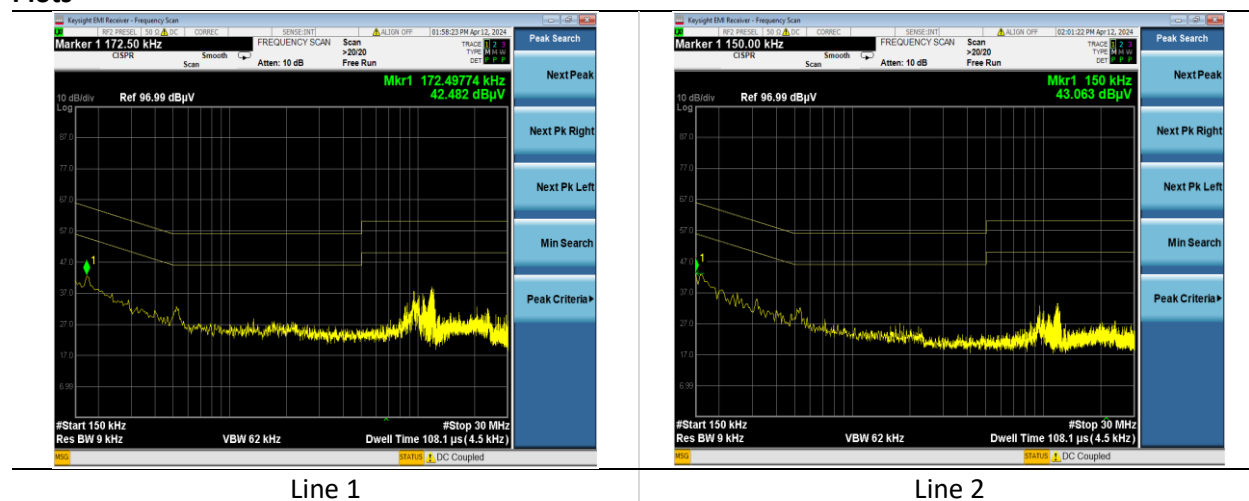

7 REVISION HISTORY

Version	Date	Notes	Person
0	01/22/2025	Initial Draft	Dylan Rosenfeldt
1	02/10/2025	Revised Draft	Dylan Rosenfeldt
2	02/12/2025	Final Draft	Dylan Rosenfeldt

END OF REPORT