



FCC RF Test Report

APPLICANT : Honeywell International Inc.
EQUIPMENT : CN75LAN mobile computer
BRAND NAME : Honeywell
MODEL NAME : CN75LAN
MARKETING NAME : CN75
FCC ID : HD5-CN75LAN
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Dec. 28, 2016 and testing was completed on Jan. 26, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : HD5-CN75LAN

Page Number : 1 of 30

Report Issued Date : Mar. 08, 2017

Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.3



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Re-use of Measured Data	6
1.5 Modification of EUT	8
1.6 Testing Location	9
1.7 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode	10
2.3 Connection Diagram of Test System	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
3 TEST RESULT	13
3.1 Output Power Measurement	13
3.2 Radiated Band Edges and Spurious Emission Measurement	14
3.3 AC Conducted Emission Measurement	18
3.4 Antenna Requirements	28
4 LIST OF MEASURING EQUIPMENT	29
5 UNCERTAINTY OF EVALUATION	30
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	
APPENDIX F. ORIGINAL REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR6D2819-01C	Rev. 01	Initial issue of report	Mar. 08, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.02 dB at 2483.520 MHz
3.3	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.50 dB at 0.702 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Honeywell International Inc.

9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.2 Manufacturer

Honeywell International Inc.

9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	CN75LAN mobile computer
Brand Name	Honeywell
Model Name	CN75LAN
Marketing Name	CN75
FCC ID	HD5-CN75LAN
Sample 1	CN75 non-WWAN-Q5 non-WWAN_Q5 keypad
Sample 2	CN75 non-WWAN-N5 non-WWAN_N5 keypad
Sample 3	CN75E non-WWAN-N7 non-WWAN_N7 keypad
Sample 4	CN75E non-WWAN-Q6 non-WWAN_Q6 keypad
EUT supports Radios application	WLAN 11a/b/g/n HT20 Bluetooth BR/EDR/LE
HW Version	v1.1
SW Version	3.00.05.0075
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Re-use of Measured Data

1.4.1 Introduction Section

The original model (FCC ID: HD5-CN75WAN) and the variant model (FCC ID: HD5-CN75LAN) has identical PCB layout, antenna, SW implementation for Bluetooth/Wi-Fi/GPS. Based on their similarity, the FCC Part 15C & 15E (equipment class: DTS, DSS, NII) test data issued for original model also apply for the variant model.

The applicant takes full responsibility that the test data as referenced in section 4 below represent compliance for this FCC ID (FCC ID: HD5-CN75LAN).

1.4.2 Difference Section

The original model (FCC ID: HD5-CN75WAN) and the variant model (FCC ID: HD5-CN75LAN) has identical PCB layout, antenna, SW implementation for Bluetooth/Wi-Fi/GPS. The details of similarity and difference can be found in the Operating Description.

The product specification is outlined in the following table:

FCC ID			HD5-CN75WAN	HD5-CN75LAN
Wireless Tech	Mode		Frequency (MHz)	
GSM	GSM Voice	Multi-Slot Class 12	850/1900	NA
	GPRS (GMSK)	DTM: No		
	EDGE (8PSK)			
UMTS	AMR/RCM12.2Kbps HSDPA/HSUPA/DC-HSDPA		B5/B4/B2	NA
CDMA2000	1xRTT/1xEV-DO		BC0/BC1/BC10	NA
Wi-Fi	11b/11g/11n(HT20)		2412-2462 MHz/	
	11a/11n(HT20)		5180-5240 MHz 5260-5320 MHz 5500-5700 MHz 5745-5825 MHz *5600-5650MHz notched	
Bluetooth	BR/EDR/LE		2402-2480 MHz	



1.4.3 Spot Check Verification Data Section

Summary of the spot check:

Test Item	Mode	HD5-CN75WAN Worst Result	HD5-CN75LAN Worst Result	Difference (dB)
Average Conducted Power (dBm)	802.11b	17.27	17.18	0.09
	802.11g	13.50	13.33	0.17
	11n HT20	13.50	13.33	0.17
	5150-5250MHz	13.43	13.10	0.33
	5250-5350MHz	13.40	13.06	0.34
	5470-5725MHz	13.19	13.12	0.07
	5725-5850MHz	13.48	13.12	0.36
	BT (1Mbps)	7.11	6.50	0.61
	BT (2Mbps)	5.86	5.35	0.51
	BT (3Mbps)	5.84	5.30	0.54
	BT-LE	6.74	6.73	0.01
	S/N of test sample			
	Test date	2016/12/28 – 2017/02/02	2016/12/28 – 2017/02/14	
Peak Radiated Spurious Emission (Band Edge) (dBuV/m)	802.11b	55.65	55.77	-0.74
	11n HT20	57.82	60.17	-2.35
	5150-5250MHz	62.25	59.61	2.64
	5250-5350MHz	62.65	60.05	2.6
	5470-5725MHz	63.72	62.24	1.48
	5725-5850MHz	74.27	71.82	2.45
	S/N of test sample			
	Test date	2016/12/28 – 2017/02/02	2016/12/28 – 2017/02/14	
Average Radiated Spurious Emission (Band Edge) (dBuV/m)	802.11b	46.82	45.94	-0.35
	11n HT20	46.38	47.98	-1.6
	5150-5250MHz	50.99	48.90	2.09
	5250-5350MHz	50.65	47.91	2.74
	5470-5725MHz	NA	NA	NA
	5725-5850MHz	NA	NA	NA
	S/N of test sample			
	Test date	2016/12/28 – 2017/02/02	2016/12/28 – 2017/02/14	
Peak Radiated Spurious Emission (Harmonic) (dBuV/m)	802.11b	36.66	37.70	-0.54
	11n HT20	37.80	36.58	1.22
	5150-5250MHz	40.81	41.66	-0.85
	5250-5350MHz	39.27	41.17	-1.9
	5470-5725MHz	44.50	46.36	-1.86
	5725-5850MHz	45.34	46.65	-1.31
	S/N of test sample			
	Test date	2016/12/28 – 2017/02/02	2016/12/28 – 2017/02/14	

Conclusion:

WLAN Radiated spurious emission test against the variant model for non-cellular part based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result (power levels measured are within 1dB, and the worst case of RSE spot check verification based on the worst condition from the original model is within 3dB, and are compliance with the limits), the test data from the original model is representative for the variant model.



The unwanted, harmonics, radiated spurious emission is reported peak measurement only due to spurious lower than 20dB than the limit.

The detail test results can be found in this document, Appendix A, hereafter.

1.4.4 Reference detail Section:

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title
DTS	HD5-CN75WAN	Original Grant	FR6D2819B	Part 15C	Conducted sections applicable
			FR6D2819C	Part 15C	All sections applicable
			FA6D2819	RF Exposure	All sections applicable
DSS	HD5-CN75WAN	Original Grant	FR6O1802A	Part 15C	Conducted sections applicable
			FA6D2819	RF Exposure	All sections applicable
NII	HD5-CN75WAN	Original Grant	FR6D2819D FR6D2819E	Part 15E	All sections applicable
			FA6D2819	RF Exposure	All sections applicable

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode


Final test mode of radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 2
Remark: 1. Snap-on 1: Ethernet Snap-On 1000AA01 2. Adapter :Level V (for Snap-on) 3. All the radiation tests were performed with sample 2.	

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

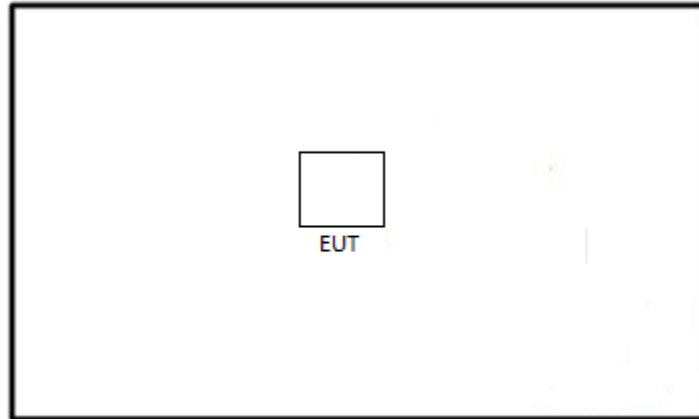

<AC Conducted Emission Mode>

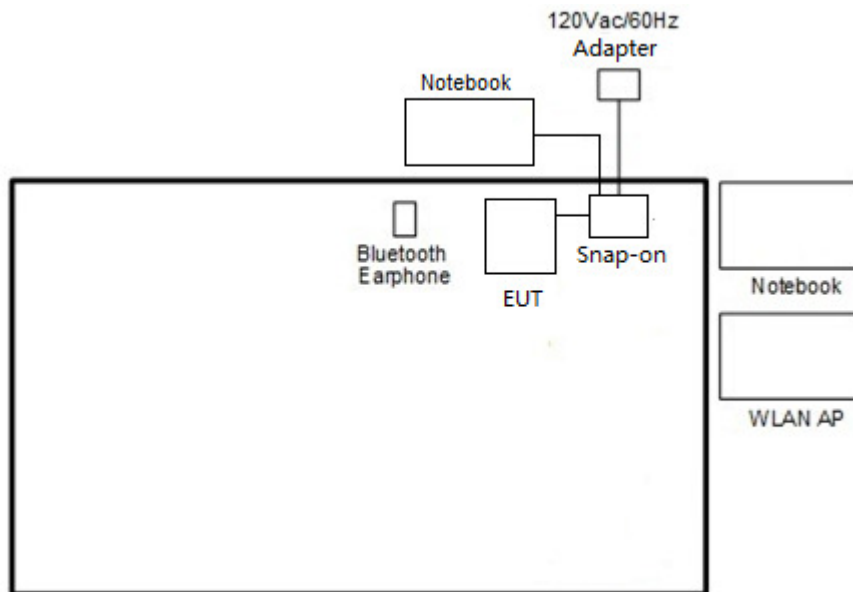

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
5.	CN75A/CN75E Vehicle dock	intermec technologies corp	1000AV01	FCC DoC	NA	NA
6.	CK75 Vehicle dock	intermec technologies corp	1001AV01	FCC DoC	NA	NA
7.	car charger	intermec technologies corp	852-057-005	Verification	NA	Unshielded, 1.2m
8.	Snap-on(LAN)	intermec technologies corp	1000AA01	FCC DoC	NA	NA
9.	Snap-on(RS232)	intermec technologies corp	1000AA03	FCC DoC	NA	NA
10.	Snap-On (VoCollect)	intermec technologies corp	1000AA05	FCC DoC	NA	NA
11.	Snap-on (USB)	intermec technologies corp	1000AA07	FCC DoC	NA	NA
12.	Snap-on adapter	intermec technologies corp	9001AE01	FCC DoC	NA	AC IP: Unshielded, 1.8m DC OP: Shielded, 1.8m
13.	Earphone	Honeywell	Vocollect SR-20	FCC DoC	1.1 meter, shielded cable	NA
14.	USB Cable	intermec technologies corp	VE011-2018	FCC DoC	NA	1.4 meter, shielded cable, w/t ferrite core
15.	Battery	intermec technologies corp	1000AB02	NA	NA	NA

2.5 EUT Operation Test Setup

For WLAN function, the RF utility, "rtt-adv-usr v21" was installed in EUT which was programmed in order to make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.1.4 Test Setup

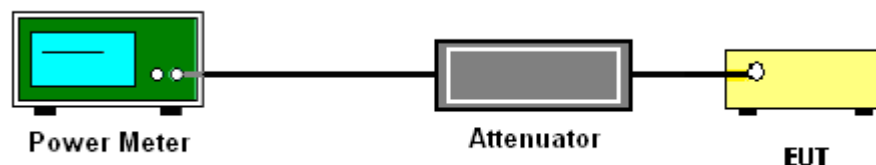

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated emissions below 30MHz

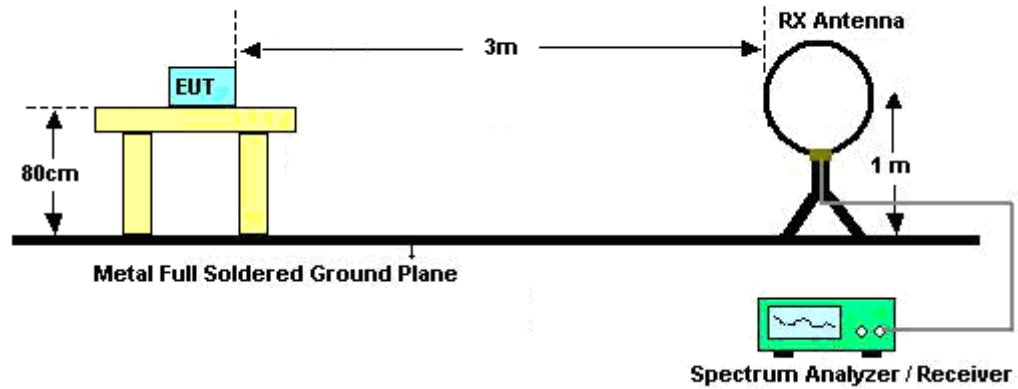

For radiated emissions from 30MHz to 1GHz

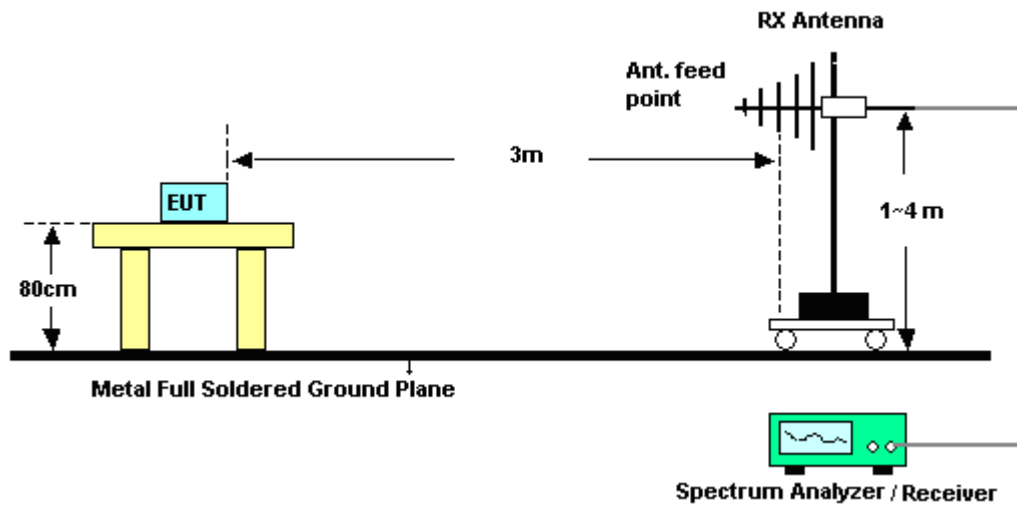

For radiated emissions above 1GHz

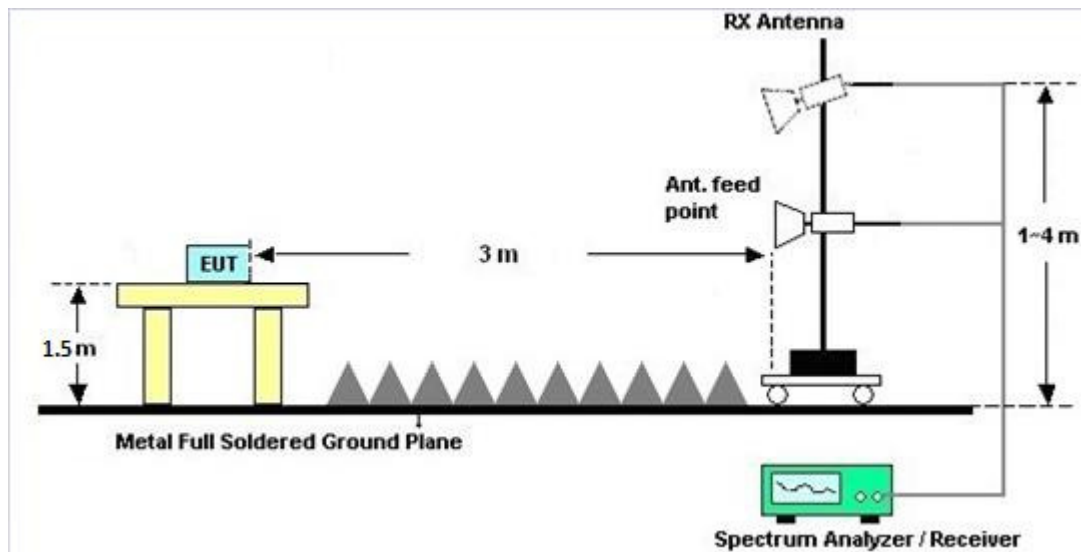

3.2.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.3.4 Test Setup

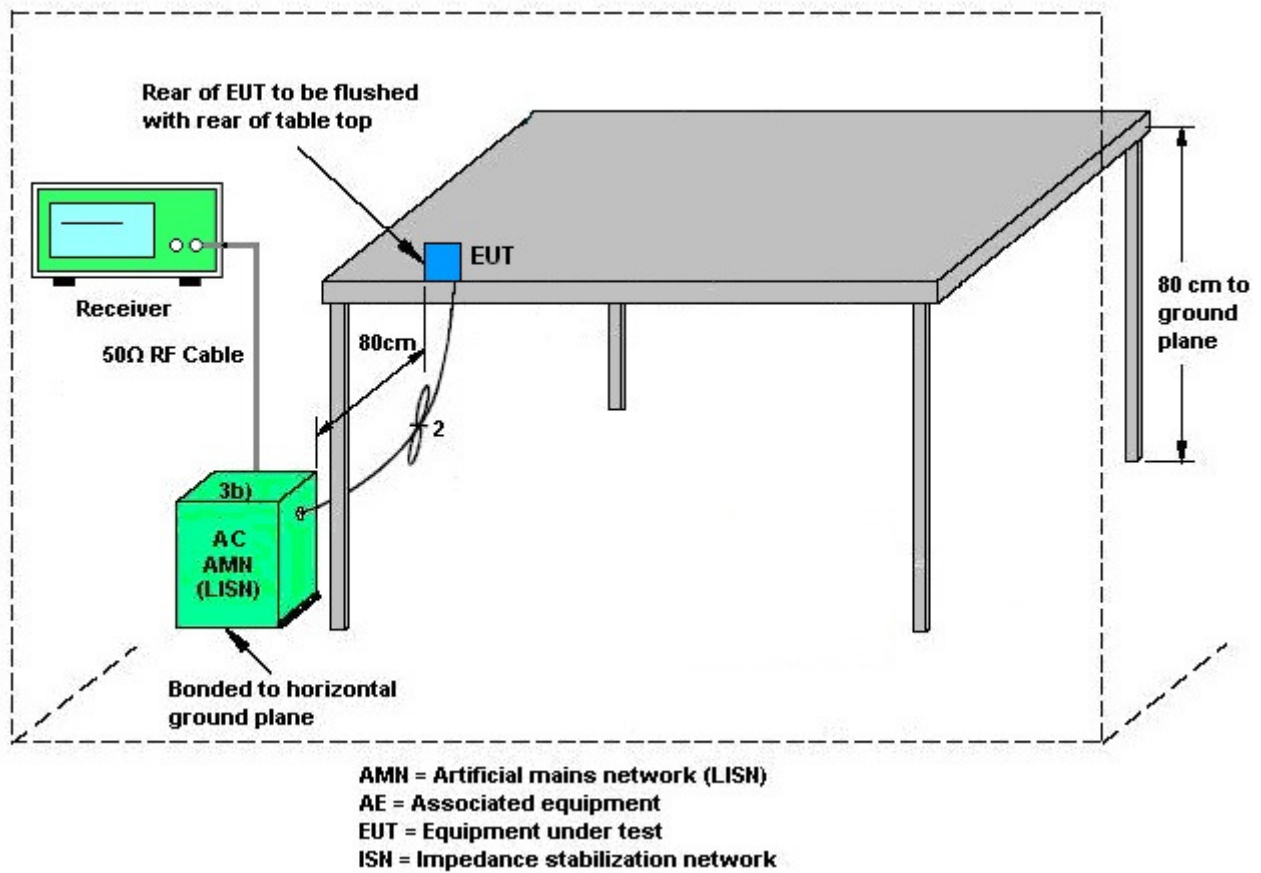

3.3.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 2		

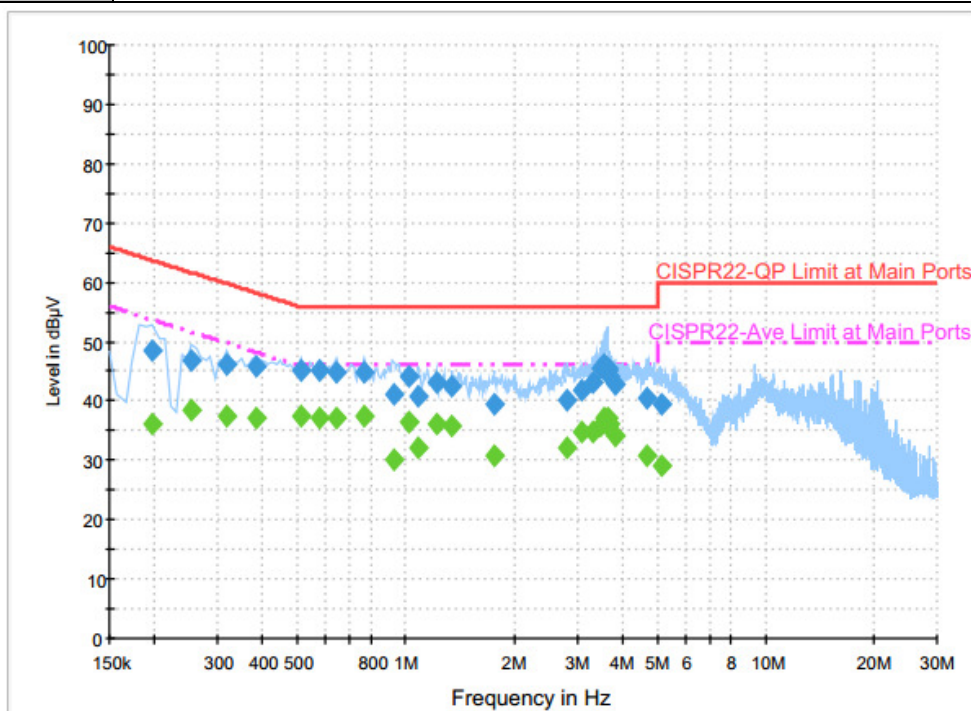


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.198000	48.6	Off	L1	19.6	15.1	63.7
0.254000	47.0	Off	L1	19.6	14.6	61.6
0.318000	46.1	Off	L1	19.6	13.7	59.8
0.382000	45.9	Off	L1	19.6	12.3	58.2
0.510000	45.1	Off	L1	19.6	10.9	56.0
0.574000	45.0	Off	L1	19.6	11.0	56.0
0.638000	44.8	Off	L1	19.6	11.2	56.0
0.766000	44.7	Off	L1	19.6	11.3	56.0
0.926000	41.1	Off	L1	19.6	14.9	56.0
1.022000	44.0	Off	L1	19.6	12.0	56.0
1.078000	40.8	Off	L1	19.6	15.2	56.0
1.214000	43.2	Off	L1	19.6	12.8	56.0
1.342000	42.6	Off	L1	19.6	13.4	56.0
1.766000	39.4	Off	L1	19.6	16.6	56.0




Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 2		

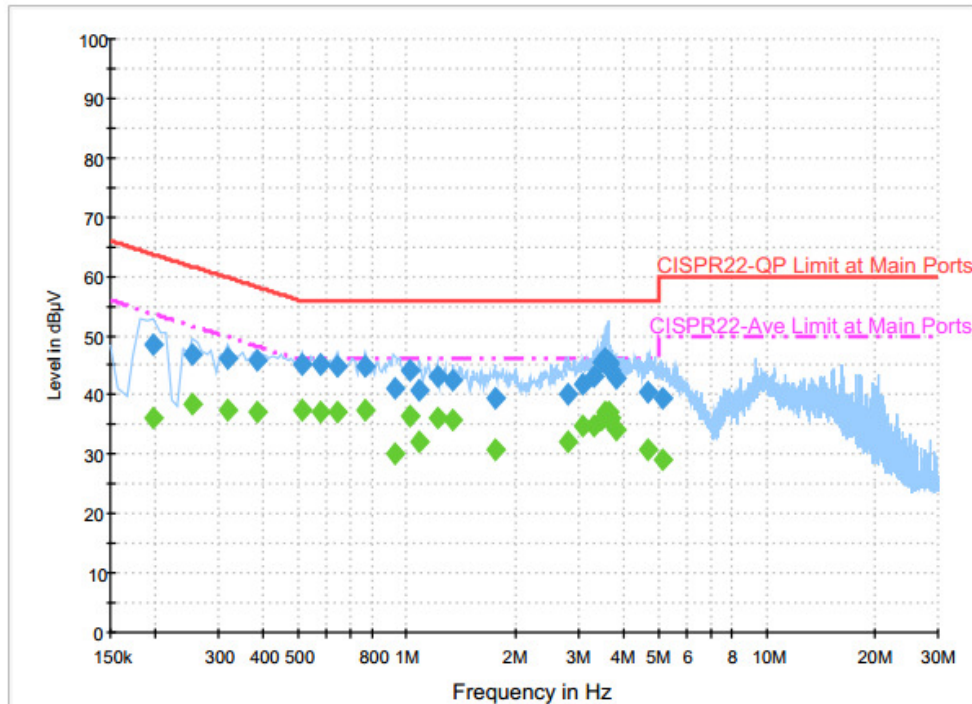**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.814000	40.3	Off	L1	19.4	15.7	56.0
3.102000	41.8	Off	L1	19.5	14.2	56.0
3.318000	43.3	Off	L1	19.5	12.7	56.0
3.462000	45.6	Off	L1	19.5	10.4	56.0
3.574000	46.0	Off	L1	19.5	10.0	56.0
3.630000	45.3	Off	L1	19.6	10.7	56.0
3.646000	45.4	Off	L1	19.6	10.6	56.0
3.710000	44.3	Off	L1	19.6	11.7	56.0
3.806000	42.9	Off	L1	19.6	13.1	56.0
4.694000	40.6	Off	L1	19.6	15.4	56.0
5.126000	39.6	Off	L1	19.6	20.4	60.0




Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 2		

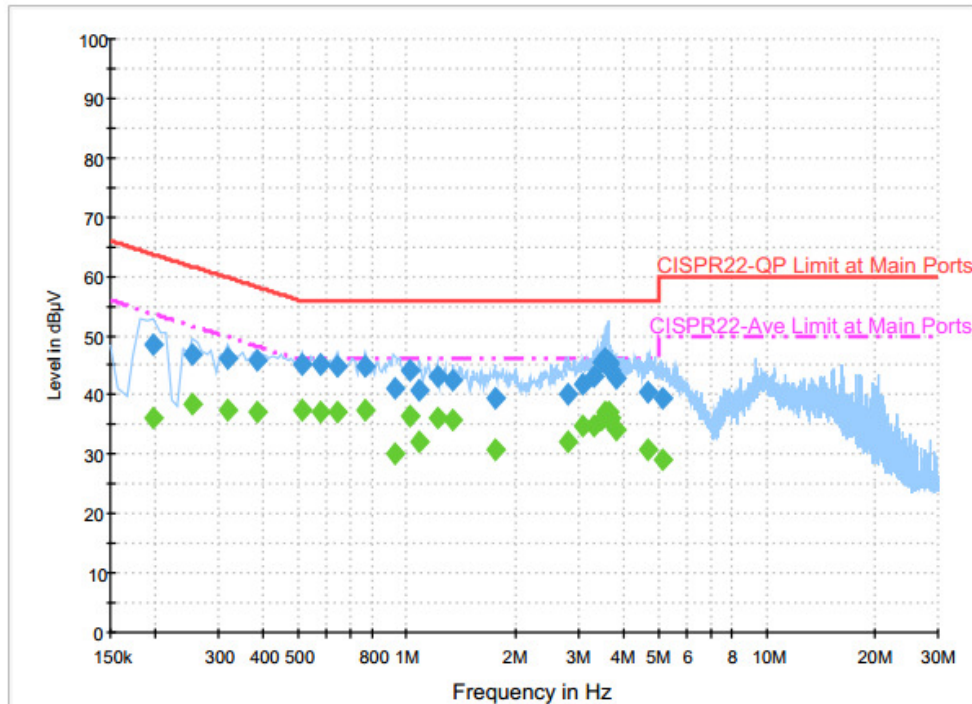**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	36.2	Off	L1	19.6	17.5	53.7
0.254000	38.3	Off	L1	19.6	13.3	51.6
0.318000	37.4	Off	L1	19.6	12.4	49.8
0.382000	37.3	Off	L1	19.6	10.9	48.2
0.510000	37.5	Off	L1	19.6	8.5	46.0
0.574000	37.0	Off	L1	19.6	9.0	46.0
0.638000	37.1	Off	L1	19.6	8.9	46.0
0.766000	37.5	Off	L1	19.6	8.5	46.0
0.926000	30.2	Off	L1	19.6	15.8	46.0
1.022000	36.6	Off	L1	19.6	9.4	46.0
1.078000	32.2	Off	L1	19.6	13.8	46.0
1.214000	36.1	Off	L1	19.6	9.9	46.0
1.342000	35.9	Off	L1	19.6	10.1	46.0
1.766000	30.8	Off	L1	19.6	15.2	46.0


Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 2		

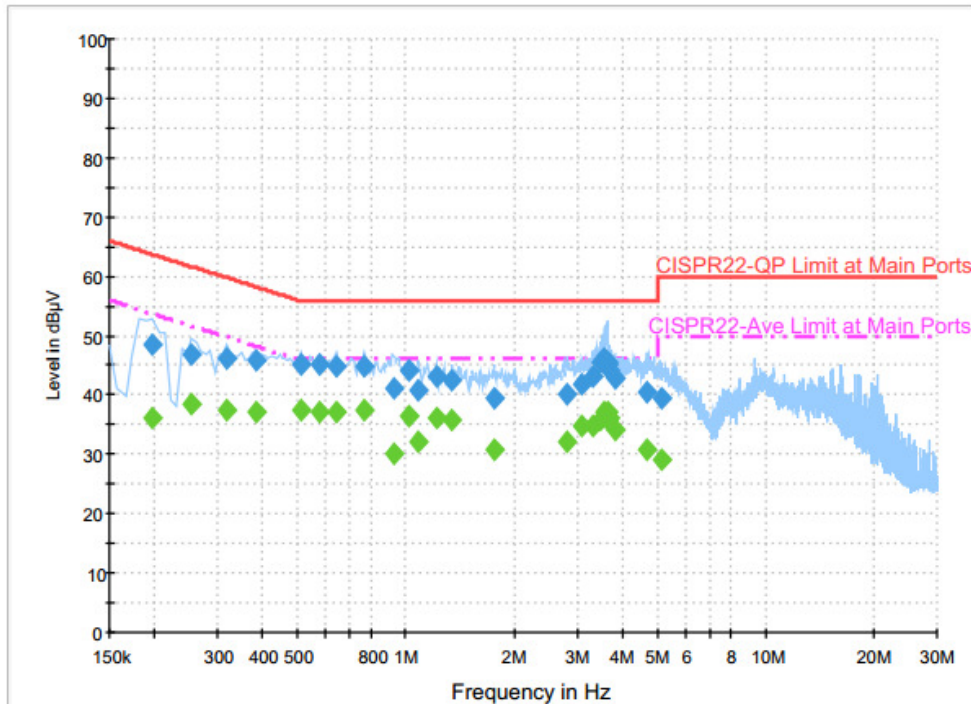
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.814000	32.1	Off	L1	19.4	13.9	46.0
3.102000	34.7	Off	L1	19.5	11.3	46.0
3.318000	34.7	Off	L1	19.5	11.3	46.0
3.462000	35.8	Off	L1	19.5	10.2	46.0
3.574000	37.1	Off	L1	19.5	8.9	46.0
3.630000	35.6	Off	L1	19.6	10.4	46.0
3.646000	37.1	Off	L1	19.6	8.9	46.0
3.710000	36.1	Off	L1	19.6	9.9	46.0
3.806000	34.1	Off	L1	19.6	11.9	46.0
4.694000	30.8	Off	L1	19.6	15.2	46.0
5.126000	29.1	Off	L1	19.6	20.9	50.0




Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 2		

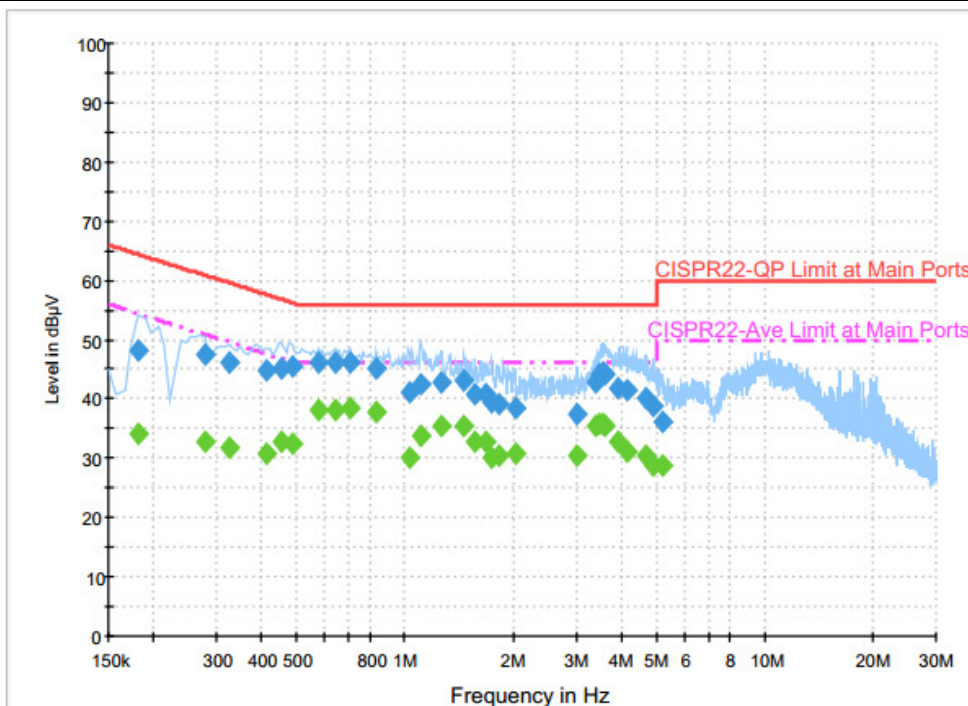**Final Result : Quasi-Peak**


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	48.3	Off	N	19.5	16.1	64.4
0.278000	47.5	Off	N	19.5	13.4	60.9
0.326000	46.1	Off	N	19.5	13.5	59.6
0.414000	44.7	Off	N	19.5	12.9	57.6
0.454000	45.1	Off	N	19.5	11.7	56.8
0.486000	45.6	Off	N	19.6	10.6	56.2
0.574000	46.3	Off	N	19.5	9.7	56.0
0.638000	46.1	Off	N	19.5	9.9	56.0
0.702000	46.1	Off	N	19.5	9.9	56.0
0.830000	45.3	Off	N	19.5	10.7	56.0
1.030000	41.2	Off	N	19.5	14.8	56.0
1.110000	42.4	Off	N	19.6	13.6	56.0
1.270000	42.9	Off	N	19.6	13.1	56.0
1.462000	43.2	Off	N	19.6	12.8	56.0
1.566000	40.8	Off	N	19.6	15.2	56.0
1.686000	40.9	Off	N	19.6	15.1	56.0
1.742000	39.6	Off	N	19.6	16.4	56.0
1.838000	39.1	Off	N	19.6	16.9	56.0

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 2		

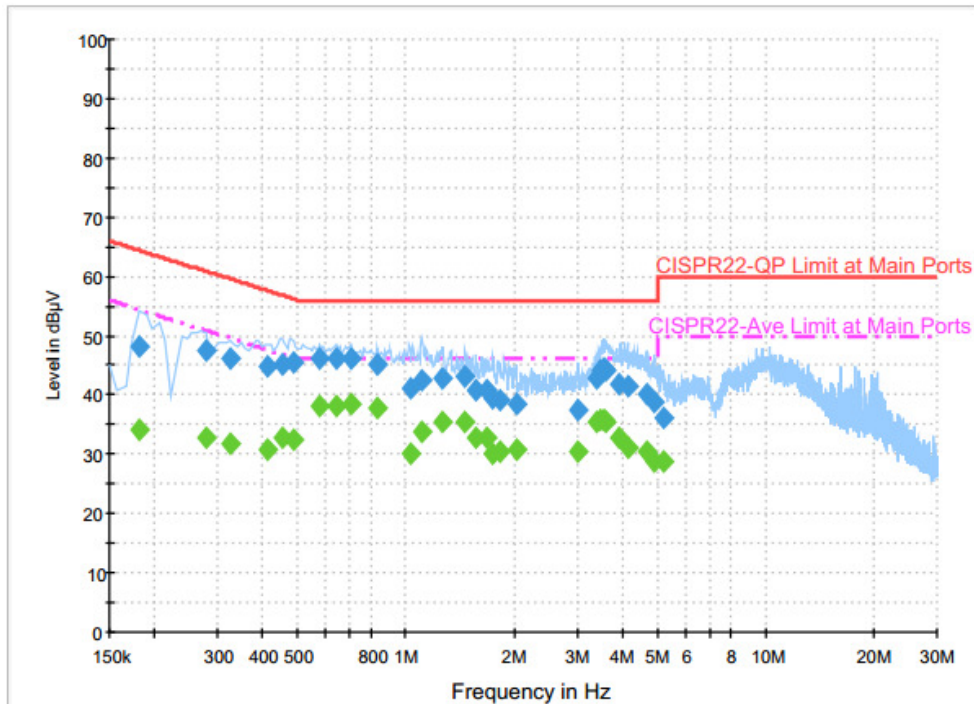
Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.038000	38.3	Off	N	19.1	17.7	56.0
3.022000	37.6	Off	N	19.4	18.4	56.0
3.414000	42.7	Off	N	19.5	13.3	56.0
3.486000	44.1	Off	N	19.5	11.9	56.0
3.542000	44.3	Off	N	19.5	11.7	56.0
3.614000	44.2	Off	N	19.5	11.8	56.0
3.910000	41.7	Off	N	19.6	14.3	56.0
4.134000	41.4	Off	N	19.6	14.6	56.0
4.662000	40.3	Off	N	19.6	15.7	56.0
4.886000	38.9	Off	N	19.6	17.1	56.0
5.198000	36.2	Off	N	19.6	23.8	60.0

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 2		

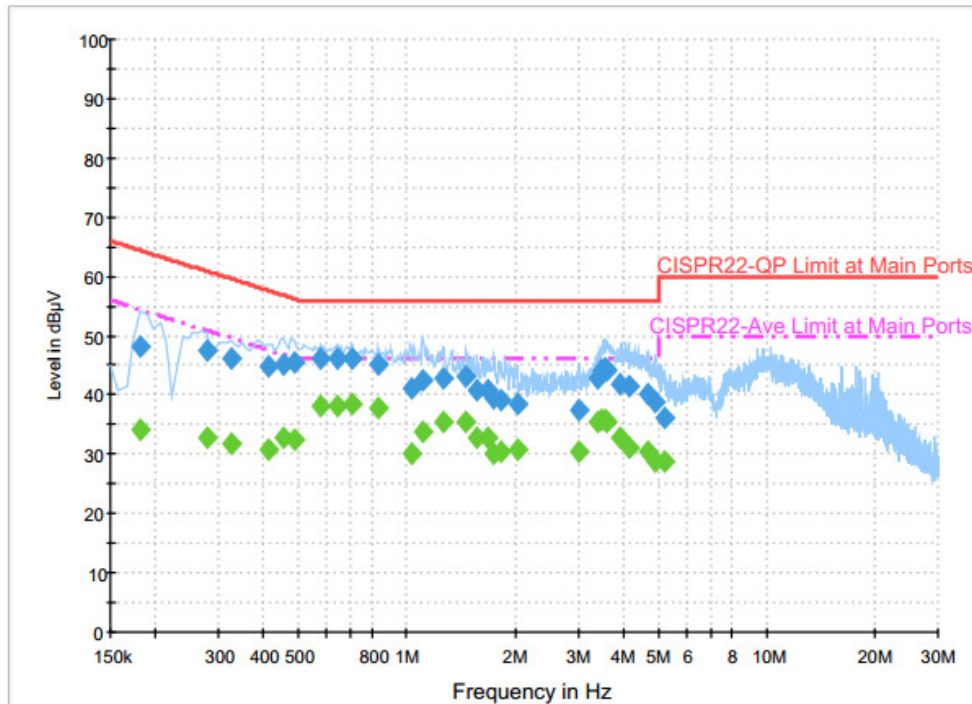
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	34.0	Off	N	19.5	20.4	54.4
0.278000	32.6	Off	N	19.5	18.3	50.9
0.326000	31.7	Off	N	19.5	17.9	49.6
0.414000	30.7	Off	N	19.5	16.9	47.6
0.454000	32.9	Off	N	19.5	13.9	46.8
0.486000	32.5	Off	N	19.6	13.7	46.2
0.574000	38.1	Off	N	19.5	7.9	46.0
0.638000	38.1	Off	N	19.5	7.9	46.0
0.702000	38.5	Off	N	19.5	7.5	46.0
0.830000	37.9	Off	N	19.5	8.1	46.0
1.030000	29.9	Off	N	19.5	16.1	46.0
1.110000	33.6	Off	N	19.6	12.4	46.0
1.270000	35.3	Off	N	19.6	10.7	46.0
1.462000	35.5	Off	N	19.6	10.5	46.0
1.566000	32.7	Off	N	19.6	13.3	46.0
1.686000	32.8	Off	N	19.6	13.2	46.0
1.742000	30.2	Off	N	19.6	15.8	46.0
1.838000	30.5	Off	N	19.6	15.5	46.0

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 2		

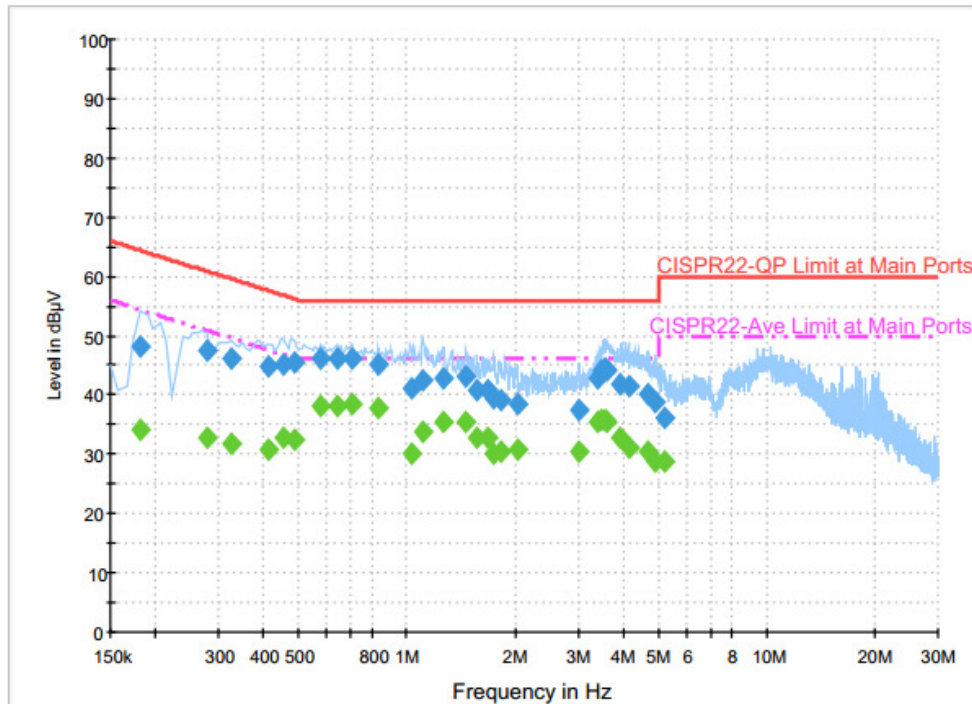
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.038000	30.8	Off	N	19.1	15.2	46.0
3.022000	30.6	Off	N	19.4	15.4	46.0
3.414000	35.3	Off	N	19.5	10.7	46.0
3.486000	35.9	Off	N	19.5	10.1	46.0
3.542000	35.8	Off	N	19.5	10.2	46.0
3.614000	35.5	Off	N	19.5	10.5	46.0
3.910000	32.6	Off	N	19.6	13.4	46.0
4.134000	31.0	Off	N	19.6	15.0	46.0
4.662000	30.3	Off	N	19.6	15.7	46.0
4.886000	28.7	Off	N	19.6	17.3	46.0
5.198000	28.9	Off	N	19.6	21.1	50.0



3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	300MHz~40GHz	Sep. 29, 2016	Jan. 05, 2017 ~ Jan. 12, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Sep. 29, 2016	Jan. 05, 2017 ~ Jan. 12, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jul. 17, 2016	Jan. 05, 2017 ~ Jan. 12, 2017	Jul. 16, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 17, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Jan. 17, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Jan. 17, 2017	Nov. 28, 2017	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Jan. 22, 2017 ~ Jan. 26, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Jan. 22, 2017 ~ Jan. 26, 2017	Sep. 01, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 15, 2016	Jan. 22, 2017 ~ Jan. 26, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1GHz ~ 18GHz	Mar. 30, 2016	Jan. 22, 2017 ~ Jan. 26, 2017	Mar. 31, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2016	Jan. 22, 2017 ~ Jan. 26, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY52350276	10Hz ~ 44GHZ	Mar. 21, 2016	Jan. 22, 2017 ~ Jan. 26, 2017	Mar. 20, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jan. 22, 2017 ~ Jan. 26, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jan. 22, 2017 ~ Jan. 26, 2017	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Jan. 22, 2017 ~ Jan. 26, 2017	Feb. 14, 2017	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 08, 2016	Jan. 22, 2017 ~ Jan. 26, 2017	Nov. 07, 2017	Radiation (03CH11-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----



Appendix A. Conducted Test Results

Report Number : FR6D2819-01C

Test Engineer:	Aking Chang	Temperature:	21~25	°C
Test Date:	2017/01/05~2017/01/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	19.30	30.00	2.29	21.59	36.00	Pass
11b	1Mbps	1	6	2437	19.29	30.00	2.29	21.58	36.00	Pass
11b	1Mbps	1	11	2462	19.27	30.00	2.29	21.56	36.00	Pass
11g	6Mbps	1	1	2412	23.40	30.00	2.29	25.69	36.00	Pass
11g	6Mbps	1	6	2437	23.44	30.00	2.29	25.73	36.00	Pass
11g	6Mbps	1	11	2462	23.60	30.00	2.29	25.89	36.00	Pass
HT20	MCS0	1	1	2412	23.64	30.00	2.29	25.93	36.00	Pass
HT20	MCS0	1	6	2437	23.62	30.00	2.29	25.91	36.00	Pass
HT20	MCS0	1	11	2462	23.65	30.00	2.29	25.94	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	17.03
11b	1Mbps	1	6	2437	0.00	17.18
11b	1Mbps	1	11	2462	0.00	17.11
11g	6Mbps	1	1	2412	0.00	13.30
11g	6Mbps	1	6	2437	0.00	13.29
11g	6Mbps	1	11	2462	0.00	13.33
HT20	MCS0	1	1	2412	0.00	13.30
HT20	MCS0	1	6	2437	0.00	13.32
HT20	MCS0	1	11	2462	0.00	13.33



Appendix B. Radiated Spurious Emission

Test Engineer :	Jacky Hung and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz	*	2462	106.19	-	-	103.39	27.4	8.98	33.58	102	297	P	H
	*	2462	102.78	-	-	99.98	27.4	8.98	33.58	102	297	A	H
		2485.72	55.77	-18.23	74	52.92	27.45	8.98	33.58	102	297	P	H
		2487.96	45.94	-8.06	54	43.04	27.5	8.98	33.58	102	297	A	H
													H
													H
	*	2462	103.22	-	-	100.42	27.4	8.98	33.58	108	110	P	V
	*	2462	99.85	-	-	97.05	27.4	8.98	33.58	108	110	A	V
		2498.84	54.67	-19.33	74	51.76	27.5	8.98	33.57	108	110	P	V
		2487.92	44.37	-9.63	54	41.47	27.5	8.98	33.58	108	110	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 11 2462MHz		4924	35.32	-38.68	74	43.48	31.88	11	51.04	100	0	P	H
		7386	36.73	-37.27	74	36.98	37.38	12.88	50.51	100	0	P	H
													H
													H
		4924	33.22	-40.78	74	41.38	31.88	11	51.04	100	0	P	V
		7386	37.7	-36.3	74	37.95	37.38	12.88	50.51	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 11 2462MHz	*	2462	103.22	-	-	100.42	27.4	8.98	33.58	108	295	P	H
	*	2462	94.17	-	-	91.37	27.4	8.98	33.58	108	295	A	H
		2484.56	60.17	-13.83	74	57.32	27.45	8.98	33.58	108	295	P	H
		2483.52	47.98	-6.02	54	45.13	27.45	8.98	33.58	108	295	A	H
													H
													H
	*	2462	99.88	-	-	97.08	27.4	8.98	33.58	109	117	P	V
	*	2462	91.55	-	-	88.75	27.4	8.98	33.58	109	117	A	V
		2483.68	57.14	-16.86	74	54.29	27.45	8.98	33.58	109	117	P	V
		2483.52	45.51	-8.49	54	42.66	27.45	8.98	33.58	109	117	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 11 2462MHz		4924	31.29	-42.71	74	39.45	31.88	11	51.04	100	0	P	H
		7386	36.58	-37.42	74	36.83	37.38	12.88	50.51	100	0	P	H
													H
													H
		4924	30.82	-43.18	74	38.98	31.88	11	51.04	100	0	P	V
		7386	36.01	-37.99	74	36.26	37.38	12.88	50.51	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		30.54	23.53	-16.47	40	29.56	25.18	1.29	32.5	-	-	P	H
		48.63	22.87	-17.13	40	38.3	15.77	1.29	32.49	-	-	P	H
		260.58	19.89	-26.11	46	30.22	19.66	2.58	32.57	-	-	P	H
		812.4	30.99	-15.01	46	30.4	28.45	4.26	32.12	-	-	P	H
		876.8	31.71	-14.29	46	29.86	29.06	4.57	31.78	-	-	P	H
		953.8	33.88	-12.12	46	29.76	30.59	4.69	31.16	161	152	P	H
													H
													H
													H
													H
													H
													H
		32.43	29.97	-10.03	40	37.03	24.14	1.29	32.49	164	258	P	V
		36.75	27.96	-12.04	40	37.18	21.98	1.29	32.49	-	-	P	V
		47.01	25.17	-14.83	40	40.17	16.2	1.29	32.49	-	-	P	V
		741.7	29.64	-16.36	46	30.36	27.54	4.09	32.35	-	-	P	V
		927.9	33.32	-12.68	46	30.09	30	4.63	31.4	-	-	P	V
		955.9	34.01	-11.99	46	29.87	30.59	4.69	31.14	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Jacky Hung and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%





Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz





WIFI 802.11b (Band Edge @ 3m)

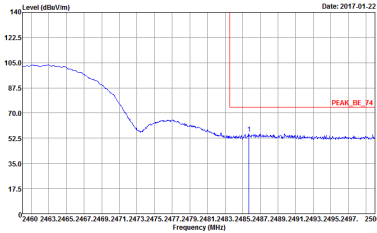
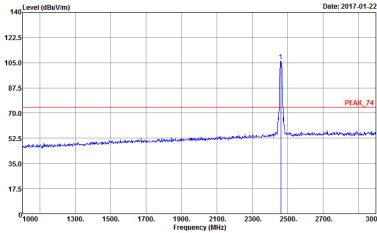
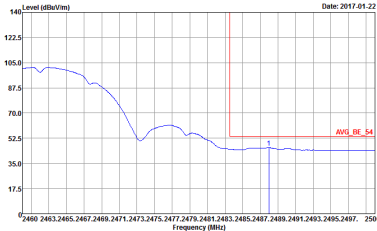
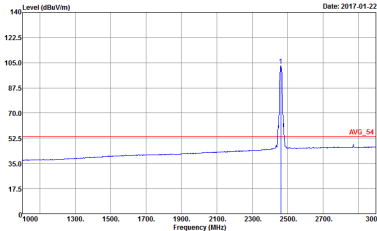
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819-01
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819-01

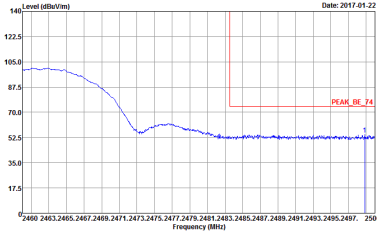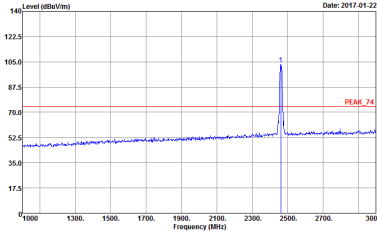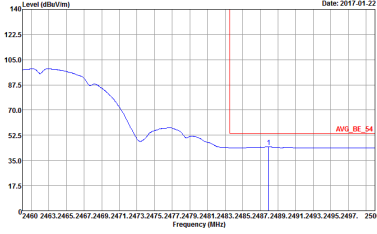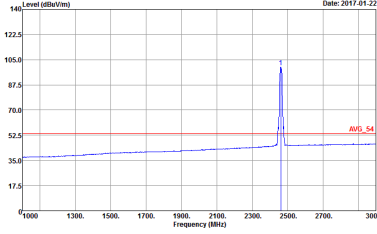



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 6D2819-01

2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

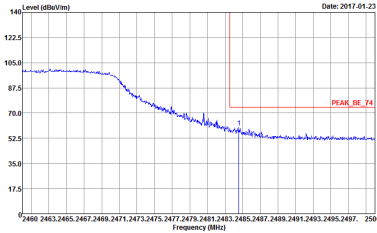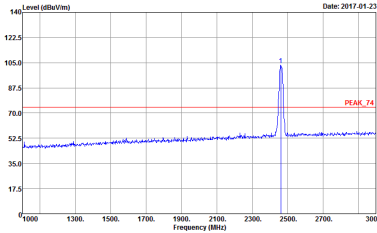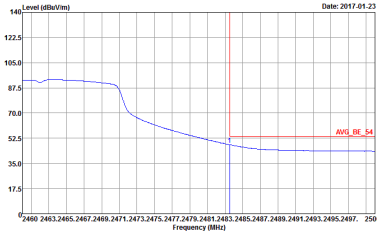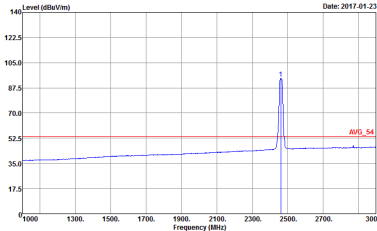WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819-01
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819-01

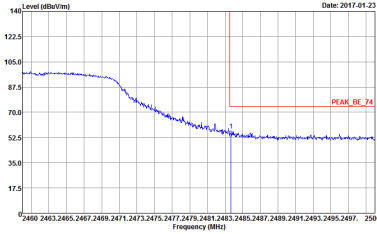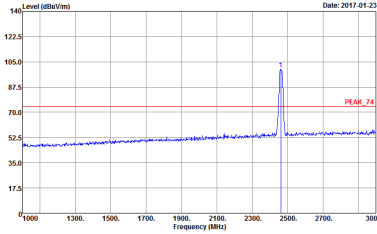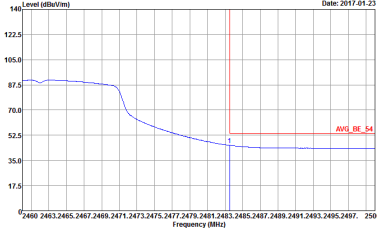
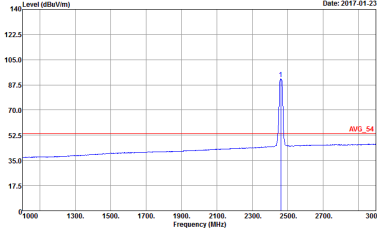
WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 6D2819-01

2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

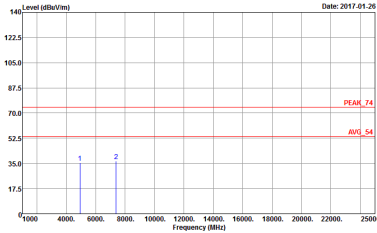
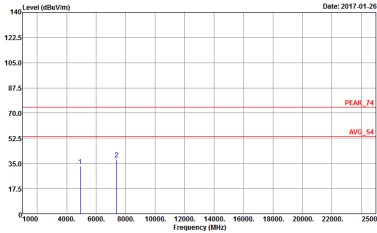
WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819-01	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819-01

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

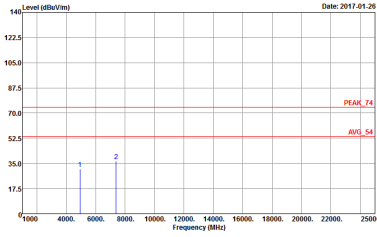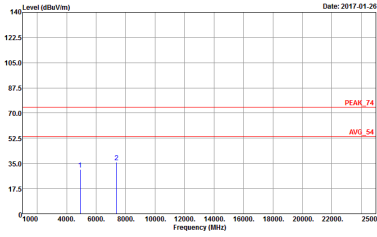WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819-01	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819-01


Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)

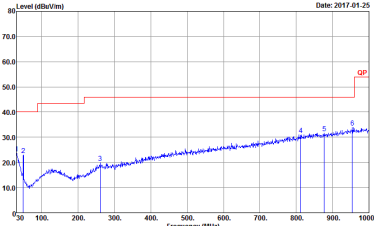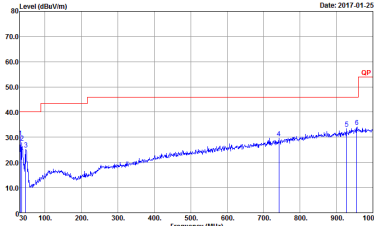WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11n HT20 LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-4FY Condition : QP 3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 602819-01	 Site : 03CH11-4FY Condition : QP 3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 602819-01

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
2.4GHz 802.11n HT20	98.82	-	-	10Hz


802.11b

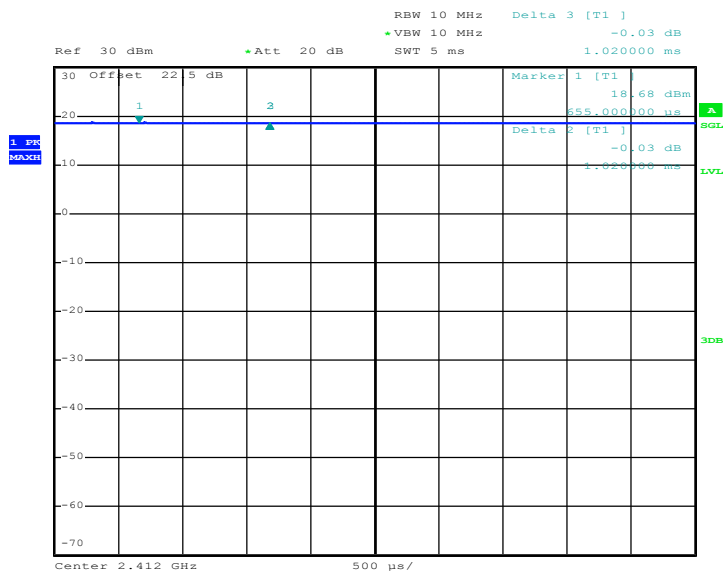

Date: 5.JAN.2017 15:13:01



802.11n HT20

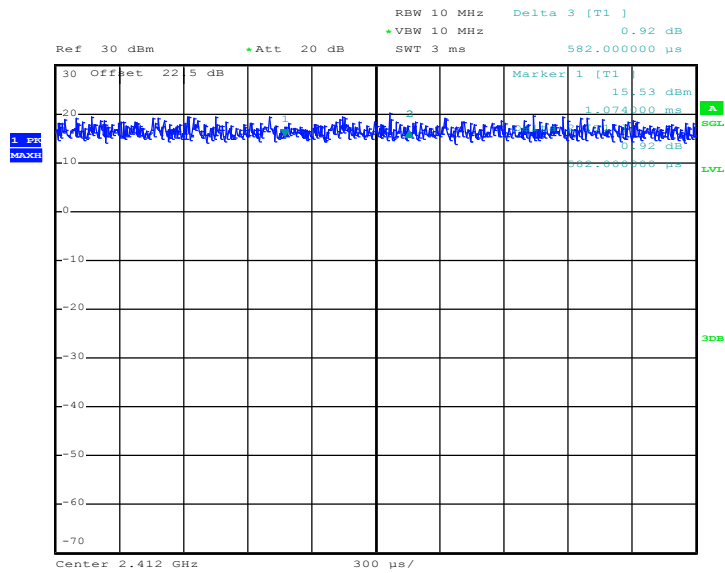

Date: 5.JAN.2017 12:17:16



Appendix F. Original Report

Please refer to Sporton report number FR6D2819C as below.



FCC RF Test Report

APPLICANT : Honeywell International Inc.
EQUIPMENT : CN75WAN mobile computer
BRAND NAME : Honeywell
MODEL NAME : CN75WAN
MARKETING NAME : CN75
FCC ID : HD5-CN75WAN
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Dec. 28, 2016 and testing was completed on Feb. 02, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 AC Conducted Emission Measurement	31
3.7 Antenna Requirements	41
4 LIST OF MEASURING EQUIPMENT	42
5 UNCERTAINTY OF EVALUATION	43
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR6D2819C	Rev. 01	Initial issue of report	Mar. 08, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.04 dB at 32.700 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.40 dB at 3.526 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Honeywell International Inc.

9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.2 Manufacturer

Honeywell International Inc.

9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	CN75WAN mobile computer
Brand Name	Honeywell
Model Name	CN75WAN
Marketing Name	CN75
FCC ID	HD5-CN75WAN
Sample 1	CN75 WWAN-Q5 WWAN_Q5 keypad
Sample 2	CN75 WWAN-N5 WWAN_N5 keypad
Sample 3	CN75E WWAN-N7 WWAN_N7 keypad
Sample 4	CN75E WWAN-Q6 WWAN_Q6 keypad
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA WLAN 11a/b/g/n HT20 Bluetooth BR/EDR/LE
HW Version	v1.1
SW Version	W03.320
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 19.42 dBm (0.0875 W) 802.11g : 23.61 dBm (0.2296 W) 802.11n HT20 : 23.68 dBm (0.2333 W)
99% Occupied Bandwidth	802.11b : 14.15MHz 802.11g : 18.10MHz 802.11n HT20 : 19.00MHz
Antenna Type / Gain	PIFA Antenna type with gain 2.29 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode


Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : WCDMA Band V Idle + Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 3
Remark: 1. Snap-on 1: Ethernet Snap-On 1000AA01 2. Adapter: Level V (for Snap-on) 3. All the radiated test cases were performed with sample 1.	

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

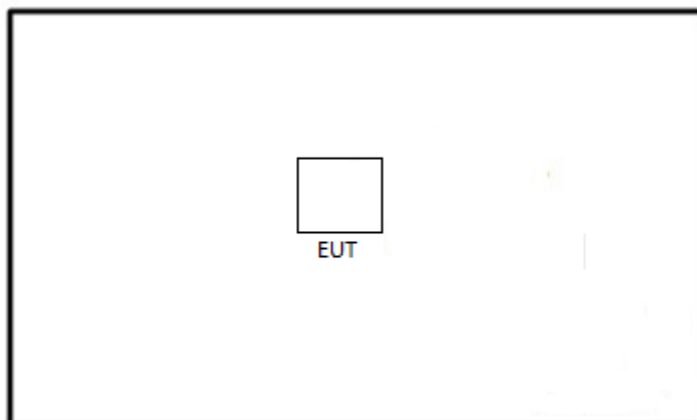

<AC Conducted Emission Mode>

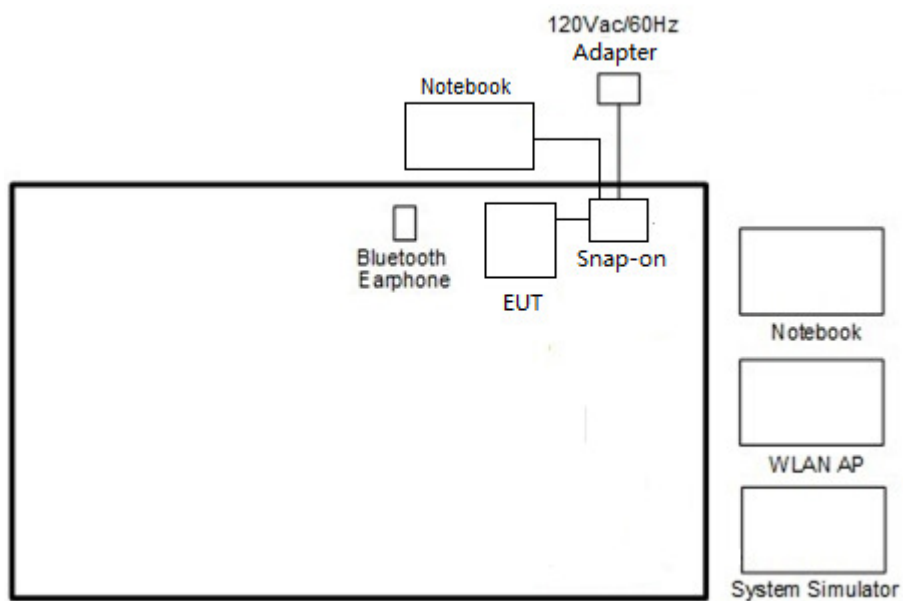



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
6.	CN75A/CN75E Vehicle dock	intermec technologies corp	1000AV01	FCC DoC	NA	NA
7.	CK75 Vehicle dock	intermec technologies corp	1001AV01	FCC DoC	NA	NA
8.	car charger	intermec technologies corp	852-057-005	Verification	NA	Unshielded, 1.2m
9.	Snap-on(LAN)	intermec technologies corp	1000AA01	FCC DoC	NA	NA
10.	Snap-on(RS232)	intermec technologies corp	1000AA03	FCC DoC	NA	NA
11.	Snap-On (VoCollect)	intermec technologies corp	1000AA05	FCC DoC	NA	NA
12.	Snap-on (USB)	intermec technologies corp	1000AA07	FCC DoC	NA	NA
13.	Snap-on adapter	intermec technologies corp	9001AE01	FCC DoC	NA	AC IP: Unshielded, 1.8m DC OP: Shielded, 1.8m
14.	Earphone	Honeywell	Vocollect SR-20	FCC DoC	1.1 meter, shielded cable	NA
15.	USB Cable	intermec technologies corp	VE011-2018	FCC DoC	NA	1.4 meter, shielded cable, w/t ferrite core
16.	Battery	intermec technologies corp	1000AB02	NA	NA	NA

2.5 EUT Operation Test Setup

For WLAN function, the RF utility, "rtt-adv-usr v21" was installed in EUT which was programmed in order to make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

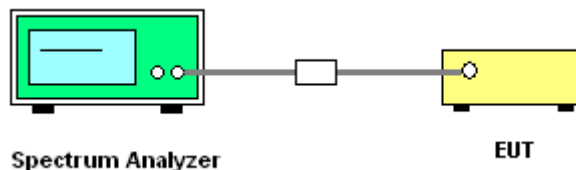



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

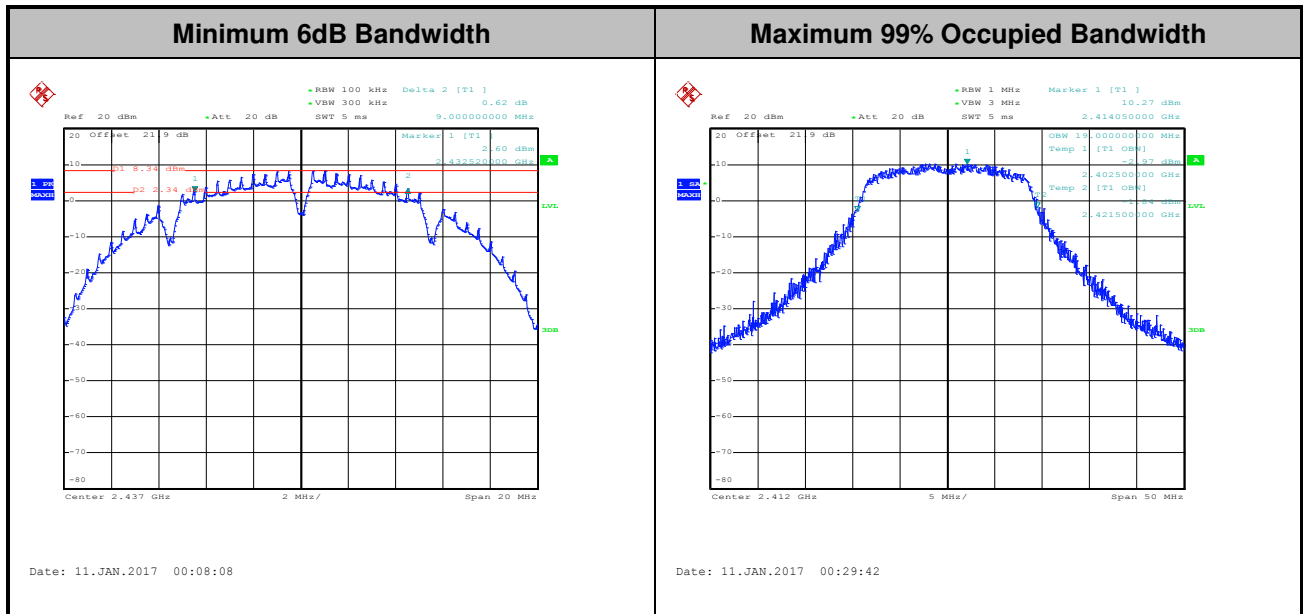

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

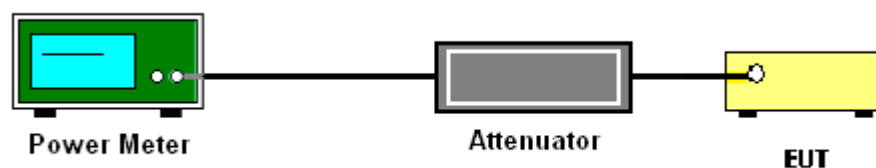

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

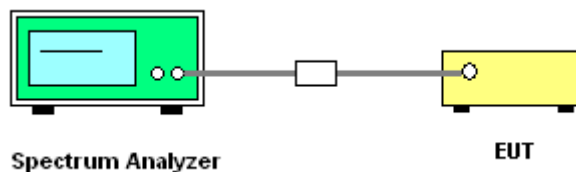

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

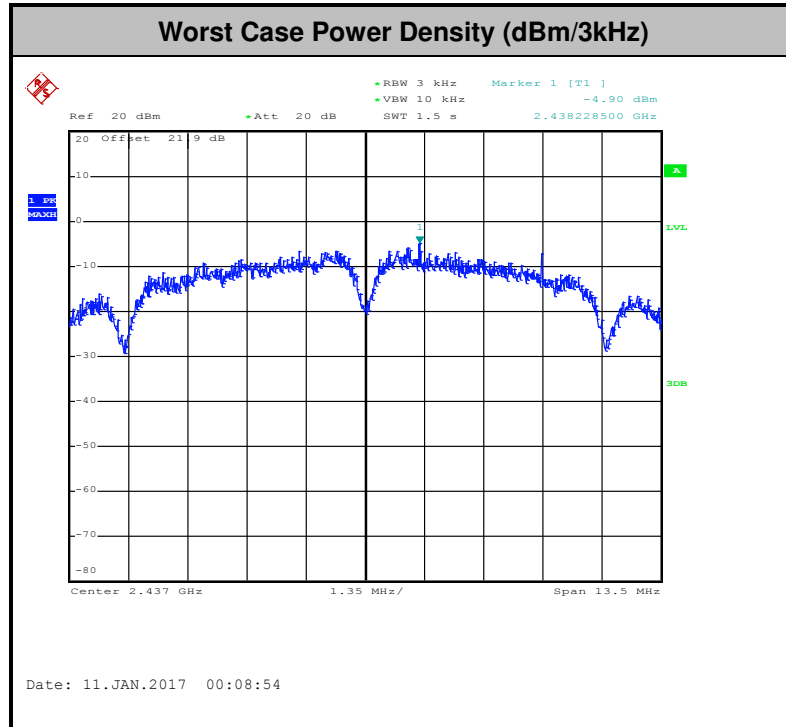

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

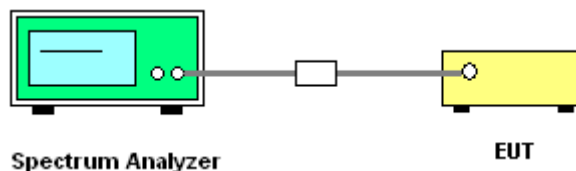




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Shiming Liu


WLAN 802.11b Channel 01

100kHz PSD reference Level

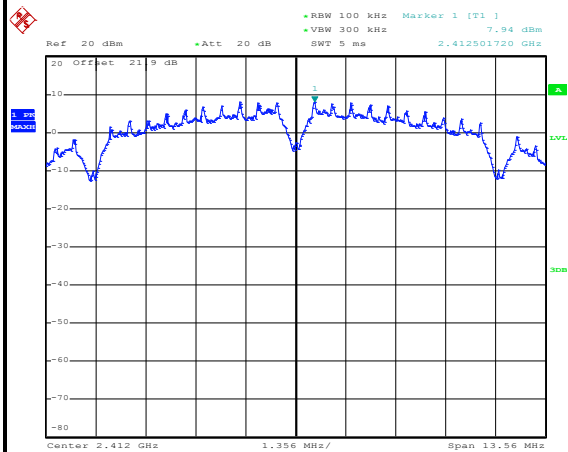


Date: 11.JAN.2017 00:02:42

Low Channel Plot

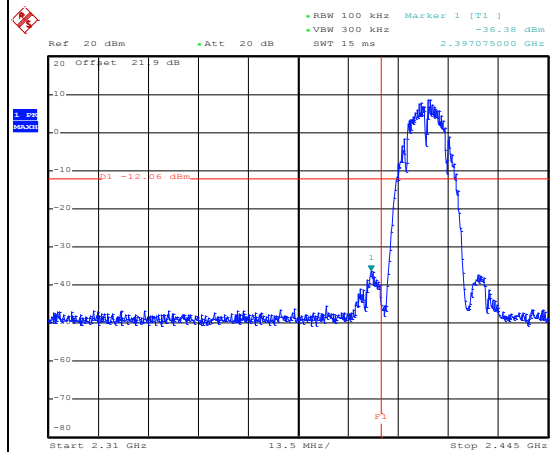


Date: 11.JAN.2017 00:02:55

Spurious Emission 30MHz~3GHz

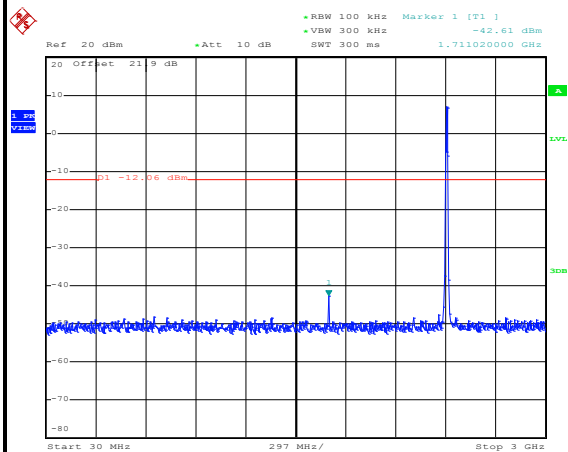

Date: 11.JAN.2017 00:03:08

Spurious Emission 2GHz~25GHz

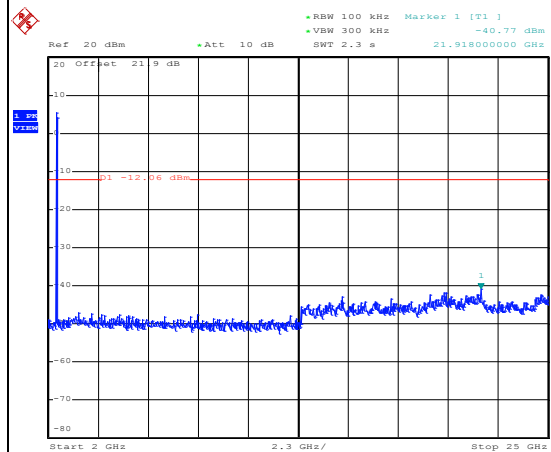


Date: 11.JAN.2017 00:03:17

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Shiming Liu


WLAN 802.11b Channel 06

100kHz PSD reference Level

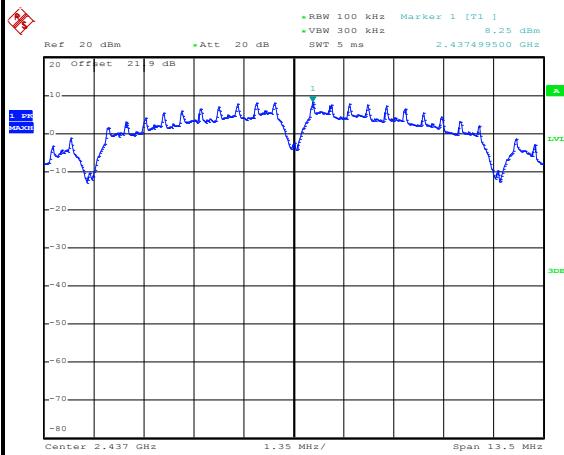


Date: 11.JAN.2017 00:09:14

Spurious Emission 30MHz~3GHz

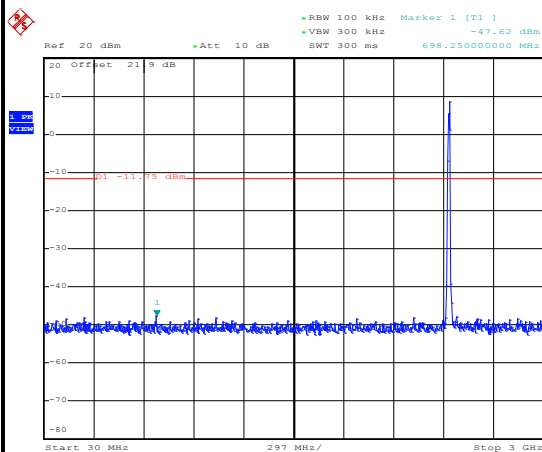

Date: 11.JAN.2017 00:09:26


Spurious Emission 2GHz~25GHz

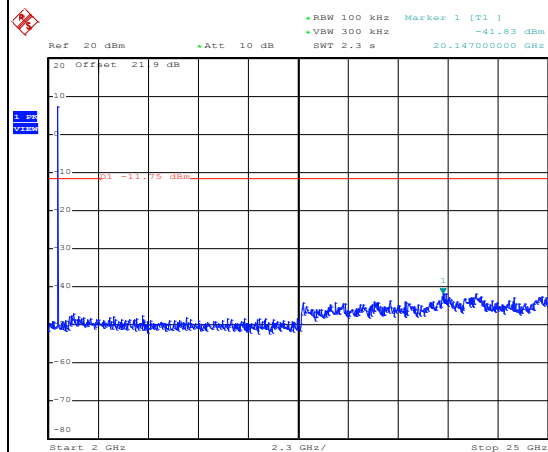


Date: 11.JAN.2017 00:09:34




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Shiming Liu

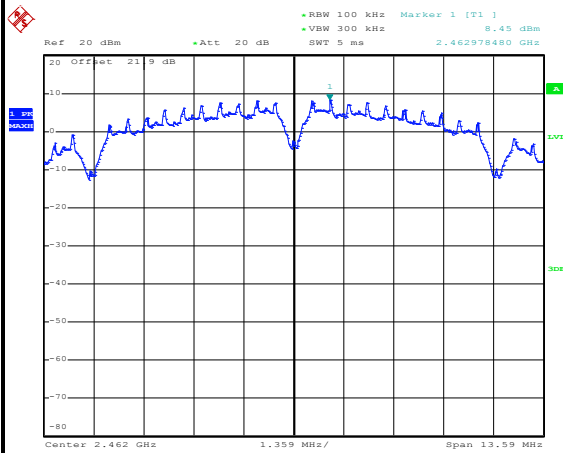WLAN 802.11b Channel 11**100kHz PSD reference Level**


Date: 11.JAN.2017 00:13:55

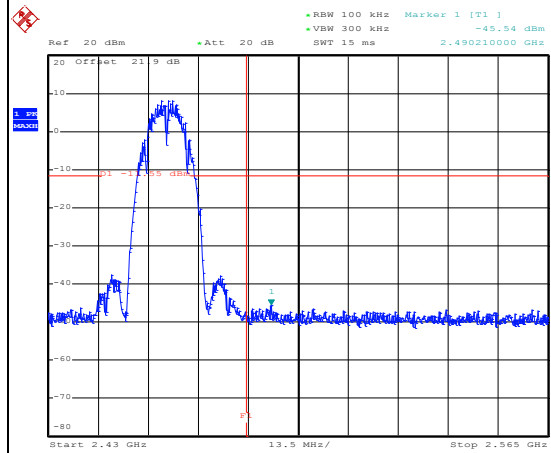High Channel Plot

Date: 11.JAN.2017 00:14:05

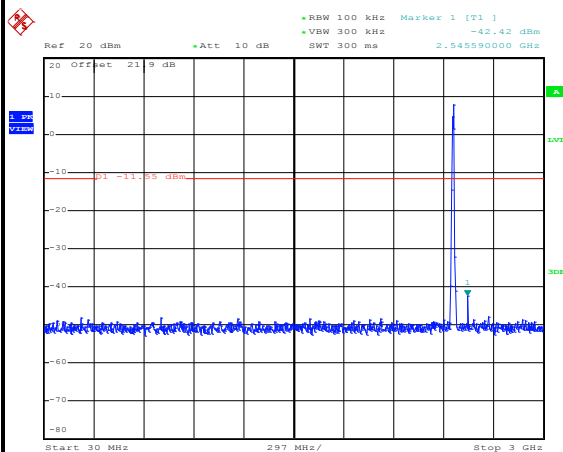Spurious Emission 30MHz~3GHz

Date: 11.JAN.2017 00:14:26

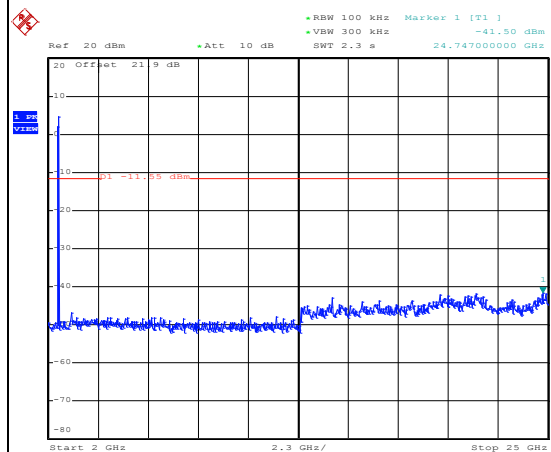Spurious Emission 2GHz~25GHz


Date: 11.JAN.2017 00:14:35



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Shiming Liu


WLAN 802.11g Channel 01

100kHz PSD reference Level

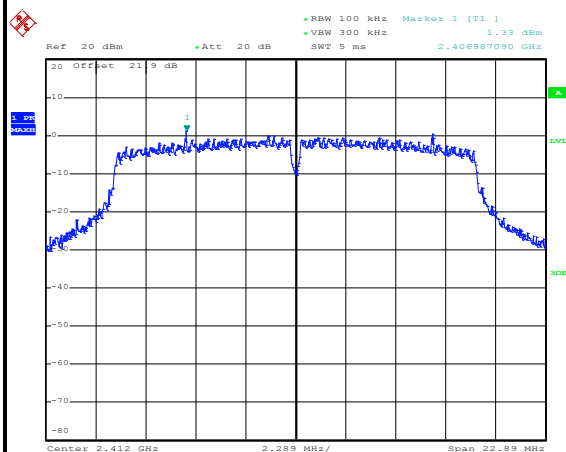


Date: 11.JAN.2017 00:18:14

Low Channel Plot

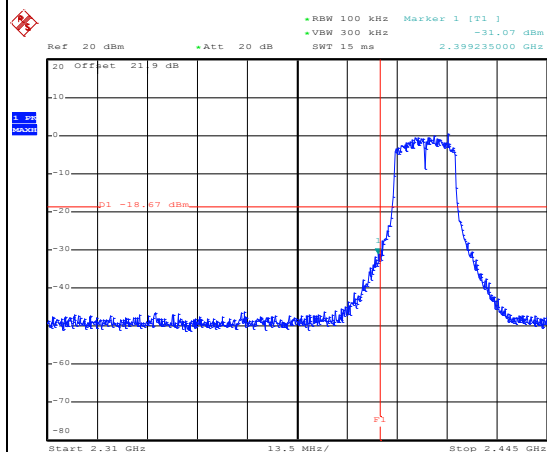


Date: 11.JAN.2017 00:18:24

Spurious Emission 30MHz~3GHz

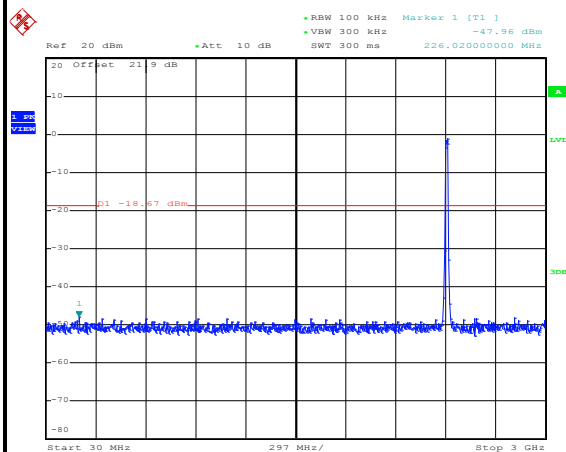

Date: 11.JAN.2017 00:18:36

Spurious Emission 2GHz~25GHz

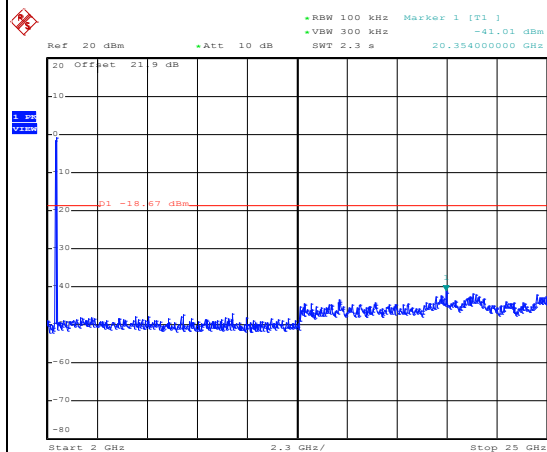


Date: 11.JAN.2017 00:18:44



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Shiming Liu


WLAN 802.11g Channel 06

100kHz PSD reference Level

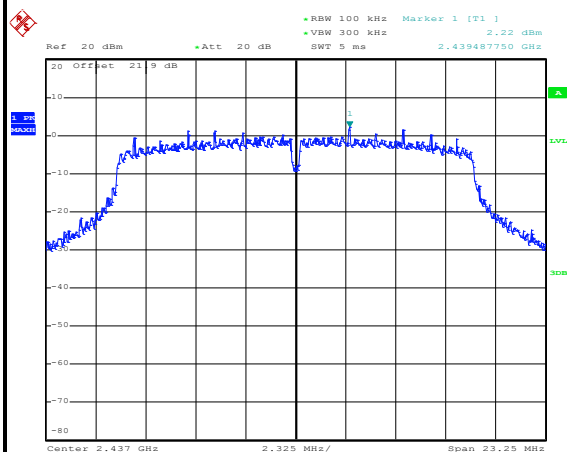


Date: 11.JAN.2017 00:20:59

Spurious Emission 30MHz~3GHz

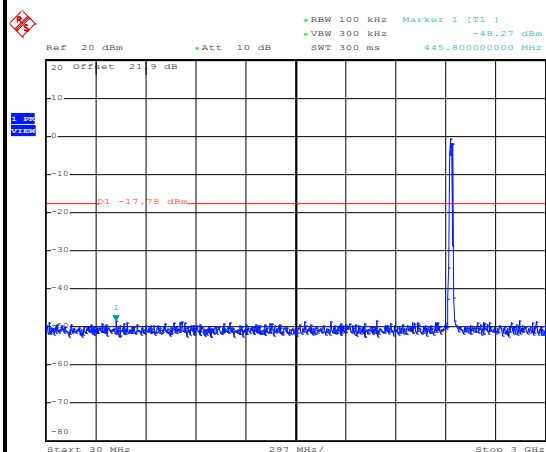

Date: 11.JAN.2017 00:21:11


Spurious Emission 2GHz~25GHz

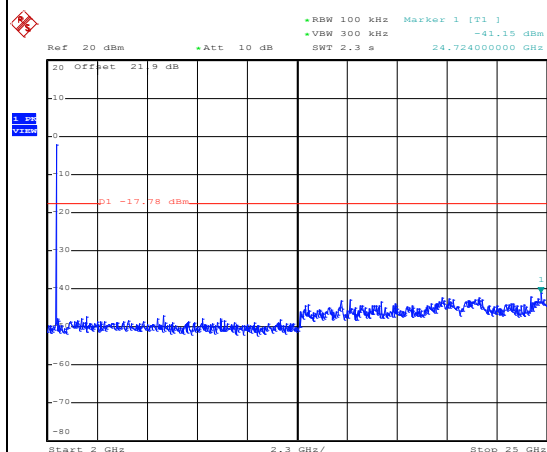


Date: 11.JAN.2017 00:21:20




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Shiming Liu

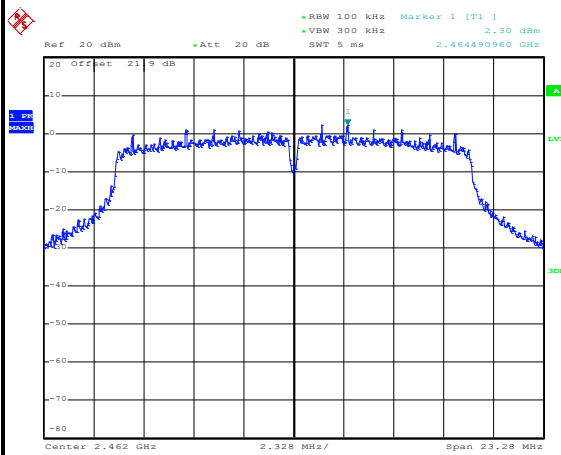WLAN 802.11g Channel 11**100kHz PSD reference Level**


Date: 11.JAN.2017 00:25:06

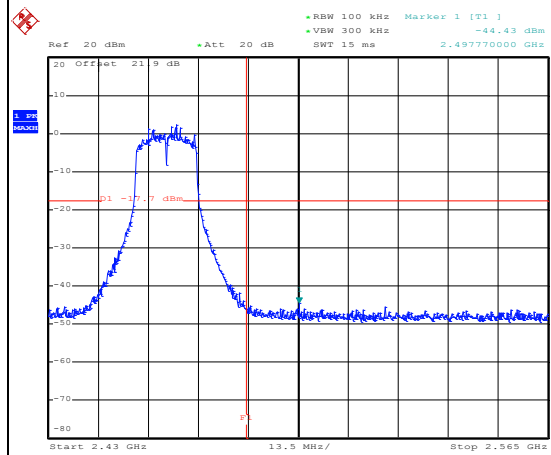High Channel Plot

Date: 11.JAN.2017 00:25:43

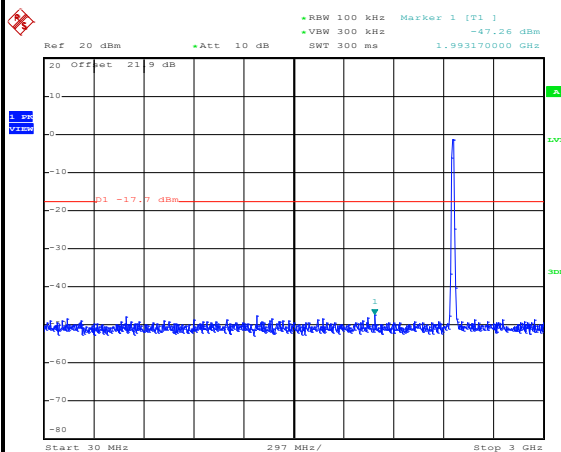Spurious Emission 30MHz~3GHz

Date: 11.JAN.2017 00:25:57

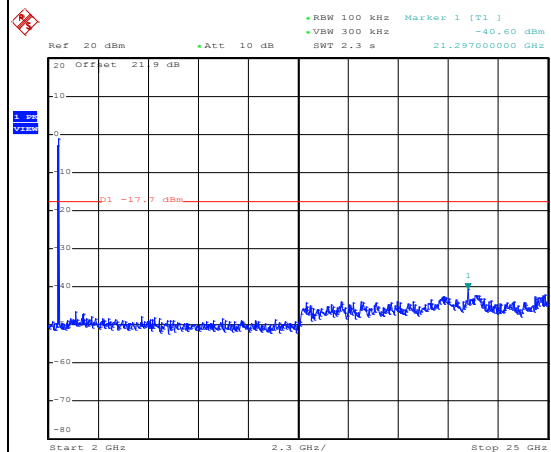Spurious Emission 2GHz~25GHz


Date: 11.JAN.2017 00:26:05



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Shiming Liu


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

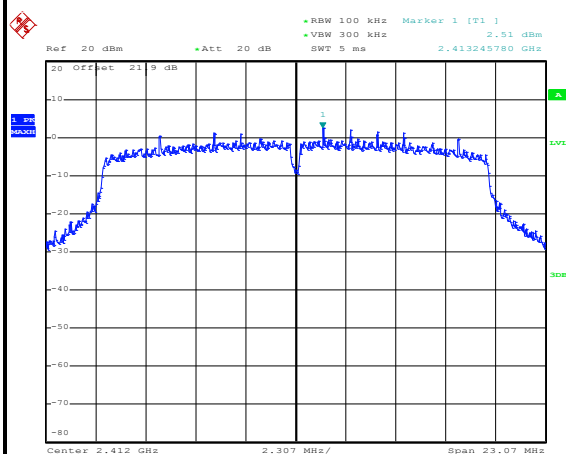


Date: 11.JAN.2017 00:28:42

Low Channel Plot

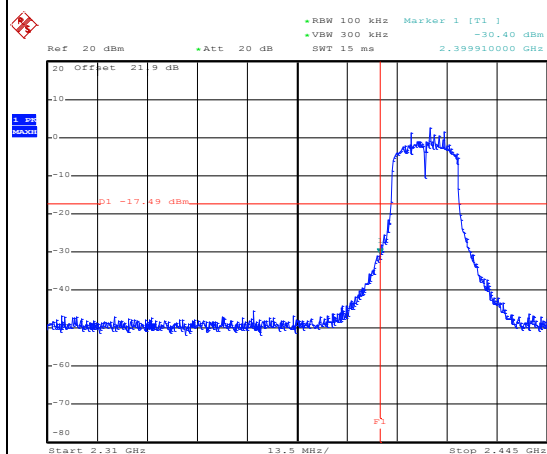


Date: 11.JAN.2017 00:28:53

Spurious Emission 30MHz~3GHz

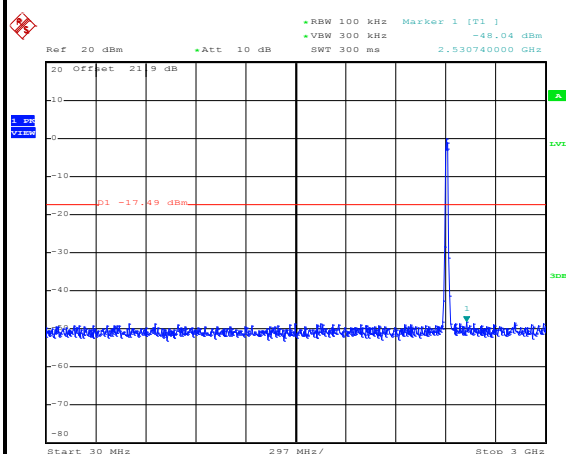

Date: 11.JAN.2017 00:29:09

Spurious Emission 2GHz~25GHz

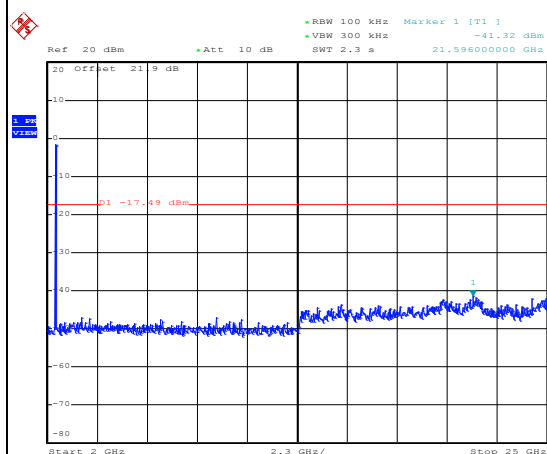


Date: 11.JAN.2017 00:29:17



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Shiming Liu


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

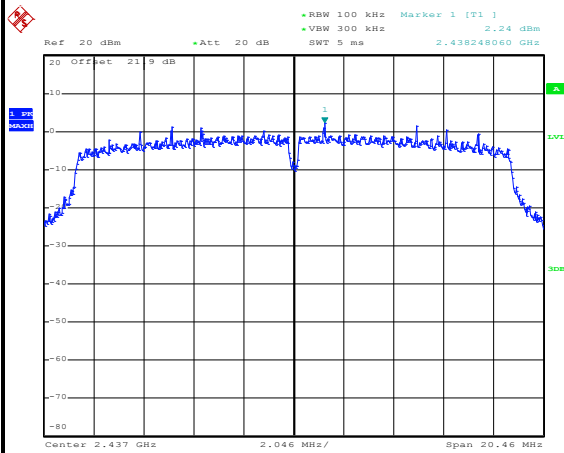


Date: 11.JAN.2017 00:37:21

Spurious Emission 30MHz~3GHz

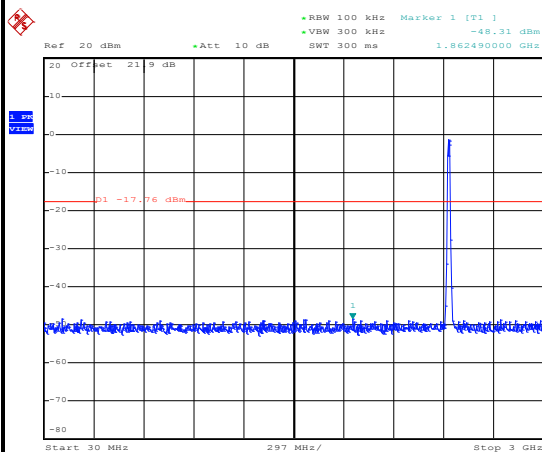

Date: 11.JAN.2017 00:37:35

Spurious Emission 2GHz~25GHz

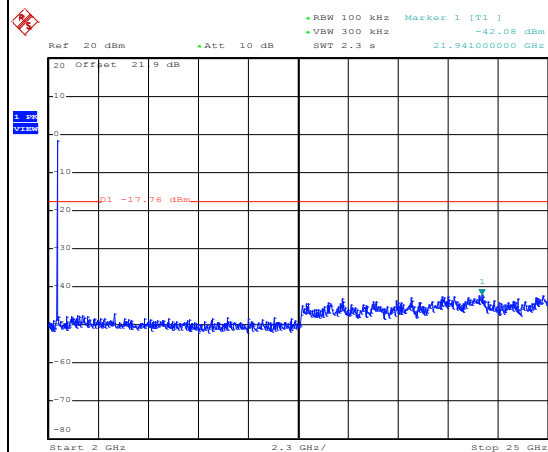


Date: 11.JAN.2017 00:37:43



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Shiming Liu


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

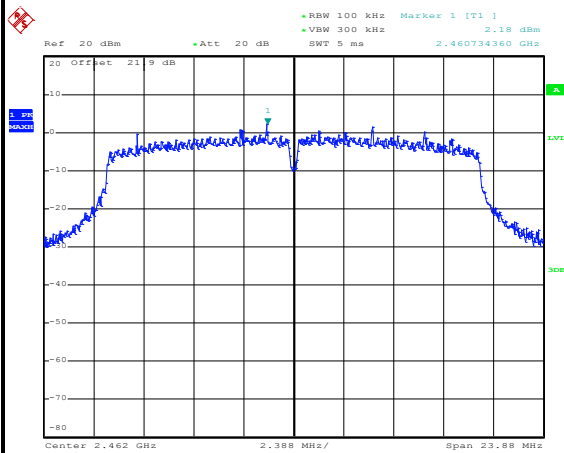


Date: 11.JAN.2017 00:40:54

High Channel Plot

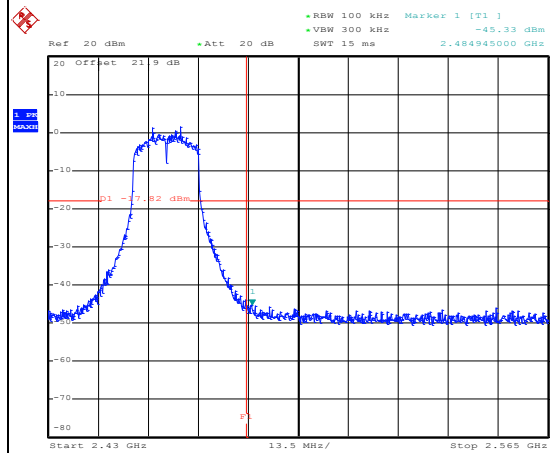


Date: 11.JAN.2017 00:41:09

Spurious Emission 30MHz~3GHz

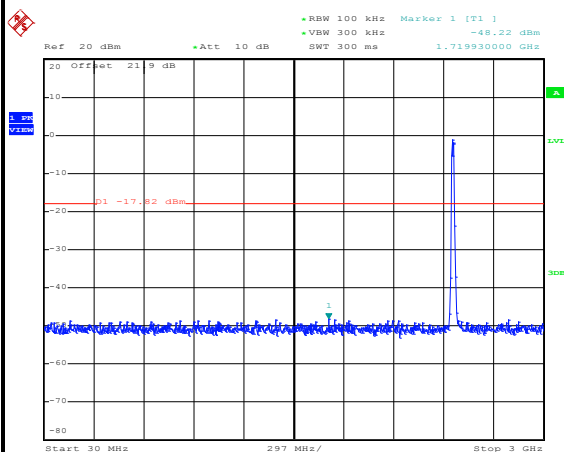

Date: 11.JAN.2017 00:41:33

Spurious Emission 2GHz~25GHz

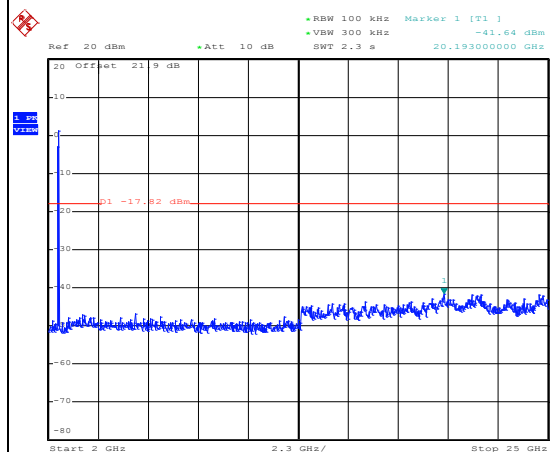

Date: 11.JAN.2017 00:41:41

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

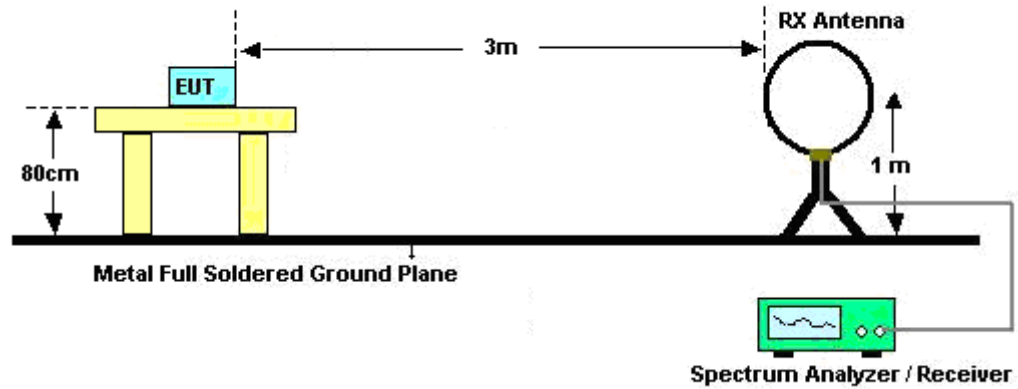

For radiated emissions from 30MHz to 1GHz

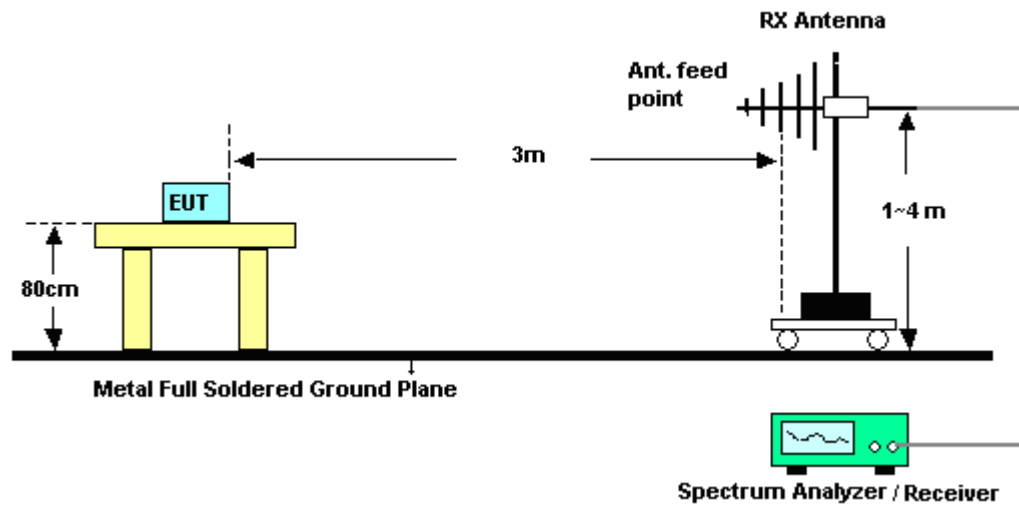

For radiated emissions above 1GHz

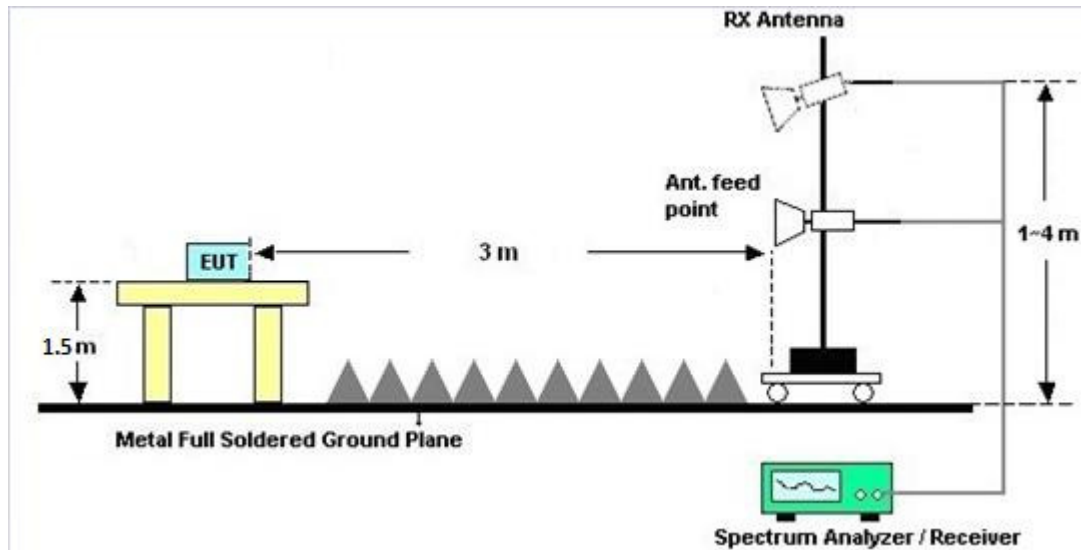

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

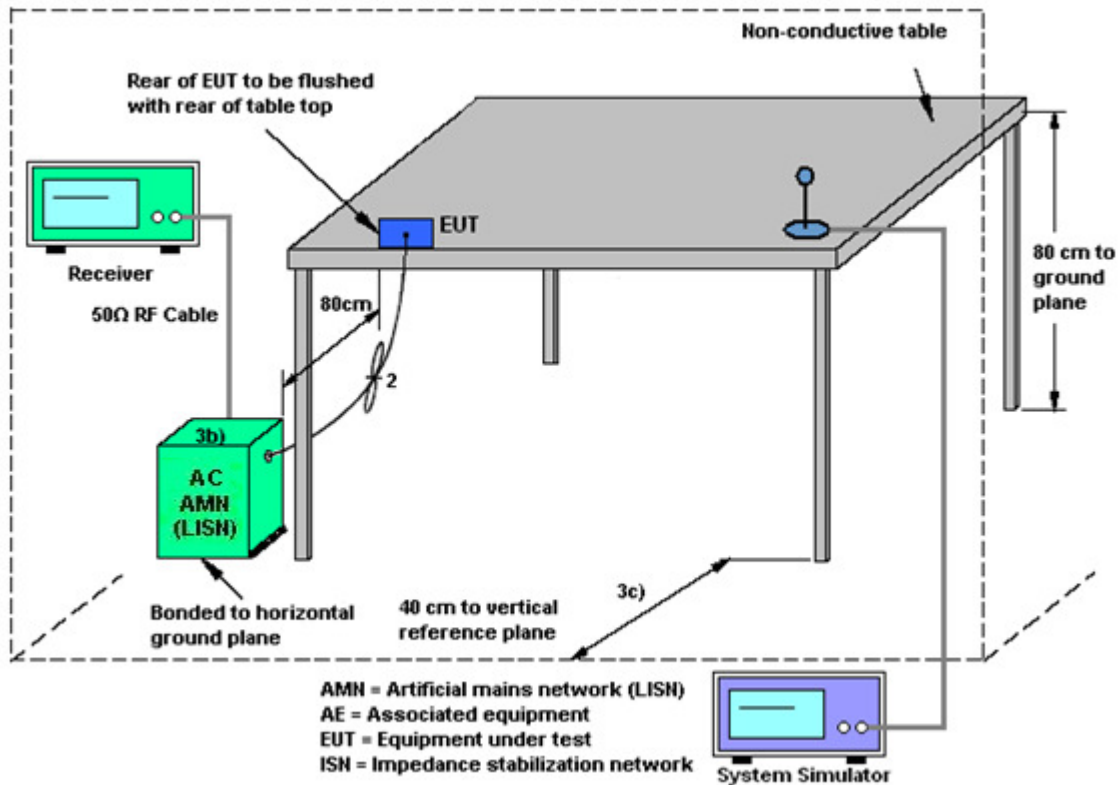

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 3		

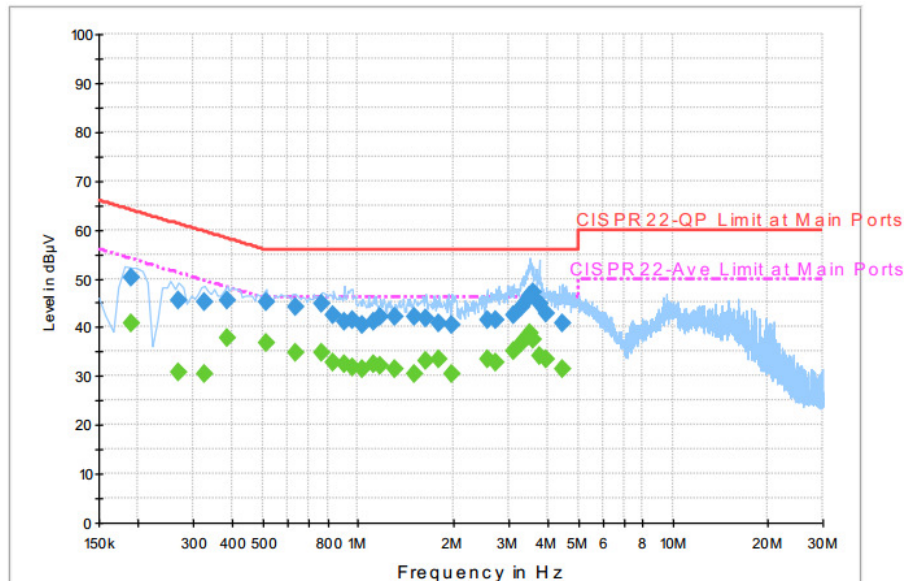


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	50.0	Off	L1	19.6	14.0	64.0
0.270000	45.5	Off	L1	19.6	15.6	61.1
0.326000	45.0	Off	L1	19.6	14.6	59.6
0.382000	45.5	Off	L1	19.6	12.7	58.2
0.510000	45.0	Off	L1	19.6	11.0	56.0
0.630000	44.1	Off	L1	19.5	11.9	56.0
0.766000	44.8	Off	L1	19.6	11.2	56.0
0.838000	42.6	Off	L1	19.6	13.4	56.0
0.902000	41.2	Off	L1	19.6	14.8	56.0
0.958000	41.5	Off	L1	19.6	14.5	56.0
1.038000	40.4	Off	L1	19.6	15.6	56.0
1.118000	41.0	Off	L1	19.6	15.0	56.0
1.182000	42.1	Off	L1	19.6	13.9	56.0
1.310000	42.1	Off	L1	19.6	13.9	56.0
1.502000	42.2	Off	L1	19.6	13.8	56.0
1.646000	41.7	Off	L1	19.6	14.3	56.0




Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 3		

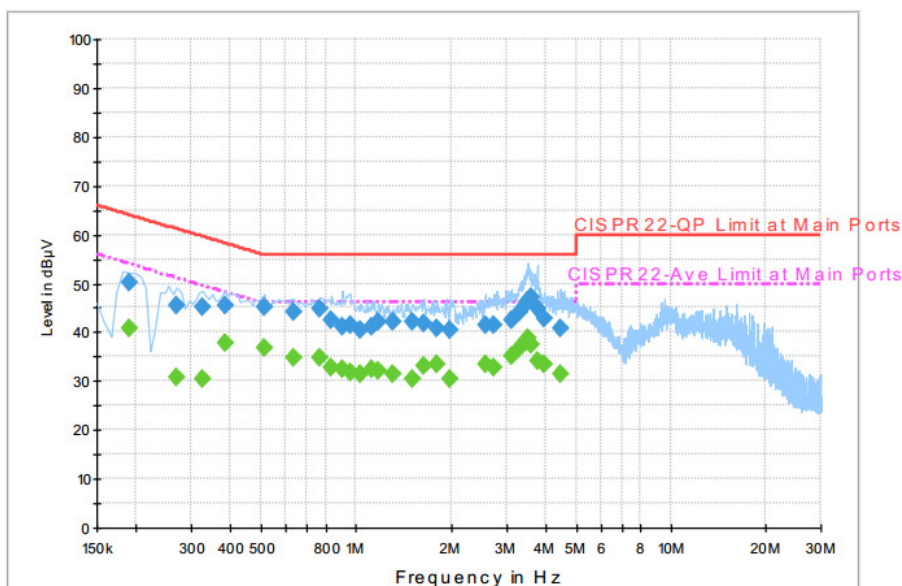**Final Result : Quasi-Peak**


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.814000	40.6	Off	L1	19.6	15.4	56.0
1.990000	40.5	Off	L1	19.6	15.5	56.0
2.574000	41.4	Off	L1	19.2	14.6	56.0
2.734000	41.4	Off	L1	19.3	14.6	56.0
3.134000	42.6	Off	L1	19.5	13.4	56.0
3.318000	44.2	Off	L1	19.5	11.8	56.0
3.478000	45.9	Off	L1	19.5	10.1	56.0
3.526000	46.5	Off	L1	19.5	9.5	56.0
3.614000	47.2	Off	L1	19.5	8.8	56.0
3.758000	44.7	Off	L1	19.6	11.3	56.0
3.974000	42.8	Off	L1	19.6	13.2	56.0
4.462000	40.9	Off	L1	19.6	15.1	56.0

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 3		

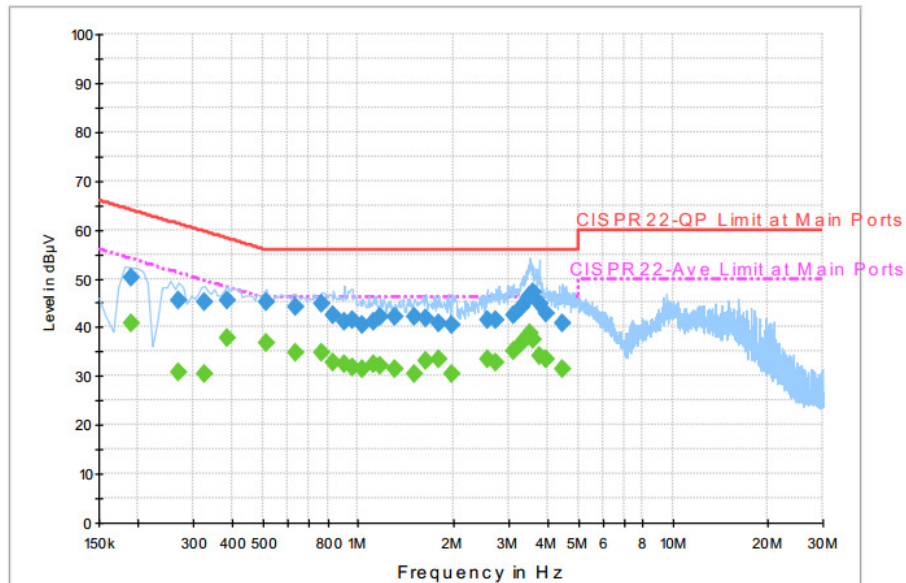
Final Result : Average


Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	40.7	Off	L1	19.6	13.3	54.0
0.270000	30.8	Off	L1	19.6	20.3	51.1
0.326000	30.5	Off	L1	19.6	19.1	49.6
0.382000	37.7	Off	L1	19.6	10.5	48.2
0.510000	36.7	Off	L1	19.6	9.3	46.0
0.630000	34.7	Off	L1	19.5	11.3	46.0
0.766000	34.9	Off	L1	19.6	11.1	46.0
0.838000	32.7	Off	L1	19.6	13.3	46.0
0.902000	32.4	Off	L1	19.6	13.6	46.0
0.958000	31.9	Off	L1	19.6	14.1	46.0
1.038000	31.3	Off	L1	19.6	14.7	46.0
1.118000	32.4	Off	L1	19.6	13.6	46.0
1.182000	32.0	Off	L1	19.6	14.0	46.0
1.310000	31.5	Off	L1	19.6	14.5	46.0
1.502000	30.4	Off	L1	19.6	15.6	46.0
1.646000	33.2	Off	L1	19.6	12.8	46.0

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 3		

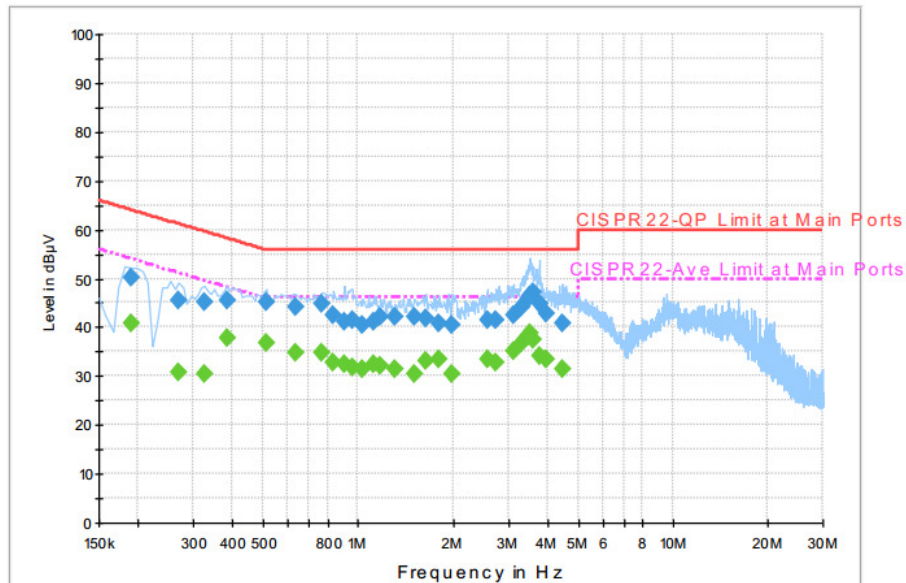
Final Result : Average


Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.814000	33.6	Off	L1	19.6	12.4	46.0
1.990000	30.6	Off	L1	19.6	15.4	46.0
2.574000	33.4	Off	L1	19.2	12.6	46.0
2.734000	32.8	Off	L1	19.3	13.2	46.0
3.134000	35.0	Off	L1	19.5	11.0	46.0
3.318000	36.7	Off	L1	19.5	9.3	46.0
3.478000	38.1	Off	L1	19.5	7.9	46.0
3.526000	38.6	Off	L1	19.5	7.4	46.0
3.614000	37.5	Off	L1	19.5	8.5	46.0
3.758000	34.1	Off	L1	19.6	11.9	46.0
3.974000	33.4	Off	L1	19.6	12.6	46.0
4.462000	31.5	Off	L1	19.6	14.5	46.0

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 3		

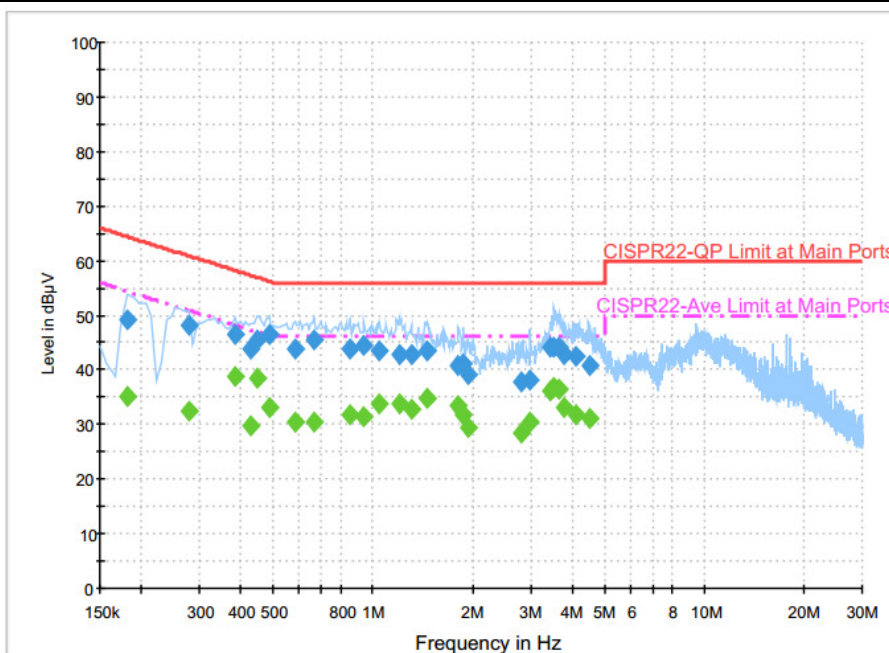
Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	49.0	Off	N	19.5	15.4	64.4
0.278000	48.2	Off	N	19.5	12.7	60.9
0.382000	46.4	Off	N	19.5	11.8	58.2
0.430000	43.8	Off	N	19.5	13.5	57.3
0.446000	45.6	Off	N	19.5	11.3	56.9
0.486000	46.4	Off	N	19.6	9.8	56.2
0.582000	43.8	Off	N	19.5	12.2	56.0
0.662000	45.4	Off	N	19.5	10.6	56.0
0.854000	43.9	Off	N	19.5	12.1	56.0
0.942000	44.4	Off	N	19.5	11.6	56.0

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 3		

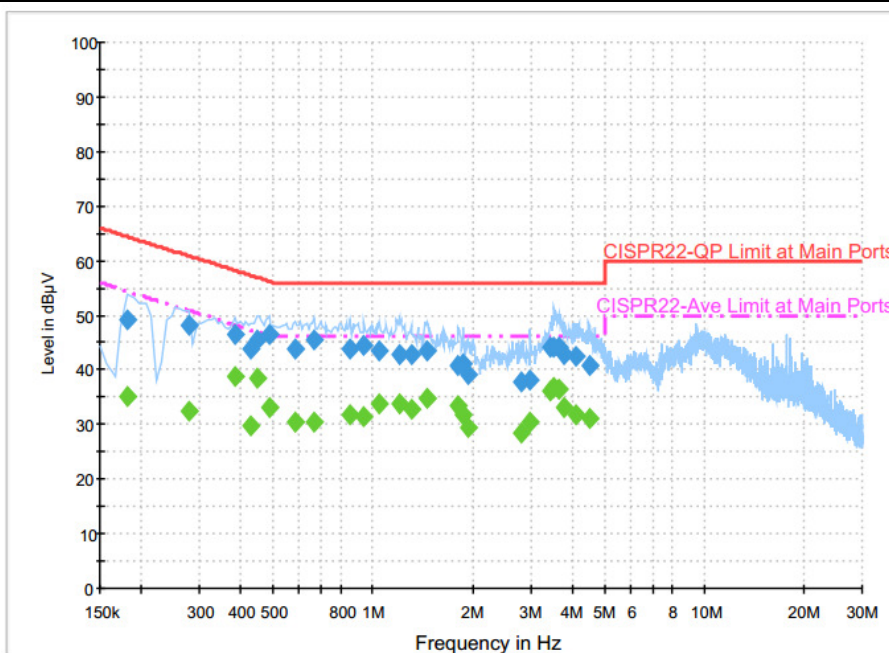
Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.046000	43.3	Off	N	19.6	12.7	56.0
1.198000	42.9	Off	N	19.6	13.1	56.0
1.302000	42.8	Off	N	19.6	13.2	56.0
1.454000	43.4	Off	N	19.6	12.6	56.0
1.814000	40.9	Off	N	19.6	15.1	56.0
1.870000	41.1	Off	N	19.6	14.9	56.0
1.950000	39.2	Off	N	19.6	16.8	56.0
2.814000	37.9	Off	N	19.4	18.1	56.0
2.990000	38.2	Off	N	19.4	17.8	56.0
3.454000	44.1	Off	N	19.5	11.9	56.0
3.534000	44.0	Off	N	19.5	12.0	56.0
3.630000	44.2	Off	N	19.5	11.8	56.0
3.782000	42.7	Off	N	19.6	13.3	56.0
4.102000	42.6	Off	N	19.6	13.4	56.0
4.518000	40.9	Off	N	19.6	15.1	56.0

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 3		

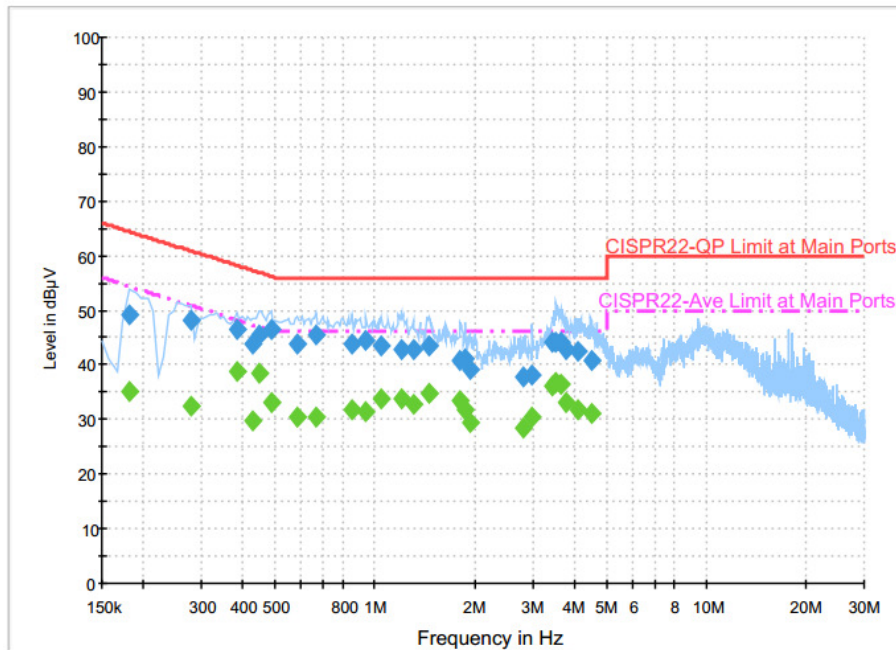
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	35.0	Off	N	19.5	19.4	54.4
0.278000	32.6	Off	N	19.5	18.3	50.9
0.382000	38.9	Off	N	19.5	9.3	48.2
0.430000	29.7	Off	N	19.5	17.6	47.3
0.446000	38.4	Off	N	19.5	8.5	46.9
0.486000	33.2	Off	N	19.6	13.0	46.2
0.582000	30.5	Off	N	19.5	15.5	46.0
0.662000	30.6	Off	N	19.5	15.4	46.0
0.854000	31.8	Off	N	19.5	14.2	46.0
0.942000	31.3	Off	N	19.5	14.7	46.0

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + Scanner + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 3		

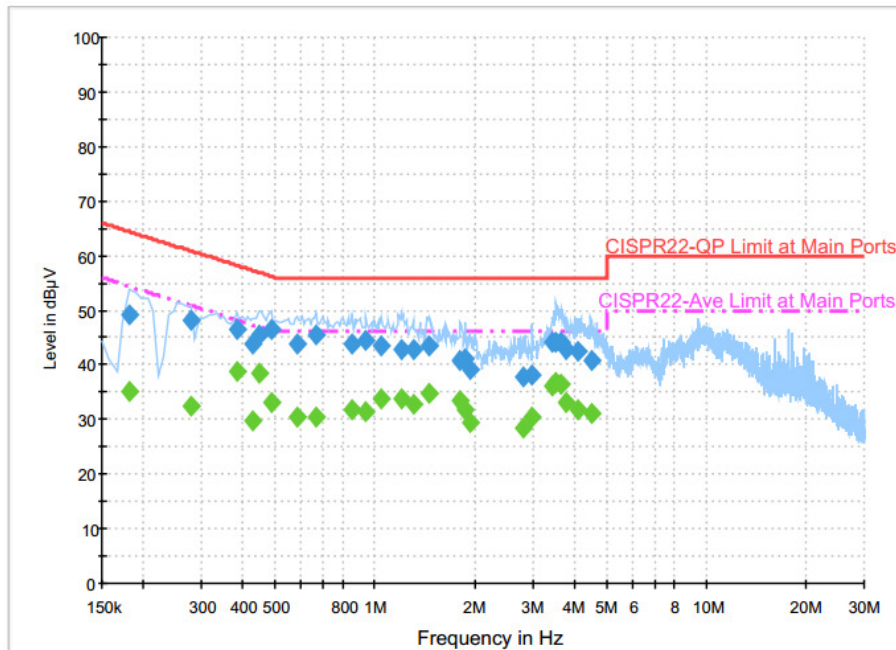
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.046000	33.9	Off	N	19.6	12.1	46.0
1.198000	33.6	Off	N	19.6	12.4	46.0
1.302000	32.7	Off	N	19.6	13.3	46.0
1.454000	34.9	Off	N	19.6	11.1	46.0
1.814000	33.3	Off	N	19.6	12.7	46.0
1.870000	31.9	Off	N	19.6	14.1	46.0
1.950000	29.3	Off	N	19.6	16.7	46.0
2.814000	28.4	Off	N	19.4	17.6	46.0
2.990000	30.4	Off	N	19.4	15.6	46.0
3.454000	36.0	Off	N	19.5	10.0	46.0
3.534000	36.9	Off	N	19.5	9.1	46.0
3.630000	36.5	Off	N	19.5	9.5	46.0
3.782000	33.2	Off	N	19.6	12.8	46.0
4.102000	31.9	Off	N	19.6	14.1	46.0
4.518000	31.0	Off	N	19.6	15.0	46.0



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	300MHz~40GHz z	Sep. 29, 2016	Jan. 10, 2017 ~ Jan. 11, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz z	Sep. 29, 2016	Jan. 10, 2017 ~ Jan. 11, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jul. 17, 2016	Jan. 10, 2017 ~ Jan. 11, 2017	Jul. 16, 2017	Conducted (TH05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Jan. 17, 2017 ~ Feb. 02, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Jan. 17, 2017 ~ Feb. 02, 2017	Sep. 01, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 15, 2016	Jan. 17, 2017 ~ Feb. 02, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-152 2	1GHz ~ 18GHz	Mar. 30, 2016	Jan. 17, 2017 ~ Feb. 02, 2017	Mar. 31, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 10, 2016	Jan. 17, 2017 ~ Feb. 02, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY523502 76	10Hz ~ 44GHZ	Mar. 21, 2016	Jan. 17, 2017 ~ Feb. 02, 2017	Mar. 20, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jan. 17, 2017 ~ Feb. 02, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jan. 17, 2017 ~ Feb. 02, 2017	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Jan. 17, 2017 ~ Feb. 02, 2017	Feb. 14, 2017	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 08, 2016	Jan. 17, 2017 ~ Feb. 02, 2017	Nov. 07, 2017	Radiation (03CH11-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 17, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Jan. 17, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Jan. 17, 2017	Nov. 28, 2017	Conduction (CO05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----



Appendix A. Conducted Test Results

Test Engineer:	Shiming Liu	Temperature:	21~25	°C
Test Date:	2017/01/10~2017/01/11	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	14.05	9.04	0.50	Pass
11b	1Mbps	1	6	2437	14.15	9.00	0.50	Pass
11b	1Mbps	1	11	2462	14.10	9.06	0.50	Pass
11g	6Mbps	1	1	2412	17.95	15.26	0.50	Pass
11g	6Mbps	1	6	2437	18.10	15.50	0.50	Pass
11g	6Mbps	1	11	2462	18.05	15.52	0.50	Pass
HT20	MCS0	1	1	2412	19.00	15.38	0.50	Pass
HT20	MCS0	1	6	2437	18.75	13.64	0.50	Pass
HT20	MCS0	1	11	2462	18.90	15.92	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	19.32	30.00	2.29	21.61	36.00	Pass
11b	1Mbps	1	6	2437	19.30	30.00	2.29	21.59	36.00	Pass
11b	1Mbps	1	11	2462	19.42	30.00	2.29	21.71	36.00	Pass
11g	6Mbps	1	1	2412	23.41	30.00	2.29	25.70	36.00	Pass
11g	6Mbps	1	6	2437	23.45	30.00	2.29	25.74	36.00	Pass
11g	6Mbps	1	11	2462	23.61	30.00	2.29	25.90	36.00	Pass
HT20	MCS0	1	1	2412	23.65	30.00	2.29	25.94	36.00	Pass
HT20	MCS0	1	6	2437	23.63	30.00	2.29	25.92	36.00	Pass
HT20	MCS0	1	11	2462	23.68	30.00	2.29	25.97	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	17.06
11b	1Mbps	1	6	2437	0.00	17.20
11b	1Mbps	1	11	2462	0.00	17.27
11g	6Mbps	1	1	2412	0.07	13.45
11g	6Mbps	1	6	2437	0.07	13.42
11g	6Mbps	1	11	2462	0.07	13.50
HT20	MCS0	1	1	2412	0.05	13.47
HT20	MCS0	1	6	2437	0.05	13.47
HT20	MCS0	1	11	2462	0.05	13.50

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-5.75	2.29	8.00	Pass
11b	1Mbps	1	6	2437	-4.90	2.29	8.00	Pass
11b	1Mbps	1	11	2462	-6.45	2.29	8.00	Pass
11g	6Mbps	1	1	2412	-11.28	2.29	8.00	Pass
11g	6Mbps	1	6	2437	-12.41	2.29	8.00	Pass
11g	6Mbps	1	11	2462	-11.63	2.29	8.00	Pass
HT20	MCS0	1	1	2412	-11.69	2.29	8.00	Pass
HT20	MCS0	1	6	2437	-12.37	2.29	8.00	Pass
HT20	MCS0	1	11	2462	-10.93	2.29	8.00	Pass



Appendix B. Radiated Spurious Emission

Test Engineer :	Jacky Hung and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2336.145	53.61	-20.39	74	51.44	27.03	8.75	33.61	337	280	P	H
		2387.07	43.9	-10.1	54	41.42	27.19	8.89	33.6	337	280	A	H
	*	2412	102.92	-	-	100.38	27.24	8.89	33.59	337	280	P	H
	*	2412	99.52	-	-	96.98	27.24	8.89	33.59	337	280	A	H
													H
													H
		2387.175	54.24	-19.76	74	51.76	27.19	8.89	33.6	254	341	P	V
		2386.965	44.82	-9.18	54	42.34	27.19	8.89	33.6	254	341	A	V
	*	2412	106.98	-	-	104.44	27.24	8.89	33.59	254	341	P	V
	*	2412	103.48	-	-	100.94	27.24	8.89	33.59	254	341	A	V
													V
													V
802.11b CH 06 2437MHz		2385.74	54.83	-19.17	74	52.35	27.19	8.89	33.6	378	259	P	H
		2389.8	42.9	-11.1	54	40.41	27.19	8.89	33.59	378	259	A	H
	*	2437	102.33	-	-	99.64	27.34	8.94	33.59	378	259	P	H
	*	2437	98.84	-	-	96.15	27.34	8.94	33.59	378	259	A	H
		2494.12	53.41	-20.59	74	50.5	27.5	8.98	33.57	378	259	P	H
		2485.58	43.17	-10.83	54	40.32	27.45	8.98	33.58	378	259	A	H
		2384.9	54.37	-19.63	74	51.94	27.14	8.89	33.6	261	345	P	V
		2389.24	43.3	-10.7	54	40.82	27.19	8.89	33.6	261	345	A	V
	*	2437	107.91	-	-	105.22	27.34	8.94	33.59	261	345	P	V
	*	2437	104.49	-	-	101.8	27.34	8.94	33.59	261	345	A	V
		2489.36	53.61	-20.39	74	50.71	27.5	8.98	33.58	261	345	P	V
		2484.95	43.51	-10.49	54	40.66	27.45	8.98	33.58	261	345	A	V



802.11b CH 11 2462MHz	*	2462	102.73	-	-	99.93	27.4	8.98	33.58	398	331	P	H
	*	2462	99.29	-	-	96.49	27.4	8.98	33.58	398	331	A	H
		2486.4	54.27	-19.73	74	51.42	27.45	8.98	33.58	398	331	P	H
		2487.24	44.42	-9.58	54	41.57	27.45	8.98	33.58	398	331	A	H
													H
													H
	*	2462	107.85	-	-	105.05	27.4	8.98	33.58	310	344	P	V
	*	2462	104.43	-	-	101.63	27.4	8.98	33.58	310	344	A	V
		2493.04	55.65	-18.35	74	52.74	27.5	8.98	33.57	310	344	P	V
		2487.16	46.82	-7.18	54	43.97	27.45	8.98	33.58	310	344	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	34.53	-39.47	74	43.16	31.69	10.77	51.09	100	0	P	H
													H
													H
													H
		4824	32.29	-41.71	74	40.92	31.69	10.77	51.09	100	0	P	V
													V
													V
													V
802.11b CH 06 2437MHz		4874	34.28	-39.72	74	42.68	31.78	10.88	51.06	100	0	P	H
		7311	37.81	-36.19	74	38.26	37.27	12.79	50.51	100	0	P	H
													H
													H
		4874	33.73	-40.27	74	42.13	31.78	10.88	51.06	100	0	P	V
		7311	35.6	-38.4	74	36.05	37.27	12.79	50.51	100	0	P	V
													V
													V
802.11b CH 11 2462MHz		4924	33.32	-40.68	74	41.48	31.88	11	51.04	100	0	P	H
		7386	36	-38	74	36.25	37.38	12.88	50.51	100	0	P	H
													H
													H
		4924	31.74	-42.26	74	39.9	31.88	11	51.04	100	0	P	V
		7386	36.66	-37.34	74	36.91	37.38	12.88	50.51	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2379.3	53.82	-20.18	74	51.46	27.14	8.82	33.6	338	278	P	H
		2390	43.7	-10.3	54	41.21	27.19	8.89	33.59	338	278	A	H
	*	2412	101.16	-	-	98.62	27.24	8.89	33.59	338	278	P	H
	*	2412	92.7	-	-	90.16	27.24	8.89	33.59	338	278	A	H
													H
													H
		2389.38	54.34	-19.66	74	51.86	27.19	8.89	33.6	230	341	P	V
		2390	44.74	-9.26	54	42.25	27.19	8.89	33.59	230	341	A	V
	*	2412	105.24	-	-	102.7	27.24	8.89	33.59	230	341	P	V
	*	2412	96.65	-	-	94.11	27.24	8.89	33.59	230	341	A	V
													V
													V
802.11g CH 06 2437MHz		2366.28	53.81	-20.19	74	51.5	27.09	8.82	33.6	374	289	P	H
		2389.66	42.8	-11.2	54	40.32	27.19	8.89	33.6	374	289	A	H
	*	2437	101.4	-	-	98.71	27.34	8.94	33.59	374	289	P	H
	*	2437	92.65	-	-	89.96	27.34	8.94	33.59	374	289	A	H
		2495.03	53.59	-20.41	74	50.68	27.5	8.98	33.57	374	289	P	H
		2485.79	43.17	-10.83	54	40.32	27.45	8.98	33.58	374	289	A	H
		2352.7	54.45	-19.55	74	52.14	27.09	8.82	33.6	258	344	P	V
		2388.4	42.92	-11.08	54	40.44	27.19	8.89	33.6	258	344	A	V
	*	2437	105.81	-	-	103.12	27.34	8.94	33.59	258	344	P	V
	*	2437	97.24	-	-	94.55	27.34	8.94	33.59	258	344	A	V
		2484.25	53.86	-20.14	74	51.01	27.45	8.98	33.58	258	344	P	V
		2486.98	43.27	-10.73	54	40.42	27.45	8.98	33.58	258	344	A	V



802.11g CH 11 2462MHz	*	2462	100.54	-	-	97.74	27.4	8.98	33.58	397	355	P	H
	*	2462	92.23	-	-	89.43	27.4	8.98	33.58	397	355	A	H
		2491.12	53.88	-20.12	74	50.98	27.5	8.98	33.58	397	355	P	H
		2483.52	43.94	-10.06	54	41.09	27.45	8.98	33.58	397	355	A	H
													H
													H
	*	2462	106.1	-	-	103.3	27.4	8.98	33.58	310	340	P	V
	*	2462	97.62	-	-	94.82	27.4	8.98	33.58	310	340	A	V
		2483.72	56.8	-17.2	74	53.95	27.45	8.98	33.58	310	340	P	V
		2483.52	46	-8	54	43.15	27.45	8.98	33.58	310	340	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	30.91	-43.09	74	39.54	31.69	10.77	51.09	100	0	P	H
													H
													H
													H
		4824	30.46	-43.54	74	39.09	31.69	10.77	51.09	100	0	P	V
													V
													V
													V
802.11g CH 06 2437MHz		4874	31.72	-42.28	74	40.12	31.78	10.88	51.06	100	0	P	H
		7311	37.89	-36.11	74	38.34	37.27	12.79	50.51	100	0	P	H
													H
													H
		4874	30.6	-43.4	74	39	31.78	10.88	51.06	100	0	P	V
		7311	37.09	-36.91	74	37.54	37.27	12.79	50.51	100	0	P	V
													V
													V
802.11g CH 11 2462MHz		4924	31.99	-42.01	74	40.15	31.88	11	51.04	100	0	P	H
		7386	36.76	-37.24	74	37.01	37.38	12.88	50.51	100	0	P	H
													H
													H
		4924	31.37	-42.63	74	39.53	31.88	11	51.04	100	0	P	V
		7386	36.9	-37.1	74	37.15	37.38	12.88	50.51	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.695	54.26	-19.74	74	51.78	27.19	8.89	33.6	338	278	P	H
		2390	43.94	-10.06	54	41.45	27.19	8.89	33.59	338	278	A	H
	*	2412	100.84	-	-	98.3	27.24	8.89	33.59	338	278	P	H
	*	2412	92.32	-	-	89.78	27.24	8.89	33.59	338	278	A	H
													H
													H
		2389.905	54.48	-19.52	74	51.99	27.19	8.89	33.59	228	351	P	V
		2390	45.12	-8.88	54	42.63	27.19	8.89	33.59	228	351	A	V
	*	2412	104.48	-	-	101.94	27.24	8.89	33.59	228	351	P	V
	*	2412	96.3	-	-	93.76	27.24	8.89	33.59	228	351	A	V
													V
													V
802.11n HT20 CH 06 2437MHz		2387.28	54.19	-19.81	74	51.71	27.19	8.89	33.6	365	285	P	H
		2387.56	42.79	-11.21	54	40.31	27.19	8.89	33.6	365	285	A	H
	*	2437	101.18	-	-	98.49	27.34	8.94	33.59	365	285	P	H
	*	2437	92.42	-	-	89.73	27.34	8.94	33.59	365	285	A	H
		2495.87	54.27	-19.73	74	51.36	27.5	8.98	33.57	365	285	P	H
		2498.46	43.16	-10.84	54	40.25	27.5	8.98	33.57	365	285	A	H
		2349.62	54.25	-19.75	74	52	27.03	8.82	33.6	259	346	P	V
		2389.66	42.95	-11.05	54	40.47	27.19	8.89	33.6	259	346	A	V
	*	2437	105.32	-	-	102.63	27.34	8.94	33.59	259	346	P	V
	*	2437	96.77	-	-	94.08	27.34	8.94	33.59	259	346	A	V
		2488.31	53.81	-20.19	74	50.91	27.5	8.98	33.58	259	346	P	V
		2488.45	43.26	-10.74	54	40.36	27.5	8.98	33.58	259	346	A	V



802.11n HT20 CH 11 2462MHz	*	2462	100.84	-	-	98.04	27.4	8.98	33.58	396	332	P	H
	*	2462	92.43	-	-	89.63	27.4	8.98	33.58	396	332	A	H
		2483.68	54.36	-19.64	74	51.51	27.45	8.98	33.58	396	332	P	H
		2483.64	44.55	-9.45	54	41.7	27.45	8.98	33.58	396	332	A	H
													H
													H
	*	2462	105.61	-	-	102.81	27.4	8.98	33.58	309	339	P	V
	*	2462	97.16	-	-	94.36	27.4	8.98	33.58	309	339	A	V
		2484.04	57.82	-16.18	74	54.97	27.45	8.98	33.58	309	339	P	V
		2483.52	46.38	-7.62	54	43.53	27.45	8.98	33.58	309	339	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	30.46	-43.54	74	39.09	31.69	10.77	51.09	100	0	P	H
													H
													H
													H
		4824	30.7	-43.3	74	39.33	31.69	10.77	51.09	100	0	P	V
													V
													V
													V
802.11n HT20 CH 06 2437MHz		4874	31.71	-42.29	74	40.11	31.78	10.88	51.06	100	0	P	H
		7311	36.69	-37.31	74	37.14	37.27	12.79	50.51	100	0	P	H
													H
													H
		4874	31.85	-42.15	74	40.25	31.78	10.88	51.06	100	0	P	V
		7311	37.33	-36.67	74	37.78	37.27	12.79	50.51	100	0	P	V
													V
													V
802.11n HT20 CH 11 2462MHz		4924	31.74	-42.26	74	39.9	31.88	11	51.04	100	0	P	H
		7386	37.8	-36.2	74	38.05	37.38	12.88	50.51	100	0	P	H
													H
													H
		4924	32.53	-41.47	74	40.69	31.88	11	51.04	100	0	P	V
		7386	35.89	-38.11	74	36.14	37.38	12.88	50.51	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		32.43	23.03	-16.97	40	30.09	24.14	1.29	32.49	-	-	P	H
		38.64	20.05	-19.95	40	30.39	20.86	1.29	32.49	-	-	P	H
		259.77	20.4	-25.6	46	30.94	19.7	2.34	32.58	-	-	P	H
		767.6	30.8	-15.2	46	31.07	27.91	4.09	32.27	-	-	P	H
		915.3	32.75	-13.25	46	30	29.64	4.63	31.52	-	-	P	H
		953.1	33.78	-12.22	46	29.67	30.59	4.69	31.17	166	254	P	H
													H
													H
													H
													H
													H
		32.7	36.96	-3.04	40	44.02	24.14	1.29	32.49	214	105	P	V
		38.1	29.87	-10.13	40	39.65	21.42	1.29	32.49	-	-	P	V
		50.52	25.11	-14.89	40	41.41	14.9	1.29	32.49	-	-	P	V
		727	29.41	-16.59	46	30.53	27.25	4.02	32.39	-	-	P	V
		876.8	31.83	-14.17	46	29.98	29.06	4.57	31.78	-	-	P	V
		930.7	33.44	-12.56	46	30.1	30.08	4.63	31.37	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.







Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Jacky Hung and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%





Note symbol

-L	Low channel location
-R	High channel location





2.4GHz 2400~2483.5MHz
WIFI 802.11b (Band Edge @ 3m)

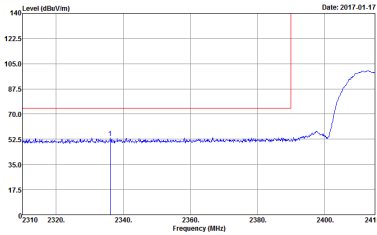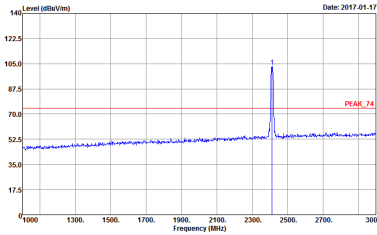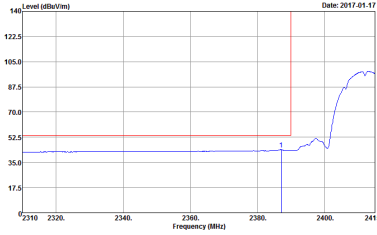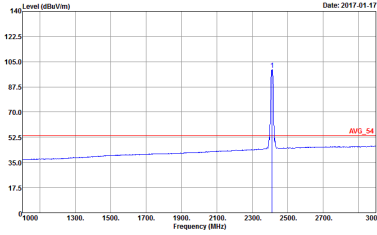WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1
	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1

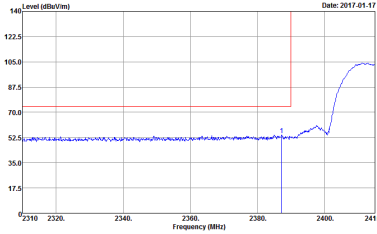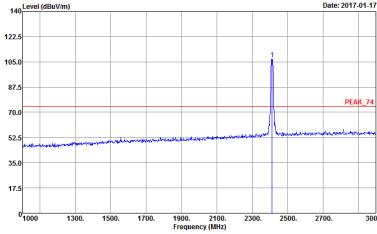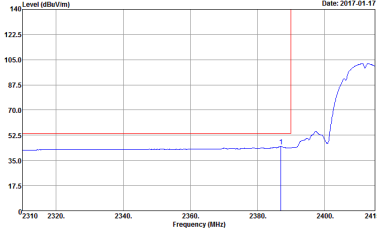
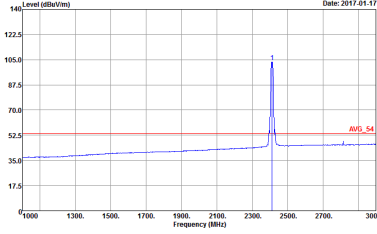


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

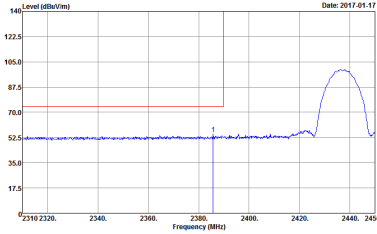
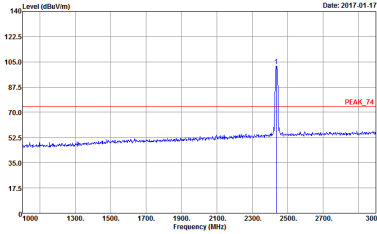
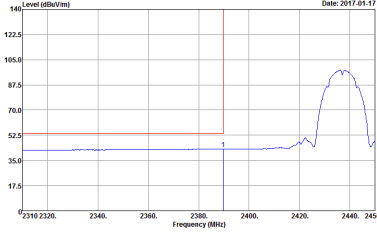
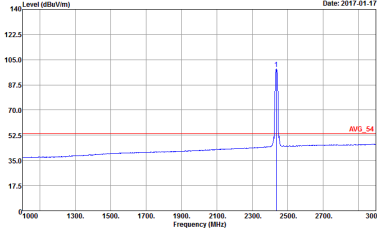


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

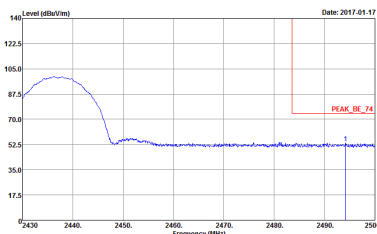
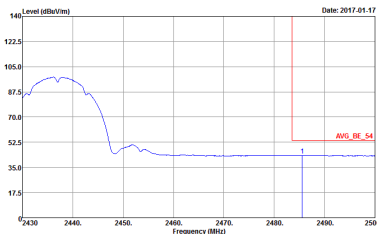


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Left blank
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Left blank

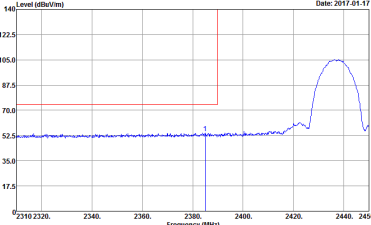
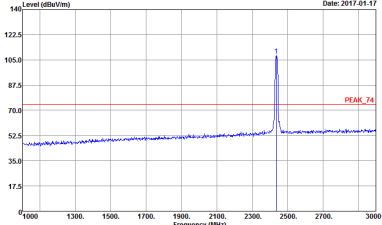
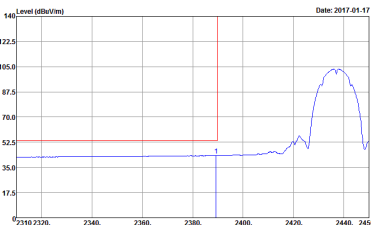
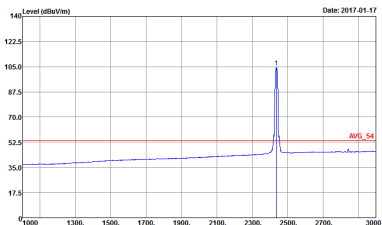


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819 EUT : Sample 1	Left blank
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819 EUT : Sample 1	Left blank

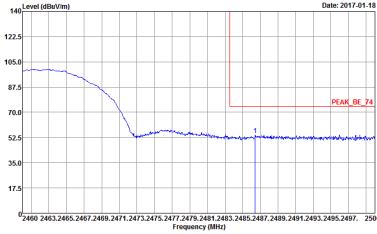
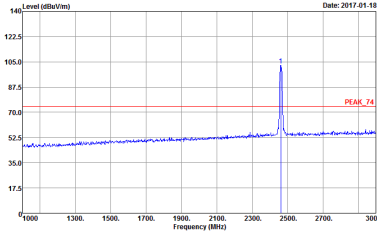
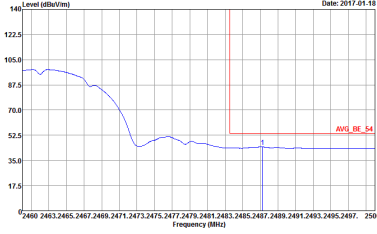
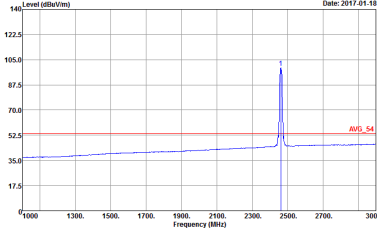






WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

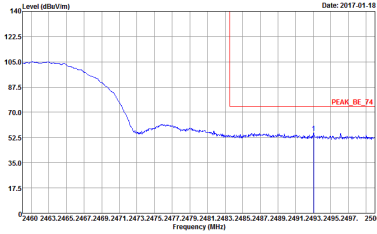
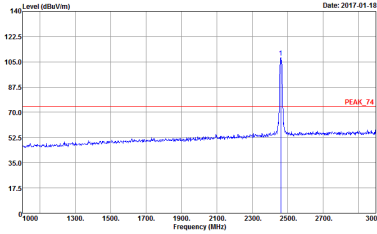
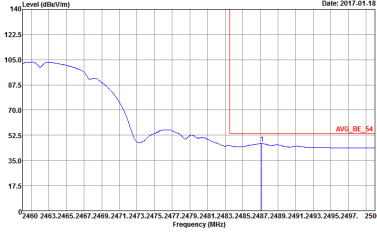
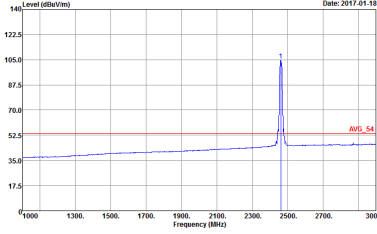




WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

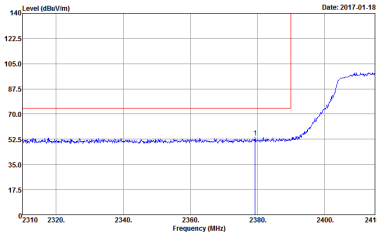
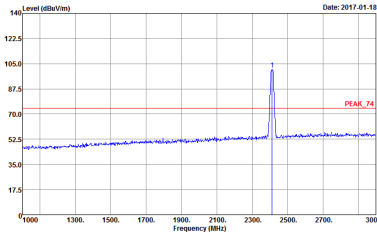
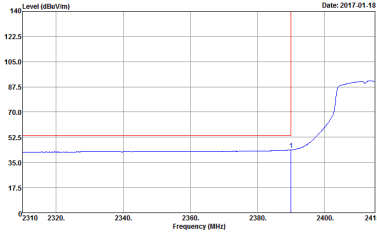
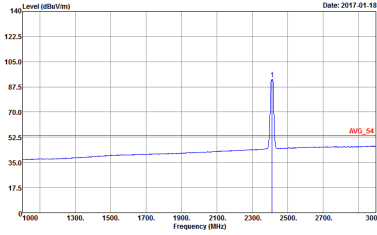
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1

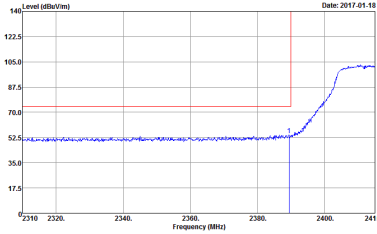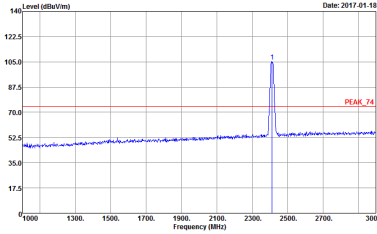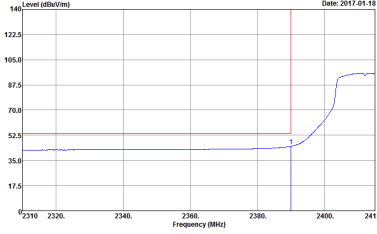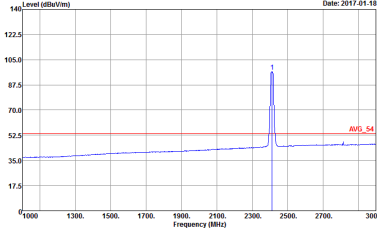WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

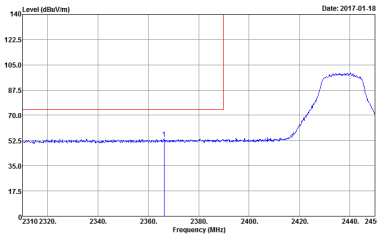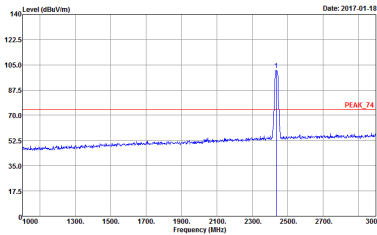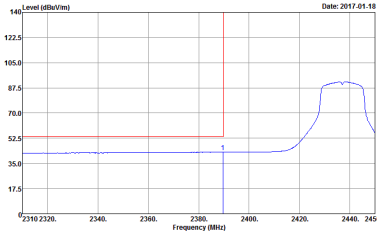
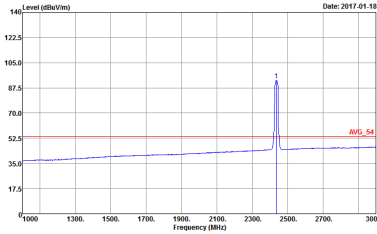
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

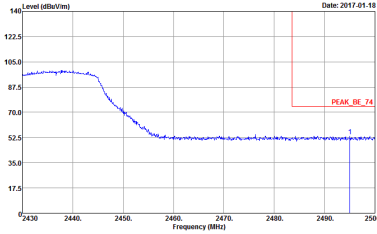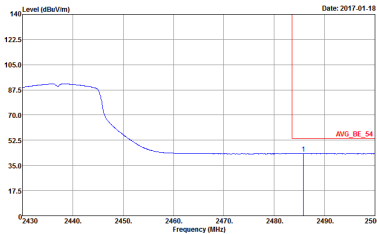WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Left blank
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Left blank

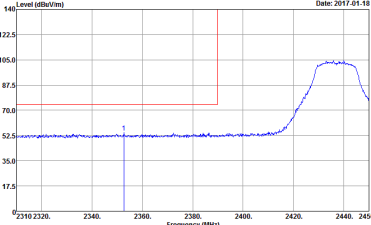
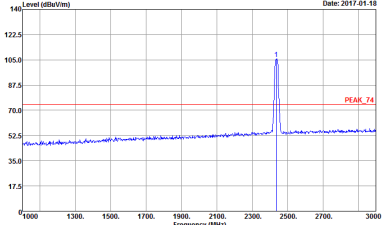
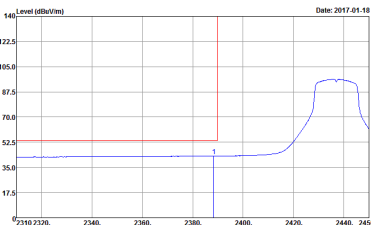
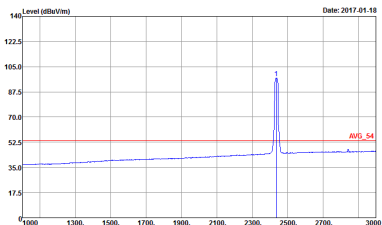


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1



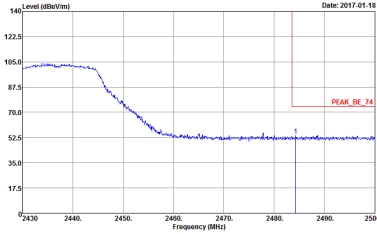
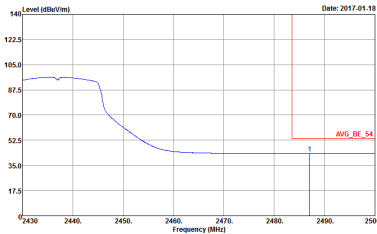


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 602819 EUT : Sample 1	Left Blank
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL Detector : Peak Project : 602819 EUT : Sample 1	Left Blank

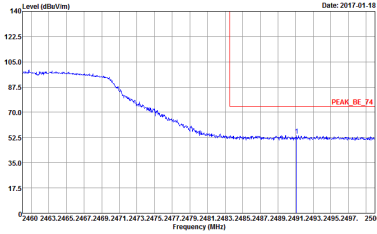
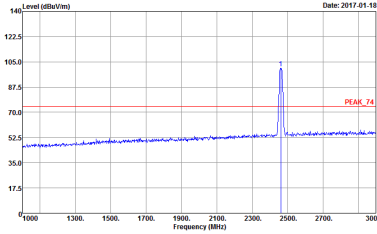
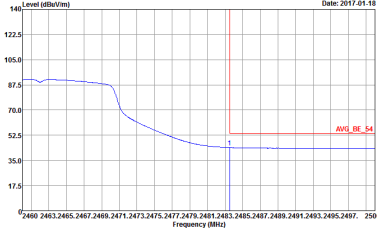
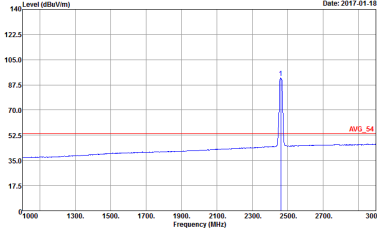






WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HV Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HV Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HV Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HV Condition : AVG_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

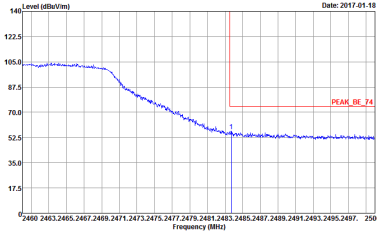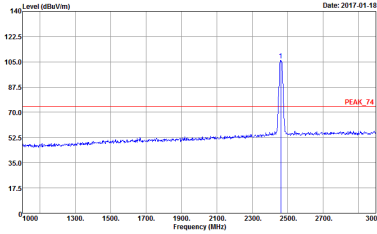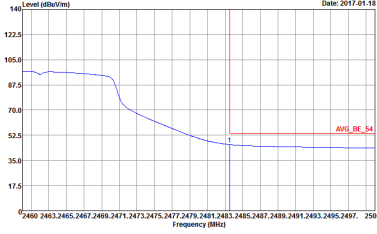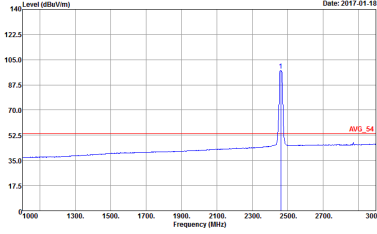





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

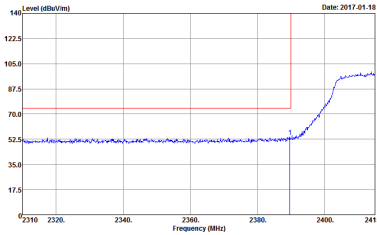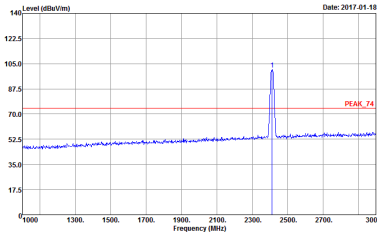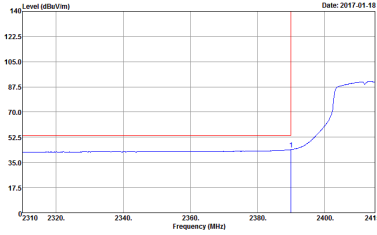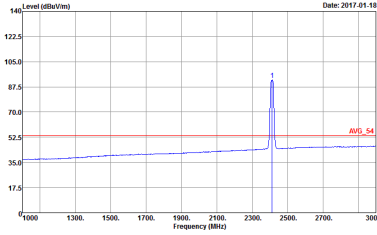WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1
	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 6D2819 EUT : Sample 1

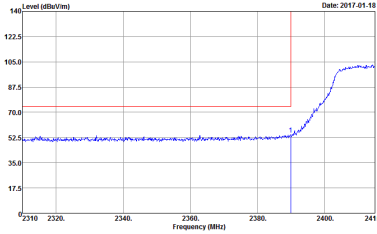
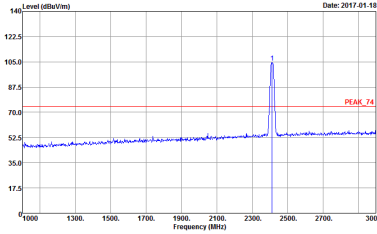
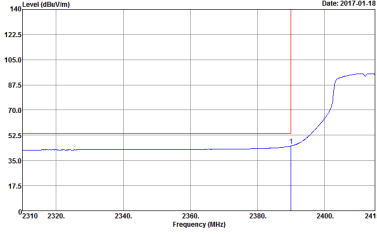
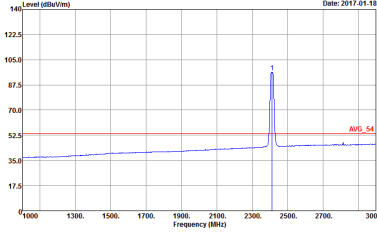
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

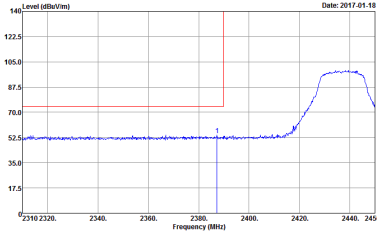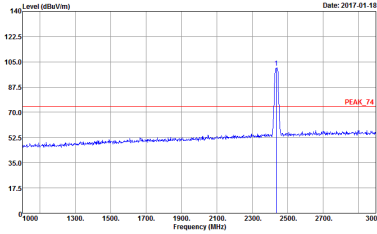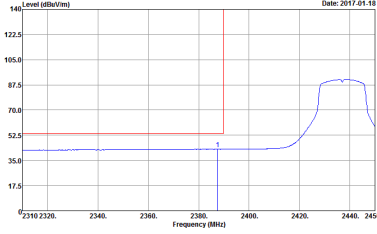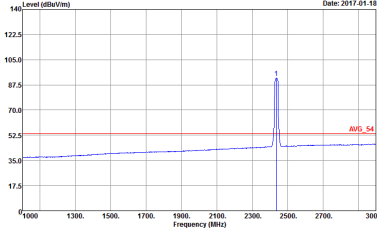



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

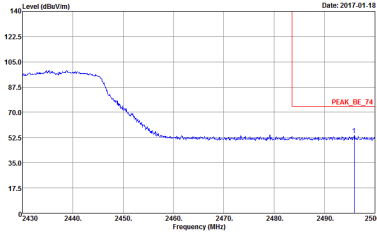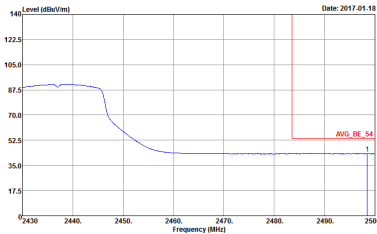WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Left blank
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Left blank

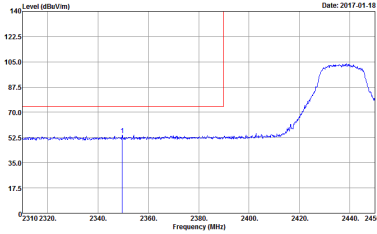
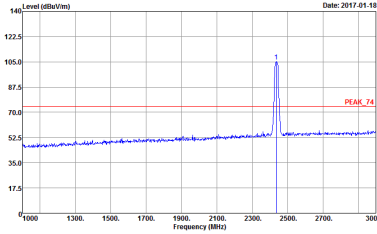
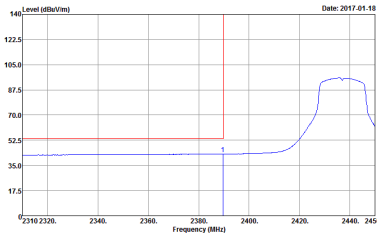
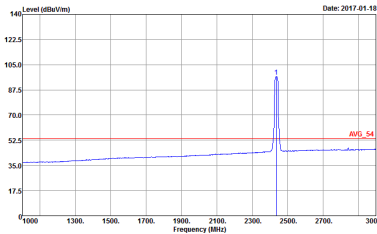






WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819 EUT : Sample 1	Left Blank
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819 EUT : Sample 1	Left Blank

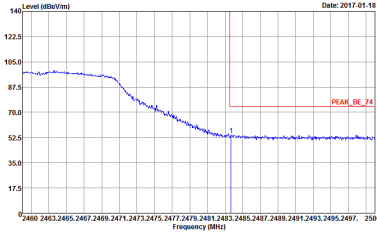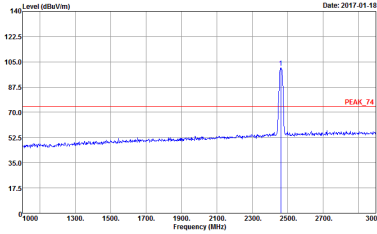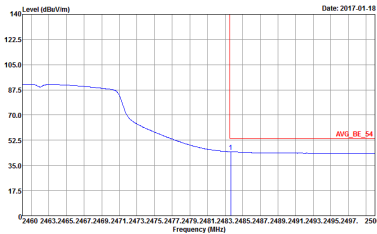
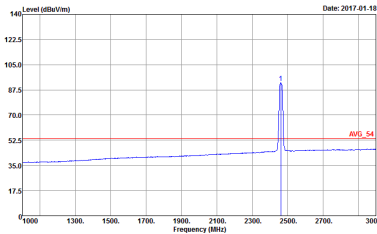


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HV Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HV Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
Avg.	 Site : 03CH11-HV Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HV Condition : AVG_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1

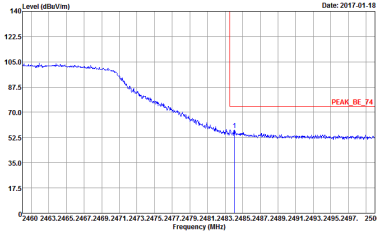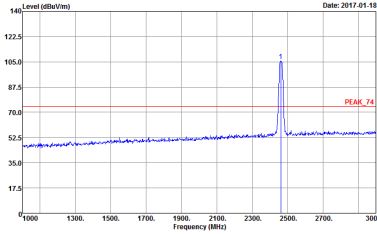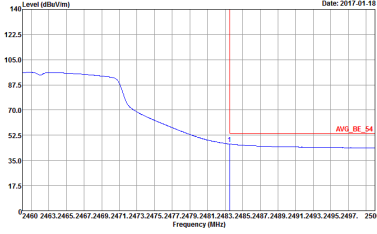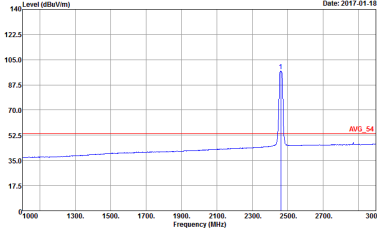WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1
	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 602819 EUT : Sample 1



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

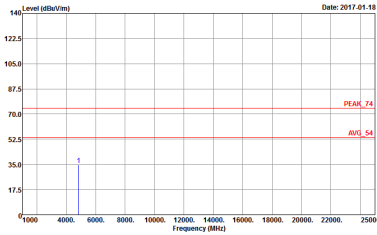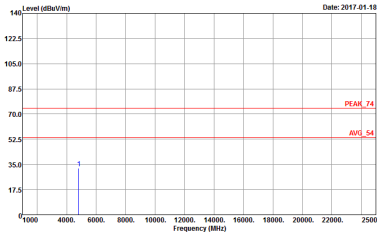WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819 EUT : Sample 1



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819 EUT : Sample 1





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819 EUT : Sample 1





2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

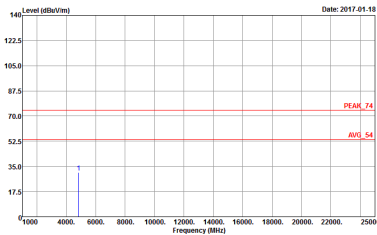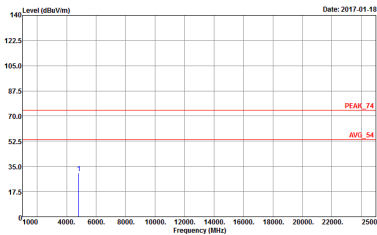WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819 EUT : Sample 1

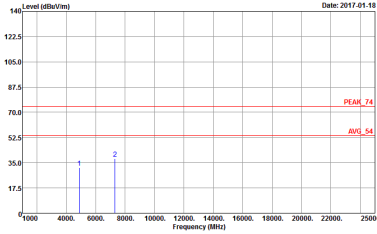
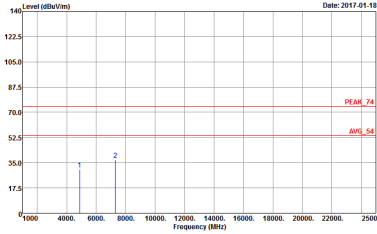


WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819 EUT : Sample 1



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819 EUT : Sample 1

2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

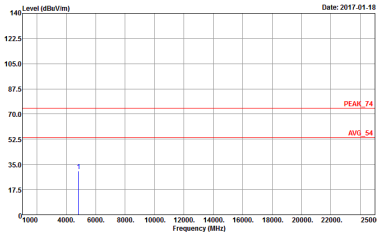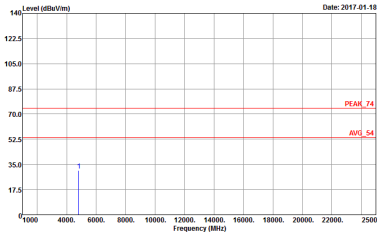WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819 EUT : Sample 1





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819 EUT : Sample 1



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819 EUT : Sample 1	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819 EUT : Sample 1


Emission below 1GHz
2.4GHz WIFI 802.11b (LF)

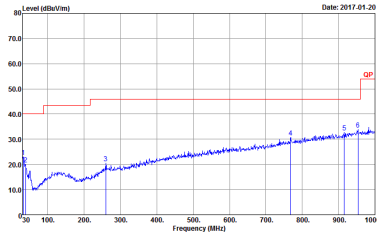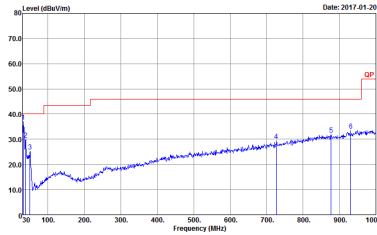WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BT-LOG 6111D-LF_ETC HORIZONTAL Project : 6D2819 Sample : Sample 1	 Site : 03CH11-HY Condition : QP 3m BT-LOG 6111D-LF_ETC VERTICAL Project : 6D2819 Sample : Sample 1

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	100.00	-	-	10Hz
802.11g	98.35	-	-	10Hz
2.4GHz 802.11n HT20	98.81	-	-	10Hz


802.11b

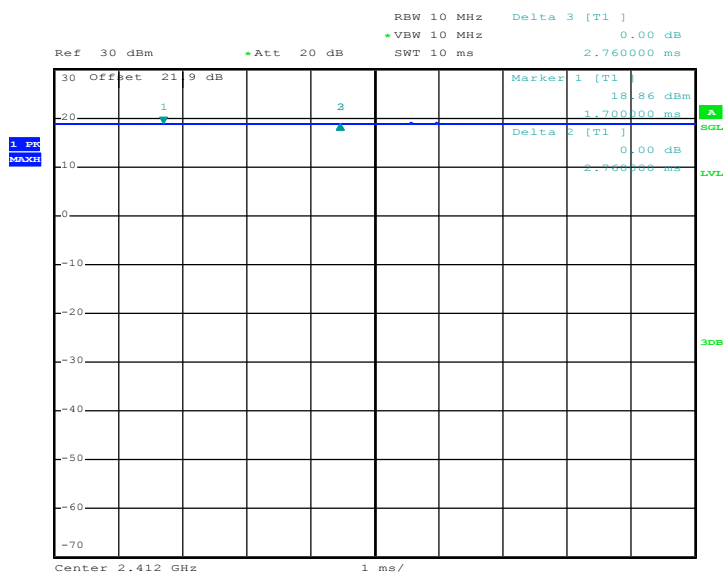

Date: 10.JAN.2017 11:13:10




802.11g

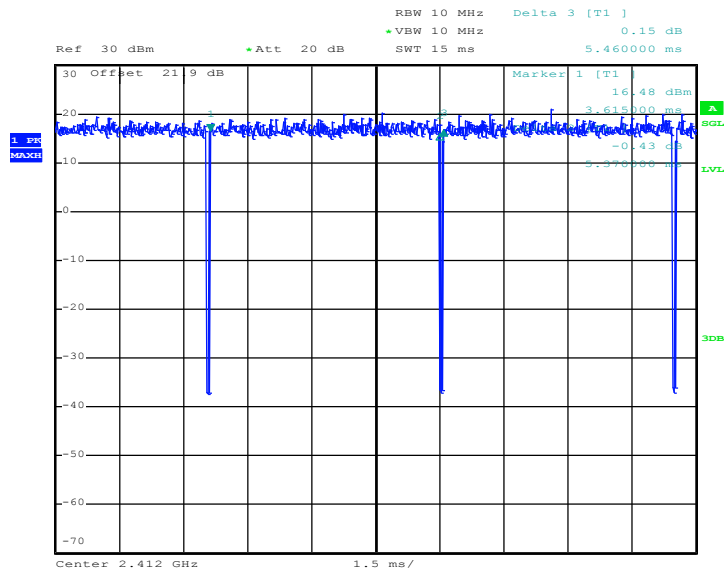

Date: 10.JAN.2017 11:19:13

2.4GHz 802.11n HT20

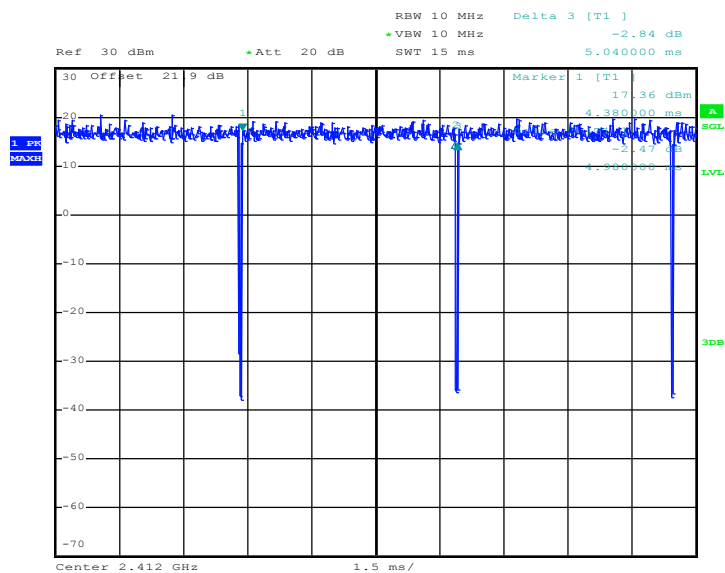

Date: 10.JAN.2017 11:27:27