Photographs of EUT set up at OATS facility July 17, 2003

Photo 1 of 3

Front View of IX260 PC – WLAN Antenna located internally in the upper right and left side of display. External Blade antenna on the right side of display is for RIM902M-2-0.

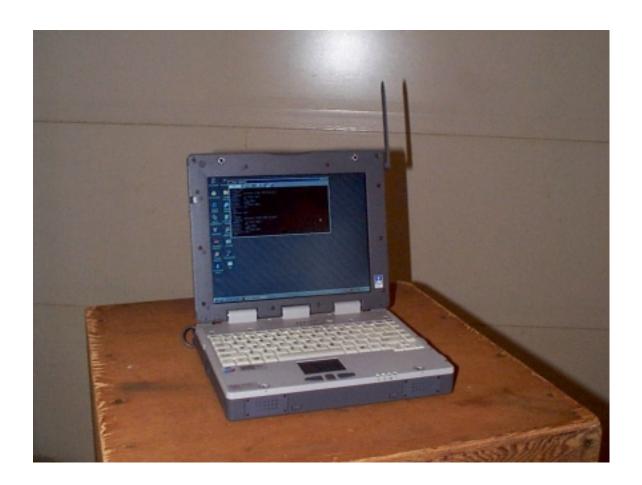


Exhibit 7 3

Photo 2 of 3

Rear View of IX260 PC – WLAN antenna located internally in the upper right and left side of display. External Blade antenna is for RIM902M-2-0.

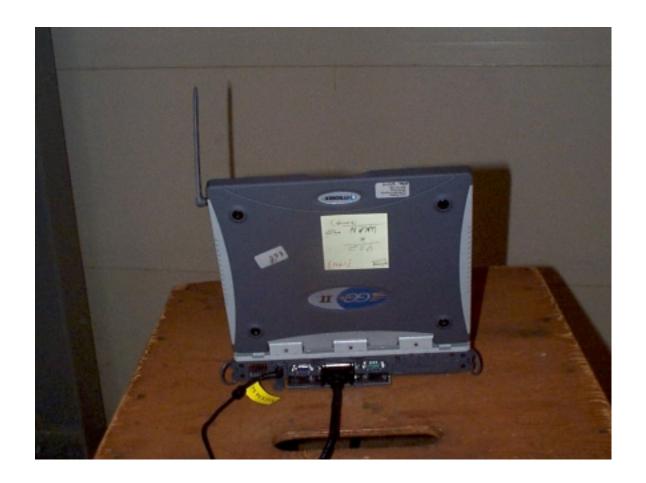


Exhibit 7 4

Photo 3 of 3

Rear View of IX260 PC – WLAN antenna located internally in the upper right and left side of display. External Blade antenna for RIM902M-2-0. An ITRONIX Breakout Box P/N 500116-001 was connected to the multi I/O port on the IX260, to accomodate the RIMKEY ID#205 for FCC type testing that was plugged into the parallel port on the Breakout Box that was located on the lower table surface.

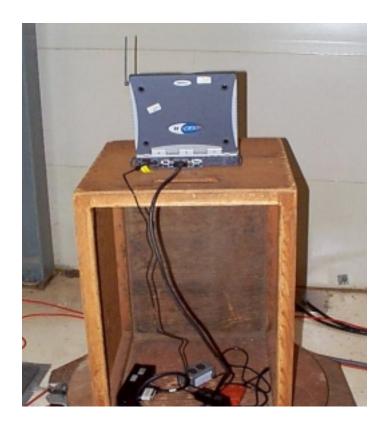


Exhibit 7 5