

# Test Report

**Report No.:** MTi210628011-04E2

**Date of issue:** Jan. 18, 2022

**Applicant:** Xiamen Hanin Electronic Technology Co., Ltd.

**Product:** Barcode Printer

**Model(s):** iT4R, HT4R, iV3800R, ST34R, P54R, 324R,  
J-5400R, Y12R, PZ420R, T432R, ST14R,  
P43R, T430R

**FCC ID:** 2AUTE-IT4R

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

## Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

# Contents

<b>1</b>	<b>General Description .....</b>	<b>5</b>
1.1	Description of the EUT .....	5
1.2	Description of test modes .....	5
1.3	Measurement uncertainty .....	6
<b>2</b>	<b>Summary of Test Result.....</b>	<b>8</b>
<b>3</b>	<b>Test Facilities and Accreditations .....</b>	<b>9</b>
3.1	Test laboratory .....	9
<b>4</b>	<b>Equipment List .....</b>	<b>10</b>
<b>5</b>	<b>Test Result .....</b>	<b>11</b>
5.1	Antenna requirement .....	11
5.2	AC power line conducted emissions.....	12
5.3	20dB occupied bandwidth .....	21
5.4	Conducted peak output power .....	25
5.5	Carrier frequency separation .....	29
5.6	Average time of occupancy .....	31
5.7	Number of hopping channels .....	35
5.8	Conducted emissions at the band edge .....	37
5.9	Conducted spurious emissions .....	41
5.10	Radiated spurious emissions .....	44
	<b>Photographs of the Test Setup.....</b>	<b>54</b>
	<b>Photographs of the EUT.....</b>	<b>55</b>


Test Result Certification	
<b>Applicant:</b>	<b>Xiamen Hanin Electronic Technology Co., Ltd.</b>
<b>Address:</b>	Room 305A, Angye Building, Pioneering Park, Torch High-tech, Zone, Xiamen
<b>Manufacturer:</b>	<b>Xiamen Hanin Electronic Technology Co., Ltd.</b>
<b>Address:</b>	Room 305A, Angye Building, Pioneering Park, Torch High-tech, Zone, Xiamen
<b>Factory:</b>	<b>Xiamen Hanin Electronic Technology Co., Ltd.</b>
<b>Address:</b>	No.96, Rongyuan Road, Tong'an District, Xiamen
<b>Product description</b>	
<b>Product name:</b>	Barcode Printer
<b>Trademark:</b>	HPRT, iDPRT
<b>Model name:</b>	iT4R
<b>Serial Model:</b>	HT4R, iV3800R, ST34R, P54R, 324R, J-5400R, Y12R, PZ420R, T432R, ST14R, P43R, T430R
<b>Standards:</b>	FCC 47 CFR Part 15 Subpart C
<b>Test method:</b>	ANSI C63.10-2013
<b>Date of Test</b>	
<b>Date of test:</b>	2021-12-14 ~ 2022-01-18
<b>Test result:</b>	Pass

Test Engineer :



(Cindy Qin)

Reviewed By :



(Leon Chen)

Approved By :



(Tom Xue)

## 1 General Description

### 1.1 Description of the EUT

Product name:	Barcode Printer
Model name:	iT4R
Series Model:	HT4R, iV3800R, ST34R, P54R, 324R, J-5400R, Y12R, PZ420R, T432R, ST14R, P43R, T430R
Model difference:	All the models are the same circuit and RF module, except the model name.
Electrical rating:	DC 24V from adapter AC 120V/60Hz
Hardware version:	iT4RMB
Software version:	V iT4R S
Accessories:	Adapter 1: MODEL: GM60-240250-F INPUT: 100-240V~50/60Hz 2.0A OUTPUT: 24.0V=2.5A; 60.0W  Adapter 2: MODEL: AP115G-240250 INPUT: 100-240V~50/60Hz 2.0A Max. OUTPUT: 24.0V=2.5A 60.0W
EUT serial number:	MTi210628011-04-S0001
<b>RF specification:</b>	
Bluetooth version:	V5.0
Operation frequency:	2402 MHz ~ 2480 MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna designation:	PCB antenna, antenna Gain: 1 dBi
Max. peak conducted output power:	7.935 dBm

### 1.2 Description of test modes

#### 1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	-	-

### 1.2.2 Test channels

Chanel	Frequency
Lowest (CH0)	2402MHz
Middle (CH39)	2441MHz
Highest (CH78)	2480MHz

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

### 1.2.3 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
/	/	/	/

### 1.3 Measurement uncertainty

Parameter	Measurement uncertainty
AC power line conducted emission (9 kHz~30 MHz)	±2.5 dB
Occupied Bandwidth	±3 %
Conducted RF output power	±0.16 dB
Conducted spurious emissions	±0.21 dB
Radiated emission (9 kHz ~ 30 MHz)	±4.0 dB
Radiated emission (30 MHz~1 GHz)	±4.2 dB

Radiated emission (above 1 GHz)	$\pm 4.3$ dB
---------------------------------	--------------

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 2 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	15.247(a)(1)	20dB occupied bandwidth	Pass
4	15.247(b)(1)	Conducted peak output power	Pass
5	15.247(a)(1)	Carrier Frequencies Separation	Pass
6	15.247(a)(1)	Average time of occupancy (Dwell time)	Pass
7	15.247(a)(1)	Number of hopping channels	Pass
8	15.247(d)	Conducted emission at the band edge	Pass
9	15.247(d)	Conducted spurious emissions	Pass
10	15.247(d)	Radiated spurious emissions	Pass

**Note:** N/A means not applicable.



### 3 Test Facilities and Accreditations

#### 3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

## 4 Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2021/06/02	2022/06/01
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127#841	2021/06/02	2022/06/01
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2021/06/02	2022/06/01
MTi-E043	EMI test receiver	R&S	ESCI7	101166	2021/06/02	2022/06/01
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00044	2021/05/30	2023/05/29
MTi-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2023/05/29
MTi-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D-2278	2021/05/30	2023/05/29
MTi-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2021/06/02	2022/06/01
MTi-E048	Pre-amplifier	Agilent	8449B	3008A01120	2021/06/02	2022/06/01
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30	2023/05/29
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2021/04/16	2022/04/15
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2021/05/06	2022/05/05
MTi-E135	Horn antenna	Schwarzbeck	BBHA 9170	00987	2021/05/30	2023/05/29
MTi-E136	Pre-amplifier	Space-Dtronics	EWLAN1840G-G45	210405001	2021/06/02	2022/06/01
MTi-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2021/06/23	2022/06/22
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D8060152	2021/06/02	2022/06/01
MTi-E068	RF Control Unit	Tonscend	JS0806-2	19D8060153	2021/06/02	2022/06/01
MTi-E069	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2021/06/02	2022/06/01
MTi-E010S	EMI Measurement Software	Farad	EZ-EMC Ver. EMEC-3A1	/	/	/
MTi-E014S	RF Test System	Tonscend	TS@JS1120 V2.6.88.0330	/	/	/

## 5 Test Result

### 5.1 Antenna requirement

#### 15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### Description of the antenna of EUT

The antenna of EUT is PCB antenna (Antenna Gain: 1 dBi). which is no consideration of replacement.

## 5.2 AC power line conducted emissions

### 5.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB $\mu$ V	Limit-Average dB $\mu$ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

**Note 1:** the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

### 5.2.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

### 5.2.3 Test setup

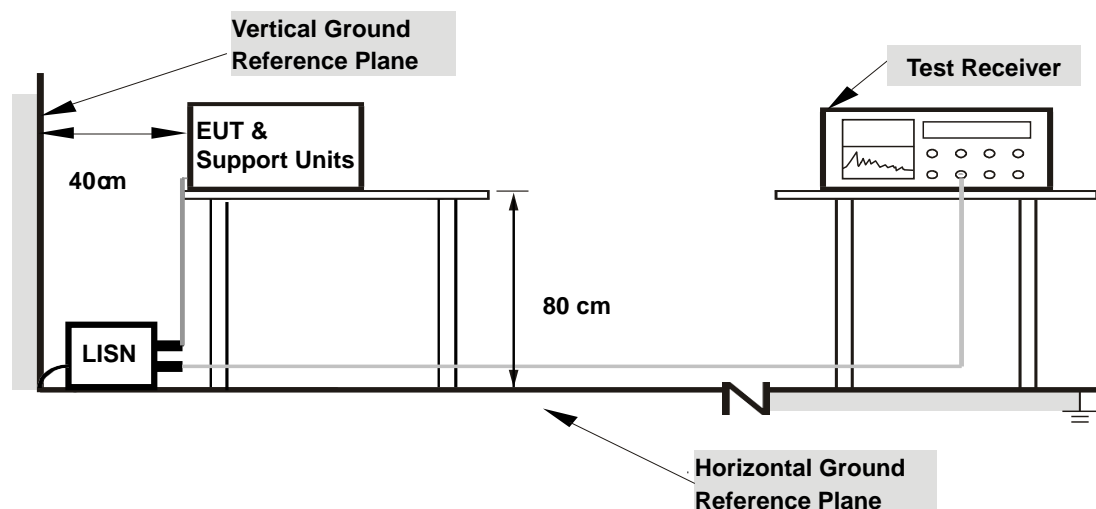

For the actual test configuration, please refer to the related item – Photographs of the test setup.


### 5.2.4 Test Result

Note:

- The three modulated high, medium and low channels have been tested. The report only shows the worst mode. The worst mode is 8DPSK CH00.
- Emission Level = Reading Level + Factor, Margin= Emission Level- Limit, Factor = LISN modulus + Cable Loss


## The model for GM60-240250-F AC/DC adapter test data

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase::	L
Test Voltage:	DC 24V from adapter AC 120V/60Hz	Test Mode:	Charging+TX

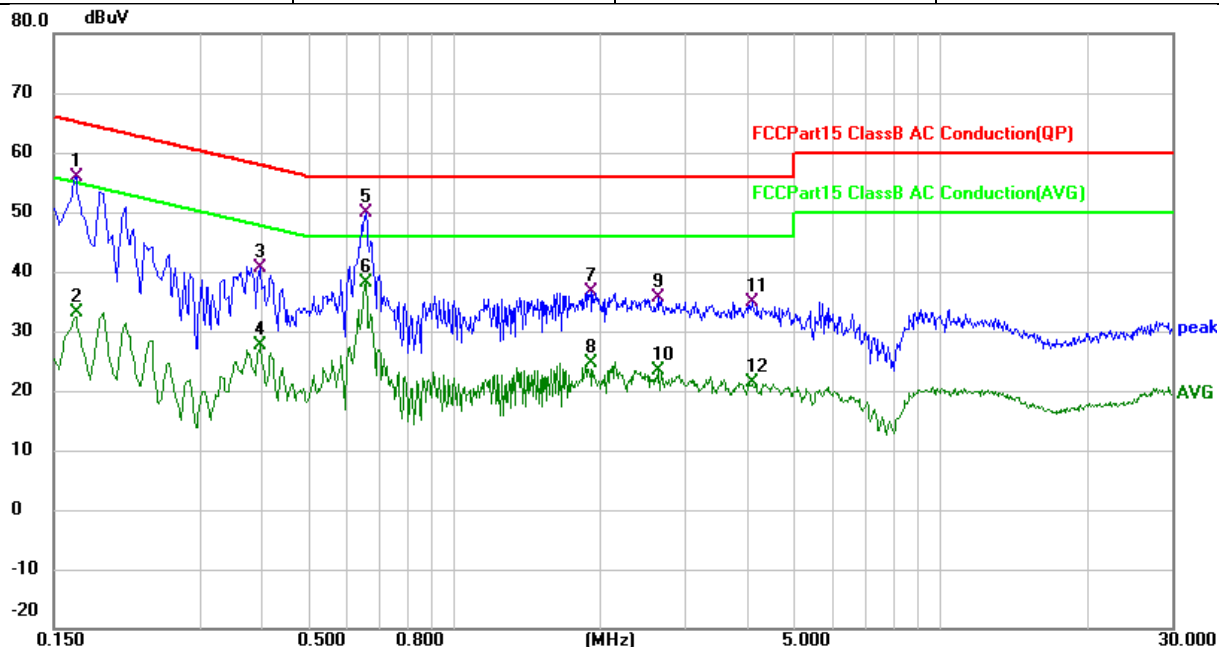


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1660	44.97	10.99	55.96	65.16	-9.20	QP
2		0.1660	22.26	10.99	33.25	55.16	-21.91	AVG
3		0.3980	29.67	10.96	40.63	57.90	-17.27	QP
4		0.3980	16.61	10.96	27.57	47.90	-20.33	AVG
5	*	0.6580	38.79	11.08	49.87	56.00	-6.13	QP
6		0.6580	27.04	11.08	38.12	46.00	-7.88	AVG
7		1.9140	21.43	15.23	36.66	56.00	-19.34	QP
8		1.9140	9.29	15.23	24.52	46.00	-21.48	AVG
9		2.6500	24.34	11.40	35.74	56.00	-20.26	QP
10		2.6500	12.09	11.40	23.49	46.00	-22.51	AVG
11		4.0939	23.46	11.44	34.90	56.00	-21.10	QP
12		4.0939	9.84	11.44	21.28	46.00	-24.72	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase::	N
Test Voltage:	DC 24V from adapter AC 120V/60Hz	Test Mode:	Charging+TX

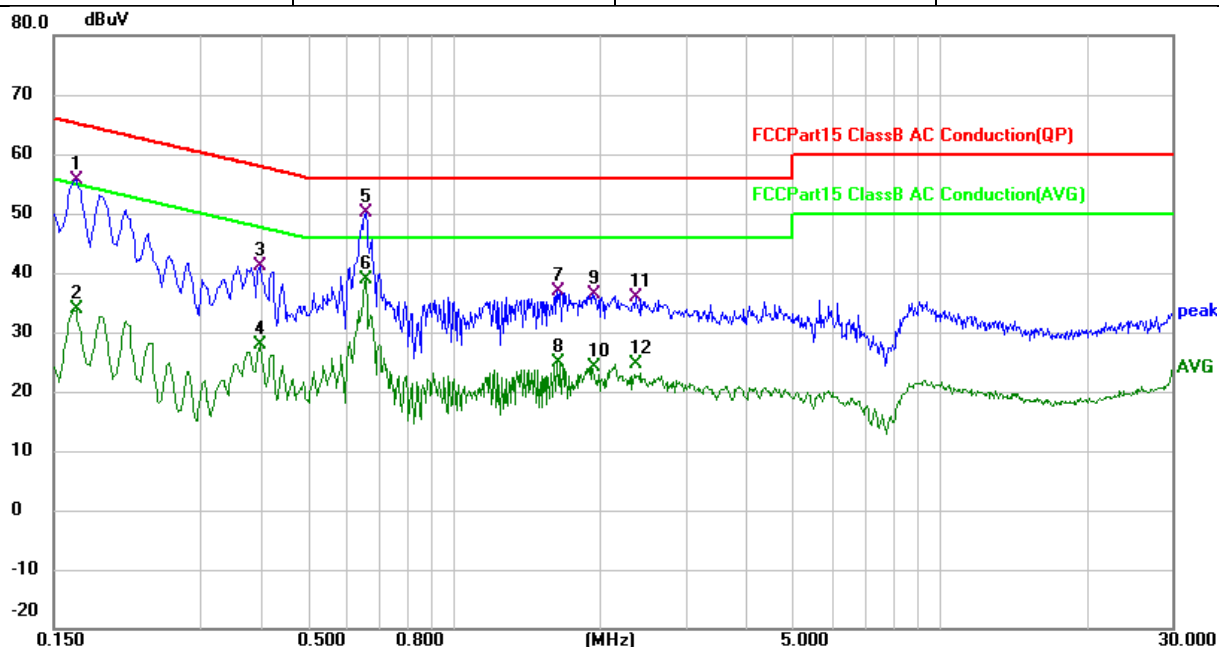


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1660	44.67	10.97	55.64	65.16	-9.52	QP
2		0.1660	22.81	10.97	33.78	55.16	-21.38	AVG
3		0.3980	30.25	10.90	41.15	57.90	-16.75	QP
4		0.3980	16.99	10.90	27.89	47.90	-20.01	AVG
5	*	0.6580	39.19	11.04	50.23	56.00	-5.77	QP
6		0.6580	27.78	11.04	38.82	46.00	-7.18	AVG
7		1.6340	22.18	14.58	36.76	56.00	-19.24	QP
8		1.6340	10.22	14.58	24.80	46.00	-21.20	AVG
9		1.9380	21.05	15.27	36.32	56.00	-19.68	QP
10		1.9380	8.75	15.27	24.02	46.00	-21.98	AVG
11		2.3660	19.86	16.12	35.98	56.00	-20.02	QP
12		2.3660	8.54	16.12	24.66	46.00	-21.34	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 24V from adapter AC 240V/60Hz	Test Mode:	Charging+TX

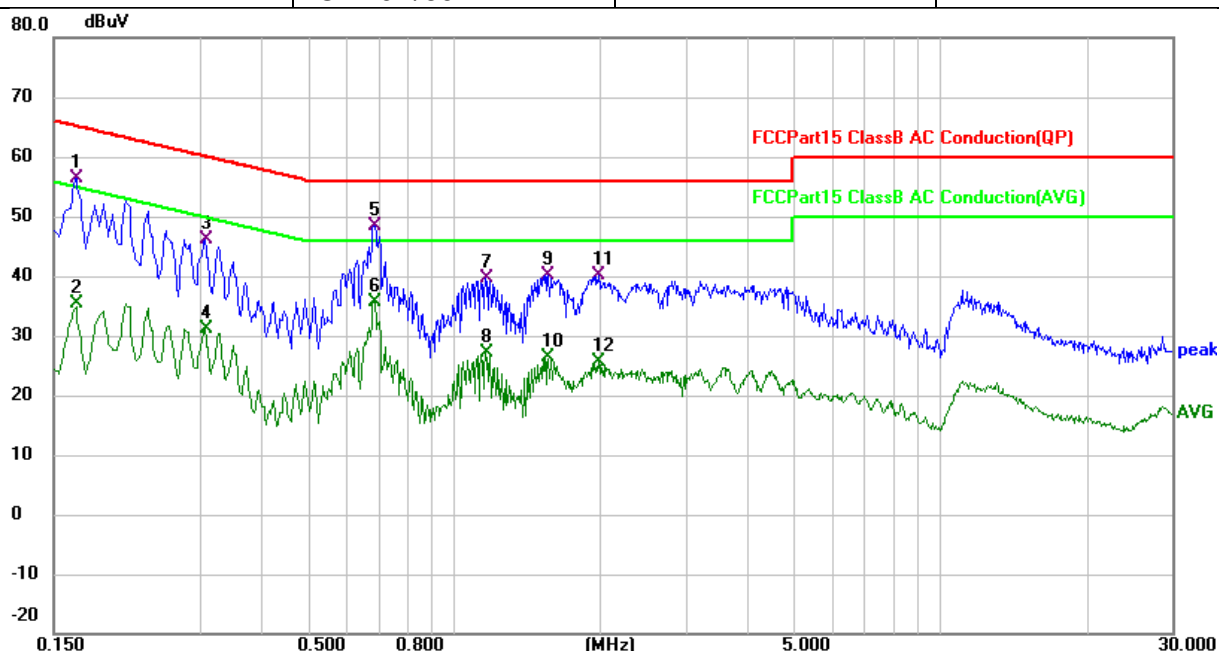

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1660	45.50	10.99	56.49	65.16	-8.67	QP
2		0.1660	24.28	10.99	35.27	55.16	-19.89	AVG
3		0.3060	35.15	10.98	46.13	60.08	-13.95	QP
4		0.3060	20.11	10.98	31.09	50.08	-18.99	AVG
5	*	0.6860	37.36	11.08	48.44	56.00	-7.56	QP
6		0.6860	24.61	11.08	35.69	46.00	-10.31	AVG
7		1.1620	25.94	13.61	39.55	56.00	-16.45	QP
8		1.1620	13.62	13.61	27.23	46.00	-18.77	AVG
9		1.5620	25.69	14.47	40.16	56.00	-15.84	QP
10		1.5620	11.98	14.47	26.45	46.00	-19.55	AVG
11		1.9900	24.63	15.40	40.03	56.00	-15.97	QP
12		1.9900	10.17	15.40	25.57	46.00	-20.43	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 24V from adapter AC 240V/60Hz	Test Mode:	Charging+TX

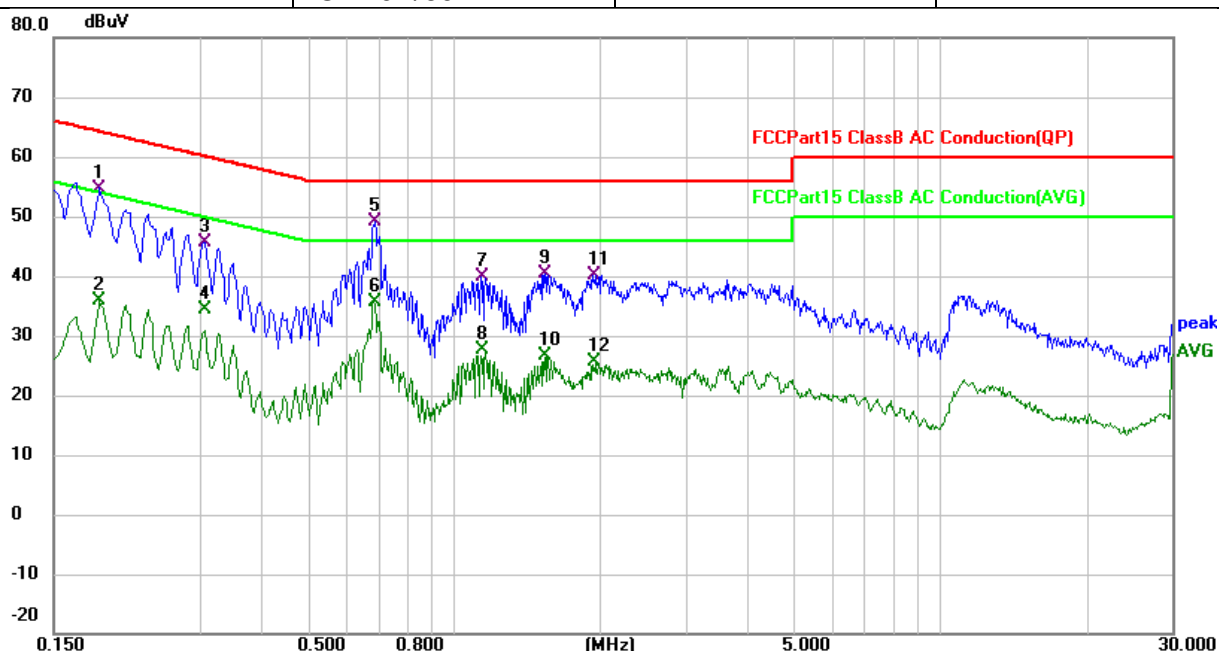


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1859	43.77	10.98	54.75	64.22	-9.47	QP
2		0.1859	24.79	10.98	35.77	54.22	-18.45	AVG
3		0.3059	34.72	10.98	45.70	60.08	-14.38	QP
4		0.3059	23.28	10.98	34.26	50.08	-15.82	AVG
5	*	0.6860	37.93	11.08	49.01	56.00	-6.99	QP
6		0.6860	24.54	11.08	35.62	46.00	-10.38	AVG
7		1.1379	26.21	13.58	39.79	56.00	-16.21	QP
8		1.1379	14.07	13.58	27.65	46.00	-18.35	AVG
9		1.5380	25.94	14.43	40.37	56.00	-15.63	QP
10		1.5380	12.15	14.43	26.58	46.00	-19.42	AVG
11		1.9379	24.79	15.29	40.08	56.00	-15.92	QP
12		1.9379	10.39	15.29	25.68	46.00	-20.32	AVG




## The model for AP115G-24250 AC/DC adapter test data

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase::	L
Test Voltage:	DC 24V from adapter AC 120V/60Hz	Test Mode:	Charging+TX

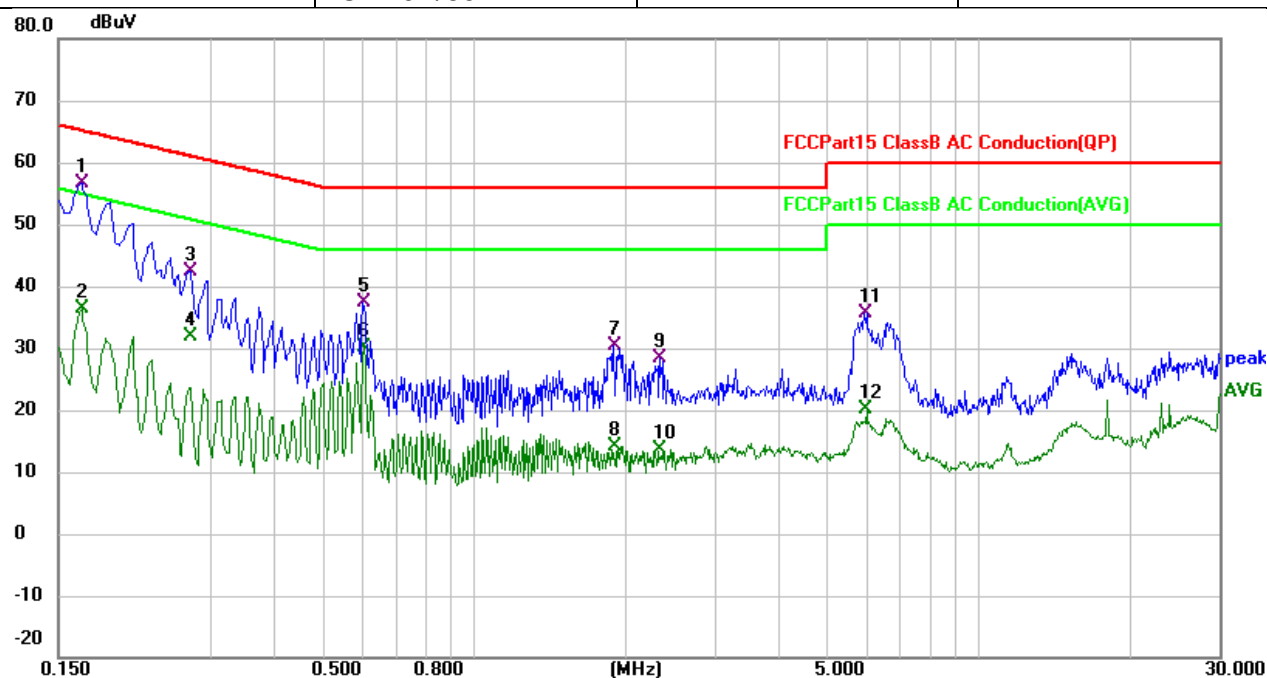


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1660	45.75	10.99	56.74	65.16	-8.42	QP
2		0.1660	25.28	10.99	36.27	55.16	-18.89	AVG
3		0.2740	31.34	10.99	42.33	61.00	-18.67	QP
4		0.2740	20.88	10.99	31.87	51.00	-19.13	AVG
5		0.6020	26.35	11.07	37.42	56.00	-18.58	QP
6		0.6020	19.01	11.07	30.08	46.00	-15.92	AVG
7		1.8940	15.09	15.18	30.27	56.00	-25.73	QP
8		1.8940	-1.13	15.18	14.05	46.00	-31.95	AVG
9		2.3340	12.29	16.06	28.35	56.00	-27.65	QP
10		2.3340	-2.43	16.06	13.63	46.00	-32.37	AVG
11		5.9459	24.20	11.54	35.74	60.00	-24.26	QP
12		5.9459	8.60	11.54	20.14	50.00	-29.86	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase::	N
Test Voltage:	DC 24V from adapter AC 120V/60Hz	Test Mode:	Charging+TX

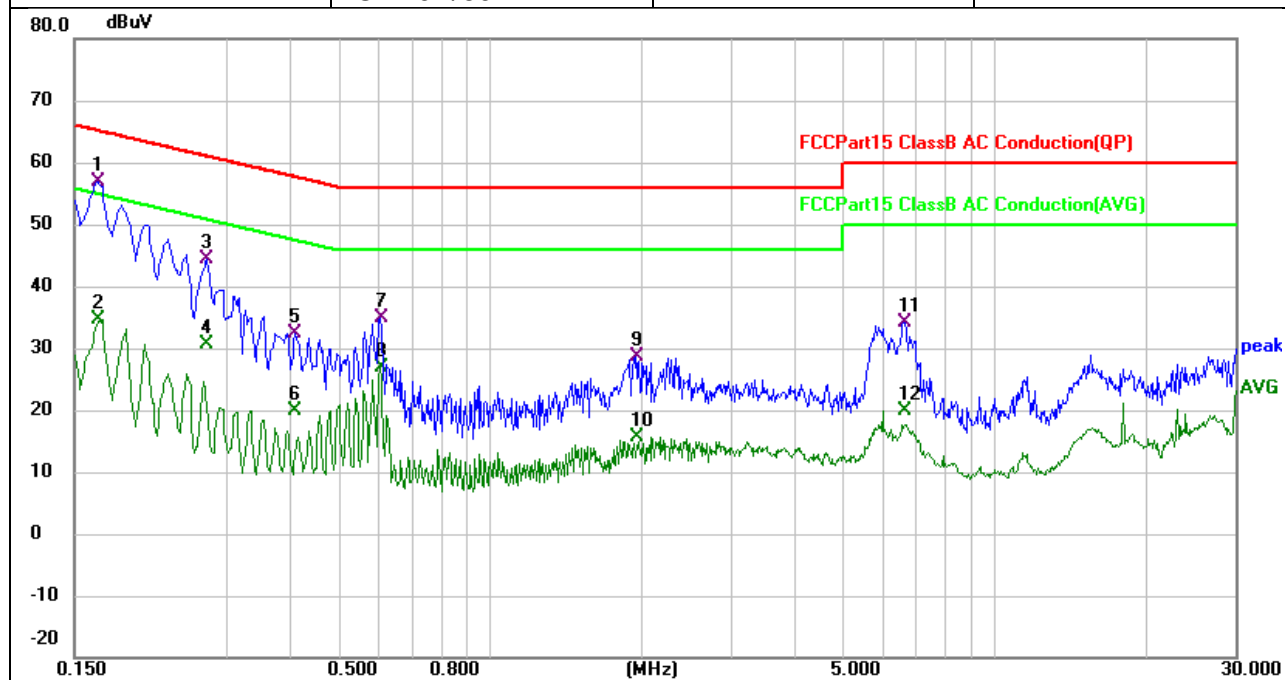


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1660	45.86	10.97	56.83	65.16	-8.33	QP
2		0.1660	23.62	10.97	34.59	55.16	-20.57	AVG
3		0.2740	33.41	10.90	44.31	61.00	-16.69	QP
4		0.2740	19.82	10.90	30.72	51.00	-20.28	AVG
5		0.4100	21.57	10.90	32.47	57.65	-25.18	QP
6		0.4100	9.03	10.90	19.93	47.65	-27.72	AVG
7		0.6060	23.98	10.99	34.97	56.00	-21.03	QP
8		0.6060	15.90	10.99	26.89	46.00	-19.11	AVG
9		1.9460	13.32	15.29	28.61	56.00	-27.39	QP
10		1.9460	0.26	15.29	15.55	46.00	-30.45	AVG
11		6.6619	22.75	11.39	34.14	60.00	-25.86	QP
12		6.6619	8.60	11.39	19.99	50.00	-30.01	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 24V from adapter AC 240V/60Hz	Test Mode:	Charging+TX

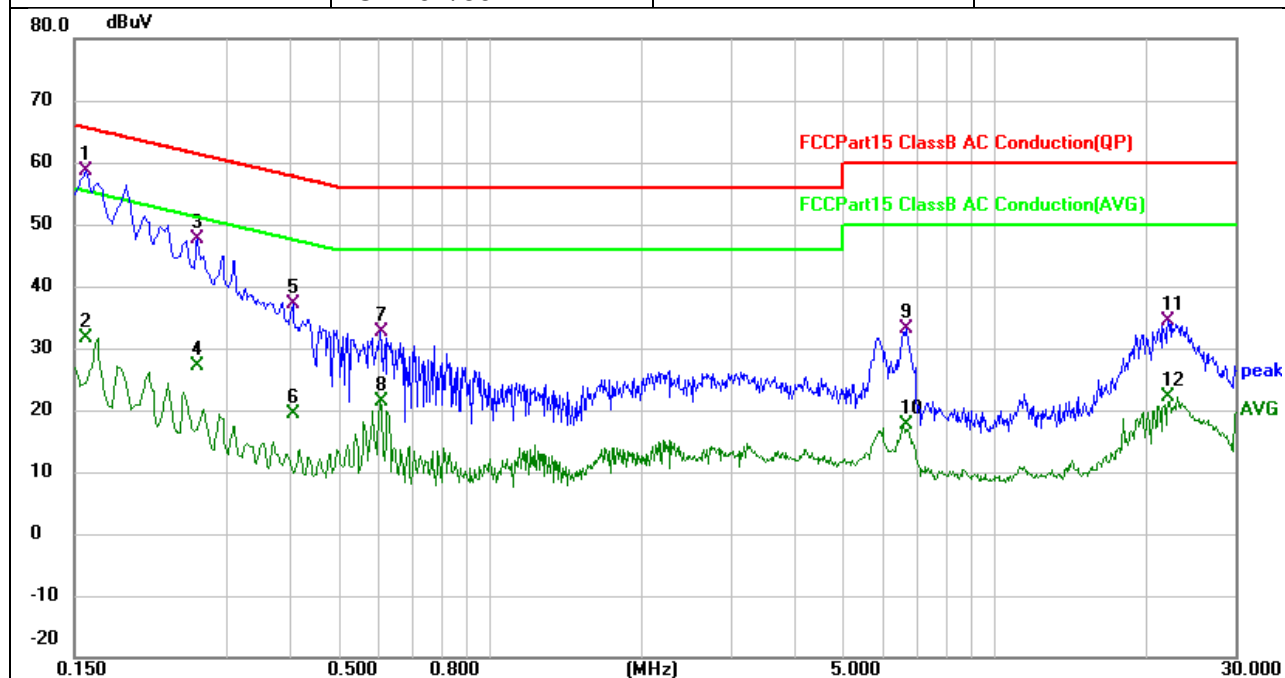

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1580	47.65	10.99	58.64	65.57	-6.93	QP
2		0.1580	20.59	10.99	31.58	55.57	-23.99	AVG
3		0.2620	36.71	10.99	47.70	61.37	-13.67	QP
4		0.2620	16.12	10.99	27.11	51.37	-24.26	AVG
5		0.4060	26.20	10.98	37.18	57.73	-20.55	QP
6		0.4060	8.40	10.98	19.38	47.73	-28.35	AVG
7		0.6060	21.66	11.07	32.73	56.00	-23.27	QP
8		0.6060	10.33	11.07	21.40	46.00	-24.60	AVG
9		6.6700	21.52	11.59	33.11	60.00	-26.89	QP
10		6.6700	6.08	11.59	17.67	50.00	-32.33	AVG
11		22.1580	22.44	11.82	34.26	60.00	-25.74	QP
12		22.1580	10.19	11.82	22.01	50.00	-27.99	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 24V from adapter AC 240V/60Hz	Test Mode:	Charging+TX

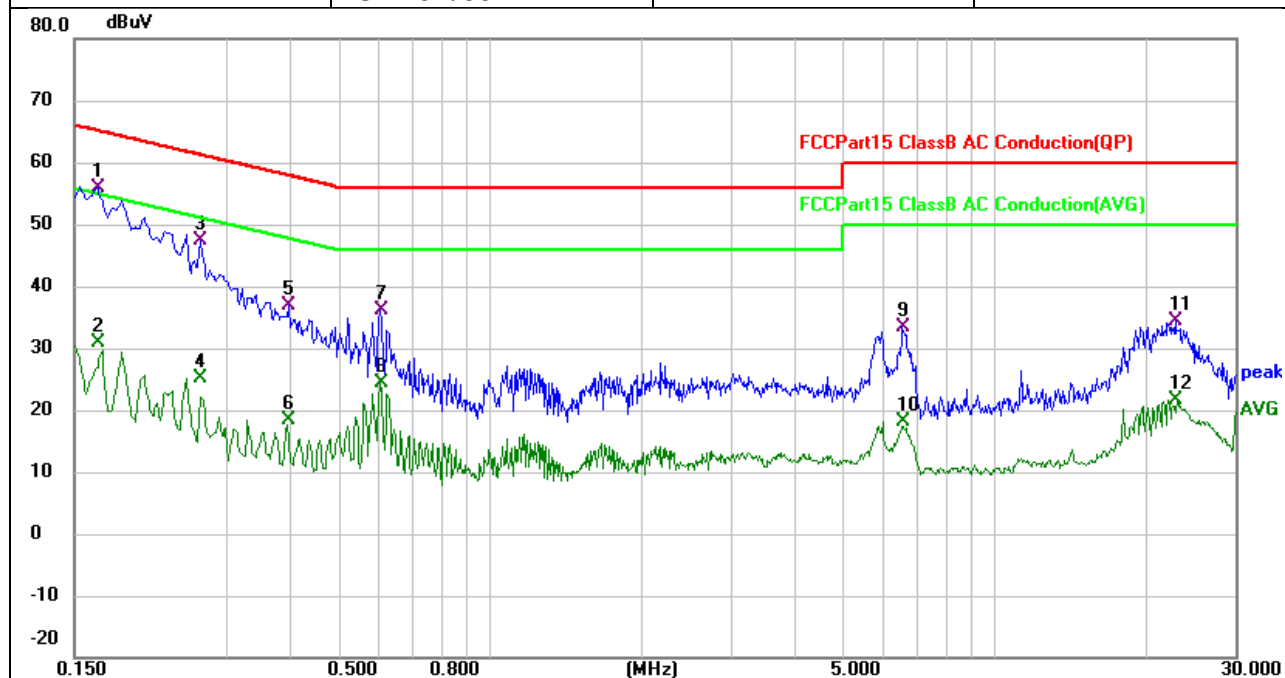


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1660	44.89	10.97	55.86	65.16	-9.30	QP
2		0.1660	19.90	10.97	30.87	55.16	-24.29	AVG
3		0.2660	36.57	10.89	47.46	61.24	-13.78	QP
4		0.2660	14.32	10.89	25.21	51.24	-26.03	AVG
5		0.3980	26.04	10.90	36.94	57.90	-20.96	QP
6		0.3980	7.45	10.90	18.35	47.90	-29.55	AVG
7		0.6060	25.14	10.99	36.13	56.00	-19.87	QP
8		0.6060	13.33	10.99	24.32	46.00	-21.68	AVG
9		6.5779	21.92	11.39	33.31	60.00	-26.69	QP
10		6.5779	6.74	11.39	18.13	50.00	-31.87	AVG
11		22.8819	22.53	11.81	34.34	60.00	-25.66	QP
12		22.8819	9.78	11.81	21.59	50.00	-28.41	AVG

### 5.3 20dB occupied bandwidth

#### 5.3.1 Limits

None, for reporting purposes only.

#### 5.3.2 Test setup









#### 5.3.3 Test procedures

- Test method: ANSI C63.10-2013 Section 6.9.2.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW=30 kHz, VBW=100 kHz, detector= Peak

#### 5.3.4 Test results


Mode	Test channel	Frequency (MHz)	20dB Bandwidth (MHz)
GFSK	CH0	2402	0.978
	CH39	2441	1.009
	CH78	2480	0.9953
$\pi/4$ -DQPSK	CH0	2402	1.356
	CH39	2441	1.347
	CH78	2480	1.345
8DPSK	CH0	2402	1.353
	CH39	2441	1.349
	CH78	2480	1.354

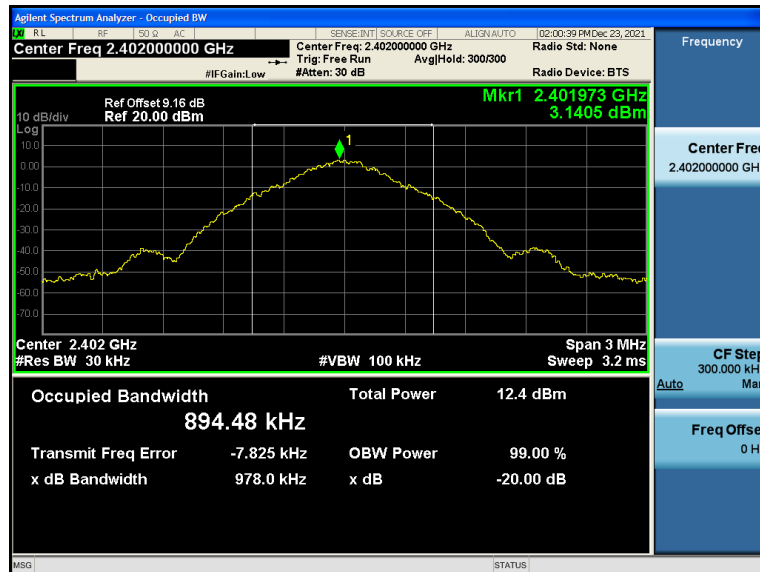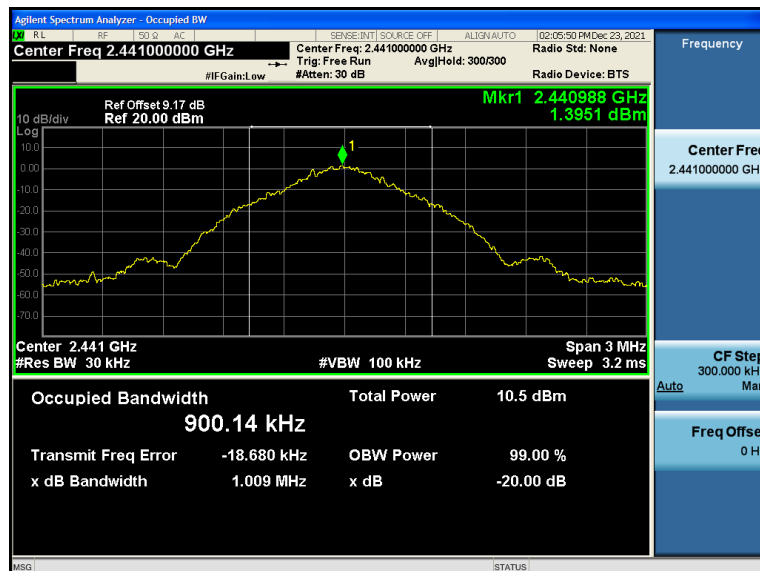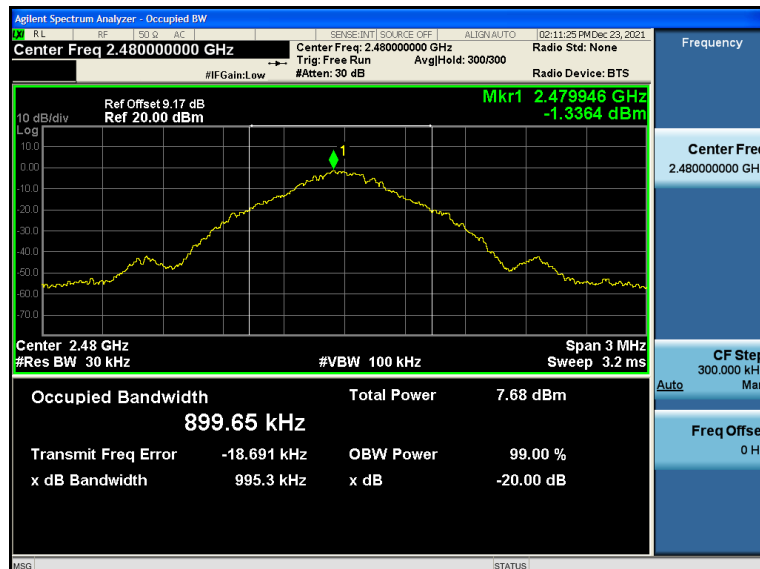**GFSK mode - 20dB occupied bandwidth**
**CH0**

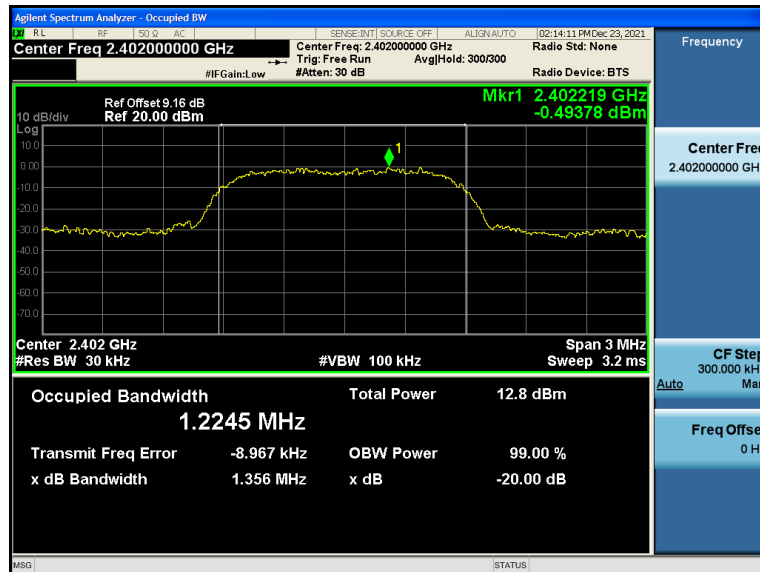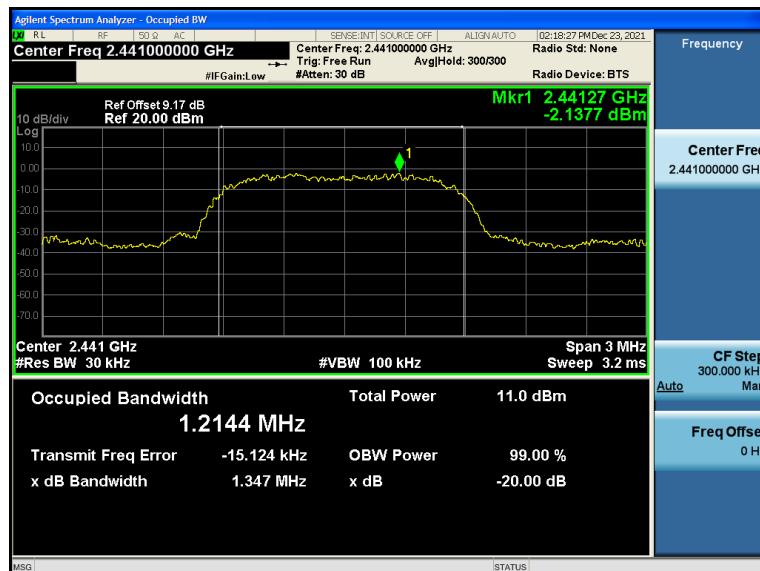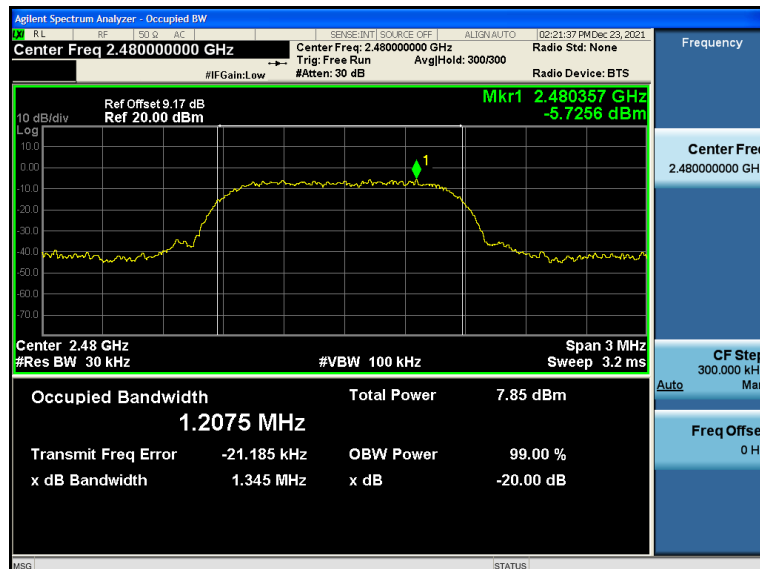**CH39**

**CH78**


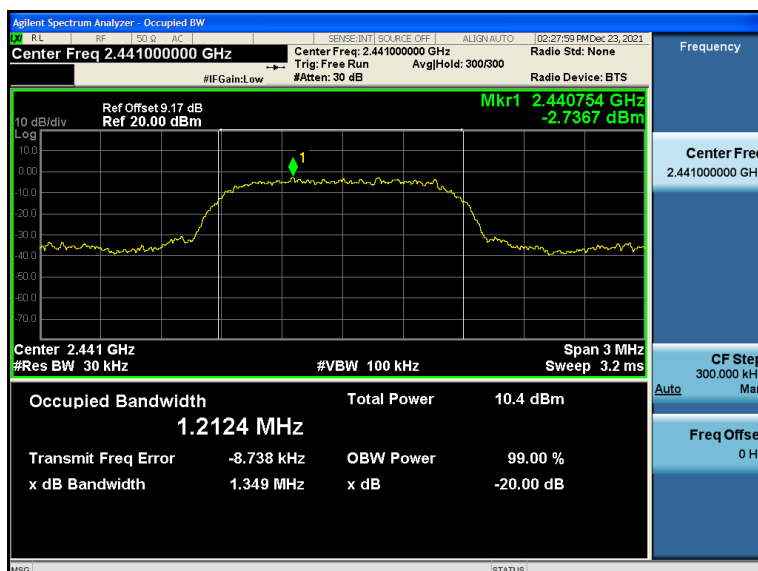
**$\pi/4$ -DQPSK mode - 20dB occupied bandwidth**
**CH0**

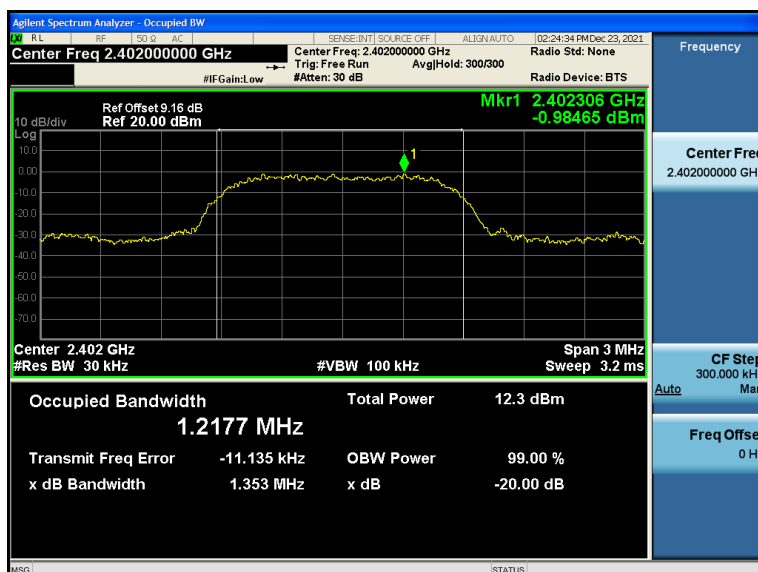**CH39**

**CH78**


# 8DPSK mode - 20dB occupied bandwidth


## CH0



## CH39



## CH78

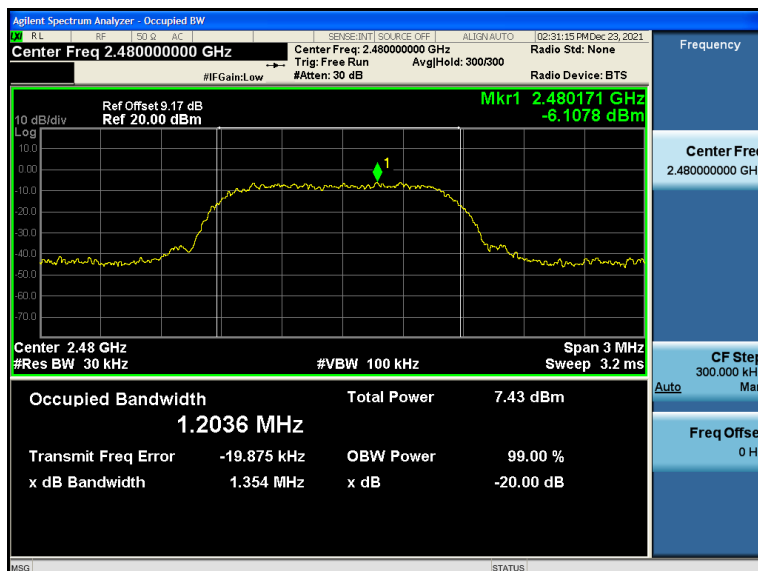




## 5.4 Conducted peak output power

### 5.4.1 Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 5.4.2 Test setup





### 5.4.3 Test procedure

- Test method: ANSI C63.10-2013 Section 7.8.5.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW > 20dB occupied bandwidth, VBW ≥ RBW, detector= Peak


### 5.4.4 Test results

Mode	Test channel	Frequency (MHz)	Conducted peak output power (dBm)	Limit (dBm)
GFSK	CH0	2402	5.458	≤ 20.97
	CH39	2441	3.236	≤ 20.97
	CH78	2480	0.443	≤ 20.97
π/4-DQPSK	CH0	2402	7.793	≤ 20.97
	CH39	2441	6.109	≤ 20.97
	CH78	2480	3.176	≤ 20.97
8DPSK	CH0	2402	7.935	≤ 20.97
	CH39	2441	6.190	≤ 20.97
	CH78	2480	3.267	≤ 20.97

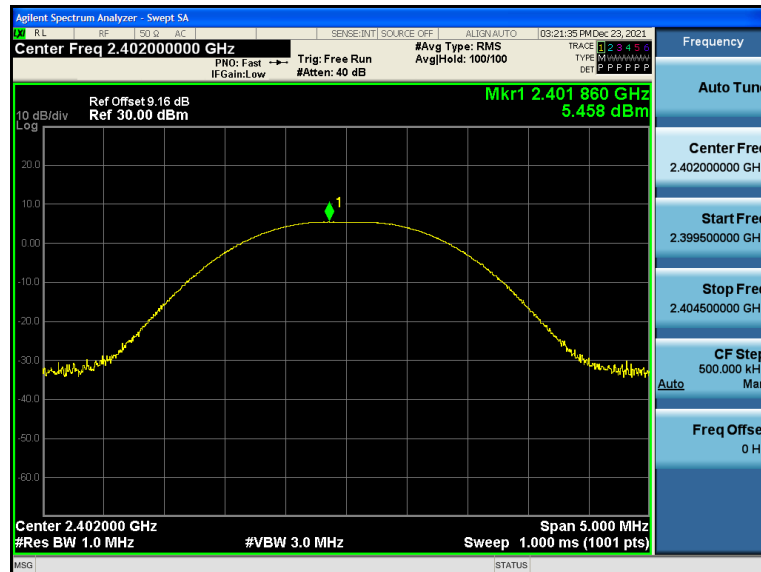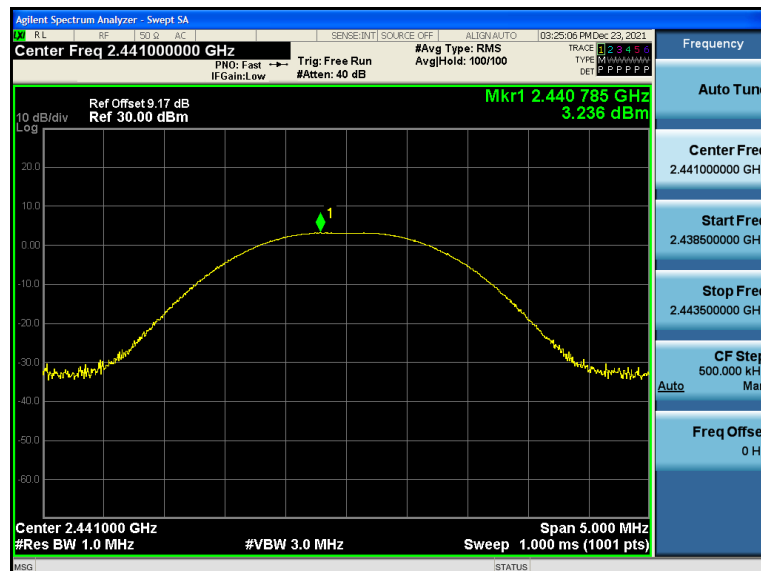
**GFSK mode - peak conducted output power**
**CH0**

**CH39**

**CH78**

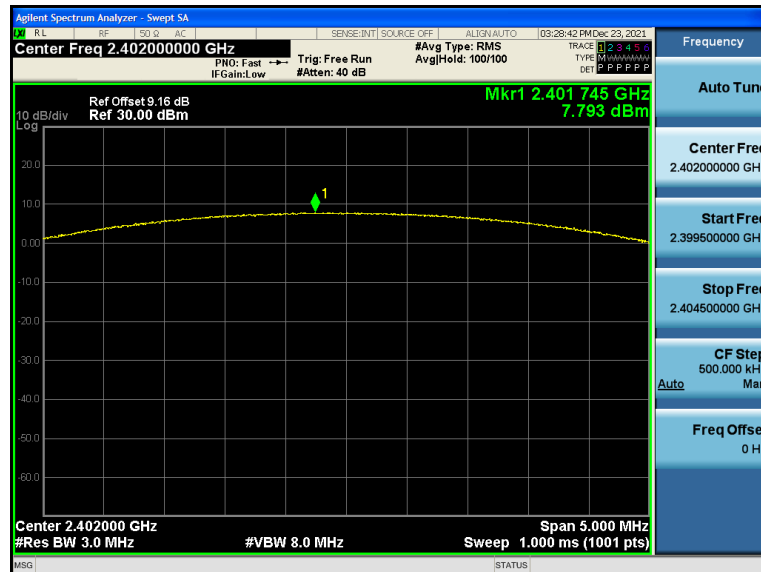
# $\pi/4$ -DQPSK mode - peak conducted output power

## CH0


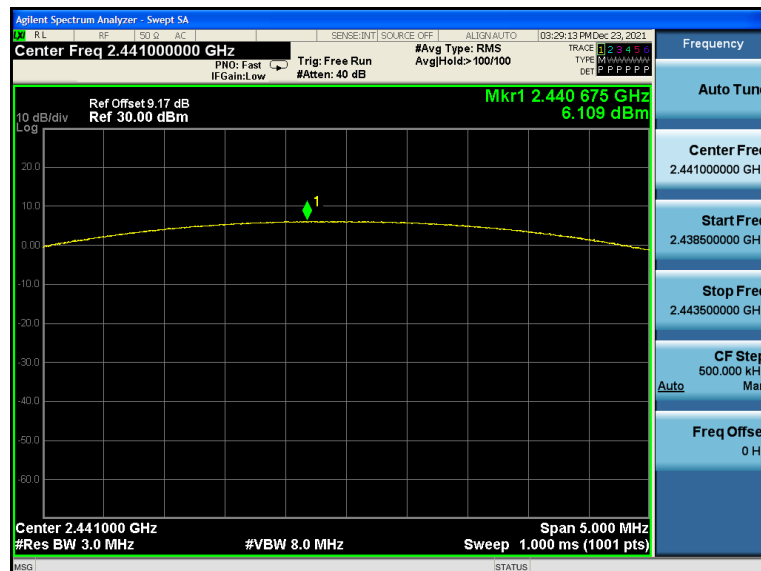


## CH39



## CH78

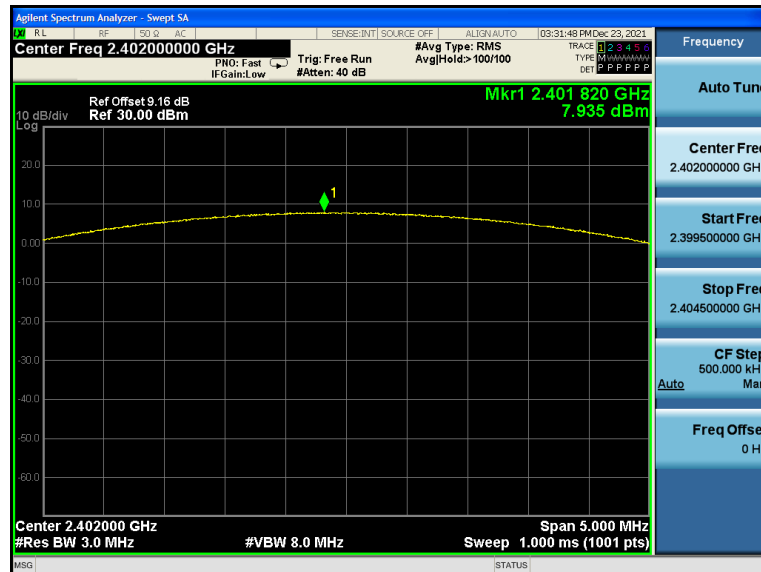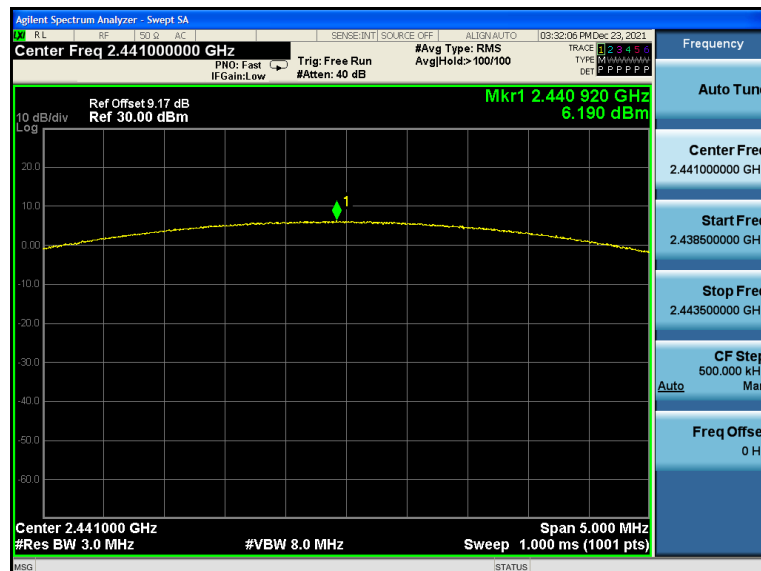

**8DPSK mode – peak conducted output power**
**CH0**

**CH39**

**CH78**



## 5.5 Carrier frequency separation

### 5.5.1 Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

### 5.5.2 Test setup



### 5.5.3 Test procedure


- Test method: ANSI C63.10-2013 Section 7.8.2.
- The EUT was set to hopping mode during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum Setting: RBW = 30 kHz, VBW = 100 kHz, detector= Peak.

### 5.5.4 Test results


Mode	Test channel	Test Result (MHz)	Limit (MHz)	Result
GFSK	Hop-mode	1.044	$\geq 0.673$	Pass
$\pi/4$ -DQPSK	Hop-mode	0.998	$\geq 0.904$	Pass
8DPSK	Hop-mode	0.948	$\geq 0.903$	Pass

## Carrier frequency separation


### GFSK

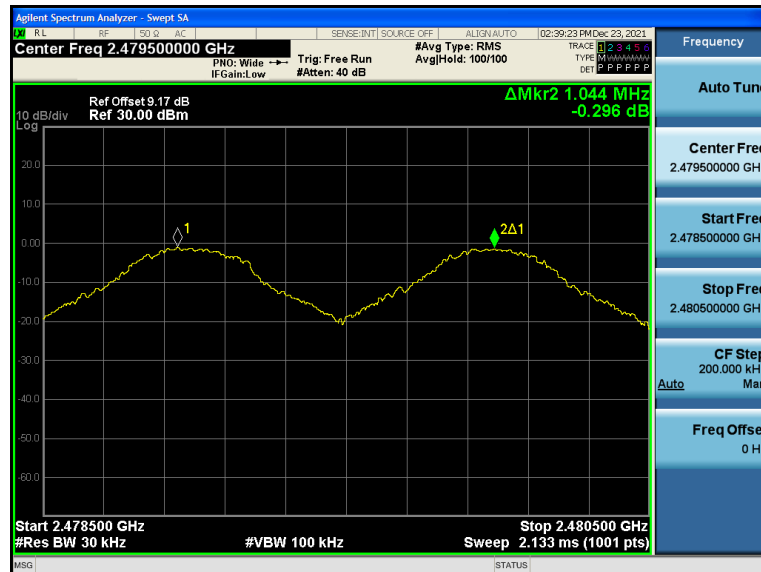

### $\pi/4$ -DQPSK

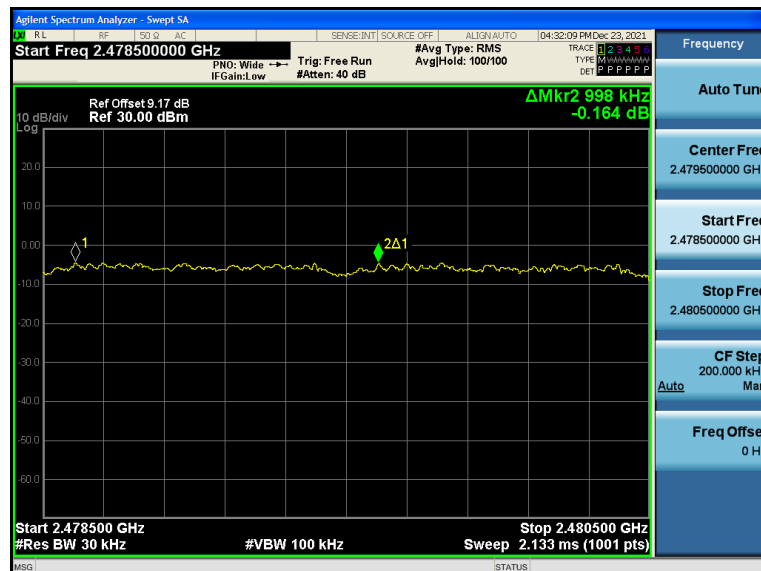

### 8DPSK

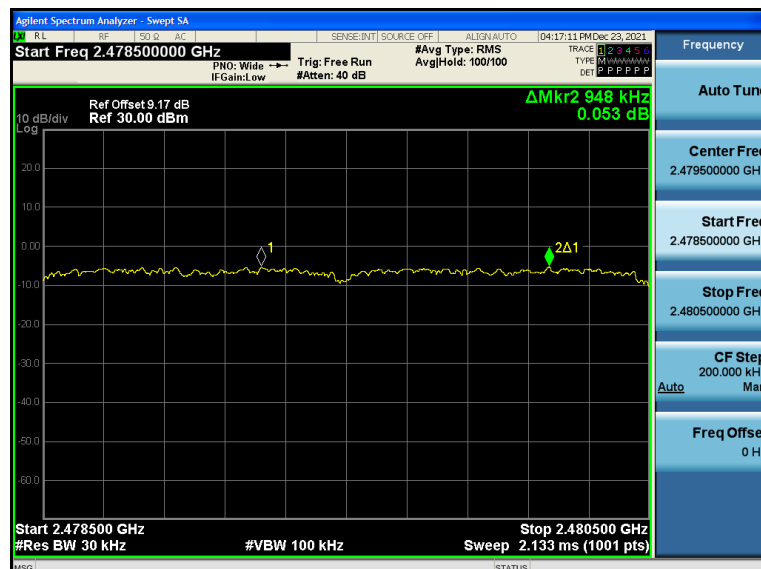


## 5.6 Average time of occupancy

### 5.6.1 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 5.6.2 Test setup



### 5.6.3 Test procedure




- Test method: ANSI C63.10-2013 Section 7.8.4
- The EUT was set to hopping mode during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 1MHz, VBW = 3MHz, Span = 0Hz, Detector = Peak, sweep time: As necessary to capture the entire dwell time per hopping channel.
- Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:
- The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

### 5.6.4 Test results

Mode	Data Packet	Frequency (MHz)	Pulse width (ms)	Number of pulses in 3.16 s	Average time of occupancy (s)	Limit (s)	Result
GFSK	DH1	2441	0.26	65	0.167	$\leq 0.4$	Pass
	DH3	2441	1.26	23	0.290	$\leq 0.4$	Pass
	DH5	2441	2.94	12	0.353	$\leq 0.4$	Pass
$\pi/4$ -DQPSK	2DH1	2441	0.26	63	0.162	$\leq 0.4$	Pass
	2DH3	2441	0.75	29	0.219	$\leq 0.4$	Pass
	2DH5	2441	1.01	26	0.263	$\leq 0.4$	Pass
8DPSK	3DH1	2441	0.25	64	0.158	$\leq 0.4$	Pass
	3DH3	2441	0.40	36	0.142	$\leq 0.4$	Pass
	3DH5	2441	1.14	21	0.24	$\leq 0.4$	Pass

#### Notes:

- Period time = 0.4 (s) \* 79 = 31.6(s)
- Average time of occupancy = Pulse width \* Number of pulses in 3.16s \* 10

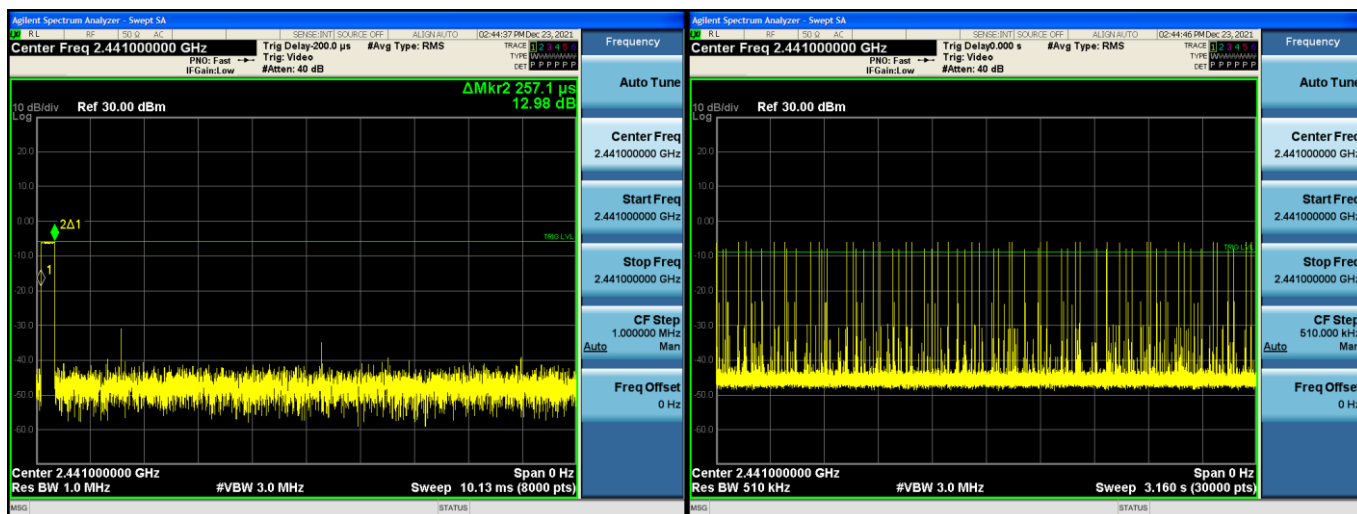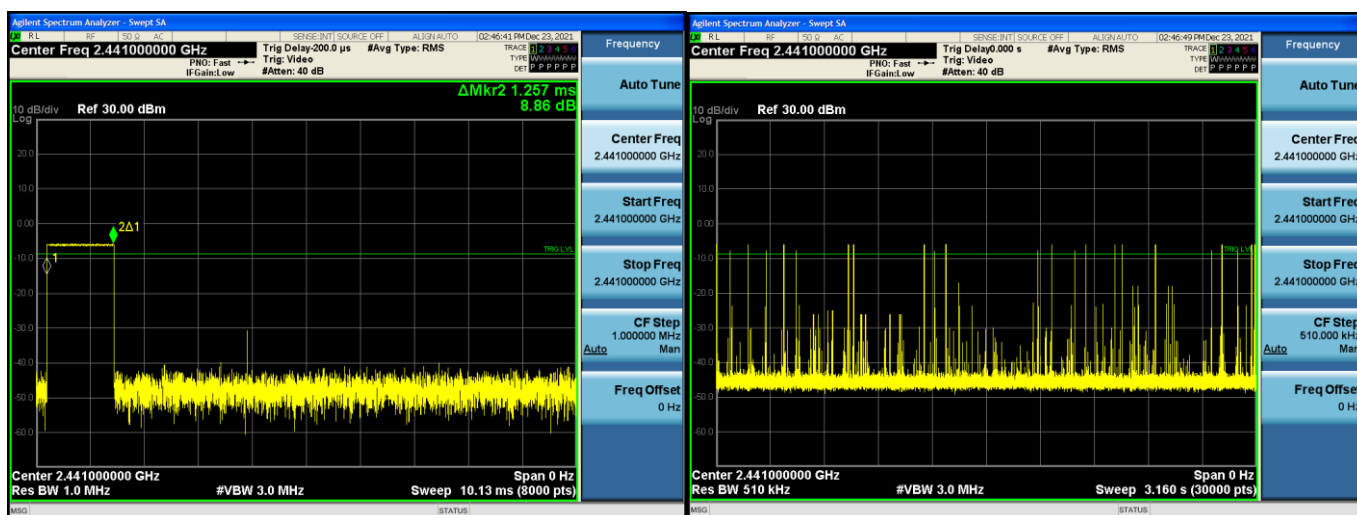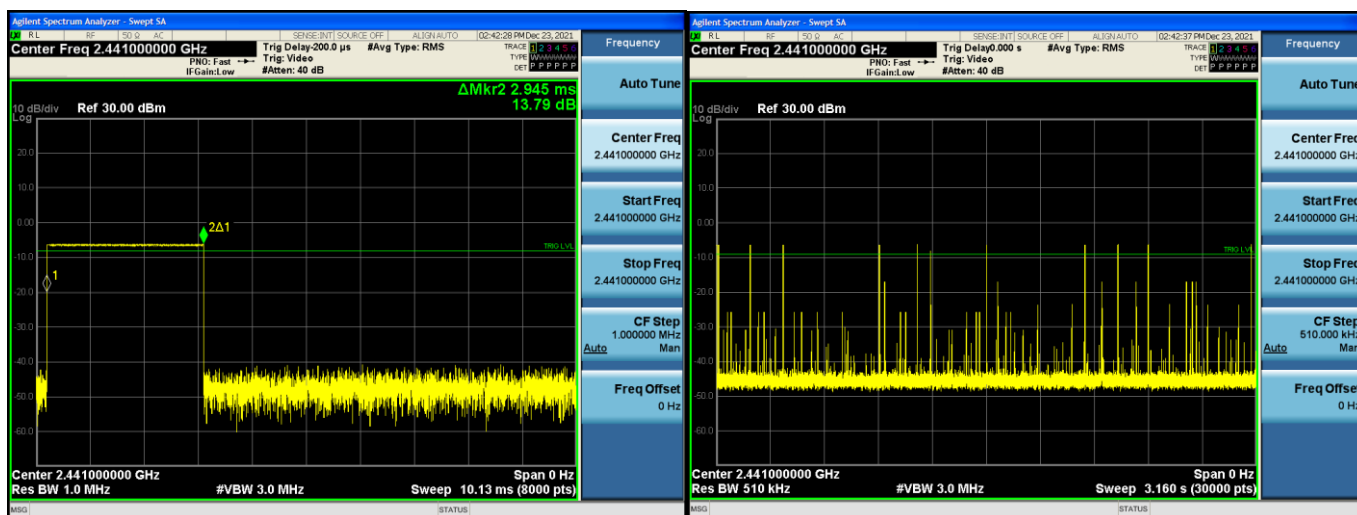
**GFSK mode - Average time of occupancy**
**Pulse width – DH1**
**Number of pulses in 3.16 s – DH1**

**Pulse width – DH3**
**Number of pulses in 3.16 s – DH3**

**Pulse width – DH5**
**Number of pulses in 3.16 s – DH5**




# $\pi/4$ -DQPSK - Average time of occupancy

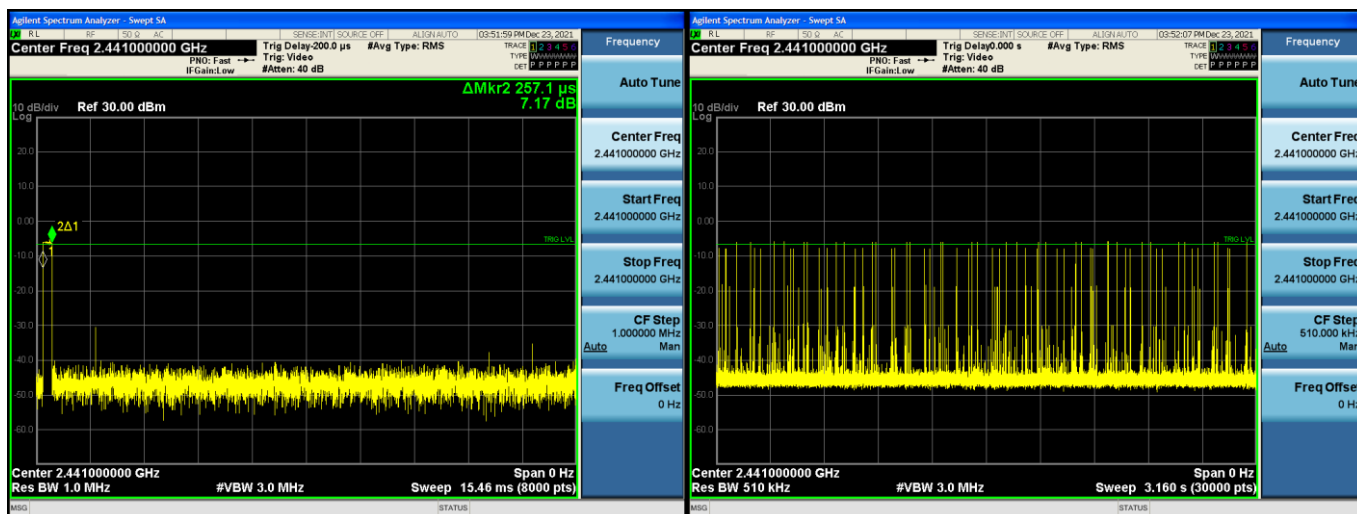
## Pulse width – 2DH1

## Number of pulses in 3.16 s – 2DH1




## Pulse width – 2DH3

## Number of pulses in 3.16 s – 2DH3

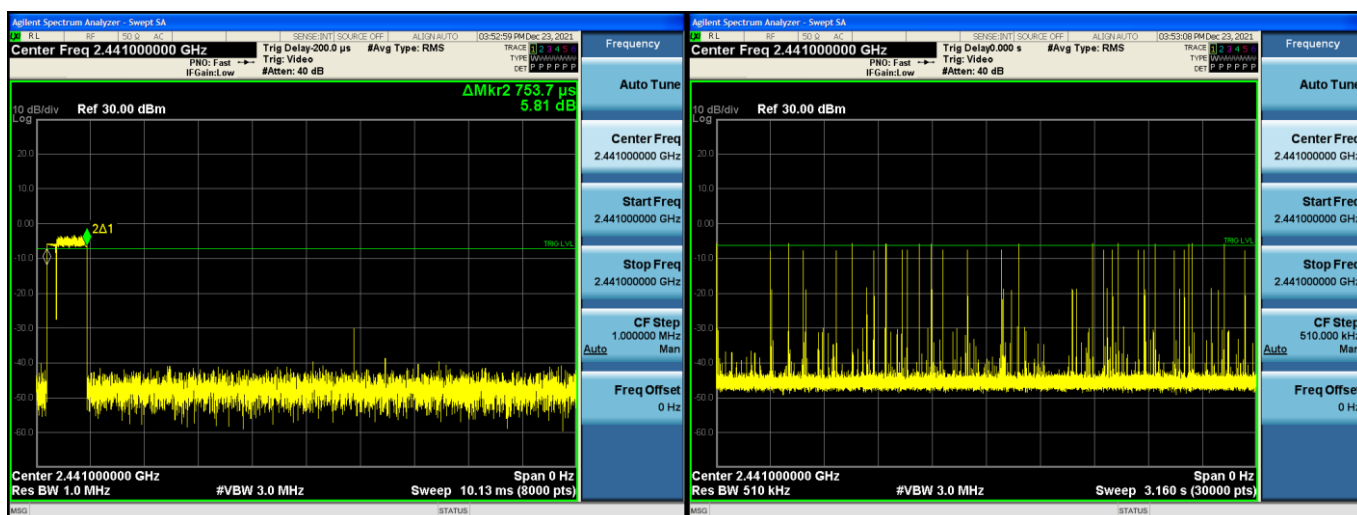

## Pulse width – 2DH5


## Number of pulses in 3.16 s – 2DH5

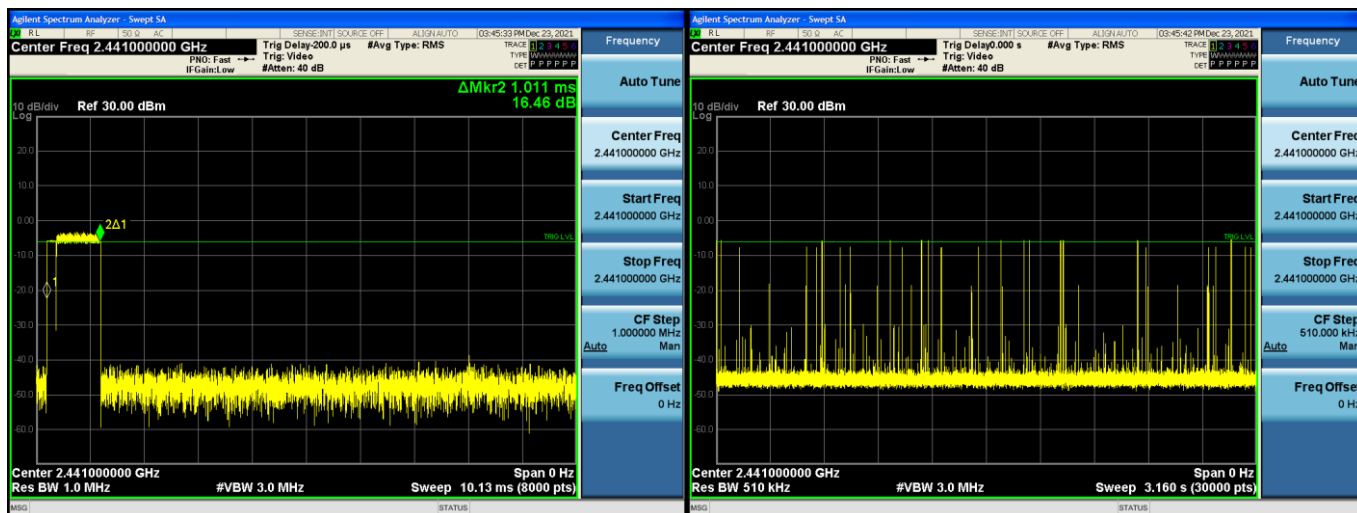

## 8DPSK - Average time of occupancy


### Pulse width – 3DH1

### Number of pulses in 3.16 s – 3DH1

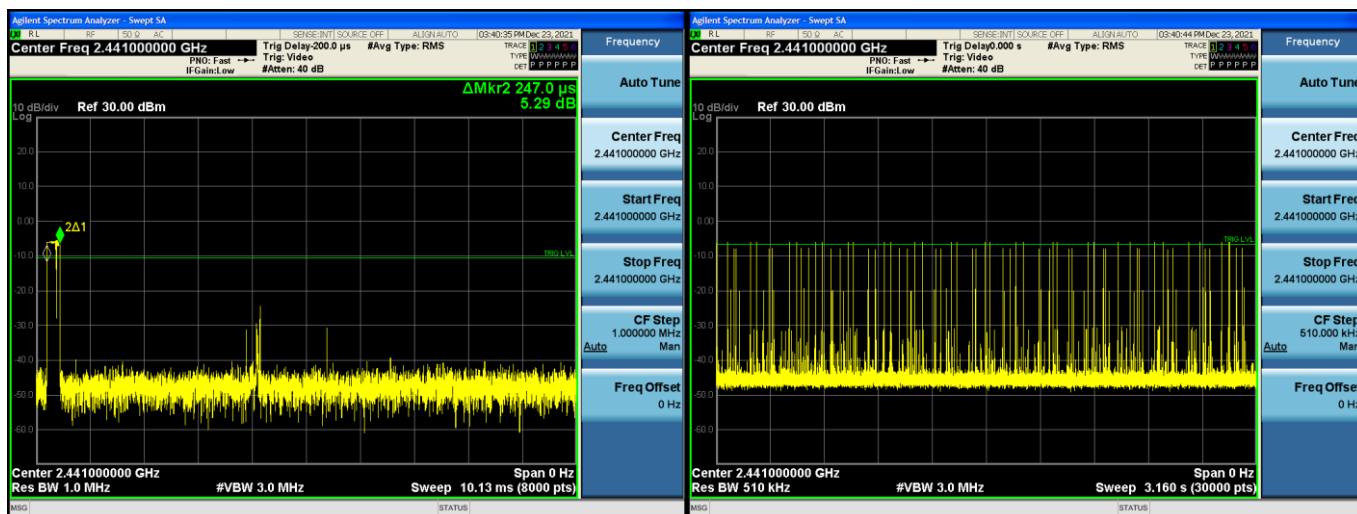


### Pulse width – 3DH3

### Number of pulses in 3.16 s – 3DH3

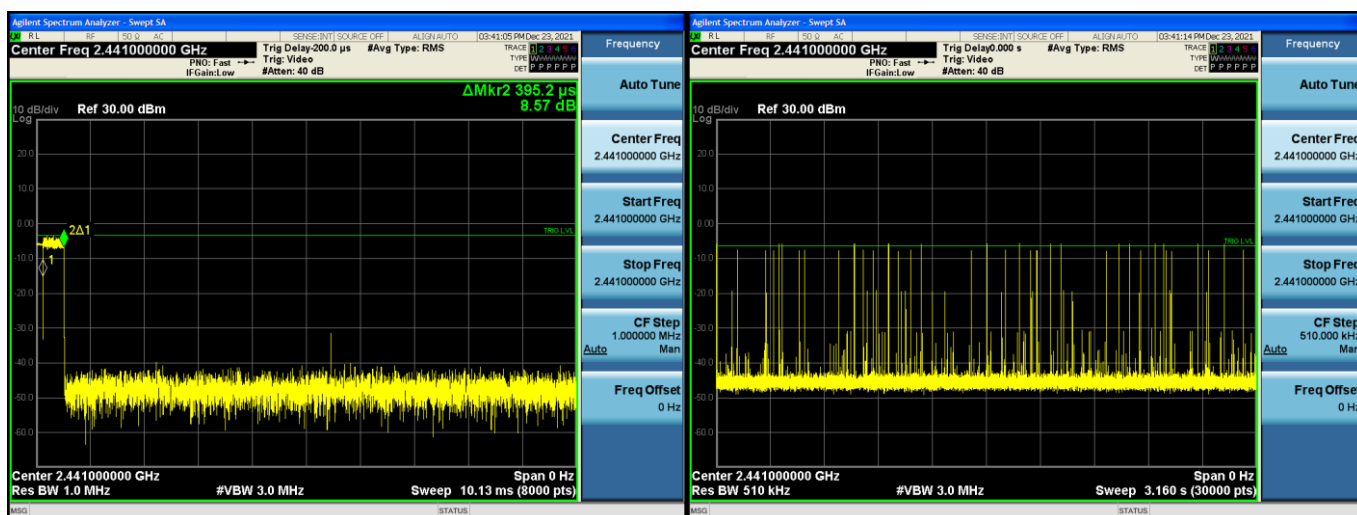

### Pulse width – 3DH5

### Number of pulses in 3.16 s – 3DH5

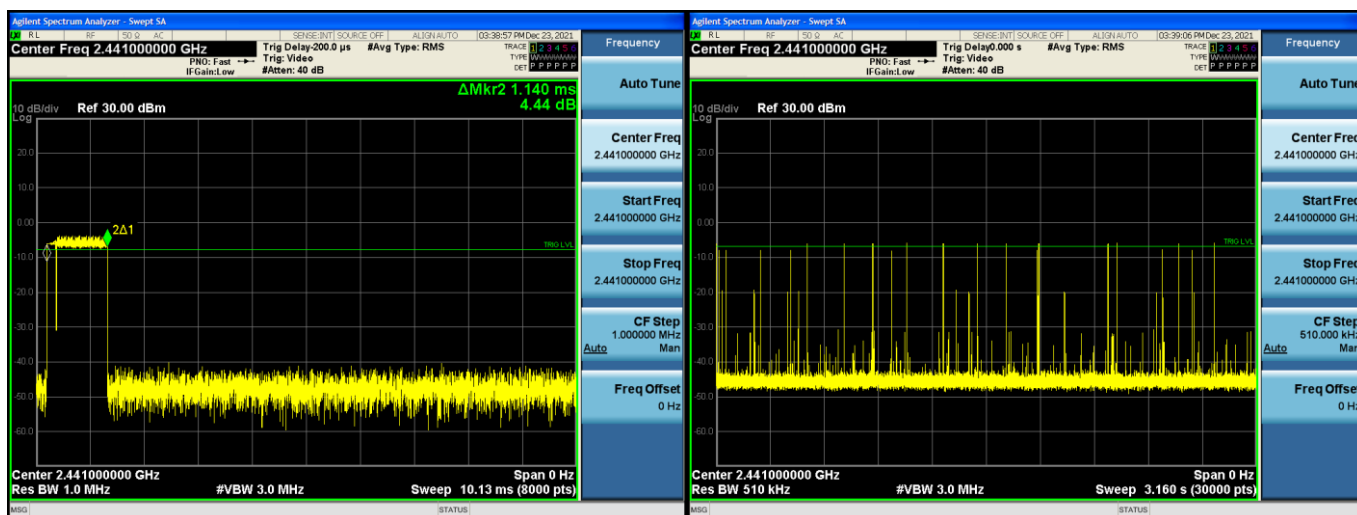


## 5.7 Number of hopping channels

### 5.7.1 Limit

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

### 5.7.2 Test setup



### 5.7.3 Test procedure


- a) Test method: ANSI C63.10-2013 Section 7.8.3
- b) The EUT was set to hopping mode during the test.
- c) The transmitter output of EUT is connected to the spectrum analyzer.
- d) Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.

### 5.7.4 Test results


Mode	Quantity of Hopping Channel	Limit	Results
GFSK	79	≥15	Pass
$\pi/4$ -DQPSK	79	≥15	Pass
8DPSK	79	≥15	Pass

## Number of hopping channels


### GFSK

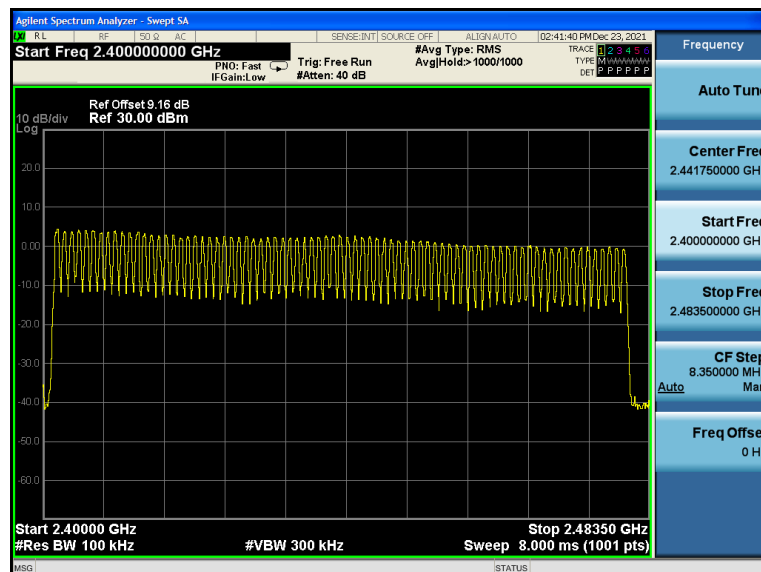

### $\pi/4$ -DQPSK

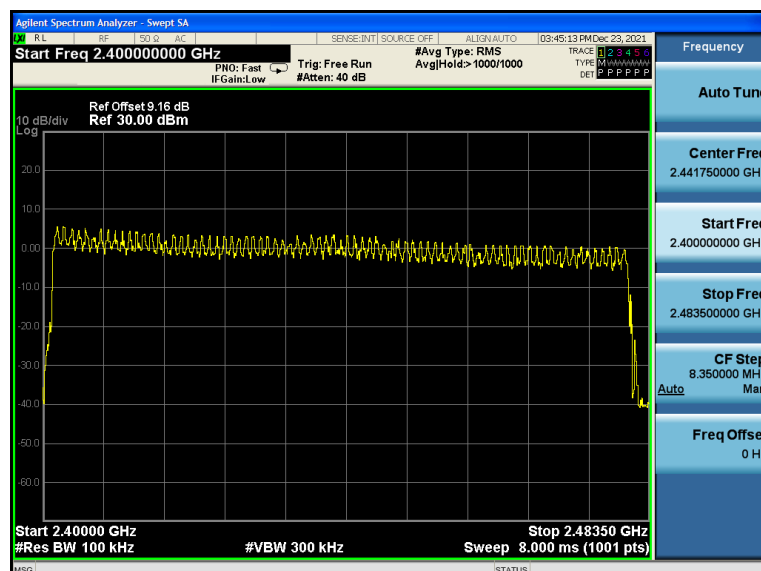

### 8DPSK

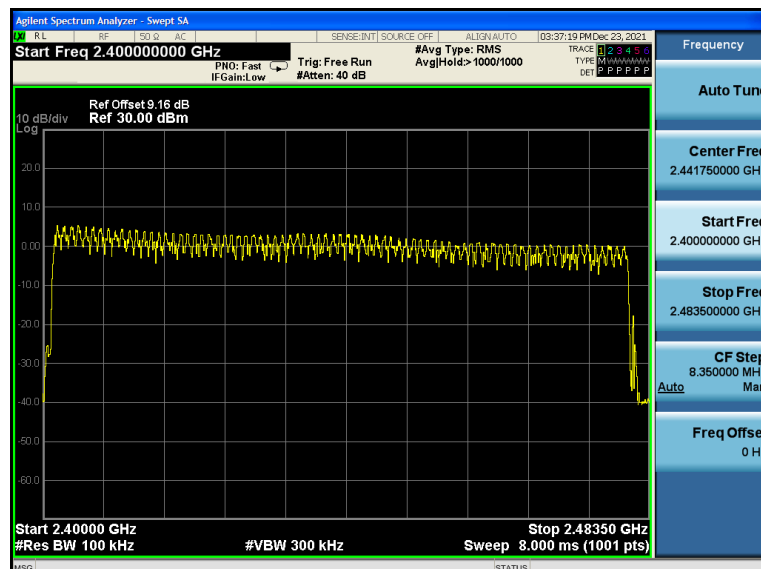


## 5.8 Conducted emissions at the band edge

### 5.8.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.8.2 Test setup



### 5.8.3 Test procedure


- Test method: ANSI C63.10-2013 Section 6.10.4
- The EUT was set to non-hopping mode & hopping mode during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.

### 5.8.4 Test results

**GFSK mode - conducted emissions at the band edge**


Low band-edge (no-hopping mode mode)

High band-edge (non-hopping mode)

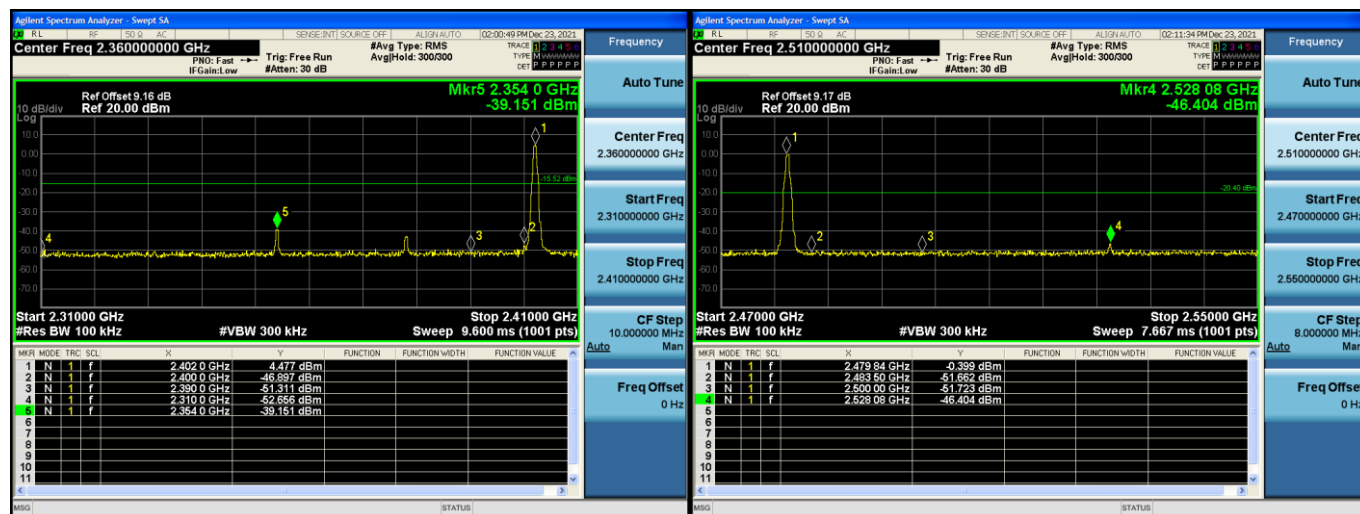

Low band-edge (hopping mode)


High band-edge (hopping mode)

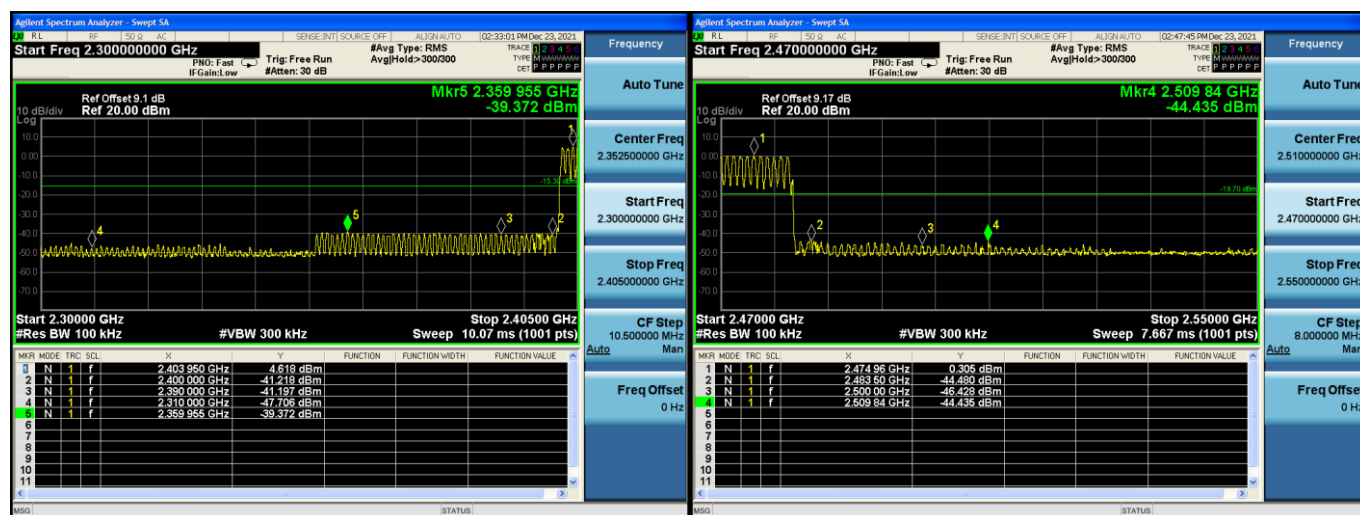

# $\pi/4$ -DQPSK mode - conducted emissions at the band edge


Low band-edge (non-hopping mode)

High band-edge (non-hopping mode)

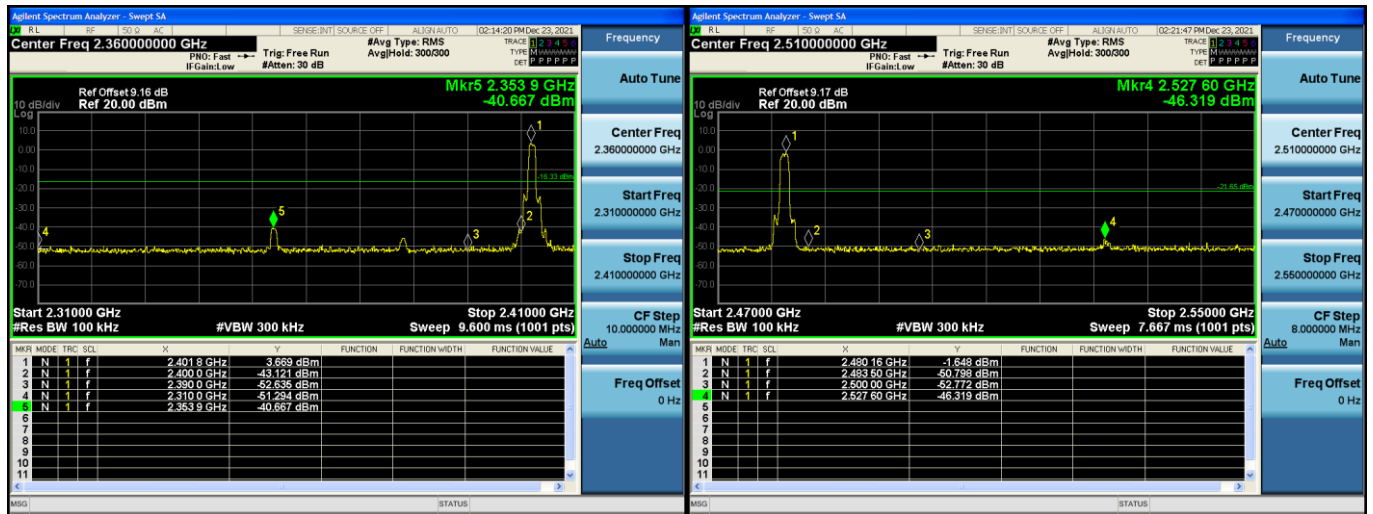

Low band-edge (hopping mode)


High band-edge (hopping mode)

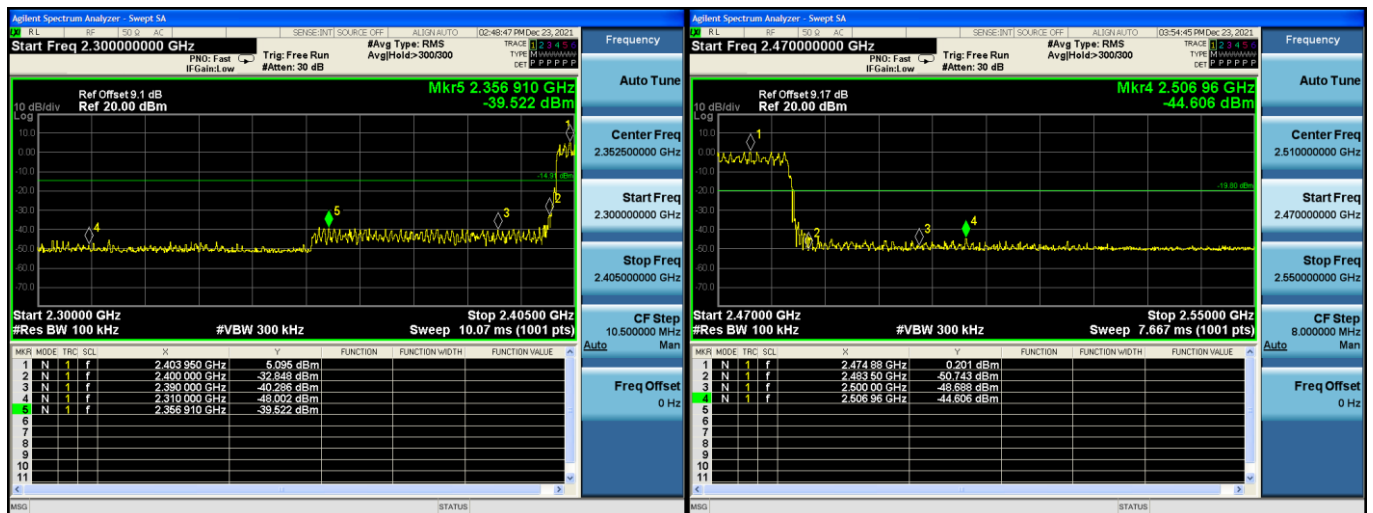

## 8DPSK mode - conducted emissions at the band edge


Low band-edge (non-hopping mode)

High band-edge (non-hopping mode)

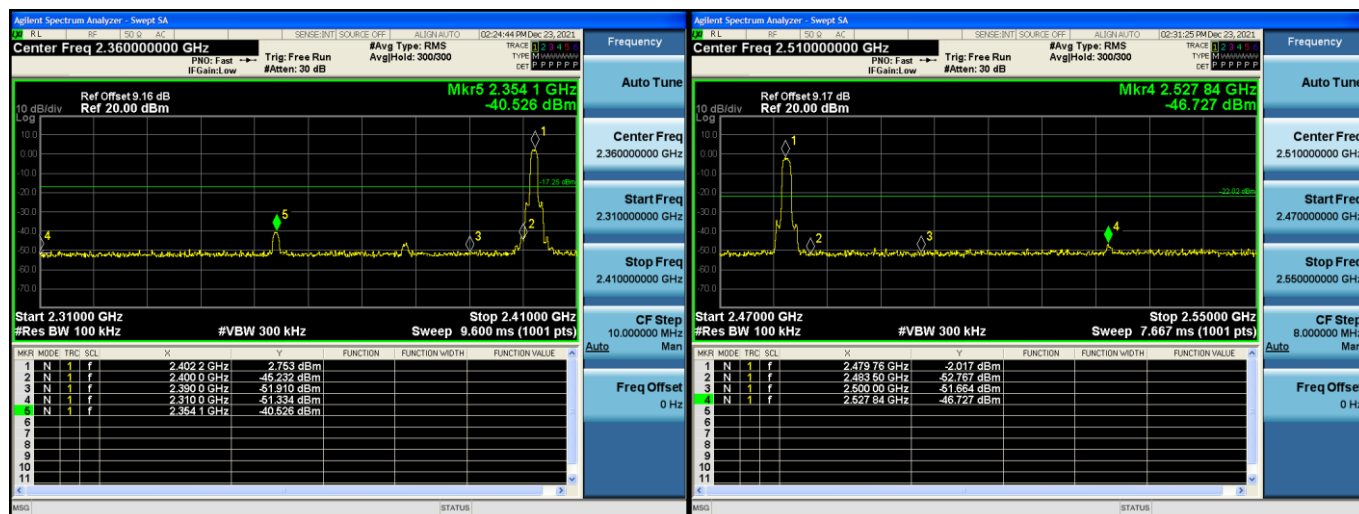

Low band-edge (hopping mode)

High band-edge (hopping mode)

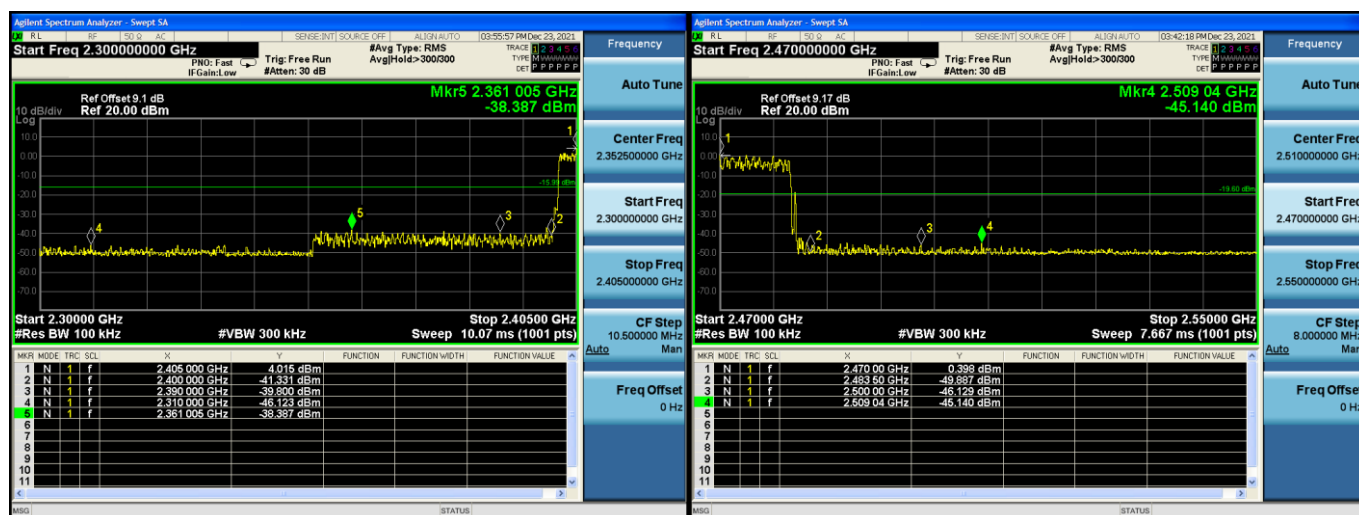




## 5.9 Conducted spurious emissions

### 5.9.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.9.2 Test setup



### 5.9.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 6.10.4
- b) The EUT was set to non-hopping mode & hopping mode during the test.
- c) The transmitter output of EUT is connected to the spectrum analyzer.
- d) Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.

### 5.9.4 Test results



#### Notes:

All modes of operation of the EUT were investigated, and only the worst-case results are reported. The worst-case mode: TX mode (8DPSK).

**Conducted spurious emissions –8DPSK mode**



CH0

CH0

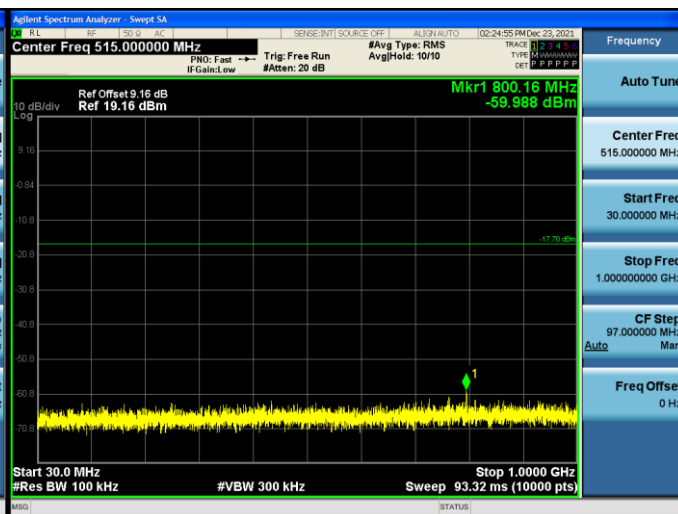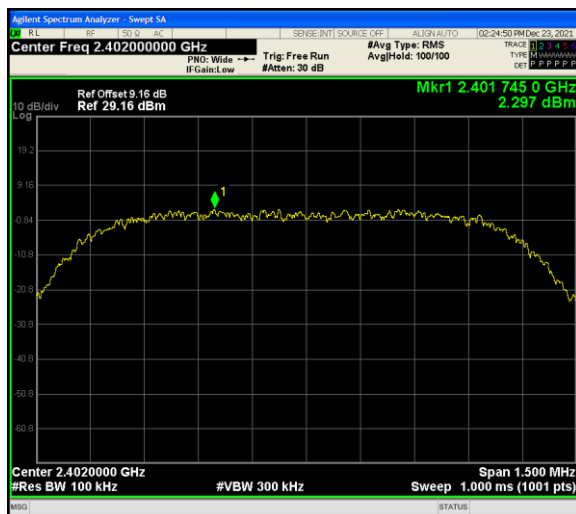



CH0

CH39

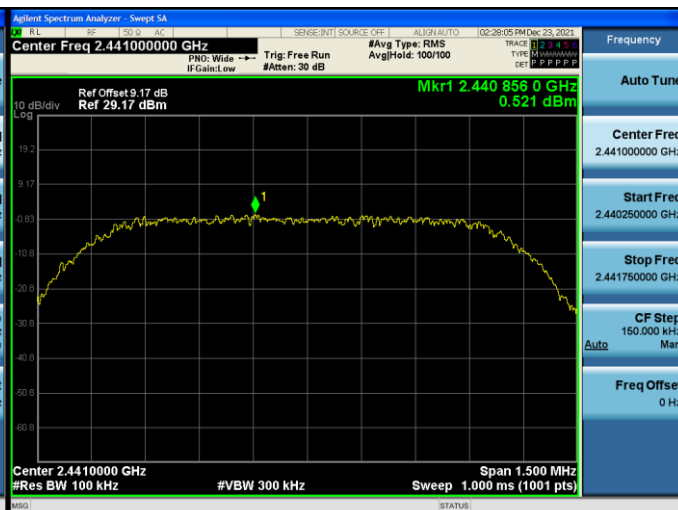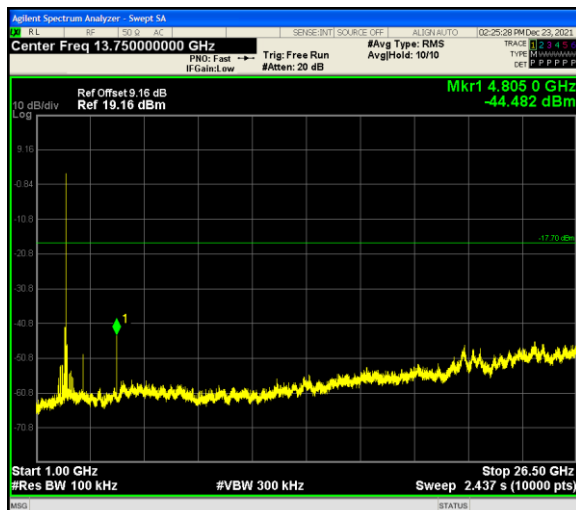

CH39


CH39

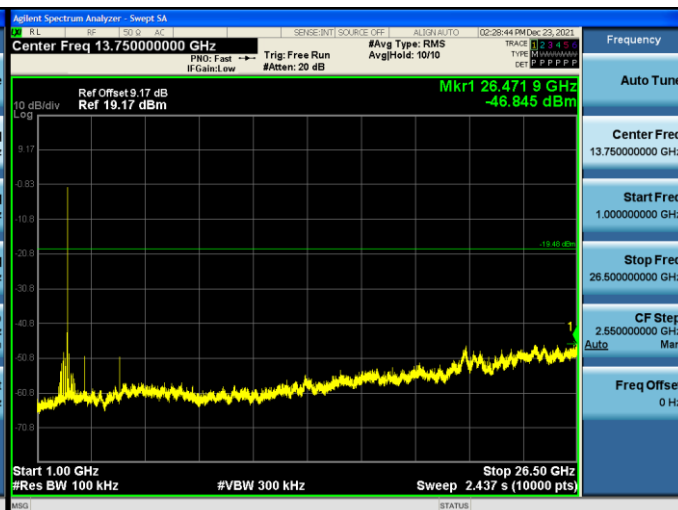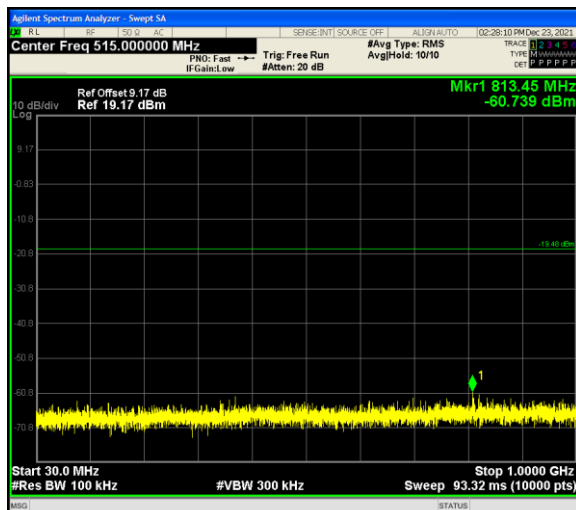


## Conducted spurious emissions –8DPSK mode

CH78

CH78

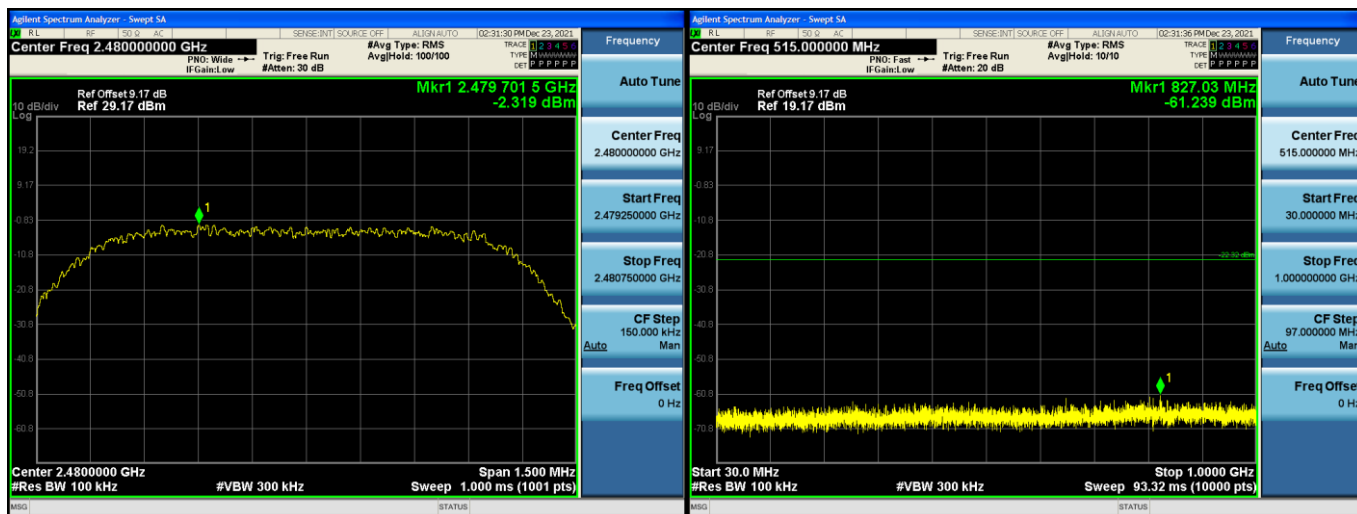

CH78

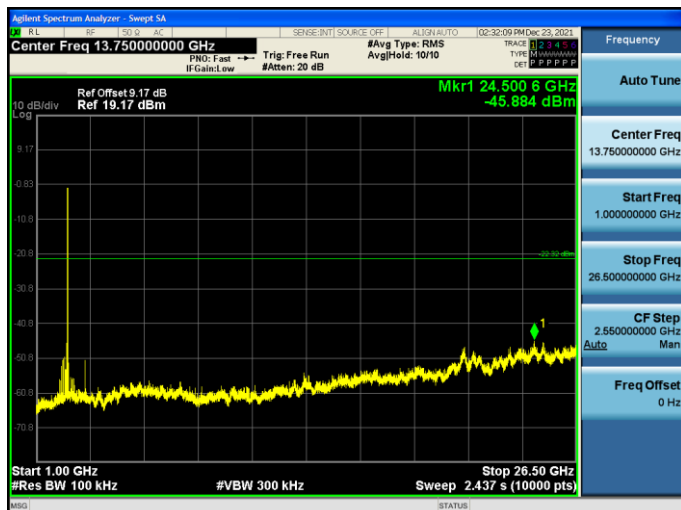

## 5.10 Radiated spurious emissions

### 5.10.1 Limits

§ 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

§ 15.209 Radiated emission limits; general requirements.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Note 1:** the tighter limit applies at the band edges.

**Note 2:** the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

**Frequency range of measurements for unlicensed wireless device**


Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

**Frequency range of measurements for unlicensed wireless device with digital device**


Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

### 5.10.2 Test setup


Below 30MHz

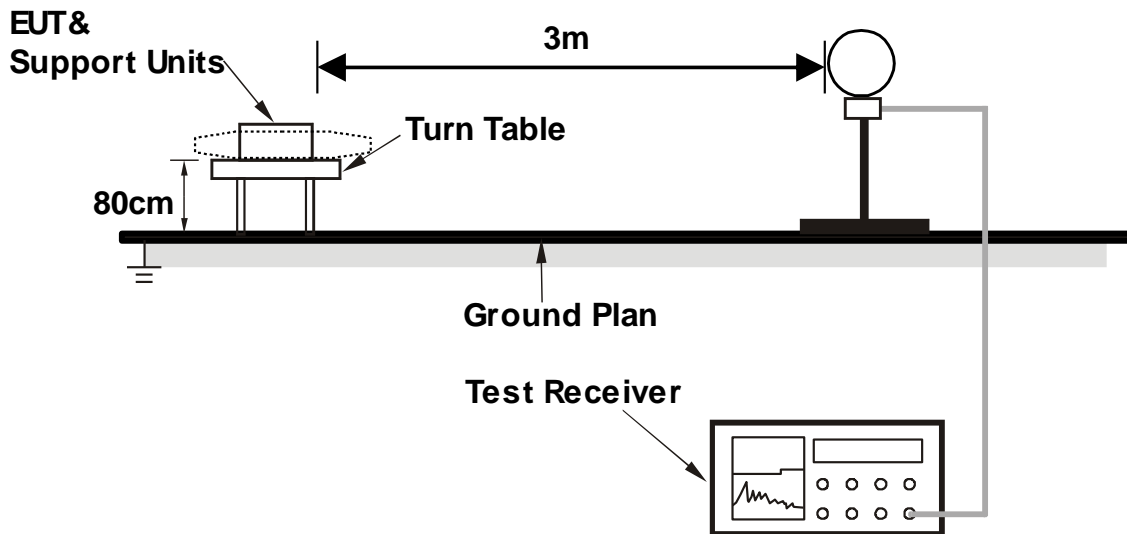

30MHz~1GHz

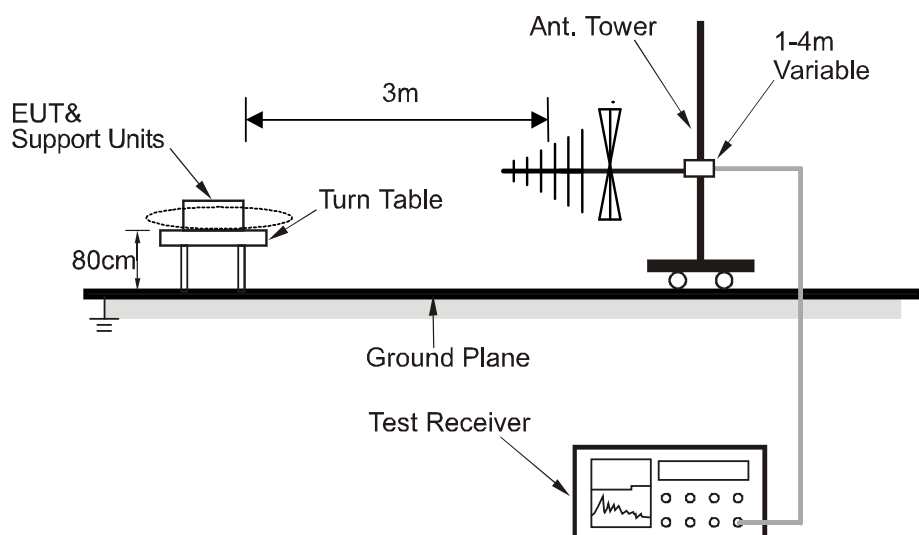

Above 1GHz

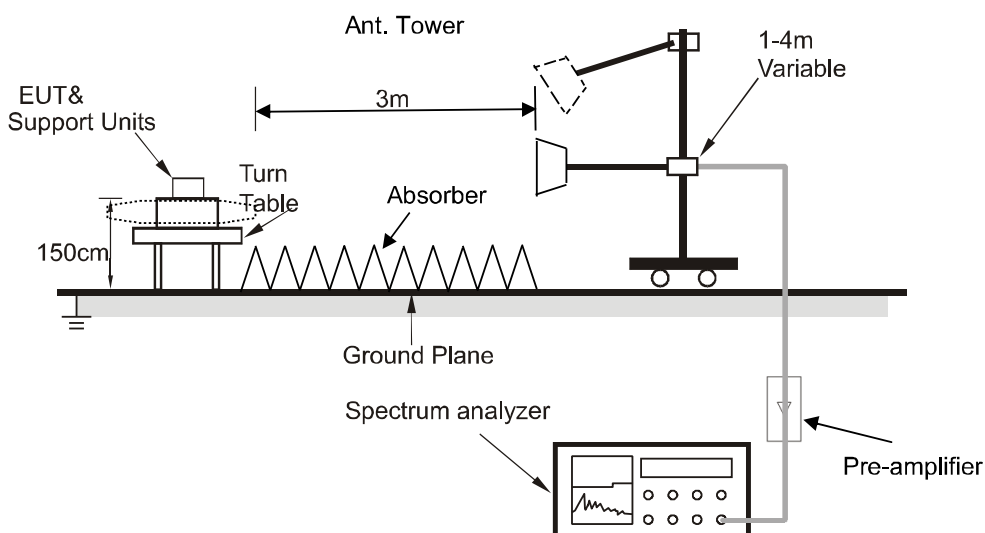

For the actual test configuration, please refer to the related item – Photographs of the test setup.

### 5.10.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 6.3, 6.4, 6.5, 6.6, 6.10.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission blew 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1.5-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

KDB 558074 D01 15.247 Meas Guidance v05r02

The use of a duty cycle correction factor (DCCF) is permitted for calculating average radiated field strength emission levels for an FHSS device in 15.247. This DCCF can be applied when the unwanted emission limit is subject to an average field strength limit (e.g., within a Government Restricted band) and the conditions specified in Section 15.35(c) can be satisfied. The average radiated field strength is calculated by subtracting the DCCF from the maximum radiated field strength level as determined through measurement. The maximum radiated field strength level represents the worst-case (maximum amplitude) RMS measurement of the emission(s) during continuous transmission (i.e., not including any time intervals during which the transmitter is off or is transmitting at a reduced power level). It is also acceptable to apply the DCCF to a measurement performed with a peak detector instead of the specified RMS power averaging detector. Note that Section 15.35(c) specifies that the DCCF shall represent the worst-case (greatest duty cycle) over any 100 msec transmission period.

### Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 1/T, Peak detector

### 5.10.4 Test results

#### Notes:

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

All modes of operation of the EUT were investigated, and only the worst-case results are reported.

There were no emissions found below 30MHz within 20dB of the limit.

#### Calculation formula:


Measurement (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB $\mu$ V/m) – Limit (dB $\mu$ V/m)

**Radiated emissions between 30MHz – 1GHz**

The model for GM60-240250-F AC/DC adapter test data:


Test mode:	TX 8DPSK-2402	Polarization:	Horizontal
Power supply:	DC 24V from adapter AC 120V/60Hz	Test site:	RE chamber 2

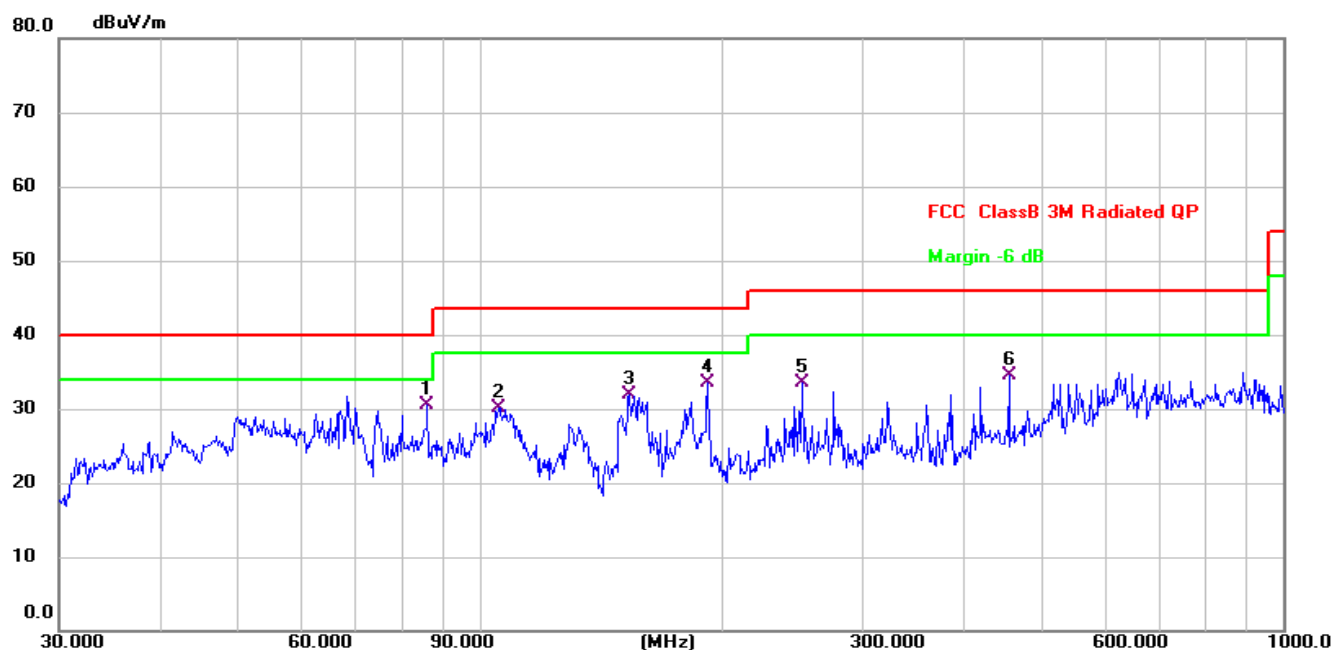

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detect
1	*	86.2000	39.89	-9.41	30.48	40.00	-9.52	QP
2		105.6414	38.72	-8.64	30.08	43.50	-13.42	QP
3		153.7384	42.14	-10.16	31.98	43.50	-11.52	QP
4		192.4182	41.87	-8.34	33.53	43.50	-9.97	QP
5		252.0627	39.36	-5.82	33.54	46.00	-12.46	QP
6		455.9057	38.09	-3.52	34.57	46.00	-11.43	QP




Test mode:	TX 8DPSK-2402	Polarization:	Vertical
Power supply:	DC 24V from adapter AC 120V/60Hz	Test site:	RE chamber 2

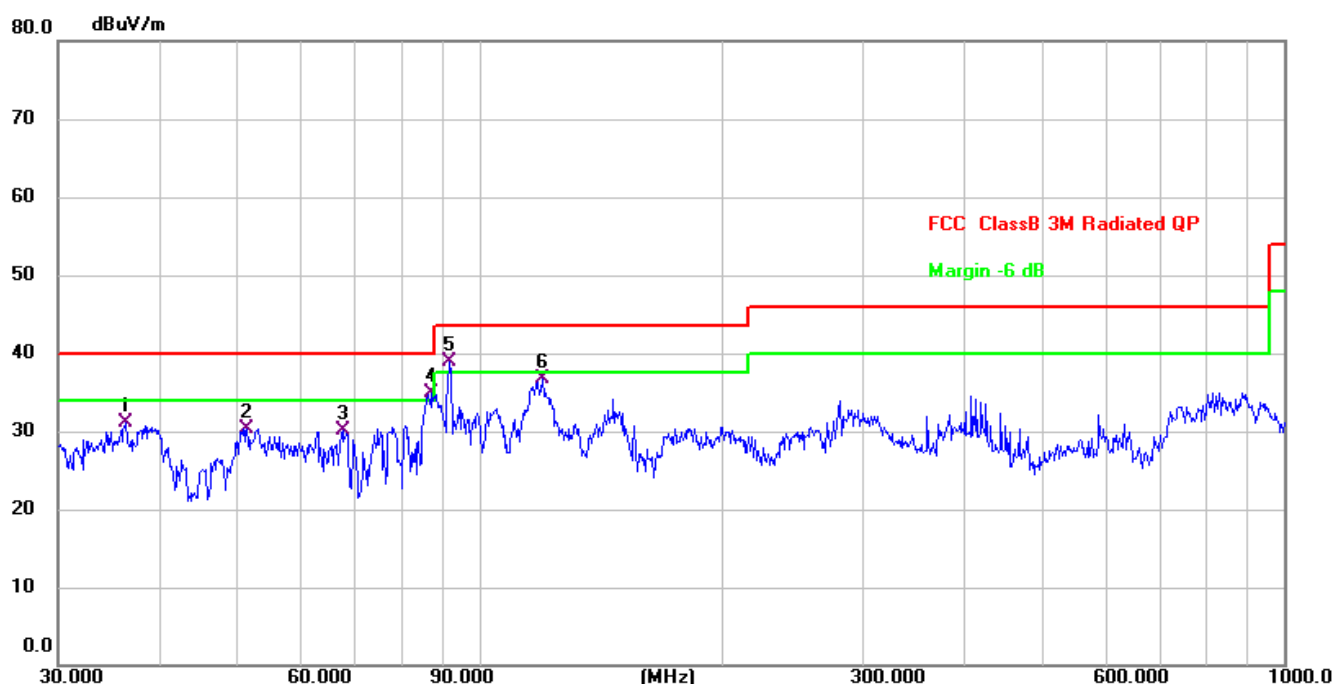

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		36.3813	39.24	-8.13	31.11	40.00	-8.89	QP
2		51.4806	38.27	-7.92	30.35	40.00	-9.65	QP
3		67.6751	39.88	-9.87	30.01	40.00	-9.99	QP
4	!	87.4175	44.10	-9.26	34.84	40.00	-5.16	QP
5	*	91.8161	47.66	-8.84	38.82	43.50	-4.68	QP
6		119.8555	46.82	-10.21	36.61	43.50	-6.89	QP


The model for AP115G-24250 AC/DC adapter test data:

Test mode:	TX 8DPSK-2402	Polarization:	Horizontal
Power supply:	DC 24V from adapter AC 120V/60Hz	Test site:	RE chamber 2

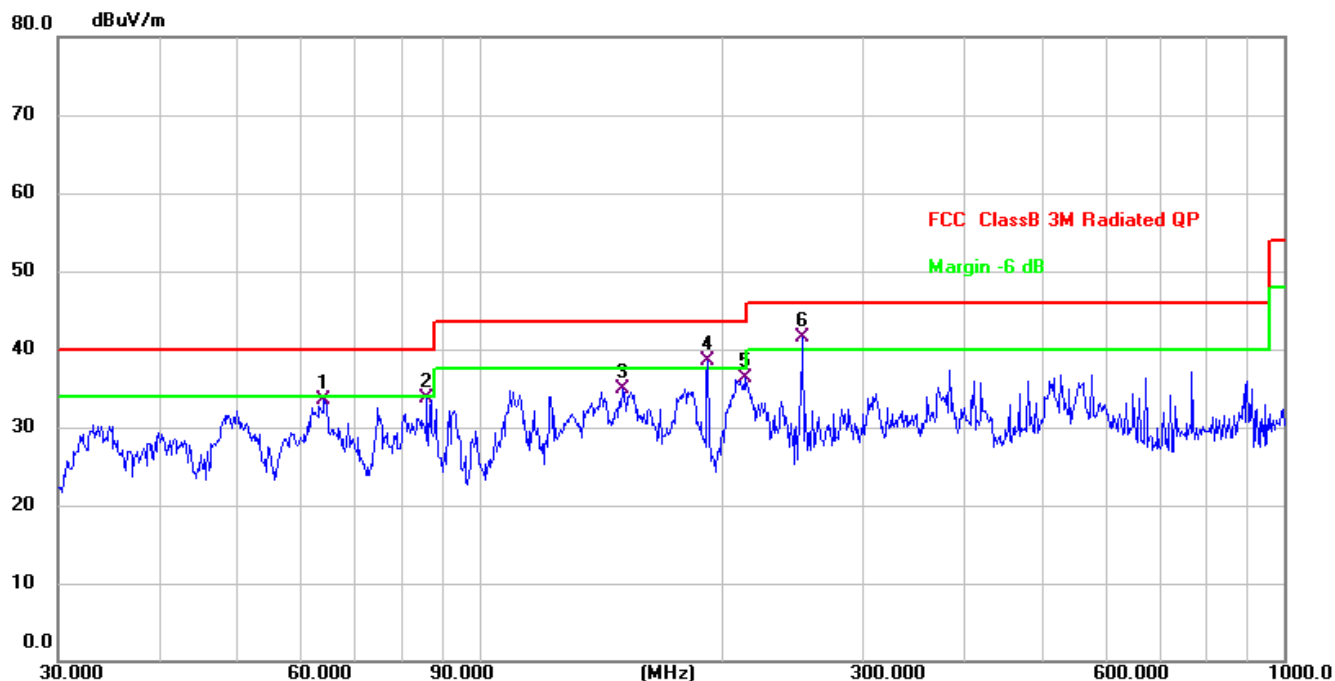

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		64.2074	43.29	-9.71	33.58	40.00	-6.42	QP
2		86.2000	43.07	-9.41	33.66	40.00	-6.34	QP
3		151.0663	45.17	-10.31	34.86	43.50	-8.64	QP
4	!	192.4182	46.91	-8.34	38.57	43.50	-4.93	QP
5		213.7632	43.65	-7.29	36.36	43.50	-7.14	QP
6	*	252.0627	47.30	-5.82	41.48	46.00	-4.52	QP

Test mode:	TX 8DPSK-2402	Polarization:	Vertical
Power supply:	DC 24V from adapter AC 120V/60Hz	Test site:	RE chamber 2

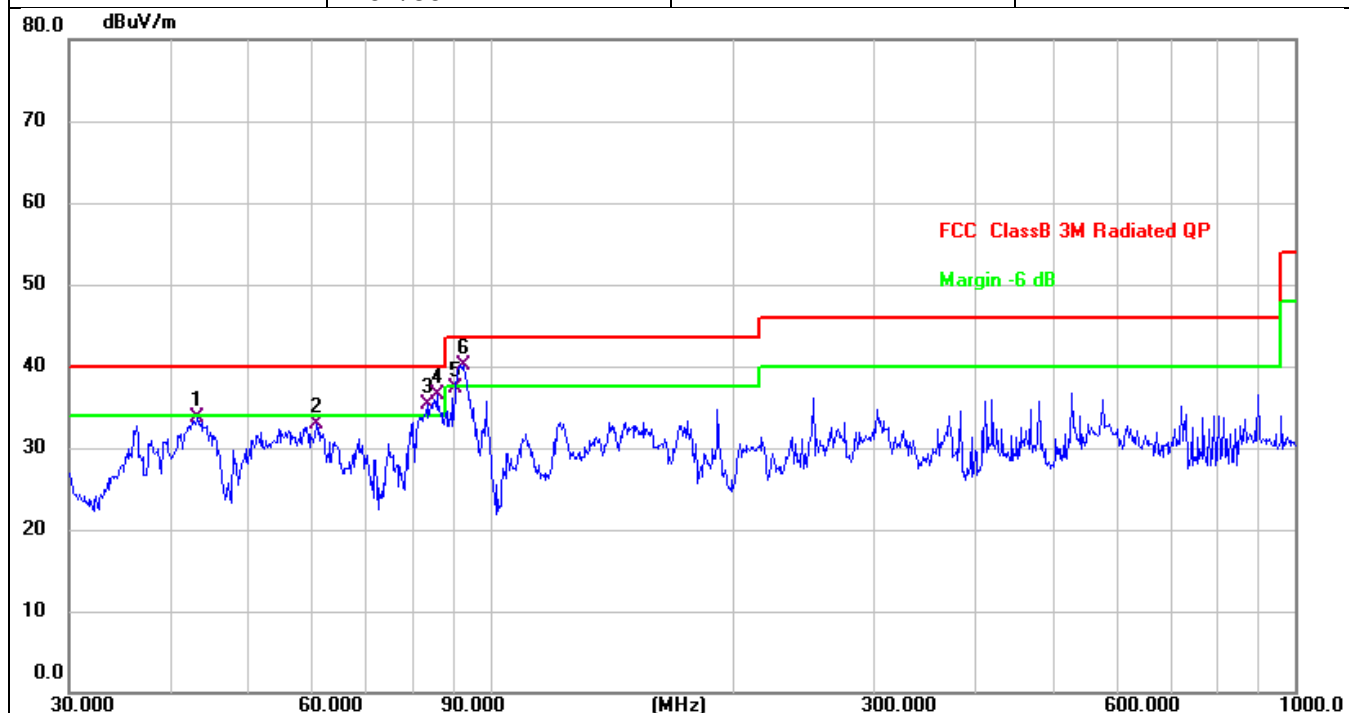

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		43.3534	41.38	-7.65	33.73	40.00	-6.27	QP
2		60.9174	42.44	-9.56	32.88	40.00	-7.12	QP
3	!	83.5220	45.12	-9.76	35.36	40.00	-4.64	QP
4	!	85.8983	46.00	-9.45	36.55	40.00	-3.45	QP
5		90.5374	46.19	-8.89	37.30	43.50	-6.20	QP
6	*	92.7870	48.88	-8.79	40.09	43.50	-3.41	QP

**Radiated emissions 1 GHz ~ 25 GHz**

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2402 MHz)( 8DPSK)--Above 1G									
4804.629	63.18	4.36	32.92	45.53	54.93	74.00	-19.07	Pk	Vertical
4804.629	43.34	4.36	32.92	45.53	35.09	54.00	-18.91	AV	Vertical
7206.567	60.79	5.02	37.63	45.56	57.88	74.00	-16.12	Pk	Vertical
7206.567	42.04	5.02	37.63	45.56	39.13	54.00	-14.87	AV	Vertical
4804.396	60.50	4.36	32.92	45.53	52.25	74.00	-21.75	Pk	Horizontal
4804.396	42.99	4.36	32.92	45.53	34.74	54.00	-19.26	AV	Horizontal
7206.424	60.63	5.02	37.63	45.56	57.72	74.00	-16.28	Pk	Horizontal
7206.424	48.77	5.02	37.63	45.56	45.86	54.00	-8.14	AV	Horizontal
Mid Channel (2441 MHz)( 8DPSK)--Above 1G									
4881.539	62.01	4.43	33.04	45.81	53.67	74.00	-20.33	Pk	Vertical
4881.539	41.88	4.43	33.04	45.81	33.54	54.00	-20.46	AV	Vertical
7322.142	59.46	5.02	37.71	45.62	56.57	74.00	-17.43	Pk	Vertical
7322.142	43.41	5.02	37.71	45.62	40.52	54.00	-13.48	AV	Vertical
4881.285	59.35	4.43	33.04	45.81	51.01	74.00	-22.99	Pk	Horizontal
4881.285	47.25	4.43	33.04	45.81	38.91	54.00	-15.09	AV	Horizontal
7322.199	58.51	5.02	37.71	45.62	55.62	74.00	-18.38	Pk	Horizontal
7322.199	48.06	5.02	37.71	45.62	45.17	54.00	-8.83	AV	Horizontal
High Channel (2480 MHz)( 8DPSK)-- Above 1G									
4959.223	60.44	4.50	33.26	46.07	52.13	74.00	-21.87	Pk	Vertical
4959.223	40.64	4.50	33.26	46.07	32.33	54.00	-21.67	AV	Vertical
7439.201	61.49	5.02	37.78	45.77	58.52	74.00	-15.48	Pk	Vertical
7439.201	46.49	5.02	37.78	45.77	43.52	54.00	-10.48	AV	Vertical
4959.165	61.97	4.50	33.26	46.07	53.66	74.00	-20.34	Pk	Horizontal
4959.165	48.40	4.50	33.26	46.07	40.09	54.00	-13.91	AV	Horizontal
7439.264	59.52	5.02	37.78	45.77	56.55	74.00	-17.45	Pk	Horizontal
7439.264	46.72	5.02	37.78	45.77	43.75	54.00	-10.25	AV	Horizontal

**Note:**

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor.
3. All the modulation modes have been tested, and only the worst results are reflected in the report.

**Radiated emissions at band edge**

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3Mbps(8DPSK)- hopping									
2310.00	60.50	2.40	27.70	40.40	50.20	74	-23.80	Pk	Horizontal
2310.00	42.98	2.40	27.70	40.40	32.68	54	-21.32	AV	Horizontal
2310.00	63.72	2.40	27.70	40.40	53.42	74	-20.58	Pk	Vertical
2310.00	42.66	2.40	27.70	40.40	32.36	54	-21.64	AV	Vertical
2390.00	59.77	2.44	28.30	40.10	50.41	74	-23.59	Pk	Vertical
2390.00	41.53	2.44	28.30	40.10	32.17	54	-21.83	AV	Vertical
2390.00	59.78	2.44	28.30	40.10	50.42	74	-23.58	Pk	Horizontal
2390.00	42.50	2.44	28.30	40.10	33.14	54	-20.86	AV	Horizontal
2400.00	64.60	2.46	28.30	40.10	55.26	74	-18.74	Pk	Vertical
2400.00	44.67	2.46	28.30	40.10	35.33	54	-18.67	AV	Vertical
2400.00	63.69	2.46	28.30	40.10	54.35	74	-19.65	Pk	Horizontal
2400.00	43.87	2.46	28.30	40.10	34.53	54	-19.47	AV	Horizontal
2483.50	61.39	2.48	28.70	39.80	52.77	74	-21.23	Pk	Vertical
2483.50	40.83	2.48	28.70	39.80	32.21	54	-21.79	AV	Vertical
2483.50	61.12	2.48	28.70	39.80	52.50	74	-21.50	Pk	Horizontal
2483.50	42.08	2.48	28.70	39.80	33.46	54	-20.54	AV	Horizontal
2500.00	60.33	2.48	28.70	39.80	51.71	74	-22.29	Pk	Vertical
2500.00	42.76	2.48	28.70	39.80	34.14	54	-19.86	AV	Vertical
2500.00	59.79	2.48	28.70	39.80	51.17	74	-22.83	Pk	Horizontal
2500.00	42.62	2.48	28.70	39.80	34.00	54	-20.00	AV	Horizontal

**Note:**

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamplifier Factor.
3. All the modulation modes have been tested, and only the worst results are reflected in the report.

## Photographs of the Test Setup

See the appendix – Test Setup Photos.

## Photographs of the EUT

See the appendix - EUT Photos.

----End of Report----