

FCC TEST REPORT

Client Name : Beijing ManThink Technology Co., Ltd.

Address : Room 904, JingKai Building B DiSheng North Road No.1,
BDA Beijing China

Product Name : OM802S

Date : Oct. 30, 2020

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	5
1.6. Description of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiated Emission and Band Edge.....	13
4.1. Test Standard and Limit.....	13
4.2. Test Setup.....	13
4.3. Test Procedure.....	15
4.4. Test Data.....	16
5. 20dB Bandwidth Test.....	28
5.1. Test Standard and Limit.....	28
5.2. Test Setup.....	28
5.3. Test Procedure.....	28
5.4. Test Data.....	28
6. Antenna Requirement.....	31
6.1. Test Standard and Requirement.....	31
6.2. Antenna Connected Construction.....	31
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	32
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	34
APPENDIX III -- INTERNAL PHOTOGRAPH.....	36



TEST REPORT

Applicant : Beijing ManThink Technology Co., Ltd.

Manufacturer : Beijing ManThink Technology Co., Ltd.

Product Name : OM802S

Model No. : OM802S, OM802P, OM802T

Trade Mark : 
ManThink

Rating(s) : Input: DC 3.3V, 130mA

Standard(s) : FCC Part15 Subpart C, Paragraph 15.249

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Receipt

Sept. 24, 2020


Date of Test

Sept. 24~Oct. 19, 2020


Prepared by


(Engineer / Yilia Zhong)

Reviewer


(Supervisor / Bibo Zhang)

Approved & Authorized Signer


(Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Beijing ManThink Technology Co., Ltd.
Address	:	Room 904, JingKai Building B DiSheng North Road No.1, BDA Beijing China
Manufacturer	:	Beijing ManThink Technology Co., Ltd.
Address	:	Room 904, JingKai Building B DiSheng North Road No.1, BDA Beijing China
Factory	:	Beijing ManThink Technology Co., Ltd.
Address	:	Room 904, JingKai Building B DiSheng North Road No.1, BDA Beijing China

1.2. Description of Device (EUT)

Product Name	:	OM802S	
Model No.	:	(Note: All samples are the same except the model number, so we prepare "OM802S" for test only.)	
Trade Mark	:	 ManThink	
Test Power Supply	:	DC 3.3V	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	923.2~924.6 MHz
	:	Number of Channel:	8 Channels
	:	Modulation Type:	LoRa
	:	Antenna Type:	Cylindrical antenna
	:	Antenna Gain(Peak):	1 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

MacBook Air	:	Model: A1466 Input: 14.85V/3.05A CMIIT ID:C02HXB48DRVC
-------------	---	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH04
Mode 3	CH08
Mode 4	TX Mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH04
Mode 3	CH08
Mode 4	TX Mode

Note:


1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

1.5. List of Channels


Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	923.2	02	923.4	03	923.6	04	923.8
05	924.0	06	924.2	07	924.4	08	924.6

1.6. Description of Test Setup

CE

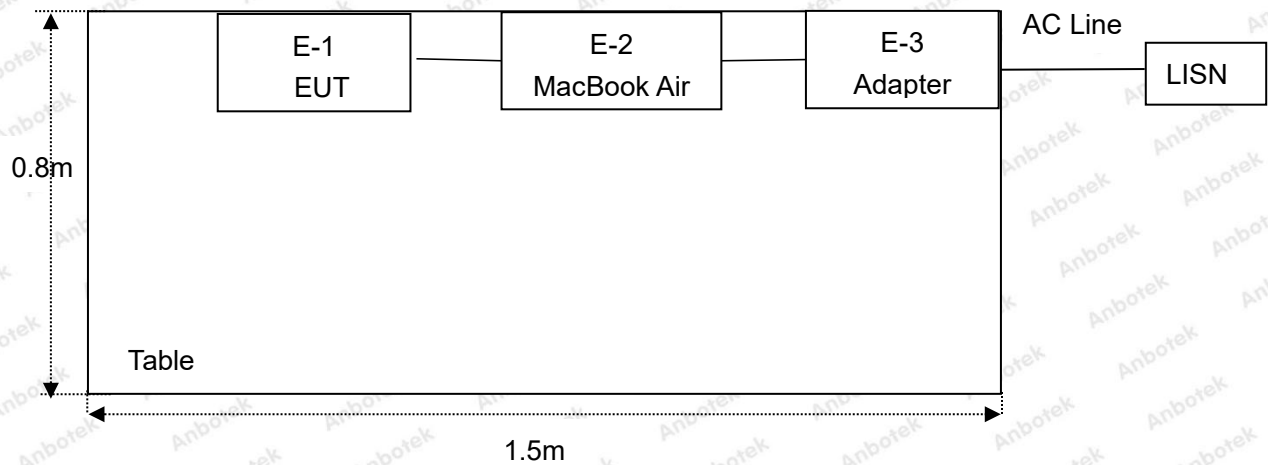

RE

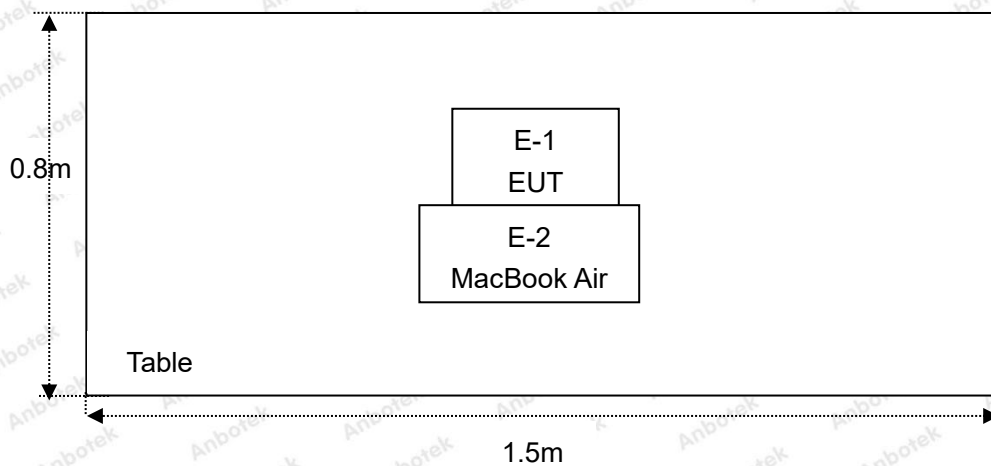

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 04, 2019	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 04, 2019	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 04, 2019	1 Year
4.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 04, 2019	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 01, 2019	1 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 01, 2019	1 Year
8.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 01, 2019	1 Year
9.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 01, 2019	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Nov. 04, 2019	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 04, 2019	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 04, 2019	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 04, 2019	1 Year
15.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
16.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 04, 2019	1 Year
17.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 04, 2019	1 Year
18.	DC Power Supply	LW	TPR-6420D	374470	Nov. 04, 2019	1 Year
19.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 04, 2019	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249,15.209,15.205	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

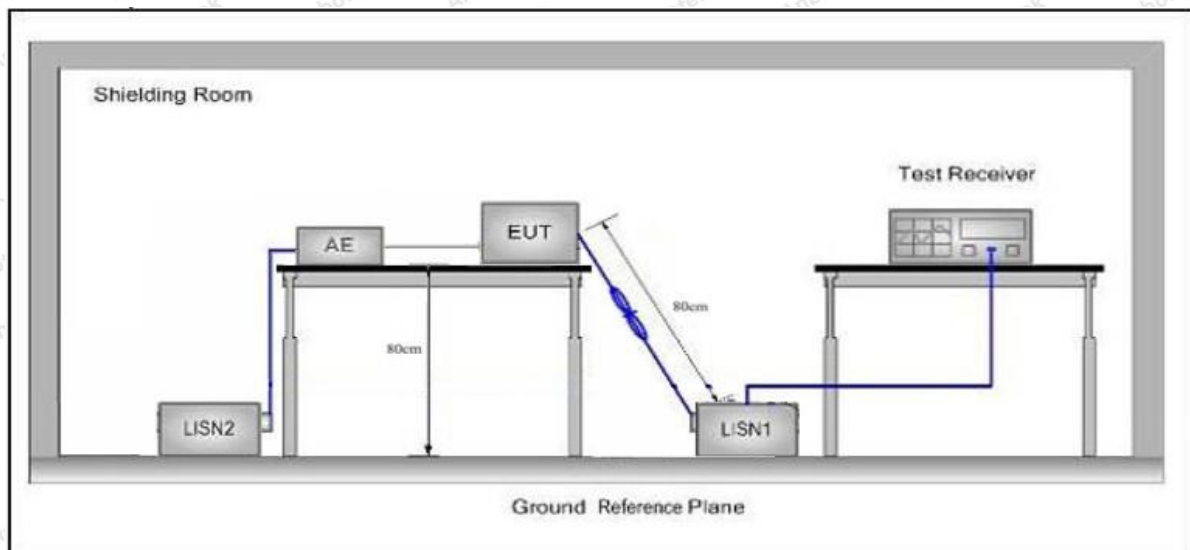

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test Transmitter (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


3.4. Test Data

Please to see the following pages.



Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: DC 3.3V
 Comment: Live Line
 Tem.: 24.2°C Hum.: 52%

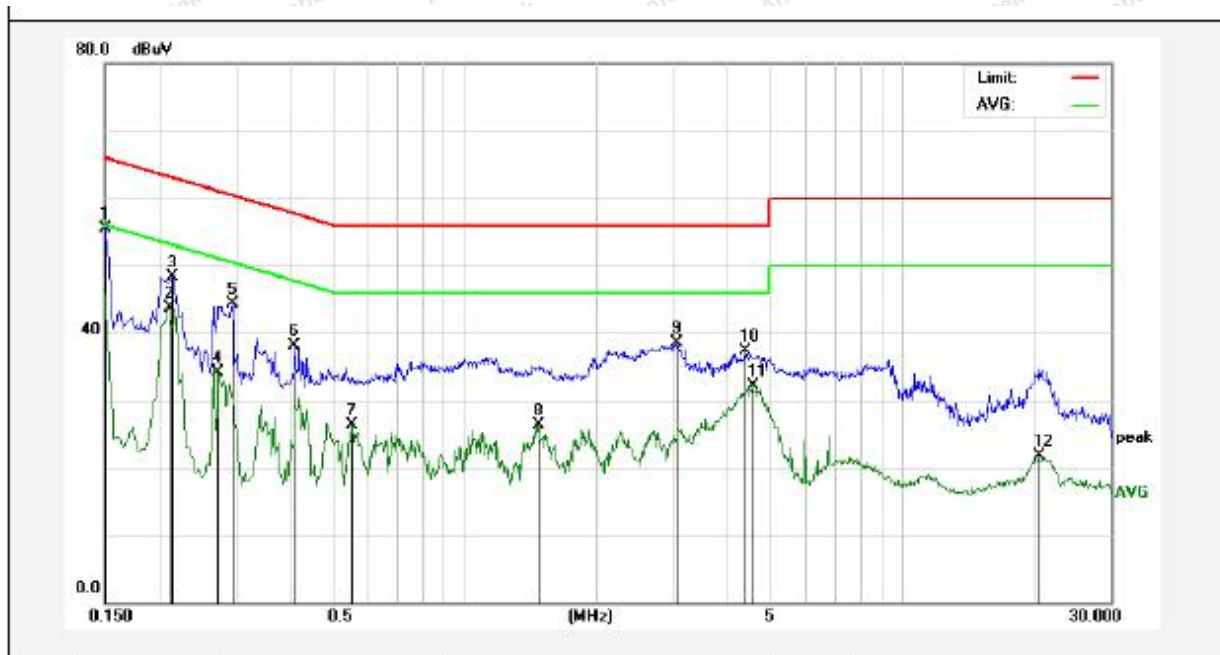

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	35.66	19.90	55.56	66.00	-10.44	QP	
2	0.2100	23.82	19.90	43.72	53.20	-9.48	AVG	
3	0.2140	28.34	19.90	48.24	63.04	-14.80	QP	
4	0.2740	14.18	19.89	34.07	50.99	-16.92	AVG	
5	0.2940	24.41	19.89	44.30	60.41	-16.11	QP	
6	0.4100	18.18	19.94	38.12	57.65	-19.53	QP	
7	0.5540	6.39	20.00	26.39	46.00	-19.61	AVG	
8	1.4660	6.26	20.13	26.39	46.00	-19.61	AVG	
9	3.0540	18.41	20.16	38.57	56.00	-17.43	QP	
10	4.3939	17.05	20.19	37.24	56.00	-18.76	QP	
11	4.5500	11.82	20.19	32.01	46.00	-13.99	AVG	
12	20.4900	1.36	20.33	21.69	50.00	-28.31	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: DC 3.3V
 Comment: Neutral Line
 Tem.: 24.2°C Hum.: 52%

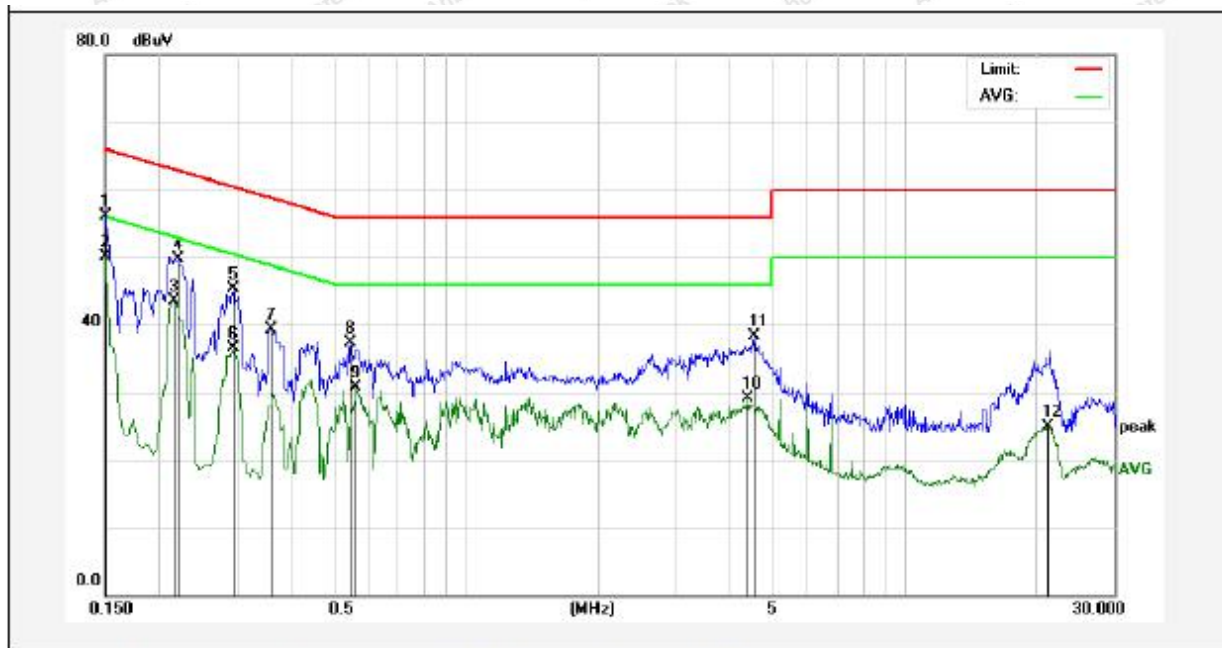

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	36.29	19.90	56.19	66.00	-9.81	QP	
2	0.1500	30.27	19.90	50.17	55.99	-5.82	AVG	
3	0.2140	23.60	19.90	43.50	53.04	-9.54	AVG	
4	0.2197	29.87	19.90	49.77	62.83	-13.06	QP	
5	0.2940	25.43	19.89	45.32	60.41	-15.09	QP	
6	0.2940	16.54	19.89	36.43	50.41	-13.98	AVG	
7	0.3580	19.38	19.92	39.30	58.77	-19.47	QP	
8	0.5460	17.39	19.99	37.38	56.00	-18.62	QP	
9	0.5620	10.68	20.00	30.68	46.00	-15.32	AVG	
10	4.3859	8.92	20.19	29.11	46.00	-16.89	AVG	
11	4.5419	18.19	20.19	38.38	56.00	-17.62	QP	
12	21.2340	4.63	20.33	24.96	50.00	-25.04	AVG	



4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1) The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Fundamental frequency (MHz)	Field Strength	Limit (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	902~928	Fundamental	50	94.0	Quasi-peak	3
		Harmonics	500	74.0	Average	3
			-	94.0	Peak	3

Remark:

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

Figure 1. Below 30MHz

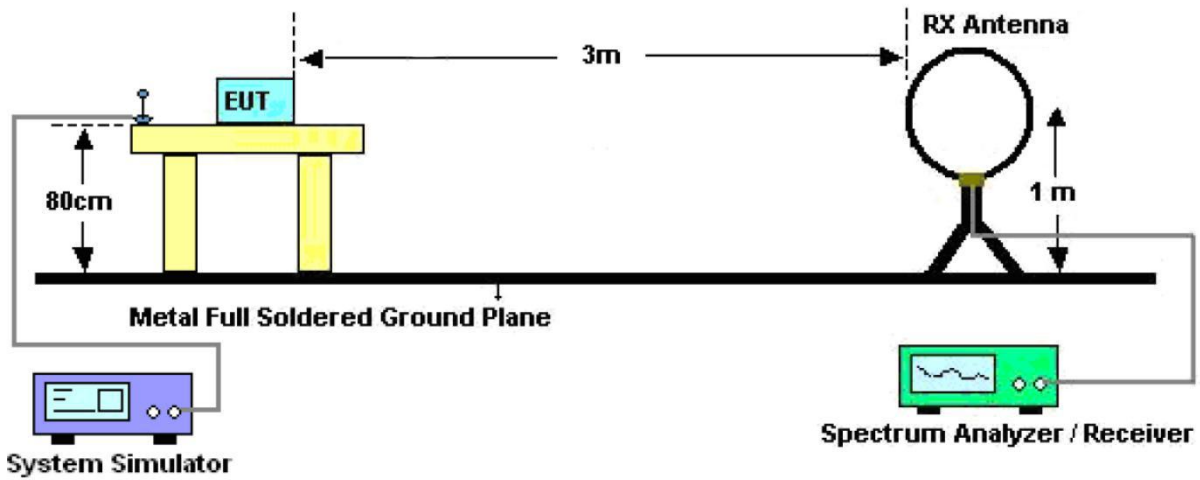


Figure 2. 30MHz to 1GHz


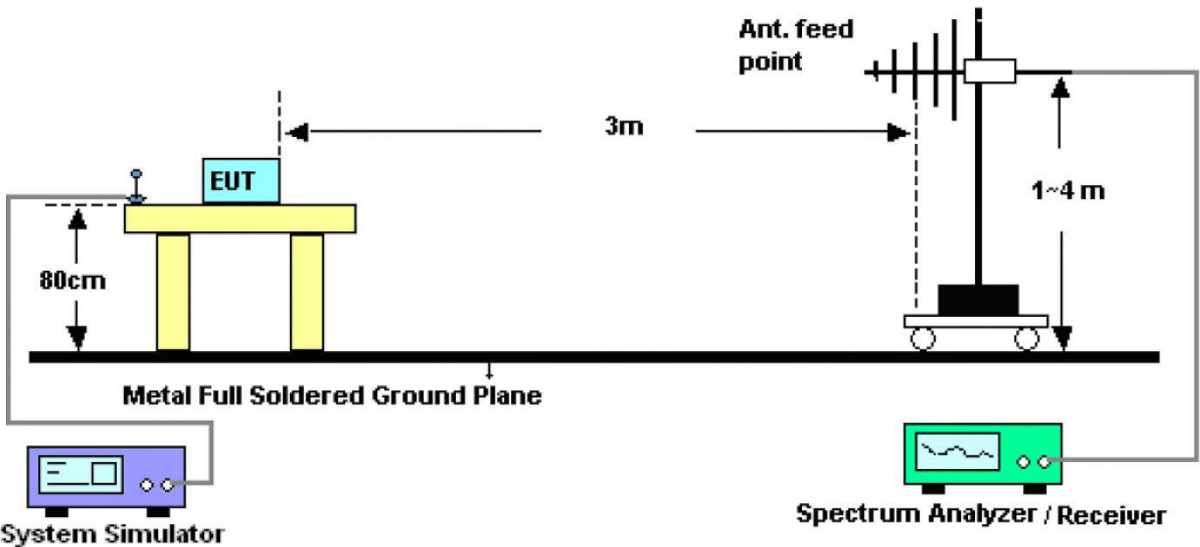


Figure 3. Above 1 GHz

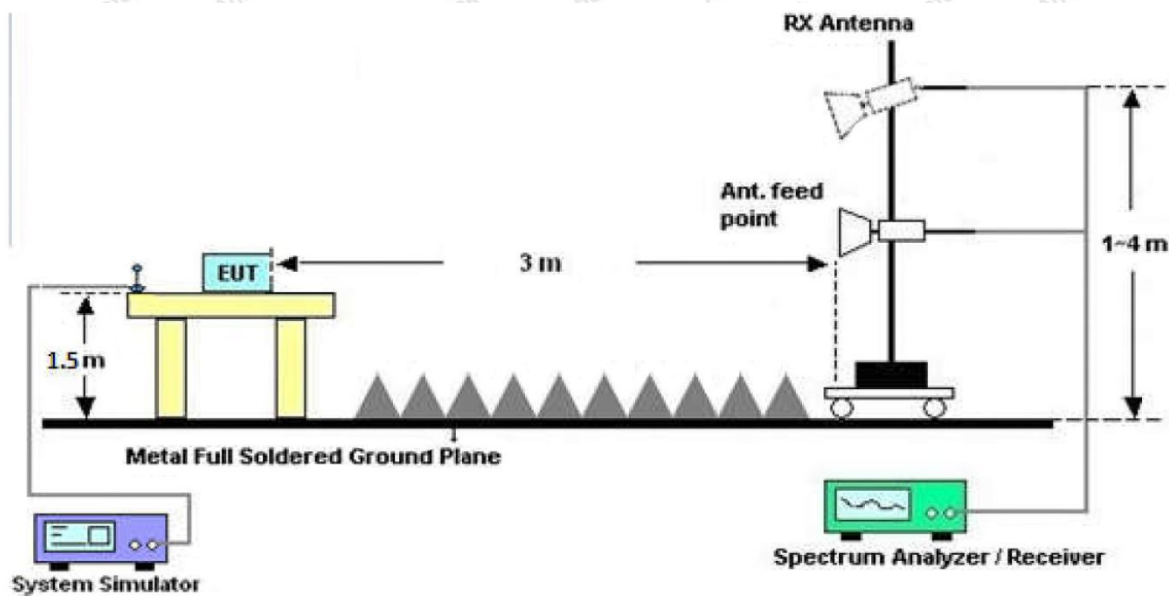

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Report No.: 18220WC00141101

FCC ID: 2ATLH-OM802S

Page 17 of 38

Test Results (30~1000MHz)

Test Mode: CH01
Power Source: DC 3.3V
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.4°C/48%RH

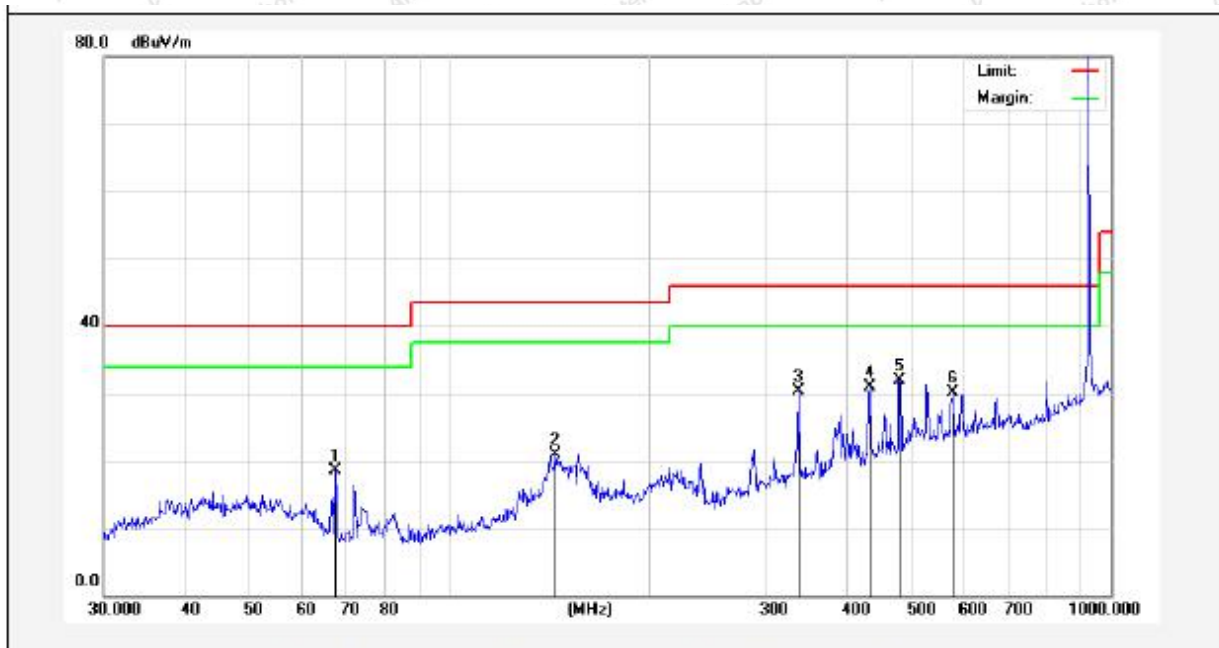

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	67.2022	36.64	-18.23	18.41	40.00	-21.59	QP	100	0	
2	144.3348	40.92	-20.00	20.92	43.50	-22.58	QP	100	360	
3	337.2155	42.61	-12.36	30.25	46.00	-15.75	QP	100	0	
4	432.5457	41.43	-10.62	30.81	46.00	-15.19	QP	100	360	
5	478.8455	41.21	-9.26	31.95	46.00	-14.05	QP	100	0	
6	576.6443	37.49	-7.34	30.15	46.00	-15.85	QP	100	360	




Report No.: 18220WC00141101

FCC ID: 2ATLH-OM802S

Page 18 of 38

Test Results (30~1000MHz)

Test Mode: CH01
Power Source: DC 3.3V
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 23.4°C/48%RH

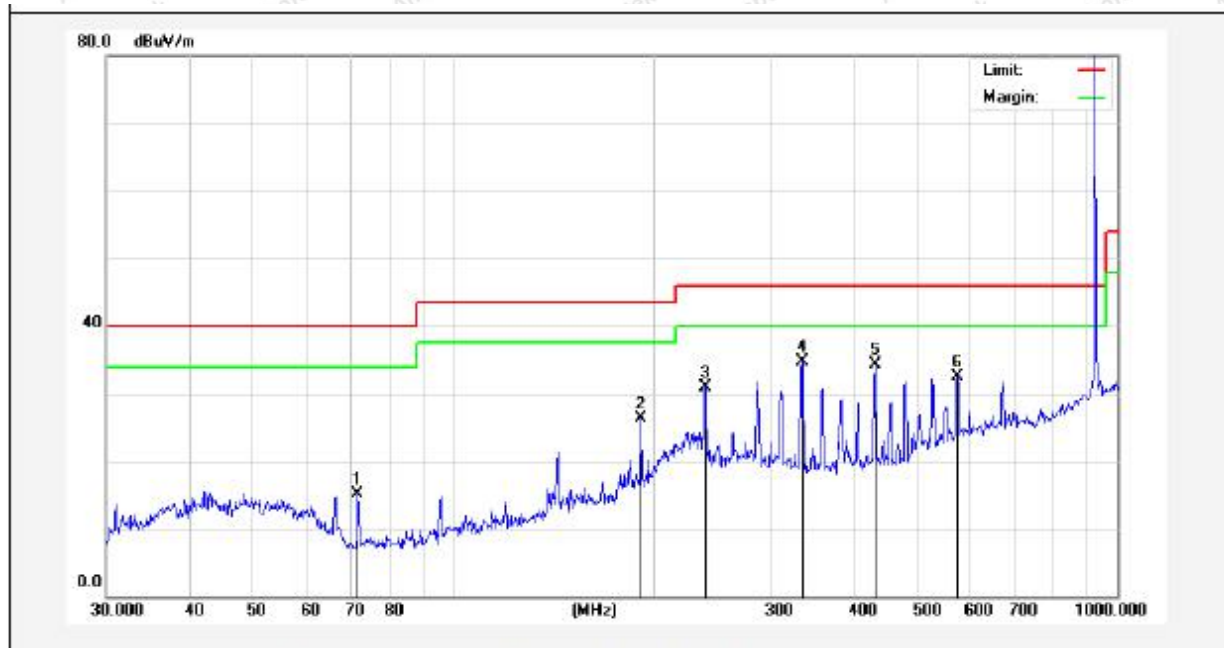

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	71.8319	35.79	-20.71	15.08	40.00	-24.92	QP	100	360	
2	191.7450	46.53	-20.27	26.26	43.50	-17.24	QP	100	0	
3	239.1473	49.93	-19.06	30.87	46.00	-15.13	QP	100	360	
4	334.8589	48.00	-13.38	34.62	46.00	-11.38	QP	100	0	
5	432.5457	46.74	-12.38	34.36	46.00	-11.64	QP	100	360	
6	574.6258	39.87	-7.40	32.47	46.00	-13.53	QP	100	0	




Report No.: 18220WC00141101

FCC ID: 2ATLH-OM802S

Page 19 of 38

Test Results (30~1000MHz)

Test Mode: CH04
Power Source: DC 3.3V
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.4°C/48%RH

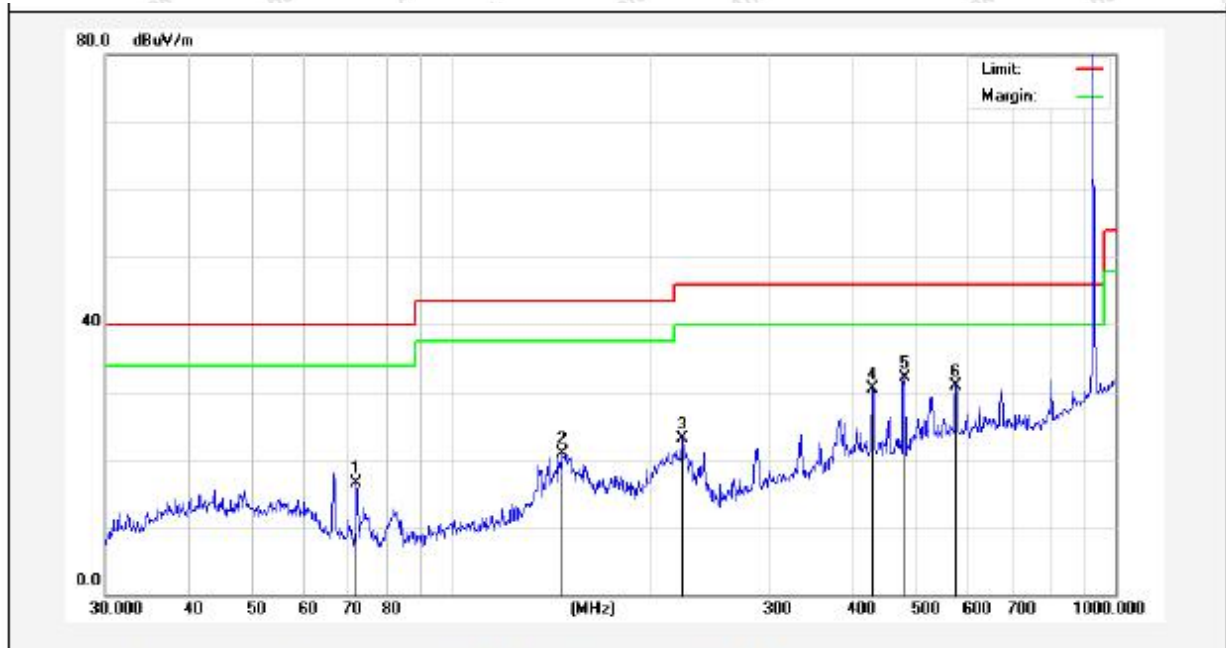

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	71.8319	34.90	-18.49	16.41	40.00	-23.59	QP	100	0	
2	146.8874	40.84	-19.95	20.89	43.50	-22.61	QP	100	360	
3	222.1698	39.43	-16.35	23.08	46.00	-22.92	QP	100	0	
4	429.5228	41.27	-10.68	30.59	46.00	-15.41	QP	100	360	
5	480.5276	41.28	-9.21	32.07	46.00	-13.93	QP	100	0	
6	574.6258	38.22	-7.40	30.82	46.00	-15.18	QP	100	360	




Report No.: 18220WC00141101

FCC ID: 2ATLH-OM802S

Page 20 of 38

Test Results (30~1000MHz)

Test Mode: CH04
Power Source: DC 3.3V
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 23.4°C/48%RH

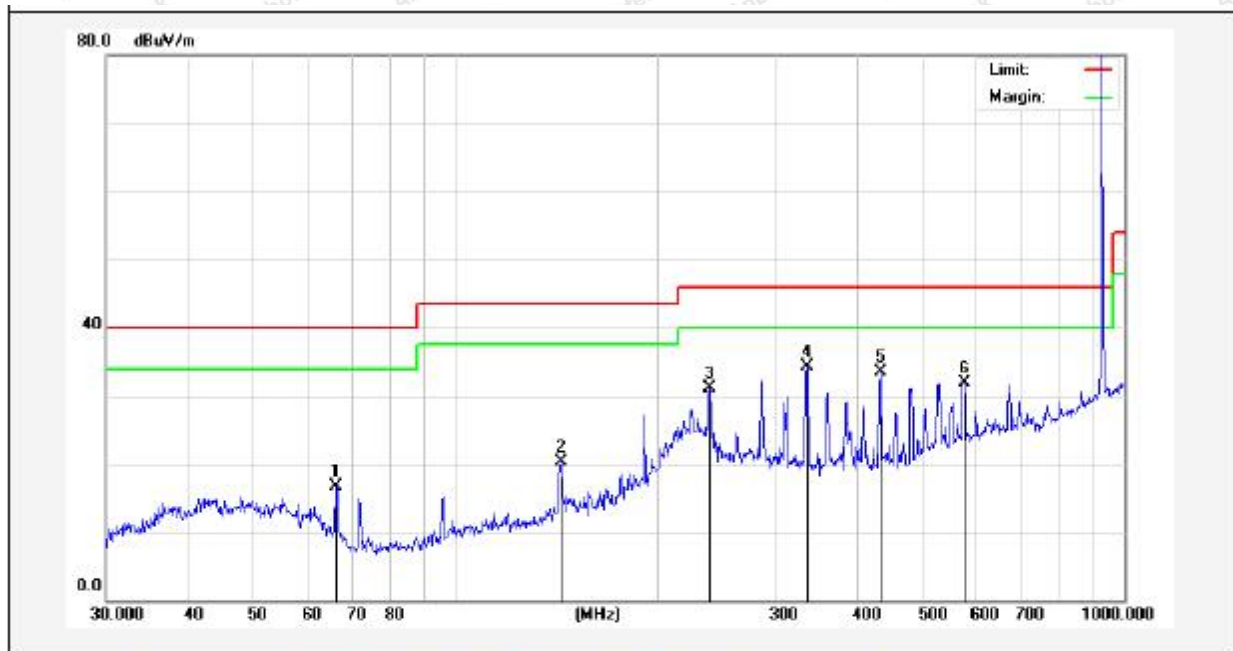

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	66.2660	35.41	-18.70	16.71	40.00	-23.29	QP	100	0	
2	143.8291	41.15	-20.84	20.31	43.50	-23.19	QP	100	360	
3	239.9874	50.19	-19.04	31.15	46.00	-14.85	QP	100	0	
4	336.0350	47.56	-13.35	34.21	46.00	-11.79	QP	100	360	
5	432.5457	45.90	-12.38	33.52	46.00	-12.48	QP	100	0	
6	576.6443	39.19	-7.34	31.85	46.00	-14.15	QP	100	360	




Report No.: 18220WC00141101

FCC ID: 2ATLH-OM802S

Page 21 of 38

Test Results (30~1000MHz)

Test Mode: CH08
Power Source: DC 3.3V
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.4°C/48%RH

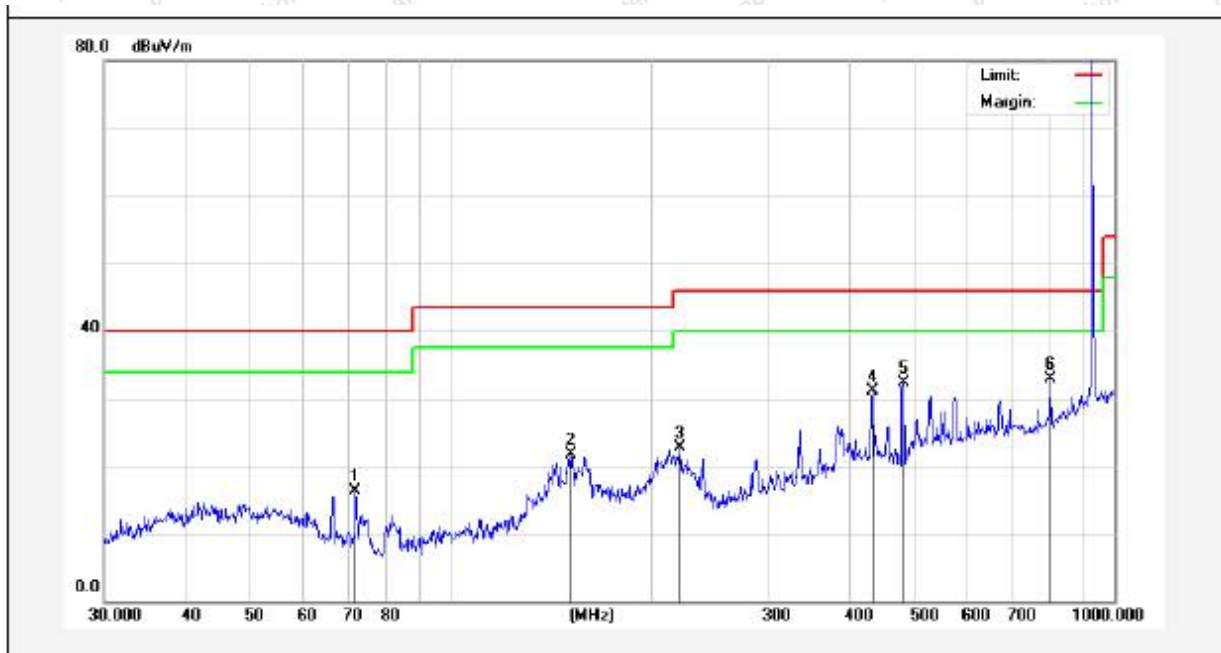

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	71.8319	34.85	-18.49	16.36	40.00	-23.64	QP	100	0	
2	151.5971	41.49	-19.83	21.66	43.50	-21.84	QP	100	360	
3	221.3917	39.08	-16.38	22.70	46.00	-23.30	QP	100	0	
4	431.0316	41.72	-10.65	31.07	46.00	-14.93	QP	100	360	
5	480.5276	41.52	-9.21	32.31	46.00	-13.69	QP	100	0	
6	798.9796	37.08	-4.17	32.91	46.00	-13.09	QP	100	360	




Report No.: 18220WC00141101

FCC ID: 2ATLH-OM802S

Page22 of 38

Test Results (30~1000MHz)

Test Mode: CH08
Power Source: DC 3.3V
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 23.4°C/48%RH

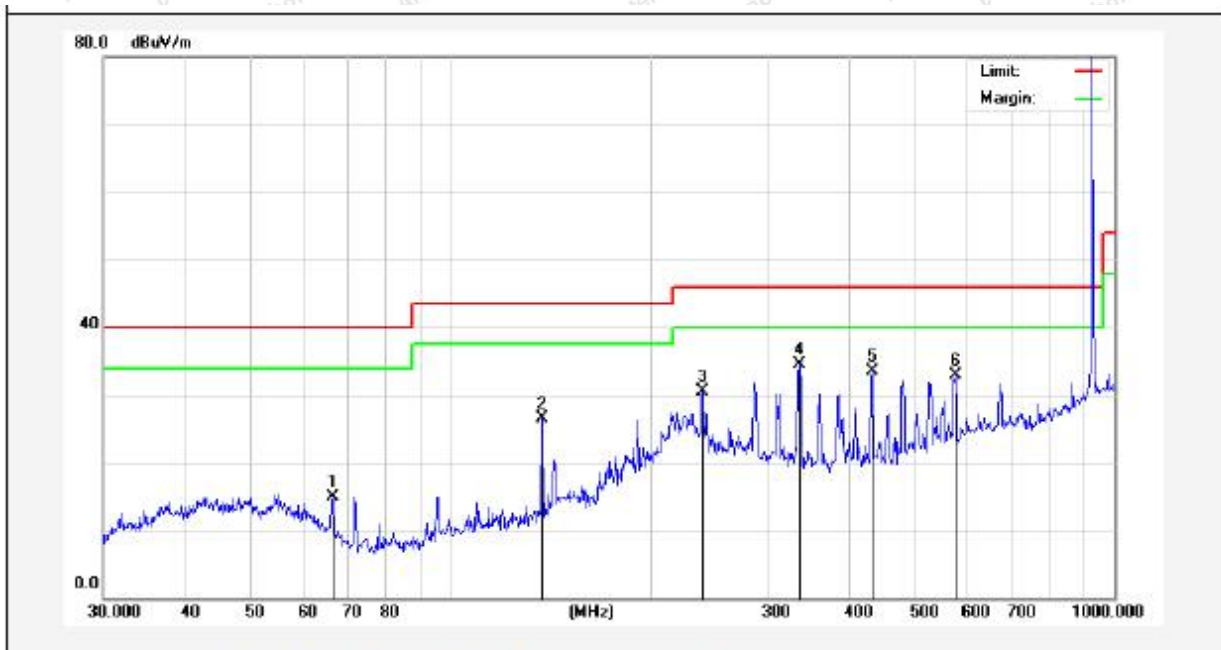

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	66.4989	33.74	-18.84	14.90	40.00	-25.10	QP	100	0	
2	137.4199	47.34	-20.82	26.52	43.50	-16.98	QP	100	360	
3	239.9874	49.47	-19.04	30.43	46.00	-15.57	QP	100	0	
4	336.0350	47.79	-13.35	34.44	46.00	-11.56	QP	100	360	
5	432.5457	45.95	-12.38	33.57	46.00	-12.43	QP	100	0	
6	576.6443	40.23	-7.34	32.89	46.00	-13.11	QP	100	360	



Fundamental

CH01

Frequency	Antenna	Reading	Factor	Results	Limits	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	Mode
923.2	H	93.83	-3.71	90.12	94	QP
923.2	V	94.97	-3.71	91.26	94	QP

CH04

Frequency	Antenna	Reading	Factor	Results	Limits	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	Mode
923.8	H	93.54	-3.71	89.83	94	QP
923.8	V	94.73	-3.71	91.02	94	QP

CH08

Frequency	Antenna	Reading	Factor	Results	Limits	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	Mode
924.6	H	93.66	-3.71	89.95	94	QP
924.6	V	94.87	-3.71	91.16	94	QP



Radiated Emission(Above 1G)

CH01

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1846.4000	H	50.41	7.39	28.73	26.31	60.22	74	-13.78	PK
1846.4000	H	40.47	7.39	28.73	26.31	50.28	54	-3.72	AV
2769.6000	H	48.40	8.10	29.71	27.01	59.2	74	-14.80	PK
2769.6000	H	37.52	8.10	29.71	27.01	48.32	54	-5.68	AV
3692.8000	H	--	--	--	--	--	--	--	PK
3692.8000	H	--	--	--	--	--	--	--	AV
1846.4000	V	45.76	7.39	28.73	26.31	55.57	74	-18.43	PK
1846.4000	V	37.86	7.39	28.73	26.31	47.67	54	-6.33	AV
2769.6000	V	46.22	8.10	29.71	27.01	57.02	74	-16.98	PK
2769.6000	V	38.95	8.10	29.71	27.01	49.75	54	-4.25	AV
3692.8000	V	--	--	--	--	--	--	--	PK
3692.8000	V	--	--	--	--	--	--	--	AV

CH04

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1847.6000	H	50.90	7.39	28.73	26.31	60.71	74	-13.29	PK
1847.6000	H	41.05	7.39	28.73	26.31	50.86	54	-3.14	AV
2771.4000	H	48.20	8.10	29.71	27.01	59	74	-15.00	PK
2771.4000	H	37.85	8.10	29.71	27.01	48.65	54	-5.35	AV
3695.2000	H	--	--	--	--	--	--	--	PK
3695.2000	H	--	--	--	--	--	--	--	AV
1847.6000	V	45.56	7.39	28.73	26.31	55.37	74	-18.63	PK
1847.6000	V	38.16	7.39	28.73	26.31	47.97	54	-6.03	AV
2771.4000	V	46.25	8.10	29.71	27.01	57.05	74	-16.95	PK
2771.4000	V	38.62	8.10	29.71	27.01	49.42	54	-4.58	AV
3695.2000	V	--	--	--	--	--	--	--	PK
3695.2000	V	--	--	--	--	--	--	--	AV



CH08


Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1849.2000	H	51.17	7.39	28.73	26.31	60.98	74	-13.02	PK
1849.2000	H	41.46	7.39	28.73	26.31	51.27	54	-2.73	AV
2773.8000	H	48.31	8.10	29.71	27.01	59.11	74	-14.89	PK
2773.8000	H	37.92	8.10	29.71	27.01	48.72	54	-5.28	AV
3698.4000	H	--	--	--	--	--	--	--	PK
3698.4000	H	--	--	--	--	--	--	--	AV
1849.2000	V	45.75	7.39	28.73	26.31	55.56	74	-18.44	PK
1849.2000	V	38.70	7.39	28.73	26.31	48.51	54	-5.49	AV
2773.8000	V	46.10	8.10	29.71	27.01	56.9	74	-17.10	PK
2773.8000	V	38.25	8.10	29.71	27.01	49.05	54	-4.95	AV
3698.4000	V	--	--	--	--	--	--	--	PK
3698.4000	V	--	--	--	--	--	--	--	AV

Remark:

1. Level = Reading + Cable Loss+Ant Factor-Amplifier
2. "--" Mark indicated Background Noise Level



Radiated Band Edge:

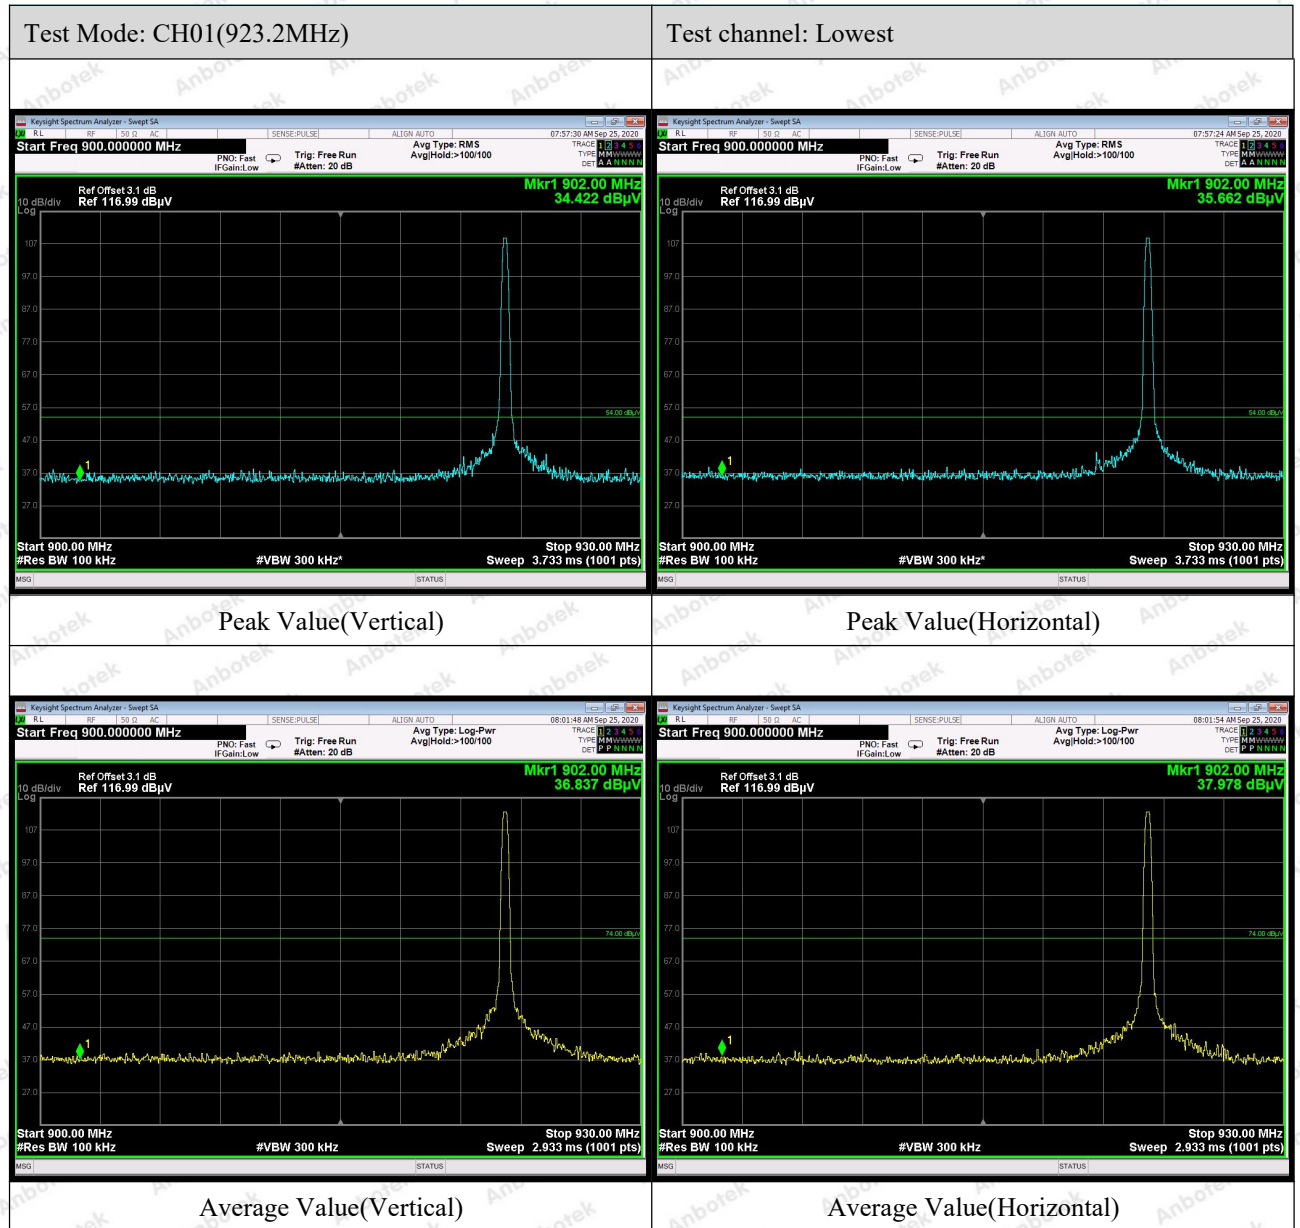




5. 20dB Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.215
---------------	-----------------------------

5.2. Test Setup



5.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 30kHz, VBW $\geq$ 3*RBW = 100kHz,
Detector= Average
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

5.4. Test Data

Test Item : 20dB Bandwidth

Test Voltage : DC 3.3V


Test Result : PASS

Test Mode : Mode 1, Mode 2,
Mode 3


Temperature : 23.2℃

Humidity : 55%RH


Test Modulation	Frequency (MHz)	Bandwidth (kHz)	Result
LoRa	923.2MHz	214.9	PASS
LoRa	923.8MHz	209.3	PASS
LoRa	924.6MHz	211.1	PASS

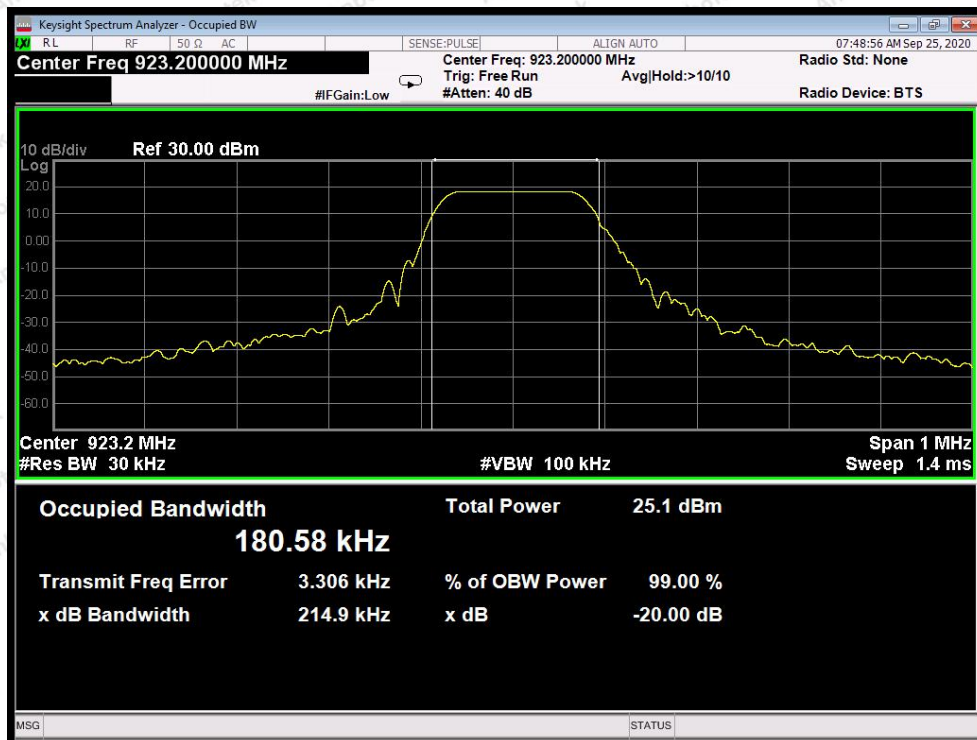

Test Mode: CH01

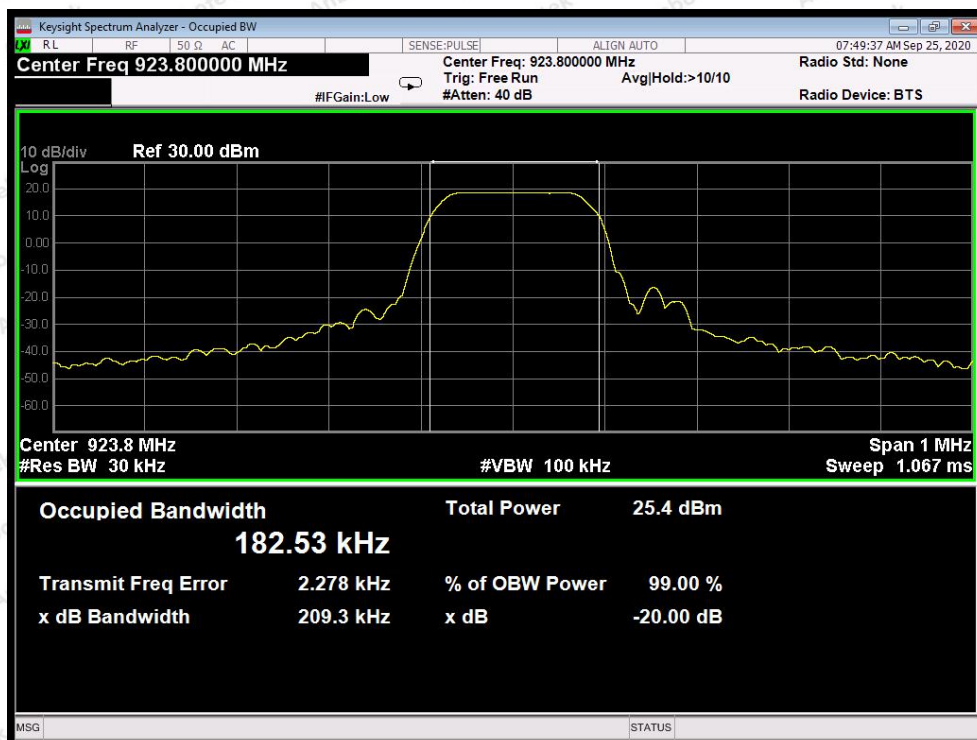

Test Mode: CH04

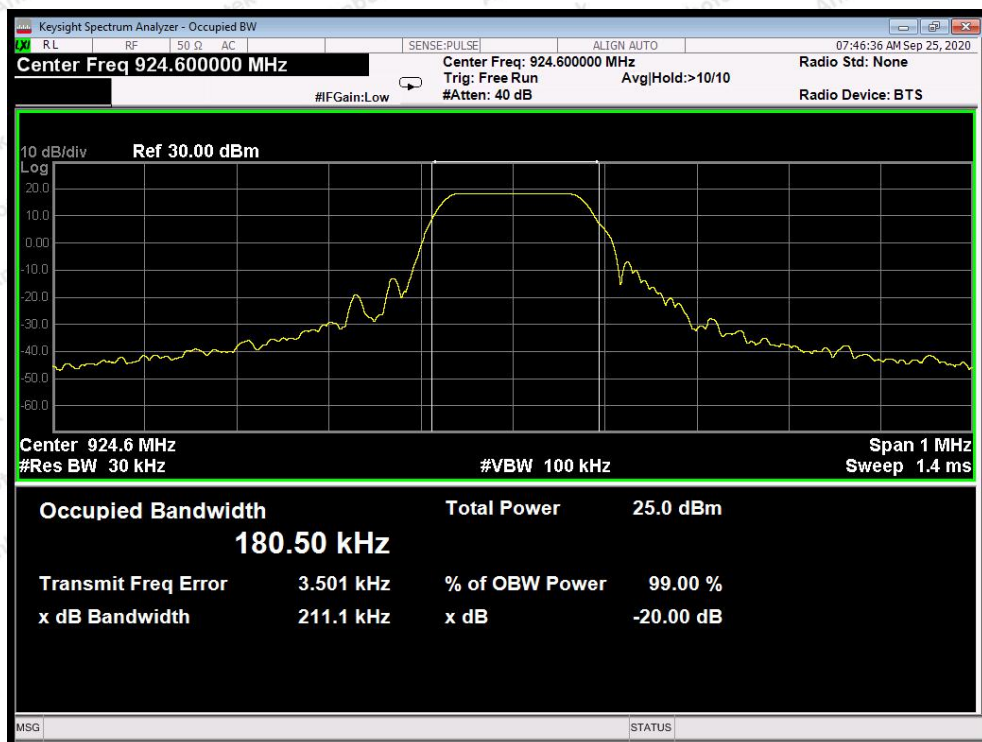

Test Mode: CH08



6. Antenna Requirement


6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction

The antenna is a Cylindrical antenna which permanently attached, and the best case gain of the antenna is

1 dBi. It complies with the standard requirement.

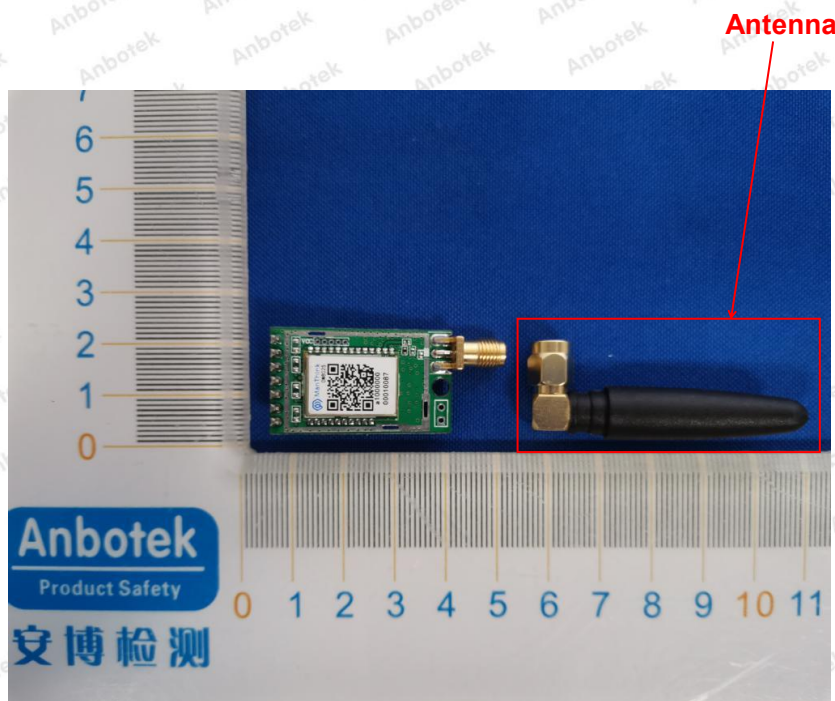


APPENDIX I -- TEST SETUP PHOTOGRAPH



Photo of Power Line Conducted Emission Test






Photo of Radiation Emission Test




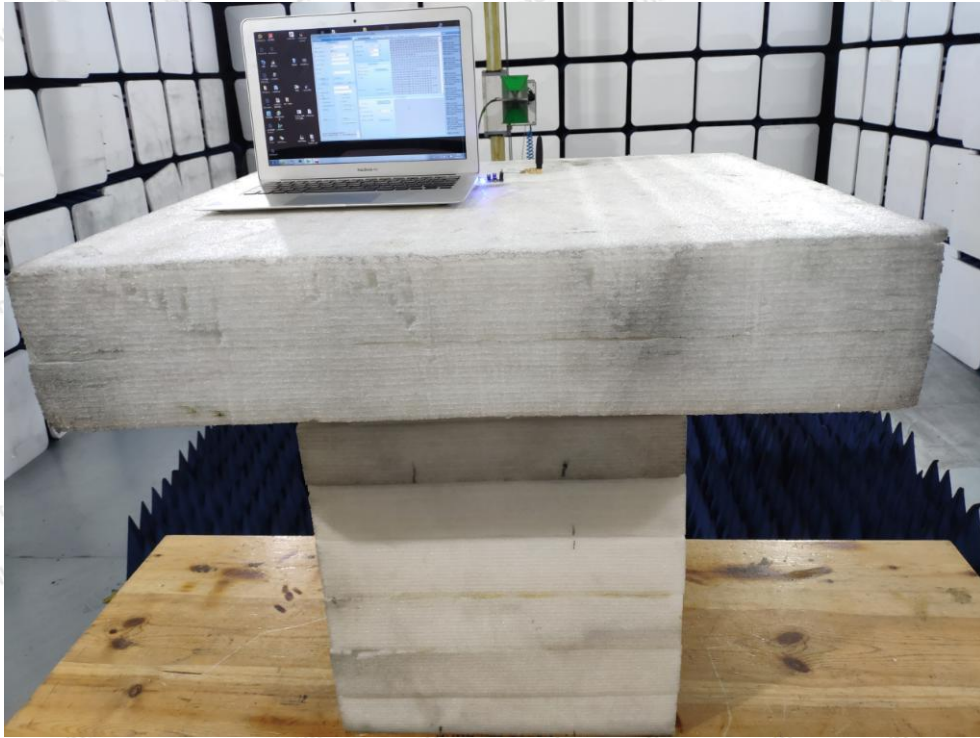


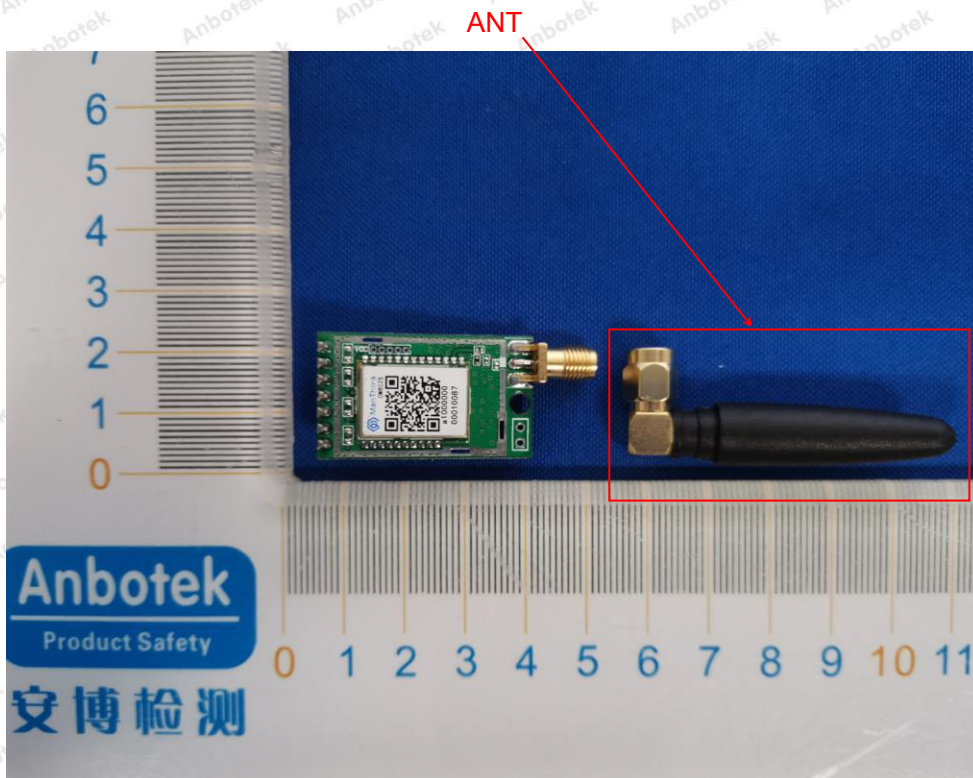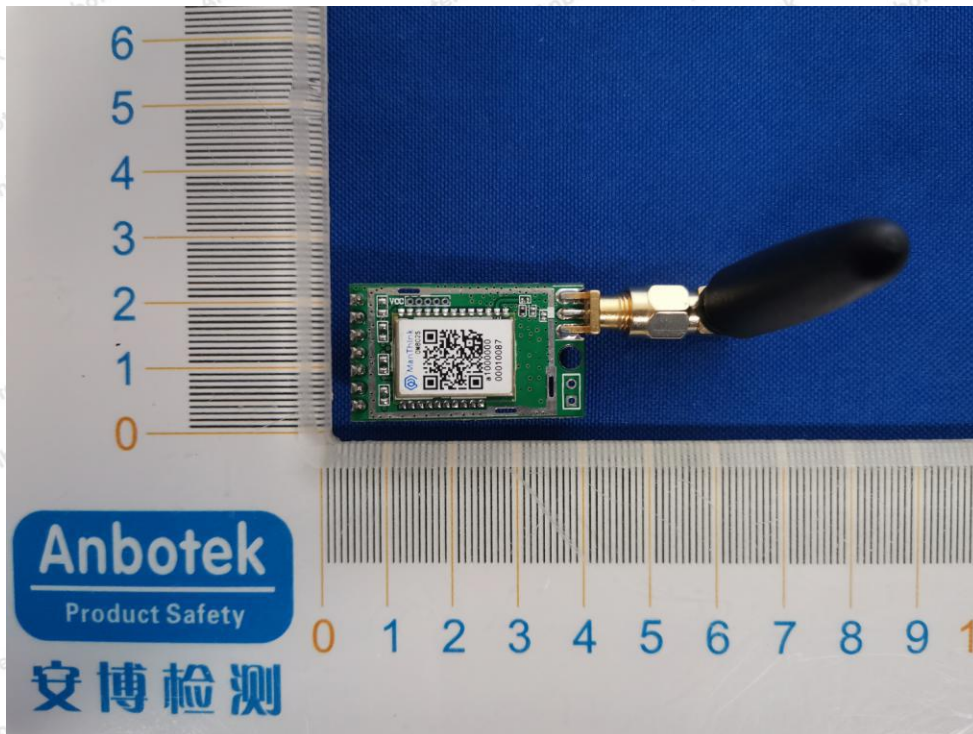APPENDIX II -- EXTERNAL PHOTOGRAPH

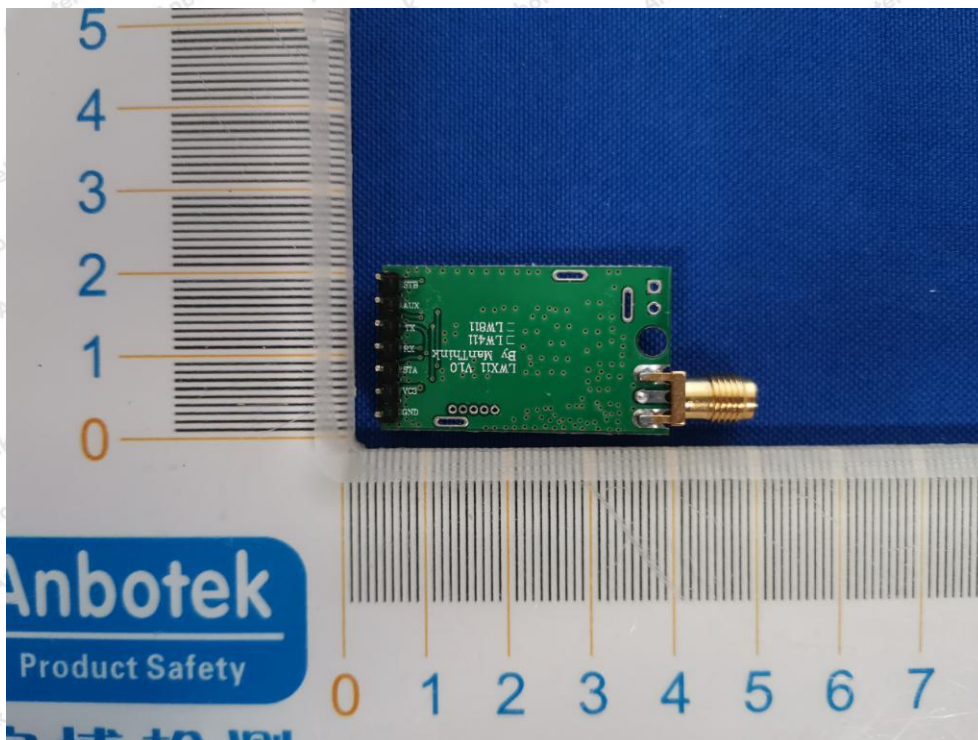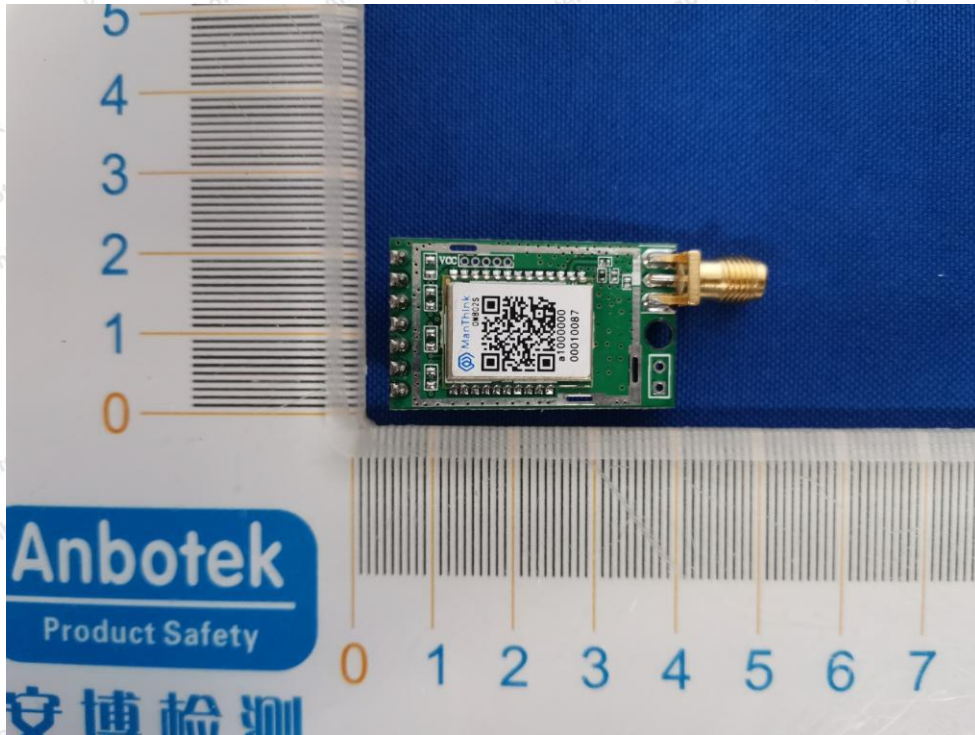

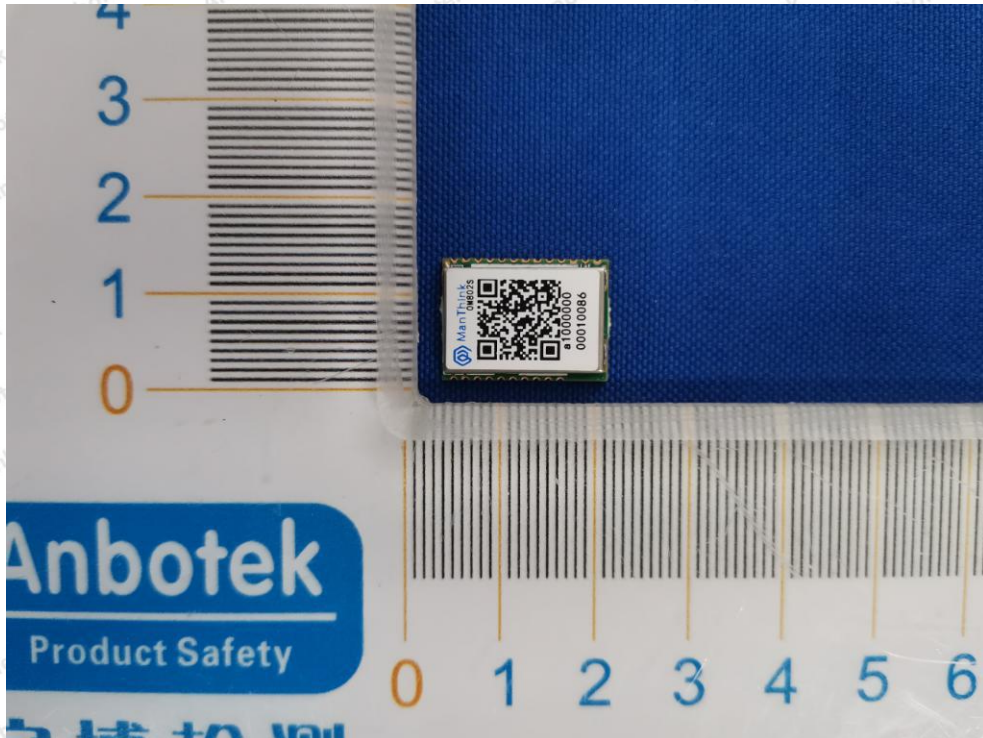APPENDIX III -- INTERNAL PHOTOGRAPH

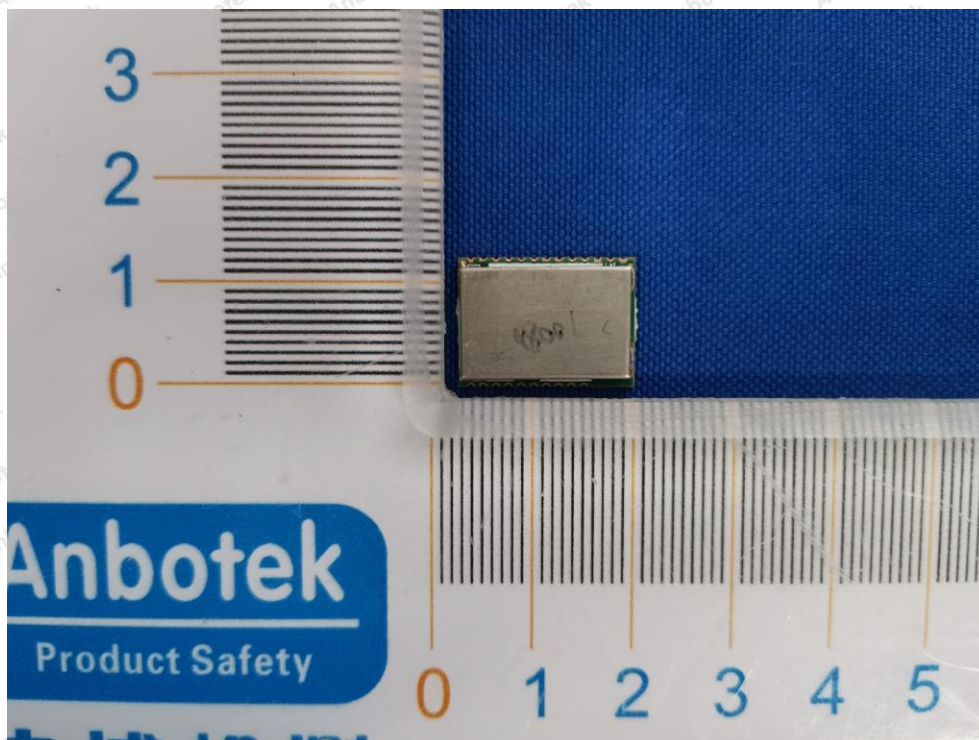

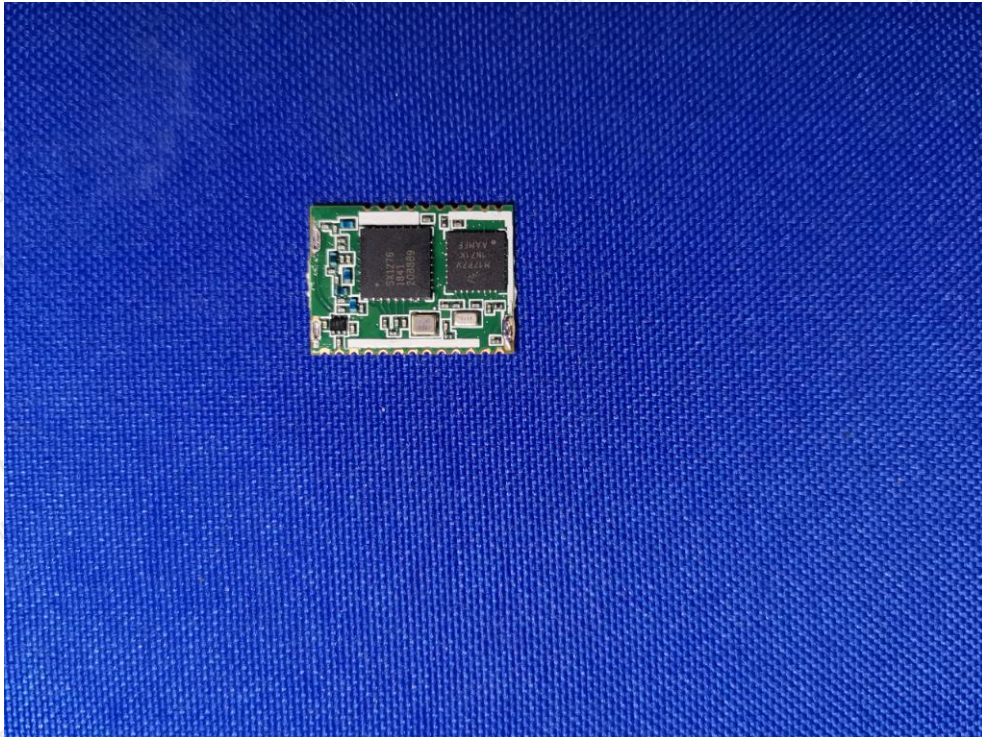

----- End of Report -----

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

Code:AB-RF-05-a



Hotline

400-003-0500

www.anbotech.com