

Exhibit 5

FCC/MELLON

SEP 11 1998

Test Data of Original

FCC TEST REPORT

FCC ID : A3KM081
 REPORT NO.: EMI97-113
 TEST DATE : DEC/25/1997
 TEST ENGI.: C.C.Wu

TEST PERFORMED BY
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION (PEI-CED)
 EMI-LAB
 P.O.BOX 123
 CHUNG LI, TAoyuan, TAIWAN, R.O.C.
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CED
 TESTED SYSTEM:

1. EUT : 14B2320W COLOR MONITOR S/N.: NO.135
 FCC ID. : A3KM081
2. COMPUTER: HP Pavilion 8140 D5250A S/N.: US72455810
 FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145S02419
 FCC ID. : DS16XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966
 FCC ID. : BFJ9D907-00038
5. MOUSE : HP M-534 S/N.: LCAS4625637
 FCC ID. : DZL210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C
 FCC ID. : CIGE03633
7. VIDEO CARD : BUILT-IN S/N.: --

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
 ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
 EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
 53.7KHz MODE(800X600/85Hz) WAS TESTED.
 INTERFACE CABLE WITH THREE FERRITE CORES(ONE INSIDE) WAS TESTED.
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
84.18	31.4	33.1	40
123.47	31.69	33.59	43.5
151.52	33.3	30	43.5
162.73	32.19	31.49	43.5

FCC ID : A3KM081

-- #113 CONT. --

185.2	32.05	31.25	43.5
235.7	33.4	33.6	46
241.31	36.14	35.14	46
392.84	31.548	31.748	46
432.11	31.668	31.668	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
39.25	25.84	33.74	40
44.9	29.1	33.8	40
56.12	22.96	30.76	40
67.35	33.81	35.41	40
72.96	33.24	32.94	40
129.08	33.47	32.47	43.5
157.13	31.35	27.85	43.5
168.37	33.24	30.04	43.5
207.65	33.3	30.1	43.5
213.26	33.54	30.04	43.5

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.
TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. Hsu

K.J.HSU, NVLAP SIGNATORY

TESTED BY:

C.C. Wu


C.C.Wu

RFI EMISSION LEVEL dBuV/m

DEC/25/1997

REPORT NO: EMI97-113
MODEL NO: 14B2320M

FCC CLASS B

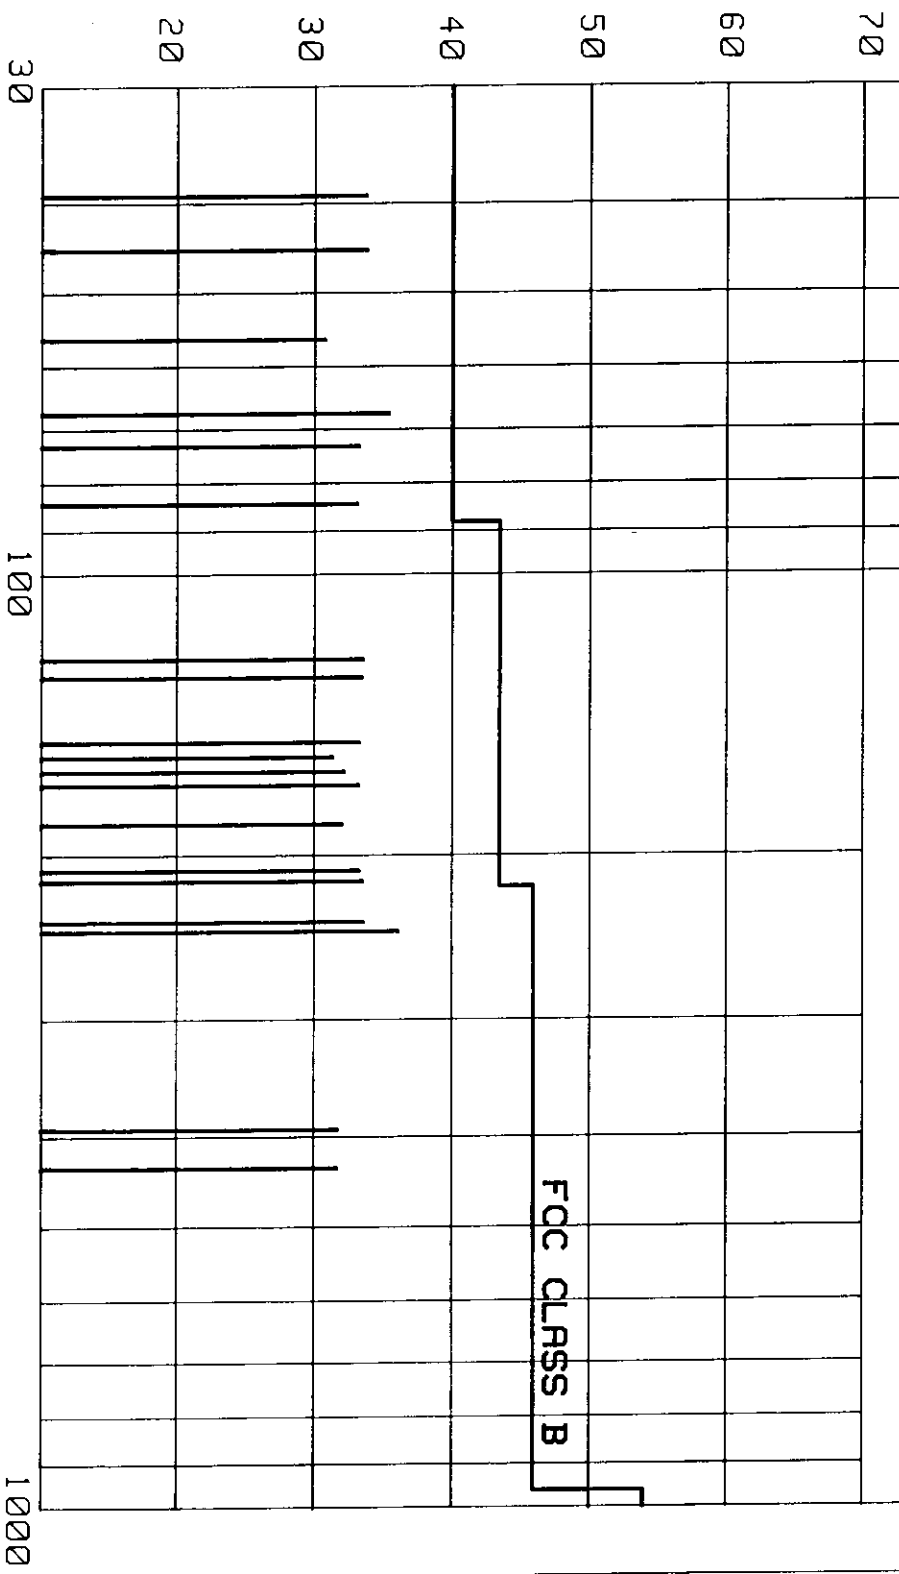


FREQUENCY MHZ

hp

A3KM081 RUN 800X600/85HZ 53.6KHZ MODE AC110V MKR 16.88 MHZ
REF 107.0 DBμV ATTEN 10 DB 41.90 DBμV

10 DB/

DL
48.0
DBμV

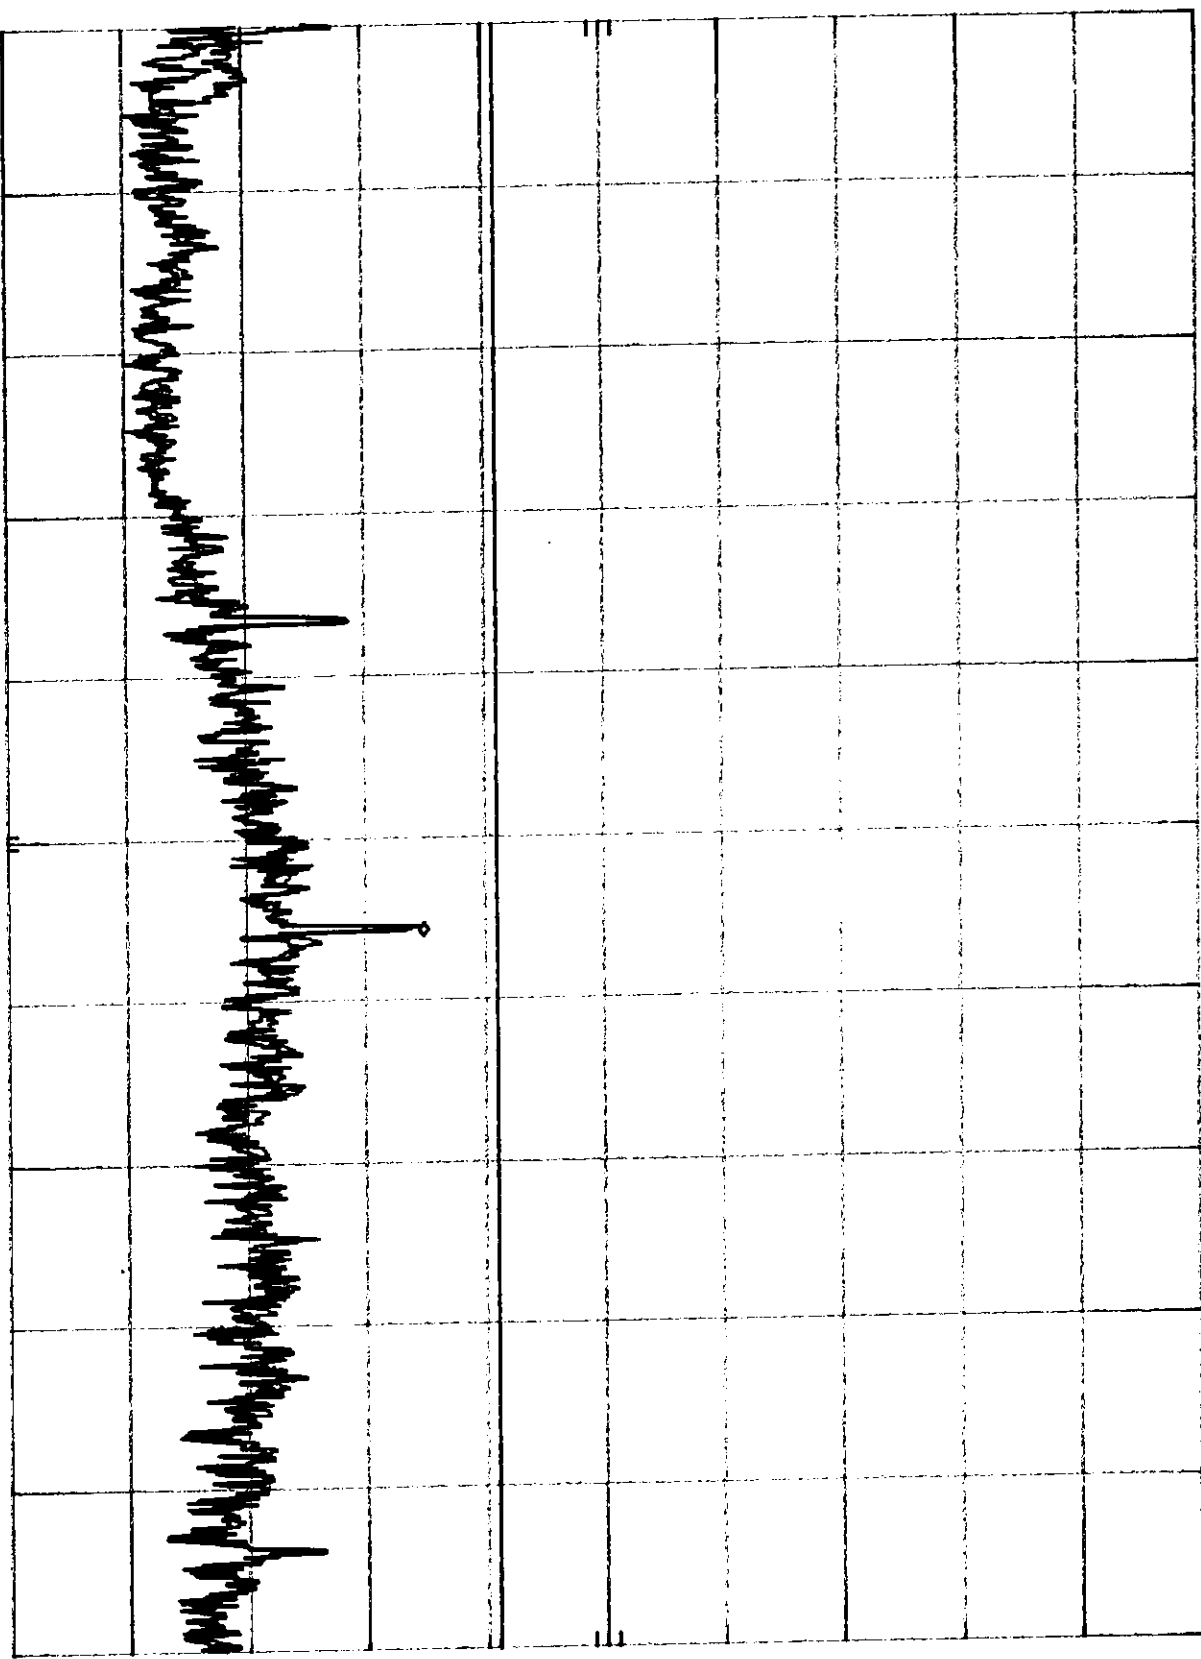


START 450 KHZ STOP 30.00 MHZ
RES BW 10 KHZ VBW 10 KHZ SWP 750 msec

h_p

A3KM081 RUN 000X600/85 53.6KHZ MODE AC220V MKR 16.88 MHZ
REF 107.0 dBμV ATTEN 10 dB 41.30 dBμV

10 dB/

DL
48.0
dBμV

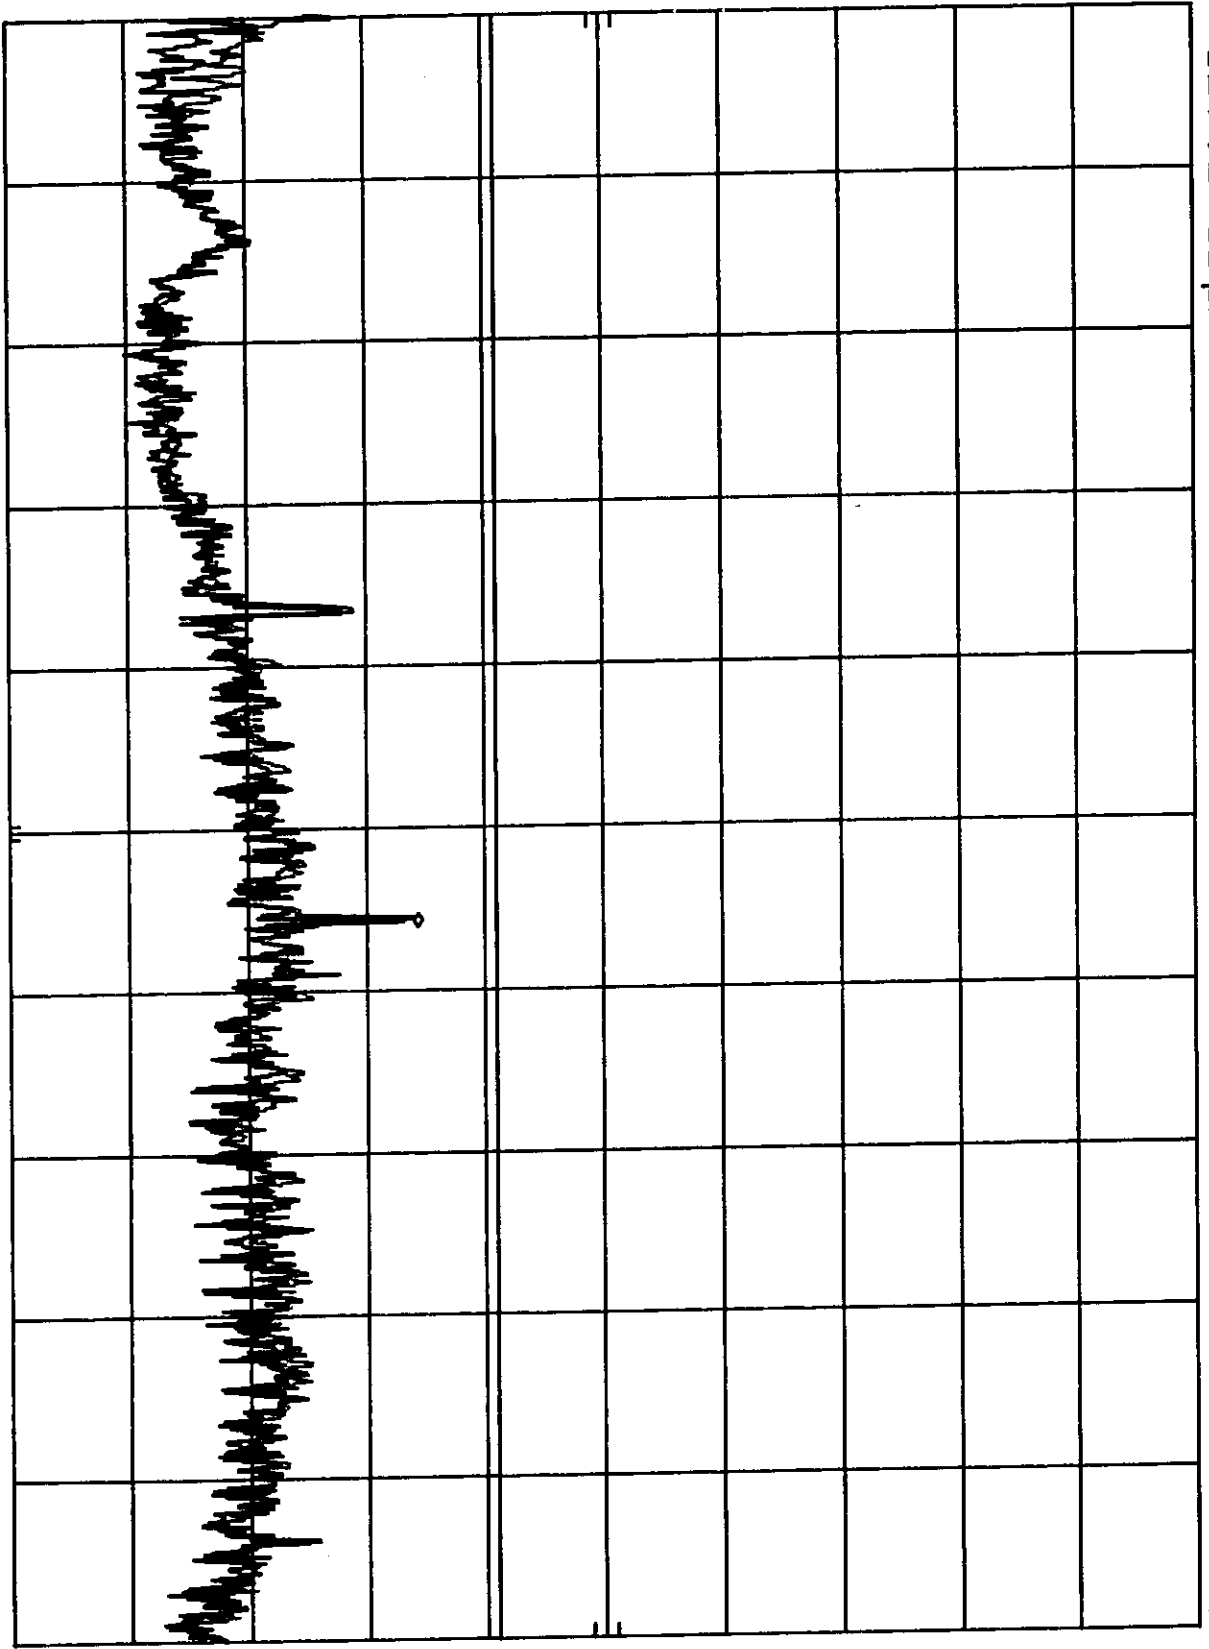

START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ
SWP 750 msec

FCC TEST REPORT

FCC ID : A3KM081
 REPORT NO.: EMI97-113A
 TEST DATE : DEC/25/1997
 TEST ENGI.: C.C.Wu

TEST PERFORMED BY
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION (PEI-CED)
 EMI-LAB
 P.O.BOX 123
 CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CED
 TESTED SYSTEM:

1. EUT : 14B2320W COLOR MONITOR S/N.: NO.135
 FCC ID. : A3KM081
2. COMPUTER: HP Pavilion 8140 D5250A S/N.: US72455810
 FCC ID. : FCC L060
3. PRINTER : HP 2225C S/N.: 3145902419
 FCC ID. : DS18XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966
 FCC ID. : BFJ9D907-00038
5. MOUSE : HP M-H-34 S/N.: LCAH4515637
 FCC ID. : D2L210470
6. KEYBOARD: HP 5102-5521 S/N.: E03633HLUS-C
 FCC ID. : C10600571
7. VIDEO CARD : BUILT-IN S/N.: --

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE ANSI C83.4-1990 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 406Hz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
 48.3KHz MODE(1024X768/60Hz) WAS TESTED.
 INTERFACE CABLE WITH THREE FERRITE CORES(ONE INSIDE) WAS TESTED.
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AND ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
30.95	31.28	32.88	40
39.05	25.24	29.54	40
65.05	27.85	31.25	40
74.45	2.4E	APPLICANT	40

FCC ID : A3K1061
 -- #113A CONT. --

117.15	33.12	31.40	43.5
130.17	31.6	28.4	43.5
143.21	33.13	AMBIENT	43.5
156.23	29.8	29.9	43.5
162.74	31.28	31.69	43.5
182.25	31.08	32.18	43.5
195.27	31.25	33.15	43.5
227.82	33.06	32.36	46
240.84	37.74	37.84	46
247.34	37.18	39.68	46
305.82	29.224	29.724	46
312.43	30.848	29.948	46
338.46	31.912	29.712	46
344.98	30.88	29.78	46
357.99	31.6	31.4	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
 SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
 20 - 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
45.55	31.11	34.44	40
49.07	31.40	AMBIENT	40
84.83	34.66	33.45	40
149.7	33.0	AMBIENT	43.5
169.74	31.17	32.07	43.5
175.75	AMBIENT	AMBIENT	43.5
200.28	32.0	AMBIENT	43.5
214.78	34.0	31.3	43.5

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
 ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
 APPROVAL OF THE LABORATORY.

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
 BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FOR CLASS B LIMIT.

CHECKED BY: K. J. H.

TESTED BY:


[Signature]

RFI EMISSION LEVEL dBuV/m

DEC/25/1997

REPORT NO: EM197-113A
MODEL NO: 14B2320N

FCC CLASS B

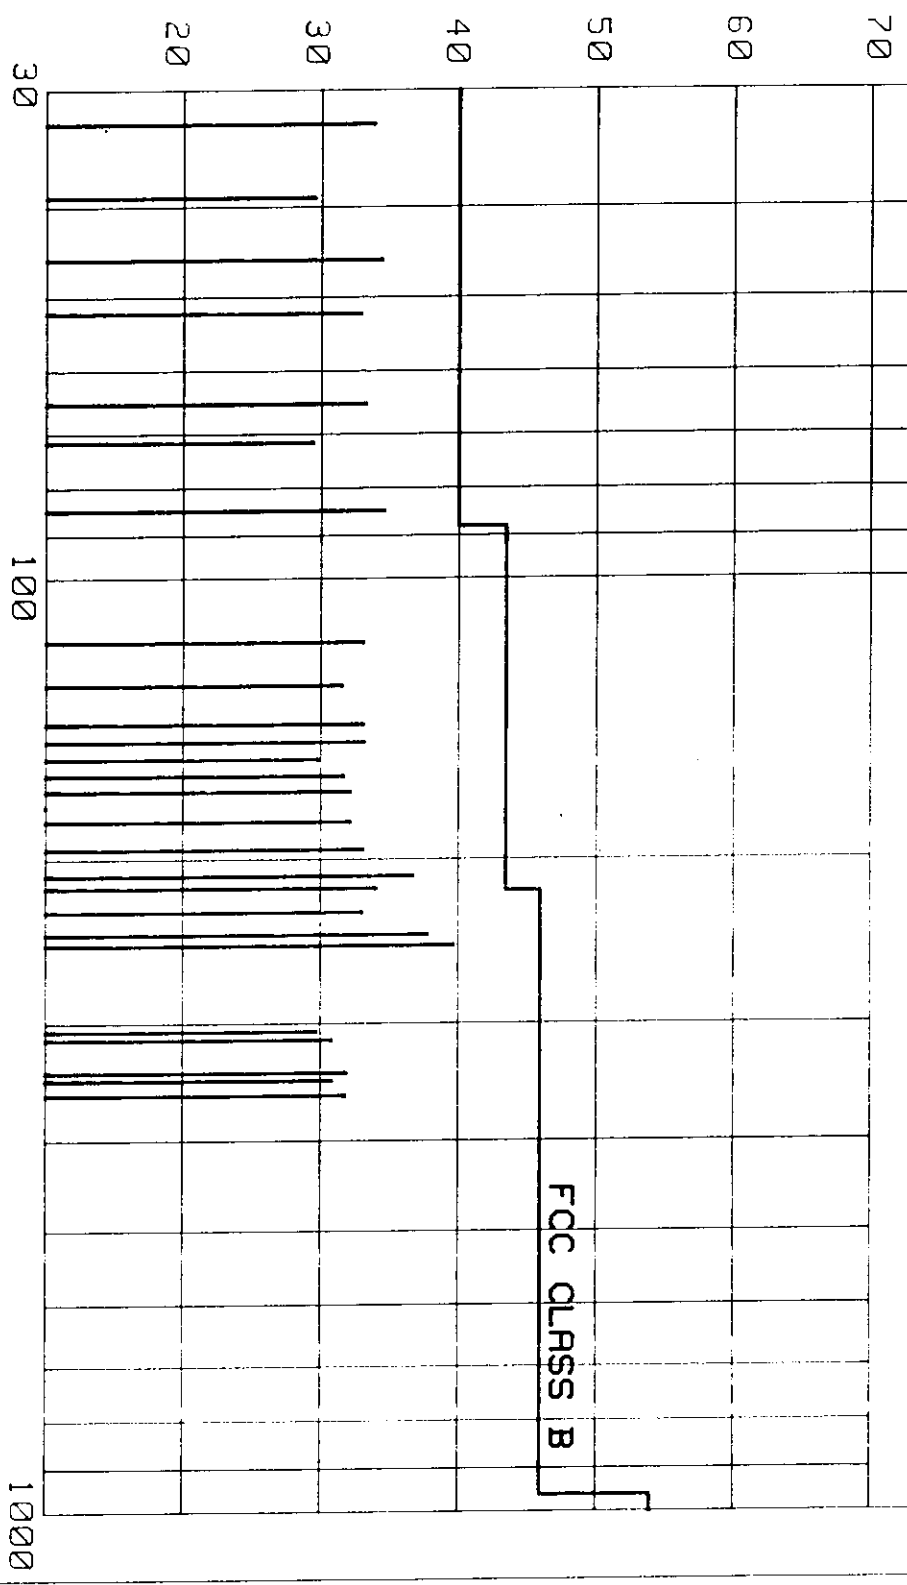


FREQUENCY MHz

h_p

A3KM081 RUN 1024X768/60HZ 48.3KHZ MODE AC220V MKF 19.60 MHZ
REF 107.0 DB μ V ATTEN 10 DB 42.10 DB μ V

10 DB/

DL
48.0
DB μ V

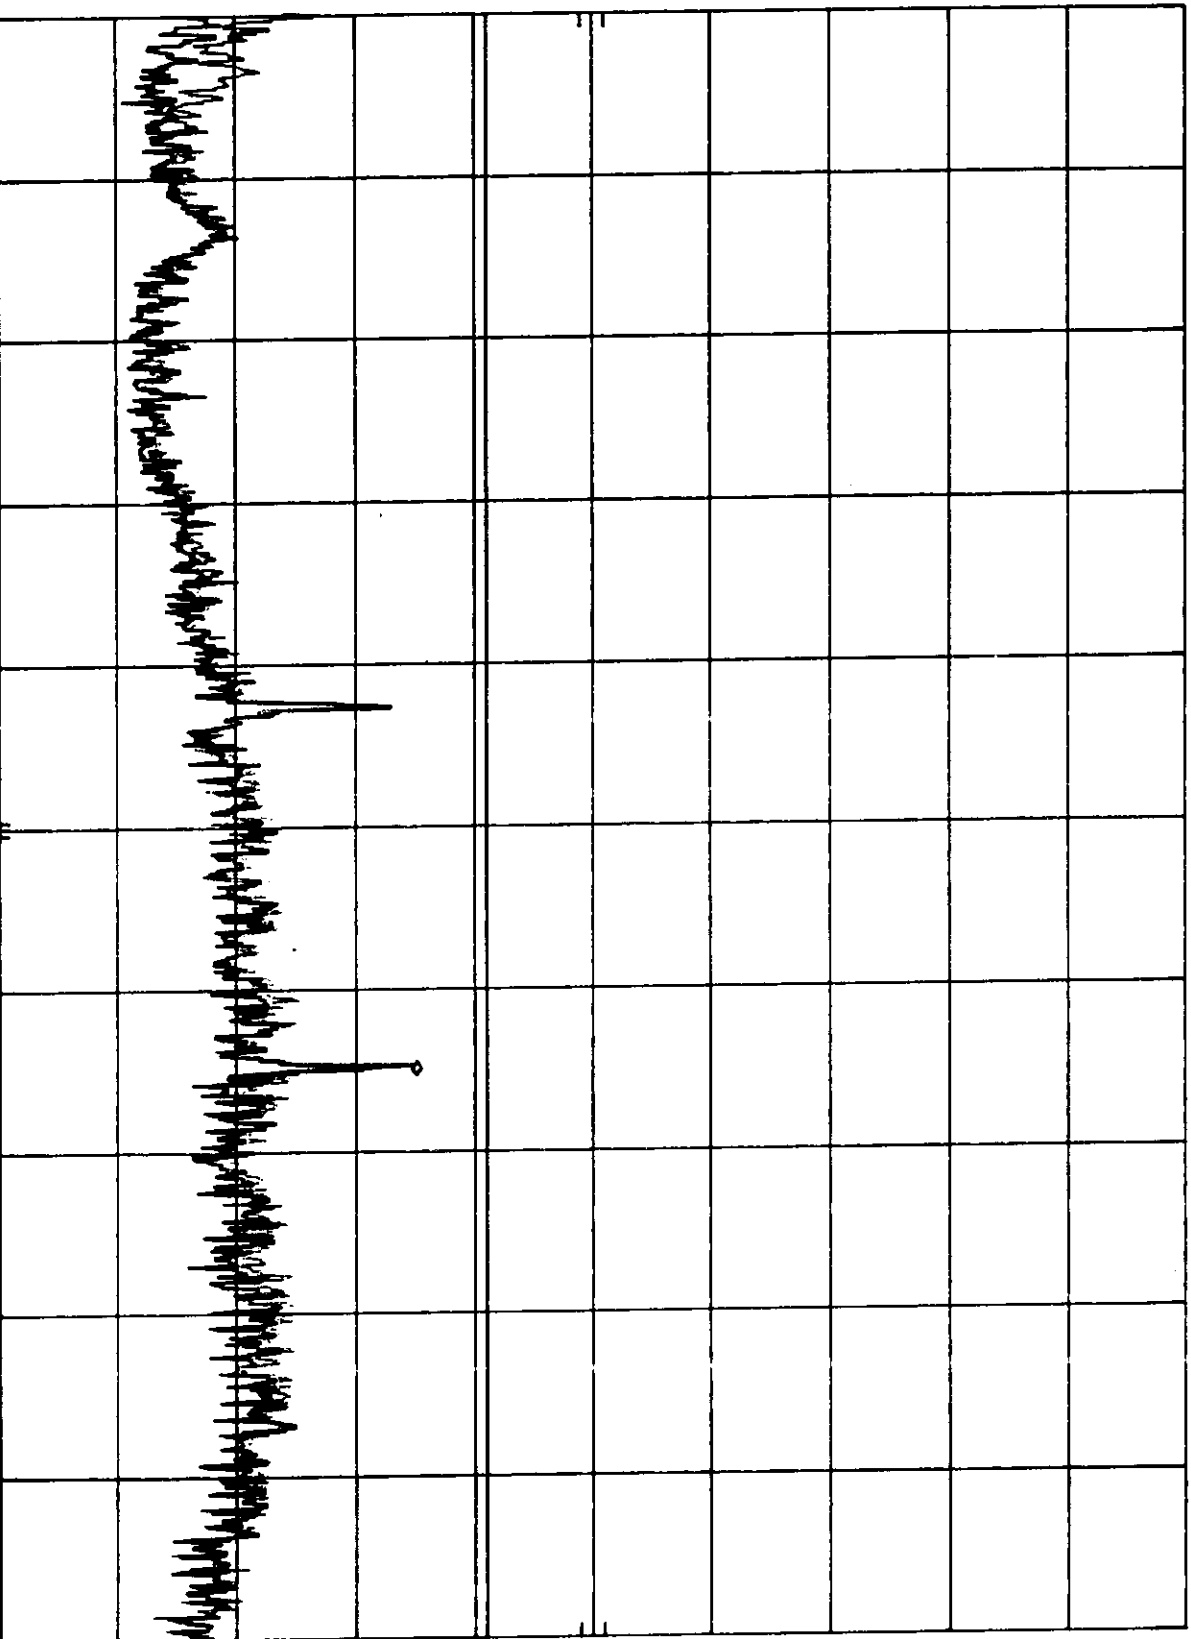

START 450 KHZ

RES BW 10 KHZ


VBW 10 KHZ

STOP 30.00 MHZ
SWP 750 msec

A3KM081 RUN 1024X768/60Hz 48.3KHz MODE AC110V MKR 19.60 MHz
42.30 dBμV

10 dB/

DL
48.0
dBμV

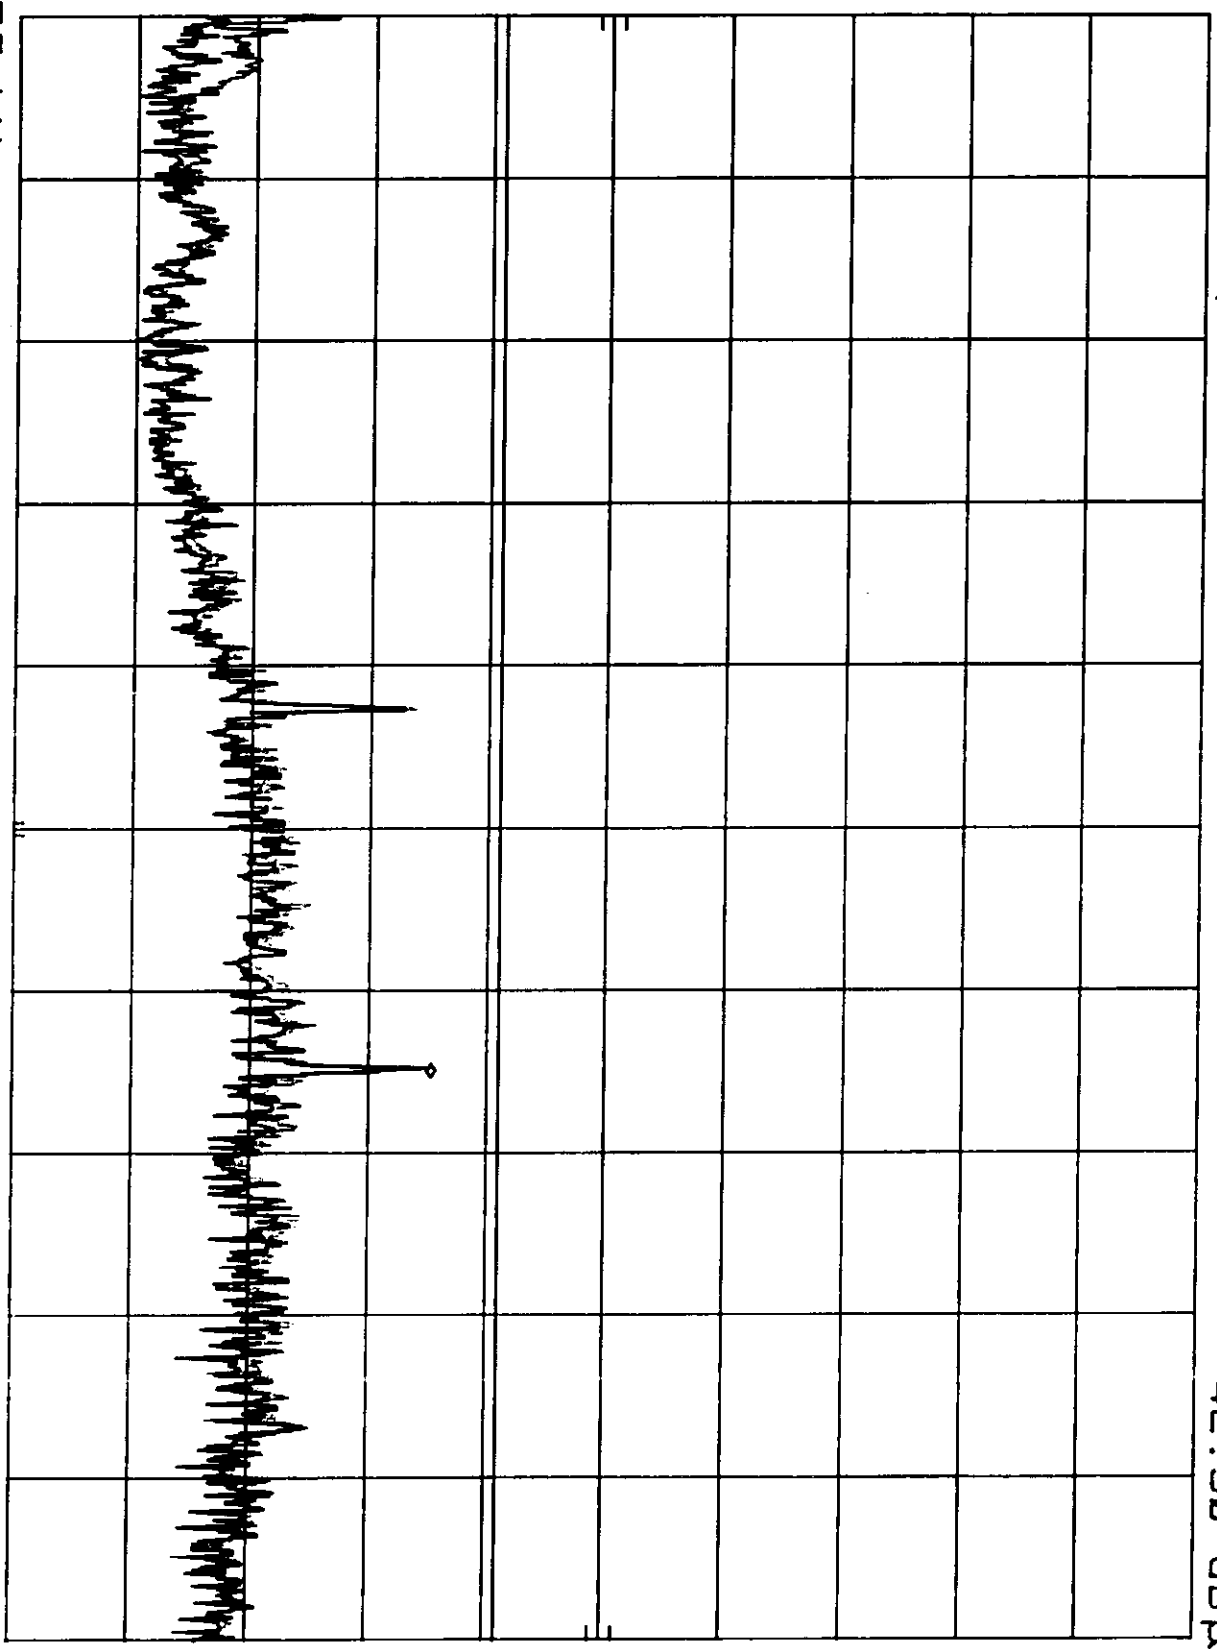

START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SWP 750 msec

RECEIVED

SEP 11 2003

Exhibit 6

**Statement of Data Measured
and
Test Data of Modified**

STATEMENT OF DATA MEASURED

1. General Information of EUT

The EUT, 14" supper VGA color monitor

Model No. : 14B2320W

FCC ID : A3KM081

Brand : PHILIPS

The monitor automatically scans horizontal frequencies between 30KHz and 54KHz , and vertical frequencies between 50Hz and 120Hz. This color monitor displays sharp and brilliant images of text and graphics with a maximum resolution up to 1024X768 pixels. With microprocessor based digital controlled circuit and software control, the monitor can automatically adjust itself to the video card's scanning frequency and displays an image with the precise parameters you desire.

The monitor has 6 factory-preset modes as indicated in the following table:

	Resolution	H-Frequency	V-Frequency	Remark
M01	640 X 400	31.5KHz	70Hz	Non-interlaced
M02	640 X 480	31.5KHz	60Hz	Non-interlaced
M03	640 X 480	37.5KHz	75Hz	Non-interlaced
M04	800 X 600	46.9KHz	75Hz	Non-interlaced
M05	800 X 600	53.6KHz	85Hz	Non-interlaced
M06	1024 X 768	48.3KHz	60Hz	Non-interlaced

2. Test Equipment and Procedure

Test was performed by:

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION
EMI - LAB

5, Tze Chiang 1 Road, Chungli Industrial Park
P.O. Box 123, Chungli, Taoyuan, Taiwan
R. O. C.

Tel : 886-3-4549862 Fax : 886-3-4549887
Internet: ronnie.yang@tw.cemail.philips.com

The test was performed in accordance with ANSI C63.4-1992, "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

Test equipment used for line Conducted and Radiated emissions as following. All equipment were calibrated according to ANSI C63.4-1992 and ISO-9000 requirement unless otherwise specified.

Test Equipment	Model No.	Serial No.	Calibrated Date
Spectrum	HP8568B	2403A06961	4/15/1998
RF Preselector	HP85685A	2901A00964	4/15/1998
QP Adapter	HP85650A	2043A00366	4/15/1998
EMI Receiver	HP85460A	3441A00199	8/27/1998
RFI Filter Section	HP85460A	3330A00177	8/27/1998
EMI Receiver	R & S ESVS30	8419977/066	8/21/1998
Biconical Antenna	EMCO 3110B	2863	3/10/1998
Biconical Antenna	EMCO 3110B	2864	3/10/1998
Log-Periodic Antenna	EMCO 3146A	1377	3/10/1998
Log-Periodic Antenna	EMCO 3146A	1378	3/10/1998
LISN	EMCO 3825/2	9311-2153	3/23/1998
LISN	EMCO 3825/2	9311-2154	3/23/1998
Turn Table	EMCO 1060	1068	4/16/1998
Antenna Tower	EMCO 1050	1113	4/16/1998
RF Cable	M17/75-RG214-NE	N/A	4/16/1998
Computer	HP9000/300	2614A78610	N/A
Printer	HP2225A	2728S02586	N/A
Plotter	HP7440A	2539A40856	N/A

Traceability to R.O.C. and international standards is assured by using calibrated all equipment.

For system measurement, the EUT "14B2320W" was connected to:

Item	Model No.	Serial No.	FCC ID
1. Computer	HP D5052N	FR80627957	B94VECTRAV6MT
2. Keyboard	HP 5182-5521	E03633HLUS-C	CIGE03633
3. Mouse	HP M-S34	LCA54625637	DZL210472
4. Printer	HP 2225C	3123S97227	DSI6XU2225
5. Modem	USRobotics 268	2680559278575	CJE-0318
6. Vide Card	Metabyte	101015	I27MM-VS03A

The system was configured for testing in a typical fashion (as a customer would normally use it) according to ANSI C63.4-1992, please see the photographs for detail.

Both conducted and radiated testing were performed according to the procedure in ANSI C63.4-1992. Conducted testing was performed in screen room and radiated testing was performed in open site at an antenna to EUT distance of 3-meter on horizontal and vertical polarization.

First, pre-scan all modes in screen room then select 2 higher modes (worst case) were tested and reported.

The line conductive interference was tested with 110VAC and 220VAC receptively. Unshielded power cord was used during test.

Tested and reported modes as following:

Report No.	Resolution	Frequencies
EMI98-063	800 X 600	53.7KHz/85Hz
EMI98-063A	1024X 768	48.3KHz/60Hz

3. Test Program and Test Results

Set up the EUT and all peripherals as chapter 6 of ANSI C63.4-1992 for AC power line conducted emissions testing and radiated emissions testing.

Turn on the power of EUT and all peripherals, select an appropriate displaying mode using the "setup" software. Then run an EMI test program "HTEST.EMI" as a basic software to execute the EUT operating under test.

- Step 1 : Run the "HTEST.EMI" on personal computer then sends "H" character to monitor continuously until full screen.
- Step 2 : Personal computer sends a complete line of continuously repeating "H" to HP 2225C printer.
- Step 3 : Personal computer sends a file of "H" pattern to floppy disk then read a file of "H" pattern from floppy disk.
- Step 4 : Personal computer sends a file of "H" pattern to hard disk then read a file of "H" pattern from hard disk.
- Step 5 : Personal computer sends a file of "H" patten to USRobotics 268 modem.
- Step 6 : Return to step 1

All data in this report are "PEAK" value within 15dB margin unless otherwise noted.
The radiated (open site) data has included antenna and cable factors, sample calculation:

Final Value (dB μ V/m) = Reading (dB μ V) + Antenna Factor (dB) + Cable Loss (dB)

The measured data of radiated RF interference at open site and line conducted interference as attached.

The subject device is in compliance with the limits for a class B digital device, pursuant to part 15, subpart B of the FCC rules.



Ronnie Yang - Manager, Safety/Dev. PEI-CED
NVLAP Signatory

FCC TEST REPORT

FCC ID : A3KM081
 REPORT NO.: EMI98-063
 TEST DATE : AUG/28/1998
 TEST ENGI.: C.C.Wu

TEST PERFORMED BY
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION (PEI-CEC)
 EMI-LAB
 P.O.BOX 123
 CHUNG LI, TAOYUAN, TAIWAN, R.O.C.
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CEC
 TESTED SYSTEM:

1. EUT : 14B2320W COLOR MONITOR S/N.: --
 FCC ID. : A3KM081
2. COMPUTER: HP D5052N S/N.: FR00627957
 FCC ID. : B94VECTRAV6MT
3. PRINTER : HP 2225C S/N.: 3145S02419
 FCC ID. : DSI6XU2225
4. MODEM : USROBOTICS 268 S/N.: 2680559278575
 FCC ID. : CJE-0318
5. MOUSE : HP M-534 S/N.: LCAS4625637
 FCC ID. : DZL210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C
 FCC ID. : CIG03633
7. VIDEO CARD : METABYTE S/N.: 101015
 FCC ID. : I27MM-US03A
8. CD_ROM : HP CR-585-B S/N.: --
 FCC ID. : IU09TB059CRB

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
 ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
 EQUIPMENT IN THE RANGE OF 9KHz TO 406Hz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
 53.7KHz MODE(800X600/85Hz) WAS TESTED.
 INTERFACE CABLE WITH ONE FERRITE CORE WAS TESTED.
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
27.6	25.98	33.28	40
53.71	28.14	31.54	40
59.08	28.79	AMBIENT	40
64.45	28.32	32.12	40

69.82	28.2	32.1	40
75.19	27.6	AMBIENT	40
85.93	29	28.8	40
112.78	29.38	32.78	43.5
118.15	32.28	30.48	43.5
128.89	29.47	30.77	43.5
134.26	31.04	31.44	43.5
155.74	27.3	28.1	43.5
171.85	31.66	29.06	43.5
182.59	30.17	28.77	43.5
214.81	32.8	AMBIENT	43.5
225.58	32.72	32.52	46
230.95	33.65	33.75	46
236.32	33.4	34.6	46
268.52	34.46	34.66	46
295.41	35.8	36.2	46
327.54	29.472	30.272	46
354.08	32	31.5	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.

SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
48.34	31.12	33.22	40
123.52	32.32	34.22	43.5

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. Hsu

K.J.HSU, NVLAP SIGNATORY

TESTED BY:

C. C. Wu


C.C.Wu

RFI EMISSION LEVEL dBuV/m

AUG/23/1998

REPORT NO: EMI98-063
MODEL NO: 14B2320M

FCC CLASS B

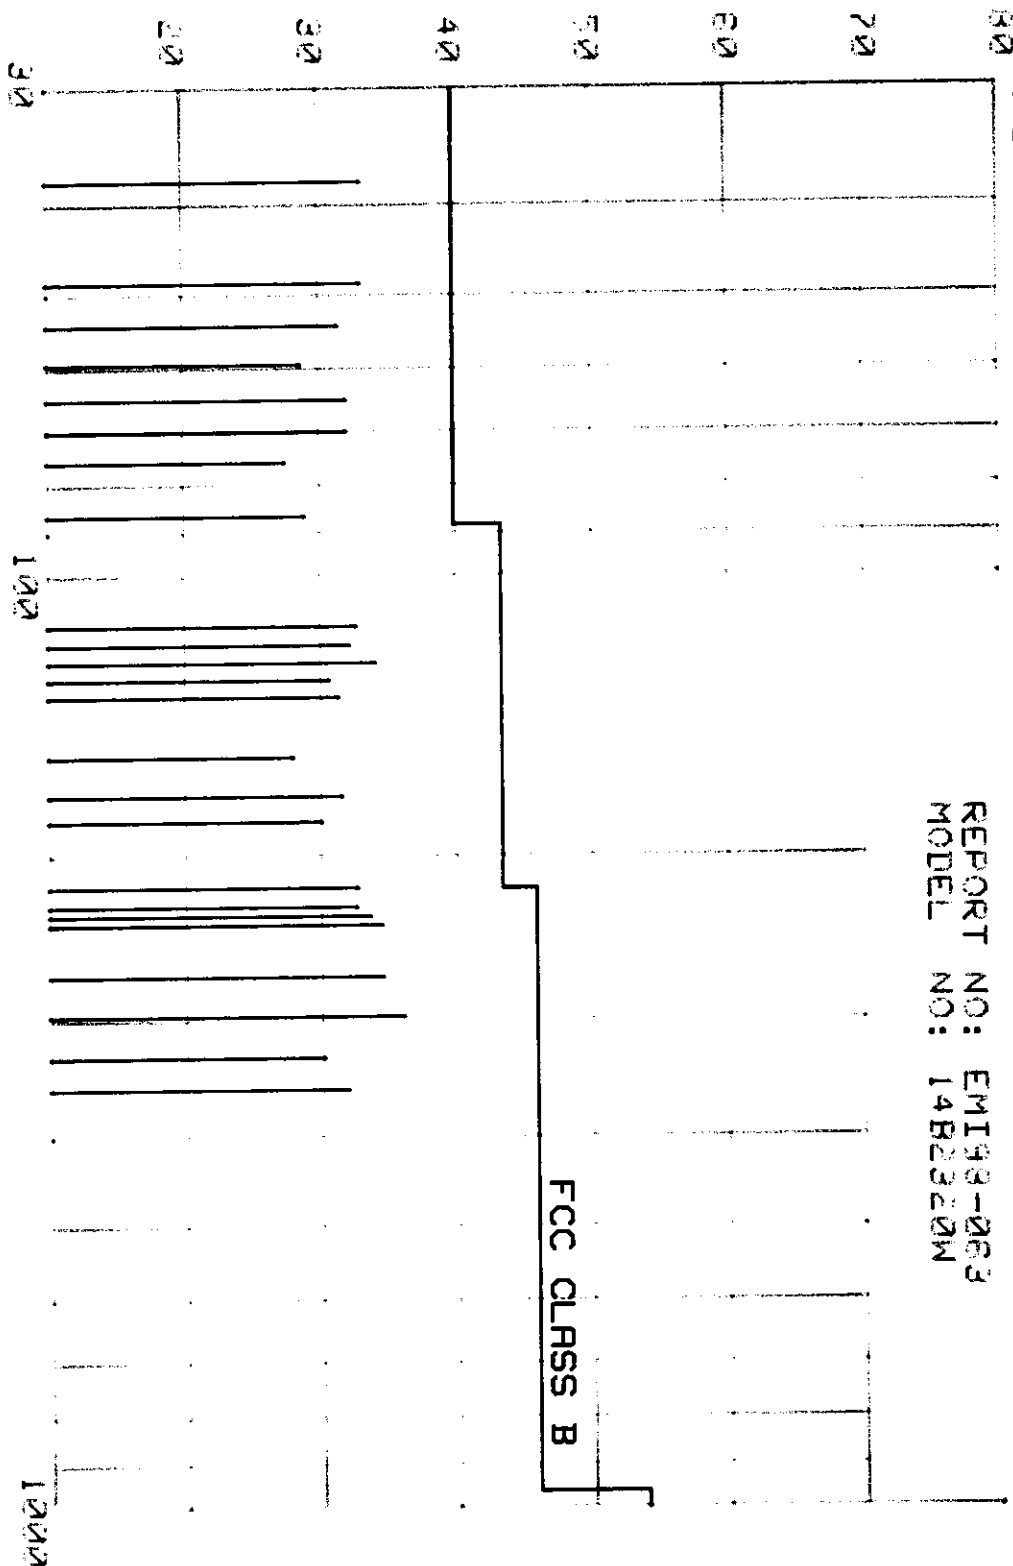


FREQUENCY MHz

A3KMM081 RUN 800X600/85Hz 53.7KHz MODE AC110V MKR 3.55 MHz
hP REF 107.0 dBμV ATTEN 10 dB 44.40 dBμV

10 dB/

DL
48.0
dBμV

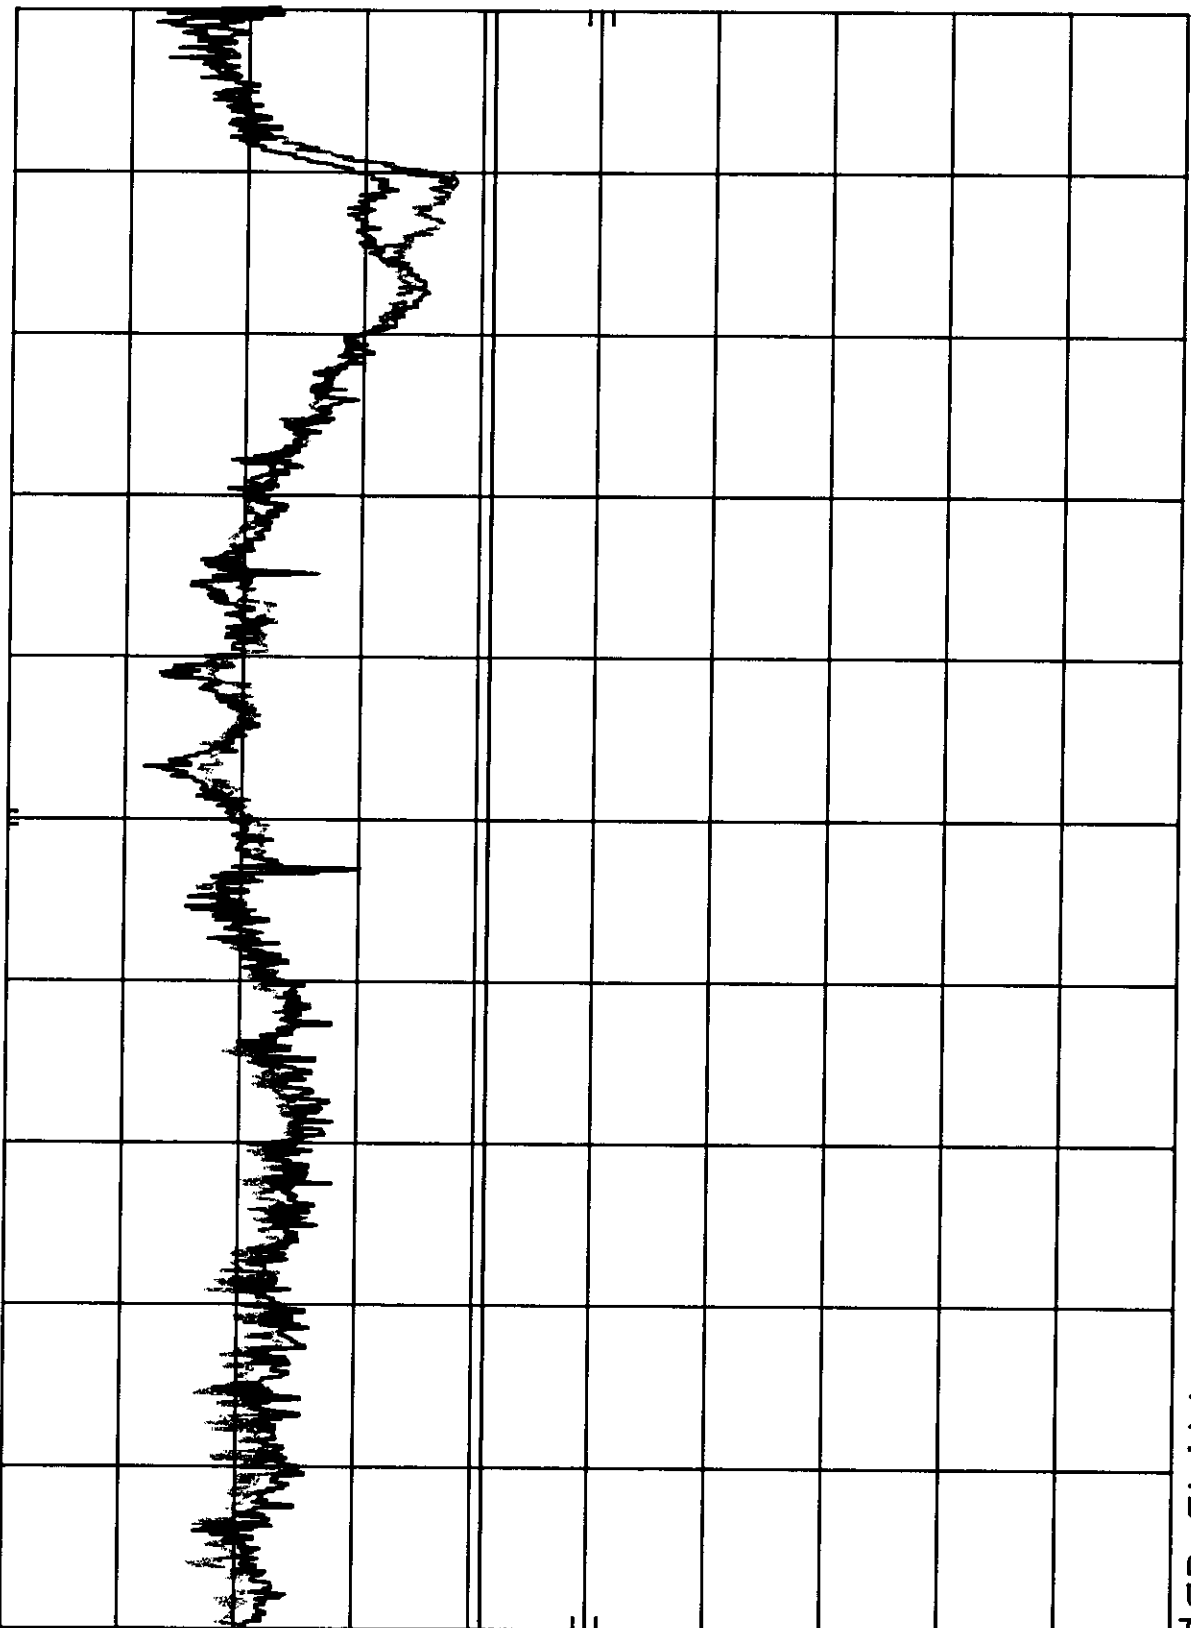


START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SMP 750 msec

A3KM081 RUN 800X600/85HZ 53.7KHZ MODE AC220V MKR 3.55 MHZ
h_p REF 107.0 dBμV ATTEN 10 dB 46.50 dBμV

10 dB/

DL
48.0
dBμV

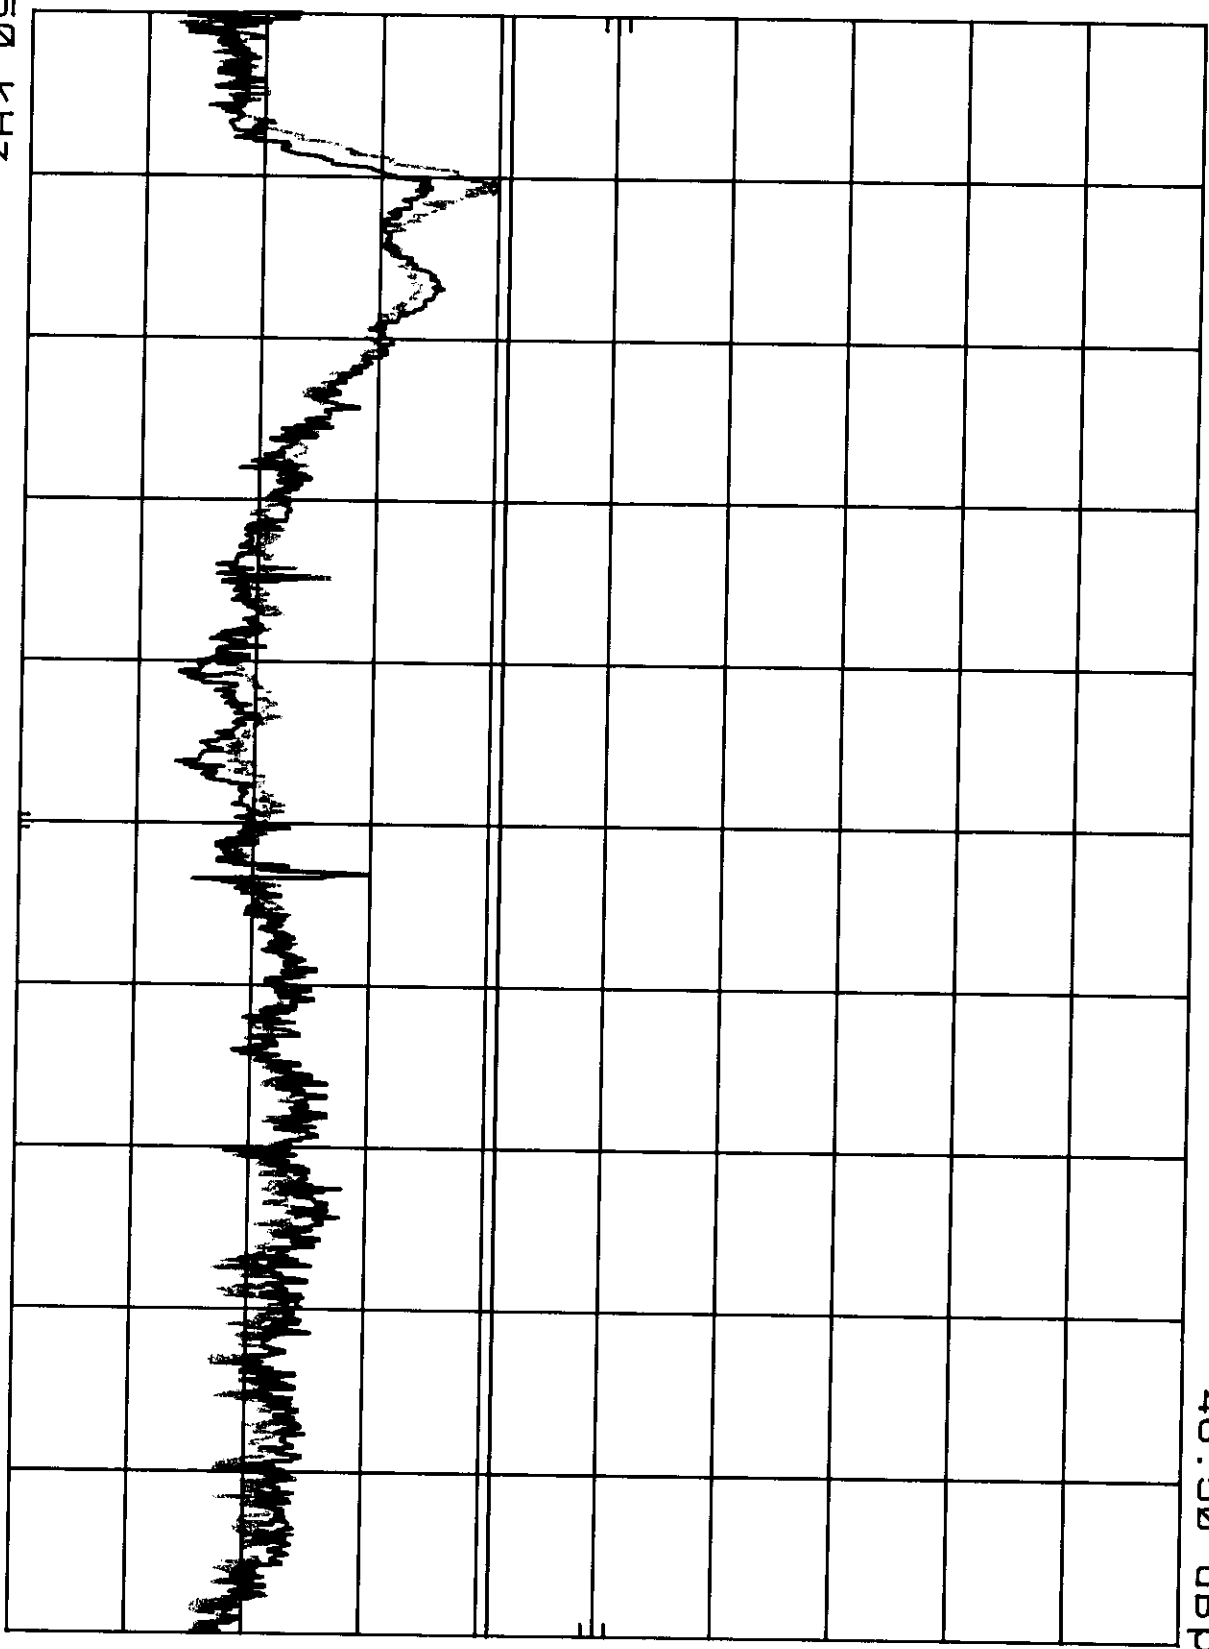

START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ
SWP 750 msec

FCC TEST REPORT

FCC ID : A3KM081
 REPORT NO.: EMI98-063A
 TEST DATE : AUG/29/1998
 TEST ENGI.: C.C.Wu

TEST PERFORMED BY
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION (PEI-CED)
 EMI-LAB
 P.O.BOX 123
 CHUNGLI, TAoyUAN, TAIWAN, R.O.C.
 TEL: 886-3-4548862 FAX: 886-3-4548887

MANUFACTURER : PEI-CED
 TESTED SYSTEM:

1. EUT : 14B2320W COLOR MONITOR S/N.: --
 FCC ID. : A3KM081
2. COMPUTER: HP D5052N S/N.: FR80627957
 FCC ID. : B94VECTRAV6MT
3. PRINTER : HP 2225C S/N.: 3145S02419
 FCC ID. : D516XU2225
4. MODEM : USROBOTICS 268 S/N.: 2680559278575
 FCC ID. : CJE-0318
5. MOUSE : HP M-534 S/N.: LCA54625637
 FCC ID. : D71210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C
 FCC ID. : CIGF03633
7. VIDEO CARD : METABYTE S/N.: 101015
 FCC ID. : I27MM-VS03A
8. CD_ROM : HP CR-585-B S/N.: --
 FCC ID. : IU09TB059CRB

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
 ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
 EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
 48.3KHz MODE(1024x768/60Hz) WAS TESTED.
 INTERFACE CABLE WITH ONE FERRITE CORE WAS TESTED.
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
42.63	25.42	31.02	40
56.83	25.07	28.57	40
63.93	25.52	28.92	40
85.22	28.55	29.75	40

FCC ID : A3KM081
 -- #063A CONT. --

113.63	31.24	31.94	43.5
134.93	29.35	29.15	43.5
156.23	27.8	27.7	43.5
163.33	30.49	28.39	43.5
170.43	27.8	27.5	43.5
177.53	AMBIENT	31.54	43.5
184.63	30.85	30.45	43.5
213.03	33.54	AMBIENT	43.5
227.23	33.54	33.84	46
241.43	35.34	34.04	46
248.53	36.36	33.46	46
305.33	30.52	29.52	46
326.63	29.848	29.848	46
355.03	31.2	31	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
 SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH RODE & SCHWARZ EMI TEST RECEIVER
 20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
120.73	32.53	33.93	43.5
127.83	33.84	35.14	43.5

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
 ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
 APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
 BY NULAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY: K. J. Hsu
 K.J.HSU, NULAP SIGNATORY


TESTED BY: C.C. Wu
 C.C.Wu

RFI EMISSION LEVEL dBuV/m

AUG/29/1998

REPORT NO: EMI98-083A
MODEL NO: 14B2322M

FCC CLASS B

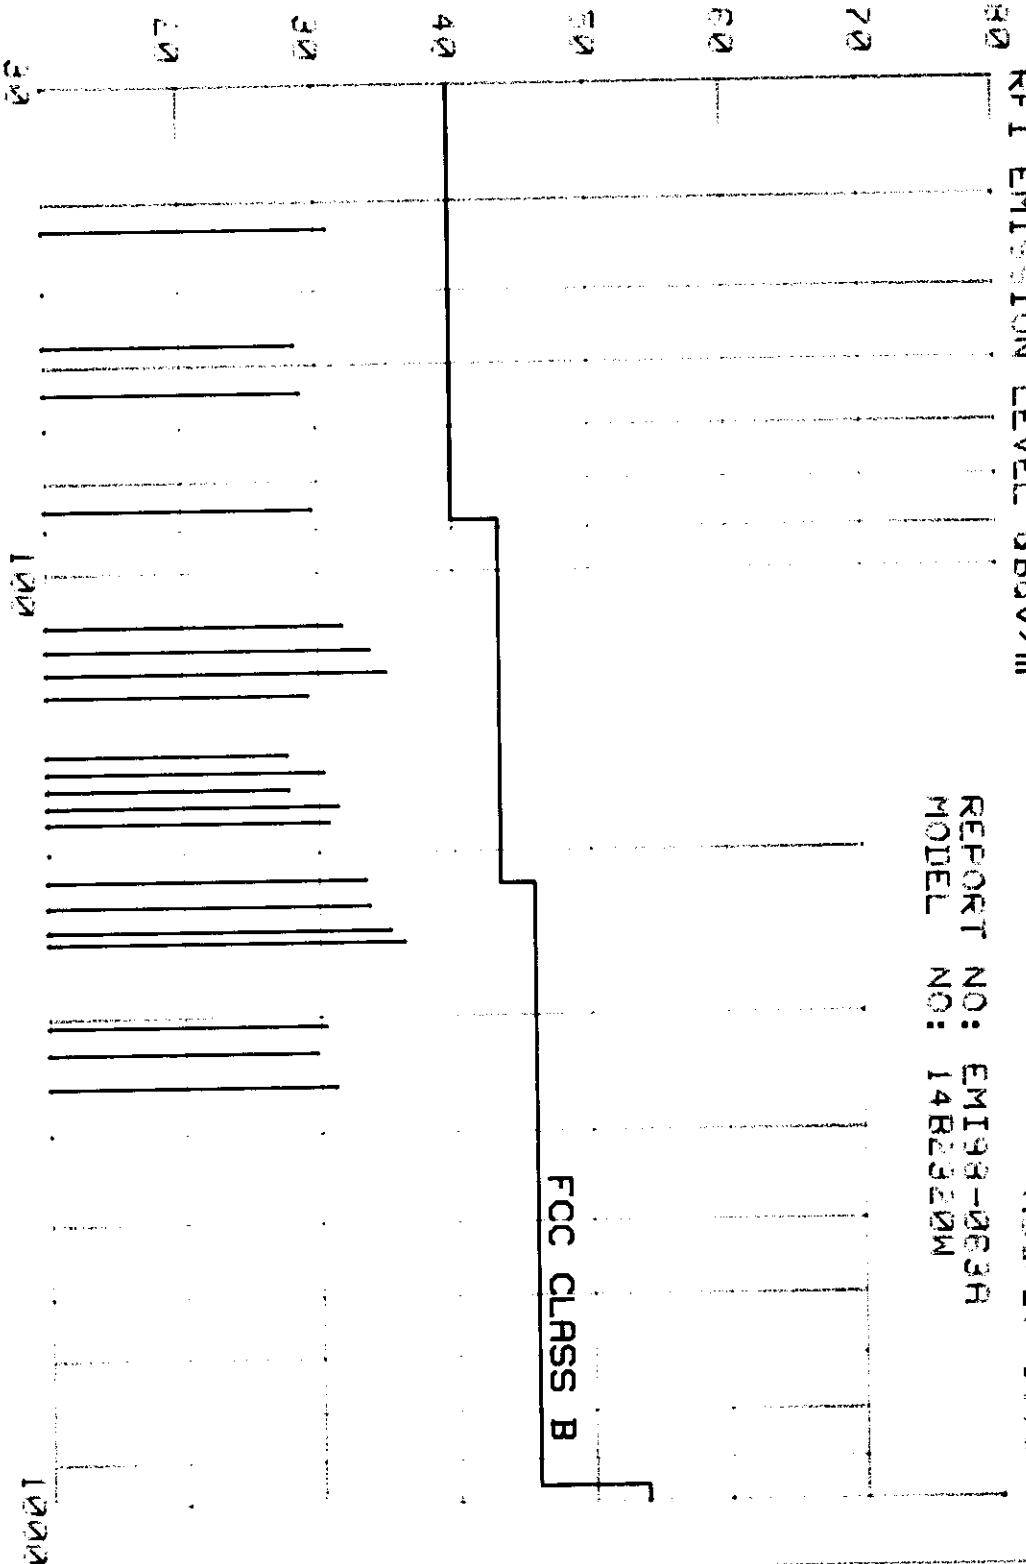


FREQUENCY MHz

hp

A3KM081 RUN 1024X768/60Hz 48.3KHz MODE AC110V MKR 3.64 MHz
REF 107.0 dBμV ATTEN 10 dB 45.20 dBμV

10 dB/

DL
48.0
dBμV

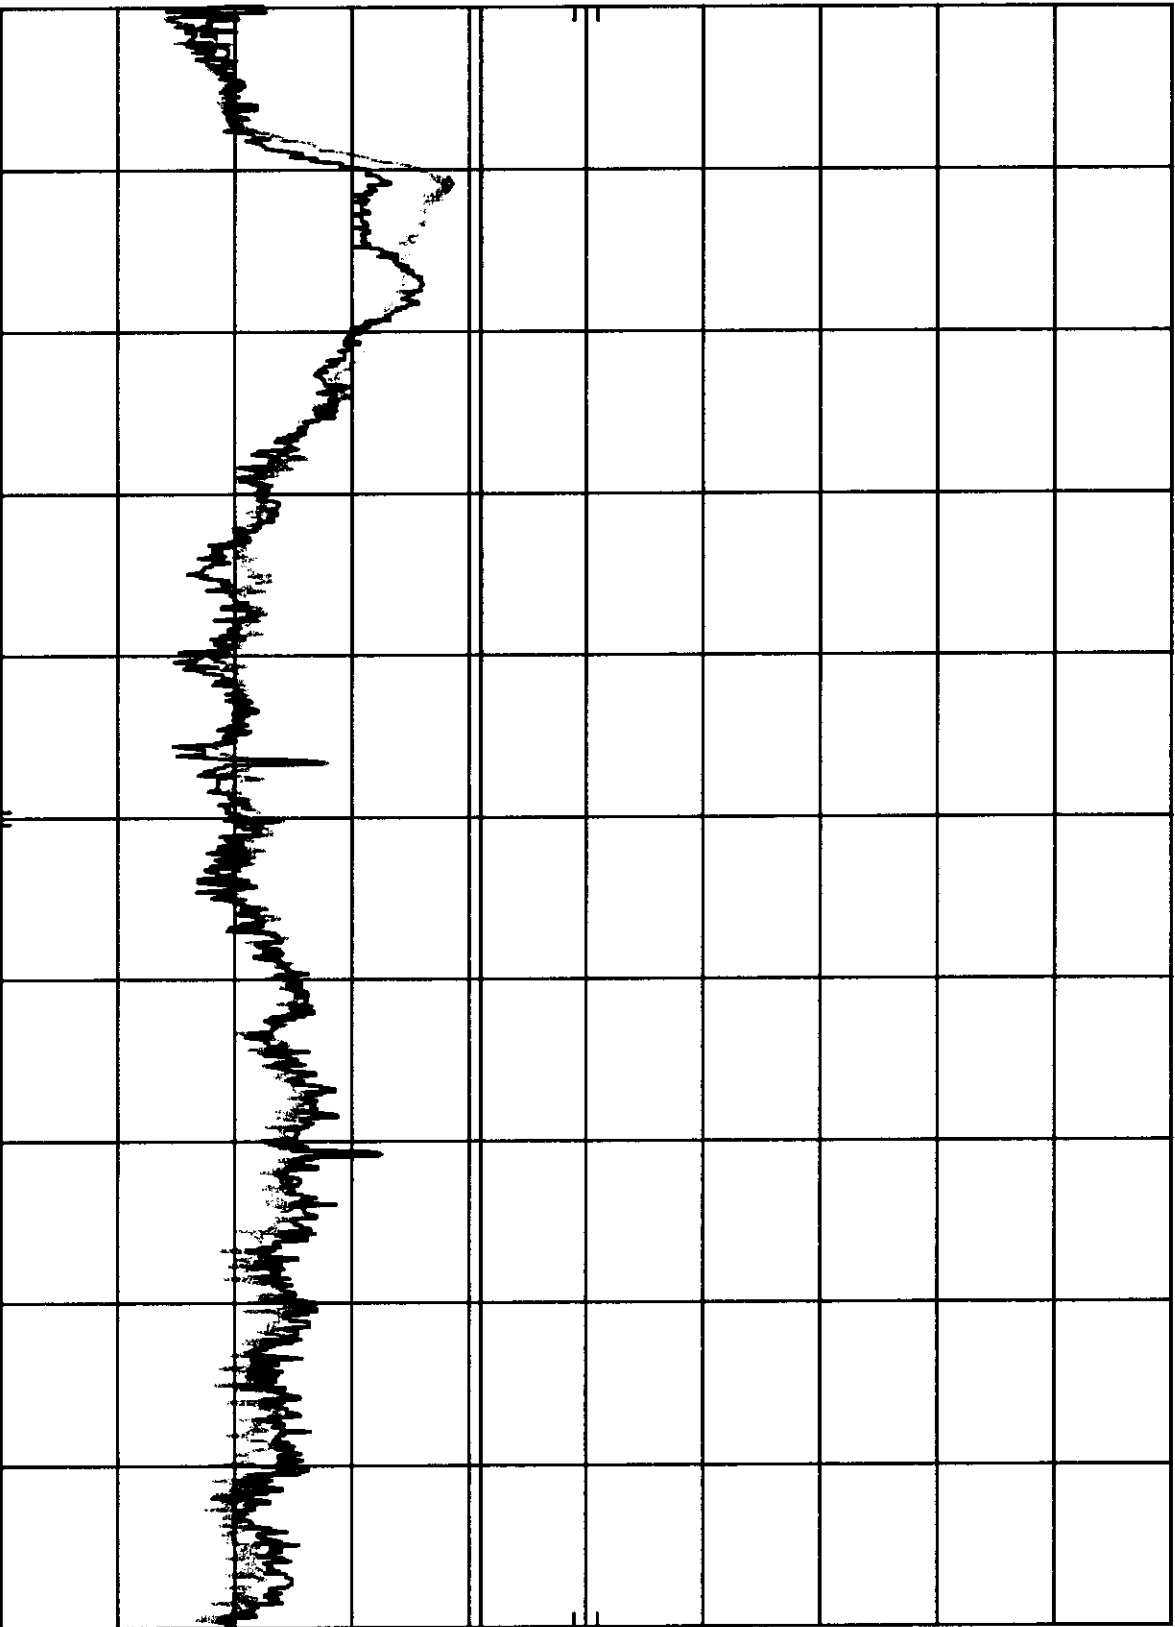


START 450 KHz STOP 30.00 MHz
RES BW 10 KHz VBW 10 KHz SWP 750 msec

A3KM081 RUN 1024X768/60Hz 48.3KHz MODE AC220V MKR 3.55 MHz
7p REF 107.0 dBμV ATTEN 10 dB 46.30 dBμV

10 dB/

DL
48.0
dBμV

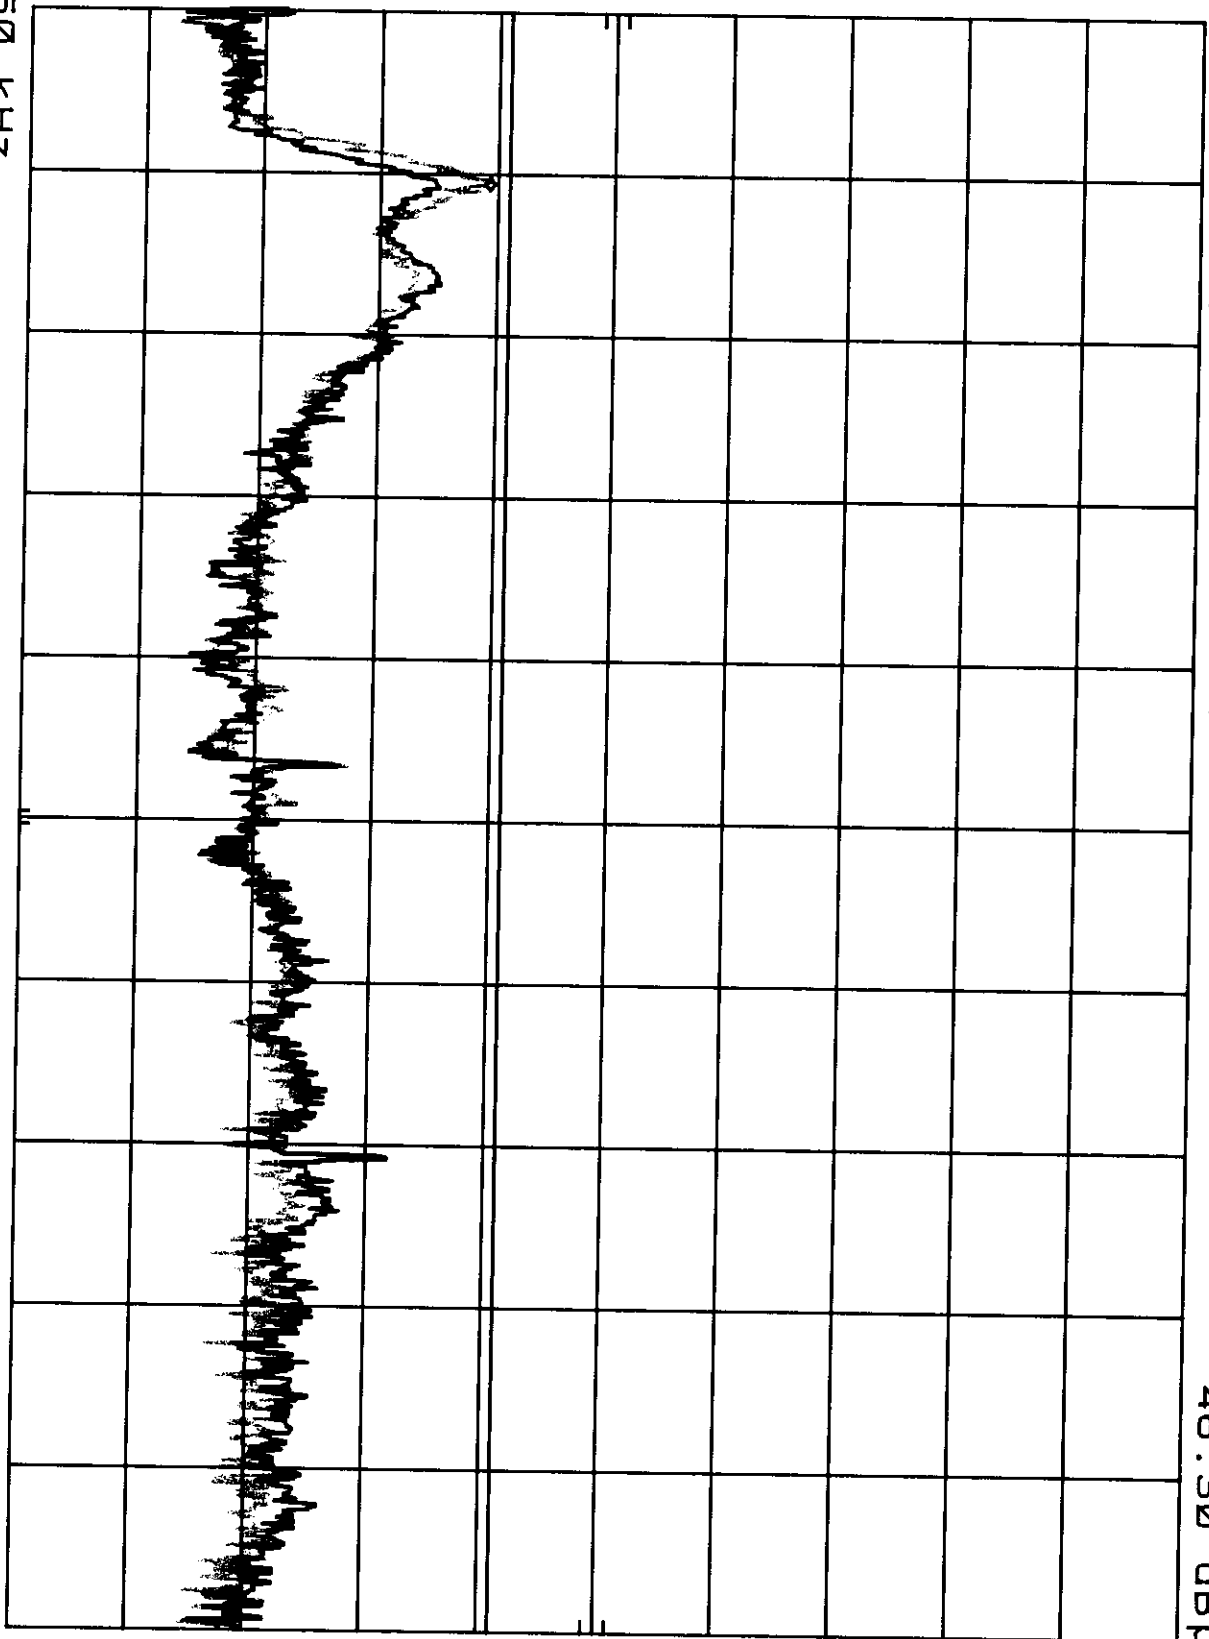

START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SWP 750 msec

Exhibit 7

Photographs