

47 CFR PART 95 TEST REPORT

for

Handheld GUE and SRD

Model No.: A03778

FCC ID: IPH-03778

of

Applicant: **Garmin International, Inc.**

Address: **1200 E. 151st St, Olathe, Kansas 66062 United States**

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No.: 20037

A2LA Accredited No.: 2732.01



Report No.: W6M21912-19556-C-95

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com





TABLE OF CONTENTS

1.	GENERAL INFORMATION	3
1.1	NOTES	3
1.2	TESTING LABORATORY	4
1.2.1	LOCATION	4
1.2.2	DETAILS OF ACCREDITATION STATUS	4
1.3	DETAILS OF APPROVAL HOLDER	5
1.4	APPLICATION DETAILS	5
1.5	GENERAL INFORMATION OF TEST ITEM	5
1.6	TEST STANDARDS	6
2.	TECHNICAL TEST	7
2.1	SUMMARY OF TEST RESULTS	7
2.2	TEST ENVIRONMENT	7
2.3	DESCRIPTION OF TESTED SYSTEM	8
2.4	TEST EQUIPMENT LIST	9
2.5	GENERAL TEST PROCEDURE	12
3.	TEST RESULTS (ENCLOSURE)	13
4.	RF POWER OUTPUT (CONDUCTED), FCC 2.1046; 95.639	14
4.1	TEST PROCEDURE	14
4.2	TEST RESULTS	14
4.3	LIMITS:	15
5.	RADIATED POWER	16
5.1	TEST PROCEDURE	16
5.2	TEST RESULTS	18
5.3	LIMITS:	21
6.	MODULATION DEVIATION, FCC 2.1047 (B), 95.631(J).....	22
6.1	TEST PROCEDURE	22
6.2	TEST RESULTS:	22
6.3	LIMITS:	22
7.	AUDIO FREQUENCY RESPONSE, FCC 2.1047 (A)	23
7.1	TEST PROCEDURE	23
7.2	TEST RESULTS:	23
7.3	LIMITS:	23
8.	OCCUPIED BANDWIDTH/EMISSION MASK, FCC 2.1049 (C) ; 95.632	24
8.1	TEST RESULTS	24
8.2	LIMIT	26
9.	RADIATED SPURIOUS EMISSION, FCC 2.1053; 95.635	27
9.1	TEST PROCEDURE	27




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21912-19556-C-95

FCC ID: IPH-03778

9.2	TEST RESULTS	27
9.2.1	SPURIOUS EMISSION NEAR THE CARRIER:	27
9.2.2	SPURIOUS EMISSION NOT NEAR THE CARRIER:	27
9.3	EXPLANATION OF TEST RESULT	28
9.4	LIMITS	29
10.	FREQUENCY STABILITY VS. TEMPERATURE, FCC 2.1055, 95.632	30
10.1	TEST PROCEDURE	30
10.2	TEST RESULTS	30
10.3	LIMITS:	30
11.	FREQUENCY STABILITY VS. VOLTAGE, FCC 2.1055 (D) ; 95.632	31
11.1	TEST PROCEDURE	31
11.2	TEST RESULTS	31
11.3	LIMITS:	31
12.	RECEIVER RADIATED SPURIOUS EMISSION	32
12.1	TEST PROCEDURES	32
12.2	TEST SETUP	32
12.3	TEST RESULT	33
13.	MAXIMUM PERMISSIBLE EXPOSURE	34
13.1	APPLICABLE STANDARD	34
13.2	MPE CALCULATION METHOD	34
APPENDIX		36



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

1. General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

August 25, 2020

Kent Lin

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

August 25, 2020


Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. 20037

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd.:

Name: ./.

Accredited number: ./.


Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

1.3 Details of approval holder

Name: Garmin International, Inc.
Street: 1200 E. 151st St,
Town: Olathe, Kansas 66062
Country: United States
Telephone: 913-440-5471
Fax: ./.

1.4 Application details

Date of receipt of test item: February 11, 2020
Date of test: from February 12, 2020 to July 15, 2020

1.5 General information of Test item


Type of test item: Handheld GUE and SRD
Model Number: A03778
Brand Name: Garmin
Multi-listing model number: ./.
Photos: ./.

Technical data

Operating frequency band:

Frequency(MHz)	Used Band
151.82 MHz	☒
154.6 MHz	☒

Sample tested frequency: 151.82 MHz 、 154.6 MHz
Number of RF-channels: 2
Type of modulation: 2GFSK
Designation of emission: 7K13F3E
Channel spacing: 12.5 kHz
Antenna Type: rigid monopole antenna



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

Connection of Antenna: ☒ detachable ☐ not detachable

Power supply: Adaptor (I/P: 100-240V~50/60Hz, 0.35A ; O/P: 5V, 2.4A)
Battery 3.6Vd.c., 1250mAh, 4.5Wh

End point of Battery voltage: nom: 3.6V / min: 3.4V / max: 4.14V


Operation modes: Half-duplex

Manufacturer: (if applicable)

Name: GARMIN Corporation
Street: No.68, Zhangshu 2nd Rd., Xizhi Dist.,
Town: New Taipei City 221,
Country: TAIWAN, R.O.C.

1.6 Test standards

Technical standard: 47 CFR PART 95 - Personal Radio Service (2019-10)
Subpart J - Multi-Use Radio Service (MURS)
Subpart E - Technical Regulations
Test Method: 47 CFR PART 2 - Frequency Allocations General Rules and
Regulations (2019-10)
TIA-603-E: 2016



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

2. Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations were ascertained in the course of the tests performed.




2.2 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86-103 KPa

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty : AMN : 1.06 dB Voltage probe : 1.12 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty : 00.009-30 MHz : 1.88 dB 30-1000 MHz : 2.79 dB 1-18 GHz : 2.36 dB 18-40 GHz : 1.55 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement Output power	Expanded Uncertainty : 1.14 dB
Estimation Result of Uncertainty of Conducted Spurious Emission Measurement	Expanded Uncertainty : 1.33 dB
Estimation Result of Uncertainty of EIRP Measurement EIRP 、 ERP 、 Output power(dBm) 、 Radiated spurious emission(dBm), Receiver spurious radiations (≥30 MHz)	Expanded Uncertainty : 30-200MHz : 2.32 dB 200-1000MHz : 2.32 dB 1-18GHz : 3.24 dB 18-40GHz : 2.88 dB

The decision rule is : Measurement uncertainty is not included in the calculation of test results.




Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

2.3 Description of Tested System

The EUT was tested with the Accessories or Peripherals Listed below:

Equipment	Model No.	Series No.	Software	Cable information	Note
--	--	--	--	--	--
--	--	--	--	--	--
--	--	--	--	--	--
--	--	--	--	--	--
--	--	--	--	--	--
--	--	--	--	--	--

Explanation: The EUT was configured as stand alone device, and there are no accessories or peripheral during the test.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

2.4 Test Equipment List


No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2020/6/11	2021/6/10
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2019/11/1	2020/10/31
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2019/9/24	2020/9/23
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2019/7/23	2020/7/22
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2019/10/3	2020/10/2
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2019/7/18	2020/7/17
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2020/6/12	2021/6/11
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2020/5/26	2021/5/25
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2019/7/25	2020/7/24
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2019/7/22	2020/7/21
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2020/4/22	2021/4/21
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2020/2/18	2021/2/17
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2020/5/8	2021/5/7
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2020/5/8	2021/5/7
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2020/3/6	2021/3/5
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2020/2/20	2021/2/19
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2020/5/8	2021/5/7
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2019/9/23	2020/9/22
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2019/9/18	2020/9/17
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2020/5/22	2021/5/21
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2020/1/13	2021/1/12



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778


ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2020/6/11	2021/6/10
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2019/8/8	2020/8/7
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2019/8/8	2020/8/7
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2020/2/20	2021/2/19
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2019/8/8	2020/8/7
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2019/8/8	2020/8/7
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2020/5/8	2021/5/7
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2020/4/9	2021/4/8
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2020/6/9	2021/6/8
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2020/5/21	2021/5/20
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2020/3/9	2021/3/8
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2020/4/20	2021/4/19
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2019/10/25	2020/10/24
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2020/1/13	2021/1/12
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2020/1/13	2021/1/12
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2020/1/13	2021/1/12
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2020/1/13	2021/1/12
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2019/9/12	2020/9/11
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2020/3/27	2021/3/26
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2019/8/9	2020/8/8
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2020/7/1	2021/6/30
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2019/9/18	2020/9/17
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2019/9/18	2020/9/17
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2020/2/20	2021/2/19
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2020/7/3	2021/7/2
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2020/6/5	2021/6/4
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2020/5/8	2021/5/7



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2020/6/5	2021/6/4
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2020/5/8	2021/5/7
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 001	Thermohygrometer	608-H1	45204316	Testo	2019/9/9	2020/9/8
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2019/9/9	2020/9/8



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

2.5 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.


The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, an exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by at the registered open field test site located at The Registration Number: 930600. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.




Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

3. Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
RF Power Output	2.1046; Part 95.2767	☒	☒	☐
Modulation Deviation	2.1047 (b); Part 95.2775	☐	☐	☐
Audio Frequency Response	2.1047 (a); Part 95.2775	☐	☐	☐
Occupied Bandwidth / Emission Mask	2.1049 (c)(1); Part 95.2773	☒	☒	☐
Radiated Spurious Emission Transmitter	2.1053; Part 95.2779	☒	☒	☐
Radiated Spurious Emission Receiver	Part 15B	☒	☒	☐
Frequency Stability vs. Temperature	2.1055 (b); Part 95.2765	☒	☒	☐
Frequency Stability vs. Voltage	2.1055 (a)(1); Part 95.2765	☒	☒	☐

The following is intentionally left blank.



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

4. RF Power Output (conducted), FCC 2.1046; Part 95.2767

4.1 Test procedure

This transmitter output was connected to a calibrated coaxial attenuator, the other end of which was connected to a spectrum analyzer. Transmitter output was derived with the spectrum analyzer in dBm. The power output at the transmitter antenna port was determined by assign the value of the attenuator to the spectrum analyzer reading.

An HP power meter was also used to measure the RF power.

Tests were performed with an un-modulated carrier at three frequencies (low, middle and high channels) and on all power levels, which can be set-up on the transmitters, if applicable.


4.2 Test Results

Test date: June 24, 2020


Temperature: 24.1 °C

Humidity: 52.0 %


Tester: Kent

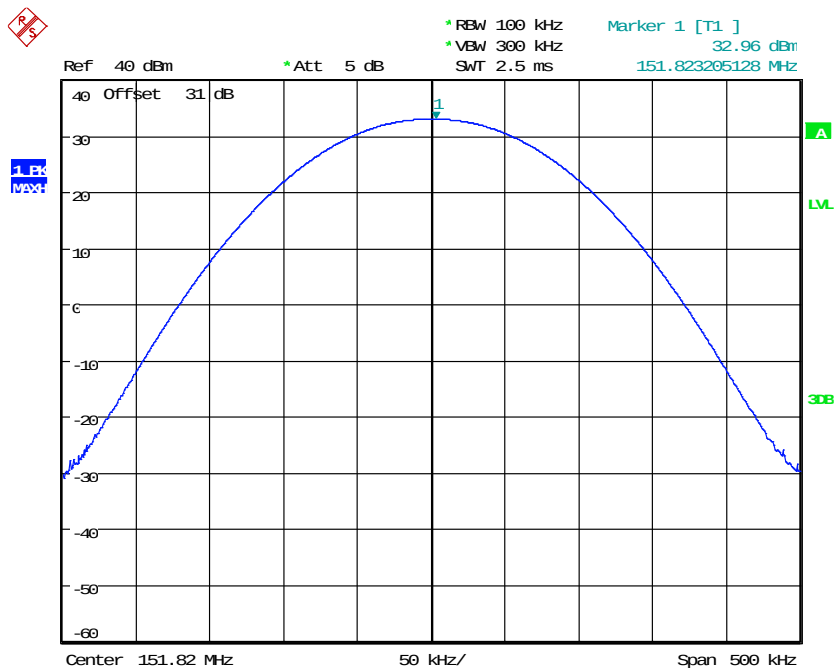

MAX OUTPUT POWER 151.82MHZ
Date: 24.JUN.2020 17:23:51



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

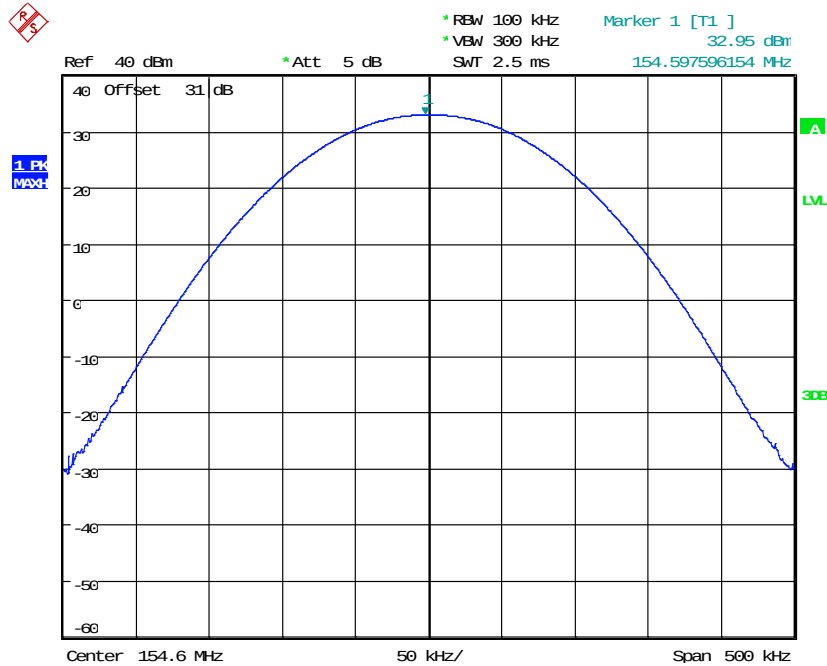

MAX OUTPUT POWER 154.6MHZ
Date: 24.JUN.2020 17:24:36

4.3 Limits:

Each MURS transmitter type must be designed such that the transmitter power output does not exceed 2 Watts under normal operating conditions.

Test equipment used: ETSTW-RE 060, ETSTW-RE 055

Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

5. Radiated Power

5.1 Test Procedure

The EUT was positioned on a non-conductive turntable, 0.8m above the ground on an open test site. The radiated emission at the fundamental frequency was measured at 3m distance with a test antenna and spectrum analyzer.


Worst case emission was recorded with the rotation of the turntable and the rising and lowering of the test antenna.

Substitution RF power Measurement at WTS

General:

The applied substitution method follows ANSI/TIA/EIA-603, ANSI/TIA/EIA-102.CAAA or the appropriate ETSI rules respectively.


The actual signal generated by the EUT can be determined by means of a substitution measurement in which a known signal source replaces the device to be measured.

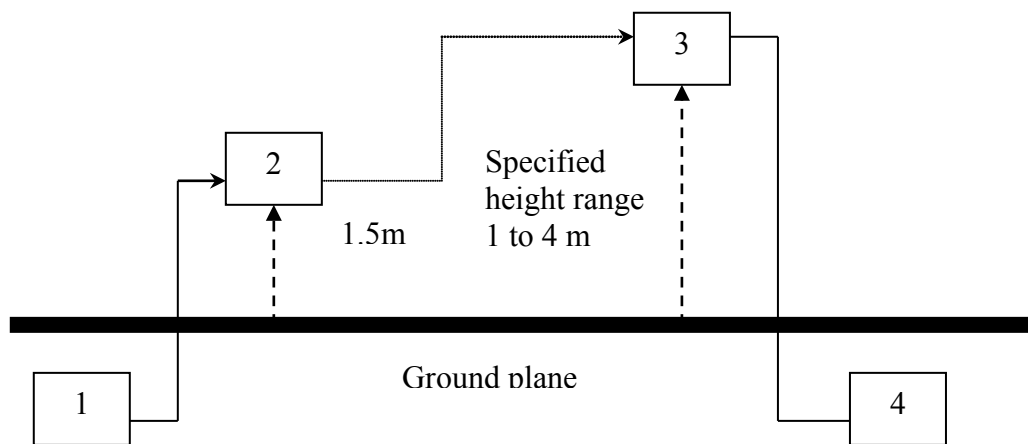

- 1) Signal generator ;
- 2) Substitution antenna ;
- 3) Test antenna ;
- 4) Spectrum analyzer or selective voltmeter.

The substitution antenna replaces the transmitter antenna at the same position and in vertical polarization. The frequency of the signal generator shall be adjusted to the measurement frequency. The test antenna shall be raised or lowered, if necessary, to ensure that the maximum signal is still received. The input signal to the substitution antenna shall be adjusted in level until an equal or a known related level to that detected from the transmitter is obtained in the measurement receiver. If a fully anechoic chamber is used as test site in order to provide free space conditions there is no need to change the height of the antenna.

The measurement will be repeated in horizontal position.



Calibration:

In order to make this kind of measurement more effective and to avoid subjective measurement faults ETS has installed automatic computer controlled measurement procedures.


With the above described substitution method a test site is calibrated over the full frequency range which is used in suitable frequency steps. For a certain power level on the substitution antenna the received power over the whole frequency range is documented. All necessary antenna gains, cable losses, filter losses and amplifications of preamplifiers are taken in consideration. The summary of this calibration measurement performs a transducer factor that is related to the considered test site and a certain measurement distance. Differences of the radiated power levels of different test samples are determined by internal attenuation of measurement receiver. The proper function of such test site will be maintained by short term plausibility checks and periodical re-calibration.

Testing:

Now the test sample will be putted on the table at the defined position and the radiated power will be receiver and documented by the measurement receiver.


On test sites with ground plane the measurement antenna will be lowered and raised to maximum values at significant frequencies.

For peak power measurements the sample is turned by the turntable over 360 degree in order to find the direction with the maximum radiation or to document the max reading with the MAXHOLD function during the rotation.



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

5.2 Test results

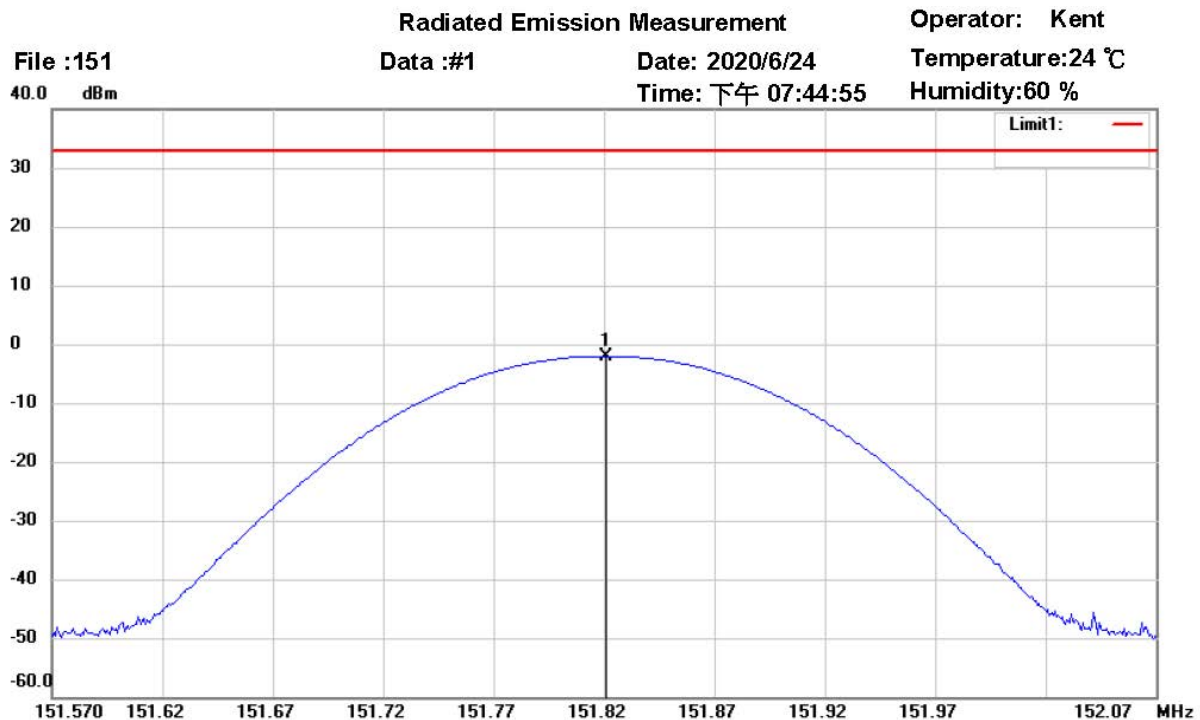

Site : Chamber

Condition : FCC Part95 MURS Power (2W)

EUT : W6M21912-19556

M/N:

Test Mode : TX 151.82MHz


Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.


Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	151.8208	-23.01	peak	20.99	-2.02	33.00	150	220	-35.02	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

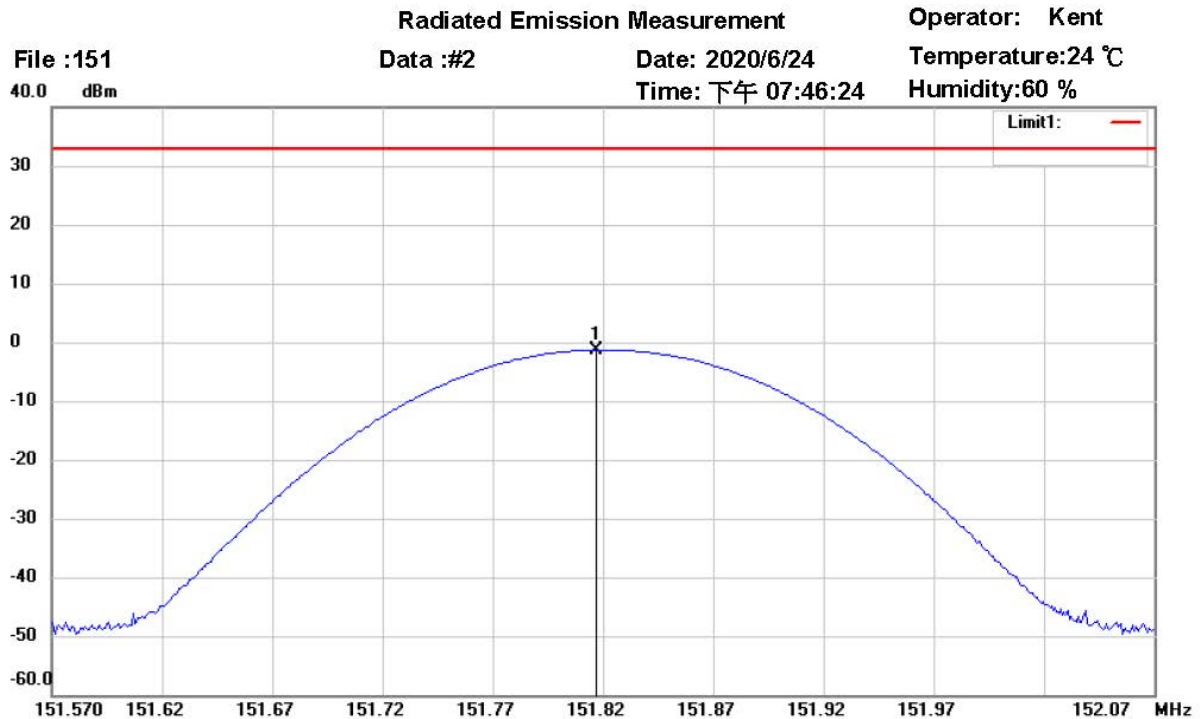

Site : Chamber

Condition : FCC Part95 MURS Power (2W)

EUT : W6M21912-19556

M/N:

Test Mode : TX 151.82MHz


Note :

Polarization: *Vertical*

Power : 3.6 Vd.c.


Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	151.8168	-22.82	peak	21.51	-1.31	33.00	150	45	-34.31	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

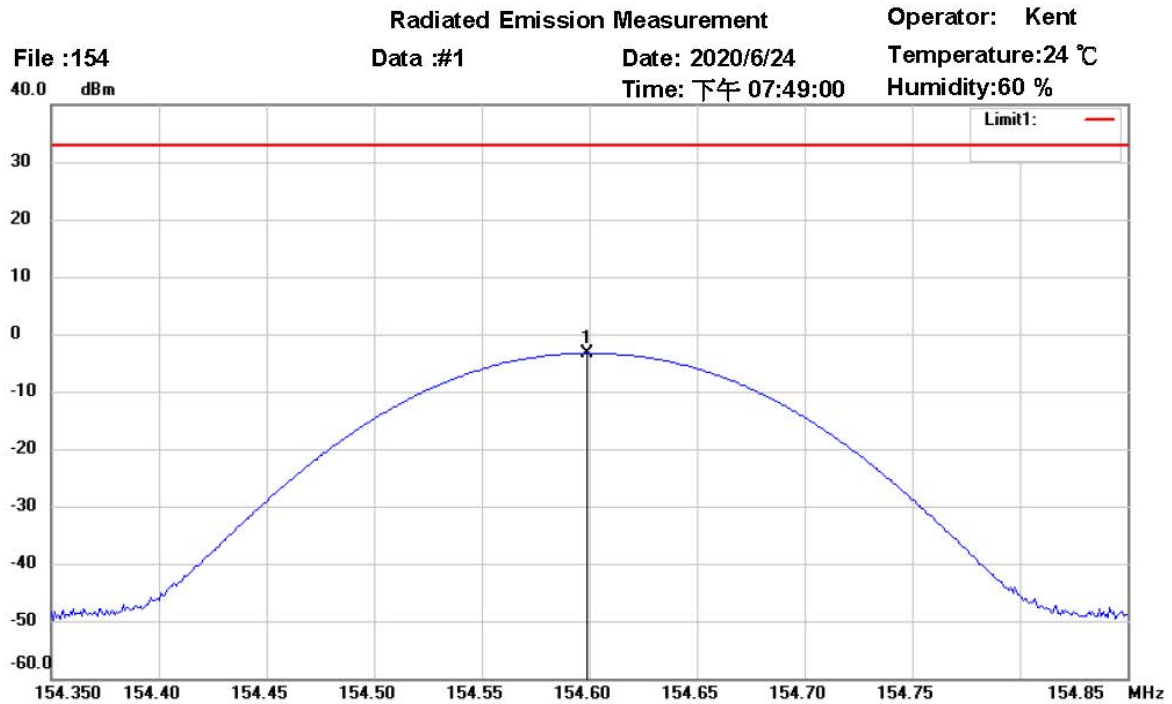

Site : Chamber

Condition : FCC Part95 MURS Power (2W)

EUT : W6M21912-19556

M/N:

Test Mode : TX 154.6MHz


Note :

Polarization: *Horizontal*


Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	154.5992	-24.55	peak	21.17	-3.38	33.00	150	95	-36.38	



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

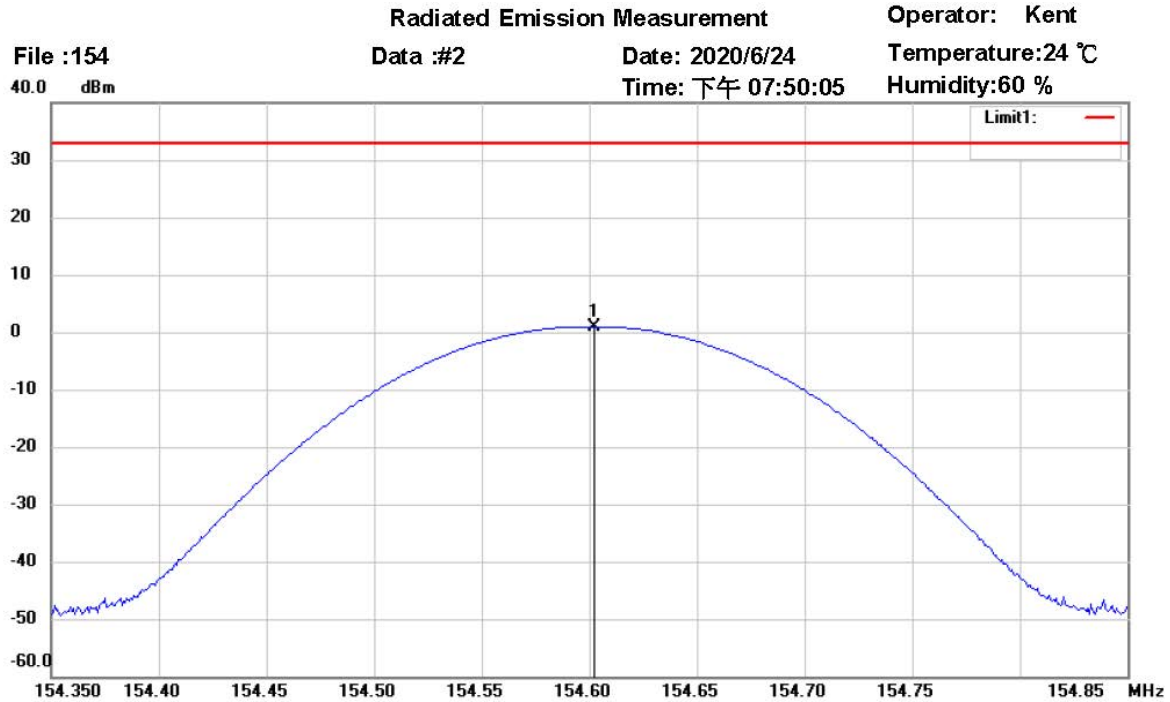

Site : Chamber

Condition : FCC Part95 MURS Power (2W)

EUT : W6M21912-19556

M/N:

Test Mode : TX 154.6MHz

Note :

Polarization: *Vertical*

Power : 3.6 Vd.c.


Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	154.6024	-20.70	peak	21.67	0.97	33.00	150	110	-32.03	

Test equipment used: ETSTW-RE 003, ETSTW-RE 122, ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 044

5.3 Limits:

Each MURS transmitter type must be designed such that the transmitter power output does not exceed 2 Watts under normal operating conditions.



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778


6. Modulation Deviation, FCC 2.1047 (b), Part 95.2775

6.1 Test procedure

Modulation limiting is the transmitter circuit's ability to limit the transmitter from producing deviations in excess of rated system deviation.

The audio signal generator is connected to the audio input of the EUT with its full rating.

The modulation response is measured at certain modulation frequencies, related to 1000Hz reference signal. Tests are performed for positive and negative modulation.

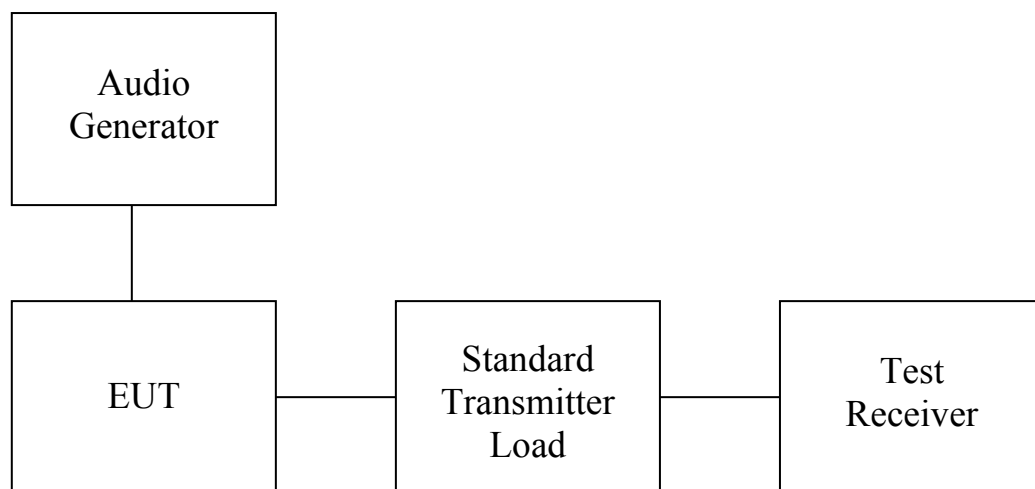

6.2 Test results:

Test date: --

Temperature: -- °C

Humidity: -- %


Tester: --

Explanation: This test is not required.

6.3 Limits:

A MURS transmitter must transmit only emission types A1D, A2B, A2D, A3E, F2B, F1D, F2D, F3E, G3E. Emission types A3E, F3E and G3E include selective calling or tone-operated squelch tones to establish or continue voice communications. MURS transmitters are prohibited from transmitting in the continuous carrier mode.

Test equipment used: ETSTW-RE 055, ETSTW-RE 060



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

7. Audio frequency response, FCC 2.1047 (a), Part 95.2775

7.1 Test procedure


The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The frequency response of the audio modulation part is measured over a frequency range of 100 Hz to 5000Hz.

For 1000Hz tone reference signal the audio generator level is adjusted to get 20% of the rated system deviation.

The deviations obtained over the frequency range from 100Hz to 5000Hz are recorded and compared with the reference deviation as follows:

$$\text{Audio Frequency Response} = 20 \log [\text{DEV}_{\text{Freq}} / \text{DEV}_{\text{ref}}].$$

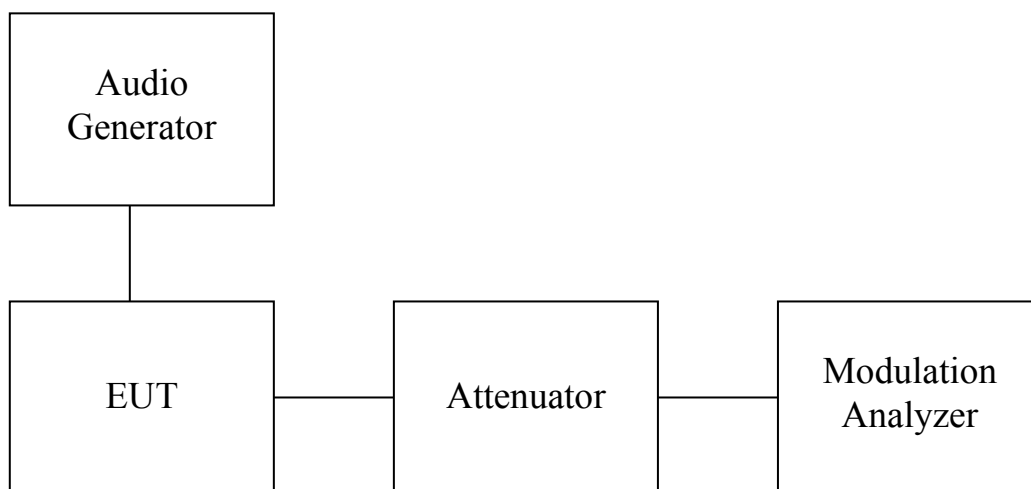

7.2 Test results:

Test date: --

Temperature: -- °C

Humidity: -- %


Tester: --

Explanation: This test is not required.

7.3 Limits:

A MURS transmitter must transmit only emission types A1D, A2B, A2D, A3E, F2B, F1D, F2D, F3E, G3E. Emission types A3E, F3E and G3E include selective calling or tone-operated squelch tones to establish or continue voice communications. MURS transmitters are prohibited from transmitting in the continuous carrier mode.

Test equipment used: ETSTW-RE 072, ETSTW-RE 055



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

8. Occupied Bandwidth/Emission Mask, FCC 2.1049 (c) ; Part 95.2773

The authorized bandwidth is 11.25 kHz on frequencies 151.82 MHz.

The authorized bandwidth is 20.0 kHz on frequencies 154.60 MHz.


8.1 Test Results

Test date: June 24, 2020


Temperature: 24.1 °C

Humidity: 52.0 %


Tester: Kent

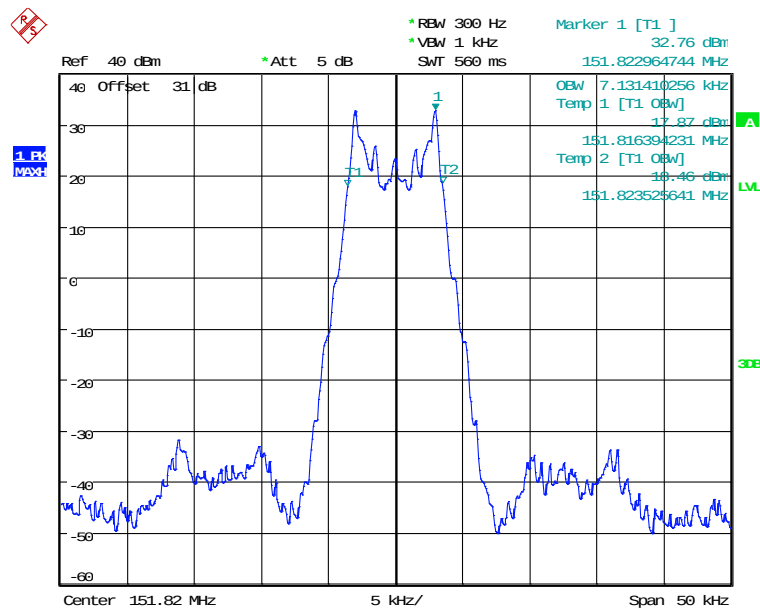

OCCUPIED BANDWIDTH 151.82MHZ
Date: 24.JUN.2020 17:28:11




Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

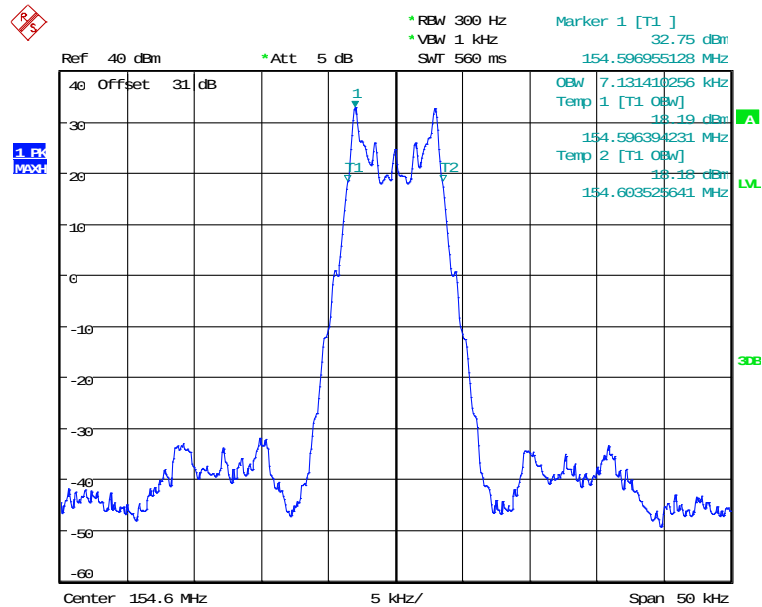


OCCUPIED BANDWIDTH 154.6MHZ
Date: 24.JUN.2020 17:27:24


Emission Mask

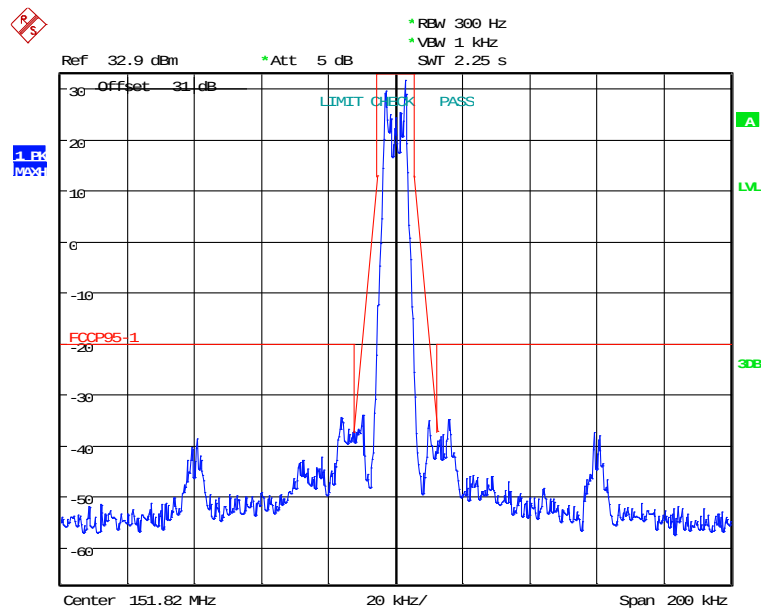

EMISSION MASK 151.82MHZ
Date: 24.JUN.2020 17:40:52



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

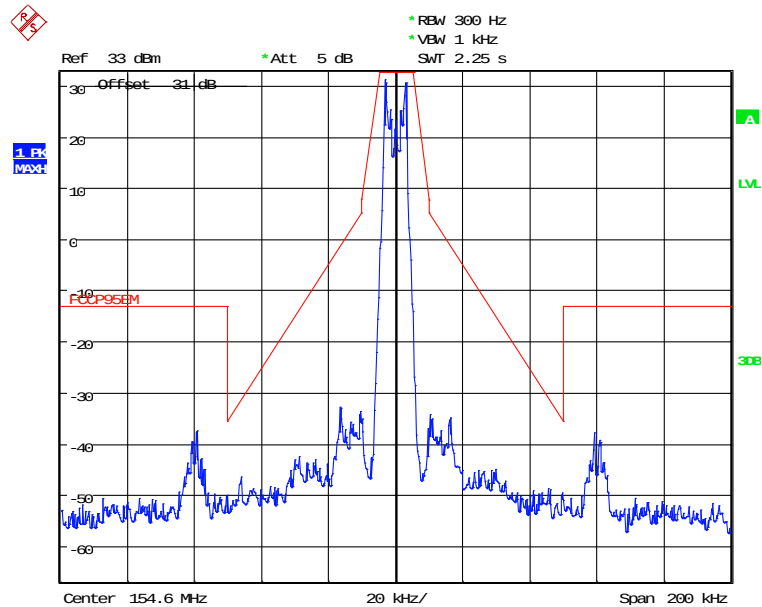


EMISSION MASK 154.6MHZ
Date: 24.JUN.2020 18:01:11

8.2 Limit

Frequencies	Authorized bandwidth
151.82 MHz	11.25 kHz
154.60 MHz	20.0 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 060



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

9. Radiated Spurious Emission, FCC 2.1053; Part 95.2779

9.1 Test procedure

The EUT was positioned on a non-conductive turntable, 0.8m above the ground plane.

The radiated emission at the fundamental frequency was measured at 3 m distance with a test antenna and spectrum analyzer.

Worst case emission was recorded with the rotation of the turntable and the raising and lowering of the test antenna.

ERP was measured using a substitution method. The EUT was replaced by reference antenna connected to a signal generator.

The test of spurious radiated emission has been carried out with the validated test software. The measurements below 1GHz were performed with a measurement bandwidth of 100 kHz, above 1GHz with a bandwidth of 1MHz.

Spurious emission limits near the carrier are defined by a emission mask.

9.2 Test Results

The measurements of the spurious emission at the upper, center and lower channel, if applicable.

The measurement diagrams show that all significant spurious emissions are well below the limit line.

9.2.1 Spurious emission near the carrier:

The Results of Emission Mask: ☒ PASSED ☐ NOT PASSED

9.2.2 Spurious emission not near the carrier:

Model: A03778

Mode: --

Temperature: --

°C

Date: --

Engineer: --

Polarization: Horizontal

Humidity: --

%

Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Polarization: Vertical


Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Note:

1. Correction Factor = Antenna Gain + Cable Loss + Amplifier Gain
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. See the attached diagram as appendix.

Test equipment used: ETSTW-RE 003, ETSTW-RE 122, ETSTW-RE 042,

ETSTW-RE 043, ETSTW-RE 044



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

9.3 Explanation of test result


The requirements in this section apply to each MURS transmitter type both with and without the connection of attachments, such as an external microphone, power cord and/or antenna.

(a) Emission masks. Emission masks applicable to transmitting equipment in the MURS are defined by the requirements in the following table. The numbers in the paragraphs column refer to attenuation requirement rule paragraph numbers under paragraph (b) of this section. The words “audio filter” refer to the audio filter described in § 95.2775.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.



9.4 Limits

For transmitters designed to operate in the MURS, transmitters shall comply with the following:

Frequency	Mask with audio low pass filter	Mask without audio low pass filter
151.82 MHz	(1)	(1)
154.60 MHz	(2)	(3)

(1) Emission Mask 1—For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows: (i) On any frequency from the center of the authorized bandwidth to 5.625 kHz removed from f_0 : Zero dB. (ii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: at least $7.27(f_d - 2.88)$ dB. (iii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: at least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation. (2) Emission Mask 2—For transmitters designed to operate with a 25 kHz channel bandwidth that are equipped with an audio low-pass filter, the power of any emission must be below the unmodulated carrier power (P) as follows: (i) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: at least 25 dB. (ii) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: at least 35 dB. (iii) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: at least $43 + 10 \log(P)$ dB. (3) Emission Mask 3—For transmitters designed to operate with a 25 kHz channel bandwidth that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier output power (P) as follows: (i) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5 kHz, but not more than 10 kHz: at least $83 \log(f_d/5)$ dB. (ii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 10 kHz, but not more than 250 percent of the authorized bandwidth: at least $29 \log(f_d^2/11)$ dB or 50 dB, whichever is the lesser attenuation. (iii) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: at least $43 + 10 \log(P)$ dB.


The compliance limit was calculated as the following table:

151.82 MHz

Maximum transmitter output power	32.96 dBm
Required attenuation	$50 + 10 \times \log(1.9770) = 52.96$ dBm
Maximum transmitter output power	32.96 dBm
Required attenuation	52.96 dB
Compliance limit	-20 dBm

154.60 MHz

Maximum transmitter output power	32.95 dBm
Required attenuation	$43 + 10 \times \log(1.9724) = 45.95$ dBm
Maximum transmitter output power	32.95 dBm
Required attenuation	45.95 dB
Compliance limit	-13 dBm



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

10. Frequency Stability vs. Temperature, FCC 2.1055, Part 95.2765

10.1 Test procedure

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable, exited the chamber through an opening made for that purpose.

After the temperature stabilized the frequency output was recorded from the counter.

10.2 Test Results

Test date: June 24, 2020

Temperature: 24.1 °C

Humidity: 52.0 %


Tester: Kent

Nominal Frequency : 151.82MHz		Nominal Frequency : 154.6MHz	
Temperature V.S Frequency Stability		Temperature V.S Frequency Stability	
Temperature°C	Measurement Frequency	Temperature°C	Measurement Frequency
-20	151.819913	-20	154.599900
-10	151.819921	-10	154.599912
0	151.819934	0	154.599938
10	151.819959	10	154.599951
20	151.819963	20	154.599959
30	151.819967	30	154.599965
40	151.819958	40	154.599955
50	151.819955	50	154.599955
Max Deviation (MHz)	-0.000087	Max Deviation (MHz)	-0.000100
Max Deviation (ppm)	-0.573	Max Deviation (ppm)	-0.647
Limit (ppm)	5	Limit (ppm)	5

10.3 Limits:

According to §95.2765, (a) MURS transmitters that operate with an emission bandwidth of 6.25 kHz or less must be designed such that the carrier frequencies remain within ± 2.0 parts-per-million (ppm) of the channel center frequencies specified in § 95.2763 during normal operating conditions. (b) MURS transmitters that operate with an emission bandwidth greater than 6.25 kHz must be designed such that the carrier frequencies remain within ± 5.0 ppm of the channel center frequencies specified in § 95.2763 during normal operating conditions.

Test equipment used: ETSTW-RE 055, ETSTW-CE 009



Registration number: W6M21912-19556-C-95

FCC ID: IPH-03778

11. Frequency Stability vs. Voltage, FCC 2.1055 (d) ; Part 95.2765

11.1 Test procedure

An external variable DC power supply was connected to the battery terminals of the equipment under test.

For hand carried, battery powered equipment primary supply voltage was reduced to the battery operating end point as specified by the manufacturer. The output frequency was recorded for each battery voltage.

11.2 Test Results

Test date: June 24, 2020

Temperature: 24.1 °C

Humidity: 52.0 %

Tester: Kent

Nominal Frequency : 151.82MHz		Nominal Frequency : 154.6MHz	
Voltage V.S Frequency Stability		Voltage V.S Frequency Stability	
Voltage	Measurement Frequency	Voltage	Measurement Frequency
3.4 V	151.819965	3.4 V	154.599955
3.6 V	151.819963	3.6 V	154.599955
4.14 V	151.819958	4.14 V	154.599955
Max Deviation (MHz)	-0.000042	Max Deviation (MHz)	-0.000045
Max Deviation (ppm)	-0.277	Max Deviation (ppm)	-0.291
Limit (ppm)	5	Limit (ppm)	5

11.3 Limits:

According to §95.2765, (a) MURS transmitters that operate with an emission bandwidth of 6.25 kHz or less must be designed such that the carrier frequencies remain within ± 2.0 parts-per-million (ppm) of the channel center frequencies specified in § 95.2763 during normal operating conditions. (b) MURS transmitters that operate with an emission bandwidth greater than 6.25 kHz must be designed such that the carrier frequencies remain within ± 5.0 ppm of the channel center frequencies specified in § 95.2763 during normal operating conditions.

Test equipment used: ETSTW-RE 055


Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778


12. Receiver Radiated Spurious Emission

12.1 Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Adjust the spectrum analyzer for the following settings:
 - Resolution Bandwidth = 100 kHz for spurious emissions below 1 GHz and 1 MHz for spurious emissions above 1GHz.
 - Video Bandwidth = 100 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1 GHz.
 - Sweep Speed slow enough to maintain measurement calibration.
 - Detector Mode = Positive Peak.

12.2 Test Setup

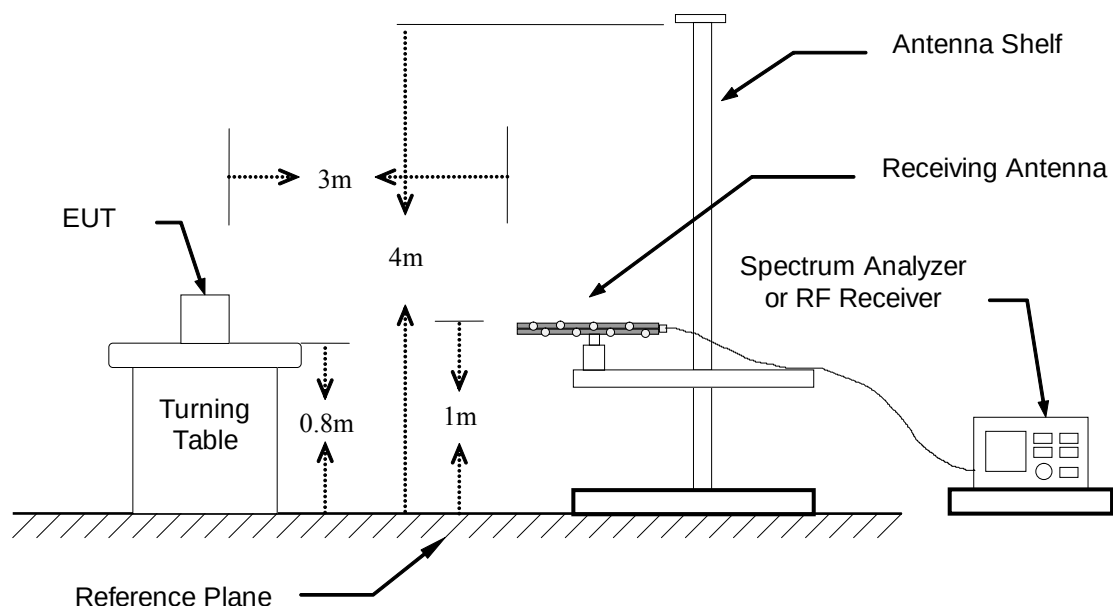



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

12.3 Test Result

Model: A03778 Date: --
Mode: -- Temperature: -- °C Engineer: --
Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. See attached diagrams in appendix.

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142,
ETSTW-RE 147, ETSTW-RE 122



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

13. Maximum Permissible Exposure

13.1 Applicable Standard

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.3 m normally can be maintained between the user and the device.

13.2 MPE Calculation Method

(A) Limits for Occupational/Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

f = frequency in MHz

*Plane-wave equivalent power density

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$


$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m) P = output power (W) G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$




Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

Max output power (W)	Antenna Gain	Power Density(S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
--	--	--	--	Complies

From the peak EUT RF output power, the minimum mobile separation distance, $d = \text{-- m}$, as well as the gain of the used antenna, the RF power density can be obtained.

Explanation: Please refer to the SAR test report.



Registration number: W6M21912-19556-C-95
FCC ID: IPH-03778

Appendix

Measurement diagrams

Radiation Spurious Emission



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
 Tel: +886-2-6606-8877
 Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File :1

Data :#1


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 02:41:40

Humidity: 60 %

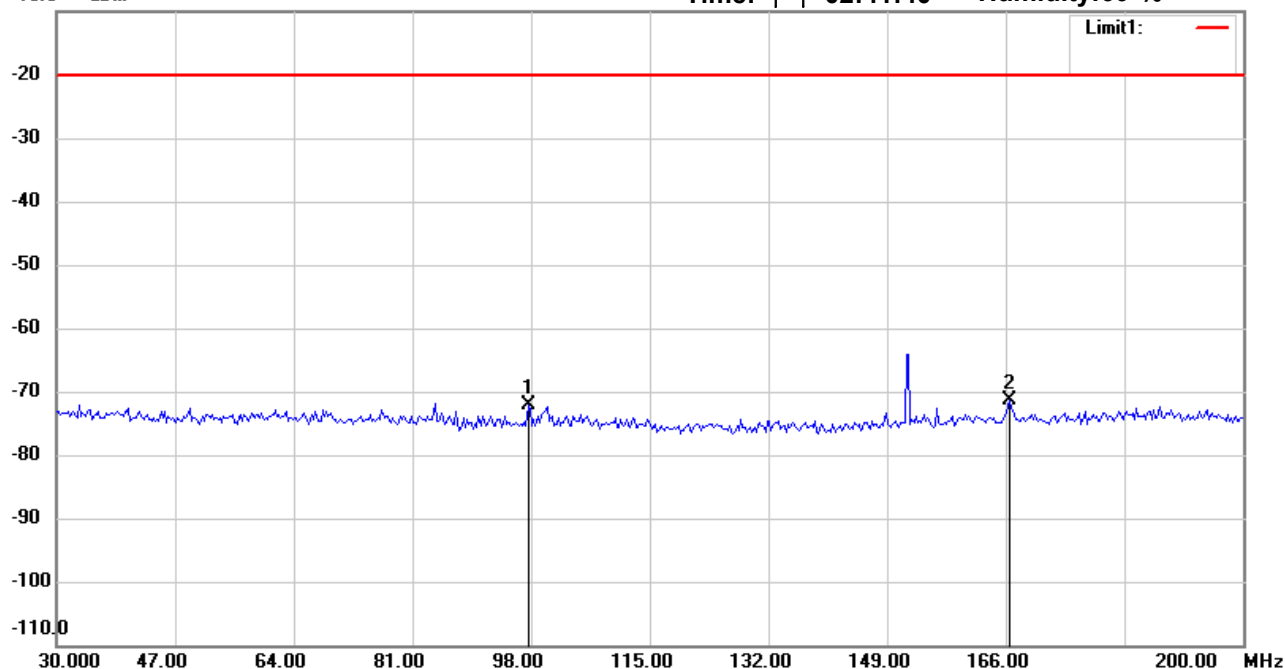

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : TX 151.82MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	97.5641	-93.46	peak	21.42	-72.04	-20.00	150	130	-52.04	
*	166.4904	-92.66	peak	21.41	-71.25	-20.00	150	220	-51.25	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File :1

Data :#2


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 02:43:15

Humidity: 60 %

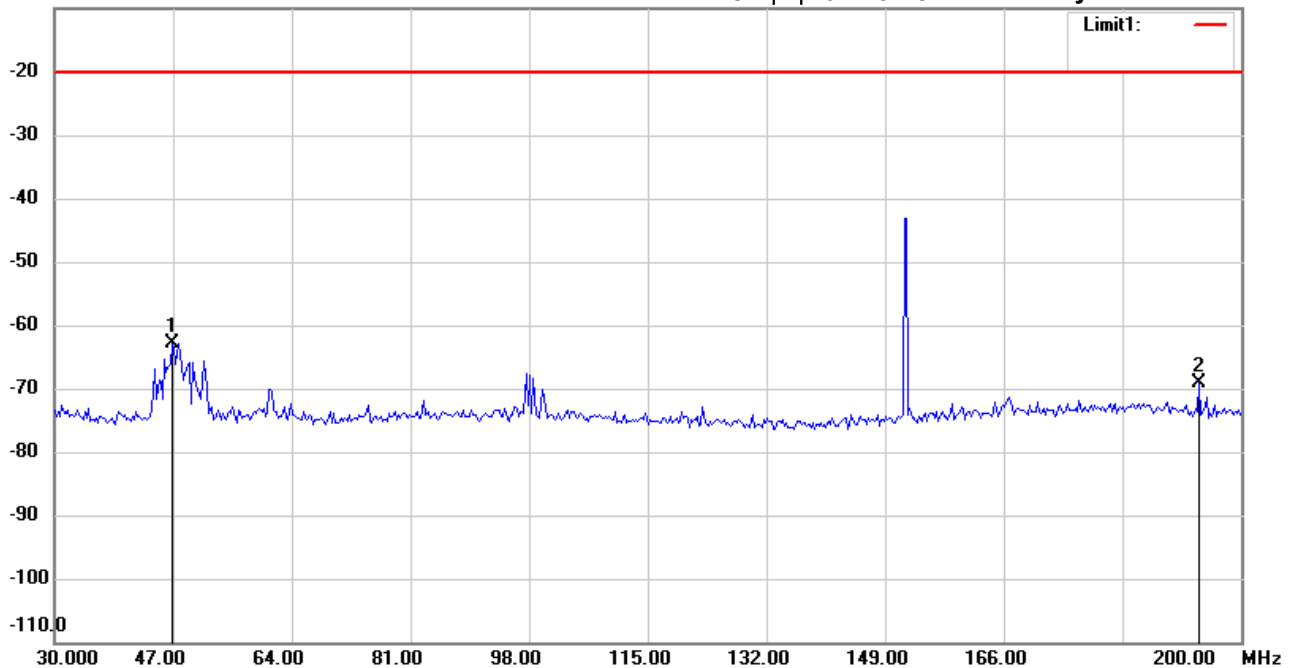

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : TX 151.82MHz

Note :

Polarization: *Vertical*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	46.8910	-84.11	peak	21.14	-62.97	-20.00	150	220	-42.97	
	194.0064	-90.92	peak	21.83	-69.09	-20.00	150	110	-49.09	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 2

Data : #1


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 07:28:32

Humidity: 60 %

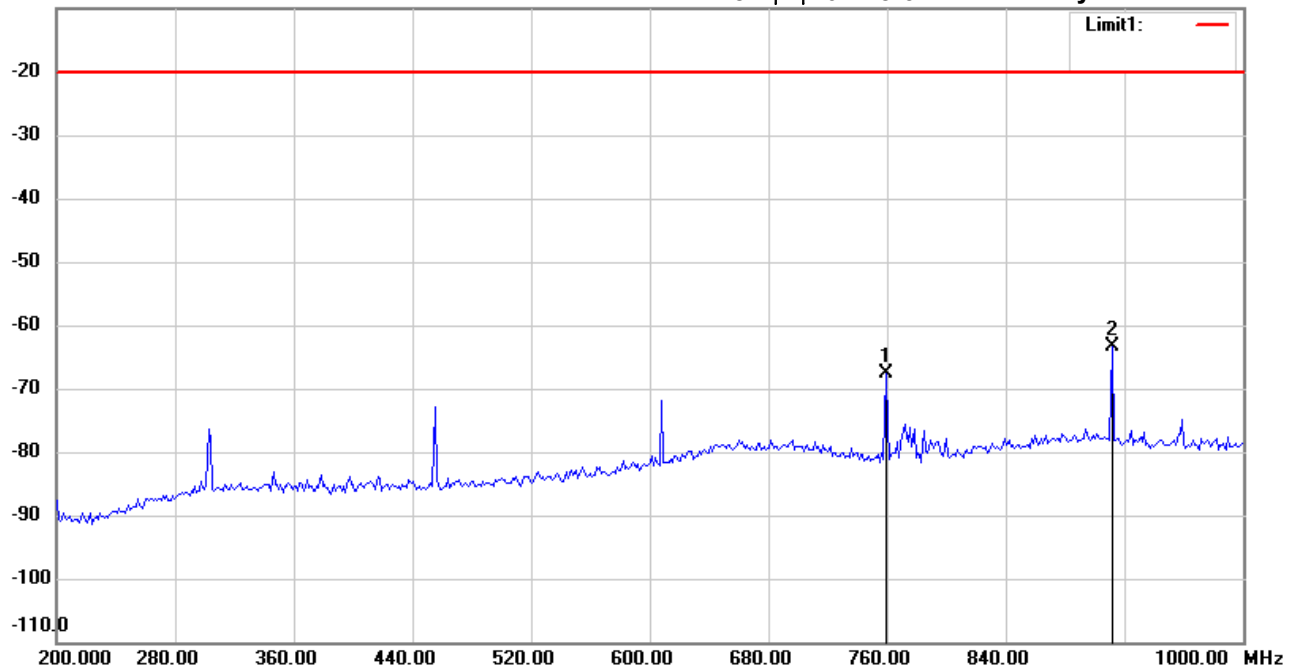

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : TX 151.82MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	758.9744	-62.94	peak	-4.58	-67.52	-20.00	150	330	-47.52	
*	911.5385	-61.67	peak	-1.72	-63.39	-20.00	150	160	-43.39	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 2

Data : #2


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 07:29:53

Humidity: 60 %

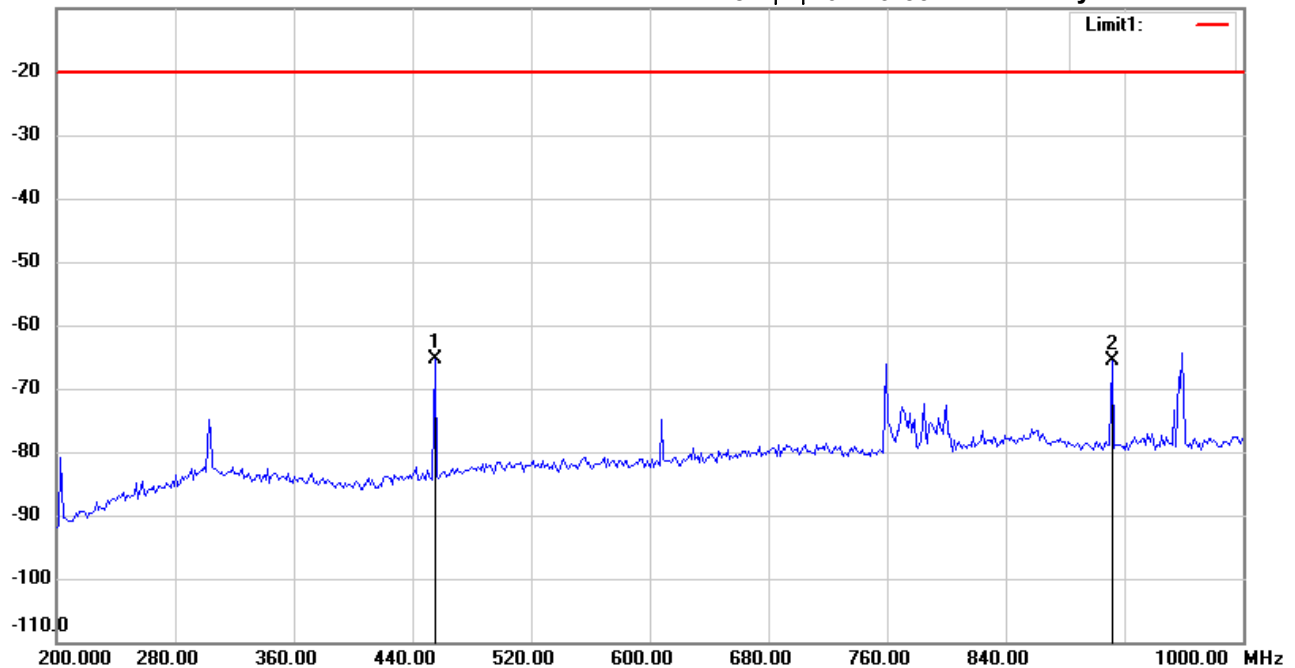

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : TX 151.82MHz

Note :

Polarization: *Vertical*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	455.1282	-56.91	peak	-8.39	-65.30	-20.00	150	110	-45.30	
	911.5385	-62.70	peak	-2.82	-65.52	-20.00	150	245	-45.52	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 3

Data : #1


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 01:29:25

Humidity: 60 %

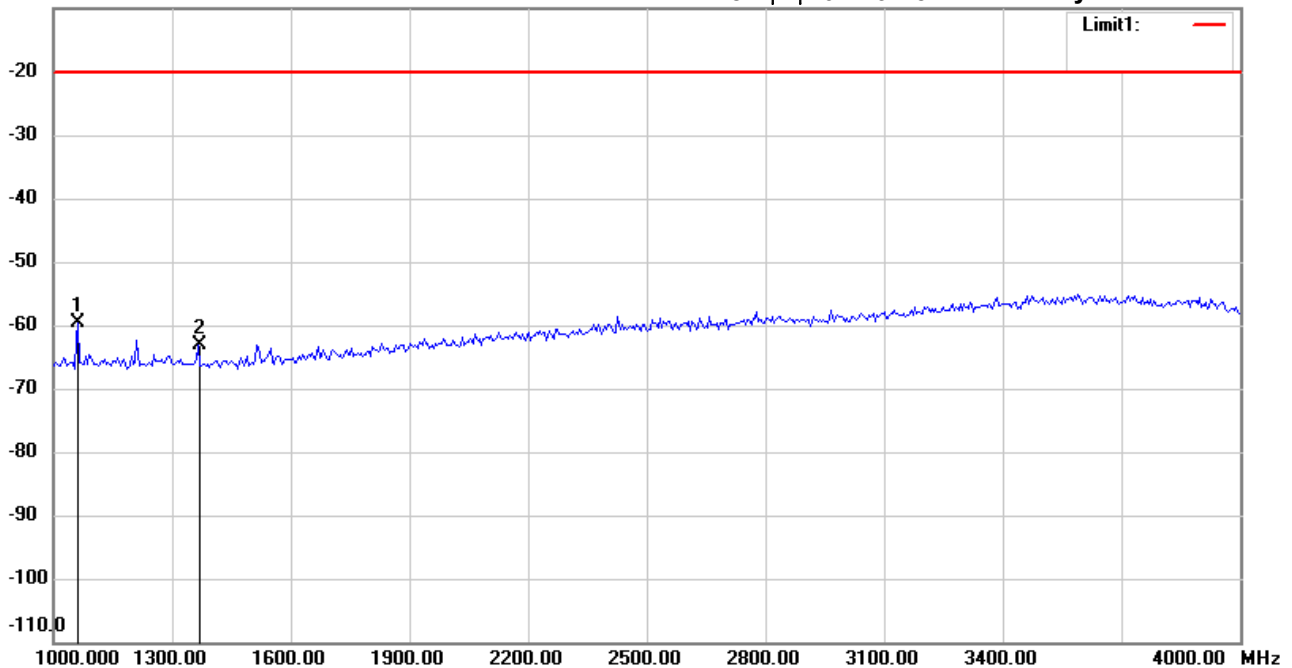

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : TX 151.82MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1062.500	-57.36	peak	-2.16	-59.52	-20.00	150	245	-39.52	
	1365.385	-60.87	peak	-2.19	-63.06	-20.00	150	185	-43.06	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 3

Data : #2


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 01:30:52

Humidity: 60 %

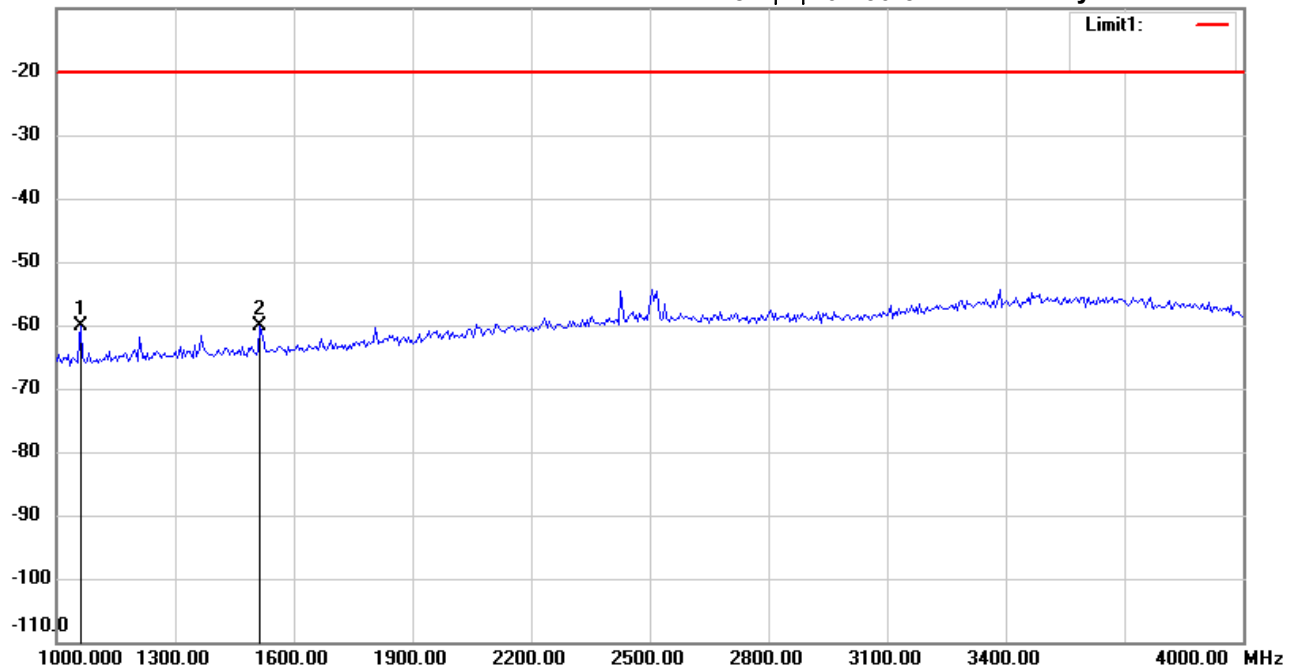

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : TX 151.82MHz

Note :

Polarization: **Vertical**

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1062.500	-58.65	peak	-1.58	-60.23	-20.00	150	245	-40.23	
*	1514.423	-59.94	peak	-0.17	-60.11	-20.00	150	110	-40.11	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File :1

Data :#1


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 02:54:11

Humidity: 60 %

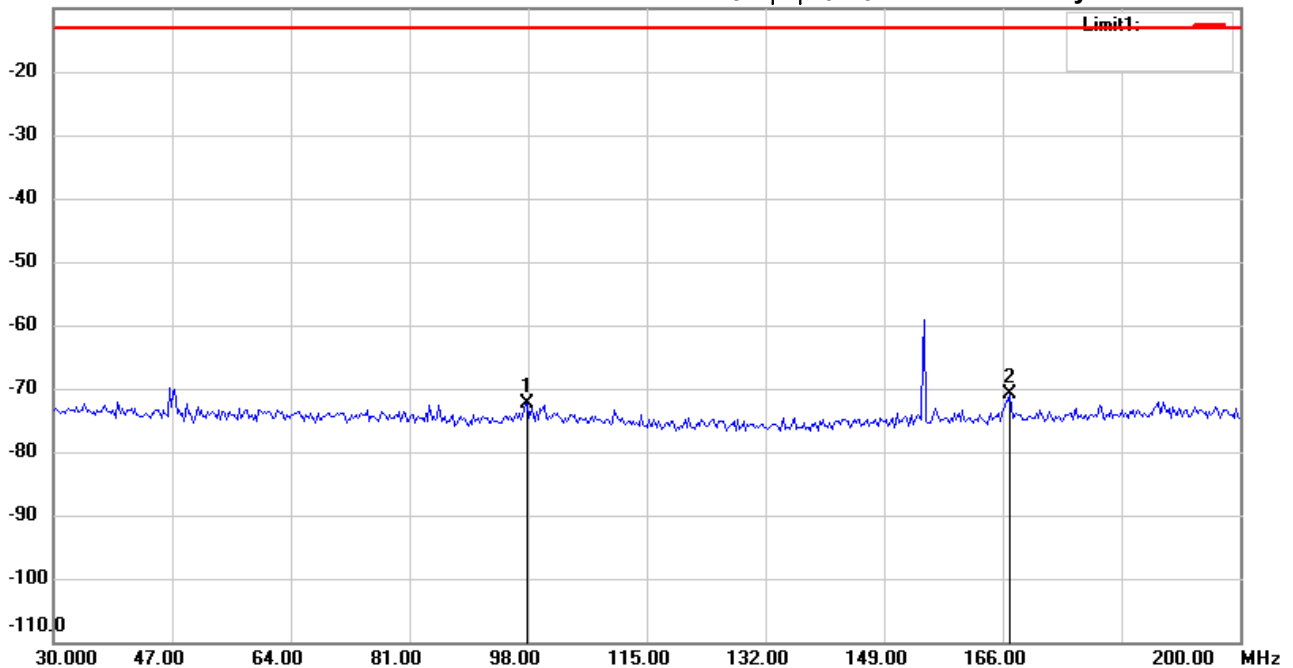

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : TX 154.6MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	97.8365	-93.80	peak	21.44	-72.36	-13.00	150	145	-59.36	
*	167.0353	-92.37	peak	21.42	-70.95	-13.00	150	110	-57.95	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File :1

Data :#2


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 02:55:55

Humidity: 60 %

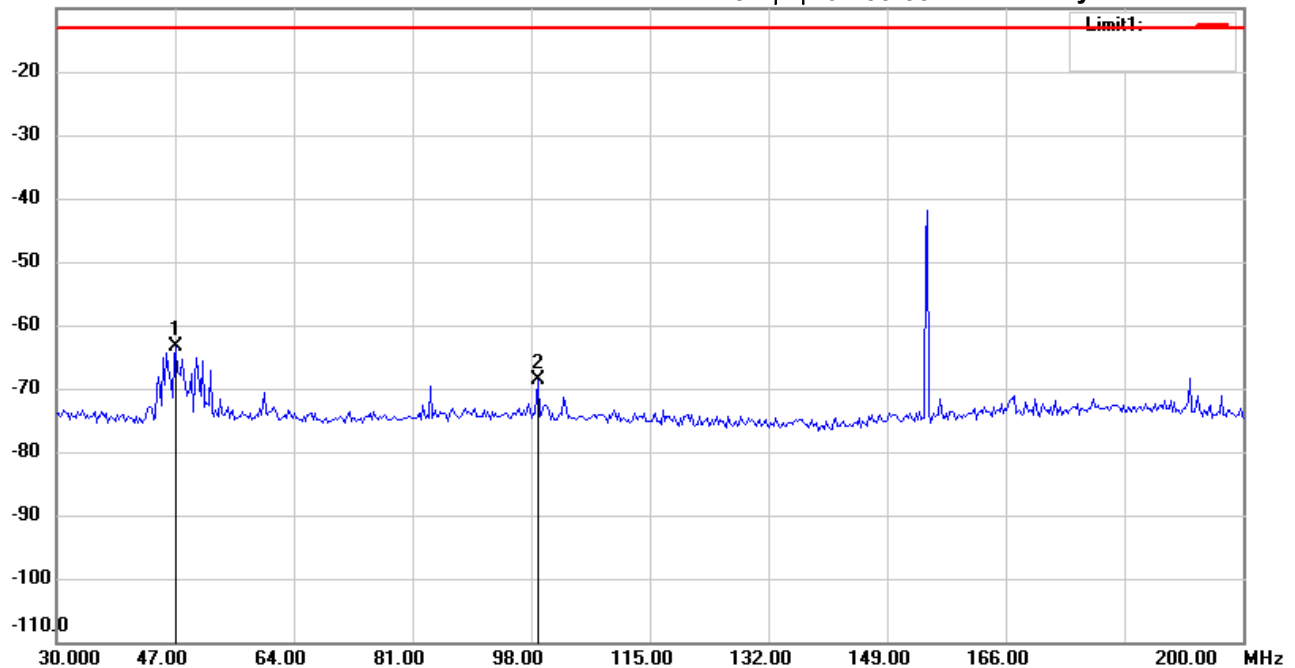

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : TX 154.6MHz

Note :

Polarization: **Vertical**

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.1635	-84.42	peak	21.16	-63.26	-13.00	150	330	-50.26	
	98.9263	-90.33	peak	21.69	-68.64	-13.00	150	160	-55.64	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 2

Data : #1


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 07:33:51

Humidity: 60 %

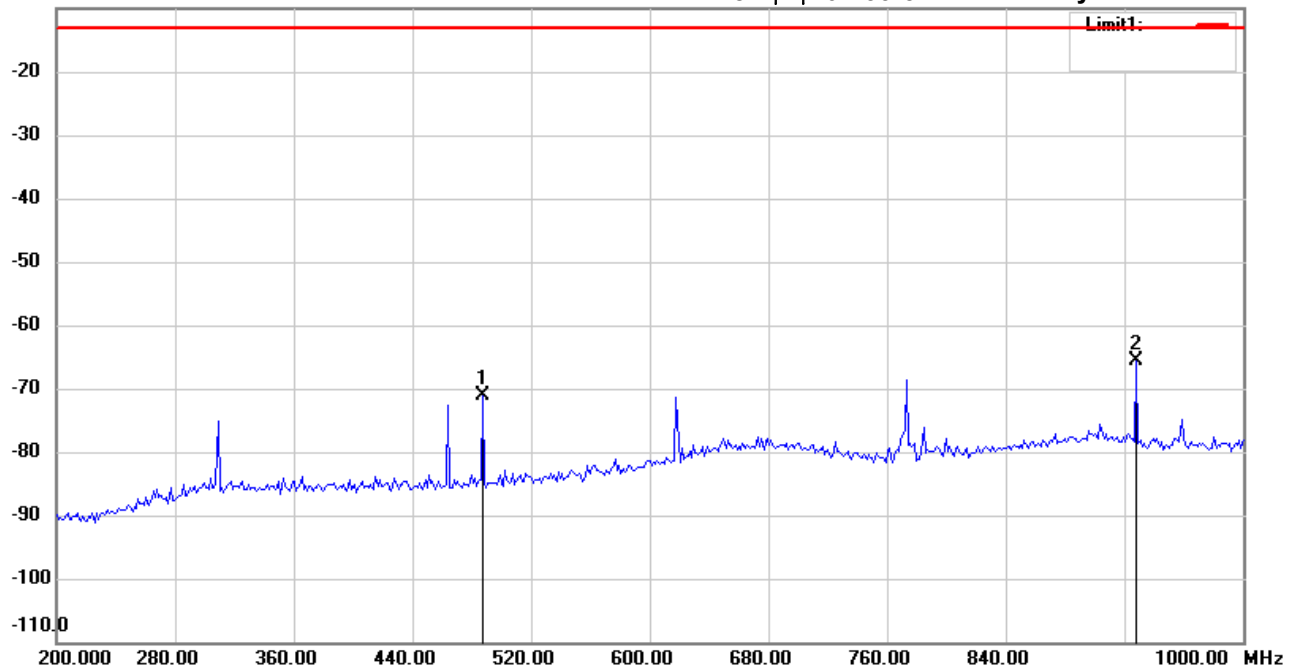

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : TX 154.6MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	487.1795	-61.67	peak	-9.36	-71.03	-13.00	150	305	-58.03	
*	928.2051	-63.38	peak	-2.27	-65.65	-13.00	150	160	-52.65	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 2

Data : #2


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 07:35:30

Humidity: 60 %

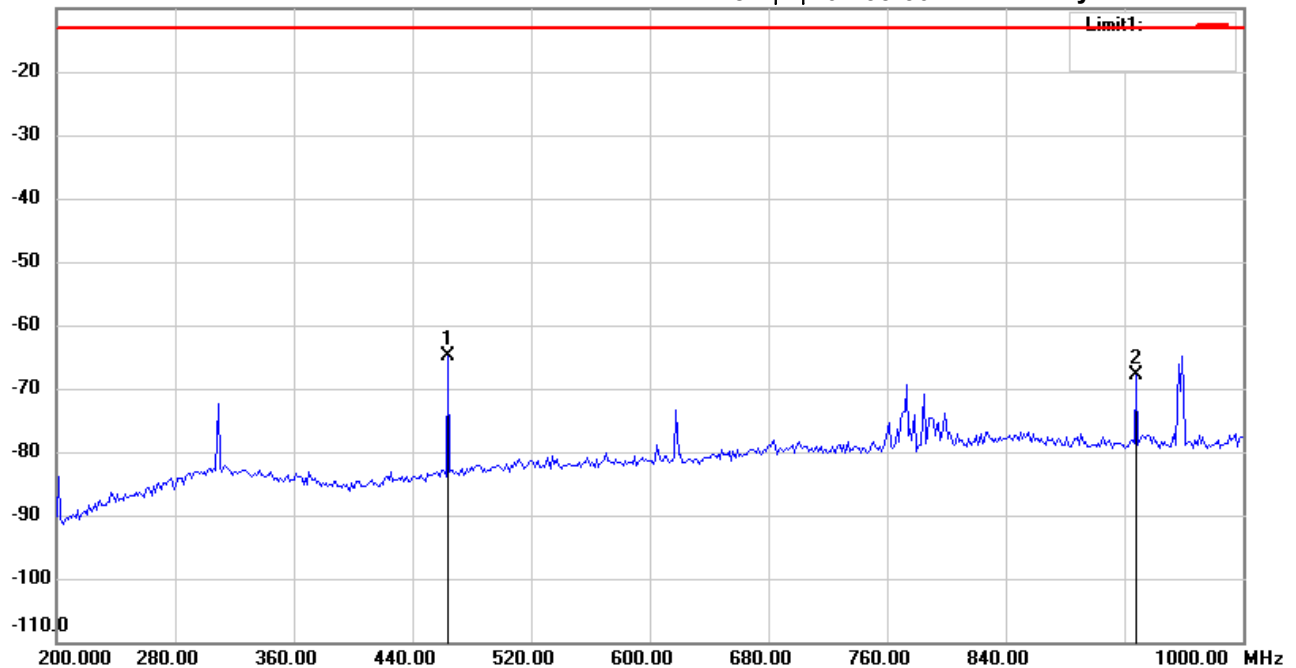

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : TX 154.6MHz

Note :

Polarization: *Vertical*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	464.1026	-56.76	peak	-8.05	-64.81	-13.00	150	355	-51.81	
	928.2051	-65.13	peak	-2.86	-67.99	-13.00	150	195	-54.99	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 3

Data : #1


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 01:34:13

Humidity: 60 %

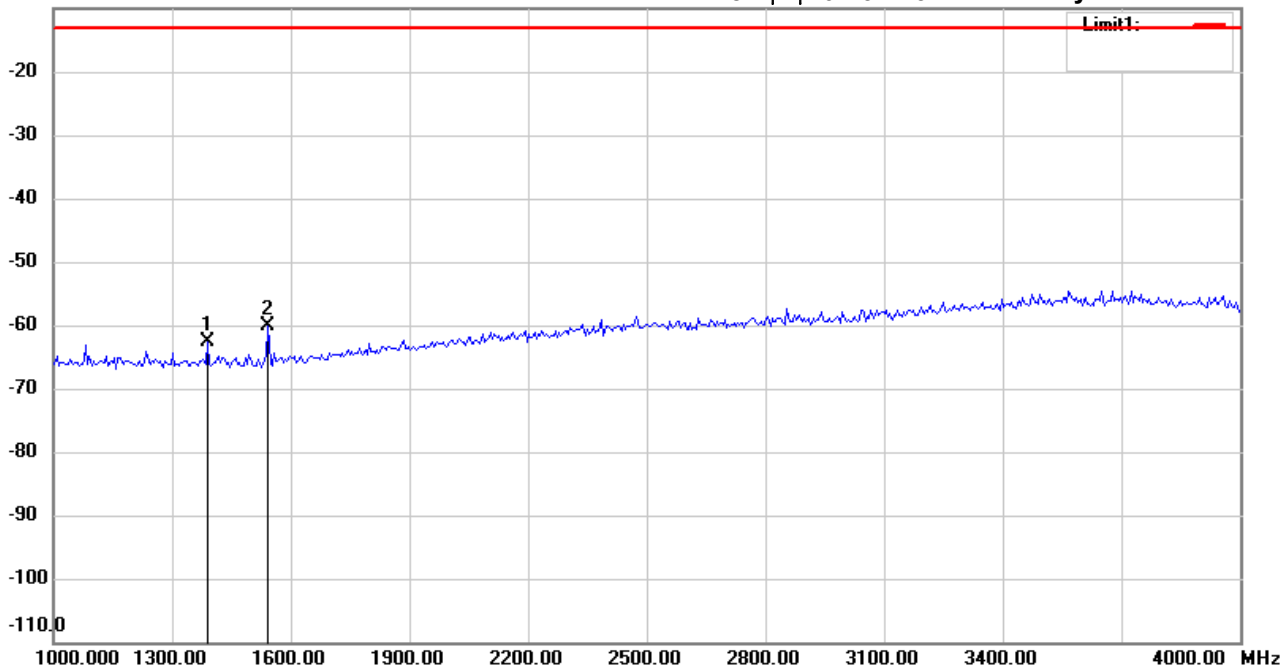

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : TX 154.6MHz

Note :

Polarization: **Horizontal**

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1389.423	-60.54	peak	-2.19	-62.73	-13.00	150	220	-49.73	
*	1543.269	-58.32	peak	-1.91	-60.23	-13.00	150	75	-47.23	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 3

Data : #2


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 01:35:36

Humidity: 60 %

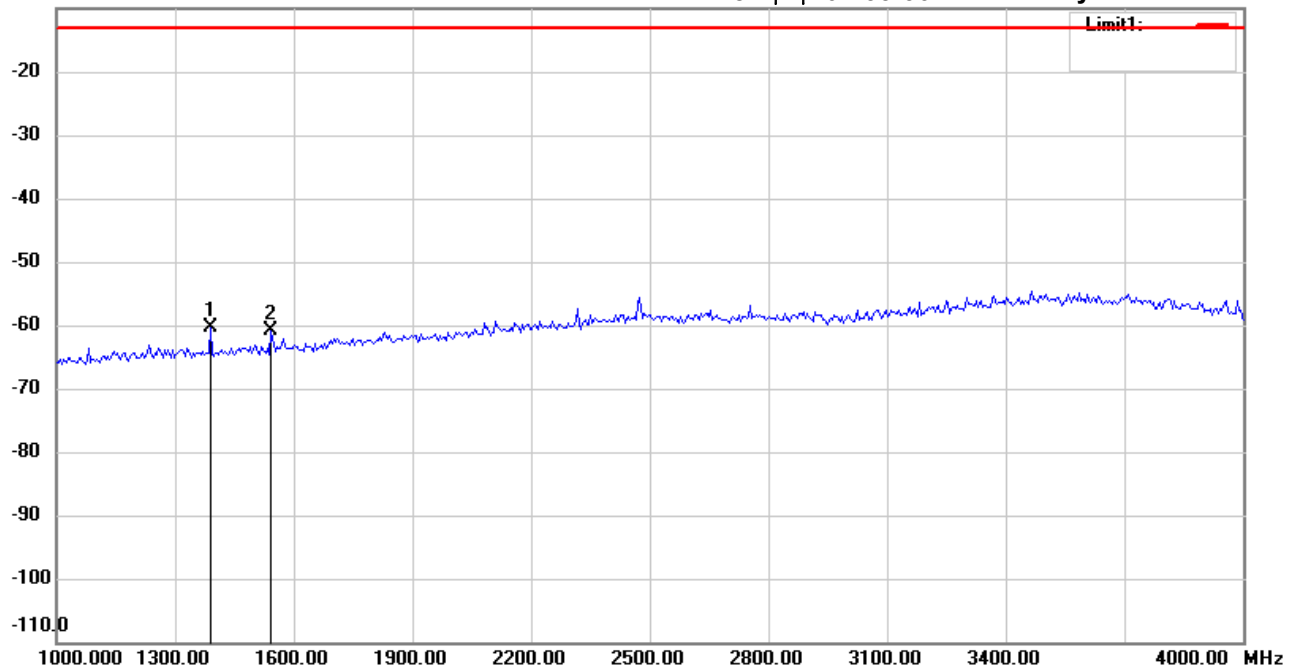

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : TX 154.6MHz

Note :

Polarization: **Vertical**

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	1389.423	-59.70	peak	-0.58	-60.28	-13.00	150	330	-47.28	
	1543.269	-60.93	peak	-0.02	-60.95	-13.00	150	140	-47.95	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
 Tel: +886-2-6606-8877
 Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File :1

Data :#1


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 02:45:31

Humidity: 60 %

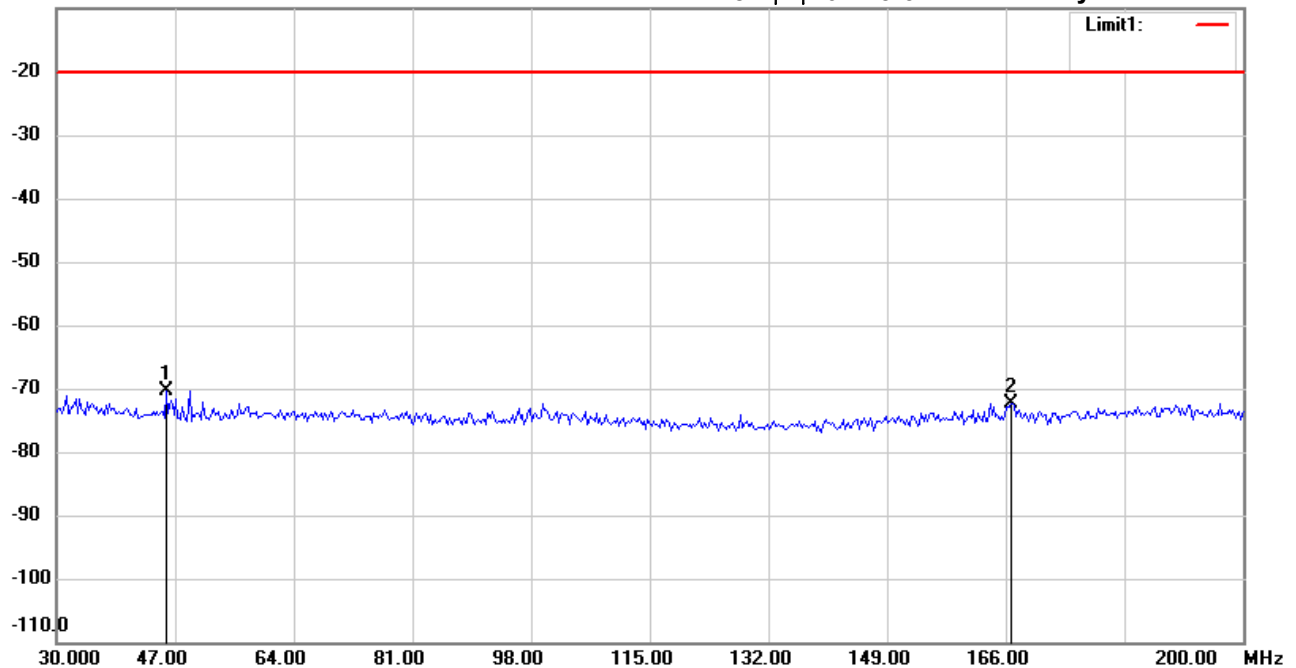

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

Polarization: *Horizontal*

EUT : W6M21912-19556

Power : 3.6 Vd.c.

M/N:

Distance: 3m

Test Mode : RX 151.82MHz

Note :

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	45.8012	-92.00	peak	21.57	-70.43	-20.00	150	120	-50.43	
	166.7628	-93.73	peak	21.41	-72.32	-20.00	150	330	-52.32	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File :1

Data :#2


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 02:47:03

Humidity: 60 %

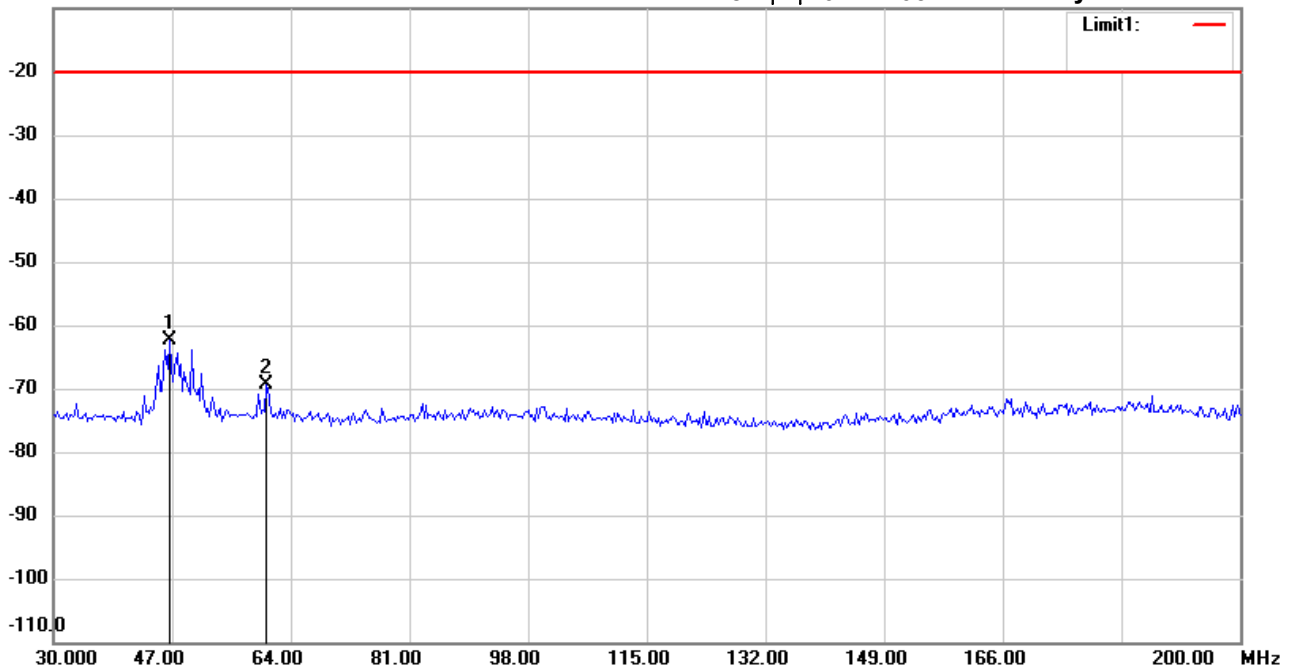

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : RX 151.82MHz

Note :

Polarization: **Vertical**

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	46.6186	-83.60	peak	21.13	-62.47	-20.00	150	220	-42.47	
	60.5128	-90.91	peak	21.57	-69.34	-20.00	150	130	-49.34	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 2

Data : #1


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 07:55:52

Humidity: 60 %

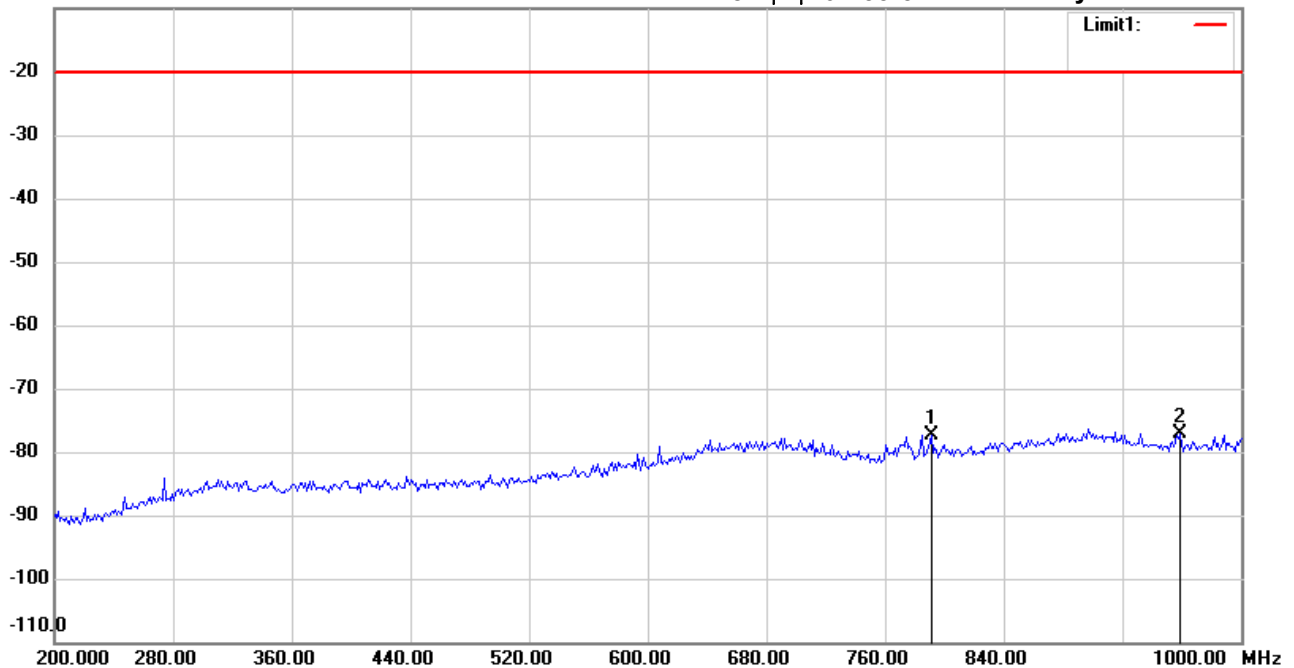

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : RX 151.82MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	791.0256	-73.16	peak	-4.25	-77.41	-20.00	150	245	-57.41	
*	958.9744	-74.19	peak	-3.02	-77.21	-20.00	150	160	-57.21	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 2

Data : #2


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 07:57:18

Humidity: 60 %

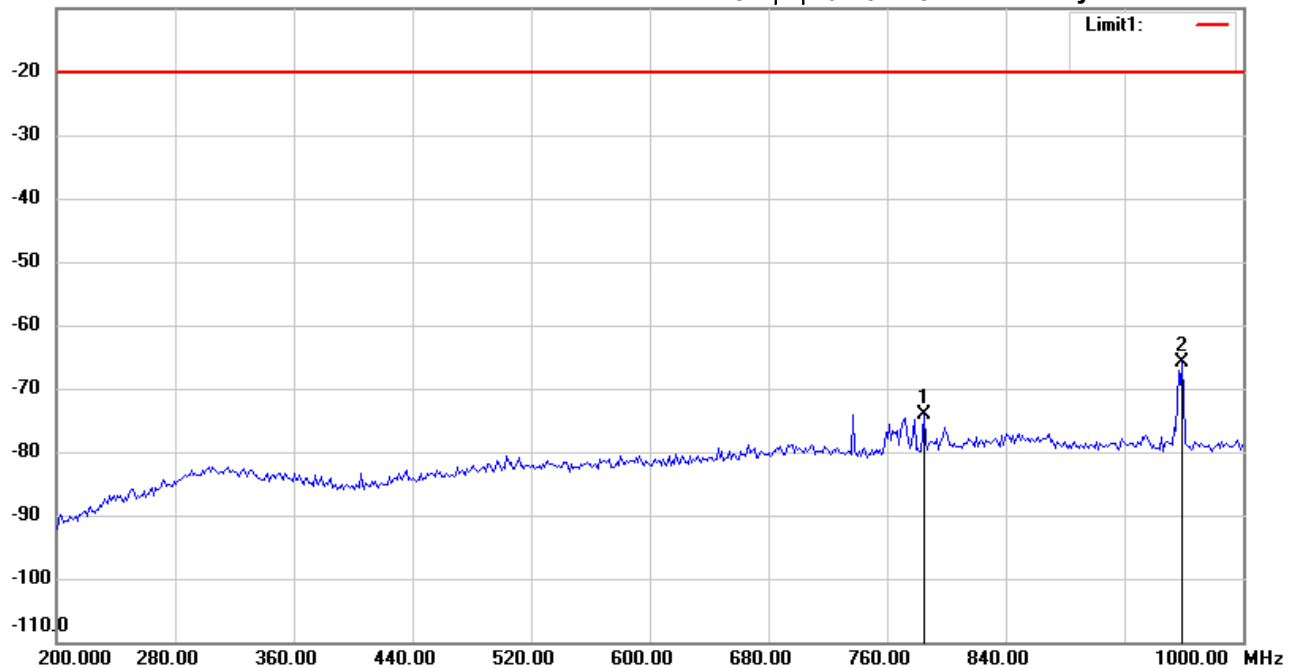

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : RX 151.82MHz

Note :

Polarization: **Vertical**

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	784.6154	-71.13	peak	-3.00	-74.13	-20.00	150	130	-54.13	
*	958.9744	-62.92	peak	-2.89	-65.81	-20.00	150	220	-45.81	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 3

Data : #1


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 09:15:18

Humidity: 60 %

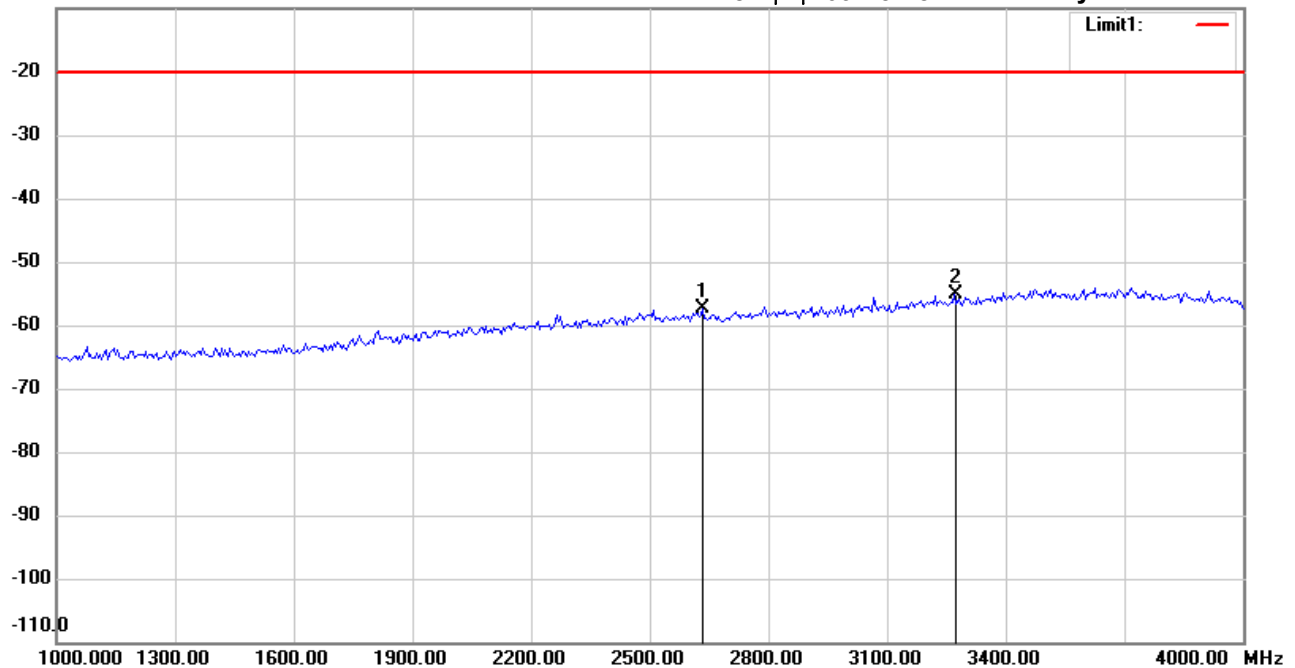

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : RX 151.82MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2634.615	-61.42	peak	4.14	-57.28	-20.00	150	245	-37.28	
*	3269.231	-61.45	peak	6.26	-55.19	-20.00	150	160	-35.19	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 3

Data : #2


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 09:16:37

Humidity: 60 %

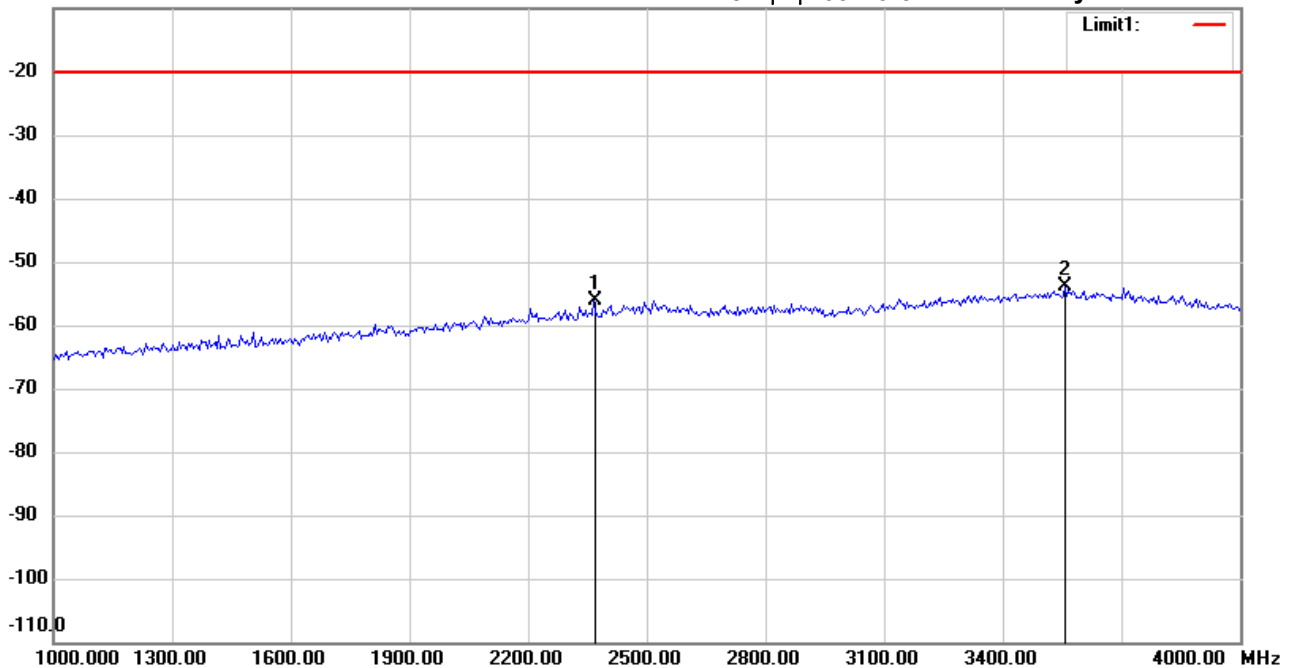

Site : Chamber

Condition : FCC_part 95 RE(-20dBm)

EUT : W6M21912-19556

M/N:

Test Mode : RX 151.82MHz

Note :

Polarization: **Vertical**

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2365.385	-60.74	peak	4.59	-56.15	-20.00	150	145	-36.15	
*	3557.692	-61.47	peak	7.64	-53.83	-20.00	150	110	-33.83	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 1

Data : #1


Date: 2020/6/24

Temperature: 24 °C

-10.0 dBm

Time: 下午 02:48:55

Humidity: 60 %

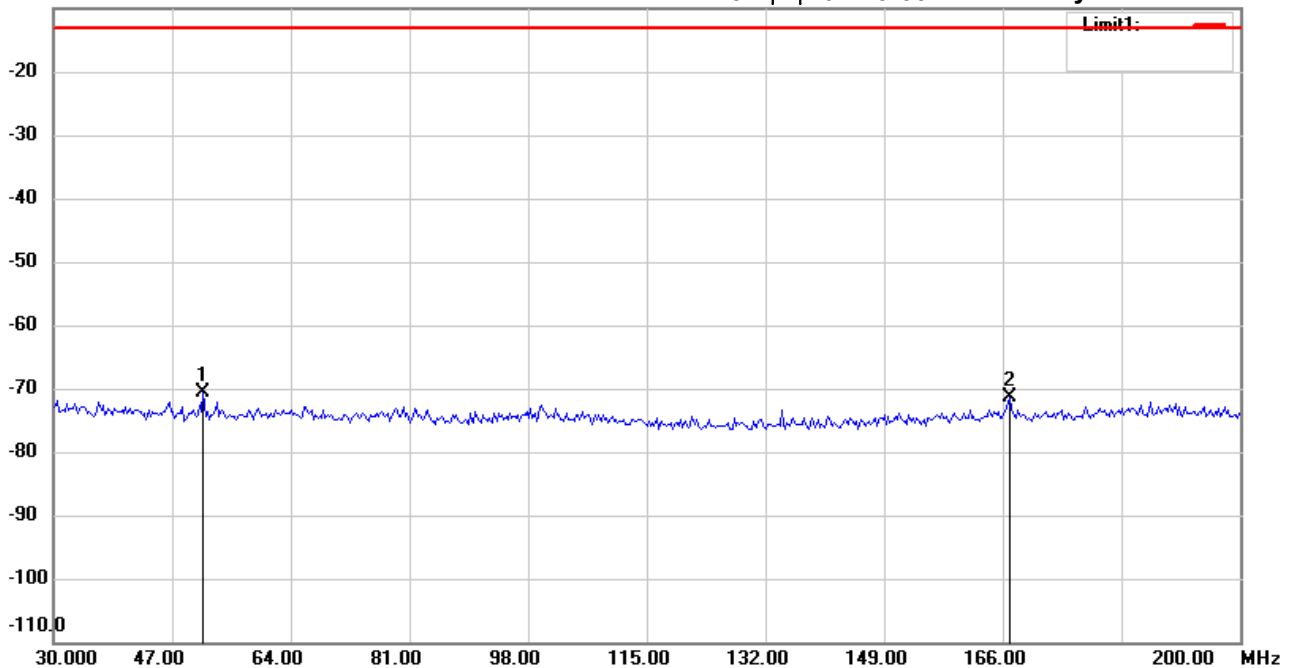

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : RX 154.6MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	51.5224	-92.05	peak	21.39	-70.66	-13.00	150	110	-57.66	
	167.0353	-92.76	peak	21.42	-71.34	-13.00	150	145	-58.34	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File :1

Data :#2


Date: 2020/6/24

Temperature:24 °C

-10.0 dBm

Time: 下午 02:50:45

Humidity:60 %

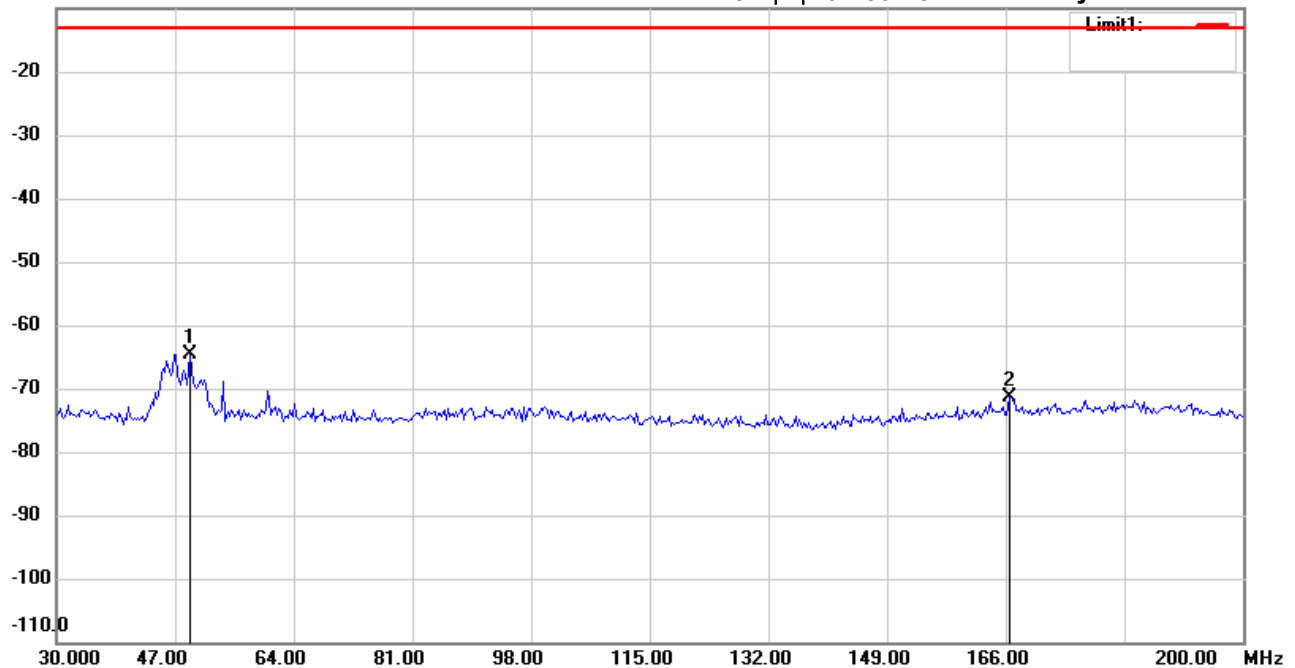

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : RX 154.6MHz

Note :

Polarization: **Vertical**

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	49.0705	-85.90	peak	21.26	-64.64	-13.00	150	245	-51.64	
	166.4904	-93.47	peak	22.16	-71.31	-13.00	150	110	-58.31	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 2

Data : #1


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 07:59:52

Humidity: 60 %

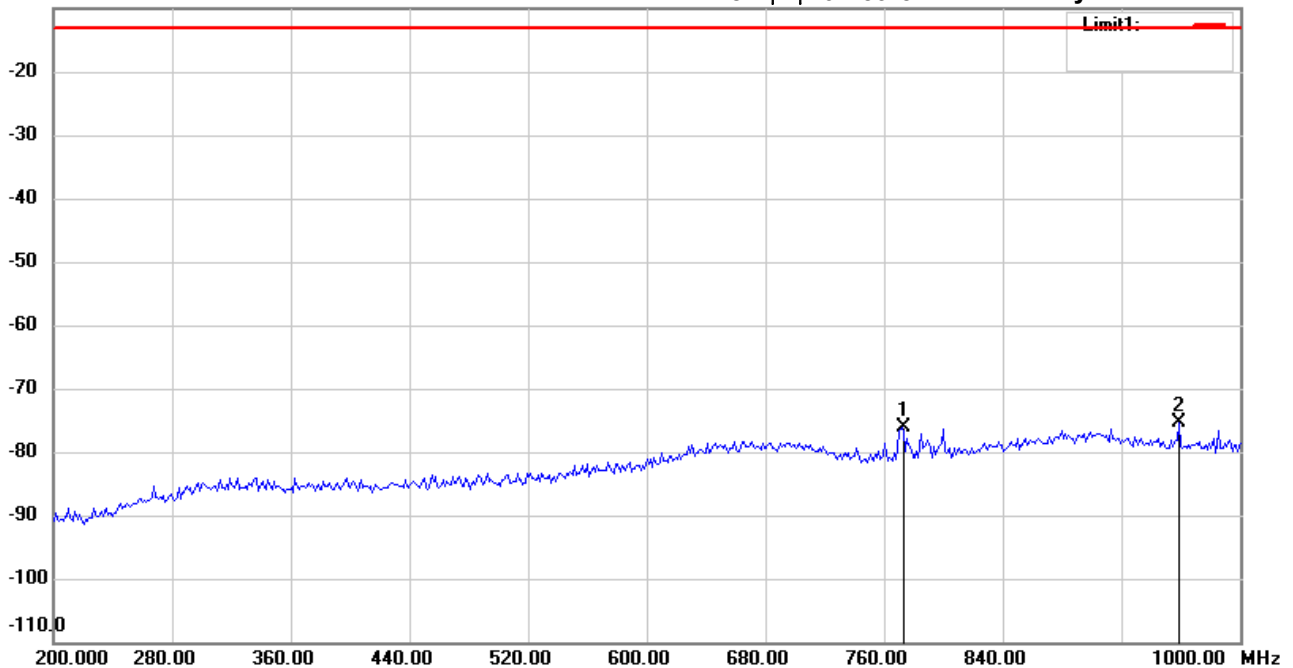

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : RX 154.6MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	771.7950	-71.63	peak	-4.45	-76.08	-13.00	150	305	-63.08	
*	958.9744	-72.47	peak	-3.02	-75.49	-13.00	150	160	-62.49	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 2

Data : #2


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 08:01:40

Humidity: 60 %

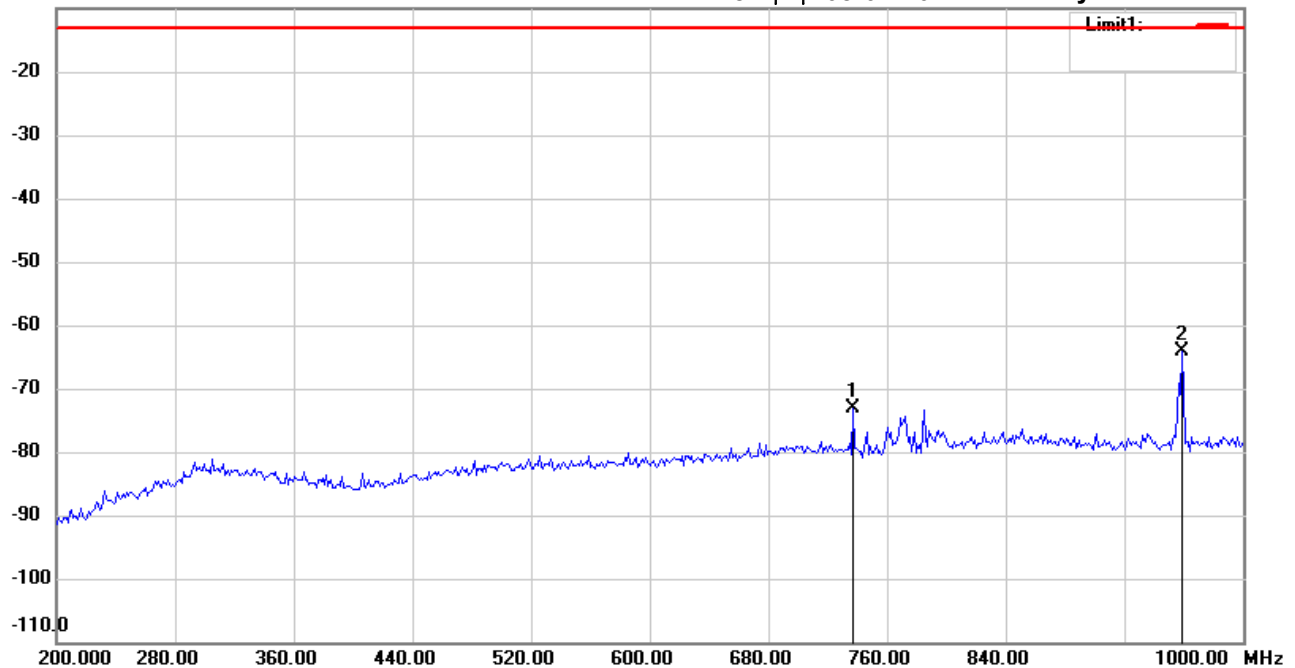

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : RX 154.6MHz

Note :

Polarization: **Vertical**

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	737.1795	-69.51	peak	-3.52	-73.03	-13.00	150	110	-60.03	
*	958.9744	-61.18	peak	-2.89	-64.07	-13.00	150	245	-51.07	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 3

Data : #1


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 09:18:11

Humidity: 60 %

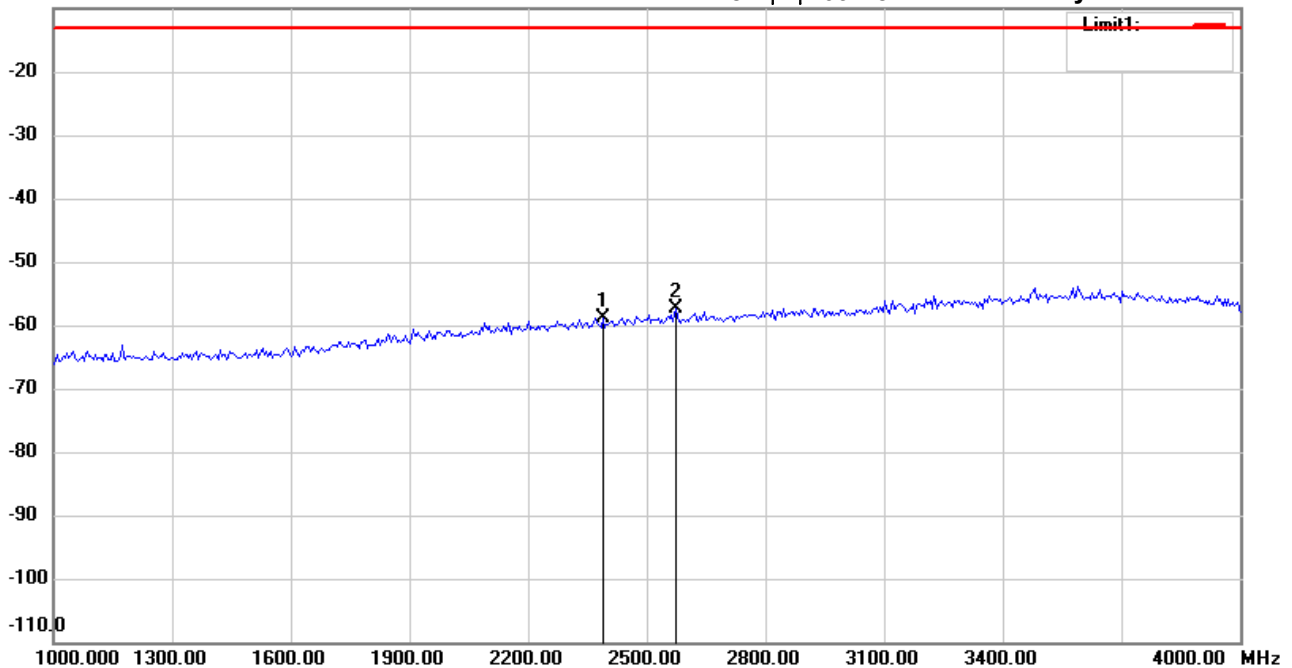

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : RX 154.6MHz

Note :

Polarization: *Horizontal*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2389.423	-61.98	peak	3.21	-58.77	-13.00	150	220	-45.77	
*	2572.115	-61.39	peak	3.98	-57.41	-13.00	150	130	-44.41	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Kent

File : 3

Data : #2


Date: 2020/6/23

Temperature: 24 °C

-10.0 dBm

Time: 下午 09:21:09

Humidity: 60 %

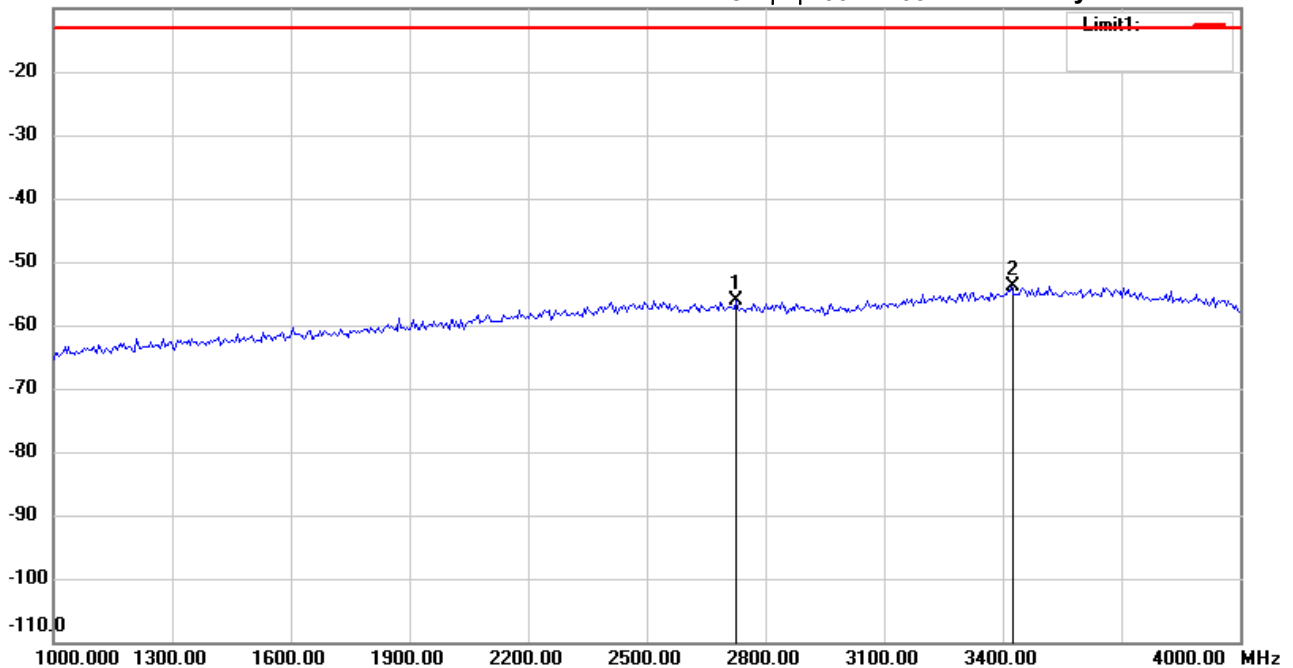

Site : Chamber

Condition : FCC_part 95 RE

EUT : W6M21912-19556

M/N:

Test Mode : RX 154.6MHz

Note :

Polarization: *Vertical*

Power : 3.6 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBm)	Detector	Corr. factor (dB)	Result (dBm)	Limit (dBm)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2725.961	-61.47	peak	5.30	-56.17	-13.00	150	130	-43.17	
*	3423.077	-61.21	peak	7.30	-53.91	-13.00	150	220	-40.91	

*:Maximum data x:Over limit !:over margin