

Regulatory WLAN Antenna Information (Template)

English Language Required for Regulatory Review / Approval

Platform information						
Brand	Tester's name	Tester's signature	Test Date	platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)
Hong-Bo	Eason Tseng	<i>Eason Tseng</i>	2020/12/16	NA	WiFi PIFA	
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.						
Antenna information						
Vendor		Type	Antenna Part number (Main)			
Hong-Bo		PIFA	260-25083			
manufacture name			manufacture address			
Changshu HongBo Telecommunication Technology Co., Ltd.			No. 8, Liuzhou Road, Lushan Industrial Park, Xinxing Development Zone, Changshu City, Jiangsu Province, China			
Peak gain w/ cable loss (dBi)*						
	5.9GHz 5850-5925MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	5.09	5.14	5.09	5.16	5.12	

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list
3. Setup photo

Section 1. Antenna Assembly Specifications

Section 2. Radiation characteristics of antenna loaded in Host Platform

4. Antenna information used for conformity with limits

Regulatory WLAN Antenna Information

Regulatory WLAN Antenna Information

Regulatory WLAN Antenna Information

Regulatory WLAN Antenna Information

Regulatory WLAN Antenna Information

Regulatory WLAN Antenna Information

Regulatory WLAN Antenna Information

Regulatory WLAN Antenna Information

Regulatory WLAN Antenna Information


Regulatory WLAN Antenna Information



b. Equipment list

Name	Manufacture	Type/Model	Serial Number	Cal. Date	Cal. Due Date
ENA Series Network Analyze	Keysight	E5071C	MY46108594	2021/8/3	2023/8/3
RF Switch	Keysight	3499A	MY4200955	NCR	NCR
Multi-Axis Positioner Controller	ETS-Lindgren	2090	N/A	NCR	NCR
Medium-Duty Positioner	ETS-Lindgren	2015	N/A	NCR	NCR
Measurement Horn Antenna	EMCO	Aug-64	86722	NCR	NCR
Measurement software	ETS-Lindgren	EM-Quest	1195	NCR	NCR

3. Setup photo

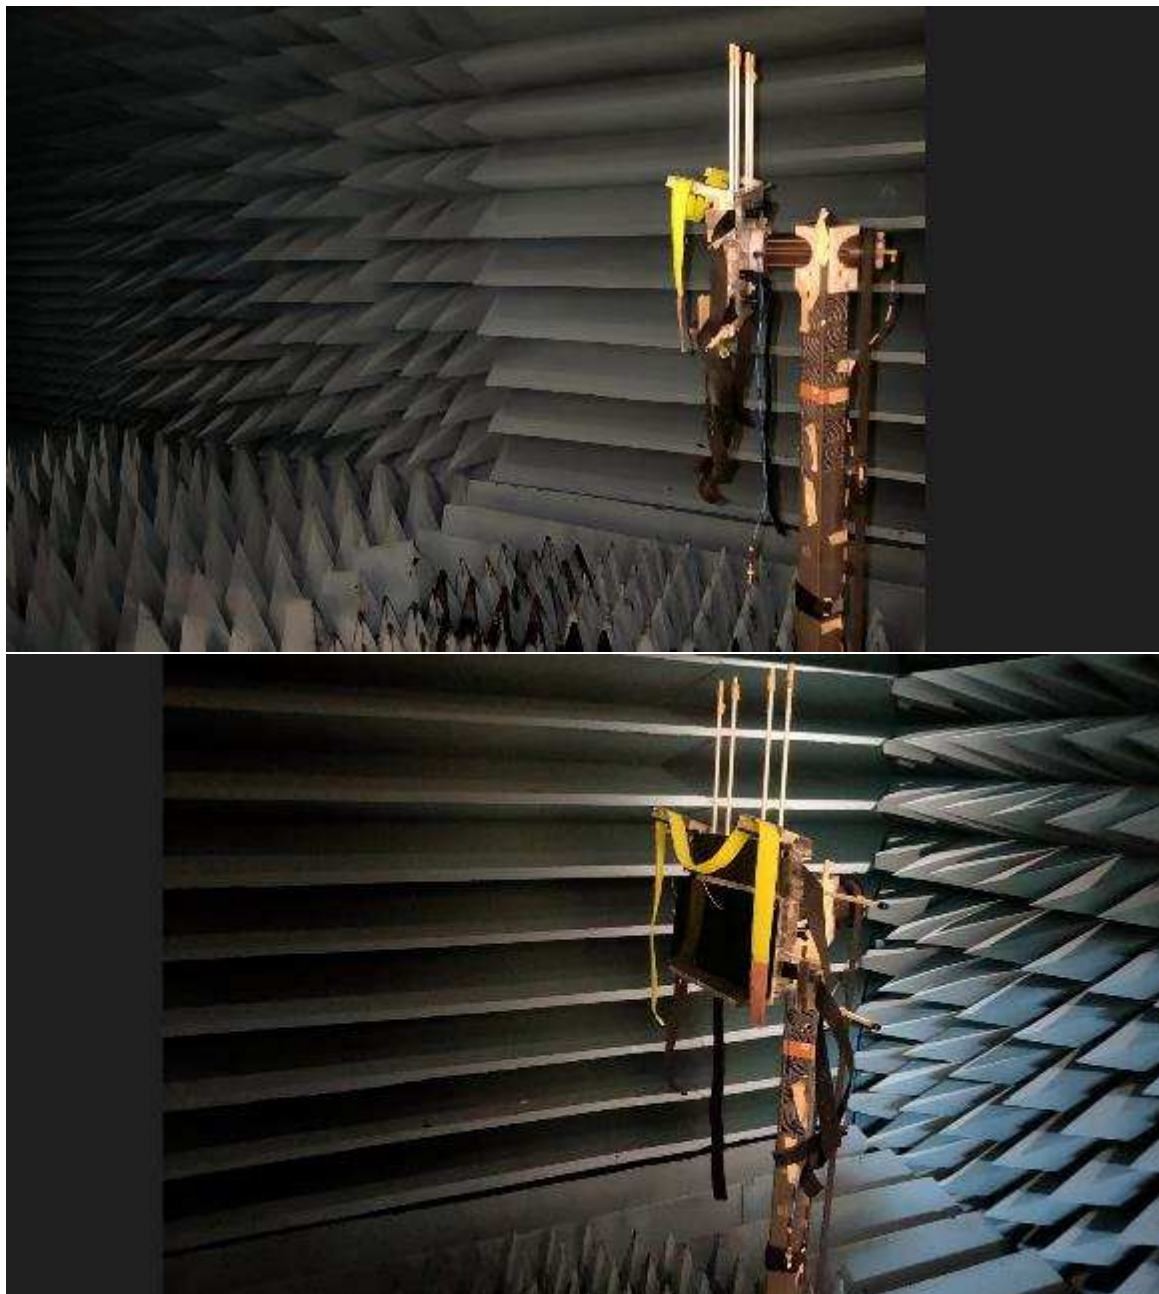

Antenna Information

Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
260-25083	Hong-Bo	PIFA	50 ohm Coaxial length: 300mm diameter: 1.13LLS Connector type: MHF4L MHF-B13-N-01	5850-5925	5.09	6.38	2.5	1.29
				5925-6425	5.14	6.49	2.5	1.35
				6425-6525	5.09	6.27	2.5	1.38
				6525-6875	5.16	6.61	2.5	1.45
				6875-7125	5.12	6.62	2.5	1.50

Note: The individual antenna gain is by measurement as indicated in above table. For module transmitter supports MIMO and use same antenna at multiple antenna ports. The direction gain values shall follow section FCC KDB 662911 D01.

- 3D Antenna Peak Gain required being test in system basis.


Frequency	Peak Gain	Theta angle	Phi angle	Frequency	Peak Gain	Theta angle	Pi angle
MHz	(dBi)	(°)	(°)	MHz	(dBi)	(°)	(°)
5850	5.09	120	180	6525	5.08	120	180
5925	5.04	120	180	6645	5.16	120	180
6085	5.03	120	180	6795	5.09	120	180
6245	5.14	120	180	6875	5.12	120	180
6405	5.08	120	180	6975	5.09	75	0
6425	5.09	120	180	7095	5.07	135	165
6465	5.02	120	180	7125	5.07	75	0

Section 2. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 5850-5925 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)	Theta angle (°)	Phi angle (°)
5850-5925	5.09	120	180

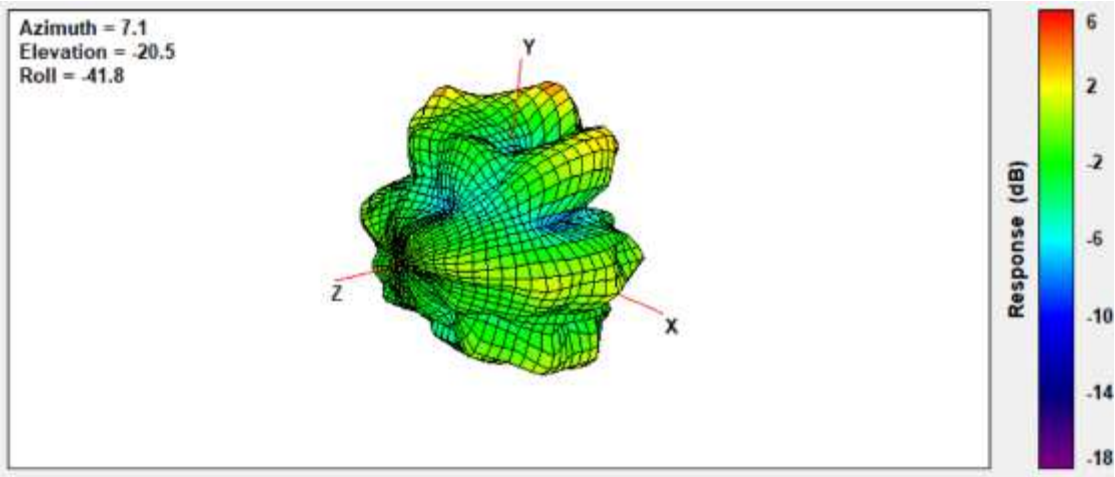


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)	Theta angle (°)	Phi angle (°)
5925-6425	5.14	120	180

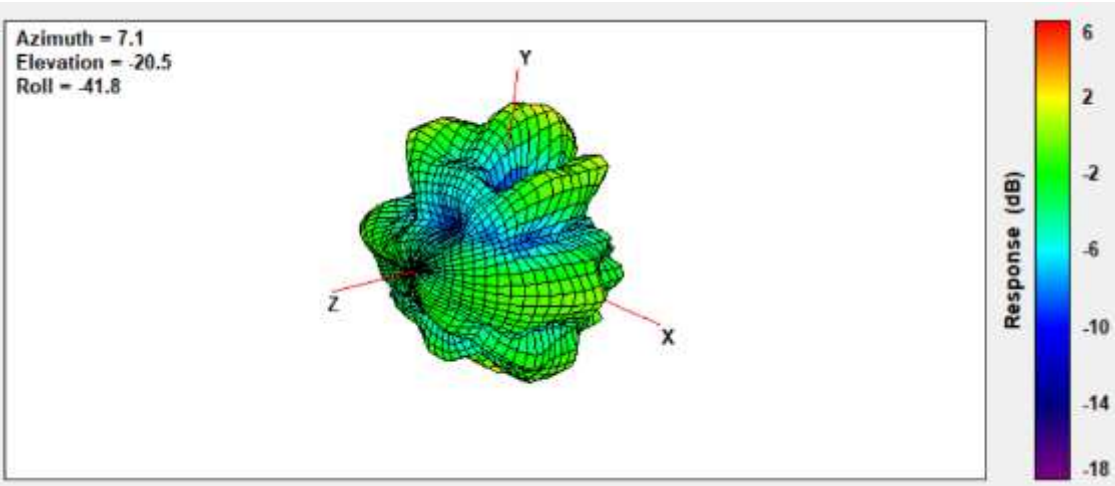


Max Antenna 3D Radiation Pattern 6425-6525MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)	Theta angle (°)	Phi angle (°)
6425-6525	5.09	120	180

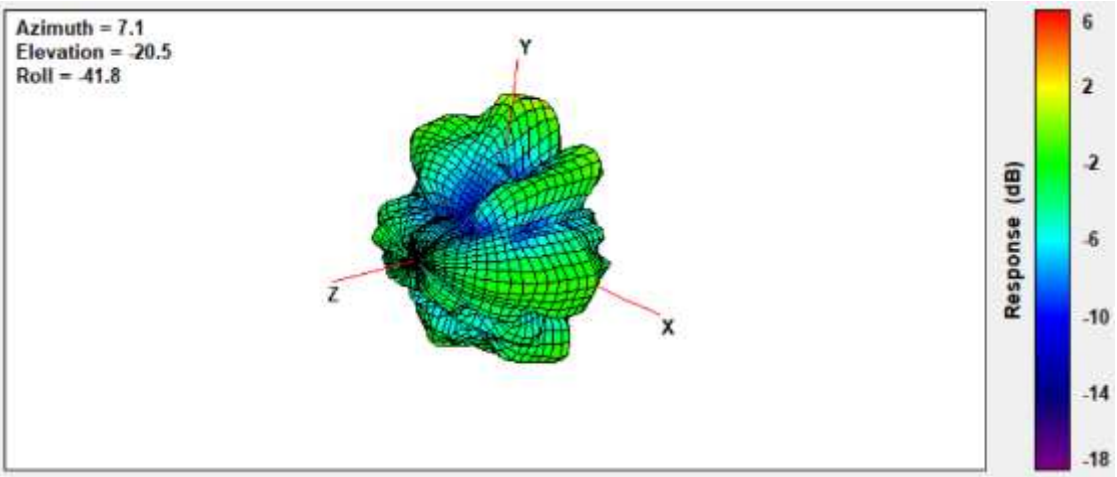


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)	Theta angle (°)	Phi angle (°)
6525-6875	5.16	120	180

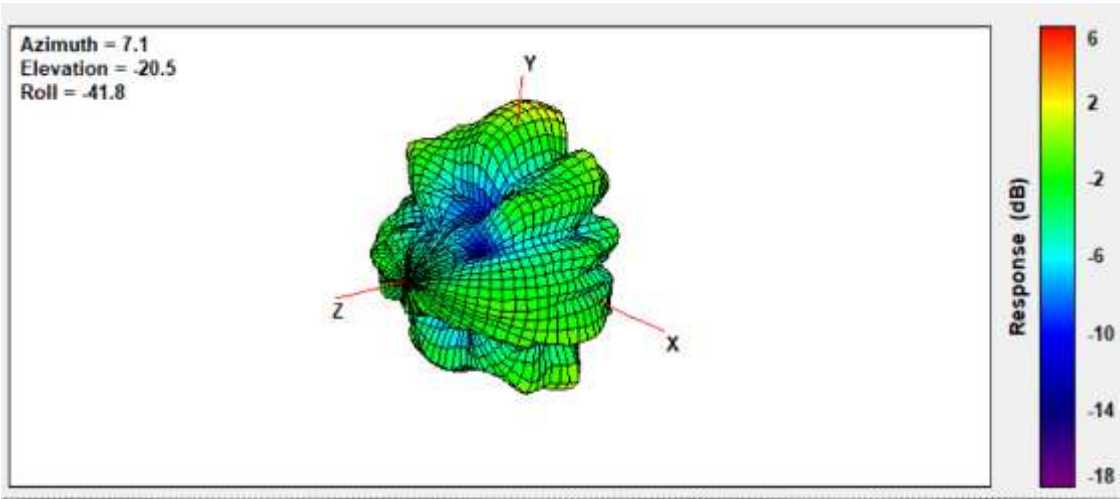

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)	Theta angle (°)	Phi angle (°)
6875-7125	5.12	120	180

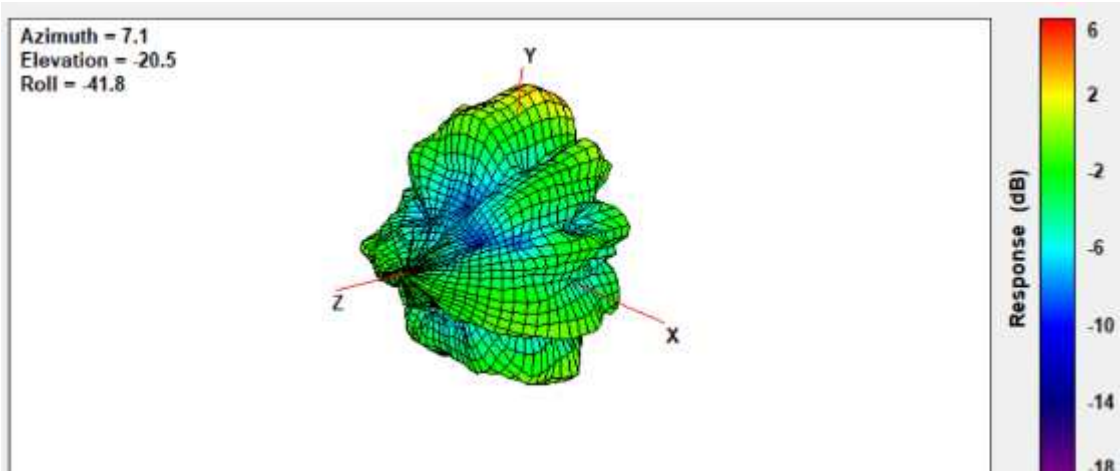

4. Antenna information used for conformity with limits

This is a WIFI/BT typical antenna for modular manufacture regulatory testing purpose. The appliable limit is subjected to modular transmitter design/specification (i.e., SISO or MIMO etc.) and FCC Part 15 regulation. Detail of conformity limit to be described in module FCC test reports.