



Tx. Spurious 802.11ax(HE20) 106T 2437MHz Ref




Tx. Spurious 802.11ax(HE20) 106T 2437MHz Emission

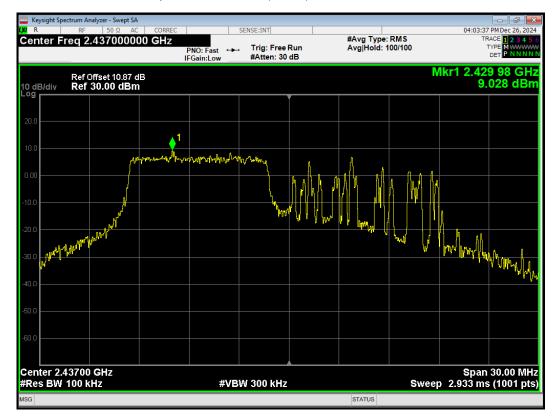


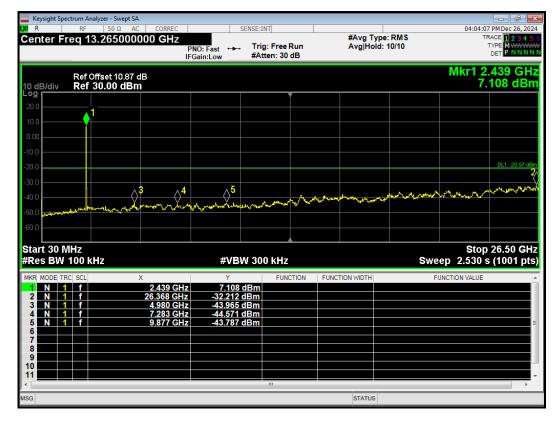

Tx. Spurious 802.11ax(HE20) 106T 2462MHz Ref

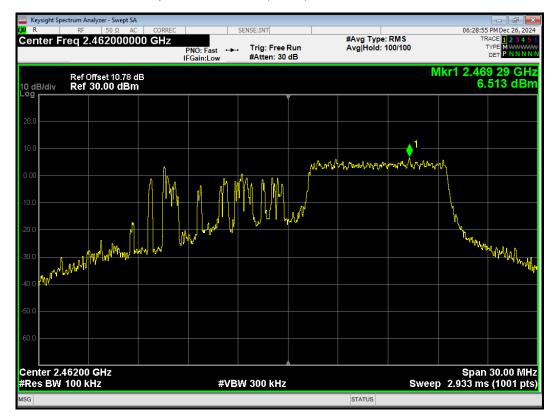


Tx. Spurious 802.11ax(HE20) 106T 2462MHz Emission

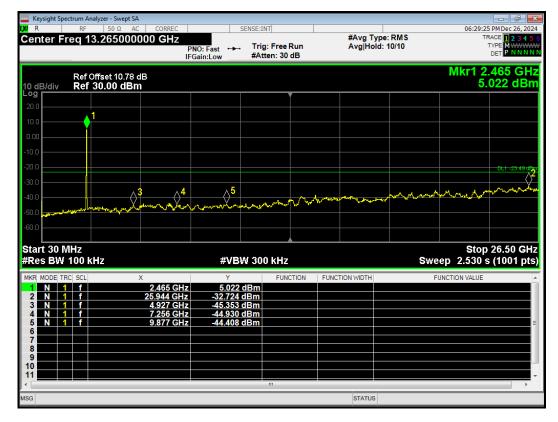




Tx. Spurious 802.11ax(HE20) 242T 2412MHz Ref

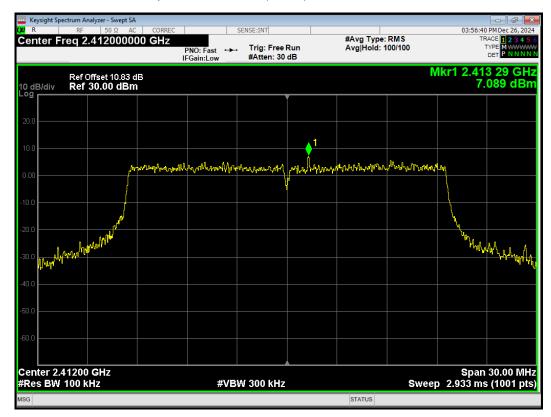


Tx. Spurious 802.11ax(HE20) 242T 2412MHz Emission

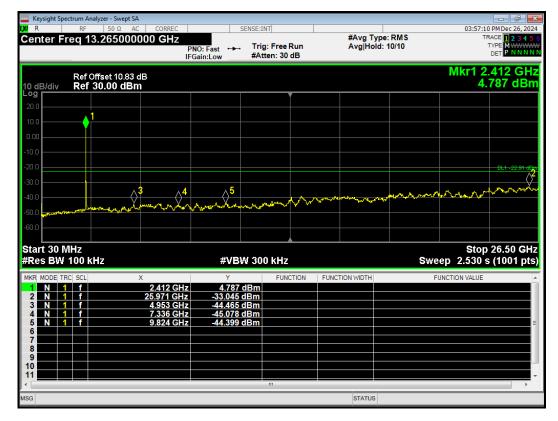




Tx. Spurious 802.11ax(HE20) 242T 2437MHz Ref

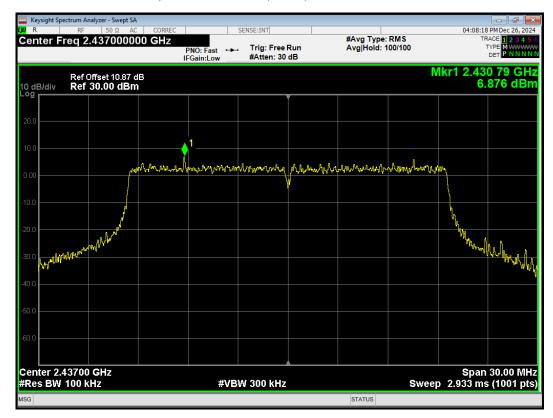


Tx. Spurious 802.11ax(HE20) 242T 2437MHz Emission

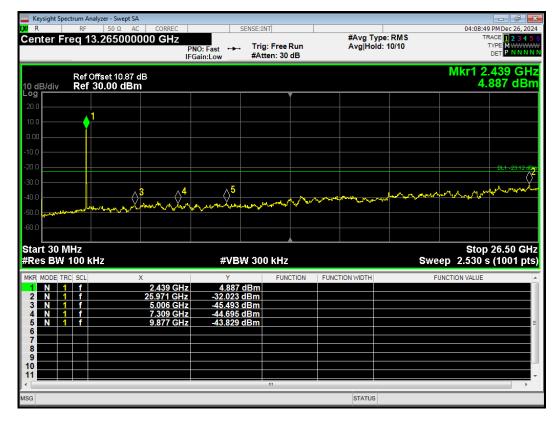




Tx. Spurious 802.11ax(HE20) 242T 2462MHz Ref

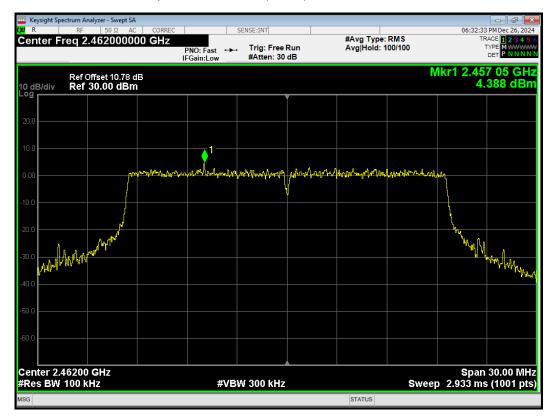


Tx. Spurious 802.11ax(HE20) 242T 2462MHz Emission

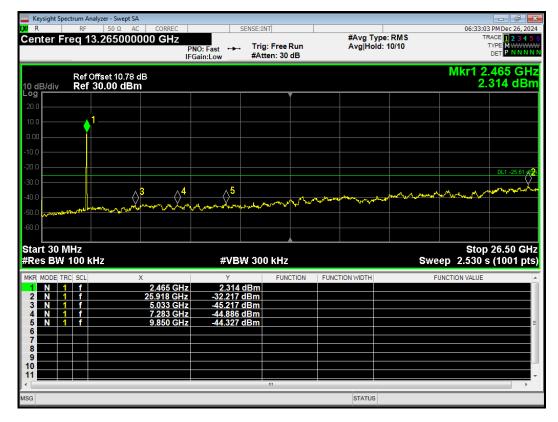




Tx. Spurious 802.11ax(HE20) 26T 2412MHz Ref

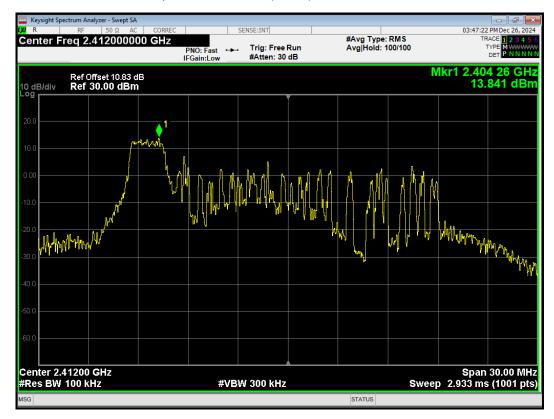

Tx. Spurious 802.11ax(HE20) 26T 2412MHz Emission

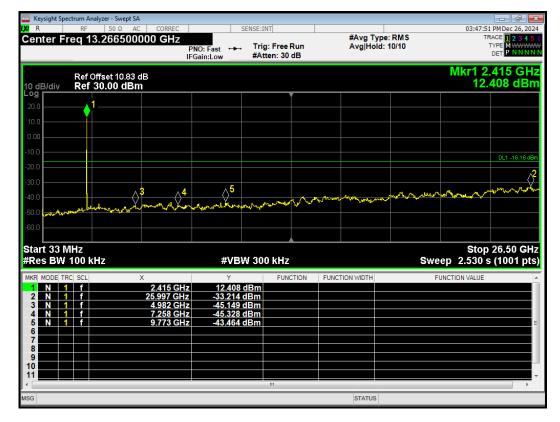




Tx. Spurious 802.11ax(HE20) 26T 2437MHz Ref




Tx. Spurious 802.11ax(HE20) 26T 2437MHz Emission

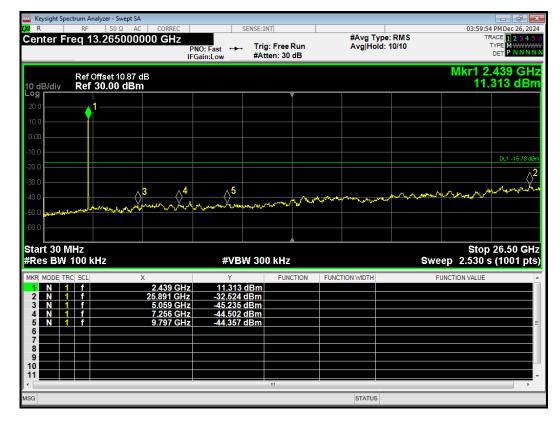




Tx. Spurious 802.11ax(HE20) 26T 2462MHz Ref

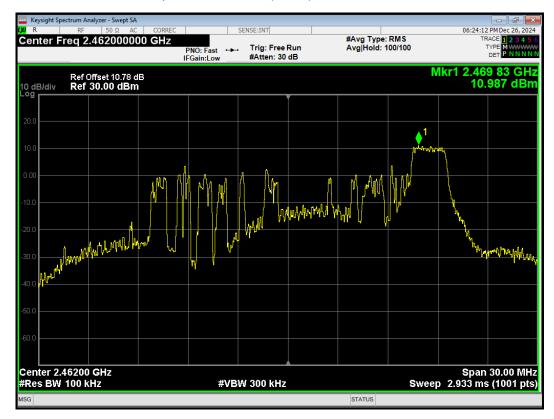


Tx. Spurious 802.11ax(HE20) 26T 2462MHz Emission

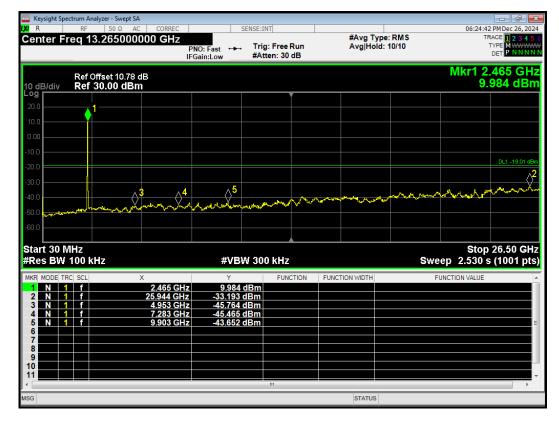




Tx. Spurious 802.11ax(HE20) 52T 2412MHz Ref

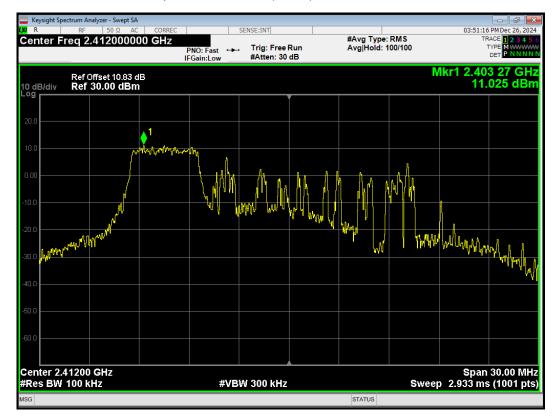


Tx. Spurious 802.11ax(HE20) 52T 2412MHz Emission

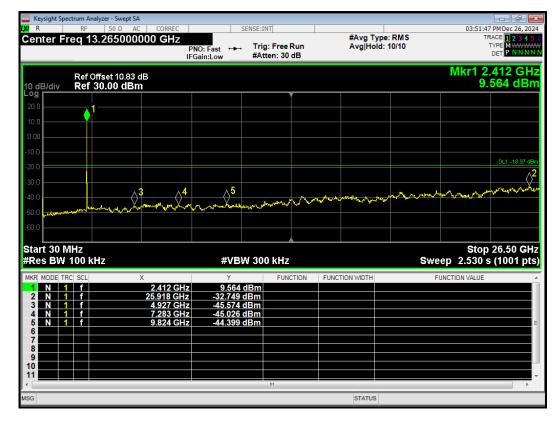




Tx. Spurious 802.11ax(HE20) 52T 2437MHz Ref

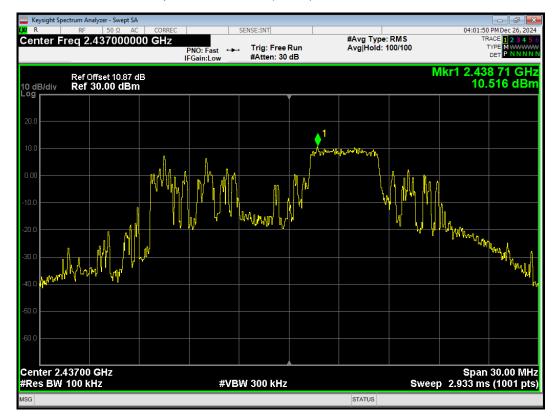


Tx. Spurious 802.11ax(HE20) 52T 2437MHz Emission

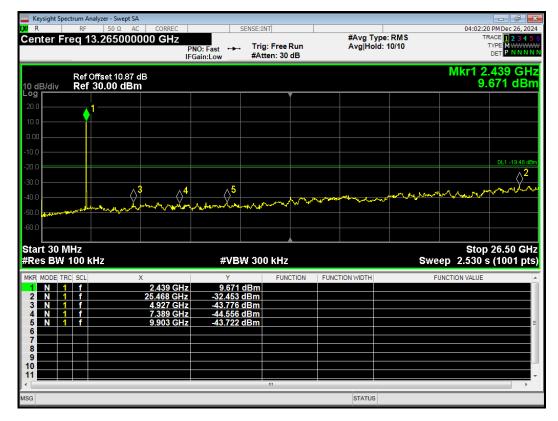




Tx. Spurious 802.11ax(HE20) 52T 2462MHz Ref

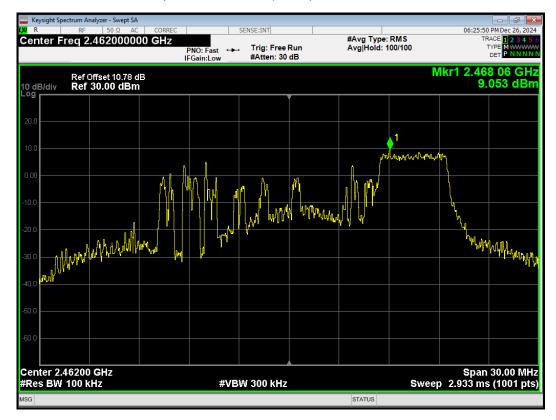


Tx. Spurious 802.11ax(HE20) 52T 2462MHz Emission

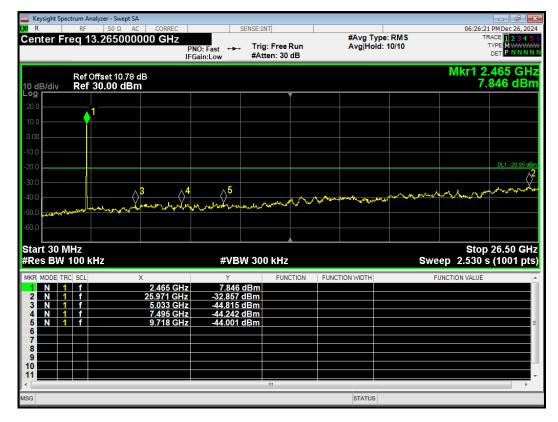




Tx. Spurious 802.11ax(HE40) 26T 2422MHz Ref

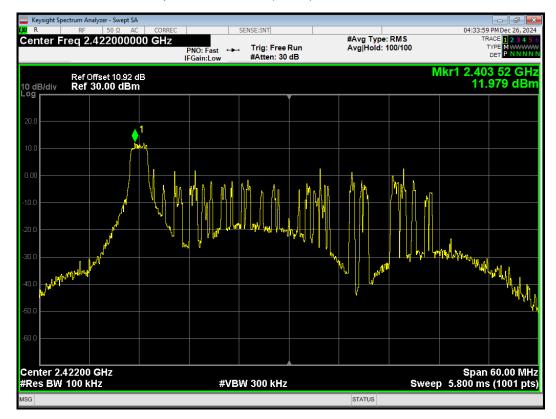


Tx. Spurious 802.11ax(HE40) 26T 2422MHz Emission

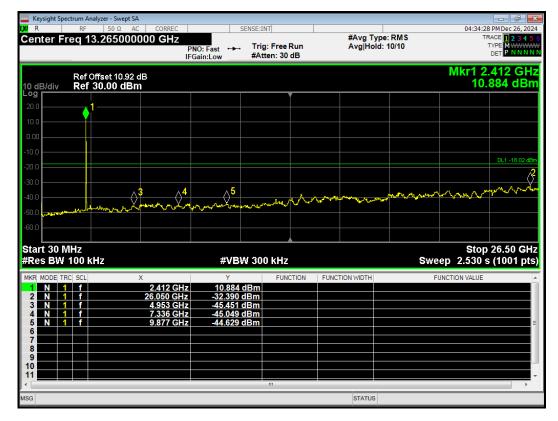




Tx. Spurious 802.11ax(HE40) 26T 2452MHz Ref

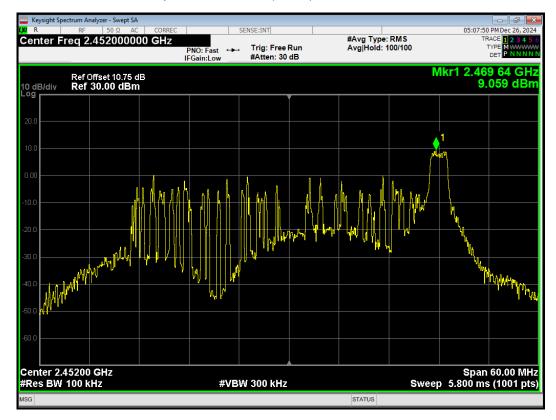


Tx. Spurious 802.11ax(HE40) 26T 2452MHz Emission

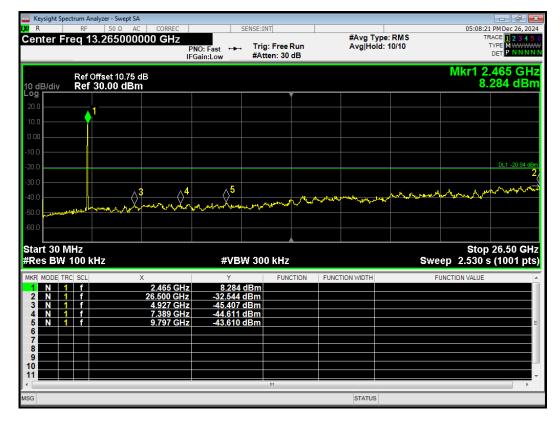




Tx. Spurious 802.11ax(HE40) 484T 2422MHz Ref

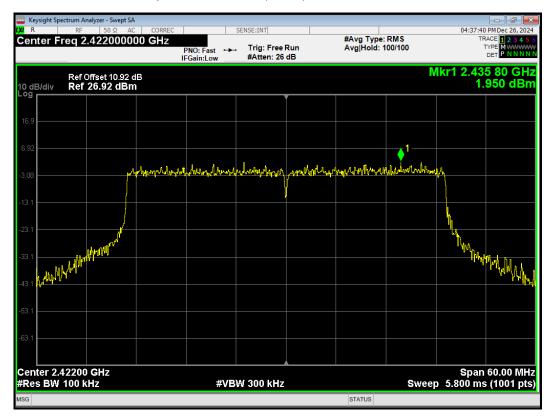

Tx. Spurious 802.11ax(HE40) 484T 2422MHz Emission

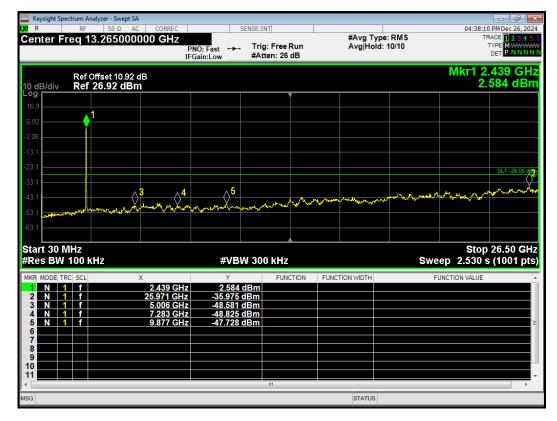

5.6. Unwanted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10. The procedure for peak unwanted emissions measurements above 1000 MHz is as follows: Set the spectrum analyzer in the following: 9kHz~150 kHz RBW=200Hz, VBW=1kHz/ Sweep=AUTO 150 kHz~30MHz RBW=9kHz, VBW=30kHz,/ Sweep=AUTO Below 1GHz RBW=100kHz / VBW=300kHz / Sweep=AUTO a) Peak emission levels are measured by setting the instrument as follows: Above 1GHz PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO b) Average emission levels are measured by setting the instrument as follows: Above 1GHz AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands

are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

💸 eurofins

RF Test Report

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is [10 $\log (1 / D)$], where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.




Test Setup




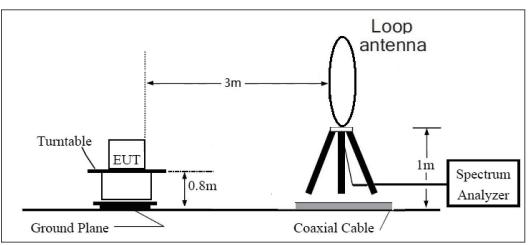



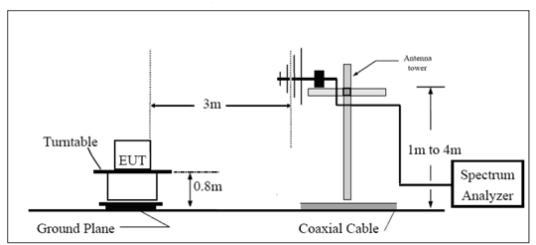

Above 1GHz

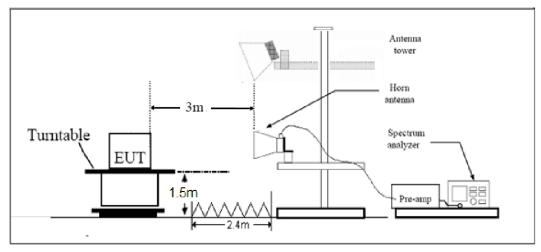

Note: Area side:2.4mX3.6m

🔅 eurofins

RF Test Report

Limits

Rule Part 15.247(d) specifies that "In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))."

Limit in restricted band

Frequency of emission (MHz)	Field strength(µV/m)	Field strength(dBµV/m)		
0.009–0.490	2400/F(kHz)	1		
0.490–1.705	24000/F(kHz)	/		
1.705–30.0	30	/		
30-88	100	40		
88-216	150	43.5		
216-960	200	46		
Above960	500	54		

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit. Peak Limit=74 dBµV/m

Average Limit=54 dBµV/m

🛟 eurofins

RF Test Report

Report No.: R2411A1739-R1

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96.

Frequency	Uncertainty				
9kHz-30MHz	3.55 dB				
30MHz-200MHz	4.17 dB				
200MHz-1GHz	4.84 dB				
1-18GHz	4.35 dB				
18-26.5GHz	5.90 dB				
26.5GHz~40GHz	5.92 dB				


🔅 eurofins

RF Test Report

Test Results:


The following graphs display the maximum values of horizontal and vertical by software. Blue trace uses the peak detection, Green trace uses the average detection.

A symbol (^{dB V/}) in the test plot below means (dBµV/m)

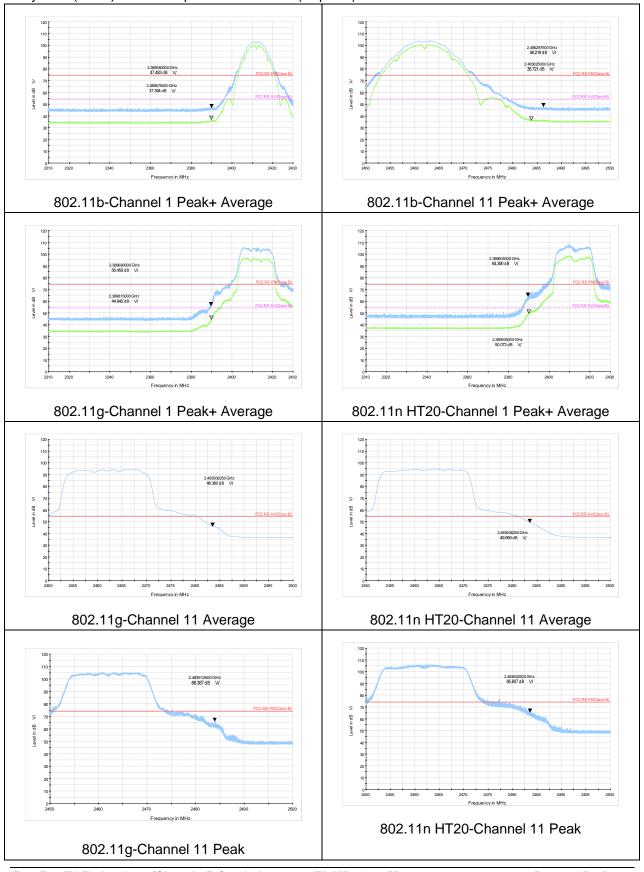


Eurofins TA Technology (Shanghai) Co., Ltd. TA-MB-04-005R This report shall not be reproduced except in full, without the written approval of Eurofins TA Technology (Shanghai) Co., Ltd.




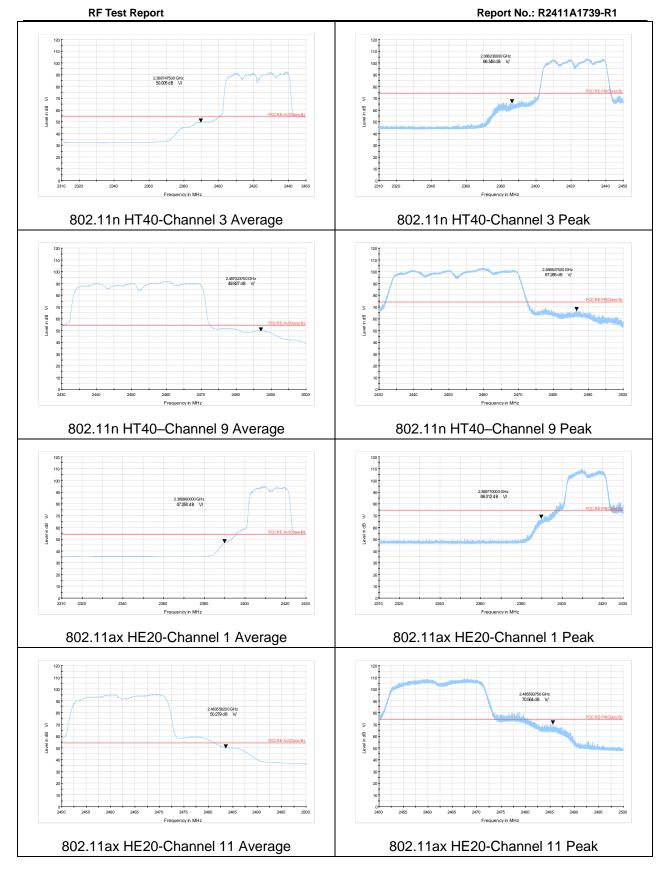



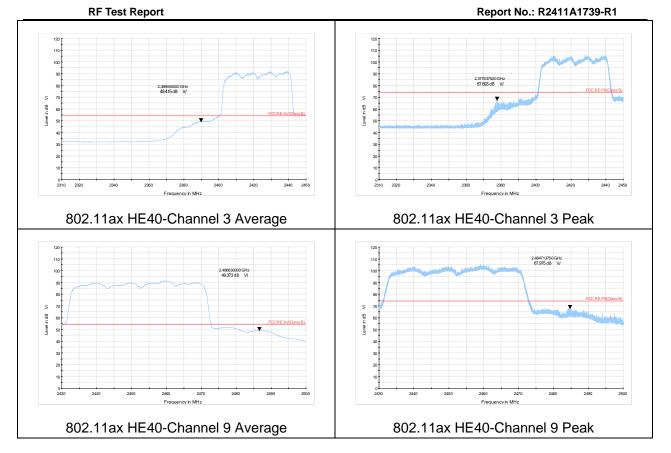


TB Mode

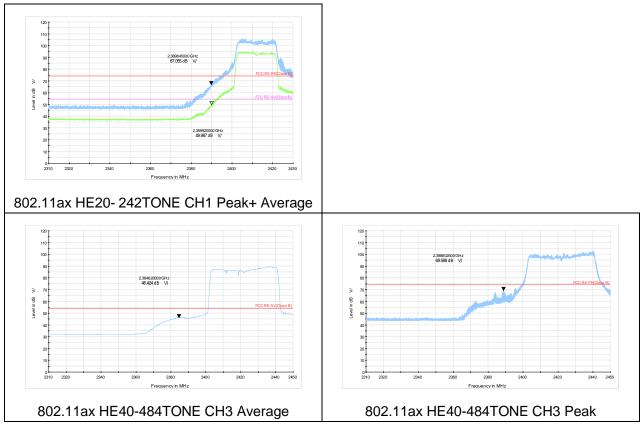



Report No.: R2411A1739-R1

After the pretest, Bluetooth LE (1M) was selected as the worst Mode for Bluetooth LE.

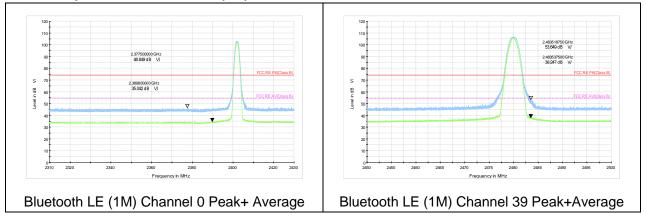



Report No.: R2411A1739-R1

Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection. After the pretest, MIMO was selected as the worst antenna.

Continuous TX mode:

Remark:

- 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
- 2. Margin = Limit Quasi-Peak/ MAX Peak/ Average
- 3. A symbol (^{dB V/}) in the test plot below means (dBµV/m) A symbol (^{dB£gV/}) in the test plot below means (dBµV/m)
- For below 1GHz


 QP Level @Spectrum Overview H
 QP Level @Spectrum Overview V
 QP Level @Final Results
 QP Limit

 For above 1GHz


 PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Spectrum Overview H
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Spectrum Overview V
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit

Wi-Fi 2.4GHz

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels. The test data of the worst-case condition was recorded in this report.

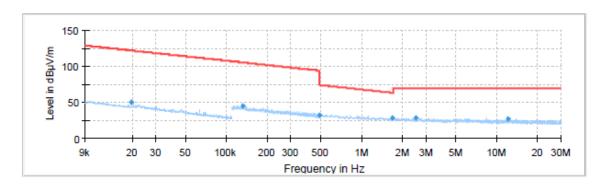

Radiates Emission from 9kHz to 30MHz

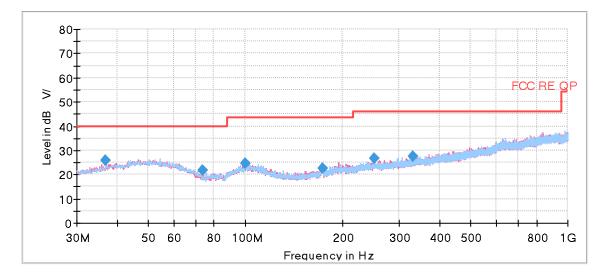

🛟 eurofins

RF Test Report

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
36.752500	25.99	40.00	14.01	100.0	V	181.0	18.8
73.575000	21.91	40.00	18.09	100.0	V	183.0	15.6
100.041250	24.81	43.50	18.69	109.0	V	338.0	19.1
173.635000	22.39	43.50	21.11	184.0	Н	83.0	19.8
250.638750	26.59	46.00	19.41	185.0	V	83.0	20.6
330.008750	27.66	46.00	18.34	225.0	V	140.0	21.8

🛟 eurofins


RF Test Report

Report No.: R2411A1739-R1

802.11b CH1

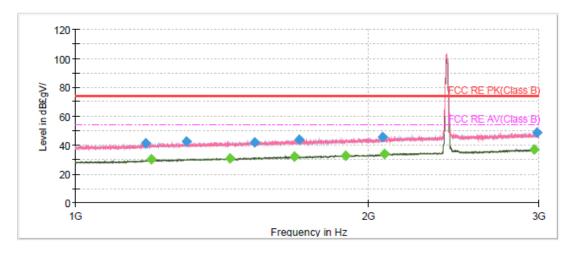

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1180.500000	41.15		74.00	32.86	500.0	200.0	V	279.0	-9.2
1196.500000		29.93	54.00	24.07	500.0	200.0	Η	166.0	-8.9
1301.750000	42.63		74.00	31.37	500.0	200.0	V	187.0	-8.2
1441.500000		30.77	54.00	23.23	500.0	200.0	Η	294.0	-7.3
1527.750000	42.11		74.00	31.89	500.0	200.0	Η	322.0	-6.9
1679.250000		32.17	54.00	21.83	500.0	200.0	Η	192.0	-6.0
1699.750000	43.93		74.00	30.07	500.0	200.0	Η	184.0	-6.0
1898.500000		32.40	54.00	21.60	500.0	200.0	Н	83.0	-5.0
2071.500000	45.32		74.00	28.68	500.0	200.0	Η	133.0	-4.0
2079.750000		33.73	54.00	20.27	500.0	200.0	V	354.0	-3.9
2965.500000		37.15	54.00	16.85	500.0	200.0	Η	108.0	-0.8
2987.500000	48.36		74.00	25.64	500.0	200.0	Η	217.0	-0.7

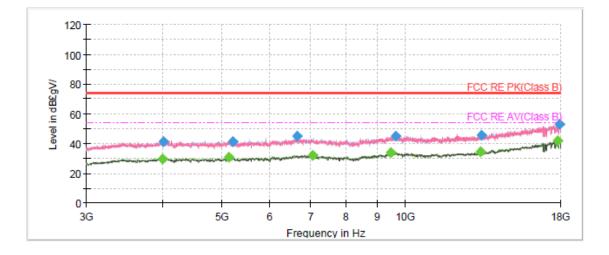


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3997.500000		29.82	54.00	24.18	500.0	200.0	V	245.0	-6.8
4012.500000	41.24		74.00	32.76	500.0	200.0	Η	68.0	-6.8
5137.500000		30.61	54.00	23.39	500.0	200.0	Η	250.0	-5.0
5223.750000	41.44		74.00	32.56	500.0	200.0	Η	68.0	-4.7
6650.625000	44.75		74.00	29.25	500.0	200.0	V	117.0	-3.4
7044.375000		31.90	54.00	22.10	500.0	200.0	V	218.0	-3.1
9481.875000		33.61	54.00	20.39	500.0	200.0	V	305.0	0.0
9661.875000	45.07		74.00	28.93	500.0	200.0	V	225.0	-0.6
13323.750000		34.57	54.00	19.43	500.0	200.0	V	290.0	2.3
13335.000000	45.46		74.00	28.54	500.0	200.0	V	310.0	2.3
17773.125000		41.77	54.00	12.23	500.0	200.0	V	295.0	10.3
17964.375000	52.69		74.00	21.31	500.0	200.0	Η	49.0	10.7

🛟 eurofins

RF Test Report


Report No.: R2411A1739-R1

802.11b CH6

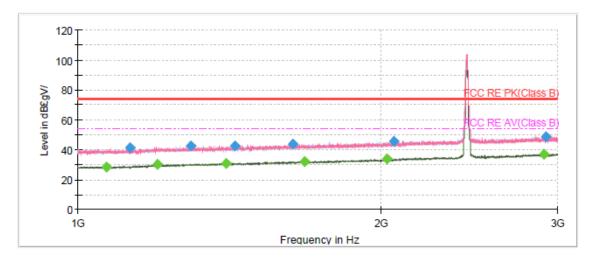

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1066.250000		28.26	54.00	25.74	500.0	200.0	Н	218.0	-10.3
1127.500000	41.19		74.00	32.81	500.0	200.0	V	244.0	-9.9
1199.750000		30.01	54.00	23.99	500.0	200.0	V	244.0	-8.8
1294.250000	42.20		74.00	31.80	500.0	200.0	V	135.0	-8.2
1404.000000		30.92	54.00	23.08	500.0	200.0	Н	218.0	-7.6
1431.250000	42.22		74.00	31.78	500.0	200.0	V	187.0	-7.4
1636.250000	43.91		74.00	30.09	500.0	200.0	Н	334.0	-6.2
1680.500000		32.21	54.00	21.79	500.0	200.0	V	266.0	-6.0
2030.750000		33.67	54.00	20.33	500.0	200.0	V	333.0	-4.3
2063.000000	45.31		74.00	28.69	500.0	200.0	V	355.0	-4.1
2910.000000		37.14	54.00	16.86	500.0	200.0	V	235.0	-1.0
2920.750000	48.74		74.00	25.26	500.0	200.0	Η	165.0	-1.0

Report No.: R2411A1739-R1

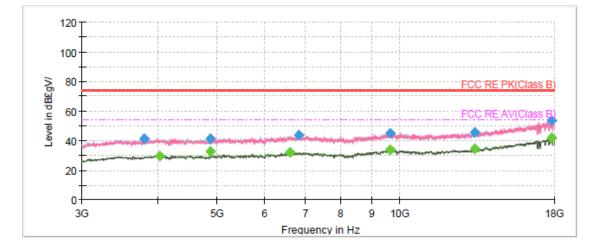


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3802.500000	41.17		74.00	32.83	500.0	200.0	V	127.0	-7.8
4035.000000		29.82	54.00	24.18	500.0	200.0	Н	252.0	-6.7
4873.125000		32.31	54.00	21.69	500.0	200.0	V	88.0	-5.8
4873.125000	41.46		74.00	32.54	500.0	200.0	V	88.0	-5.8
6600.000000		32.17	54.00	21.83	500.0	200.0	Н	247.0	-3.3
6813.750000	43.41		74.00	30.59	500.0	200.0	Н	164.0	-3.2
9665.625000		33.77	54.00	20.23	500.0	200.0	V	309.0	-0.6
9667.500000	45.04		74.00	28.96	500.0	200.0	Н	296.0	-0.6
13312.500000		34.36	54.00	19.64	500.0	200.0	V	309.0	2.3
13321.875000	45.79		74.00	28.21	500.0	200.0	V	270.0	2.3
17773.125000		42.04	54.00	11.96	500.0	200.0		14.0	10.3
17790.000000	53.44		74.00	20.56	500.0	200.0	V	54.0	10.2

🛟 eurofins

RF Test Report

Report No.: R2411A1739-R1


802.11b CH11

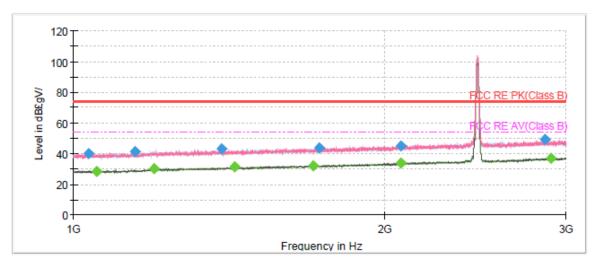

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1035.250000	39.74		74.00	34.26	500.0	200.0	V	274.0	-10.5
1053.000000		28.28	54.00	25.72	500.0	200.0	Н	218.0	-10.5
1147.000000	41.24		74.00	32.76	500.0	200.0	Н	252.0	-9.8
1197.500000		30.01	54.00	23.99	500.0	200.0	V	192.0	-8.9
1392.000000	43.22		74.00	30.78	500.0	200.0	V	183.0	-7.6
1434.000000		31.28	54.00	22.72	500.0	200.0	Н	170.0	-7.4
1705.250000		32.27	54.00	21.73	500.0	200.0	V	296.0	-6.0
1729.000000	43.85		74.00	30.15	500.0	200.0	V	274.0	-5.8
2073.250000		33.90	54.00	20.10	500.0	200.0	V	200.0	-4.0
2076.750000	45.15		74.00	28.85	500.0	200.0	V	261.0	-3.9
2861.500000	49.12		74.00	24.88	500.0	200.0	Н	37.0	-1.1
2899.000000		37.10	54.00	16.90	500.0	200.0	V	253.0	-1.0



Report No.: R2411A1739-R1

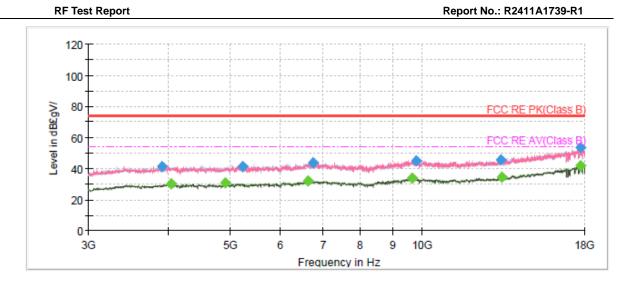


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3916.875000	41.31		74.00	32.69	500.0	200.0	Н	94.0	-7.4
4036.875000		29.98	54.00	24.02	500.0	200.0		131.0	-6.7
4923.750000		31.02	54.00	22.98	500.0	200.0	Н	60.0	-5.3
5227.500000	41.48		74.00	32.52	500.0	200.0	Η	139.0	-4.7
6633.750000		32.20	54.00	21.80	500.0	200.0		325.0	-3.4
6748.125000	43.74		74.00	30.26	500.0	200.0	V	233.0	-3.5
9669.375000		33.59	54.00	20.42	500.0	200.0	V	97.0	-0.6
9789.375000	45.05		74.00	28.95	500.0	200.0	V	146.0	-0.5
13303.125000	45.64		74.00	28.36	500.0	200.0	Η	158.0	2.3
13351.875000		34.57	54.00	19.43	500.0	200.0	Η	182.0	2.4
17728.125000	53.40		74.00	20.60	500.0	200.0	Η	90.0	10.3
17746.875000		41.83	54.00	12.17	500.0	200.0	V	320.0	10.3

🔅 eurofins

RF Test Report

Report No.: R2411A1739-R1


802.11g CH1

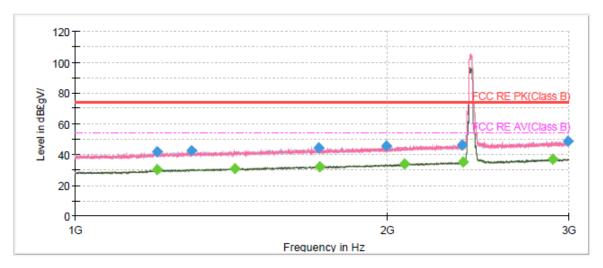

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1199.250000		29.87	54.00	24.13	500.0	200.0	Н	27.0	-8.8
1199.500000	42.02		74.00	31.98	500.0	200.0	V	0.0	-8.8
1295.000000	42.35		74.00	31.65	500.0	200.0	V	0.0	-8.2
1427.250000		30.85	54.00	23.15	500.0	200.0	Н	151.0	-7.4
1719.500000	44.11		74.00	29.89	500.0	200.0	V	308.0	-5.9
1723.000000		32.13	54.00	21.87	500.0	200.0	Н	100.0	-5.9
1998.250000	45.32		74.00	28.68	500.0	200.0	V	316.0	-4.6
2077.750000		34.14	54.00	19.86	500.0	200.0	V	342.0	-3.9
2362.000000	46.30		74.00	27.70	500.0	200.0	V	316.0	-2.9
2370.500000		34.85	54.00	19.15	500.0	200.0	Η	185.0	-2.8
2897.250000		37.13	54.00	16.87	500.0	200.0	Η	9.0	-1.1
2994.500000	48.47		74.00	25.53	500.0	200.0	V	71.0	-0.6



Report No.: R2411A1739-R1

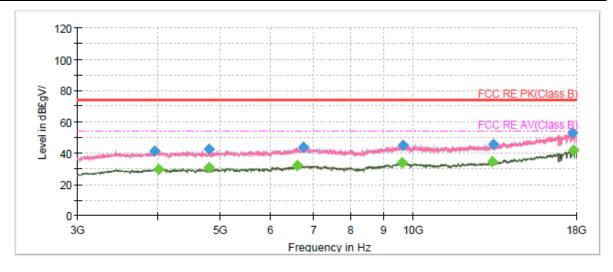


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3956.250000	41.49		74.00	32.51	500.0	200.0	V	258.0	-7.1
4008.750000		29.72	54.00	24.28	500.0	200.0	V	282.0	-6.8
4811.250000	42.27		74.00	31.73	500.0	200.0	V	91.0	-6.1
4815.000000		30.50	54.00	23.50	500.0	200.0	V	87.0	-6.1
6596.250000		32.10	54.00	21.90	500.0	200.0	Н	55.0	-3.4
6750.000000	43.49		74.00	30.51	500.0	200.0	V	176.0	-3.5
9622.500000		33.71	54.00	20.29	500.0	200.0	Н	128.0	-0.6
9658.125000	45.06		74.00	28.94	500.0	200.0	Н	84.0	-0.6
13318.125000		34.49	54.00	19.51	500.0	200.0	V	351.0	2.3
13344.375000	45.73		74.00	28.27	500.0	200.0	Н	254.0	2.3
17737.500000	52.98		74.00	21.02	500.0	200.0	V	297.0	10.3
17778.750000		41.67	54.00	12.33	500.0	200.0	V	200.0	10.3

🔅 eurofins


RF Test Report

Report No.: R2411A1739-R1

802.11g CH6

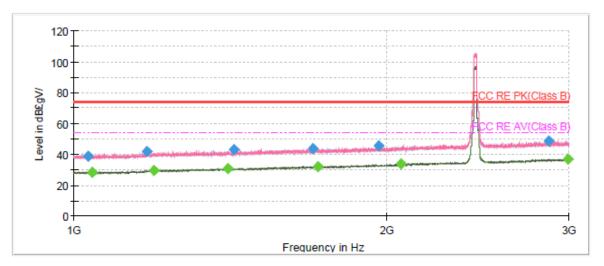

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1031.750000	38.61		74.00	35.39	500.0	200.0	V	224.0	-10.6
1042.250000		28.45	54.00	25.55	500.0	200.0	Η	255.0	-10.5
1175.250000	41.83		74.00	32.17	500.0	200.0	Η	33.0	-9.3
1194.500000		29.74	54.00	24.26	500.0	200.0	V	232.0	-8.9
1406.500000		30.91	54.00	23.09	500.0	200.0	Η	86.0	-7.5
1427.250000	43.01		74.00	30.99	500.0	200.0	Η	316.0	-7.4
1700.500000	43.53		74.00	30.47	500.0	200.0	V	357.0	-6.0
1717.750000		32.10	54.00	21.90	500.0	200.0	Η	64.0	-5.9
1967.000000	45.69		74.00	28.31	500.0	200.0	V	110.0	-4.7
2066.000000		33.72	54.00	20.28	500.0	200.0	Η	194.0	-4.1
2865.500000	48.45		74.00	25.55	500.0	200.0	Н	1.0	-1.1
2991.750000		37.11	54.00	16.89	500.0	200.0	Н	33.0	-0.6

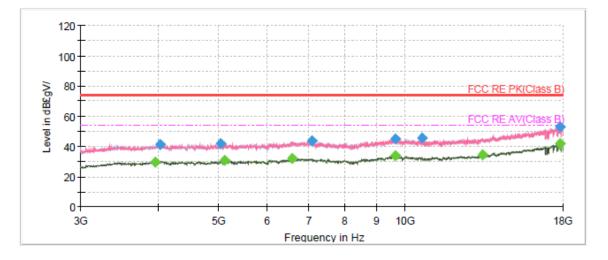


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3950.625000		29.79	54.00	24.21	500.0	200.0	Н	52.0	-7.2
4035.000000	41.09		74.00	32.91	500.0	200.0	V	299.0	-6.7
5053.125000	41.70		74.00	32.30	500.0	200.0	Н	227.0	-5.1
5120.625000		30.49	54.00	23.51	500.0	200.0	Н	7.0	-4.9
6590.625000		31.99	54.00	22.01	500.0	200.0	Н	56.0	-3.4
7085.625000	43.45		74.00	30.55	500.0	200.0	Н	56.0	-3.0
9656.250000	44.87		74.00	29.13	500.0	200.0	V	334.0	-0.6
9661.875000		33.64	54.00	20.36	500.0	200.0	V	261.0	-0.6
10663.125000	45.32		74.00	28.68	500.0	200.0	Н	210.0	-0.8
13331.250000		34.25	54.00	19.75	500.0	200.0	V	183.0	2.3
17788.125000	52.66		74.00	21.34	500.0	200.0	V	108.0	10.2
17812.500000		41.81	54.00	12.19	500.0	200.0	V	280.0	10.2


🛟 eurofins

RF Test Report

802.11g CH11

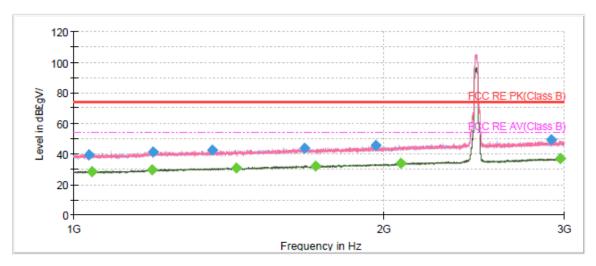

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1033.500000	39.42		74.00	34.58	500.0	200.0	V	299.0	-10.6
1040.500000		28.55	54.00	25.45	500.0	200.0	Н	156.0	-10.5
1191.250000		29.68	54.00	24.32	500.0	200.0	Н	232.0	-9.0
1194.000000	41.11		74.00	32.89	500.0	200.0	V	183.0	-8.9
1362.750000	42.27		74.00	31.74	500.0	200.0	V	265.0	-7.7
1439.750000		30.96	54.00	23.04	500.0	200.0	V	295.0	-7.3
1676.250000	43.87		74.00	30.13	500.0	200.0	V	231.0	-6.1
1718.500000		32.21	54.00	21.79	500.0	200.0	V	304.0	-5.9
1965.750000	45.74		74.00	28.26	500.0	200.0	V	55.0	-4.7
2079.750000		33.92	54.00	20.08	500.0	200.0	V	213.0	-3.9
2913.250000	49.00		74.00	25.00	500.0	200.0	V	196.0	-1.0
2972.500000		37.10	54.00	16.90	500.0	200.0	Η	279.0	-0.7

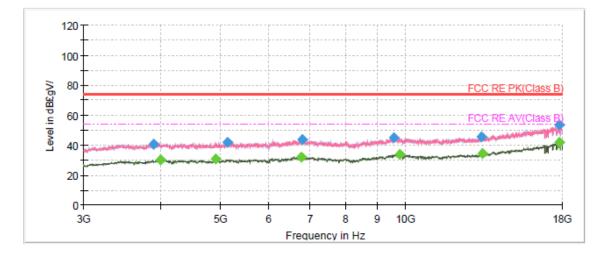


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3890.625000	40.89		74.00	33.11	500.0	200.0	Η	179.0	-7.4
4001.250000		29.89	54.00	24.11	500.0	200.0	V	125.0	-6.8
4925.625000		30.89	54.00	23.11	500.0	200.0	Η	120.0	-5.3
5145.000000	41.74		74.00	32.26	500.0	200.0	V	333.0	-5.0
6780.000000		32.12	54.00	21.88	500.0	200.0	V	328.0	-3.3
6798.750000	43.41		74.00	30.59	500.0	200.0	V	207.0	-3.2
9568.125000	45.01		74.00	28.99	500.0	200.0	Η	101.0	-0.5
9802.500000		33.83	54.00	20.17	500.0	200.0	V	226.0	-0.4
13316.250000	45.36		74.00	28.64	500.0	200.0	V	188.0	2.3
13342.500000		34.35	54.00	19.65	500.0	200.0	Η	125.0	2.3
17782.500000	53.35		74.00	20.65	500.0	200.0		88.0	10.3
17788.125000		42.05	54.00	11.95	500.0	200.0	V	358.0	10.2


RF Test Report

Report No.: R2411A1739-R1

802.11n (HT20) CH1

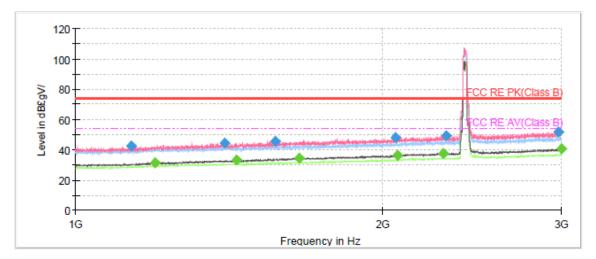

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1133.000000	42.32		74.00	31.68	500.0	200.0	V	43.0	-9.8
1196.250000		31.63	54.00	22.37	500.0	200.0	V	52.0	-8.9
1399.750000	44.13		74.00	29.87	500.0	200.0	٧	79.0	-7.6
1437.500000		33.12	54.00	20.88	500.0	200.0	V	57.0	-7.3
1570.000000	45.84		74.00	28.16	500.0	200.0	V	30.0	-6.6
1658.000000		34.72	54.00	19.29	500.0	200.0	V	12.0	-6.1
2061.000000	47.74		74.00	26.26	500.0	200.0	V	43.0	-4.1
2071.000000		36.50	54.00	17.50	500.0	200.0	V	12.0	-4.0
2297.750000		37.51	54.00	16.49	500.0	200.0	V	65.0	-2.8
2313.000000	49.04		74.00	24.96	500.0	200.0	V	34.0	-2.9
2982.250000	51.71		74.00	22.29	500.0	200.0	V	8.0	-0.7
2998.250000		40.64	54.00	13.36	500.0	200.0	V	17.0	-0.6

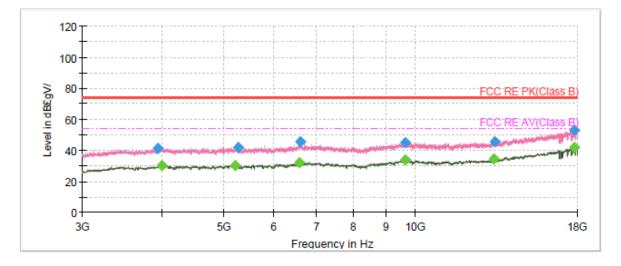


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)		Time	(cm)		(deg)	(dB/m)
					(ms)				
3941.250000	41.14		74.00	32.86	500.0	200.0	V	150.0	-7.3
4003.125000		29.87	54.00	24.13	500.0	200.0	Η	60.0	-6.8
5223.750000		30.37	54.00	23.63	500.0	200.0	V	351.0	-4.7
5270.625000	41.75		74.00	32.25	500.0	200.0	Н	219.0	-4.7
6588.750000		32.20	54.00	21.80	500.0	200.0	V	322.0	-3.4
6598.125000	45.27		74.00	28.73	500.0	200.0	Η	134.0	-3.3
9641.250000	45.02		74.00	28.98	500.0	200.0	Η	80.0	-0.6
9658.125000		33.89	54.00	20.11	500.0	200.0	Η	30.0	-0.6
13308.750000		34.33	54.00	19.67	500.0	200.0	Н	15.0	2.3
13336.875000	45.25		74.00	28.75	500.0	200.0	Н	45.0	2.3
17776.875000		41.94	54.00	12.06	500.0	200.0	V	351.0	10.3
17793.750000	52.76		74.00	21.24	500.0	200.0	V	165.0	10.2


RF Test Report

Report No.: R2411A1739-R1

802.11n (HT20) CH6

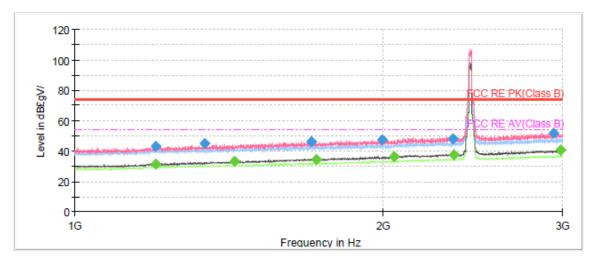

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1199.750000		31.60	54.00	22.40	500.0	200.0	V	11.0	-8.8
1200.250000	42.88		74.00	31.12	500.0	200.0	V	6.0	-8.8
1339.500000	44.72		74.00	29.28	500.0	200.0	V	76.0	-8.0
1433.500000		33.13	54.00	20.87	500.0	200.0	V	37.0	-7.4
1702.750000	46.43		74.00	27.57	500.0	200.0	V	50.0	-6.0
1724.250000		34.68	54.00	19.32	500.0	200.0	V	24.0	-5.9
1999.250000	47.66		74.00	26.34	500.0	200.0	V	15.0	-4.5
2053.500000		36.58	54.00	17.42	500.0	200.0	V	54.0	-4.2
2343.000000	48.23		74.00	25.77	500.0	200.0	V	54.0	-3.0
2346.000000		37.68	54.00	16.32	500.0	200.0	V	19.0	-3.0
2943.250000	51.86		74.00	22.14	500.0	200.0	V	15.0	-0.9
2987.000000		40.76	54.00	13.24	500.0	200.0	V	76.0	-0.7

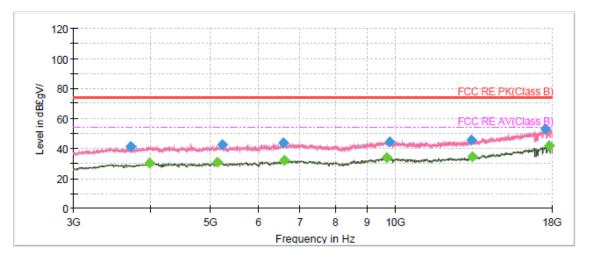


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3716.250000	41.17		74.00	32.83	500.0	200.0	V	151.0	-7.9
3986.250000		30.28	54.00	23.72	500.0	200.0	۷	0.0	-6.8
5143.125000		30.52	54.00	23.48	500.0	200.0	V	176.0	-5.0
5225.625000	42.25		74.00	31.75	500.0	200.0	Н	44.0	-4.7
6585.000000	43.64		74.00	30.36	500.0	200.0	Н	34.0	-3.4
6603.750000		32.11	54.00	21.89	500.0	200.0	Η	151.0	-3.3
9678.750000		33.70	54.00	20.30	500.0	200.0	Н	127.0	-0.7
9791.250000	44.50		74.00	29.50	500.0	200.0	Н	44.0	-0.5
13320.000000	45.29		74.00	28.71	500.0	200.0	V	176.0	2.3
13340.625000		34.36	54.00	19.64	500.0	200.0	Η	141.0	2.3
17542.500000	53.07		74.00	20.93	500.0	200.0	Η	180.0	9.9
17784.375000		41.67	54.00	12.33	500.0	200.0	V	291.0	10.2

Report No.: R2411A1739-R1


802.11n (HT20) CH11

RF Test Report

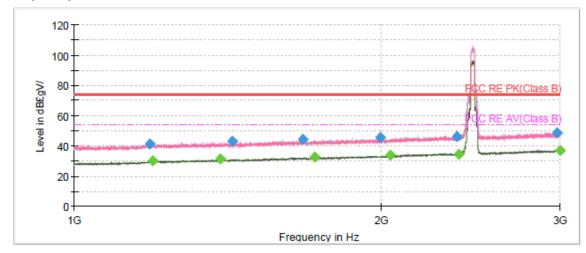

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1187.000000	40.97		74.00	33.03	500.0	200.0	Н	72.0	-9.1
1193.500000		30.20	54.00	23.80	500.0	200.0	V	189.0	-8.9
1390.250000		31.14	54.00	22.86	500.0	200.0	Н	101.0	-7.6
1429.500000	42.94		74.00	31.06	500.0	200.0	V	235.0	-7.4
1677.250000	44.38		74.00	29.62	500.0	200.0	Н	1.0	-6.1
1723.250000		32.34	54.00	21.66	500.0	200.0	V	158.0	-5.9
1998.250000	45.64		74.00	28.36	500.0	200.0	V	231.0	-4.6
2045.000000		33.77	54.00	20.24	500.0	200.0	Н	27.0	-4.3
2375.750000	46.14		74.00	27.86	500.0	200.0	Н	148.0	-2.8
2385.000000		34.30	54.00	19.70	500.0	200.0	H	5.0	-2.7
2981.500000	48.69		74.00	25.31	500.0	200.0	H	0.0	-0.7
3000.000000		37.19	54.00	16.81	500.0	200.0	V	248.0	-0.6



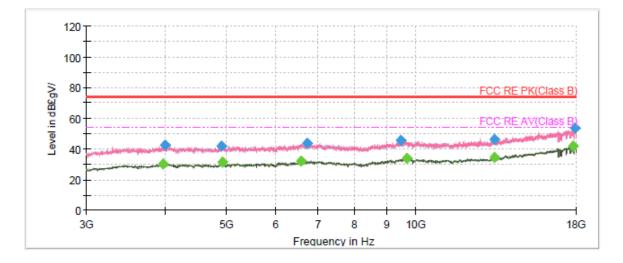


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3969.375000		30.24	54.00	23.76	500.0	200.0	Н	20.0	-7.0
4003.125000	42.32		74.00	31.68	500.0	200.0	Н	136.0	-6.8
4925.625000	41.91		74.00	32.09	500.0	200.0	Н	136.0	-5.3
4927.500000		31.10	54.00	22.90	500.0	200.0	Н	112.0	-5.4
6575.625000		32.23	54.00	21.77	500.0	200.0	V	44.0	-3.4
6729.375000	43.41		74.00	30.59	500.0	200.0	Н	25.0	-3.5
9470.625000	45.53		74.00	28.47	500.0	200.0	Н	116.0	-0.1
9678.750000		34.00	54.00	20.00	500.0	200.0	Н	73.0	-0.7
13344.375000	46.07		74.00	27.93	500.0	200.0	Η	236.0	2.3
13348.125000		34.27	54.00	19.73	500.0	200.0	Н	276.0	2.4
17776.875000		41.87	54.00	12.13	500.0	200.0	H	194.0	10.3
17962.500000	53.36		74.00	20.64	500.0	200.0	V	0.0	10.7


RF Test Report

Report No.: R2411A1739-R1

802.11n (HT40) CH3

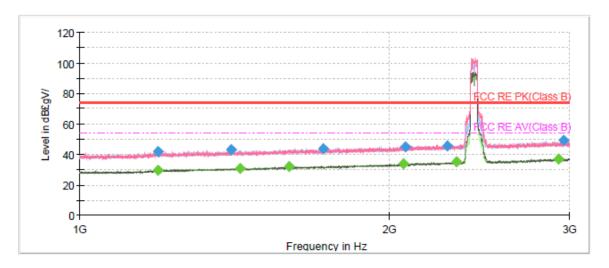

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1190.500000		29.67	54.00	24.33	500.0	200.0	Η	119.0	-9.0
1191.750000	41.82		74.00	32.18	500.0	200.0	Н	28.0	-9.0
1404.750000	43.03		74.00	30.97	500.0	200.0	V	253.0	-7.6
1431.500000		31.01	54.00	22.99	500.0	200.0	Η	72.0	-7.4
1599.750000		32.01	54.00	21.99	500.0	200.0	Η	67.0	-6.3
1727.000000	43.84		74.00	30.16	500.0	200.0	Η	67.0	-5.8
2066.000000		33.71	54.00	20.29	500.0	200.0	Η	177.0	-4.1
2076.000000	44.97		74.00	29.03	500.0	200.0	V	142.0	-4.0
2281.000000	45.44		74.00	28.56	500.0	200.0	Η	97.0	-3.0
2327.250000		34.86	54.00	19.14	500.0	200.0	V	178.0	-3.0
2925.500000		37.05	54.00	16.95	500.0	200.0	Η	36.0	-1.0
2962.500000	49.12		74.00	24.88	500.0	200.0	V	34.0	-0.8

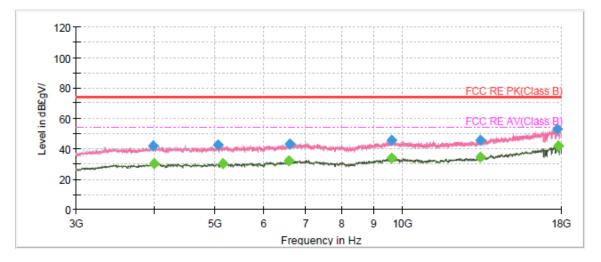


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)		Time	(cm)		(deg)	(dB/m)
					(ms)				
3988.125000	42.14		74.00	31.86	500.0	200.0	Η	0.0	-6.8
4005.000000		30.14	54.00	23.86	500.0	200.0	Н	157.0	-6.8
5055.000000	42.48		74.00	31.52	500.0	200.0	V	310.0	-5.1
5152.500000		30.28	54.00	23.72	500.0	200.0	V	148.0	-5.0
6568.125000		32.23	54.00	21.77	500.0	200.0	Η	89.0	-3.4
6605.625000	43.34		74.00	30.66	500.0	200.0	Н	89.0	-3.3
9618.750000	45.23		74.00	28.77	500.0	200.0	V	0.0	-0.6
9631.875000		33.65	54.00	20.35	500.0	200.0	Н	171.0	-0.6
13331.250000		34.74	54.00	19.26	500.0	200.0	Η	133.0	2.3
13335.000000	45.37		74.00	28.63	500.0	200.0	Η	308.0	2.3
17730.000000	52.89		74.00	21.11	500.0	200.0	V	60.0	10.3
17773.125000		41.60	54.00	12.40	500.0	200.0	Η	181.0	10.3

RF Test Report

Report No.: R2411A1739-R1

802.11n (HT40) CH6

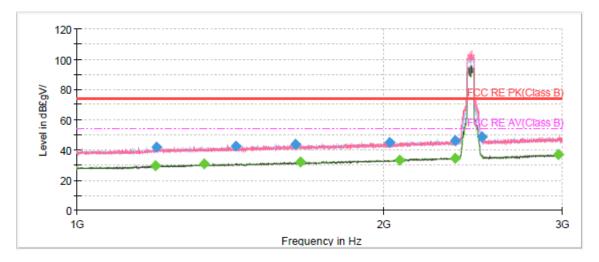

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1195.250000		29.66	54.00	24.34	500.0	200.0	Н	28.0	-8.9
1197.750000	42.02		74.00	31.98	500.0	200.0	Η	71.0	-8.8
1333.000000		30.86	54.00	23.14	500.0	200.0	V	133.0	-8.0
1432.000000	42.74		74.00	31.26	500.0	200.0	Н	264.0	-7.4
1639.750000	43.69		74.00	30.31	500.0	200.0	Н	174.0	-6.2
1659.250000		32.12	54.00	21.88	500.0	200.0	Η	41.0	-6.1
2030.250000	45.06		74.00	28.94	500.0	200.0	Η	32.0	-4.3
2076.000000		33.49	54.00	20.51	500.0	200.0	V	247.0	-4.0
2352.000000	45.98		74.00	28.02	500.0	200.0	Н	120.0	-2.9
2352.000000		34.42	54.00	19.58	500.0	200.0	Η	120.0	-2.9
2500.750000	48.77		74.00	25.23	500.0	200.0	V	106.0	-2.1
2970.750000		36.85	54.00	17.15	500.0	200.0	V	172.0	-0.7




RF Test Report Report No.: R2411A1739-R1 120 100 Level in dBEgV/ 80 60 40 20 0-5G 6 10G 18G 3G 7 8 9 Frequency in Hz

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3973.125000		29.88	54.00	24.12	500.0	200.0	V	303.0	-6.9
3997.500000	41.10		74.00	32.90	500.0	200.0	V	352.0	-6.8
5128.125000	42.14		74.00	31.86	500.0	200.0	V	222.0	-4.9
5150.625000		30.65	54.00	23.35	500.0	200.0	V	347.0	-5.0
6026.250000	43.14		74.00	30.86	500.0	200.0	V	0.0	-4.3
6590.625000		32.07	54.00	21.93	500.0	200.0	V	337.0	-3.4
9643.125000	44.84		74.00	29.16	500.0	200.0	Η	258.0	-0.5
9821.250000		33.56	54.00	20.44	500.0	200.0	V	157.0	-0.4
13321.875000	45.49		74.00	28.51	500.0	200.0	Н	204.0	2.3
13333.125000		34.31	54.00	19.69	500.0	200.0	Η	316.0	2.3
17737.500000	53.73		74.00	20.27	500.0	200.0	Η	199.0	10.3
17773.125000		42.04	54.00	11.96	500.0	200.0	V	255.0	10.3

🛟 eurofins


RF Test Report

802.11n (HT40) CH9

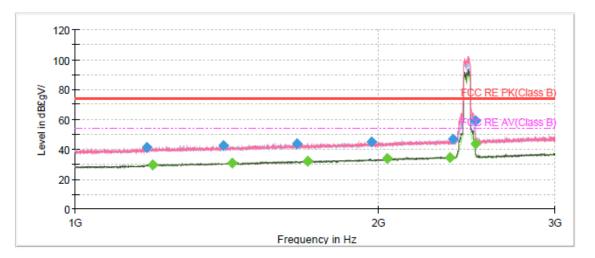

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1178.500000	41.04		74.00	32.96	500.0	200.0	V	171.0	-9.2
1193.750000		29.82	54.00	24.18	500.0	200.0	Η	252.0	-8.9
1404.000000	42.52		74.00	31.48	500.0	200.0	V	232.0	-7.6
1432.000000		30.85	54.00	23.15	500.0	200.0	V	32.0	-7.4
1661.500000	43.78		74.00	30.22	500.0	200.0	Н	71.0	-6.1
1703.250000		32.26	54.00	21.74	500.0	200.0	Н	315.0	-6.0
1970.500000	45.00		74.00	29.00	500.0	200.0	V	80.0	-4.7
2041.250000		33.94	54.00	20.06	500.0	200.0	V	127.0	-4.3
2359.500000		34.46	54.00	19.54	500.0	200.0	٧	14.0	-2.9
2374.750000	46.87		74.00	27.13	500.0	200.0	Η	306.0	-2.8
2498.250000		43.54	54.00	10.46	500.0	200.0	V	88.0	-2.1
2498.250000	59.35		74.00	14.65	500.0	200.0	V	88.0	-2.1


Report No.: R2411A1739-R1

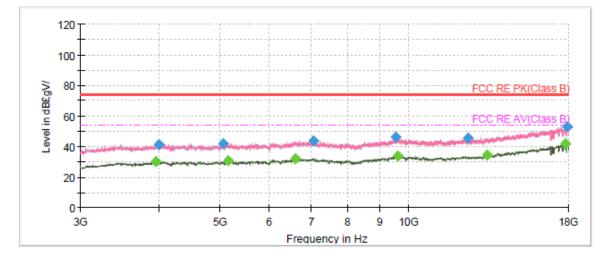

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3960.000000		29.94	54.00	24.06	500.0	200.0	Η	30.0	-7.1
3995.625000	41.01		74.00	32.99	500.0	200.0	V	306.0	-6.8
5064.375000	42.09		74.00	31.91	500.0	200.0	V	275.0	-5.0
5158.125000		30.49	54.00	23.51	500.0	200.0	Н	136.0	-4.9
6601.875000		31.96	54.00	22.04	500.0	200.0	V	34.0	-3.3
7066.875000	43.70		74.00	30.30	500.0	200.0	Н	102.0	-3.1
9534.375000	46.03		74.00	27.97	500.0	200.0	V	311.0	-0.2
9615.000000		33.58	54.00	20.42	500.0	200.0	V	246.0	-0.7
12436.875000	45.72		74.00	28.28	500.0	200.0	V	266.0	0.4
13338.750000		34.39	54.00	19.61	500.0	200.0	٧	251.0	2.3
17782.500000		41.69	54.00	12.31	500.0	200.0	V	336.0	10.3
17902.500000	52.83		74.00	21.17	500.0	200.0	V	20.0	10.1


RF Test Report

802.11ax HE20 CH 1

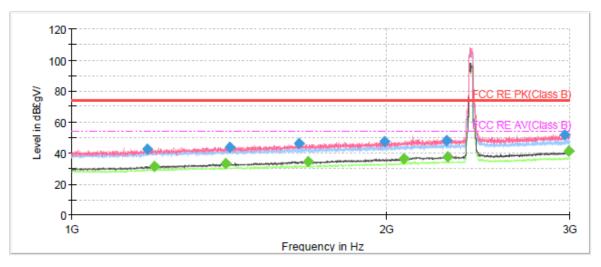

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1182.000000	42.56		74.00	31.44	500.0	200.0		48.0	-9.2
1198.500000		31.39	54.00	22.61	500.0	200.0		0.0	-8.8
1404.500000		32.99	54.00	21.01	500.0	200.0	V	71.0	-7.6
1416.750000	43.98		74.00	30.02	500.0	200.0	V	39.0	-7.4
1649.750000	46.25		74.00	27.75	500.0	200.0	V	0.0	-6.1
1684.000000		34.64	54.00	19.36	500.0	200.0	V	43.0	-6.0
1993.750000	47.48		74.00	26.52	500.0	200.0	V	57.0	-4.6
2078.500000		36.39	54.00	17.61	500.0	200.0	V	62.0	-3.9
2288.000000	47.81		74.00	26.19	500.0	200.0	V	12.0	-2.9
2288.750000		37.63	54.00	16.37	500.0	200.0		52.0	-2.9
2966.250000	51.55		74.00	22.45	500.0	200.0	V	76.0	-0.8
2991.250000		41.05	54.00	12.95	500.0	200.0	V	7.0	-0.6

Report No.: R2411A1739-R1

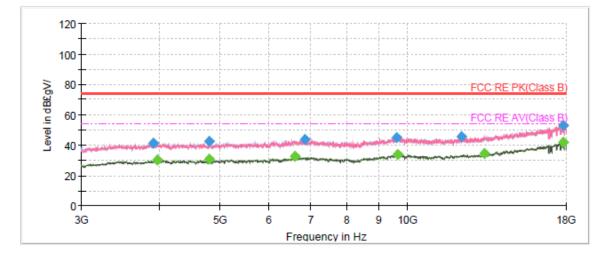


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3915.000000	40.92		74.00	33.08	500.0	200.0	Η	204.0	-7.4
3975.000000		30.07	54.00	23.93	500.0	200.0	Η	331.0	-6.9
4809.375000		30.77	54.00	23.23	500.0	200.0	V	112.0	-6.1
4811.250000	42.35		74.00	31.65	500.0	200.0	V	96.0	-6.1
6598.125000		32.36	54.00	21.64	500.0	200.0	Η	54.0	-3.3
6858.750000	43.59		74.00	30.41	500.0	200.0	Η	54.0	-3.2
9605.625000	44.88		74.00	29.12	500.0	200.0	V	241.0	-0.7
9660.000000		33.58	54.00	20.42	500.0	200.0	Η	326.0	-0.6
12221.250000	45.65		74.00	28.35	500.0	200.0	Η	73.0	0.3
13323.750000		34.51	54.00	19.49	500.0	200.0	V	15.0	2.3
17775.000000	53.07		74.00	20.93	500.0	200.0	Η	15.0	10.3
17795.625000		41.64	54.00	12.36	500.0	200.0	Η	68.0	10.2

RF Test Report


Report No.: R2411A1739-R1

802.11ax HE20 CH6

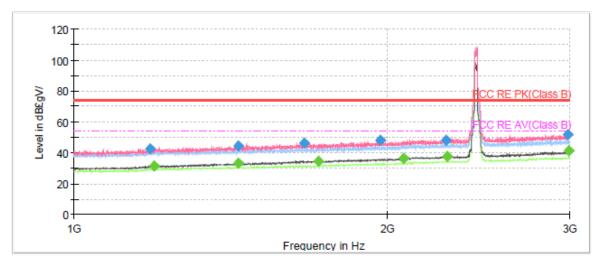

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1183.000000	42.63		74.00	31.37	500.0	200.0	V	12.0	-9.2
1193.000000		31.42	54.00	22.58	500.0	200.0	V	3.0	-8.9
1438.750000		33.44	54.00	20.56	500.0	200.0	V	34.0	-7.3
1439.000000	44.33		74.00	29.67	500.0	200.0	V	12.0	-7.3
1667.000000	45.91		74.00	28.09	500.0	200.0	V	72.0	-6.1
1720.000000		34.58	54.00	19.42	500.0	200.0	V	17.0	-5.9
1970.000000	48.16		74.00	25.84	500.0	200.0	V	3.0	-4.7
2077.500000		36.28	54.00	17.72	500.0	200.0	V	48.0	-3.9
2282.250000	48.06		74.00	25.94	500.0	200.0	V	34.0	-3.0
2284.750000		37.64	54.00	16.36	500.0	200.0	V	3.0	-2.9
2988.000000	51.79		74.00	22.21	500.0	200.0	V	91.0	-0.7
2991.250000		41.11	54.00	12.89	500.0	200.0	V	72.0	-0.6




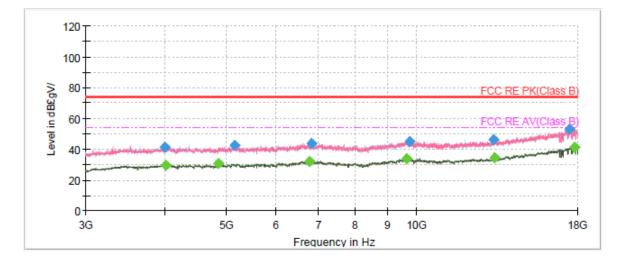

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
		· · · ·					FUI		
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3993.750000	41.42		74.00	32.58	500.0	200.0	V	300.0	-6.8
4008.750000		29.82	54.00	24.18	500.0	200.0	Η	163.0	-6.8
4867.500000		30.90	54.00	23.10	500.0	200.0	V	116.0	-5.9
5160.000000	42.60		74.00	31.40	500.0	200.0	Н	293.0	-4.9
6780.000000		32.02	54.00	21.98	500.0	200.0	Н	178.0	-3.3
6826.875000	43.96		74.00	30.04	500.0	200.0	Н	32.0	-3.2
9654.375000		33.59	54.00	20.41	500.0	200.0	V	266.0	-0.5
9761.250000	45.14		74.00	28.86	500.0	200.0	Н	125.0	-0.5
13273.125000	45.89		74.00	28.11	500.0	200.0	Н	100.0	2.2
13323.750000		34.31	54.00	19.69	500.0	200.0	V	41.0	2.3
17506.875000	53.14		74.00	20.86	500.0	200.0	V	353.0	9.8
17776.875000		41.52	54.00	12.48	500.0	200.0	V	0.0	10.3




802.11ax HE20 CH11

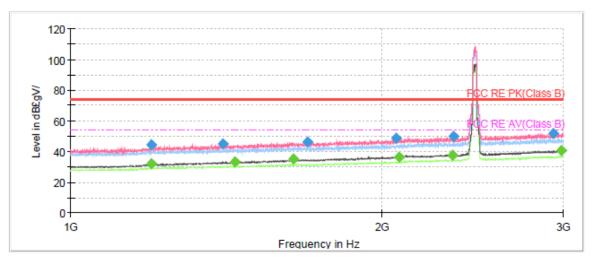

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1197.000000		31.70	54.00	22.30	500.0	200.0	V	236.0	-8.9
1197.750000	44.39		74.00	29.61	500.0	200.0	V	297.0	-8.8
1403.750000	44.64		74.00	29.36	500.0	200.0	V	319.0	-7.6
1441.250000		33.23	54.00	20.77	500.0	200.0	V	327.0	-7.3
1644.250000		34.79	54.00	19.21	500.0	200.0	V	253.0	-6.2
1694.250000	46.31		74.00	27.69	500.0	200.0	V	301.0	-6.0
2067.750000	48.63		74.00	25.37	500.0	200.0	V	359.0	-4.0
2078.750000		36.50	54.00	17.50	500.0	200.0	V	253.0	-3.9
2342.750000		37.56	54.00	16.44	500.0	200.0	V	99.0	-3.0
2347.750000	49.61		74.00	24.39	500.0	200.0	V	341.0	-3.0
2931.250000	51.80		74.00	22.20	500.0	200.0	V	253.0	-1.0
2989.750000		40.67	54.00	13.33	500.0	200.0	V	306.0	-0.6




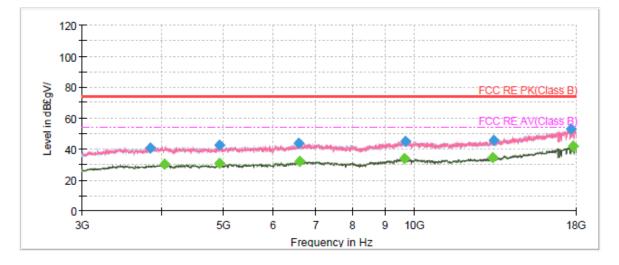

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
3847.500000	40.91		74.00	33.09	500.0	200.0	Η	56.0	-7.5
4038.750000		29.94	54.00	24.06	500.0	200.0		314.0	-6.7
4927.500000		30.82	54.00	23.18	500.0	200.0	V	120.0	-5.4
4927.500000	42.45		74.00	31.55	500.0	200.0	V	120.0	-5.4
6577.500000	43.57		74.00	30.43	500.0	200.0	V	145.0	-3.4
6609.375000		32.16	54.00	21.84	500.0	200.0	Н	183.0	-3.4
9661.875000		33.89	54.00	20.11	500.0	200.0	۷	357.0	-0.6
9678.750000	44.93		74.00	29.07	500.0	200.0	V	343.0	-0.7
13327.500000		34.26	54.00	19.74	500.0	200.0	V	102.0	2.3
13333.125000	45.75		74.00	28.25	500.0	200.0	V	284.0	2.3
17655.000000	53.03		74.00	20.97	500.0	200.0		51.0	10.2
17773.125000		41.69	54.00	12.31	500.0	200.0	V	324.0	10.3

RF Test Report


802.11ax HE40 CH3

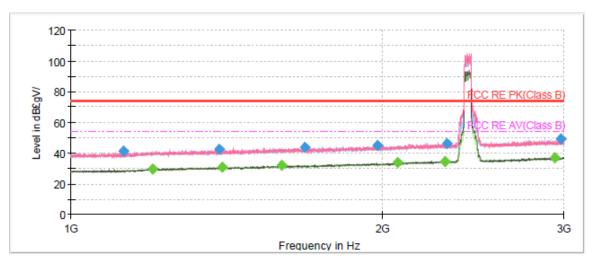

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1123.500000	40.98		74.00	33.02	500.0	200.0	Η	291.0	-9.9
1200.250000		29.82	54.00	24.18	500.0	200.0	Η	63.0	-8.8
1390.750000	42.43		74.00	31.57	500.0	200.0	V	351.0	-7.6
1402.250000		30.74	54.00	23.26	500.0	200.0	V	328.0	-7.6
1600.500000		32.10	54.00	21.90	500.0	200.0	Н	32.0	-6.3
1683.250000	43.80		74.00	30.20	500.0	200.0	Η	124.0	-6.0
1980.750000	44.79		74.00	29.21	500.0	200.0	V	122.0	-4.7
2071.750000		33.63	54.00	20.37	500.0	200.0	V	311.0	-4.0
2302.250000		34.40	54.00	19.60	500.0	200.0	V	51.0	-2.8
2310.500000	46.20		74.00	27.80	500.0	200.0	Η	189.0	-2.8
2942.750000		36.83	54.00	17.17	500.0	200.0	Η	111.0	-0.9
2982.500000	49.01		74.00	24.99	500.0	200.0	V	355.0	-0.7




Report No.: R2411A1739-R1

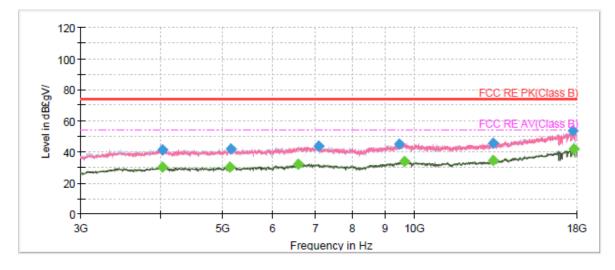


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
4035.000000		29.98	54.00	24.02	500.0	200.0	Н	304.0	-6.7
4035.000000	41.31		74.00	32.69	500.0	200.0	Н	304.0	-6.7
5141.250000		30.37	54.00	23.63	500.0	200.0	Н	4.0	-5.0
5152.500000	41.73		74.00	32.27	500.0	200.0	Н	9.0	-5.0
6570.000000		32.13	54.00	21.87	500.0	200.0	Н	163.0	-3.4
7072.500000	43.49		74.00	30.51	500.0	200.0	Н	191.0	-3.0
9483.750000	44.92		74.00	29.08	500.0	200.0	V	82.0	0.0
9669.375000		33.70	54.00	20.30	500.0	200.0	V	241.0	-0.6
13316.250000		34.71	54.00	19.29	500.0	200.0	V	282.0	2.3
13320.000000	45.45		74.00	28.55	500.0	200.0	Н	135.0	2.3
17745.000000	53.31		74.00	20.69	500.0	200.0		11.0	10.3
17773.125000		41.94	54.00	12.06	500.0	200.0	Η	0.0	10.3

RF Test Report

802.11ax HE40 CH6

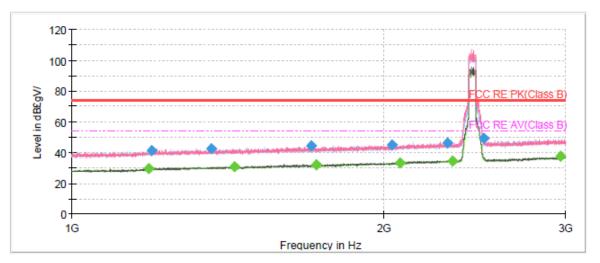

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1185.250000		29.74	54.00	24.26	500.0	200.0	V	161.0	-9.1
1194.500000	41.30		74.00	32.70	500.0	200.0	Н	35.0	-8.9
1364.250000	42.28		74.00	31.72	500.0	200.0	V	298.0	-7.7
1435.000000		30.72	54.00	23.28	500.0	200.0	V	201.0	-7.4
1701.250000	44.14		74.00	29.86	500.0	200.0	Н	92.0	-6.0
1723.500000		31.98	54.00	22.02	500.0	200.0	V	345.0	-5.9
2040.000000	45.08		74.00	28.92	500.0	200.0	Н	155.0	-4.3
2074.500000		33.46	54.00	20.54	500.0	200.0	V	354.0	-4.0
2304.500000	46.24		74.00	27.76	500.0	200.0	V	315.0	-2.8
2330.500000		34.45	54.00	19.55	500.0	200.0	V	244.0	-3.0
2499.500000	49.08		74.00	24.92	500.0	200.0	V	123.0	-2.1
2969.750000		37.34	54.00	16.66	500.0	200.0	Η	273.0	-0.7

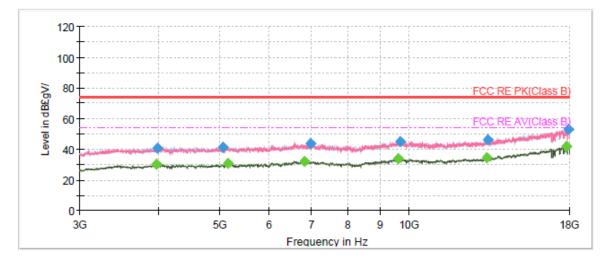


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)		Time	(cm)		(deg)	(dB/m)
					(ms)				
3965.625000		29.90	54.00	24.10	500.0	200.0	Н	98.0	-7.0
3986.250000	40.68		74.00	33.32	500.0	200.0	Η	128.0	-6.8
5060.625000	41.38		74.00	32.62	500.0	200.0	V	187.0	-5.0
5152.500000		30.50	54.00	23.50	500.0	200.0	Н	217.0	-5.0
6825.000000		32.00	54.00	22.00	500.0	200.0	Η	302.0	-3.2
6980.625000	43.58		74.00	30.42	500.0	200.0	V	98.0	-2.9
9635.625000		33.75	54.00	20.25	500.0	200.0	Η	246.0	-0.6
9686.250000	45.03		74.00	28.97	500.0	200.0	V	197.0	-0.7
13321.875000		34.67	54.00	19.33	500.0	200.0	V	0.0	2.3
13333.125000	45.88		74.00	28.12	500.0	200.0	V	359.0	2.3
17782.500000		42.10	54.00	11.90	500.0	200.0	H	11.0	10.3
17962.500000	52.94		74.00	21.06	500.0	200.0	V	41.0	10.7


RF Test Report

Report No.: R2411A1739-R1

802.11ax HE40 CH9

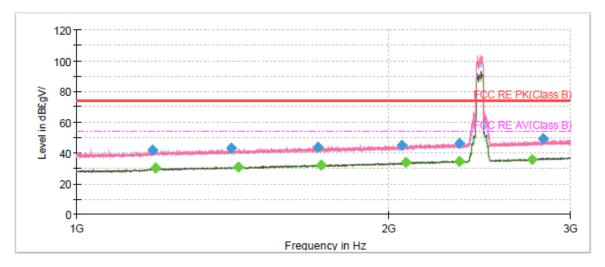

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)		(dB£gV/m)		Time	(cm)		(deg)	(dB/m)
					(ms)				· ·
1184.500000	42.08		74.00	31.92	500.0	200.0	V	0.0	-9.1
1190.750000		29.93	54.00	24.07	500.0	200.0	V	343.0	-9.0
1411.250000	42.83		74.00	31.17	500.0	200.0	Н	167.0	-7.5
1432.000000		30.95	54.00	23.05	500.0	200.0	V	278.0	-7.4
1711.500000	43.77		74.00	30.23	500.0	200.0	V	209.0	-5.9
1722.250000		32.18	54.00	21.82	500.0	200.0	V	27.0	-5.9
2061.000000	44.90		74.00	29.10	500.0	200.0	V	108.0	-4.1
2079.500000		33.56	54.00	20.44	500.0	200.0	V	270.0	-3.9
2344.000000	45.92		74.00	28.08	500.0	200.0	Н	112.0	-3.0
2344.000000		34.41	54.00	19.59	500.0	200.0	Η	112.0	-3.0
2754.000000		35.68	54.00	18.32	500.0	200.0	Η	121.0	-1.5
2823.750000	49.20		74.00	24.80	500.0	200.0	Η	121.0	-1.2

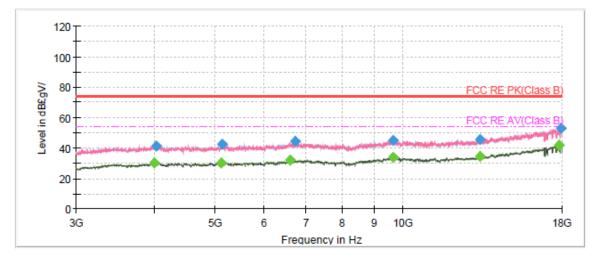


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
4006.875000		30.10	54.00	23.90	500.0	200.0	Η	133.0	-6.8
4033.125000	41.04		74.00	32.96	500.0	200.0	Η	69.0	-6.8
5118.750000		30.39	54.00	23.61	500.0	200.0	Н	159.0	-4.9
5141.250000	42.29		74.00	31.71	500.0	200.0	Н	164.0	-5.0
6603.750000		32.27	54.00	21.73	500.0	200.0	V	258.0	-3.3
6735.000000	44.09		74.00	29.91	500.0	200.0	Η	49.0	-3.5
9658.125000		33.90	54.00	20.10	500.0	200.0	Η	243.0	-0.6
9663.750000	44.84		74.00	29.16	500.0	200.0	Н	5.0	-0.6
13310.625000		34.72	54.00	19.28	500.0	200.0	V	342.0	2.3
13327.500000	45.75		74.00	28.25	500.0	200.0	V	358.0	2.3
17784.375000		41.78	54.00	12.22	500.0	200.0	V	312.0	10.2
17902.500000	53.01		74.00	20.99	500.0	200.0	V	277.0	10.1

🛟 eurofins

RF Test Report

Report No.: R2411A1739-R1

During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels. The test data of the worst-case condition was recorded in this report.

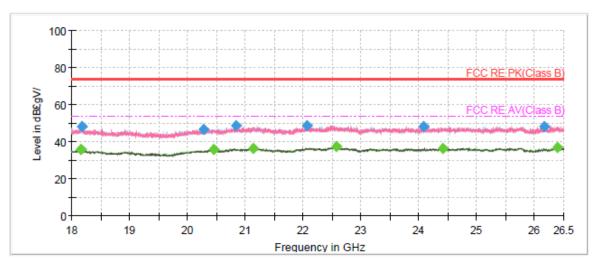


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dB£gV/m)	(dB£gV/m)	(dB£gV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
18151.937500		35.89	54.00	18.11	500.0	100.0	V	347.0	-5.8
18171.062500	48.16		74.00	25.84	500.0	100.0	Н	26.0	-5.8
20279.062500	46.89		74.00	27.11	500.0	100.0	Н	106.0	-5.7
20454.375000		35.92	54.00	18.08	500.0	100.0	Н	143.0	-4.9
20846.437500	48.63		74.00	25.37	500.0	100.0	V	347.0	-4.8
21143.937500		36.59	54.00	17.41	500.0	100.0	Η	157.0	-4.2
22069.375000	48.86		74.00	25.14	500.0	100.0	Н	170.0	-3.8
22567.687500		37.28	54.00	16.72	500.0	200.0	Н	305.0	-3.4
24081.750000	48.13		74.00	25.87	500.0	100.0	V	301.0	-3.2
24415.375000		36.65	54.00	17.35	500.0	100.0	Η	139.0	-3.1
26166.375000	48.32		74.00	25.68	500.0	200.0	Η	0.0	-2.5
26389.500000		36.72	54.00	17.28	500.0	200.0	Η	249.0	-2.2



TB Mode

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels. The test data of the worst-case condition was recorded in this report.

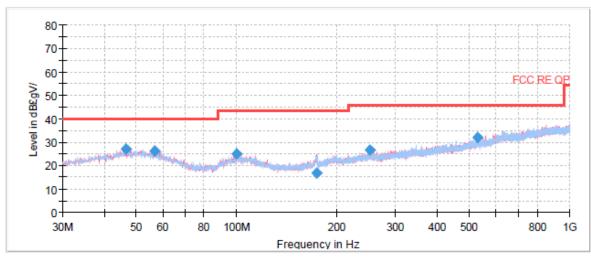

Radiates	Emission	from	30MHz to 1GHz
radiatoo			

Frequency (MHz)	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
46.450000	27.00	40.00	13.00	125.0	Н	202.0	21.1
56.721250	26.34	40.00	13.66	110.0	Н	32.0	20.3
100.040000	25.07	43.50	18.43	197.0	V	4.0	19.1
174.003750	16.85	43.50	26.65	125.0	V	325.0	20.1
250.556250	26.67	46.00	19.33	197.0	V	188.0	20.6
527.973750	32.06	46.00	13.94	125.0	Н	148.0	26.0