



802.11ax-HE20 Power Spectral Density - Ant 3


Channel 36 (5180MHz)

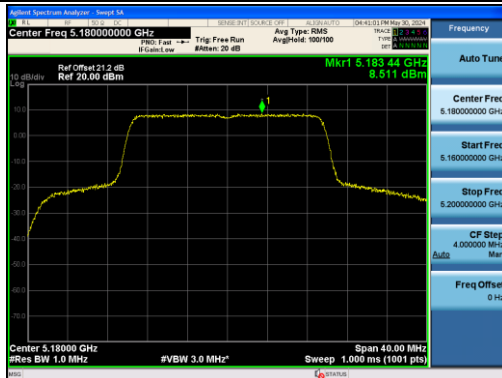


Channel 40 (5200MHz)

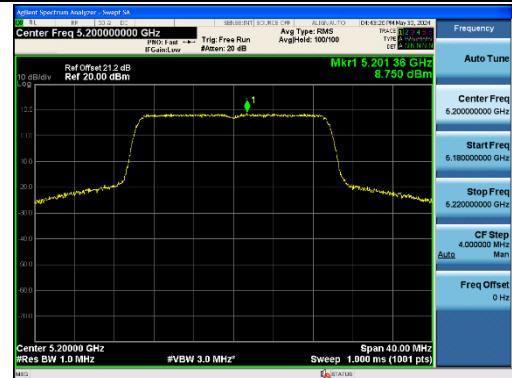

Channel 48 (5240MHz)

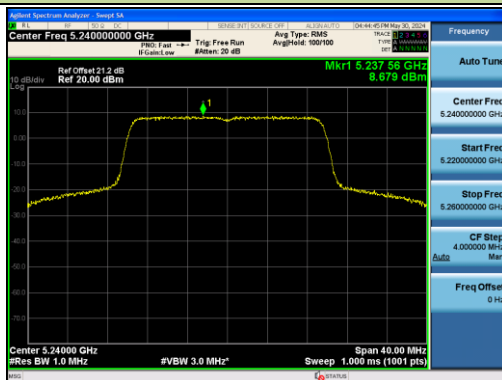


Channel 52 (5260MHz)

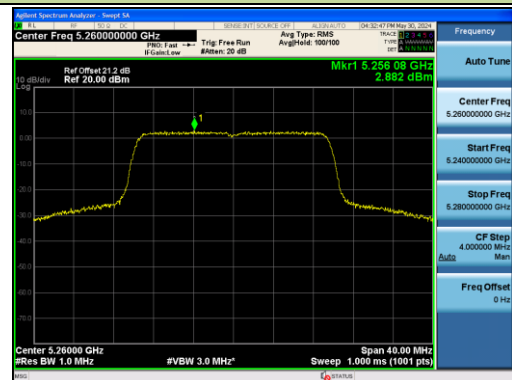


Channel 60 (5300MHz)




Channel 64 (5320MHz)

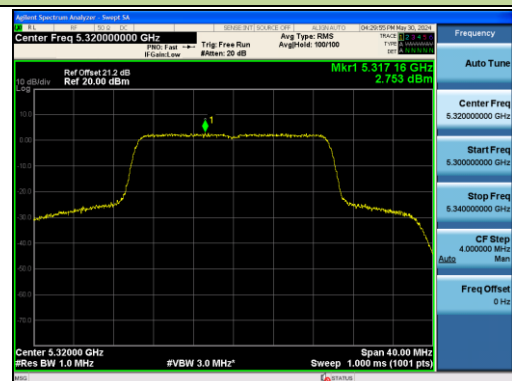


Channel 100 (5500MHz)

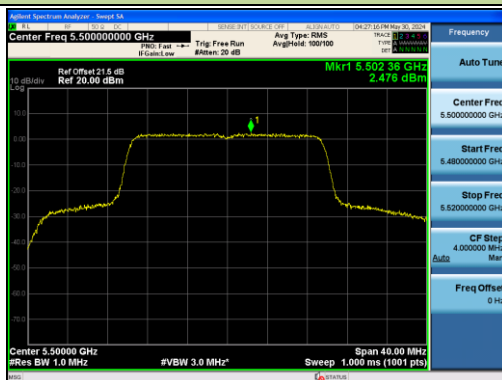


Channel 116 (5580MHz)

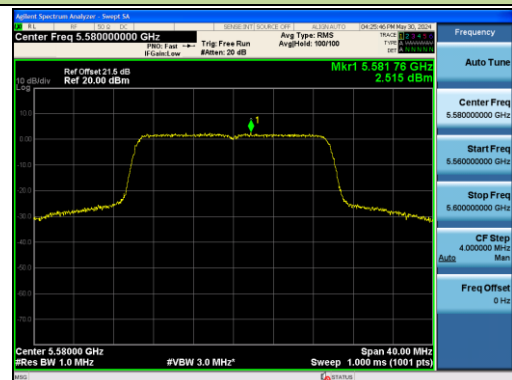


Channel 140 (5700MHz)

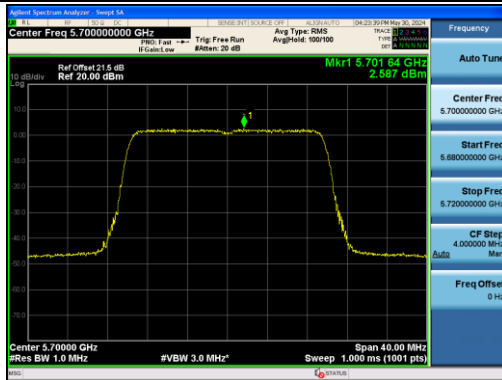


Channel 144 (5720MHz)

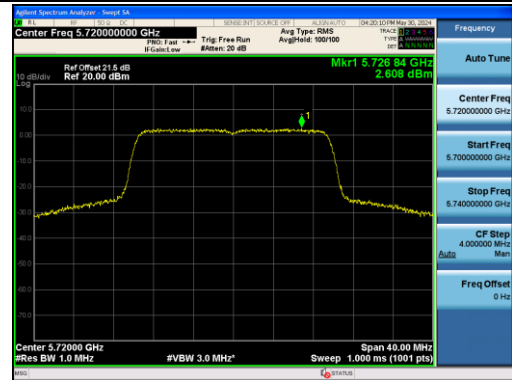


Channel 149 (5745MHz)

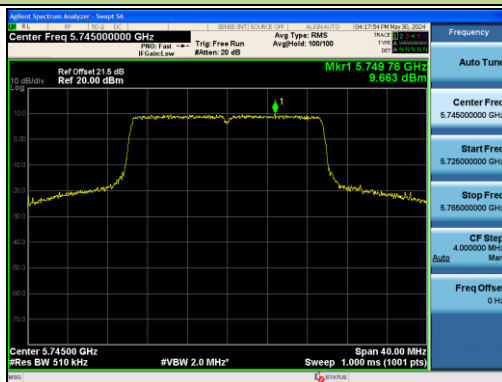

Channel 157 (5785MHz)

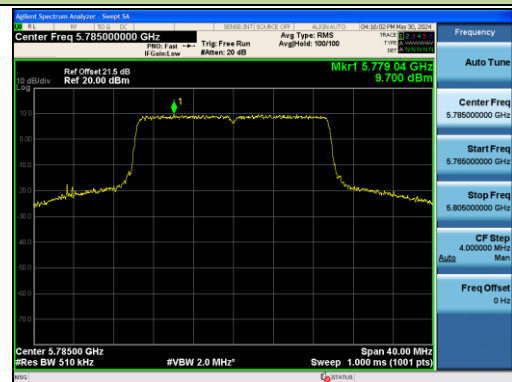


Channel 165 (5825MHz)

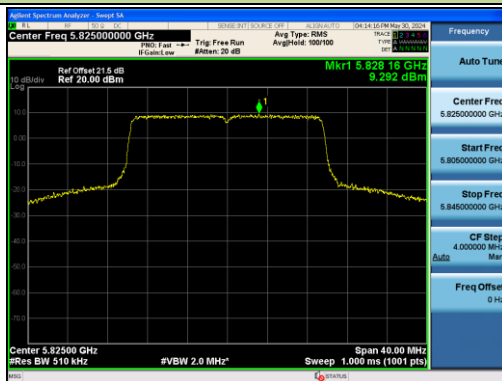


802.11ax-HE40 Power Spectral Density - Ant 3


Channel 38 (5190MHz)

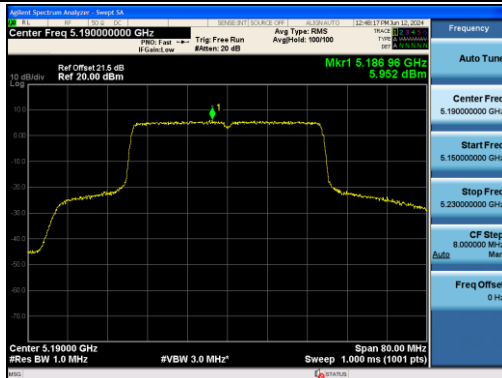


Channel 46 (5230MHz)

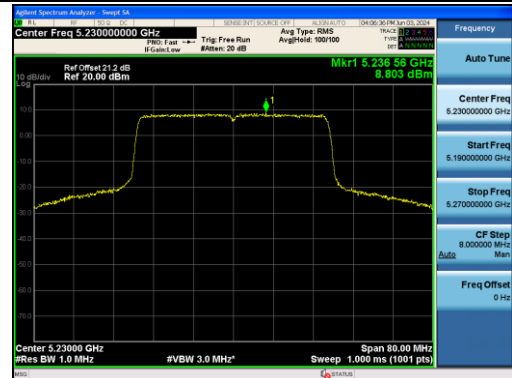


Channel 54 (5270MHz)

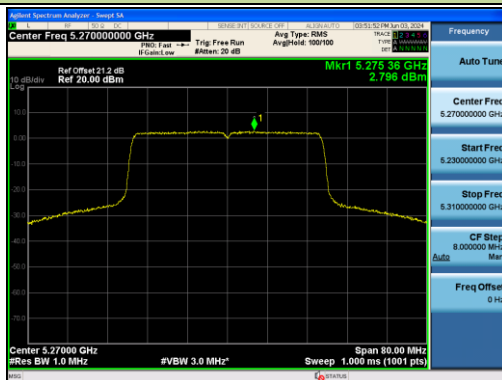


Channel 62 (5310MHz)

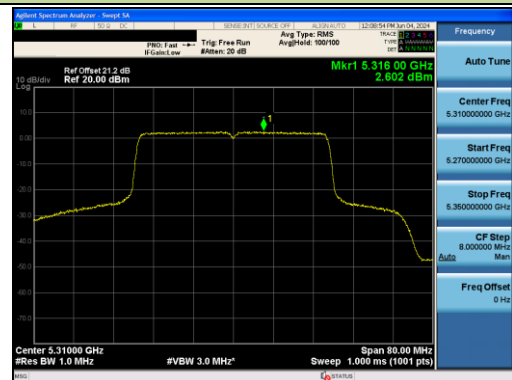


Channel 102 (5510MHz)

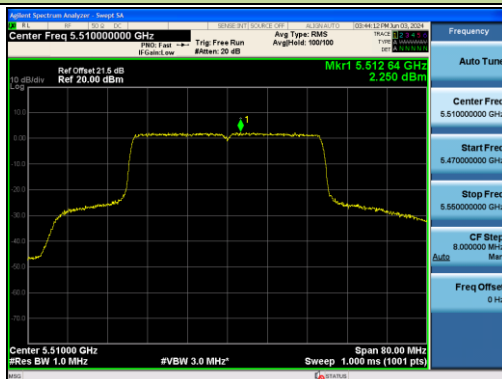


Channel 110 (5550MHz)

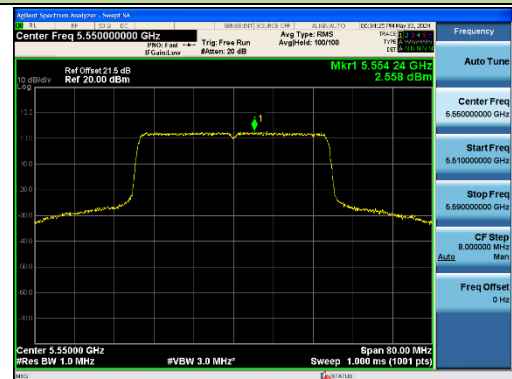


Channel 134 (5670MHz)

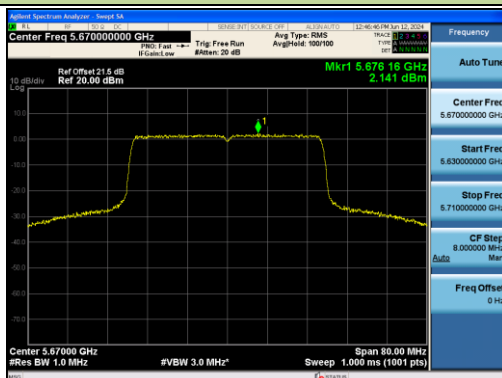


Channel 14 (5710MHz)

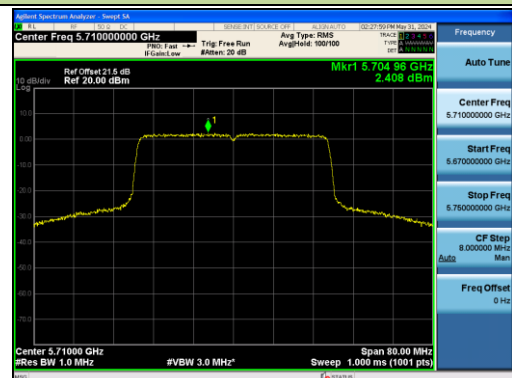

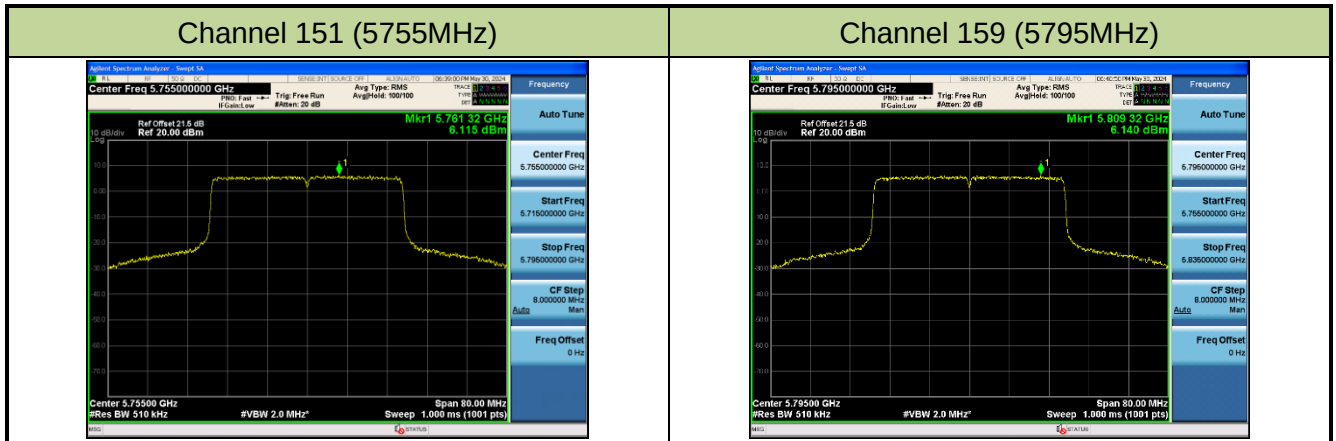

802.11ax-HE80 Power Spectral Density - Ant 3


Channel 42 (5210MHz)

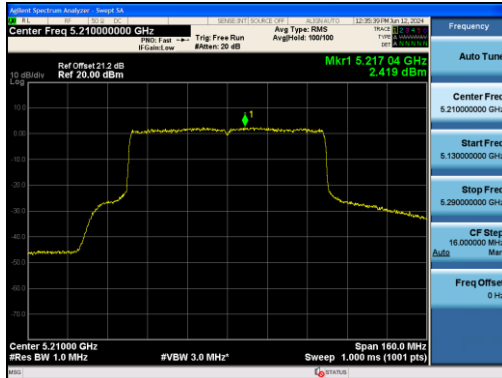


Channel 58 (5290MHz)




Channel 106 (5530MHz)

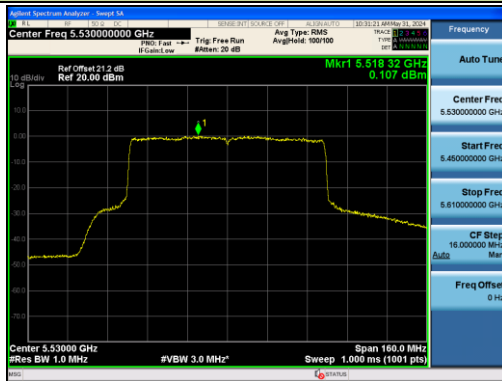


Channel 122 (5610MHz)

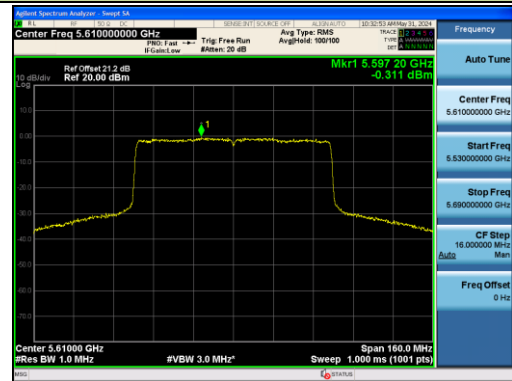

Channel 138 (5690MHz)

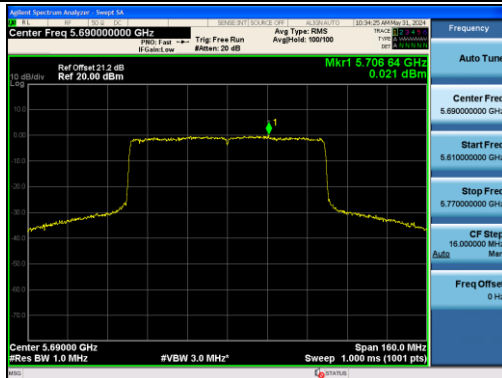


Channel 155 (5775MHz)

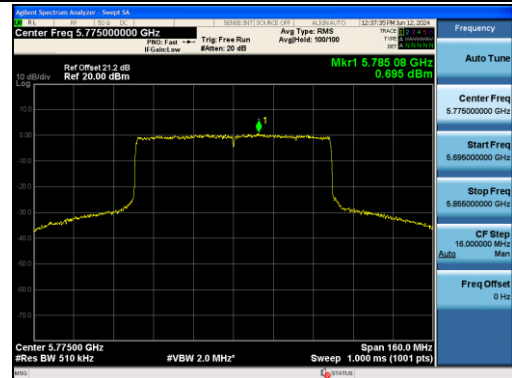


802.11ax-HE160 Power Spectral Density - Ant 3

Channel 50 (5250MHz)

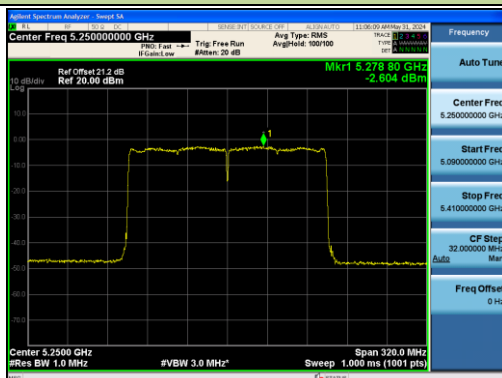


Channel 114 (5570MHz)

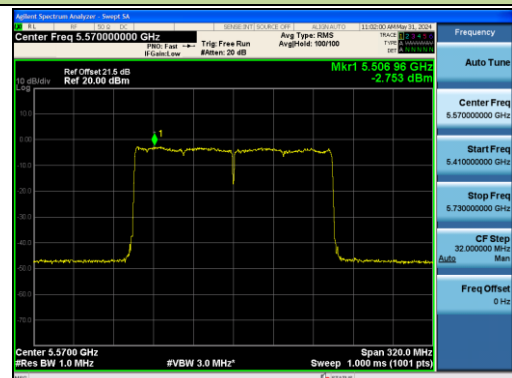

802.11be-EHT20 Power Spectral Density - Ant 3

Channel 36 (5180MHz)

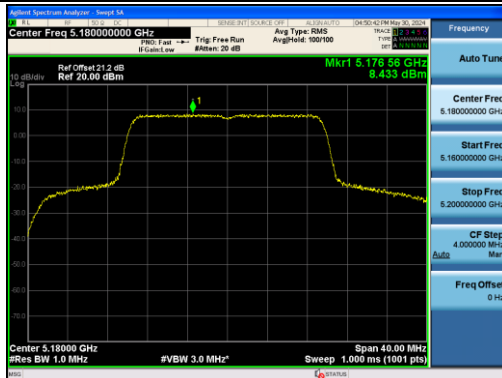


Channel 40 (5200MHz)




Channel 48 (5240MHz)



Channel 52 (5260MHz)

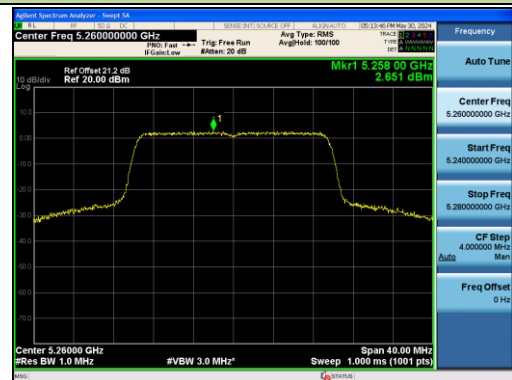


Channel 60 (5300MHz)

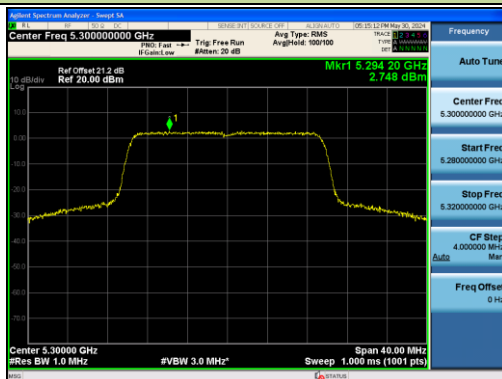

Channel 64 (5320MHz)




Channel 100 (5500MHz)

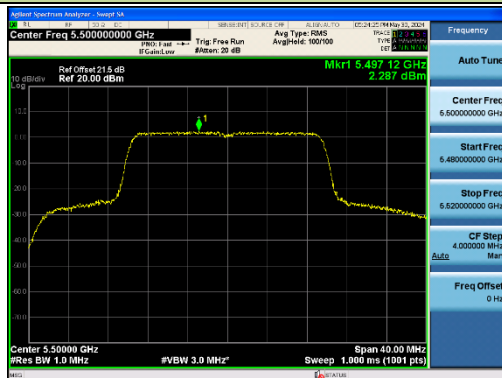


Channel 116 (5580MHz)




Channel 140 (5700MHz)

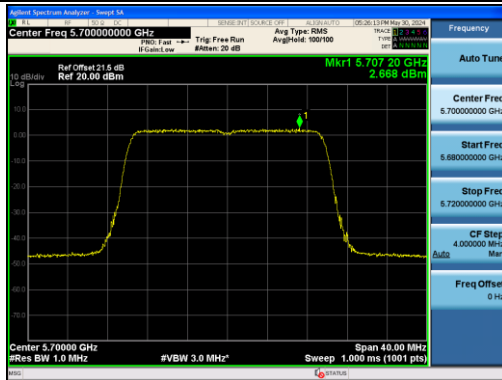


Channel 144 (5720MHz)

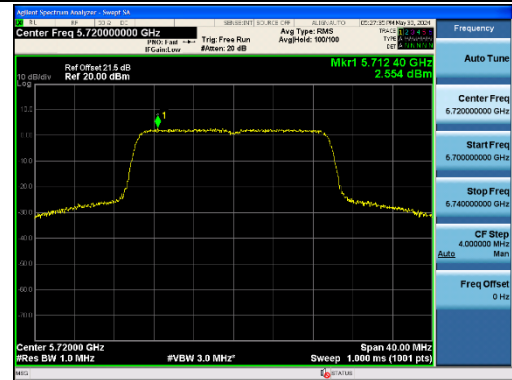


Channel 149 (5745MHz)

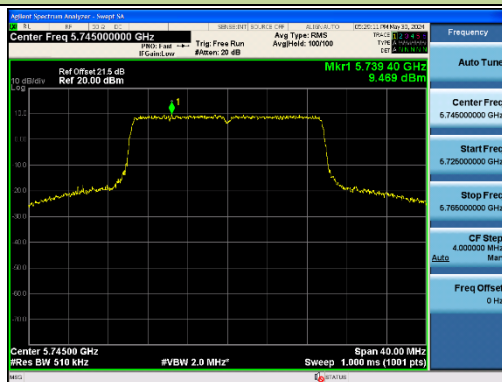

Channel 157 (5785MHz)

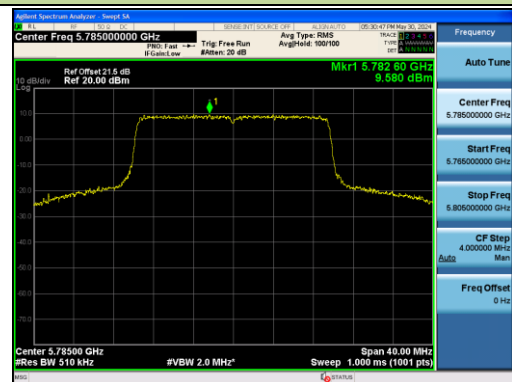


Channel 165 (5825MHz)

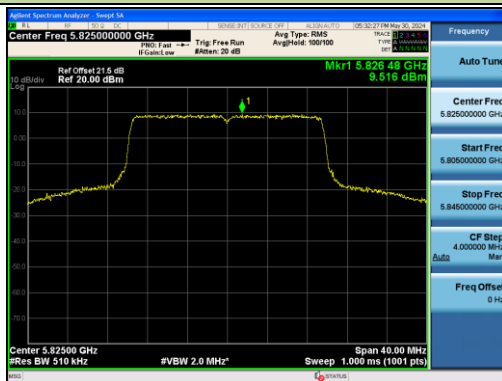


802.11be-EHT40 Power Spectral Density - Ant 3


Channel 38 (5190MHz)

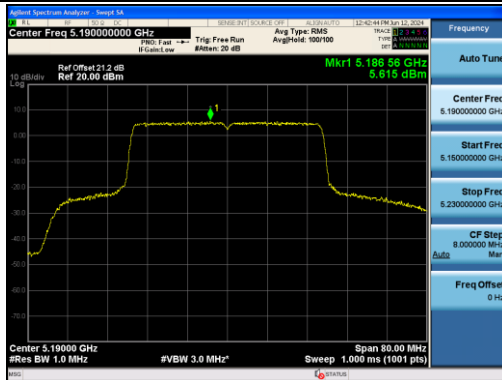


Channel 46 (5230MHz)

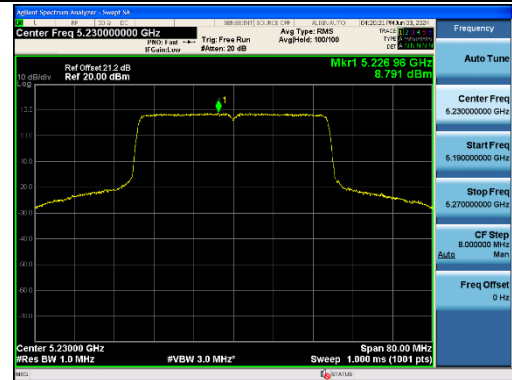


Channel 54 (5270MHz)

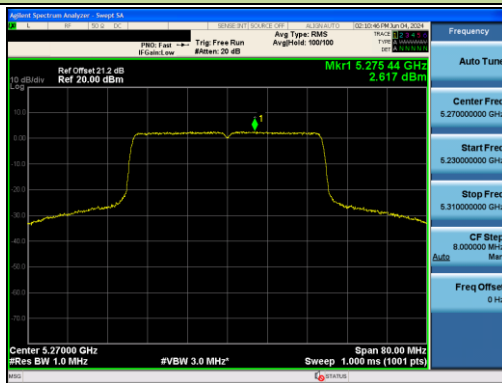


Channel 62 (5310MHz)

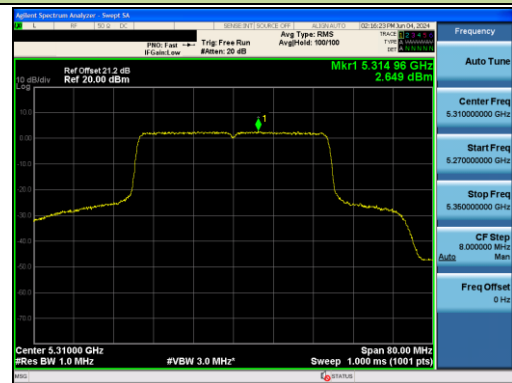


Channel 102 (5510MHz)

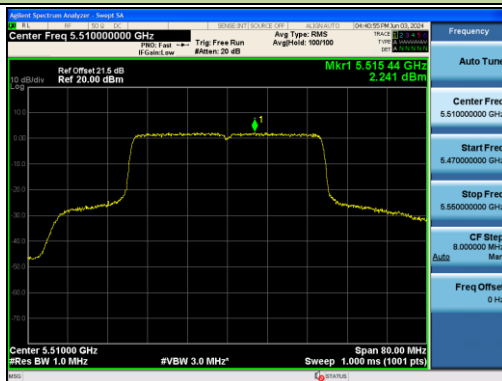


Channel 110 (5550MHz)

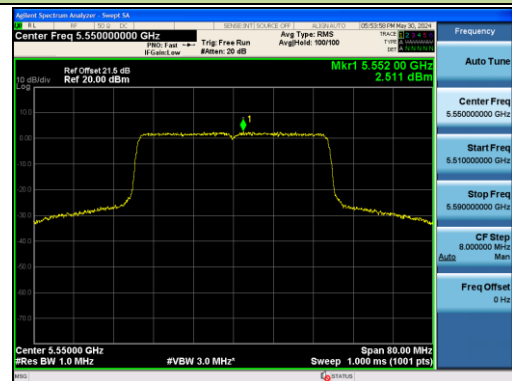


Channel 134 (5670MHz)

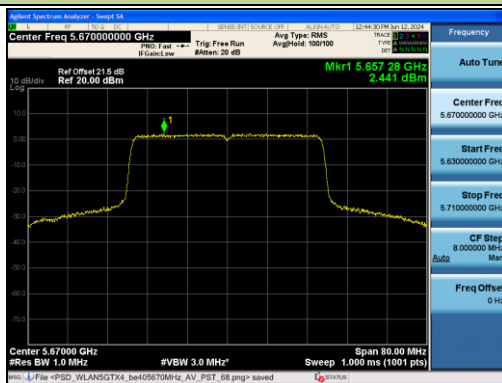


Channel 142 (5710MHz)

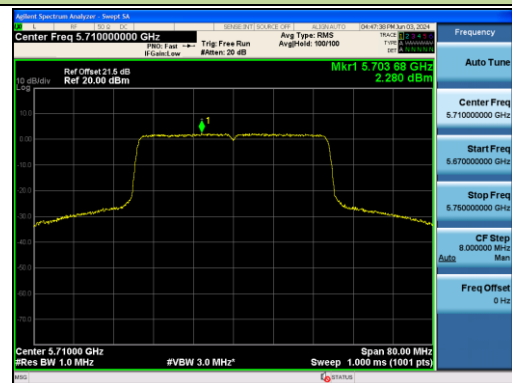

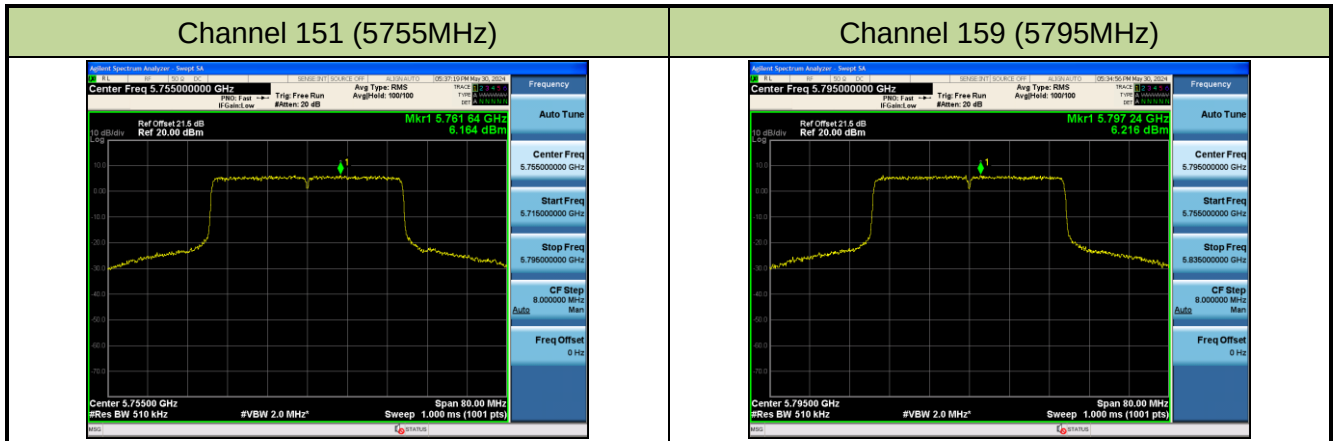


802.11be-EHT80 Power Spectral Density - Ant 3


Channel 42 (5210MHz)

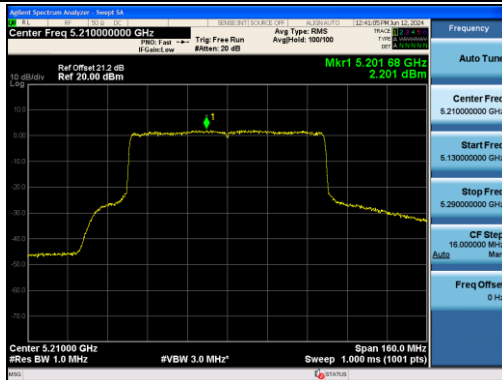


Channel 58 (5290MHz)

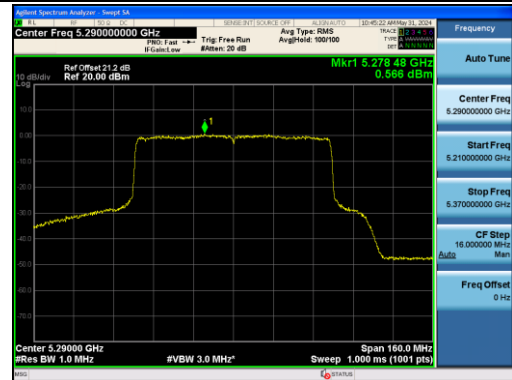


Channel 106 (5530MHz)

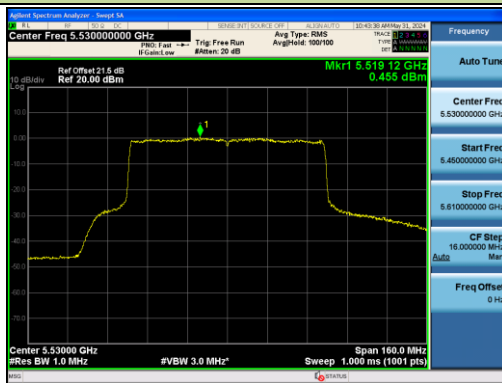


Channel 122 (5610MHz)

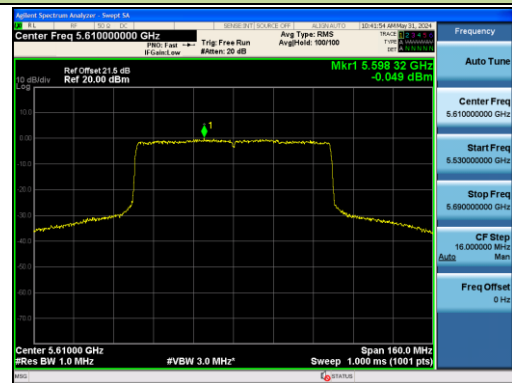

Channel 138 (5690MHz)

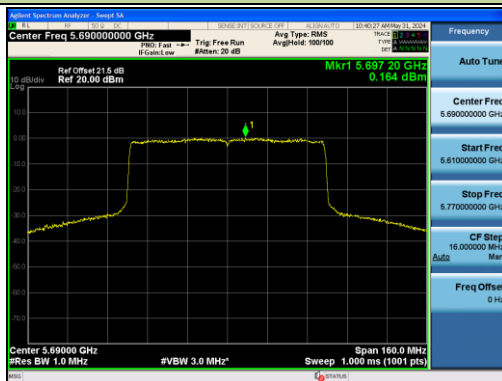

Channel 155 (5775MHz)

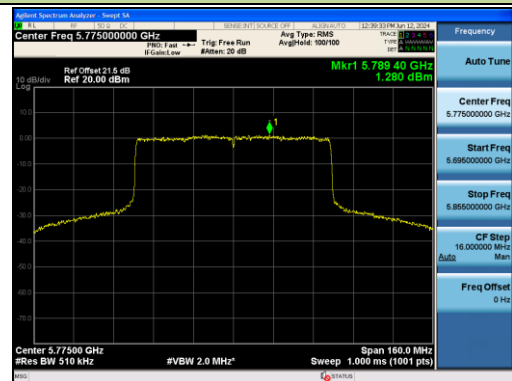


802.11be-EHT160 Power Spectral Density - Ant 3

Channel 50 (5250MHz)



Channel 114 (5570MHz)

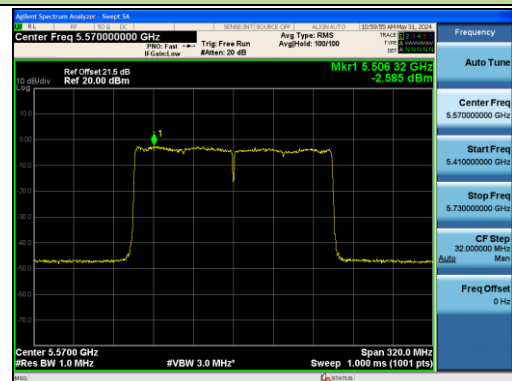

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

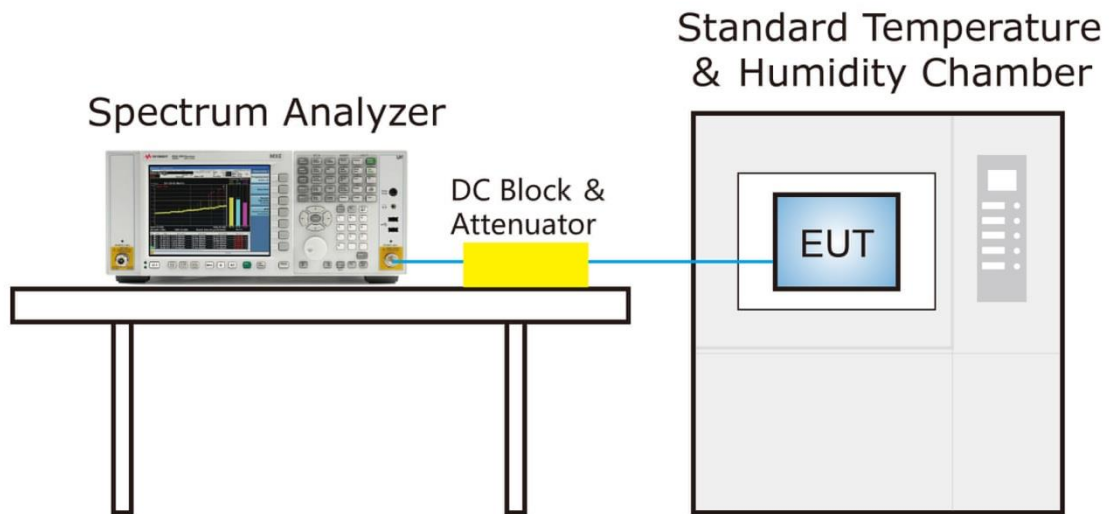

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

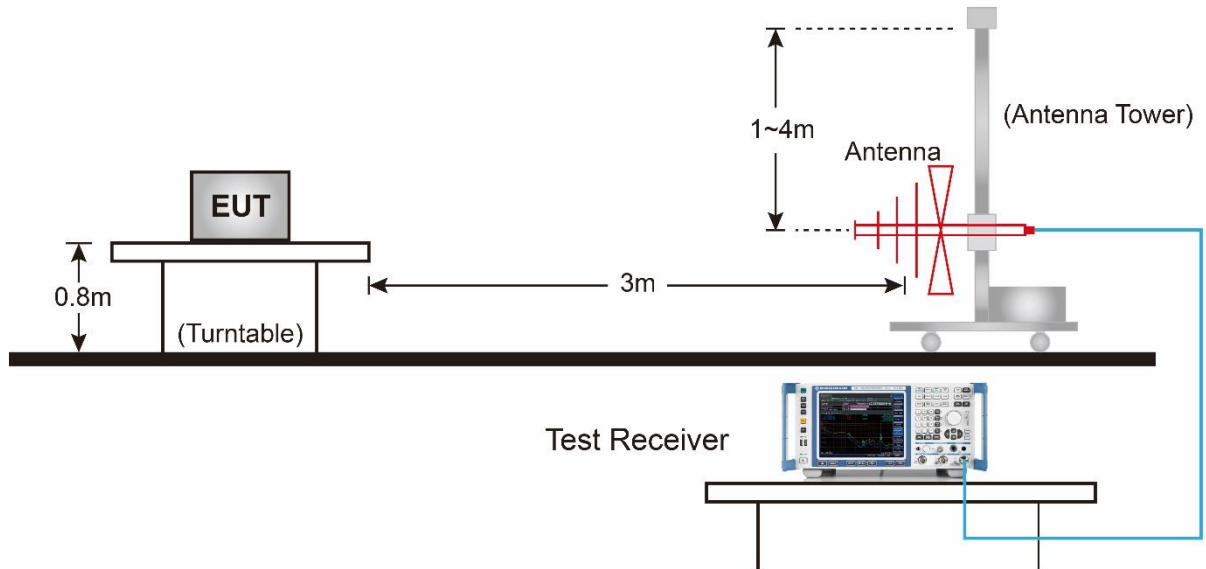


Above 1GHz Test Setup:

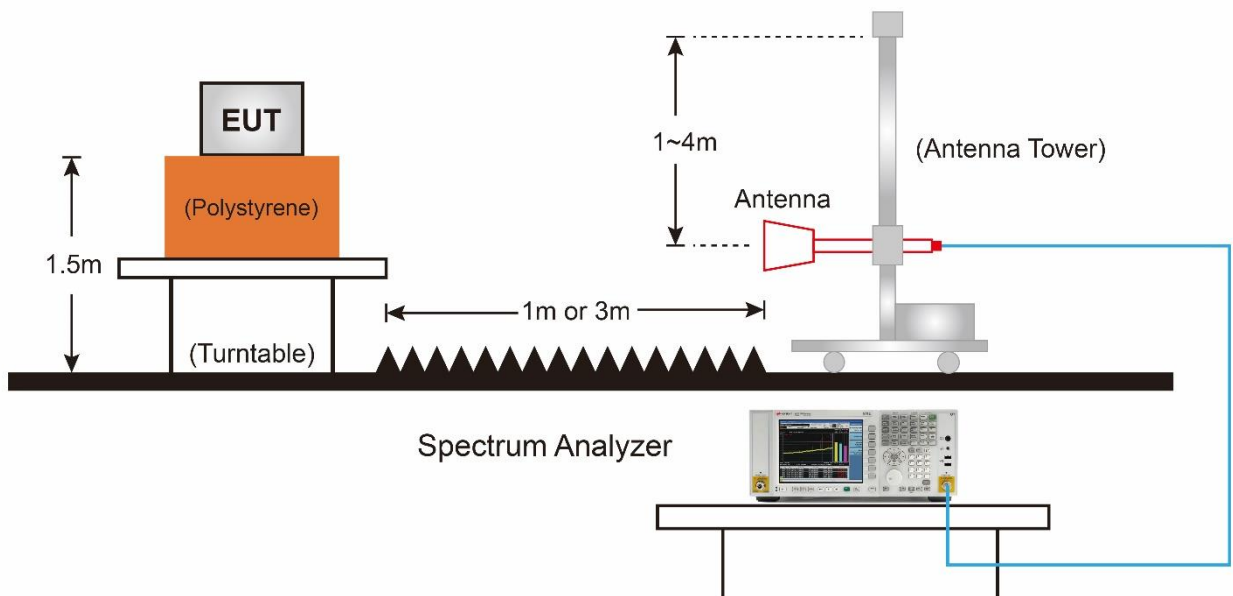

7.8.5.Test Result

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-13
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

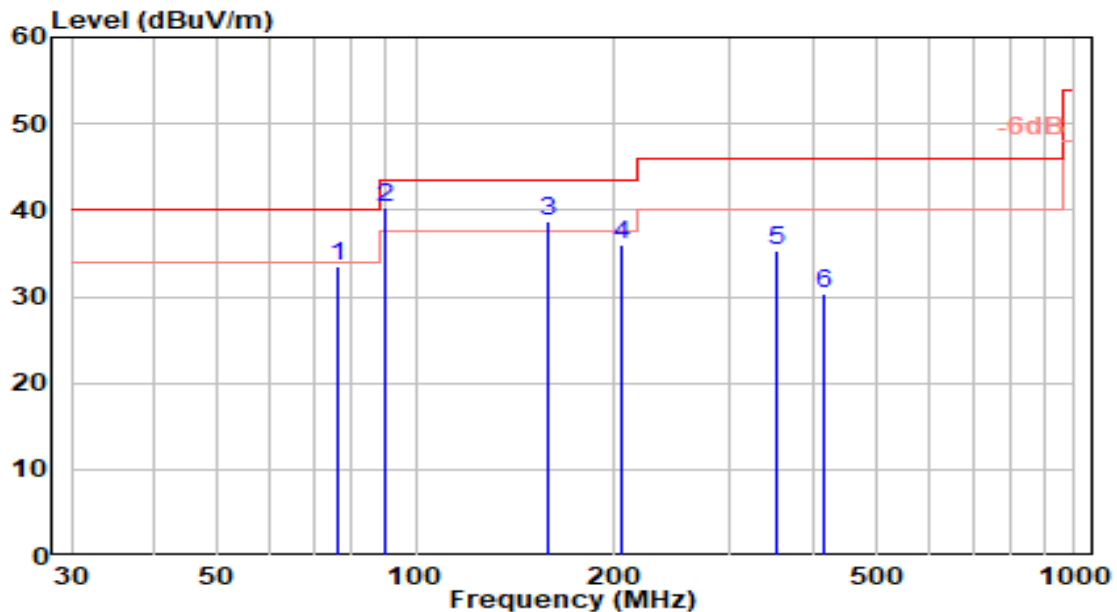


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		75.950	19.00	14.55	33.54	-6.46	40.00	200	302	QP
2	*	90.000	23.55	16.83	40.38	-3.12	43.50	200	282	QP
3		158.590	23.36	15.43	38.78	-4.72	43.50	150	94	QP
4		205.560	18.17	17.84	36.01	-7.49	43.50	100	276	QP
5		352.220	12.74	22.50	35.24	-10.76	46.00	150	145	QP
6		416.360	6.84	23.48	30.32	-15.68	46.00	200	324	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-13
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

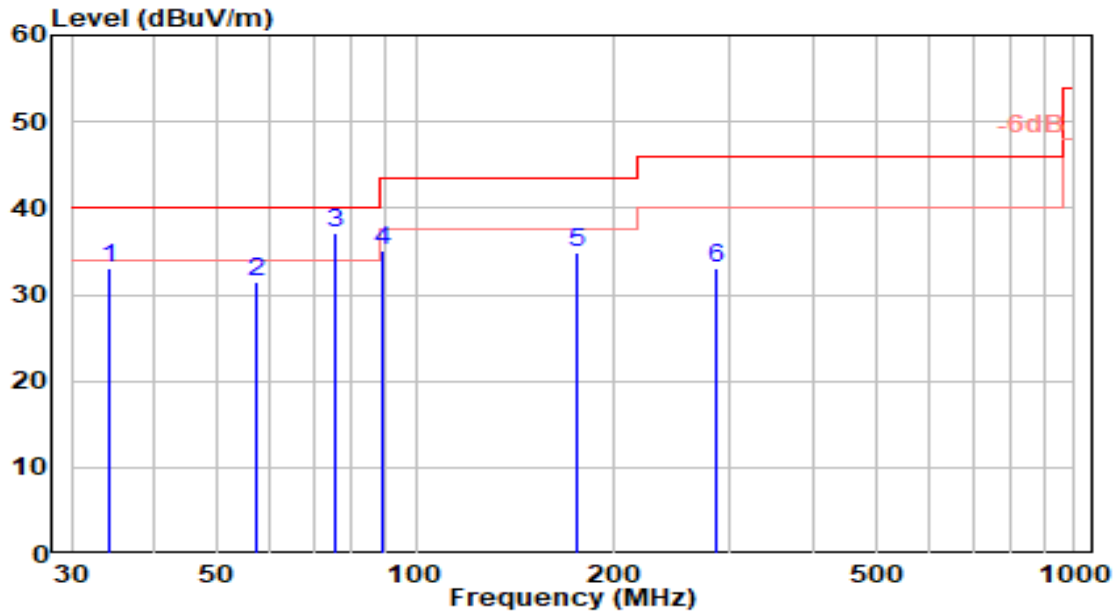


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	34.240	15.43	17.57	33.00	-7.00	40.00	200	177	QP
2	57.120	11.78	19.59	31.36	-8.64	40.00	100	7	QP
3	* 75.170	22.40	14.68	37.08	-2.92	40.00	100	7	QP
4	89.160	18.55	16.58	35.12	-8.38	43.50	200	7	QP
5	175.680	18.64	16.12	34.77	-8.73	43.50	100	313	QP
6	285.410	12.72	20.31	33.03	-12.97	46.00	150	83	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

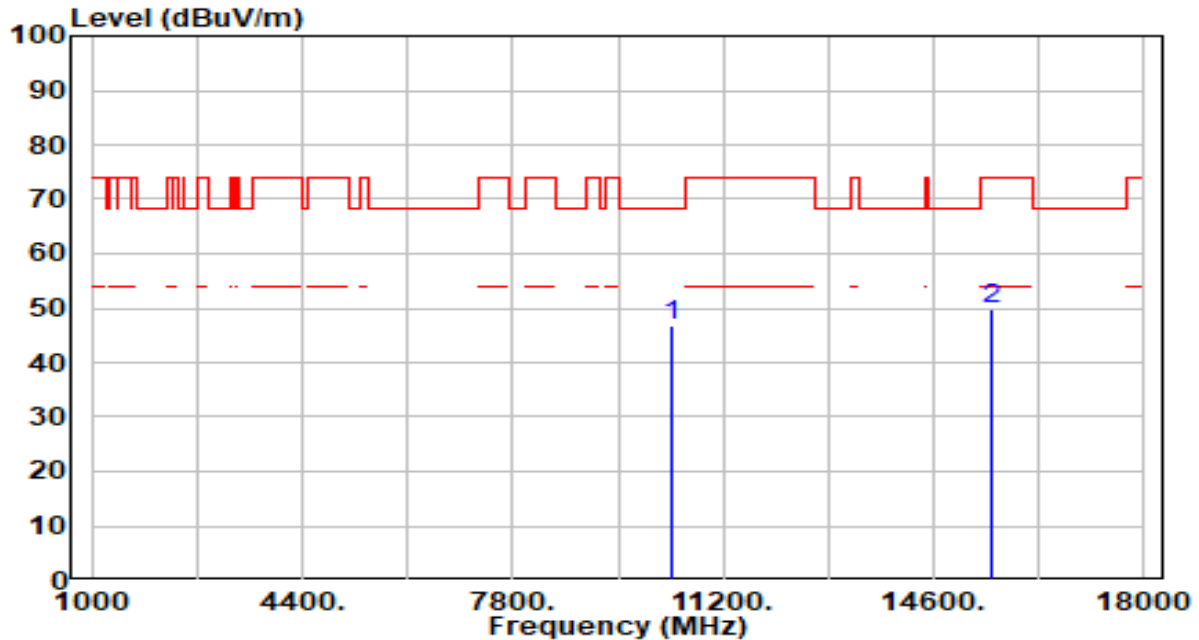


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.98	4.87	46.85	-21.35	68.20	100	0	Peak
2		15540.000	43.74	6.21	49.95	-24.05	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

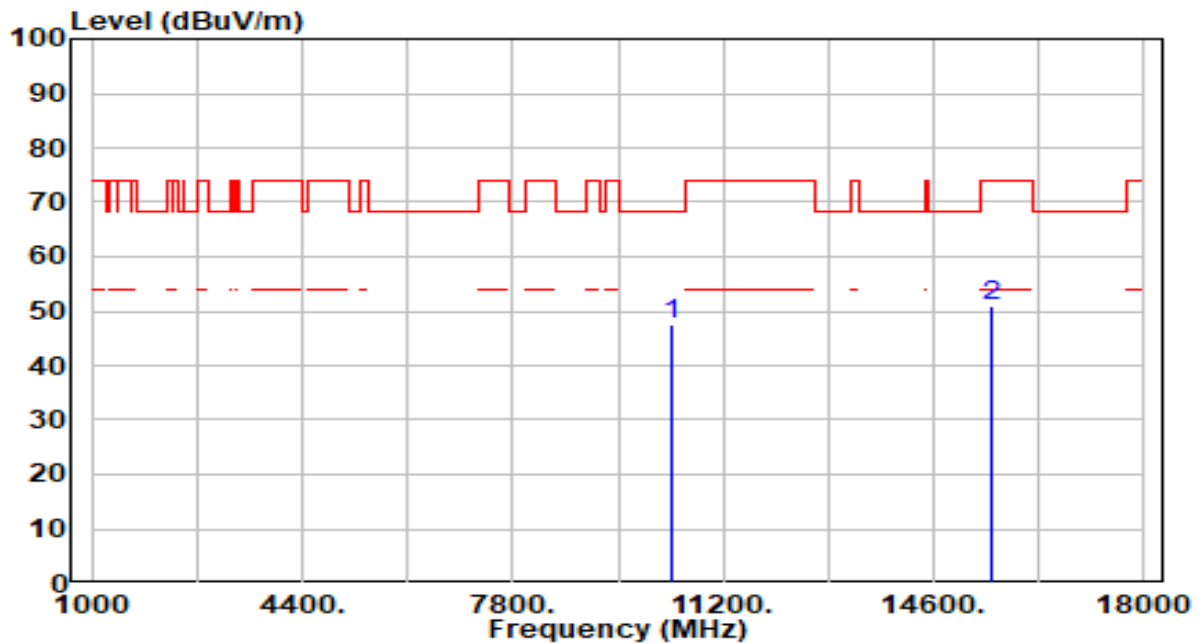


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.74	4.87	47.61	-20.59	68.20	200	360	Peak
2		15540.000	44.68	6.21	50.89	-23.11	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

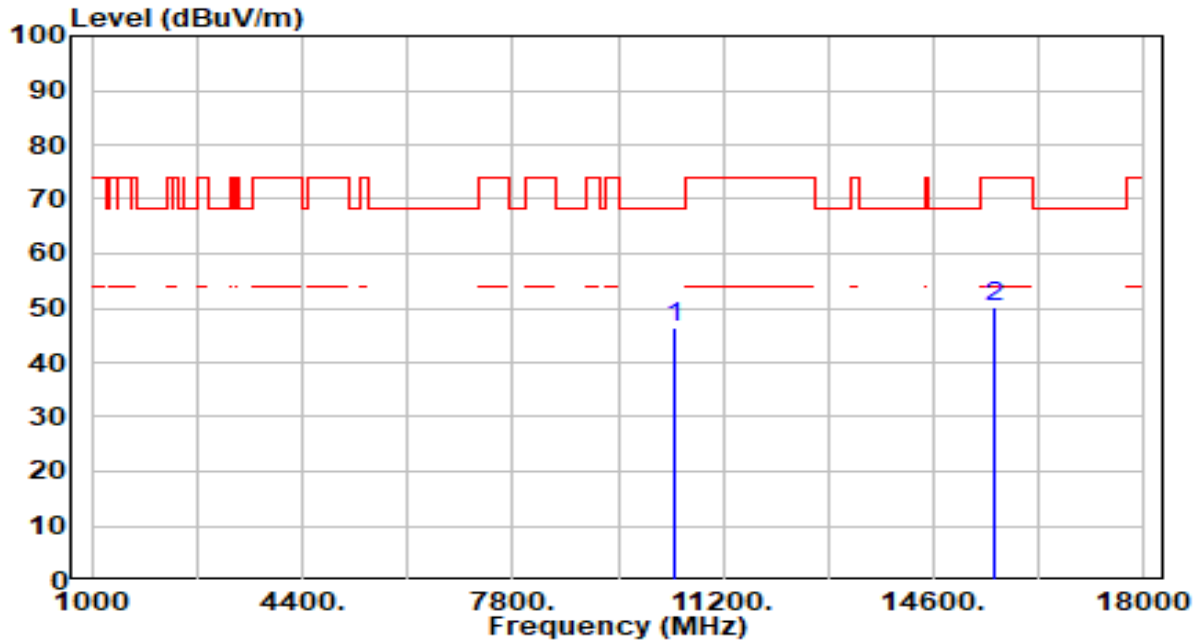


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.54	4.82	46.36	-21.84	68.20	100	349	Peak
2		15600.000	44.10	6.15	50.25	-23.75	74.00	200	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

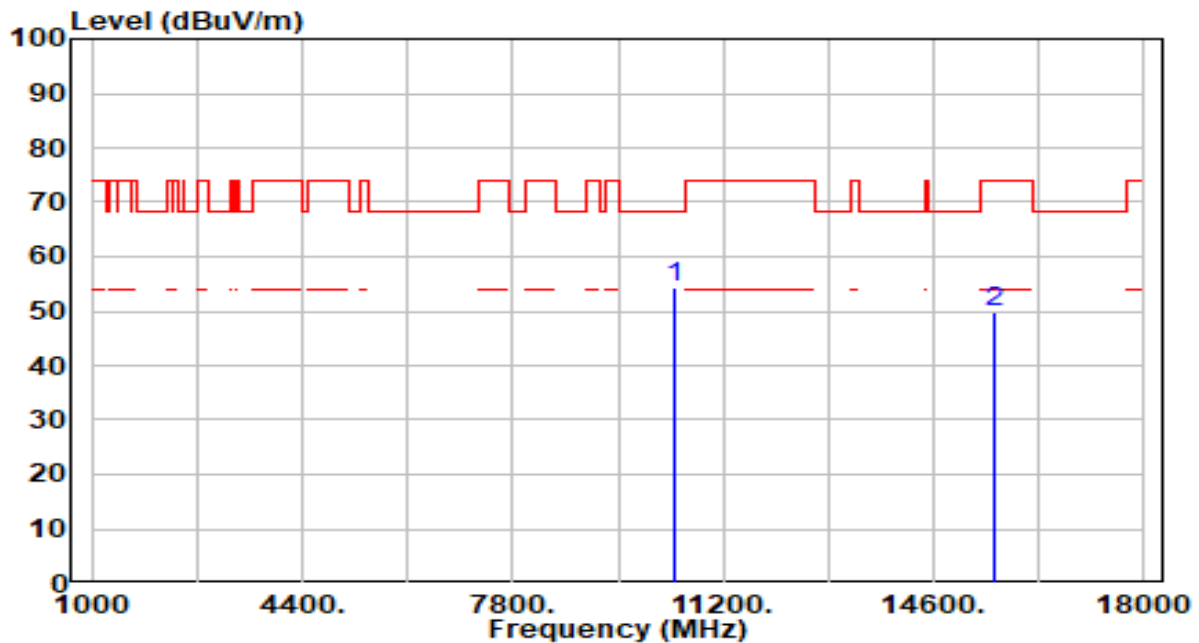


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	49.45	4.82	54.27	-13.93	68.20	200	136	Peak
2		15600.000	43.66	6.15	49.81	-24.19	74.00	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

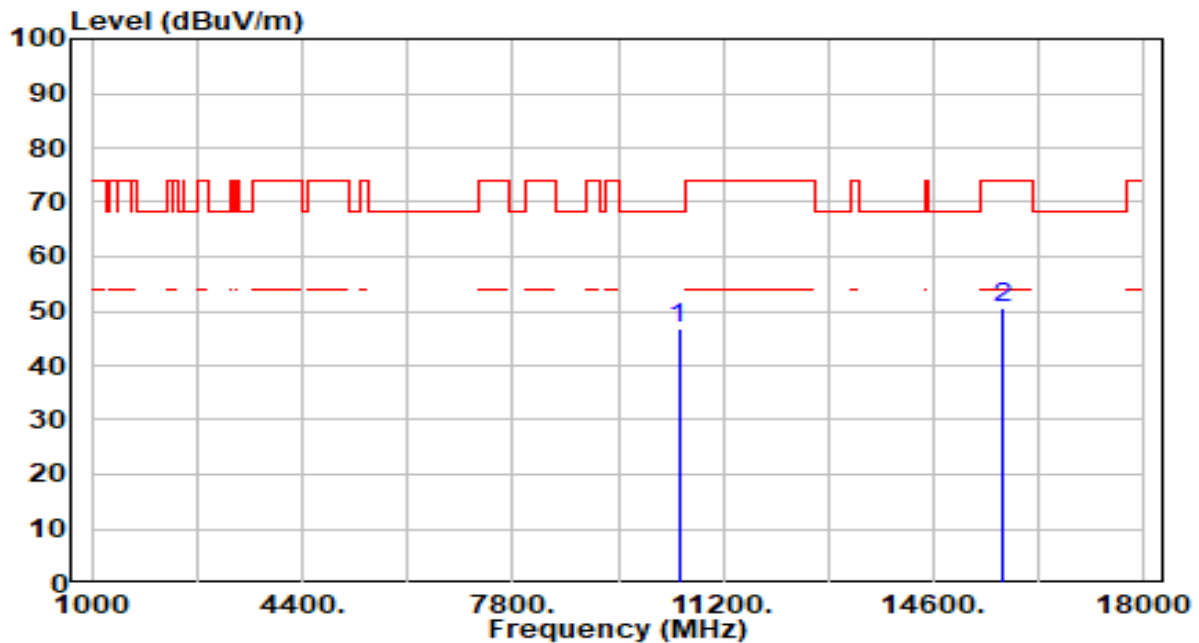


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	42.23	4.71	46.94	-21.26	68.20	100	0	Peak
2		15720.000	44.09	6.39	50.48	-23.52	74.00	100	44	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

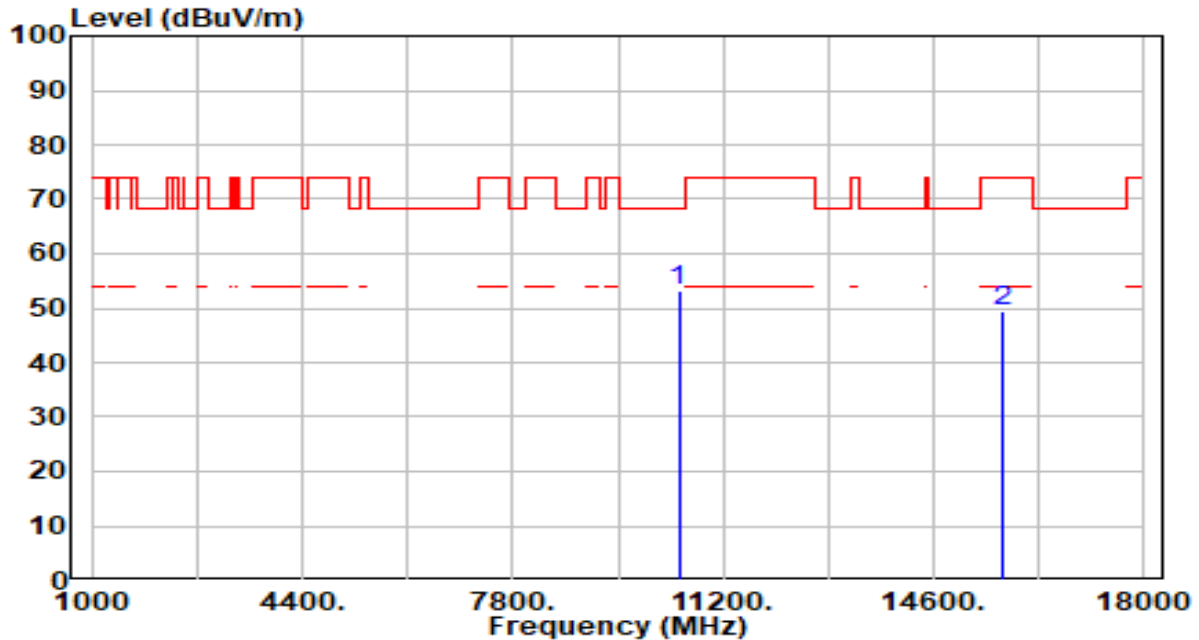


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	48.36	4.71	53.07	-15.13	68.20	169	0	Peak
2		15720.000	43.20	6.39	49.59	-24.41	74.00	100	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

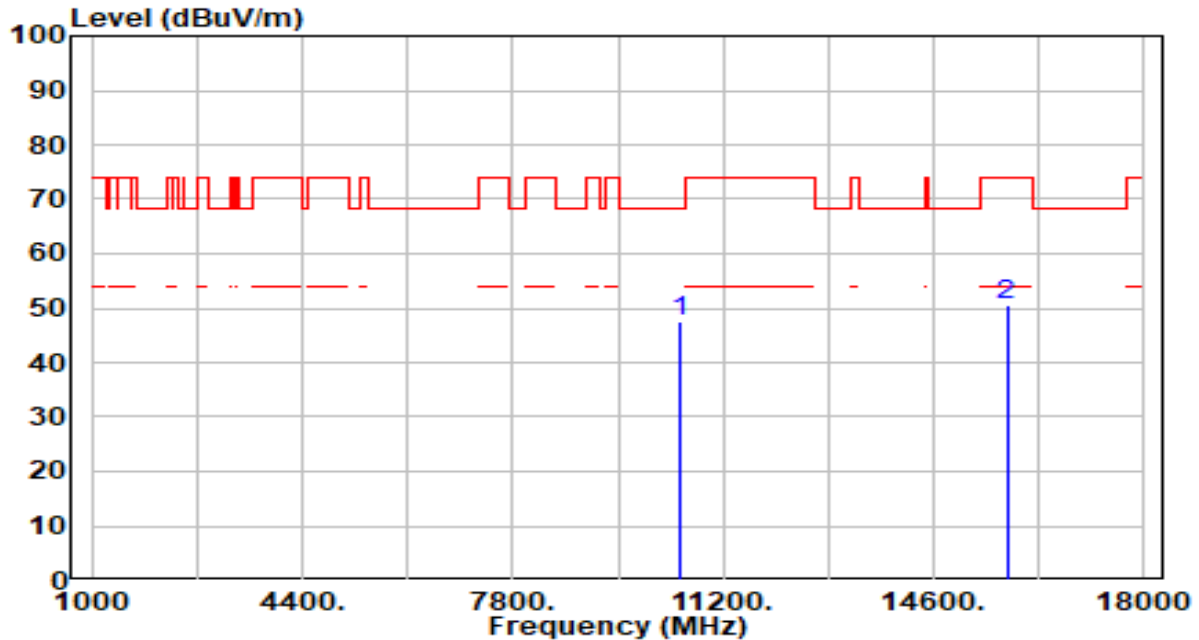


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.79	4.67	47.46	-20.74	68.20	100	90	Peak
2		15780.000	44.00	6.51	50.51	-23.49	74.00	100	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

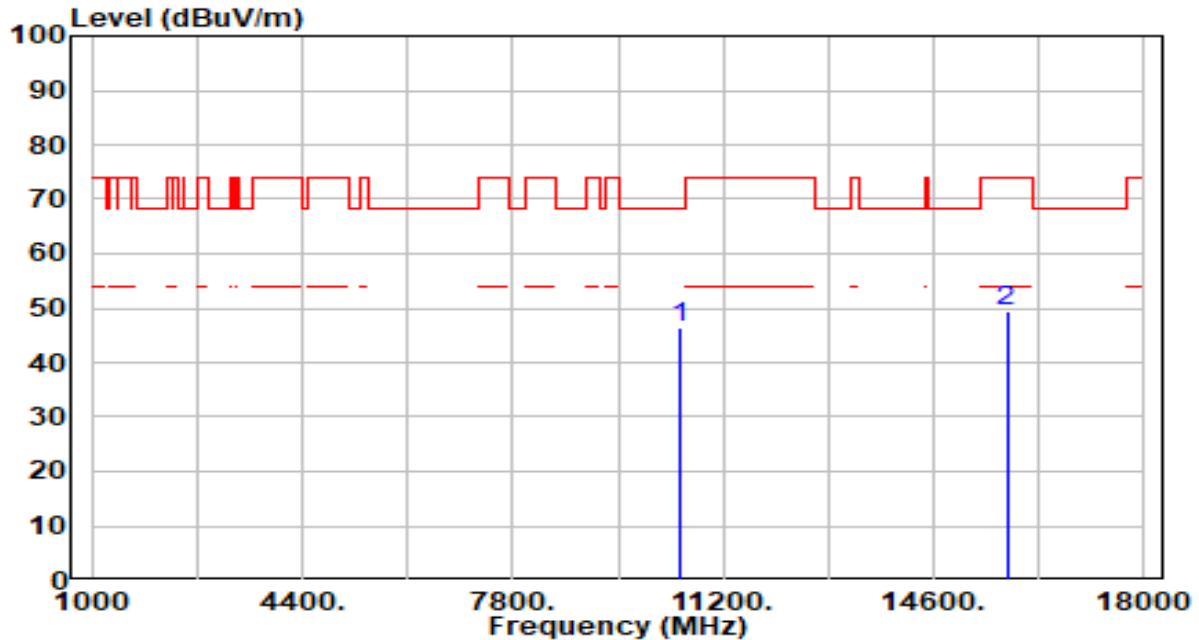


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.86	4.67	46.53	-21.67	68.20	200	291	Peak
2		15780.000	42.92	6.51	49.42	-24.58	74.00	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

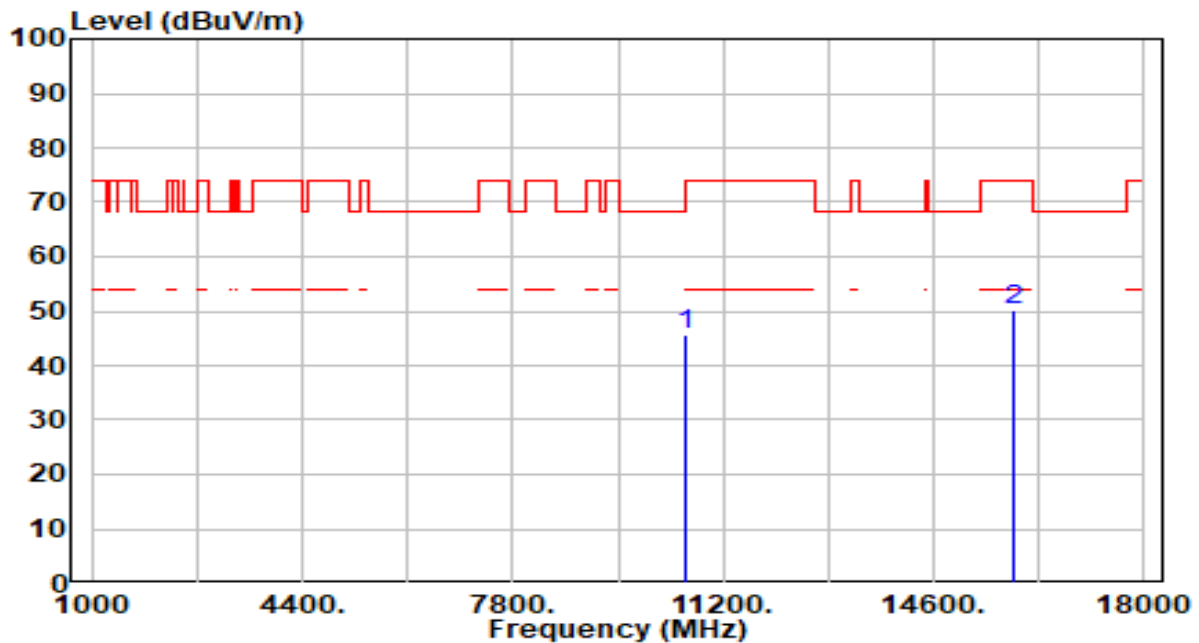


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.17	4.61	45.79	-22.41	68.20	168	360	Peak
2		15900.000	43.77	6.55	50.32	-23.68	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

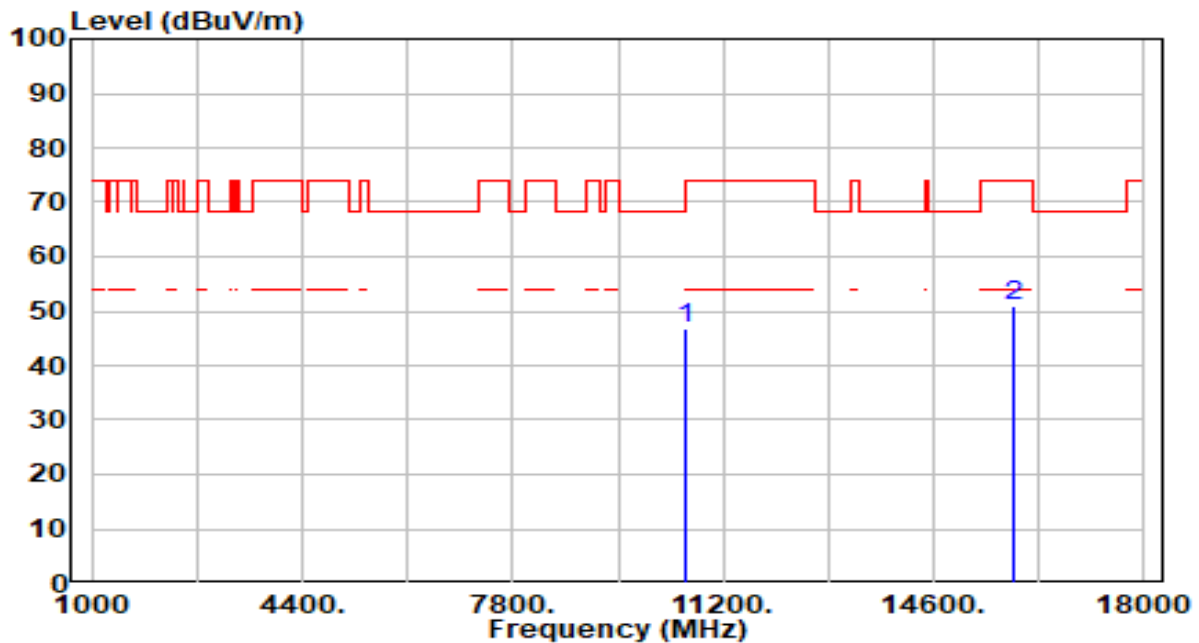


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.10	4.61	46.72	-21.49	68.20	200	51	Peak
2		15900.000	44.31	6.55	50.86	-23.14	74.00	100	281	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

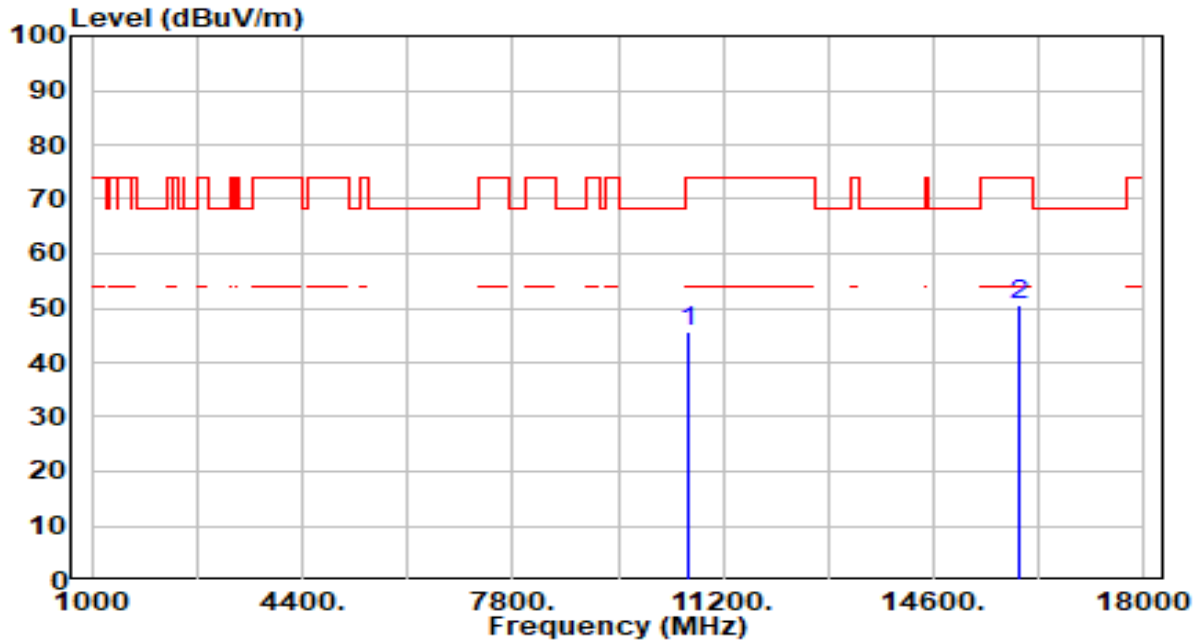


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.10	4.62	45.73	-28.27	74.00	200	118	Peak
2	*	15960.000	43.96	6.55	50.51	-23.49	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

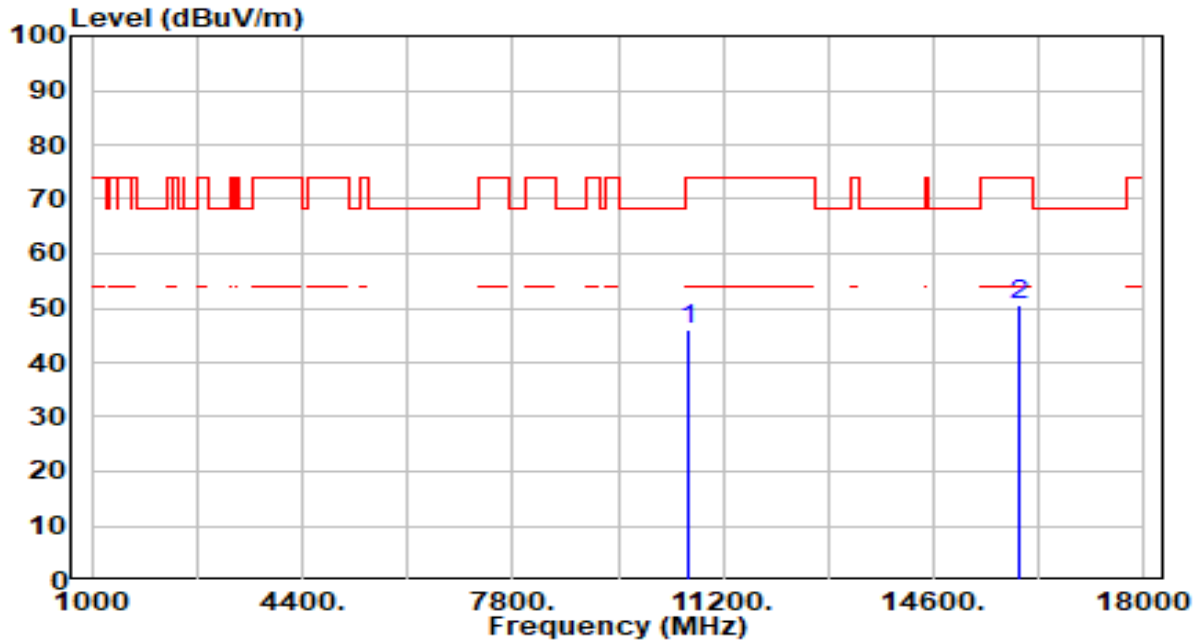


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.47	4.62	46.09	-27.91	74.00	100	1	Peak
2	*	15960.000	44.17	6.55	50.72	-23.28	74.00	100	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

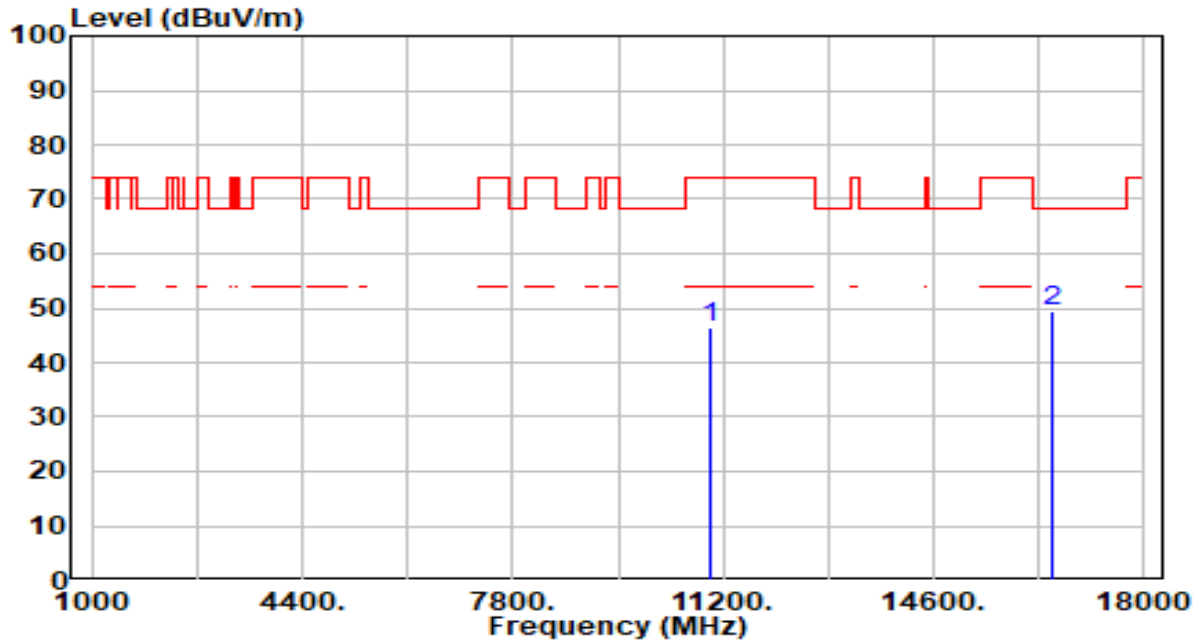


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.99	4.52	46.51	-27.49	74.00	100	14	Peak
2	*	16500.000	43.48	6.10	49.58	-18.62	68.20	100	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

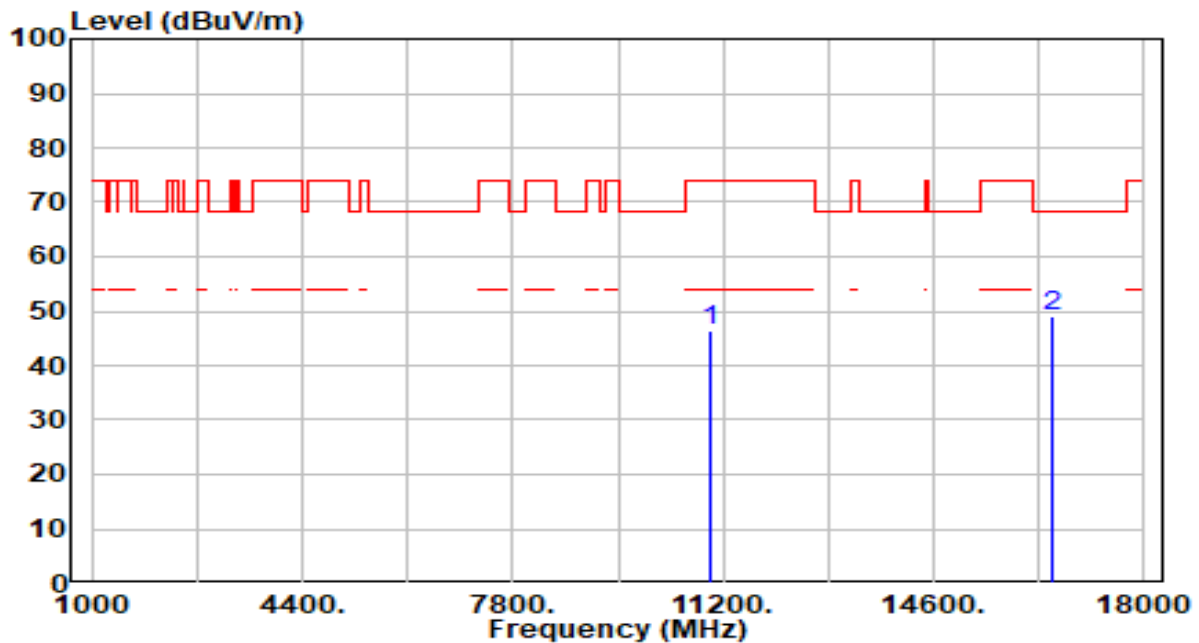


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.83	4.52	46.35	-27.65	74.00	200	86	Peak
2	*	16500.000	42.85	6.10	48.95	-19.25	68.20	100	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

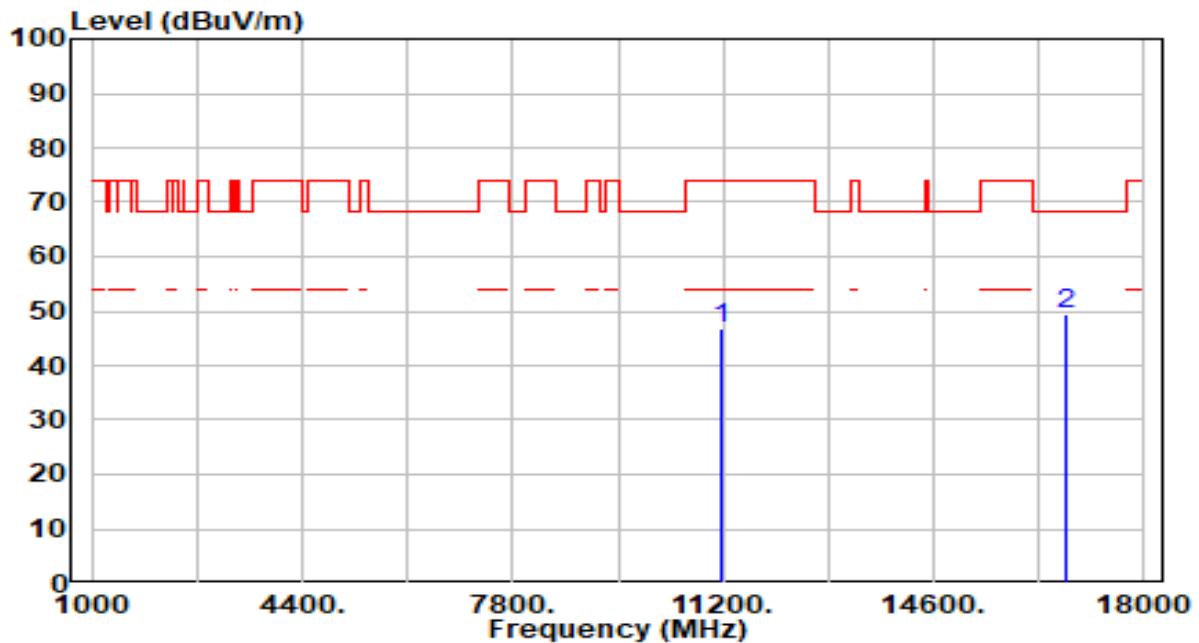


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.87	4.94	46.81	-27.19	74.00	100	156	Peak
2	*	16740.000	43.21	6.19	49.40	-18.80	68.20	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

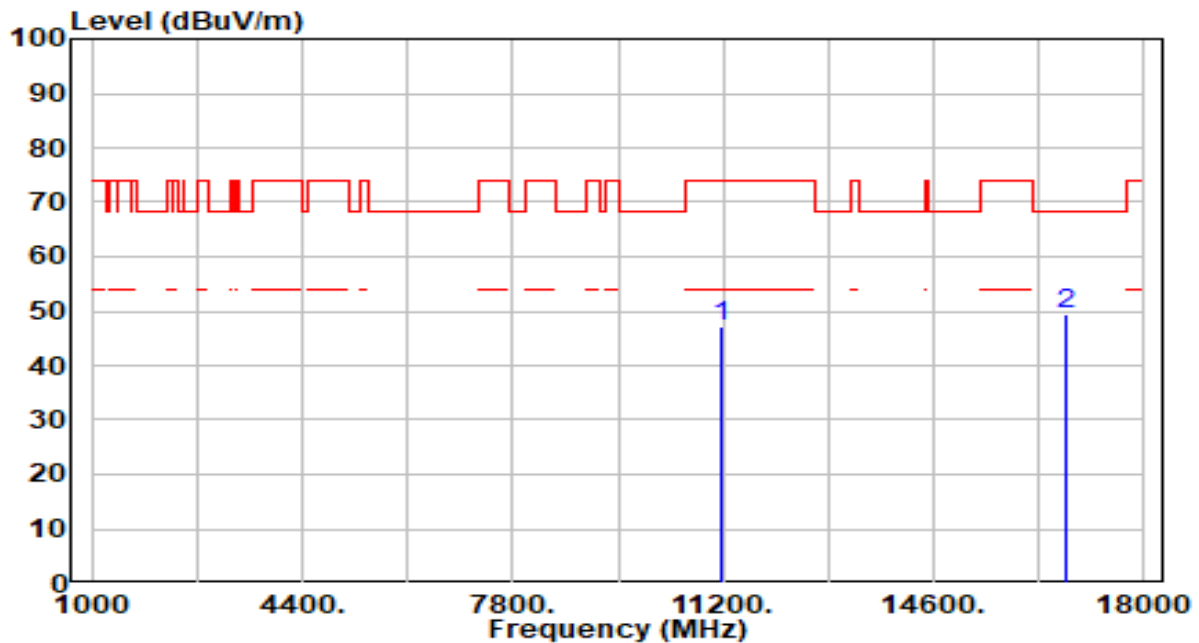


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	42.10	4.94	47.04	-26.96	74.00	100	0	Peak
2	*	16740.000	43.16	6.19	49.35	-18.85	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

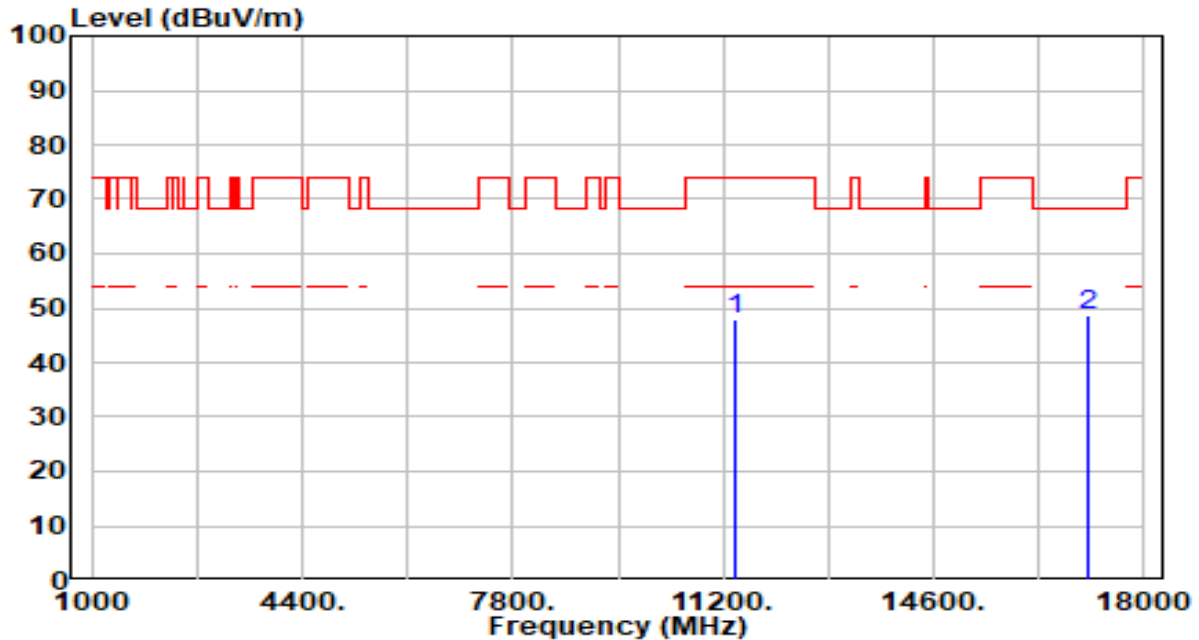


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.50	5.26	47.77	-26.23	74.00	200	91	Peak
2	*	17100.000	42.71	5.97	48.68	-19.52	68.20	200	28	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

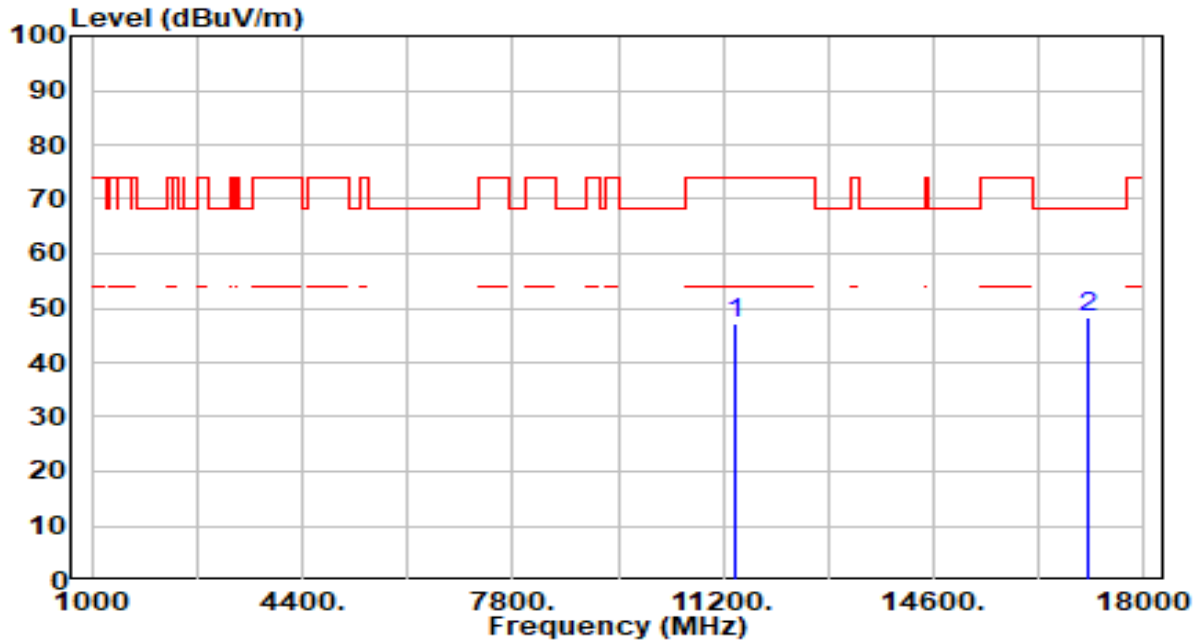


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.82	5.26	47.08	-26.92	74.00	100	47	Peak
2	*	17100.000	42.42	5.97	48.39	-19.81	68.20	100	53	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

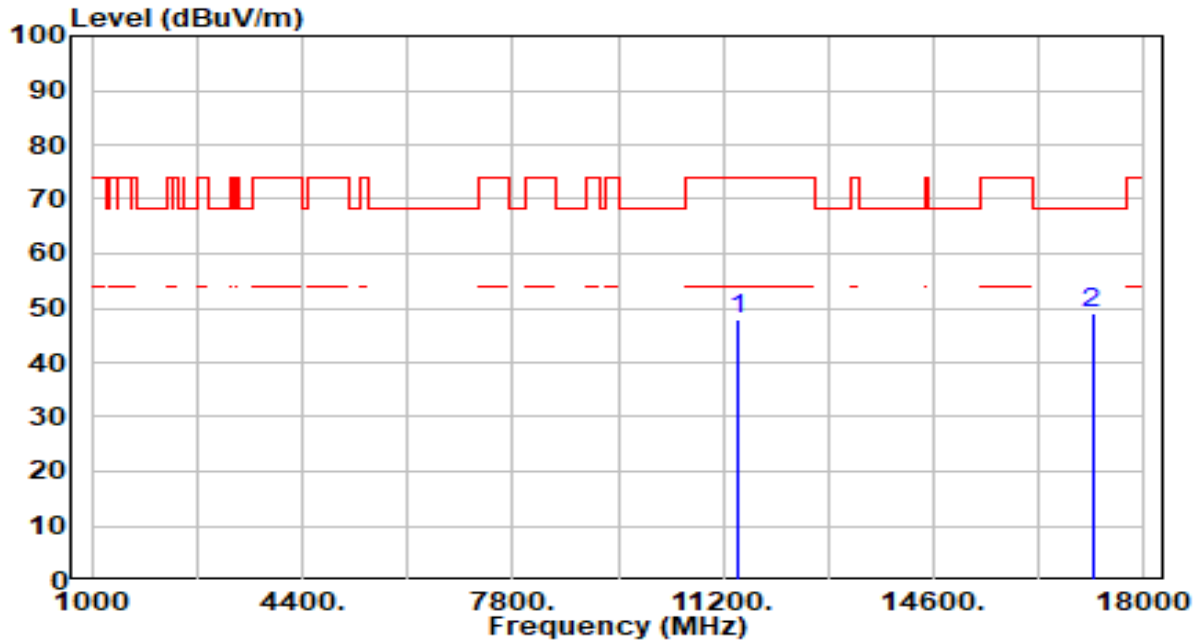


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	42.49	5.29	47.78	-26.22	74.00	100	288	Peak
2	*	17160.000	43.31	5.87	49.18	-19.02	68.20	100	262	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

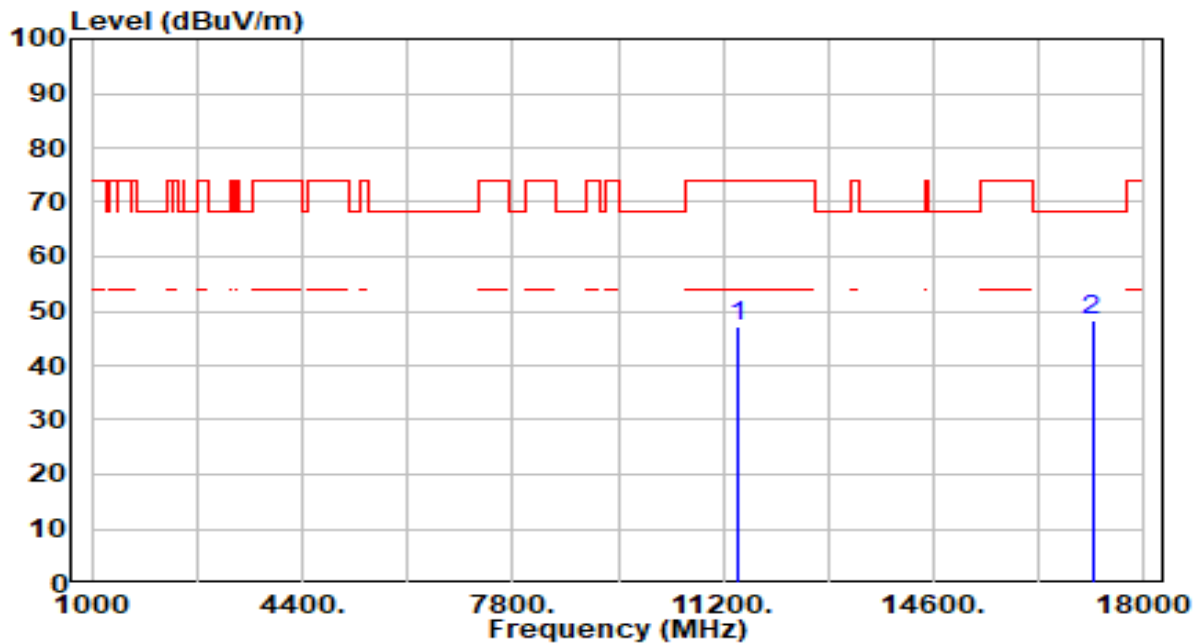


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.75	5.29	47.03	-26.97	74.00	100	214	Peak
2	*	17160.000	42.60	5.87	48.47	-19.73	68.20	100	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

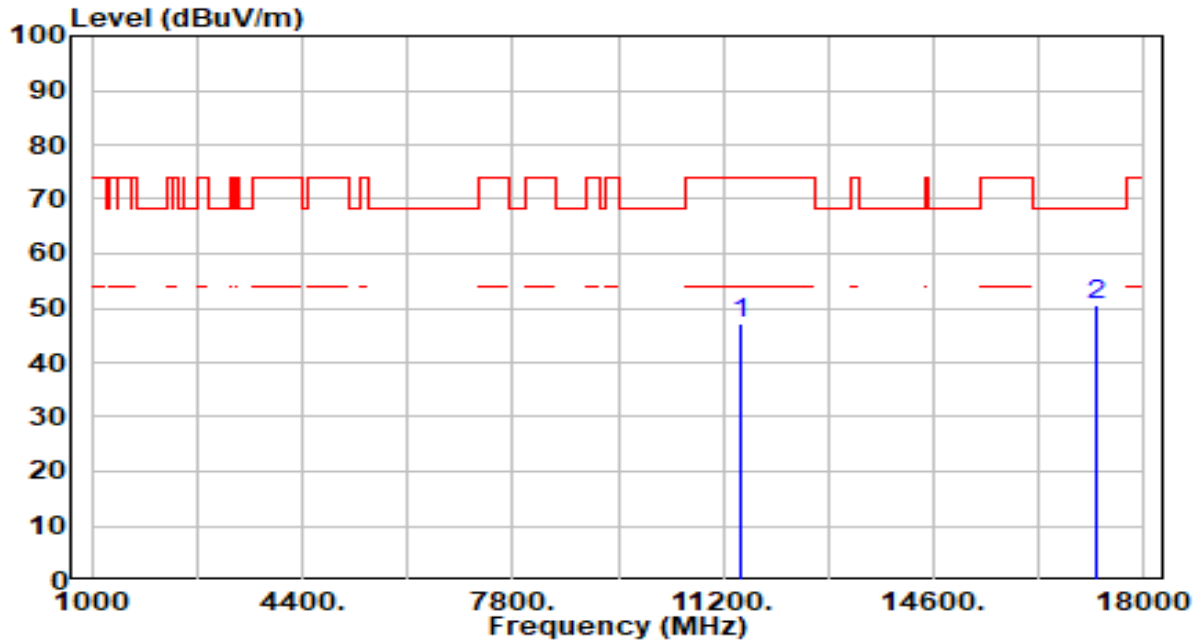


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.81	5.32	47.13	-26.87	74.00	100	12	Peak
2	*	17235.000	44.69	5.71	50.40	-17.80	68.20	100	284	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

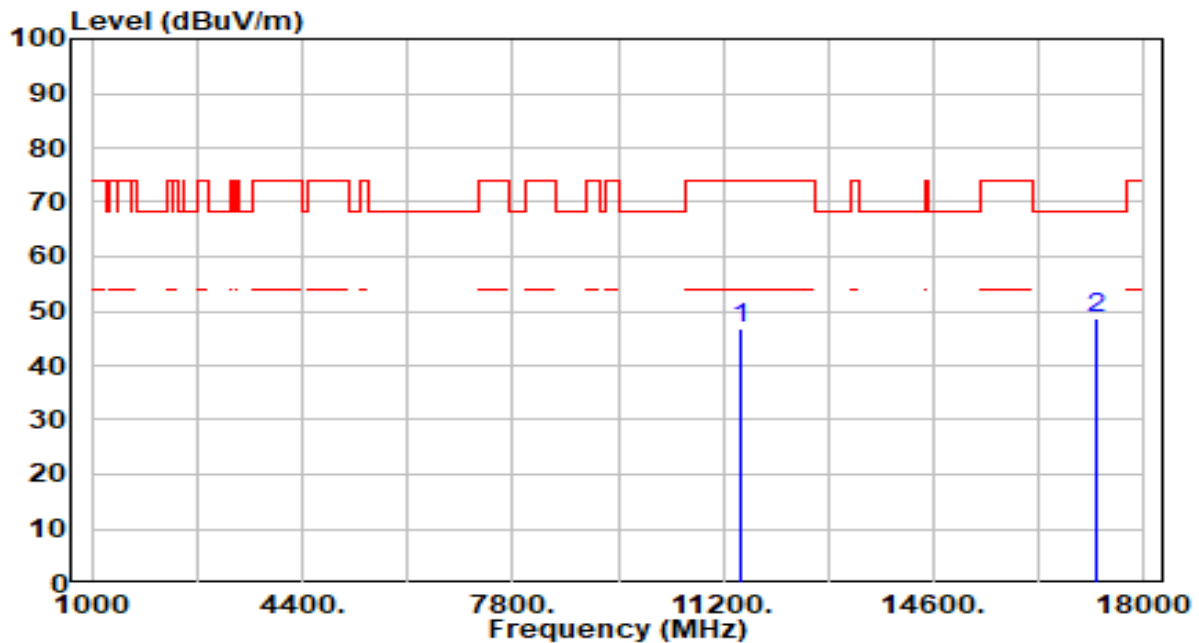


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.36	5.32	46.68	-27.32	74.00	200	291	Peak
2	*	17235.000	42.98	5.71	48.69	-19.51	68.20	200	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

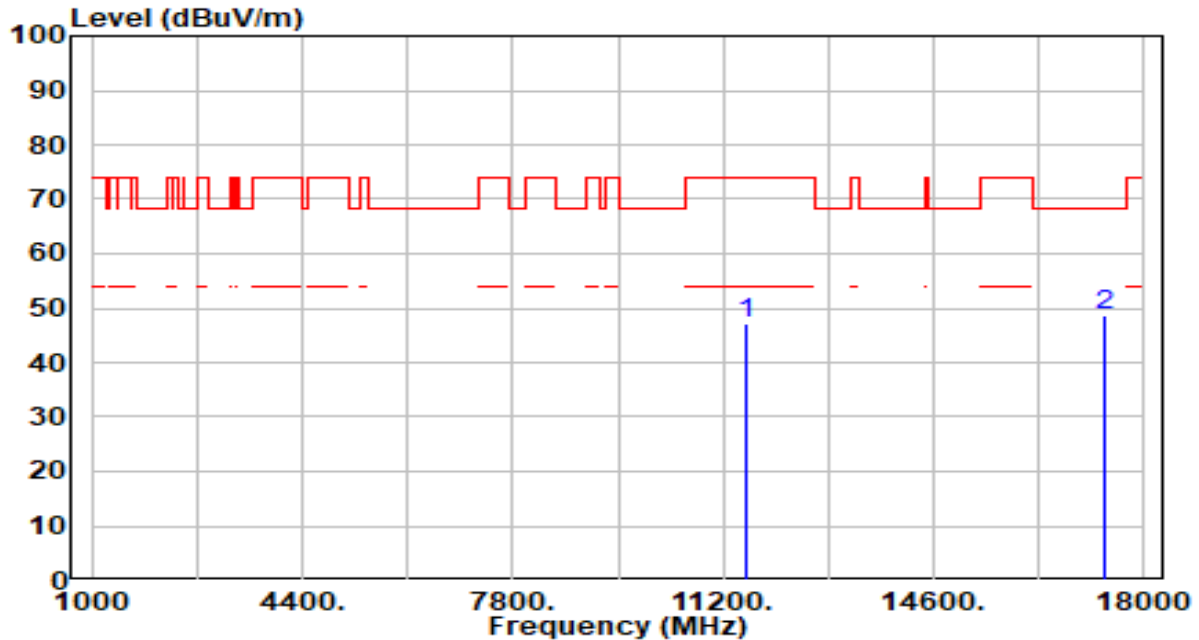


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	41.62	5.38	46.99	-27.01	74.00	100	107	Peak
2	*	17355.000	43.32	5.39	48.71	-19.49	68.20	100	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

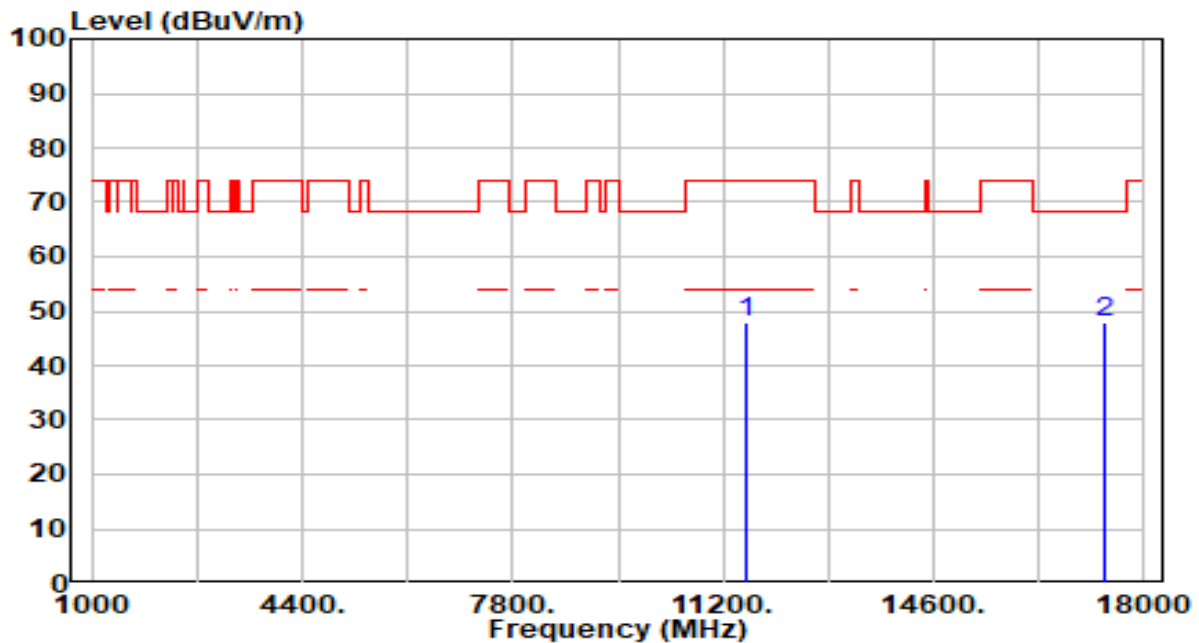


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	42.38	5.38	47.76	-26.24	74.00	200	205	Peak
2	*	17355.000	42.68	5.39	48.07	-20.13	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

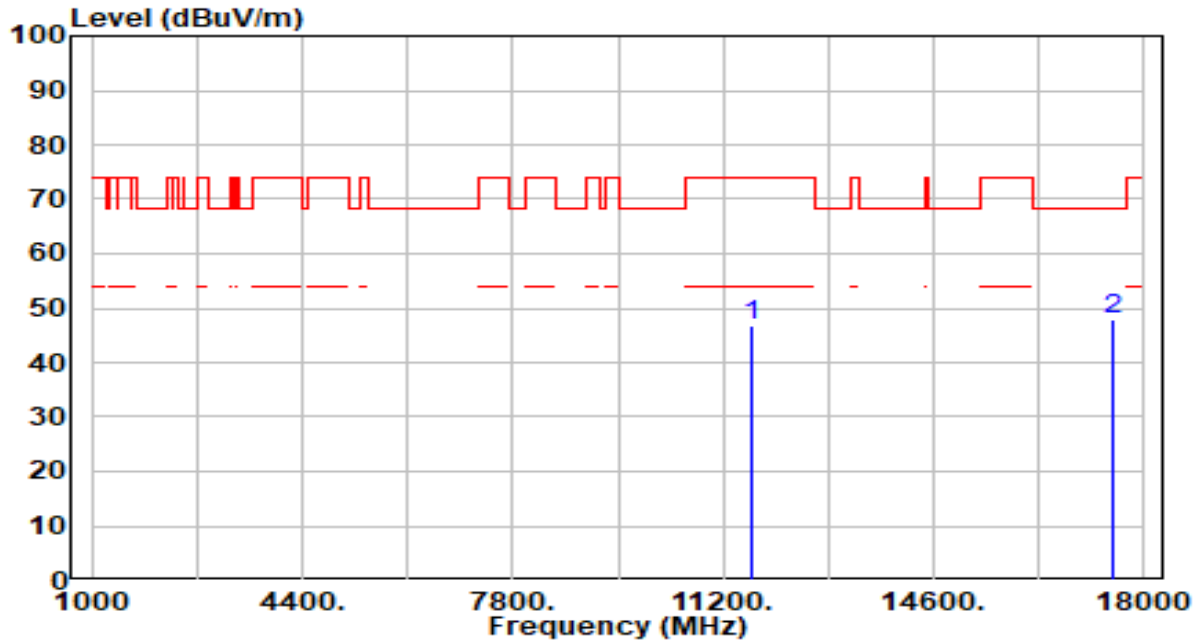


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.53	5.36	46.90	-27.10	74.00	100	256	Peak
2	*	17475.000	42.66	5.29	47.96	-20.24	68.20	198	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

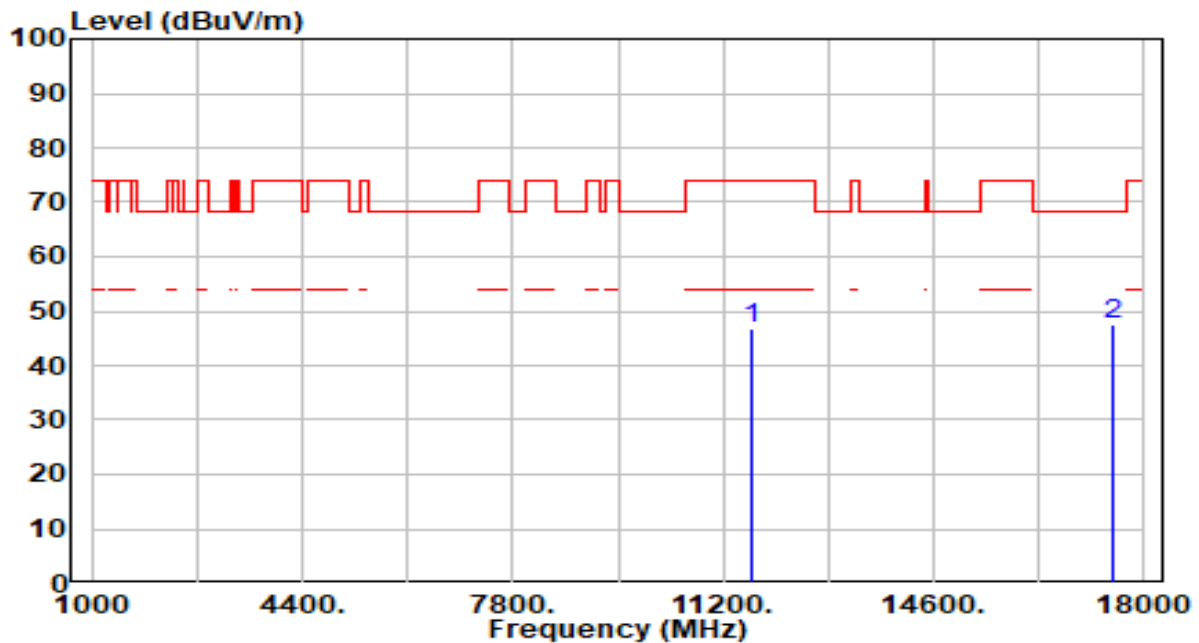


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.29	5.36	46.65	-27.35	74.00	193	360	Peak
2	*	17475.000	42.30	5.29	47.59	-20.61	68.20	100	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

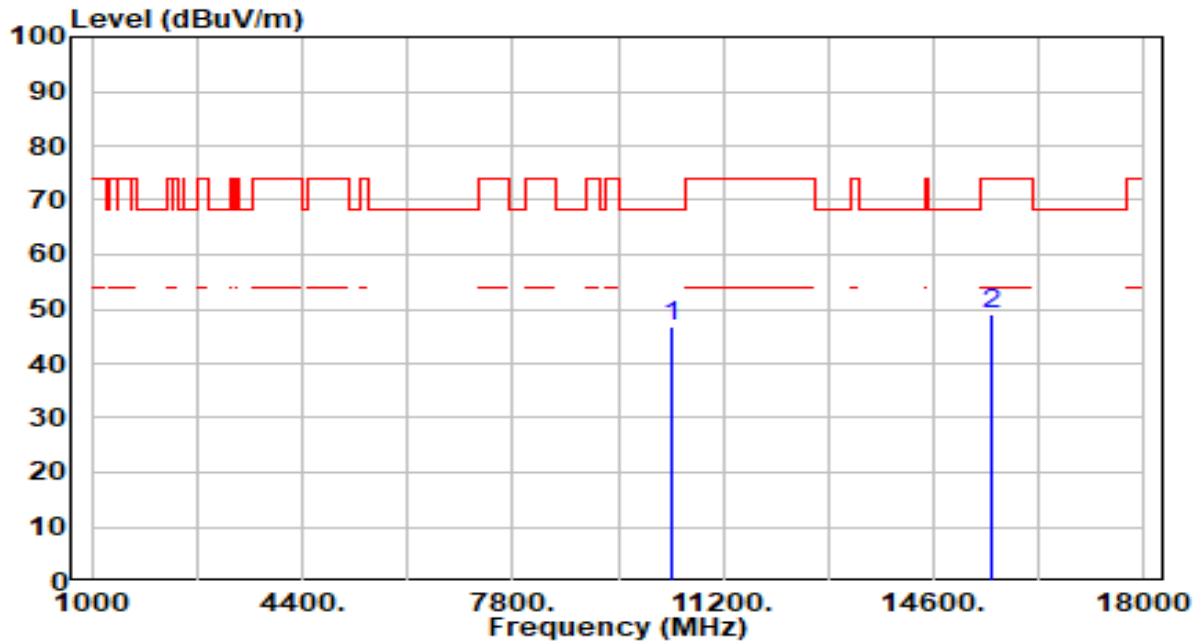


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.79	4.87	46.67	-21.53	68.20	100	45	Peak
2		15540.000	43.04	6.21	49.24	-24.76	74.00	100	157	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

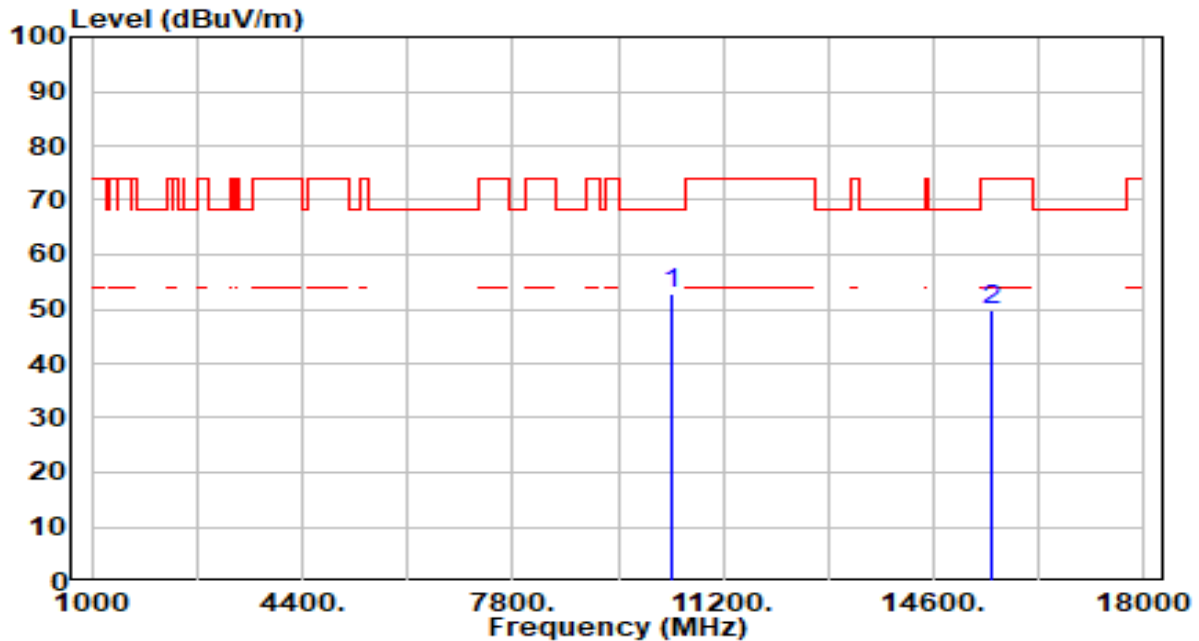


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	47.78	4.87	52.65	-15.55	68.20	200	147	Peak
2		15540.000	43.79	6.21	50.00	-24.00	74.00	100	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

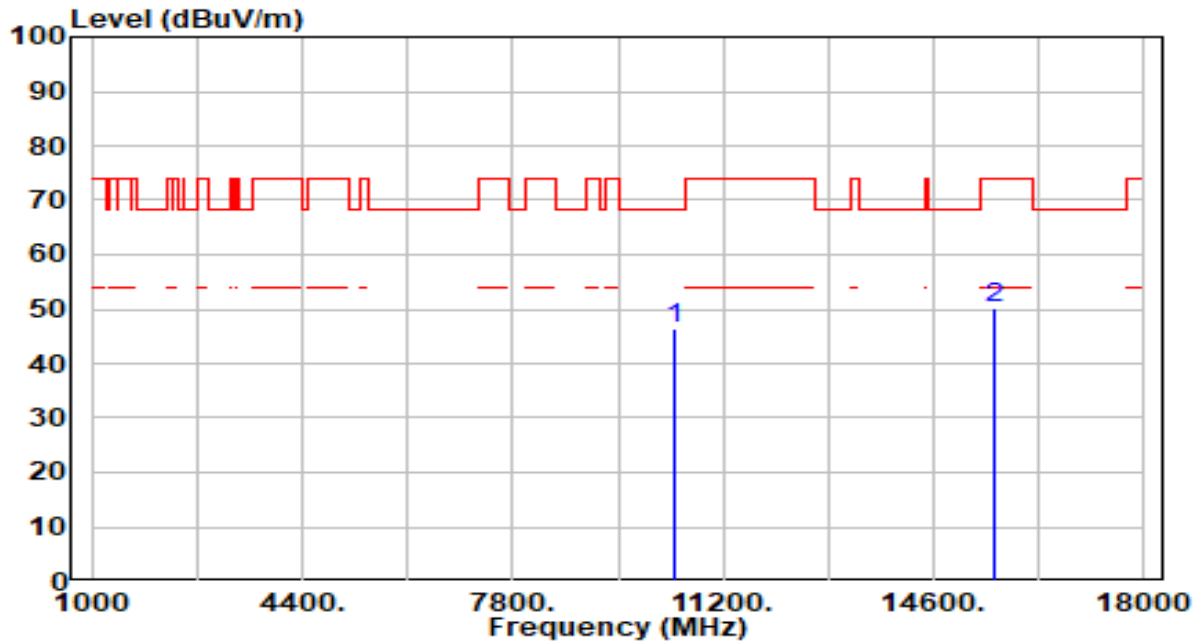


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.61	4.82	46.43	-21.77	68.20	100	69	Peak
2		15600.000	44.01	6.15	50.16	-23.84	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

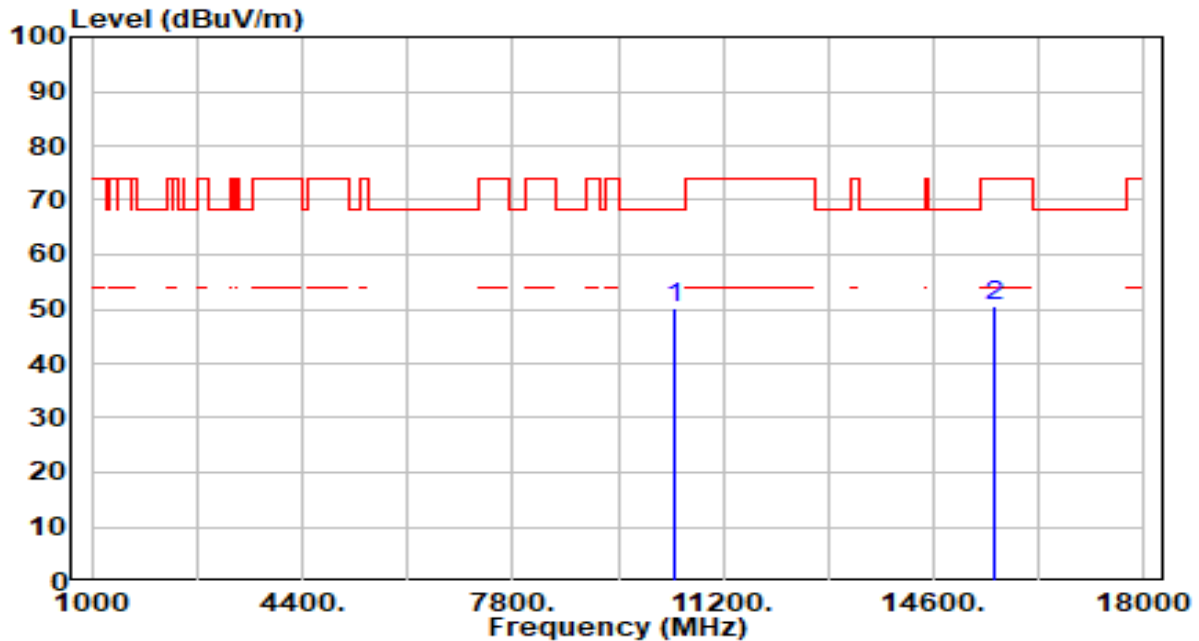


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	45.42	4.82	50.24	-17.96	68.20	200	180	Peak
2		15600.000	44.26	6.15	50.40	-23.60	74.00	100	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

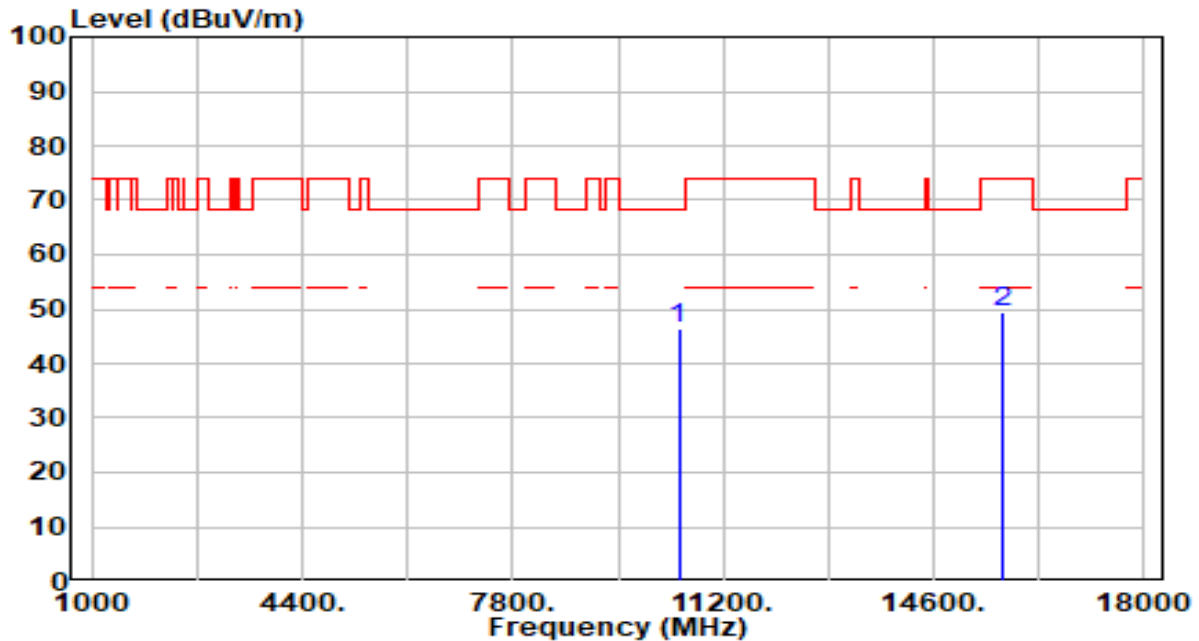


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.66	4.71	46.37	-21.83	68.20	200	82	Peak
2		15720.000	43.14	6.39	49.52	-24.48	74.00	100	220	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

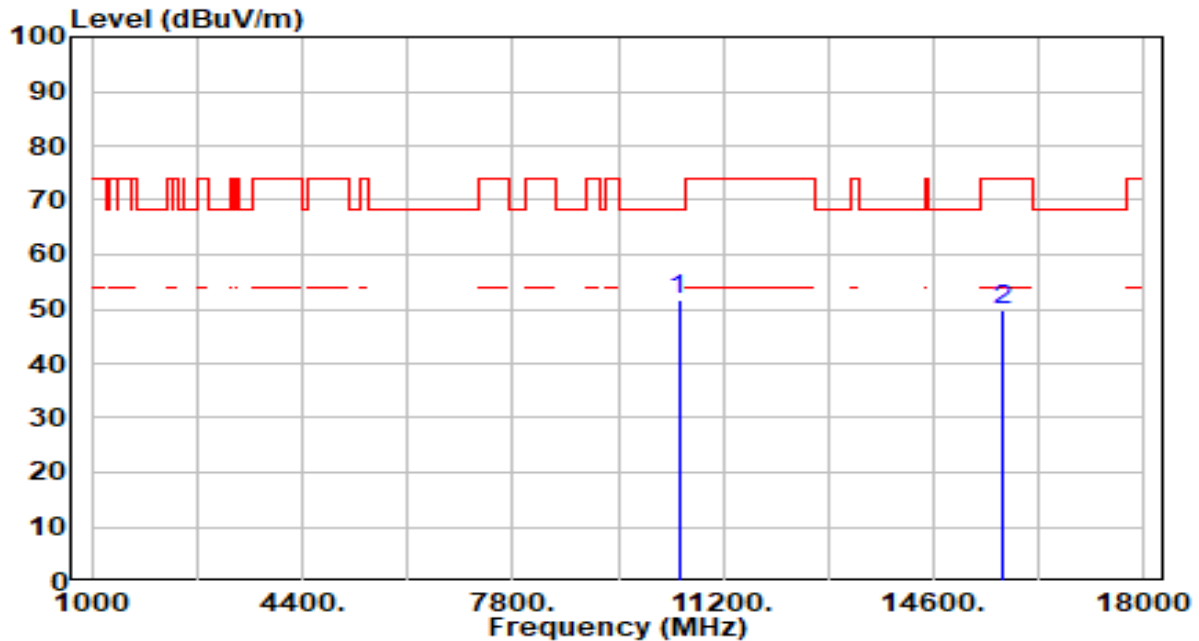


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	46.87	4.71	51.58	-16.62	68.20	168	360	Peak
2		15720.000	43.46	6.39	49.85	-24.15	74.00	100	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

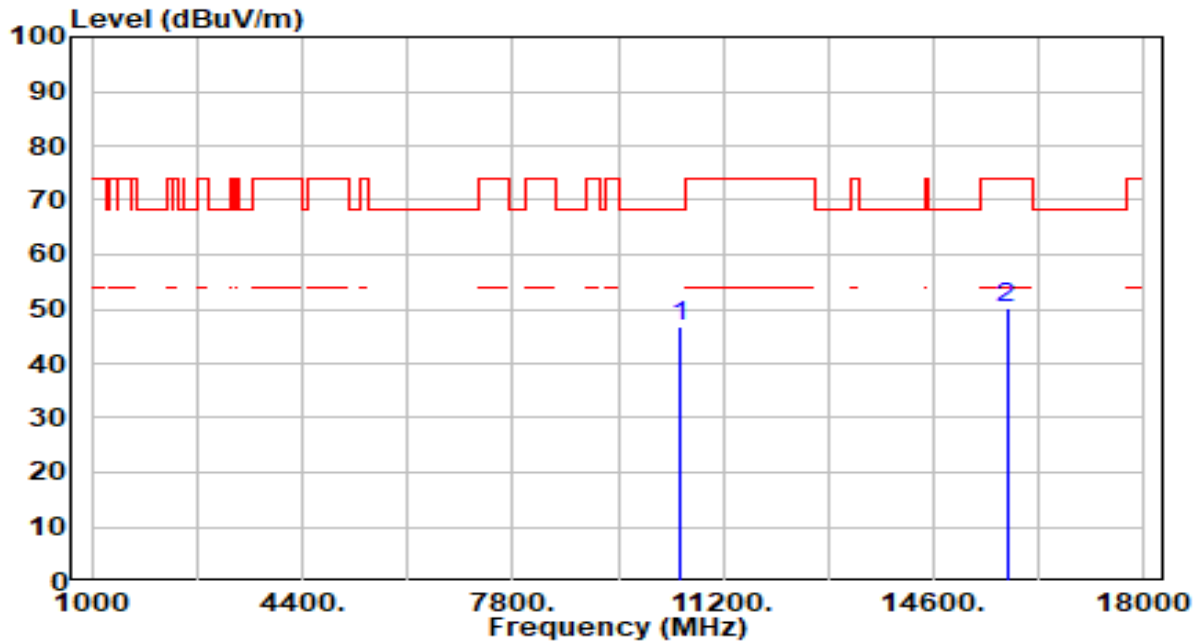


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.95	4.67	46.62	-21.58	68.20	100	82	Peak
2		15780.000	43.56	6.51	50.06	-23.94	74.00	200	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

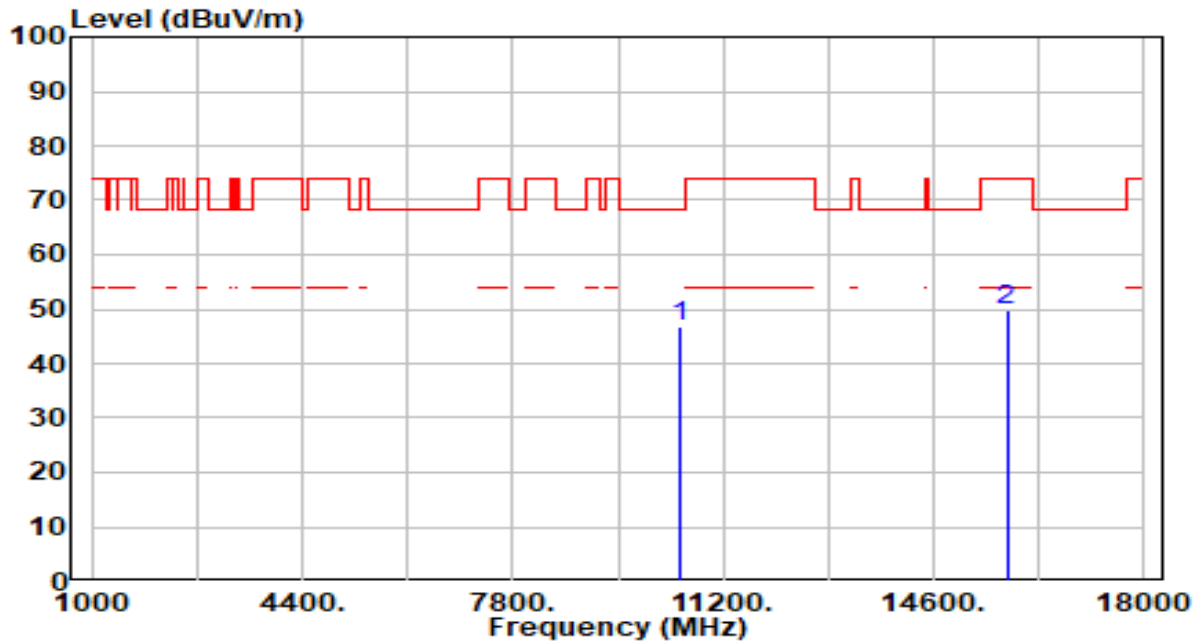


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.98	4.67	46.65	-21.55	68.20	100	330	Peak
2		15780.000	43.16	6.51	49.67	-24.33	74.00	100	76	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

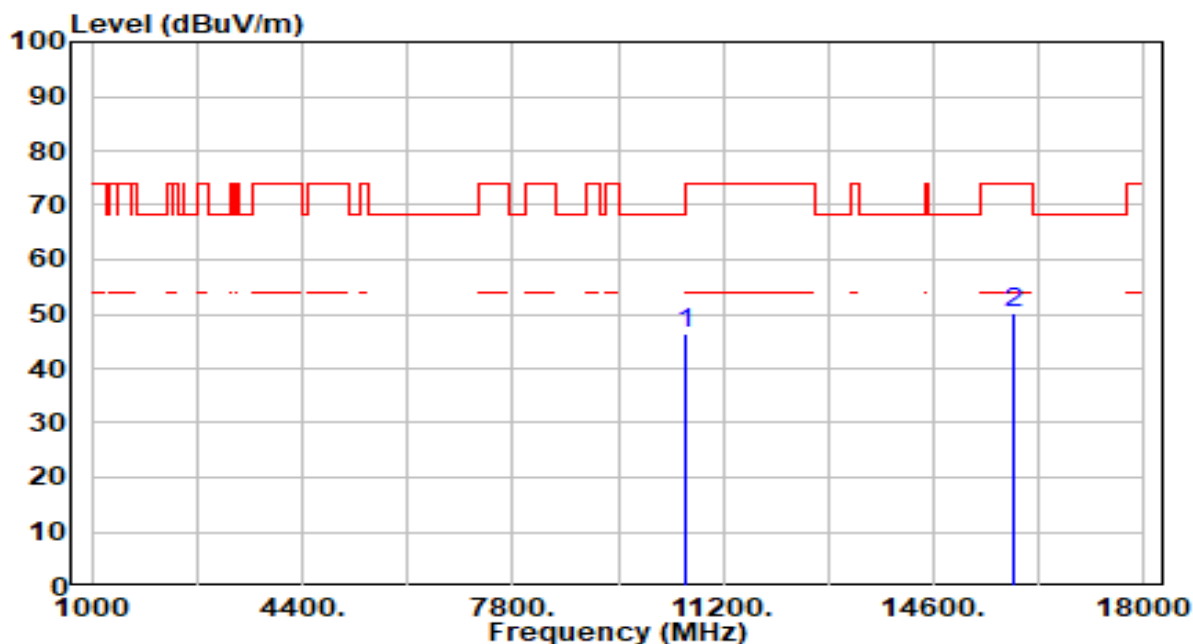


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.73	4.61	46.34	-21.86	68.20	100	201	Peak
2		15900.000	43.60	6.55	50.15	-23.85	74.00	109	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

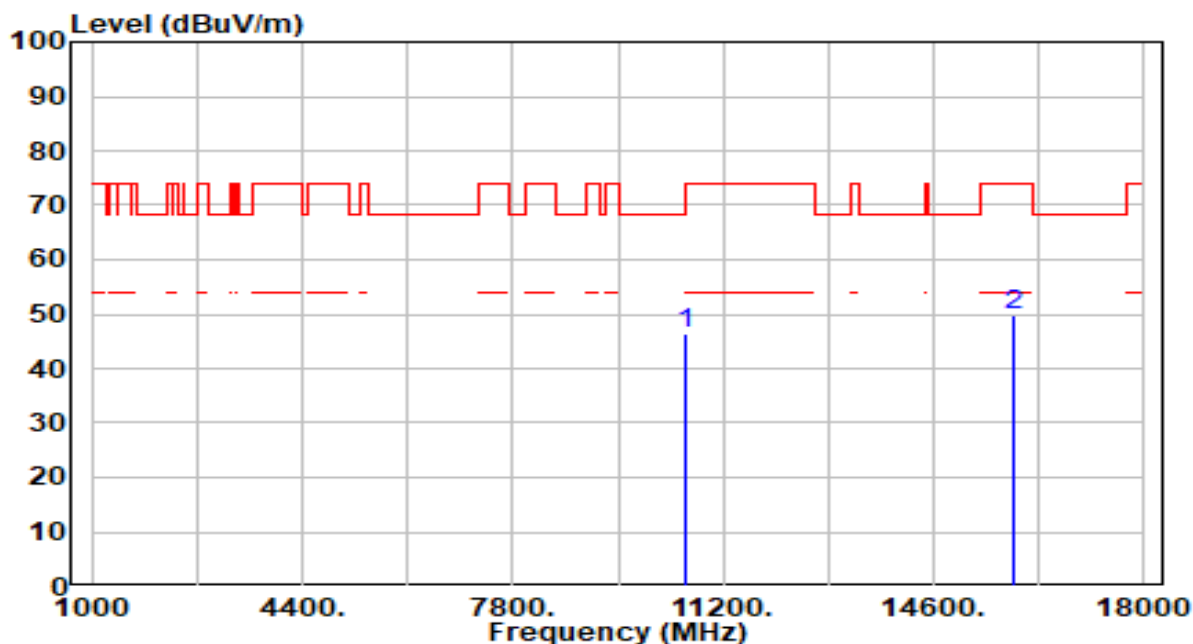


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.96	4.61	46.57	-21.63	68.20	200	360	Peak
2		15900.000	43.26	6.55	49.81	-24.19	74.00	100	7	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

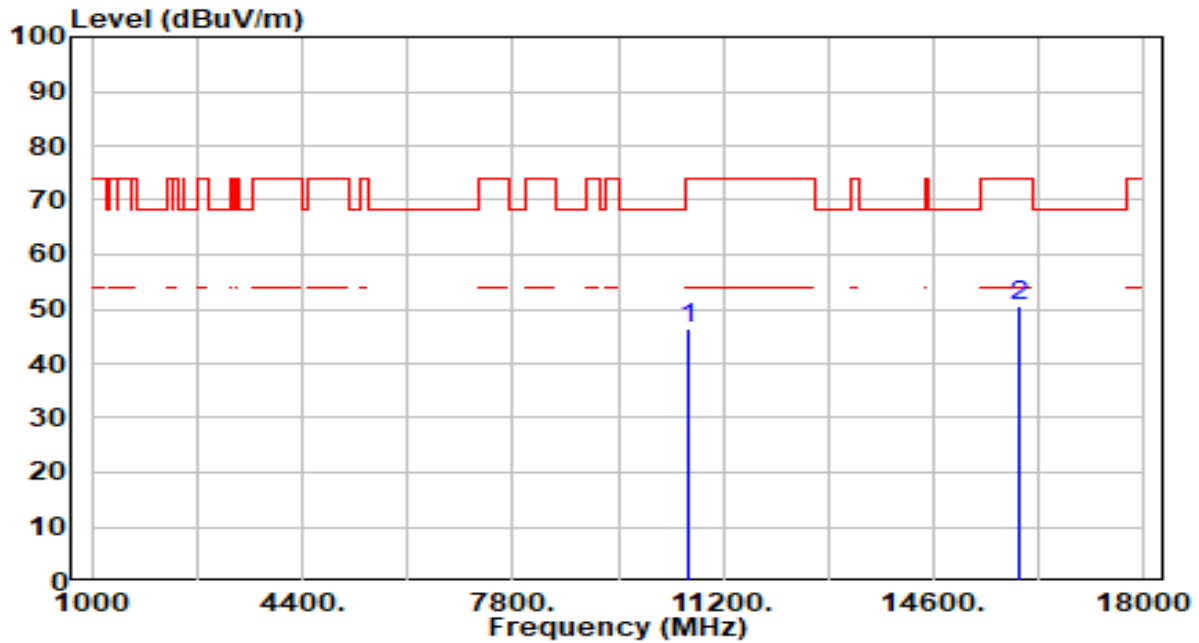


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.62	4.62	46.24	-27.76	74.00	200	290	Peak
2	* 15960.000	44.09	6.55	50.64	-23.36	74.00	100	336	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

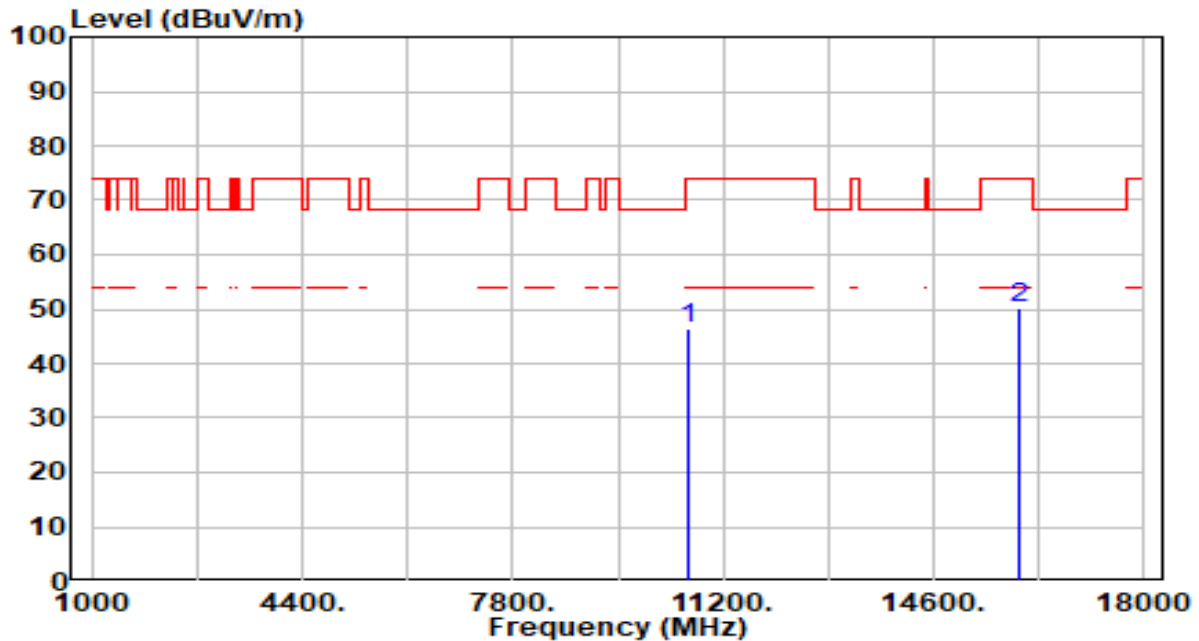


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.71	4.62	46.33	-27.67	74.00	200	206	Peak
2	* 15960.000	43.71	6.55	50.26	-23.74	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

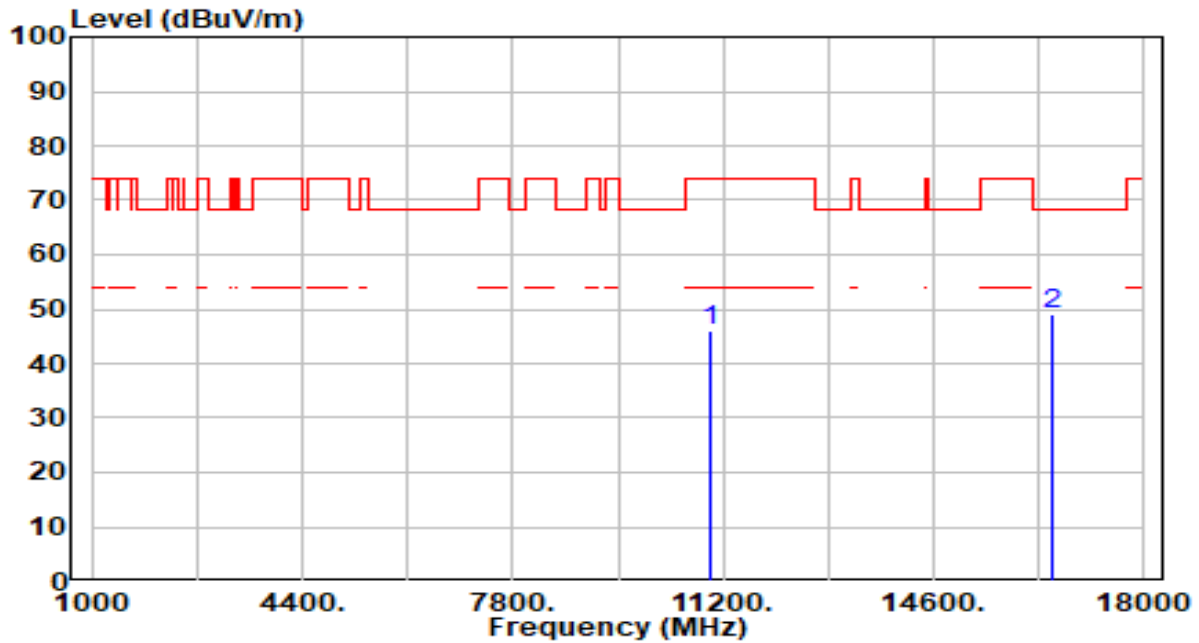


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.57	4.52	46.09	-27.91	74.00	100	341	Peak
2	*	16500.000	42.82	6.10	48.92	-19.28	68.20	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

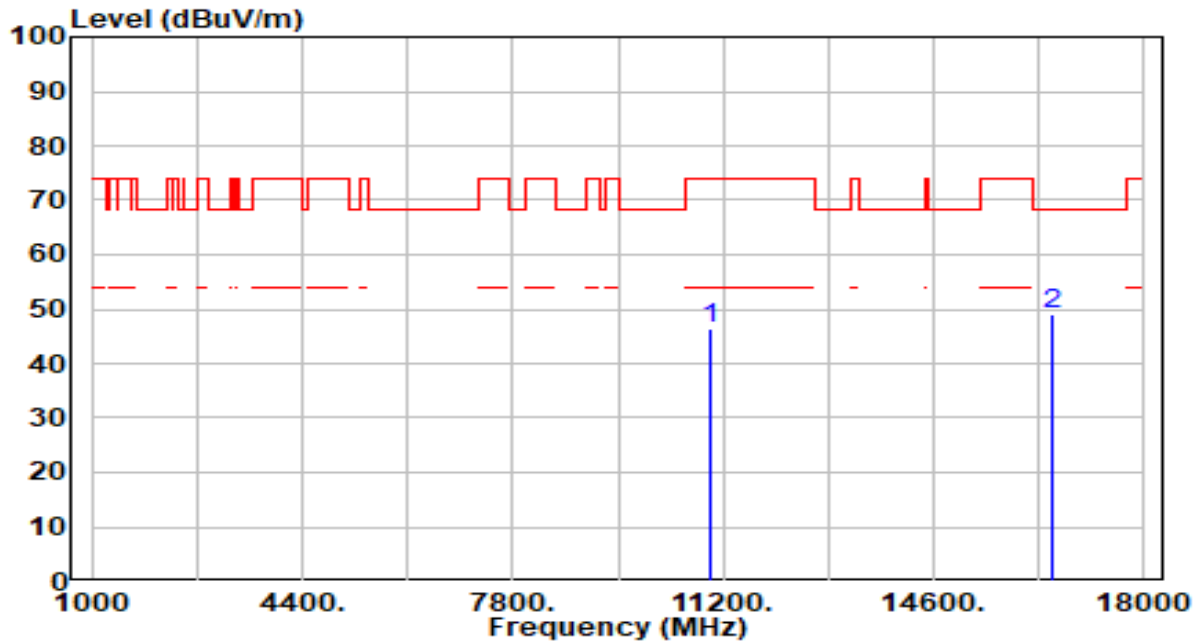


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.75	4.52	46.27	-27.73	74.00	100	360	Peak
2	*	16500.000	42.93	6.10	49.03	-19.17	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

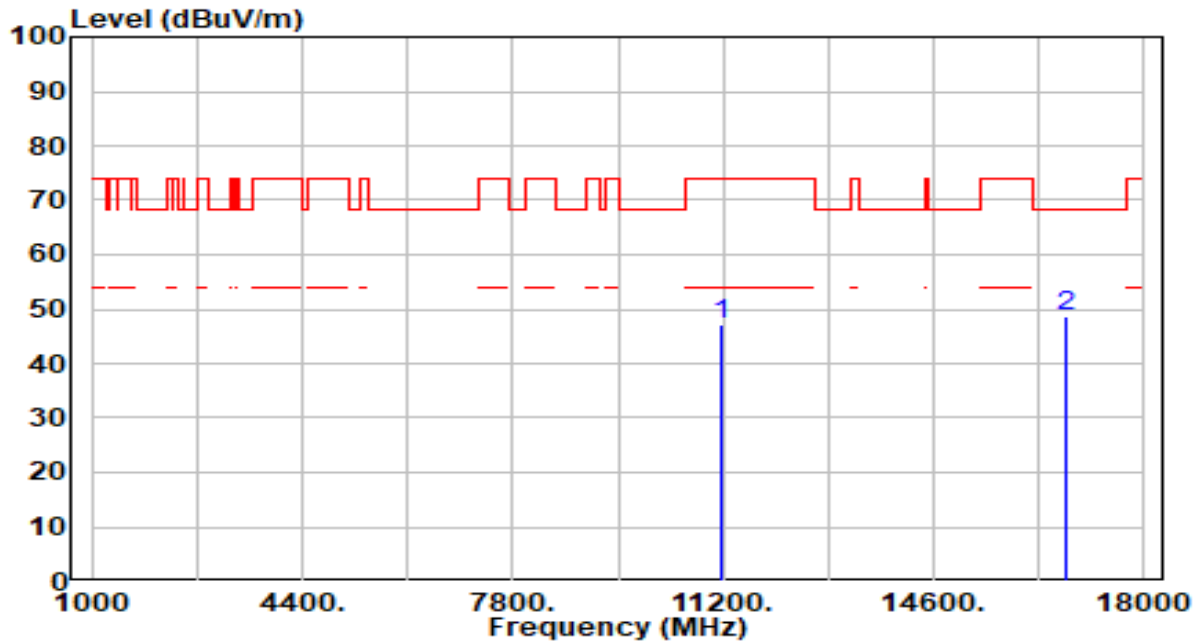


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	42.19	4.94	47.12	-26.88	74.00	200	291	Peak
2	*	16740.000	42.40	6.19	48.59	-19.61	68.20	100	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

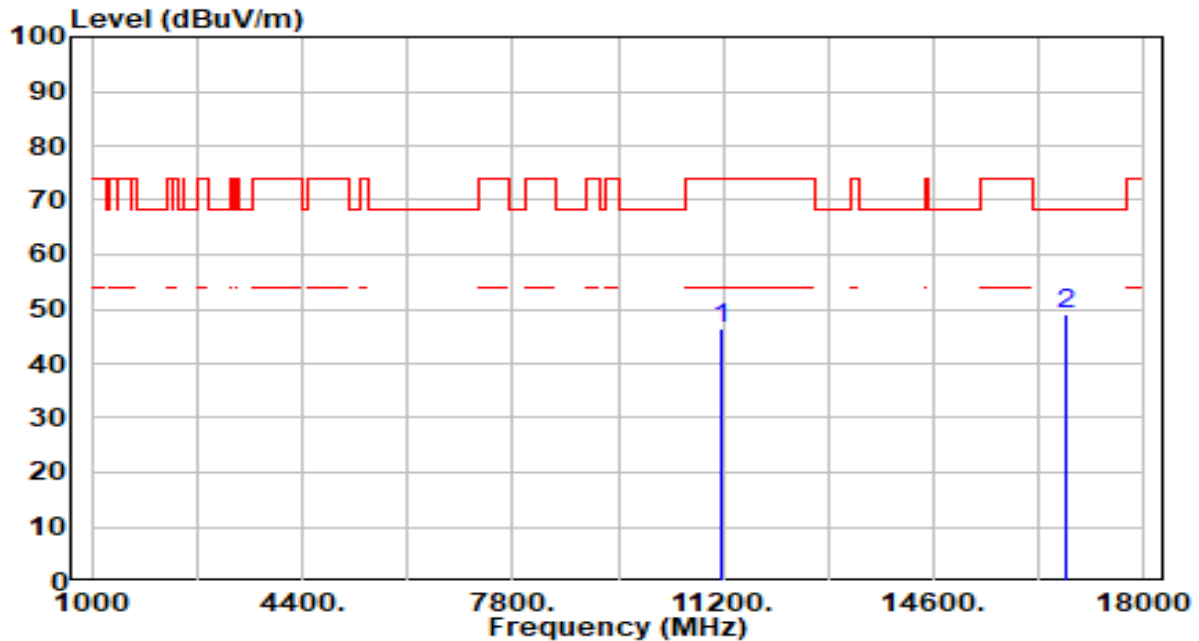


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.53	4.94	46.47	-27.53	74.00	100	77	Peak
2	*	16740.000	42.88	6.19	49.07	-19.13	68.20	100	183	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

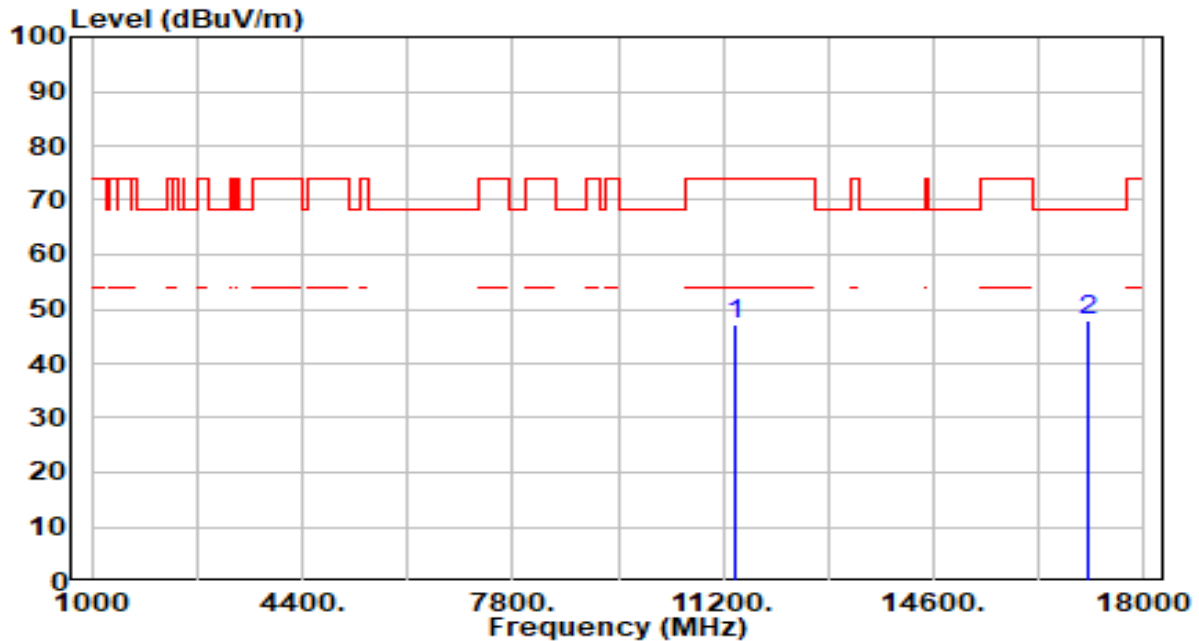


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.96	5.26	47.22	-26.78	74.00	100	271	Peak
2	*	17100.000	41.99	5.97	47.96	-20.24	68.20	100	303	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

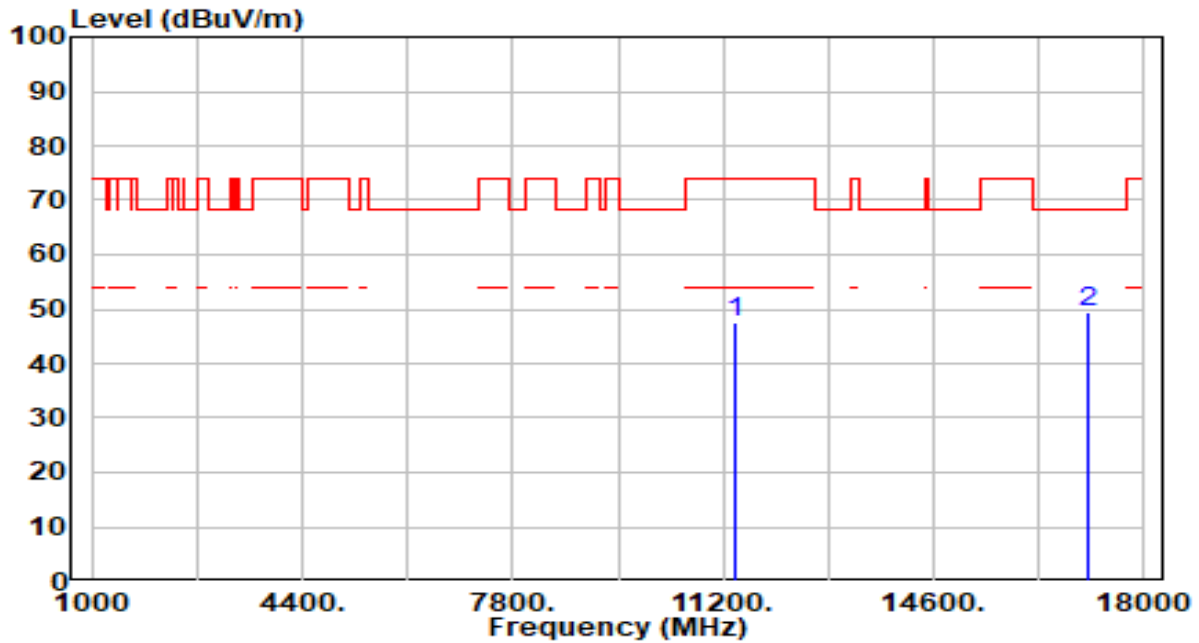


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.16	5.26	47.42	-26.58	74.00	100	269	Peak
2	*	17100.000	43.29	5.97	49.26	-18.94	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

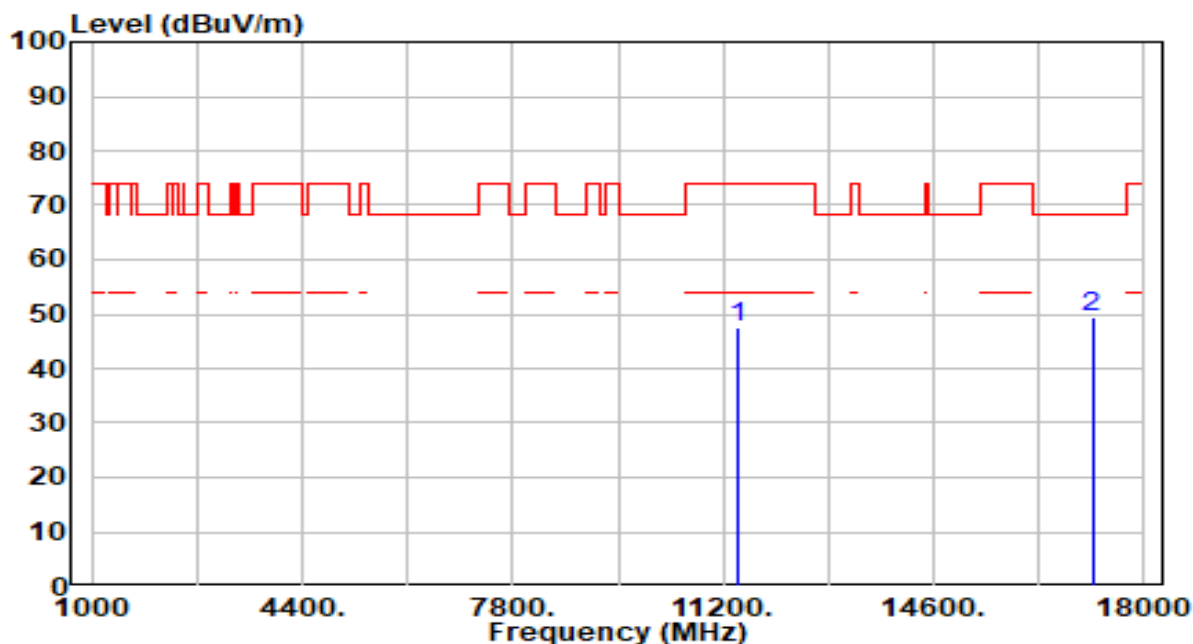


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	42.12	5.29	47.41	-26.59	74.00	100	360	Peak
2	*	17160.000	43.48	5.87	49.35	-18.85	68.20	100	278	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

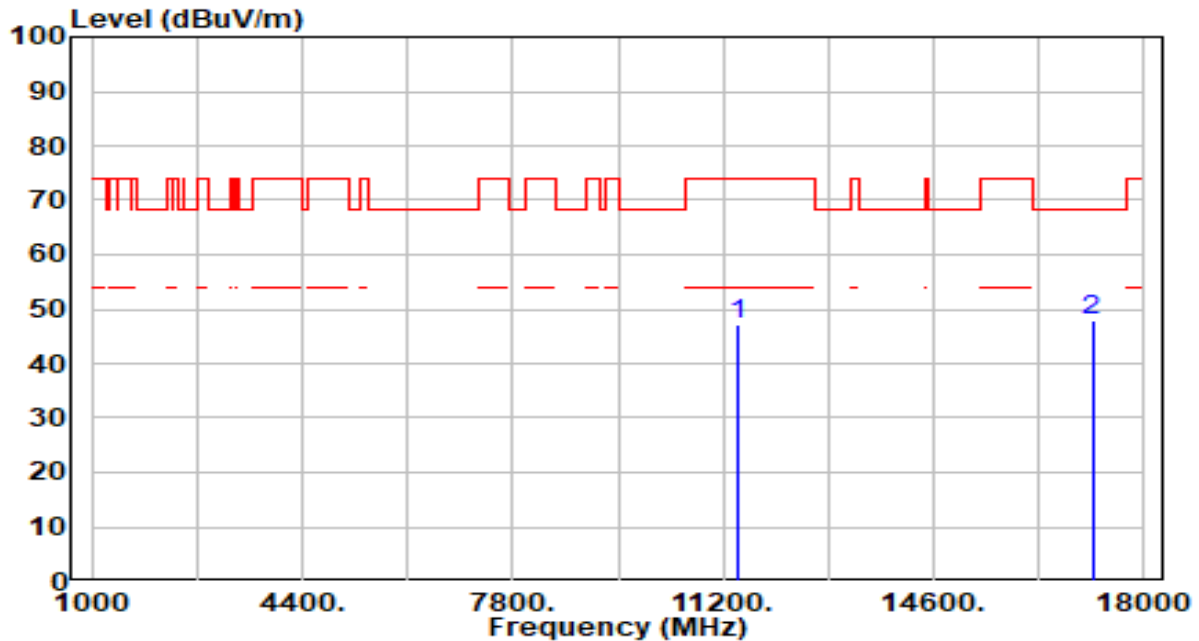


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.84	5.29	47.13	-26.87	74.00	100	188	Peak
2	*	17160.000	42.23	5.87	48.10	-20.10	68.20	200	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

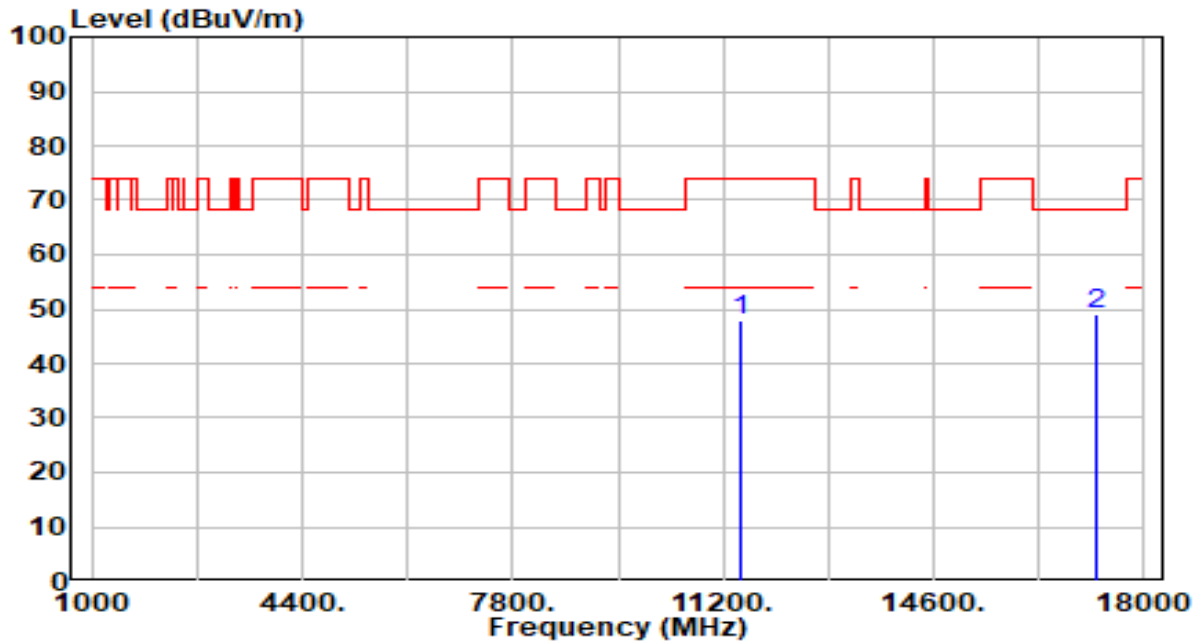


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	42.48	5.32	47.80	-26.20	74.00	100	319	Peak
2	* 17235.000	43.35	5.71	49.06	-19.14	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

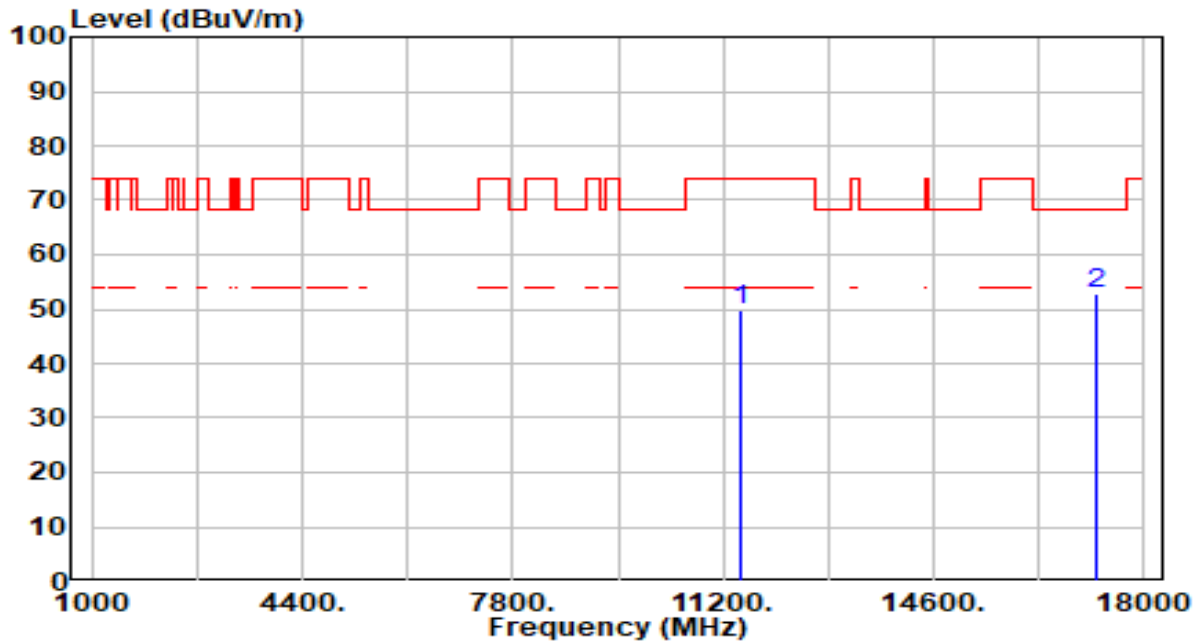


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	44.64	5.32	49.96	-24.04	74.00	200	355	Peak
2	* 17235.000	47.23	5.71	52.94	-15.26	68.20	100	348	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

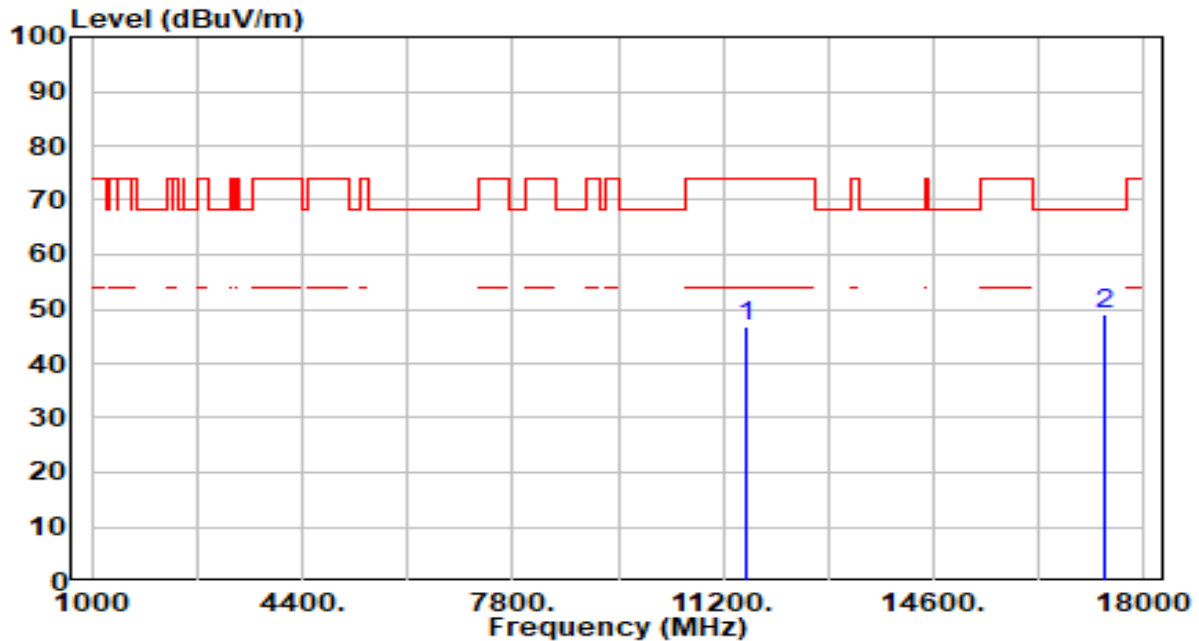


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	41.48	5.38	46.86	-27.14	74.00	100	326	Peak
2	*	17355.000	43.84	5.39	49.23	-18.97	68.20	100	168	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

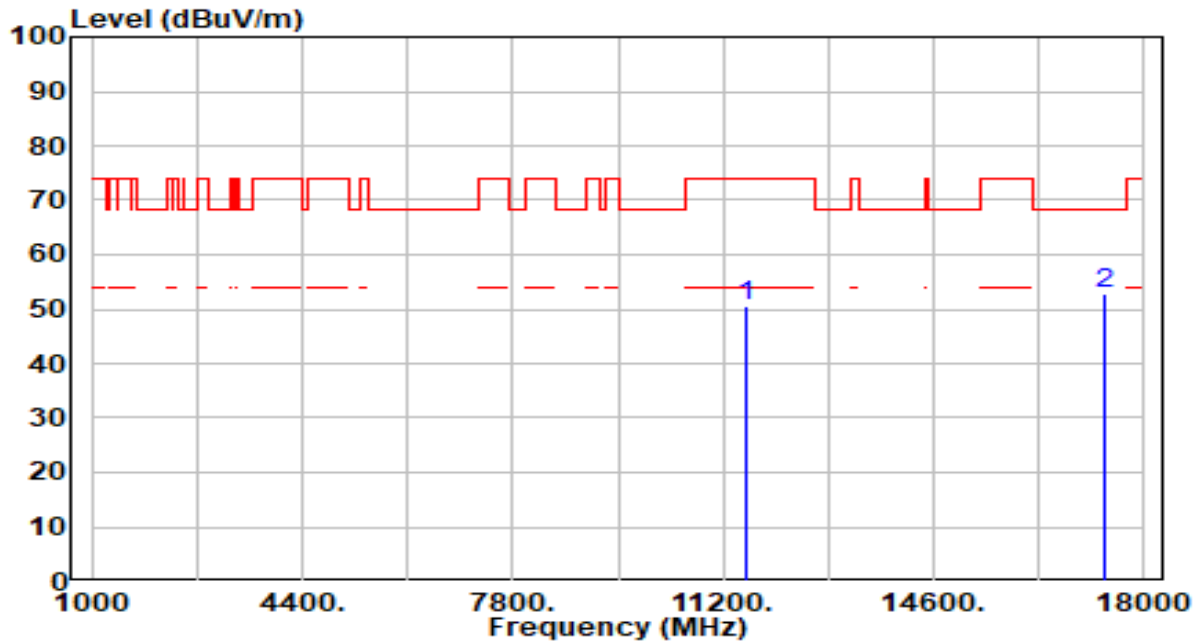


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	45.23	5.38	50.61	-23.39	74.00	200	314	Peak
2	* 17355.000	47.56	5.39	52.95	-15.25	68.20	100	212	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

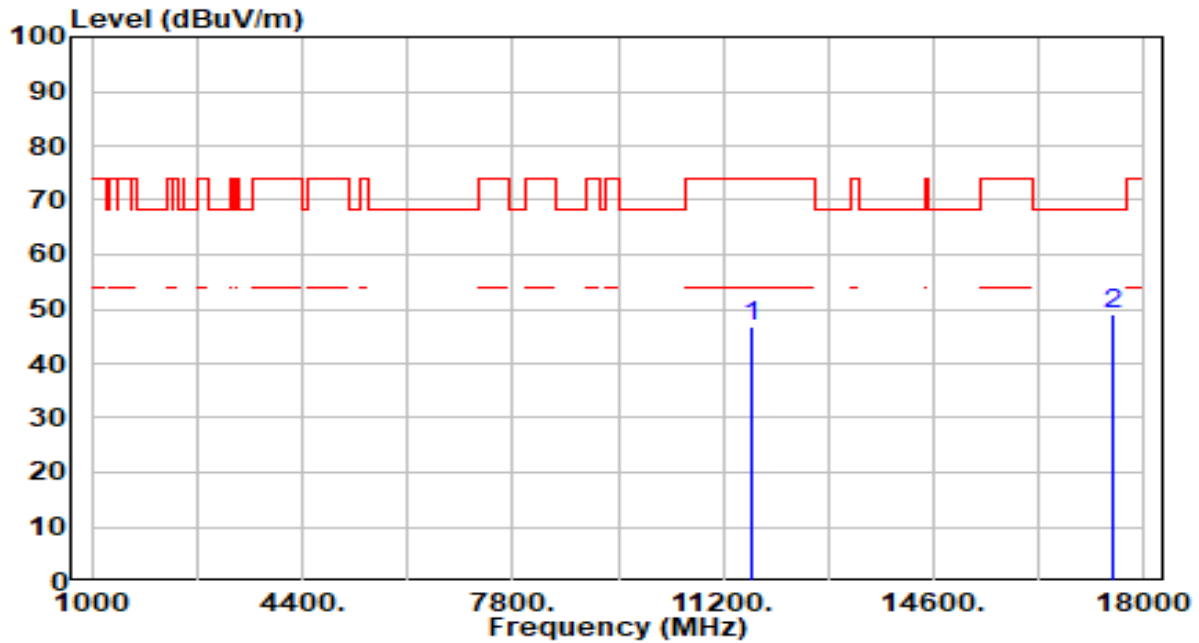


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.30	5.36	46.67	-27.33	74.00	200	0	Peak
2	* 17475.000	43.89	5.29	49.18	-19.02	68.20	100	47	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

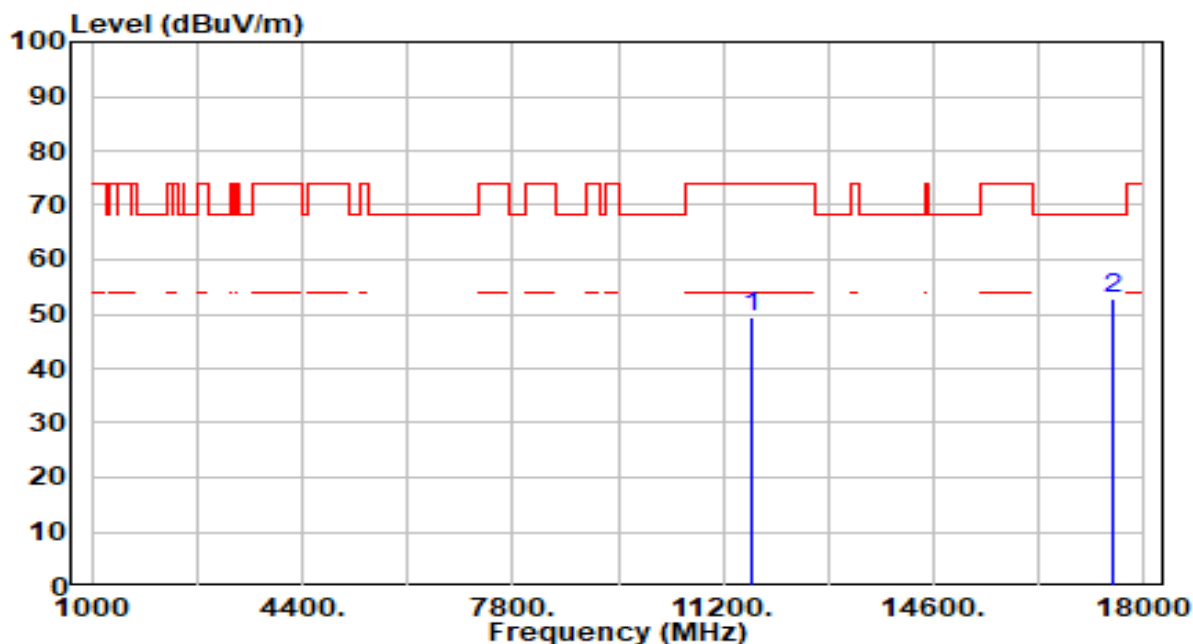


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	44.15	5.36	49.52	-24.48	74.00	200	316	Peak
2	* 17475.000	47.47	5.29	52.76	-15.44	68.20	100	197	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band1_TX_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

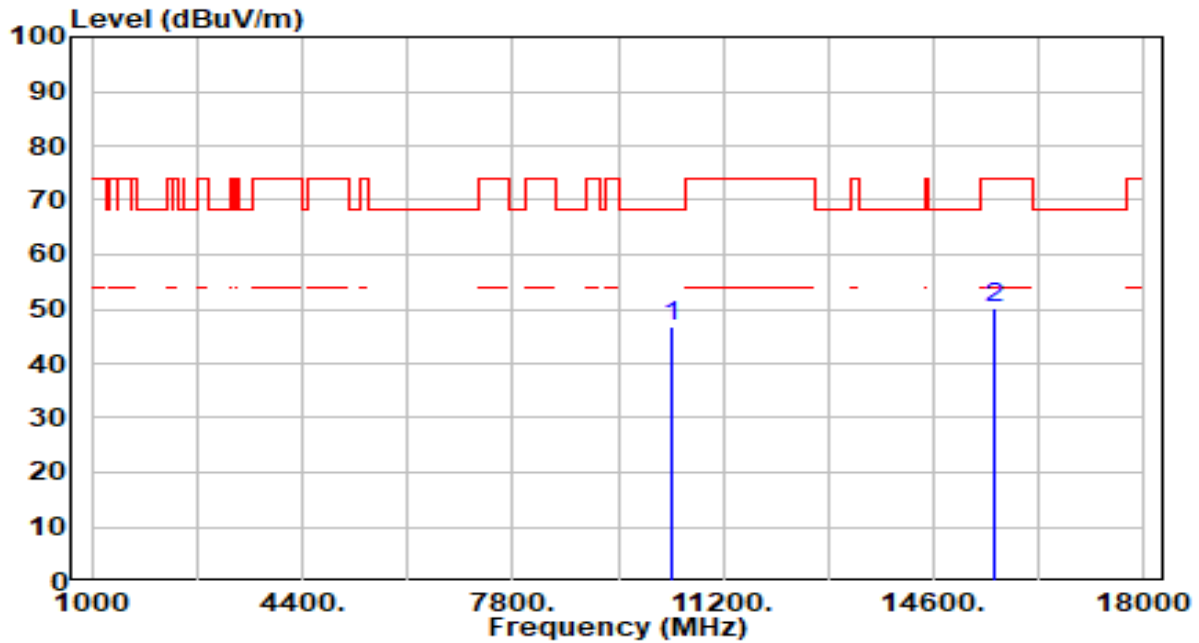


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.83	4.84	46.67	-21.53	68.20	100	102	Peak
2		15570.000	44.11	6.18	50.29	-23.71	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band1_TX_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

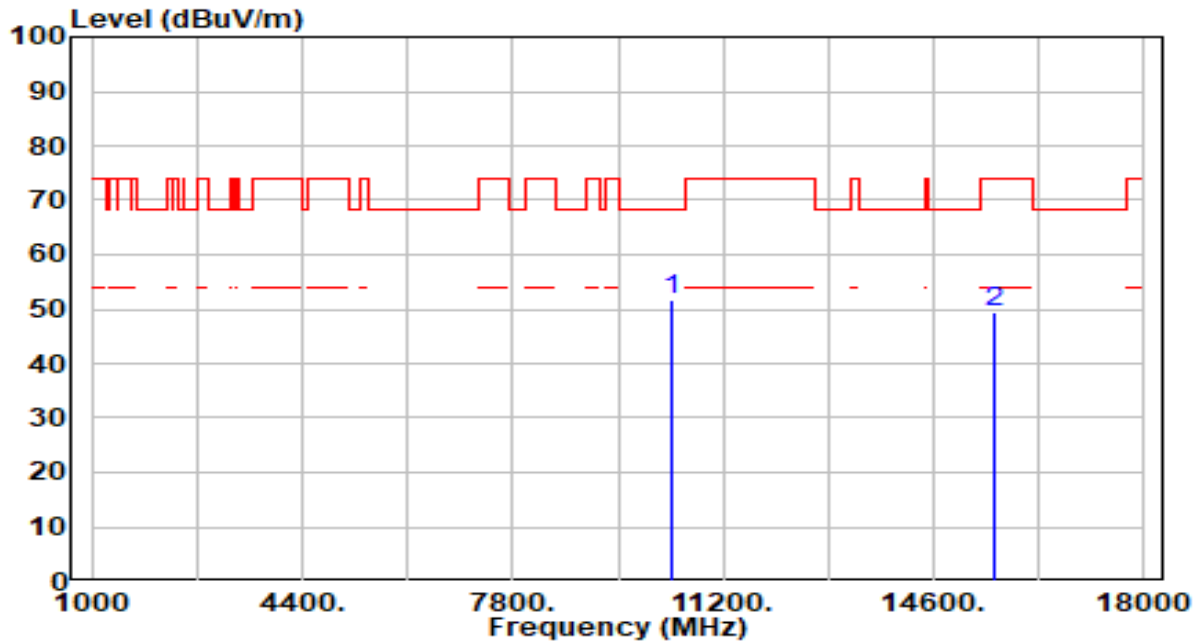


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	46.69	4.84	51.53	-16.67	68.20	200	139	Peak
2		15570.000	43.31	6.18	49.49	-24.51	74.00	200	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band1_TX_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

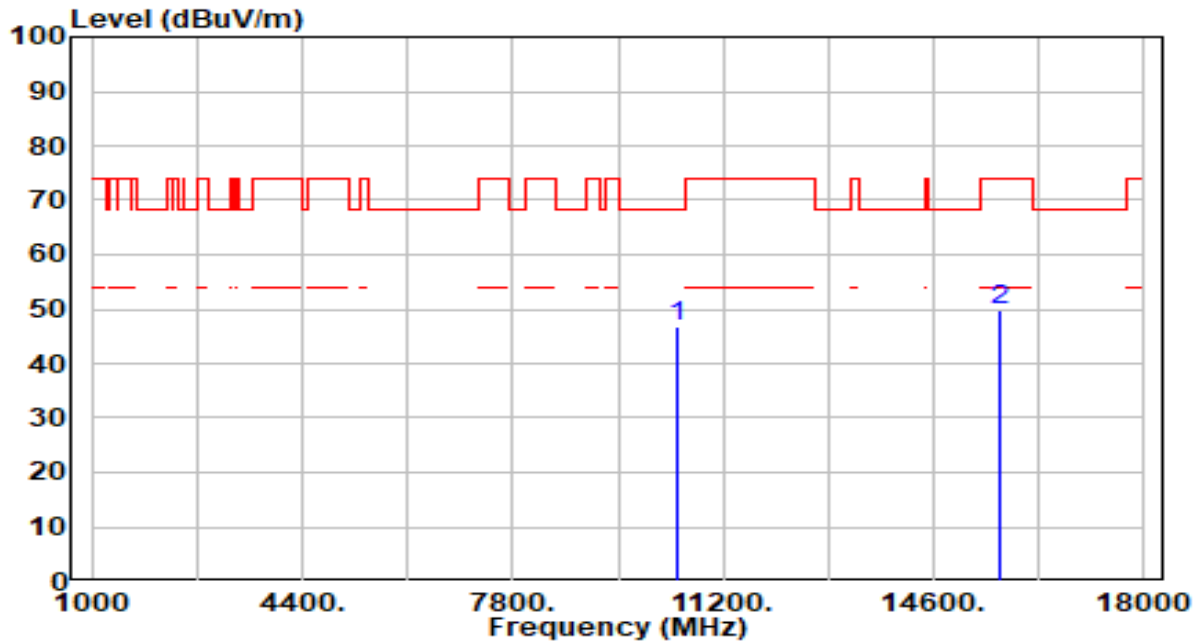


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	42.14	4.74	46.88	-21.32	68.20	100	281	Peak
2		15690.000	43.45	6.33	49.78	-24.22	74.00	200	93	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band1_TX_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

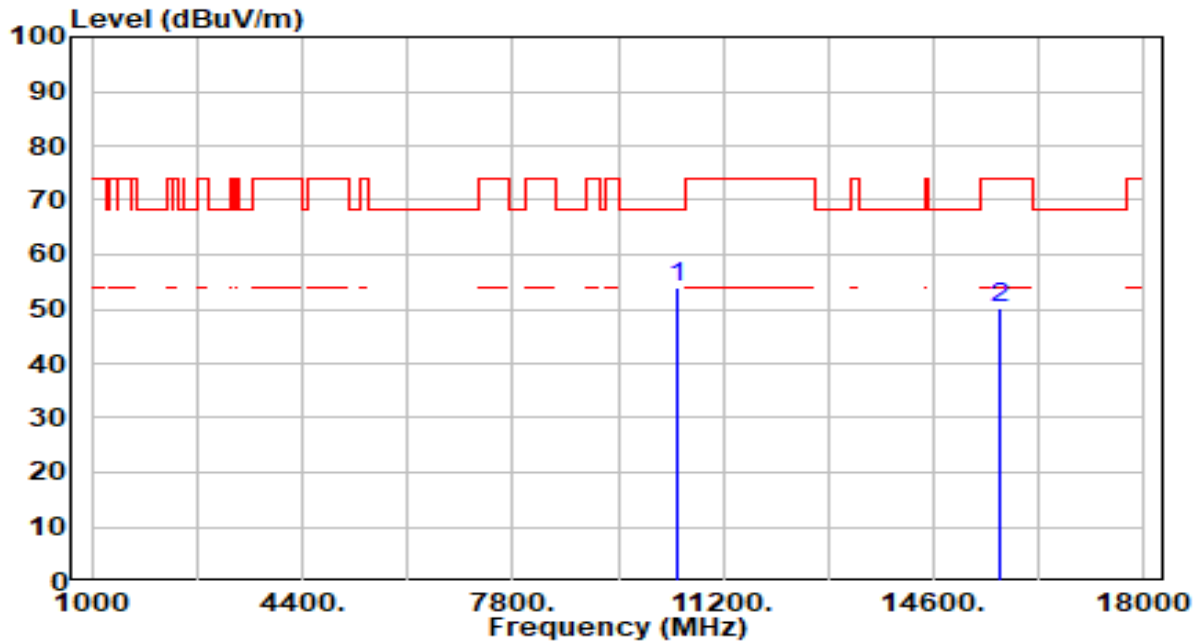


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	49.17	4.74	53.91	-14.29	68.20	168	360	Peak
2		15690.000	43.90	6.33	50.23	-23.77	74.00	200	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band2_TX_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

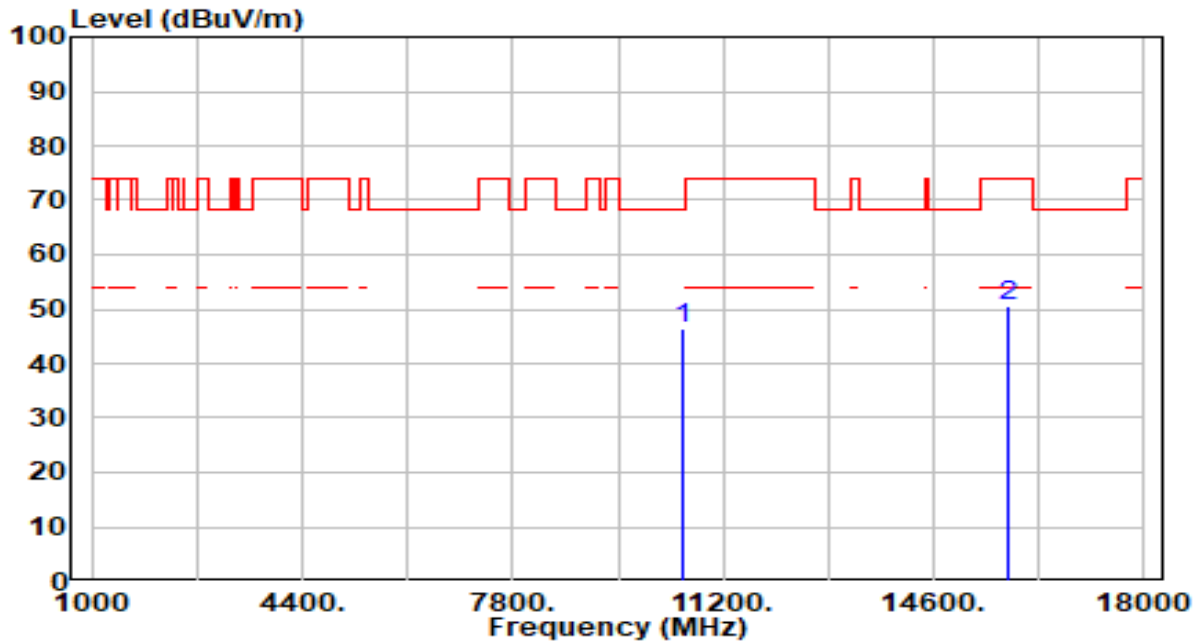


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.69	4.66	46.35	-21.85	68.20	100	360	Peak
2		15810.000	43.91	6.55	50.45	-23.55	74.00	100	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band2_TX_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

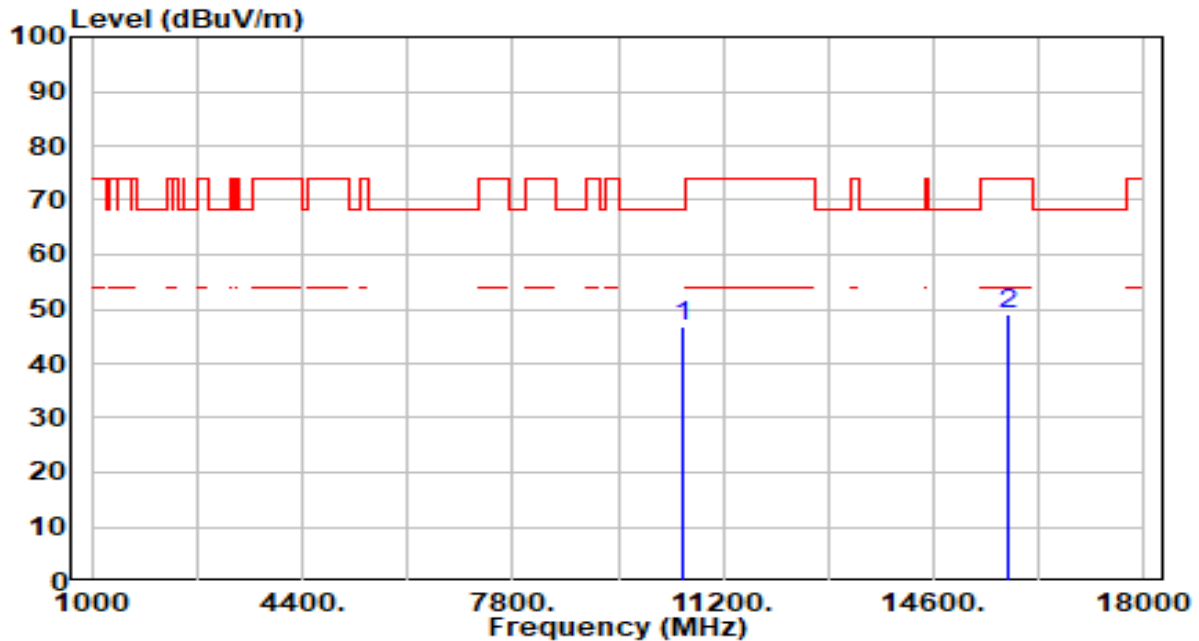


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	42.19	4.66	46.85	-21.35	68.20	161	0	Peak
2		15810.000	42.69	6.55	49.24	-24.76	74.00	100	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band2_TX_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

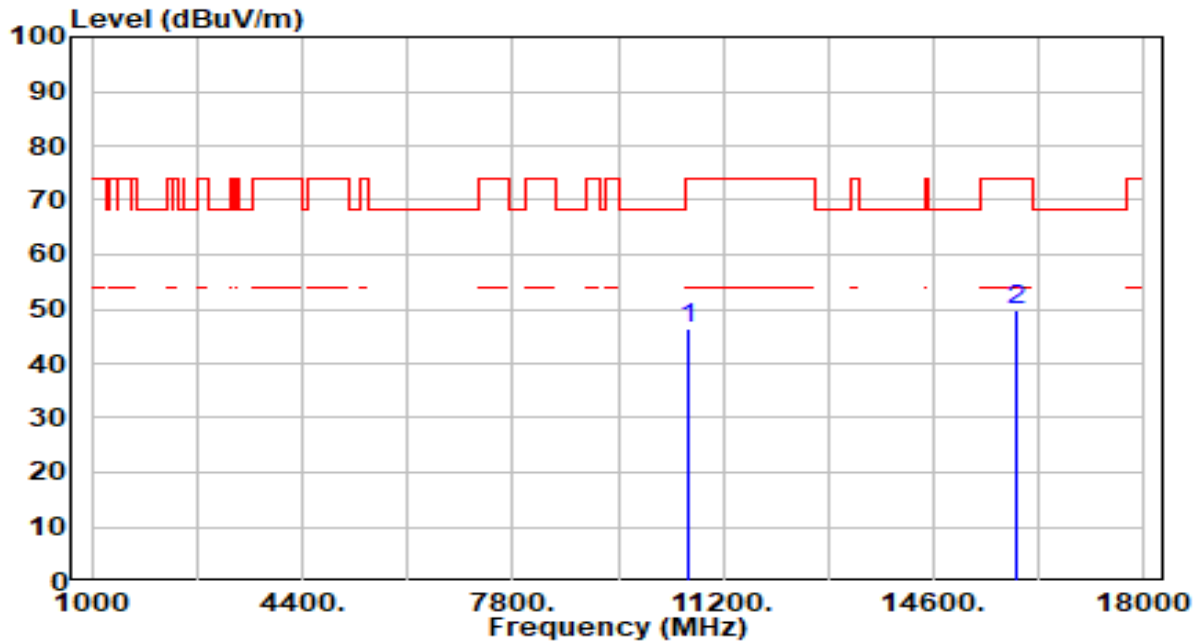


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	41.89	4.62	46.51	-27.49	74.00	100	360	Peak
2	*	15930.000	43.19	6.55	49.74	-24.26	74.00	100	110	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band2_TX_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

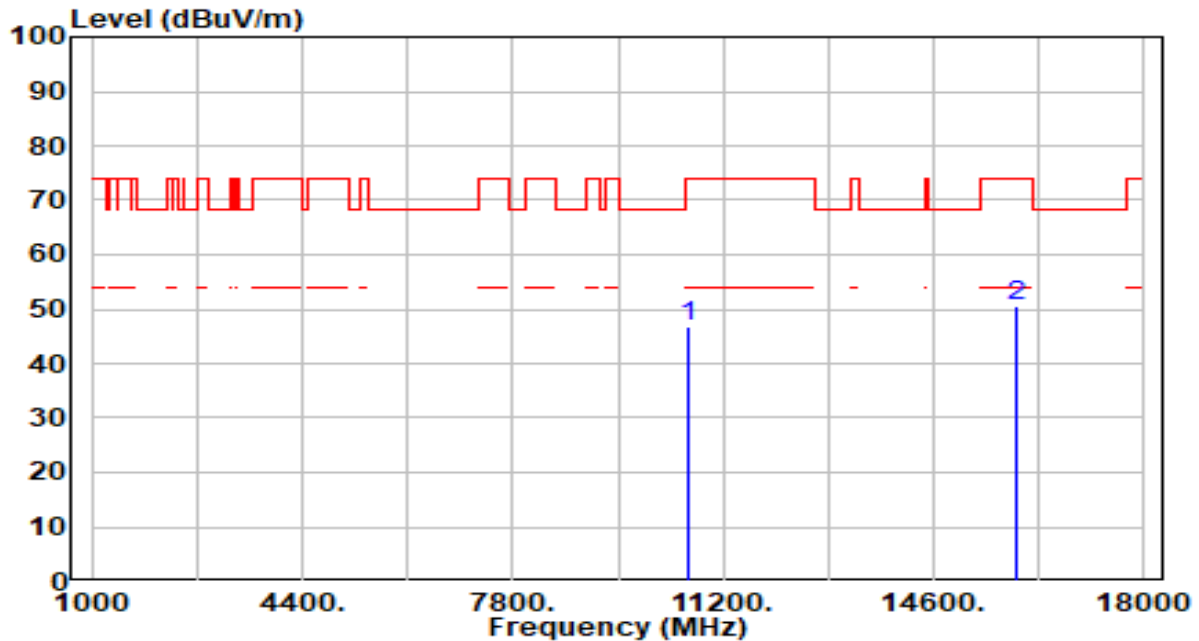


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	42.21	4.62	46.82	-27.18	74.00	200	360	Peak
2	* 15930.000	44.20	6.55	50.75	-23.25	74.00	100	302	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

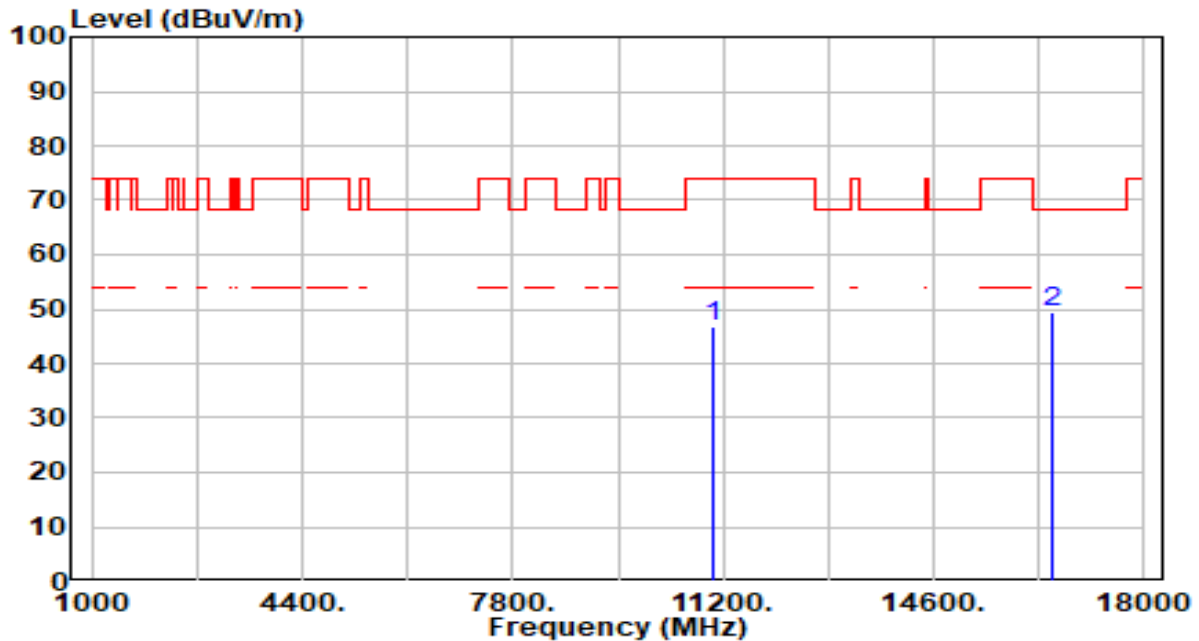


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	42.31	4.57	46.88	-27.12	74.00	100	281	Peak
2	*	16530.000	43.43	6.10	49.54	-18.66	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

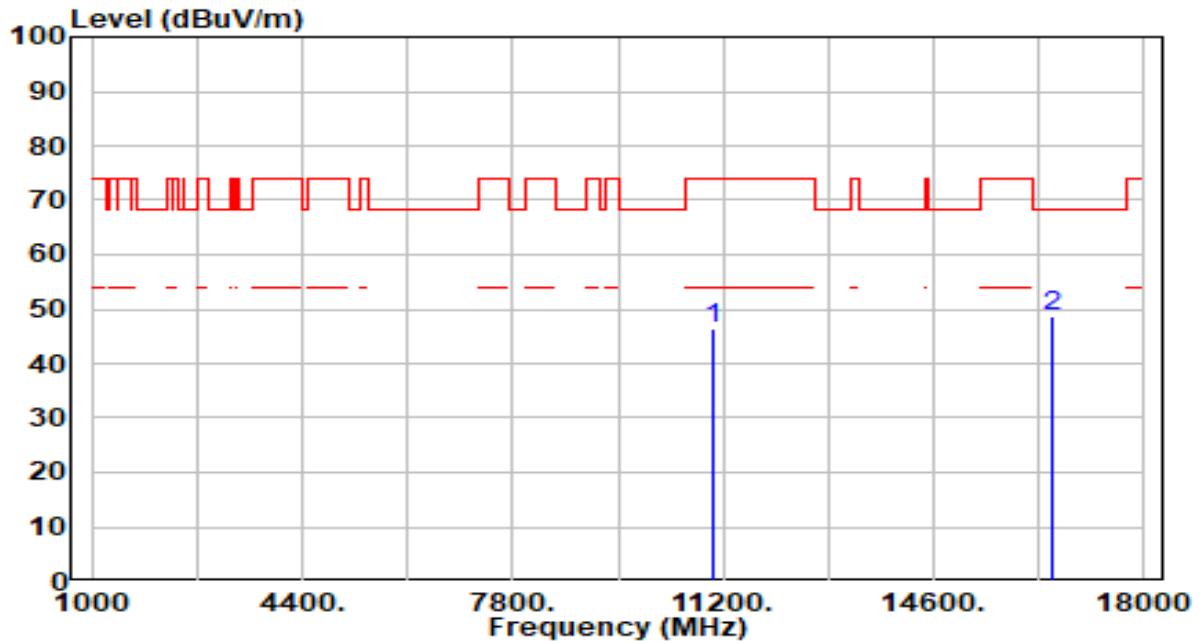


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.91	4.57	46.49	-27.51	74.00	200	360	Peak
2	* 16530.000	42.75	6.10	48.85	-19.35	68.20	100	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

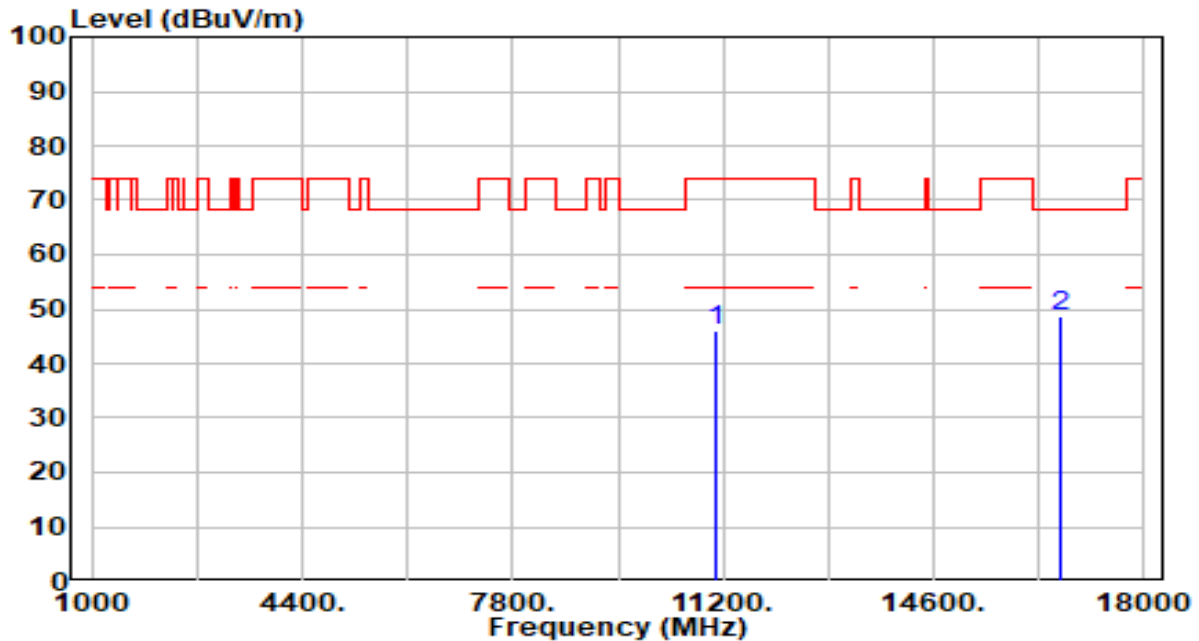


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.34	4.78	46.13	-27.87	74.00	100	248	Peak
2	*	16650.000	42.35	6.14	48.49	-19.71	68.20	100	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

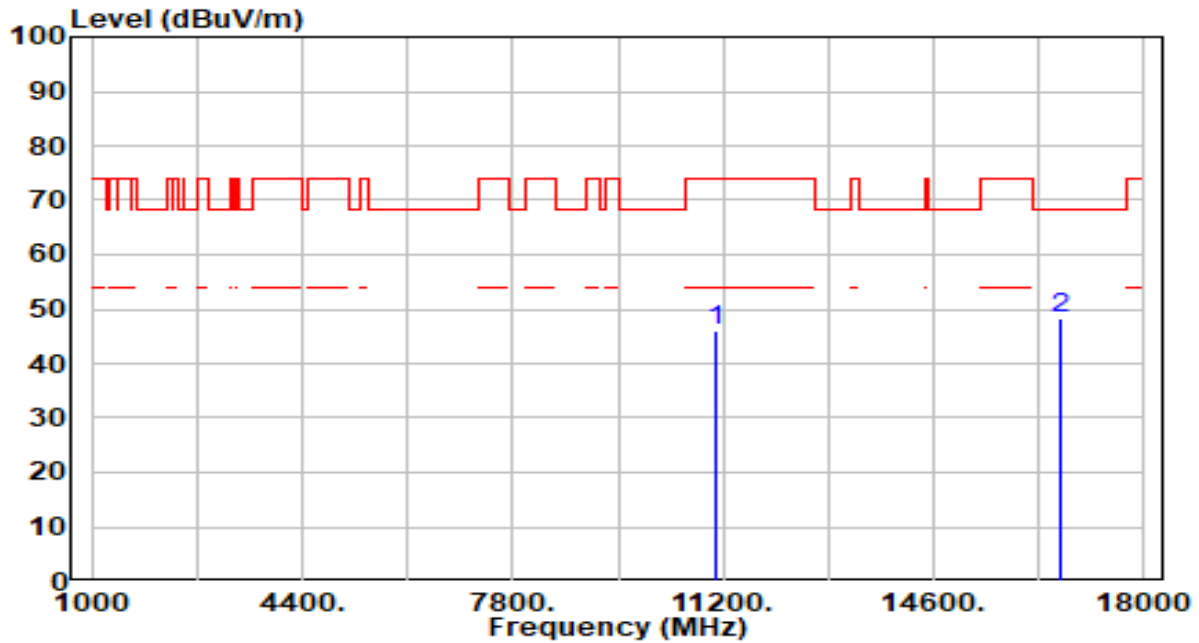


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.11	4.78	45.89	-28.11	74.00	200	10	Peak
2	* 16650.000	42.24	6.14	48.37	-19.83	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

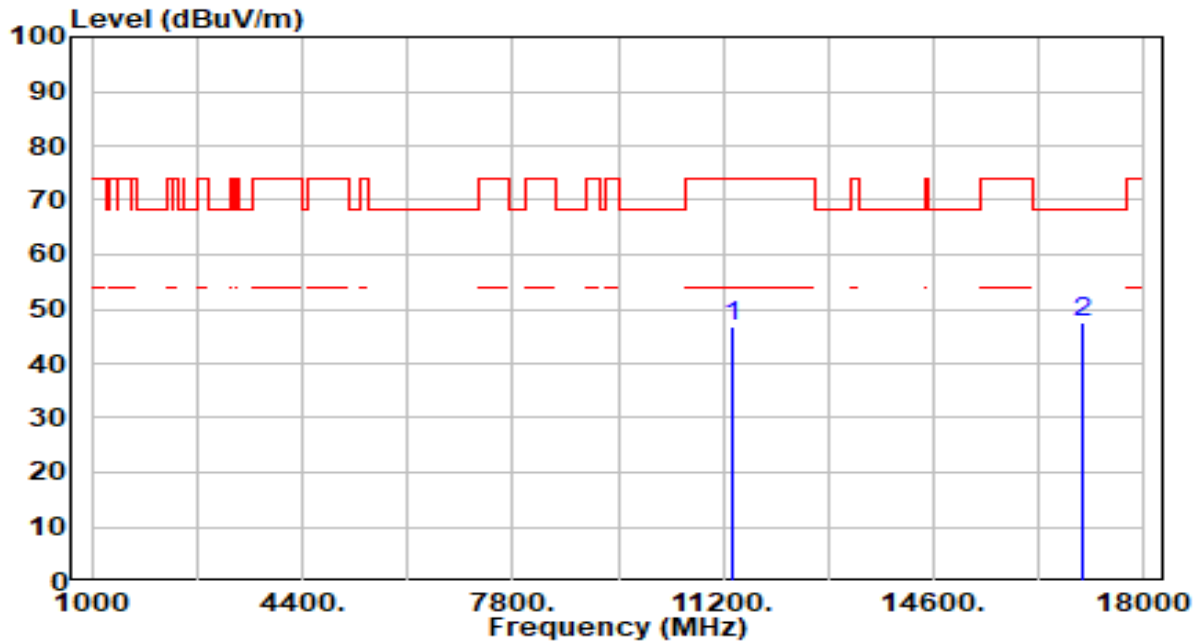


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.61	5.20	46.80	-27.20	74.00	100	360	Peak
2	*	17010.000	41.36	6.12	47.49	-20.71	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

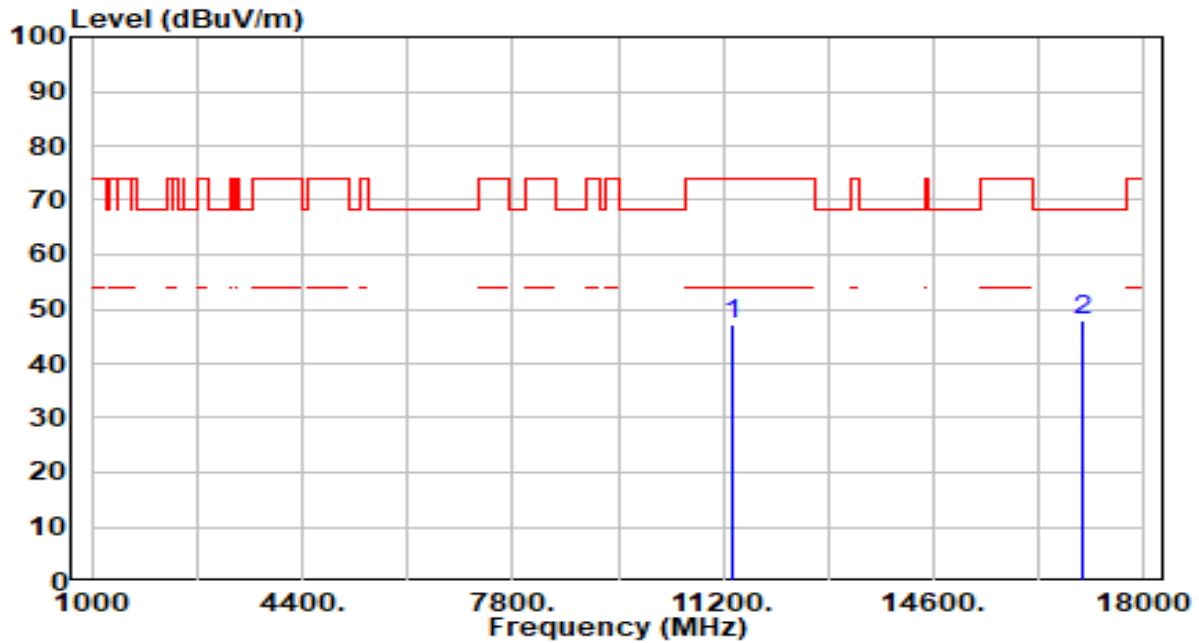


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.84	5.20	47.03	-26.97	74.00	100	253	Peak
2	*	17010.000	41.72	6.12	47.84	-20.36	68.20	100	148	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

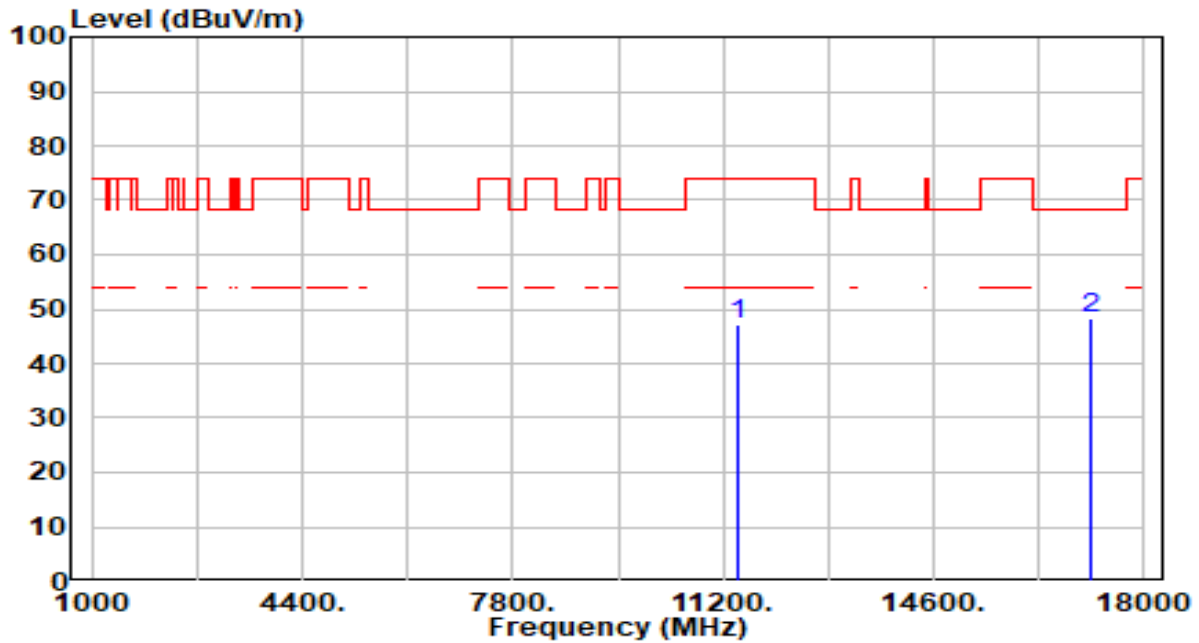


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	42.00	5.28	47.27	-26.73	74.00	100	111	Peak
2	*	17130.000	42.47	5.92	48.40	-19.80	68.20	100	28	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

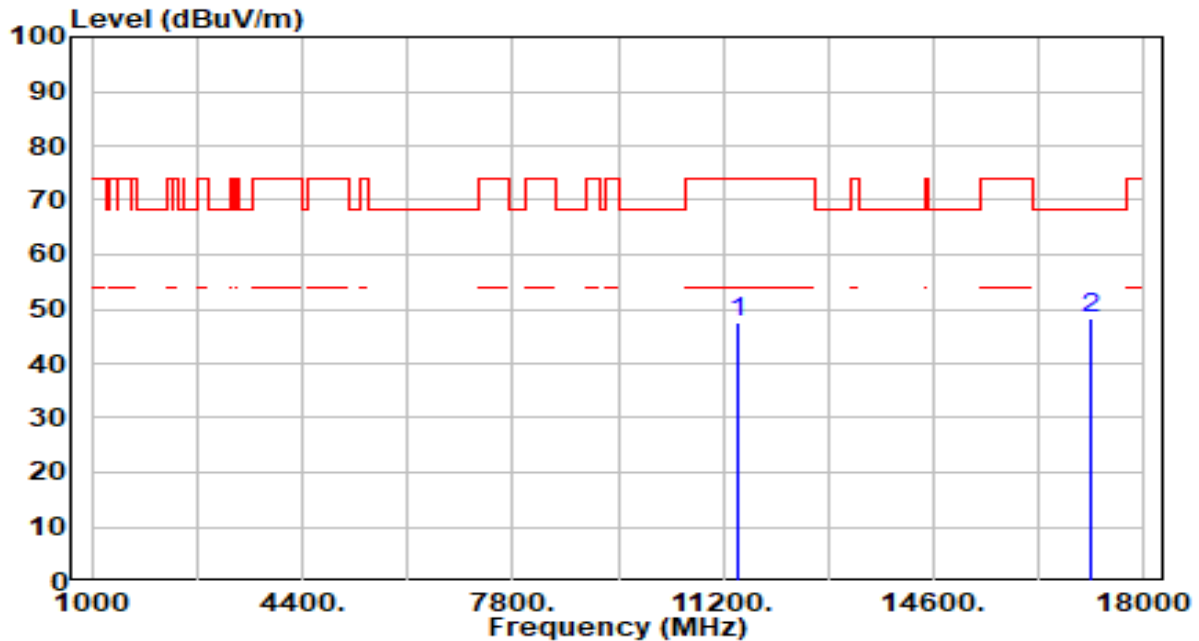


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	42.16	5.28	47.44	-26.56	74.00	100	264	Peak
2	*	17130.000	42.55	5.92	48.47	-19.73	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

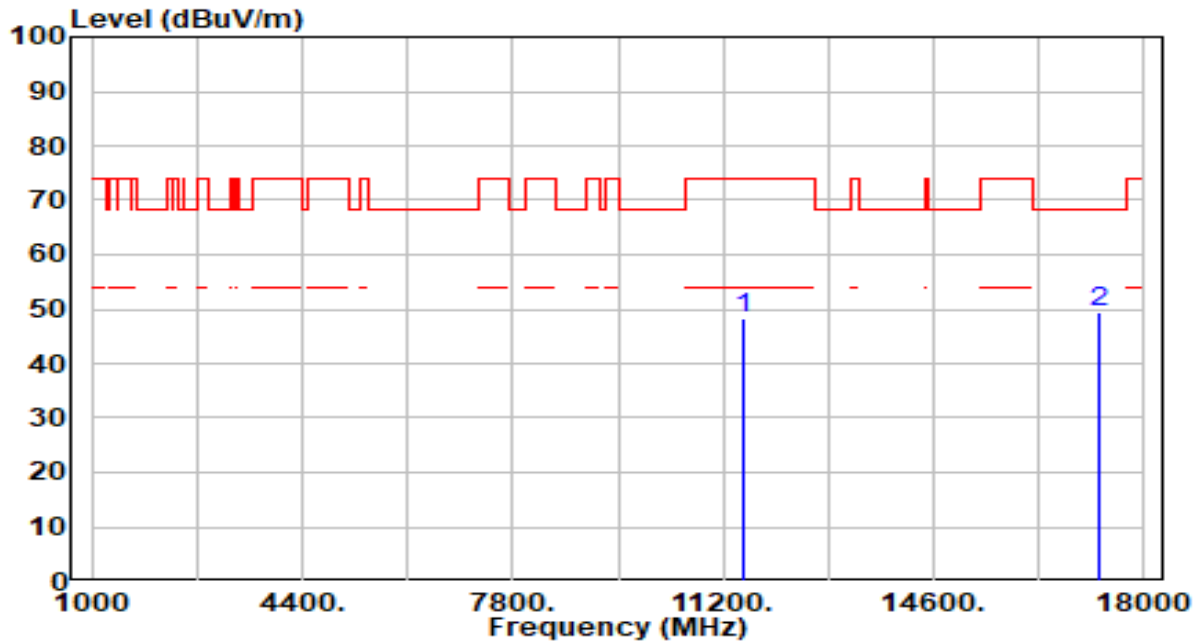


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	43.02	5.33	48.35	-25.65	74.00	200	154	Peak
2	*	17265.000	43.86	5.63	49.49	-18.71	68.20	100	167	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

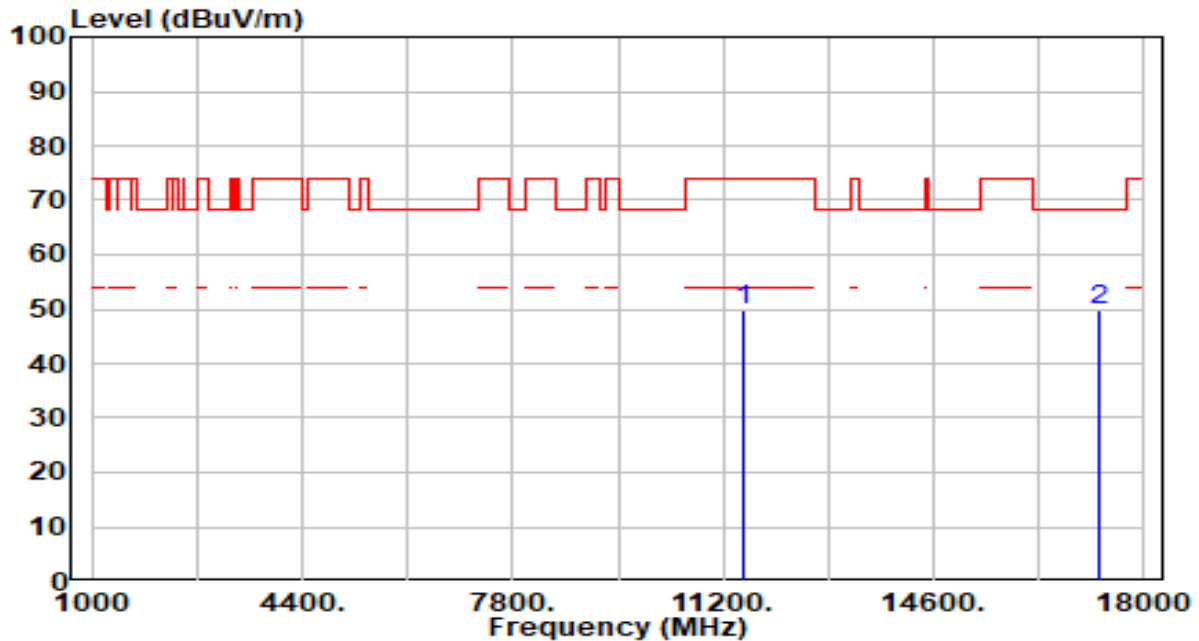


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	44.31	5.33	49.64	-24.36	74.00	100	148	Peak
2	* 17265.000	44.13	5.63	49.76	-18.44	68.20	100	208	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

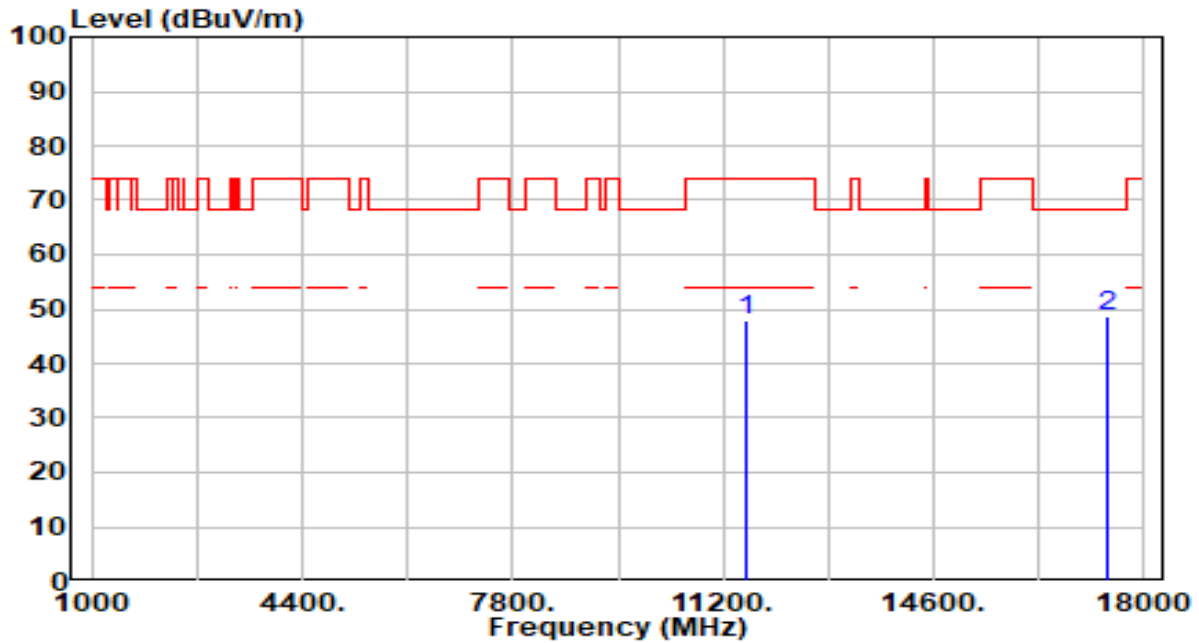


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	42.43	5.39	47.82	-26.18	74.00	158	360	Peak
2	* 17385.000	43.56	5.31	48.86	-19.34	68.20	100	251	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

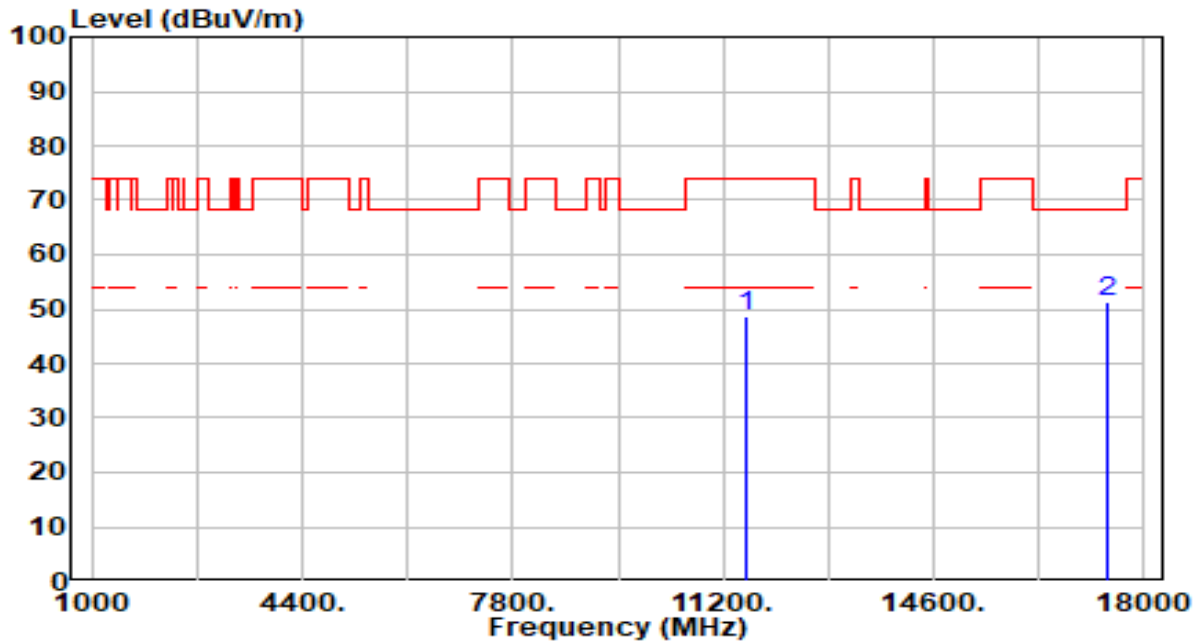


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	43.30	5.39	48.69	-25.31	74.00	200	39	Peak
2	* 17385.000	45.99	5.31	51.30	-16.90	68.20	100	197	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band1_TX_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

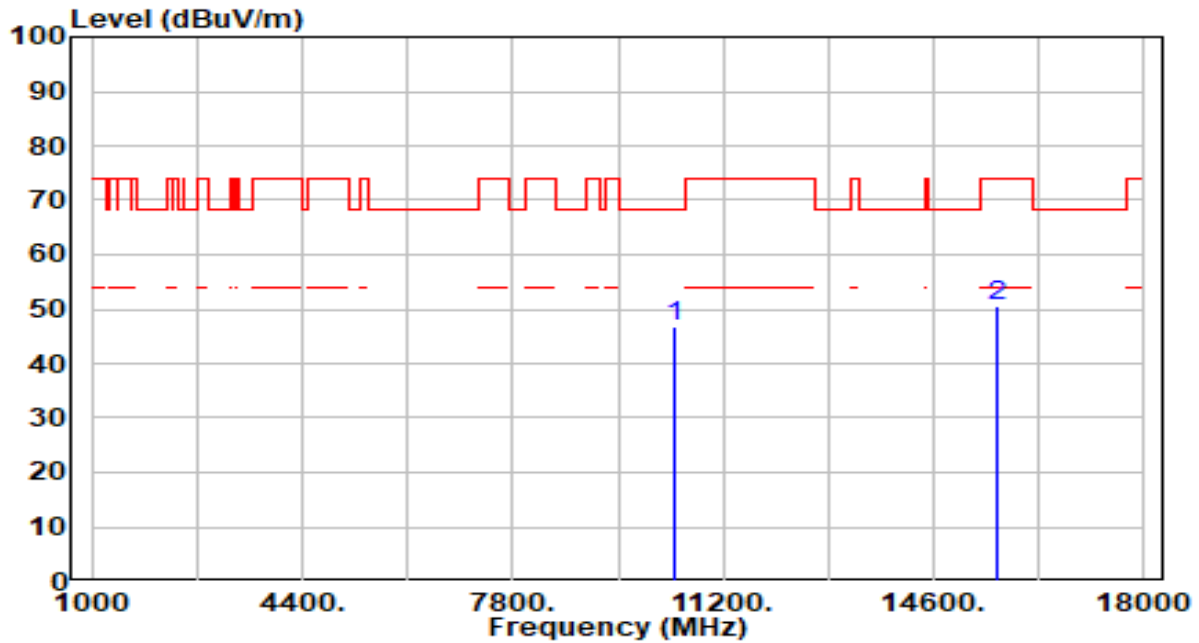


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.96	4.79	46.75	-21.45	68.20	200	103	Peak
2		15630.000	44.48	6.21	50.68	-23.32	74.00	100	188	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band1_TX_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

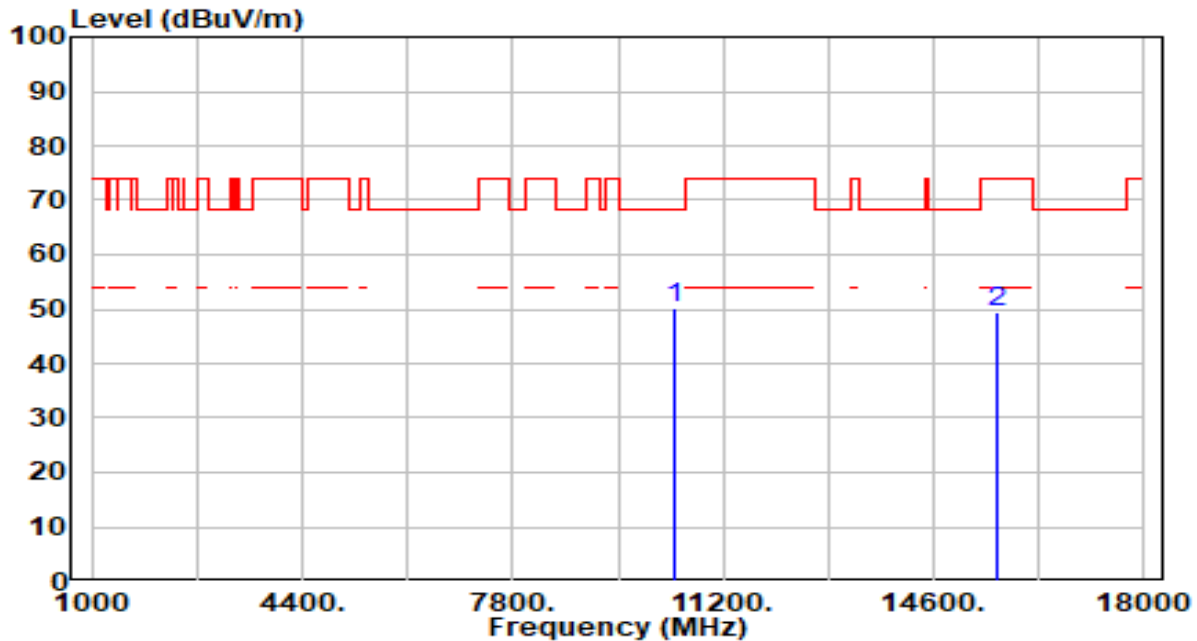


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	45.45	4.79	50.24	-17.96	68.20	156	360	Peak
2		15630.000	43.34	6.21	49.55	-24.45	74.00	200	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band2_TX_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

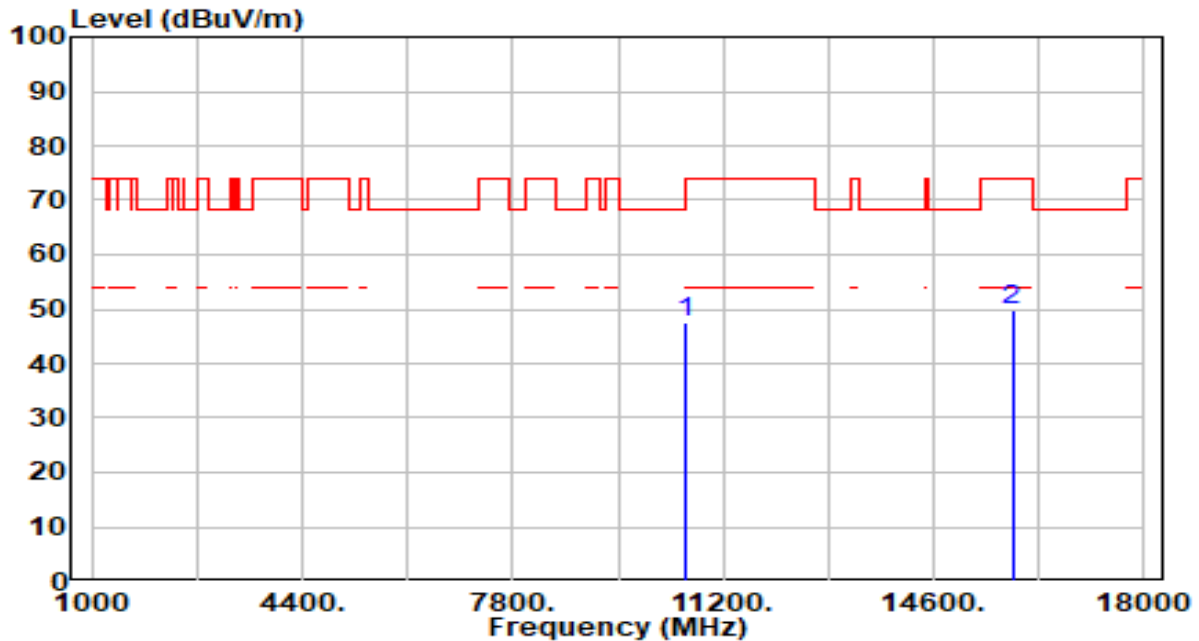


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	42.74	4.63	47.37	-20.83	68.20	100	224	Peak
2		15870.000	43.13	6.55	49.68	-24.32	74.00	142	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band2_TX_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

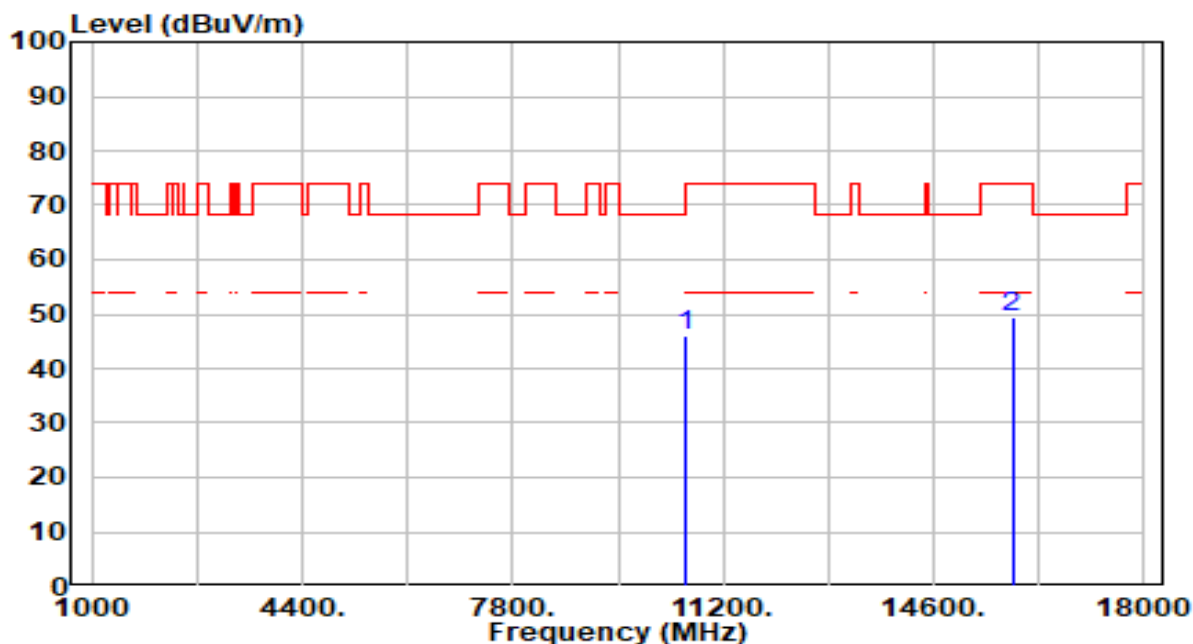


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.56	4.63	46.19	-22.01	68.20	200	302	Peak
2		15870.000	42.86	6.55	49.41	-24.59	74.00	100	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

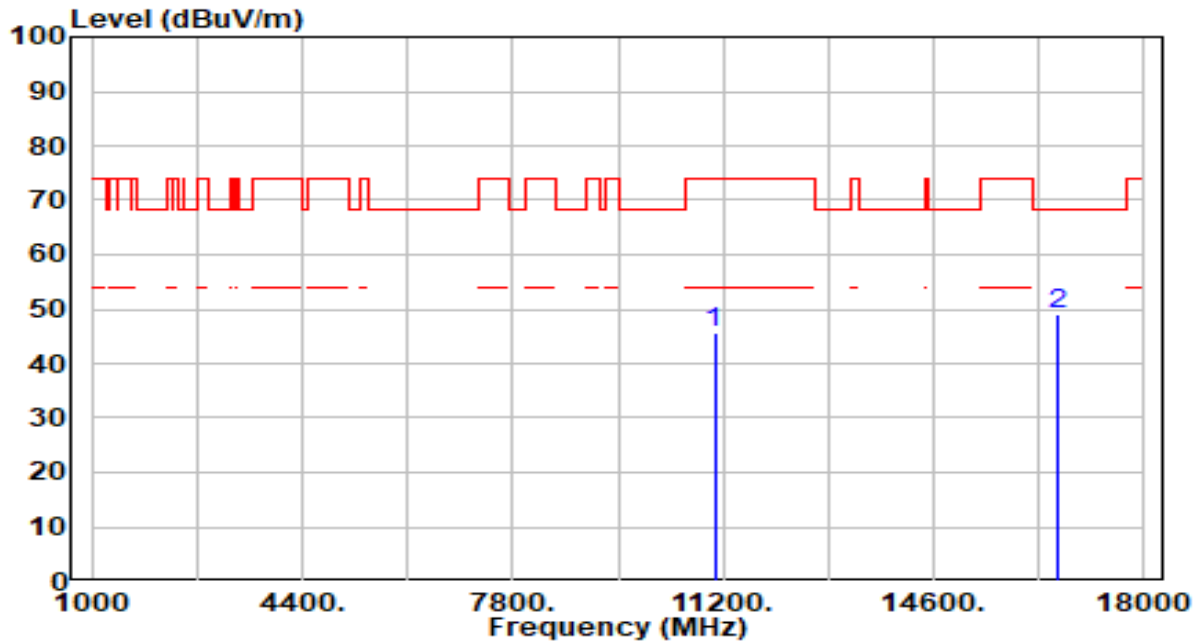


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.03	4.68	45.71	-28.29	74.00	100	328	Peak
2	* 16590.000	42.78	6.11	48.88	-19.32	68.20	100	211	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

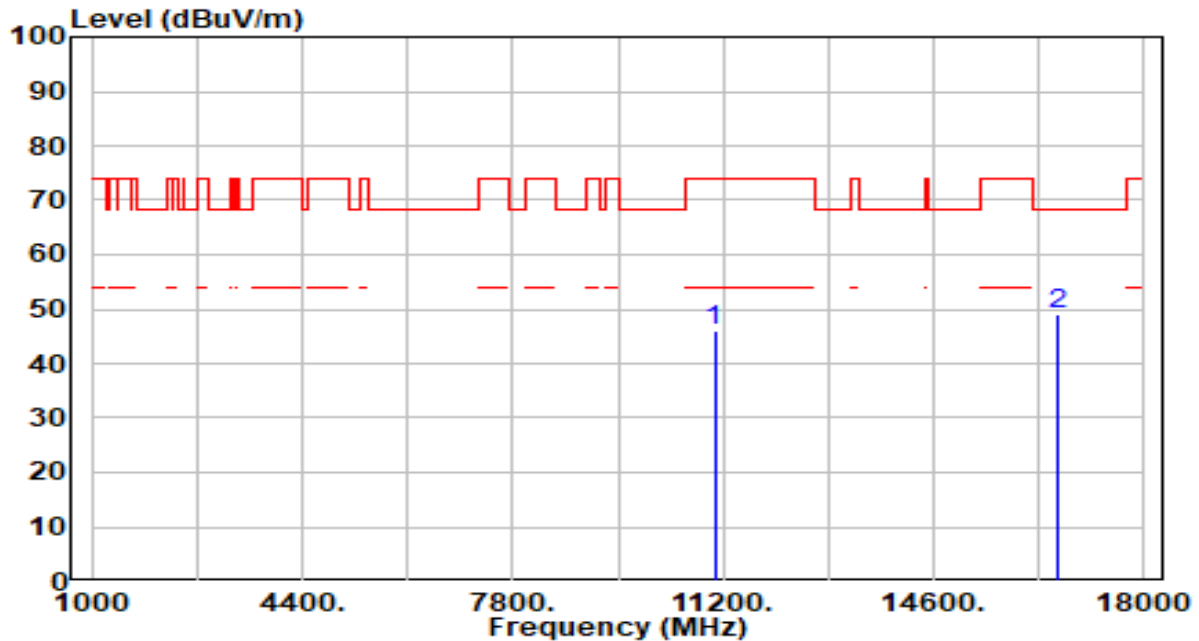


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.52	4.68	46.20	-27.80	74.00	100	326	Peak
2	* 16590.000	42.80	6.11	48.91	-19.29	68.20	100	291	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

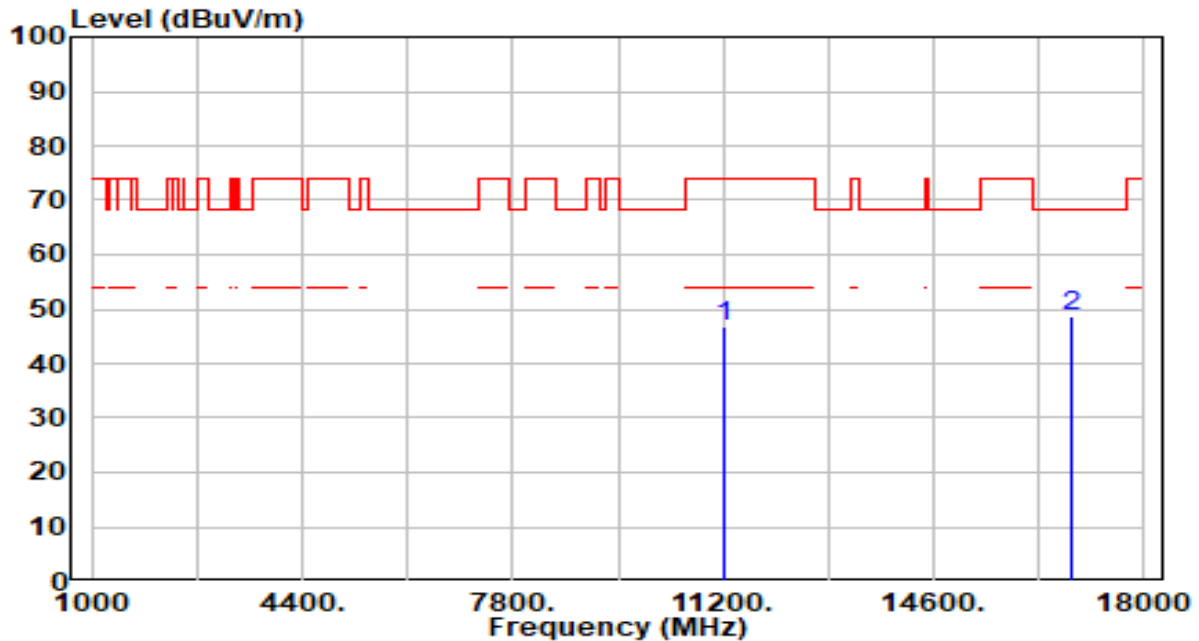


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.88	5.06	46.95	-27.05	74.00	200	28	Peak
2	* 16830.000	42.36	6.21	48.57	-19.63	68.20	100	217	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

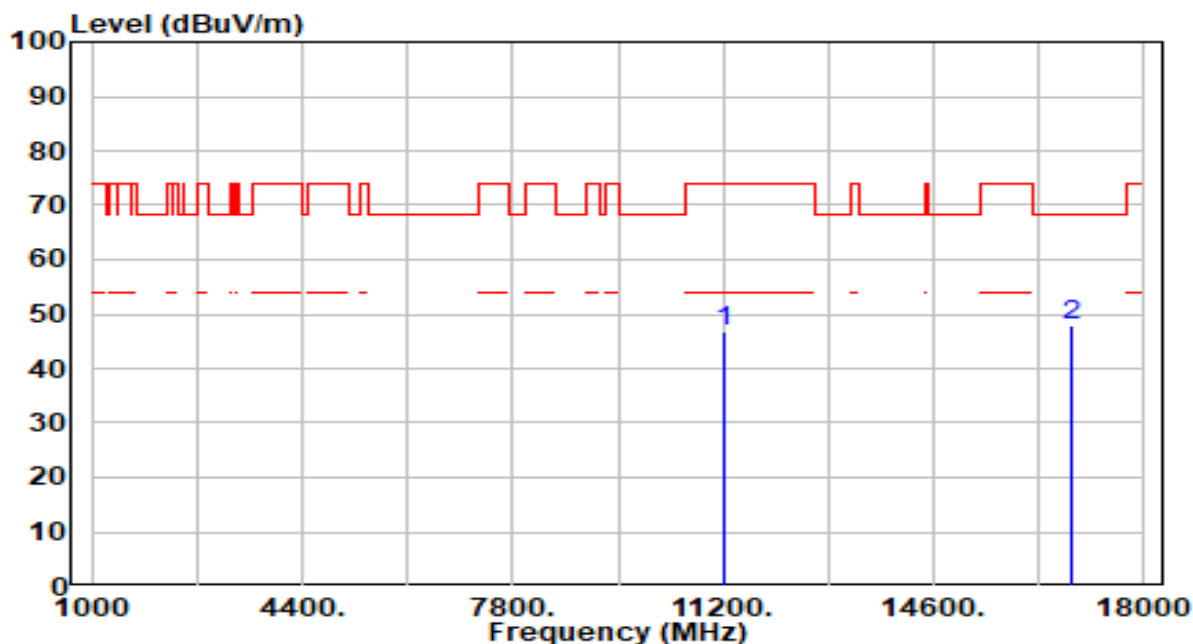


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.76	5.06	46.83	-27.17	74.00	200	206	Peak
2	* 16830.000	41.59	6.21	47.80	-20.40	68.20	100	151	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

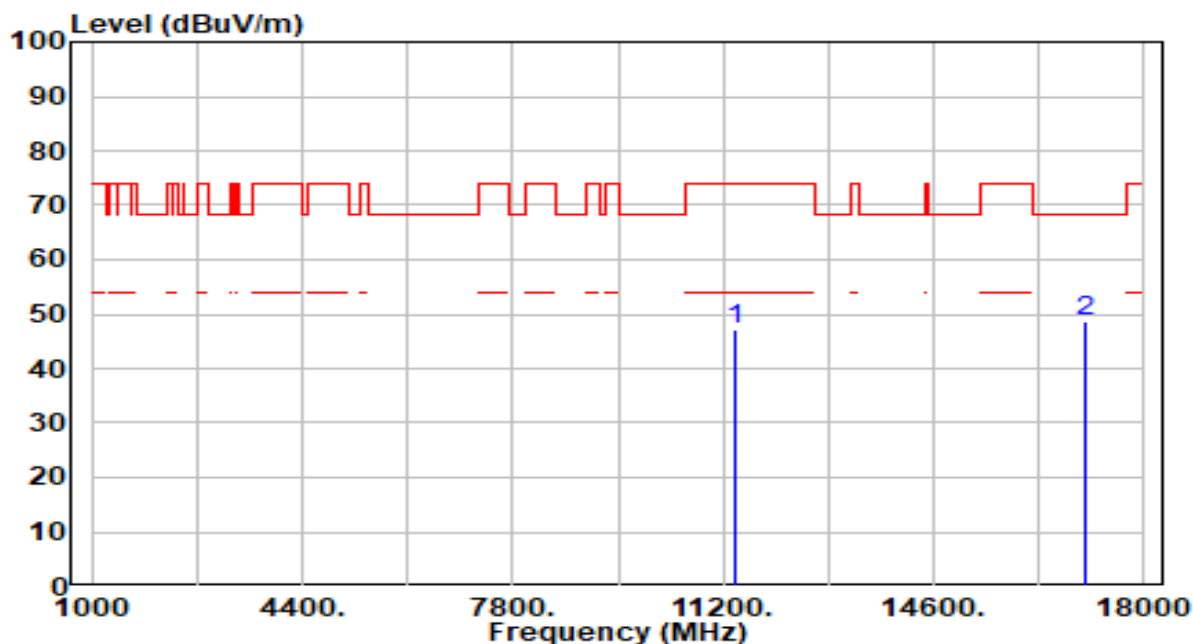


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.91	5.24	47.15	-26.85	74.00	100	278	Peak
2	* 17070.000	42.66	6.02	48.68	-19.52	68.20	100	281	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

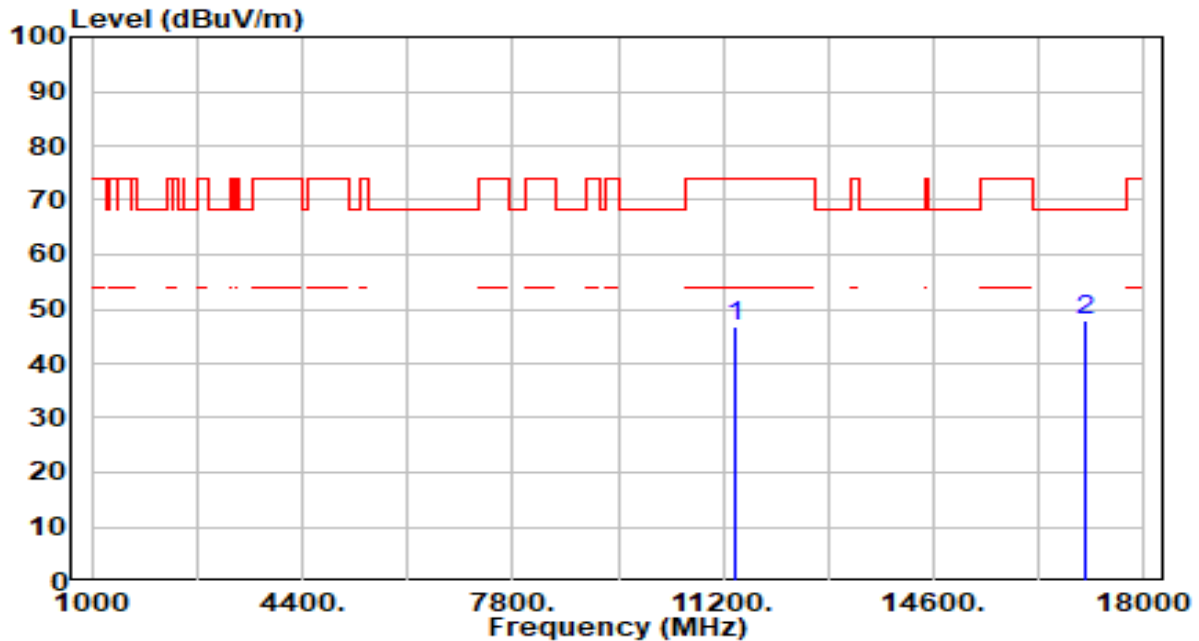


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.61	5.24	46.85	-27.15	74.00	200	208	Peak
2	* 17070.000	42.05	6.02	48.07	-20.13	68.20	100	137	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band4_TX_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

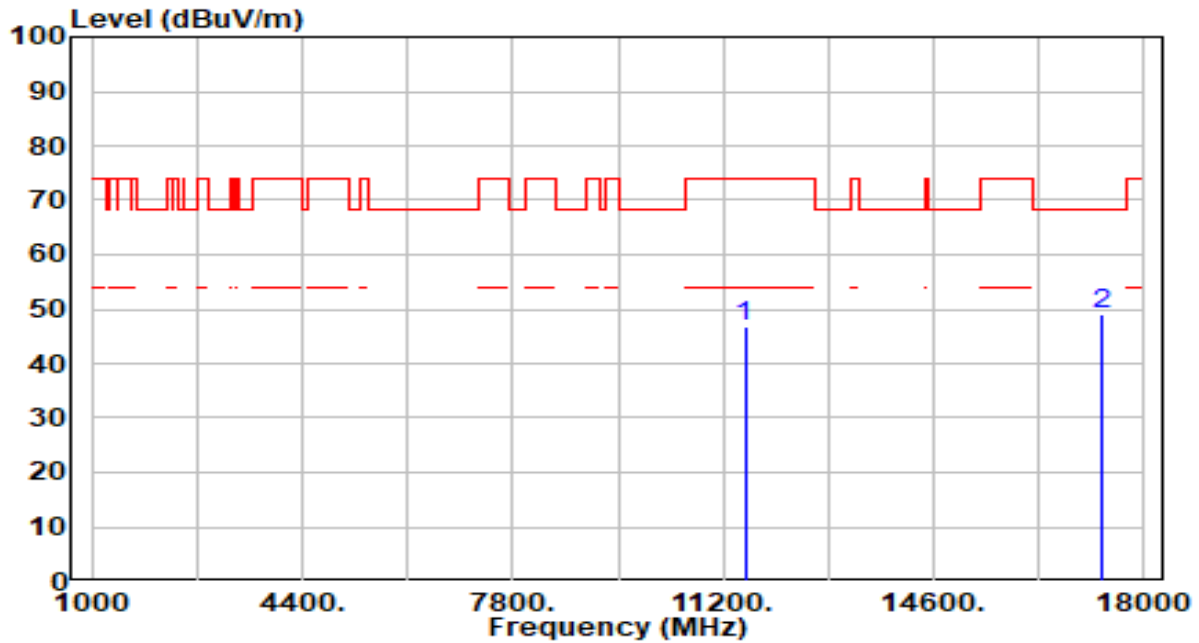


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	41.39	5.36	46.75	-27.25	74.00	105	338	Peak
2	* 17325.000	43.71	5.47	49.18	-19.02	68.20	105	251	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band4_TX_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

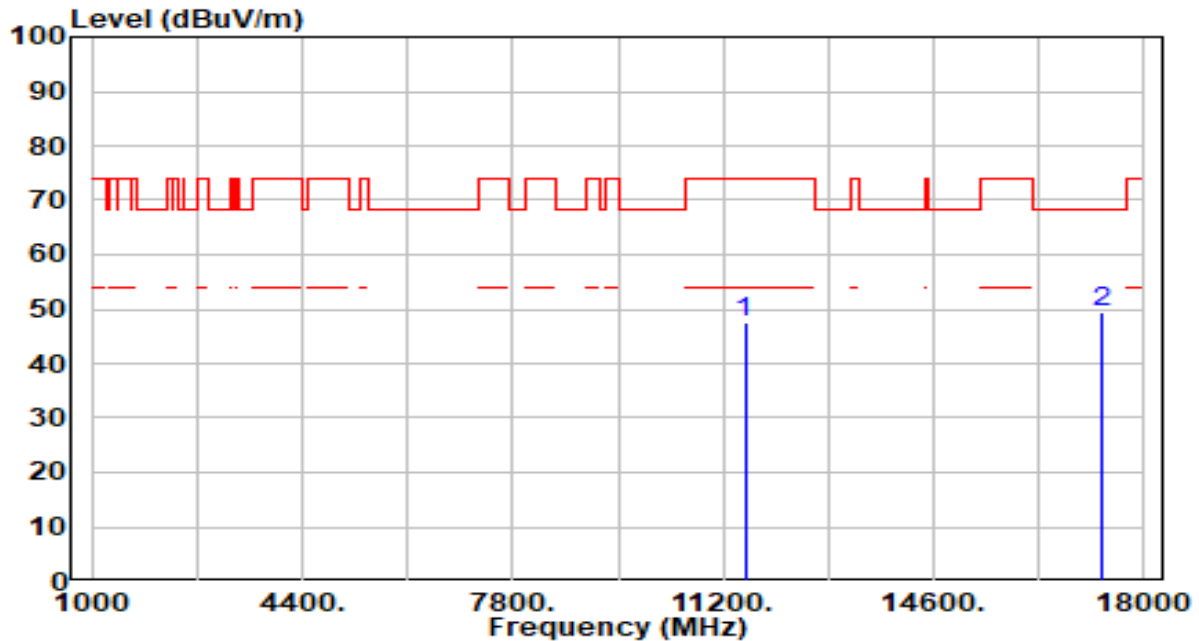


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	42.15	5.36	47.51	-26.49	74.00	186	360	Peak
2	*	17325.000	43.83	5.47	49.30	-18.90	68.20	100	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

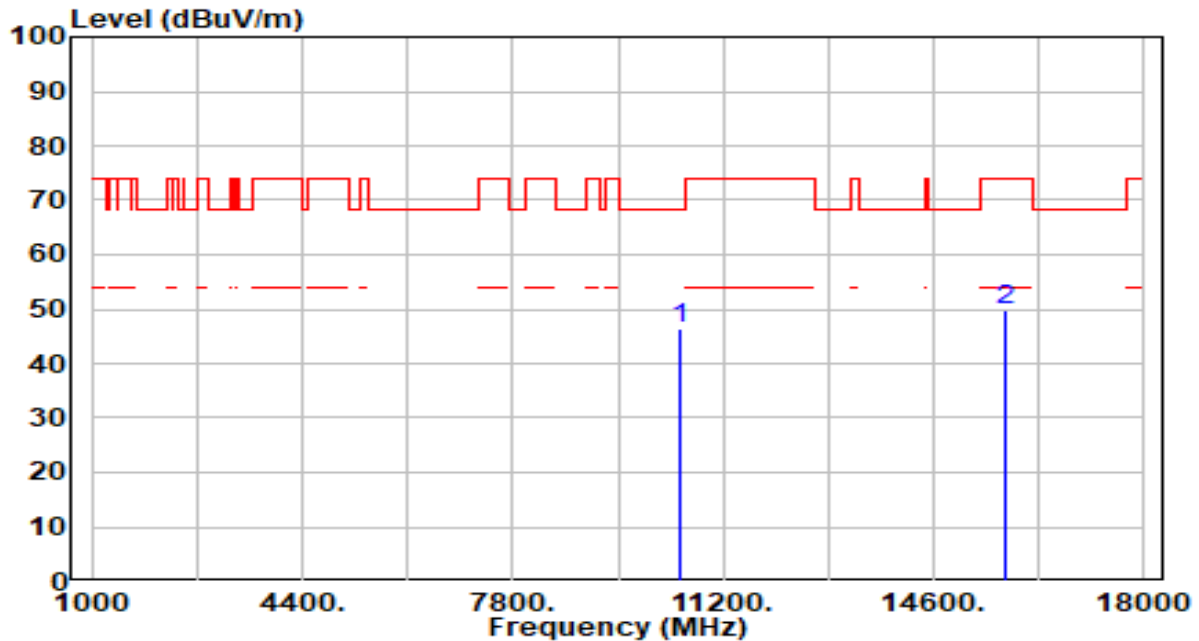


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.87	4.68	46.55	-21.65	68.20	100	109	Peak
2		15750.000	43.35	6.45	49.79	-24.21	74.00	100	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

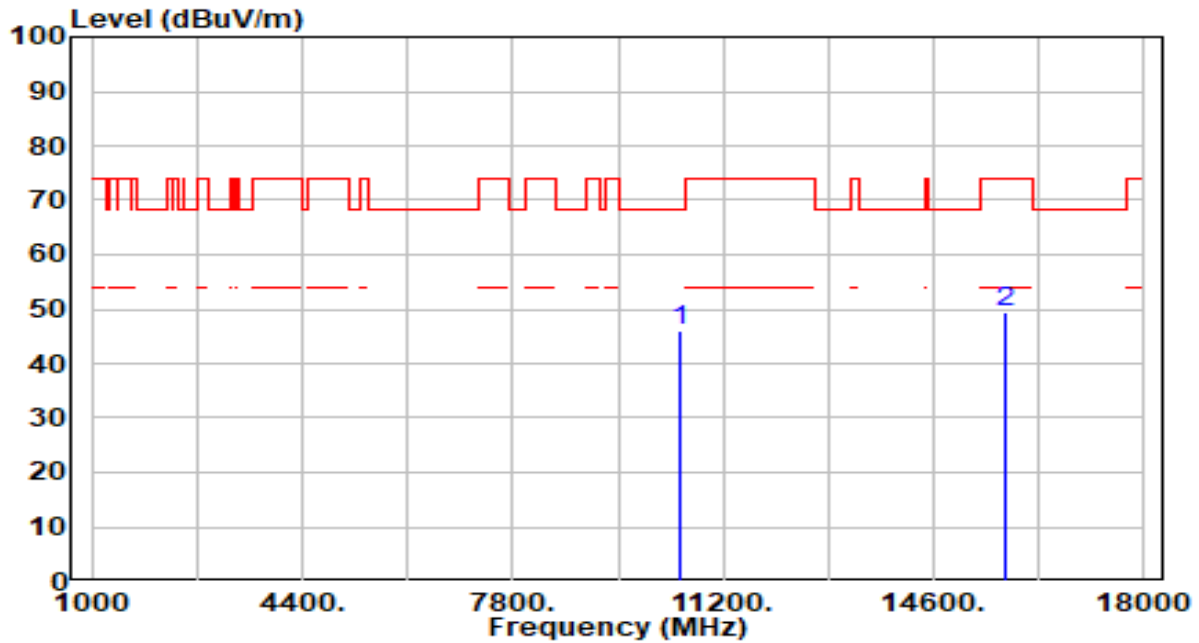


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.43	4.68	46.12	-22.08	68.20	200	346	Peak
2		15750.000	43.17	6.45	49.62	-24.38	74.00	200	77	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band3_TX_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

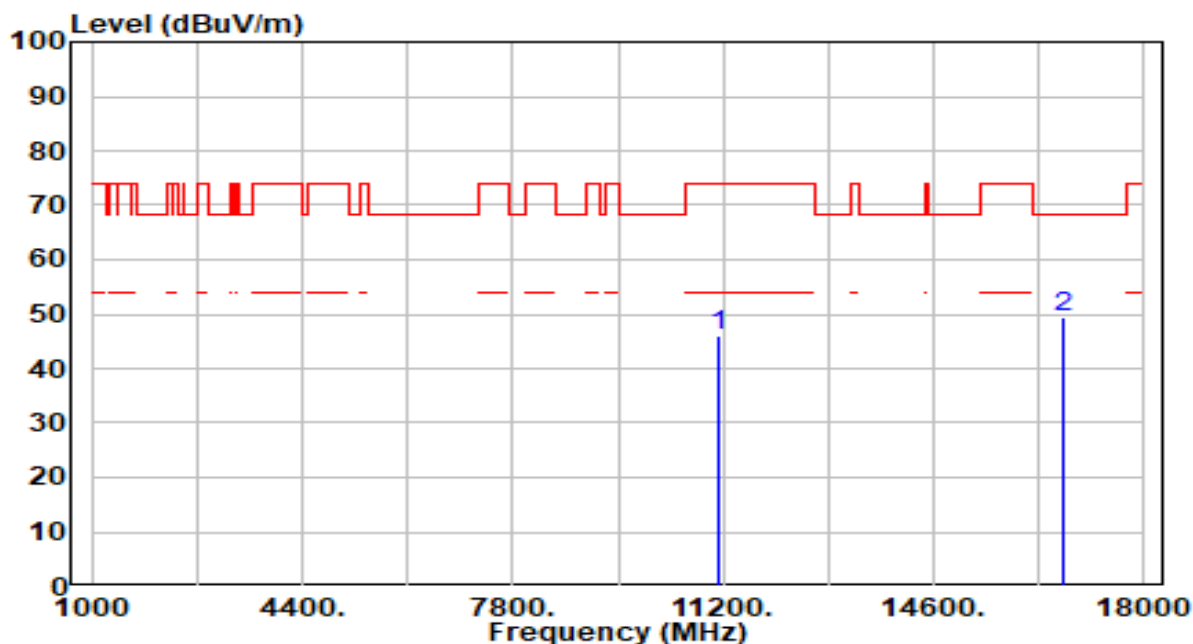


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.18	4.89	46.07	-27.93	74.00	199	360	Peak
2	* 16710.000	43.39	6.17	49.56	-18.64	68.20	100	136	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band3_TX_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

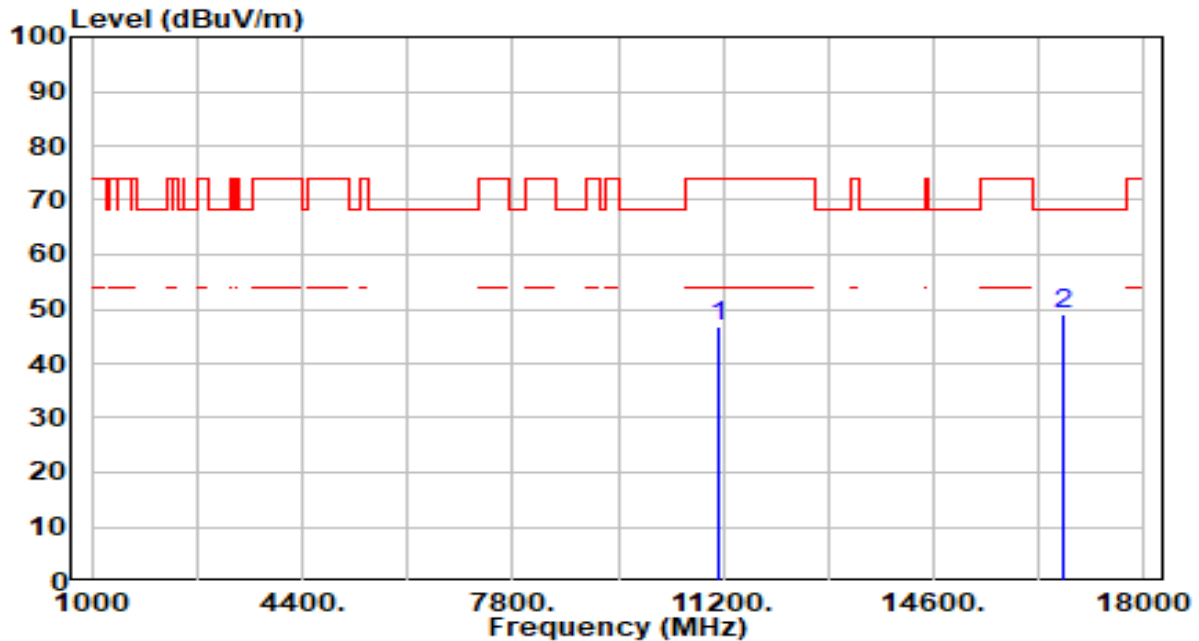


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.85	4.89	46.73	-27.27	74.00	100	0	Peak
2	*	16710.000	42.94	6.17	49.11	-19.09	68.20	200	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-13
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

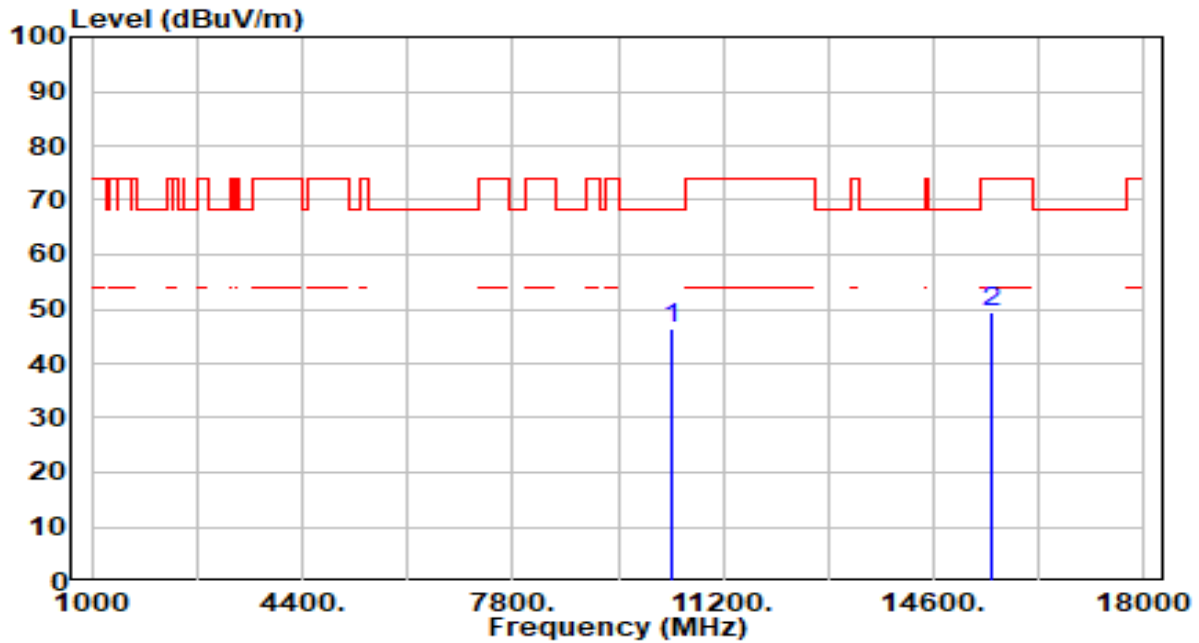


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.69	4.87	46.56	-21.64	68.20	100	342	Peak
2		15540.000	43.27	6.21	49.48	-24.52	74.00	200	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-13
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

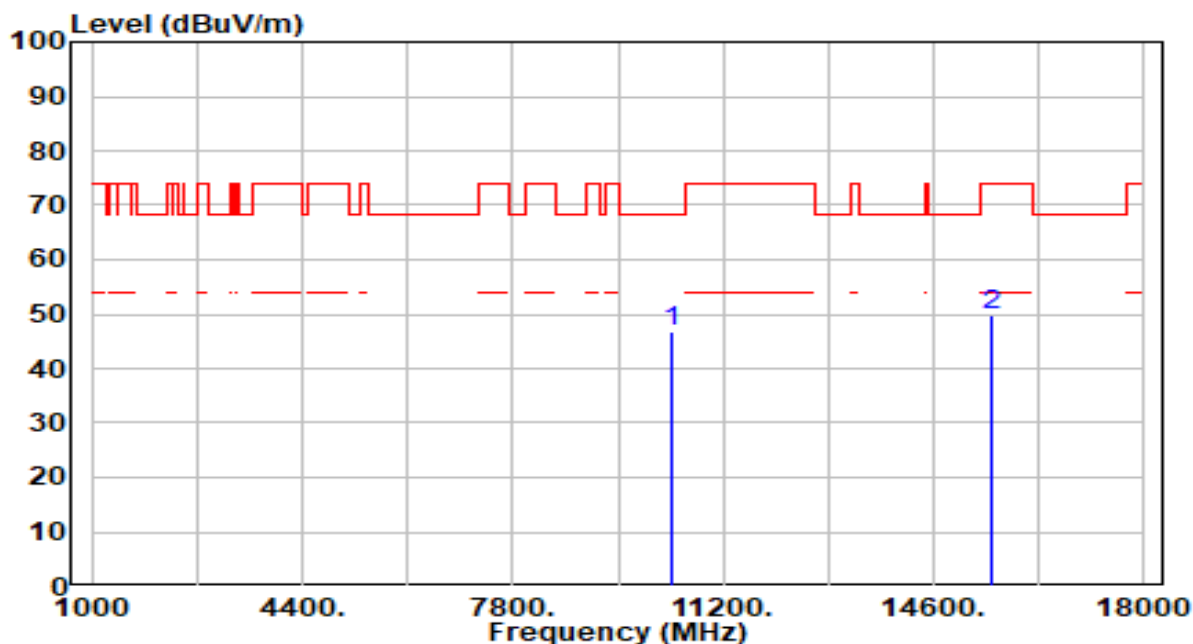


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.02	4.87	46.89	-21.31	68.20	100	224	Peak
2		15540.000	43.61	6.21	49.82	-24.18	74.00	113	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

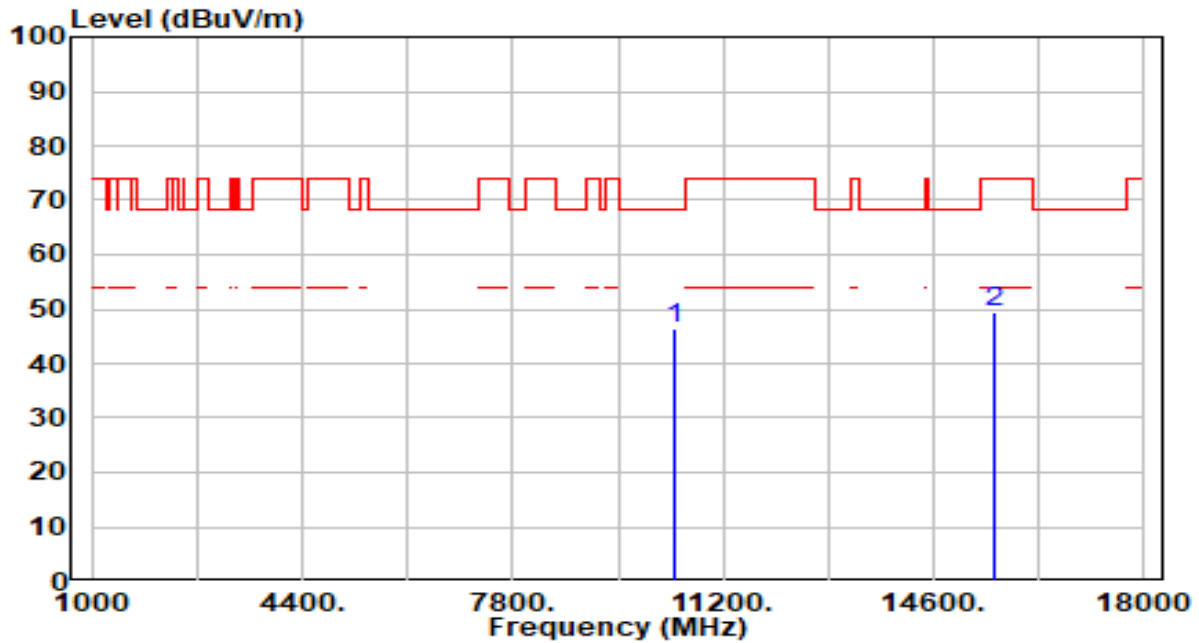


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.74	4.82	46.56	-21.64	68.20	100	319	Peak
2		15600.000	43.34	6.15	49.48	-24.52	74.00	102	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

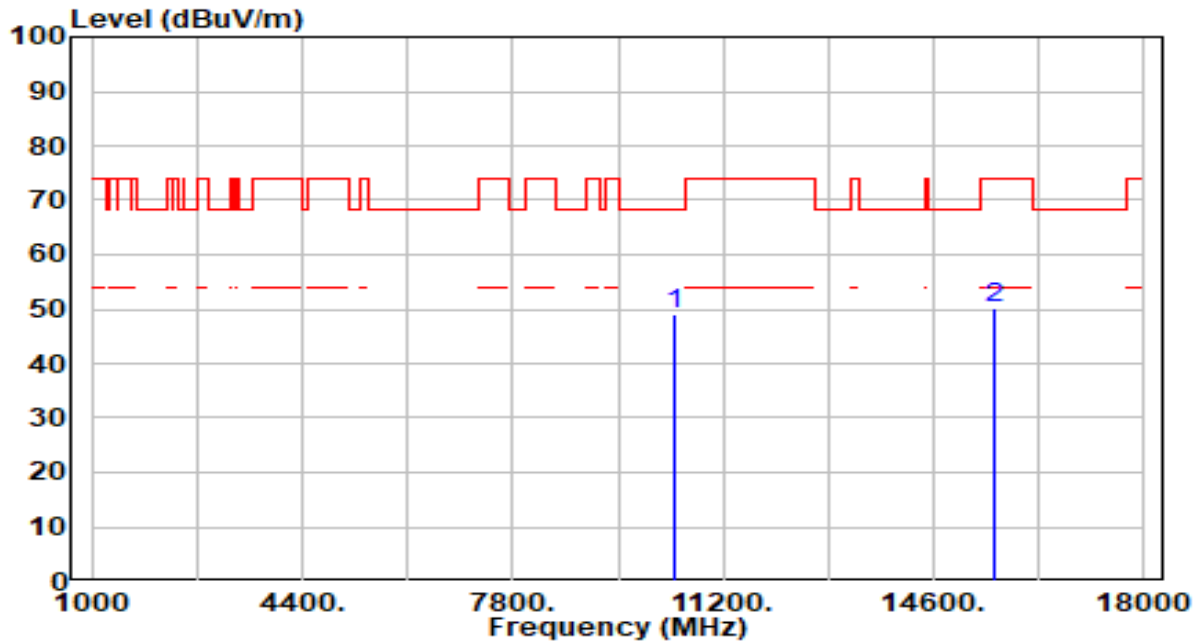


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	44.38	4.82	49.19	-19.01	68.20	142	360	Peak
2		15600.000	44.19	6.15	50.34	-23.66	74.00	100	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

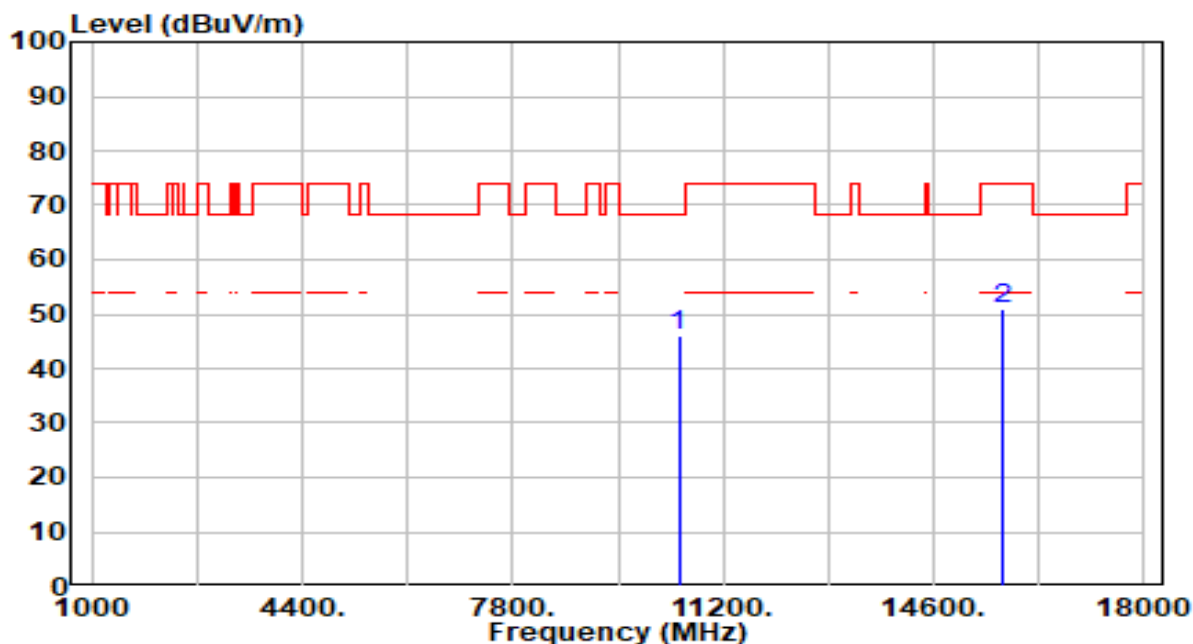


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.33	4.71	46.04	-22.16	68.20	200	210	Peak
2		15720.000	44.69	6.39	51.08	-22.92	74.00	100	89	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

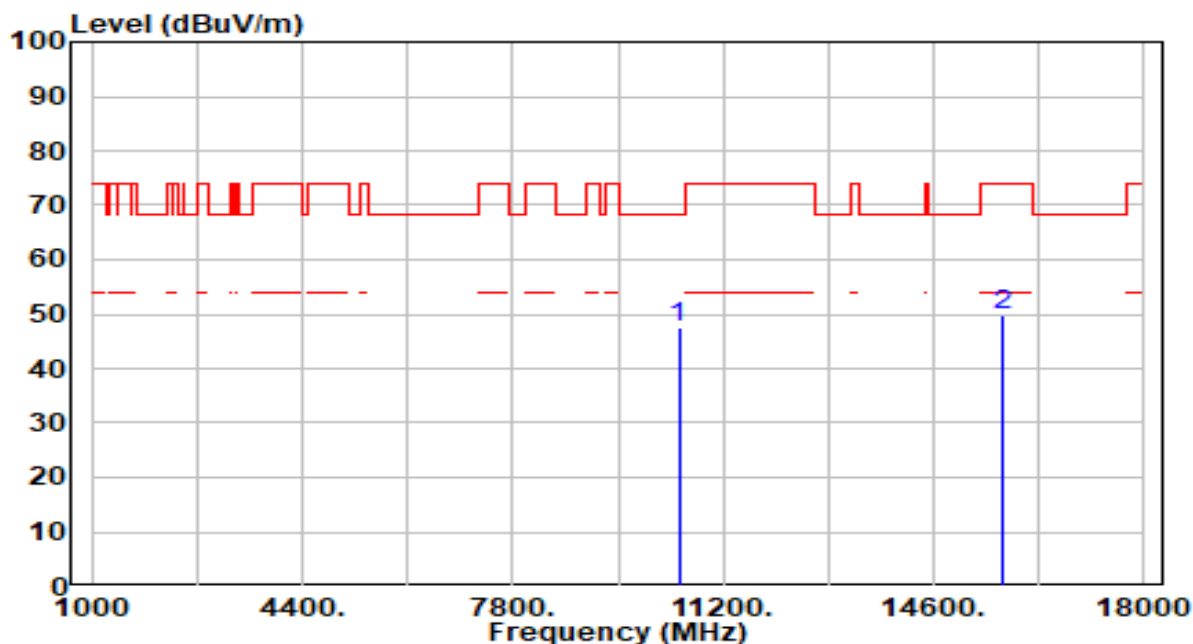


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	42.86	4.71	47.57	-20.63	68.20	200	360	Peak
2		15720.000	43.26	6.39	49.65	-24.35	74.00	100	139	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

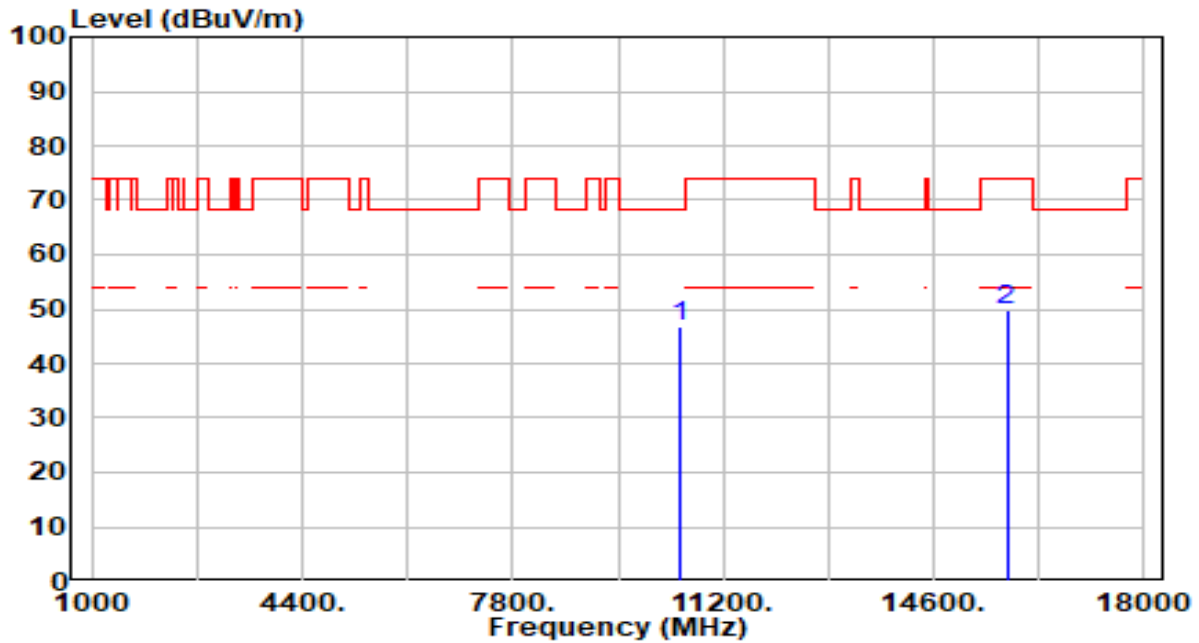


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.98	4.67	46.66	-21.54	68.20	100	135	Peak
2		15780.000	43.19	6.51	49.70	-24.30	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

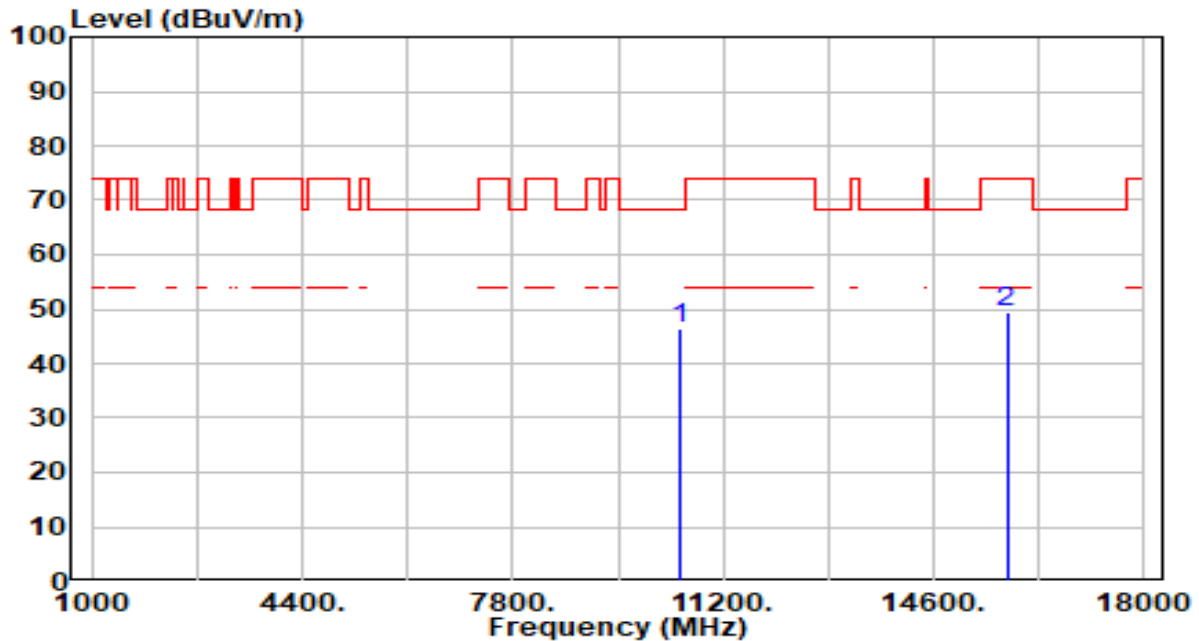


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.91	4.67	46.58	-21.62	68.20	100	358	Peak
2		15780.000	43.08	6.51	49.59	-24.41	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

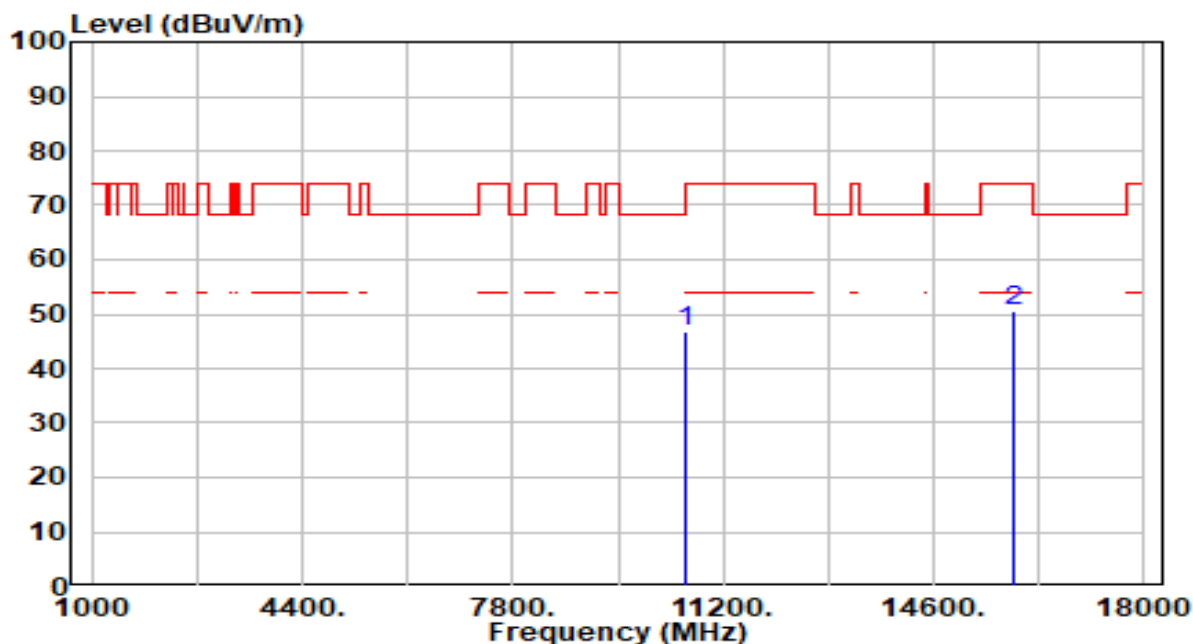


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.11	4.61	46.72	-21.48	68.20	200	88	Peak
2		15900.000	43.84	6.55	50.39	-23.61	74.00	100	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

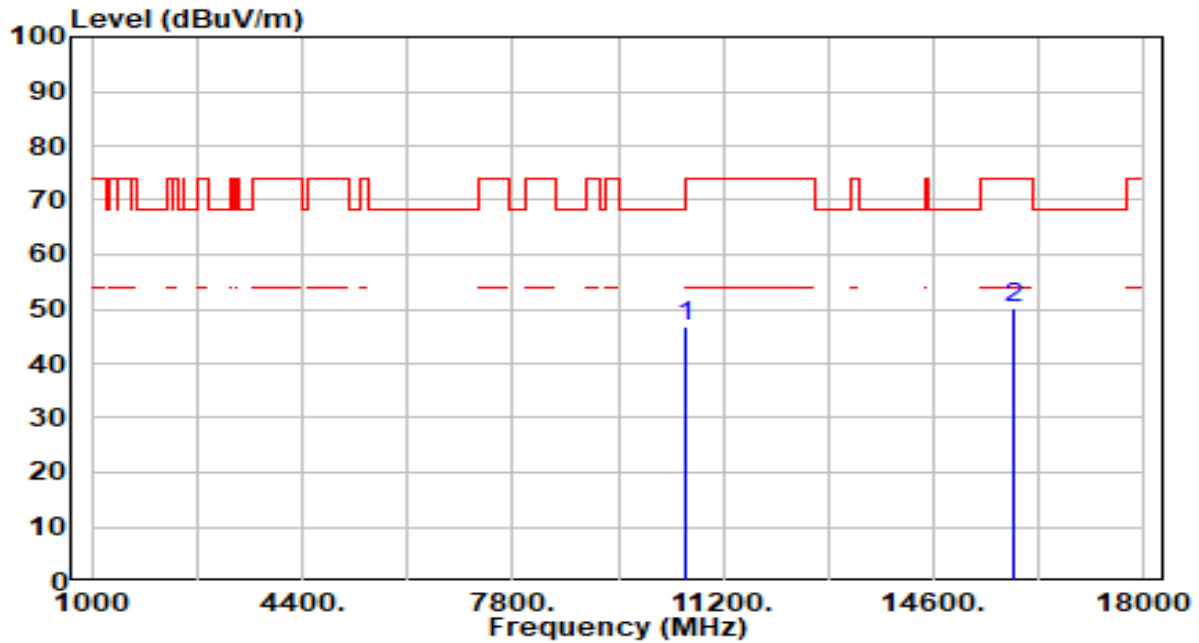


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.03	4.61	46.64	-21.56	68.20	200	272	Peak
2		15900.000	43.47	6.55	50.02	-23.98	74.00	100	163	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

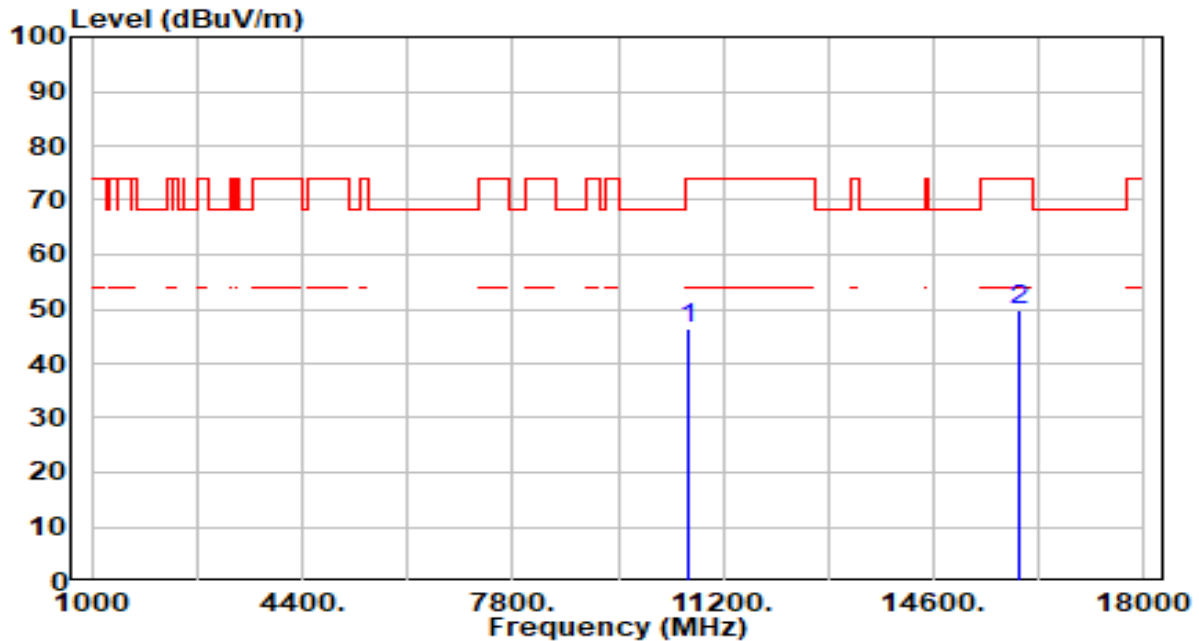


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.98	4.62	46.60	-27.40	74.00	100	319	Peak
2	* 15960.000	43.15	6.55	49.70	-24.30	74.00	100	69	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

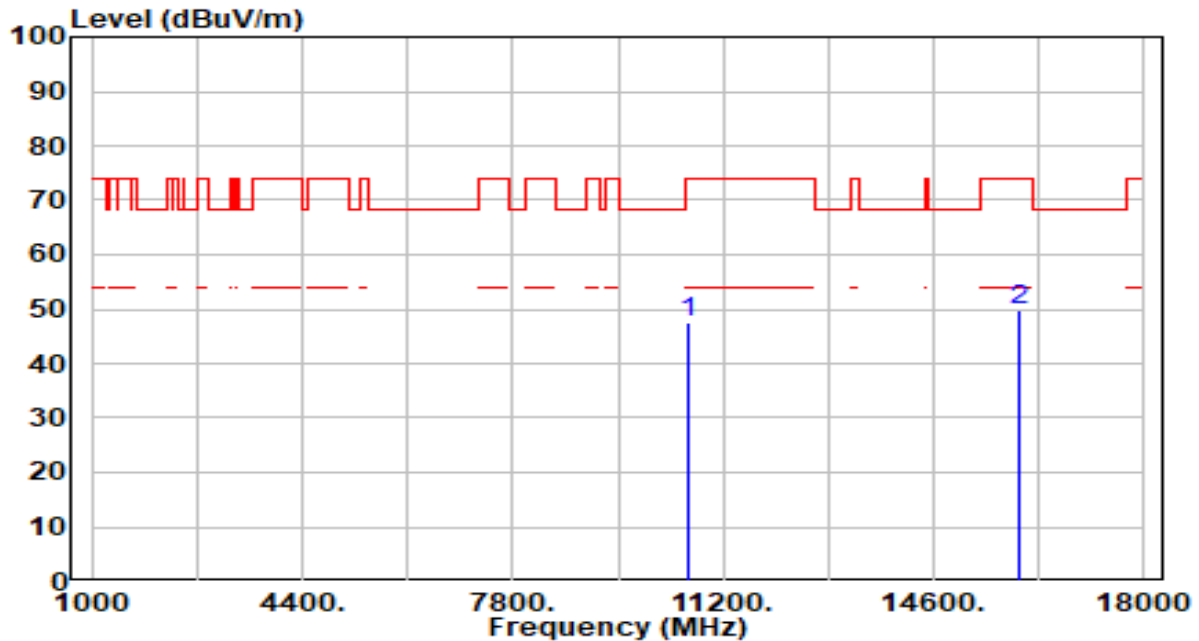


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	42.88	4.62	47.51	-26.49	74.00	100	53	Peak
2	* 15960.000	43.16	6.55	49.71	-24.29	74.00	100	358	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

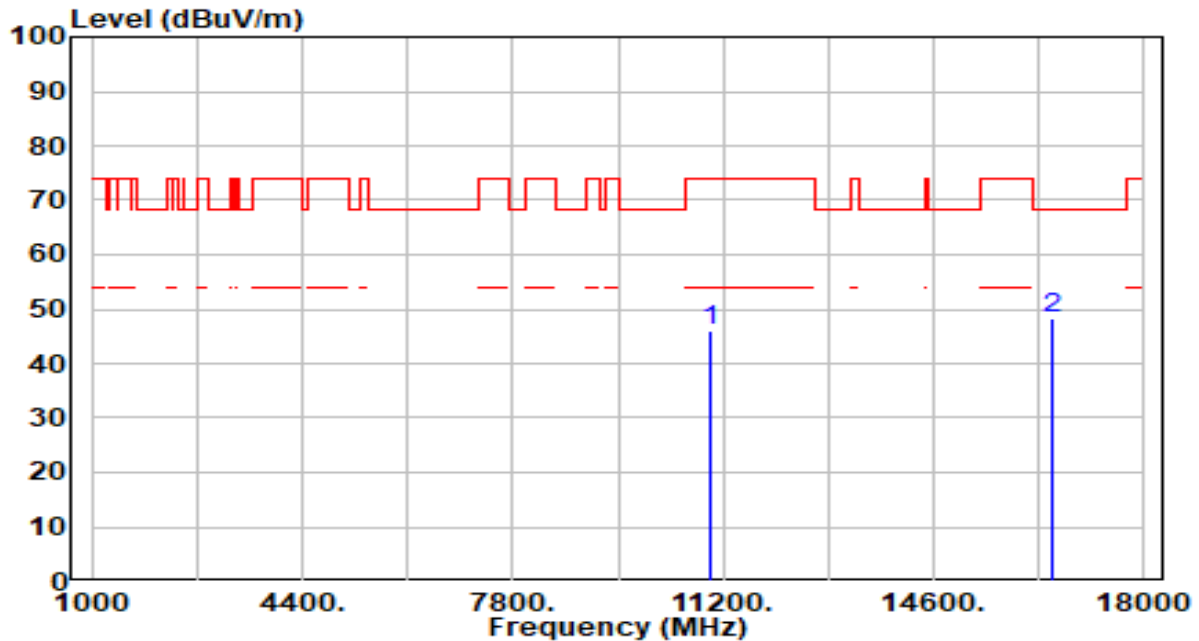


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.67	4.52	46.19	-27.81	74.00	103	360	Peak
2	* 16500.000	42.13	6.10	48.23	-19.97	68.20	100	251	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

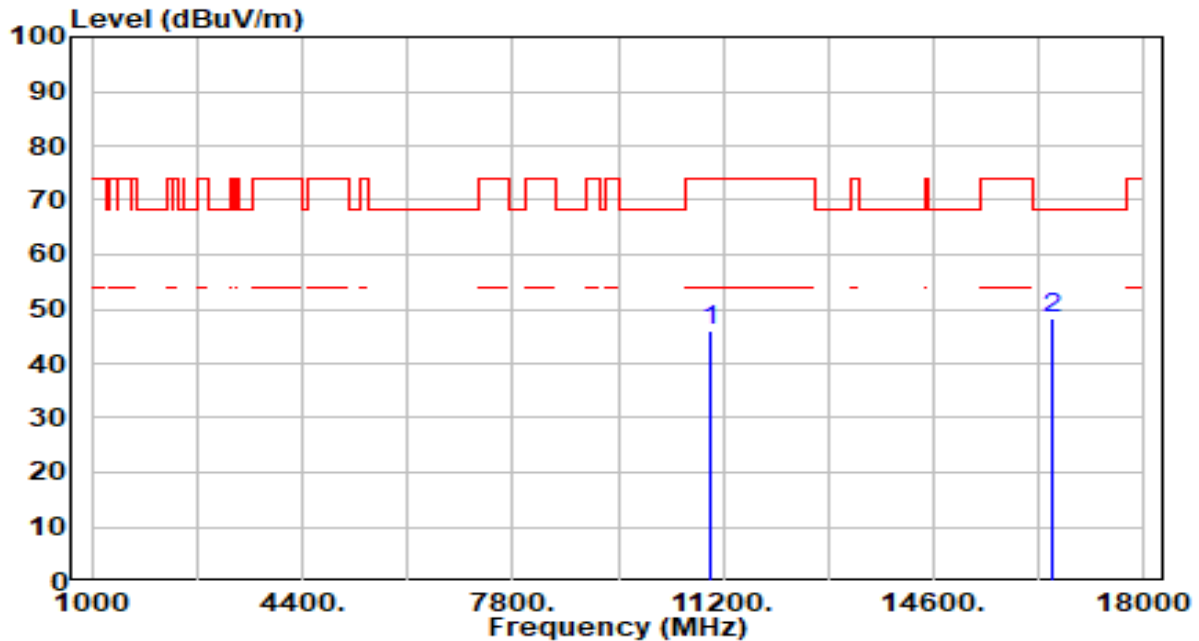


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.42	4.52	45.94	-28.06	74.00	200	265	Peak
2	*	16500.000	42.36	6.10	48.46	-19.74	68.20	100	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

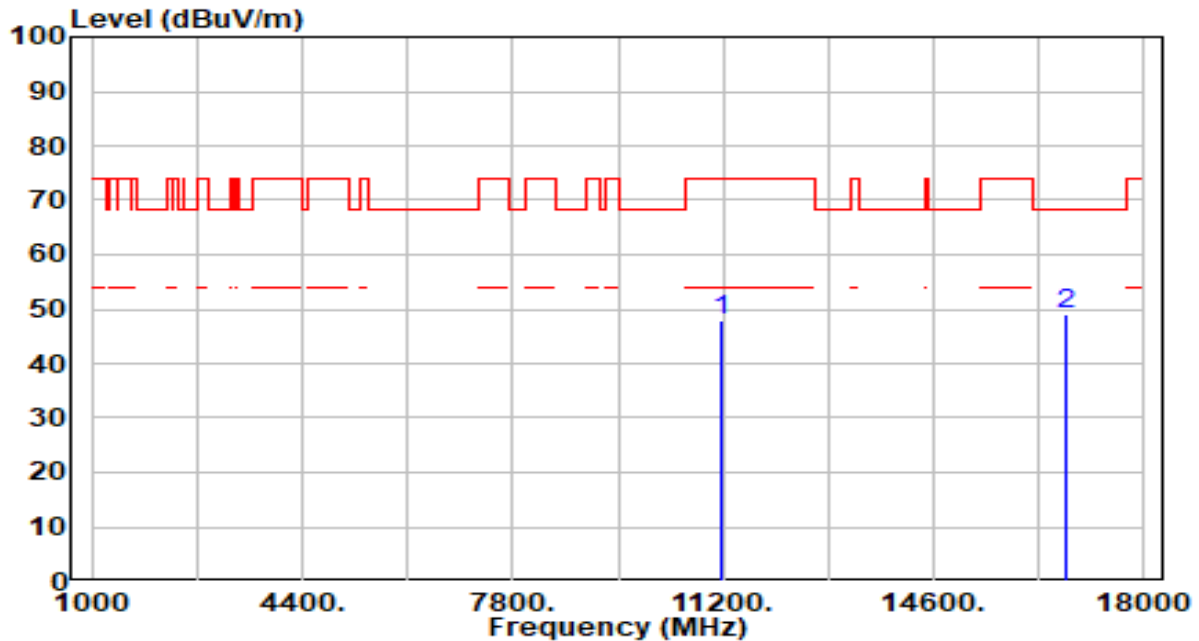


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.80	4.94	47.74	-26.26	74.00	100	301	Peak
2	* 16740.000	42.93	6.19	49.12	-19.08	68.20	100	12	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

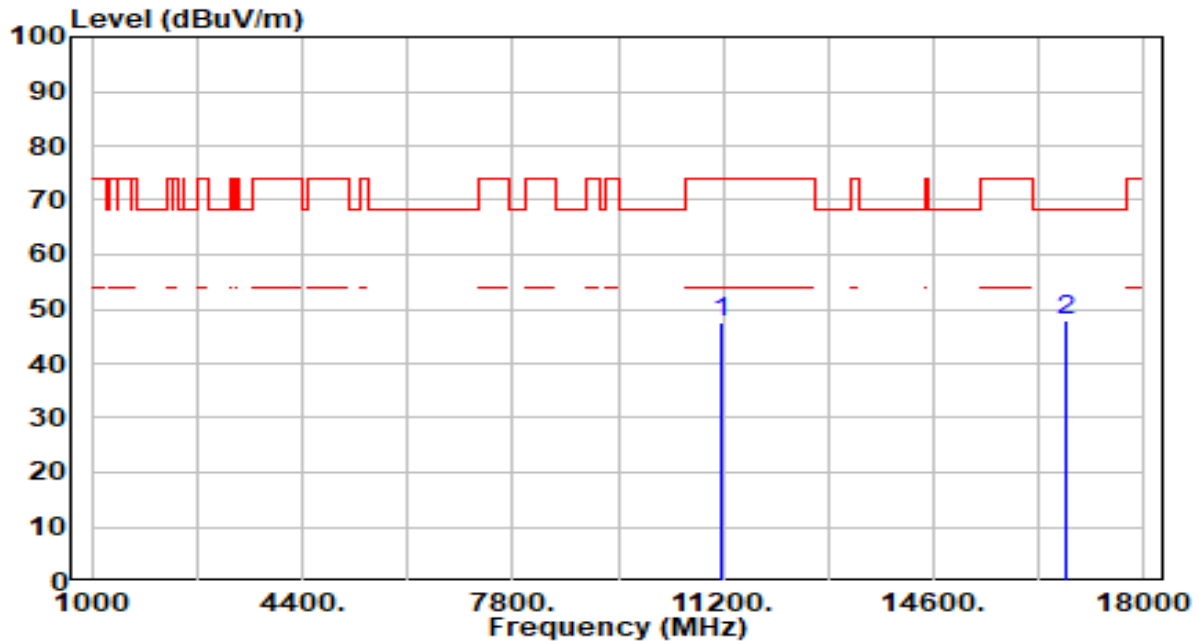


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.46	4.94	47.40	-26.60	74.00	100	42	Peak
2	* 16740.000	41.89	6.19	48.08	-20.12	68.20	200	338	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

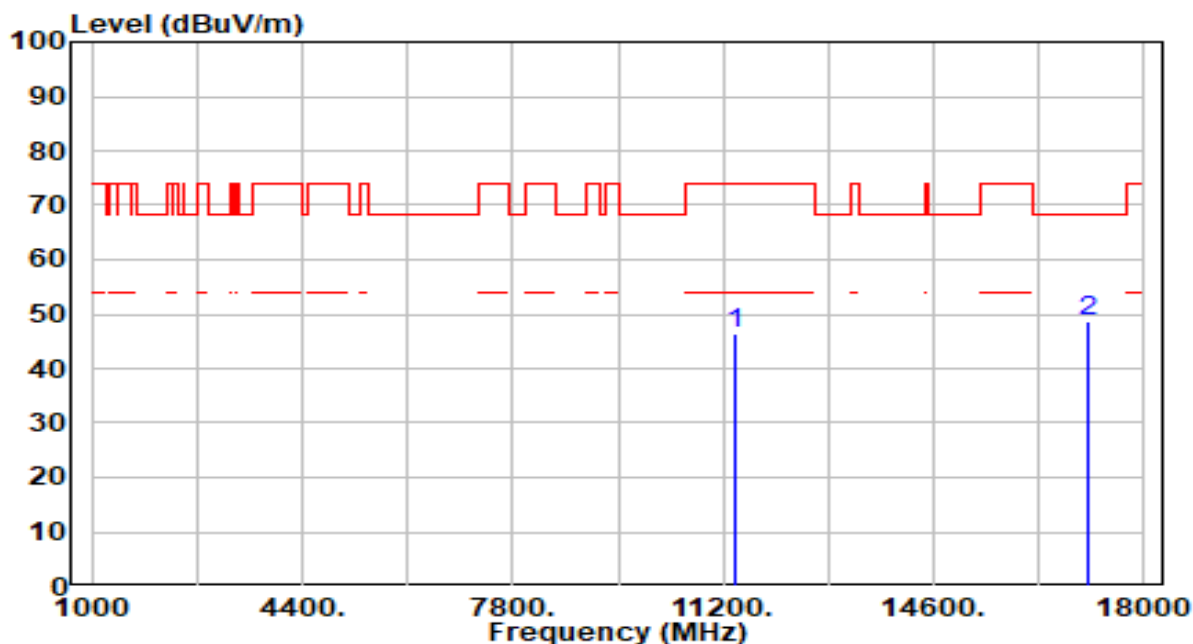


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.27	5.26	46.54	-27.46	74.00	100	18	Peak
2	*	17100.000	42.62	5.97	48.60	-19.60	68.20	100	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

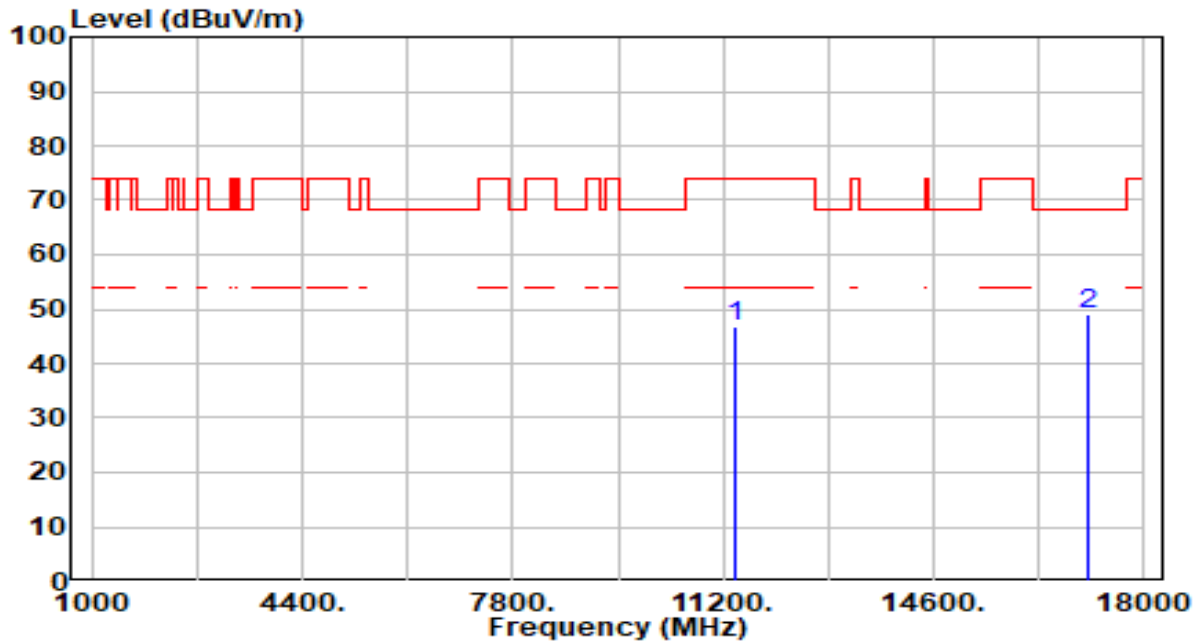


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.48	5.26	46.74	-27.26	74.00	100	268	Peak
2	*	17100.000	43.02	5.97	48.99	-19.21	68.20	100	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

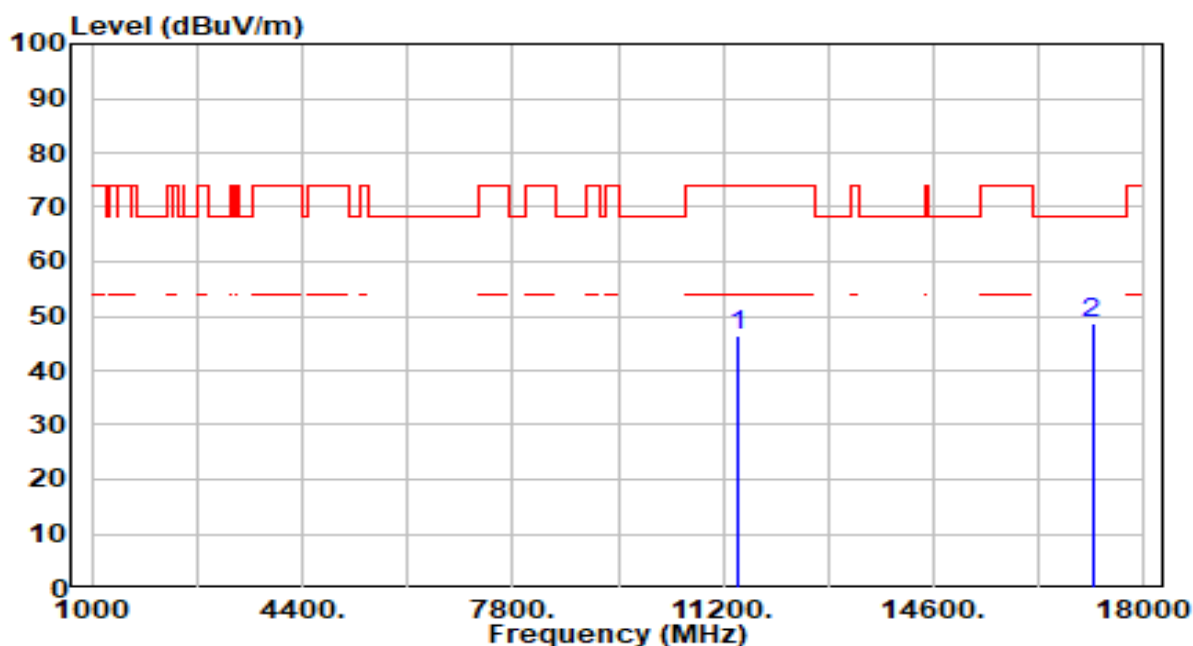


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.15	5.29	46.44	-27.56	74.00	123	360	Peak
2	* 17160.000	42.89	5.87	48.76	-19.44	68.20	100	268	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

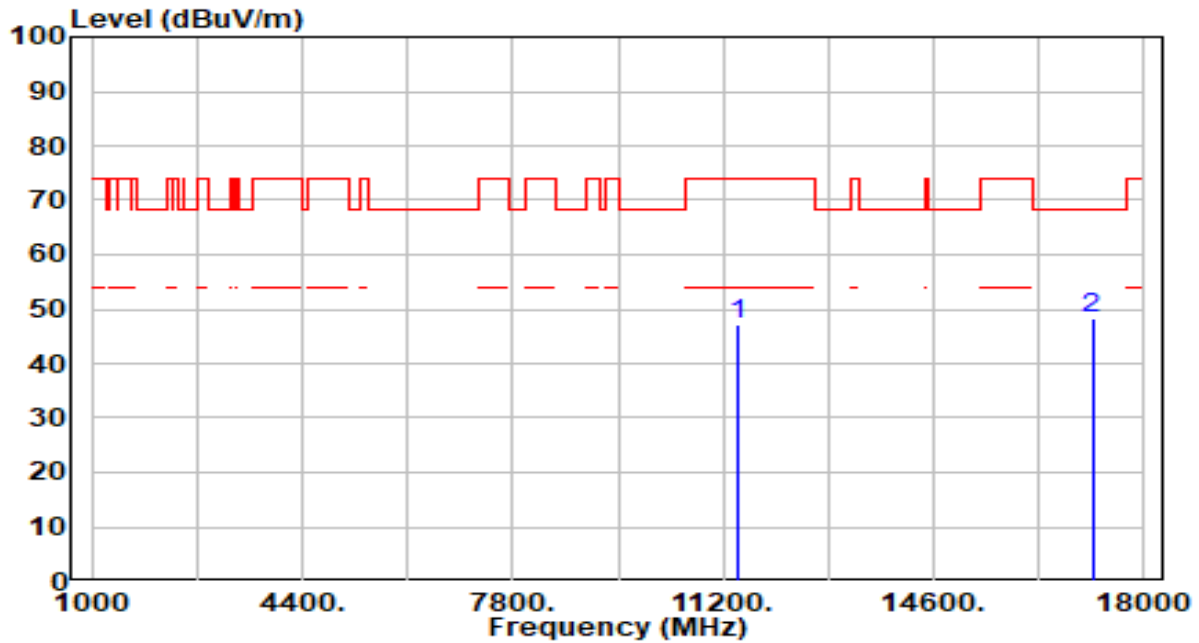


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.87	5.29	47.16	-26.84	74.00	100	133	Peak
2	* 17160.000	42.36	5.87	48.24	-19.96	68.20	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

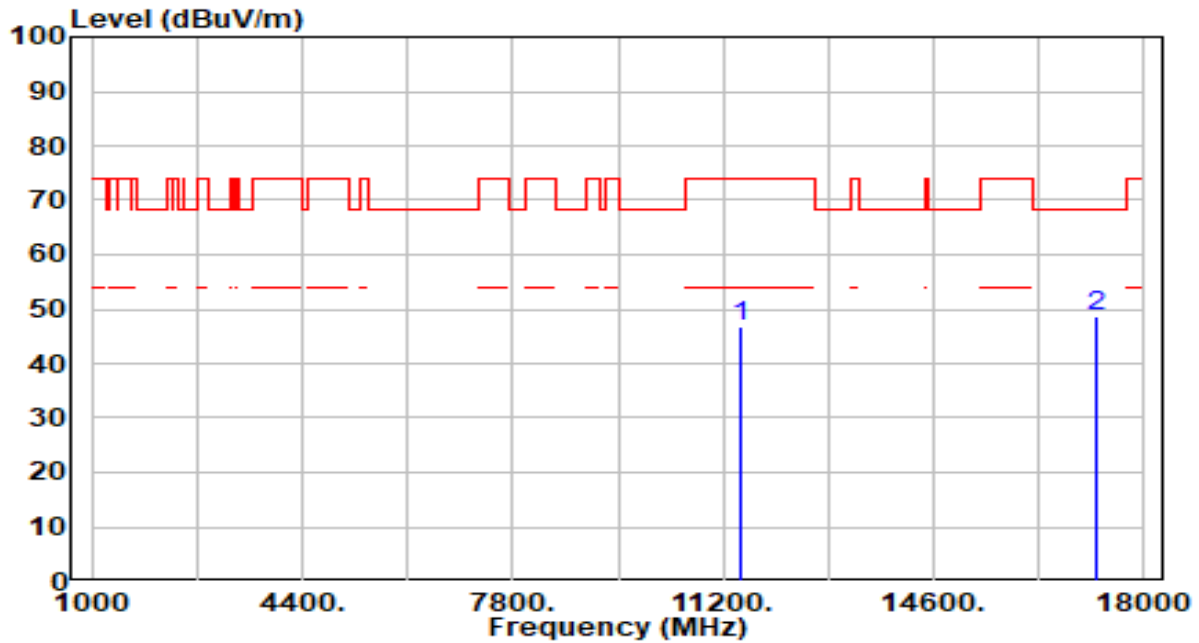


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.56	5.32	46.88	-27.12	74.00	115	360	Peak
2	*	17235.000	42.85	5.71	48.56	-19.64	68.20	200	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

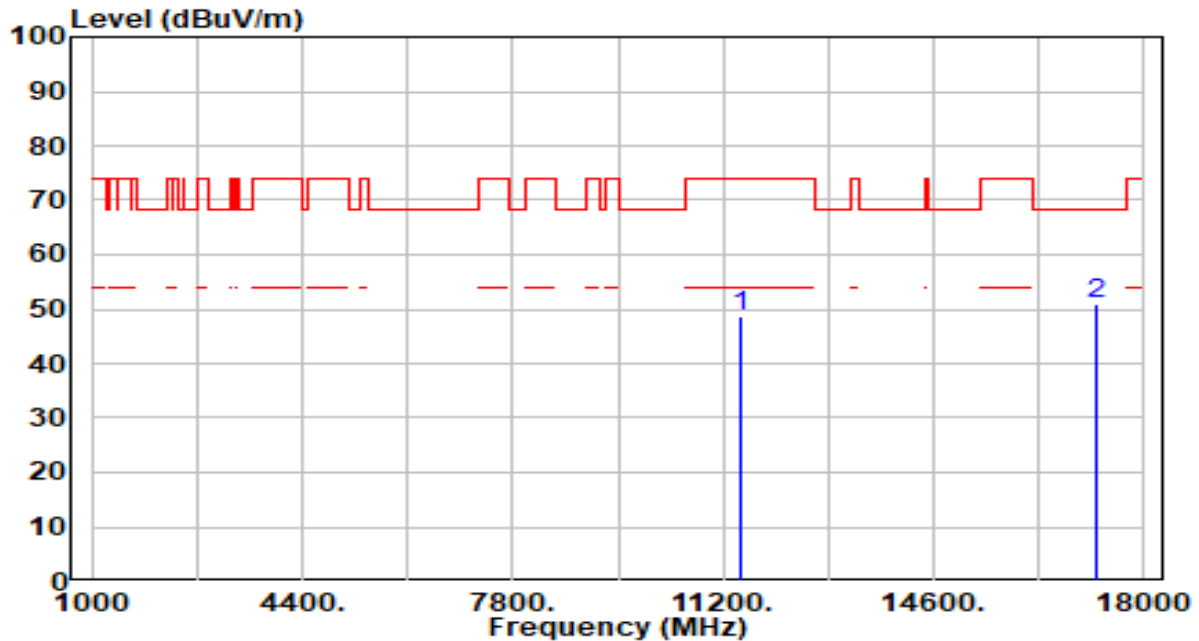


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	43.33	5.32	48.65	-25.35	74.00	200	91	Peak
2	* 17235.000	45.17	5.71	50.88	-17.32	68.20	119	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

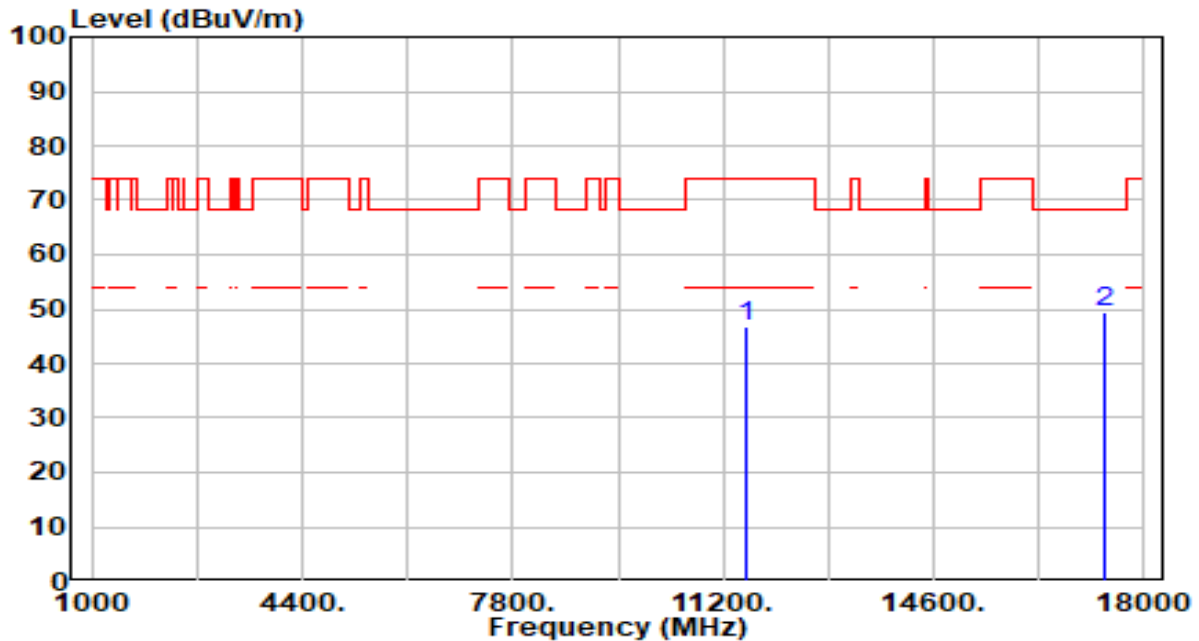


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	41.49	5.38	46.87	-27.13	74.00	100	301	Peak
2	*	17355.000	44.09	5.39	49.48	-18.72	68.20	100	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

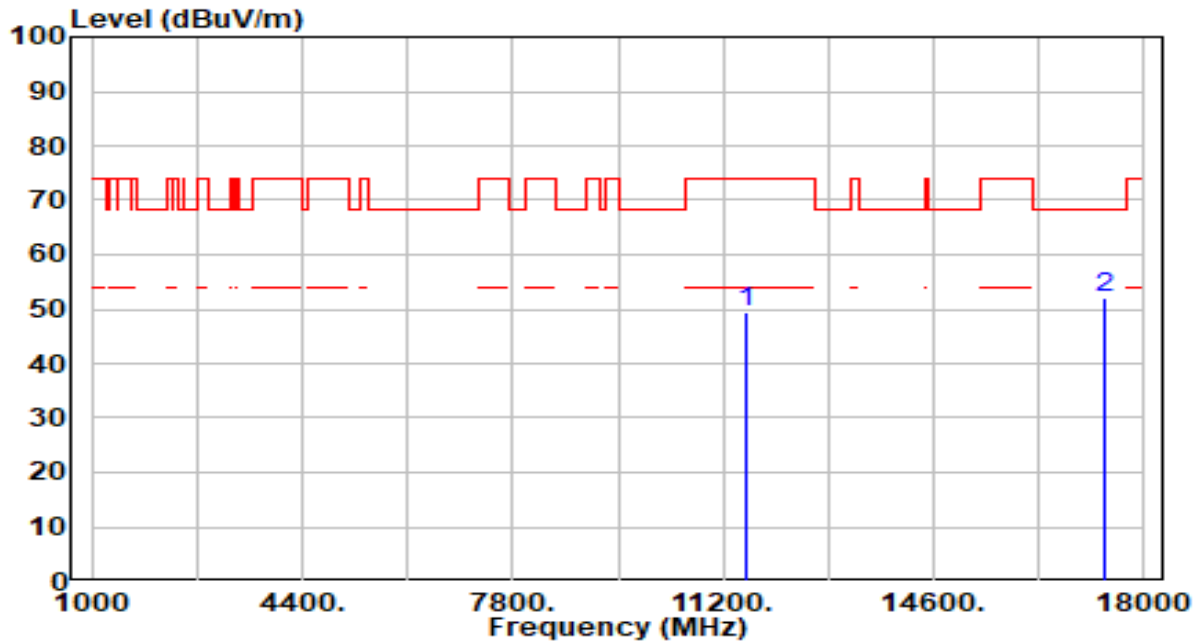


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	44.16	5.38	49.54	-24.46	74.00	100	360	Peak
2	* 17355.000	46.67	5.39	52.06	-16.14	68.20	105	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

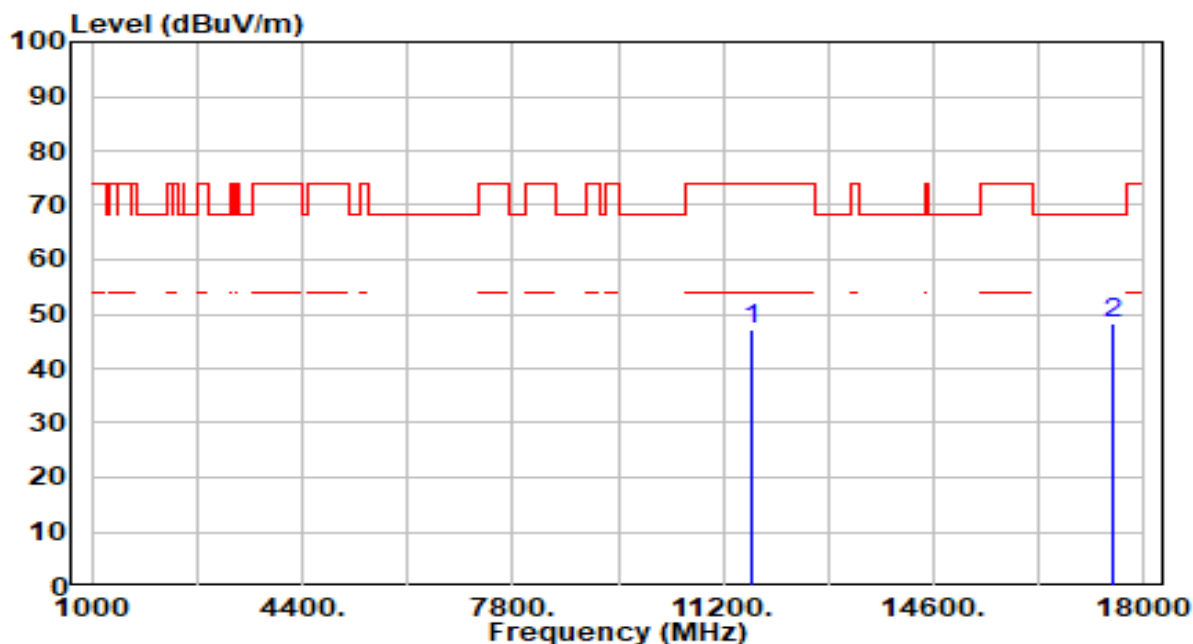


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.84	5.36	47.20	-26.80	74.00	100	144	Peak
2	* 17475.000	43.17	5.29	48.47	-19.73	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

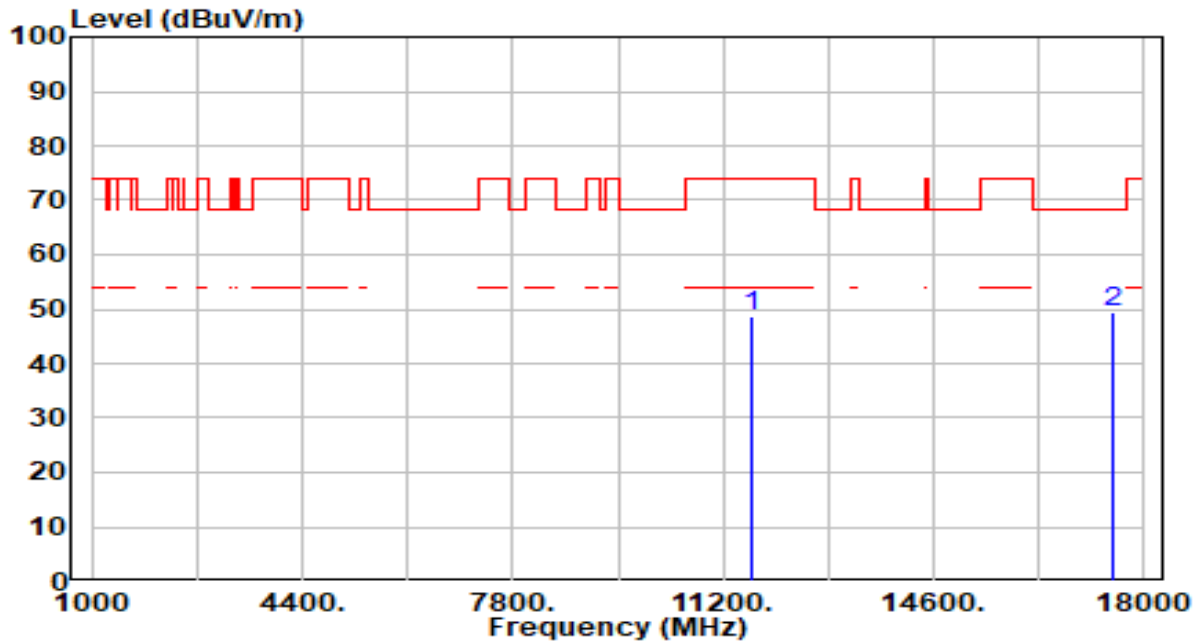


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	43.49	5.36	48.86	-25.14	74.00	101	360	Peak
2	* 17475.000	43.98	5.29	49.27	-18.93	68.20	200	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

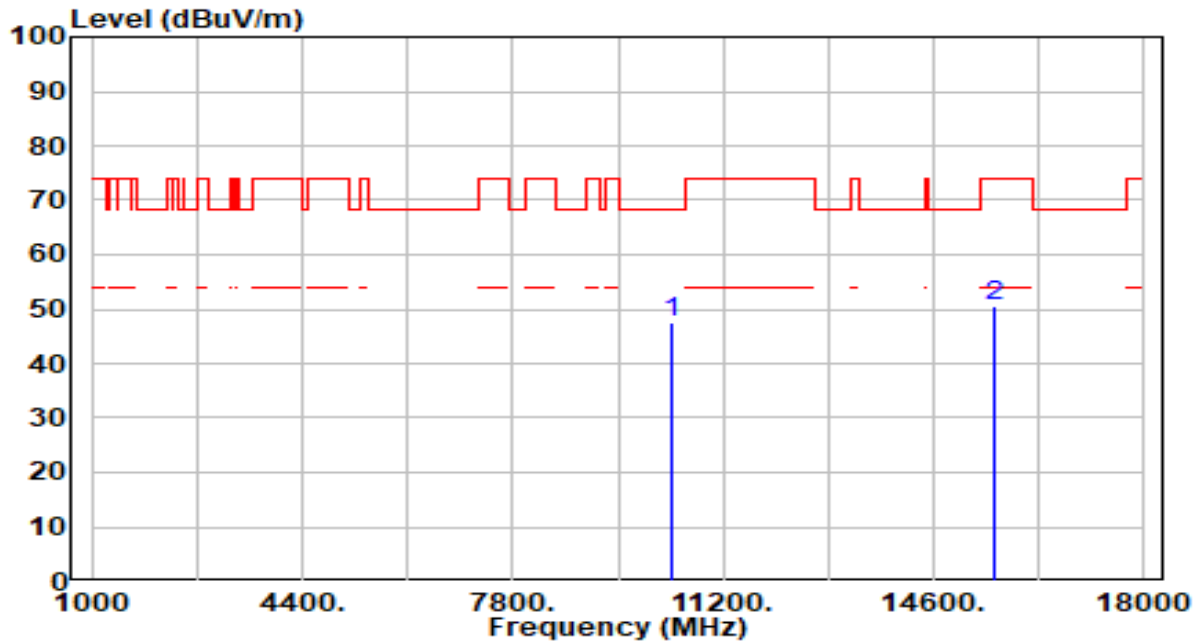


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	42.63	4.84	47.47	-20.73	68.20	100	340	Peak
2		15570.000	44.28	6.18	50.46	-23.54	74.00	100	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

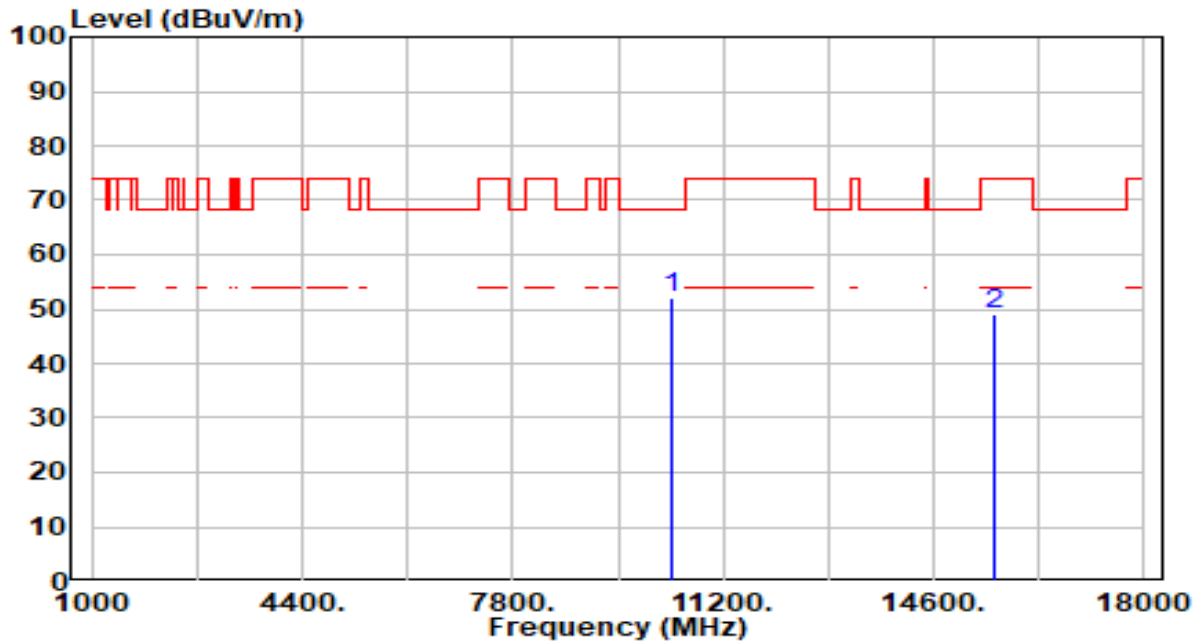


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	47.37	4.84	52.21	-15.99	68.20	200	149	Peak
2		15570.000	43.02	6.18	49.20	-24.80	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

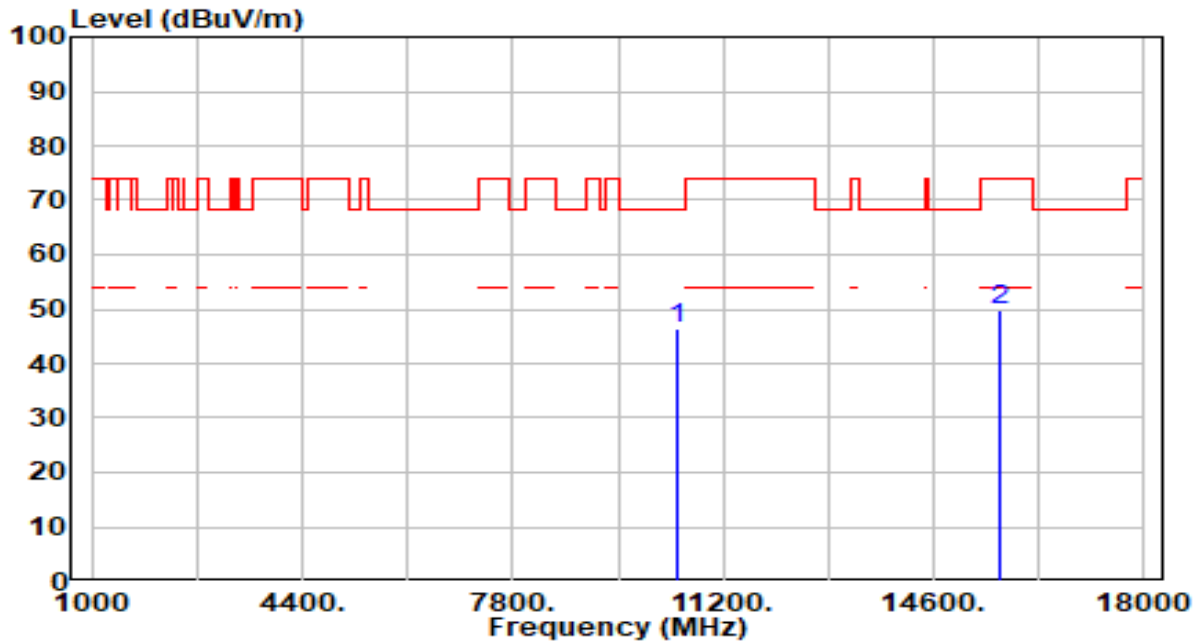


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	41.69	4.74	46.43	-21.77	68.20	200	301	Peak
2		15690.000	43.61	6.33	49.94	-24.06	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

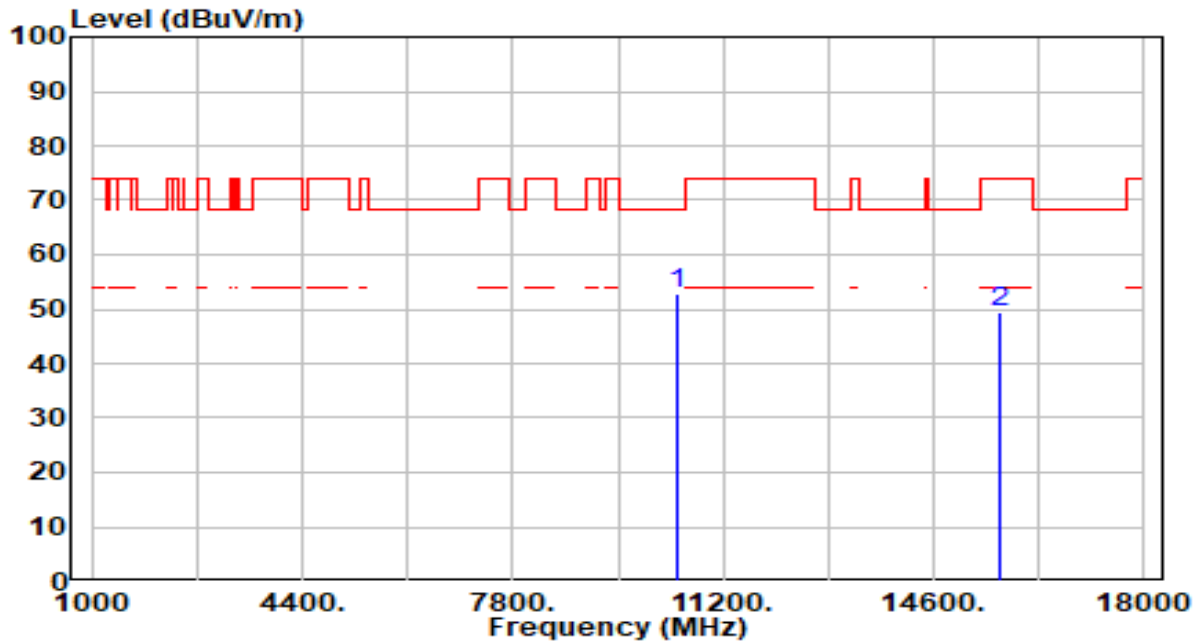


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	48.24	4.74	52.98	-15.22	68.20	200	192	Peak
2		15690.000	43.12	6.33	49.45	-24.55	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

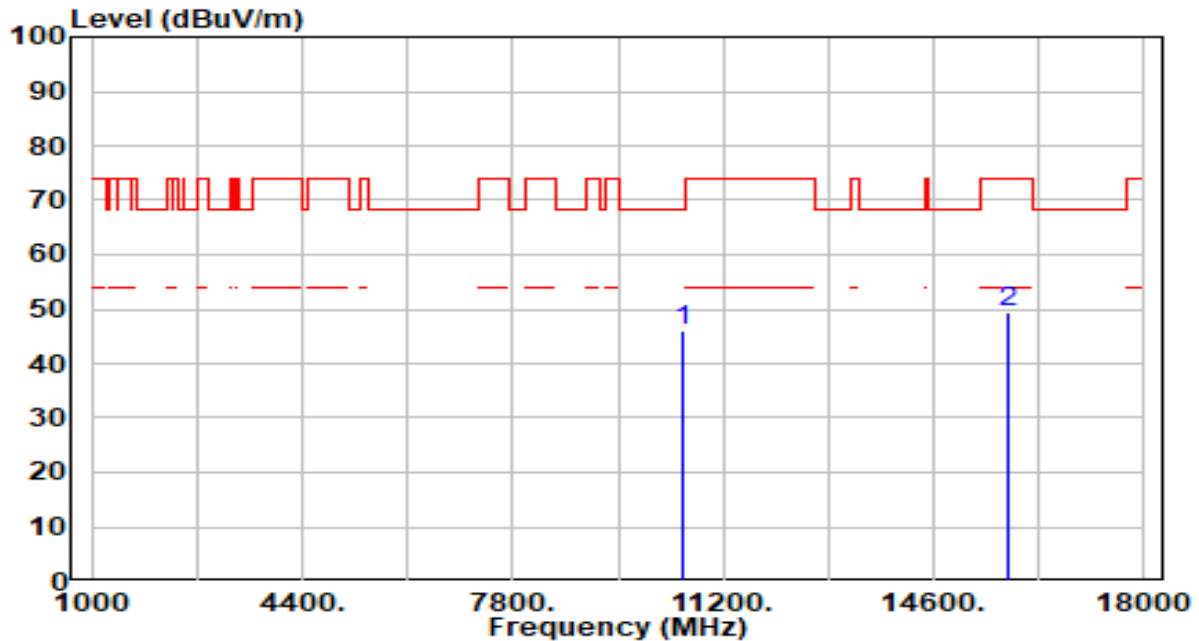


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.47	4.66	46.13	-22.07	68.20	200	102	Peak
2		15810.000	43.04	6.55	49.58	-24.42	74.00	100	357	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

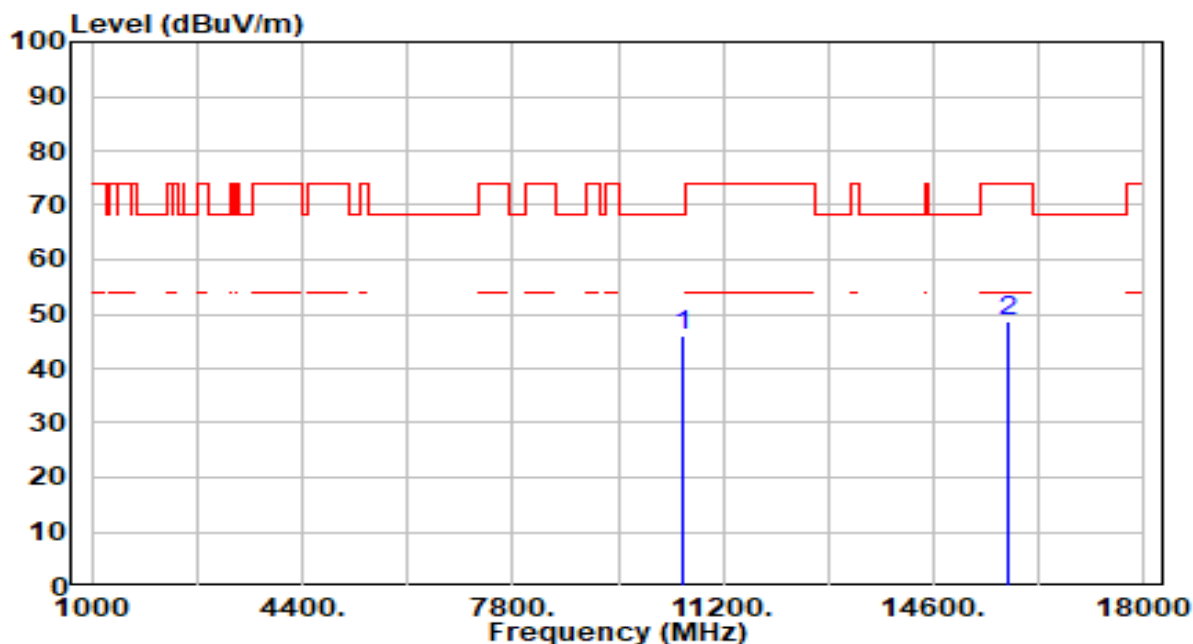


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.50	4.66	46.15	-22.05	68.20	200	99	Peak
2		15810.000	42.23	6.55	48.78	-25.22	74.00	100	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

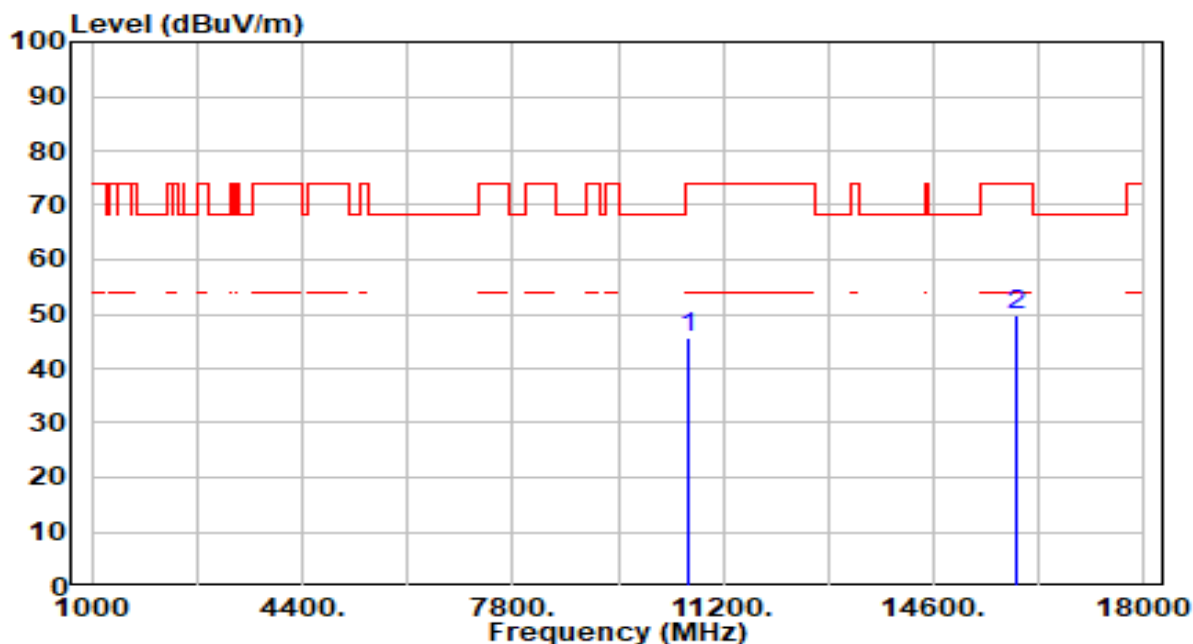


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.09	4.62	45.71	-28.29	74.00	184	360	Peak
2	* 15930.000	43.37	6.55	49.92	-24.08	74.00	100	327	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

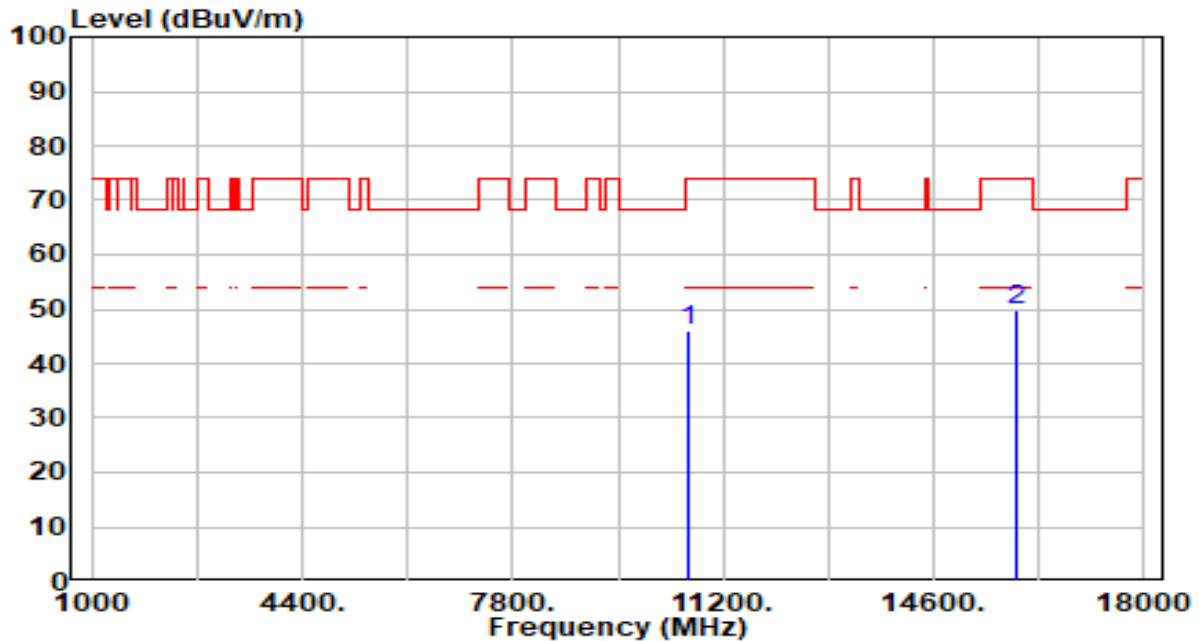


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.59	4.62	46.21	-27.79	74.00	100	310	Peak
2	* 15930.000	43.44	6.55	49.99	-24.01	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

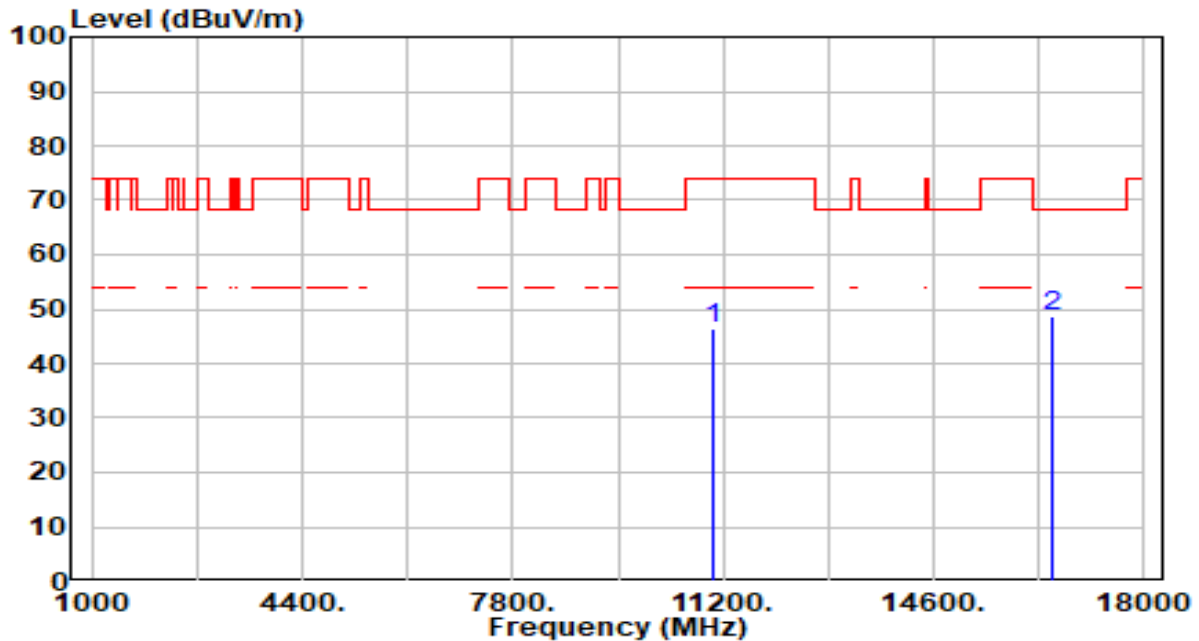


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	41.66	4.57	46.23	-27.77	74.00	200	147	Peak
2	*	16530.000	42.47	6.10	48.57	-19.63	68.20	100	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

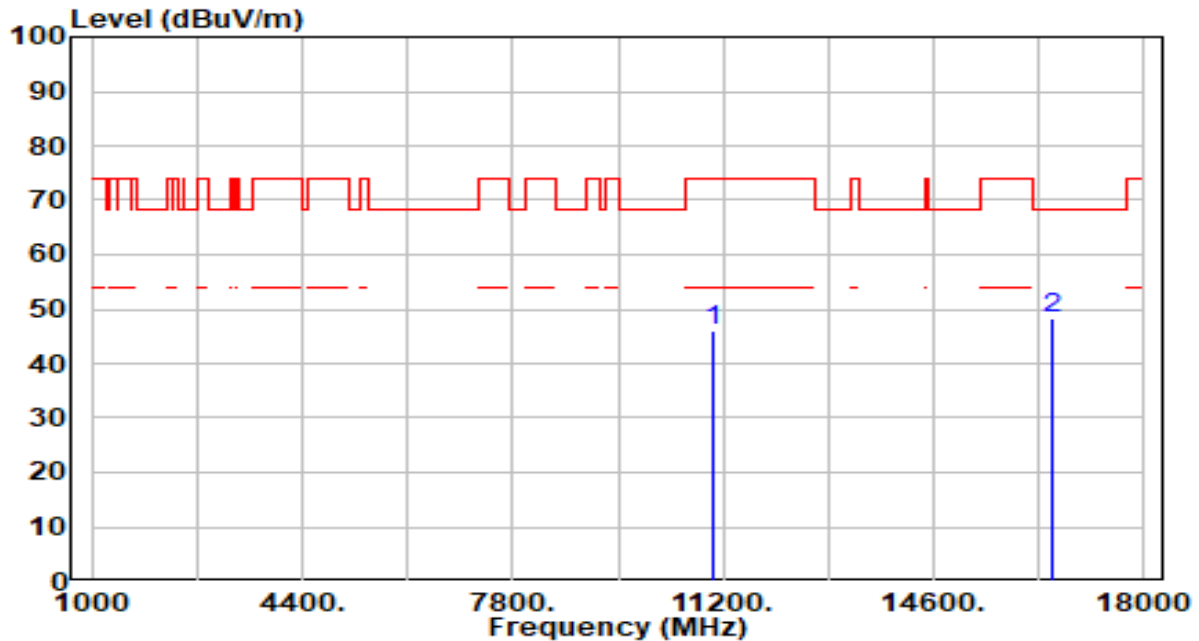


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.63	4.57	46.21	-27.79	74.00	200	211	Peak
2	* 16530.000	42.25	6.10	48.36	-19.84	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

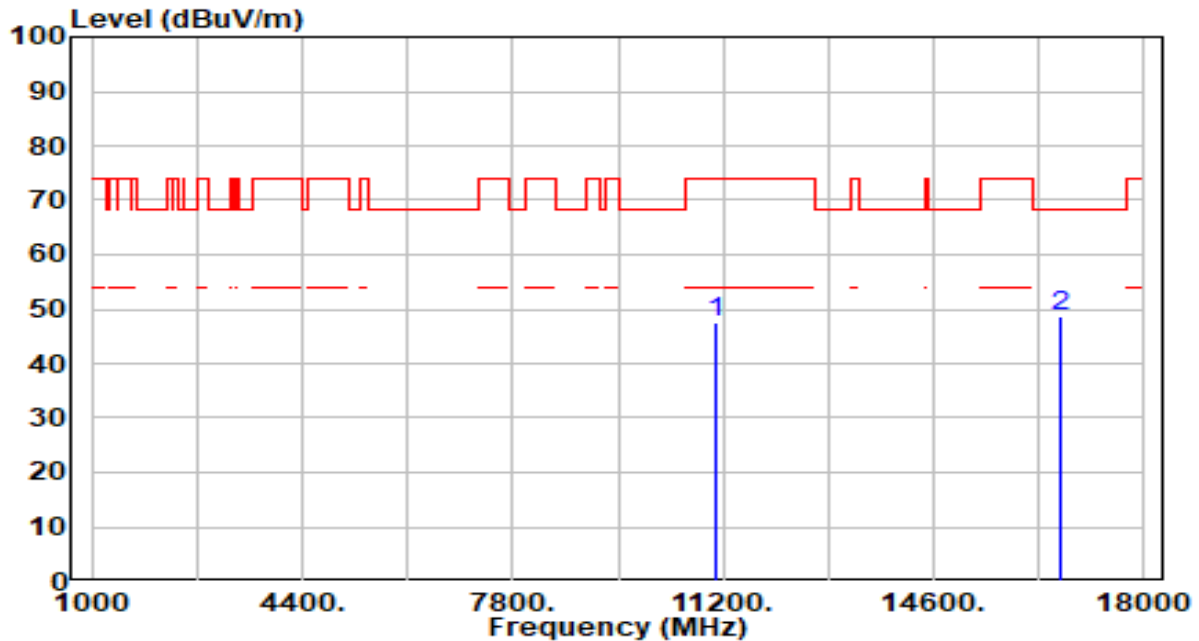


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	42.74	4.78	47.52	-26.48	74.00	200	360	Peak
2	*	16650.000	42.53	6.14	48.66	-19.54	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

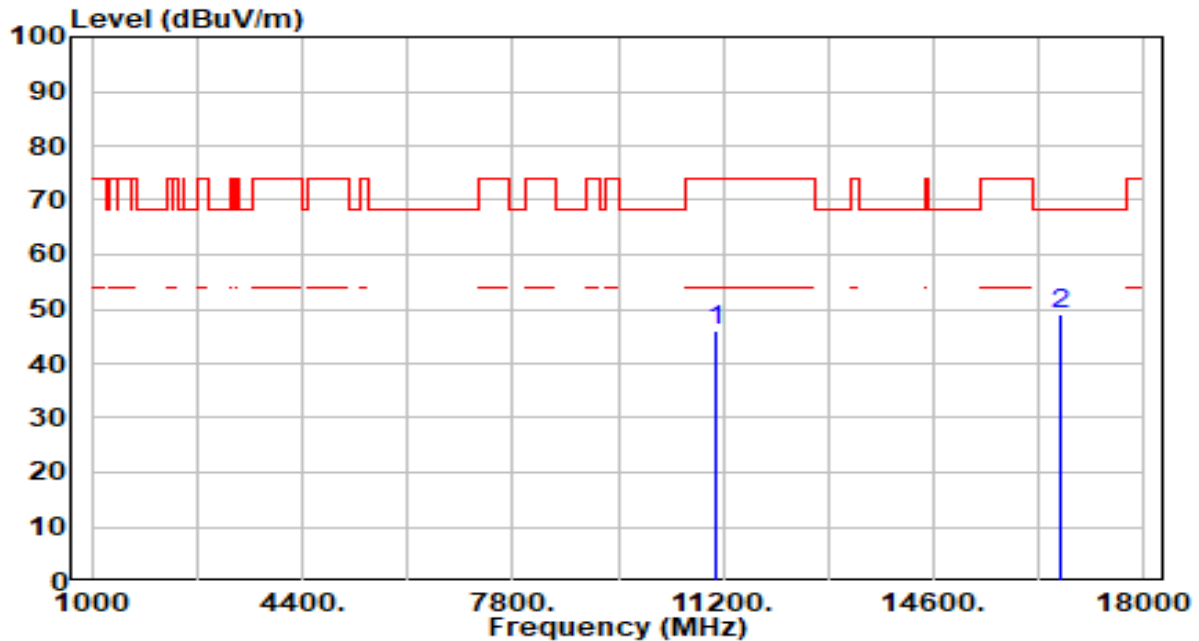


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.28	4.78	46.06	-27.94	74.00	200	27	Peak
2	*	16650.000	42.76	6.14	48.90	-19.30	68.20	100	130	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

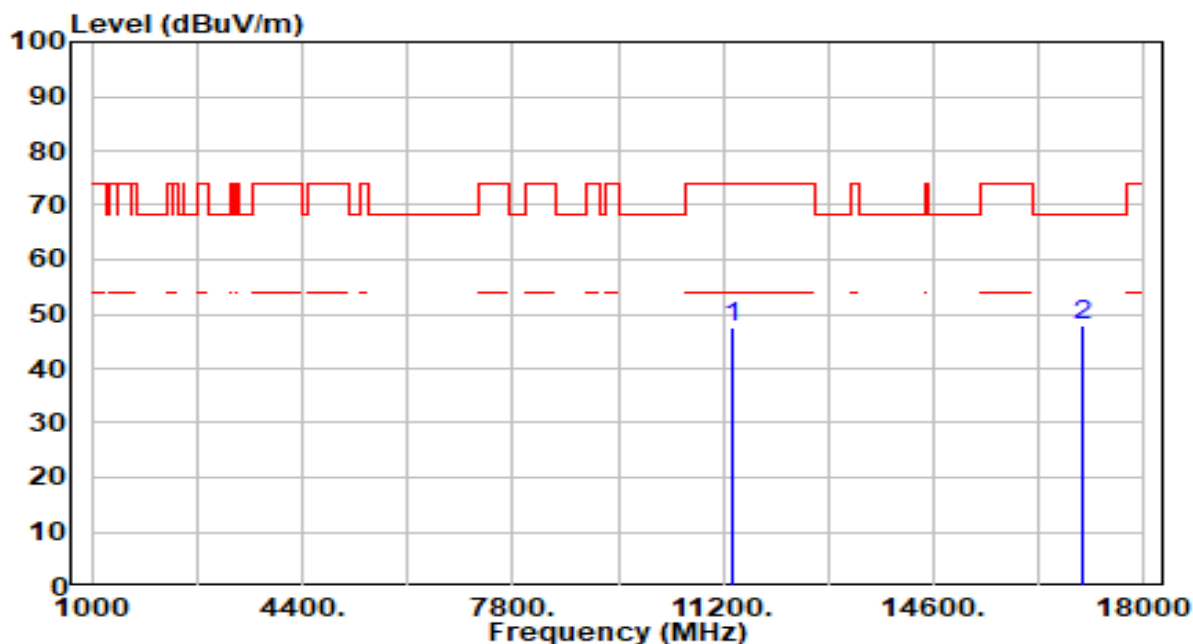


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	42.16	5.20	47.36	-26.64	74.00	100	336	Peak
2	*	17010.000	41.99	6.12	48.11	-20.09	68.20	100	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

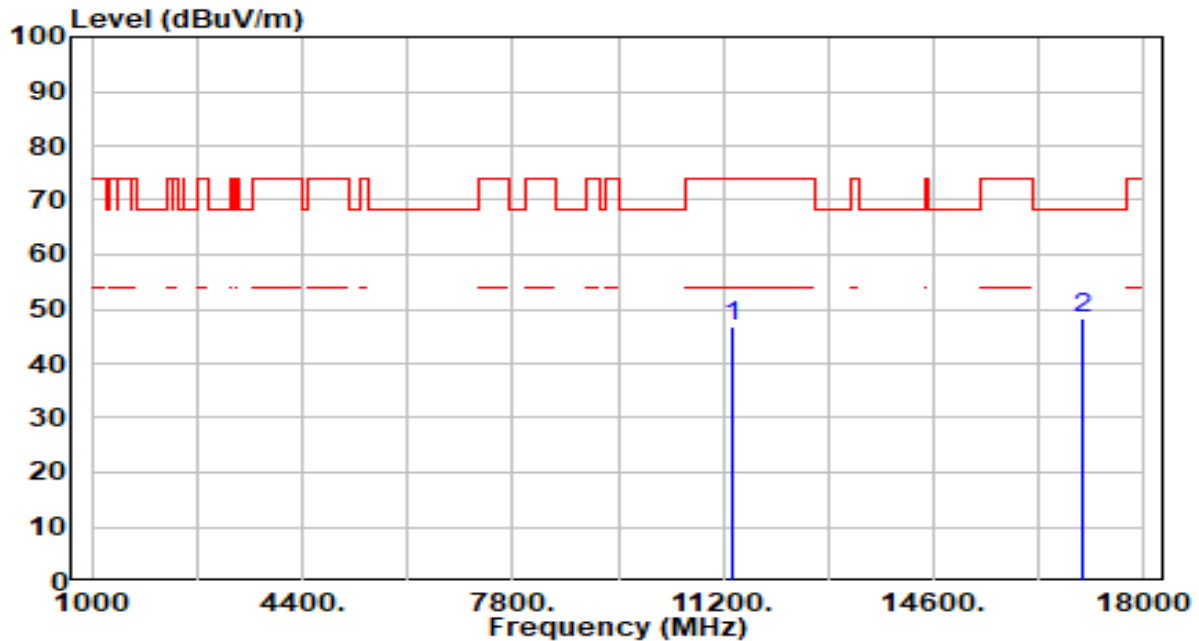


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.70	5.20	46.90	-27.10	74.00	100	161	Peak
2	*	17010.000	42.03	6.12	48.15	-20.05	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

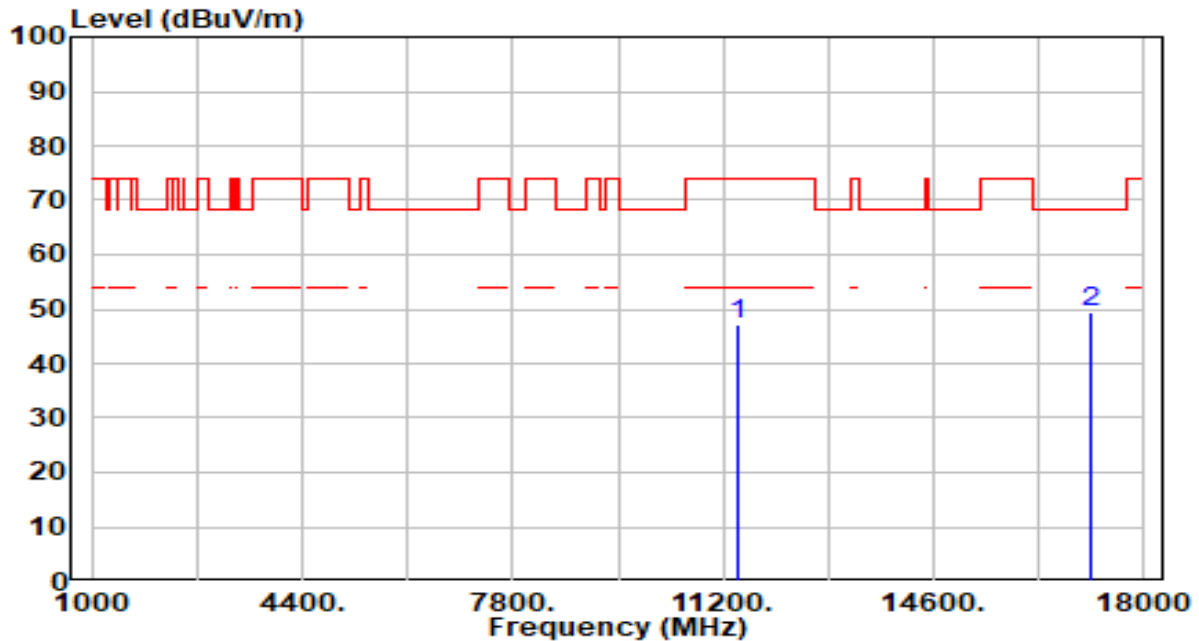


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.81	5.28	47.09	-26.91	74.00	100	360	Peak
2	* 17130.000	43.54	5.92	49.46	-18.74	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

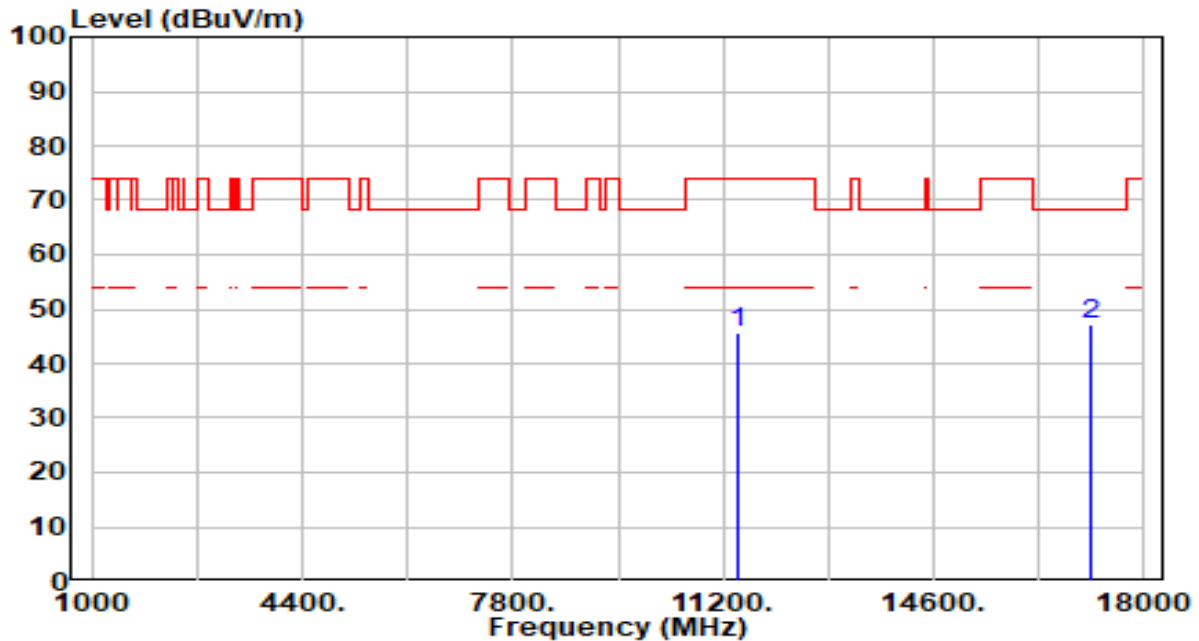


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	40.21	5.28	45.49	-28.51	74.00	100	0	Peak
2	* 17130.000	41.38	5.92	47.30	-20.90	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

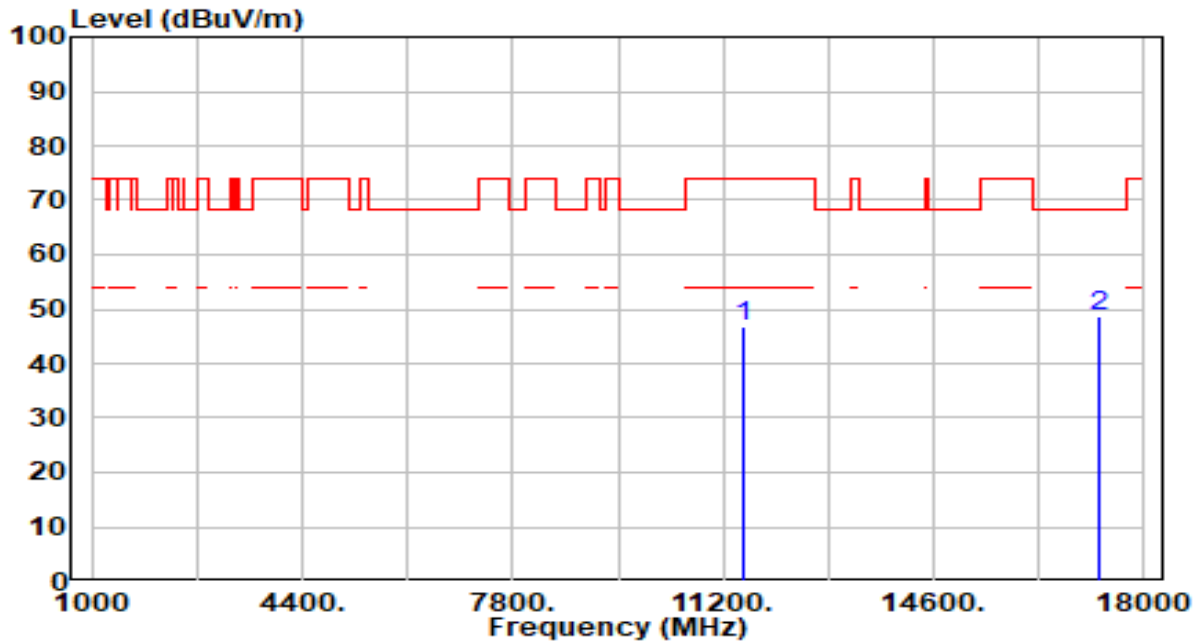


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	41.61	5.33	46.94	-27.06	74.00	100	354	Peak
2	* 17265.000	43.02	5.63	48.65	-19.55	68.20	100	33	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

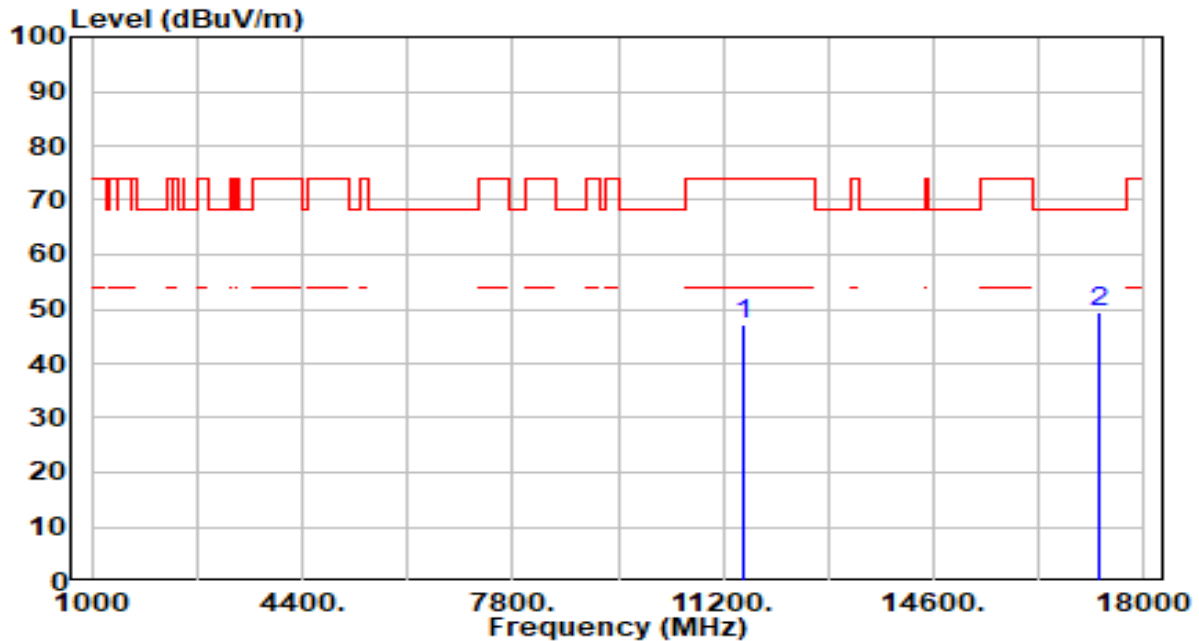


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	41.97	5.33	47.30	-26.70	74.00	100	0	Peak
2	*	17265.000	43.85	5.63	49.48	-18.72	68.20	100	78	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

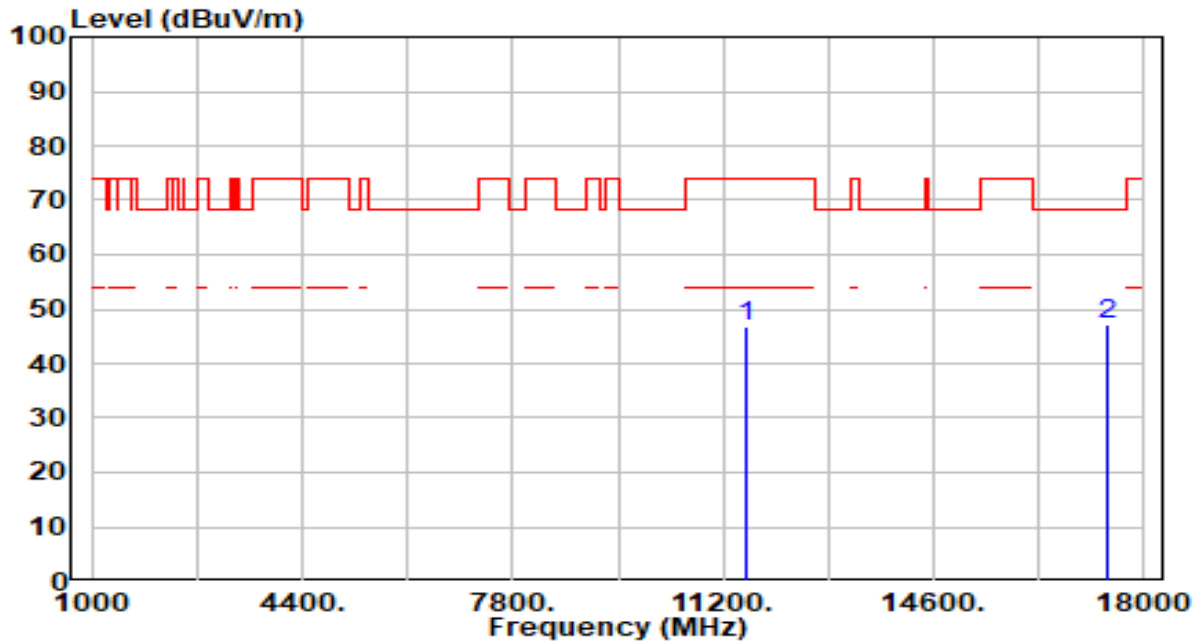


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	41.32	5.39	46.71	-27.29	74.00	200	47	Peak
2	* 17385.000	41.92	5.31	47.23	-20.97	68.20	100	335	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

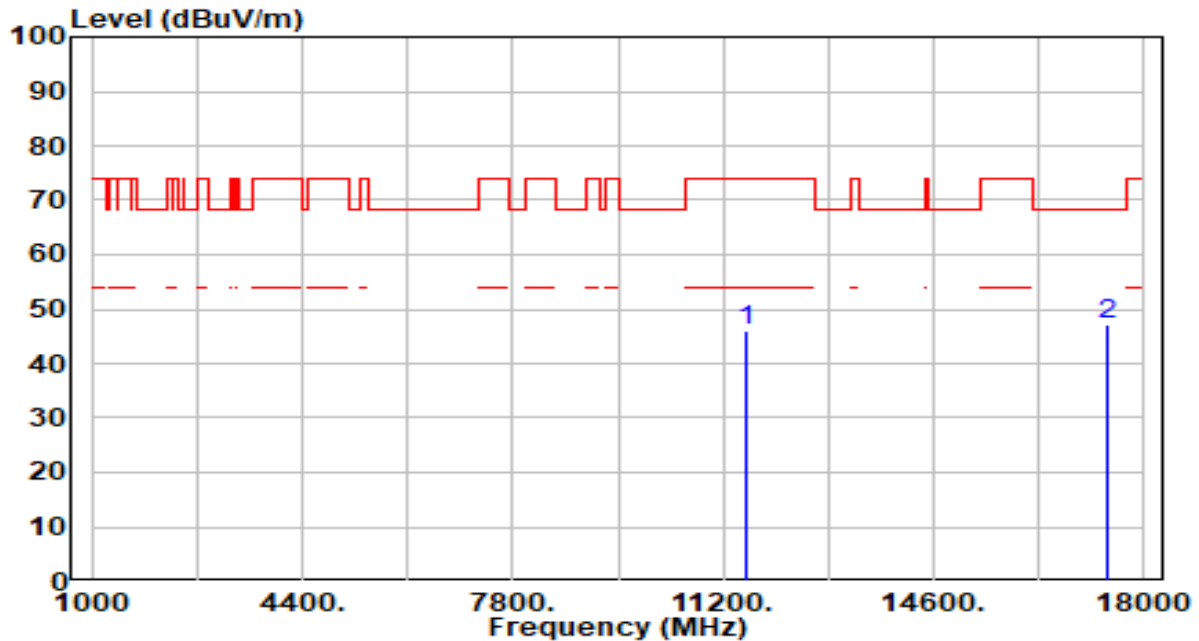


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	40.81	5.39	46.21	-27.79	74.00	100	91	Peak
2	* 17385.000	41.73	5.31	47.03	-21.17	68.20	100	34	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band1_TX_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

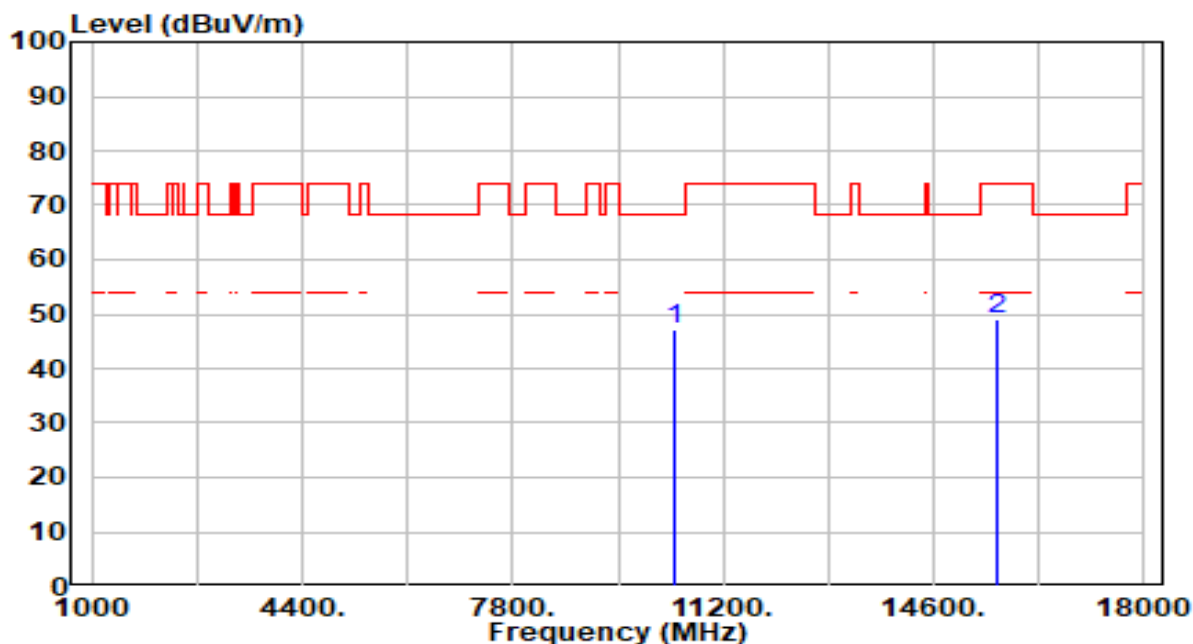


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.34	4.79	47.13	-21.07	68.20	200	155	Peak
2		15630.000	42.93	6.21	49.13	-24.87	74.00	100	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band1_TX_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

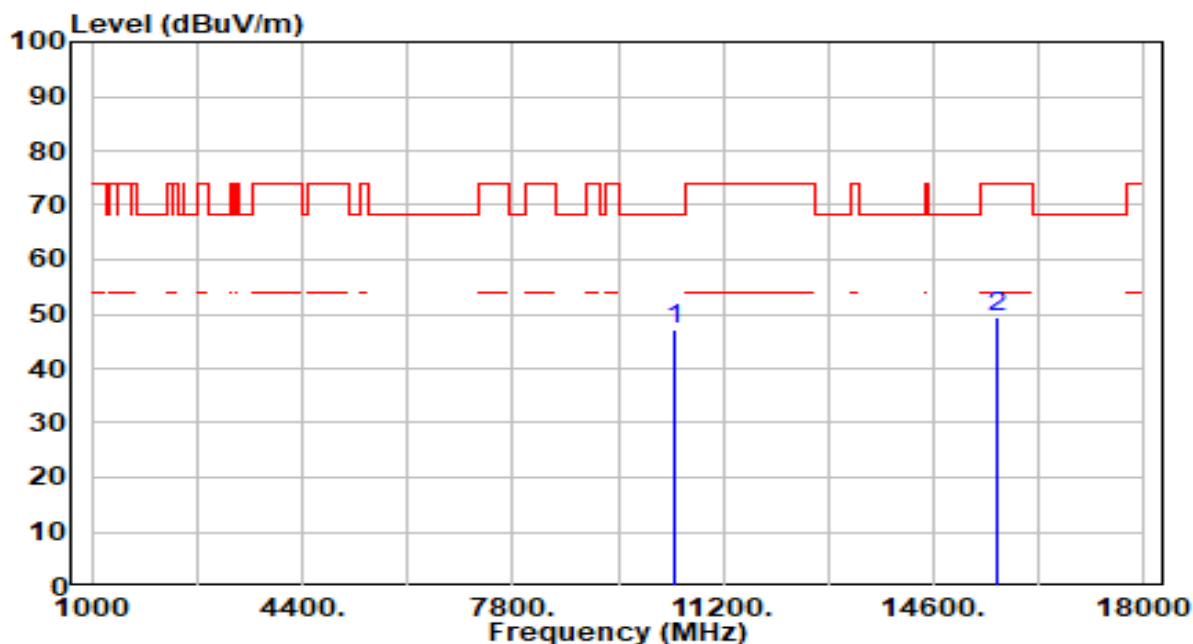


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.28	4.79	47.07	-21.13	68.20	200	176	Peak
2		15630.000	43.37	6.21	49.58	-24.42	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band2_TX_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

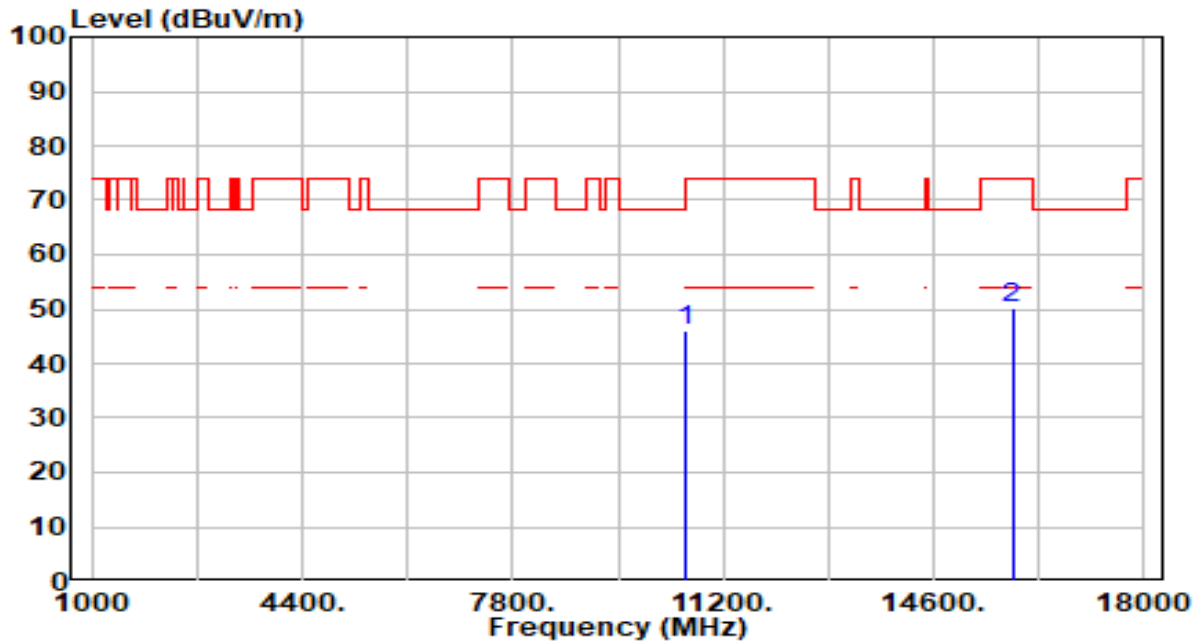


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.25	4.63	45.87	-22.33	68.20	100	353	Peak
2		15870.000	43.49	6.55	50.04	-23.96	74.00	100	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band2_TX_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

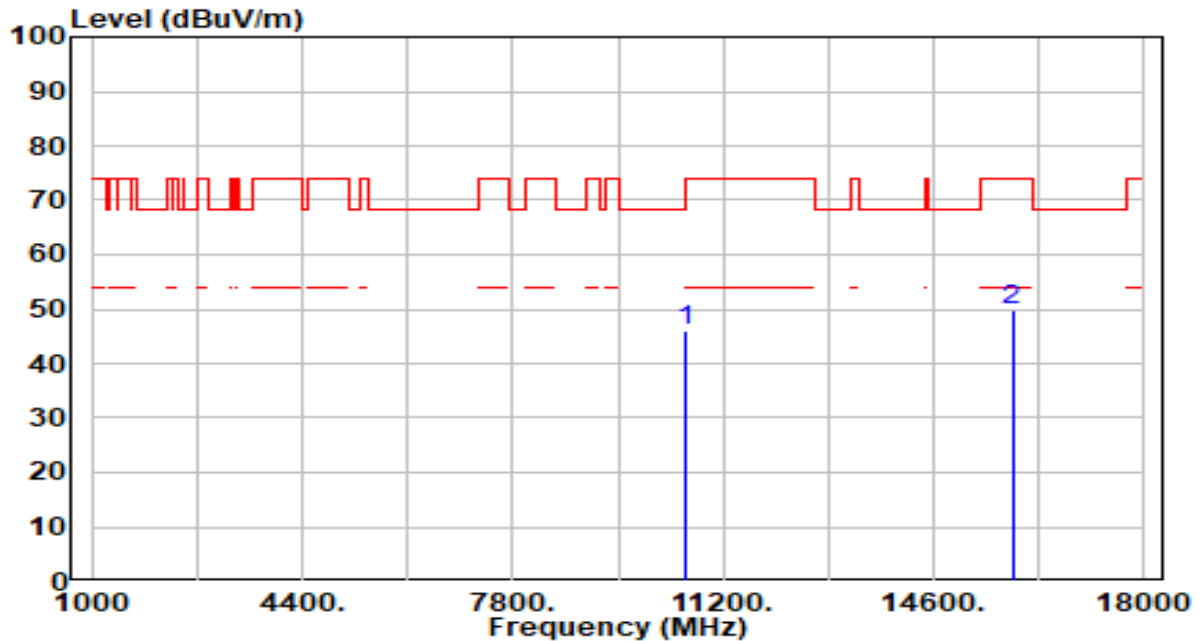


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.53	4.63	46.15	-22.05	68.20	100	47	Peak
2		15870.000	43.32	6.55	49.87	-24.13	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

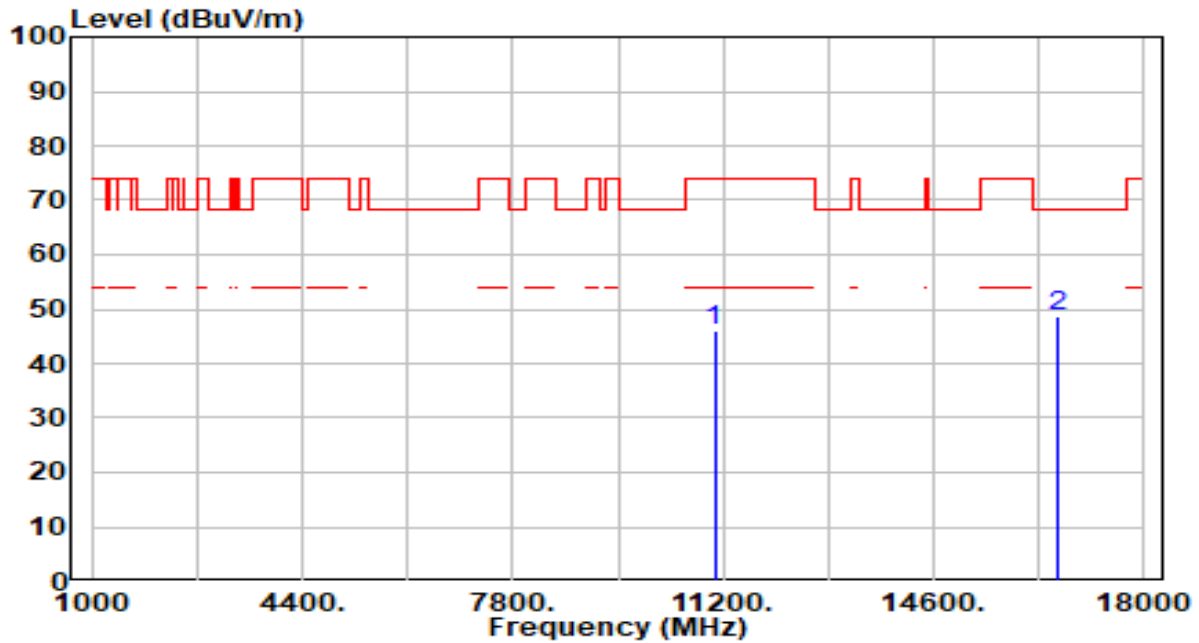


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.19	4.68	45.86	-28.14	74.00	200	260	Peak
2	* 16590.000	42.66	6.11	48.76	-19.44	68.20	100	91	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

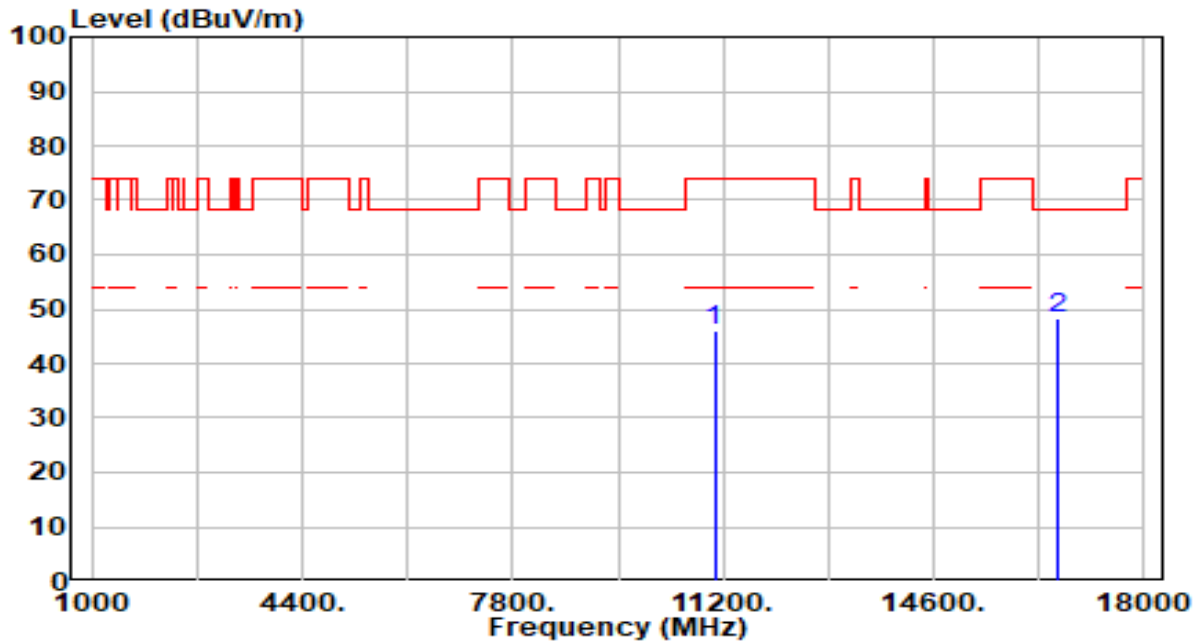


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.35	4.68	46.02	-27.98	74.00	200	302	Peak
2	* 16590.000	42.25	6.11	48.36	-19.84	68.20	100	80	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

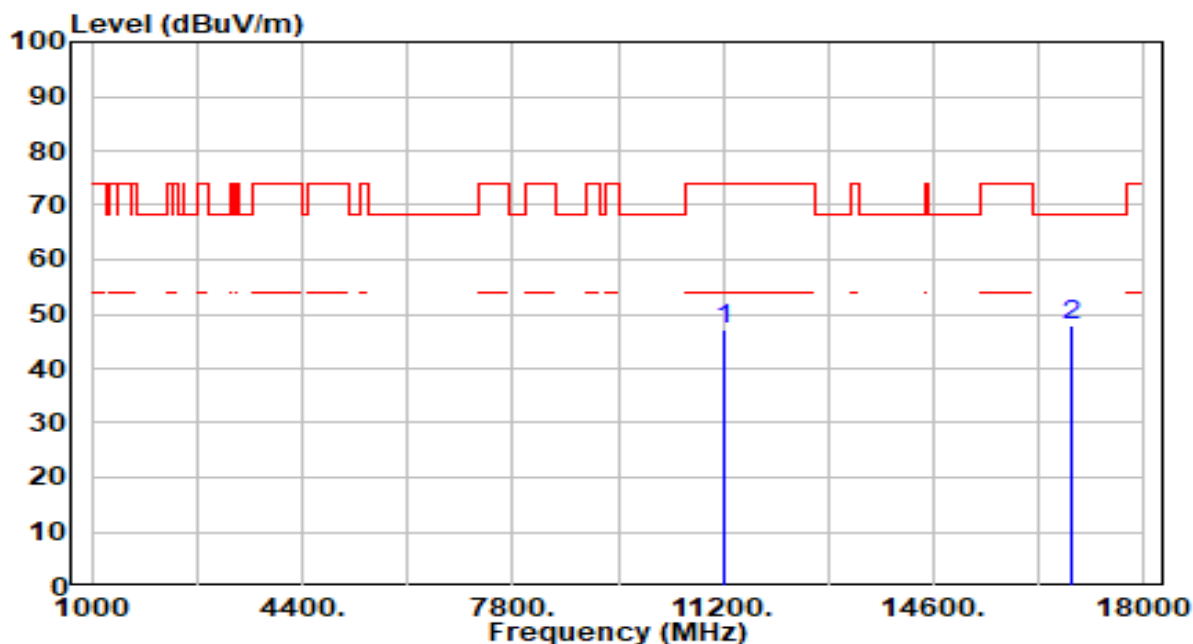


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	42.10	5.06	47.17	-26.83	74.00	100	227	Peak
2	* 16830.000	41.88	6.21	48.09	-20.11	68.20	100	281	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

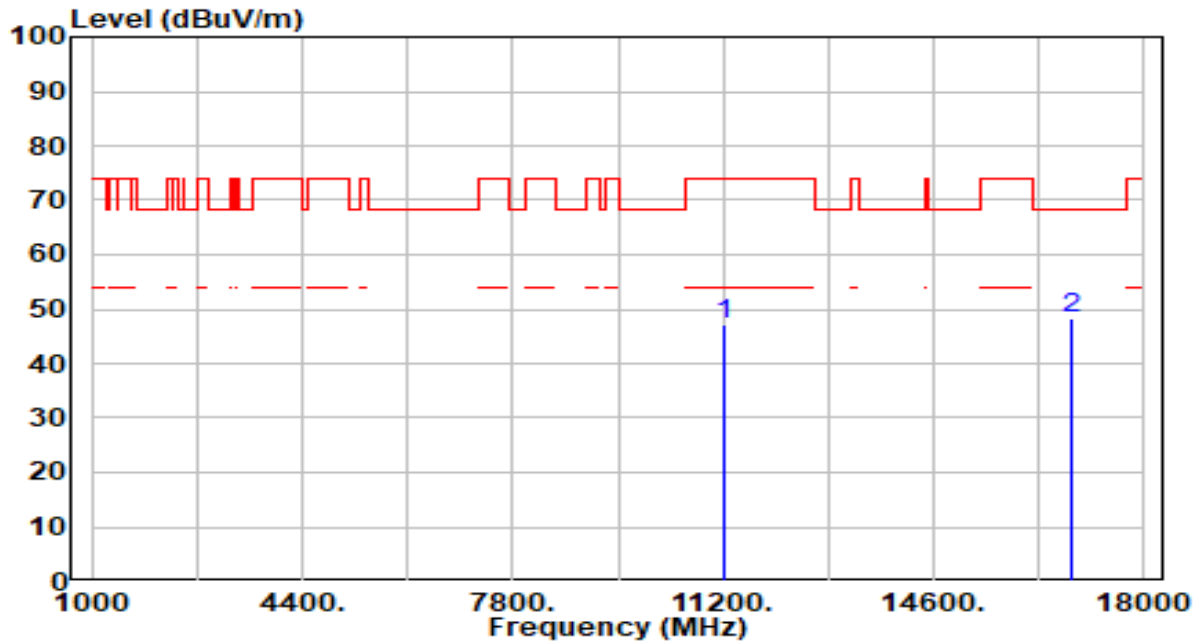


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	41.95	5.06	47.01	-26.99	74.00	100	66	Peak
2	*	16830.000	41.98	6.21	48.19	-20.01	68.20	100	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

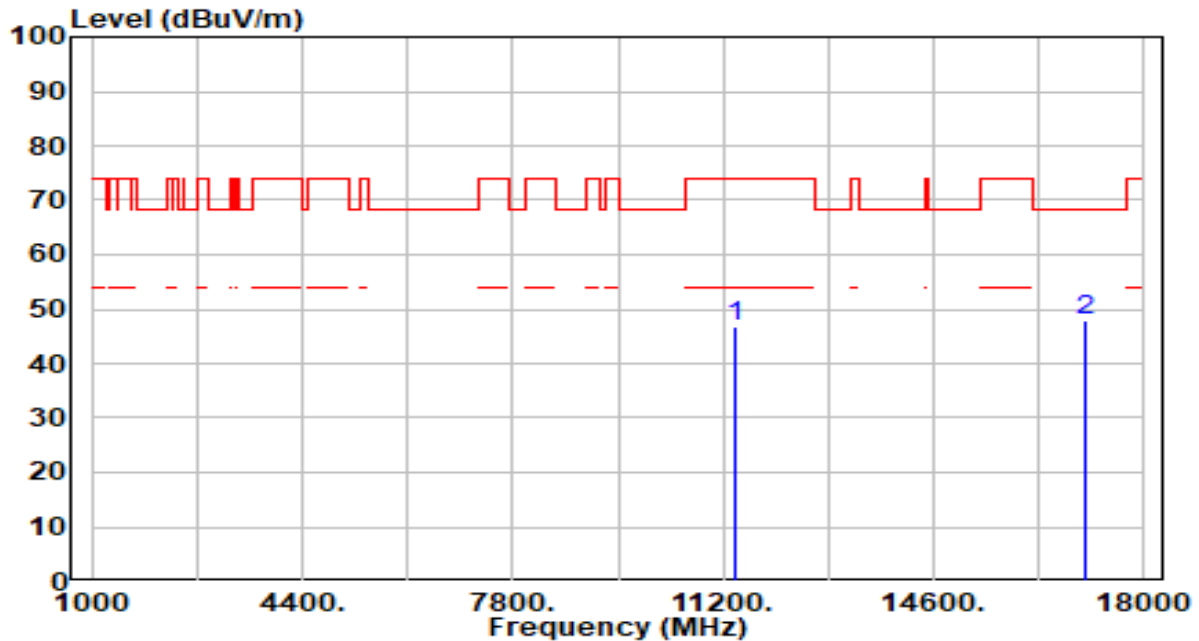


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	41.61	5.24	46.85	-27.15	74.00	100	196	Peak
2	*	17070.000	41.89	6.02	47.92	-20.28	68.20	100	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

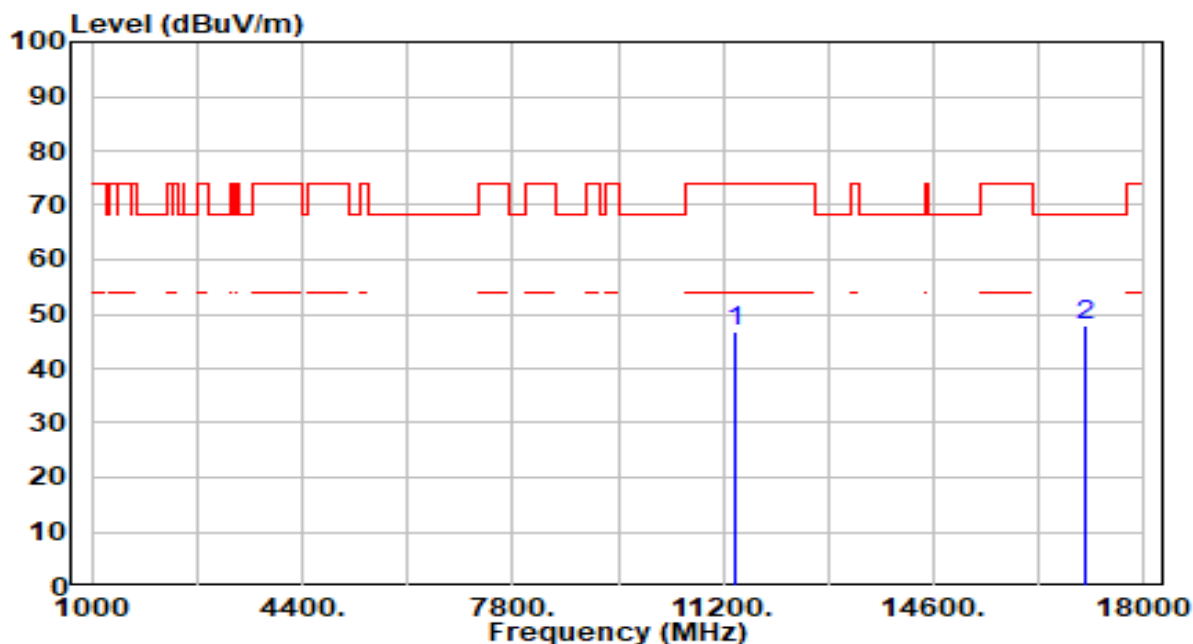


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.70	5.24	46.94	-27.06	74.00	200	62	Peak
2	* 17070.000	42.09	6.02	48.11	-20.09	68.20	100	233	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

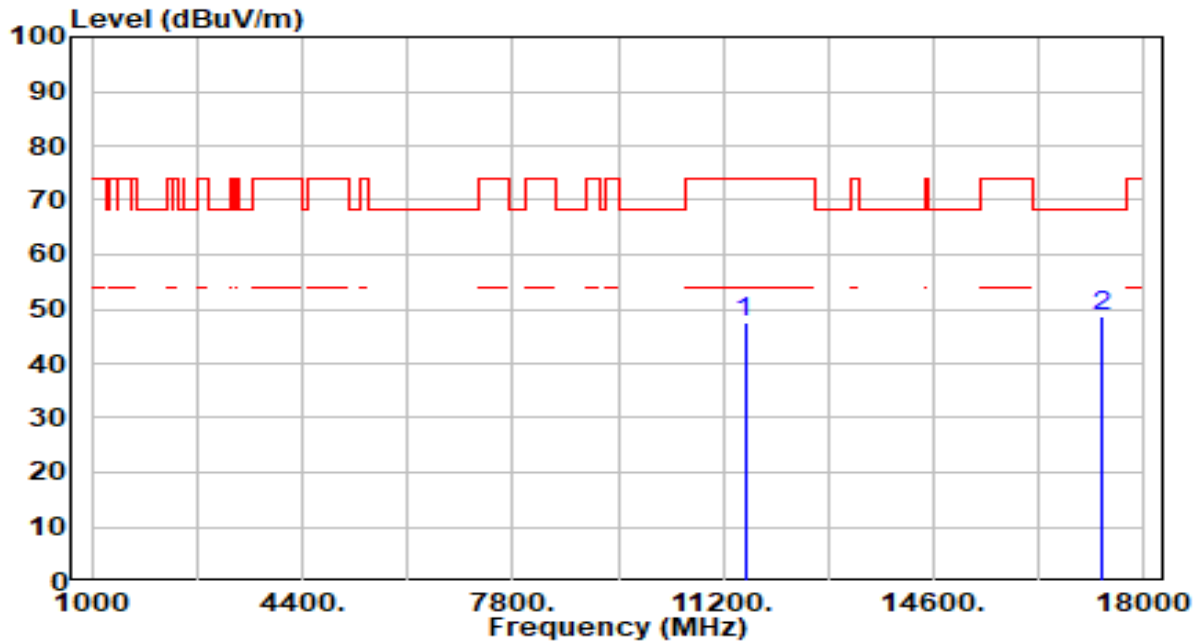


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.06	5.36	47.42	-26.58	74.00	100	199	Peak
2	* 17325.000	43.24	5.47	48.71	-19.49	68.20	100	214	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

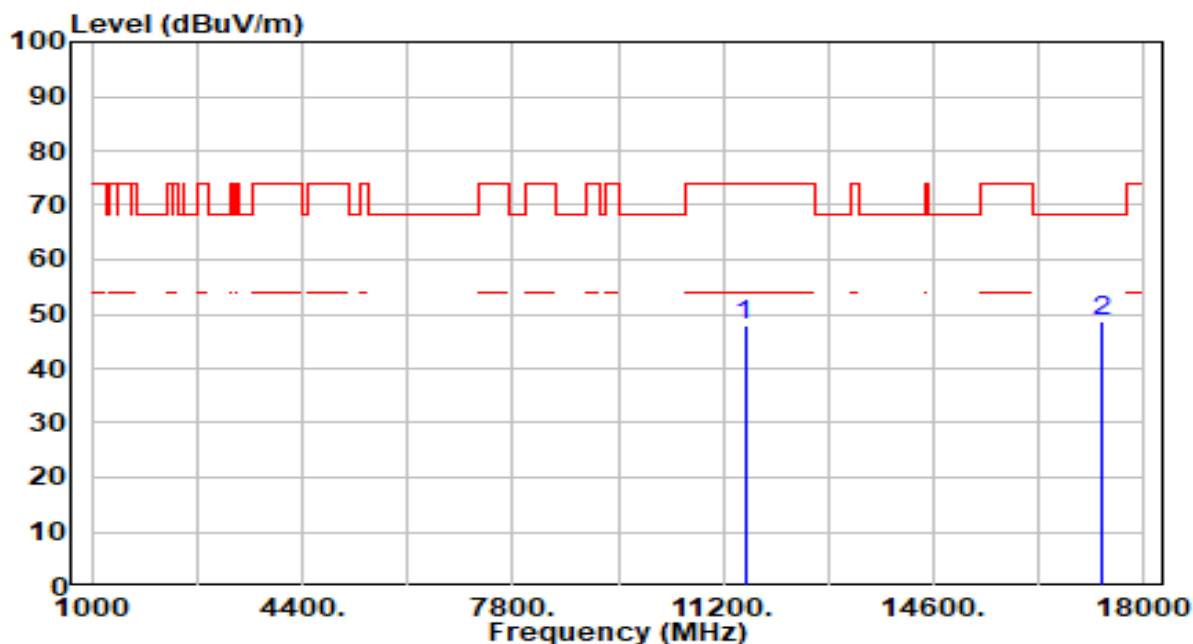


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.44	5.36	47.80	-26.20	74.00	100	360	Peak
2	* 17325.000	43.30	5.47	48.77	-19.43	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

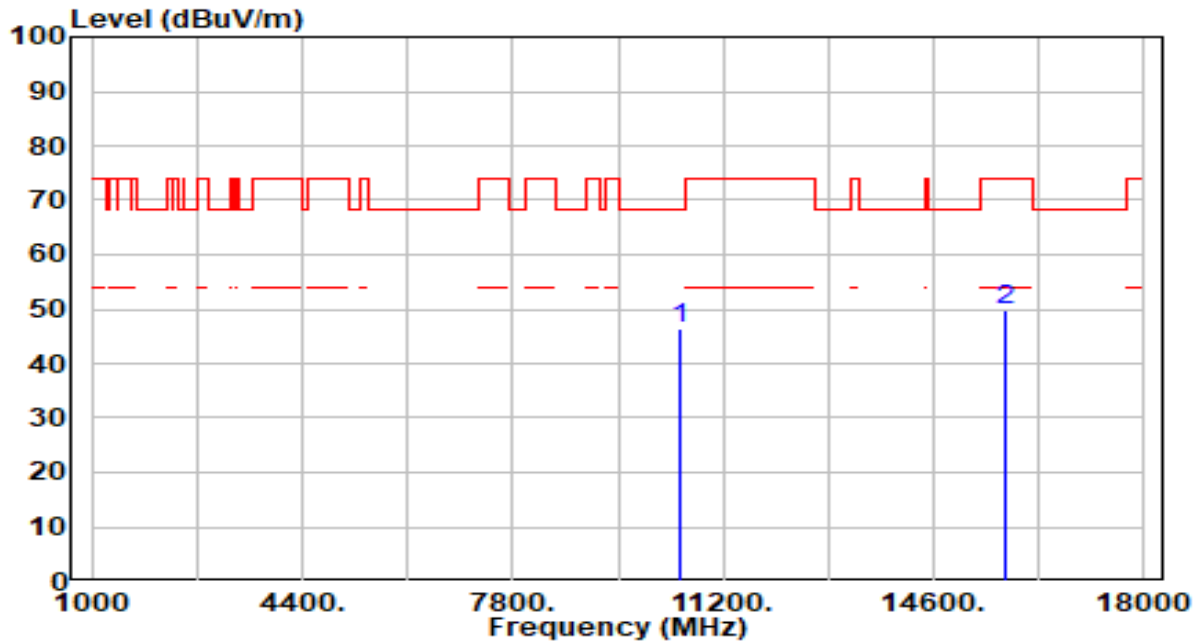


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.71	4.68	46.40	-21.80	68.20	100	34	Peak
2		15750.000	43.33	6.45	49.78	-24.22	74.00	100	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

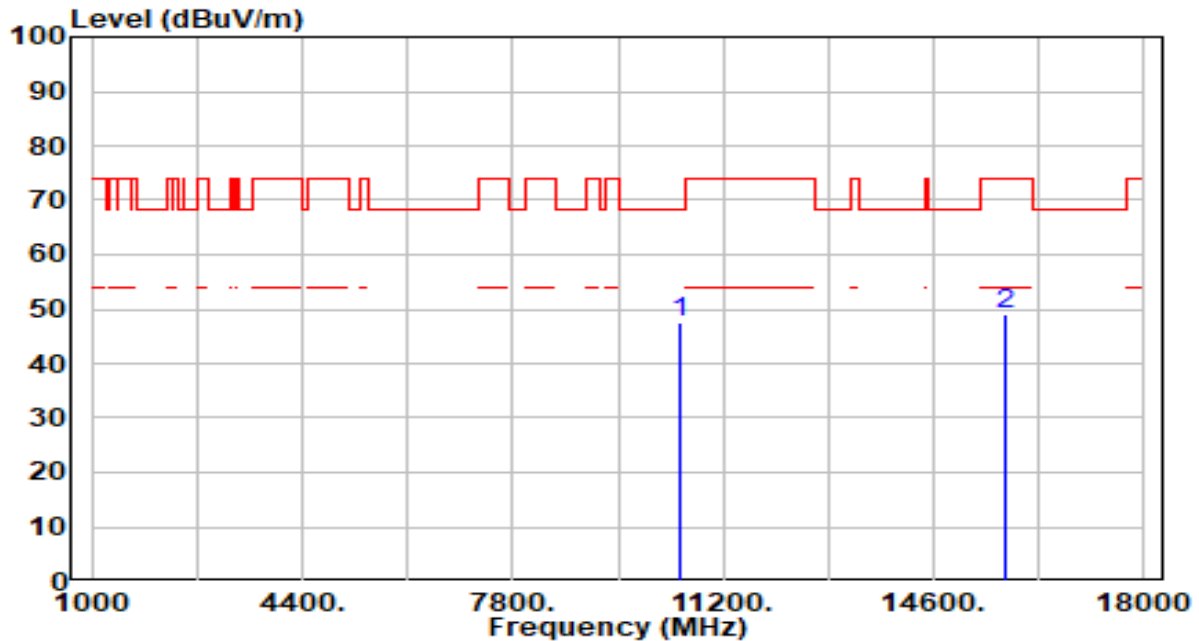


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	42.81	4.68	47.50	-20.70	68.20	100	360	Peak
2		15750.000	42.61	6.45	49.06	-24.94	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band3_TX_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

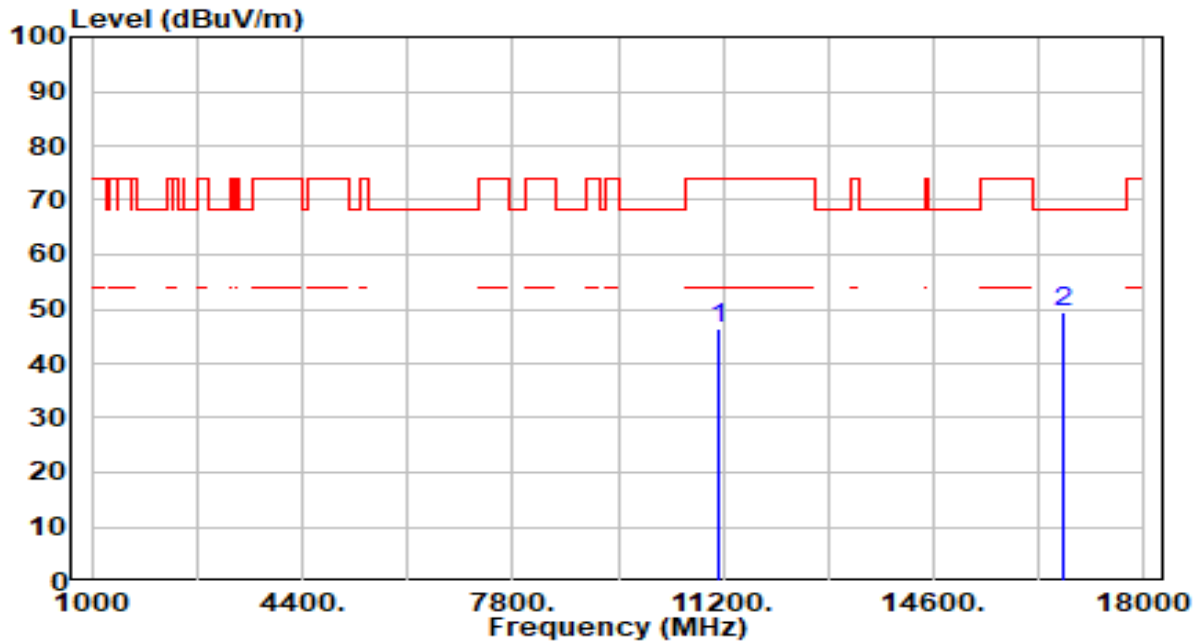


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.41	4.89	46.30	-27.70	74.00	136	360	Peak
2	* 16710.000	43.38	6.17	49.55	-18.65	68.20	100	159	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band3_TX_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

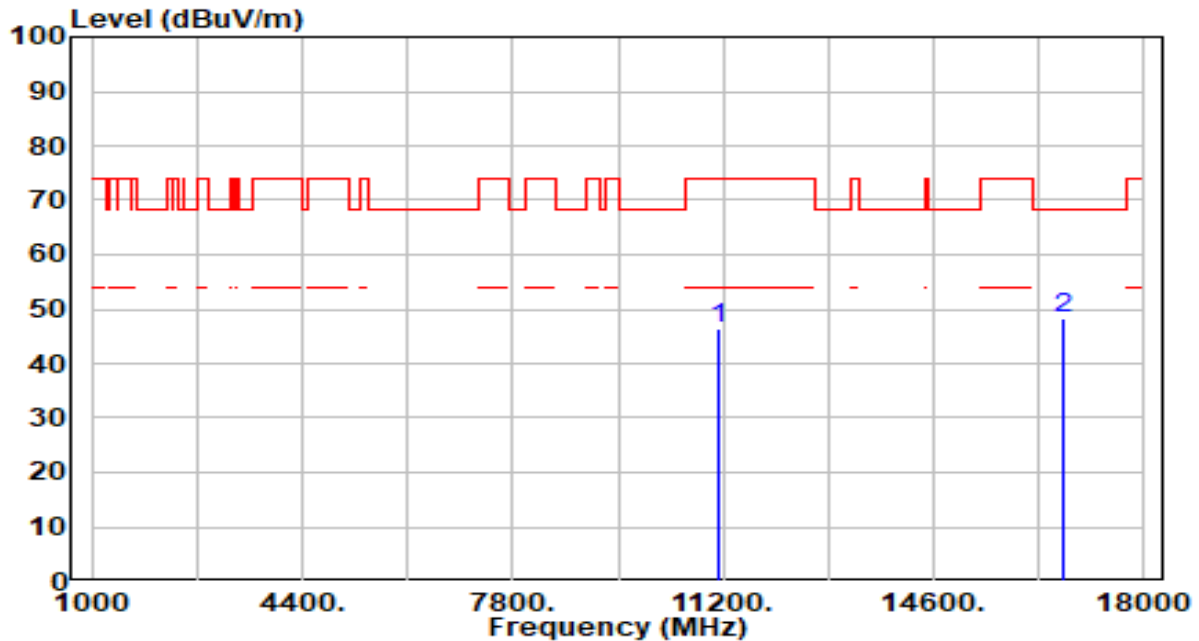


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.54	4.89	46.43	-27.57	74.00	200	102	Peak
2	* 16710.000	42.25	6.17	48.42	-19.78	68.20	100	319	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band1_TX_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

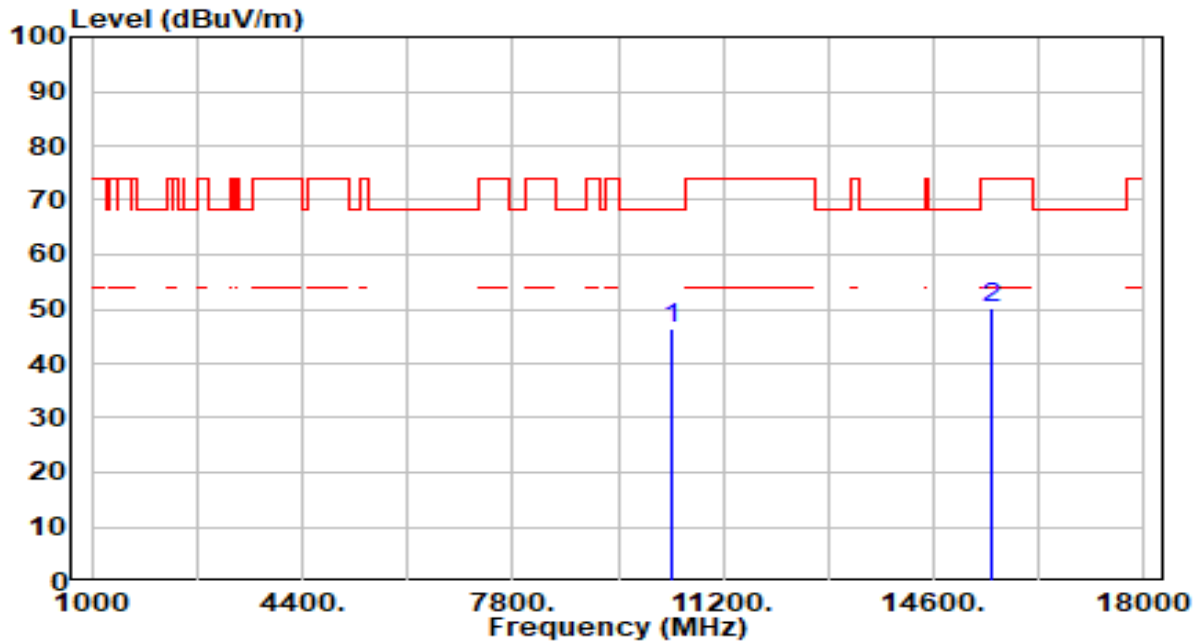


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.69	4.87	46.56	-21.64	68.20	100	15	Peak
2		15540.000	44.12	6.21	50.32	-23.68	74.00	100	65	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band1_TX_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

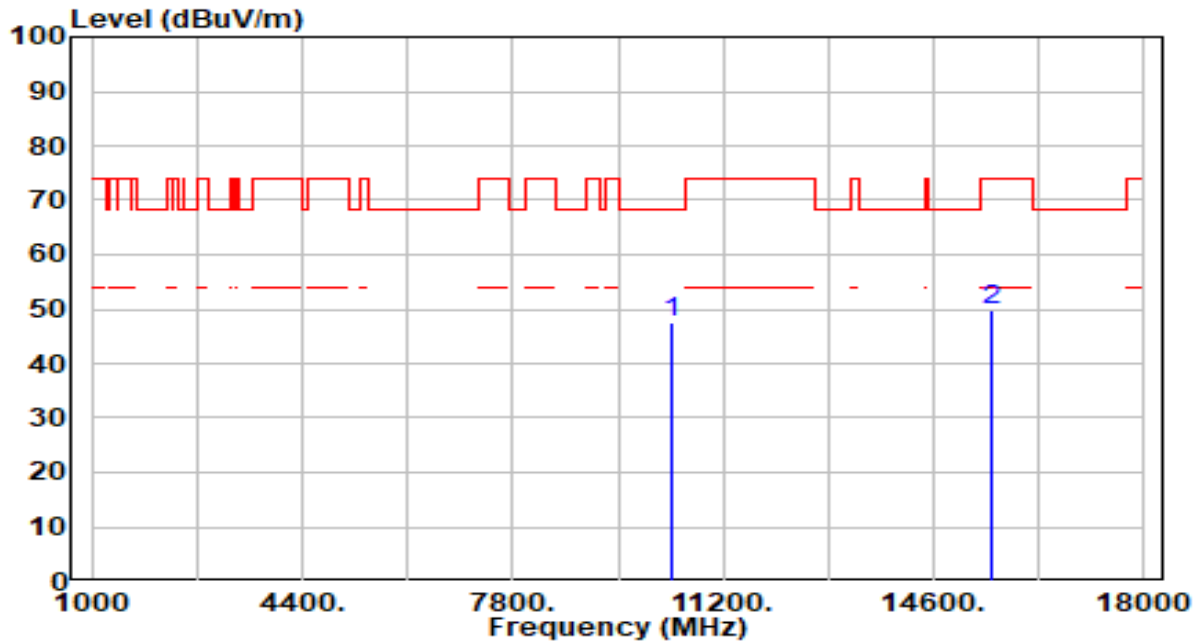


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.69	4.87	47.57	-20.63	68.20	132	360	Peak
2		15540.000	43.44	6.21	49.64	-24.36	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

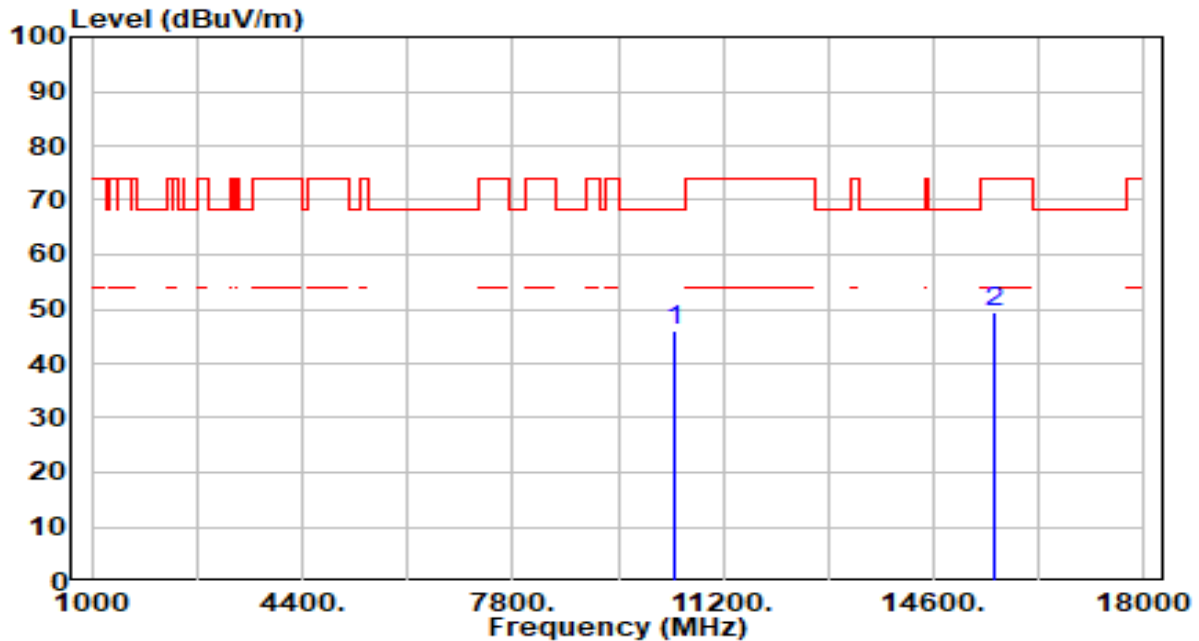


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.21	4.82	46.02	-22.18	68.20	108	360	Peak
2		15600.000	43.16	6.15	49.31	-24.69	74.00	200	128	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band1_TX_CH 40_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

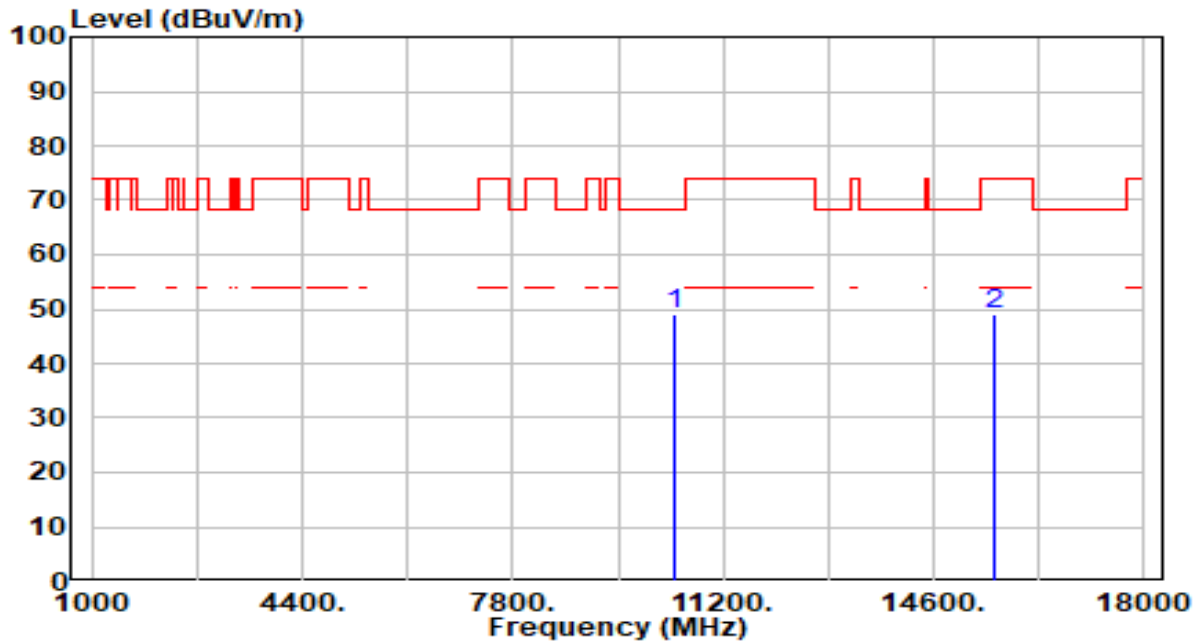


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	44.07	4.82	48.89	-19.31	68.20	200	213	Peak
2		15600.000	43.01	6.15	49.15	-24.85	74.00	100	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band1_TX_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

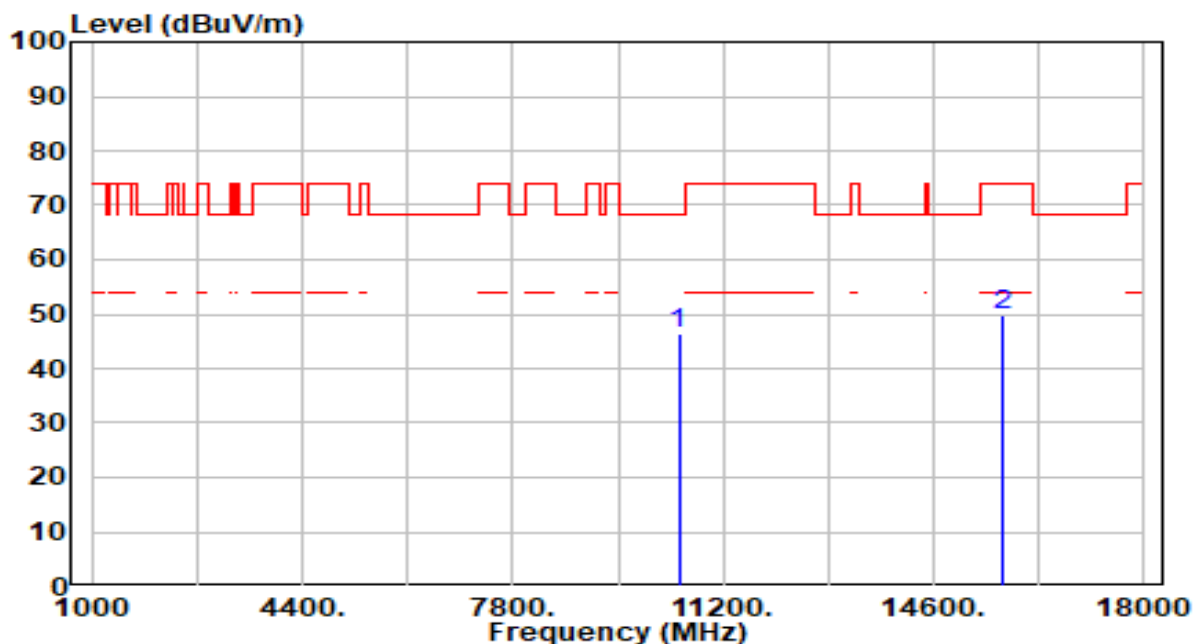


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.78	4.71	46.49	-21.71	68.20	200	331	Peak
2		15720.000	43.41	6.39	49.80	-24.20	74.00	100	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band1_TX_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

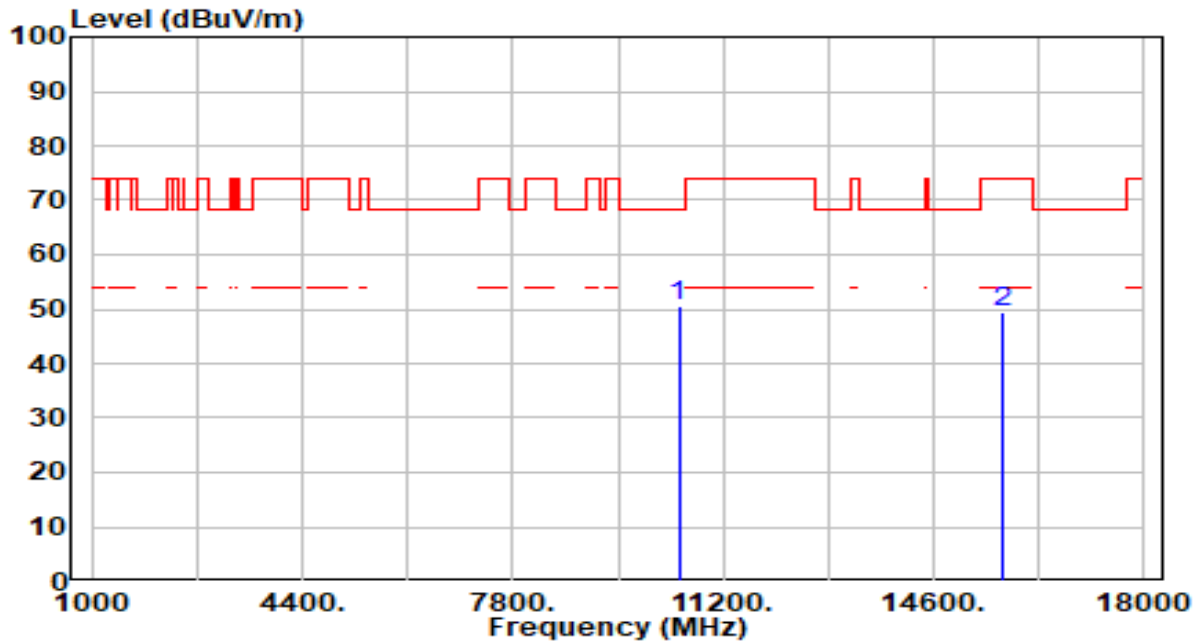


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	45.68	4.71	50.39	-17.81	68.20	200	146	Peak
2		15720.000	43.05	6.39	49.43	-24.57	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band2_TX_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

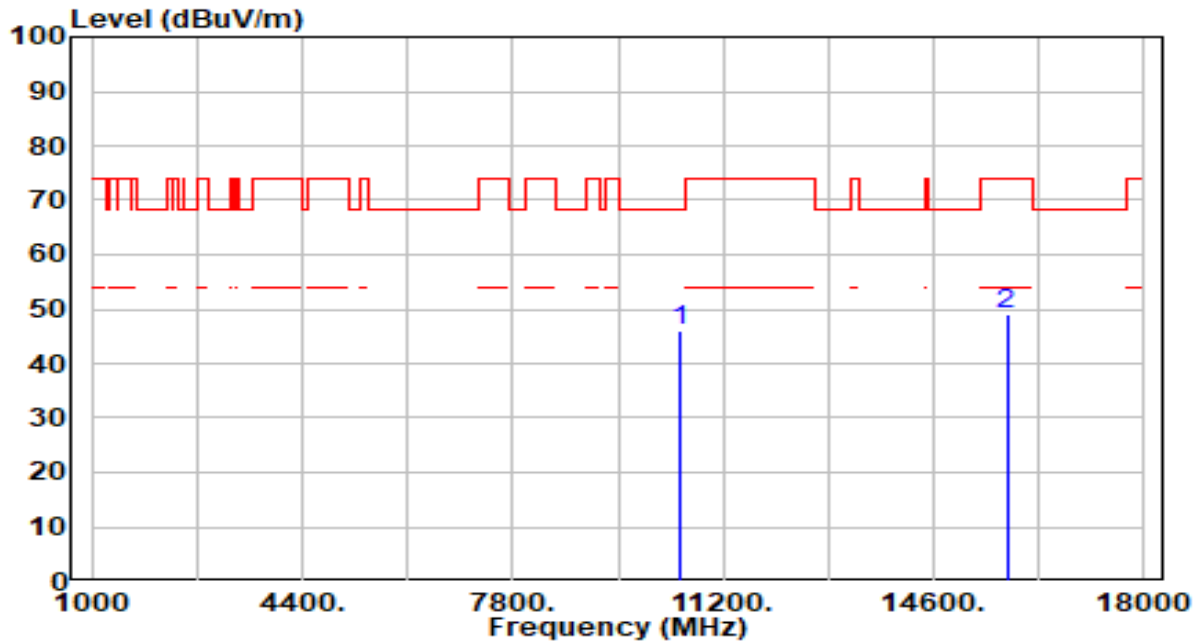


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.18	4.67	45.85	-22.35	68.20	100	360	Peak
2		15780.000	42.69	6.51	49.20	-24.80	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band2_TX_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

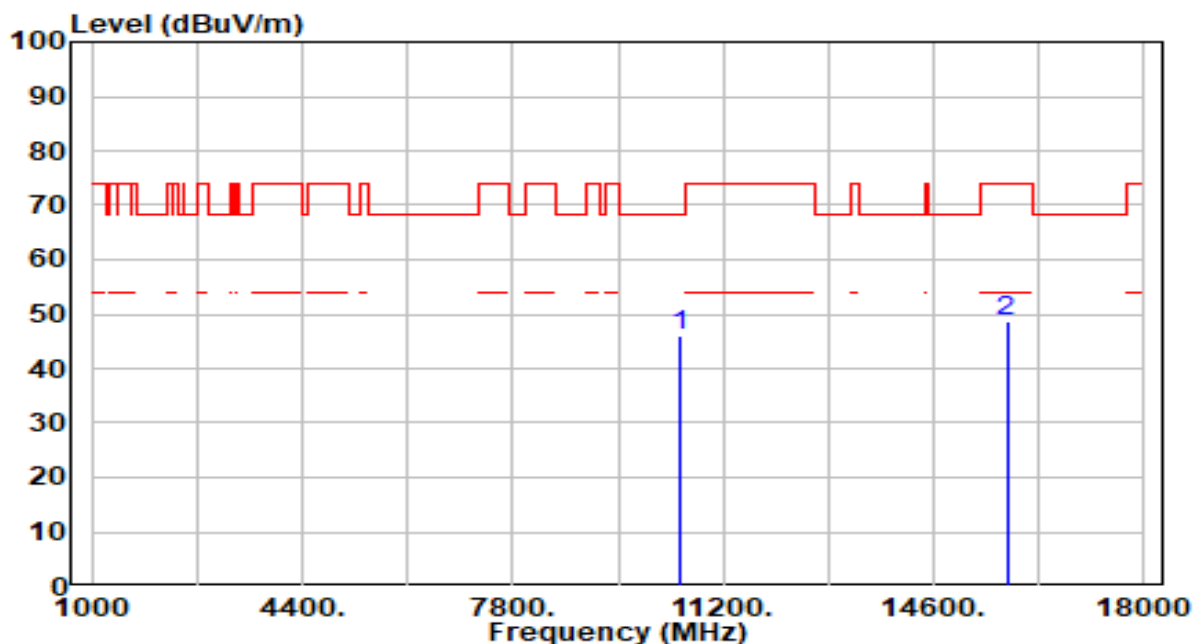


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.36	4.67	46.03	-22.17	68.20	100	113	Peak
2		15780.000	42.19	6.51	48.70	-25.30	74.00	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band2_TX_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

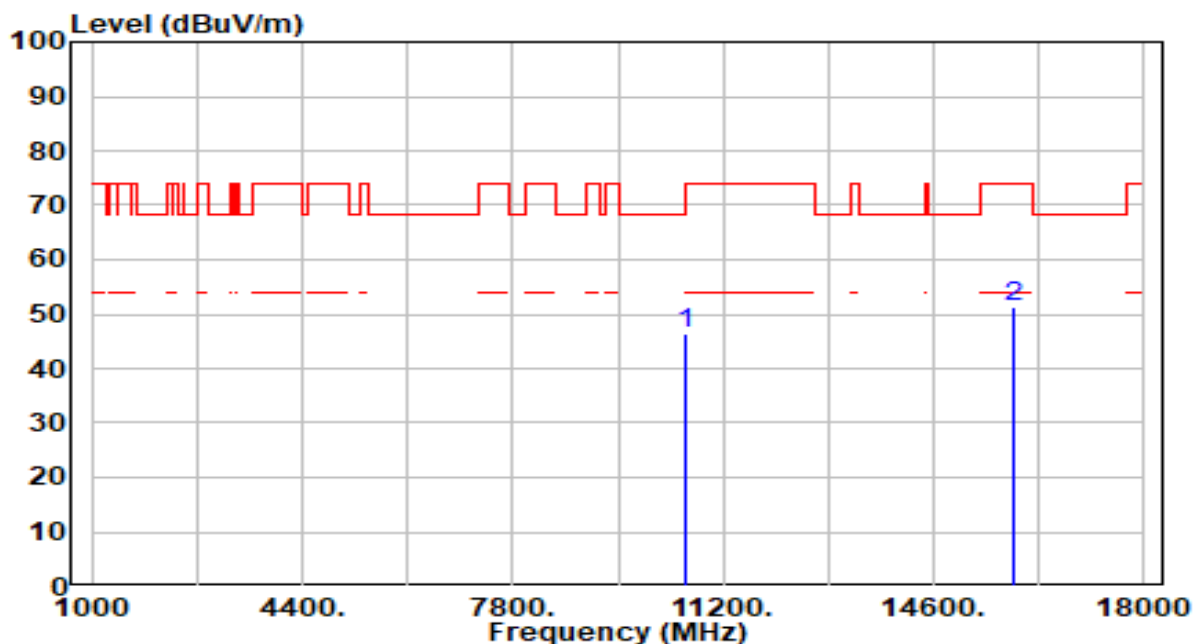


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.72	4.61	46.33	-21.87	68.20	100	360	Peak
2		15900.000	44.68	6.55	51.23	-22.77	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band2_TX_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

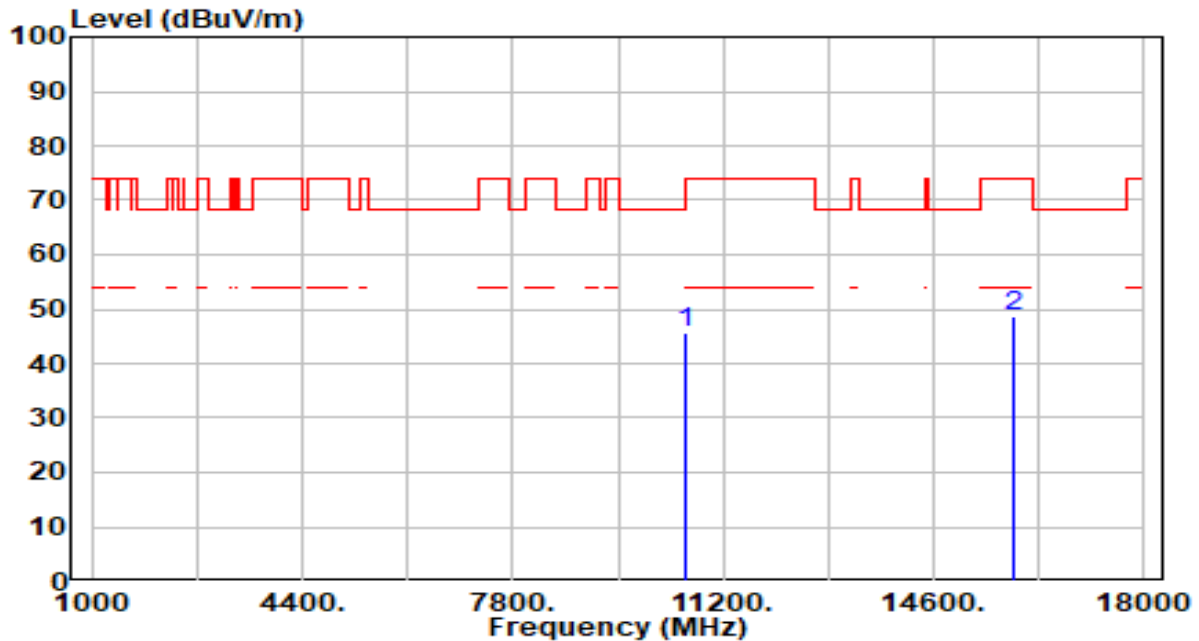


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.09	4.61	45.71	-22.49	68.20	200	180	Peak
2		15900.000	42.09	6.55	48.64	-25.36	74.00	100	69	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band2_TX_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

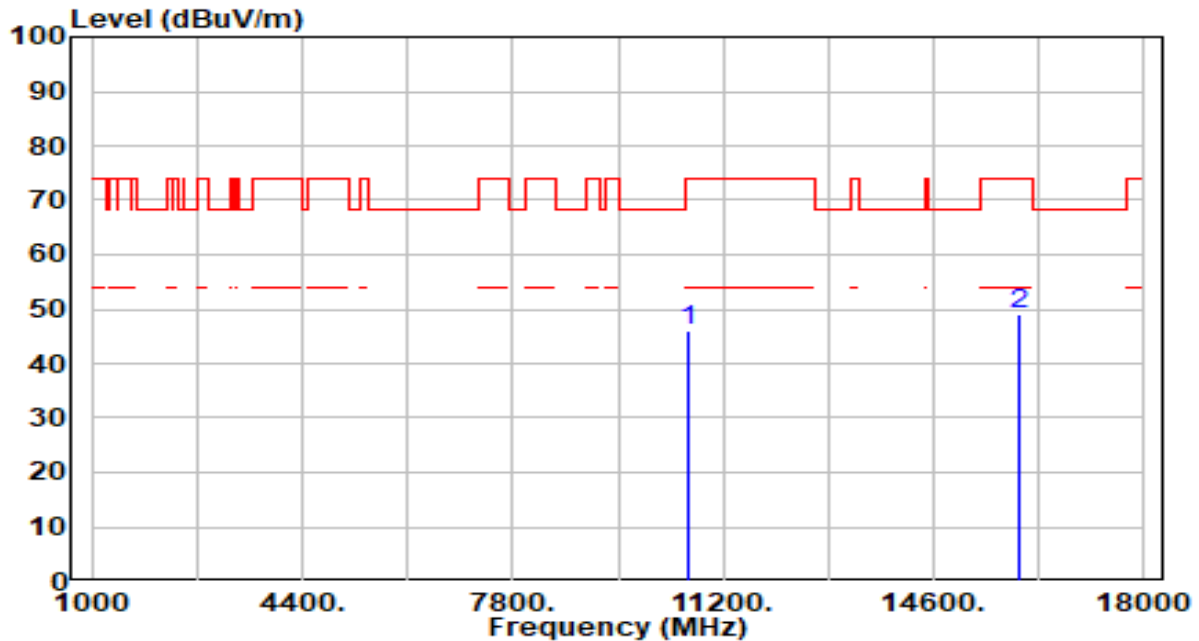


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.47	4.62	46.10	-27.90	74.00	100	96	Peak
2	* 15960.000	42.56	6.55	49.11	-24.89	74.00	200	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band2_TX_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

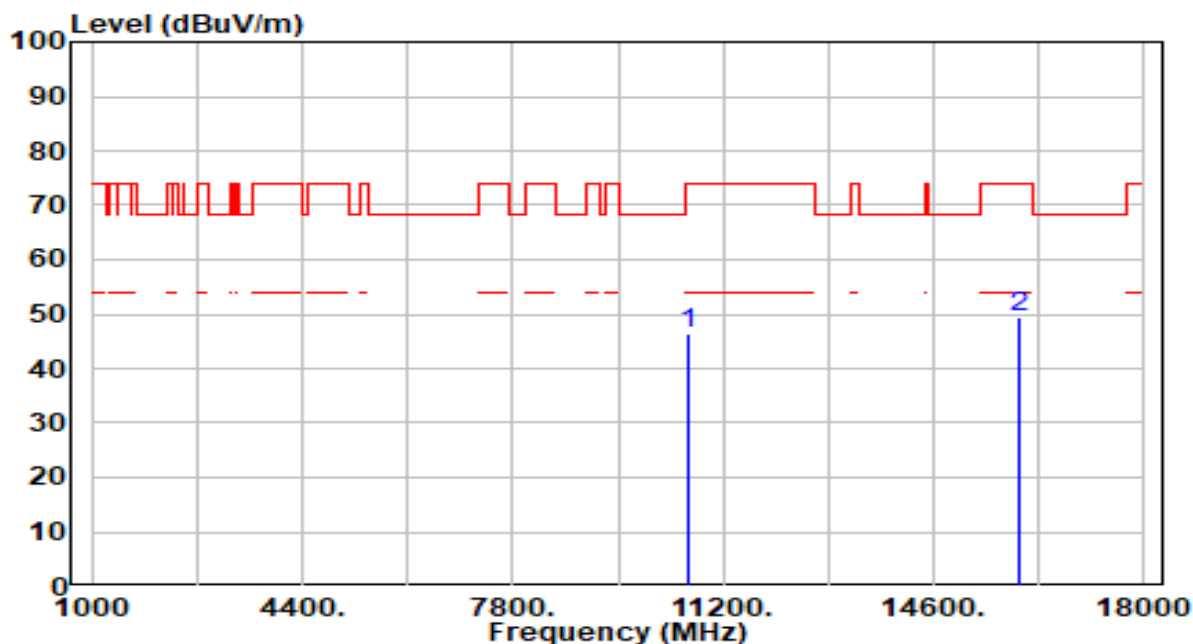


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.65	4.62	46.27	-27.73	74.00	200	209	Peak
2	* 15960.000	42.98	6.55	49.53	-24.47	74.00	100	359	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band3_TX_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

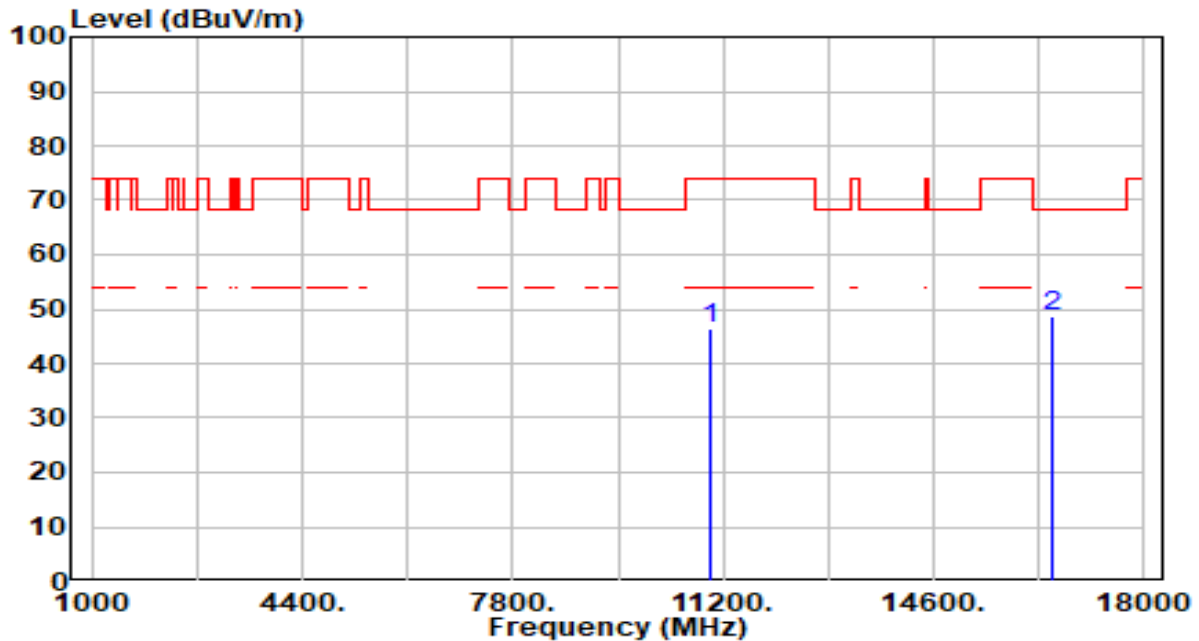


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.03	4.52	46.55	-27.45	74.00	100	360	Peak
2	*	16500.000	42.41	6.10	48.51	-19.69	68.20	100	125	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band3_TX_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

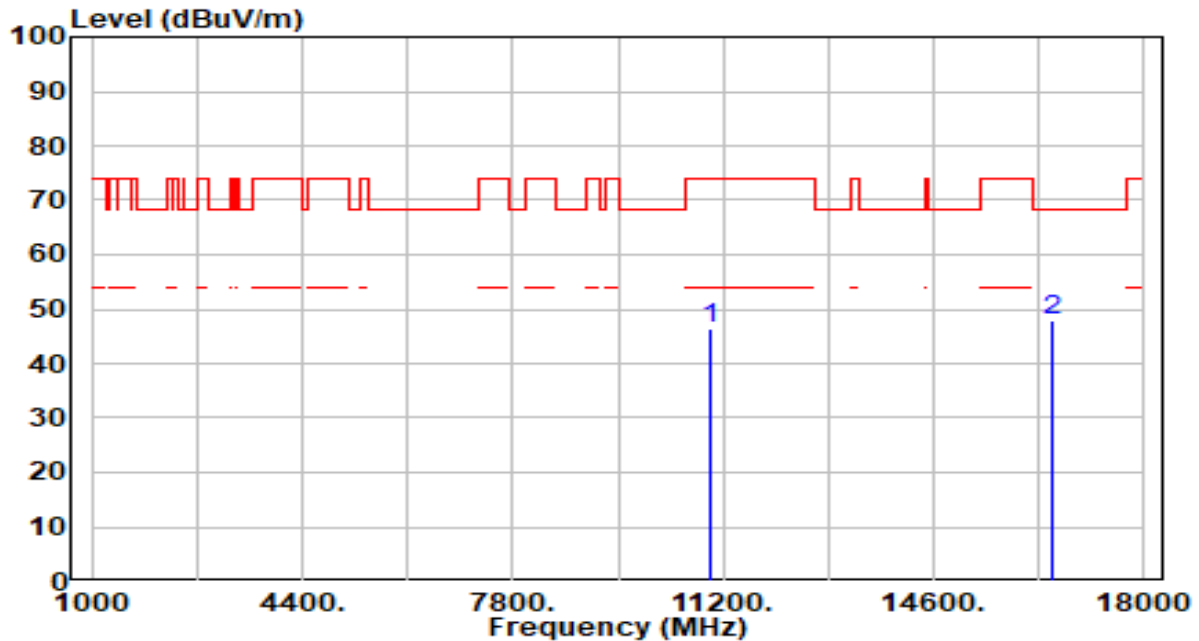


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.72	4.52	46.24	-27.76	74.00	100	0	Peak
2	*	16500.000	41.77	6.10	47.87	-20.33	68.20	100	262	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band3_TX_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

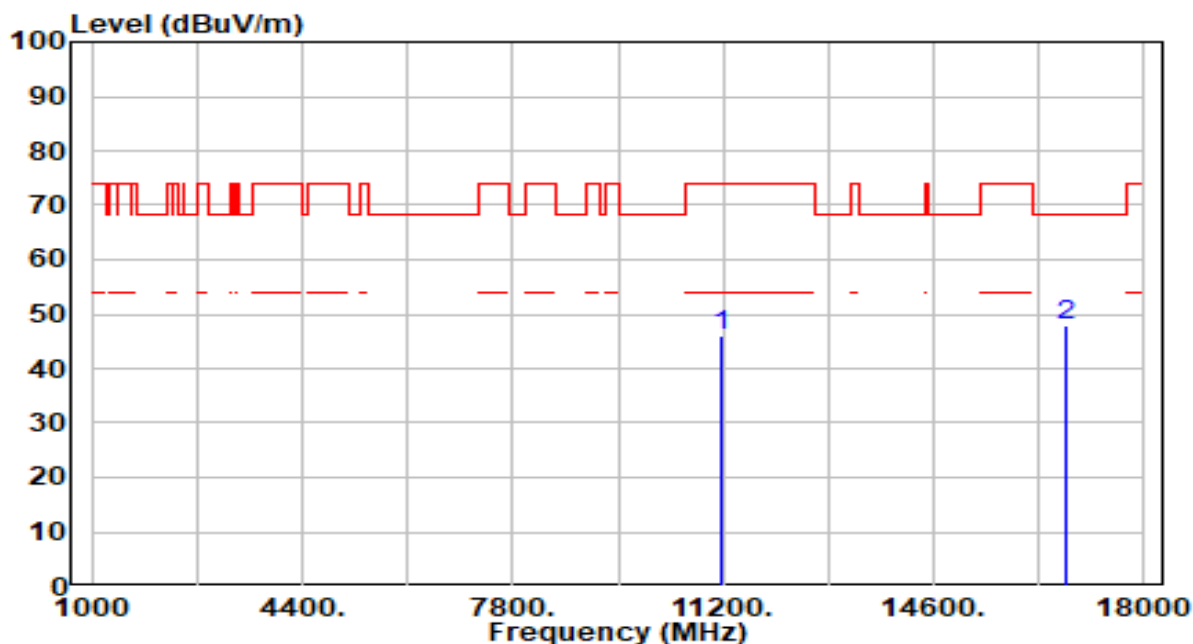


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.13	4.94	46.06	-27.94	74.00	100	355	Peak
2	*	16740.000	41.90	6.19	48.09	-20.11	68.20	100	191	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band3_TX_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

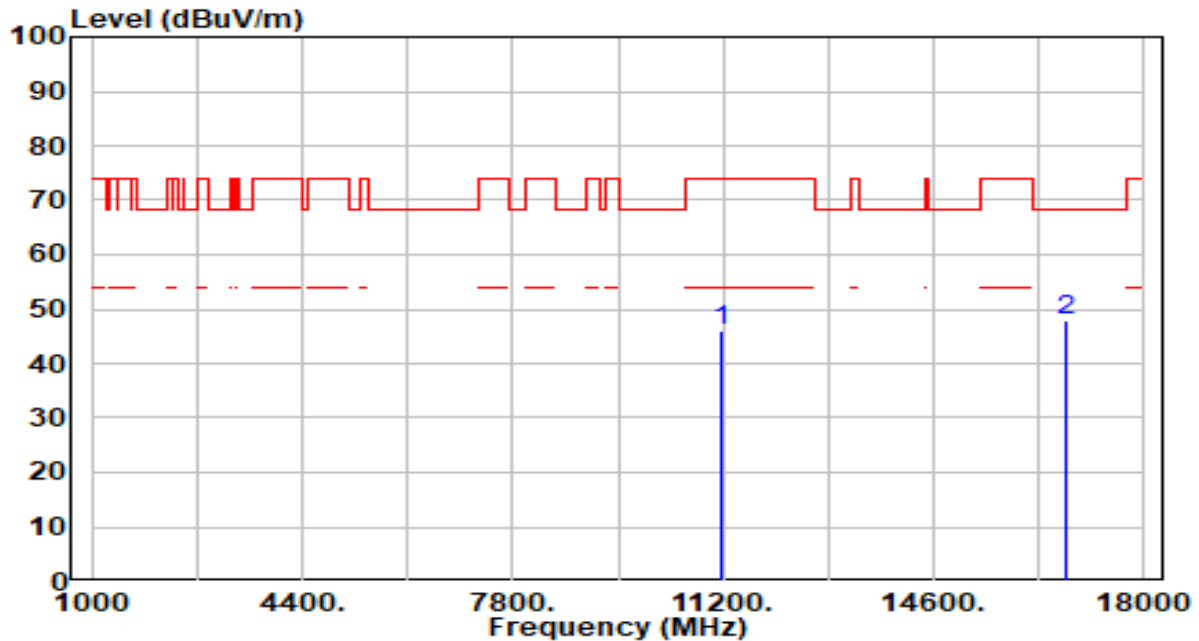


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	41.15	4.94	46.08	-27.92	74.00	100	274	Peak
2	* 16740.000	41.92	6.19	48.11	-20.09	68.20	100	341	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-13
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band3_TX_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

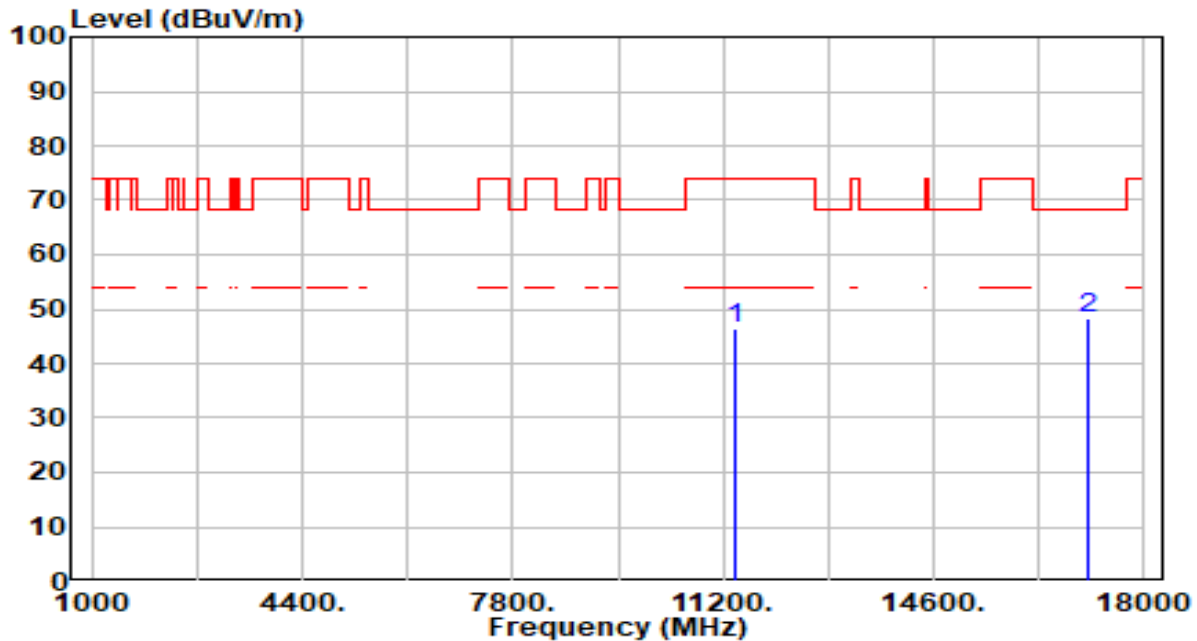


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	41.13	5.26	46.39	-27.61	74.00	100	110	Peak
2	* 17100.000	42.30	5.97	48.27	-19.93	68.20	100	138	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-13
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band3_TX_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

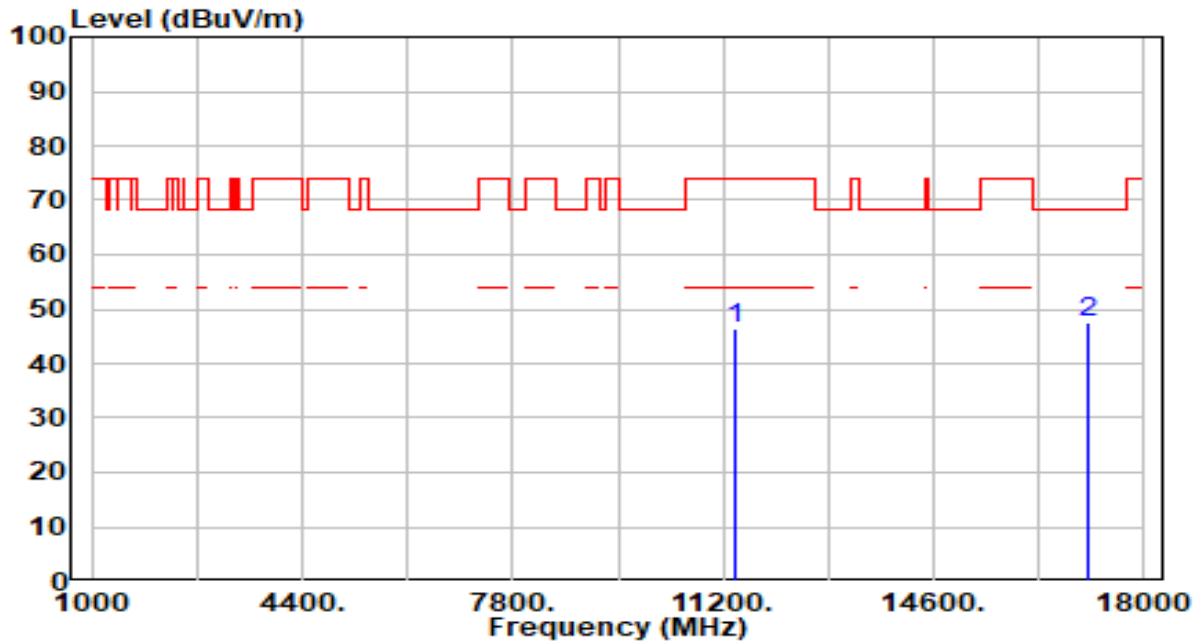


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.24	5.26	46.50	-27.50	74.00	200	250	Peak
2	*	17100.000	41.67	5.97	47.64	-20.56	68.20	100	76	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band3_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

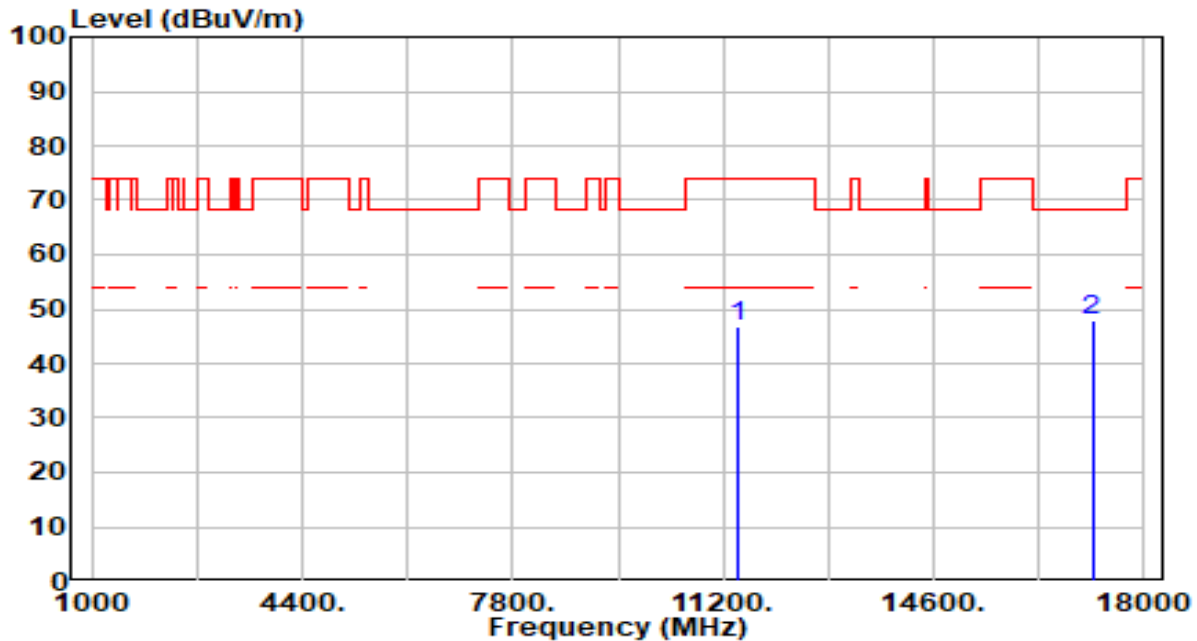


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.38	5.29	46.67	-27.33	74.00	100	89	Peak
2	*	17160.000	42.24	5.87	48.11	-20.09	68.20	100	108	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band3_TX_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

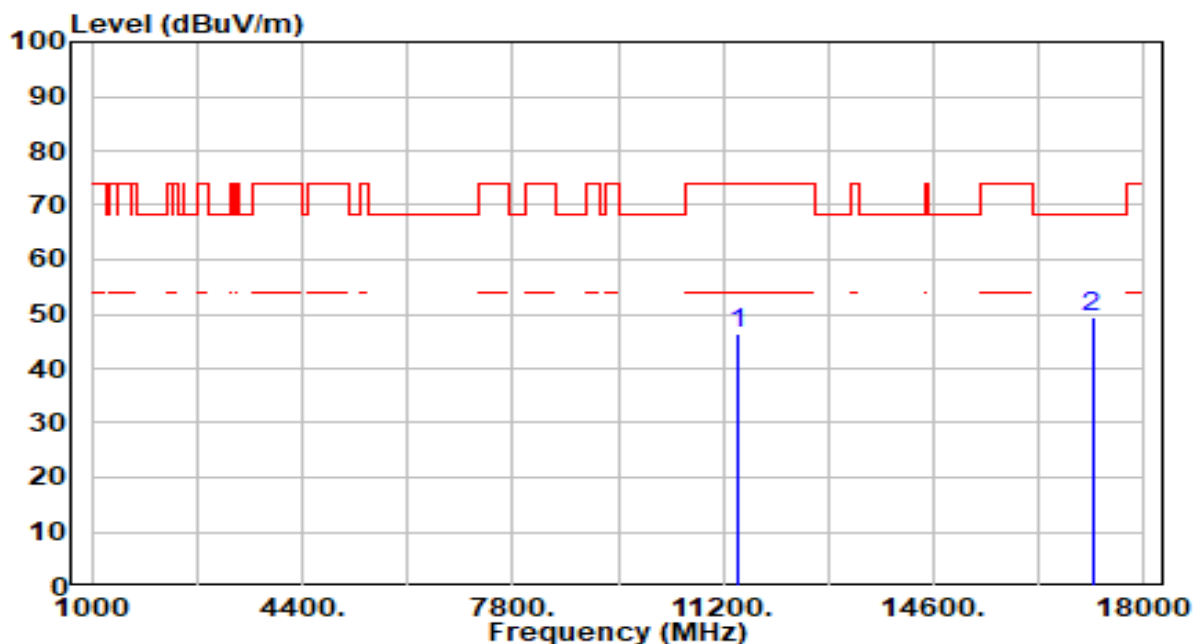


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.28	5.29	46.57	-27.43	74.00	100	284	Peak
2	*	17160.000	43.40	5.87	49.27	-18.93	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

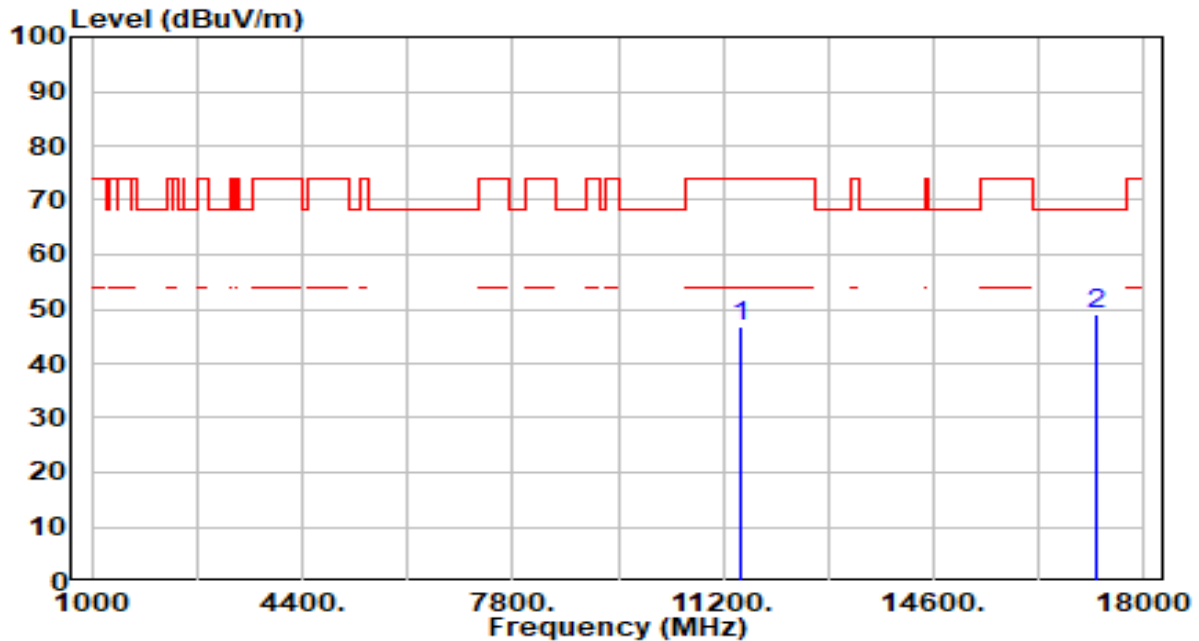


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	41.45	5.32	46.76	-27.24	74.00	200	257	Peak
2	* 17235.000	43.53	5.71	49.24	-18.96	68.20	100	146	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

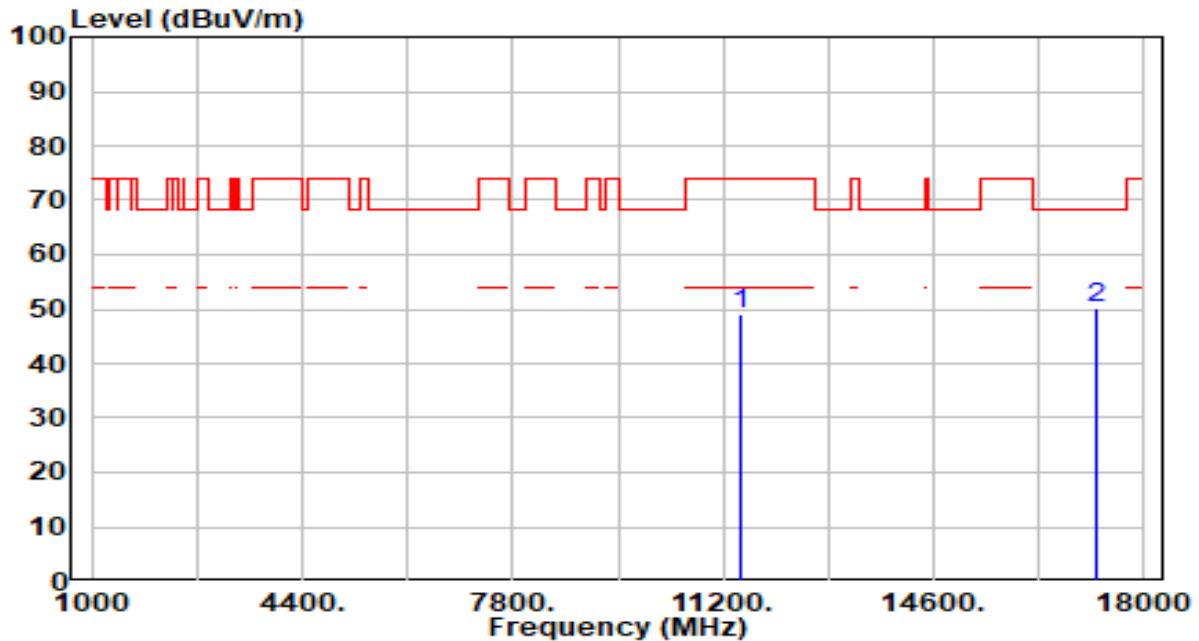


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	43.64	5.32	48.96	-25.04	74.00	100	0	Peak
2	* 17235.000	44.36	5.71	50.07	-18.13	68.20	100	46	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

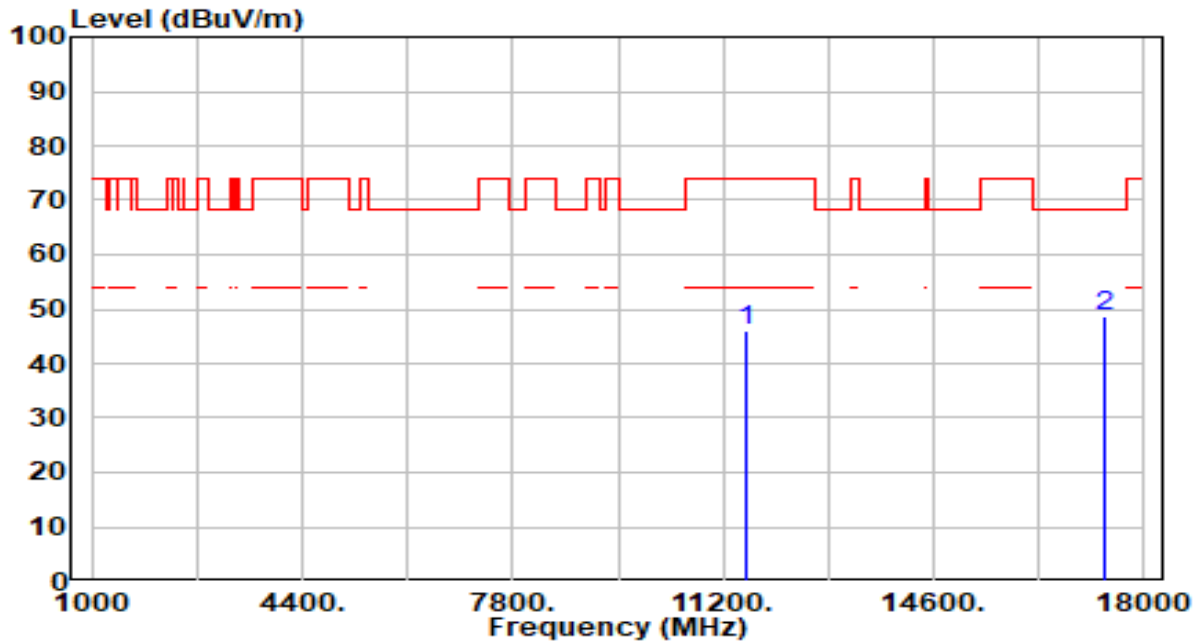


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	40.78	5.38	46.15	-27.85	74.00	100	180	Peak
2	* 17355.000	43.47	5.39	48.86	-19.34	68.20	200	213	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

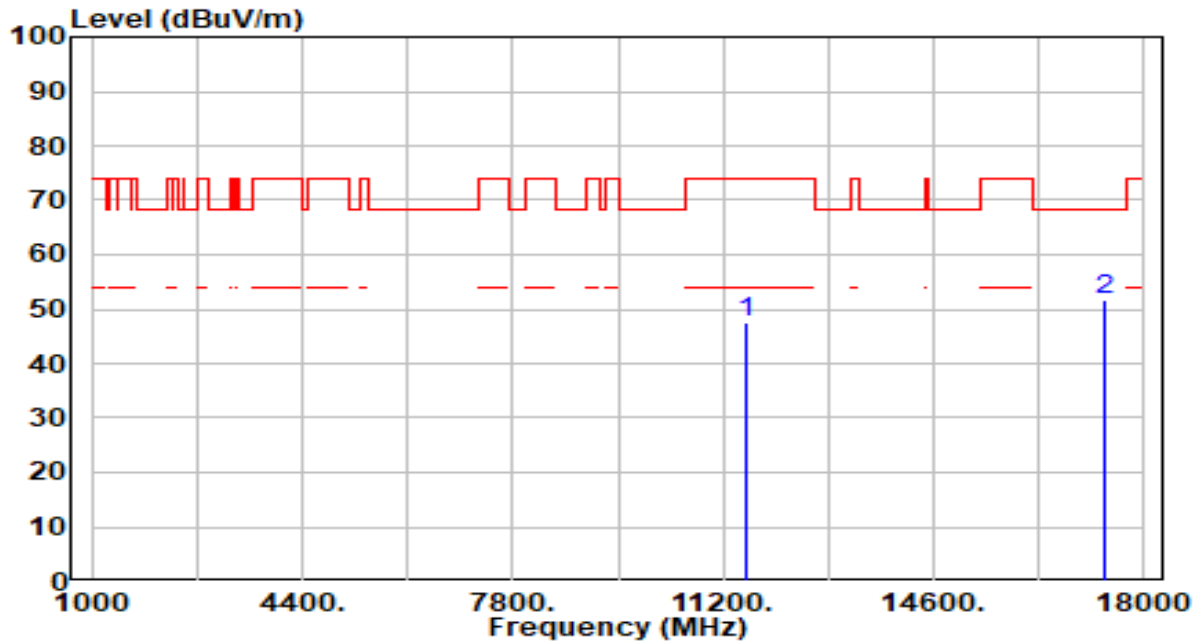


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	42.32	5.38	47.70	-26.30	74.00	200	212	Peak
2	*	17355.000	46.17	5.39	51.56	-16.64	68.20	200	203	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

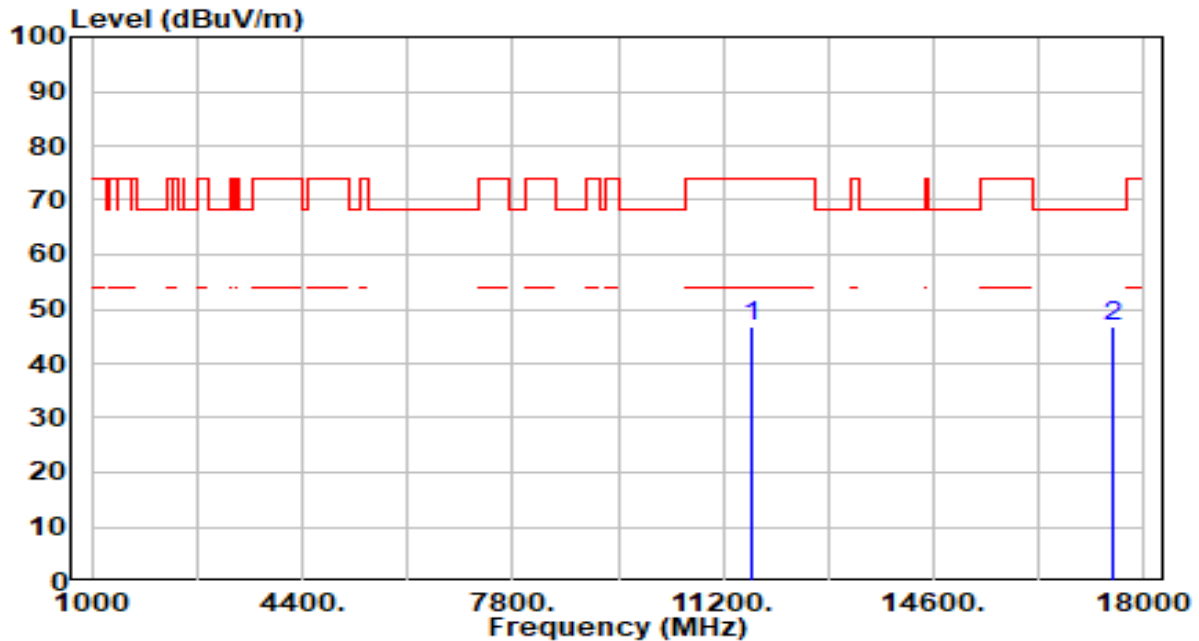


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.47	5.36	46.83	-27.17	74.00	200	76	Peak
2	* 17475.000	41.58	5.29	46.87	-21.33	68.20	100	253	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-20MHz_Band4_TX_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

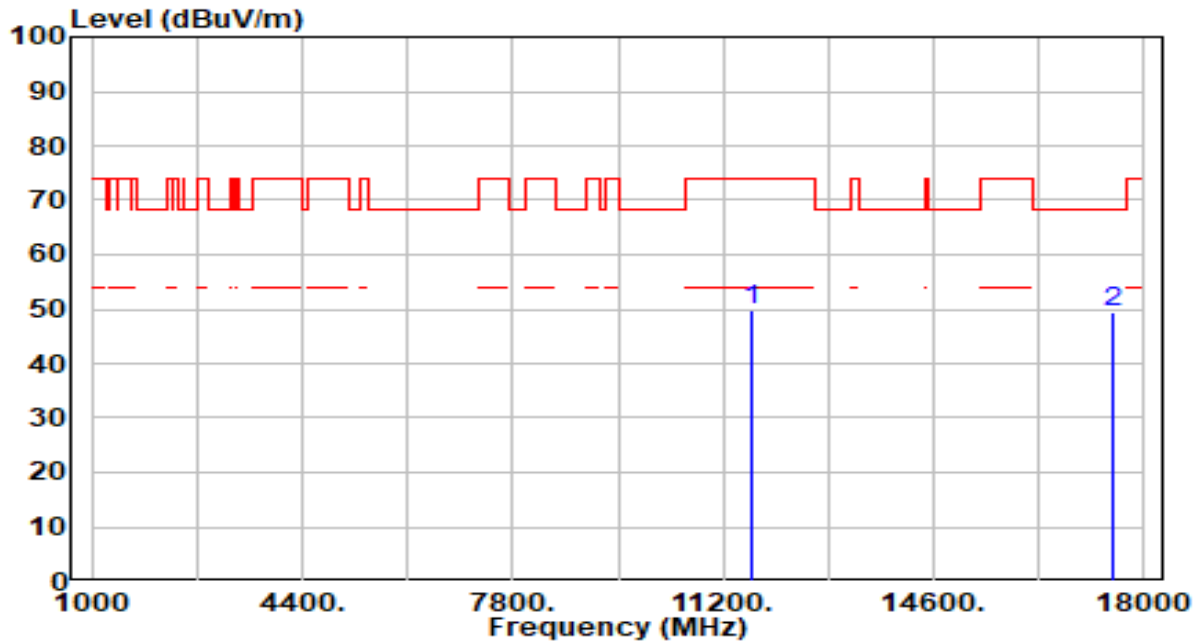


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	44.51	5.36	49.87	-24.13	74.00	100	360	Peak
2	*	17475.000	44.10	5.29	49.39	-18.81	68.20	200	133	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band1_TX_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

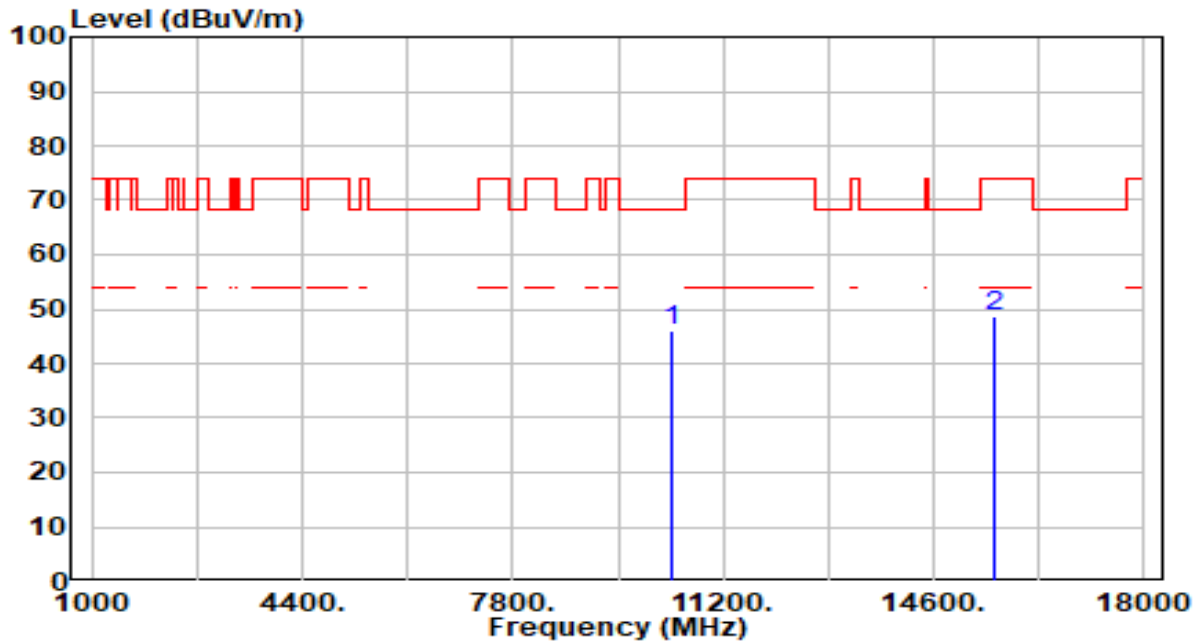


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.32	4.84	46.16	-22.04	68.20	200	33	Peak
2		15570.000	42.37	6.18	48.54	-25.46	74.00	100	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band1_TX_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

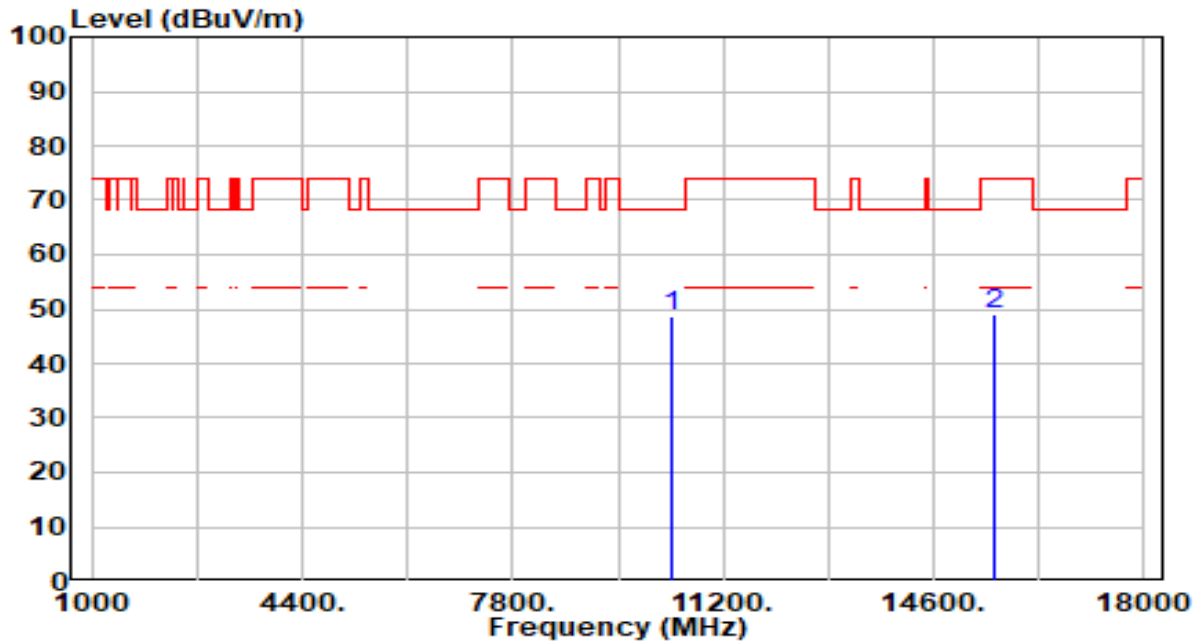


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	43.69	4.84	48.53	-19.67	68.20	153	360	Peak
2		15570.000	42.82	6.18	49.00	-25.00	74.00	100	358	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band1_TX_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

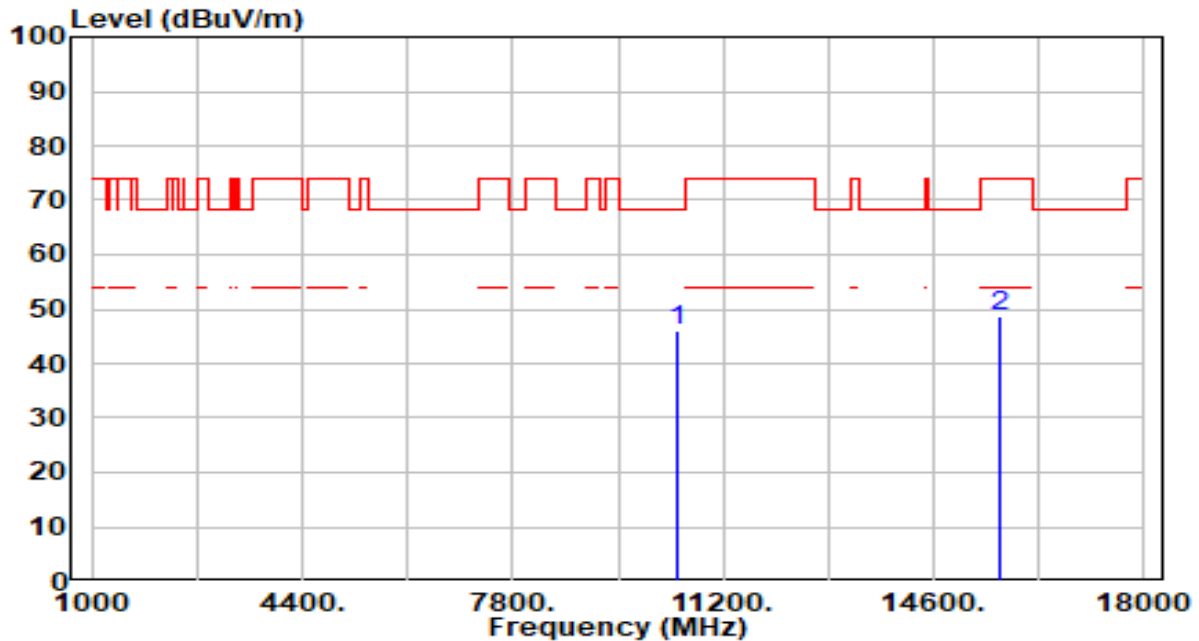


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	41.37	4.74	46.11	-22.09	68.20	200	140	Peak
2		15690.000	42.41	6.33	48.74	-25.26	74.00	100	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band1_TX_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

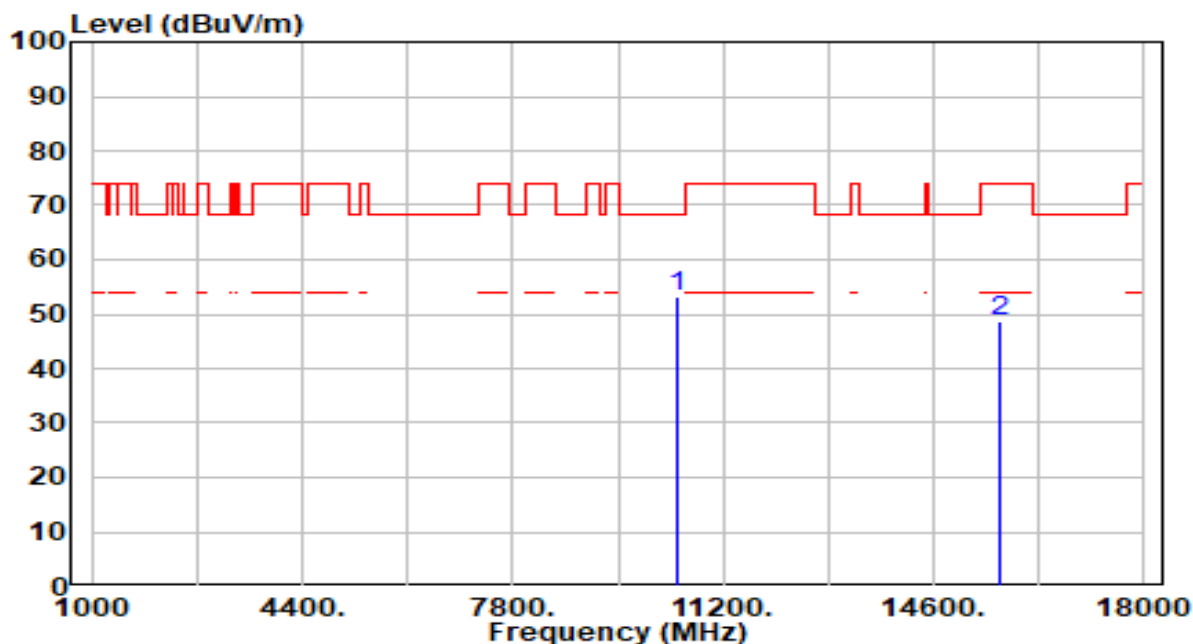


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	48.43	4.74	53.17	-15.03	68.20	200	243	Peak
2		15690.000	42.37	6.33	48.69	-25.31	74.00	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band2_TX_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

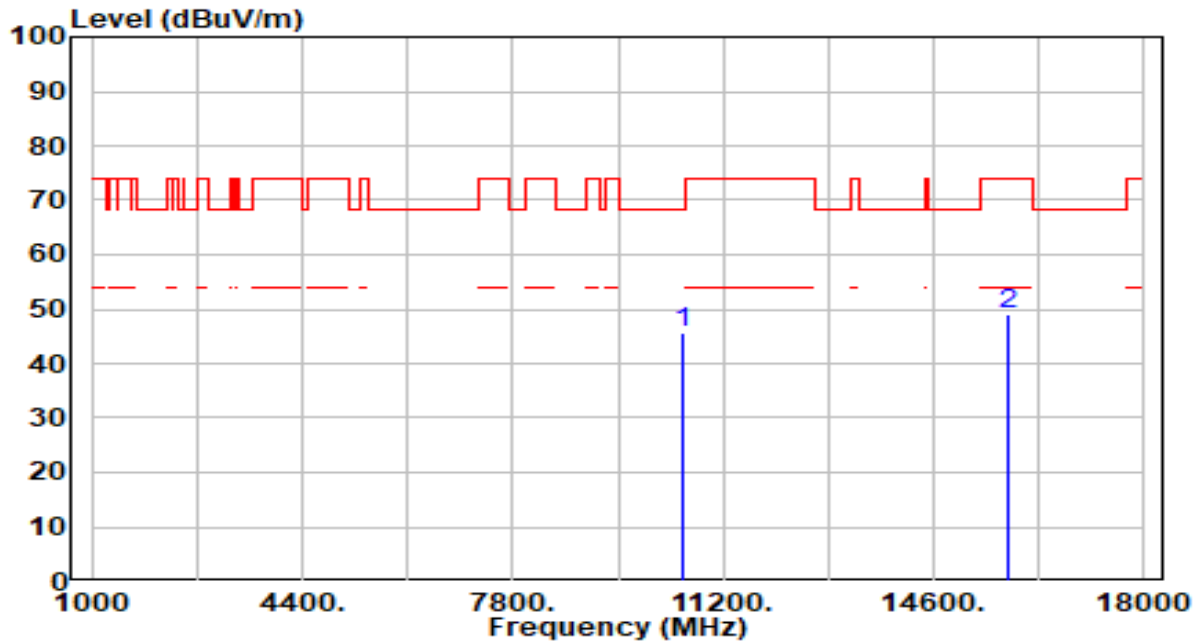


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	40.94	4.66	45.60	-22.60	68.20	100	257	Peak
2		15810.000	42.62	6.55	49.17	-24.83	74.00	100	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE6500 Dual-Band Wi-Fi 7 Router	Date of Test	2024-06-12
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11be-40MHz_Band2_TX_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

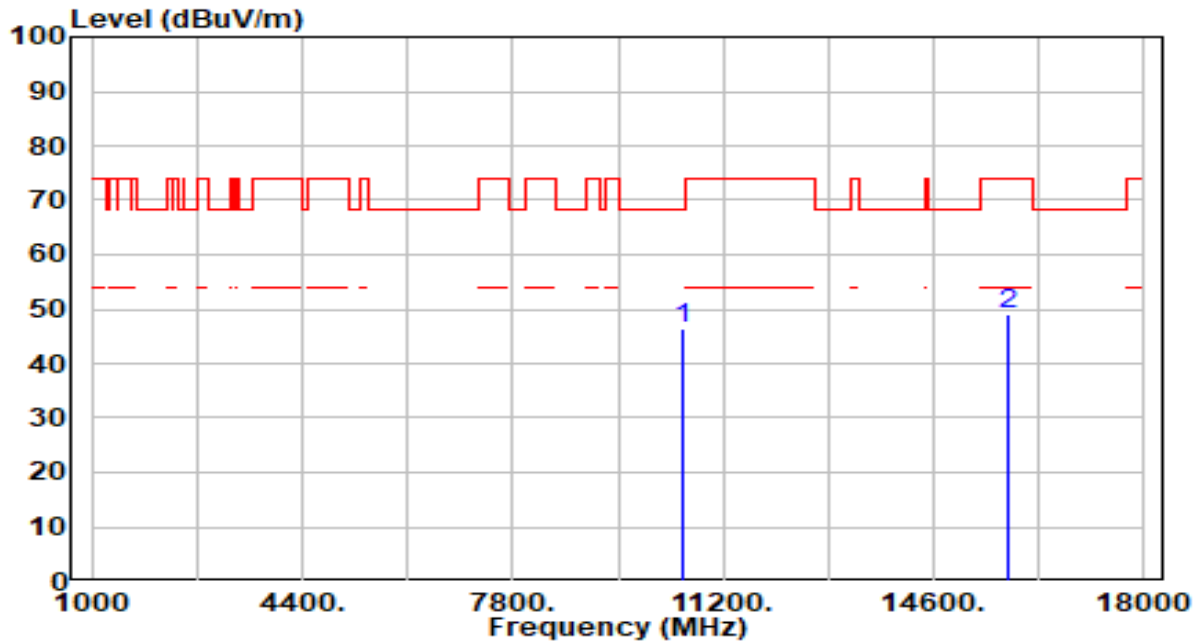

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.57	4.66	46.23	-21.97	68.20	100	0	Peak
2		15810.000	42.35	6.55	48.90	-25.10	74.00	100	183	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.