

FCC TEST REPORT

Product Name: Smart Phone
Trade Mark: BOLD
Model No.: K5
Report Number: 24111214608EMC-1
Test Standards: FCC 47 CFR Part 15 Subpart B
FCC ID: YHLBLU5KSP
Test Result: PASS
Date of Issue: December 24, 2024

Prepared for:

BLU Products, Inc.
8600 NW 36th Street, Suite #300 | Miami, FL 33166

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6th, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:

David Chen

David Chen
Senior Project Engineer

Reviewed by:

Henry Lu

Henry Lu
Team Leader

Approved by:

Robben Chen

Robben Chen
Assistant Manager

Date: December 24, 2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Version

Version No.	Date	Description
V1.0	December 24, 2024	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 DESCRIPTION OF SUPPORT UNITS	5
1.4 TEST LOCATION	5
1.5 TEST FACILITY	5
1.6 DEVIATION FROM STANDARDS	5
1.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
1.9 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	9
4.2 TEST MODES	9
4.3 TEST SETUP	10
4.3.1 FOR RADIATED EMISSIONS TEST SETUP	10
4.3.2 FOR CONDUCTED EMISSIONS TEST SETUP	11
4.4 SYSTEM TEST CONFIGURATION	11
5. REFERENCE DOCUMENTS FOR TESTING	11
6. EMC REQUIREMENTS SPECIFICATION	12
6.1 RADIATED EMISSION	12
6.2 CONDUCTED EMISSION	17
APPENDIX 1 PHOTOS OF TEST SETUP	20
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	20

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	8600 NW 36th Street, Suite #300 Miami, FL 33166
Manufacturer:	BLU Products, Inc.
Address of Manufacturer:	8600 NW 36th Street, Suite #300 Miami, FL 33166

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smart Phone
Model No.:	K5
Trade Mark:	BOLD
DUT Stage:	Identical Prototype
Rated Voltage:	<input checked="" type="checkbox"/> Powered by USB port (5Vdc)
	<input checked="" type="checkbox"/> 100-240V~50/60Hz and/or 3.85Vdc (1x3.85V Lithium-ion Battery)
Classification of digital devices:	Class B
Highest Internal Frequency:	2617.5 MHz
Software Version:	BOLD_K0010_V14.0.01.01_GENERIC_20241104 (Provided by the customer)
Hardware Version:	S63L0_V3.0 (Provided by the customer)
Sample Received Date:	November 12, 2024
Sample Tested Date:	November 15, 2024 to November 16, 2024

Remark:

The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.

1.2.2 Description of Accessories

Adapter	
Model No.:	US-BJD-2000
Input:	100-240 V~50/60 Hz 0.35 A
Output:	5.0 V \equiv 2000 mA 10W

Cable	
Connector:	USB Cable
Cable Type:	Unshielded without ferrite
Length:	1.0 Meter

Battery	
Model No.:	C956547500P
Battery Type:	Lithium-ion Battery
Rated Voltage:	3.85 Vdc
Rated Capacity:	5000 mAh

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

1.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	DELL	Latitude 3400	16238087894	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
Earphone	HUAWEI	3.5 mm	1.2 Meter	UnionTrust

1.4 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.6 DEVIATION FROM STANDARDS

None.

1.7 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

None.

1.9 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	± 3.2 dB
2	Conducted emission 150kHz-30MHz	± 2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-40GHz	± 4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart B Test Cases			
Test Item	Test Requirement	Test Method	Result
Conducted Emission	FCC 47 CFR Part 15.107	ANSI C63.4-2014	PASS
Radiated Emission	FCC 47 CFR Part 15.109	ANSI C63.4-2014	PASS



3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	25-Oct-2024	24-Oct-2025
<input type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	28-Oct-2024	27-Oct-2025
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	29-Oct-2024	28-Oct-2025
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	29-Oct-2024	28-Oct-2025
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	01-Apr-2024	31-Mar-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118385	00201874	01-Apr-2024	31-Mar-2025
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	28-Oct-2024	27-Oct-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118384	00202652	28-Oct-2024	27-Oct-2025
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESCI3	1166.5950.03	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	LISN	R&S	EVN216	3560.6550.12	26-Sep-2024	25-Sep-2025
<input type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	25-Oct-2024	24-Oct-2025
<input checked="" type="checkbox"/>	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	120V~60 Hz/240V~50 Hz or/and 3.85 V Battery	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
Radiated Emission	25.1	65.9	99.7	S202411124624-ZJA04/7	Linson Xie
Conducted Emission	23.0	60.0	99.7		David du

4.2 TEST MODES

Test Item	EMI Test Modes
Radiated Emission	Test Mode 1: Charging from 120 Vac + MP4 playing (With TF Card) + Earphone+ +Light on + GSM 850 idle(Receivers 869-894MHz) Test Mode 2: Charging from 120 Vac + Camera (Front)+ With TF Card+ WCDMA Band V idle(Receivers 869-894MHz) Test Mode 3: Charging from 120 Vac + Camera (Rear) + With TF Card+ LTE Band 5 idle(Receivers 869-894MHz) Test Mode 4: Charging from 240 Vac + Worst from mode 1~3 + GPS on + LTE Band 12 idle(Receivers 729-746MHz) Test Mode 5: Battery + FM (With Earphone) + GPS on + LTE Band 13 idle(Receivers 746-756MHz) Test Mode 6: USB Cable (data transfer with notebook) + With TF Card+ LTE Band 17 idle(Receivers 734-746MHz)
Conducted Emission	Test Mode 1: Charging from 120 Vac + MP4 playing (With TF Card) + Earphone +Light on +GSM 850 idle(Receivers 869-894MHz) Test Mode 2: Charging from 120 Vac + Camera (Front)+ With TF Card+ WCDMA Band V idle(Receivers 869-894MHz) Test Mode 3: Charging from 120 Vac + Camera (Rear) + With TF Card + LTE Band 5 idle(Receivers 869-894MHz) Test Mode 4: Charging from 240 Vac + Worst from mode 1~3 + GPS on + LTE Band 12 idle(Receivers 729-746MHz) Test Mode 5: USB Cable (data transfer with notebook) + With TF Card+ LTE Band 13 idle(Receivers 746-756MHz) Test Mode 6: Worst from mode 1~5 + LTE Band 17 idle(Receivers 734-746MHz)
Remark: The above test modes in boldface were the worst cases, only the test data of these modes were reported.	

4.3 TEST SETUP

4.3.1 For Radiated Emissions test setup

Figure 1. 30MHz to 1GHz


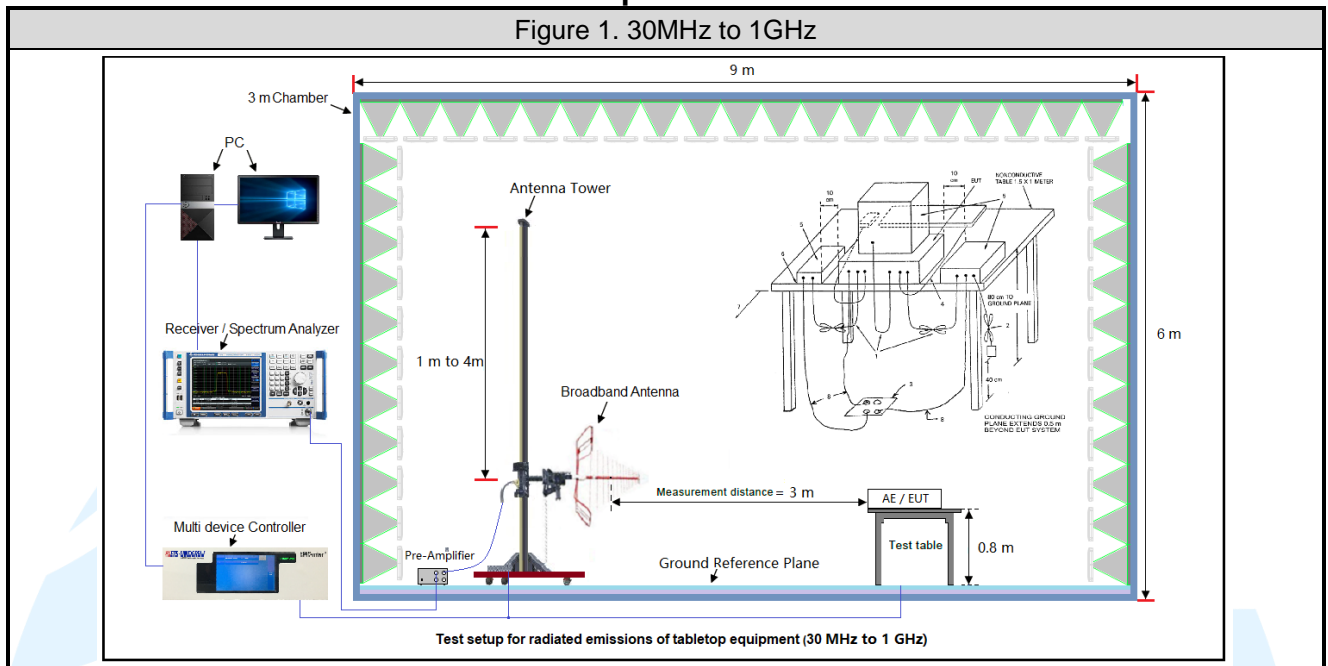


Figure 2. Above 1GHz

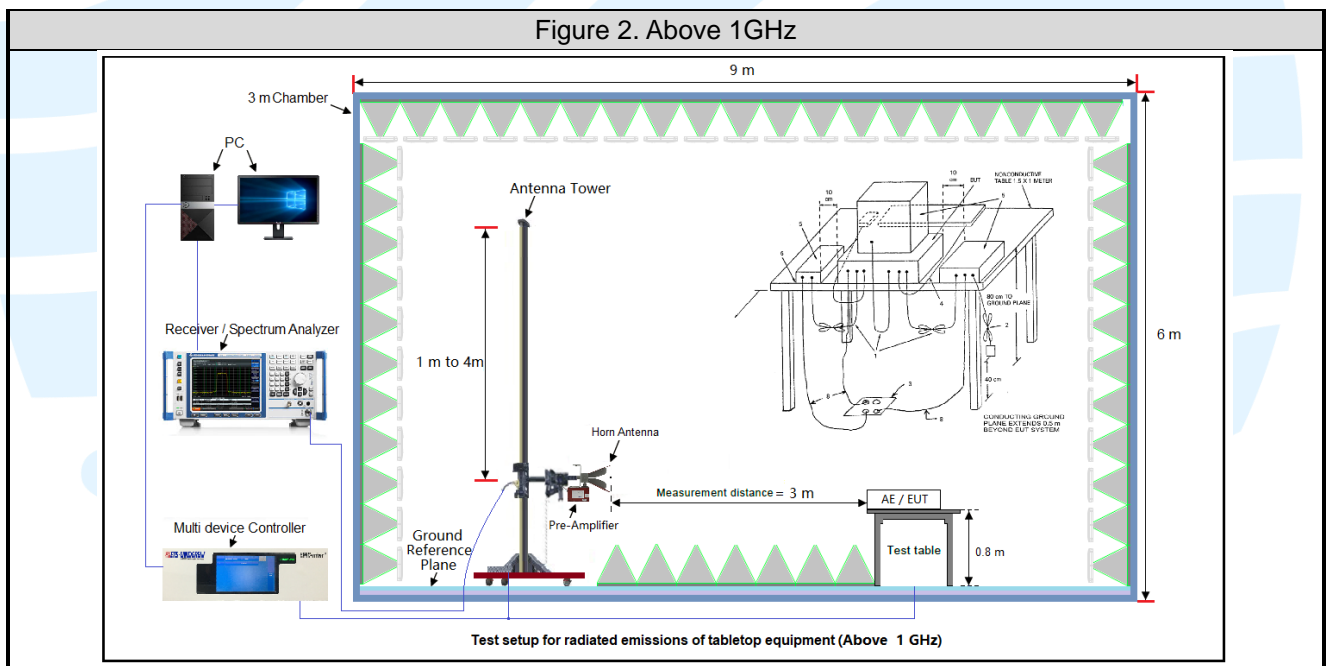

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

4.3.2 For Conducted Emissions test setup

Figure 3. Conducted Emissions setup

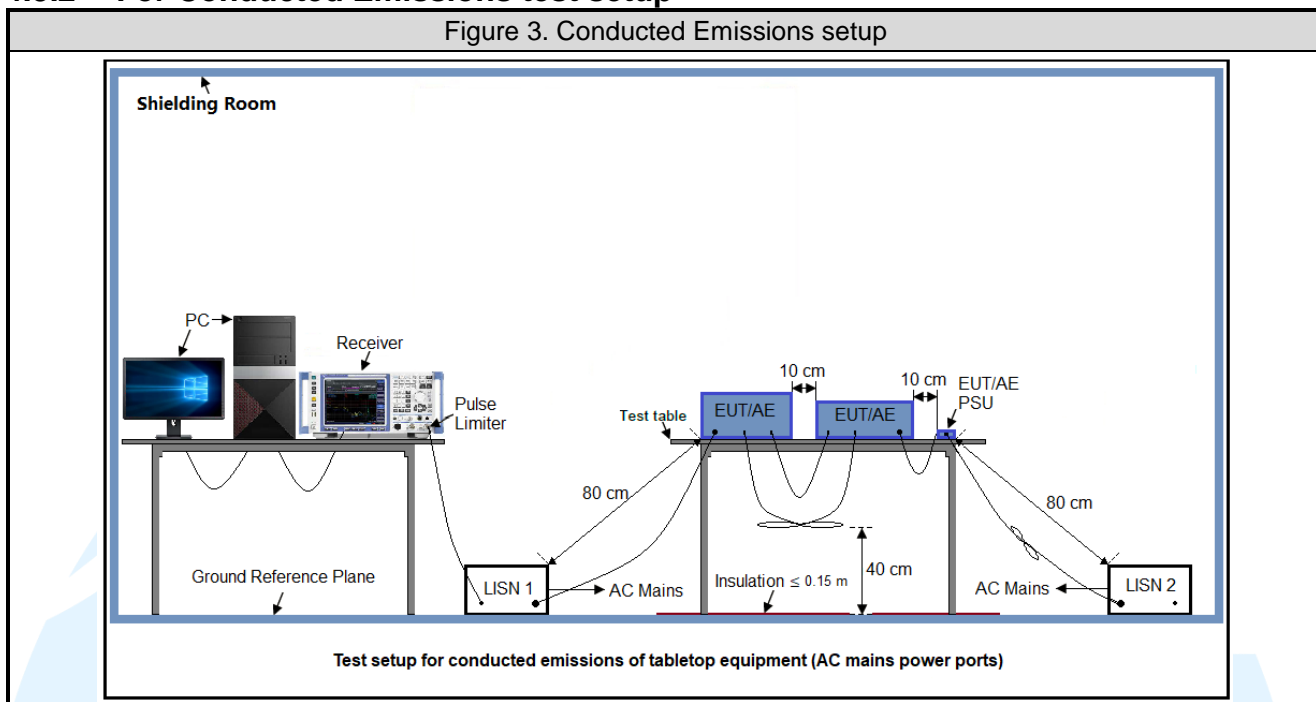

4.4 SYSTEM TEST CONFIGURATION

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic (according to KDB 896810 D02 SDoC FAQ v01r01) of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
3	KDB 174176 D01 Line Conducted FAQ v01r01	AC power-line conducted emission frequency asked questions
4	KDB 896810 D02 SDoC FAQ v01r02	Supplier's Declaration of Conformity frequency asked questions

6. EMC REQUIREMENTS SPECIFICATION

6.1 RADIATED EMISSION

Test Requirement: FCC 47 CFR Part 15.109

Test Method: ANSI C63.4-2014

Receiver Setup:

Frequency: (f) (MHz)	Detector type	Measurement receiver bandwidth	
		RBW	VBW
$30 \leq f \leq 1\,000$	Quasi Peak	120 kHz	300 kHz
$f \geq 1000$	Peak	1 MHz	3 MHz
	Average	1 MHz	3 MHz

Measured frequency range

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Limits:

Limits for Class B devices

Frequency (MHz)	limits at 3m (dB μ V/m)		
	QP Detector	PK Detector	AV Detector
30-88	40.0	--	--
88-216	43.5	--	--
216-960	46.0	--	--
960 to 1000	54.0	--	--
Above 1000	--	74.0	54.0

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.3.1 for details.

Test Procedures:

- From 30 MHz to 1GHz test procedure as below:
 - The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
 - Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
 - For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.
- Above 1GHz test procedure as below:
 - The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
 - Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.


- 3) For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Equipment Used: Refer to section 3 for details.

Test Result: Pass


The worst measurement data as follows:

Below 1GHz (Quasi Peak):
Test Mode4
Horizontal

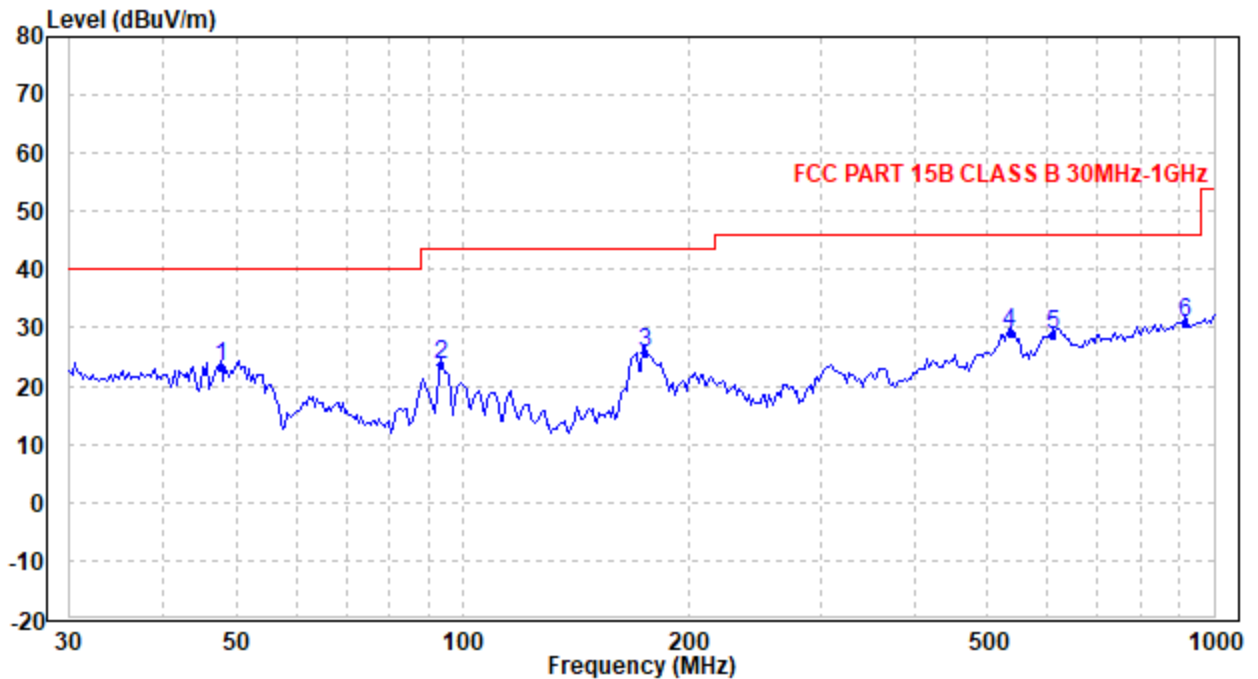

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.703	36.52	-13.10	23.42	40.00	-16.58	QP
2	93.653	39.68	-16.08	23.60	43.50	-19.90	QP
3	175.040	37.17	-11.44	25.73	43.50	-17.77	QP
4	535.038	30.86	-1.77	29.09	46.00	-16.91	QP
5	611.462	29.32	-0.47	28.85	46.00	-17.15	QP
6	912.695	26.07	4.90	30.97	46.00	-15.03	QP

Vertical

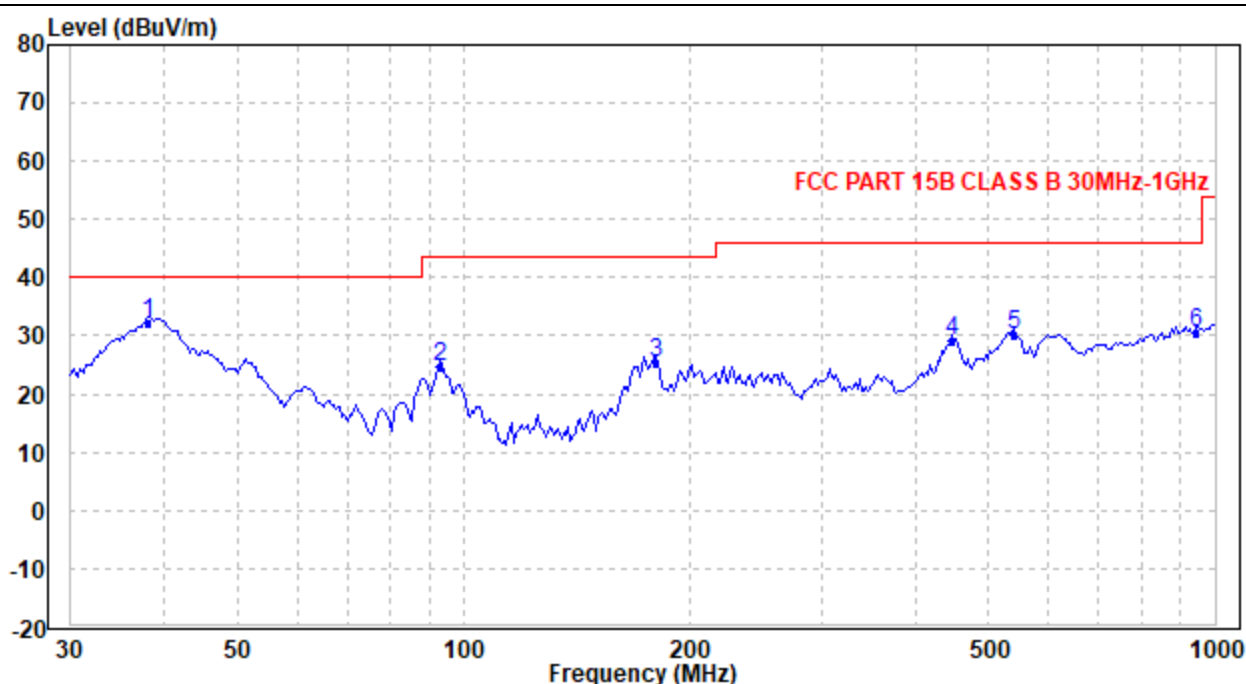

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.096	39.53	-7.34	32.19	40.00	-7.81	QP
2	92.997	40.72	-16.09	24.63	43.50	-18.87	QP
3	180.030	37.27	-11.83	25.44	43.50	-18.06	QP
4	445.693	33.25	-4.01	29.24	46.00	-16.76	QP
5	538.811	32.01	-1.69	30.32	46.00	-15.68	QP
6	945.334	25.39	5.10	30.49	46.00	-15.51	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Above 1GHz (Peak & Average)
Test Mode1
Horizontal

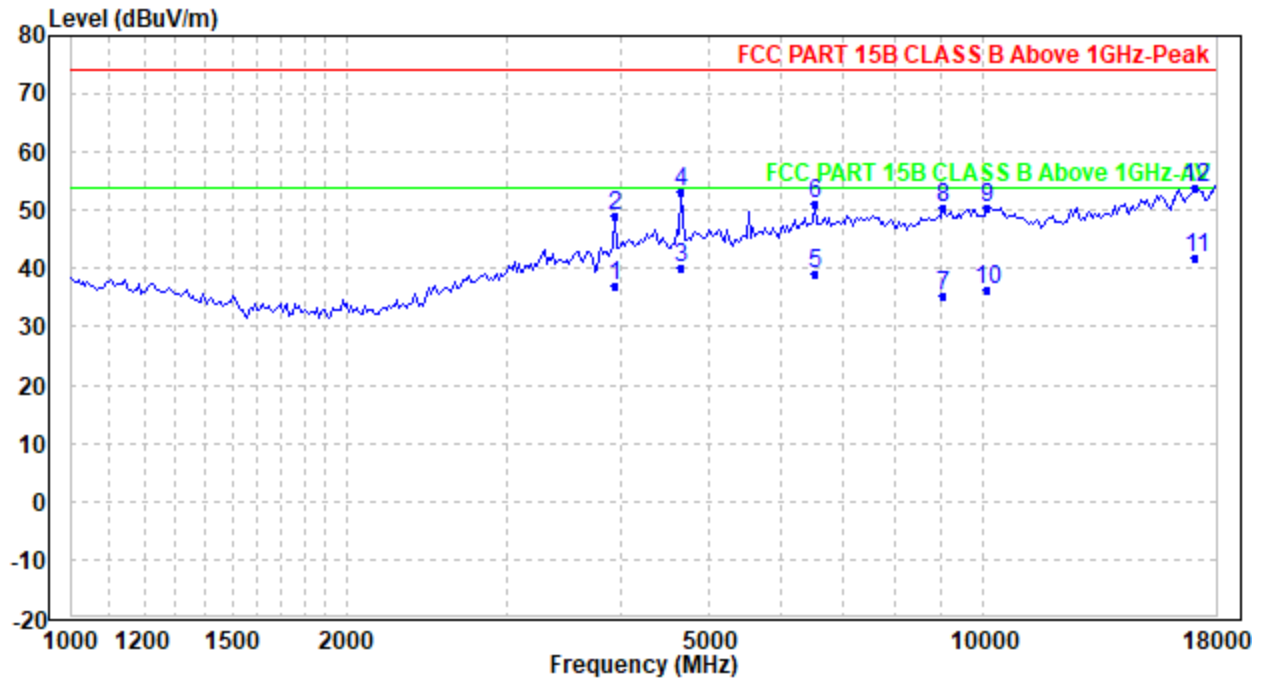

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3946.313	40.13	-3.15	36.98	54.00	-17.02	Average
2	3946.313	52.26	-3.15	49.11	74.00	-24.89	Peak
3	4668.133	42.17	-2.13	40.04	54.00	-13.96	Average
4	4668.133	55.30	-2.13	53.17	74.00	-20.83	Peak
5	6532.007	37.86	1.24	39.10	54.00	-14.90	Average
6	6532.007	49.99	1.24	51.23	74.00	-22.77	Peak
7	9034.809	32.50	2.79	35.29	54.00	-18.71	Average
8	9034.809	47.66	2.79	50.45	74.00	-23.55	Peak
9	10085.910	47.21	3.34	50.55	74.00	-23.45	Peak
10	10085.910	33.07	3.34	36.41	54.00	-17.59	Average
11	17085.680	33.10	8.78	41.88	54.00	-12.12	Average
12	17085.680	45.22	8.78	54.00	74.00	-20.00	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Vertical

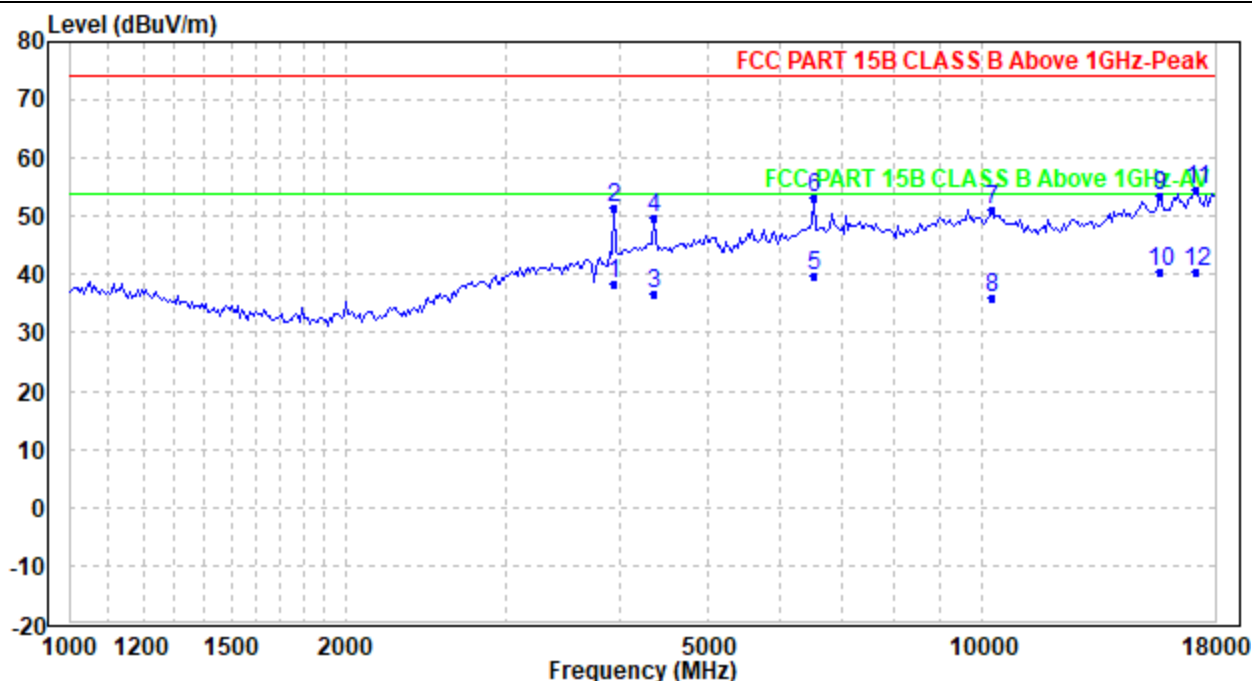

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3946.313	41.48	-3.15	38.33	54.00	-15.67	Average
2	3946.313	54.61	-3.15	51.46	74.00	-22.54	Peak
3	4354.681	39.18	-2.39	36.79	54.00	-17.21	Average
4	4354.681	52.32	-2.39	49.93	74.00	-24.07	Peak
5	6532.007	38.67	1.24	39.91	54.00	-14.09	Average
6	6532.007	51.81	1.24	53.05	74.00	-20.95	Peak
7	10262.700	47.69	3.36	51.05	74.00	-22.95	Peak
8	10262.700	32.53	3.36	35.89	54.00	-18.11	Average
9	15663.860	46.01	7.44	53.45	74.00	-20.55	Peak
10	15663.860	32.87	7.44	40.31	54.00	-13.69	Average
11	17184.940	45.60	8.92	54.52	74.00	-19.48	Peak
12	17184.940	31.46	8.92	40.38	54.00	-13.62	Average

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. All possible modes of operation were investigated, and testing at two nominal voltages of 240V~50Hz and 120V~60Hz, only the worst case emissions reported.
5. For Radiated Emission above 18GHz, there was not any unwanted emission detected.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

6.2 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15.107

Test Method: ANSI C63.4-2014

Limits:

Limits for Class B devices

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.3.2 for details.

Test Procedures:

- 1) The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- 2) The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:

Quasi Peak and Average:

Test Mode5

Live Line

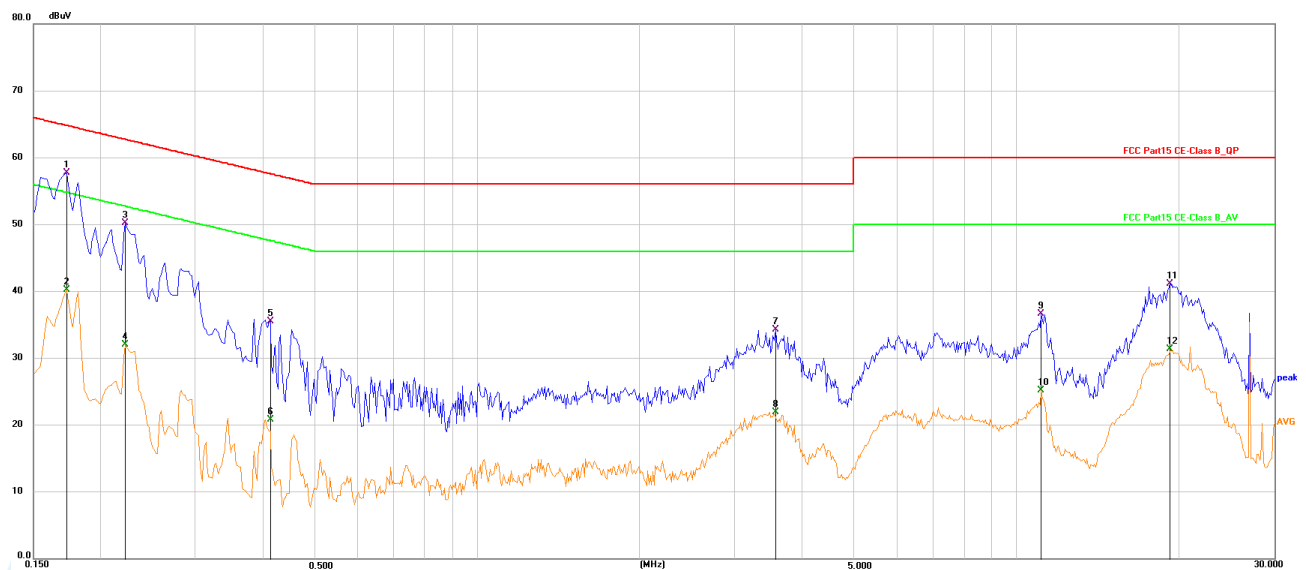

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1724	47.95	9.78	57.73	64.84	-7.11	QP
2	0.1724	30.47	9.78	40.25	54.84	-14.59	AVG
3	0.2220	40.41	9.79	50.20	62.74	-12.54	QP
4	0.2220	22.24	9.79	32.03	52.74	-20.71	AVG
5	0.4110	25.75	9.79	35.54	57.63	-22.09	QP
6	0.4110	11.07	9.79	20.86	47.63	-26.77	AVG
7	3.5655	24.57	9.74	34.31	56.00	-21.69	QP
8	3.5655	12.15	9.74	21.89	46.00	-24.11	AVG
9	11.1074	26.94	9.71	36.65	60.00	-23.35	QP
10	11.1074	15.44	9.71	25.15	50.00	-24.85	AVG
11	19.3064	31.26	9.90	41.16	60.00	-18.84	QP
12	19.3064	21.49	9.90	31.39	50.00	-18.61	AVG

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Neutral Line

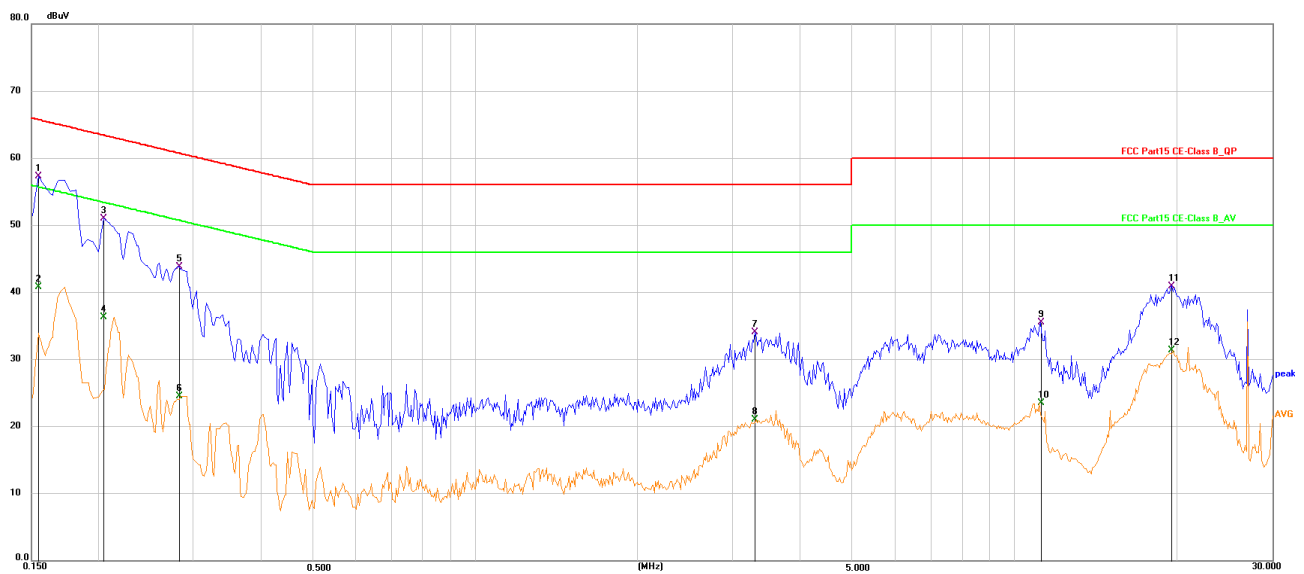

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1544	47.50	9.82	57.32	65.76	-8.44	QP
2	0.1544	30.91	9.82	40.73	55.76	-15.03	AVG
3	0.2040	41.28	9.76	51.04	63.45	-12.41	QP
4	0.2040	26.54	9.76	36.30	53.45	-17.15	AVG
5	0.2805	34.07	9.78	43.85	60.80	-16.95	QP
6	0.2805	14.77	9.78	24.55	50.80	-26.25	AVG
7	3.3000	24.30	9.75	34.05	56.00	-21.95	QP
8	3.3000	11.33	9.75	21.08	46.00	-24.92	AVG
9	11.1479	25.85	9.70	35.55	60.00	-24.45	QP
10	11.1479	13.86	9.70	23.56	50.00	-26.44	AVG
11	19.5405	31.10	9.85	40.95	60.00	-19.05	QP
12	19.5405	21.46	9.85	31.31	50.00	-18.69	AVG

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V~50Hz and 120V~60Hz, only the worst case emissions reported.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

***** End of Report *****

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
