

SAR TEST REPORT



The following samples were submitted and identified on behalf of the client as:

Product Name	Notebook Computer
Brand Name	acer
Model No.	N20Q10
Prepared for	Acer Incorporated 8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)
Standards	IEEE/ANSI C95.1-1992, IEEE 1528-2013
FCC ID	HLZAX201D2Q
Date of Receipt	Dec. 08, 2020
Date of Test(s)	Dec. 13, 2020 ~Dec. 17, 2020
Date of Issue In the configuration tested, the EU Remarks:	Jan. 20, 2021 Complied with the standards specified above.

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Kimmy Chiou	Engineer / Kiki Lin	Asst. Manager / John Yeh
Kimmy Chiou	Kiki Lin	John Teh

Date: Jan. 20, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No. : EN/2020/C0008 Page: 2 of 80


Revision History

Report Number	Revision	Description	Issue Date
EN/2020/C0008	Rev.00	Initial creation of document	Jan. 05, 2021
EN/2020/C0008	Rev.01	Add RU power table	Jan. 20, 2021
EN/2020/C0008	Rev.02	Modify Max SAR	Jan. 20, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號





0. Guidance applied

The SAR testing method and procedure for this device is in accordance with the following standards: IEEE/ANSI C95.1-1992 IEEE 1528-2013 KDB248227D01v02r02 KDB865664D01v01r04 KDB865664D02v01r02 KDB447498D01v06 KDB616217D04v01r02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.sqs.com.tw
```



Contents


0. Guidance applied	3
1. General Information	
1.1 Testing Laboratory	
1.2 Details of Applicant	
1.3 Description of EUT	
1.4 Test Environment	36
1.5 Operation Description	36
1.6 Operating modes validation by power measurement	38
1.7 The SAR Measurement System	41
1.8 System Components	43
1.9 SAR System Verification	
1.10 Tissue Simulant Fluid for the Frequency Band	
1.11 Evaluation Procedures	
1.12 Probe Calibration Procedures	
1.13 Test Standards and Limits	53
2. Summary of Results	
2.1 Decision rules	55
2.1 Decision rules 2.2 Summary of Results	55 55
 2.1 Decision rules 2.2 Summary of Results 2.3 Reporting statements of conformity 	55 55 56
 2.1 Decision rules 2.2 Summary of Results 2.3 Reporting statements of conformity 3. Simultaneous Transmission Analysis 	55 55 56 57
 2.1 Decision rules 2.2 Summary of Results 2.3 Reporting statements of conformity 	55 55 56 57
 2.1 Decision rules 2.2 Summary of Results 2.3 Reporting statements of conformity 3. Simultaneous Transmission Analysis 	55 55 56 57 58
 2.1 Decision rules	55 55 56 56 58 58
 2.1 Decision rules	55 55 56 57 58 58 61
 2.1 Decision rules	55 55 56 56 58 58 61 62
 2.1 Decision rules	55 56 56 58 58 58 61 62 73
 2.1 Decision rules	55 55 56 58 58 61 62 73 78
 2.1 Decision rules	55 56 57 58 58 61 62 62 73 78 80
 2.1 Decision rules	55 56 57 58 58 61 62 62 73 78 80 80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488





1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Central RF Lab						
1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, Neihu District, Taipei City,						
11493, Taiwan.						
FCC Designation	C Designation					
Number	TW0029					
Tel +886-2-2299-3279						
Fax +886-2-2298-0488						
Internet	http://www.tw.sgs.com/					

1.2 Details of Applicant

Company Name	Acer Incorporated
	8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei City 22181, Taiwan (R.O.C)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.3 Description of EUT

General Information of	Host:			1		
Equipment Under Test	Notebook Computer					
Brand Name	acer					
Model No.	N20Q10					
Integrated Module	Brand Name: Intel Model Name: AX201D2W					
FCC ID	HLZAX201D2Q					
Mode of Operation	WLAN802.11 a/b/g/n/ac/ax(20M/40	M/80M/	′160M)		
Duty Cycle	WLAN802.11 a/b/g/n/ac/ax(20M/40M/80/160M)	Ref	er to p 32-35			
	Bluetooth	72.9%				
	WLAN802.11 b/g/n/ax(20M)	2412	_	2472		
	WLAN802.11 n/ax(40M)	2422	—	2462		
	WLAN802.11 a/n/ac/ax(20M) 5.2G	5180	—	5240		
	WLAN802.11 n/ac/ax(40M) 5.2G	5190	—	5230		
	WLAN802.11 ac/ax(80M) 5.2G		5210			
TX Frequency Range	WLAN802.11 ac/ax(160M) 5.2G	5250				
(MHz)	WLAN802.11 a/n/ac/ax(20M) 5.3G	5260	—	5320		
	WLAN802.11 n/ac/ax(40M) 5.3G	5270	_	5310		
	WLAN802.11 ac/ax(80M) 5.3G	5290				
	WLAN802.11 a/n/ac/ax(20M) 5.6G	5500	_	5720		
	WLAN802.11 n/ac/ax(40M) 5.6G	5510	_	5710		
	WLAN802.11 ac/ax(80M) 5.6G	5530	_	5690		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



	WLAN802.11 a/n/ac/ax(20M) 5.8G	5745	—	5825
TX Frequency Range (MHz)	WLAN802.11 n/ac/ax(40M) 5.8G	5755	_	5795
	WLAN802.11 ac/ax(80M) 5.8G	5775		
	Bluetooth	2402	_	2480
	WLAN802.11 b/g/n/ax(20M)	1	_	13
	WLAN802.11 n/ax(40M)	3	_	11
	WLAN802.11 a/n/ac/ax(20M) 5.2G	36	_	48
	WLAN802.11 n/ac/ax(40M) 5.2G	38	_	46
	WLAN802.11 ac/ax(80M) 5.2G		42	
	WLAN802.11 ac/ax(160M) 5.2G		50	
	WLAN802.11 a/n/ac/ax(20M) 5.3G		_	64
Channel Number	WLAN802.11 n/ac/ax(40M) 5.3G		—	62
(ARFCN)	WLAN802.11 ac/ax(80M) 5.3G		58	
	WLAN802.11 a/n/ac/ax(20M) 5.6G	100	_	144
	WLAN802.11 n/ac/ax(40M) 5.6G	102	_	142
	WLAN802.11 ac/ax(80M) 5.6G	106	_	138
	WLAN802.11 a/n/ac/ax(20M) 5.8G		_	165
	WLAN802.11 n/ac/ax(40M) 5.8G	151	_	159
	WLAN802.11 ac/ax(80M) 5.8G		155	
	Bluetooth	0	—	78

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.sgs.com.tw
```



Max. SAR (1g) (Unit: W/Kg)								
Antenna	Band	Measured	Reported	Channel	Position			
	WLAN 802.11b	0.42	0.43	6	Top side			
	WLAN 802.11ac(80M) 5.2G	0.64	0.69	38	Top side			
Main	WLAN 802.11ac(80M) 5.3G	0.60	0.66	54	Top side			
-	WLAN 802.11ac(80M) 5.6G	0.76	0.81	138	Top side			
	WLAN 802.11ac(80M) 5.8G	0.69	0.74	155	Top side			
	WLAN 802.11b	0.84	0.88	6	Top side			
	Bluetooth(GFSK)	0.04	0.07	78	Top side			
Aux	WLAN 802.11n(40M) 5.2G	1.11	1.19	42	Top side			
Aux	WLAN 802.11n(40M) 5.3G	1.03	1.12	54	Top side			
	WLAN 802.11ac(80M) 5.6G	0.80	0.86	138	Top side			
	WLAN 802.11n(40M) 5.8G	0.77	0.82	155	Top side			

Antenna Information

Tablet mode										
Vendor		WNC								
Antenna			Main					Aux		
Frequency	2400~2500 5150~5250 5250~5350 5470~5725 5725~5875				2400~2500	5150~5250	5250~5350	5470~5725	5725~5875	
Gain (dBi)	1.70 0.31 0.04 -1.10 -0.38					-0.02	-1.74	-1.74	-2.13	-2.95
					Laptop mode	1				
Vendor					W	NC				
Antenna			Main (PIFA)					Aux (PIFA)		
Frequency	2400~2500 5150~5250 5250~5350 5470~5725 5725~5875				5725~5875	2400~2500	5150~5250	5250~5350	5470~5725	5725~5875
Gain (dBi)	1.69	1.60	0.62	0.64	0.46	1.26	-0.97	-1.5	-1.86	-1.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



power table.							
Antenna	SI	SO	MIMO				
Band	Main	Aux	Main + Aux				
WLAN802.11b	V	V	-				
WLAN802.11g	V	V	-				
WLAN802.11n(20M)	V	V	V				
WLAN802.11n(40M)	V	V	V				
WLAN802.11ax(20M)	V	V	V				
WLAN802.11ax(40M)	V	V	V				
WLAN802.11a	V	V	-				
WLAN802.11n(20M) 5G	V	V	V				
WLAN802.11n(40M) 5G	V	V	V				
WLAN802.11ac(20M) 5G	V	V	V				
WLAN802.11ac(40M) 5G	V	V	V				
WLAN802.11ac(80M) 5G	V	V	V				
WLAN802.11ac(160M) 5G	V	V	V				
WLAN802.11ax(20M) 5G	V	V	V				
WLAN802.11ax(40M) 5G	V	V	V				
WLAN802.11ax(80M) 5G	V	V	V				
WLAN802.11ax(160M) 5G	V	V	V				

WLAN802.11 a/b/g/n/ax(20M/40M)/ac/ax(20M/40M/80M/160M) conducted power table:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.sgs.com.tw
```



Tablet mode

Main

Main Antenna							
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
		1	2412		20.00	19.96	
		2	2417		20.00	19.92	
		6	2437		21.00	21.00	
	802.11b	10	2457	1Mbps	20.00	19.93	
		11	2462		20.00	19.98	
		12	2467		20.00	19.93	
		13	2472		20.00	19.92	
		1	2412		18.50	18.42	
		2	2417		18.50	18.44	
		6	2437		21.00	20.93	
	802.11g	10	2457	6Mbps	17.50	17.40	
	Ū.	11	2462		17.50	17.43	
		12	2467		17.50	17.44	
		13	2472		17.50	17.47	
		1	2412	-	17.50	17.48	
		2	2417		17.50	17.46	
		6	2437		21.00	20.96	
2450 MHz	802.11n20-HT0	10	2457	MCS0	16.50	16.44	
		11	2462		16.50	16.48	
		12	2467		16.50	16.46	
		13	2472		16.50	16.45	
		1	2412		17.50	17.41	
		2	2417		17.50	17.42	
		6	2437	1	20.00	19.93	
	802.11ax20-HE0	10	2457	MCS0	16.00	15.90	
		11	2462	1	16.00	15.94	
		12	2467		16.00	15.91	
		13	2472	1	16.00	15.93	
		3	2422		15.50	15.45	
		4	2427		15.50	15.41	
		6	2437	1	17.00	16.92	
	802.11n40-HT0	8	2447	MCS0	15.00	14.97	
		9	2452	1	15.00	14.96	
		10	2457	1	15.00	14.98	
		11	2462		15.00	14.91	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise states are results and the results and the results are results and the results and the results are results are results and the results are r documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488




Main Antenna								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
2450 MHz	802.11ax40-HE0	3 4 6 8 9 10 11	2422 2427 2437 2447 2452 2457 2462	MCS0	15.50 15.50 17.00 15.00 15.00 15.00 15.00	15.47 15.40 16.90 14.94 14.92 14.94 14.97		
		Main	Antenna					
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
	802.11a	36 40 44 48	5180 5200 5220 5240	6Mbps	19.00 19.00 19.00 19.00	18.96 18.95 18.91 18.92		
	802.11n20-HT0	36 40 44 48	5180 5200 5220 5240	MCS0	19.00 19.00 19.00 19.00	18.96 18.94 18.91 18.90		
	802.11ac20-VHT0	36 40 44 48	5180 5200 5220 5240	MCS0	18.00 19.00 19.00 19.00	17.90 18.92 18.93 18.96		
5.15-5.25 GHz	802.11ax20-HE0	40 36 40 44 48	5240 5180 5200 5220 5240	MCS0	19.00 19.00 19.00 19.00 19.00	18.98 18.95 18.94 18.94 18.94		
	802.11n40-HT0	38 46	5190 5230	MCS0	19.00 19.00 19.00	19.00 18.95		
	802.11ac40-VHT0	38 46	5190 5230	MCS0	18.00 18.00 19.00	17.94 18.97		
	802.11ax40-HE0	38 46	5190 5230	MCS0	19.00 19.00 19.00	18.91 18.93		
	802.11ac80-VHT0 802.11ax80-HE0	42 42	5210 5210	MCS0 MCS0	18.50 18.00	18.41 17.92		
	802.11ac160-VHT0 802.11ax160-HE0		5250 5250	MCS0 MCS0	15.00 15.00	14.93 14.91		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488






		Mair	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		19.50	19.42
	802.11a	56	5280	6Mbps	19.50	19.44
	002.118	60	5300	olviops	19.50	19.43
		64	5320		19.00	18.91
		52	5260		19.50	19.41
	802.11n20-HT0	56	5280	MCS0	19.50	19.47
	002.111201110	60	5300	Meee	19.50	19.45
		64	5320		18.50	18.42
		52	5260	MCS0	19.50	19.47
	802.11ac20-VHT0	56	5280		19.50	19.43
	002.110020 11110	60	5300		19.50	19.46
5.25-5.35 GHz		64	5320		17.75	17.73
0.20 0.00 01 12		52	5260		19.50	19.44
	802.11ax20-HE0	56	5280	MCS0	19.50	19.43
	002.110,201120	60	5300	MOOD	19.50	19.42
		64	5320		18.00	17.94
	802.11n40-HT0	54	5270	MCS0	19.50	19.48
	002.1111401110	62	5310	MOOD	17.50	17.47
	802.11ac40-VHT0	54	5270	MCS0	19.50	19.46
		62	5310	10000	16.75	16.72
	802.11ax40-HE0	54	5270	MCS0	19.50	19.40
		62	5310		17.00	16.95
	802.11ac80-VHT0	58	5290	MCS0	18.00	17.90
	802.11ax80-HE0	58	5290	MCS0	17.50	17.45

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Main Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
	802.11a	100 104 116 120 136 140	5500 5520 5580 5600 5680 5700	6Mbps	19.50 19.50 19.50 19.50 19.50 19.50 18.50	19.46 19.48 19.43 19.41 19.45 18.46			
	802.11n20-HT0	144 100 104 116 120 136 140	5720 5500 5520	19.50 19.00 19.50 19.50 19.50 19.50 19.50 18.00	19.43 18.93 19.41 19.42 19.45 19.45 19.41 17.94				
5600 MHz	802.11ac20-VHT0	144 100 104 116 120 136 140 144	5720 5500 5520 5580 5600 5680 5700 5720	MCS0 MCS0	19.50 18.50 19.50 19.50 19.50 19.50 17.50 19.50	19.41 18.42 19.44 19.43 19.42 19.46 17.42 19.46			
	802.11ax20-HE0	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720		19.00 19.50 19.50 19.50 19.50 19.50 18.00 19.50	18.92 19.42 19.48 19.42 19.47 19.47 17.94 19.44			
	802.11n40-HT0	102 110 118 134 142	5510 5550 5590 5670 5710	MCS0	18.50 19.50 19.50 19.50 19.50	18.43 19.45 19.42 19.46 19.47			
	802.11ac40-VHT0	102 110	5510 5550 5590 5670 5710	MCS0	17.75 19.50 19.50 18.75 19.50	17.74 19.44 19.40 18.71 19.47			

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.sgs.com.tw
```



Main Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		102	5510		18.50	18.44			
		110	5550		19.50	19.45			
	802.11ax40-HE0	118	5590	MCS0	19.50	19.44			
		134	5670		19.00	18.96			
		142	5710		19.50	19.47			
		106	5530		19.00	19.00			
5600 MHz	802.11ac80-VHT0	122	5610	MCS0	19.50	19.41			
		138	5690		19.50	19.50			
		106	5530		18.50	18.48			
	802.11ax80-HE0	122	5610	MCS0	19.50	19.41			
		138	5690		19.50	19.43			
	802.11ac160-VHT0		5570	MCS0	15.00	14.91			
	802.11ax160-HE0	114	5570	MCS0	15.50	15.43			
	Main Antenna								
Max. Rated									
						Average			
Dond	Mada	Channel	Frequency	Data Rate	Avg. Power + Max.	Average			
Band	Mode	Channel	(MHz)	Dala Rale		power			
			、 <i>,</i>		Tolerance	(dBm)			
					(dBm)	10.10			
	000.44-	149	5745		19.50	19.43			
	802.11a	157	5785	6Mbps	19.50	19.46			
		165	5825		19.50	19.47			
		149	5745		19.50	19.43			
	802.11n20-HT0	157	5785	MCS0	19.50	19.45			
		165	5825		19.50	19.40			
		149	5745	MOOO	19.50	19.47			
	802.11ac20-VHT0	157	5785	MCS0	19.50	19.45			
		165	5825		19.50	19.42			
5800 MHz	000 44	149	5745	MOOD	19.50	19.44			
	802.11ax20-HE0	157	5785	MCS0	19.50	19.48			
		165	5825		19.50	19.44			
	802.11n40-HT0	151	5755	MCS0	19.50	19.41			
		159	5795		19.50	19.46			
	802.11ac40-VHT0	151	5755	MCS0	19.50	19.45			
		159	5795		19.50	19.41			
	802.11ax40-HE0	151	5755	MCS0	19.50	19.44			
		159	5795		19.50	19.43			
	802.11ac80-VHT0	155	5775	MCS0	19.50	19.50			
	802.11ax80-HE0	155	5775	MCS0	19.00	18.95			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Aux

	Aux Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
	802.11b	1 2 6 10 11	2412 2417 2437 2457 2462 2462	1Mbps	19.50 19.50 21.00 19.50 19.50	19.46 19.40 20.94 19.42 19.48				
	802.11g	12 13 1 2 6 10	2467 2472 2412 2417 2437 2457	6Mbps	19.50 19.50 18.50 18.50 21.00 18.00	19.47 19.48 18.47 18.45 20.90 17.92				
	602.1 Tg	11 12 13 1	2462 2467 2472 2412		18.00 18.00 18.00 18.50	17.98 17.96 17.93 18.46				
2450 MHz	802.11n20-HT0	2 6 10 11 12	2417 2437 2457 2462 2467	MCS0	18.50 21.00 17.50 17.50 17.50	18.45 20.96 17.43 17.41 17.40				
	802.11ax20-HE0	13 1 2 6 10 11 12 13	2472 2412 2417 2437 2457 2462 2462 2467 2472	MCS0	17.50 18.50 20.00 17.00 17.00 17.00 17.00	17.42 18.42 18.41 19.92 16.93 16.90 16.92 16.95				
	802.11n40-HT0	3 4 6 8 9 10 11	2472 2422 2427 2437 2447 2452 2452 2457 2462	MCS0	17.00 17.00 17.00 15.00 15.00 15.00 15.00	16.92 16.92 16.94 14.96 14.98 14.92 14.97				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號




Aux Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
2450 MHz	802.11n40-HE0	3 4 6 8 9 10 11	2422 2427 2437 2447 2452 2457 2462	MCS0	17.00 17.00 15.00 15.00 15.00 15.00	16.95 16.94 16.95 14.91 14.91 14.95 14.98			
		Aux	Antenna						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
	802.11a	36 40 44 48	5180 5200 5220 5240	6Mbps	17.50 17.50 17.50 17.50	17.42 17.43 17.45 17.47			
	802.11n20-HT0	36 40 44 48	5180 5200 5220 5240	MCS0	17.50 17.50 17.50 17.50	17.41 17.40 17.43 17.45			
	802.11ac20-VHT0	36 40 44 48	5180 5200 5220 5240	MCS0	17.50 17.50 17.50 17.50 17.50	17.42 17.41 17.42 17.42 17.44			
5.15-5.25 GHz	802.11ax20-HE0	36 40 44	5180 5200 5220	MCS0	17.50 17.50 17.50	17.46 17.44 17.43			
	802.11n40-HT0	48 38 46	5240 5190 5230	MCS0	17.50 17.50 17.50	17.46 17.40 17.44			
	802.11ac40-VHT0	38 46	5190 5230	MCS0	17.50 17.50 17.50	<u>17.43</u> 17.42			
	802.11ax40-HE0	38 46	5190 5230	MCS0	17.50 17.50	17.47 17.44			
	802.11ac80-VHT0 802.11ax80-HE0	42 42	5210 5210	MCS0 MCS0	17.50 17.50	17.49 17.47			
	802.11ac160-VHT0 802.11ax160-HE0	50 50	5250 5250	MCS0 MCS0	15.50 15.50	15.45 15.42			

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號






	Aux Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		52	5260		18.50	18.40				
	802.11a	56	5280	6Mbps	18.50	18.44				
	002.11a	60	5300	olviops	18.50	18.42				
		64	5320		18.50	18.45				
		52	5260		18.50	18.46				
	802.11n20-HT0	56	5280	MCS0	18.50	18.47				
	002.11120-1110	60	5300	10000	18.50	18.44				
		64	5320		18.50	18.42				
		52	5260	MCS0	18.50	18.43				
	802.11ac20-VHT0	56	5280		18.50	18.42				
		60	5300		18.50	18.43				
5.25-5.35 GHz		64	5320		17.50	17.44				
0.20 0.00 0112		52	5260		18.50	18.43				
	802.11ax20-HE0	56	5280	MCS0	18.50	18.44				
	002.110,201120	60	5300	MOOD	18.50	18.46				
		64	5320		18.50	18.40				
	802.11n40-HT0	54	5270	MCS0	18.50	18.48				
	002.1111401110	62	5310	10000	17.50	17.50				
	802.11ac40-VHT0	54	5270	MCS0	18.50	18.43				
		62	5310	10000	16.75	16.71				
	802.11ax40-HE0	54	5270	MCS0	18.50	18.42				
		62	5310		17.00	16.90				
	802.11ac80-VHT0	58	5290	MCS0	18.00	17.95				
	802.11ax80-HE0	58	5290	MCS0	18.00	17.96				

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488





Aux Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
	802.11a	100 104 116 120 136 140	5500 5520 5580 5600 5680 5700	6Mbps MCS0	19.00 19.00 19.00 19.00 19.00 18.50	18.91 18.90 18.94 18.93 18.98 18.45			
	802.11n20-HT0	144 100 104 116 120 136 140 144	5720 5500 5520 5580 5600 5680 5700		19.00 19.00 19.00 19.00 19.00 19.00 18.50	18.96 18.97 18.93 18.94 18.90 18.95 18.42 18.92			
5600 MHz	802.11ac20-VHT0	100 104 116 120 136 140 144	5720 5500 5520 5580 5600 5680 5700 5720	MCS0	19.00 18.50 19.00 19.00 19.00 19.00 17.00 19.00	18.92 18.41 18.94 18.93 18.91 18.94 16.96 18.95			
	802.11ax20-HE0	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720	MCS0	19.00 19.00 19.00 19.00 19.00 19.00 17.50 19.00	18.90 18.89 18.94 18.93 18.96 17.40 18.97			
	802.11n40-HT0	102 110 118 134 142	5510 5550 5590 5670 5710	MCS0	18.50 19.00 19.00 19.00 19.00	18.44 18.96 18.91 18.91 18.91			
	802.11ac40-VHT0	102 110	5510 5550 5590 5670 5710	MCS0	17.75 19.00 19.00 18.75 19.00	17.72 18.98 18.92 18.71 18.98			

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Aux Antenna								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
		102	5510		18.50	18.48		
		110	5550		19.00	18.97		
	802.11ax40-HE0	118	5590	MCS0	19.00	18.91		
		134	5670		19.00	18.93		
		142	5710		19.00	18.95		
		106	5530		18.50	18.47		
5600 MHz	802.11ac80-VHT0		5610	MCS0	19.00	18.92		
		138	5690		19.00	18.96		
	802.11ax80-HE0	106	5530		18.00	17.97		
		122	5610	MCS0	19.00	18.92		
		138	5690		19.00	18.96		
	802.11ac160-VHT0		5570	MCS0	15.50	15.40		
	802.11ax160-HE0	114	5570	MCS0	15.00	14.93		
		Aux	Antenna					
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
		149	5745		19.00	18.92		
	802.11a	157	5785	6Mbps	19.00	18.95		
		165	5825		19.00	18.93		
		149	5745		19.00	18.90		
	802.11n20-HT0	157	5785	MCS0	19.00	18.94		
		165	5825		19.00	18.92		
		149	5745		19.00	18.93		
	802.11ac20-VHT0	157	5785	MCS0	19.00	18.94		
		165	5825		19.00	18.92		

149

157

165

151

159

151

159

151

159

155

155

5745

5785

5825

5755

5795

5755

5795

5755

5795

5775

5775

MCS0

MCS0

MCS0

MCS0

MCS0

MCS0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

802.11ax20-HE0

802.11n40-HT0

802.11ac40-VHT0

802.11ax40-HE0

802.11ac80-VHT0

802.11ax80-HE0

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

5800 MHz

www.sgs.com.tw

19.00

19.00

19.00

19.00

19.00

19.00

19.00

19.00

19.00

19.00

19.00

18.94

18.91

18.93

18.94

18.91

18.97

18.96

18.91

18.94

19.00

18.95



Laptop mode

Main

		Mair	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		20.00	19.97
		2	2417		20.00	19.96
		6	2437		21.00	21.00
	802.11b	10	2457	1Mbps	20.00	19.95
		11	2462		20.00	19.98
		12	2467		20.00	19.97
		13	2472		20.00	19.90
		1	2412		18.50	18.46
		2	2417		18.50	18.45
		6	2437		21.00	20.91
	802.11g	10	2457	6Mbps	17.50	17.41
	-	11	2462	1	17.50	17.42
		12	2467		17.50	17.47
		13	2472		17.50	17.44
		1	2412		17.50	17.40
		2	2417		17.50	17.47
		6	2437		21.00	20.94
2450 MHz	802.11n20-HT0	10	2457	MCS0	16.50	16.46
		11	2462		16.50	16.44
		12	2467		16.50	16.46
		13	2472		16.50	16.40
		1	2412		17.50	17.46
		2	2417		17.50	17.40
		6	2437		20.00	19.94
	802.11ax20-HE0	10	2457	MCS0	16.00	15.92
		11	2462		16.00	15.90
		12	2467		16.00	15.96
		13	2472		16.00	15.95
		3	2422		15.50	15.42
		4	2427		15.50	15.43
		6	2437		17.00	16.96
	802.11n40-HT0	8	2447	MCS0	15.00	14.92
		9	2452		15.00	14.93
		10	2457		15.00	14.95
		11	2462		15.00	14.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488




Main Antenna								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
2450 MHz	802.11ax40-HE0	3 4 6 8 9 10 11	2422 2427 2437 2447 2452 2457 2462	MCS0	15.50 15.50 17.00 15.00 15.00 15.00 15.00	15.42 15.40 16.96 14.93 14.96 14.91 14.95		
		Main	Antenna					
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)		
	802.11a	36 40 44 48	5180 5200 5220 5240	6Mbps	19.50 20.00 21.00 21.00	19.41 19.91 20.90 20.91		
	802.11n20-HT0	36 40 44 48	5180 5200 5220 5240	MCS0	19.00 20.00 21.00 21.00	18.92 19.90 20.93 20.96		
	802.11ac20-VHT0	36 40 44 48	5180 5200 5220 5240	MCS0	18.00 19.50 20.00 20.00	17.95 19.43 19.92 19.96		
5.15-5.25 GHz	802.11ax20-HE0	40 36 40 44 48	5240 5180 5200 5220 5240	MCS0	19.50 20.00 21.00 21.00	19.43 19.91 20.97 20.93		
	802.11n40-HT0	38 46	5190 5230	MCS0	19.00 21.00	<u>19.00</u> 21.00		
	802.11ac40-VHT0	38 46	5190 5230	MCS0	18.00 20.00	17.93 19.95		
	802.11ax40-HE0	38 46	5190 5230	MCS0	<u>19.00</u> 21.00	18.96 20.95		
	802.11ac80-VHT0 802.11ax80-HE0	42	5210 5210	MCS0 MCS0	18.50 18.00	<u>18.47</u> 17.92		
	802.11ac160-VHT0 802.11ax160-HE0		5250 5250	MCS0 MCS0	15.00 15.00	14.95 14.90		

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.sgs.com.tw
```






		Mair	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		21.00	20.97
	802.11a	56	5280	6Mbps	21.00	20.99
	002.114	60	5300	01010003	21.00	20.94
		64	5320		19.00	19.00
		52	5260		21.00	20.96
	802.11n20-HT0	56	5280	MCS0	21.00	20.93
	002.1111201110	60	5300	meee	21.00	20.94
		64	5320		18.50	18.42
		52	5260	MCS0	20.00	19.90
	802.11ac20-VHT0	56	5280		20.00	19.92
		60	5300		20.00	19.90
5.25-5.35 GHz		64	5320		17.75	17.73
0.20 0.00 0.12		52	5260		21.00	20.92
	802.11ax20-HE0	56	5280	MCS0	21.00	20.95
	0021110/201120	60	5300		21.00	20.90
		64	5320		18.00	17.95
	802.11n40-HT0	54	5270	MCS0	20.50	20.46
	002.111101110	62	5310		17.50	17.42
	802.11ac40-VHT0	54	5270	MCS0	20.00	19.94
		62	5310		16.75	16.71
	802.11ax40-HE0	54	5270	MCS0	20.50	20.45
		62	5310		17.00	16.97
	802.11ac80-VHT0	58	5290	MCS0	18.00	17.96
	802.11ax80-HE0	58	5290	MCS0	17.50	17.44

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






		Mair	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11a	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720	6Mbps	19.50 21.00 21.00 21.00 21.00 18.50 21.00	19.42 20.94 20.95 20.90 20.97 18.41 20.96
	802.11n20-HT0	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720	MCS0	19.00 21.00 21.00 21.00 21.00 18.00 21.00	18.90 20.93 20.93 20.91 20.96 17.95 20.91
5600 MHz	802.11ac20-VHT0	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720	MCS0	18.50 20.00 20.00 20.00 20.00 17.50 20.00	18.47 19.95 19.93 19.92 19.97 17.41 19.88
	802.11ax20-HE0	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720	MCS0	19.00 21.00 21.00 21.00 21.00 18.00 21.00	18.91 20.92 20.91 20.90 20.96 17.92 20.95
	802.11n40-HT0	102 110 118 134 142	5510 5550 5590 5670 5710	MCS0	18.50 21.00 21.00 19.50 21.00	18.46 20.94 20.92 19.43 20.97
	802.11ac40-VHT0	102 110	5510 5550 5590 5670 5710	MCS0	17.75 20.00 20.00 18.75 20.00	17.70 19.97 19.93 18.68 19.95

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





		Mair	n Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		18.50	18.40
		110	5550		21.00	20.95
	802.11ax40-HE0	118	5590	MCS0	21.00	20.91
		134	5670		19.00	18.92
		142	5710		21.00	20.92
		106	5530		19.00	18.93
5600 MHz	802.11ac80-VHT0	122	5610	MCS0	20.00	19.92
		138	5690		21.00	20.99
		106	5530		18.50	18.41
	802.11ax80-HE0	122	5610	MCS0	19.50	19.47
		138	5690		20.00	19.97
	802.11ac160-VHT0		5570	MCS0	15.00	14.90
	802.11ax160-HE0	114	5570	MCS0	15.50	15.45
		Main	Antenna			
					Max. Rated	
					Avg. Power	Average
Band	Mode	Channel	Frequency	Data Rate	+ Max.	Average
Danu	wode	Channel	(MHz)	Dala Rale		power
					Tolerance	(dBm)
		1.10	5745		(dBm)	00.07
	002.110	149	5745	<u>CMbpp</u>	21.00	20.97
	802.11a	157	5785	6Mbps	21.00	20.90
		165	5825		21.00	20.95
	802.11n20-HT0	149	5745	MCS0	21.00	20.92
	002.11120-010	157 165	5785 5825	NIC30	21.00 21.00	20.93
		149				20.90 19.92
	802.11ac20-VHT0	149	5745 5785	MCS0	20.00 20.00	19.92
	002.118620-01110	165	5825	10030	20.00	19.90
		149	5745		20.00	20.91
5800 MHz	802.11ax20-HE0	149	5785	MCS0	21.00	20.91
	002.110,201120	165	5825	MOOD	21.00	20.95
		4 = 4			21.00	20.98
	802.11n40-HT0	151 159	5755 5795	MCS0	21.00	20.95
		155	5755		20.00	19.95
	802.11ac40-VHT0	159	5795	MCS0	20.00	19.96
		151	5755		21.00	20.95
	802.11ax40-HE0	159	5795	MCS0	21.00	20.90
	802.11ac80-VHT0	155	5775	MCS0	19.50	19.47
	802.11ax80-HE0	155	5775	MCS0	19.00	18.91
	002.110.00 HE0	100	5115	10000	10.00	10.51

. . . .

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Aux

		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11b	1 2 6 10 11 12 13	2412 2417 2437 2457 2462 2462 2467 2472	1Mbps	19.50 19.50 21.00 19.50 19.50 19.50 19.50	19.45 19.43 20.94 19.42 19.44 19.44 19.44
	802.11g	1 2 6 10 11 12 13	2412 2417 2437 2457 2462 2462 2467 2472	6Mbps	18.50 18.50 21.00 18.00 18.00 18.00 18.00	18.40 18.44 20.91 17.96 17.94 17.96 17.93
2450 MHz	802.11n20-HT0	1 2 6 10 11 12 13	2412 2417 2437 2457 2462 2462 2467 2472	MCS0	18.50 18.50 21.00 17.50 17.50 17.50 17.50	18.44 18.42 20.91 17.48 17.47 17.45 17.45
	802.11ax20-HE0	1 2 6 10 11 12 13	2412 2417 2437 2457 2462 2462 2467 2472	MCS0	18.50 18.50 20.00 17.00 17.00 17.00 17.00	18.40 18.41 19.97 16.92 16.97 16.95 16.92
	802.11n40-HT0	3 4 6 8 9 10 11	2422 2427 2437 2447 2452 2452 2457 2462	MCS0	17.00 17.00 15.00 15.00 15.00 15.00 15.00	16.90 16.93 16.94 14.93 14.95 14.92 14.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號




		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2450 MHz	802.11n40-HE0	.11n40-HE0 9 10		MCS0	17.00 17.00 17.00 15.00 15.00 15.00	16.94 16.91 16.98 14.95 14.92 14.96
		11	2457 2462		15.00	14.97
		Αυχ	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11a	36 40 44 48	5180 5200 5220 5240	6Mbps	19.50 20.00 21.00 21.00	19.44 19.91 20.90 20.94
	802.11n20-HT0	36 40 44 48	5180 5200 5220 5240	MCS0	19.00 20.00 21.00 21.00	18.97 19.94 20.98 20.93
	802.11ac20-VHT0	36 40 44 48	5180 5200 5220 5240	MCS0	18.00 19.00 20.00 20.00	17.92 18.93 19.97 19.91
5.15-5.25 GHz	802.11ax20-HE0	36 40 44 48	5180 5200 5220 5240	MCS0	19.00 20.00 21.00 21.00	18.94 19.91 20.96 20.92
	802.11n40-HT0	38	5190	MCS0	19.00	19.00
	802.11ac40-VHT0	46 38 46	5230 5190 5230	MCS0	21.00 18.00 20.00	21.00 17.93 19.97
	802.11ax40-HE0	38 46	5190 5230	MCS0	19.00 21.00	18.91 20.96
	802.11ac80-VHT0 802.11ax80-HE0	42 42	5210 5210	MCS0 MCS0	18.50 18.50	18.42 18.47
	802.11ac160-VHT0 802.11ax160-HE0	50 50	5250 5250	MCS0 MCS0	15.50 15.50	15.46 15.43

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號






		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		21.00	20.92
	802.11a	56	5280	6Mbps	21.00	21.00
	002.114	60	5300	olviops	21.00	20.98
		64	5320		19.00	18.98
		52	5260		21.00	20.95
	802.11n20-HT0	56	5280	MCS0	21.00	20.93
	002.11120-1110	60	5300	10000	21.00	20.96
		64	5320		19.00	18.91
		52	5260	MCS0	20.00	19.92
	802.11ac20-VHT0	56	5280		20.00	19.98
	002.118620-01110	60	5300		20.00	19.93
5.25-5.35 GHz		64	5320		17.50	17.41
0.20-0.00 0112		52	5260		21.00	20.94
	802.11ax20-HE0	56	5280	MCS0	21.00	20.92
	002.11020-1120	60	5300	10000	21.00	20.96
		64	5320		18.50	18.44
	802.11n40-HT0	54	5270	MCS0	20.50	20.45
	002.11140-1110	62	5310	10000	17.50	17.48
	802.11ac40-VHT0	54	5270	MCS0	20.00	19.98
	002.11ac40-01110	62	5310	10000	16.75	16.72
	802.11ax40-HE0	54	5270	MCS0	20.50	20.44
		62	5310	10000	17.00	16.98
	802.11ac80-VHT0	58	5290	MCS0	18.00	17.93
	802.11ax80-HE0	58	5290	MCS0	18.00	17.94

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11a	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720	6Mbps	19.50 21.00 21.00 21.00 21.00 18.50 21.00	19.42 20.98 20.94 20.93 20.96 18.46 20.90
	802.11n20-HT0	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720	MCS0	19.00 21.00 21.00 21.00 21.00 21.00 18.50 21.00	18.92 20.95 20.91 20.95 20.95 20.98 18.40 20.95
5600 MHz	802.11ac20-VHT0	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720	MCS0	18.50 20.00 20.00 20.00 20.00 17.00 20.00	18.47 19.97 19.90 19.93 19.91 16.93 19.91
	802.11ax20-HE0	100 104 116 120 136 140 144	5500 5520 5580 5600 5680 5700 5720	MCS0	19.00 21.00 21.00 21.00 21.00 21.00 17.50 21.00	18.93 20.96 20.94 20.90 20.98 17.42 20.90
	802.11n40-HT0	102 110 118 134 142	5510 5550 5590 5670 5710	MCS0	18.50 21.00 21.00 19.00 21.00	18.48 20.94 20.92 18.94 20.97
	802.11ac40-VHT0	102 110	5510 5550 5590 5670 5710	MCS0	17.75 20.00 20.00 18.75 20.00	17.70 19.90 19.95 18.73 19.92

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		18.50	18.43
		110	5550		21.00	20.96
	802.11ax40-HE0	118	5590	MCS0	21.00	20.91
		134	5670		19.50	19.45
		142	5710		21.00	20.98
		106	5530		18.50	18.48
5600 MHz	802.11ac80-VHT0	122	5610	MCS0	20.00	19.92
		138	5690		21.00	20.99
		106	5530		18.00	17.90
	802.11ax80-HE0	122	5610	MCS0	19.50	19.42
		138	5690		20.00	19.92
	802.11ac160-VHT0	114	5570	MCS0	15.50	15.41
	802.11ax160-HE0	114	5570	MCS0	15.00	14.98
		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		21.00	20.96
	802.11a	157	5785	6Mbps	21.00	20.90


					(dBm)	
		149	5745		21.00	20.96
	802.11a	157	5785	6Mbps	21.00	20.90
		165	5825		21.00	20.93
		149	5745		21.00	20.97
	802.11n20-HT0	157	5785	MCS0	21.00	20.95
		165	5825		21.00	20.91
		149	5745		20.00	19.93
	802.11ac20-VHT0	157	5785	MCS0	20.00	19.91
		165	5825		20.00	19.94
5800 MHz		149	5745		21.00	20.93
3000 MITZ	802.11ax20-HE0	157	5785	MCS0	21.00	20.97
		165	5825		21.00	20.93
	802.11n40-HT0	151	5755	MCS0	21.00	20.96
	002.11140-0110	159	5795	WC30	21.00	20.98
	802.11ac40-VHT0	151	5755	MCS0	20.00	19.94
	002.11ac40-v1110	159	5795	WC30	20.00	19.90
	802.11ax40-HE0	151	5755	MCS0	21.00	20.97
	002.11aX40-HE0	159	5795	10030	21.00	20.94
	802.11ac80-VHT0	155	5775	MCS0	19.00	18.91
	802.11ax80-HE0	155	5775	MCS0	19.00	18.95

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488





Bluetooth conducted power table:

		1Mbps		2Mb	ps	3Mbps		
Mode	Channel	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	CH 00	2402		8.91		8.08		8.10
BR/EDR	CH 39	2441	10.50	9.45	10.00	8.55	10.00	8.54
	CH 78	2480	Ī	9.82		8.73		8.74

RU power table:

Notebook mode	2.4GH	z - Main	5.2GHz - Main			5.	3GHz - Ma	ain		5.6GHz	5.6GHz - Main				5.8GHz - Main		
WLAN 802.11ax																	
Maximum specified	20MHz	40MHz	20MHz	40MHz	80MHz	160MHz	20MHz	40MHz	80MHz	20MHz	40MHz	80MHz	160MHz	20MHz	40MHz	80MH	
output power (dBm)																	
26 Tones	17	13	18	17	13	9	18	16.5	12.5	18	17	15	9.5	18	17	14	
52 Tones	18	14	19	18	14	10	19	17.5	13.5	19	18	16	10.5	19	18	15	
106 Tones	19	15	20	19	15	11	20	18.5	14.5	20	19	17	11.5	20	19	16	
242 Tones	20	16	21	20	16	12	21	19.5	15.5	21	20	18	12.5	21	20	17	
484 Tones		17		21	17	13		20.5	16.5		21	19	13.5		21	18	
996 Tones					18	14			17.5			20	14.5			19	
2x996 Tones						15							15.5				
Tablet mode	2.4GH	z - Main		5.2GHz	z - Main		5.	3GHz - Ma	ain		5.6GHz	z - Main		5.	8GHz - Ma	in	
Tablet mode WLAN 802.11ax	2.4GH	z - Main		5.2GHz	z - Main	1	5.	3GHz - Ma	ain I		5.6GHz	z - Main		5.	8GHz - Ma	in	
	2.4GHz	z - Main 40MHz	20MHz	5.2GHz 40MHz	z - Main 80MHz	160MHz	5. 20MHz	3GHz - Ma 40MHz	ain 80MHz	20MHz	5.6GHz 40MHz	z - Main 80MHz	160MHz		8GHz - Ma 40MHz		
WLAN 802.11ax			20MHz			160MHz				20MHz			160MHz			in 80MH	
WLAN 802.11ax Maximum specified			20MHz 16			160MHz 9				20MHz 16.5			160MHz 9.5				
WLAN 802.11ax Maximum specified output power (dBm)	20MHz	40MHz		40MHz	80MHz		20MHz	40MHz	80MHz		40MHz	80MHz		20MHz	40MHz	80MH	
WLAN 802.11ax Maximum specified output power (dBm) 26 Tones	20MHz 17	40MHz 13	16	40MHz 15	80MHz 13	9	20MHz 16.5	40MHz 15.5	80MHz 12.5	16.5	40MHz 15.5	80MHz 14.5	9.5	20MHz 16.5	40MHz 15.5	80MH	
WLAN 802.11ax Maximum specified output power (dBm) 26 Tones 52 Tones	20MHz 17 18	40MHz 13 14	16 17	40MHz 15 16	80MHz 13 14	9 10	20MHz 16.5 17.5	40MHz 15.5 16.5	80MHz 12.5 13.5	16.5 17.5	40MHz 15.5 16.5	80MHz 14.5 15.5	9.5 10.5	20MHz 16.5 17.5	40MHz 15.5 16.5	80MH 14 15	
WLAN 802.11ax Maximum specified output power (dBm) 26 Tones 52 Tones 106 Tones	20MHz 17 18 19	40MHz 13 14 15	16 17 18	40MHz 15 16 17	80MHz 13 14 15	9 10 11	20MHz 16.5 17.5 18.5	40MHz 15.5 16.5 17.5	80MHz 12.5 13.5 14.5	16.5 17.5 18.5	40MHz 15.5 16.5 17.5	80MHz 14.5 15.5 16.5	9.5 10.5 11.5	20MHz 16.5 17.5 18.5	40MHz 15.5 16.5 17.5	80MH 14 15 16	
WLAN 802.11ax Maximum specified output power (dBm) 26 Tones 52 Tones 106 Tones 242 Tones	20MHz 17 18 19	40MHz 13 14 15 16	16 17 18	40MHz 15 16 17 18	80MHz 13 14 15 16	9 10 11 12	20MHz 16.5 17.5 18.5	40MHz 15.5 16.5 17.5 18.5	80MHz 12.5 13.5 14.5 15.5	16.5 17.5 18.5	40MHz 15.5 16.5 17.5 18.5	80MHz 14.5 15.5 16.5 17.5	9.5 10.5 11.5 12.5	20MHz 16.5 17.5 18.5	40MHz 15.5 16.5 17.5 18.5	80MH 14 15 16 17	

Notebook mode	2.4GH	lz - Aux		5.2GHz - Aux			5	.3GHz - Ai	XL		5.6GH	lz - Aux		5.8GHz - Aux		
WLAN 802.11ax Maximum specified output power (dBm)	20MHz	40MHz	20MHz	40MHz	80MHz	160MHz	20MHz	40MHz	80MHz	20MHz	40MHz	80MHz	160MHz	20MHz	40MHz	80MHz
26 Tones	17	13	18	17	13.5	9.5	18	16.5	13	18	17	15	9	18	17	14
52 Tones	17	13	10	17	13.5	9.5	10	17.5	13	10	17	16	10	10	17	14
106 Tones	10	14	20	10	14.5	11.5	20	17.5	14	20	10	17	10	20	10	16
242 Tones	20	16	20	20	16.5	12.5	20	19.5	16	20	20	18	12	20	20	17
484 Tones	20	17	21	21	17.5	13.5	21	20.5	17	21	21	19	13	-	21	18
996 Tones					18.5	14.5			18			20	14			19
2x996 Tones						15.5							15			
Tablet mode	2.4GH	lz - Aux		5.2GH	lz - Aux		5	.3GHz - Ai	XL		5.6GH	lz - Aux		5	i.8GHz - Au	JX
WLAN 802.11ax Maximum specified output power (dBm)	20MHz	40MHz	20MHz	40MHz	80MHz	160MHz	20MHz	40MHz	80MHz	20MHz	40MHz	80MHz	160MHz	20MHz	40MHz	80MH
26 Tones	17	13	14.5	13.5	12.5	9.5	15.5	14.5	13	16	15	14	9	16	15	14
52 Tones	18	14	15.5	14.5	13.5	10.5	16.5	15.5	14	17	16	15	10	17	16	15
106 Tones	19	15	16.5	15.5	14.5	11.5	17.5	16.5	15	18	17	16	11	18	17	16
242 Tones	20	16	17.5	16.5	15.5	12.5	18.5	17.5	16	19	18	17	12	19	18	17
484 Tones		17		17.5	16.5	13.5		18.5	17		19	18	13		19	18
996 Tones					17.5	14.5			18			19	14			19
2x996 Tones						15.5							15			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



dB/div Ref 23	.00 dBm						Mkr3 7. 7.2	560 n 26 dB
g 		1		2	3			
		_ <u>γ</u>		Y	_ ∕─			(
.0				[
.0								
.0								
.0								لب
.0								
0								
enter 2.4800000 s BW 6 MHz	000 GHz	#\(D)/	/ 3.6 kHz			Sweep 12		pan 0

BT Duty=2.729/3.743=0.729(scaling=1.372)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Wifi b Duty=8.07/8.34=0.968(Scaling=1.033)

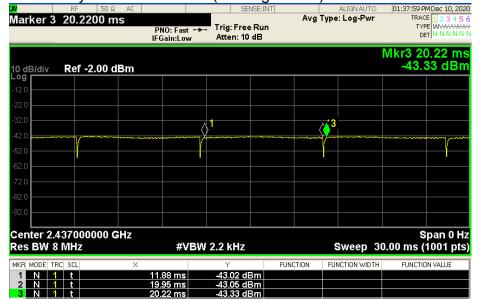

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



RF	50 Ω AC		SENSE:I		ALIGNAUTO	02:27:32 PM Dec 10, 20 TRACE 1 2 3 4 5
arker 1 2.341		PNO: Fast 🔸 IFGain:Low	. Trig: Free Ru Atten: 40 dB	n	Type. Log-Fwi	TYPE WWWWWW DET N N N N N
dB/div Ref 2	3.00 dBm					Mkr1 2.341 m -25.29 dBr
	3.00 abiii					
13.0						
3.00						
.00						
7.0			1		<u></u>	
7.0		manan y			Yy	
7.0		V			V	
7.0						
7.0						
7.0						
enter 5.280000	000 GHz					Span 0 H
es BW 6 MHz		#VBW	3.6 kHz		Sweep 6.	000 ms (1001 pt
KRI MODEI TRCI SCLI	×		Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
		2.341 ms	-25.29 dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
		1.350 ms	-23.93 dBm			

Wifi a dutv=2.009/2.150=0.934(scaling=1.071)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Wifi n40 duty=3.708/4.02=0.922(scaling=1.085)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Wifi ac80 duty=3.76/4.007=0.938(scaling=1.066)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

Use chipset specific software to control the EUT, and makes it transmit in maximum power. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

The device is a convertible laptop computer with RF feature. The device will adjust the maximum output power for different user scenario and EUT was tested as below based on KDB inquiry.

Tablet mode

SAR is measured with back/edges _0mm (reduced power)

Laptop mode

SAR is not required for this mode because the separation distance between the antennas and keyboard bottom surface is larger than 20cm.

Note:

802.11b DSSS SAR Test Requirements:

- 1. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is \leq 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.11g/n OFDM SAR Test Exclusion Requirements:

3. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

- 4. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- 5. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 6. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 7. BT and WLAN Aux use the same antenna path, but they can't transmit at the same time.
- 8. According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is \leq 100 MHz.
- 9. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is \geq 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (~10% from the 1-g SAR limit)

```
www.sqs.com.tw
```

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.6 Operating modes validation by power measurement

The device is a convertible laptop computer with predefined single fixed power to each device modes.


For the operating modes validation, the measured conducted output power is monitored qualitatively to identify the triggering characteristics and recorded quantitatively.

DUT operating mode	Lid Angle description	WLAN TX state
Lid-close	$0^{\circ} \leq \text{Lid angle} < 45^{\circ}$	No TX transmission
Notebook	$45^{\circ} \leq \text{Lid angle} \leq 200^{\circ}$	Full Power Level
Tablet	$200^{\circ} \le \text{Lid angle} \le 360^{\circ}$	Reduced Power Level

1.6.1 Results and conclusion

The measured output power versus lid angle is tabulated in the following table based on the guidance from 2019-11 TCB workshop, and the triggering verification complies with the device mode / power level declared by the manufacturer.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Antenna	Operation mode	Lid angle	802.11b	802.11n(40M) 5.2G	802.11n(40M) 5.3G	802.11a 5.3G	802.11ac(80M) 5.6G	802.11ac(80M) 5.8G	802.11n(40M) 5.8G
		0*	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	20° 30°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		40°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Laptop	50°	20.93	20.93	20.48	20.92	20.98	19.49	20.85
		45° 40°	20.83 n/a	20.89 n/a	20.37 n/a	20.98 n/a	20.90 n/a	19.35 n/a	21.00 n/a
		41°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	42°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		43° 44°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		45°	20.98	20.88	20.43	20.83	20.88	19.33	20.86
		46°	20.87	21.00	20.38	20.99	20.85	19.48	20.95
		47° 48°	20.82 20.95	20.91 20.86	20.37 20.39	20.86 20.94	20.95 20.82	19.40 19.50	20.85 20.90
		49*	20.93	20.90	20.59	20.84	20.99	19.42	21.00
		50*	20.97	20.90	20.37	20.87	20.87	19.38	20.96
		60° 70°	20.81 20.96	20.81 20.94	20.36 20.45	20.83 21.00	20.90 20.91	19.38 19.35	20.89 20.91
		80*	20.96	20.94	20.45	20.99	20.91	19.35	20.91
	Laptop	90°	20.94	20.91	20.35	20.83	20.87	19.39	20.92
		100° 110°	20.95	21.00 20.96	20.43 20.36	20.90	20.86	19.43 19.44	20.89 20.92
		120*	20.85	20.96	20.38	20.95	20.84	19.44	20.92
		130°	20.95	20.97	20.34	20.99	20.82	19.45	21.00
		140° 150°	20.86 20.92	21.00 20.88	20.35 20.40	20.84 20.98	20.99 20.95	19.46 19.32	20.88 20.93
		160°	20.92	20.89	20.40	20.90	20.99	19.45	20.93
		170°	20.89	20.88	20.38	20.83	20.97	19.39	20.93
		180° 190°	20.83	20.85	20.35 20.31	20.94	20.85	19.43	20.98 20.94
	Tablet	200*	20.84	20.85	19.48	19.45	19.40	19.50	19.38
		195°	20.85	20.96	20.45	20.97	20.87	19.50	20.93
	1.0.1	196°	20.82	20.81	20.42	20.90	20.83	19.37	20.91
	Laptop	197* 198*	20.84 20.89	20.91 20.83	20.49 20.31	20.88 20.99	20.85 20.84	19.46 19.34	21.00 20.97
		199°	20.81	20.87	20.38	20.84	20.84	19.41	20.92
		200*	20.86	18.97	19.39	19.39	19.38	19.43	19.39
		201° 202°	20.99 20.89	18.89 18.82	19.43 19.37	19.47 19.31	19.33 19.32	19.44 19.50	19.42 19.50
		202° 203°	20.89	18.92	19.50	19.31	19.32	19.30	19.39
		204°	20.85	18.89	19.48	19.43	19.34	19.37	19.47
		205° 215°	20.94 20.89	18.87 18.97	19.40 19.47	19.48	19.49 19.39	19.37 19.33	19.36 19.42
		225°	20.90	18.95	19.34	19.36	19.31	19.39	19.47
		235°	20.93	19.00	19.48	19.33	19.44	19.33	19.33
		245° 255°	20.96	18.91 18.98	19.40 19.42	19.34 19.46	19.49 19.31	19.33 19.46	19.32 19.39
	Tablet	255°	20.94	18.93	19.42	19.38	19.31	19.40	19.42
		275°	20.84	18.93	19.34	19.42	19.50	19.36	19.40
		285° 295°	20.97 20.90	18.83 18.86	19.50 19.40	19.45 19.34	19.39 19.42	19.36 19.37	19.46 19.45
		295 305°	20.90	18.89	19.40	19.34	19.42	19.37	19.45
		315°	20.81	18.97	19.33	19.47	19.45	19.40	19.35
		325° 335°	20.81	18.92	19.36 19.35	19.31	19.43 19.49	19.31	19.34 19.35
		335"	20.91	18.94	19.35	19.45	19.49	19.46	19.35
		355°	20.99	18.99	19.41	19.34	19.47	19.46	19.35
		360°	20.94	18.87	19.46	19.33	19.38	19.38	19.39
		350° 340°	20.81 20.85	18.88	19.50 19.34	19.37	19.37	19.45 19.32	19.43 19.32
Main		330°	20.81	18.98	19.49	19.50	19.33	19.49	19.38
		320°	20.96	18.82	19.44	19.44	19.38	19.37	19.32
		310° 300°	20.83 20.85	18.98 18.91	19.44 19.48	19.49 19.41	19.49 19.41	19.45 19.39	19.45 19.45
		290°	20.99	18.83	19.48	19.31	19.44	19.31	19.49
	Tablet	280°	20.84	18.95	19.43	19.35	19.38	19.34	19.33
		270° 260°	20.87	18.84	19.43 19.43	19.41	19.33 19.40	19.46 19.38	19.31 19.39
		250°	20.00	18.90	19.50	19.39	19.34	19.33	19.32
		240°	20.92	18.90	19.48	19.45	19.40	19.49	19.41
		230° 220°	20.93 20.98	19.00 18.83	19.44 19.34	19.39 19.39	19.31 19.34	19.33 19.37	19.36 19.33
		210°	21.00	18.98	19.46	19.33	19.43	19.31	19.42
		200°	20.96	18.96	19.38	19.41	19.39	19.36	19.47
	Laptop	190° 195°	20.81 20.90	20.95 20.81	20.40 20.38	20.82 20.93	20.99 20.94	19.49 19.34	20.92 20.87
	Tablet	200°	20.90	18.81	19.38	19.40	19.39	19.34	19.44
		199*	20.99	20.86	20.49	20.92	20.98	19.32	20.95
		198° 197°	20.91 20.89	20.94 20.91	20.32 20.32	20.91 20.97	20.98	19.40	20.92 21.00
		197*	20.89	20.91	20.32	20.89	20.91	19.46	20.81
		195*	20.89	20.82	20.34	20.88	20.98	19.36	20.82
		194° 193°	20.83 20.93	20.81 20.95	20.43 20.42	20.90 20.82	20.92 20.98	19.48 19.40	20.94 20.99
		193* 192*	20.93	20.95	20.42	20.82	20.98	19.40	20.99 20.86
		191°	20.89	20.98	20.39	21.00	20.83	19.48	20.92
		190°	20.91	21.00	20.39	20.81	20.93	19.40	20.96
		180° 170°	20.82	20.97 20.85	20.45 20.43	20.82	20.94	19.49	20.82
	Laptop	160°	20.93	20.85	20.43	20.86	20.98	19.40	20.85
		150°	20.93	20.86	20.43	20.83	20.86	19.43	20.96
		140° 130°	20.87 20.95	20.91 20.95	20.41 20.42	21.00 20.86	20.90 20.96	19.49 19.46	20.89 20.91
		130° 120°	20.95	20.95	20.42	20.86	20.96	19.46	20.91 20.96
		110°	20.97	20.96	20.37	20.90	20.92	19.41	20.87
		100°	21.00	20.87	20.48	20.91	20.88	19.47	20.82
		90° 80°	20.96 20.91	20.81 20.95	20.37 20.34	20.83 20.96	20.95	19.35 19.38	21.00 20.83
		70°	20.97	20.92	20.34 20.46	20.98	20.92	19.47	20.83
		60°	20.99	20.81	20.40	20.81	21.00	19.44	20.82
	Lid -!	50° 40°	20.94 n/a	20.85 n/a	20.33	20.96 n/a	20.87	19.47	20.87 n/a
	Lid close Laptop	40° 45°	n/a 20.93	n/a 20.91	n/a 20.45	n/a 20.98	n/a 20.99	n/a 19.45	n/a 20.93
		44°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		43°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		42° 41°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		40°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		39°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		38° 37°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
	Lid close	37*	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
	Liu Cluse	35°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		25° 15°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		15° 5°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		4°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		3° 2°	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		2" 1°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Operating mode validation by power measurement

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

www.sgs.com.tw



0M) 5.6G 802.11ac(80M) 5.8G 802.11n(40M) 5.8G

802.11a 5.3G 802.11

Antenna	Operation mode	Lid angle	802.11b	802.11ac(80M) 5.2G	802.11n(40M) 5.2G	802.11n(40M) 5.3G	802.11a 5.3G		802.11ac(80M) 5.8G	802.11n(40M) 5.8G
		0° 10°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
	Lid close	20*	n/a p/a	n/a p/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
	Lid close	20°	n/a n/a	n/a	n/a	n/a n/a	n/a	n/a	n/a n/a	n/a
		40*	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Laptop	50*	20.83	n/a 18.44	n/a 21.00	20.44	20.96	20.88	18.89	20.81
	Laptop	45*	20.83 20.96	18.50	20.82	20.47	20.93	20.89	18.98	20.93
		40*	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	41*	n/a	n/a	n/a	n/a	n/a	n/a	n/a n/a	n/a
	Lid close	42* 43*	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		45	D/8	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		45°	20.83	18.40	20.99	20.49	20.91	20.98	18.86	20.89
		46°	20.96	18.40	21.00	20.46	20.95	20.81	18.88	20.84
		47°	20.83	18.34	20.99	20.32	20.82	20.83	18.92	20.90
		48° 49°	20.93	18.47 18.50	20.82	20.42 20.38	20.92 20.86	20.99 20.87	18.84 18.89	20.85
		49° 50°	21.00	18.50	20.81	20.38	20.86	20.87	18.89	20.81
		50°	20.93	18.45	20.91	20.48	20.82	20.99	18.89	20.85
		60° 70°		18.46		20.45	20.89	20.99 20.96	18.89 18.94	20.85 20.87
		80°	21.00	18.45 18.46 18.42	20.87	20.37	20.87	20.87	18.87	20.84
	Laptop	90°	20.99	18.31	20.99	20.31	20.85	20.88	18.91	20.96
		100° 110°	20.88 20.99	18.39 18.35	20.88 20.83	20.38 20.41	20.96 20.86	20.86 20.99	18.88 18.86	20.93 20.86
		120°	20.99	18.35	20.83	20.41	20.86	20.99	18.85	20.85
		130°	20.85	18.45	21.00	20.45	20.97	20.87	18.95	20.86
		140° 150°	20.95	18.31 18.34	20.92	20.41	20.84	20.91	18.89 18.90	20.82
			20.84		20.99	20.32	20.81	20.87	18.90	20.81
		160°	20.98	18.48	20.94 20.86	20.44 20.45	20.88 20.93	20.92 20.95	18.87 18.84	20.92
		170° 180°	20.85 20.94	18.48 18.44	20.96	20.36	20.97	20.95	18.96	21.00
		190°	20.99	18.43 17.33	20.94 17.40	20.45 18.44	20.88	21.00	18.97 18.95	20.99
	Tablet	200°	20.93						18.95	
		195°	20.95	18.35	20.92	20.40	20.93	20.83	18.92	20.87
	Laptop	196°	20.97 21.00	18.50	20.82 20.94	20.35 20.41	21.00	20.81	18.96	20.84
	Laptop	197°	20.85	18.43	20.94	20.41	20.91	20.98	18.83	20.85
		199°	20.92	18.44	20.90	20.50 20.49	20.96	20.94	18.97	20.92
		200°	20.95	17.48	17.31	18.44	18.50	18.85	18.98	18.86
	1	201° 202°	20.84 20.82	17.39 17.38	17.36	18.33 18.49	18.49	18.97 18.88	18.96	18.83
	1									
	1	203° 204°	20.90 20.98	17.34	17.34	18.48	18.43 18.33	18.95 18.95	19.00 18.81	18.94 18.92
	1	204° 205°	20.98	17.42	17.39	18.37	18.33	18.88	18.92	18.92
	1	215°	20.93	17.41	17.36	18.33	18.33	18.88	18.84	18.94
	1			17.32	17.37	18.38		18.88 18.94 18.94	18.90	
	1	235°	21.00	17.49	17.48	18.49	18.31	18.94	18.81	18.90
	1	245°	20.87 20.84	17.45 17.42	17.40 17.46	18.37 18.33	18.44 18.39	18.84 18.90	18.90 18.86	18.84 18.98
	Tablet	255° 265°	20.84 20.86	17.42	17.46	18.33 18.36	18.44	18.90 18.81	18.86	18.98
		275°	20.99	17.31	17.38	18.45	18.38	18.96	18.90	18.82
		285°	20.85	17.43	17.43	18.40	18.48	18.95	18.95	18.83
		295°	20.82 20.95	17.33 17.33	17.42 17.42	18.38 18.44	18.49 18.45	18.89	18.98 18.91	19.00 18.95
		305°						18.81		
		315° 325°	20.92 21.00	17.38	17.42	18.34	18.48 18.37	18.91 18.94	18.90 18.91	18.99 18.92
		335°	20.94	17.41 17.36	17.38	18.37	18.37	18.89	18.92	18.84
		345° 355°	20.85 21.00 20.97	17.50 17.42	17.35	18.37 18.33	18.44 18.47	18.94 18.84	18.98 18.90	18.85
			21.00	17.42	17.44					
		360°	20.97	17.33	17.37	18.39	18.31	18.90	18.89	18.90
		350°	20.98 20.96	17.44 17.34	17.32	18.42	18.39 18.42 18.31	18.81 18.94	19.00	18.83 18.88
Aux		340°	20.96	17.34	17.32	18.35 18.47	18.42	18.94	18.99	18.86
		320°	20.82	17.46	17.33	18.37	18.34	18.93	18.83	18.84
		310°	20.88	17.36	17.47	18.45	18.49	18.98	18.83	18.89
		300°	20.90	17.33	17.32	18.40	18.42	18.99	18.92	18.95
		290°	20.90	17.34	17.49 17.33	18.41	18.48	18.91	19.00 18.88	18.84
	Tablet	280°	20.88	17.45	17.33	18.37	18.48 18.33	19.00	18.88	18.96 18.81
		260°	20.90 20.96	17.46 17.37	17.43	18.38	18.39	18.90	19.00	18.86
		250°	20.95	17.34	17.48	19.47	18.34	10.04	10.04	18.84
		240°		17.34 17.48 17.37	17.48 17.37 17.41	18.48 18.41	18.36	18.82 18.99	18.93 18.82	18.84 18.84 18.96
		230°	21.00	17.37	17.41	18.41	18.33	18.99	18.82	18.96
		220° 210°	20.84 20.83	17.44 17.33	17.40 17.45	18.33 18.38	18.33 18.46	18.92 18.97	19.00 18.95	18.99 18.92
		200°	20.85	17.33	17.39	18.32	18.33	18.82	18.91	18.95
		190°	20.99	18.33	20.89	20.49	20.84	20.85	18.98	20.99
	Laptop	195°	20.82	18.40	20.94	20.42	20.81	20.81	18.97	21.00
	Tablet	200° 199°	20.98 20.90	17.47 18.32	17.31 20.98	18.43 20.31	18.37 20.91	18.95	19.00 18.91	18.96 20.94
		199°	20.90	18.32	20.98	20.31	20.91	20.85	18.91	20.94
	1	198°	20.85	18.48	20.91	20.36	20.98	20.90	18.86	20.94
	1	196°	20.84	18.46	20.99	20.49	20.85	20.82	18.92	20.97
	1	195° 194°		18.37 18.35	20.90		20.84		18.86	
	1	194°	20.94 20.92	18.35	20.99	20.38 20.42	20.99	20.93 21.00	18.90	20.87 20.88
	1	193°	20.82	18.33	20.88	20.47	20.95	20.97	18.99	20.98
	1	192° 191°	20.83 20.86	18.43 18.45	20.82 20.81	20.32 20.49	20.94	20.92 20.92	18.87 18.88	20.98 20.85
		191°	20.86	18.45	20.81	20.49	20.90 20.93	20.92	18.85	20.85
	1	180*	20.81	18.33	20.85	20.31	20.93	20.88	18.98	21.00
	Laptop	170°	20.82	18.39	20.99	20.35	20.85	20.83	18.83	20.92
	captop	160°	20.94	18.34	20.97	20.31	20.82	20.85	18.91	20.97
		150°	20.99	18.35	20.90	20.38	20.95	20.85	18.89	20.93
	1	140° 130°	20.93 20.85	18.45 18.31	20.86	20.34 20.40	20.89	20.94 20.85	18.95 18.96	20.91 20.90
	1	130° 120°	20.85 20.81	18.31 18.37	20.99 20.89	20.40	20.93 20.81	20.85 20.97	18.96 18.89	20.90 20.82
			20.01		40.05	20.49	20.01		18.98	20.82
		110°	20.92	18.38	20.97		20.93	20.89		
		110° 100°	20.82	18.38 18.46	20.94	20.45	20.82	20.89 20.98	18.88	20.82
		110°		18.38				20.89		20.82 20.89
		110° 100° 90° 80°	20.82 20.95 20.92	18.38 18.46 18.47 18.42	20.94 20.97 20.93	20.45 20.41 20.50	20.82 20.86 20.97	20.89 20.98 20.93 20.93	18.88 18.85 18.98	20.89 21.00
		110° 100° 90° 80° 70°	20.82 20.95 20.92 20.91	18.38 18.46 18.47 18.42 18.38	20.94 20.97 20.93 20.88	20.45 20.41 20.50 20.45	20.82 20.86 20.97 20.86	20.89 20.98 20.93 20.93 20.93 20.95	18.88 18.85 18.98 18.94	20.89 21.00 20.97
		110° 100° 90° 80° 70° 60°	20.82 20.95 20.92 20.91 20.99	18.38 18.46 18.47 18.42 18.38 18.44	20.94 20.97 20.93 20.88 20.97	20.45 20.41 20.50 20.45 20.47	20.82 20.86 20.97 20.86 20.91	20.89 20.98 20.93 20.93 20.96 20.86	18.88 18.85 18.98 18.94 18.92	20.89 21.00 20.97 20.86
	Lid close	110° 100° 90° 80° 70°	20.82 20.95 20.92 20.91 20.99 20.99	18.38 18.46 18.47 18.42 18.38 18.44 18.34	20.94 20.97 20.93 20.88 20.97 20.94	20.45 20.41 20.50 20.45 20.47 20.50	20.82 20.86 20.97 20.86	20.89 20.98 20.93 20.93 20.96 20.86 20.89	18.88 18.85 18.98 18.94	20.89 21.00 20.97 20.86 20.87
	Lid close Laptop	110° 100° 90° 80° 70° 60° 50° 40° 40°	20.82 20.95 20.92 20.91 20.99 20.97 n/a 20.87	18.38 18.46 18.47 18.42 18.38 18.44 18.34 18.34 18.33	20.94 20.97 20.93 20.88 20.97 20.94 n/a 20.94	20.45 20.41 20.50 20.45 20.47 20.50 Na 20.49	20.82 20.86 20.97 20.86 20.91 20.95 n/a 20.95	20.89 20.98 20.93 20.93 20.96 20.86 20.89 n/a 20.95	18.88 18.85 18.98 18.94 18.92 18.90 17/a 18.81	20.89 21.00 20.97 20.86 20.87 n/a 20.96
		110° 100° 90° 80° 70° 60° 50° 40° 45° 44°	20.82 20.95 20.92 20.91 20.99 20.97 n/a 20.87 n/a	18.38 18.46 18.47 18.42 18.33 18.44 18.34 18.34 18.34 n ¹ a 18.33 n ¹ a	20.94 20.97 20.93 20.88 20.97 20.94 n/a 20.94 n/a	20.45 20.41 20.50 20.45 20.47 20.50 n/a 20.49 n/a	20.82 20.86 20.97 20.86 20.91 20.95 n/a 20.92 n/a	20.89 20.98 20.93 20.93 20.96 20.86 20.86 20.89 n ⁴ a 20.95 n ⁴ a	18.88 18.85 18.98 18.94 18.92 18.90 n/a 18.81 n/a	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a
		110° 90° 80° 50° 50° 40° 45° 44° 43°	20.82 20.95 20.92 20.91 20.99 20.97 r/a 20.87 r/a 1/a	18.38 18.46 18.47 18.42 18.38 18.44 18.34 18.34 18.33 18.33 18.33 r/a	20.94 20.97 20.93 20.88 20.97 20.94 n/a 20.94 n/a n/a	20.45 20.41 20.50 20.45 20.47 20.50 r/a 20.49 r/a r/a	20.82 20.86 20.97 20.86 20.91 20.95 r/a 20.95 r/a r/a r/a	20.89 20.98 20.93 20.93 20.96 20.86 20.89 n ¹ a 20.95 n ¹ a 7 ¹ a	18.88 18.85 18.98 18.94 18.94 18.92 18.90 n/a 18.81 n/a n/a	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a n/a
		110° 100° 90° 80° 70° 60° 40° 45° 45° 44° 43°	20.82 20.95 20.92 20.91 20.99 20.97 n ¹ a 20.87 n ¹ a n ¹ a n ¹ a n ¹ a	18.38 18.46 18.47 18.42 18.33 18.44 18.34 18.33 n/a 18.33 n/a 18.33 n/a n/a	20.94 20.97 20.93 20.93 20.97 20.94 n/a 20.94 n/a n/a n/a	20.45 20.41 20.50 20.45 20.47 20.50 n/a 20.49 n/a n/a n/a	20.82 20.86 20.97 20.98 20.91 20.95 n/a 20.95 n/a 20.92 n/a n/a	20.89 20.93 20.93 20.95 20.96 20.86 20.86 20.86 20.85 r/a r/a r/a	18.88 18.85 18.98 18.94 18.92 18.90 n/a 18.81 n/a n/a n/a	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a n/a n/a
		110° 100° 90° 80° 70° 60° 40° 45° 45° 44° 43°	20.82 20.95 20.92 20.91 20.97 n/a 20.97 n/a n/a n/a n/a n/a n/a	18.38 18.46 18.47 18.42 18.33 18.44 18.33 18.34 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.34 19.35	20.94 20.97 20.93 20.88 20.97 20.94 n/a n/a n/a n/a n/a n/a n/a	20.45 20.41 20.50 20.45 20.47 20.50 n/a n/a n/a n/a n/a	20.82 20.86 20.97 20.86 20.91 20.95 n/a 20.95 n/a n/a n/a n/a	20.89 20.93 20.93 20.95 20.96 20.96 7/a 20.95 7/a 7/a 7/a 7/a 7/a	18.88 18.85 18.98 18.94 18.90 n/a 18.81 18.81 n/a n/a n/a n/a n/a	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a n/a n/a n/a
		110° 90° 80° 50° 50° 40° 45° 44° 43°	20.82 20.95 20.92 20.91 20.99 20.97 n/a 20.87 n/a n/a n/a n/a n/a n/a	18.38 18.46 18.47 18.42 18.33 18.34 18.34 18.33 n'a n'a n'a n'a n'a n'a n'a	20.94 20.97 20.93 20.88 20.97 20.94 n/a 20.94 n/a n/a n/a n/a n/a	20.45 20.41 20.50 20.45 20.47 20.60 r/a 20.49 r/a r/a r/a r/a	20.82 20.96 20.97 20.96 20.91 20.95 n/a 20.95 n/a n/a n/a n/a n/a	20.89 20.98 20.93 20.93 20.96 20.96 20.89 n/a 20.95 n/a n/a n/a n/a n/a	18.88 18.85 18.99 18.94 18.92 18.90 n/a 18.81 n/a n/a n/a n/a n/a	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a n/a n/a n/a n/a
		110" 90" 80" 60" 60" 40" 45" 44" 45" 44" 43" 41" 40" 38"	20.82 20.95 20.91 20.99 20.97 n/a 20.87 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	18.38 18.46 18.47 18.42 18.33 18.34 18.34 18.33 n'a n'a n'a n'a n'a n'a n'a n'a	20.94 20.97 20.93 20.98 20.97 20.94 n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.45 20.41 20.50 20.45 20.47 20.50 n/a n/a n/a n/a n/a n/a n/a	20.82 20.86 20.97 20.96 70.95 70.95 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.92 70.95 70.97 70.95 70.97 70.95 70.97 70 70 70 70 70 70 70 70 70 70 70 70 70	20.89 20.98 20.93 20.93 20.93 20.96 20.89 r/a 20.89 r/a	18.85 18.85 18.99 18.94 18.92 18.90 18.81 18.81 18.81 1/a 1/a 1/a 1/a 1/a 1/a 1/a 1/a 1/a	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a n/a n/a n/a
	Laptop	110" 90" 80" 70" 60" 50" 40" 44" 44" 44" 42" 44" 42" 41" 40" 39" 38" 38"	20.82 20.95 20.92 20.97 20.99 10'a 10'a 10'a 10'a 10'a 10'a 10'a 10'a	18.38 18.46 18.47 18.42 18.39 18.44 18.34 18.33 18.33 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.94 20.97 20.93 20.89 20.97 70.94 70'a 70'a 70'a 70'a 70'a 70'a 70'a 70'a	20.45 20.41 20.50 20.47 20.47 20.47 7/a 7/a 7/a 7/a 7/a 7/a 7/a 7/a 7/a 7/	20.82 20.86 20.97 20.96 20.91 20.91 20.92 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.89 20.93 20.93 20.93 20.96 20.86 20.85 n°a n°a n°a n°a n°a n°a n°a n°a n°a	18.88 18.85 18.99 18.94 18.92 18.92 18.90 1/a 1/a 1/a 1/a 1/a 1/a 1/a 1/a 1/a 1/a	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a
		110" 100" 90" 80" 70" 60" 50" 40" 44" 43" 44" 43" 44" 41" 40" 39" 38" 37" 36"	20.82 20.95 20.95 20.97 20.97 10'a 10'a 10'a 10'a 10'a 10'a 10'a 10'a	18.38 18.46 18.47 18.42 18.42 18.54 18.54 18.54 18.34 18.34 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.34 18.33 18.34 18.35 18	20.94 20.97 20.85 20.85 20.97 20.94 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.45 20.41 20.50 20.45 20.47 20.67 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.82 20.85 20.97 20.66 20.91 20.92 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.89 20.98 20.93 20.93 20.93 20.93 20.96 20.96 20.96 7/a	18.89 18.85 18.94 18.94 18.92 18.92 18.92 18.91 17/a 17/a 17/a 17/a 17/a 17/a 17/a 17/	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a
	Laptop	110" 90" 80" 70" 60" 50" 40" 44" 44" 44" 42" 44" 42" 41" 40" 39" 38" 38"	20.82 20.95 20.95 20.97 20.97 10'a 10'a 10'a 10'a 10'a 10'a 10'a 10'a	18.38 18.46 18.47 18.42 18.42 18.34 18.34 18.34 18.34 18.34 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.34 18.33 18.34 18.35 18	20.94 20.97 20.85 20.85 20.97 20.94 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.45 20.41 20.50 20.45 20.47 20.67 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.82 20.85 20.97 20.66 20.91 20.92 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.89 20.98 20.93 20.93 20.93 20.93 20.96 20.96 20.96 7/a	18.89 18.85 18.94 18.94 18.92 18.92 18.92 18.91 17/a 17/a 17/a 17/a 17/a 17/a 17/a 17/	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a
	Laptop	110" 100" 90" 80" 50" 50" 40" 44" 44" 42" 44" 42" 44" 42" 44" 39" 38" 38" 37" 36" 35"	20.82 20.95 20.92 20.97 20.99 10'a 10'a 10'a 10'a 10'a 10'a 10'a 10'a	18.38 18.46 18.47 18.47 18.47 18.33 18.34 18.34 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.33 18.34 18.33 18.33 18.33 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.34 18.33 18.34 18.34 18.34 18.34 18.33 18.34 18.33 18.34 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.33 18.34 18.34 18.33 18.34 18.33 18.34 18.35 18.34 18.35 18.34 18.37 18	20.94 20.97 20.93 20.93 20.97 70.94 70'a 70'a 70'a 70'a 70'a 70'a 70'a 70'a	20.45 20.41 20.50 20.47 20.47 20.47 7/a 7/a 7/a 7/a 7/a 7/a 7/a 7/a 7/a 7/	20.82 20.86 20.97 20.96 20.91 20.91 20.92 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.89 20.93 20.93 20.93 20.96 20.86 20.85 n°a n°a n°a n°a n°a n°a n°a n°a n°a	18.88 18.85 18.99 18.94 18.92 18.92 18.90 17/a 17/a 17/a 17/a 17/a 17/a 17/a 17/a	20.89 21.00 20.97 20.86 20.87 n/a 20.96 n/a n/a n/a n/a n/a n/a n/a n/a n/a
	Laptop	1107 1007 907 807 707 607 507 407 407 407 447 443 447 447 443 447 407 307 307 307 307 307 357 357	20.82 20.95 20.92 20.99 20.99 20.97 Na 20.97 Na 20.87 Na Na Na Na Na Na Na Na Na Na Na Na Na	18.33 18.46 19.47 19.42 19.42 19.42 19.43 19.44 19.45 19	20.94 20.97 20.93 20.98 20.98 20.94 r03 r03 r03 r03 r03 r03 r03 r03 r03 r03	20.45 20.41 20.50 20.45 20.45 20.45 20.50 r/a r/a r/a r/a r/a r/a r/a r/a r/a r/a	20.82 20.86 20.97 20.36 20.31 20.35 Na 20.35 Na Na Na Na Na Na Na Na Na Na Na Na Na	20.99 20.99 20.93 20.05	18.88 18.85 18.99 18.94 18.94 18.92 18.90 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.89 21.00 20.97 20.96 20.96 na na na na na na na na na na na na na
	Laptop	1107 1007 907 907 907 907 907 907 907	20.82 20.95 20.95 20.91 20.91 20.97 62 20.97 63 76 76 76 76 76 76 76 76 76 76 76 76 76	18.38 18.46 18.47 18.47 18.42 18.33 18.44 18.34 na na na na na na na na na na	20.94 20.97 20.93 20.98 20.98 20.97 20.94 n°a 20.94 n°a n°a n°a n°a n°a n°a n°a n°a n°a n°a	20.46 20.41 20.50 20.45 20.45 20.45 20.45 20.45 20.40 n ¹⁰ n ¹⁰ n	20.82 20.86 20.97 20.96 20.95 20.95 n/a 20.95 n/a 20.95 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.99 20.98 20.98 20.93 20.93 20.95 20.96 20.96 70 20.96 70 20.96 70 70 70 70 70 70 70 70 70 70 70 70 70	18.88 18.85 18.94 18.94 18.94 18.92 18.92 18.90 n ⁰ a n ⁰ a	20.89 20.00 21.00 20.97 20.86 20.97 20.86 20.87 20.86 20.96
	Laptop	1107 1007 907 807 707 607 507 407 407 407 447 443 447 447 443 447 407 307 307 307 307 307 357 357	20.82 20.95 20.97 20.99 20.99 20.97 74 20.87 74 74 74 74 74 74 74 74 74 74 74 74 74	18.38 18.46 18.47 18.47 18.42 18.33 18.34 18	20.94 20.97 20.93 20.98 20.98 20.94 r/a r/a r/a r/a r/a r/a r/a r/a r/a r/a	20.45 20.41 20.50 20.45 20.45 20.50 r/a r/a r/a r/a r/a r/a r/a r/a r/a r/a	20.82 20.86 20.97 20.96 20.91 20.95 70 20.95 70 70 20.95 70 70 70 70 70 70 70 70 70 70 70 70 70	20.99 20.99 20.99 20.93 20.93 20.06 20.06 20.06 70 20.06 70 70 70 70 70 70 70 70 70 70 70 70 70	18.88 18.85 18.99 18.94 18.92 18.92 18.90 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.89 20.00 20.07 20.07 20.06 20.07
	Laptop	1107 1007 907 907 907 907 907 907 907	20.82 20.95 20.95 20.91 20.91 20.91 20.97 76 76 76 76 76 76 76 76 76 76 76 76 76	18.33 18.46 18.47 18.42 18.42 18.42 18.43 18.43 18.34 18.34	20.04 20.07 20.03 20.03 20.03 20.03 20.04 r0a	20.46 20.41 20.50 20.45 20.45 20.45 20.45 20.45 n ¹ a n ¹ a	20.82 20.86 20.97 20.95 20.95 20.95 70 20.95 70 70 70 70 70 70 70 70 70 70 70 70 70	20.99 20.99 20.99 20.93 20.93 20.93 20.95 20.95 76 76 76 76 76 76 76 76 76 76 76 76 76	18.89 18.85 18.95 18.94 18.94 18.92 18.90 n ⁶ a n ⁶ a	20.89 21.00 20.07 20.87 20.87 20.87 20.86 20.87 20.96
	Laptop	1107 1007 907 907 907 907 907 907 907	20.82 20.95 20.97 20.99 20.99 20.97 74 20.87 74 74 74 74 74 74 74 74 74 74 74 74 74	18.38 18.46 18.47 18.47 18.42 18.33 18.34 18	20.94 20.97 20.93 20.98 20.98 20.94 r/a r/a r/a r/a r/a r/a r/a r/a r/a r/a	20.45 20.41 20.50 20.45 20.45 20.50 r/a r/a r/a r/a r/a r/a r/a r/a r/a r/a	20.82 20.86 20.97 20.96 20.91 20.95 70 20.95 70 70 20.95 70 70 70 70 70 70 70 70 70 70 70 70 70	20.99 20.99 20.99 20.93 20.93 20.06 20.06 20.06 70 20.06 70 70 70 70 70 70 70 70 70 70 70 70 70	18.88 18.85 18.99 18.94 18.92 18.92 18.90 n/a n/a n/a n/a n/a n/a n/a n/a n/a n/a	20.89 20.00 20.07 20.86 20.87 20.87 20.87 20.87 20.87 20.87 20.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|²)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

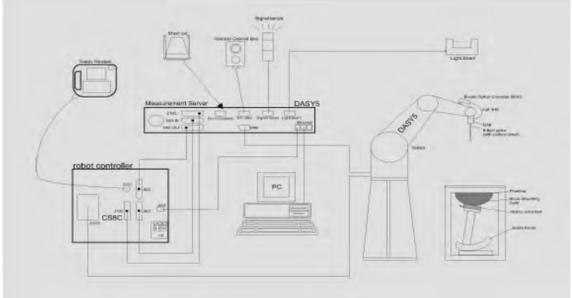


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows 7.
- 8. DASY 5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- Tissue simulating liquid mixed according to the given recipes. 10.
- 11. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



1.8 System Components

EX3DV4 E-Field Probe

Construction		
Construction	Symmetrical design with triangular core Built-in shielding against static charges	17. 9 10
	PEEK enclosure material (resistant to	and the second sec
	organic solvents, e.g., DGBE)	1
	organic solvents, e.g., DGDL)	1
Calibration	Basic Broad Band Calibration in air	
	Conversion Factors (CF) for HSL	
	2450/5200/5300/5600/5800 MHz	
	Additional CF for other liquids and	
	frequencies upon request	
Frequency	10 MHz to > 6 GHz	
Directivity	± 0.3 dB in HSL (rotation around probe ax	is)
	± 0.5 dB in tissue material (rotation norma	l to probe axis)
Dynamic	10 μW/g to > 100 mW/g	
Range	Linearity: \pm 0.2 dB (noise: typically < 1 μ W	//g)
Dimensions	Tip diameter: 2.5 mm	
Application	High precision dosimetric measurements i	n any exposure scenario
	(e.g., very strong gradient fields). Only	y probe which enables
	compliance testing for frequencies up to	6 GHz with precision of
	better 30%.	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



PHANTOM

Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell	2 ± 0.2 mm
Thickness	
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm
	Minor axis: 400 mm

DEVICE HOLDER

Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin) , which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	
		Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 2450/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the liquid depth above the ear reference points was \geq 15 cm \pm 5 mm (frequency \leq 3 GHz) or \geq 10 cm \pm 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

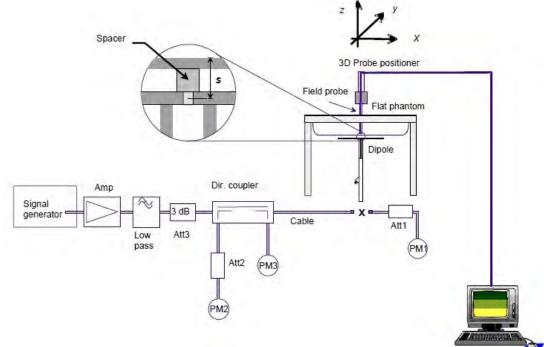


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles extent of the law.



Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date		
D2450V2	727	2450	Head	52.6	13.20	52.8	0.38%	Dec. 13, 2020		
Validation Kit	S/N		uency Hz)	1W Target SAR-1g (mW/g)	Pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date		
		5200	Head	80.1	7.50	75	-6.37%	Dec. 14, 2020		
D5GHzV2	1000	1000	1023	5300	Head	82.8	7.90	79	-4.59%	Dec. 15, 2020
0301272	1023	5600	Head	83.1	8.39	83.9	0.96%	Dec. 16, 2020		
		5800	Head	81.4	8.06	80.6	-0.98%	Dec. 17, 2020		

Table 1. Results of system validation


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

```
www.sgs.com.tw
```

Member of SGS Group





1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within ± 5% of the target values.

The depth of the tissue simulant in the flat section of the phantom was ≥ 15 cm ± 5 mm (Frequency \leq 3G) or \geq 10 cm \pm 5 mm (Frequency >3G) during all tests. (Fig. 2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		2402	39.285	1.757	38.541	1.785	-1.89%	1.57%
		2412	39.268	1.766	38.482	1.798	-2.00%	1.80%
		2437	39.223	1.788	38.381	1.829	-2.15%	2.27%
	Dec. 13, 2020	2441	39.216	1.792	38.368	1.833	-2.16%	2.29%
		2450	39.200	1.800	38.335	1.844	-2.21%	2.44%
		2462	39.185	1.813	38.308	1.858	-2.24%	2.48%
		2480	39.162	1.833	38.215	1.878	-2.42%	2.47%
		5190	35.997	4.645	36.243	4.466	0.68%	-3.85%
	Dec. 14, 2020	5200	35.986	4.655	36.163	4.494	0.49%	-3.46%
	Dec. 14, 2020	5210	35.974	4.665	36.087	4.515	0.31%	-3.22%
		5230	35.951	4.686	36.047	4.541	0.27%	-3.09%
	Dec. 15, 2020	5260	35.917	4.717	35.993	4.593	0.21%	-2.62%
Head		5270	35.906	4.727	35.949	4.611	0.12%	-2.45%
		5280	35.894	4.737	35.929	4.626	0.10%	-2.34%
	Dec. 15, 2020	5300	35.871	4.758	35.858	4.649	-0.04%	-2.28%
		5310	35.860	4.768	35.802	4.664	-0.16%	-2.18%
		5320	35.849	4.778	35.771	4.676	-0.22%	-2.13%
		5530	35.609	4.993	35.158	4.945	-1.27%	-0.97%
	Dec. 16, 2020	5600	35.529	5.065	35.007	5.031	-1.47%	-0.67%
	Dec. 10, 2020	5610	35.517	5.075	34.981	5.045	-1.51%	-0.60%
		5690	35.426	5.157	34.761	5.142	-1.88%	-0.30%
		5755	35.351	5.224	34.563	5.234	-2.23%	0.19%
	Dec. 17, 2020	5775	35.329	5.244	34.475	5.259	-2.42%	0.28%
	Dec. 17, 2020	5795	35.306	5.265	34.441	5.292	-2.45%	0.52%
		5800	35.300	5.270	34.431	5.311	-0.025	0.78%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No. : EN/2020/C0008 Page: 48 of 80

The composition of the tissue simulating liquid:

Fraguanav			Ingredient								
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount			
2450M	Head	550ml	450ml	_	_		_	1.0L(Kg)			

Body Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's midding and the document is a wave and the document document of the document and the document of the document document and the document document document and the document do prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group



1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.


In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the

electric field (*E*) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = C \frac{\delta T}{\delta t},$$

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

www.sqs.com.tw

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



- The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about $\pm 10\%$ (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is $\pm 5\%$ (RSS) when the same liquid is used for the calibration and for actual measurements and $\pm 7-9\%$ (RSS) when not, which is in good agreement with the estimates given in [2].

1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責; 可時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This docum



Report No. : EN/2020/C0008 Page: 52 of 80


setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- 1. N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- 2. K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- 3. K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the (1) whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- Occupational/Controlled limits apply when persons are exposed as a (2) consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- Limits for General Population/Uncontrolled exposure: 0.08 W/kg as (3) averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279



exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013: Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of Results

Tablet mode

WLAN Main Antenna

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power	Averaged S (W/		Plot
			()		()	Tolerance (dBm)	(dBm)			Measured	Reported	3-
		Back side	0	6	2437	21.00	21.00	1.033	100.00%	0.191	0.197	-
		Top side	0	6	2437	21.00	21.00	1.033	100.00%	0.416	0.430	62
	WLAN 802.11b	Bottom side	0	6	2437	21.00	21.00	1.033	100.00%	0.025	0.026	-
		Right side	0	6	2437	21.00	21.00	1.033	100.00%	0.131	0.135	-
		Left side	0	6	2437	21.00	21.00	1.033	100.00%	0.012	0.012	-
		Back side	0	38	5190	19.00	19.00	1.085	100.00%	0.508	0.551	-
		Top side	0	38	5190	19.00	19.00	1.085	100.00%	0.638	0.692	63
	WLAN 802.11ac(80M) 5.2G	Bottom side	0	38	5190	19.00	19.00	1.085	100.00%	0.039	0.042	-
		Right side	0	38	5190	19.00	19.00	1.085	100.00%	0.278	0.302	-
		Left side	0	38	5190	19.00	19.00	1.085	100.00%	0.011	0.012	-
	WLAN 802.11n(40M) 5.3G	Back side	0	54	5270	19.50	19.48	1.085	100.46%	0.483	0.526	-
		Top side	0	54	5270	19.50	19.48	1.085	100.46%	0.601	0.655	64
Main		Bottom side	0	54	5270	19.50	19.48	1.085	100.46%	0.039	0.043	-
IVICIIII		Right side	0	54	5270	19.50	19.48	1.085	100.46%	0.271	0.295	-
		Left side	0	54	5270	19.50	19.48	1.085	100.46%	0.008	0.009	-
		Back side	0	138	5690	19.50	19.50	1.066	100.00%	0.420	0.448	-
		Top side	0	122	5610	19.50	19.41	1.066	102.09%	0.742	0.808	-
	WLAN 802.11ac(80M) 5.6G	Top side	0	138	5690	19.50	19.50	1.066	100.00%	0.762	0.812	65
	WEAN 802.112C(800) 5.86	Bottom side	0	138	5690	19.50	19.50	1.066	100.00%	0.045	0.048	-
		Right side	0	138	5690	19.50	19.50	1.066	100.00%	0.315	0.336	-
		Left side	0	138	5690	19.50	19.50	1.066	100.00%	0.014	0.015	-
		Back side	0	155	5775	19.50	19.50	1.066	100.00%	0.398	0.424	-
		Top side	0	155	5775	19.50	19.50	1.066	100.00%	0.693	0.739	66
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	19.50	19.50	1.066	100.00%	0.039	0.041	-
		Right side	0	155	5775	19.50	19.50	1.066	100.00%	0.217	0.231	-
		Left side	0	155	5775	19.50	19.50	1.066	100.00%	0.012	0.013	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



WLAN Aux Antenna

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
			()			Tolerance (dBm)	(dBm)	g		Measured	Reported	pugo
	WLAN 802.11b	Back side	0	6	2437	21.00	20.94	1.033	101.39%	0.306	0.321	-
		Top side	0	6	2437	21.00	20.94	1.033	101.39%	0.835	0.875	67
		Top side*	0	6	2437	21.00	20.94	1.033	101.39%	0.829	0.868	-
	WEAR 802.110	Top side	0	11	2462	19.50	19.48	1.033	100.46%	0.796	0.826	-
		Bottom side	0	6	2437	21.00	20.94	1.033	101.39%	0.030	0.031	-
		Left side	0	6	2437	21.00	20.94	1.033	101.39%	0.196	0.205	-
		Back side	0	78	2480	10.50	9.82	1.372	116.95%	0.036	0.058	-
	Bluetooth	Top side	0	78	2480	10.50	9.82	1.372	116.95%	0.041	0.065	68
	(GFSK)	Bottom side	0	78	2480	10.50	9.82	1.372	116.95%	0.022	0.034	-
		Left side	0	78	2480	10.50	9.82	1.372	116.95%	0.027	0.043	-
		Back side	0	42	5210	17.50	17.49	1.066	100.23%	0.459	0.490	-
		Top side	0	42	5210	17.50	17.49	1.066	100.23%	1.110	1.186	69
	WLAN 802.11ac(80M) 5.2G	Top side*	0	42	5210	17.50	17.49	1.066	100.23%	1.080	1.154	-
		Bottom side	0	42	5210	17.50	17.49	1.066	100.23%	0.043	0.046	-
		Left side	0	42	5210	17.50	17.49	1.066	100.23%	0.347	0.371	-
Aux	WLAN 802.11n(40M) 5.3G	Back side	0	54	5270	18.50	18.48	1.085	100.46%	0.432	0.471	-
		Top side	0	54	5270	18.50	18.48	1.085	100.46%	1.030	1.122	70
		Top side*	0	54	5270	18.50	18.48	1.085	100.46%	1.010	1.101	-
		Top side	0	62	5310	17.50	17.50	1.085	100.00%	0.991	1.075	-
		Bottom side	0	54	5270	18.50	18.48	1.085	100.46%	0.042	0.045	-
		Left side	0	54	5270	18.50	18.48	1.085	100.46%	0.335	0.365	-
		Back side	0	138	5690	19.00	18.96	1.066	100.93%	0.358	0.385	-
		Top side	0	122	5610	19.00	18.92	1.066	101.86%	0.716	0.778	-
	WLAN 802.11ac(80M) 5.6G	Top side	0	138	5690	19.00	18.96	1.066	100.93%	0.800	0.861	71
	WLAN 802.11ac(80W) 5.6G	Top side*	0	138	5690	19.00	18.96	1.066	100.93%	0.797	0.858	-
		Bottom side	0	138	5690	19.00	18.96	1.066	100.93%	0.037	0.039	-
		Left side	0	138	5690	19.00	18.96	1.066	100.93%	0.236	0.254	-
		Back side	0	155	5775	19.00	19.00	1.066	100.00%	0.341	0.364	-
	MI AN 802 11cc(20M) 5 CC	Top side	0	155	5775	19.00	19.00	1.066	100.00%	0.769	0.820	72
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	19.00	19.00	1.066	100.00%	0.036	0.038	
		Left side	0	155	5775	19.00	19.00	1.066	100.00%	0.203	0.216	-

* - repeated at the highest SAR measurement according to the KDB 865664 D01

Note:

Scaling = $\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(mW)}{P1(mW)} = 10^{\left(\frac{P2-P1}{10}\right)(dBm)}$ Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's midding and the document is a wave and the document document of the document and the document of the document document and the document document document and the document do prosecuted to the fullest extent of the law.



3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
2.4GHz WLAN MIMO	Yes
5GHz WLAN MIMO	Yes
BT + 2.4GHz WLAN Main	Yes
BT + 5GHz WLAN Main	Yes

Note:

1. Bluetooth and WLAN Aux share the same antenna path, and BT can transmit with WLAN Main simultaneously.

2. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission is the same with (or less than) that used in standalone transmission, and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR = $\frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be \leq 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. : EN/2020/C0008 Page: 59 of 80

		The simultane	ous Transmiss	ion conditions	(Tablet mode)					
Exposure position 1g(W/kg)	1	2	3	4	5	Scenario 1	Scenario 2	Scenario 3	Scenario 4	SPLSR
	WLAN 2.4GHz Main	WLAN 2.4GHz Aux	WLAN 5GHz Main	WLAN 5GHz Aux	BT (Aux)	1+2 Sum	3+4 Sum	1+5 Sum	3+5 Sum	
Back side	0.197	0.321	0.551	0.490	0.058	0.518	1.041	0.255	0.609	ΣSAR<1.6, Not required
Top side	0.430	0.875	0.812	1.186	0.065	1.305	1.998	0.495	0.877	Analyzed as below
Bottom side	0.026	0.031	0.048	0.046	0.034	0.057	0.094	0.060	0.082	ΣSAR<1.6, Not required
Right side	0.135	-	0.336	-	-	0.135	0.336	0.135	0.336	ΣSAR<1.6, Not required
Left side	0.012	0.205	0.015	0.371	0.043	0.217	0.386	0.055	0.058	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



WLAN 5 GHz Main + 5 GHz Aux

Conditions	Position	SAR Value	Coo	ordinates (o	cm)	ΣSAR (W/kg)	Peak Location Separation	SPLSR	Simultaneous Transmission
		(W/kg)	x	У	z	(Wildy)	Distance (mm)		SAR Test
WLAN Main	Top side	0.812	-0.92	5.64	-0.21	1.998	160.65	0.018	SPLSR<0.04,
WLAN Aux	Top side	1.186	-0.52 -10.42		-0.24	1.550	100.05	0.010	Not required
	_	_							
v k									

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw

Member of SGS Group



Report No. : EN/2020/C0008 Page: 61 of 80

4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration	
SPEAG	Dosimetric E-Field Probe	EX3DV4	3770	May.27,2020	May.26,2021	
SPEAG	System Validation	D2450V2	727	Apr.22,2020	Apr.21,2021	
	Dipole	D5GHzV2	1023	Jan.28,2020	Jan.27,2021	
SPEAG	Data acquisition Electronics	DAE4	856	Apr. 23,2020	Apr. 22,2021	
SPEAG	Software	DASY 52 52.10.4	N/A	Calibration not required	Calibration not required	
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Jan.28,2020	Jan.27,2021	
Agilent	Dual-directional	772D	MY46151242	Aug.17,2020	Aug.16,2021	
, ignorit	coupler	778D	MY48220468	Aug.17,2020	Aug.16,2021	
Agilent	Signal Generator	N5181A	MY50141235	May.04,2020	May.03,2021	
Agilent	Power Meter	E4417A	MY51410006	Mar.09,2020	Mar.08,2021	
Agilopt	Power Sensor	E9301H	MY51470001	Mar.09,2020	Mar.08,2021	
Agilent		E93010	MY51470002	Mar.09,2020	Mar.08,2021	
TECPEL	Digital thermometer	DTM-303A	TP130074	Apr.10,2020	Apr.09,2021	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.sgs.com.tw



Date: 2020/12/13

5. Measurements

Report No. :EN/2020/C0008

WLAN 802.11b_Tablet mode_Top side_CH 6_Main_0mm

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:0.968 Medium parameters used: f = 2437 MHz; σ = 1.829 S/m; ϵ_r = 38.381; ρ = 1000 kg/m³ Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 21.5°C **DASY5** Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.4, 7.4, 7.4) @ 2437 MHz; Calibrated: 2020/5/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.616 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement arid: dx=5mm. dv=5mm. dz=5mm

Reference Value = 6.945V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 0.598 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.945V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.186 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 0.523 W/kg

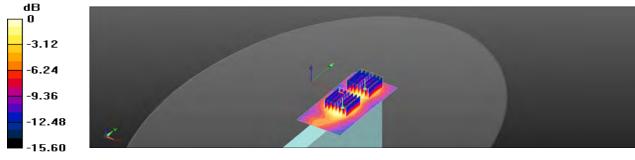

0 dB = 0.523 W/kg = -2.81 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No. : EN/2020/C0008 Page: 63 of 80

Date: 2020/12/14

Report No. :EN/2020/C0008 WLAN 802.11n(40M) 5.2G Tablet mode Top side CH 38 Main 0mm Communication System: WLAN 5G; Frequency: 5190 MHz; Duty cycle= 1:0.922 Medium parameters used: f = 5190 MHz; σ = 4.466 S/m; ε_r = 36.243; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 22.1°C

DASY5 Configuration:


- Probe: EX3DV4 SN3770; ConvF(5.4, 5.4, 5.4) @ 5190 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.202 V/m: Power Drift = 0.05 dB Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.266 W/kg Smallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = 57.7%Maximum value of SAR (measured) = 1.17 W/kg

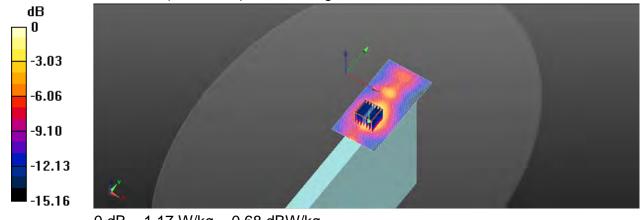

0 dB = 1.17 W/kg = 0.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. : EN/2020/C0008 Page: 64 of 80

Date: 2020/12/15

Report No. :EN/2020/C0008 WLAN 802.11n(40M) 5.3G Tablet mode Top side CH 54 Main 0mm Communication System: WLAN 5G; Frequency: 5270 MHz; Duty cycle= 1:0.922 Medium parameters used: f = 5270 MHz; σ = 4.611 S/m; ϵ_r = 35.949; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.6°C; Liquid temperature: 22.3°C

DASY5 Configuration:


- Probe: EX3DV4 SN3770; ConvF(5.4, 5.4, 5.4) @ 5270 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.976 V/m: Power Drift = 0.09 dB Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.257 W/kg Smallest distance from peaks to all points 3 dB below = 9.6 mm Ratio of SAR at M2 to SAR at M1 = 56.6%Maximum value of SAR (measured) = 1.09 W/kg

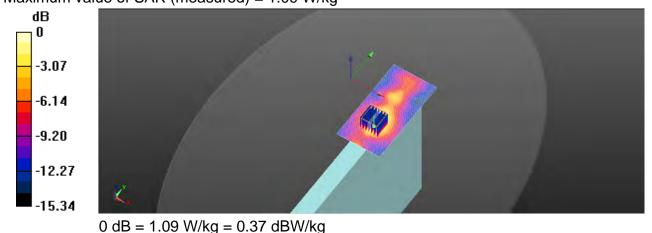

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.sqs.com.tw

Member of SGS Group

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

f (886-2) 2298-0488



Report No. : EN/2020/C0008 Page: 65 of 80

Date: 2020/12/16

Report No. :EN/2020/C0008 WLAN 802.11ac(80M) 5.6G Tablet mode Top side CH 138 Main 0mm Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:0.938 Medium parameters used: f = 5690 MHz; σ = 5.142 S/m; ϵ_r = 34.761; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C DASY5 Configuration: Probe: EX3DV4 - SN3770; ConvF(4.9, 4.9, 4.9) @ 5690 MHz; Calibrated: 2020/5/27 Sensor-Surface: 2mm (Mechanical Surface Detection) Electronics: DAE4 Sn856; Calibrated: 2020/4/23 Phantom: ELI DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483) Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 1.46 W/kg Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.699 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 3.07 W/kg SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.294 W/kgSmallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = 53% Maximum value of SAR (measured) = 1.44 W/kg Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.699 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 1.37 W/kg

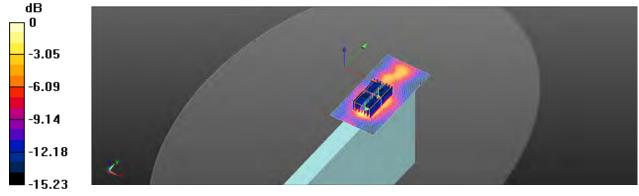

0 dB = 1.37 W/kg = 1.37 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. : EN/2020/C0008 Page: 66 of 80

Date: 2020/12/17


Report No. :EN/2020/C0008 WLAN 802.11ac(80M) 5.8G Tablet mode Top side CH 155 Main 0mm Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:0.938 Medium parameters used: f = 5775 MHz; σ = 5.259 S/m; ϵ_r = 34.475; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.3°C DASY5 Configuration: Probe: EX3DV4 - SN3770; ConvF(4.9, 4.9, 4.9) @ 5775 MHz; Calibrated: 2020/5/27 Sensor-Surface: 2mm (Mechanical Surface Detection) Electronics: DAE4 Sn856; Calibrated: 2020/4/23 Phantom: ELI DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483) Area Scan (61x121x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 1.35 W/kg Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.777 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 2.72 W/kg SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.282 W/kgSmallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = 53.8% Maximum value of SAR (measured) = 1.29 W/kg Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.777 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.243 W/kgSmallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.06 W/kg

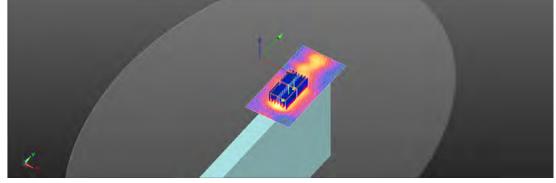

0 dB = 1.06 W/kg = 0.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No. : EN/2020/C0008 Page: 67 of 80

Date: 2020/12/13

Report No. :EN/2020/C0008 WLAN 802.11b Tablet mode Top side CH 6 Aux 0mm Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty cycle= 1:0.968 Medium parameters used: f = 2437 MHz; σ = 1.829 S/m; ϵ_r = 38.381; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 21.9°C; Liquid temperature: 21.5°C


DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.4, 7.4, 7.4) @ 2437 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x91x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 1.32 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.503 V/m: Power Drift = 0.16 dB Peak SAR (extrapolated) = 1.85 W/kg SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.413 W/kg Smallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = 52.9%Maximum value of SAR (measured) = 1.23 W/kg

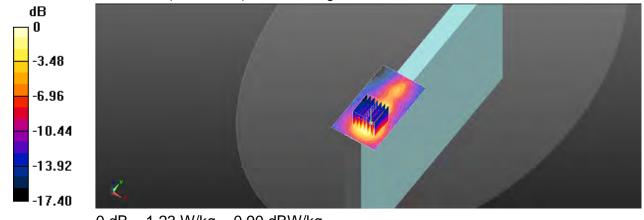

0 dB = 1.23 W/kg = 0.90 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

```
www.sqs.com.tw
```



Report No. : EN/2020/C0008 Page: 68 of 80

Date: 2020/12/13

Report No. :EN/2020/C0008 Bluetooth(GFSK) Tablet mode Top side CH 78 0mm Communication System: Bluetooth; Frequency: 2480 MHz; Duty cycle= 1:0.729 Medium parameters used: f = 2480 MHz; σ = 1.878 S/m; ϵ_r = 38.215; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 21.9°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.4, 7.4, 7.4) @ 2480 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x91x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 0.0599 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 2.186 V/m: Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.0539 W/kg

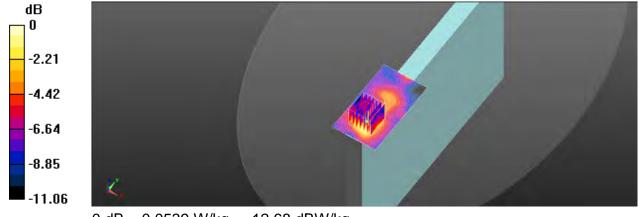

0 dB = 0.0539 W/kg = -12.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. : EN/2020/C0008 Page: 69 of 80

Date: 2020/12/14

Report No. :EN/2020/C0008 WLAN 802.11ac(80M) 5.2G Tablet mode Top side CH 42 Aux 0mm Communication System: WLAN 5G; Frequency: 5210 MHz; Duty cycle= 1:0.938 Medium parameters used: f = 5210 MHz; σ = 4.515 S/m; ϵ_r = 36.087; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 22.1°C

DASY5 Configuration:


- Probe: EX3DV4 SN3770; ConvF(5.4, 5.4, 5.4) @ 5210 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 2.24 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.824 V/m: Power Drift = -0.08 dB Peak SAR (extrapolated) = 4.28 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.368 W/kg Smallest distance from peaks to all points 3 dB below = 7.4 mm Ratio of SAR at M2 to SAR at M1 = 56.4%Maximum value of SAR (measured) = 2.25 W/kg

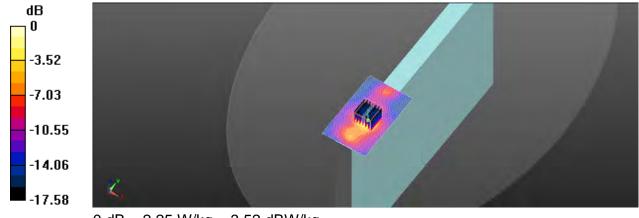

0 dB = 2.25 W/kg = 3.52 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. : EN/2020/C0008 Page: 70 of 80

Date: 2020/12/15

Report No. :EN/2020/C0008 WLAN 802.11n(40M) 5.3G Tablet mode Top side CH 54 Aux 0mm Communication System: WLAN 5G; Frequency: 5270 MHz; Duty cycle= 1:0.922 Medium parameters used: f = 5270 MHz; σ = 4.611 S/m; ϵ_r = 35.949; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.6°C; Liquid temperature: 22.3°C

DASY5 Configuration:


- Probe: EX3DV4 SN3770; ConvF(5.4, 5.4, 5.4) @ 5270 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 2.24 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.803 V/m: Power Drift = 0.11 dB Peak SAR (extrapolated) = 4.14 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.330 W/kg Smallest distance from peaks to all points 3 dB below = 7.4 mm Ratio of SAR at M2 to SAR at M1 = 55.2%Maximum value of SAR (measured) = 2.10 W/kg

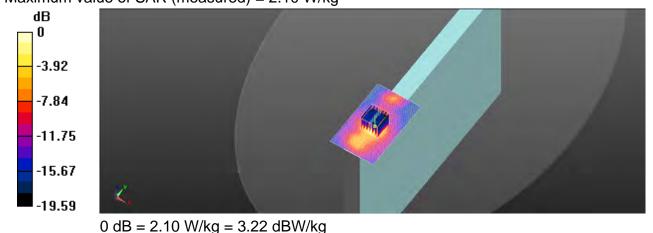

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.sqs.com.tw



Report No. : EN/2020/C0008 Page: 71 of 80

Date: 2020/12/16

Report No. :EN/2020/C0008 WLAN 802.11ac(80M) 5.6G Tablet mode Top side CH 138 Aux 0mm Communication System: WLAN 5G; Frequency: 5690 MHz; Duty cycle= 1:0.938 Medium parameters used: f = 5690 MHz; σ = 5.142 S/m; ϵ_r = 34.761; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

DASY5 Configuration:


- Probe: EX3DV4 SN3770; ConvF(4.9, 4.9, 4.9) @ 5690 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 1.72 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.335V/m: Power Drift = -0.03 dB Peak SAR (extrapolated) = 3.50 W/kg SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.309 W/kg Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

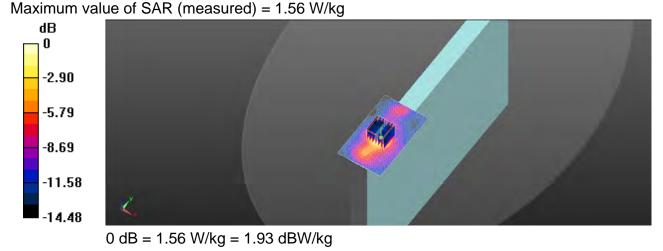

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Report No. : EN/2020/C0008 Page: 72 of 80

Date: 2020/12/17

Report No. :EN/2020/C0008 WLAN 802.11ac(80M) 5.8G Tablet mode Top side CH 155 Aux 0mm Communication System: WLAN 5G; Frequency: 5775 MHz; Duty cycle= 1:0.938 Medium parameters used: f = 5775 MHz; σ = 5.259 S/m; ϵ_r = 34.475; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 22.3°C

DASY5 Configuration:


- Probe: EX3DV4 SN3770; ConvF(4.9, 4.9, 4.9) @ 5775 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x111x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 1.61 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.205 V/m: Power Drift = 0.15 dB Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.286 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 51.4%Maximum value of SAR (measured) = 1.50 W/kg

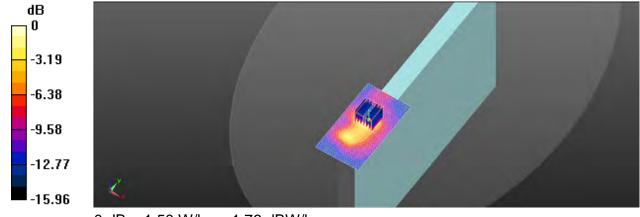

0 dB = 1.50 W/kg = 1.76 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. : EN/2020/C0008 Page: 73 of 80

6. SAR System Performance Verification

Date: 2020/12/13

Report No. :EN/2020/C0008 Dipole 2450 MHz SN:727

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1 Medium parameters used: f = 2450 MHz; σ = 1.844 S/m; ϵ_r = 38.335; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 21.9°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(7.4, 7.4, 7.4) @ 2450 MHz; Calibrated: 2020/5/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Pin=250mW/Area Scan (51x61x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 21.4 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 105.3 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.16 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 19.9 W/kg

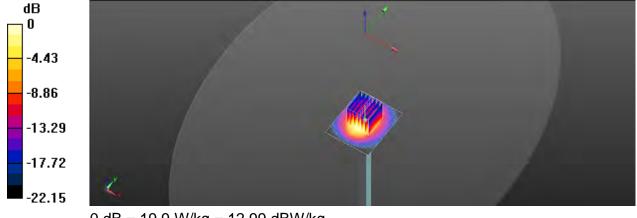

0 dB = 19.9 W/kg = 12.99 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. : EN/2020/C0008 Page: 74 of 80

Date: 2020/12/14

Report No. :EN/2020/C0008 Dipole 5200 MHz SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty cycle= 1:1 Medium parameters used: f = 5200 MHz; σ = 4.494 S/m; ε_r = 36.163; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.4, 5.4, 5.4) @ 5200 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 15.6 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm


Reference Value = 59.88 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 29.7 W/kg

SAR(1 g) = 7.5 W/kg; SAR(10 g) = 2.17 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 15.4 W/kg

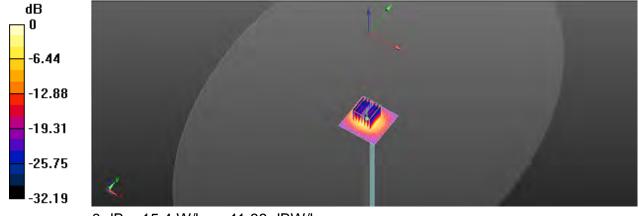

0 dB = 15.4 W/kg = 11.88 dBW/kg

Х

Member of SGS Group

www.sqs.com.tw

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

f (886-2) 2298-0488



Report No. : EN/2020/C0008 Page: 75 of 80

Date: 2020/12/15

Report No. :EN/2020/C0008 Dipole 5300 MHz SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty cycle= 1:1 Medium parameters used: f = 5300 MHz; σ = 4.649 S/m; ϵ_r = 35.858; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.6°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(5.4, 5.4, 5.4) @ 5300 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 16.6 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm


Reference Value = 60.61 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.27 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 16.5 W/kg

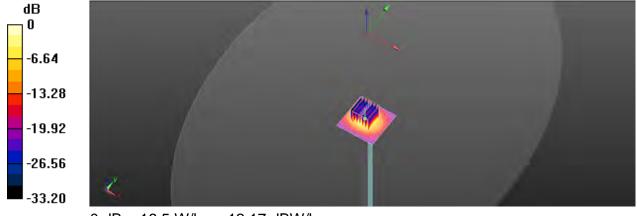

0 dB = 16.5 W/kg = 12.17 dBW/kg

```
www.sqs.com.tw
```

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. : EN/2020/C0008 Page: 76 of 80

Date: 2020/12/16

Report No. :EN/2020/C0008 Dipole 5600 MHz SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty cycle= 1:1 Medium parameters used: f = 5600 MHz; σ = 5.031 S/m; ϵ_r = 35.007; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.79, 4.79, 4.79) @ 5600 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 18.0 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm

Reference Value = 60.86 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 8.39 W/kg; SAR(10 g) = 2.39 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 17.6 W/kg

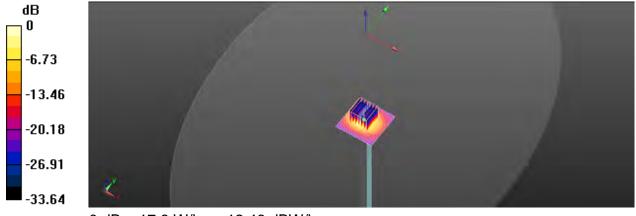

0 dB = 17.6 W/kg = 12.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Date: 2020/12/17

Report No. :EN/2020/C0008 Dipole 5800 MHz SN:1023

Communication System: CW; Frequency: 5800 MHz; Duty cycle= 1:1 Medium parameters used: f = 5800 MHz; σ = 5.311 S/m; ϵ_r = 34.431; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.3°C


DASY5 Configuration:

- Probe: EX3DV4 SN3770; ConvF(4.9, 4.9, 4.9) @ 5800 MHz; Calibrated: 2020/5/27 •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn856; Calibrated: 2020/4/23
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 17.4 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm Reference Value = 58.18 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 37.0 W/kg SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.29 W/kgSmallest distance from peaks to all points 3 dB below = 7.9 mm Ratio of SAR at M2 to SAR at M1 = 50.2% Maximum value of SAR (measured) = 17.1 W/kg

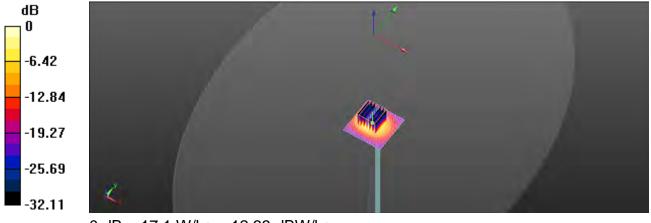

0 dB = 17.1 W/kg = 12.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.sqs.com.tw



7. Uncertainty Budget

A	с	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	x 0
lsotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	8
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	~
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	8
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Readout Electronics	0.30%	Ν	1	1	1	1	0.30%	0.30%	80
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	œ
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	œ
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	2.45%	N	1	1	0.64	0.43	1.57%	1.05%	М
Liquid Conductivity (mea.)	3.85%	N	1	1	0.6	0.49	2.31%	1.89%	М
Combined standard uncertainty		RSS					12.04%	11.90%	
Expant uncertainty (95% confidence interval), K=2							24.09%	23.81%	

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
f (886-2) 2298-0488
```



A	с	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	8
lsotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	8
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	8
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	8
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	8
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	~
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	8
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	8
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	2.42%	N	1	1	0.64	0.43	1.55%	1.04%	М
Liquid Conductivity (mea.)	2.48%	N	1	1	0.6	0.49	1.49%	1.22%	М
Combined standard uncertainty		RSS					11.62%	11.52%	
Expant uncertainty (95% confidence interval), K=2							23.24%	23.04%	

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : EN/2020/C0008 Page : 80 of 80

Appendixes

Refer to separated files for the following appendixes.

EN2020C0008 SAR_Appendix A Photographs

EN2020C0008 SAR_Appendix B DAE & Probe Cal. Certificate

EN2020C0008 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留約天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

an Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

```
www.sgs.com.tw
```

Member of SGS Group