



## Shenzhen EBO Testing Center

A506, Financial port building, Xin'an Sixth Road, 82<sup>th</sup> District, Bao'an,  
Shenzhen, China.  
Telephone: +86-755-33126608,  
Email: ebo@ebotest.com

Report No.: EBO1707001-E148  
Page 1 of 29

# FCC REPORT

**Applicant:** GUANGDONG SIRUI OPTICAL CO., LTD

**Address of Applicant:** The Third Industrial Zone, Wuguishan Town, Zhongshan City,  
Guangdong, China

**Equipment Under Test (EUT)**

Product Name: PLATFORM TERMINAL

Model No.: BP360-01A

**FCC ID:** 2AMTDBP360-01A

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.249:2017

**Date of sample receipt:** July 3, 2017

**Date of Test:** July 3, 2017 to July 13, 2017

**Date of report issued:** July 13, 2017

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kevin Yu  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 2 of 29

### 2 Version

| Version No. | Date          | Description |
|-------------|---------------|-------------|
| 00          | July 13, 2017 | Original    |
|             |               |             |
|             |               |             |
|             |               |             |
|             |               |             |

Prepared by:

Date:

July 13, 2017

Project Engineer

Reviewed by:

Date:

July 13, 2017

Reviewer

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 3 of 29

### 3 Contents

|                                                      | Page |
|------------------------------------------------------|------|
| 1 COVER PAGE .....                                   | 1    |
| 2 VERSION .....                                      | 2    |
| 3 CONTENTS .....                                     | 3    |
| 4 TEST SUMMARY .....                                 | 4    |
| 4.1 MEASUREMENT UNCERTAINTY .....                    | 4    |
| 5 GENERAL INFORMATION .....                          | 5    |
| 5.1 CLIENT INFORMATION .....                         | 5    |
| 5.2 GENERAL DESCRIPTION OF EUT .....                 | 5    |
| 5.3 TEST MODE .....                                  | 7    |
| 5.4 DESCRIPTION OF SUPPORT UNITS .....               | 7    |
| 5.5 TEST FACILITY .....                              | 7    |
| 5.6 TEST LOCATION .....                              | 7    |
| 6 TEST INSTRUMENTS LIST .....                        | 8    |
| 7 TEST RESULTS AND MEASUREMENT DATA .....            | 10   |
| 7.1 ANTENNA REQUIREMENT .....                        | 10   |
| 7.2 CONDUCTED EMISSIONS .....                        | 11   |
| 7.3 RADIATED EMISSION METHOD .....                   | 14   |
| 7.3.1 Field Strength of The Fundamental Signal ..... | 16   |
| 7.3.2 Spurious emissions .....                       | 17   |
| 7.3.3 Bandedge emissions .....                       | 21   |
| 7.4 20dB OCCUPY BANDWIDTH .....                      | 22   |
| 8 TEST SETUP PHOTO .....                             | 24   |
| 9 EUT CONSTRUCTIONAL DETAILS .....                   | 26   |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 4 of 29

### 4 Test Summary

| Test Item                                | Section in CFR 47     | Result |
|------------------------------------------|-----------------------|--------|
| Antenna requirement                      | 15.203                | Pass   |
| AC Power Line Conducted Emission         | 15.207                | Pass   |
| Field strength of the fundamental signal | 15.249 (a)            | Pass   |
| Spurious emissions                       | 15.249 (a) (d)/15.209 | Pass   |
| Band edge                                | 15.249 (d)/15.205     | Pass   |
| 20dB Occupied Bandwidth                  | 15.215 (c)            | Pass   |

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark: Test according to ANSI C63.4 2014 and ANSI C63.10 2013.*

#### 4.1 Measurement Uncertainty

| Test Item                        | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission                | 9kHz ~ 30MHz    | $\pm 4.34\text{dB}$     | (1)   |
| Radiated Emission                | 30MHz ~ 1000MHz | $\pm 4.24\text{dB}$     | (1)   |
| Radiated Emission                | 1GHz ~ 26.5GHz  | $\pm 4.68\text{dB}$     | (1)   |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | $\pm 3.45\text{dB}$     | (1)   |

Note (1): The measurement uncertainty is for coverage factor of  $k=2$  and a level of confidence of 95%.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 5 of 29

## 5 General Information

### 5.1 Client Information

|                                  |                                                                             |
|----------------------------------|-----------------------------------------------------------------------------|
| Applicant:                       | GUANGDONG SIRUI OPTICAL CO., LTD                                            |
| Address of Applicant:            | The Third Industrial Zone, Wuguishan Town, Zhongshan City, Guangdong, China |
| Manufacturer/Factory:            | GUANGDONG SIRUI OPTICAL CO., LTD                                            |
| Address of Manufacturer/Factory: | The Third Industrial Zone, Wuguishan Town, Zhongshan City, Guangdong, China |

### 5.2 General Description of EUT

|                      |                                        |
|----------------------|----------------------------------------|
| Product Name:        | PLATFORM TERMINAL                      |
| Model No.:           | BP360-01A                              |
| Operation Frequency: | 2402MHz~2480MHz                        |
| Channel Numbers:     | 40                                     |
| Channel Separation:  | 2MHz                                   |
| Modulation Type:     | GFSK                                   |
| Antenna Type:        | PCB Antenna                            |
| Antenna gain:        | 0dBi (declare by Applicant)            |
| Power supply:        | DC 3.7V, 450mAh Polymer Li-ion Battery |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 6 of 29

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2402MHz   | 11      | 2422MHz   | 21      | 2442MHz   | 31      | 2462MHz   |
| 2                                   | 2404MHz   | 12      | 2424MHz   | 22      | 2444MHz   | 32      | 2464MHz   |
| ⋮                                   | ⋮         | ⋮       | ⋮         | ⋮       | ⋮         | ⋮       | ⋮         |
| 9                                   | 2418MHz   | 19      | 2438MHz   | 29      | 2458MHz   | 39      | 2478MHz   |
| 10                                  | 2420MHz   | 20      | 2440MHz   | 30      | 2460MHz   | 40      | 2480MHz   |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel             | Frequency |
|---------------------|-----------|
| The lowest channel  | 2402MHz   |
| The middle channel  | 2440MHz   |
| The Highest channel | 2480MHz   |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 7 of 29

### 5.3 Test mode

|                                                                                                                                                                                                                                                                     |                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                                                   | Keep the EUT in continuously transmitting mode |
| <i>Remark: During the test, the dutycycle &gt;98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i> |                                                |

#### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

| Axis                   | X     | Y     | Z     |
|------------------------|-------|-------|-------|
| Field Strength(dBuV/m) | 84.73 | 89.59 | 87.12 |

### 5.4 Description of Support Units

| Manufacturer | Description | Model     | Serial Number |
|--------------|-------------|-----------|---------------|
| DELTA        | ADAPTER     | ADP-60ADT | N/A           |

### 5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

### 5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 8 of 29

### 6 Test Instruments list

| Radiated Emission: |                                          |                                    |                             |               |                     |                         |
|--------------------|------------------------------------------|------------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                           | Manufacturer                       | Model No.                   | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber                | ZhongYu Electron                   | 9.2(L)*6.2(W)*<br>6.4(H)    | 250           | July. 03 2015       | July. 02 2020           |
| 2                  | Control Room                             | ZhongYu Electron                   | 6.2(L)*2.5(W)*<br>2.4(H)    | 251           | N/A                 | N/A                     |
| 3                  | EMI Test Receiver                        | Rohde & Schwarz                    | ESU26                       | 203           | June. 29 2017       | June. 28 2018           |
| 4                  | BiConiLog Antenna                        | SCHWARZBECK<br>MESS-<br>ELEKTRONIK | VULB9163                    | 214           | June. 29 2017       | June. 28 2018           |
| 5                  | Double -ridged<br>waveguide horn         | SCHWARZBECK<br>MESS-<br>ELEKTRONIK | 9120D-829                   | 208           | June. 29 2017       | June. 28 2018           |
| 6                  | Horn Antenna                             | ETS-LINDGREN                       | 3160                        | 217           | June. 29 2017       | June. 28 2018           |
| 7                  | EMI Test Software                        | AUDIX                              | E3                          | N/A           | N/A                 | N/A                     |
| 8                  | Coaxial Cable                            | GTS                                | N/A                         | 213           | June. 29 2017       | June. 28 2018           |
| 9                  | Coaxial Cable                            | GTS                                | N/A                         | 211           | June. 29 2017       | June. 28 2018           |
| 10                 | Coaxial cable                            | GTS                                | N/A                         | 210           | June. 29 2017       | June. 28 2018           |
| 11                 | Coaxial Cable                            | GTS                                | N/A                         | 212           | June. 29 2017       | June. 28 2018           |
| 12                 | Amplifier(100kHz-<br>3GHz)               | HP                                 | 8347A                       | 204           | June. 29 2017       | June. 28 2018           |
| 13                 | Amplifier(2GHz-<br>20GHz)                | HP                                 | 8349B                       | 206           | June. 29 2017       | June. 28 2018           |
| 14                 | Amplifier (18-26GHz)                     | Rohde & Schwarz                    | AFS33-18002<br>650-30-8P-44 | 218           | June. 29 2017       | June. 28 2018           |
| 15                 | Band filter                              | Amindeon                           | 82346                       | 219           | June. 29 2017       | June. 28 2018           |
| 16                 | Constant temperature<br>and humidity box | Oregon Scientific                  | BA-888                      | 248           | June. 29 2017       | June. 28 2018           |
| 17                 | D.C. Power Supply                        | Instek                             | PS-3030                     | 232           | June. 29 2017       | June. 28 2018           |
| 18                 | Wideband Radio<br>Communication Tester   | Rohde & Schwarz                    | CMW500                      | 588           | June. 29 2017       | June. 28 2018           |
| 19                 | Splitter                                 | Agilent                            | 11636B                      | 237           | June. 29 2017       | June. 28 2018           |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 9 of 29

| Disturbance voltages: |                   |                                |                      |               |                     |                         |
|-----------------------|-------------------|--------------------------------|----------------------|---------------|---------------------|-------------------------|
| Item                  | Test Equipment    | Manufacturer                   | Model No.            | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                     | Shielding Room    | ZhongYu Electron               | 7.0(L)x3.0(W)x3.0(H) | 252           | Jul. 02 2017        | Jul. 01 2018            |
| 2                     | EMI Test Receiver | Rohde & Schwarz                | ESCS30               | 223           | Jul. 02 2017        | Jul. 01 2018            |
| 3                     | 10dB Pulse Limita | Rohde & Schwarz                | N/A                  | 224           | Jul. 02 2017        | Jul. 01 2018            |
| 4                     | Coaxial Switch    | ANRITSU CORP                   | MP59B                | 225           | Jul. 02 2017        | Jul. 01 2018            |
| 5                     | LISN              | SCHWARZBECK<br>MESS-ELEKTRONIK | NSLK8127             | 226           | Jul. 02 2017        | Jul. 01 2018            |
| 6                     | Coaxial Cable     | GTS                            | N/A                  | 227           | Jul. 02 2017        | Jul. 01 2018            |
| 7                     | EMI Test Software | AUDIX                          | E3                   | N/A           | N/A                 | N/A                     |
| 8                     | Thermo meter      | KTJ                            | TA328                | 233           | Jul. 02 2017        | Jul. 01 2018            |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## 7 Test results and Measurement Data

### 7.1 Antenna requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | FCC Part15 C Section 15.203 /247(c) |
| <b>15.203 requirement:</b><br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |                                     |
| <b>15.247(c) (1)(i) requirement:</b><br>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.                                                                                |                                     |
| <b>EUT Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |
| The antenna is Ceramic antenna, the best case gain of the antenna is 0dBi                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 11 of 29

### 7.2 Conducted Emissions

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |              |           |
| Test Method:                                     | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |              |           |
| Test Frequency Range:                            | 150KHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
| Class / Severity:                                | Class B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |              |           |
| Receiver setup:                                  | RBW=9KHz, VBW=30KHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
| Test setup:                                      | <div><p style="text-align: center;"><b>Reference Plane</b></p><p>Remark:<br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.8m</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |
| Test procedure:                                  | <div><div>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</div></div> |              |           |
| Test Instruments:                                | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |              |           |
| Test mode:                                       | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |              |           |
| Test results:                                    | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |              |           |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 12 of 29

### Measurement data:


|            |                      |  |      |
|------------|----------------------|--|------|
| Test mode: | Bluetooth mode (BLE) |  | LINE |
|------------|----------------------|--|------|

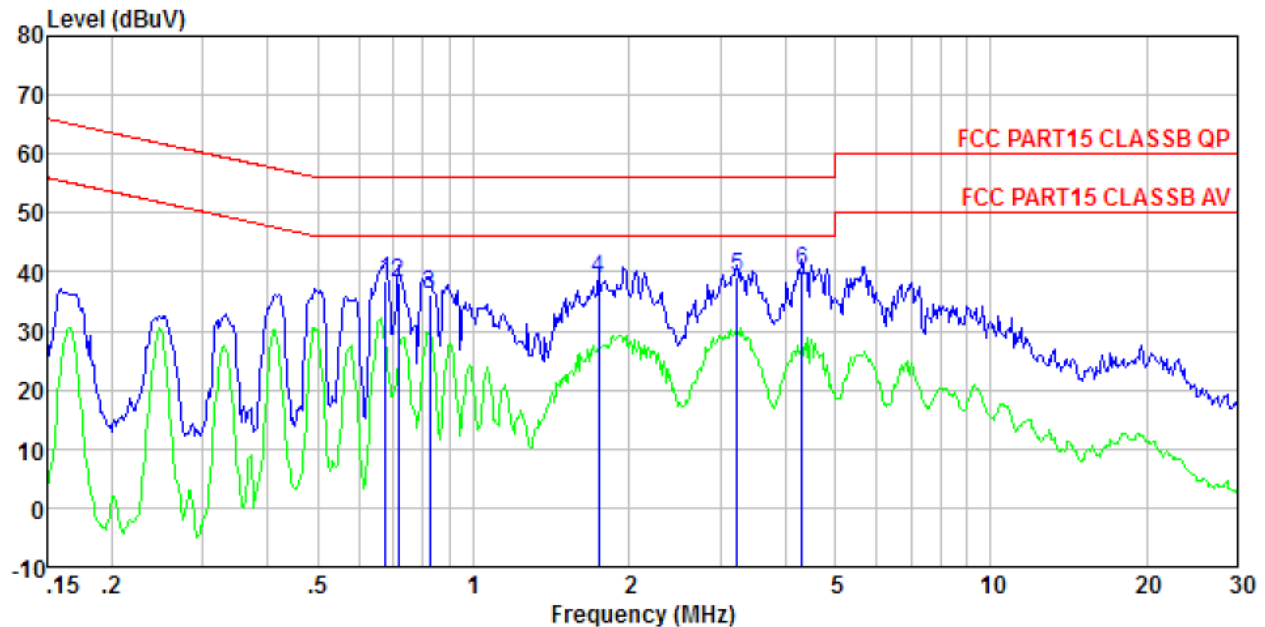

|   | Freq  | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|---|-------|------------|-------------|------------|-------|------------|------------|--------|
|   | MHz   | dBuV       | dB          | dB         | dBuV  | dBuV       | dB         |        |
| 1 | 0.675 | 38.13      | 0.29        | 0.13       | 38.55 | 56.00      | -17.45     | QP     |
| 2 | 0.716 | 37.71      | 0.28        | 0.13       | 38.12 | 56.00      | -17.88     | QP     |
| 3 | 0.822 | 35.87      | 0.27        | 0.13       | 36.27 | 56.00      | -19.73     | QP     |
| 4 | 1.744 | 38.47      | 0.21        | 0.14       | 38.82 | 56.00      | -17.18     | QP     |
| 5 | 3.241 | 38.67      | 0.21        | 0.15       | 39.03 | 56.00      | -16.97     | QP     |
| 6 | 4.315 | 39.87      | 0.21        | 0.15       | 40.23 | 56.00      | -15.77     | QP     |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

|            |                      |  |         |
|------------|----------------------|--|---------|
| Test mode: | Bluetooth mode (BLE) |  | NEUTRAL |
|------------|----------------------|--|---------|

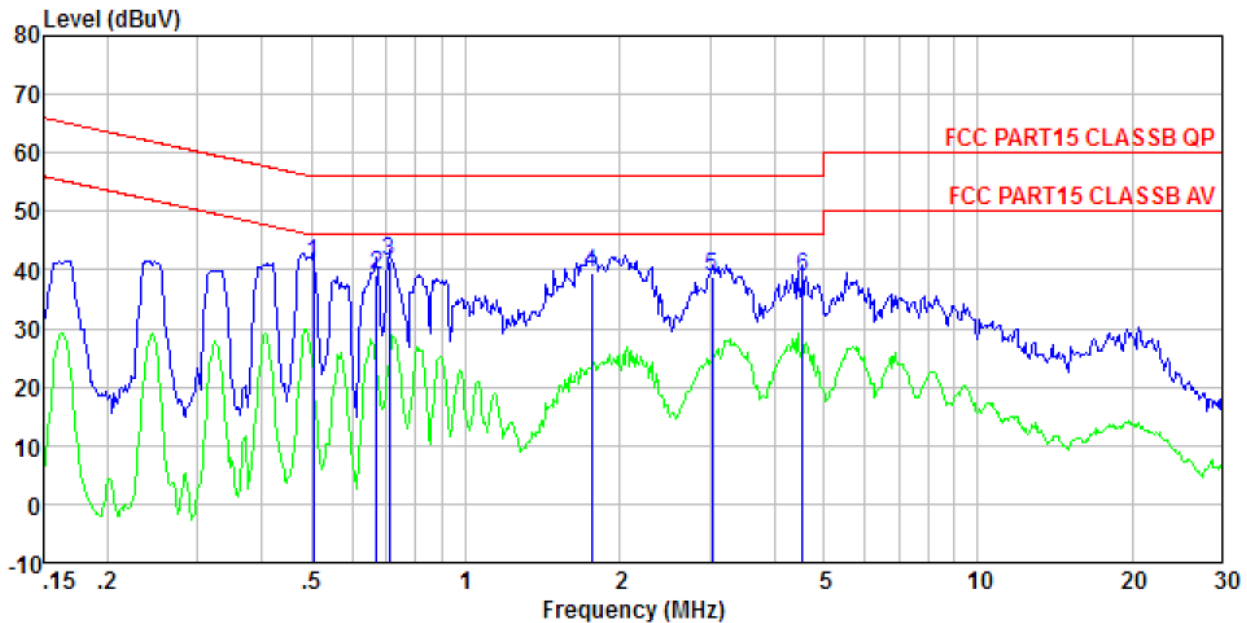


|   | Freq  | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|---|-------|------------|-------------|------------|-------|------------|------------|--------|
|   | MHz   | dBuV       | dB          | dB         | dBuV  | dBuV       | dB         |        |
| 1 | 0.505 | 40.62      | 0.35        | 0.11       | 41.08 | 56.00      | -14.92     | QP     |
| 2 | 0.672 | 38.62      | 0.25        | 0.13       | 39.00 | 56.00      | -17.00     | QP     |
| 3 | 0.708 | 40.99      | 0.24        | 0.13       | 41.36 | 56.00      | -14.64     | QP     |
| 4 | 1.762 | 39.30      | 0.20        | 0.14       | 39.64 | 56.00      | -16.36     | QP     |
| 5 | 3.025 | 38.57      | 0.20        | 0.15       | 38.92 | 56.00      | -17.08     | QP     |
| 6 | 4.549 | 38.51      | 0.21        | 0.15       | 38.87 | 56.00      | -17.13     | QP     |


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 7.3 Radiated Emission Method
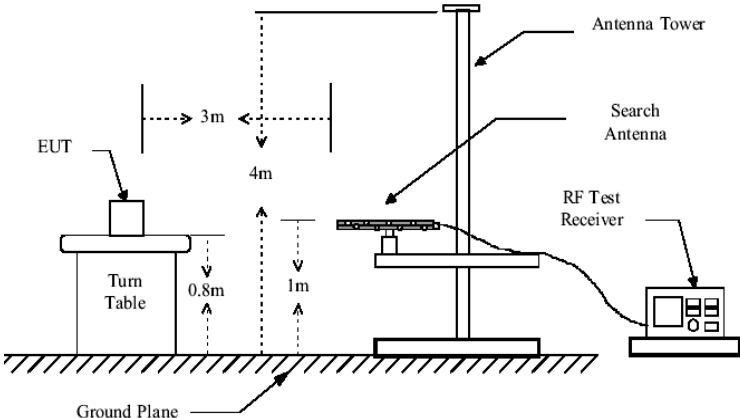
|                                                      |                                                                                                                                                                                                                                                                |            |                    |        |                  |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------|--------|------------------|
| Test Requirement:                                    | FCC Part15 C Section 15.209                                                                                                                                                                                                                                    |            |                    |        |                  |
| Test Method:                                         | ANSI C63.10:2013                                                                                                                                                                                                                                               |            |                    |        |                  |
| Test Frequency Range:                                | 30MHz to 25GHz                                                                                                                                                                                                                                                 |            |                    |        |                  |
| Test site:                                           | Measurement Distance: 3m                                                                                                                                                                                                                                       |            |                    |        |                  |
| Receiver setup:                                      | Frequency                                                                                                                                                                                                                                                      | Detector   | RBW                | VBW    | Remark           |
|                                                      | 30MHz-1GHz                                                                                                                                                                                                                                                     | Quasi-peak | 120KHz             | 300KHz | Quasi-peak Value |
|                                                      | Above 1GHz                                                                                                                                                                                                                                                     | Peak       | 1MHz               | 3MHz   | Peak Value       |
|                                                      |                                                                                                                                                                                                                                                                | Peak       | 1MHz               | 10Hz   | Average Value    |
| Limit:<br>(Field strength of the fundamental signal) | Frequency                                                                                                                                                                                                                                                      |            | Limit (dBuV/m @3m) |        | Remark           |
|                                                      | 2400MHz-2483.5MHz                                                                                                                                                                                                                                              |            | 94.00              |        | Average Value    |
| Limit:<br>(Spurious Emissions)                       | Frequency                                                                                                                                                                                                                                                      |            | Limit (dBuV/m @3m) |        | Remark           |
|                                                      | 30MHz-88MHz                                                                                                                                                                                                                                                    |            | 40.00              |        | Quasi-peak Value |
|                                                      | 88MHz-216MHz                                                                                                                                                                                                                                                   |            | 43.50              |        | Quasi-peak Value |
|                                                      | 216MHz-960MHz                                                                                                                                                                                                                                                  |            | 46.00              |        | Quasi-peak Value |
|                                                      | 960MHz-1GHz                                                                                                                                                                                                                                                    |            | 54.00              |        | Quasi-peak Value |
|                                                      | Above 1GHz                                                                                                                                                                                                                                                     |            | 54.00              |        | Average Value    |
|                                                      |                                                                                                                                                                                                                                                                |            | 74.00              |        | Peak Value       |
| Limit:<br>(band edge)                                | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. |            |                    |        |                  |
| Test setup:                                          | Below 1GHz                                                                                                                                                                                                                                                     |            |                    |        |                  |
|                                                      | <div></div>                                                                                                                                                                |            |                    |        |                  |
|                                                      | Above 1GHz                                                                                                                                                                                                                                                     |            |                    |        |                  |
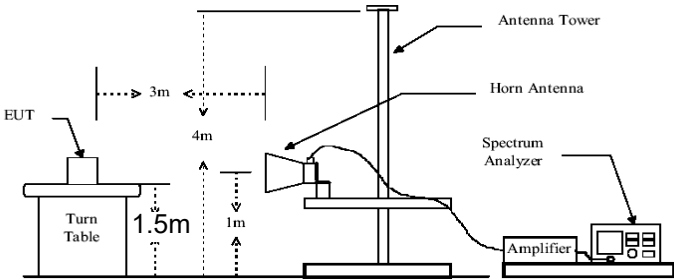
|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <p>Test Procedure:</p>   | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> |
| <p>Test Instruments:</p> | <p>Refer to section 6.0 for details</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <p>Test mode:</p>        | <p>Refer to section 5.3 for details</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <p>Test results:</p>     | <p>Pass</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## Measurement data:



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 16 of 29

### 7.3.1 Field Strength of The Fundamental Signal

#### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2402.00         | 90.37             | 27.58                 | 5.39            | 34.01                    | 89.33          | 114.00              | -24.67          | Vertical     |
| 2402.00         | 85.28             | 27.58                 | 5.39            | 34.01                    | 84.24          | 114.00              | -29.76          | Horizontal   |
| 2440.00         | 90.64             | 27.48                 | 5.43            | 33.96                    | 89.59          | 114.00              | -24.41          | Vertical     |
| 2440.00         | 84.73             | 27.48                 | 5.43            | 33.96                    | 83.68          | 114.00              | -30.32          | Horizontal   |
| 2480.00         | 89.71             | 27.52                 | 5.47            | 33.92                    | 88.78          | 114.00              | -25.22          | Vertical     |
| 2480.00         | 83.94             | 27.52                 | 5.47            | 33.92                    | 83.01          | 114.00              | -30.99          | Horizontal   |

#### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2402.00         | 80.66             | 27.58                 | 5.39            | 34.01                    | 79.62          | 94.00               | -14.38          | Vertical     |
| 2402.00         | 75.62             | 27.58                 | 5.39            | 34.01                    | 74.58          | 94.00               | -19.42          | Horizontal   |
| 2440.00         | 80.69             | 27.48                 | 5.43            | 33.96                    | 79.64          | 94.00               | -14.36          | Vertical     |
| 2440.00         | 74.14             | 27.48                 | 5.43            | 33.96                    | 73.09          | 94.00               | -20.91          | Horizontal   |
| 2480.00         | 79.72             | 27.52                 | 5.47            | 33.92                    | 78.79          | 94.00               | -15.21          | Vertical     |
| 2480.00         | 74.32             | 27.52                 | 5.47            | 33.92                    | 73.39          | 94.00               | -20.61          | Horizontal   |

Note: RBW 3MHz VBW 3MHz Peak detector is for PK value, RMS detector is for AV value

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 17 of 29

### 7.3.2 Spurious emissions

#### ■ Below 1GHz

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 98.487          | 32.58             | 11.73                 | 1.18            | 29.8                     | 15.69          | 43.5                | -27.81          | Vertical     |
| 104.17          | 31.66             | 11.8                  | 1.23            | 29.79                    | 14.9           | 43.5                | -28.6           | Vertical     |
| 140.835         | 30.06             | 7.3                   | 1.51            | 29.64                    | 9.23           | 43.5                | -34.27          | Vertical     |
| 152.664         | 29.57             | 7.68                  | 1.59            | 29.59                    | 9.25           | 43.5                | -34.25          | Vertical     |
| 180.017         | 33.38             | 8.8                   | 1.74            | 29.48                    | 14.44          | 43.5                | -29.06          | Vertical     |
| 213.763         | 39.46             | 10.69                 | 1.92            | 29.5                     | 22.57          | 43.5                | -20.93          | Vertical     |
| 200.688         | 39.16             | 10.2                  | 1.84            | 29.4                     | 21.8           | 43.5                | -21.7           | Horizontal   |
| 215.268         | 39.69             | 10.69                 | 1.93            | 29.52                    | 22.79          | 43.5                | -20.71          | Horizontal   |
| 244.232         | 32.82             | 11.66                 | 2.09            | 29.74                    | 16.83          | 46                  | -29.17          | Horizontal   |
| 274.194         | 30.21             | 12.63                 | 2.24            | 29.98                    | 15.1           | 46                  | -30.9           | Horizontal   |
| 365.539         | 23.7              | 14.79                 | 2.69            | 29.8                     | 11.38          | 46                  | -34.62          | Horizontal   |
| 597.223         | 25.11             | 19.25                 | 3.71            | 29.4                     | 18.67          | 46                  | -27.33          | Horizontal   |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 18 of 29

### ■ Above 1GHz

|               |                |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

#### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4804.00         | 37.45             | 31.78                 | 8.60            | 32.09              | 45.74          | 74.00               | -28.26          | Vertical     |
| 7206.00         | 31.93             | 36.15                 | 11.65           | 32.00              | 47.73          | 74.00               | -26.27          | Vertical     |
| 9608.00         | 31.55             | 37.95                 | 14.14           | 31.62              | 52.02          | 74.00               | -21.98          | Vertical     |
| 12010.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14412.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4804.00         | 41.77             | 31.78                 | 8.60            | 32.09              | 50.06          | 74.00               | -23.94          | Horizontal   |
| 7206.00         | 33.70             | 36.15                 | 11.65           | 32.00              | 49.50          | 74.00               | -24.50          | Horizontal   |
| 9608.00         | 30.99             | 37.95                 | 14.14           | 31.62              | 51.46          | 74.00               | -22.54          | Horizontal   |
| 12010.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14412.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

#### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4804.00         | 26.24             | 31.78                 | 8.60            | 32.09              | 34.53          | 54.00               | -19.47          | Vertical     |
| 7206.00         | 20.60             | 36.15                 | 11.65           | 32.00              | 36.40          | 54.00               | -17.60          | Vertical     |
| 9608.00         | 19.67             | 37.95                 | 14.14           | 31.62              | 40.14          | 54.00               | -13.86          | Vertical     |
| 12010.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14412.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4804.00         | 30.48             | 31.78                 | 8.60            | 32.09              | 38.77          | 54.00               | -15.23          | Horizontal   |
| 7206.00         | 22.78             | 36.15                 | 11.65           | 32.00              | 38.58          | 54.00               | -15.42          | Horizontal   |
| 9608.00         | 19.41             | 37.95                 | 14.14           | 31.62              | 39.88          | 54.00               | -14.12          | Horizontal   |
| 12010.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14412.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

#### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

“This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.”



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 19 of 29

|               |        |
|---------------|--------|
| Test channel: | Middle |
|---------------|--------|

### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4880.00         | 36.83             | 31.85                 | 8.67            | 32.12                    | 45.23          | 74.00               | -28.77          | Vertical     |
| 7320.00         | 31.52             | 36.37                 | 11.72           | 31.89                    | 47.72          | 74.00               | -26.28          | Vertical     |
| 9760.00         | 31.19             | 38.35                 | 14.25           | 31.62                    | 52.17          | 74.00               | -21.83          | Vertical     |
| 12200.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14640.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4880.00         | 41.02             | 31.85                 | 8.67            | 32.12                    | 49.42          | 74.00               | -24.58          | Horizontal   |
| 7320.00         | 33.23             | 36.37                 | 11.72           | 31.89                    | 49.43          | 74.00               | -24.57          | Horizontal   |
| 9760.00         | 30.57             | 38.35                 | 14.25           | 31.62                    | 51.55          | 74.00               | -22.45          | Horizontal   |
| 12200.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14640.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4880.00         | 25.75             | 31.85                 | 8.67            | 32.12                    | 34.15          | 54.00               | -19.85          | Vertical     |
| 7320.00         | 20.26             | 36.37                 | 11.72           | 31.89                    | 36.46          | 54.00               | -17.54          | Vertical     |
| 9760.00         | 19.37             | 38.35                 | 14.25           | 31.62                    | 40.35          | 54.00               | -13.65          | Vertical     |
| 12200.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14640.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4880.00         | 29.93             | 31.85                 | 8.67            | 32.12                    | 38.33          | 54.00               | -15.67          | Horizontal   |
| 7320.00         | 22.41             | 36.37                 | 11.72           | 31.89                    | 38.61          | 54.00               | -15.39          | Horizontal   |
| 9760.00         | 19.06             | 38.35                 | 14.25           | 31.62                    | 40.04          | 54.00               | -13.96          | Horizontal   |
| 12200.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14640.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

“This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.”



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 20 of 29

|               |         |
|---------------|---------|
| Test channel: | Highest |
|---------------|---------|

### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4960.00         | 35.69             | 31.93                 | 8.73            | 32.16              | 44.19          | 74.00               | -29.81          | Vertical     |
| 7440.00         | 30.76             | 36.59                 | 11.79           | 31.78              | 47.36          | 74.00               | -26.64          | Vertical     |
| 9920.00         | 30.51             | 38.81                 | 14.38           | 31.88              | 51.82          | 74.00               | -22.18          | Vertical     |
| 12400.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14880.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4960.00         | 39.64             | 31.93                 | 8.73            | 32.16              | 48.14          | 74.00               | -25.86          | Horizontal   |
| 7440.00         | 32.37             | 36.59                 | 11.79           | 31.78              | 48.97          | 74.00               | -25.03          | Horizontal   |
| 9920.00         | 29.78             | 38.81                 | 14.38           | 31.88              | 51.09          | 74.00               | -22.91          | Horizontal   |
| 12400.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14880.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4960.00         | 24.85             | 31.93                 | 8.73            | 32.16              | 33.35          | 54.00               | -20.65          | Vertical     |
| 7440.00         | 19.65             | 36.59                 | 11.79           | 31.78              | 36.25          | 54.00               | -17.75          | Vertical     |
| 9920.00         | 18.83             | 38.81                 | 14.38           | 31.88              | 40.14          | 54.00               | -13.86          | Vertical     |
| 12400.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14880.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4960.00         | 28.90             | 31.93                 | 8.73            | 32.16              | 37.40          | 54.00               | -16.60          | Horizontal   |
| 7440.00         | 21.72             | 36.59                 | 11.79           | 31.78              | 38.32          | 54.00               | -15.68          | Horizontal   |
| 9920.00         | 18.43             | 38.81                 | 14.38           | 31.88              | 39.74          | 54.00               | -14.26          | Horizontal   |
| 12400.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14880.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

“This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.”



## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 21 of 29

### 7.3.3 Bandedge emissions

*All of the restriction bands were tested, and only the data of worst case was exhibited.*

|               |                |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

#### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 41.56             | 27.59                 | 5.38            | 30.18                    | 44.35          | 74.00               | -29.65          | Horizontal   |
| 2400.00         | 44.16             | 27.58                 | 5.39            | 30.18                    | 46.95          | 74.00               | -27.05          | Horizontal   |
| 2390.00         | 41.99             | 27.59                 | 5.38            | 30.18                    | 44.78          | 74.00               | -29.22          | Vertical     |
| 2400.00         | 46.06             | 27.58                 | 5.39            | 30.18                    | 48.85          | 74.00               | -25.15          | Vertical     |

#### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 32.41             | 27.59                 | 5.38            | 30.18                    | 35.20          | 54.00               | -18.80          | Horizontal   |
| 2400.00         | 33.57             | 27.58                 | 5.39            | 30.18                    | 36.36          | 54.00               | -17.64          | Horizontal   |
| 2390.00         | 32.26             | 27.59                 | 5.38            | 30.18                    | 35.05          | 54.00               | -18.95          | Vertical     |
| 2400.00         | 35.09             | 27.58                 | 5.39            | 30.18                    | 37.88          | 54.00               | -16.12          | Vertical     |

|               |                 |
|---------------|-----------------|
| Test channel: | Highest channel |
|---------------|-----------------|

#### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 43.51             | 27.53                 | 5.47            | 29.93                    | 46.58          | 74.00               | -27.42          | Horizontal   |
| 2500.00         | 42.93             | 27.55                 | 5.49            | 29.93                    | 46.04          | 74.00               | -27.96          | Horizontal   |
| 2483.50         | 44.13             | 27.53                 | 5.47            | 29.93                    | 47.20          | 74.00               | -26.80          | Vertical     |
| 2500.00         | 43.81             | 27.55                 | 5.49            | 29.93                    | 46.92          | 74.00               | -27.08          | Vertical     |

#### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 35.22             | 27.53                 | 5.47            | 29.93                    | 38.29          | 54.00               | -15.71          | Horizontal   |
| 2500.00         | 33.41             | 27.55                 | 5.49            | 29.93                    | 36.52          | 54.00               | -17.48          | Horizontal   |
| 2483.50         | 36.32             | 27.53                 | 5.47            | 29.93                    | 39.39          | 54.00               | -14.61          | Vertical     |
| 2500.00         | 33.22             | 27.55                 | 5.49            | 29.93                    | 36.33          | 54.00               | -17.67          | Vertical     |

#### Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




## Shenzhen EBO Testing Center

Report No.: EBO1707001-E148

Page 22 of 29

### 7.4 20dB Occupancy Bandwidth
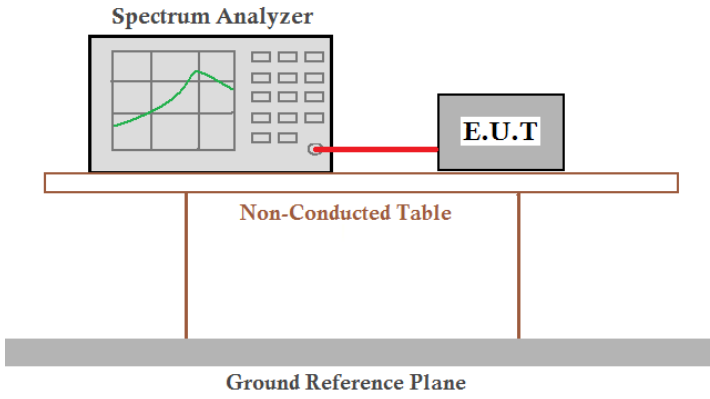
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.249/15.215                                                 |
| Test Method:      | ANSI C63.10:2013                                                                   |
| Limit:            | Operation Frequency range 2400MHz~2483.5MHz                                        |
| Test setup:       |  |
| Test Instruments: | Refer to section 6.0 for details                                                   |
| Test mode:        | Refer to section 5.3 for details                                                   |
| Test results:     | Pass                                                                               |

### Measurement Data

| Test channel | 20dB bandwidth(MHz) | Result |
|--------------|---------------------|--------|
| Lowest       | 1.204               | Pass   |
| Middle       | 1.194               | Pass   |
| Highest      | 1.196               | Pass   |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




## Shenzhen EBO Testing Center


Report No.: EBO1707001-E148

Page 23 of 29


Test plot as follows:

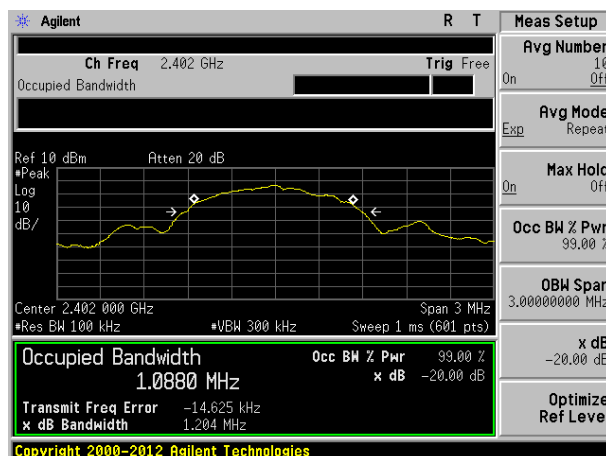

Lowest channel

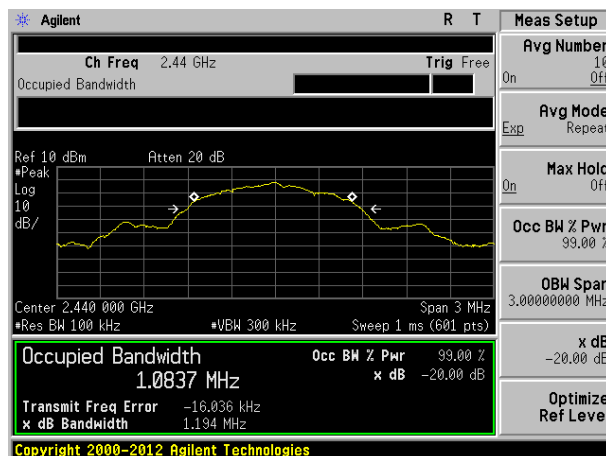

Middle channel


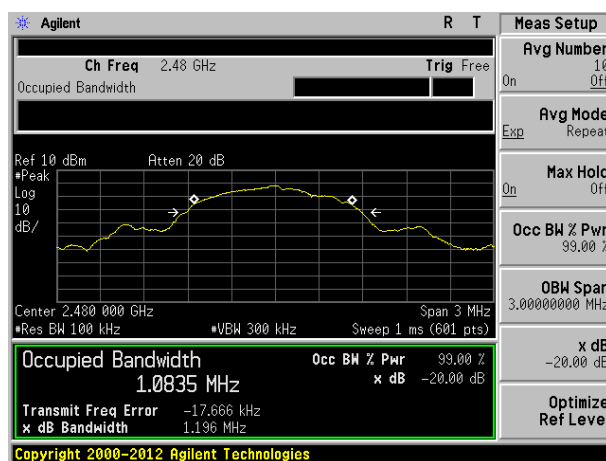


Highest channel

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 8 Test Setup Photo

Radiated Emission

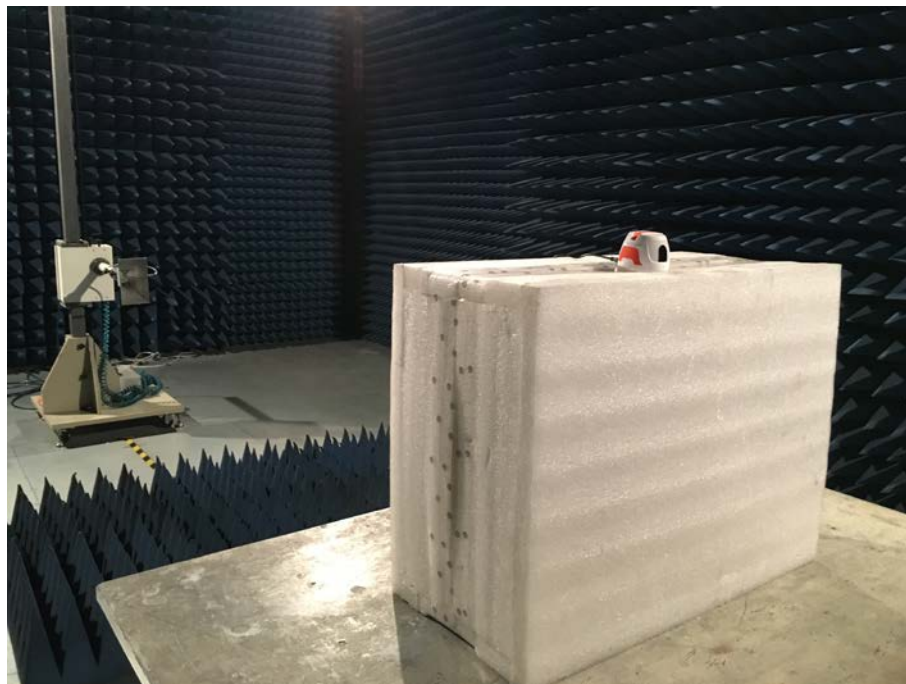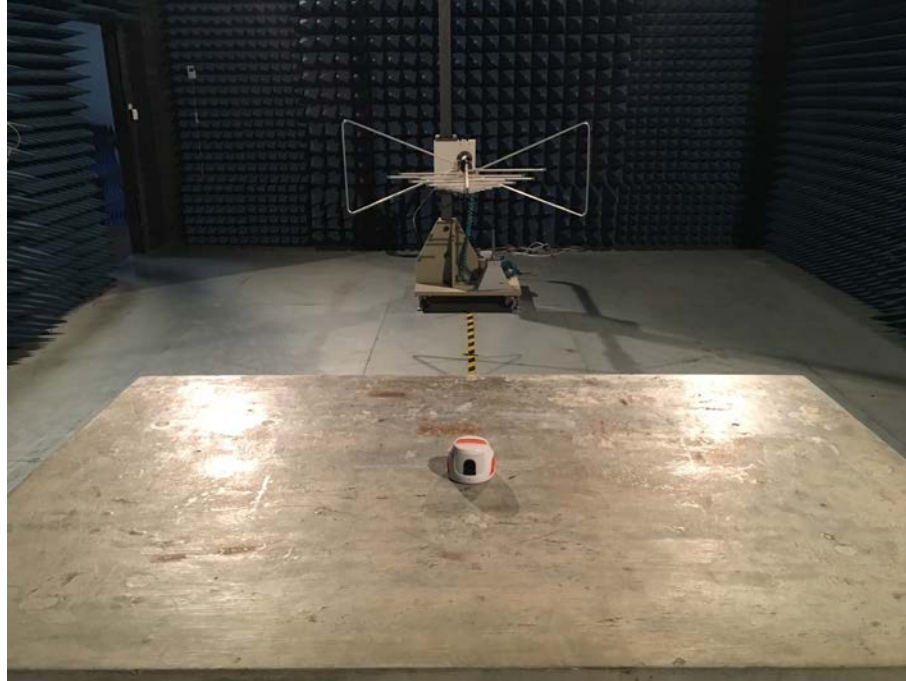

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## Shenzhen EBO Testing Center


Report No.: EBO1707001-E148  
Page 25 of 29

### Conducted Emission






"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## 9 EUT Constructional Details

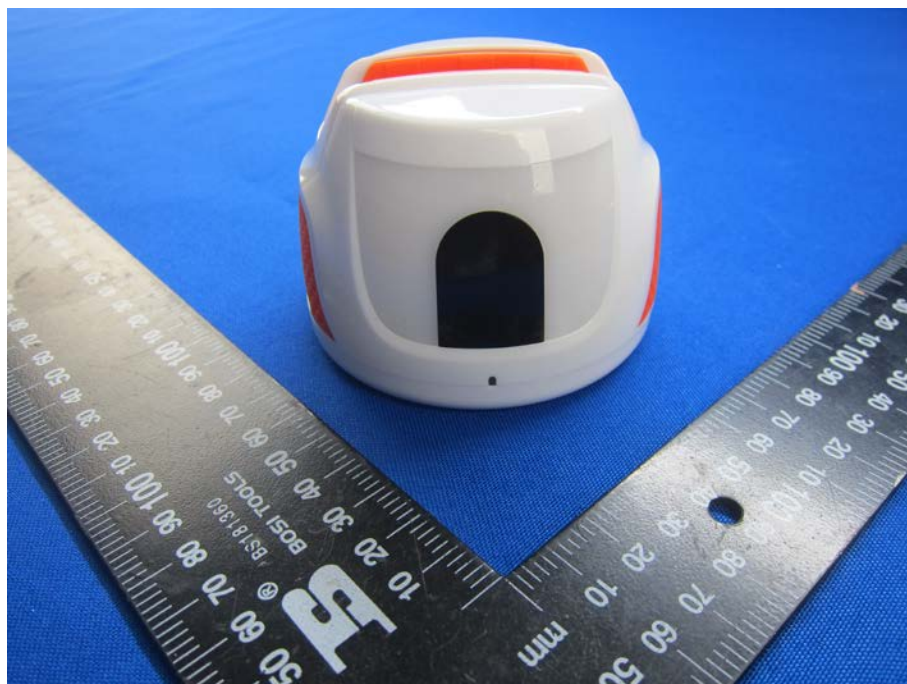

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotest.com> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotest.com> Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

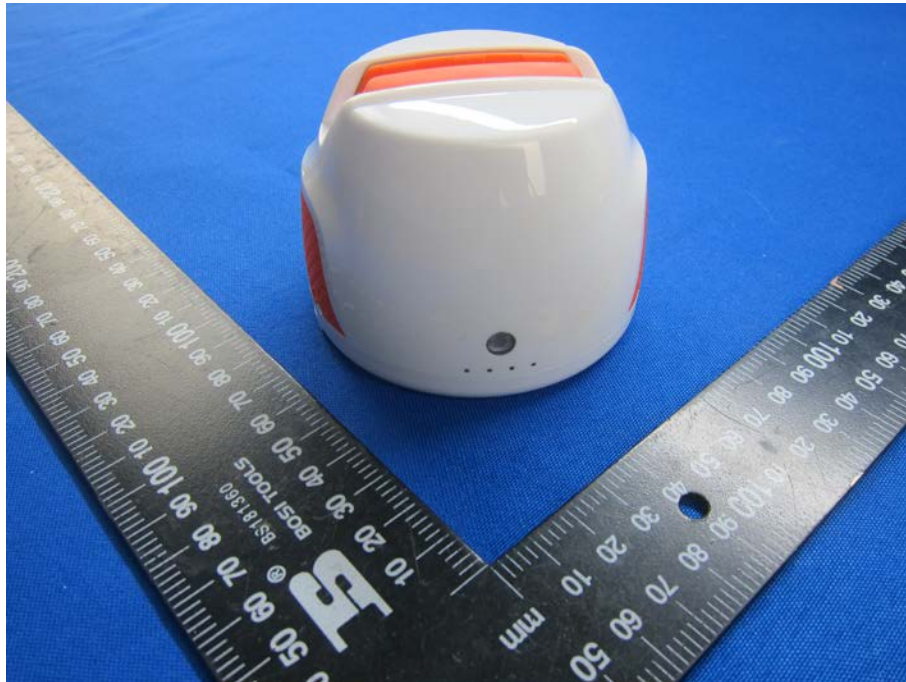

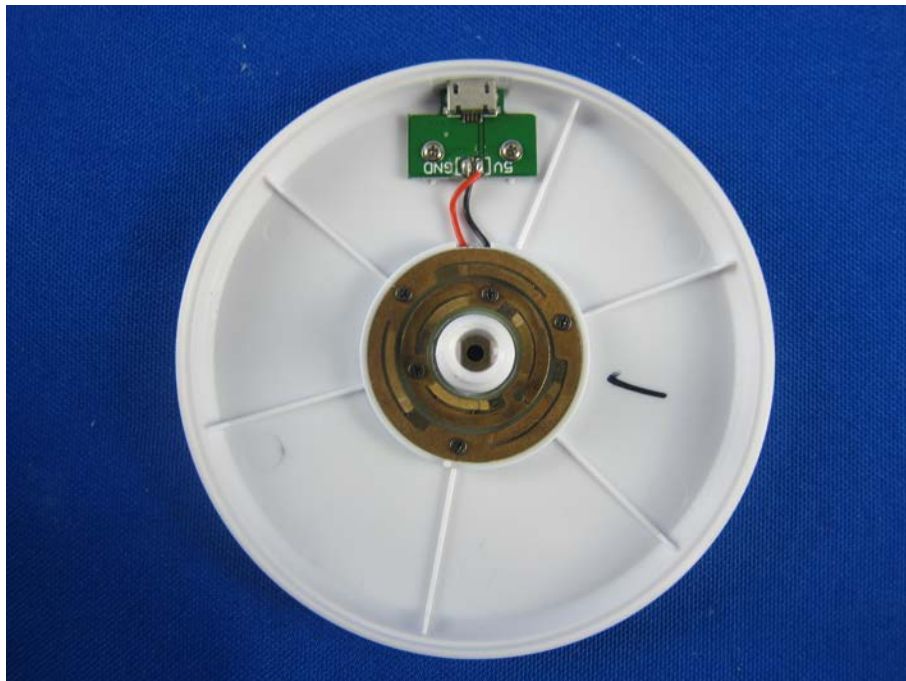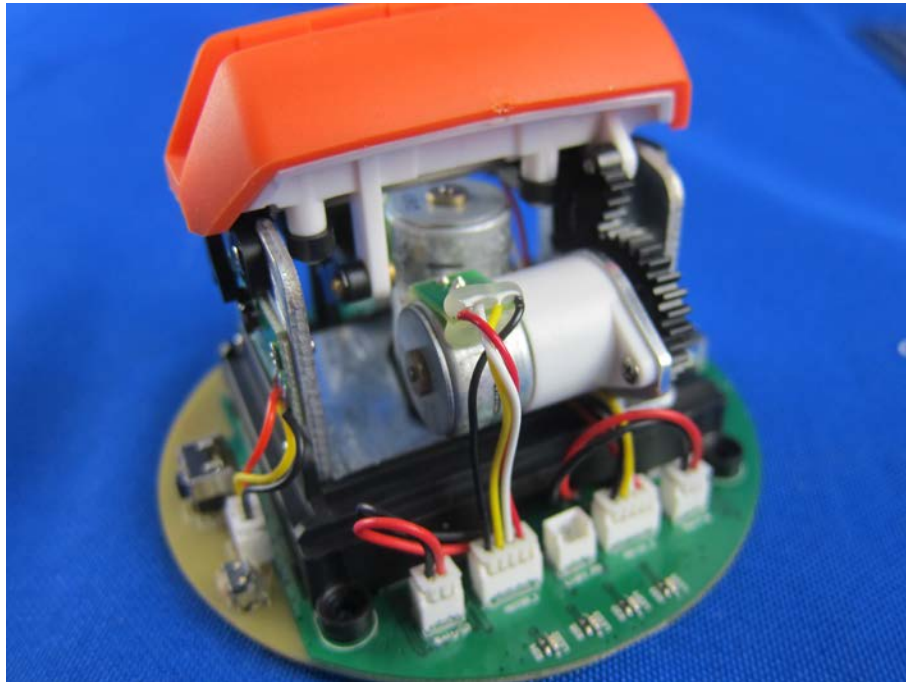

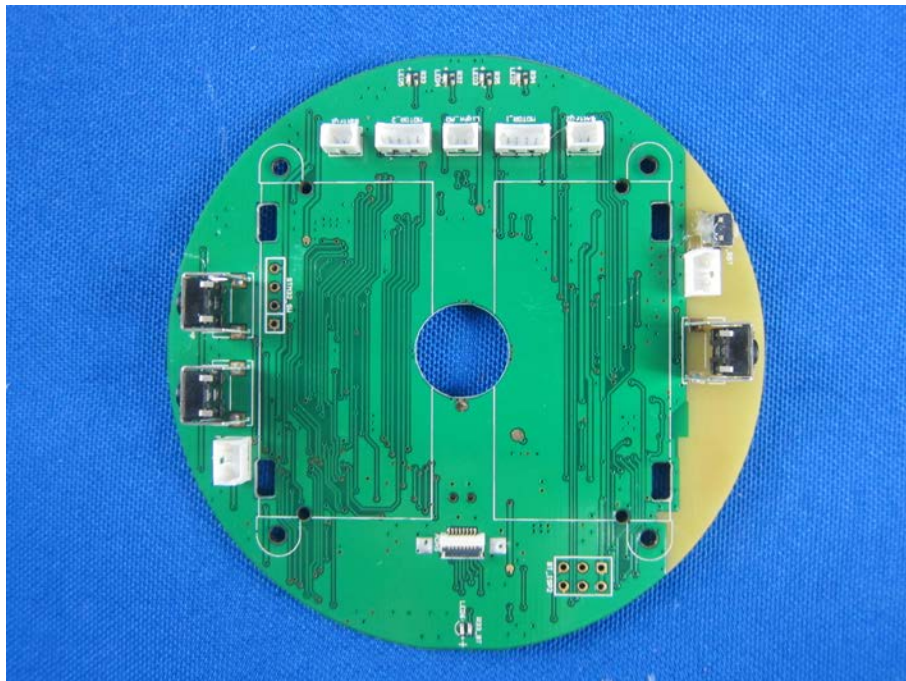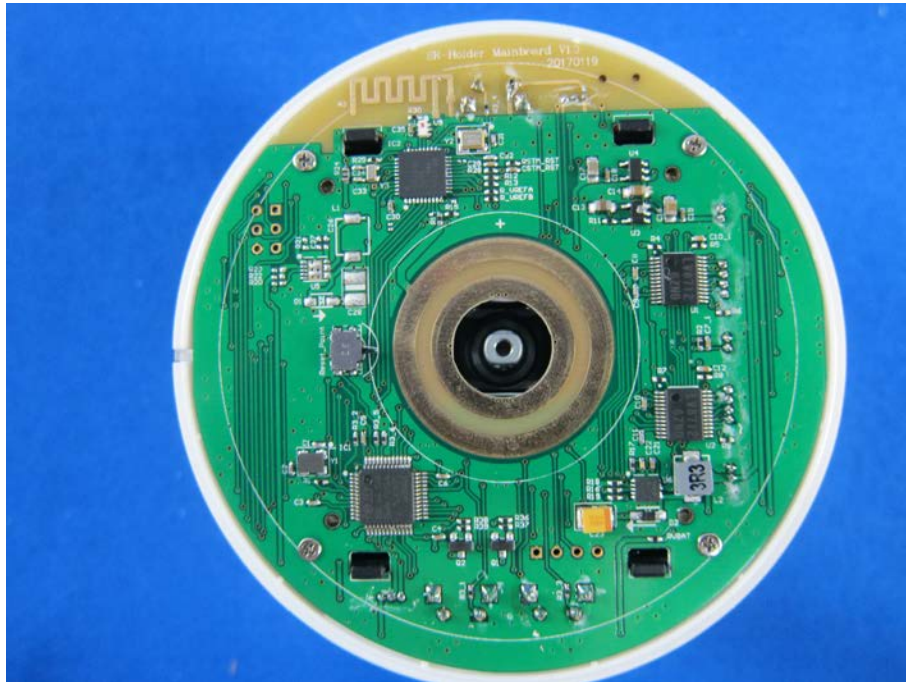

-----End-----