

FCC TEST REPORT (WLAN 15.247)

REPORT NO.: RF140220D03

MODEL NO.: LAPAC1200

FCC ID: Q87-LAPAC1200

RECEIVED: Feb. 20, 2014

TESTED: Feb. 21 ~ Apr. 10, 2014

ISSUED: Apr. 15, 2014

APPLICANT: Linksys LLC

ADDRESS: 131 Theory Drive Irvine California 92617 United States

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New
Taipei City, Taiwan (R.O.C.)

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3 DUTY CYCLE OF TEST SIGNAL	13
3.4 DESCRIPTION OF SUPPORT UNITS	15
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST.....	15
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	16
4. TEST TYPES AND RESULTS	17
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	17
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	17
4.1.2 TEST INSTRUMENTS.....	18
4.1.3 TEST PROCEDURES	19
4.1.4 DEVIATION FROM TEST STANDARD.....	19
4.1.5 TEST SETUP	20
4.1.6 EUT OPERATING CONDITIONS	20
4.1.7 TEST RESULTS	21
4.2 CONDUCTED EMISSION MEASUREMENT.....	44
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	44
4.2.2 TEST INSTRUMENTS.....	44
4.2.3 TEST PROCEDURES	45
4.2.4 DEVIATION FROM TEST STANDARD.....	45
4.2.5 TEST SETUP	45
4.2.6 EUT OPERATING CONDITIONS	45
4.2.7 TEST RESULTS	46
4.3 6DB BANDWIDTH MEASUREMENT	48
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	48
4.3.2 TEST SETUP	48
4.3.3 TEST INSTRUMENTS.....	48
4.3.4 TEST PROCEDURE.....	48
4.3.5 DEVIATION FROM TEST STANDARD.....	48
4.3.6 EUT OPERATING CONDITIONS	48
4.3.7 TEST RESULTS	49



A D T

4.4	CONDUCTED OUTPUT POWER.....	53
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	53
4.4.2	TEST SETUP.....	53
4.4.3	TEST INSTRUMENTS.....	53
4.4.4	TEST PROCEDURES.....	53
4.4.5	DEVIATION FROM TEST STANDARD.....	53
4.4.6	EUT OPERATING CONDITIONS.....	53
4.4.7	TEST RESULTS - FOR PEAK POWER.....	54
4.4.8	TEST RESULTS - FOR AVERAGE POWER.....	56
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	58
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	58
4.5.2	TEST SETUP.....	58
4.5.3	TEST INSTRUMENTS.....	58
4.5.4	TEST PROCEDURE.....	58
4.5.5	DEVIATION FROM TEST STANDARD.....	58
4.5.6	EUT OPERATING CONDITION.....	58
4.5.7	TEST RESULTS.....	59
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	63
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	63
4.6.2	TEST SETUP.....	63
4.6.3	TEST INSTRUMENTS.....	63
4.6.4	TEST PROCEDURE.....	63
4.6.5	DEVIATION FROM TEST STANDARD.....	64
4.6.6	EUT OPERATING CONDITION.....	64
4.6.7	TEST RESULTS.....	64
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	81
6.	INFORMATION ON THE TESTING LABORATORIES.....	82
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	83



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140220D03	Original release	Apr. 15, 2014



A D T

1. CERTIFICATION

PRODUCT: AC1200 Dual Band Access Point
BRAND NAME: Linksys
MODEL NO.: LAPAC1200
APPLICANT: Linksys LLC
TESTED: Feb. 21 ~ Apr. 10, 2014
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Annie Chang , **DATE:** Apr. 15, 2014
(Annie Chang / Supervisor)

APPROVED BY : Rex Lai , **DATE:** Apr. 15, 2014
(Rex Lai / Assistant Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.09dB at 0.15000MHz.
15.205 & 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2390.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	150kHz~30MHz	3.43 dB
Radiated emissions	30MHz ~ 1GHz	4.00 dB
	Above 1GHz	3.36 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	AC1200 Dual Band Access Point
MODEL NO.	LAPAC1200
POWER SUPPLY	12Vdc from AC Adapter or 48Vdc from PoE
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/ 5.5/ 2/ 1Mbps 802.11g: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps 802.11a: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps 802.11n: up to 300Mbps 802.11ac: 866.7Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) 5.0GHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz)
OUTPUT POWER	775.7mW for 2412 ~ 2462MHz 892.7mW for 5745 ~ 5825MHz
ANTENNA TYPE	PIFA antenna with 2dBi gain
ANTENNA CONNECTOR	N/A
DATA CABLE	Refer to user's manual
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Refer to Note as below

NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	Tx Function
802.11b	2TX
802.11g	2TX
802.11a	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX
802.11ac (80MHz)	2TX

2. The frequency bands used in this EUT are listed as follows:

Frequency Band (MHz)	2412~2462	5180~5240	5745~5825
802.11b	√		
802.11g	√		
802.11a		√	√
802.11n (20MHz)	√	√	√
802.11n (40MHz)	√	√	√
802.11ac (80MHz)		√	√

3. The EUT was power supplied from the following power adapters or PoE:

Item	Brand	Model No.	Plug Type	Rating
Adapter 1	LEI	IU18-2120150-WP	US, EU, UK Plug	AC I/P: 100-240V, 50/60Hz 0.6A DC O/P: 12V 1.5A Non-shielded DC (1.5m)
Adapter 2	LEI	MU18-R120150-A1	US Plug	AC I/P: 100-240V, 50/60Hz 0.6A DC O/P: 12V 1.5A Non-shielded DC (1.5m)
	LEI	MU18-R120150-C5	EU Plug	
	LEI	MU18-R120150-B2	UK Plug	
	LEI	MU18-R120150-A3	AU Plug	
	Four adapters are identical with each other except for their plug type difference			
Adapter 3	DVE	DSA-20CA-12 120150	US, EU, UK Plug	AC I/P: 100-240V, 50/60Hz 0.8A DC O/P: 12V 1.5A Non-shielded DC (1.5m)
Adapter 4	DVE	DSA-18PFG-12 FUS 12015	US Plug	AC I/P:100-240V, 50/60Hz 0.6A DC O/P:12V 1.5A Non-shielded DC (1.5m)
	DVE	DSA-18PFG-12 FEU 120150	EU Plug	
	DVE	DSA-18PFG-12 FUK 120120	UK Plug	
	DVE	DSA-18PFG-12 FAU 120150	AU Plug	
	Four adapters are identical with each other except for their plug type difference			
PoE	-			48Vdc

After pre-tested above four adapters and PoE mode, the **Adapter 2** was the worst case, therefore, only its test data was recorded in this report.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY
155	5775MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of 3 axis. The worst case was found when positioned on X-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	2412-2462	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g		1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)		1 to 11	1, 6, 11	OFDM	BPSK	13
802.11n (40MHz)		3 to 9	3, 6, 9	OFDM	BPSK	27
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	1
802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	6
802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	13
802.11ac (80MHz)		155	155	OFDM	BPSK	58.6

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	2412-2462	1 to 11	6	OFDM	BPSK	6
802.11a	5745-5825	149 to 165	149	OFDM	BPSK	6



A D T

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	2412-2462	1 to 11	6	OFDM	BPSK	6

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	2412-2462	1 to 11	1, 11	DSSS	DBPSK	1
802.11g		1 to 11	1, 11	OFDM	BPSK	6
802.11n (20MHz)		1 to 11	1, 11	OFDM	BPSK	13
802.11n (40MHz)		3 to 9	3, 9	OFDM	BPSK	27
802.11a	5745-5825	149 to 165	149, 165	OFDM	BPSK	1
802.11n (20MHz)		149 to 165	149, 165	OFDM	BPSK	6
802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	13
802.11ac (80MHz)		155	155	OFDM	BPSK	58.6

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	2412-2462	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g		1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)		1 to 11	1, 6, 11	OFDM	BPSK	13
802.11n (40MHz)		3 to 9	3, 6, 9	OFDM	BPSK	27
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	1
802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	6
802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	13
802.11ac (80MHz)		155	155	OFDM	BPSK	58.6



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	20deg. C, 64% RH	120Vac, 60Hz	Joey Liu
RE<1G	20deg. C, 72% RH	120Vac, 60Hz	Joey Liu
PLC	20deg. C, 70% RH	120Vac, 60Hz	Justin Liu
APCM	25deg. C, 60%RH	120Vac, 60Hz	Saxon Lee

3.3 DUTY CYCLE OF TEST SIGNAL


Duty cycle is < 98%, duty factor shall be considered (Duty cycle of test signal of 802.11b is 100 %).

802.11b: Duty cycle of test signal is 100 %

802.11g: Duty cycle = $2.02/2.08 = 0.971$, Duty factor = $10 * \log(1/0.971) = 0.13$

802.11n (20MHz): Duty cycle = $1.87/1.93 = 0.969$, Duty factor = $10 * \log(1/0.969) = 0.14$

802.11n (40MHz): Duty cycle = $0.924/0.972 = 0.951$, Duty factor = $10 * \log(1/0.951) = 0.22$

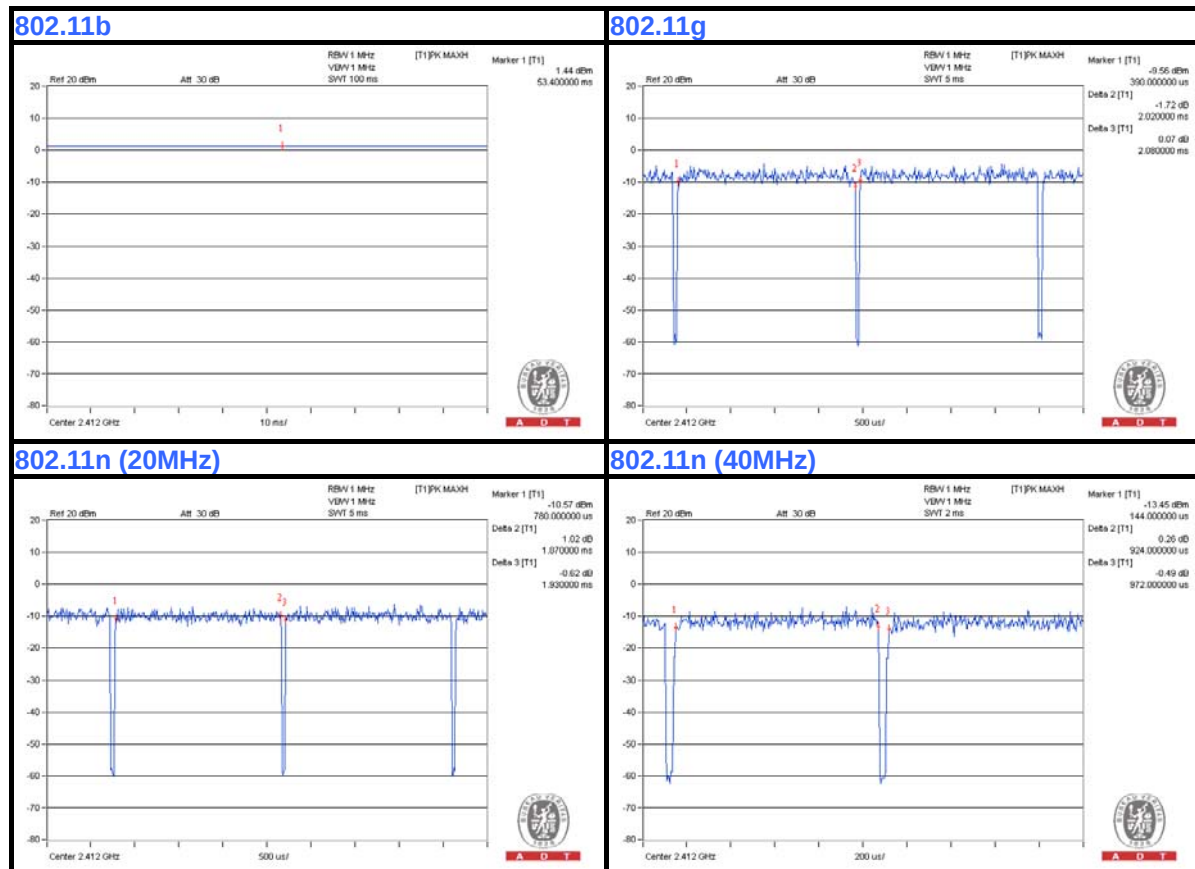


Duty cycle is < 98%, duty factor shall be considered

802.11a: Duty cycle = $2.03/2.11 = 0.962$, Duty factor = $10 * \log(1/0.962) = 0.17$

802.11n (20MHz): Duty cycle = $1.88/1.97 = 0.954$, Duty factor = $10 * \log(1/0.954) = 0.20$

802.11n (40MHz): Duty cycle = $0.936/1.000 = 0.936$, Duty factor = $10 * \log(1/0.936) = 0.29$

802.11ac (80MHz): Duty cycle = $0.454/0.517 = 0.878$, Duty factor = $10 * \log(1/0.878) = 0.57$

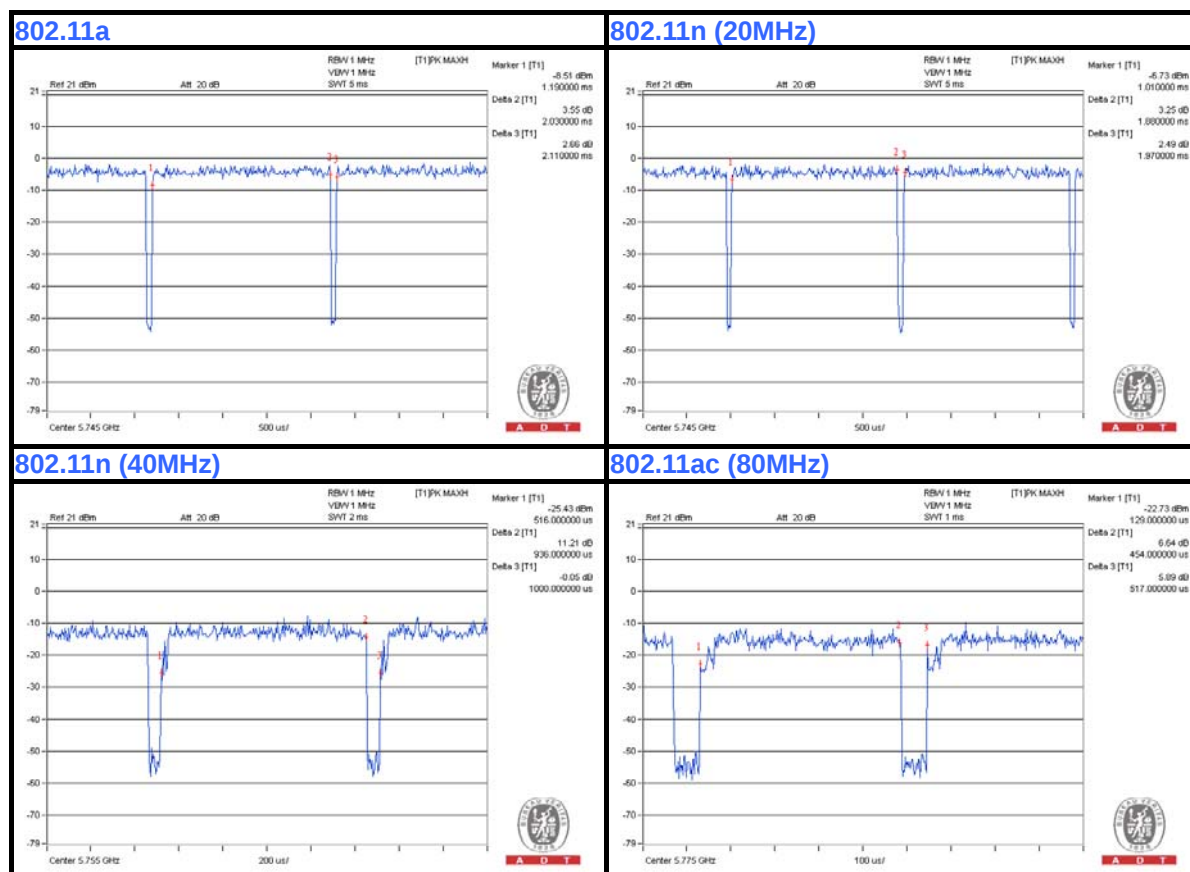

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E5410	BW33YM1	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m UTP LAN Cable

NOTE: All power cords of the above support units are non shielded (1.8m).

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

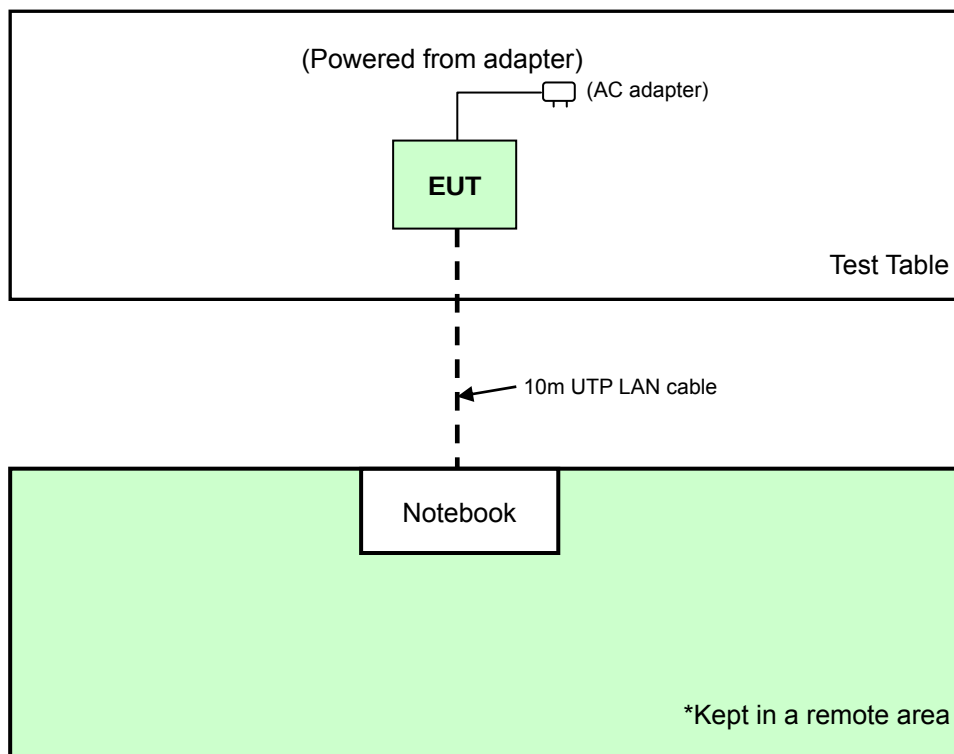



A D T

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The product has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 26, 2014	Feb. 25, 2015
HP Preamplifier	8449B	3008A01201	Feb. 26, 2014	Feb. 25, 2015
Agilent TEST RECEIVER	N9038A	MY51210129	Jan. 18, 2014	Jan. 17, 2015
Schwarzbeck Antenna	VULB 9168	139	Feb. 24, 2014	Feb. 23, 2015
Schwarzbeck Antenna	VHBA 9123	480	May 29, 2013	May 28, 2015
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.4	NA	NA	NA
SUHNER RF cable	SF102	CABLE-CH6	Aug. 16, 2013	Aug. 15, 2014
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	May 13, 2013	May 12, 2014
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	May 17, 2013	May 16, 2014
Anritsu Power Sensor	MA2411B	0738404	Apr. 24, 2013	Apr. 23, 2014
Anritsu Power Meter	ML2495A	0842014	Apr. 25, 2013	Apr. 24, 2014

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $> 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Frequency range 30MHz~1GHz

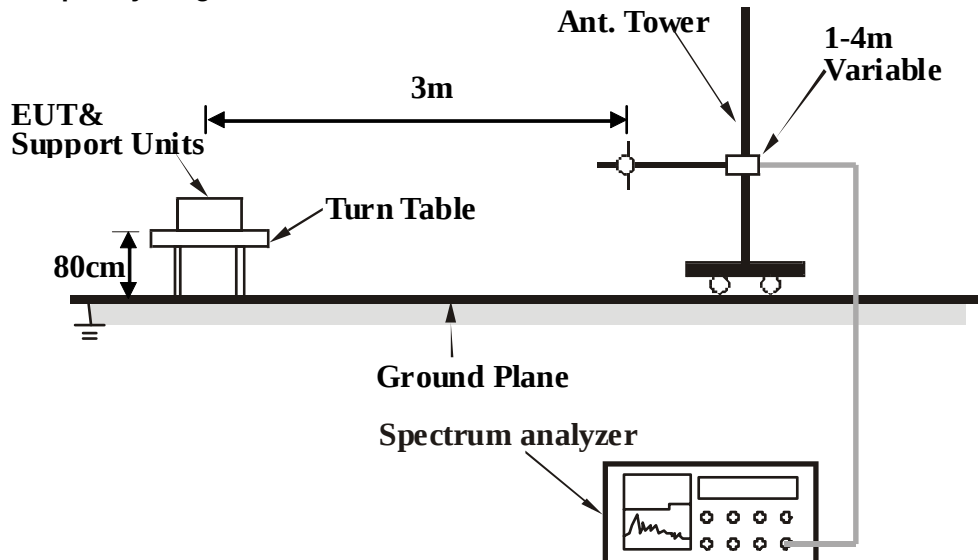

Frequency range above 1GHz

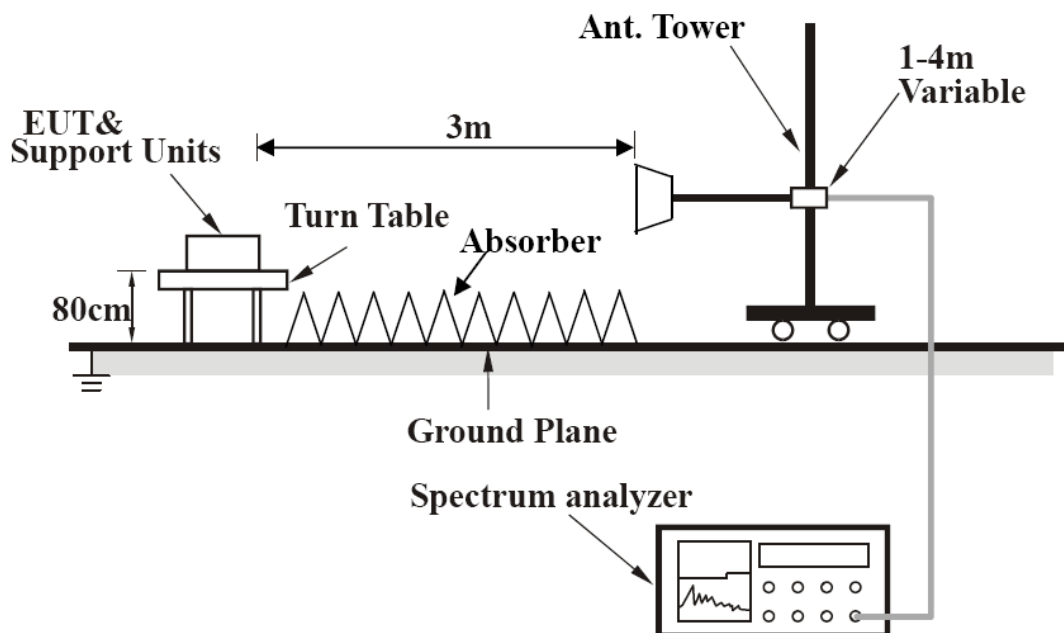

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

The Notebook connected with EUT via a LAN cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.00 H	22	72.60	-4.67
2	2390.00	51.9 AV	54.0	-2.1	1.00 H	22	56.55	-4.67
3	*2412.00	115.6 PK			1.00 H	32	120.16	-4.58
4	*2412.00	112.1 AV			1.00 H	32	116.67	-4.58
5	4824.00	48.7 PK	74.0	-25.3	1.00 H	38	46.54	2.17
6	4824.00	41.1 AV	54.0	-12.9	1.00 H	38	38.94	2.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	1.00 V	180	74.91	-4.67
2	2390.00	52.9 AV	54.0	-1.2	1.00 V	180	57.52	-4.67
3	*2412.00	118.7 PK			1.00 V	180	123.28	-4.58
4	*2412.00	115.2 AV			1.00 V	180	119.81	-4.58
5	4824.00	50.7 PK	74.0	-23.3	1.04 V	180	48.50	2.17
6	4824.00	42.0 AV	54.0	-12.1	1.04 V	180	39.78	2.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.1 PK			1.00 H	225	120.58	-4.48
2	*2437.00	112.9 AV			1.00 H	225	117.39	-4.48
3	4874.00	49.5 PK	74.0	-24.5	1.00 H	261	47.15	2.32
4	4874.00	37.6 AV	54.0	-16.4	1.00 H	261	35.26	2.32
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	120.2 PK			1.00 V	285	124.69	-4.48
2	*2437.00	116.3 AV			1.00 V	285	120.82	-4.48
3	4874.00	49.8 PK	74.0	-24.2	1.04 V	10	47.49	2.32
4	4874.00	43.1 AV	54.0	-10.9	1.04 V	10	40.80	2.32

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.3 PK			1.00 H	33	121.65	-4.39
2	*2462.00	114.0 AV			1.00 H	33	118.34	-4.39
3	2483.50	65.8 PK	74.0	-8.3	1.00 H	223	70.06	-4.31
4	2483.50	50.4 AV	54.0	-3.6	1.00 H	223	54.75	-4.31
5	4924.00	49.4 PK	74.0	-24.6	1.00 H	257	47.04	2.40
6	4924.00	38.5 AV	54.0	-15.5	1.00 H	257	36.09	2.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.0 PK			1.00 V	342	122.38	-4.39
2	*2462.00	114.3 AV			1.00 V	342	118.67	-4.39
3	2483.50	67.5 PK	74.0	-6.5	1.00 V	342	71.81	-4.31
4	2483.50	53.0 AV	54.0	-1.0	1.00 V	342	57.27	-4.31
5	4924.00	50.5 PK	74.0	-23.5	1.02 V	12	48.10	2.40
6	4924.00	41.8 AV	54.0	-12.2	1.02 V	12	39.42	2.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	1.01 H	32	74.54	-4.67
2	2390.00	50.1 AV	54.0	-3.9	1.01 H	32	54.77	-4.67
3	*2412.00	112.6 PK			1.01 H	23	117.19	-4.58
4	*2412.00	101.7 AV			1.01 H	23	106.24	-4.58
5	4824.00	48.4 PK	74.0	-25.6	1.02 H	257	46.27	2.17
6	4824.00	37.8 AV	54.0	-16.2	1.02 H	257	35.62	2.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	1.00 V	283	73.34	-4.67
2	2390.00	53.0 AV	54.0	-1.1	1.00 V	283	57.62	-4.67
3	*2412.00	118.1 PK			1.00 V	283	122.63	-4.58
4	*2412.00	107.0 AV			1.00 V	283	111.55	-4.58
5	4824.00	49.9 PK	74.0	-24.1	1.00 V	12	47.77	2.17
6	4824.00	37.9 AV	54.0	-16.1	1.00 V	12	35.75	2.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.0 PK			1.02 H	35	120.45	-4.48
2	*2437.00	104.9 AV			1.02 H	35	109.40	-4.48
3	4874.00	49.6 PK	74.0	-24.4	1.00 H	252	47.24	2.32
4	4874.00	38.9 AV	54.0	-15.1	1.00 H	252	36.62	2.32
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	120.8 PK			1.02 V	33	125.31	-4.48
2	*2437.00	110.8 AV			1.02 V	33	115.31	-4.48
3	4874.00	50.9 PK	74.0	-23.1	1.00 V	6	48.60	2.32
4	4874.00	43.0 AV	54.0	-11.1	1.00 V	6	40.63	2.32

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.0 PK			1.03 H	28	117.42	-4.39
2	*2462.00	101.9 AV			1.03 H	28	106.33	-4.39
3	2483.50	67.7 PK	74.0	-6.3	1.03 H	28	71.97	-4.31
4	2483.50	51.7 AV	54.0	-2.3	1.03 H	28	55.99	-4.31
5	4924.00	49.5 PK	74.0	-24.5	1.01 H	238	47.10	2.40
6	4924.00	38.1 AV	54.0	-15.9	1.01 H	238	35.69	2.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.9 PK			1.01 V	284	122.27	-4.39
2	*2462.00	106.5 AV			1.01 V	284	110.93	-4.39
3	2483.50	68.6 PK	74.0	-5.4	1.01 V	284	72.88	-4.31
4	2483.50	52.9 AV	54.0	-1.1	1.01 V	284	57.23	-4.31
5	4924.00	51.1 PK	74.0	-22.9	1.01 V	16	48.71	2.40
6	4924.00	42.1 AV	54.0	-11.9	1.01 V	16	39.70	2.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.01 H	25	71.91	-4.67
2	2390.00	52.9 AV	54.0	-1.1	1.01 H	25	57.53	-4.67
3	*2412.00	112.1 PK			1.01 H	25	116.66	-4.58
4	*2412.00	99.8 AV			1.01 H	25	104.42	-4.58
5	4824.00	50.5 PK	74.0	-23.5	1.00 H	256	48.31	2.17
6	4824.00	41.0 AV	54.0	-13.1	1.00 H	256	38.78	2.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	1.00 V	287	71.35	-4.67
2	2390.00	52.7 AV	54.0	-1.3	1.00 V	287	57.33	-4.67
3	*2412.00	115.8 PK			1.00 V	287	120.36	-4.58
4	*2412.00	105.4 AV			1.00 V	287	110.01	-4.58
5	4824.00	51.0 PK	74.0	-23.0	1.00 V	10	48.81	2.17
6	4824.00	40.9 AV	54.0	-13.1	1.00 V	10	38.77	2.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.0 PK			1.00 H	26	121.50	-4.48
2	*2437.00	105.9 AV			1.00 H	26	110.36	-4.48
3	4874.00	50.9 PK	74.0	-23.1	1.00 H	251	48.55	2.32
4	4874.00	39.0 AV	54.0	-15.1	1.00 H	251	36.63	2.32
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	120.6 PK			1.03 V	286	125.05	-4.48
2	*2437.00	106.5 AV			1.03 V	286	111.00	-4.48
3	4874.00	51.0 PK	74.0	-23.0	1.00 V	12	48.71	2.32
4	4874.00	41.1 AV	54.0	-12.9	1.00 V	12	38.75	2.32

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.3 PK			1.01 H	27	116.69	-4.39
2	*2462.00	100.3 AV			1.01 H	27	104.72	-4.39
3	2483.50	65.0 PK	74.0	-9.0	1.01 H	27	69.29	-4.31
4	2483.50	50.9 AV	54.0	-3.1	1.01 H	27	55.24	-4.31
5	4924.00	50.8 PK	74.0	-23.2	1.00 H	261	48.40	2.40
6	4924.00	41.2 AV	54.0	-12.8	1.00 H	261	38.76	2.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.0 PK			1.00 V	285	123.38	-4.39
2	*2462.00	107.4 AV			1.00 V	285	111.77	-4.39
3	2483.50	67.1 PK	74.0	-6.9	1.00 V	285	71.38	-4.31
4	2483.50	52.8 AV	54.0	-1.2	1.00 V	285	57.13	-4.31
5	4924.00	49.9 PK	74.0	-24.1	1.02 V	20	47.48	2.40
6	4924.00	41.1 AV	54.0	-13.0	1.02 V	20	38.65	2.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.03 H	23	73.56	-4.67
2	2390.00	52.5 AV	54.0	-1.5	1.03 H	23	57.18	-4.67
3	*2422.00	108.3 PK			1.03 H	23	112.85	-4.54
4	*2422.00	96.6 AV			1.03 H	23	101.18	-4.54
5	4844.00	49.7 PK	74.0	-24.3	1.00 H	249	47.43	2.23
6	4844.00	39.0 AV	54.0	-15.1	1.00 H	249	36.72	2.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.00 V	285	72.75	-4.67
2	2390.00	53.0 AV	54.0	-1.0	1.00 V	285	57.64	-4.67
3	*2422.00	111.1 PK			1.00 V	285	115.59	-4.54
4	*2422.00	99.0 AV			1.00 V	285	103.50	-4.54
5	4844.00	51.0 PK	74.0	-23.0	1.02 V	13	48.79	2.23
6	4844.00	41.0 AV	54.0	-13.0	1.02 V	13	38.78	2.23

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.2 PK			1.01 H	24	119.72	-4.48
2	*2437.00	104.2 AV			1.01 H	24	108.71	-4.48
3	4874.00	50.5 PK	74.0	-23.5	1.00 H	257	48.17	2.32
4	4874.00	39.9 AV	54.0	-14.1	1.00 H	257	37.60	2.32
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	121.0 PK			1.03 V	284	125.43	-4.48
2	*2437.00	110.1 AV			1.03 V	284	114.53	-4.48
3	4874.00	49.7 PK	74.0	-24.3	1.00 V	15	47.37	2.32
4	4874.00	41.0 AV	54.0	-13.0	1.00 V	15	38.71	2.32

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	109.8 PK			1.01 H	24	114.24	-4.42
2	*2452.00	98.6 AV			1.01 H	24	103.04	-4.42
3	2483.50	66.3 PK	74.0	-7.7	1.01 H	24	70.59	-4.31
4	2483.50	52.5 AV	54.0	-1.5	1.01 H	24	56.85	-4.31
5	4904.00	50.6 PK	74.0	-23.5	1.00 H	256	48.16	2.39
6	4904.00	39.9 AV	54.0	-14.1	1.00 H	256	37.52	2.39
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.6 PK			1.00 V	286	115.01	-4.42
2	*2452.00	98.9 AV			1.00 V	286	103.28	-4.42
3	2483.50	67.1 PK	74.0	-6.9	1.00 V	286	71.44	-4.31
4	2483.50	52.9 AV	54.0	-1.1	1.00 V	286	57.22	-4.31
5	4904.00	51.1 PK	74.0	-23.0	1.00 V	18	48.66	2.39
6	4904.00	41.0 AV	54.0	-13.0	1.00 V	18	38.64	2.39

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	87.9 PK	94.0	-6.1	1.75 H	184	83.63	4.27
2	#5725.00	61.4 AV	77.5	-16.1	1.75 H	184	57.14	4.27
3	*5745.00	114.0 PK			1.75 H	184	109.66	4.33
4	*5745.00	97.5 AV			1.75 H	184	93.16	4.33
5	11490.00	61.3 PK	74.0	-12.7	1.75 H	188	43.54	17.79
6	11490.00	48.1 AV	54.0	-5.9	1.75 H	188	30.35	17.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	90.9 PK	95.9	-5.0	1.35 V	164	86.64	4.27
2	#5725.00	65.5 AV	80.4	-14.8	1.35 V	164	61.27	4.27
3	*5745.00	115.9 PK			1.35 V	164	111.58	4.33
4	*5745.00	100.4 AV			1.35 V	164	96.03	4.33
5	11490.00	63.0 PK	74.0	-11.1	1.35 V	166	45.16	17.79
6	11490.00	49.2 AV	54.0	-4.8	1.35 V	166	31.44	17.79

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	113.9 PK			1.76 H	190	109.43	4.48
2	*5785.00	98.5 AV			1.76 H	190	94.01	4.48
3	11570.00	61.4 PK	74.0	-12.6	1.76 H	190	43.38	18.00
4	11570.00	48.2 AV	54.0	-5.8	1.76 H	190	30.16	18.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	116.4 PK			1.35 V	165	111.88	4.48
2	*5785.00	100.5 AV			1.35 V	165	96.04	4.48
3	11570.00	62.4 PK	74.0	-11.6	1.35 V	166	44.41	18.00
4	11570.00	49.0 AV	54.0	-5.0	1.35 V	166	31.01	18.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	112.6 PK			1.70 H	190	107.93	4.69
2	*5825.00	97.3 AV			1.70 H	190	92.56	4.69
3	#5850.00	79.3 PK	92.6	-13.3	1.70 H	190	74.47	4.83
4	#5850.00	59.3 AV	77.3	-17.9	1.70 H	190	54.50	4.83
5	11650.00	61.2 PK	74.0	-12.8	1.70 H	190	43.31	17.93
6	11650.00	47.6 AV	54.0	-6.4	1.70 H	190	29.63	17.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	115.1 PK			1.36 V	165	110.38	4.69
2	*5825.00	99.4 AV			1.36 V	165	94.71	4.69
3	#5850.00	82.4 PK	95.1	-12.7	1.36 V	165	77.58	4.83
4	#5850.00	61.3 AV	79.4	-18.1	1.36 V	165	56.47	4.83
5	11650.00	61.6 PK	74.0	-12.4	1.36 V	165	43.66	17.93
6	11650.00	48.2 AV	54.0	-5.9	1.36 V	165	30.22	17.93

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	83.1 PK	93.2	-10.2	1.71 H	187	78.78	4.27
2	#5725.00	66.9 AV	81.5	-14.6	1.71 H	187	62.66	4.27
3	*5745.00	113.2 PK			1.71 H	187	108.91	4.33
4	*5745.00	101.5 AV			1.71 H	187	97.20	4.33
5	#10490.00	57.6 PK	93.2	-35.7	1.71 H	187	42.51	15.05
6	#10490.00	44.6 AV	81.5	-36.9	1.71 H	187	29.57	15.05
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	85.9 PK	94.6	-8.6	1.35 V	163	81.65	4.27
2	#5725.00	68.6 AV	83.6	-15.0	1.35 V	163	64.29	4.27
3	*5745.00	114.6 PK			1.35 V	163	110.24	4.33
4	*5745.00	103.6 AV			1.35 V	163	99.26	4.33
5	#10490.00	57.7 PK	94.6	-36.9	1.35 V	163	42.64	15.05
6	#10490.00	44.4 AV	83.6	-39.2	1.35 V	163	29.37	15.05

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	113.6 PK			1.72 H	190	109.11	4.48
2	*5785.00	102.4 AV			1.72 H	190	97.91	4.48
3	11570.00	62.1 PK	74.0	-11.9	1.72 H	192	44.12	18.00
4	11570.00	47.8 AV	54.0	-6.2	1.72 H	192	29.78	18.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.6 PK			1.35 V	164	111.10	4.48
2	*5785.00	104.6 AV			1.35 V	164	100.14	4.48
3	11570.00	63.4 PK	74.0	-10.6	1.35 V	165	45.41	18.00
4	11570.00	47.4 AV	54.0	-6.6	1.35 V	165	29.41	18.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	112.3 PK			1.70 H	190	107.65	4.69
2	*5825.00	101.0 AV			1.70 H	190	96.26	4.69
3	#5850.00	75.1 PK	92.3	-17.2	1.70 H	190	70.28	4.83
4	#5850.00	58.5 AV	81.0	-22.5	1.70 H	190	53.65	4.83
5	11650.00	60.7 PK	74.0	-13.3	1.70 H	190	42.76	17.93
6	11650.00	47.6 AV	54.0	-6.4	1.70 H	190	29.71	17.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.8 PK			1.35 V	165	109.51	4.27
2	*5825.00	103.0 AV			1.35 V	165	98.69	4.27
3	#5850.00	78.1 PK	93.8	-15.7	1.35 V	165	73.27	4.83
4	#5850.00	60.4 AV	83.0	-22.6	1.35 V	165	55.54	4.83
5	11650.00	61.6 PK	74.0	-12.4	1.35 V	165	43.65	17.93
6	11650.00	48.3 AV	54.0	-5.7	1.35 V	165	30.36	17.93

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.

802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	81.0 PK	89.7	-8.8	1.00 H	2	76.69	4.27
2	#5725.00	64.7 AV	78.3	-13.6	1.00 H	2	60.47	4.27
3	*5755.00	109.7 PK			1.47 H	2	105.35	4.38
4	*5755.00	98.3 AV			1.47 H	2	93.93	4.38
5	11510.00	61.4 PK	74.0	-12.6	1.47 H	2	43.63	17.81
6	11510.00	48.1 AV	54.0	-5.9	1.47 H	2	30.28	17.81
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	83.4 PK	90.9	-7.5	1.41 V	163	79.13	4.27
2	#5725.00	66.1 AV	80.2	-14.1	1.41 V	163	61.84	4.27
3	*5755.00	110.9 PK			1.41 V	163	106.55	4.38
4	*5755.00	100.2 AV			1.41 V	163	95.84	4.38
5	11510.00	61.5 PK	74.0	-12.5	1.41 V	163	43.72	17.81
6	11510.00	48.2 AV	54.0	-5.8	1.41 V	163	30.37	17.81

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.
- The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	109.8 PK			1.47 H	1	105.24	4.51
2	*5795.00	98.6 AV			1.47 H	1	94.09	4.51
3	#5850.00	73.1 PK	89.8	-16.7	1.47 H	1	68.24	4.83
4	#5850.00	57.9 AV	78.6	-20.7	1.47 H	1	53.06	4.83
5	11590.00	61.2 PK	74.0	-12.8	1.47 H	1	43.13	18.07
6	11590.00	48.2 AV	54.0	-5.9	1.47 H	1	30.08	18.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	110.9 PK			1.48 V	166	106.35	4.51
2	*5795.00	99.8 AV			1.48 V	166	95.32	4.51
3	#5850.00	75.7 PK	90.9	-15.1	1.48 V	166	70.91	4.83
4	#5850.00	59.8 AV	79.8	-20.1	1.48 V	166	54.94	4.83
5	11590.00	61.8 PK	74.0	-12.2	1.48 V	166	43.76	18.07
6	11590.00	48.0 AV	54.0	-6.0	1.48 V	166	29.93	18.07

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

802.11ac (80MHz)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	87.6 PK	90.1	-2.4	1.75 H	360	83.36	4.27
2	#5725.00	69.2 AV	74.5	-5.3	1.75 H	360	64.88	4.27
3	*5775.00	110.1 PK			1.75 H	360	105.60	4.45
4	*5775.00	94.5 AV			1.75 H	360	90.02	4.45
5	#5850.00	75.0 PK	90.1	-15.1	1.75 H	360	70.12	4.83
6	#5850.00	56.3 AV	74.5	-18.2	1.75 H	360	51.45	4.83
7	11550.00	63.6 PK	74.0	-10.4	1.75 H	360	45.63	17.94
8	11550.00	48.5 AV	54.0	-5.5	1.75 H	360	30.52	17.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	89.5 PK	91.0	-1.5	1.26 V	156	85.25	4.27
2	#5725.00	71.6 AV	75.5	-3.9	1.26 V	156	67.29	4.27
3	*5775.00	111.0 PK			1.26 V	156	106.53	4.45
4	*5775.00	95.5 AV			1.26 V	156	91.03	4.45
5	#5850.00	77.0 PK	91.0	-14.0	1.26 V	156	72.12	4.83
6	#5850.00	59.7 AV	75.5	-15.8	1.26 V	156	54.86	4.83
7	11550.00	62.8 PK	74.0	-11.2	1.26 V	156	44.89	17.94
8	11550.00	48.6 AV	54.0	-5.5	1.26 V	156	30.61	17.94

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.92	24.3 QP	40.0	-15.7	1.27 H	256	39.06	-14.73
2	187.53	24.9 QP	43.5	-18.6	1.38 H	134	40.72	-15.85
3	359.93	33.0 QP	46.0	-13.1	1.43 H	130	44.40	-11.45
4	375.01	40.8 QP	46.0	-5.2	1.52 H	14	51.97	-11.20
5	875.02	36.7 QP	46.0	-9.3	1.73 H	210	39.76	-3.10
6	899.99	40.1 QP	46.0	-5.9	1.25 H	207	42.63	-2.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.33	32.3 QP	40.0	-7.7	1.37 V	87	45.62	-13.32
2	112.16	29.6 QP	43.5	-13.9	1.29 V	0	46.58	-16.96
3	375.03	28.0 QP	46.0	-18.0	1.18 V	308	39.21	-11.20
4	500.01	28.9 QP	46.0	-17.1	1.28 V	158	37.96	-9.02
5	625.00	34.2 QP	46.0	-11.8	1.34 V	115	40.64	-6.48
6	899.99	33.6 QP	46.0	-12.4	1.28 V	360	36.20	-2.57

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	149.94	24.2 QP	43.5	-19.3	1.17 H	97	38.01	-13.80
2	250.00	22.4 QP	46.0	-23.6	1.39 H	104	36.78	-14.36
3	300.17	29.1 QP	46.0	-16.9	1.43 H	139	41.50	-12.41
4	360.04	32.0 QP	46.0	-14.0	1.18 H	182	43.48	-11.45
5	374.98	31.3 QP	46.0	-14.8	1.56 H	192	42.46	-11.21
6	600.07	29.3 QP	46.0	-16.7	1.76 H	199	36.48	-7.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.28	32.1 QP	40.0	-7.9	1.28 V	16	45.55	-13.44
2	111.33	20.7 QP	43.5	-22.8	1.10 V	14	37.58	-16.91
3	374.98	24.2 QP	46.0	-21.9	1.64 V	128	35.36	-11.21
4	500.01	25.0 QP	46.0	-21.0	1.37 V	106	34.01	-9.02
5	539.98	25.4 QP	46.0	-20.6	1.21 V	218	33.79	-8.42
6	600.02	27.3 QP	46.0	-18.7	1.73 V	41	34.43	-7.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCI	100412	Sep. 13, 2013	Sep. 12, 2014
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	100104	Dec. 06, 2013	Dec. 05, 2014
LISN With Adapter (for EUT)	AD10	C09Ada-001	Dec. 06, 2013	Dec. 05, 2014
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100220	Nov. 17, 2013	Nov. 16, 2014
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	835239/002	Mar. 08, 2013	Mar. 07, 2014
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 15, 2013	May 14, 2014
Software	ADT_Cond_V7.3.7	NA	NA	NA
Software	ADT_ISN_V7.3.7	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C09.01	Feb. 20, 2014	Feb. 19, 2015
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010789	May 23, 2013	May 22, 2014
Isolation Transformer (Erika Fiedler)	D-65396	017	Jul. 29, 2013	Jul. 28, 2014

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 9.

3. The VCCI Site Registration No. C-1312.

4.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

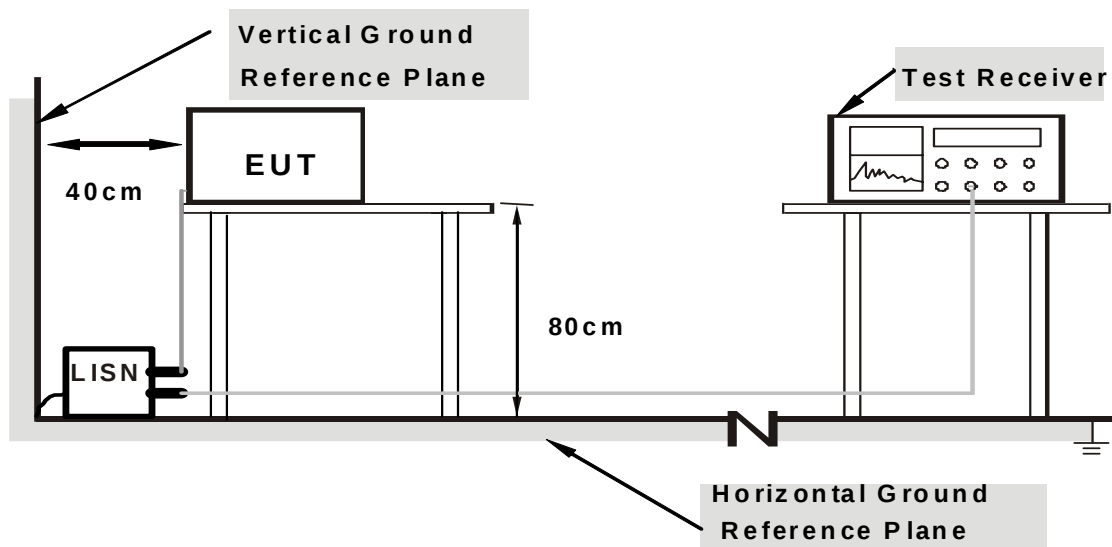

Note: Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA :


For 2.4GHz: 802.11g

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Channel	TX Channel 6		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.16	56.20	35.92	56.36	36.08	66.00	56.00	-9.64	-19.92
2	0.18125	0.16	51.01	28.73	51.17	28.89	64.43	54.43	-13.26	-25.54
3	0.24766	0.17	44.13	24.56	44.30	24.73	61.84	51.84	-17.53	-27.10
4	0.38047	0.21	38.36	28.20	38.57	28.41	58.27	48.27	-19.70	-19.86
5	0.87656	0.25	22.48	11.24	22.73	11.49	56.00	46.00	-33.27	-34.51
6	9.95313	0.75	32.91	26.88	33.66	27.63	60.00	50.00	-26.34	-22.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

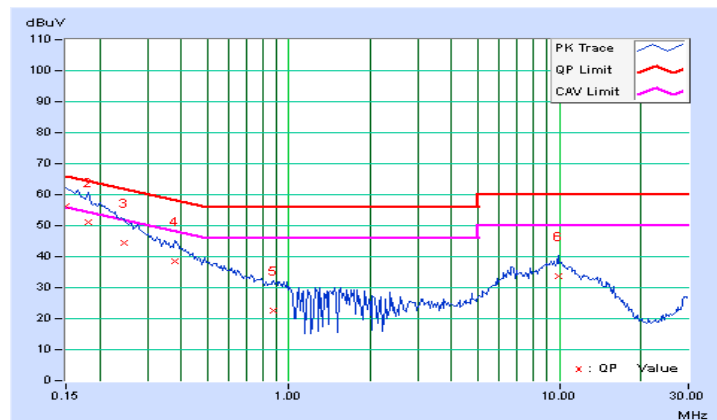


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Channel	TX Channel 6		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.30	56.61	36.25	56.91	36.55	66.00	56.00	-9.09	-19.45
2	0.16953	0.31	52.97	33.43	53.28	33.74	64.98	54.98	-11.71	-21.25
3	0.20859	0.32	48.29	27.19	48.61	27.51	63.26	53.26	-14.65	-25.75
4	0.28281	0.34	41.26	24.50	41.60	24.84	60.73	50.73	-19.13	-25.89
5	0.38012	0.37	39.68	34.56	40.05	34.93	58.28	48.28	-18.22	-13.34
6	0.86094	0.42	25.90	20.51	26.32	20.93	56.00	46.00	-29.68	-25.07
7	9.09766	0.67	34.36	28.66	35.03	29.33	60.00	50.00	-24.97	-20.67

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

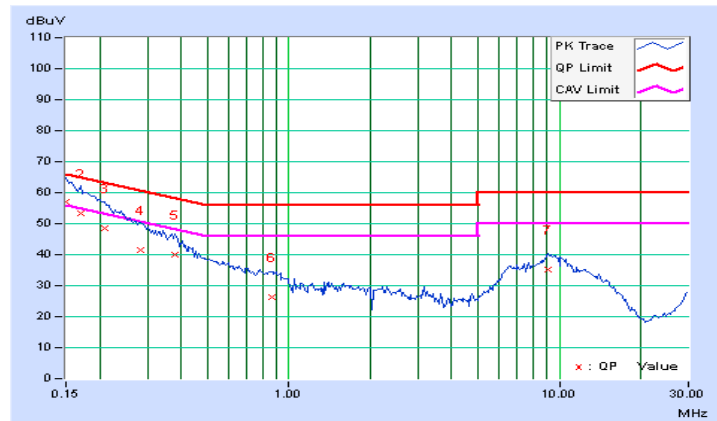


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

For 2.4GHz:


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
802.11b					
1	2412	7.08	6.65	0.5	PASS
6	2437	7.11	7.11	0.5	PASS
11	2462	6.64	7.10	0.5	PASS
802.11g					
1	2412	16.37	16.39	0.5	PASS
6	2437	16.39	16.43	0.5	PASS
11	2462	16.39	16.39	0.5	PASS
802.11n (20MHz)					
1	2412	16.65	16.98	0.5	PASS
6	2437	17.16	15.74	0.5	PASS
11	2462	17.23	16.34	0.5	PASS
802.11n (40MHz)					
3	2422	35.20	35.17	0.5	PASS
6	2437	35.08	35.11	0.5	PASS
9	2452	35.20	33.90	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b

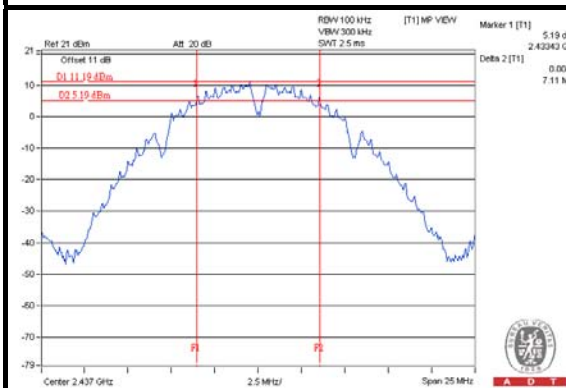


802.11g

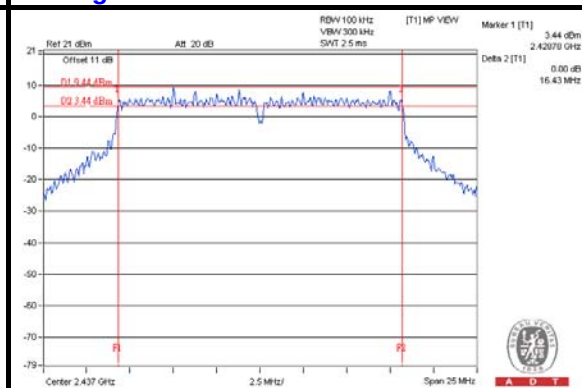

802.11n (20MHz)

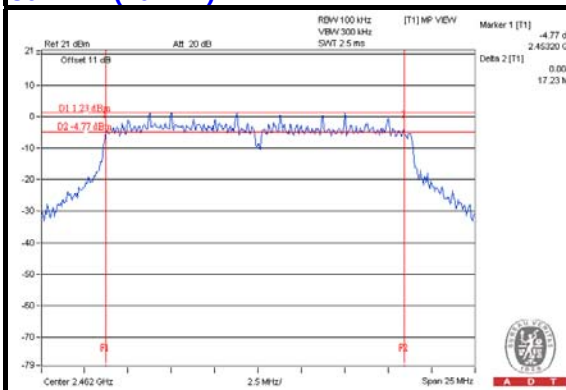

802.11n (40MHz)

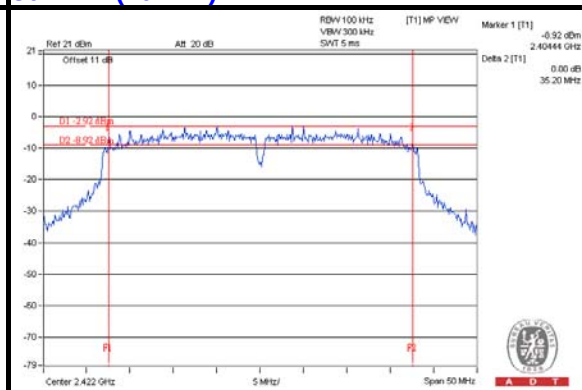

**A D T****For 5.0GHz:**


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
802.11a					
149	5745	16.45	16.39	0.5	PASS
157	5785	16.42	16.38	0.5	PASS
165	5825	16.44	16.42	0.5	PASS
802.11n (20MHz)					
149	5745	17.60	17.63	0.5	PASS
157	5785	17.58	17.62	0.5	PASS
165	5825	17.65	17.21	0.5	PASS
802.11n (40MHz)					
151	5755	36.09	36.34	0.5	PASS
159	5795	36.46	36.46	0.5	PASS
802.11ac (80MHz)					
155	5775	75.73	75.84	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

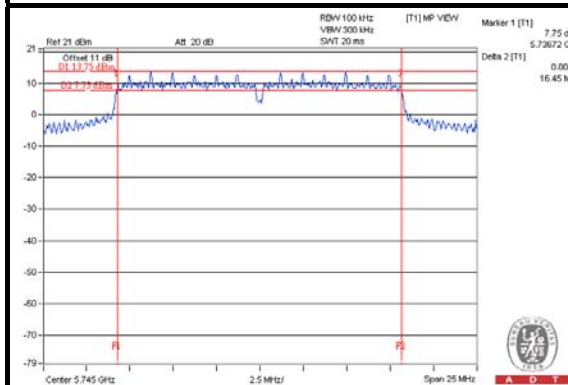


802.11n (20MHz)

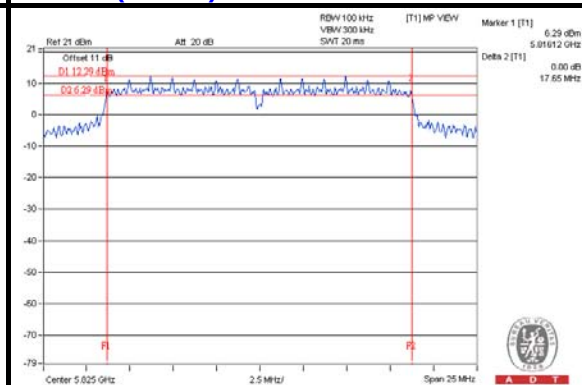

802.11n (40MHz)

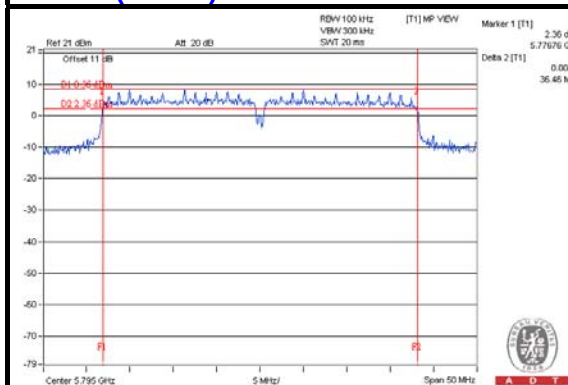

802.11ac (80MHz)

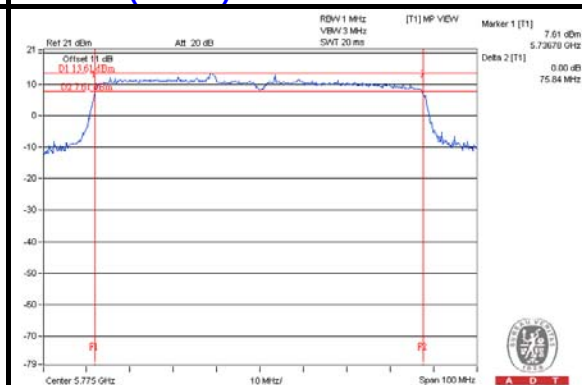

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.4.2 TEST SETUP

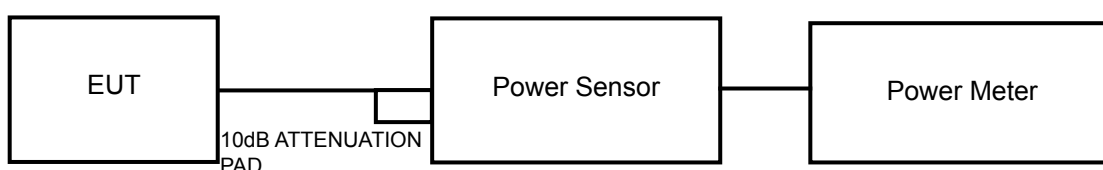

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS - FOR PEAK POWER

For 2.4GHz:

CHAN.	CHAN. FREQ. (MHz)	POWER OUTPUT (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
802.11b							
1	2412	25.65	25.64	733.7	28.66	30	PASS
6	2437	25.99	25.56	756.9	28.79	30	PASS
11	2462	25.86	25.43	734.6	28.66	30	PASS
802.11g							
1	2412	22.76	22.64	372.5	25.71	30	PASS
6	2437	26.12	25.64	775.7	28.90	30	PASS
11	2462	23.44	23.16	427.8	26.31	30	PASS
802.11n (20MHz)							
1	2412	22.86	22.77	382.4	25.83	30	PASS
6	2437	25.79	25.84	763.0	28.83	30	PASS
11	2462	23.65	23.77	467.0	26.72	30	PASS
802.11n (40MHz)							
3	2422	14.45	13.11	48.3	16.84	30	PASS
6	2437	19.76	18.69	168.6	22.27	30	PASS
9	2452	16.35	15.87	81.8	19.13	30	PASS

**A D T****For 5.0GHz:**

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
802.11a							
149	5745	26.38	26.61	892.7	29.51	30	PASS
157	5785	26.28	26.57	878.6	29.44	30	PASS
165	5825	26.05	26.19	818.6	29.13	30	PASS
802.11n (20MHz)							
149	5745	26.34	26.49	876.2	29.43	30	PASS
157	5785	26.06	26.28	828.3	29.18	30	PASS
165	5825	25.94	26.13	802.8	29.05	30	PASS
802.11n (40MHz)							
151	5755	26.33	26.52	878.3	29.44	30	PASS
159	5795	26.19	26.47	859.5	29.34	30	PASS
802.11ac (80MHz)							
155	5775	25.64	26.37	799.9	29.03	30	PASS

4.4.8 TEST RESULTS - FOR AVERAGE POWER

For 2.4GHz:

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1	
802.11b				
1	2412	22.66	22.62	25.65
6	2437	22.96	22.71	25.85
11	2462	22.67	22.53	25.61
802.11g				
1	2412	13.55	13.44	16.51
6	2437	16.73	16.64	19.70
11	2462	14.12	14.09	17.12
802.11n (20MHz)				
1	2412	13.61	13.45	16.54
6	2437	16.66	16.85	19.77
11	2462	14.33	14.72	17.54
802.11n (40MHz)				
3	2422	10.11	9.41	12.78
6	2437	15.77	14.92	18.38
9	2452	12.22	11.95	15.10



For 5.0GHz:


CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1	
802.11a				
149	5745	22.51	24.08	26.38
157	5785	22.39	24.02	26.29
165	5825	22.28	23.95	26.21
802.11n (20MHz)				
149	5745	22.13	24.36	26.40
157	5785	22.09	24.28	26.33
165	5825	22.01	23.41	25.78
802.11n (40MHz)				
151	5755	22.11	23.34	25.78
159	5795	22.03	23.15	25.64
802.11ac (80MHz)				
155	5775	19.66	21.49	23.68

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.5.7 TEST RESULTS

For 2.4GHz:

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
802.11b							
0	1	2412	-3.27	3.01	-0.26	8	PASS
	6	2437	-3.33	3.01	-0.32	8	PASS
	11	2462	-2.91	3.01	0.10	8	PASS
1	1	2412	-4.20	3.01	-1.19	8	PASS
	6	2437	-2.60	3.01	0.41	8	PASS
	11	2462	-3.31	3.01	-0.30	8	PASS
802.11g							
0	1	2412	-13.73	3.01	-10.72	8	PASS
	6	2437	-4.38	3.01	-1.37	8	PASS
	11	2462	-11.68	3.01	-8.67	8	PASS
1	1	2412	-14.30	3.01	-11.29	8	PASS
	6	2437	-4.65	3.01	-1.64	8	PASS
	11	2462	-13.38	3.01	-10.37	8	PASS
802.11n (20MHz)							
0	1	2412	-14.22	3.01	-11.21	8	PASS
	6	2437	-5.08	3.01	-2.07	8	PASS
	11	2462	-13.76	3.01	-10.75	8	PASS
1	1	2412	-15.38	3.01	-12.37	8	PASS
	6	2437	-6.58	3.01	-3.57	8	PASS
	11	2462	-14.57	3.01	-11.56	8	PASS
802.11n (40MHz)							
0	3	2422	-17.17	3.01	-14.16	8	PASS
	6	2437	-9.75	3.01	-6.74	8	PASS
	9	2452	-15.88	3.01	-12.87	8	PASS
1	3	2422	-17.35	3.01	-14.34	8	PASS
	6	2437	-10.54	3.01	-7.53	8	PASS
	9	2452	-16.89	3.01	-13.88	8	PASS

NOTE:


- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = 2dBi + 10log(2)=5.01dBi <6dBi, so the power spectral density limit is not reduced.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b

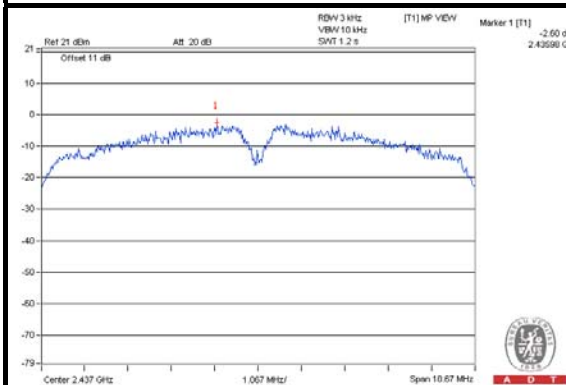


802.11g

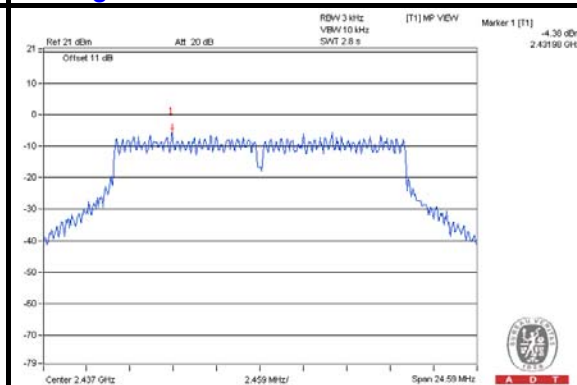

802.11n (20MHz)

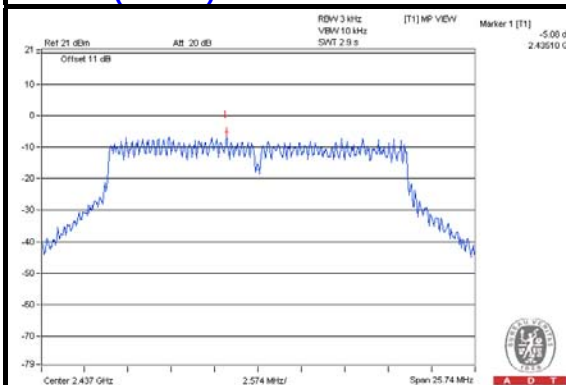

802.11n (40MHz)

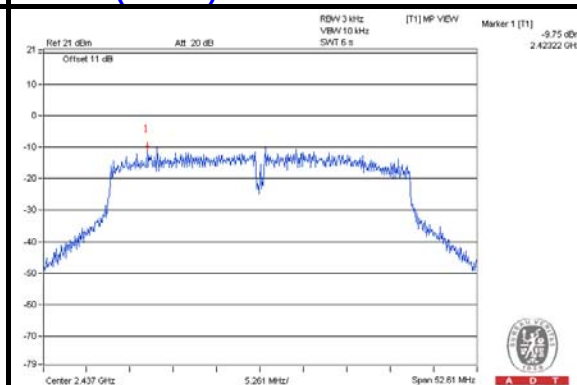



A D T

For 5.0GHz:

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
802.11a							
0	149	5745	-2.03	3.01	1.15	8	PASS
	157	5785	-3.03	3.01	0.15	8	PASS
	165	5825	-2.21	3.01	0.97	8	PASS
1	149	5745	-1.55	3.01	1.63	8	PASS
	157	5785	-0.14	3.01	3.04	8	PASS
	165	5825	-1.99	3.01	1.19	8	PASS
802.11n (20MHz)							
0	149	5745	-2.56	3.01	0.65	8	PASS
	157	5785	-2.95	3.01	0.26	8	PASS
	165	5825	-3.43	3.01	-0.22	8	PASS
1	149	5745	-0.24	3.01	2.97	8	PASS
	157	5785	-1.30	3.01	1.91	8	PASS
	165	5825	-2.34	3.01	0.87	8	PASS
802.11n (40MHz)							
0	151	5755	-7.19	3.01	-3.89	8	PASS
	159	5795	-5.61	3.01	-2.31	8	PASS
1	151	5755	-7.14	3.01	-3.84	8	PASS
	159	5795	-4.38	3.01	-1.08	8	PASS
802.11ac (80MHz)							
0	155	5775	-12.60	3.01	-9.02	8	PASS
1	155	5775	-11.04	3.01	-7.46	8	PASS

NOTE:


- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, so the power spectral density limit is not reduced.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

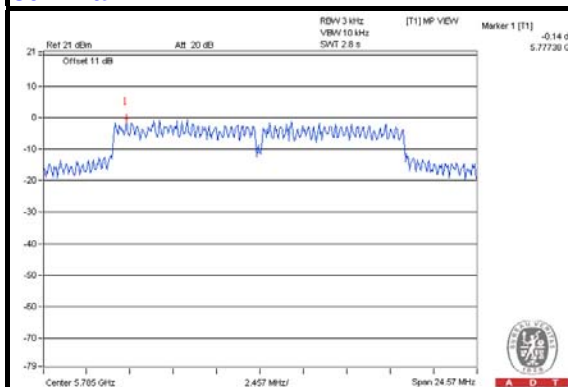


802.11n (20MHz)

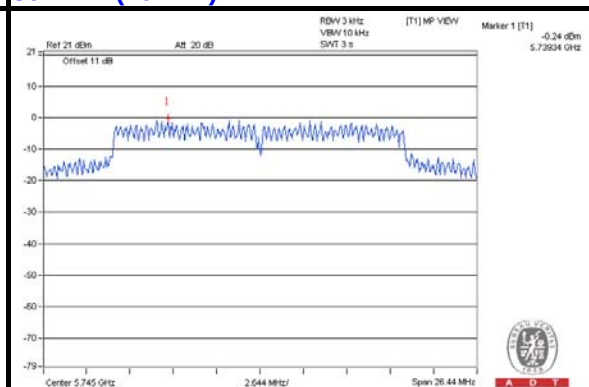

802.11n (40MHz)

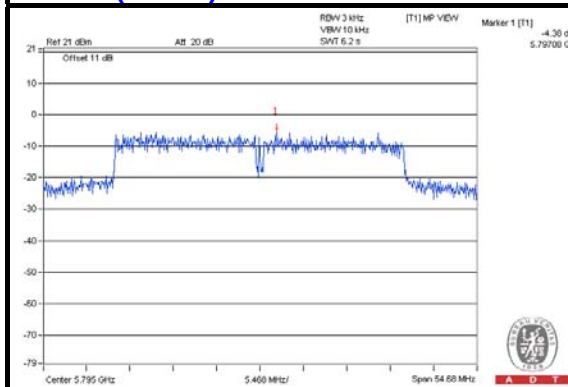

802.11ac (80MHz)

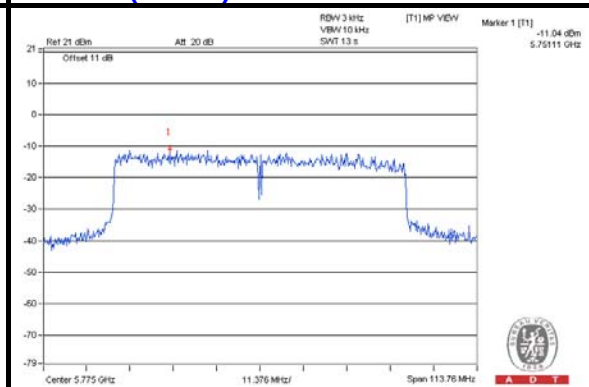


4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Ensure that the number of measurement points $\geq$ span/RBW
4. According to measurement points to set differ measurement span.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T

802.11b: CHAIN 0



CH 1

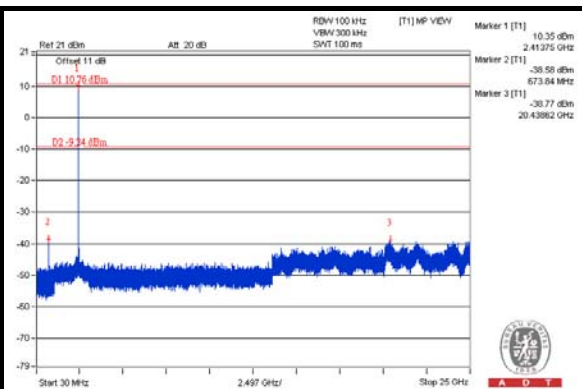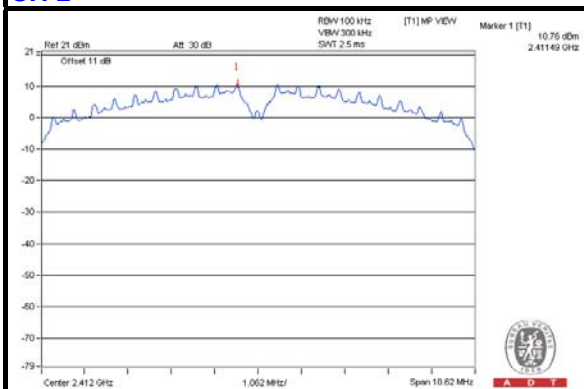


CH 6

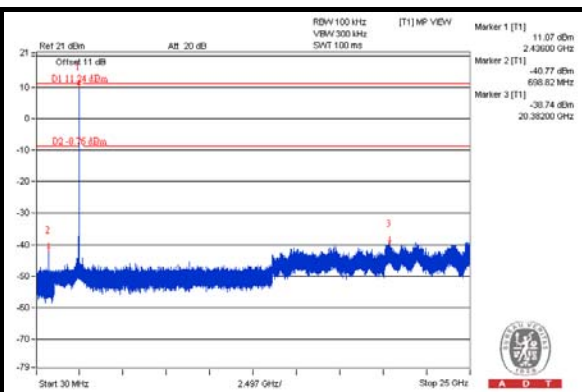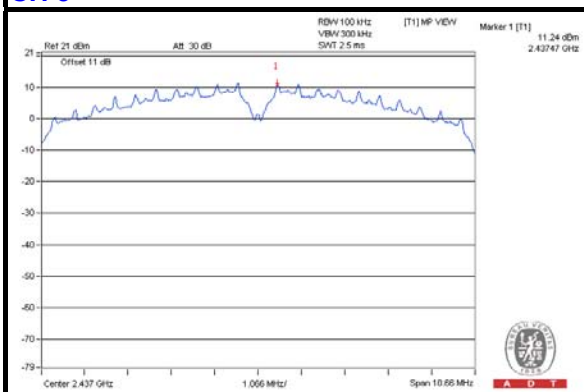


CH 11

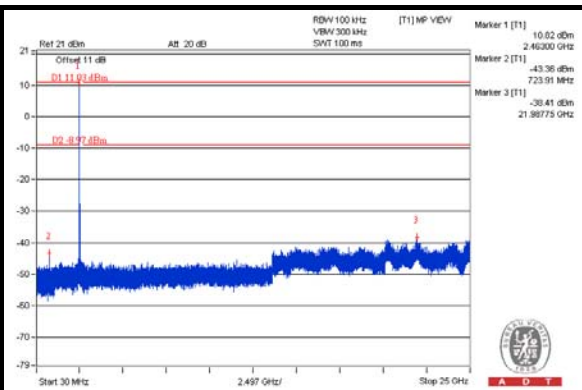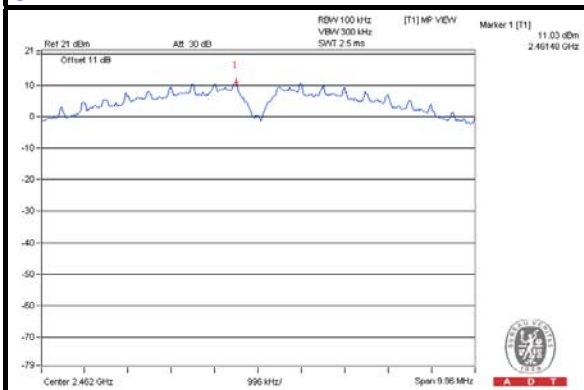

CH 1 Band edge

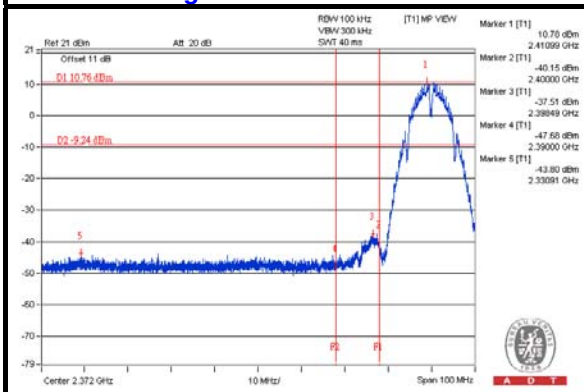

CH 11 Band edge

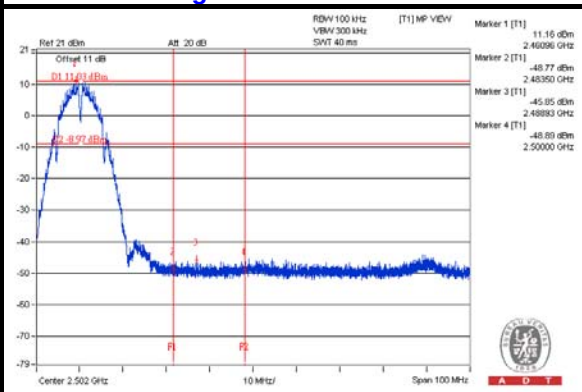





A D T

802.11b: CHAIN 1


CH 1

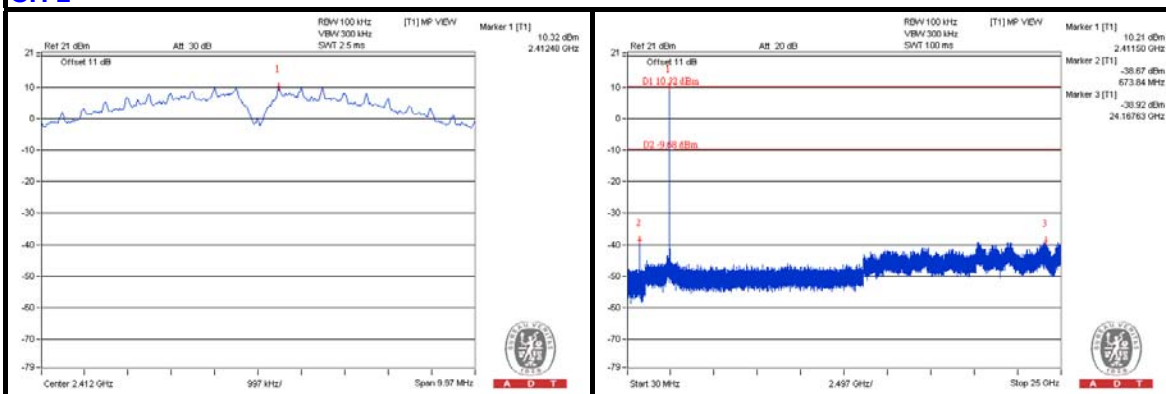


CH 6

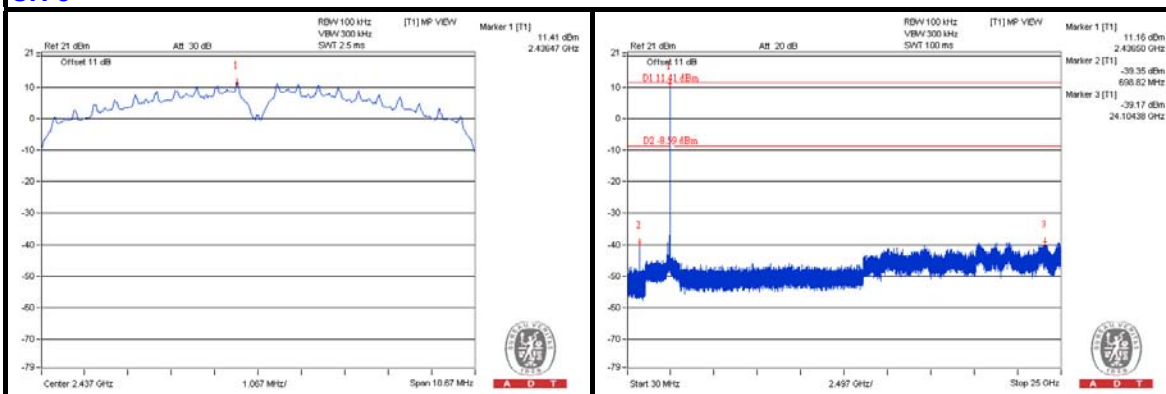


CH 11

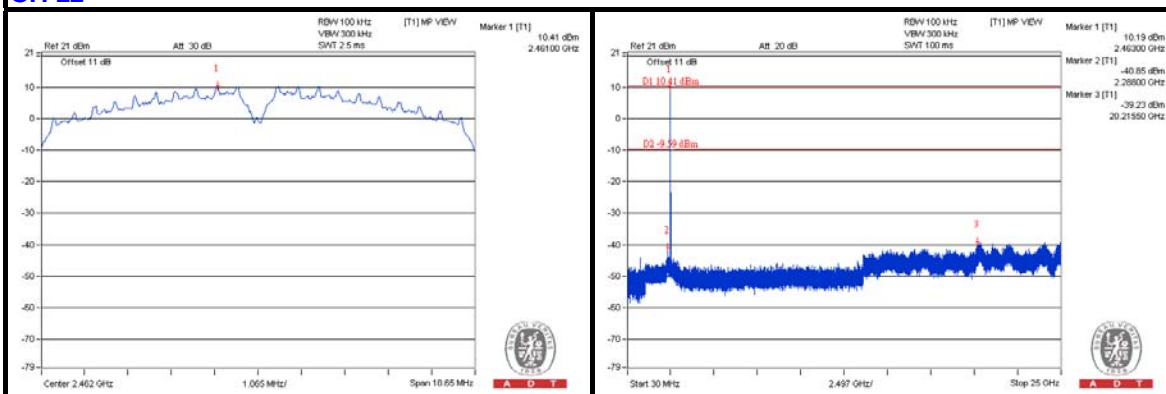

CH 1 Band edge

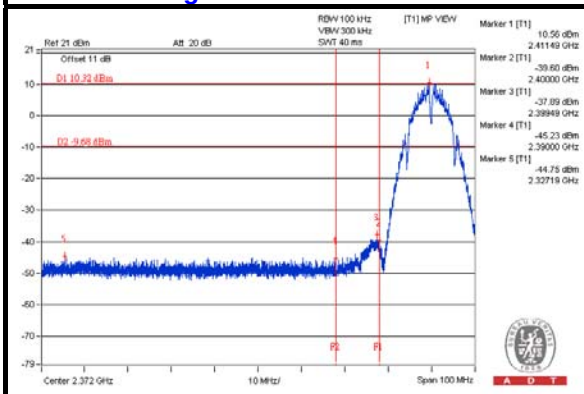

CH 11 Band edge


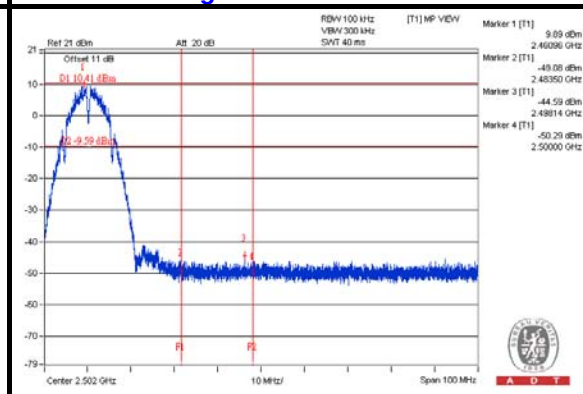






A D T

802.11g: CHAIN 0



CH 1

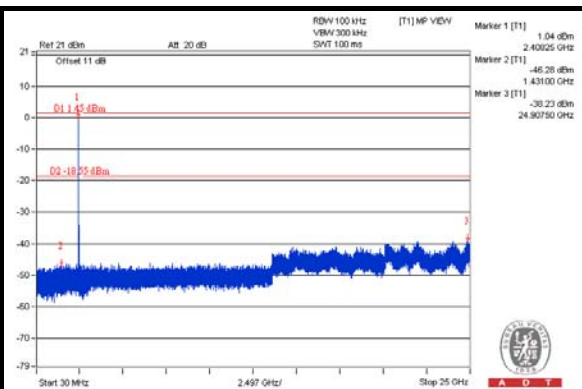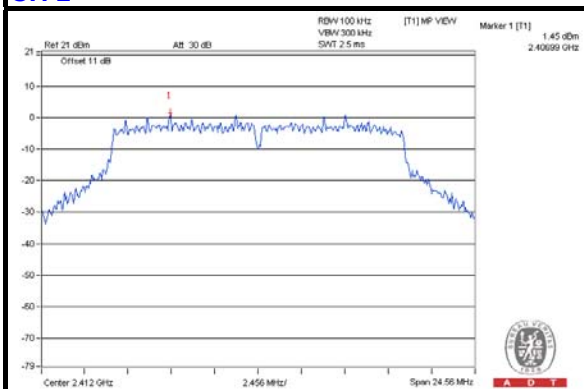


CH 6

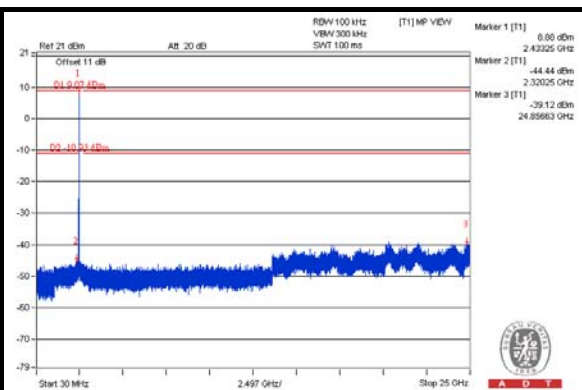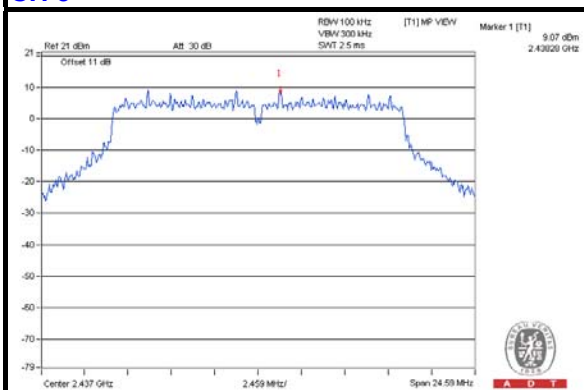


CH 11

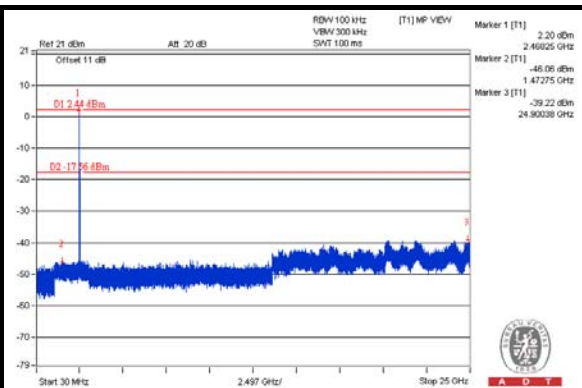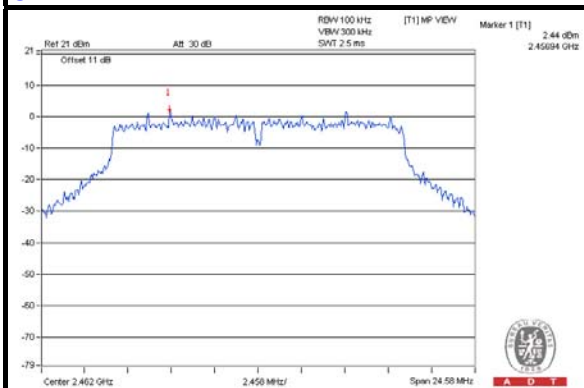

CH 1 Band edge

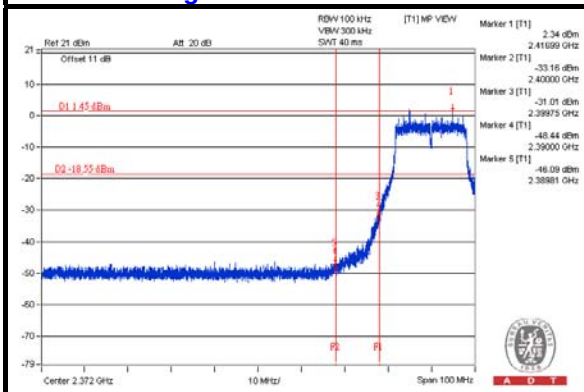

CH 11 Band edge

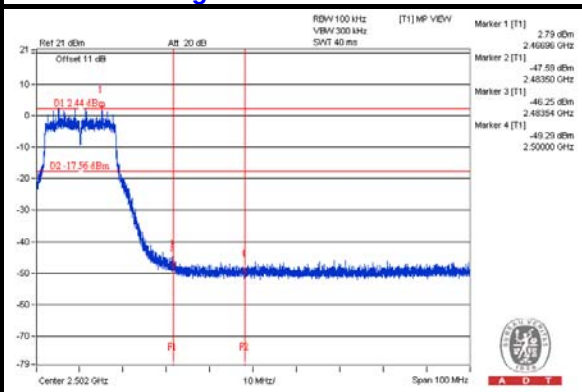





A D T

802.11g: CHAIN 1


CH 1

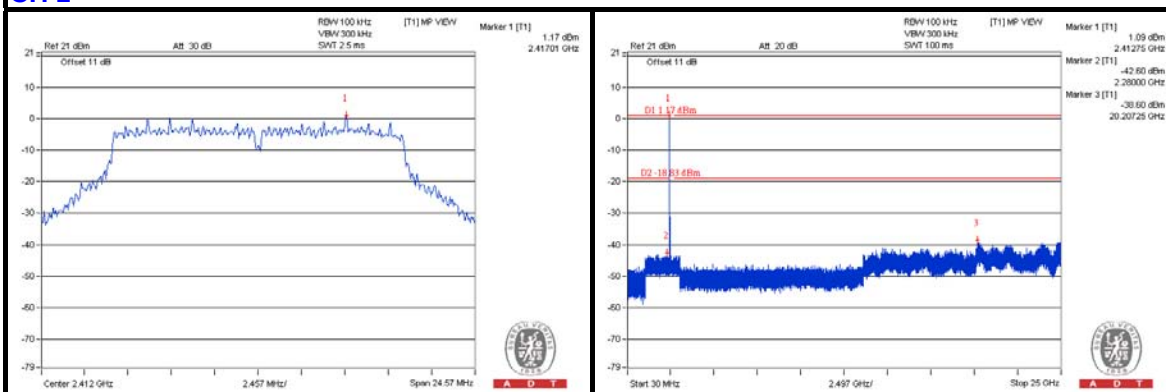


CH 6

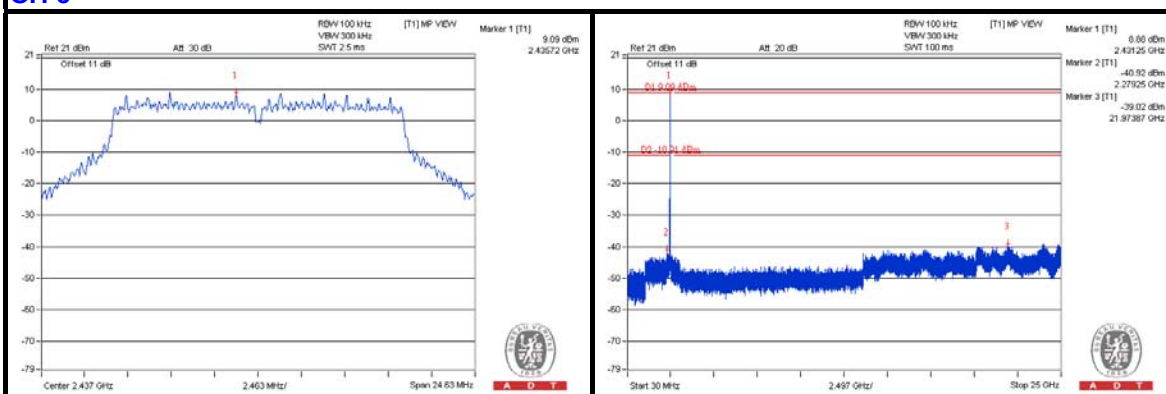


CH 11

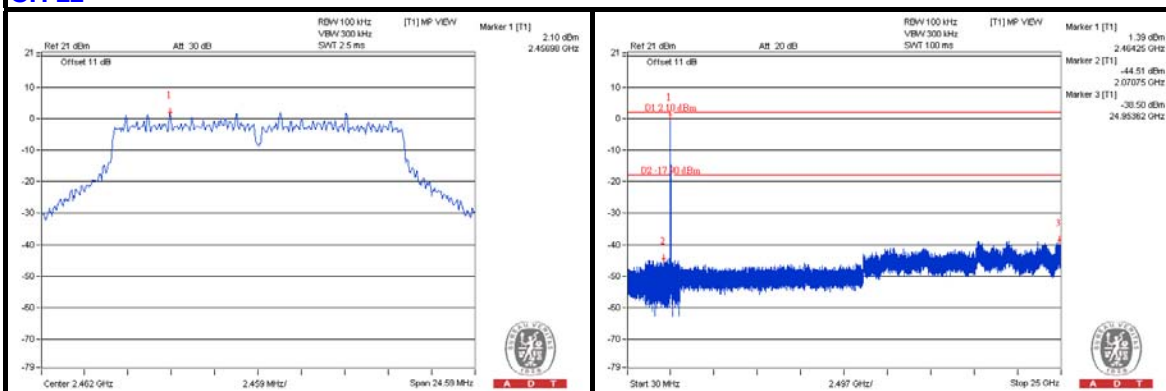

CH 1 Band edge

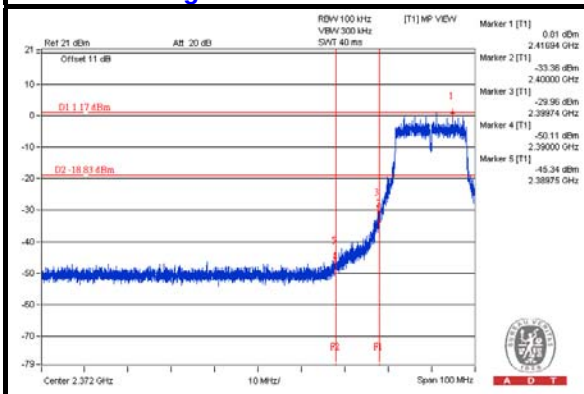

CH 11 Band edge


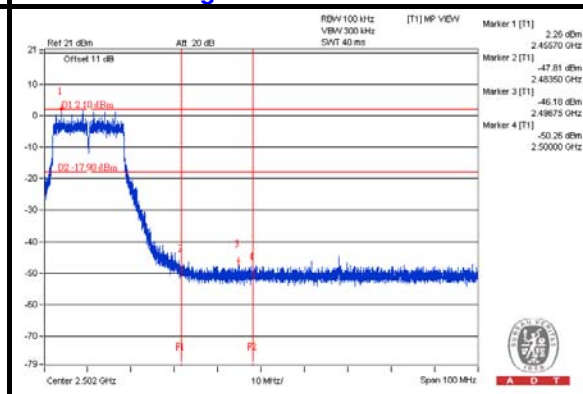






A D T

802.11n (20MHz): CHAIN 0



CH 1

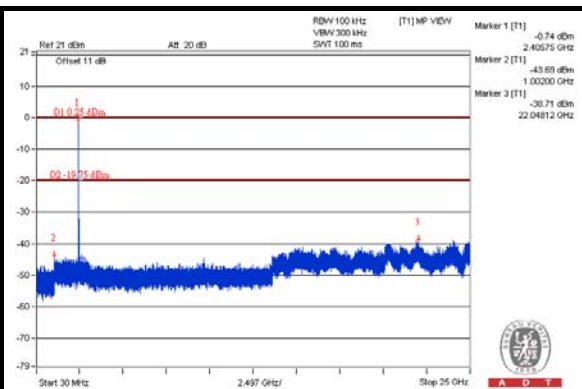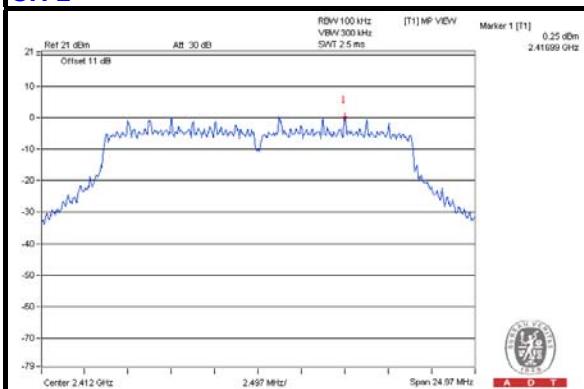


CH 6

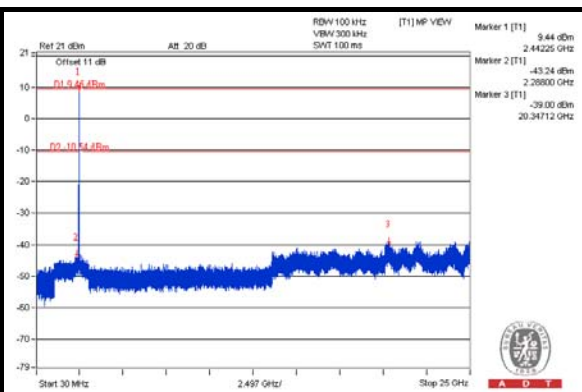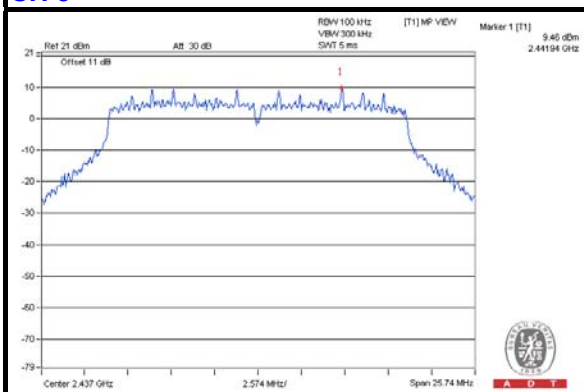


CH 11

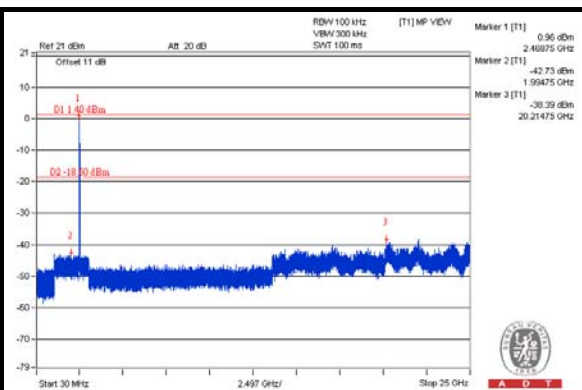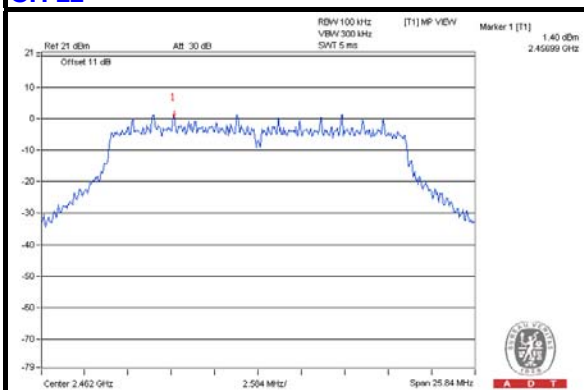

CH 1 Band edge

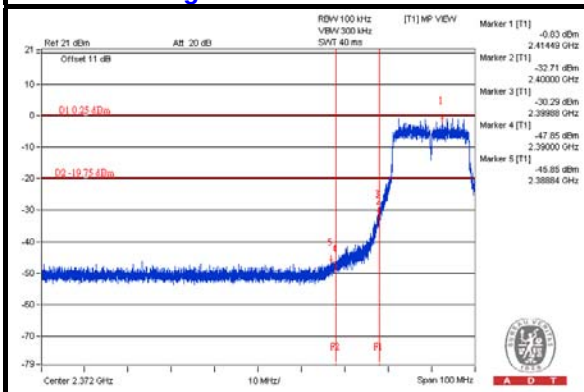

CH 11 Band edge

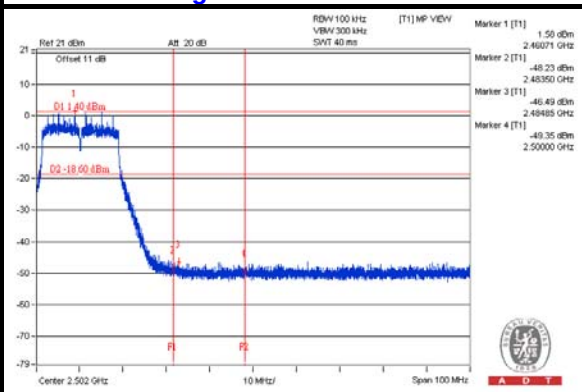





A D T

802.11n (20MHz): CHAIN 1


CH 1

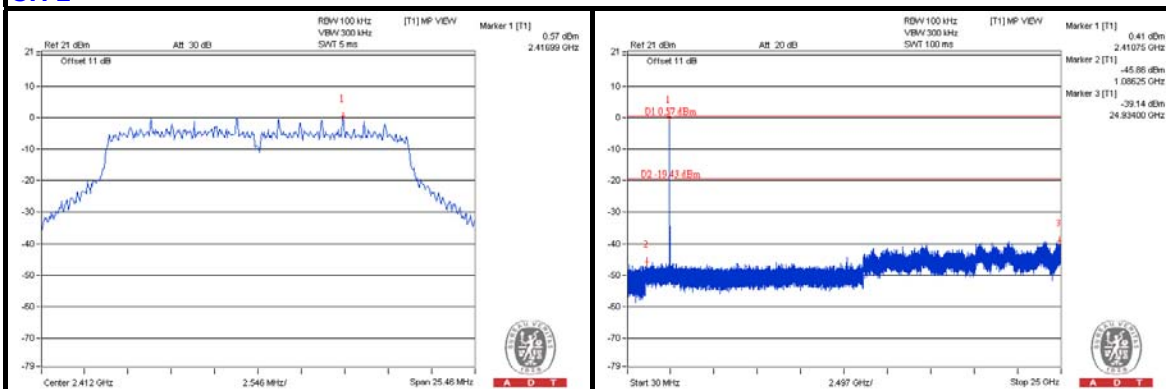


CH 6

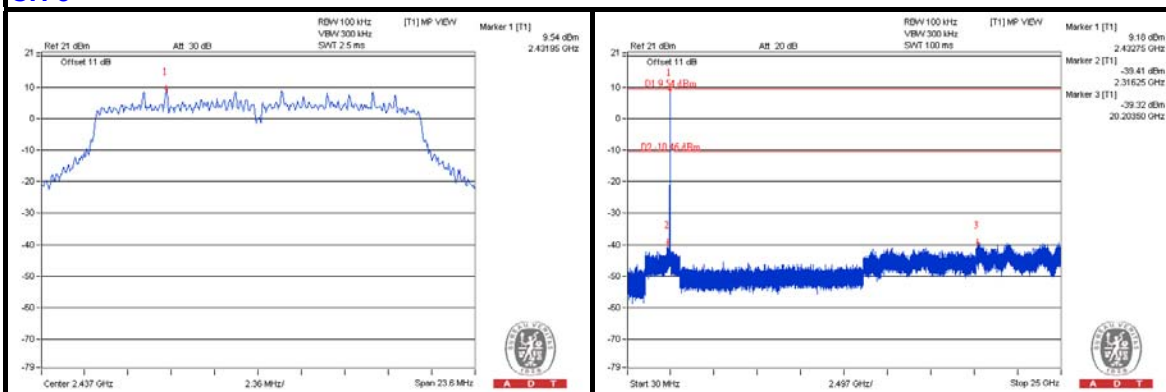

CH 11

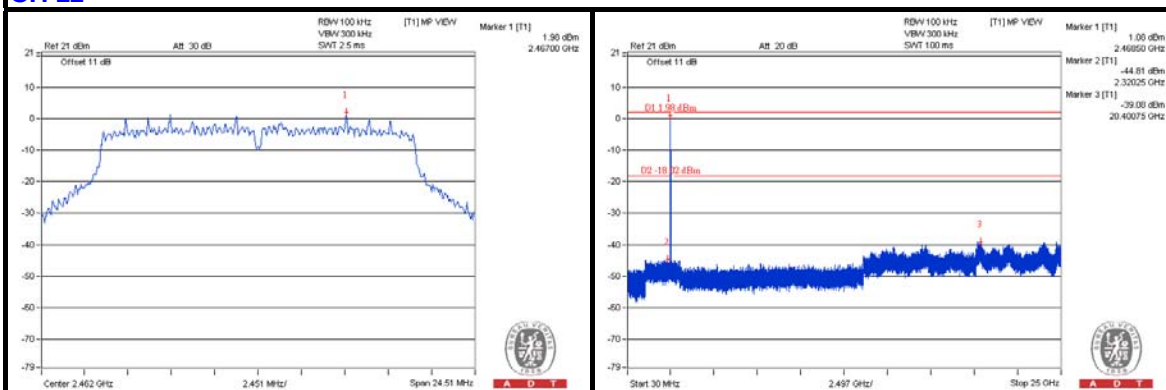

CH 1 Band edge

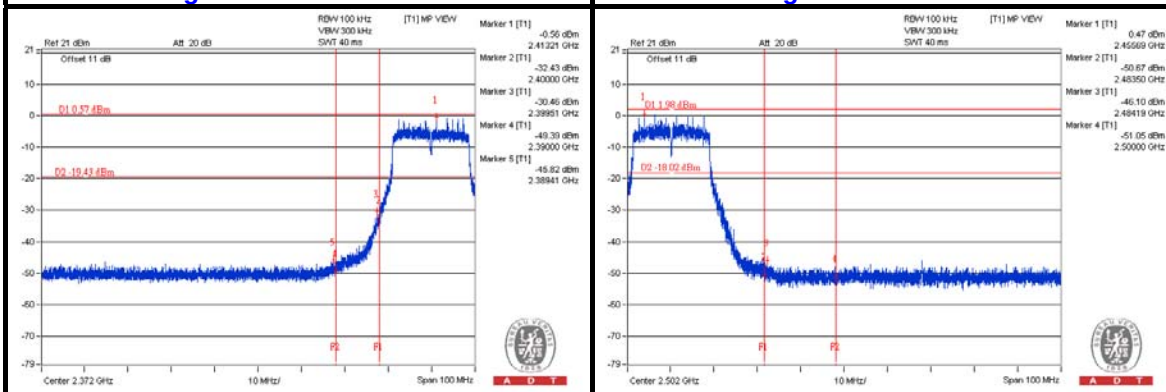





A D T

802.11n (40MHz): CHAIN 0


CH 3

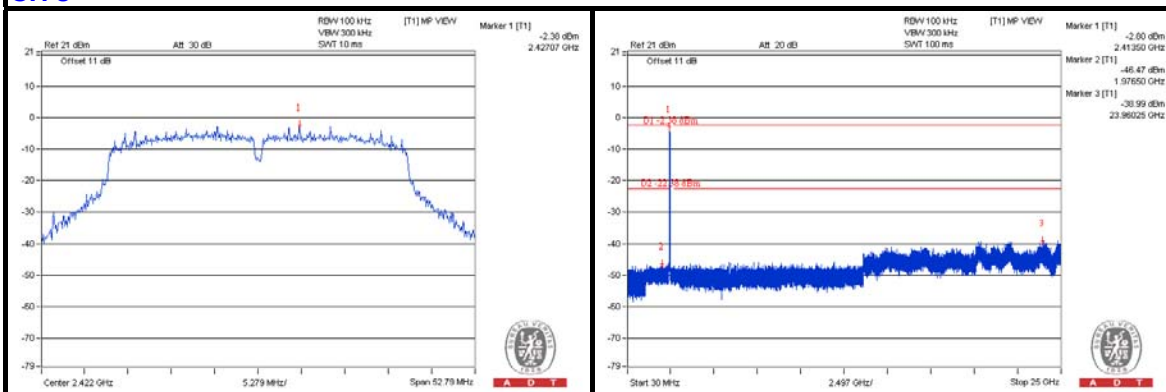


CH 6

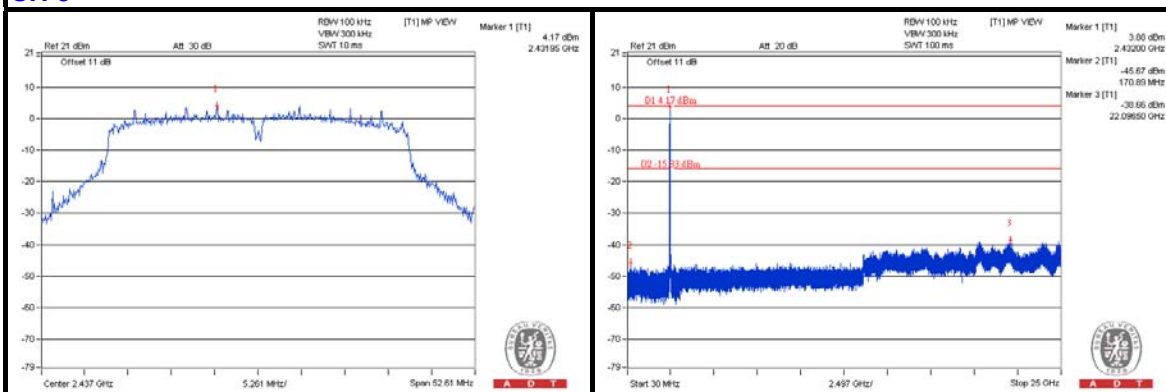

CH 9

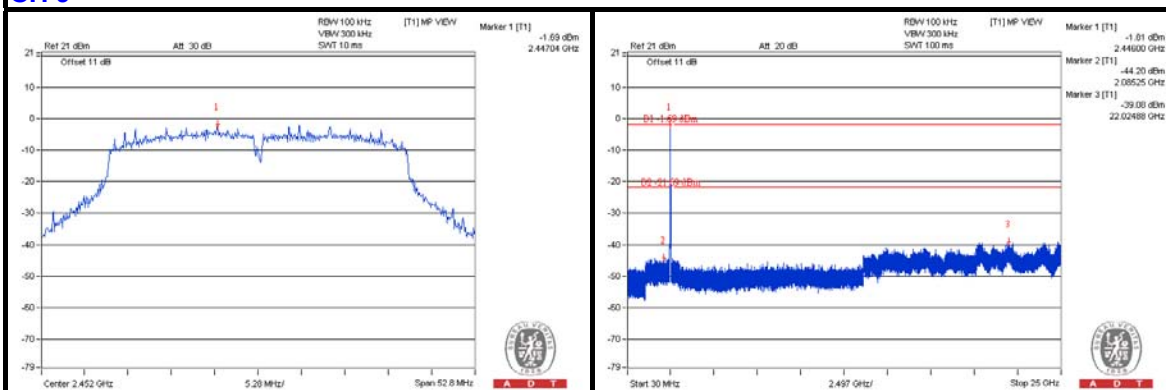

CH 3 Band edge

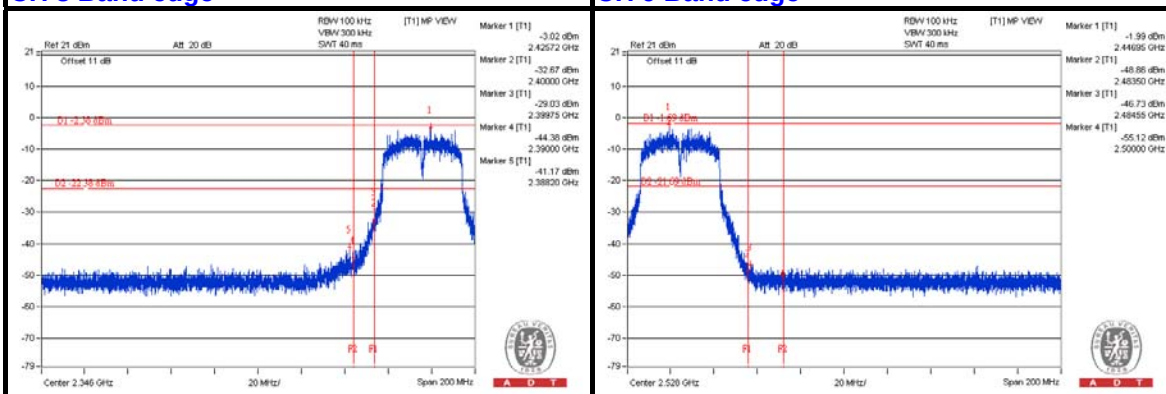





A D T

802.11n (40MHz): CHAIN 1


CH 3

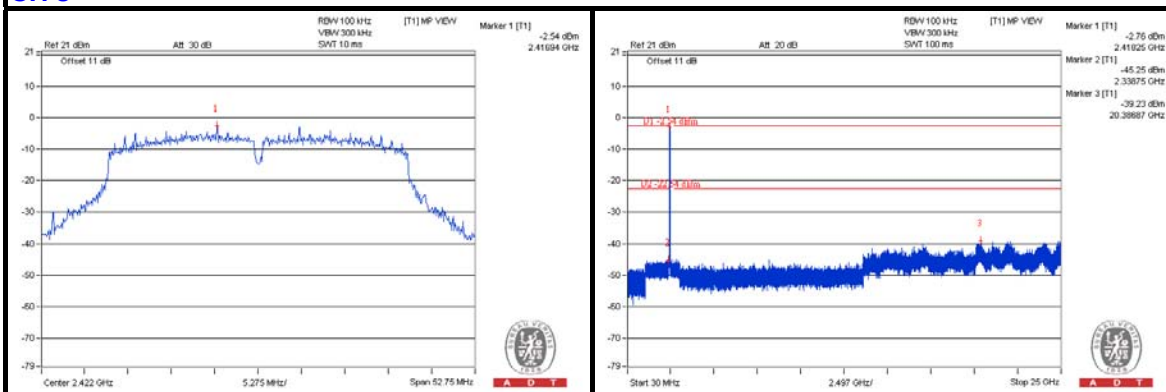


CH 6

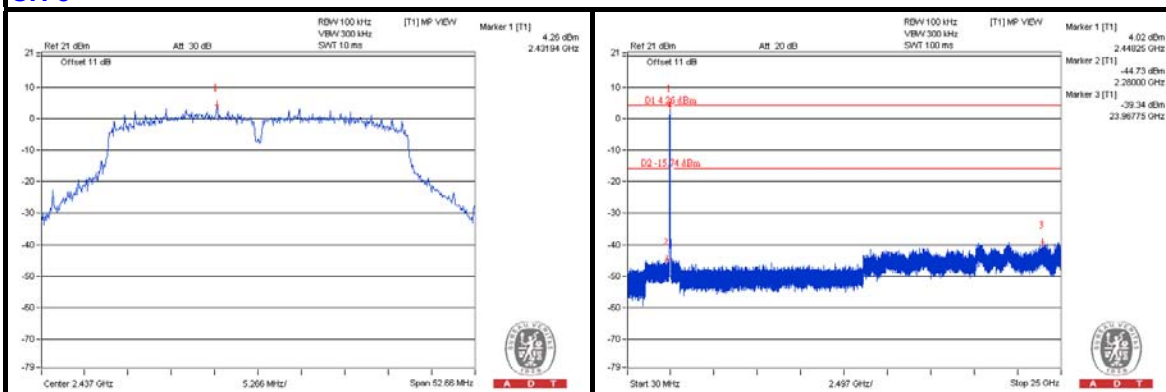

CH 9

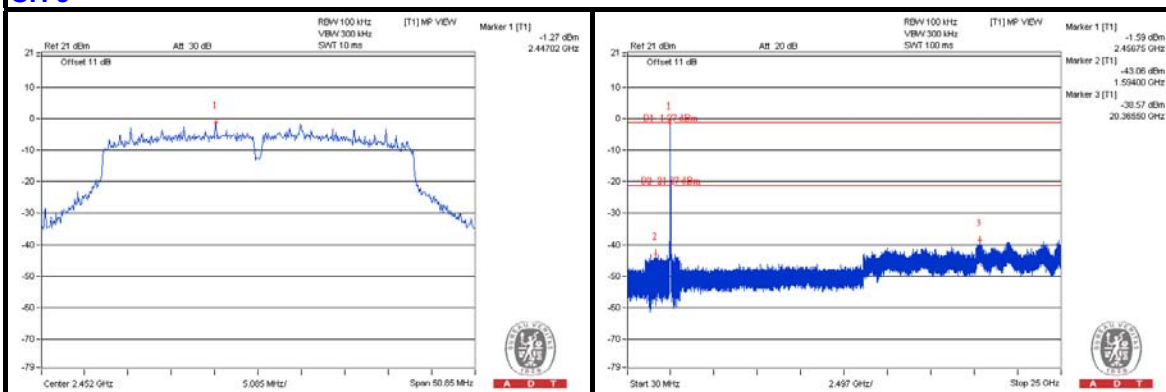

CH 3 Band edge

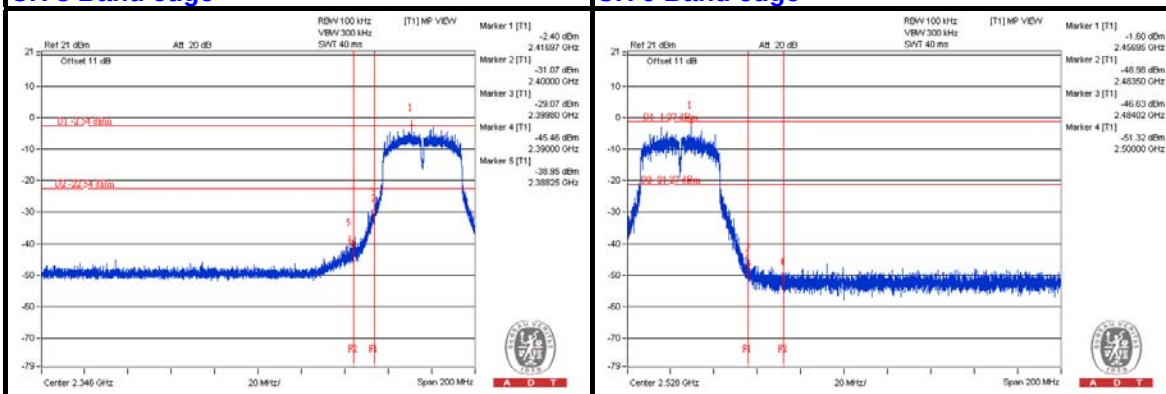





A D T

802.11a: CHAIN 0


CH 149

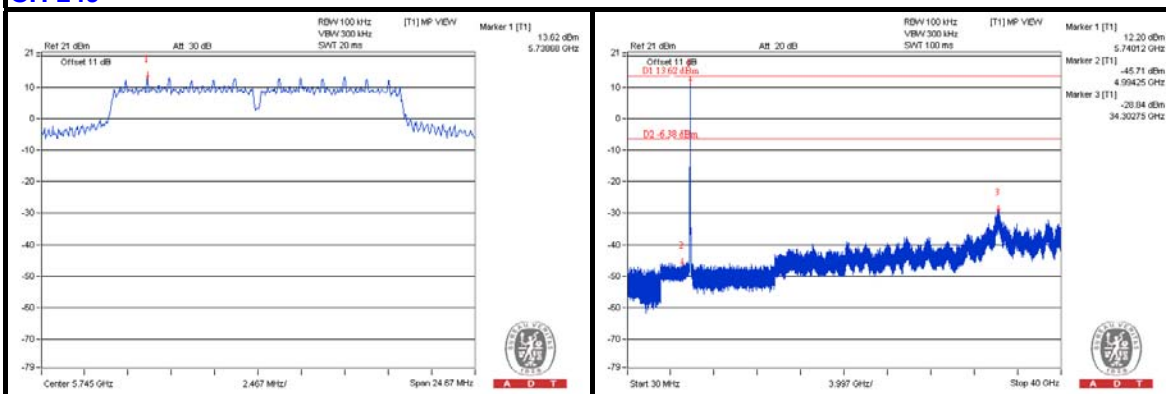


CH 157

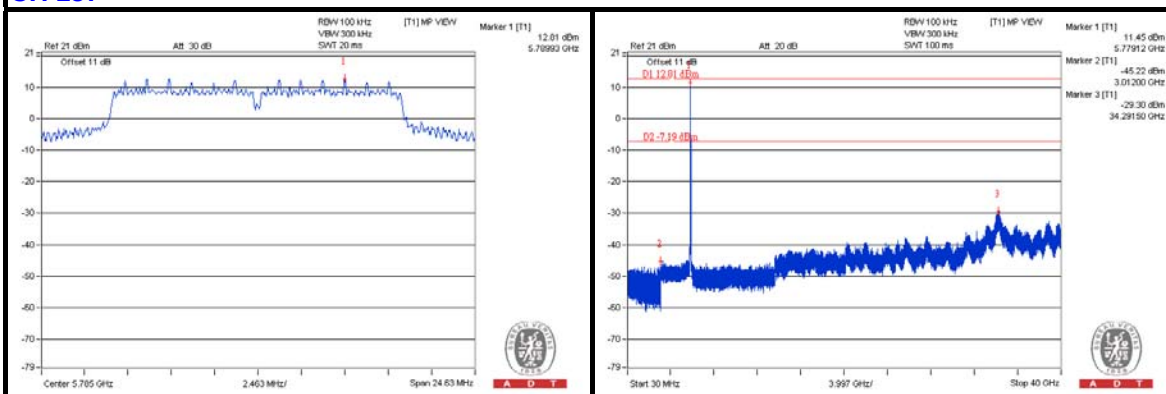


CH 165

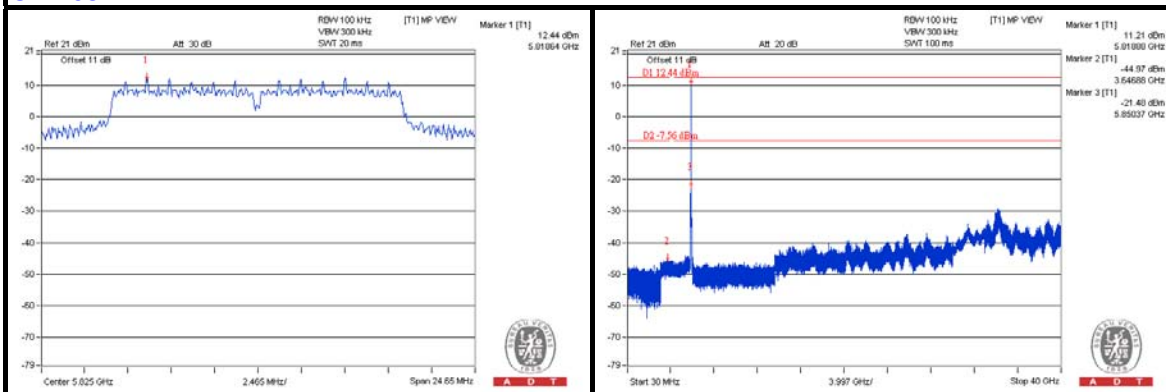

CH 149 Band edge

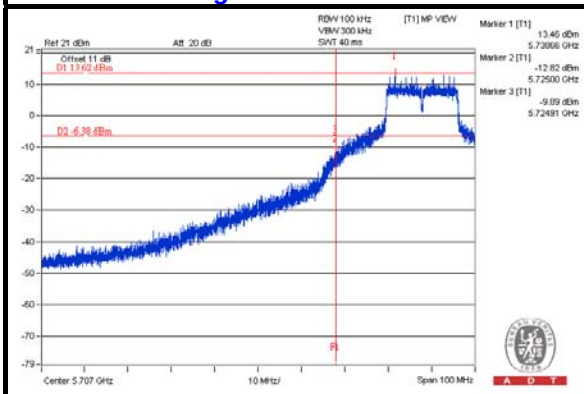

CH 165 Band edge

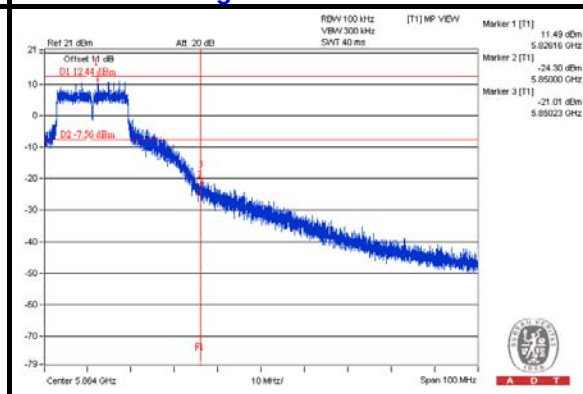





A D T

802.11a: CHAIN 1


CH 149

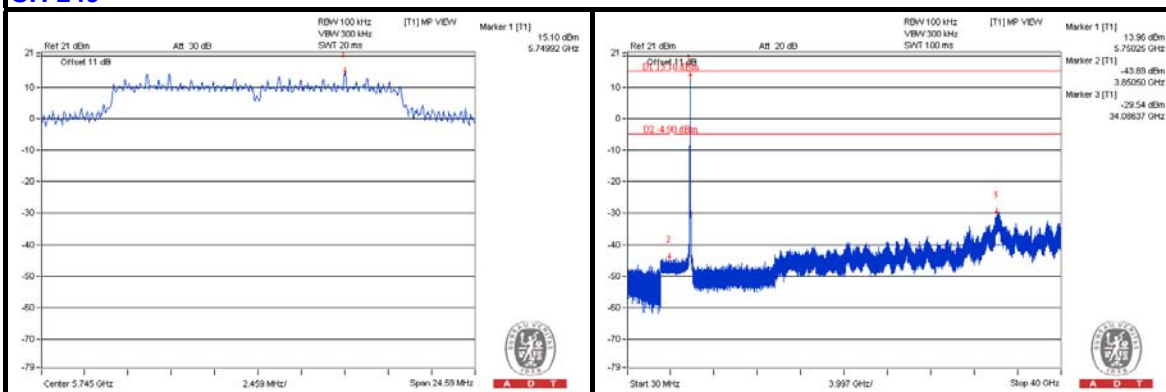


CH 157

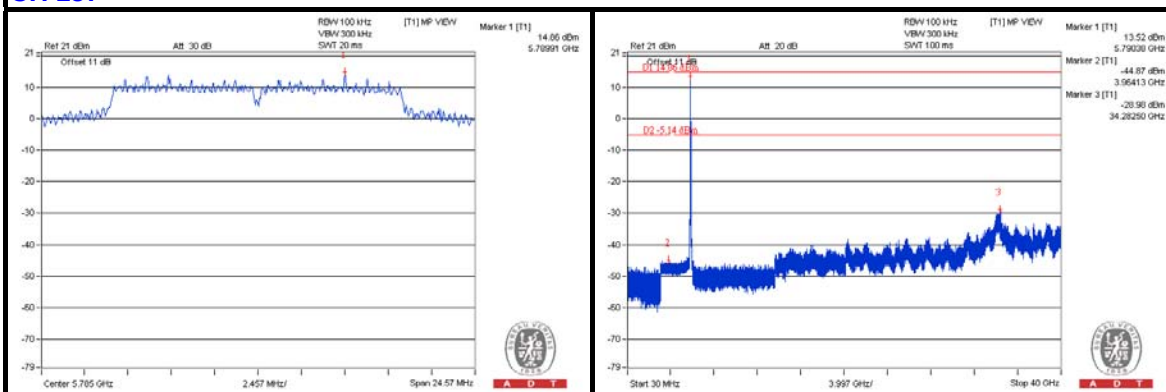

CH 165

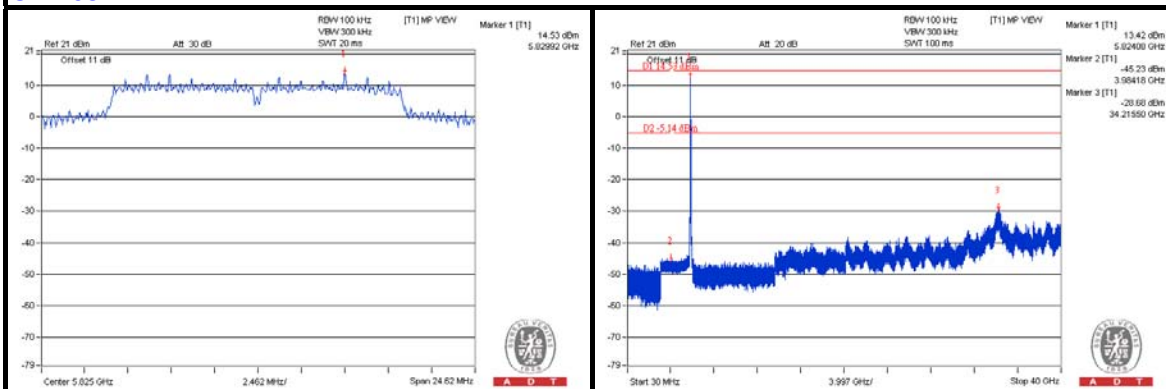

CH 149 Band edge


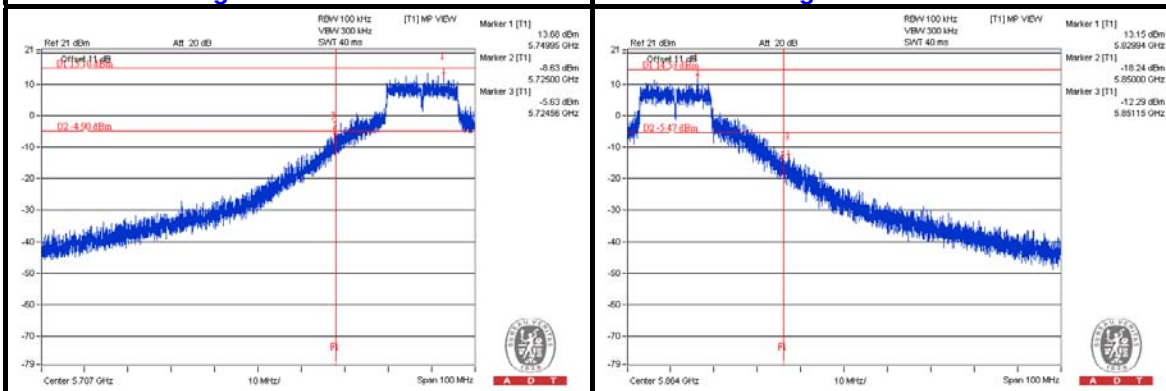






A D T

802.11n (20MHz): CHAIN 0



CH 149

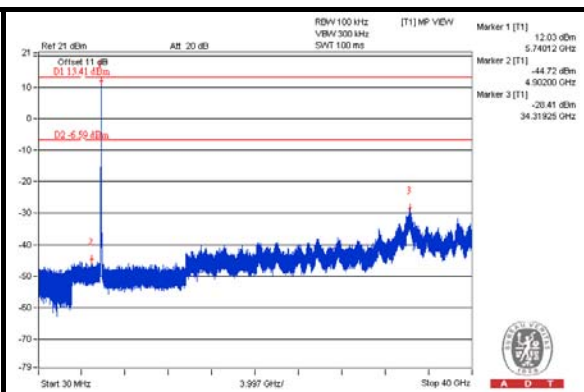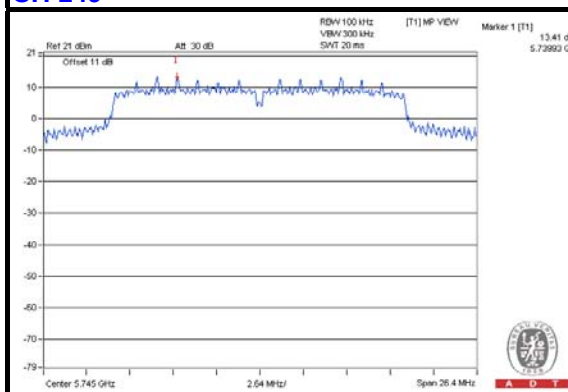


CH 157

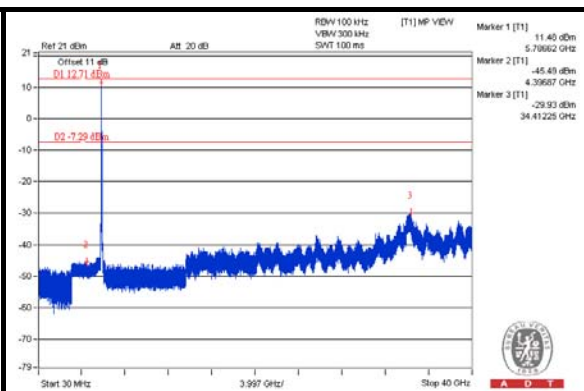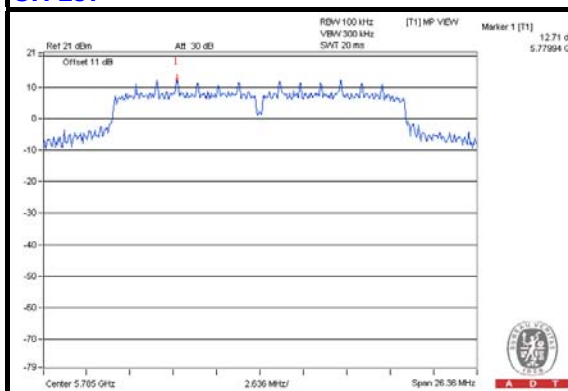


CH 165

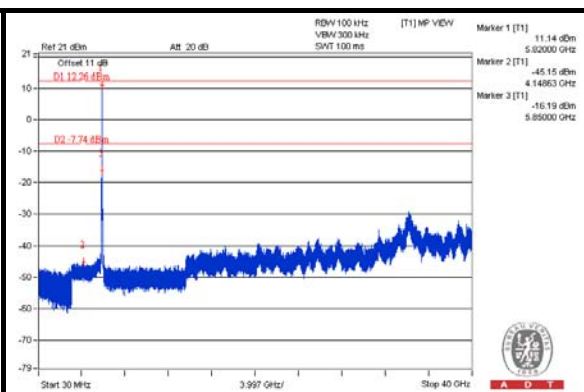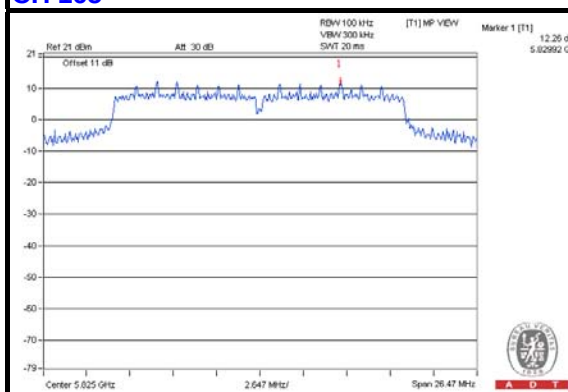

CH 149 Band edge

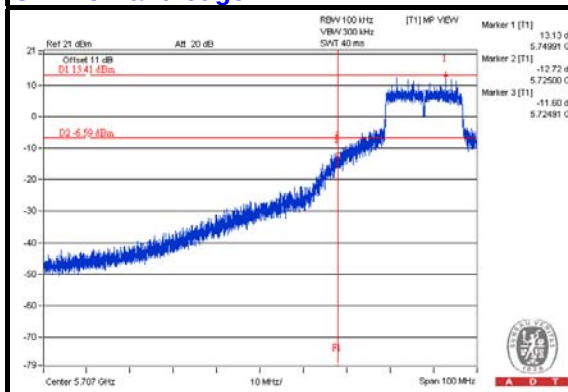

CH 165 Band edge


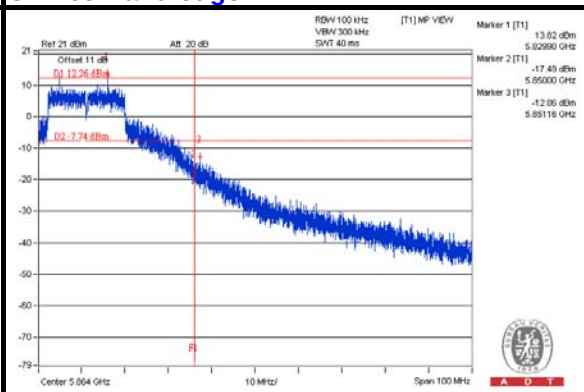






A D T

802.11n (20MHz): CHAIN 1



CH 149

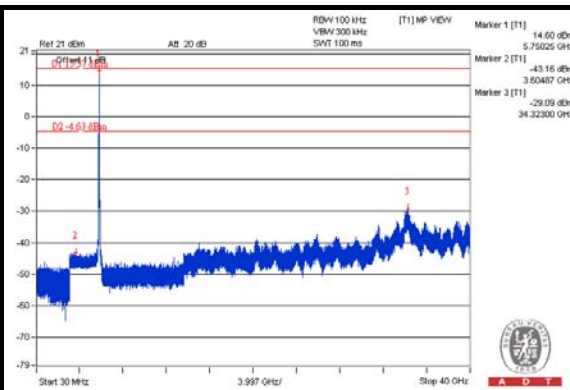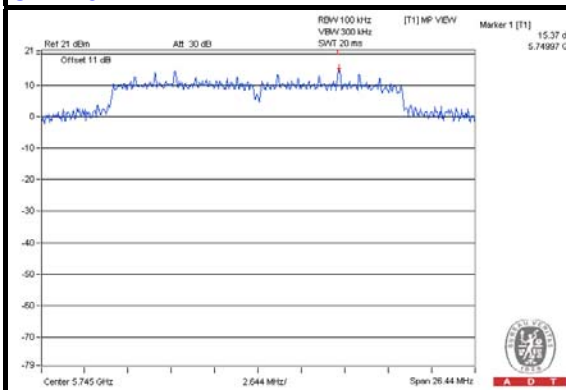


CH 157

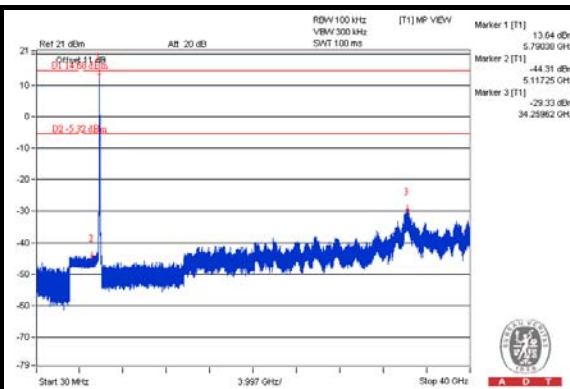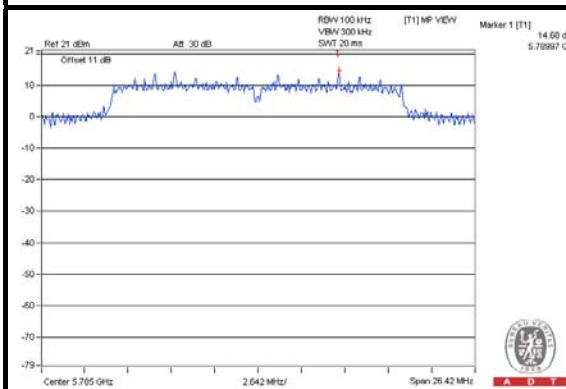


CH 165

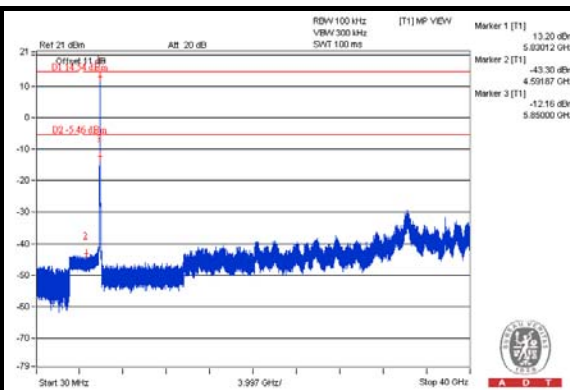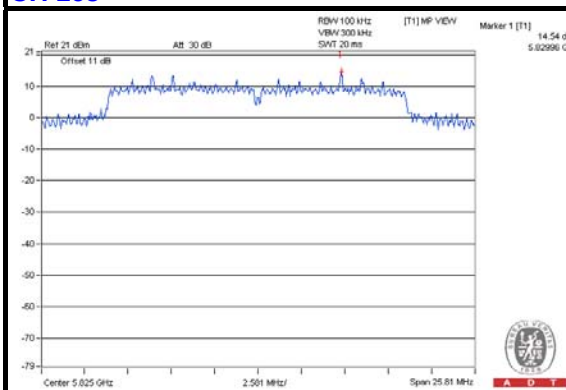

CH 149 Band edge

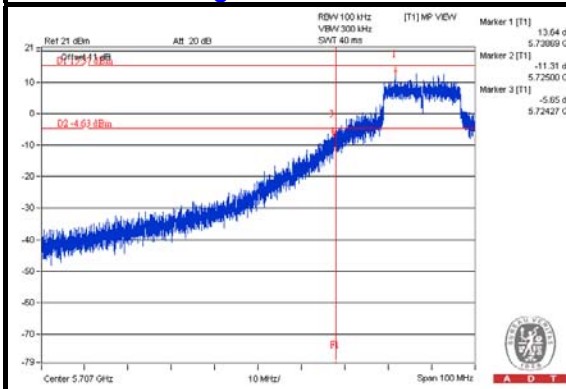

CH 165 Band edge


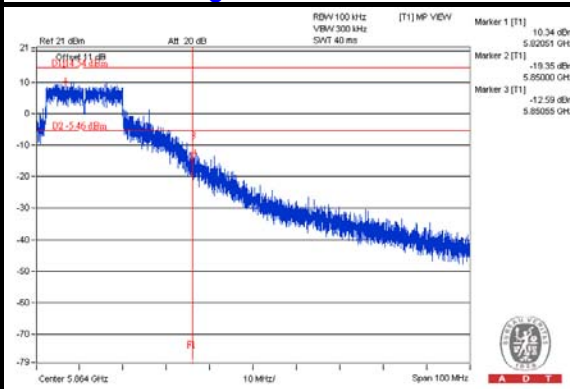






A D T

802.11n (40MHz): CHIAN 0


CH 151

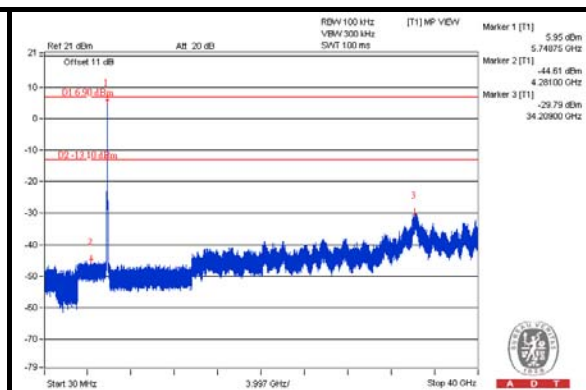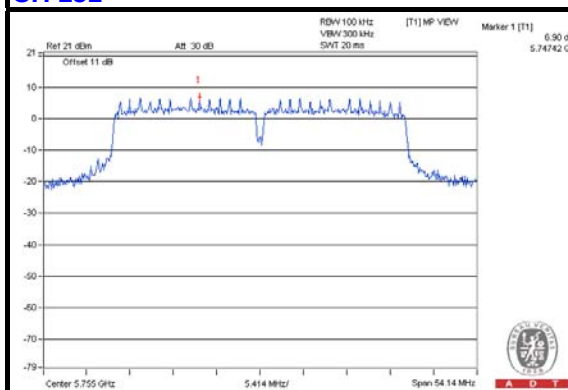


CH 159

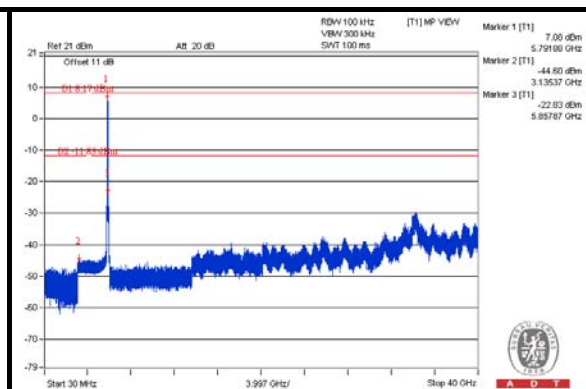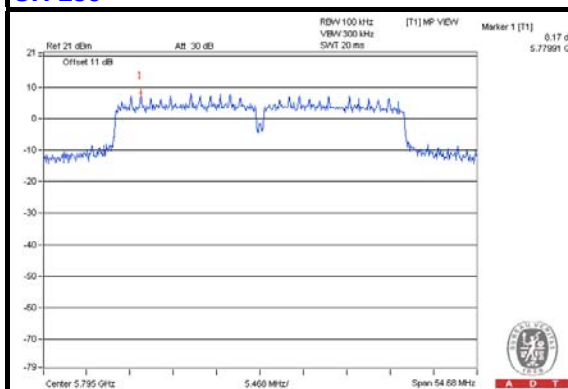

CH 151 Band edge

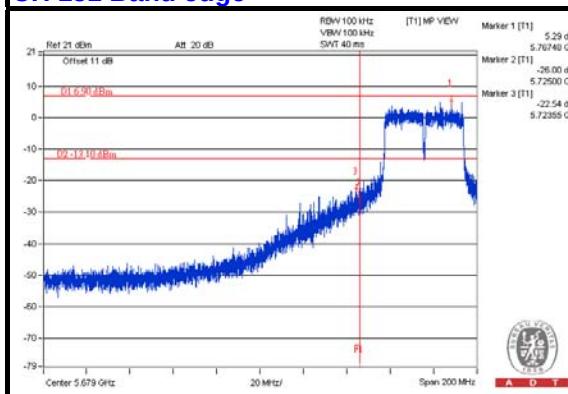

CH 159 Band edge

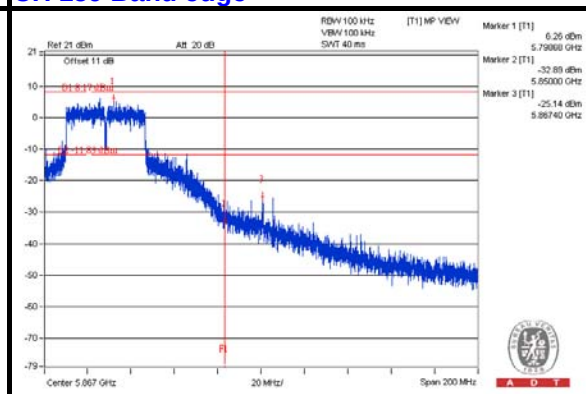





A D T

802.11n (40MHz): CHIAN 1


CH 151

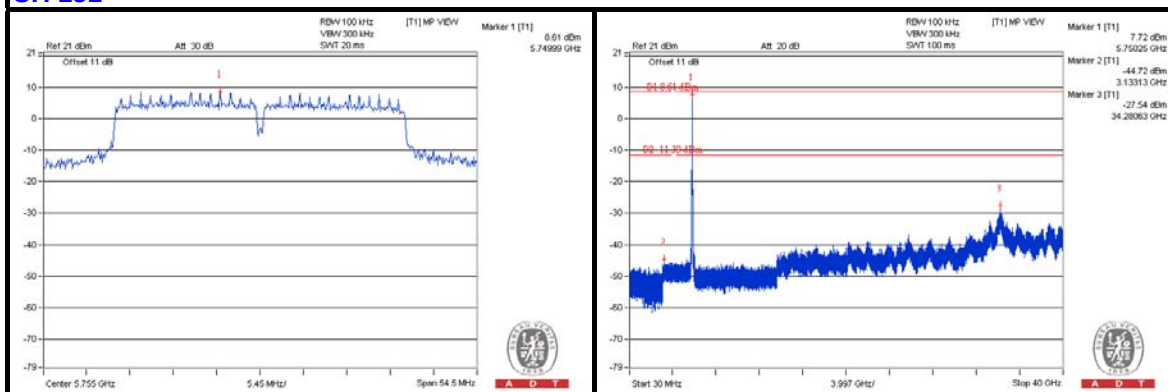


CH 159

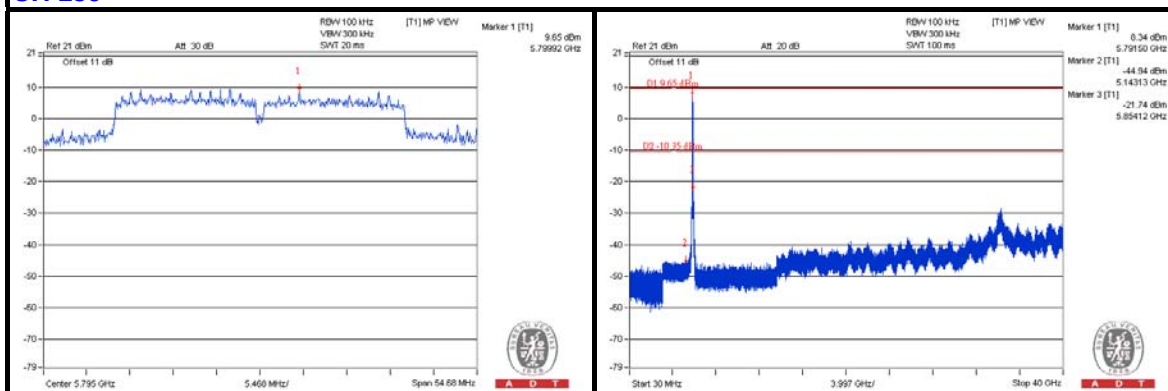

CH 151 Band edge


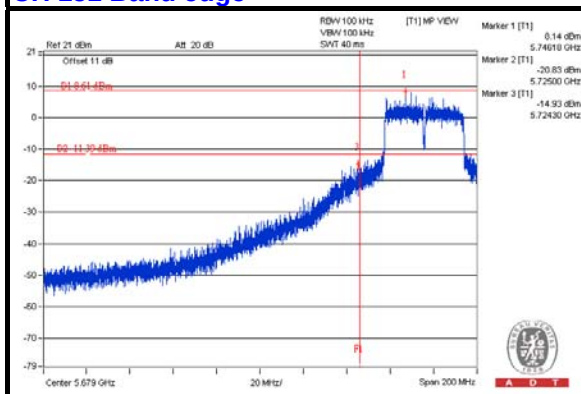


CH 159 Band edge


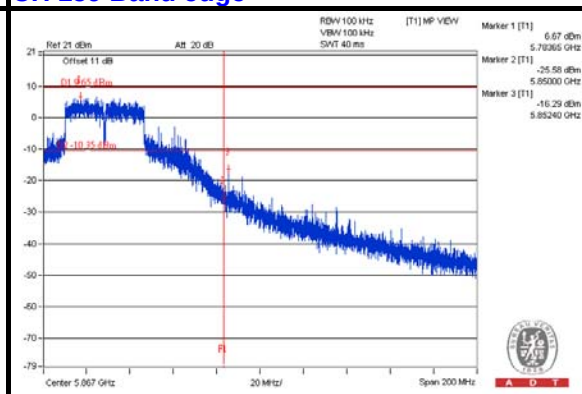


802.11ac (80MHz): CHIAN 0

CH 155

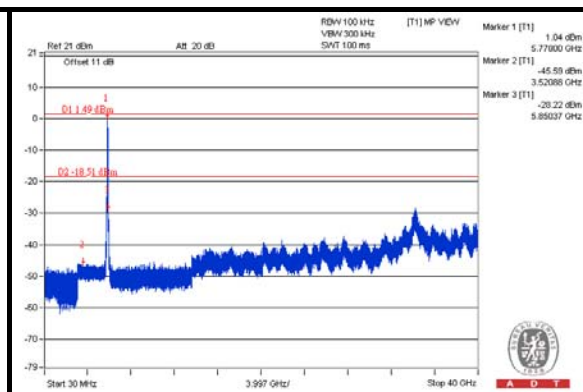
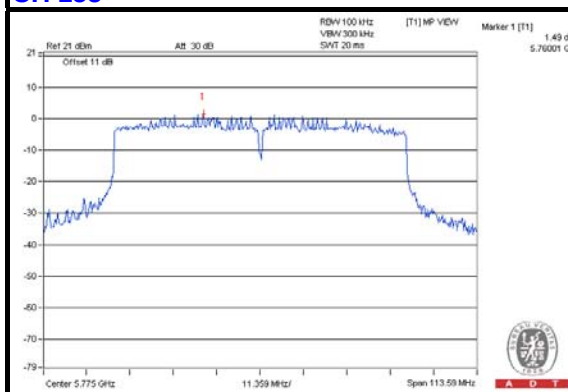


CH 155 Band edge

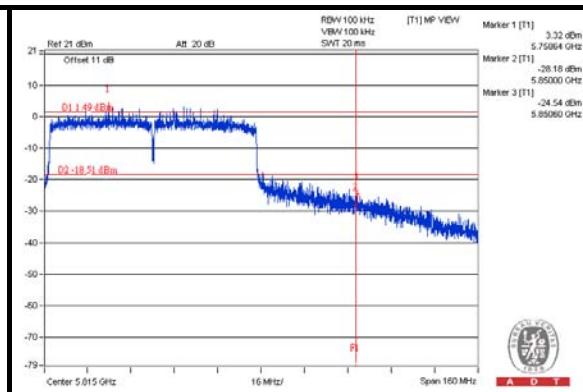
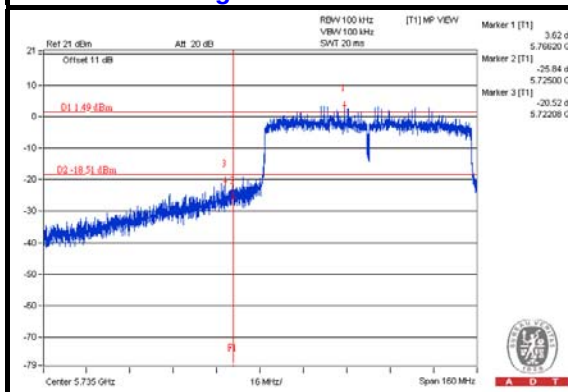


802.11ac (80MHz): CHIAN 1

CH 155

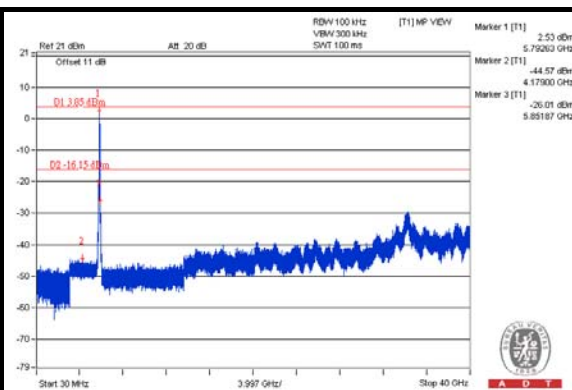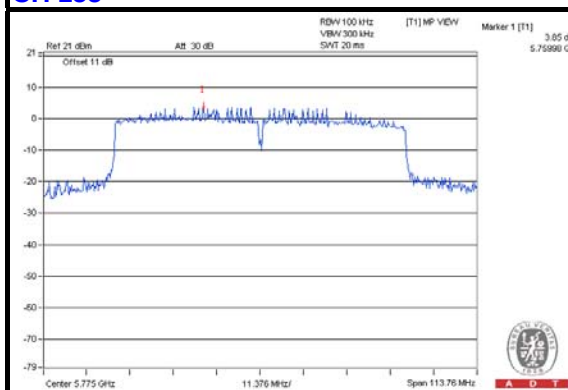

CH 155 Band edge

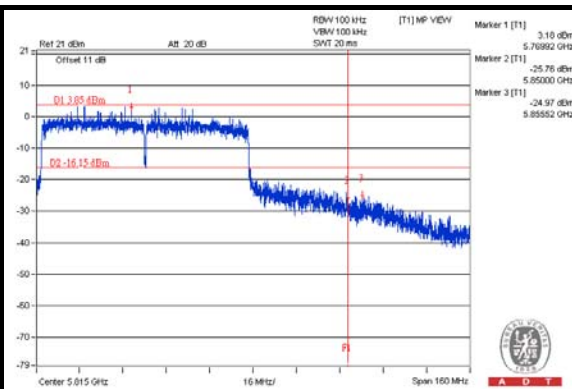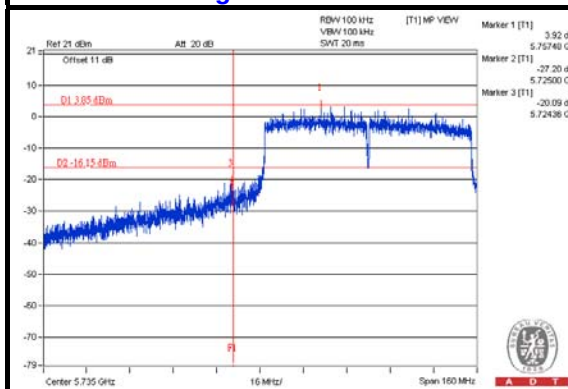

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---