



i3-TECHNOLOGIES



i3SYNC


USER MANUAL

1 Description of functions

- A** HDMI
- B** USB for power supply
- C** Mode switch: switch Presentation mode / Video mode
- D** F1 button: Press and hold for 5 seconds to reboot the transmitter



- A** HDMI OUT
- B** Micro USB
- C** Slide switch: overwrite on /off
- D** Main button: for pairing with transmitter
- E** F1 button: for firmware update
- F** Micro SD Card slot: for firmware update

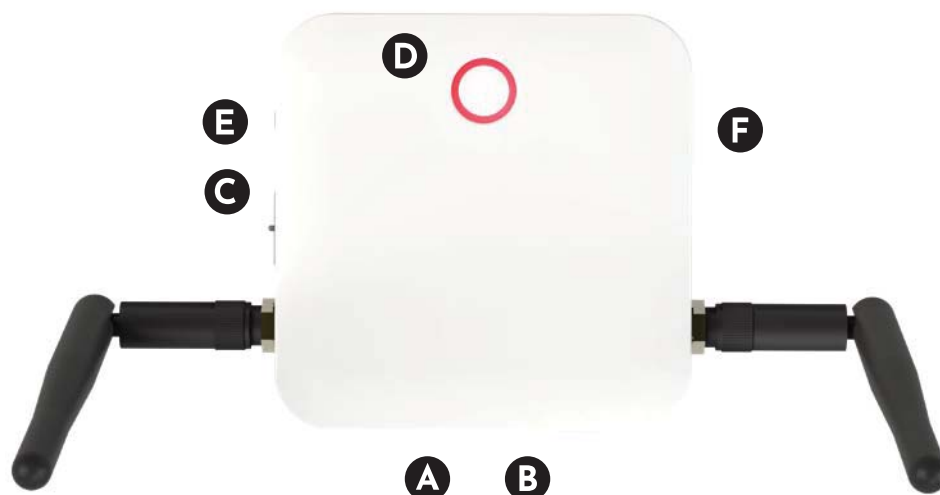

Status	Color	LED Action
Standby	Red	Lights up constantly
Pairing	Green	Blink
Paired and Ready	Green	Lights up constantly
Mirroring	Blue	Lights up constantly
Error	Red	Blink
FW update	White	Blink


2 How to install

A Receiver

- 1 Connect a HDMI cable from a display to the HDMI OUT port of the Receiver.
- 2 Connect the micro USB cable for power supply.
- 3 The device will automatically start up after inserting the Power Supply.

B Transmitter

- 1 Connect the HDMI cable into your laptop or other device.
- 2 Connect the USB cable for power supply into your laptop or other device.

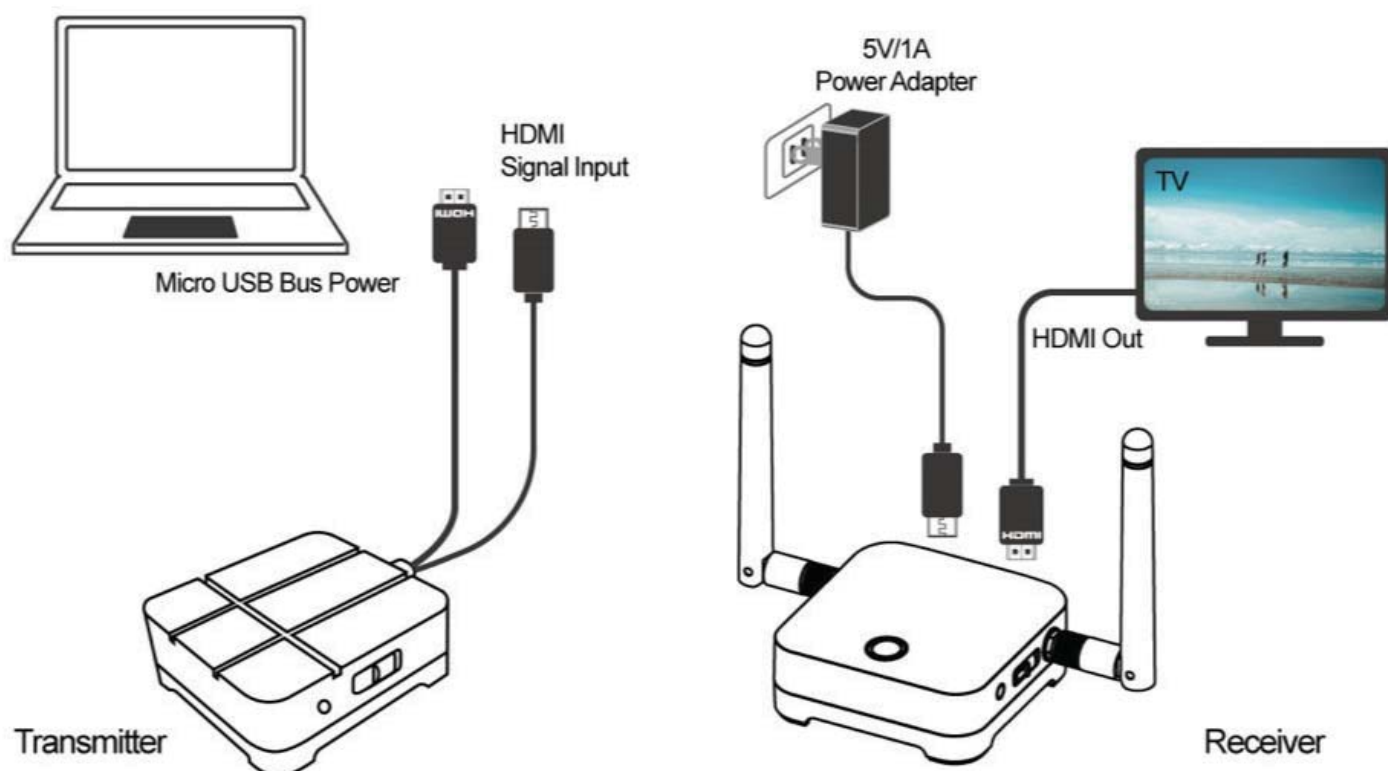

3 How to pair

- 1 Press the main button of the receiver and transmitter simultaneously.
- 2 Transmitter and receiver are blinking green during the pairing process.
- 3 When the pairing is succesful, the receiver and transmitter will have a constant green light.

4 How to use

- 1 Connect the i3SYNC receiver to your display.
- 2 Connect the i3SYNC transmitter to your laptop.
- 3 Wait for a constant green light of the main button from the transmitter.
- 4 Press the main button to mirror, the main button will change into blue.

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

CAUTION:


Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF exposure warning

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

Note : End user should not change the external antenna with any other type of the antenna.



i3-TECHNOLOGIES

www.i3-technologies.com